



Desired color use:



-  Exposed metal (edge bleed serial bar code)
-  Satin process black (edge bleed label body)

1. Regulatory marks
2. Fatigue Science company ID
3. FCC ID number
4. IC number
5. Serial number generation, starting at 01001
6. Serial number barcode


Fonts:

DIN Next LT Pro Medium
 DIN Next LT Pro Light

- 0.2mm maximum thickness (label plus adhesive)
- PSA must adhere permanently to TPE or equivalent
- Label material and inks used must be highly durable
- Label material and inks must be impervious to long-term (years) skin contact, salt water, etc.

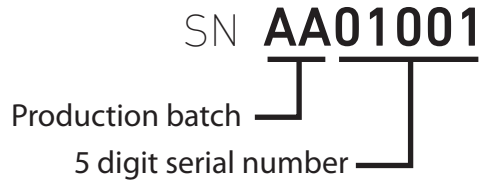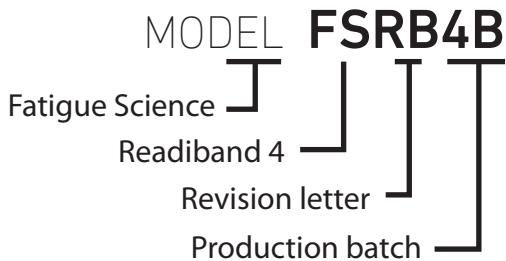

Information for UPC Code 128 barcode:

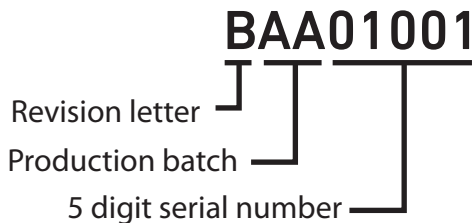

Readiband 4 Label
 RB4AP0011B8
 1/27/2016

Chad Attlesey
 Archinoetics LLC
 chad@archinoetics.com
 507.250.1577

FC CE

Fatigue Science™

FCC ID XVL123-RB4

IC 8707A-RB4

MODEL FSRB4B SN AA01001

