



## SGS-CSTC Standards Technical Services Co., Ltd.

198 Kezhu Road, Sciencetech Park, Guangzhou Economic & Technological  
Development District, Guangzhou, China 510663  
Telephone: +86 (0) 20 82155555  
Fax: +86 (0) 20 82075059  
Email: ee.guangzhou@sgs.com

Report No.: GZEM130700347301  
Page: 1 of 74  
FCC ID: XVM5172301

# TEST REPORT

<b>Application No.:</b>	GZEM1307003473RF
<b>FCC ID:</b>	XVM5172301
<b>Applicant:</b>	Ace Bayou Corp
<b>Product Name:</b>	X ROCKER GAMING CHAIR; X-ROCKER VIBE
<b>Product Description:</b>	Bluetooth speaker massage chair with 2.4 GHz as carrier
<b>Model No:</b>	5172301, 5172XXX, 0777XXX, 0601XXX; 5173801, 5173XXX, 0779XXX, 0605XXX. (X=0-9) ♣
♣	Please refer to section 3 of this report for more details.
<b>Trade Mark:</b>	XRocker
<b>Standards:</b>	47 CFR PART 15 Subpart C: 2012 section 15.247
<b>Date of Receipt:</b>	2013-07-31
<b>Date of Test:</b>	2013-08-14 to 2013-09-05
<b>Date of Issue:</b>	2013-09-06
<b>Test Result :</b>	<b>Pass*</b>

\* In the configuration tested, the EUT detailed in this report complied with the standards specified above. Please refer to section 3 of this report for further detail.

Authorized Signature:

Richard EP- 2013  
Manager

The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. All test results in this report can be traceable to National or International Standards.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at [www.sgs.com/terms\\_and\\_conditions.htm](http://www.sgs.com/terms_and_conditions.htm) and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at [www.sgs.com/terms\\_e-document.htm](http://www.sgs.com/terms_e-document.htm). Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



## 2 Version

Revision Record				
Version	Chapter	Date	Modifier	Remark
00		2013-09-06		Original

Authorized for issue by:			
Tested By			2013-08-14 to 2013-09-05 <hr/> Date
Prepared By			2013-09-05 <hr/> Date
Checked By			2013-09-06 <hr/> Date



### 3 Test Summary

Test	Test Requirement	Test method	Result
Antenna Requirement	FCC PART 15 C section 15.247 (c) and Section 15.203	FCC PART 15 C section 15.247 (c) and Section 15.203	PASS
Occupied Bandwidth	FCC PART 15 C section 15.247 (a)(1)	ANSI C63.10: Clause 6.9.1	PASS
Carrier Frequencies Separated	FCC PART 15 C section 15.247(a)(1)	ANSI C63.10: Clause 7.7.2	PASS
Hopping Channel Number	FCC PART 15 C section 15.247(a)(1)(iii)	ANSI C63.10: Clause 7.7.3	PASS
Dwell Time	FCC PART 15 C section 15.247(a)(1)(iii)	ANSI C63.10: Clause 7.7.4	PASS
Pseudorandom Frequency Hopping Sequence	FCC PART 15 C section 15.247(a)(1)	ANSI C63.10: Clause 7.7.5	PASS
Maximum Peak Output Power	FCC PART 15 C section 15.247(b)(1)	ANSI C63.10: Clause 6.10.1	PASS
Conducted Spurious Emission	FCC PART 15 C section 15.247(d)	ANSI C63.10: Clause 6.7	PASS
Radiated Spurious Emission	FCC PART 15 C section 15.247(d)	ANSI C63.10: Clause 6.4, 6.5 and 6.6	PASS**
Band Edges Measurement	FCC PART 15 C section 15.247 (d) & 15.205	ANSI C63.10: Clause 6.9.1	PASS
Conducted Emissions at Mains Terminals	FCC PART 15 C section 15.207	ANSI C63.10: Clause 6.2	PASS
<b>Remark:</b>			
<p>N/A: not applicable. Refer to the relative section for the details.            EUT: In this whole report EUT means Equipment Under Test.            Tx: In this whole report Tx (or tx) means Transmitter.            Rx: In this whole report Rx (or rx) means Receiver.            RF: In this whole report RF means Radio Frequency.            ANSI C63.10: the detail version is ANSI C63.10:2009 in the whole report.            DA 00-705 was used as a guideline in preparing this Test Report.</p>			
<p>** After pretest, the electrical board with the Bluetooth module removed out of the equipment has been tested on Radiated Emission, which is worse than the Bluetooth in the equipment, so we only show the main electrical board with the Bluetooth module in Radiated Spurious Emission Test Setup.</p>			



✦ **Model No.:** 5172301, 5172XXX, 0777XXX, 0601XXX; 5173801, 5173XXX, 0779XXX, 0605XXX. (X=0-9)  
According to the confirmation from the applicant, all models are totally identically in mechanical and electrical construction, except for Product Name, Model No., Adapter, appearance and the Function.

Product Name	Model No.	Adapter	Function
X ROCKER GAMING CHAIR	<b>5172301</b> , 5172XXX, 0777XXX, 0601XXX. (X=0-9)	BI20-090200-AdU, CS18D090200FUF	Without vibration function
X-ROCKER VIBE	<b>5173801</b> , 5173XXX, 0779XXX, 0605XXX. (X=0-9)	BI30-120200-AdU, CS24E120200FUF	With vibration function

Therefore only two models **5172301**(with adapter BI20-090200-AdU & CS18D090200FUF) and **5173801** (with adapter BI30-120200-AdU & CS24E120200FUF) were tested in this report.

As all RF circuit is the same for all models, then model 5173801 with adapter CS24E120200FUF is full test, and for Conducted Emissions at Mains Terminals data with different adapters were tested respectively and shown in this report.



## 4 Contents

<b>1</b>	<b>COVER PAGE .....</b>	<b>1</b>
<b>2</b>	<b>VERSION.....</b>	<b>2</b>
<b>3</b>	<b>TEST SUMMARY .....</b>	<b>3</b>
<b>4</b>	<b>CONTENTS.....</b>	<b>5</b>
<b>5</b>	<b>GENERAL INFORMATION .....</b>	<b>6</b>
5.1	Client Information .....	6
5.2	General Description of E.U.T. ....	6
5.3	Details of E.U.T. ....	6
5.4	Modulation configure .....	7
5.5	Description of Support Units .....	8
5.6	Deviation from Standards .....	8
5.7	Abnormalities from Standard Conditions .....	8
5.8	Other Information Requested by the Customer .....	8
5.9	Test Location .....	8
5.10	Test Facility .....	9
<b>6</b>	<b>EQUIPMENT USED DURING TEST .....</b>	<b>10</b>
<b>7</b>	<b>TEST RESULTS .....</b>	<b>12</b>
7.1	E.U.T. test conditions.....	12
7.2	Antenna Requirement .....	14
7.3	Occupied Bandwidth .....	15
7.4	Carrier Frequencies Separated.....	20
7.5	Hopping Channel Number.....	24
7.6	Dwell Time .....	26
7.7	Pseudorandom Frequency Hopping Sequence .....	37
7.8	Maximum Peak Output Power.....	39
7.9	Conducted Spurious Emissions .....	44
7.10	Radiated Spurious Emissions .....	47
7.11	Band Edges Requirement .....	62
7.12	Conducted Emissions at Mains Terminals 150 kHz to 30 MHz .....	65
<b>8</b>	<b>PHOTOGRAPHS.....</b>	<b>ERROR! BOOKMARK NOT DEFINED.</b>
8.1	Radiated Spurious Emission Test Setup .....	<b>Error! Bookmark not defined.</b>
8.2	Conducted Emission Test Setup .....	<b>Error! Bookmark not defined.</b>
<b>9</b>	<b>EUT CONSTRUCTIONAL DETAILS .....</b>	<b>ERROR! BOOKMARK NOT DEFINED.</b>



## 5 General Information

### 5.1 Client Information

Applicant: Ace Bayou Corp  
Address of Applicant: 3700 Desire Parkway New Orleans. LA. US

### 5.2 General Description of E.U.T.

Product Name: X ROCKER GAMING CHAIR, X-ROCKER VIBE  
Model No.: 5172301, 5173801

### 5.3 Details of E.U.T.

Operating Frequency 2402 MHz to 2480 MHz  
Type of Modulation: GFSK, ( $\pi/4$ )DQPSK, 8DPSK  
Number of Channels 79 Channels  
Channel Separation: 1 MHz  
Dwell time Per channel is less than 0.4s.  
Antenna Type Integral  
Antenna gain: 3.0 dBi  
Speciality: Bluetooth specification version 3.0  
Function: Speaker massage chair with BT function to transmit and receive audio signal.  
Rated Supply (Voltage): AC 100-240V, 50/60 Hz  
Adapter Details **Model: BI20-090200-AdU & CS18D090200FUF**  
Input: AC 100-240V, 50/60 Hz, 0.5A  
Output: DC 9V, 2A  
**Model: BI30-120200-AdU**  
Input: AC 100-240V, 50/60 Hz, 1.2A  
Output: DC 12V, 2A  
**Model: CS24E120200FUF**  
Input: AC 100-240V, 50/60 Hz, 0.8A  
Output: DC 12V, 2A  
Power Cord: 1.8 m x 2 wires unshielded DC cable

Remark: The device meets the requirements stated within Parts 15.247(g) & (h) in that they were developed under the Bluetooth protocol and operate as a true frequency hopping system. The device does not have the ability to be coordinated with other FHSS systems in an effort to avoid the simultaneous occupancy of individual hopping frequencies by multiple transmitters.


### 5.4 Modulation configure

Modulation	Packet	Packet Type	Packet Size
GFSK	DH1	4	24
	DH3	11	183
	DH5	15	339
$(\pi/4)$ DQPSK	2DH1	20	54
	2DH3	26	367
	2DH5	30	379
8DPSK	3DH1	24	83
	3DH3	27	552
	3DH5	31	1021

**Remark:**

**Modulation 8-DPSK**

The modulation 8 PSK works with 8 phases between 0 and  $2\pi$  (0 and 360 degrees), it can be seeing bellow in the circle.

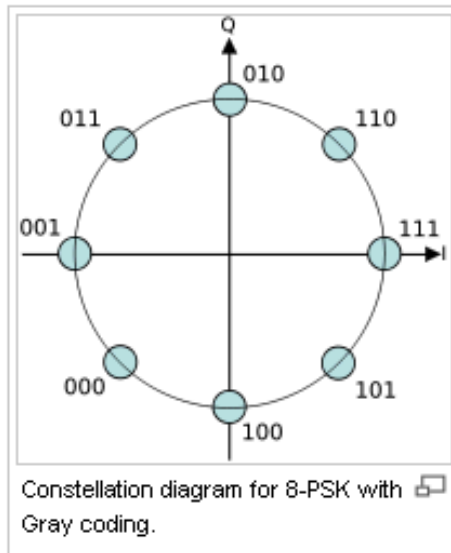

Normal mode: the Bluetooth has been tested on the Modulation of GFSK;

EDR mode: the Bluetooth has been tested on the Modulation of  $(\pi/4)$ DQPSK and 8DPSK, compliance test and record the worst case on 8DPSK.



### 5.5 Description of Support Units

The EUT has been tested as an independent unit for fixed frequency by testing lab.

The EUT has been tested with corresponding accessories as below:

Supplied by SGS:

Description	Manufacturer	Model No.	SN/Certificate NO
NoteBook	IBM	T30	S/N78-3VMLX 06/01
BT test board	SGS EMC	RF 07	RF 07

### 5.6 Deviation from Standards

Biconical and log periodic antennas were used instead of dipole antennas.

### 5.7 Abnormalities from Standard Conditions

None.

### 5.8 Other Information Requested by the Customer

None.

### 5.9 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services Co., Ltd., Guangzhou EMC Laboratory,  
198 Kezhu Road, Sciencetech Park, Guangzhou Economic & Technology Development District,  
Guangzhou, China 510663

Tel: +86 20 82155555 Fax: +86 20 82075059

No tests were sub-contracted.



## 5.10 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **NVLAP (Lab Code: 200611-0)**

SGS-CSTC Standards Technical Services Co., Ltd., Guangzhou EMC Laboratory is recognized under the National Voluntary Laboratory Accreditation Program (NVLAP/NIST). NVLAP Code: 200611-0.

- **ACMA**

SGS-CSTC Standards Technical Services Co., Ltd., EMC Laboratory can also perform testing for the Australian C-Tick mark as a result of our NVLAP accreditation.

- **SGS UK(Certificate No.: 32), SGS-TUV SAARLAND and SGS-FIMKO**

Have approved SGS-CSTC Standards Technical Services Co., Ltd., EMC Laboratory as a supplier of EMC TESTING SERVICES and SAFETY TESTING SERVICES.

- **CNAS (Lab Code: L0167)**

SGS-CSTC Standards Technical Services Co., Ltd., EMC Laboratory has been assessed and in compliance with CNAS-CL01:2006 accreditation criteria for testing laboratories (identical to ISO/IEC 17025:2005 General Requirements) for the Competence of Testing Laboratories.

- **FCC (Registration No.: 282399)**

SGS-CSTC Standards Technical Services Co., Ltd., EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 282399, May 31, 2002.

- **Industry Canada (Registration No.: 4620B-1)**

The 3m/10m Alternate Semi-anechoic chamber of SGS-CSTC Standards Technical Services Co., Ltd. has been registered by Certification and Engineering of Industry Canada for radio equipment testing with Registration No. 4620B-1.

- **VCCI (Registration No.: R-2460, C-2584, G-449 and T-1179)**

The 10m Semi-anechoic chamber and Shielded Room of SGS-CSTC Standards Technical Services Co., Ltd. have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: R-2460, C-2584, G-449 and T-1179 respectively.

- **CBTL (Lab Code: TL129)**

SGS-CSTC Standards Technical Services Co., Ltd., E&E Laboratory has been assessed and fully comply with the requirements of ISO/IEC 17025:2005, the Basic Rules, IECEE 01:2006-10 and Rules of procedure IECEE 02:2006-10, and the relevant IECEE CB-Scheme Operational documents.



## 6 Equipment Used during Test

RE in Chamber						
No.	Test Equipment	Manufacturer	Model No.	Serial No.	Cal.Due date	Calibration Interval
					(YYYY-MM-DD)	
EMC0525	Compact Semi-Anechoic Chamber	ChangZhou ZhongYu	N/A	N/A	2014-08-30	2Y
EMC0522	EMI Test Receiver	Rohde & Schwarz	ESIB26	100283	2014-05-06	1Y
EMC0056	EMI Test Receiver	Rohde & Schwarz	ESCI	100236	2014-03-04	1Y
EMC0528	RI High frequency Cable	SGS	20 m	N/A	2014-05-09	1Y
EMC2025	Trilog Broadband Antenna 30-3000MHz	SCHWARZBECK MESS-ELEKTRONIK	VULB 9163	9163-450	2016-08-31	3Y
EMC0524	Bi-log Type Antenna	Schaffner -Chase	CBL6112B	2966	2016-08-31	3Y
EMC0519	Bilog Type Antenna	Schaffner -Chase	CBL6143	5070	2014-06-02	2Y
EMC2026	Horn Antenna 1-18GHz	SCHWARZBECK MESS-ELEKTRONIK	BBHA 9120D	9120D-841	2016-08-31	3Y
EMC0518	Horn Antenna	Rohde & Schwarz	HF906	100096	2014-07-01	2Y
EMC0521	1-26.5 GHz Pre-Amplifier	Agilent	8449B	3008A01649	2014-03-04	1Y
EMC2065	Amplifier	HP	8447F	N/A	2014-08-31	1Y
EMC2063	1-26GHz Pre Amplifier	Compliance Direction System Inc.	PAP-1G26-48	6279.628	2014-07-29	1Y
EMC0075	310N Amplifier	Sonama	310N	272683	2014-03-04	1Y
EMC0523	Active Loop Antenna	EMCO	6502	42963	2014-04-07	2Y
EMC2041	Broad-Band Horn Antenna (14)15-26.5(40)GHZ	SCHWARZBECK MESS-ELEKTRONIK	BBHA 9170	9170-375	2014-06-01	3Y
EMC2069	2.4GHz filter	Micro-Tronics	BRM 50702	149	2014-06-05	1Y
EMC0530	10m Semi-Anechoic Chamber	ETS	N/A	N/A	2014-04-27	2Y



Conducted Emission						
No.	Test Equipment	Manufacturer	Model No.	Serial No.	Cal.Due date	Calibration Interval
					(YYYY-MM-DD)	
EMC0306	Shielding Room	Zhong Yu	8 x 3 x 3.8 m <sup>3</sup>	N/A	N/A	N/A
EMC0118	Two-line v-netwok	R&S	ENV216	100359	2014-03-04	1Y
EMC0102	LISN	SCHAFFNER CHASE	MN2050D/1	1421	2014-8-31	1Y
EMC2046	Artificial Mains Network (LISN)	AFJ Instruments	LT32C	S.N.320311201 50	2014-03-04	1Y
EMC0506	EMI Test Receiver	Rohde & Schwarz	ESCS30	100085	2014-03-04	1Y
EMC0107	Coaxial Cable	SGS	2m	N/A	2014-07-25	2Y
EMC0106	Voltage Probe	SGS	N/A	N/A	N/A	1Y
EMC0120	8 Line ISN	Fischer Custom Communications Inc.	FCC-TLISN-T8-02	20550	2014-8-31	1Y
EMC0121	4 Line ISN	Fischer Custom Communications Inc.	FCC-TLISN-T4-02	20549	2014-8-31	1Y
EMC0122	2 Line ISN	Fischer Custom Communications Inc.	FCC-TLISN-T2-02	20548	2014-8-31	1Y
EMC2047	CDN	Elektronik- Feinmechanik	L-801:AF2	2793	2014-11-11	3Y
EMC2048	CDN	Elektronik- Feinmechanik	L-801:M2/M3	2738	2014-11-11	3Y
EMC2062	6dB Attenuator	HP	8491A	24487	2014-01-04	1Y
EMC167	Conical metal housing	SGS-EMC	N/A	N/A	2013-12-16	1Y

General used equipment						
No.	Test Equipment	Manufacturer	Model No.	Serial No.	Cal.Due date	Calibration Interval
					(YYYY-MM-DD)	
EMC0006	DMM	Fluke	73	70681569	2013-11-5	1Y
EMC0007	DMM	Fluke	73	70671122	2013-11-5	1Y

## 7 Test Results

### 7.1 E.U.T. test conditions

**Test Voltage:** AC 120V, 60 Hz

**Temperature:** 20.0 -25.0 °C

**Humidity:** 38-50 % RH

**Atmospheric Pressure:** 1000 -1010 mbar

**Test frequencies and frequency range:** According to the 15.31(m) Measurements on intentional radiators or receivers, other than TV broadcast receivers, shall be performed and, if required, reported for each band in which the device can be operated with the device operating at the number of frequencies in each band specified in the following table:

According to the 15.33 (a) For an intentional radiator, the spectrum shall be investigated from the lowest radio frequency signal generated in the device, without going below 9 kHz, up to at least the frequency shown in the following table:

#### Number of fundamental frequencies to be tested in EUT transmit band

Frequency range in which device operates	Number of frequencies	Location in frequency range of operation
1 MHz or less	1	Middle
1 MHz to 10 MHz	2	1 near top and 1 near bottom
More than 10 MHz	3	1 near top, 1 near middle and 1 near bottom

#### Frequency range of radiated emission measurements

Lowest frequency generated in the device	Upper frequency range of measurement
9 kHz to below 10 GHz	10th harmonic of highest fundamental frequency or to 40 GHz, whichever is lower
At or above 10 GHz to below 30 GHz	5th harmonic of highest fundamental frequency or to 100 GHz, whichever is lower
At or above 30 GHz	5th harmonic of highest fundamental frequency or to 200 GHz, whichever is lower, unless otherwise specified



EUT channels and frequencies list:

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	27	2429	54	2456
1	2403	28	2430	55	2457
2	2404	29	2431	56	2458
3	2405	30	2432	57	2459
4	2406	31	2433	58	2460
5	2407	32	2434	59	2461
6	2408	33	2435	60	2462
7	2409	34	2436	61	2463
8	2410	35	2437	62	2464
9	2411	36	2438	63	2465
10	2412	37	2439	64	2466
11	2413	38	2440	65	2467
12	2414	39	2441	66	2468
13	2415	40	2442	67	2469
14	2416	41	2443	68	2470
15	2417	42	2444	69	2471
16	2418	43	2445	70	2472
17	2419	44	2446	71	2473
18	2420	45	2447	72	2474
19	2421	46	2448	73	2475
20	2422	47	2449	74	2476
21	2423	48	2450	75	2477
22	2424	49	2451	76	2478
23	2425	50	2452	77	2479
24	2426	51	2453	78	2480
25	2427	52	2454	/	/
26	2428	53	2455	/	/

Test frequencies are the lowest channel: 0 channel(2402 MHz), middle channel: 39 channel(2441 MHz) and highest channel: 78 channel(2480 MHz)

## 7.2 Antenna Requirement

### Standard requirement

15.203 requirement:

For intentional device. According to 15.203. an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

15.247(c) (1)(i) requirement:

(i) Systems operating in the 2400-2483.5 MHz bands that are used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

### EUT Antenna

The antenna is integrated on the main PCB and no consideration of replacement. The best case gain of the antenna is 3.0 dBi.



**Test result: The unit does meet the FCC requirements.**

### 7.3 Occupied Bandwidth


**Test Requirement:** FCC Part 15 C section 15.247

(a)(1) Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

**Test Method:** ANSI C63.10: Clause 6.9.1

**Test Status:** Pre-test the EUT in continuous transmitting mode at the lowest (2402 MHz), middle (2441 MHz) and highest (2480 MHz) channel with different data package. Compliance test in normal mode (DH5) and EDR mode (3DH5) as the worst case was found.

**Test Configuration:**

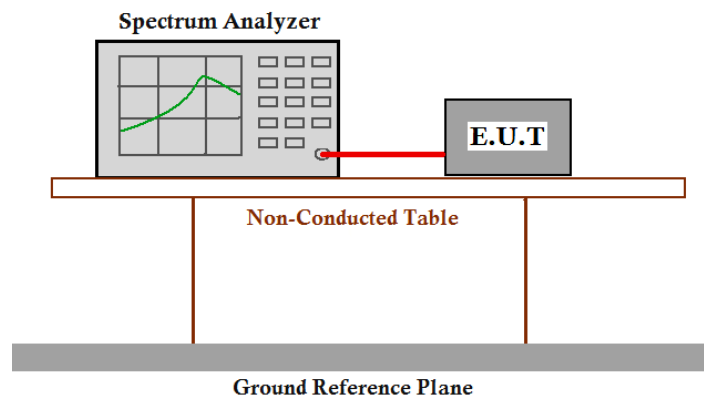

**Test Procedure:**

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer: Span = approximately 2 to 3 times the 20Db bandwidth, centring on a hopping channel;
3. Set the spectrum analyzer: RBW  $\geq$  1% of the 20dB bandwidth VBW  $\geq$  RBW. Sweep = auto; Detector Function = Peak. Trace = Max Hold.
4. Mark the peak frequency and -20 dB points bandwidth.



**Test result:**

**Normal mode:**

Test Channel	Bandwidth(MHz)	2/3 bandwidth(MHz)
Lowest	1.152	0.768
Middle	1.152	0.768
Highest	1.152	0.768

**EDR mode:**


Test Channel	bandwidth	2/3 bandwidth
Lowest	1.413	0.942
Middle	1.393	0.929
Highest	1.393	0.929




Result plot as follows:

Normal mode (DH5):


Lowest Channel(2.402 GHz):

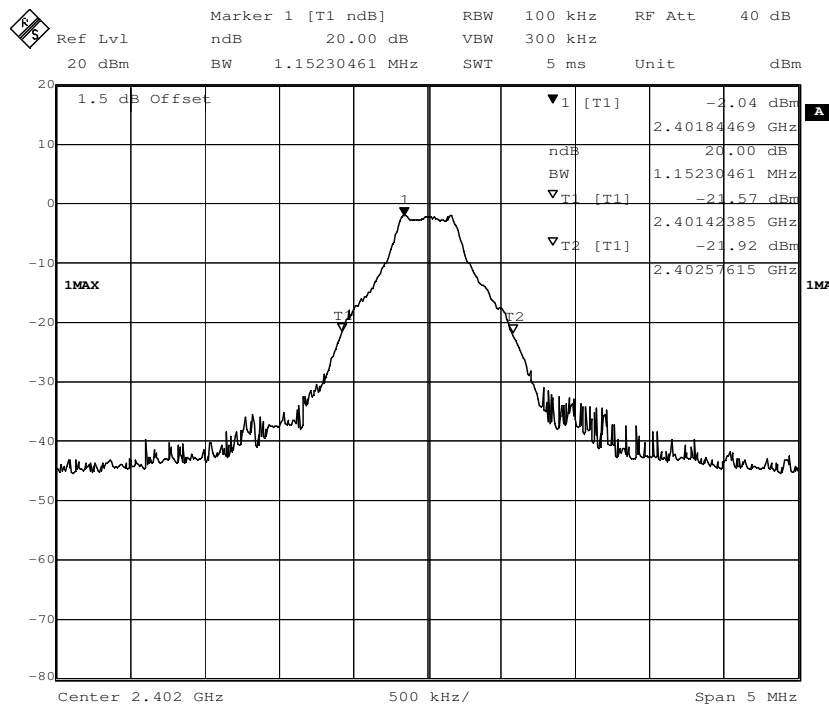

Middle Channel(2.441 GHz):

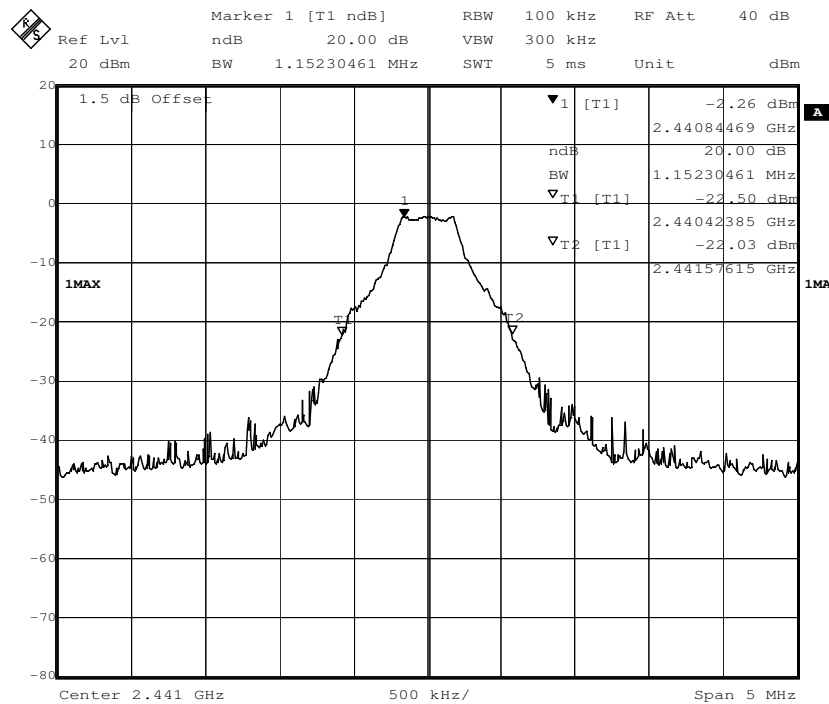


Highest Channel(2.480 GHz):

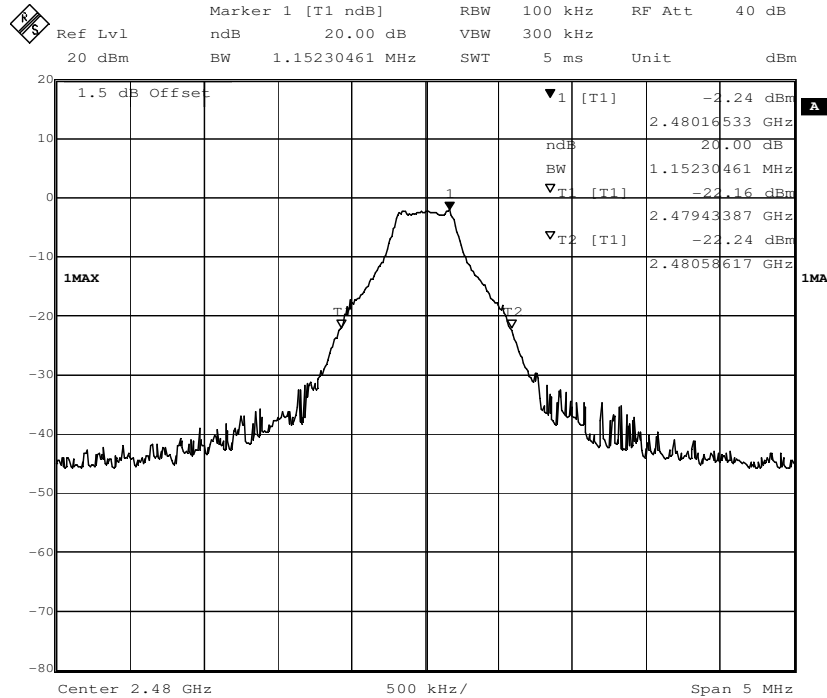


EDR mode (3DH5):


Lowest channel(2.402 GHz):

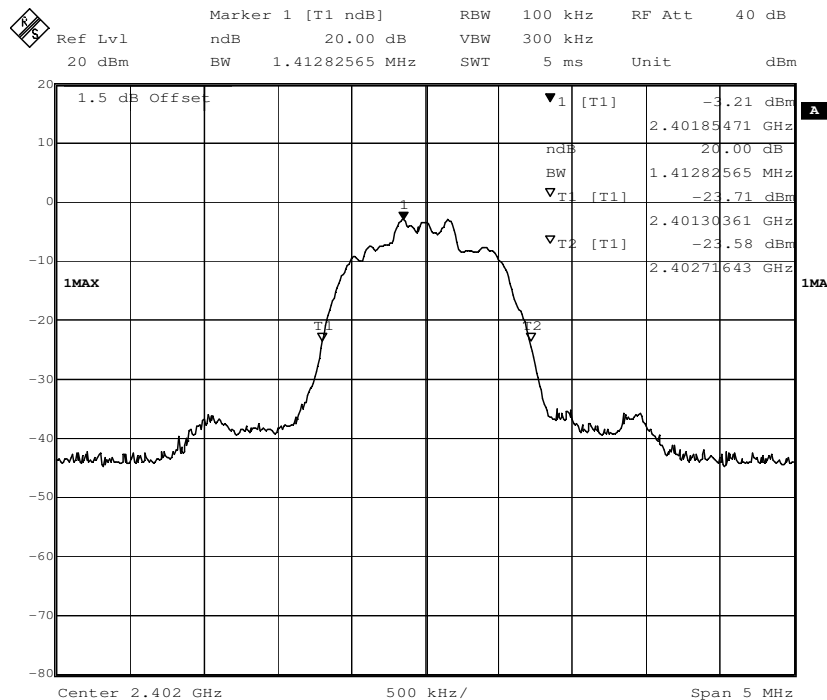

Middle channel(2.441 GHz):

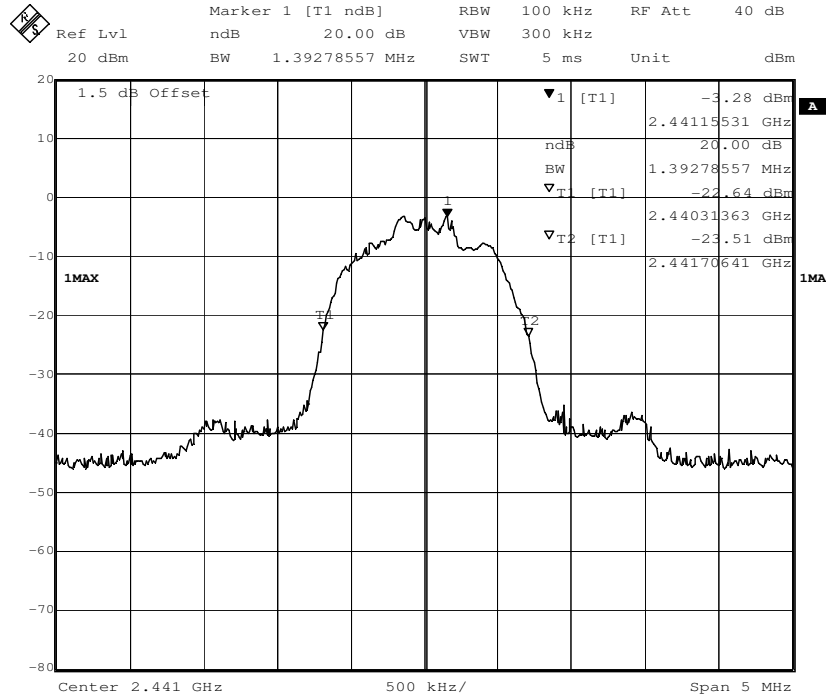

Highest channel(2.480 GHz):

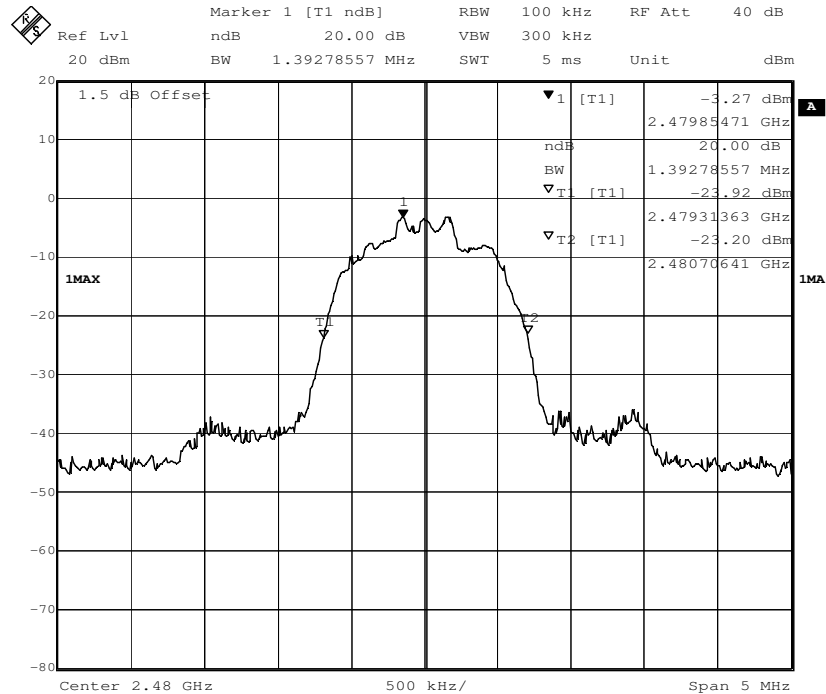

## 7.4 Carrier Frequencies Separated


**Test Requirement:** FCC Part 15 C section 15.247

(a),(1) Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

**Test Method:** ANSI C63.10: Clause 7.7.2

**Test Status:** Pre-test the EUT in continuous transmitting mode at the lowest (2402 MHz), middle (2441 MHz) and highest (2480 MHz) channel and hopping mode with different data packet. Compliance test in hopping with EDR mode (3DH5) as the worst case was found.

**Test Configuration:**

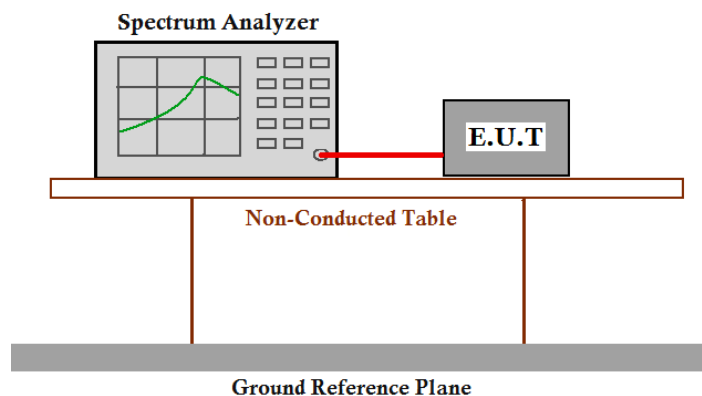

**Test Procedure:**

1. Remove the antenna from the EUT and then connect a low attenuation RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW  $\geq$  1% of the span, VBW  $\geq$  RBW,. Sweep = auto; Detector Function = Peak. Trace = Max, hold.
3. Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section. Submit this plot.



**Test result:**


Test Channel	Carrier Frequencies Separated	Pass/Fail
Lower Channels (channel 0 and channel 1)	1.002MHz	Pass
Middle Channels (channel 39 and channel 40)	1.022MHz	Pass
Upper Channels (channel 77 and channel 78)	1.002MHz	Pass

**Remark:**


The limit is maximum two-thirds of the 20 dB bandwidth: 942 KHz.

**Result plot as follows:**


**Lowest Channels: Carrier Frequencies Separated**

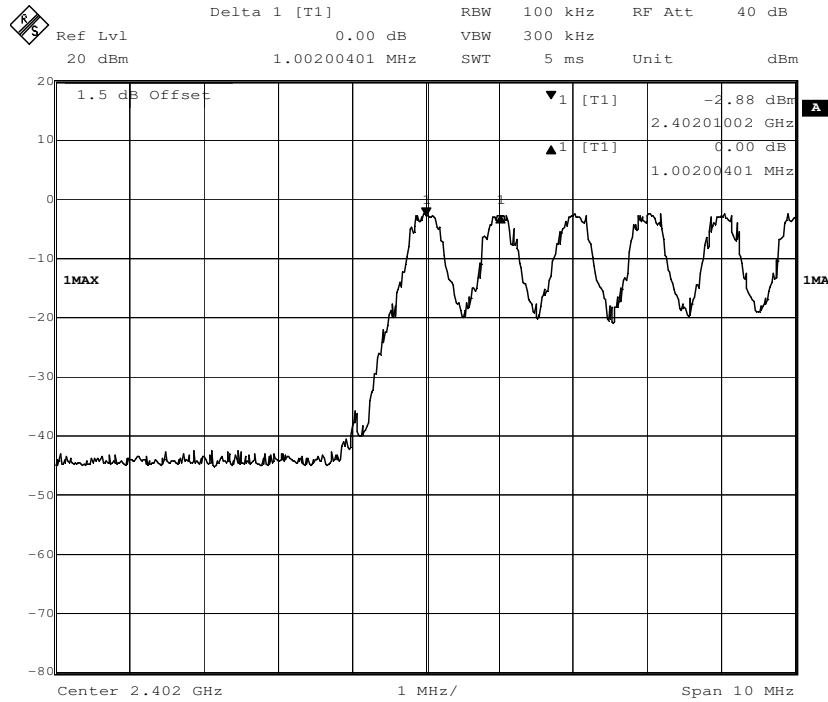

**Middle Channels: Carrier Frequencies Separated**

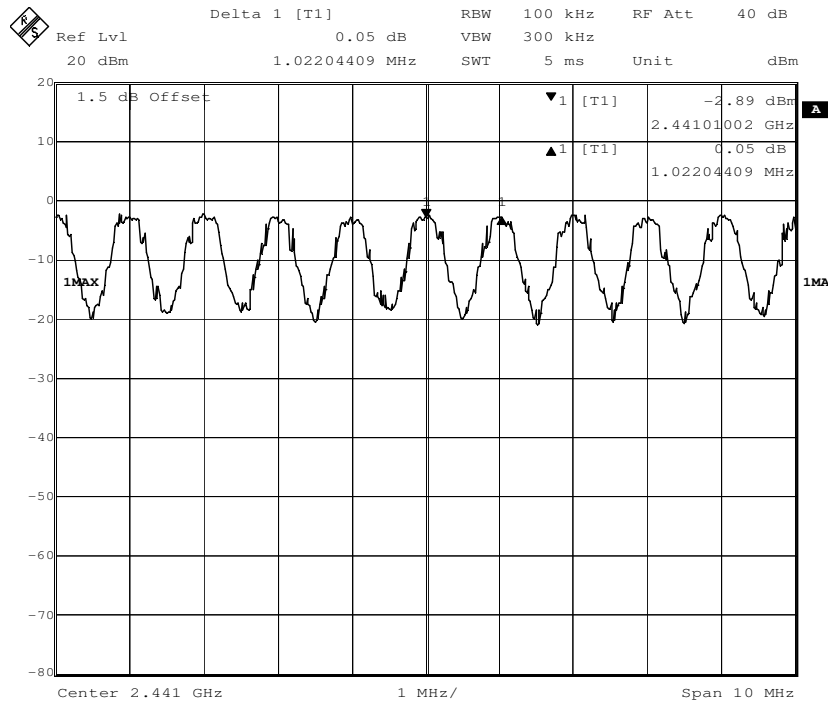

Highest Channels: **Carrier Frequencies Separated**

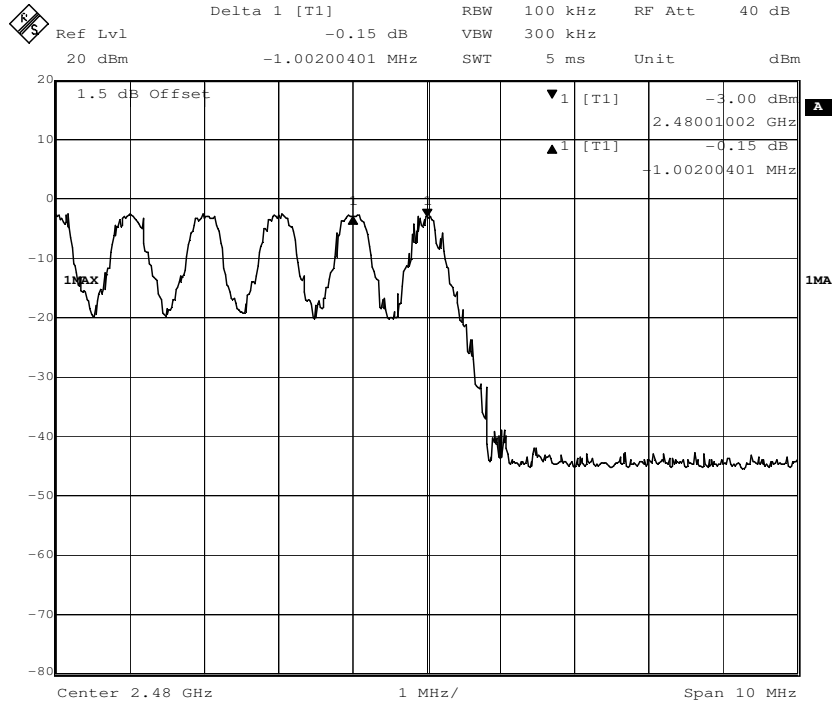

**Test result: The unit does meet the FCC requirements.**

## 7.5 Hopping Channel Number


**Test Requirement:** FCC Part15 C section 15.247

(a)(1)(iii) Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.

**Test Method:** ANSI C63.10: Clause 7.7.3

**Test Status:** Pre-test the EUT in hopping mode with different data packet. Compliance test in hopping with EDR mode (3DH5) as the worst case was found.

**Test Configuration:**

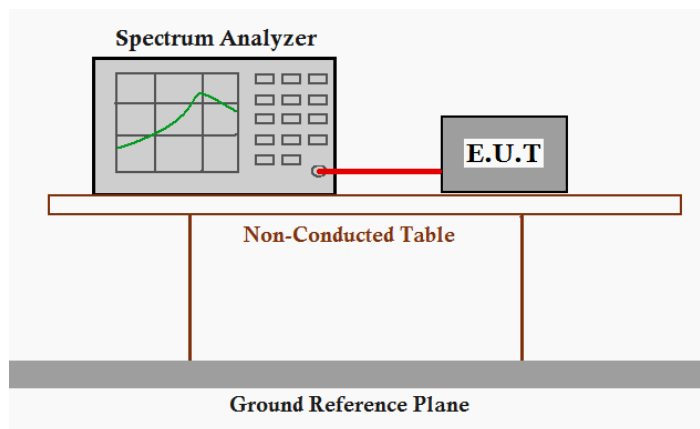


**Test Procedure:**

1. Remove the antenna from the EUT and then connect a low attenuation RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 100 kHz. VBW = 100 kHz. Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. It may prove necessary to break the span up to sections. in order to clearly show all of the hopping frequencies. The limit is specified in one of the subparagraphs of this Section.
4. Set the spectrum analyzer: start frequency = 2400 MHz. stop frequency = 2483.5 MHz. Submit the test result graph.





Test result: Total channels are 79 channels.

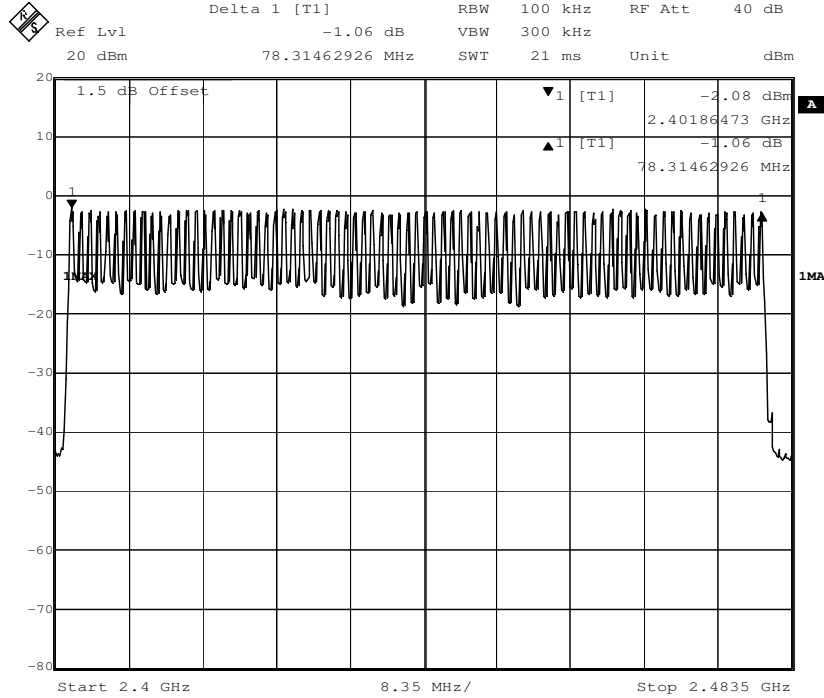

Test result: The unit does meet the FCC requirements.

## 7.6 Dwell Time


**Test Requirement:** FCC Part 15 C section 15.247

(a)(1)(iii) Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

**Test Method:** ANSI C63.10: Clause 7.7.4

**Test Status:** Test the EUT in hopping mode at the lowest (2402 MHz), middle (2441 MHz) and highest (2480 MHz) channel with different data packet. Compliance test in hopping mode with EDR mode (3DH1, 3DH3 and 3DH5) as the worst case was found.

**Test Configuration:**

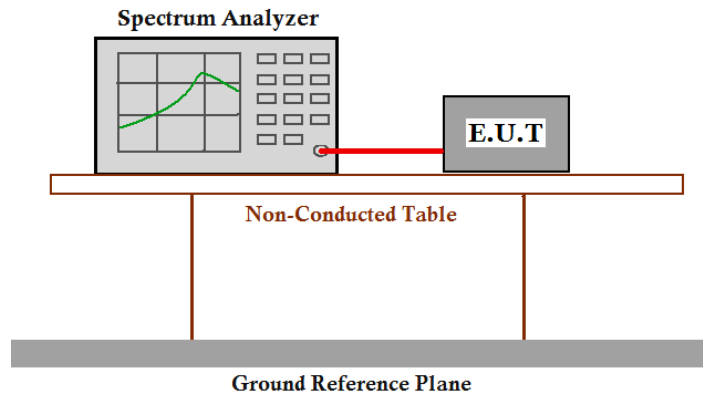

**Test Procedure:**

1. Remove the antenna from the EUT and then connect a low attenuation RF cable from the antenna port to the spectrum.
2. Set spectrum analyzer span = 0. centered on a hopping channel;
3. Set RBW = 1 MHz and VBW = 1 MHz. Sweep = as necessary to capture the entire dwell time per hopping channel. Detector Function = Peak. Trace = Max hold;
4. Use the marker-delta function to determine the dwell time. If this value varies with different modes of operation (e.g.. data rate. modulation format. etc.). Repeat this test for each variation. The limit is specified in one of the subparagraphs of this Section. Submit this plot(s). An oscilloscope may be used instead of a spectrum analyzer.



**Test Result:**

The test period: T= 0.4 Second/Channel x 79 Channel = 31.6 s

<b>1. Channel 0: 2.402GHz</b>						
3DH1 time slot	=	0.393	(ms)	*	33	* (31.6/3.16) = 129.690 ms
3DH3 time slot	=	1.654	(ms)	*	16	* (31.6/3.16) = 264.640 ms
3DH5 time slot	=	2.897	(ms)	*	11	* (31.6/3.16) = 318.670 ms
<b>2. Channel 39: 2.441GHz</b>						
3DH1 time slot	=	0.393	(ms)	*	33	* (31.6/3.16) = 129.690 ms
3DH3 time slot	=	1.654	(ms)	*	16	* (31.6/3.16) = 264.640 ms
3DH5 time slot	=	2.914	(ms)	*	11	* (31.6/3.16) = 320.540 ms
<b>3. Channel 78: 2.480GHz</b>						
3DH1 time slot	=	0.401	(ms)	*	33	* (31.6/3.16) = 132.330 ms
3DH3 time slot	=	1.654	(ms)	*	16	* (31.6/3.16) = 264.640 ms
3DH5 time slot	=	2.897	(ms)	*	11	* (31.6/3.16) = 318.670 ms

The average time of occupancy in the specified 31.6 second period is equal to pulse width\*(# of pulse in observation period)\*(test period / observation period)

The results are not greater than 0.4 seconds.


**The unit does meet the FCC requirements.**

Result plot as follows:


1. Lowest channel (2.402 GHz):

(1). 3DH1

Pulse Width:

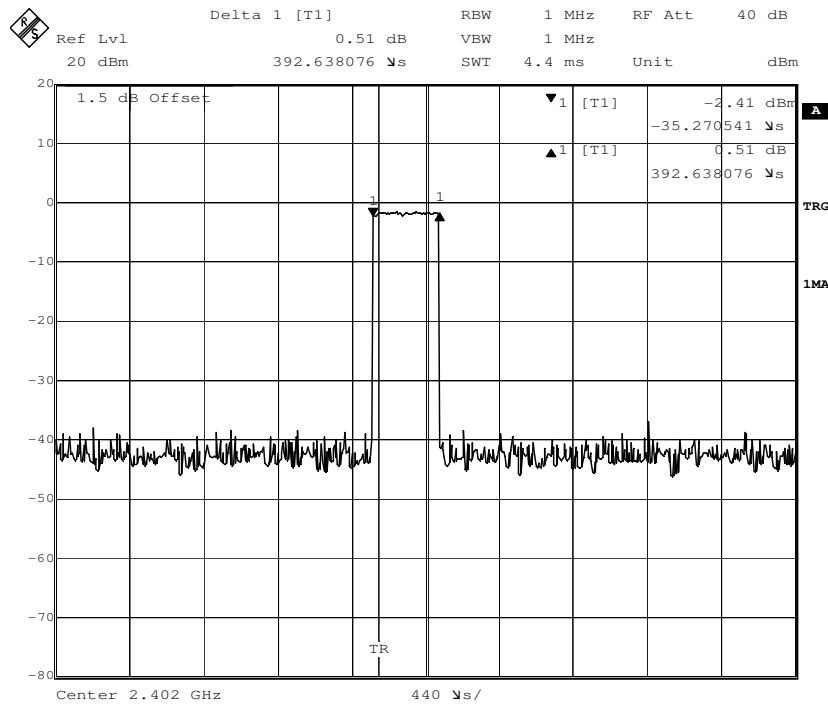


Number of Pulses in 3.16 S observation period:

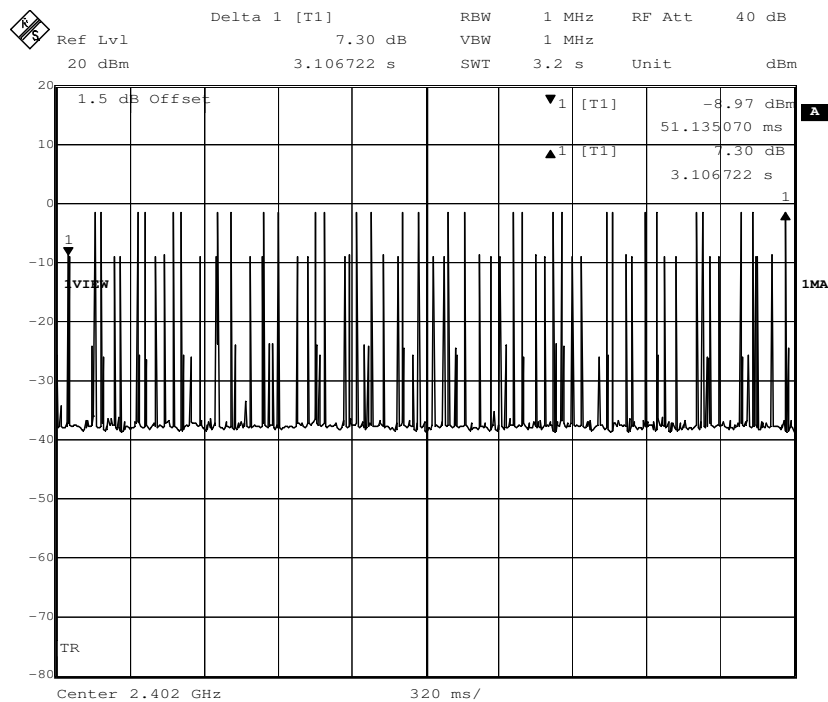




(2) 3DH3

Pulse Width:

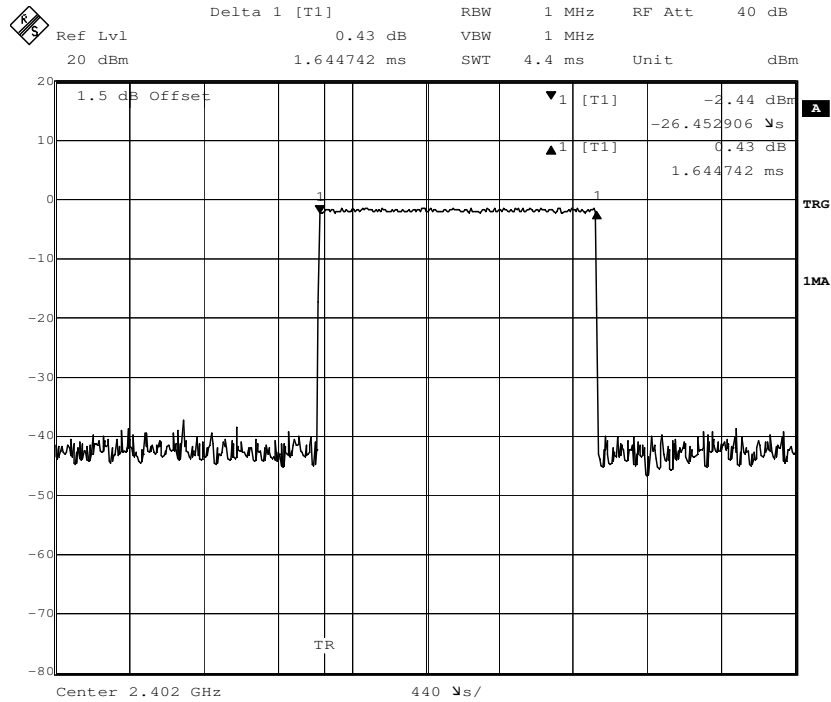

Number of Pulses in 3.16 S observation period:

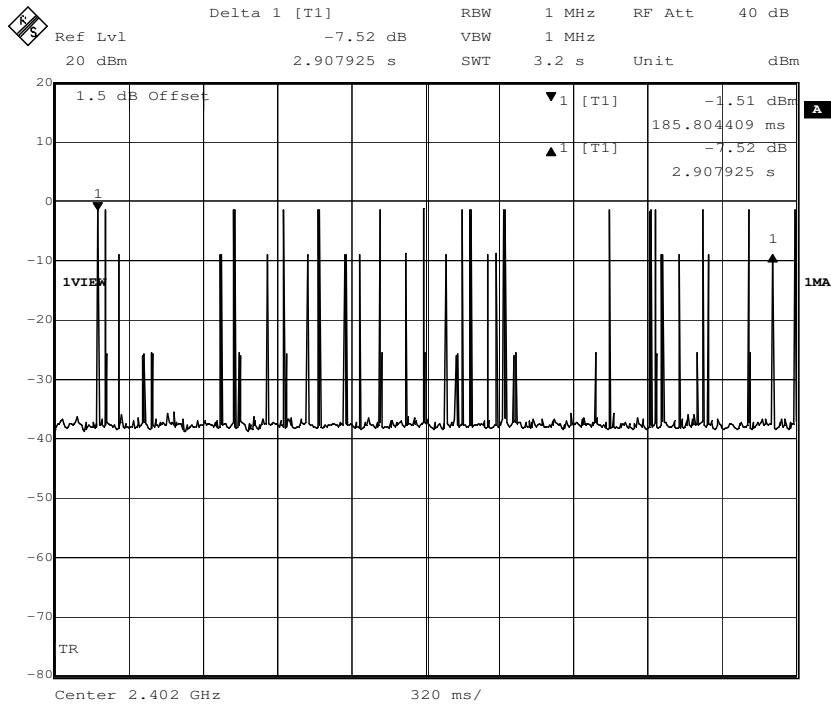





**2. Middle Channel (2.441 GHz):**

(1). 3DH1

Pulse Width:

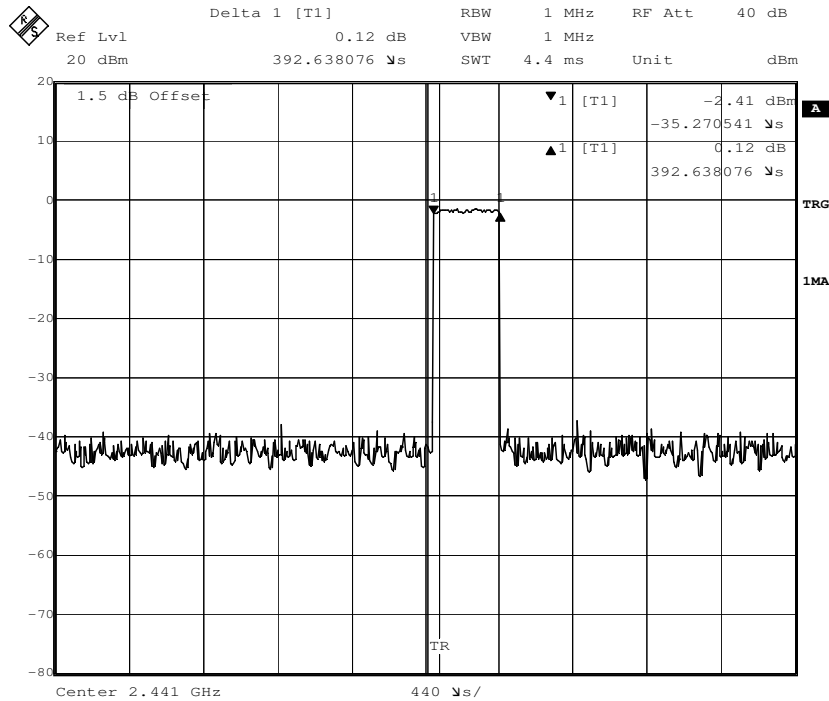


Number of Pulses in 3.16 S observation period:

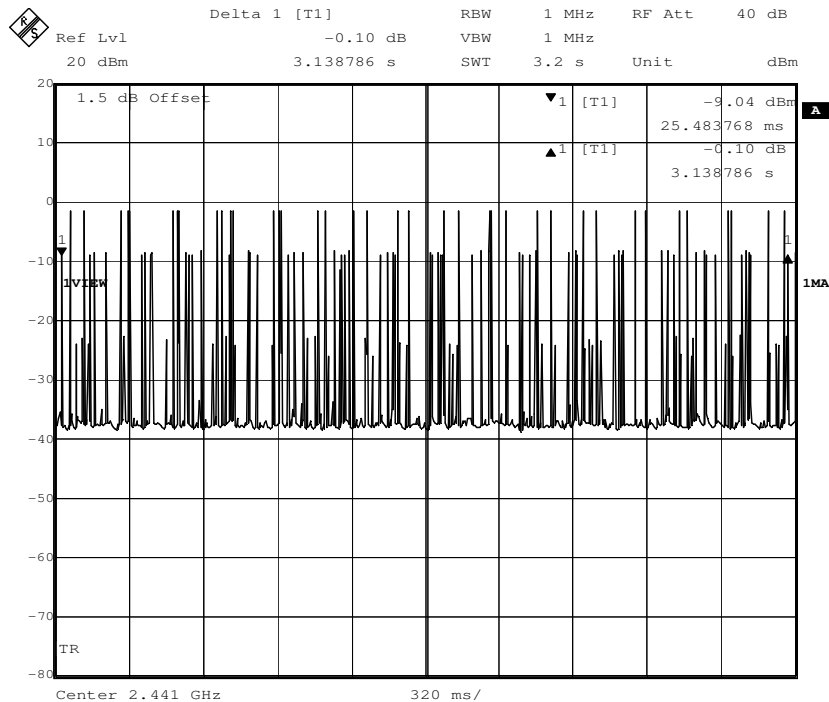


(2) 3DH3

Pulse Width:

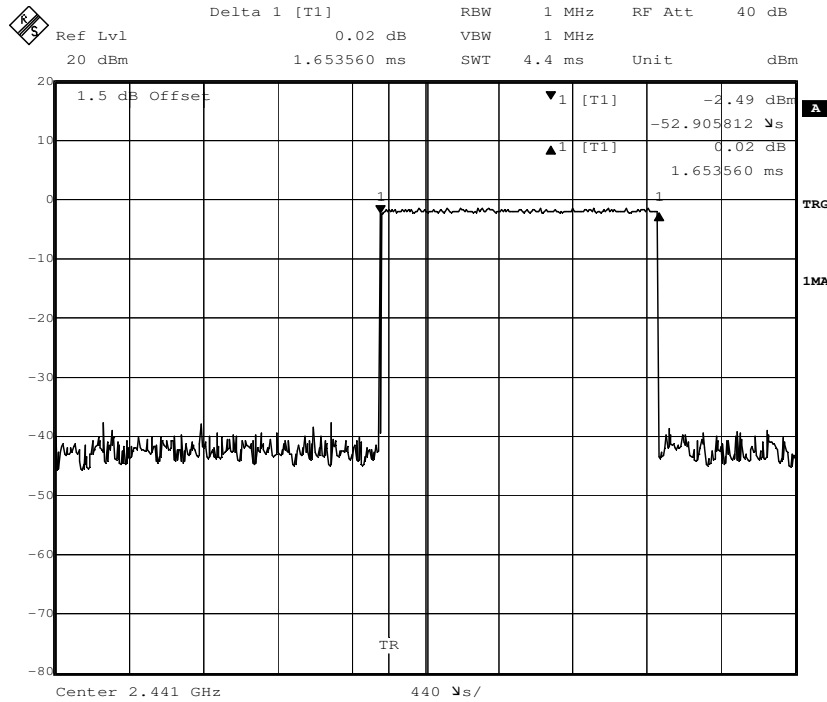


Number of Pulses in 3.16 S observation period:

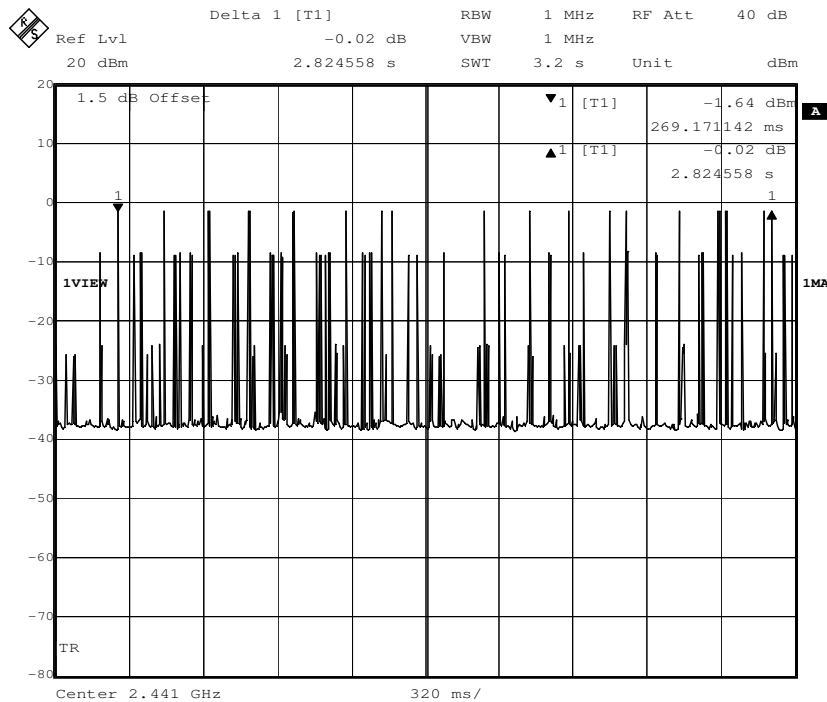




(3) 3DH5

Pulse Width:

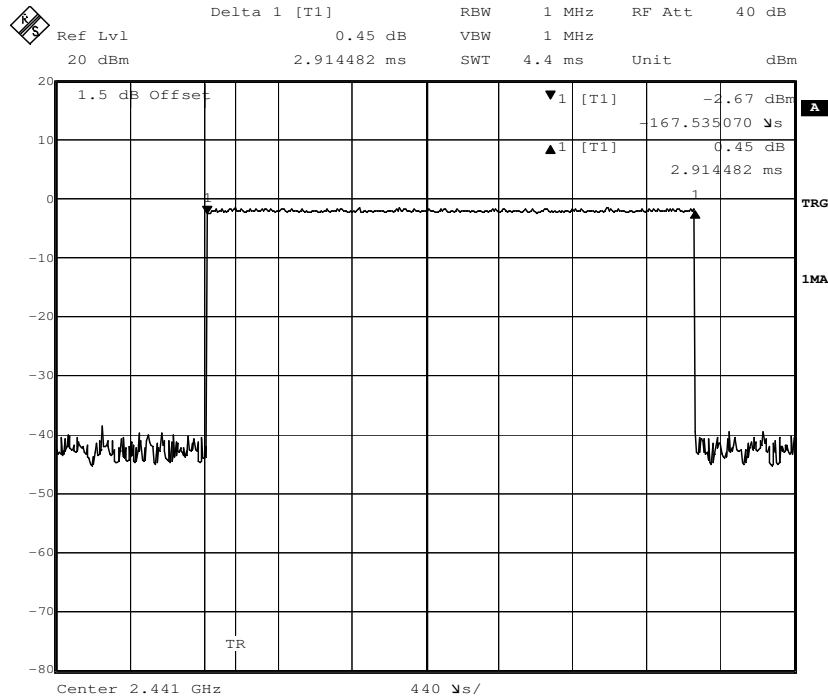


Number of Pulses in 3.16 S observation period:

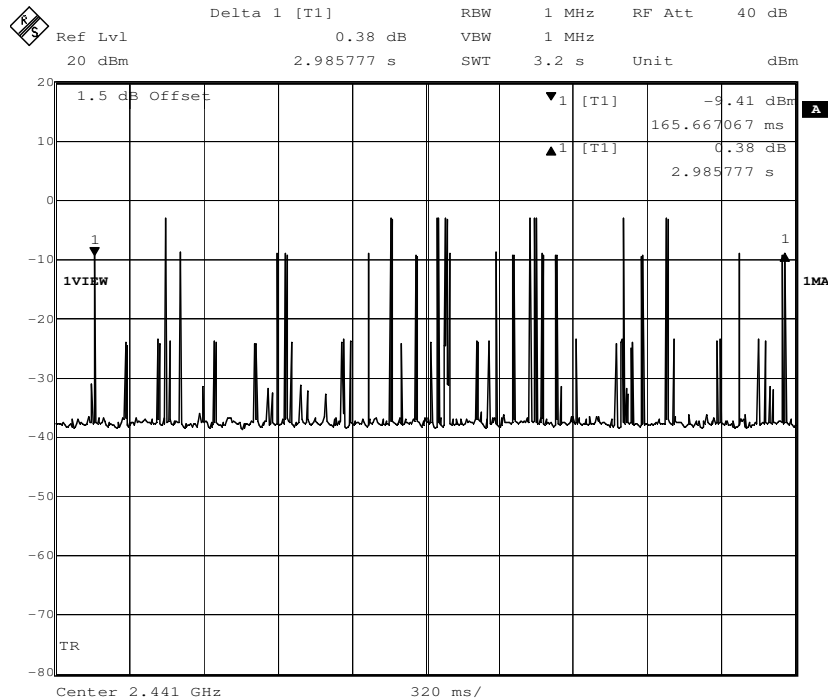


**3. Highest Channel (2.48 GHz):**

(1). 3DH1

Pulse Width:

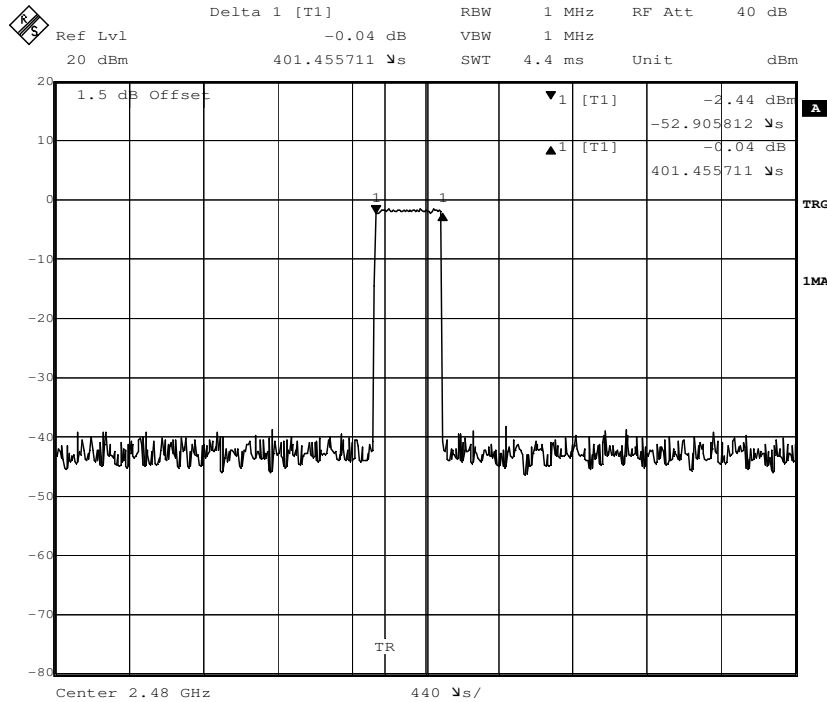


Number of Pulses in 3.16 S observation period:

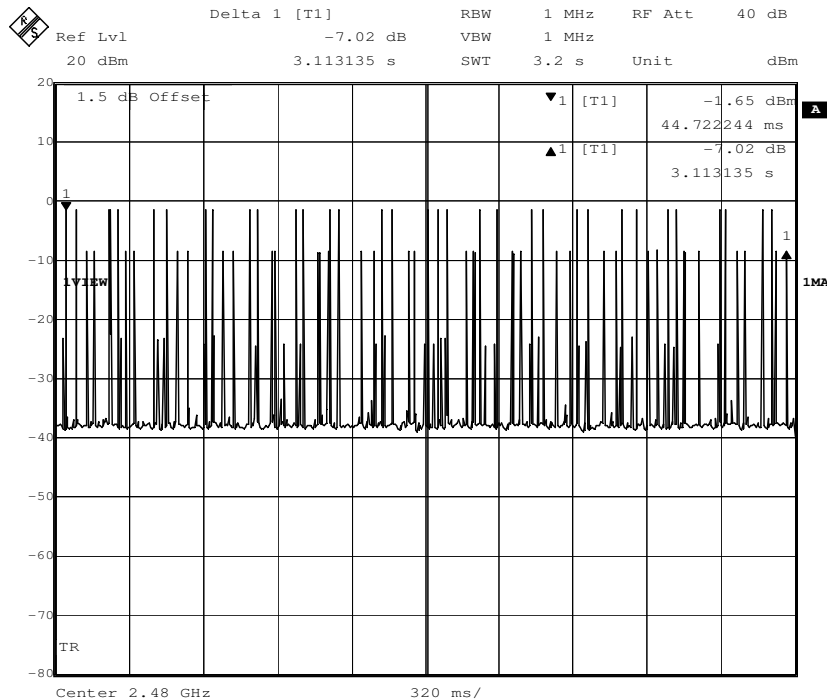


(2) 3DH3

Pulse Width:

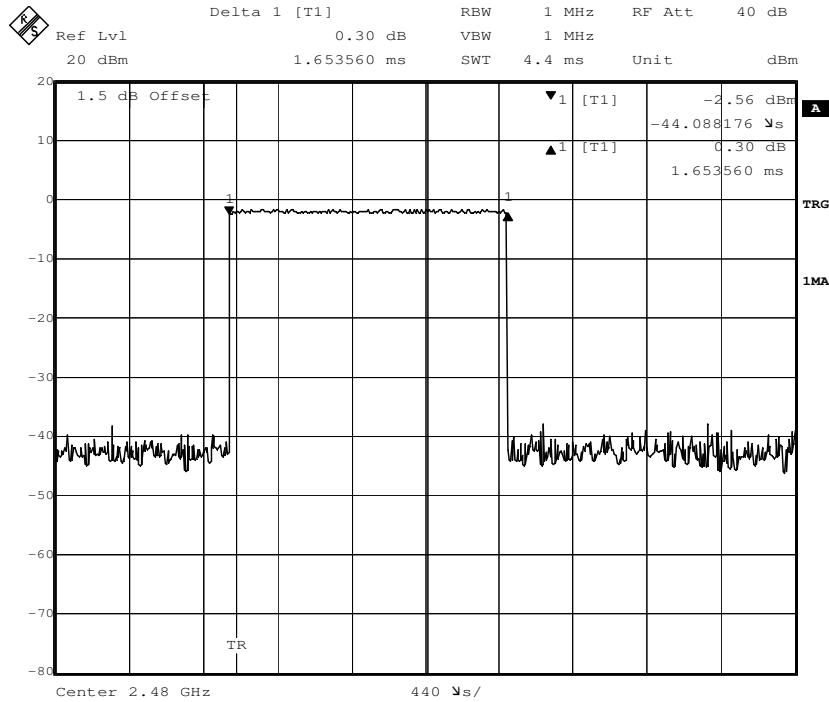


Number of Pulses in 3.16 S observation period:

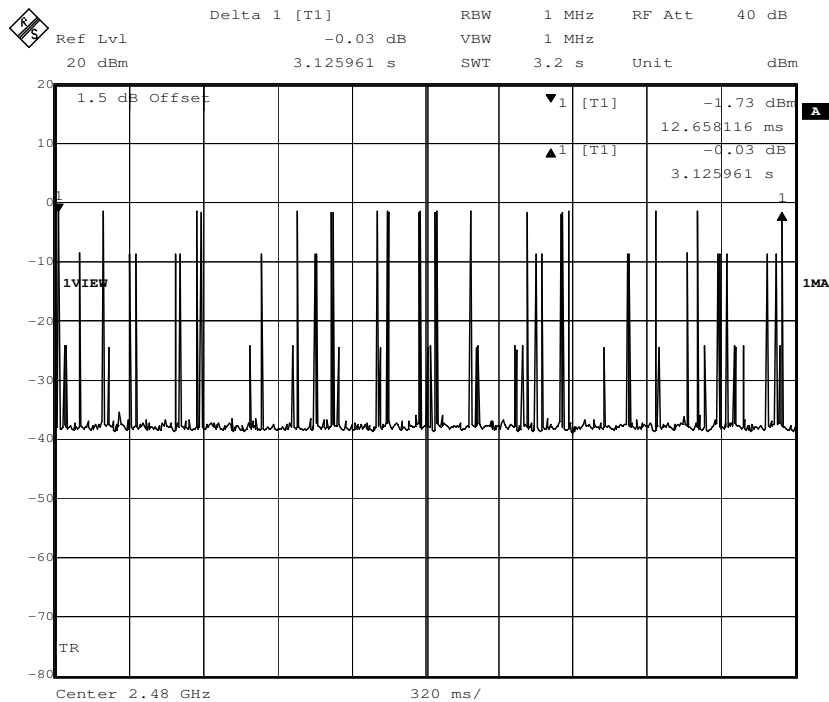


(3) 3DH5

Pulse Width:

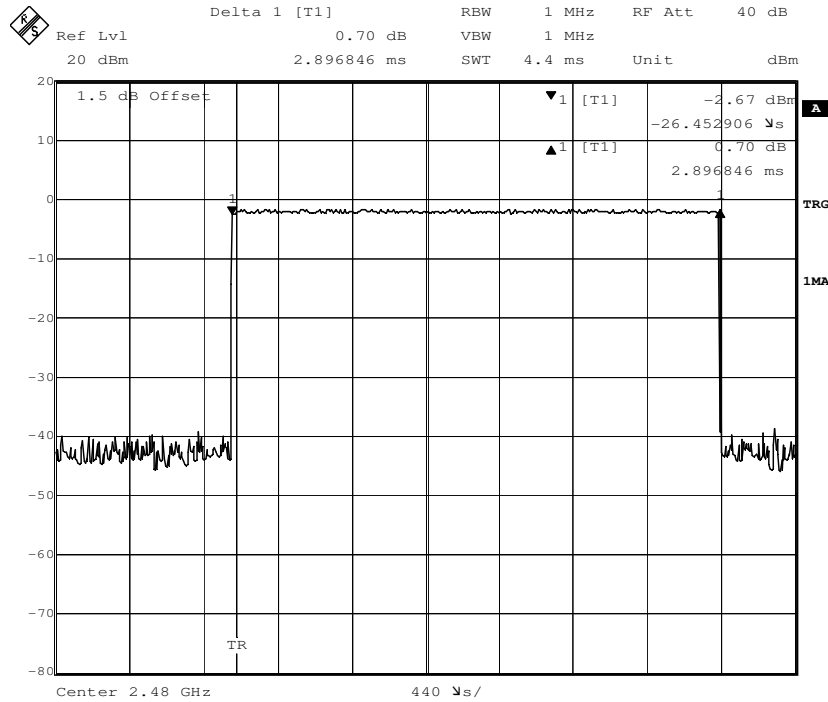

Number of Pulses in 3.16 S observation period:

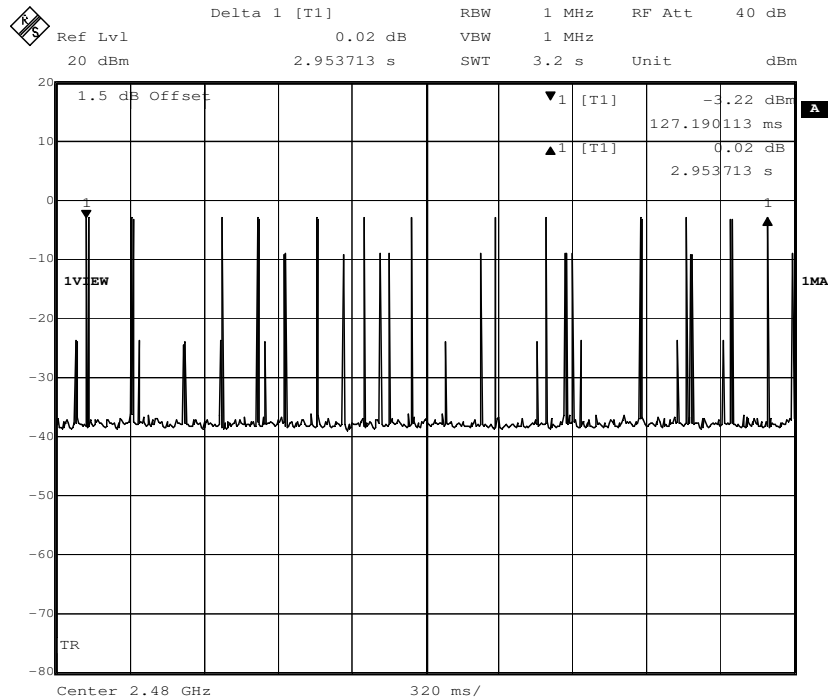



## 7.7 Pseudorandom Frequency Hopping Sequence

### 7.7.1 Standard requirement

15.247(a)(1) requirement:


Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

Alternatively. Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a Pseudorandom ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

### 7.7.2 EUT Pseudorandom Frequency Hopping Sequence


The pseudorandom sequence may be generated in a nine-stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first ONE of 9 consecutive ONES; i.e. the shift register is initialized with nine ones.

- Number of shift register stages: 9
- Length of pseudo-random sequence:  $2^9 - 1 = 511$  bits
- Longest sequence of zeros: 8 (non-inverted signal)

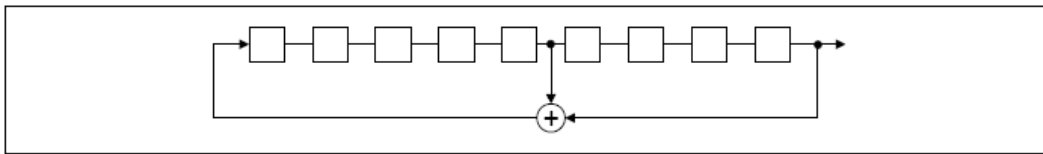

*Linear Feedback Shift Register for Generation of the PRBS sequence*

An example of Pseudorandom Frequency Hopping Sequence as follow:

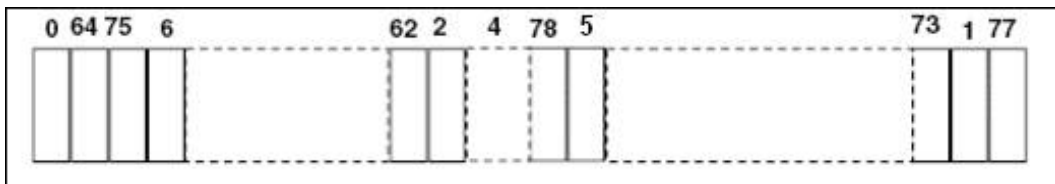

Each frequency used equally on the average by each transmitter.

The system receivers have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shift frequencies in synchronization with the transmitted signals.

## 7.8 Maximum Peak Output Power

**Test Requirement:** FCC Part 15 C section 15.247

(b)(1) For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.


Refer to the result "Hopping channel number" of this document. The 1 watt (30.0 dBm) limit applies.

**Test Method:** ANSI C63.10: Clause 6.10.1

**Test Limit:**

**Test mode:** Pre-test the EUT in continuous transmitting mode at the lowest (2402 MHz), middle (2441 MHz) and highest (2480 MHz) channel with different data packet. Compliance test in continuous transmitting mode with normal (DH5) and EDR mode (3DH5) as the worst case was found.

**Test Configuration:**

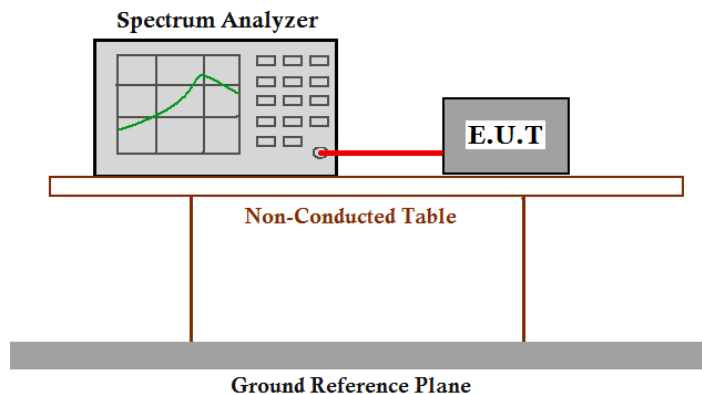

**Test Procedure:**

1. Remove the antenna from the EUT and then connect a low attenuation RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 2 MHz. VBW = 2 MHz. Sweep = auto; Detector Function = Peak.
3. Keep the EUT in transmitting at lowest, medium and highest channel individually. Record the max value.




<b>Test Result:</b>				
<b>Normal mode:</b>				
Test Channel	Fundamental Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Result
Lowest	2402	-1.62	30.0	Pass
Middle	2441	-1.56	30.0	Pass
Highest	2480	-1.42	30.0	Pass
<b>EDR mode:</b>				
Test Channel	Fundamental Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Result
Lowest	2402	-2.82	30.0	Pass
Middle	2441	-2.48	30.0	Pass
Highest	2480	-2.41	30.0	Pass
<b>Remark: cable lose=1.5 dB</b>				
<b>Test result: The unit does meet the FCC requirements.</b>				




**Result plot as follows:**

**Normal mode:**


**Lowest Channel(2.402 MHz):**

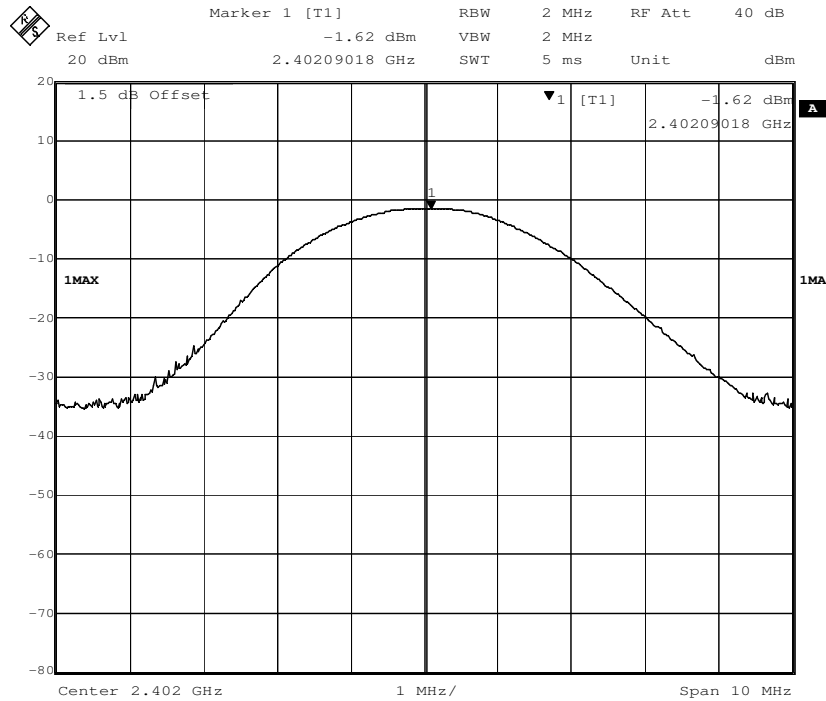

**Middle Channel(2.441 GHz):**

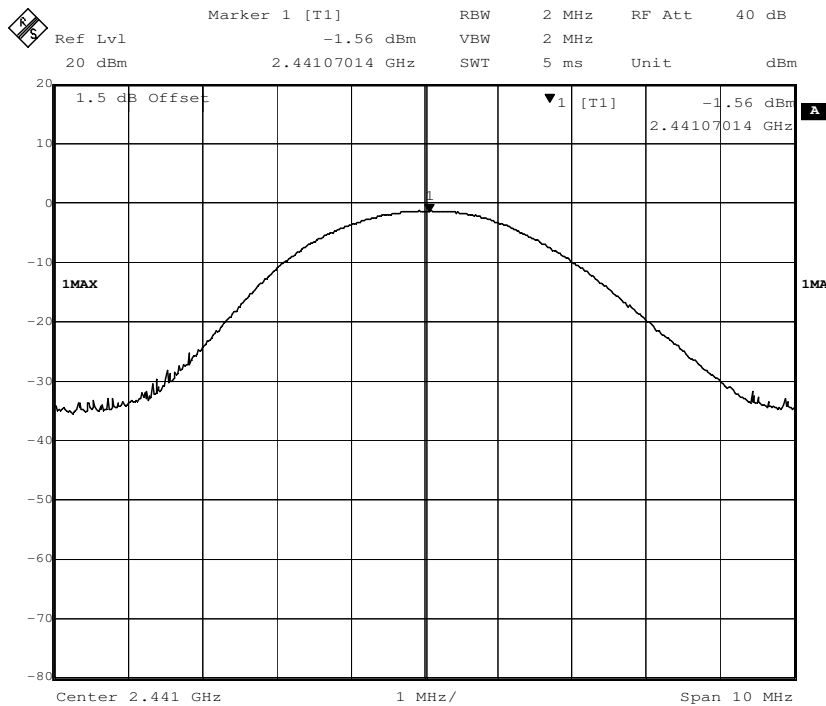


Highest Channel(2.480 GHz):

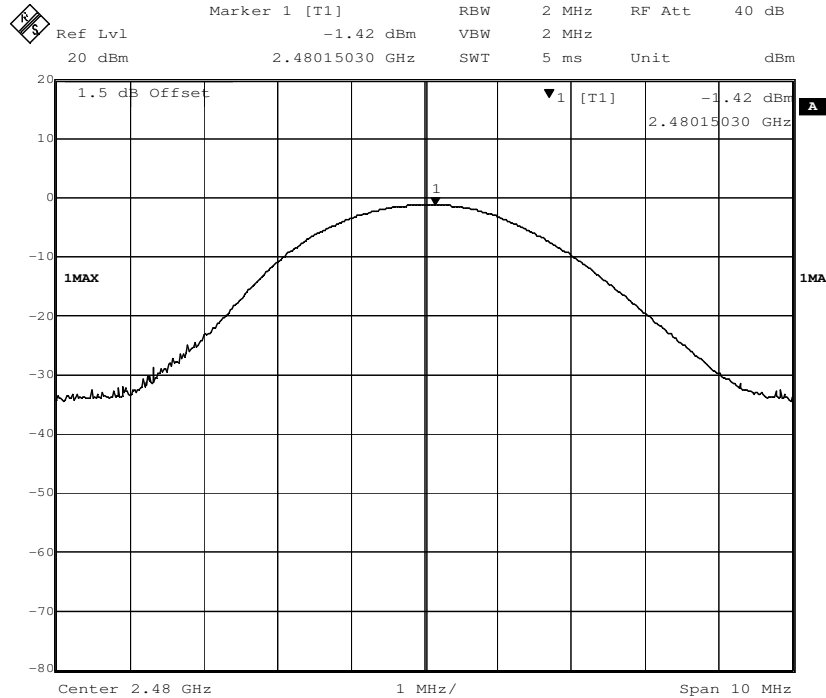


EDR mode:

Lowest channel(2.402 GHz):

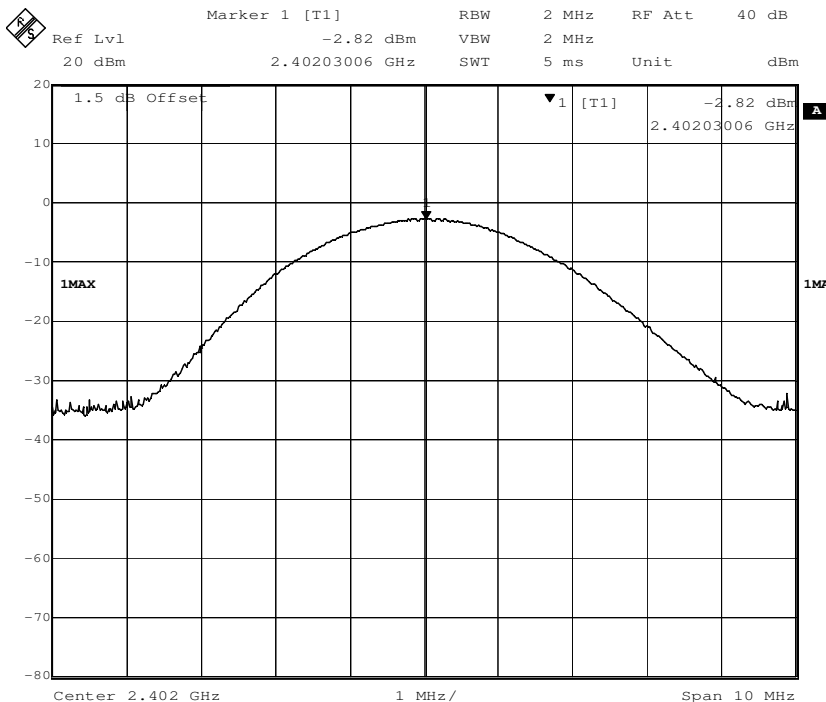

Middle channel(2.441 GHz):

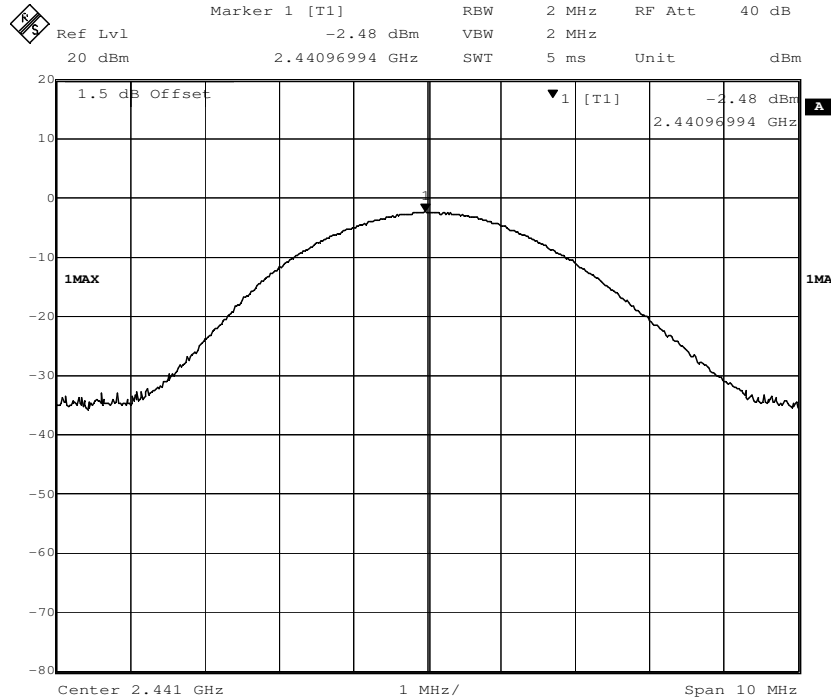

Highest channel(2.480 GHz):



## 7.9 Conducted Spurious Emissions


**Test Requirement:** FCC Part15 C section 15.247

(d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating. The radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power. Based on either an RF conducted or a radiated measurement. Provided the transmitter demonstrates compliance with the peak conducted power limits.

**Test Method:** ANSI C63.10: Clause 6.7

**Test Status:** Pre-test the EUT in continuous transmitting mode at the lowest (2402 MHz), middle (2441 MHz) and highest (2480 MHz) channel with different data packet. Compliance test in continuous transmitting mode with normal mode (DH5) as the worst case was found.

**Test Configuration:**

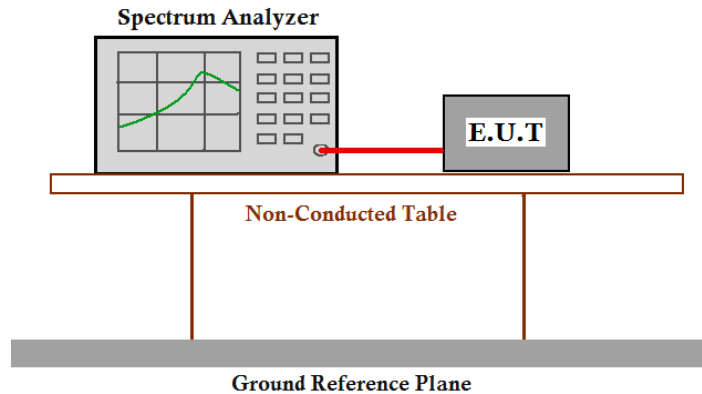


**Test Procedure:**


1. Remove the antenna from the EUT and then connect a low attenuation RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 100 kHz. VBW  $\geq$  RBW. Sweep = auto; Detector Function = Peak (Max. hold).

Result plot as follows:

Lowest Channel: 30 M to 25 GHz

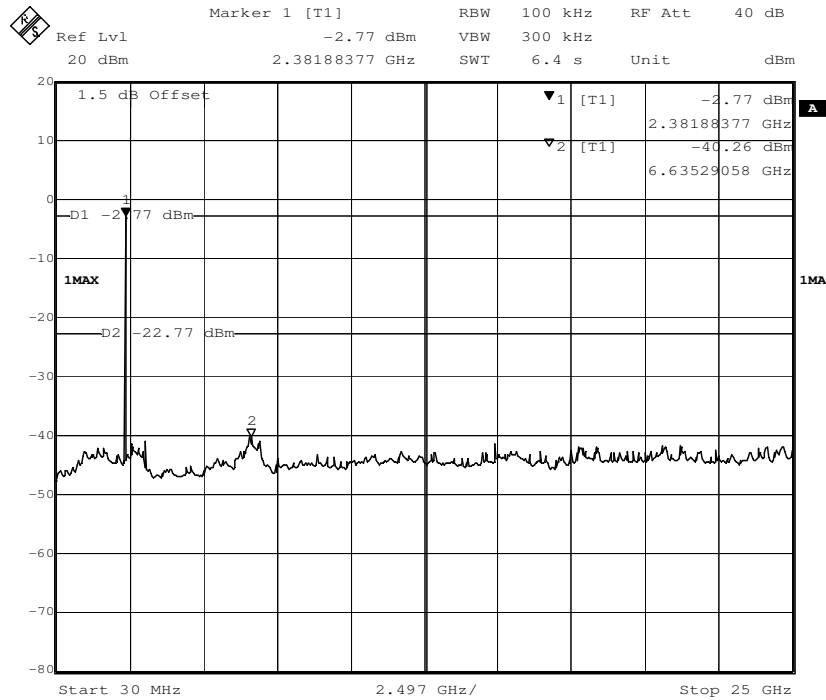


Middle Channel: 30 M to 25 GHz

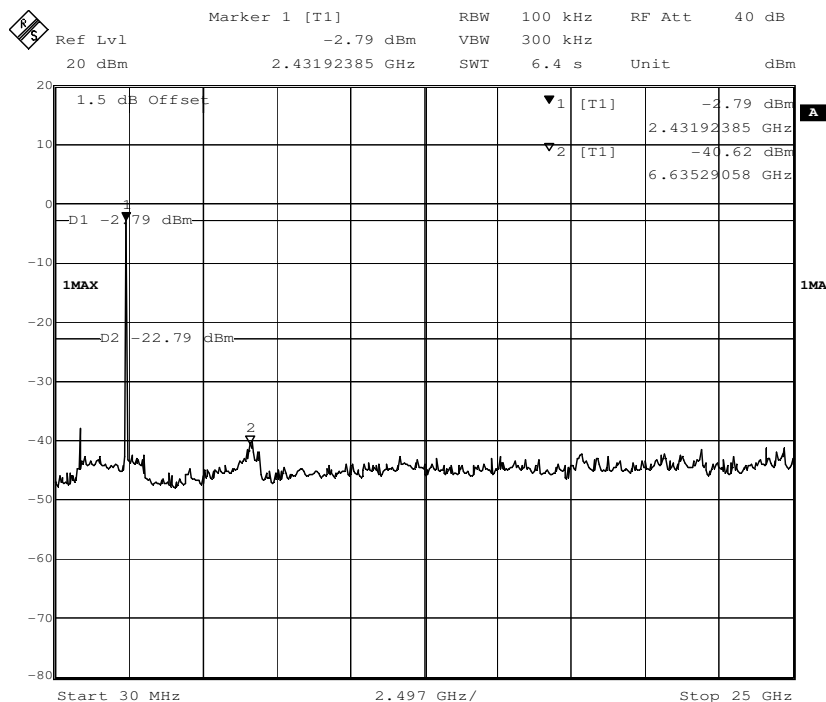



Highest Channel: 30 M to 25 GHz

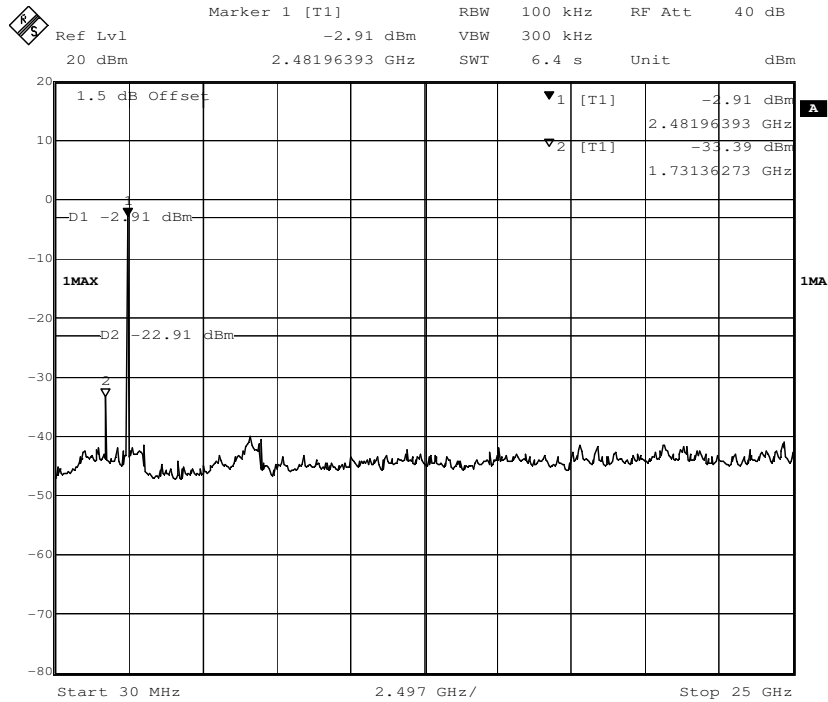


## 7.10 Radiated Spurious Emissions


<b>Test Requirement:</b>	FCC Part15 C section 15.247  (d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating. The radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, and provided the transmitter demonstrates compliance with the peak conducted power limits.
<b>Test Method:</b>	ANSI C63.10: Clause 6.4, 6.5 and 6.6
<b>Test Status:</b>	Pre-test the EUT in continuous transmitting mode at the lowest (2402 MHz), middle (2441 MHz) and highest (2480 MHz) channel with different data packet. Compliance test in continuous transmitting mode with normal mode (DH5) as the worst case was found.
<b>Detector:</b>	For PK value: RBW = 1 MHz for $f \geq 1$ GHz, 100 kHz for $f < 1$ GHz VBW $\geq$ RBW Sweep = auto Detector function = peak Trace = max hold For AV value: RBW = 1 MHz for $f \geq 1$ GHz, 100 kHz for $f < 1$ GHz VBW = 10 Hz Sweep = auto Detector function = peak Trace = max hold
15.209 Limit:	40.0 dB $\mu$ V/m between 30MHz & 88MHz 43.5 dB $\mu$ V/m between 88MHz & 216MHz 46.0 dB $\mu$ V/m between 216MHz & 960MHz 54.0 dB $\mu$ V/m above 960MHz

**Test Configuration:**

- 1) 9 kHz to 30 MHz emissions:

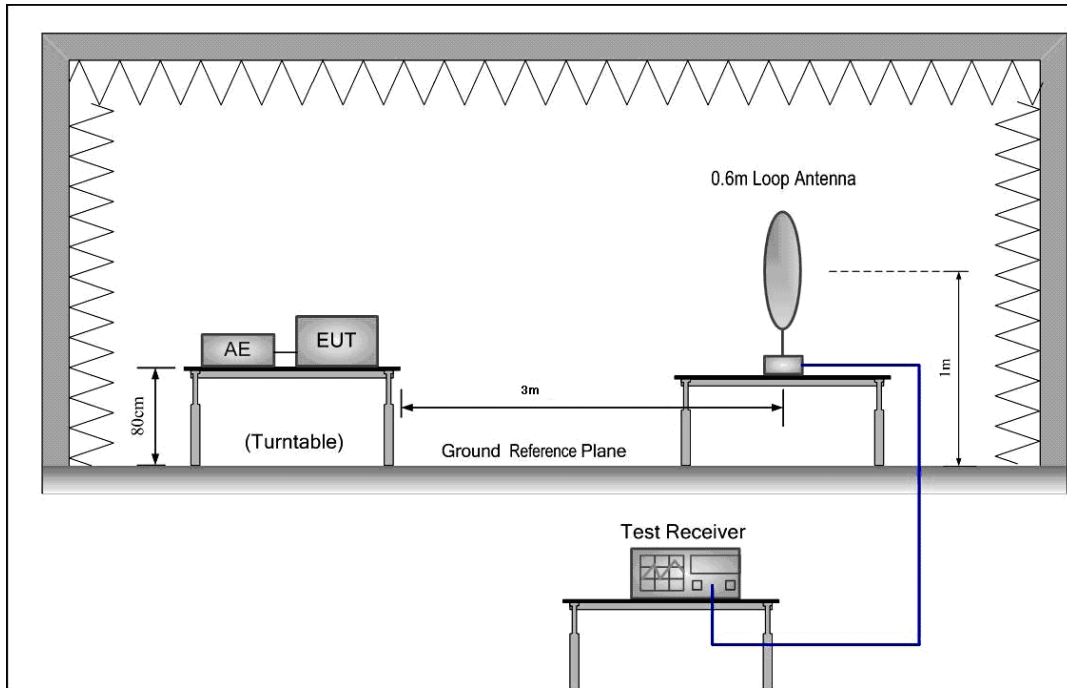


- 2) 30 MHz to 1 GHz emissions:

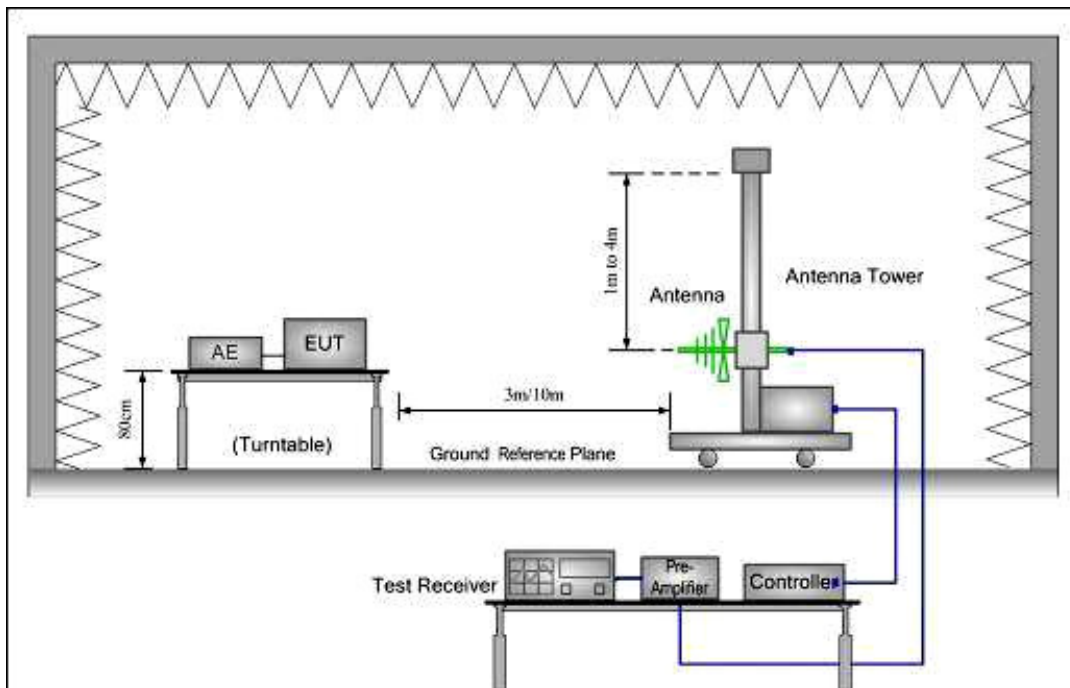



3) 1 GHz to 40 GHz emissions:

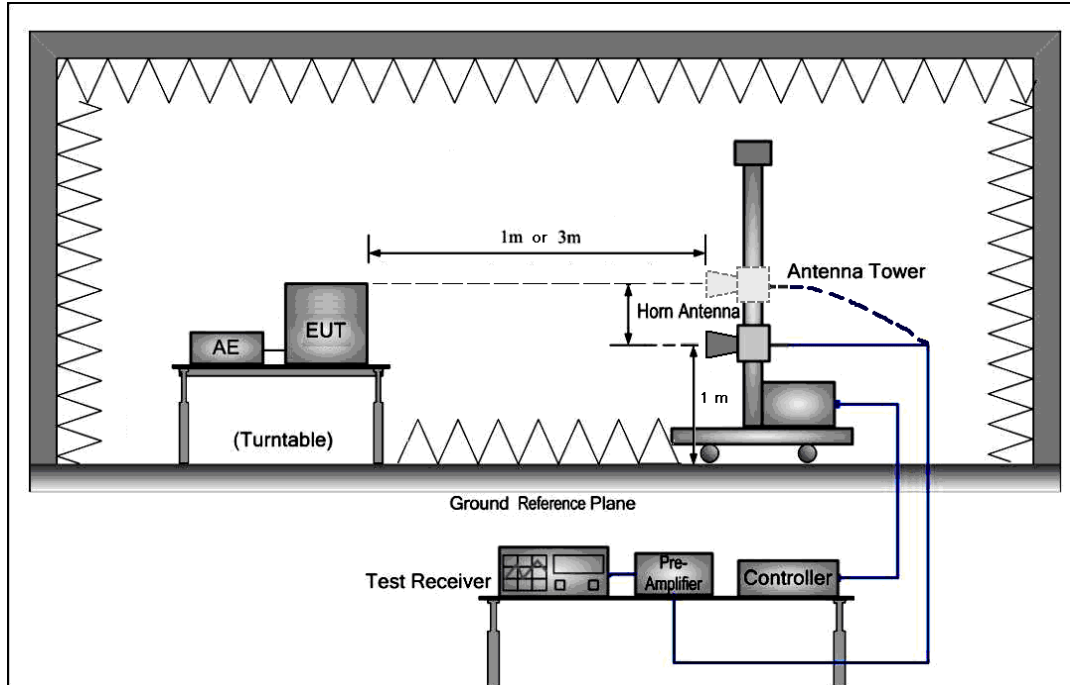

**Test Procedure:**

Test site with RF absorbing material covering the ground plane that met the site validation criterion called out in CISPR 16-1-4:2007 was used to perform radiated emission test above 1 GHz.

The receiver scanned from the lowest frequency generated within the EUT to 25GHz. When an emission was found, the table was rotated to produce the maximum signal strength. An initial pre-scan was performed for in peak detection mode using the receiver. The EUT was measured for both the Horizontal and Vertical polarities and performed a pre-test three orthogonal planes. For intentional radiators, measurements of the variation of the input power or the radiated signal level of the fundamental frequency component of the emission, as appropriate, shall be performed with the supply voltage varied between 85% and 115% of the nominal rated supply voltage. The worst case emissions were reported.

For hand-held or body-worn devices rotated through three orthogonal axes(X,Y,Z) to determine which attitude (orientation) and equipment arrangement produces the highest emission relative to the limit; the attitude and equipment arrangement that produces the highest emission relative to the limit was used in making final radiated emission measurements.

Now set the VBW to 10 Hz, while maintaining all of the other instrument settings. This peak level, once corrected, must comply with the limit specified in Section 15.209. If the dwell time per channel of the hopping signal is less than 100 ms, then the reading obtained with the 10 Hz VBW may be further adjusted by a "duty cycle correction factor", derived from  $20\log(\text{dwell time}/100 \text{ ms})$ , in an effort to demonstrate compliance with the 15.209 limit.

Submit this data.

### 7.10.1 Harmonic and other spurious emissions

#### 7.10.1.1 Test at low Channel in transmitting status

##### 9 kHz~30 MHz Field Strength of Unwanted Emissions.Quasi-Peak Measurement


The measurements with active loop antenna were greater than 20dB below the limit, so the test data were not recorded in the test report.

##### 30 MHz~1 GHz Spurious Emissions. Quasi-Peak Measurement

Vertical:

Peak scan

Level (dBμV/m)

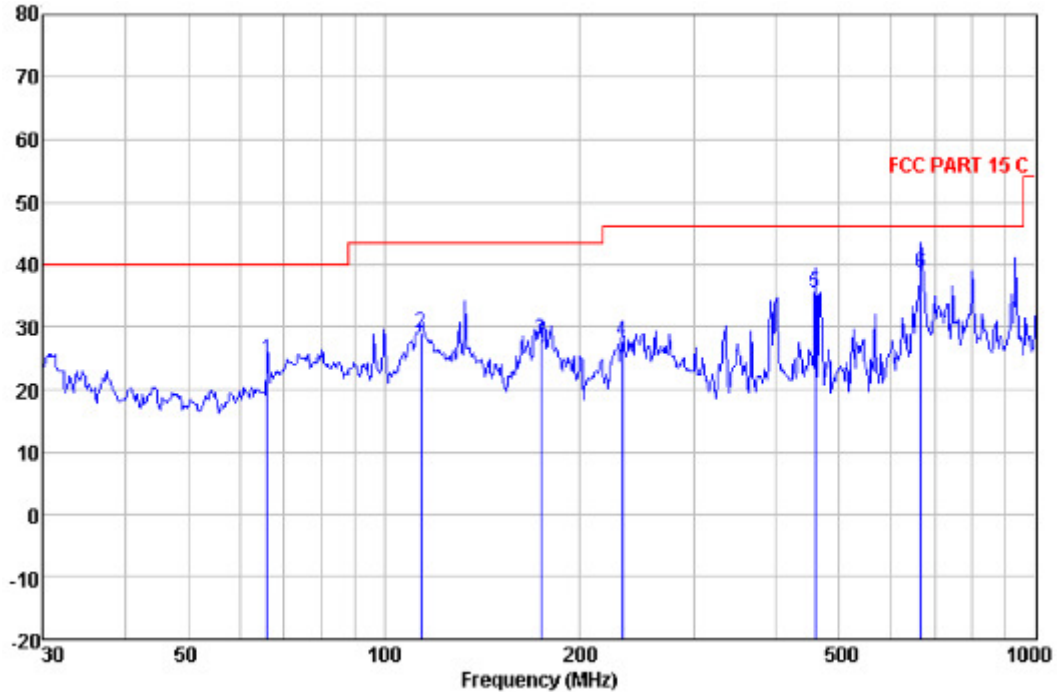


Quasi-peak measurement

Freq MHz	ReadAntenna Level dBuV	Cable Preamp Factor dB/m	Cable Loss dB	Preamp Factor dB	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Remark
66.266	46.73	4.53	0.17	26.67	24.76	40.00	-15.24	QP
114.114	43.63	11.73	0.26	26.54	29.08	43.50	-14.42	QP
173.814	45.56	8.07	0.61	26.24	28.00	43.50	-15.50	QP
231.718	42.71	10.20	0.76	26.03	27.64	46.00	-18.36	QP
459.114	44.57	16.46	1.34	26.90	35.47	46.00	-10.53	QP
665.804	45.46	18.45	1.82	27.17	38.56	46.00	-7.44	QP

**Horizontal:**

Peak scan

Level (dB $\mu$ V/m)

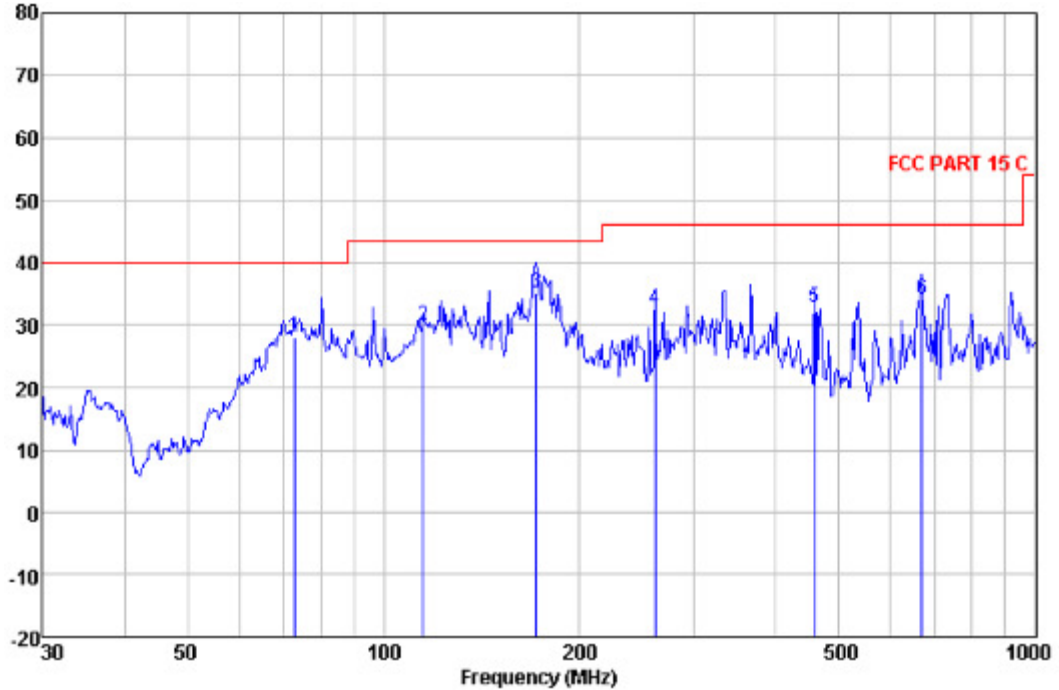

Quasi-peak measurement

Freq	ReadAntenna	Cable	Preamp	Limit	Over	Remark
MHz	Level	Factor	Loss	Line	Limit	
	dB $\mu$ V	dB/m	dB	dB	dB $\mu$ V/m	dB
72.847	49.63	4.95	0.15	26.65	28.08	40.00 -11.92 QP
114.917	44.40	11.70	0.27	26.54	29.83	43.50 -13.67 QP
171.393	52.35	8.43	0.58	26.27	35.09	43.50 -8.41 QP
261.058	45.15	12.46	0.80	25.97	32.44	46.00 -13.56 QP
459.114	41.82	16.46	1.34	26.90	32.72	46.00 -13.28 QP
670.489	41.17	18.30	1.83	27.15	34.15	46.00 -11.85 QP



1~25 GHz Harmonics & Spurious Emissions. Peak & Average Measurement

Peak Measurement:

Frequency (MHz)	Antenna factors (dB/m)	Cable loss (dB)	Preamp factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Limit (dBμV/m)	Antenna polarization
4804.00	31.53	8.98	49.30	56.16	47.37	74.00	V
7206.00	36.47	12.32	49.73	55.35	54.41	74.00	V
9608.00	38.08	16.30	49.89	53.80	58.29	74.00	V
4804.00	31.53	8.98	49.30	57.10	48.31	74.00	H
7206.00	36.47	12.32	49.73	56.04	55.10	74.00	H
9608.00	38.08	16.30	49.89	53.56	58.05	74.00	H

Average Measurement:

Frequency (MHz)	Antenna factors (dB/m)	Cable loss (dB)	Preamp factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Limit (dBμV/m)	Antenna polarization
4804.00	31.53	8.98	49.30	51.16	42.37	54.00	V
7206.00	36.47	12.32	49.73	50.35	49.41	54.00	V
9608.00	38.08	16.30	49.89	45.80	50.29	54.00	V
4804.00	31.53	8.98	49.30	49.10	40.31	54.00	H
7206.00	36.47	12.32	49.73	50.04	49.10	54.00	H
9608.00	38.08	16.30	49.89	45.56	50.05	54.00	H

### 7.10.1.2 Test at middle Channel in transmitting status

#### 9 kHz~30 MHz Field Strength of Unwanted Emissions.Quasi-Peak Measurement


The measurements with active loop antenna were greater than 20dB below the limit, so the test data were not recorded in the test report.

#### 30 MHz~1 GHz Spurious Emissions .Quasi-Peak Measurement

Vertical:

Peak scan

Level (dBμV/m)

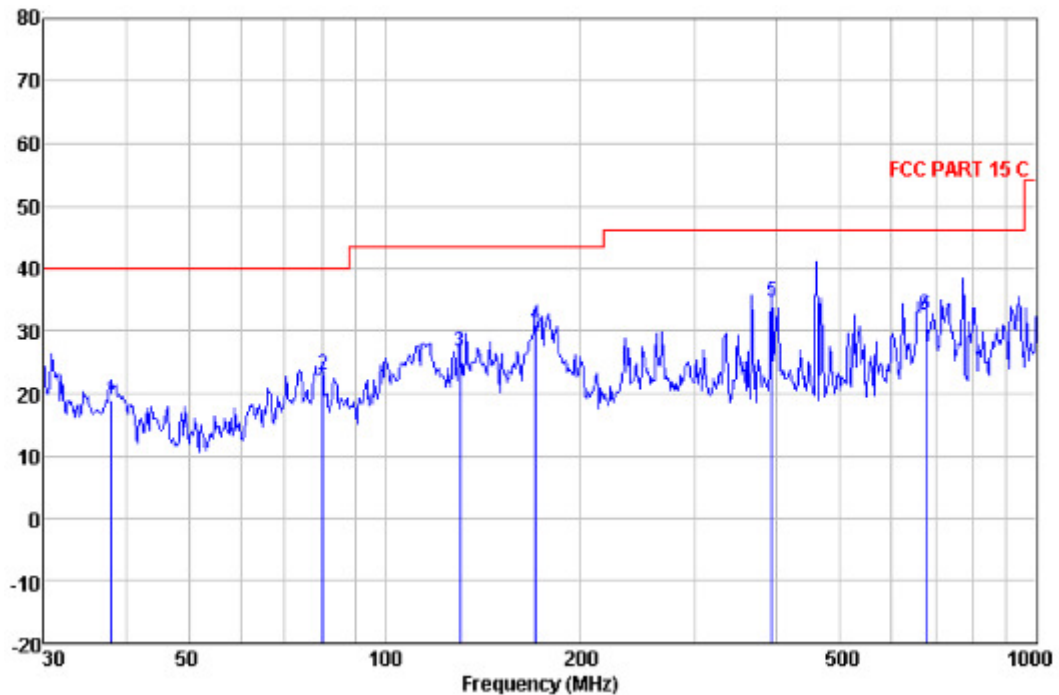


Quasi-peak measurement

Freq	ReadAntenna Level	Antenna Factor	Cable Loss	Preamplifier Factor	Level	Limit Line	Over Limit	Remark
MHz	dBμV	dB/m	dB	dB	dBμV/m	dBμV/m	dB	
38.078	30.09	15.50	0.18	26.78	18.99	40.00	-21.01	QP
80.362	43.06	6.38	0.21	26.63	23.02	40.00	-16.98	QP
130.379	40.87	11.97	0.40	26.44	26.80	43.50	-16.70	QP
170.195	47.94	8.60	0.57	26.28	30.83	43.50	-12.67	QP
392.095	44.10	15.70	1.20	26.43	34.57	46.00	-11.43	QP
675.208	39.40	18.45	1.84	27.13	32.56	46.00	-13.44	QP

**Horizontal:**

Peak scan

Level (dBµV/m)

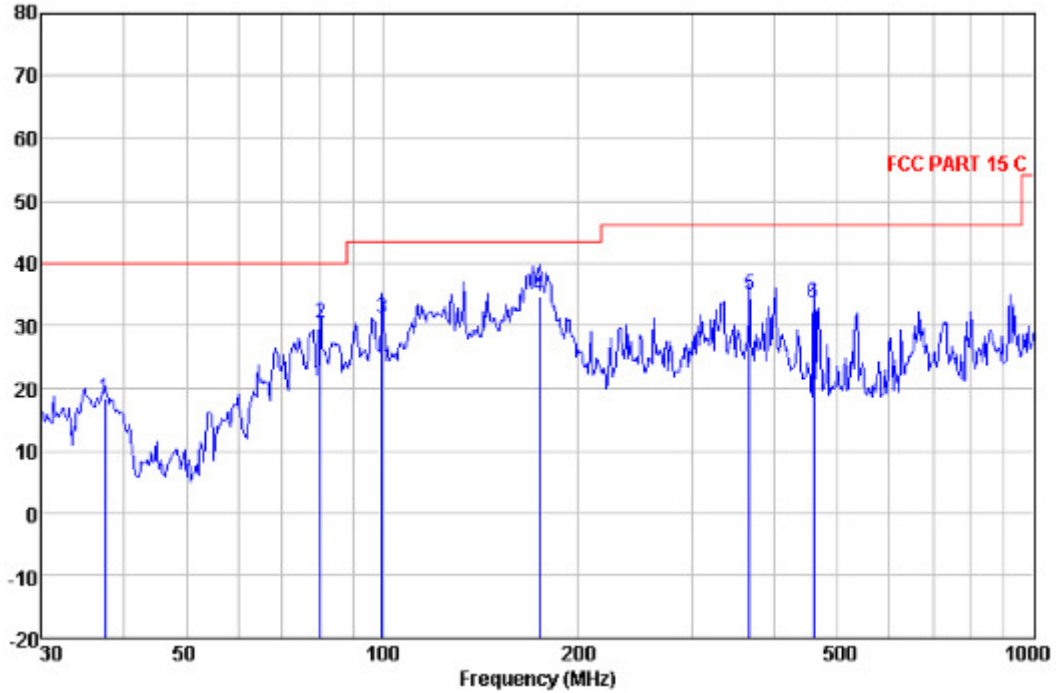

Quasi-peak measurement

Freq	ReadAntenna Level	Antenna Factor	Cable Loss	Preamplifier Factor	Level	Limit Line	Over Limit	Remark
MHz	dBµV	dB/m	dB	dB	dBµV/m	dBµV/m	dB	
37.548	29.04	15.84	0.18	26.78	18.28	40.00	-21.72	QP
80.362	50.36	6.38	0.21	26.63	30.32	40.00	-9.68	QP
99.878	46.79	10.80	0.21	26.58	31.22	43.50	-12.28	QP
173.814	52.29	8.07	0.61	26.24	34.73	43.50	-8.77	QP
365.539	44.80	14.99	1.20	26.16	34.83	46.00	-11.17	QP
459.114	42.74	16.46	1.34	26.90	33.64	46.00	-12.36	QP



1~25 GHz Harmonics & Spurious Emissions. Peak & Average Measurement

Peak Measurement:

Frequency (MHz)	Antenna factors (dB/m)	Cable loss (dB)	Preamp factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Limit (dBμV/m)	Antenna polarization
4882.00	31.57	8.63	49.30	56.11	47.01	74.00	V
7323.00	36.50	12.23	49.74	55.28	54.27	74.00	V
9764.00	38.51	15.70	49.89	53.02	57.34	74.00	V
4882.00	31.57	8.63	49.30	57.95	48.85	74.00	H
7323.00	36.50	12.23	49.74	55.75	54.74	74.00	H
9764.00	38.51	15.70	49.89	51.92	56.24	74.00	H

Average Measurement:

Frequency (MHz)	Antenna factors (dB/m)	Cable loss (dB)	Preamp factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Limit (dBμV/m)	Antenna polarization
4882.00	31.57	8.63	49.30	50.11	41.01	54.00	V
7323.00	36.50	12.23	49.74	49.28	48.27	54.00	V
9764.00	38.51	15.70	49.89	45.02	49.34	54.00	V
4882.00	31.57	8.63	49.30	50.95	41.85	54.00	H
7323.00	36.50	12.23	49.74	49.75	48.74	54.00	H
9764.00	38.51	15.70	49.89	44.92	49.24	54.00	H

### 7.10.1.3 Test at high Channel in transmitting status

#### 9 kHz~30 MHz Field Strength of Unwanted Emissions.Quasi-Peak Measurement


The measurements with active loop antenna were greater than 20dB below the limit, so the test data were not recorded in the test report.

#### 30 MHz~1 GHz Spurious Emissions .Quasi-Peak Measurement

Vertical:

Peak scan

Level (dB $\mu$ V/m)

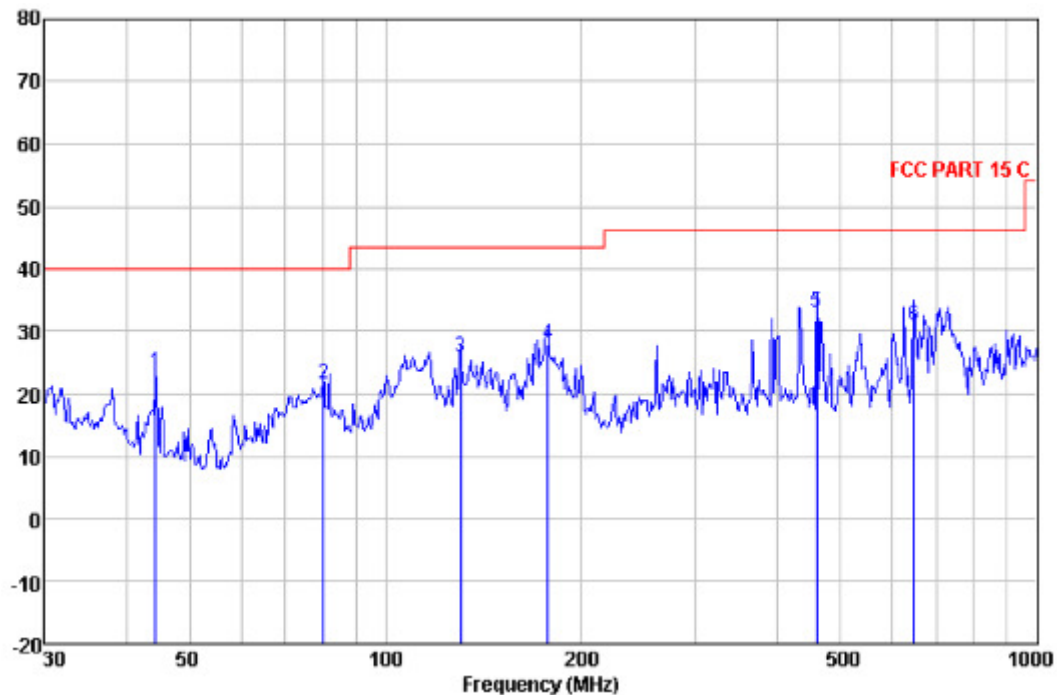

Quasi-peak measurement

Freq MHz	ReadAntenna Level dB $\mu$ V	Cable Factor dB/m	Preamp Loss dB	Preamp Factor dB	Level dB $\mu$ V/m	Limit Line dB $\mu$ V/m	Over Limit dB	Remark
44.431	39.18	10.98	0.14	26.75	23.55	40.00	-16.45	QP
80.362	41.52	6.38	0.21	26.63	21.48	40.00	-18.52	QP
130.379	39.97	11.97	0.40	26.44	25.90	43.50	-17.60	QP
177.509	45.91	7.75	0.64	26.20	28.10	43.50	-15.40	QP
459.114	42.14	16.46	1.34	26.90	33.04	46.00	-12.96	QP
647.386	37.53	18.73	1.79	27.20	30.85	46.00	-15.15	QP






Horizontal:

Peak scan

Level (dBuV/m)

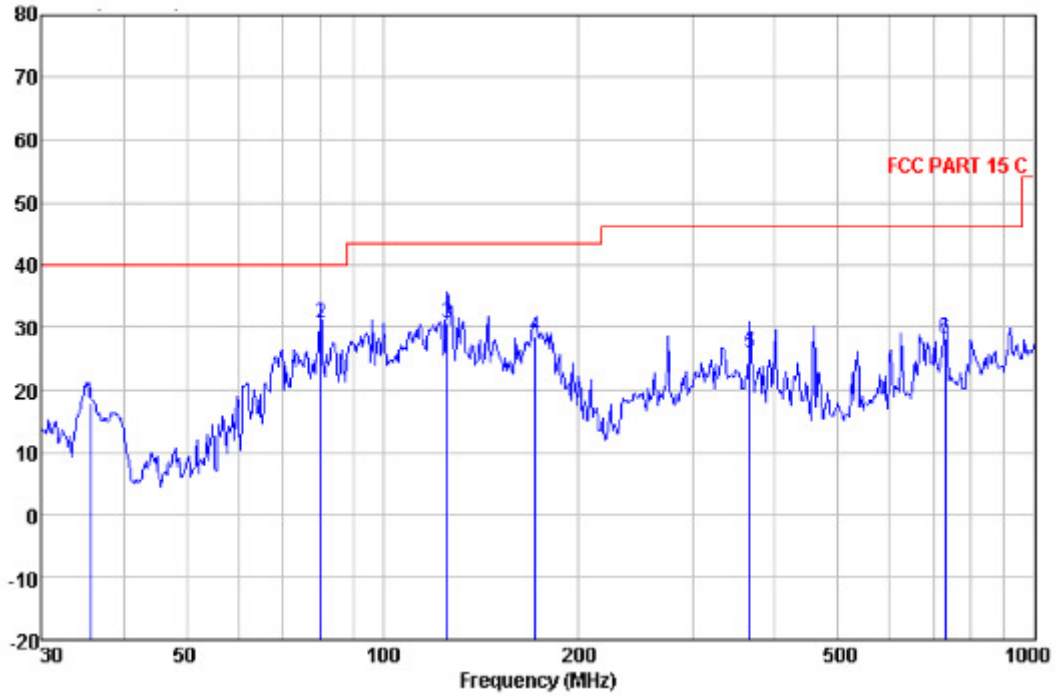

Quasi-peak measurement

Freq	ReadAntenna Level	Antenna Factor	Cable Loss	Preamplifier Factor	Level	Limit Line	Over Limit	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
35.624	27.54	17.01	0.14	26.79	17.90	40.00	-22.10	QP
80.362	50.75	6.38	0.21	26.63	30.71	40.00	-9.29	QP
125.446	44.91	11.91	0.35	26.48	30.69	43.50	-12.81	QP
171.393	45.90	8.43	0.58	26.27	28.64	43.50	-14.86	QP
365.539	35.79	14.99	1.20	26.16	25.82	46.00	-20.18	QP
729.358	33.82	19.70	1.86	27.08	28.30	46.00	-17.70	QP



1~25 GHz Harmonics & Spurious Emissions. Peak & Average Measurement

Peak Measurement:

Frequency (MHz)	Antenna factors (dB/m)	Cable loss (dB)	Preamp factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Limit (dBμV/m)	Antenna polarization
4960.00	31.70	8.28	49.30	56.44	47.12	74.00	V
7440.00	36.60	12.14	49.76	52.38	51.36	74.00	V
9920.00	38.68	15.10	49.90	48.32	52.20	74.00	V
4960.00	31.70	8.28	49.30	57.57	48.25	74.00	H
7440.00	36.60	12.14	49.76	56.81	55.79	74.00	H
9920.00	38.68	15.10	49.90	52.77	56.65	74.00	H

Average Measurement:

Frequency (MHz)	Antenna factors (dB/m)	Cable loss (dB)	Preamp factor (dB)	Reading Level (dBμV)	Emission Level (dBμV/m)	Limit (dBμV/m)	Antenna polarization
4960.00	31.70	8.28	49.30	50.44	41.12	54.00	V
7440.00	36.60	12.14	49.76	47.38	46.36	54.00	V
9920.00	38.68	15.10	49.90	43.32	47.20	54.00	V
4960.00	31.70	8.28	49.30	52.57	43.25	54.00	H
7440.00	36.60	12.14	49.76	50.81	49.79	54.00	H
9920.00	38.68	15.10	49.90	45.77	49.65	54.00	H

Remark:

- 1). The field strength is calculated by adding the Antenna Factor. Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:  
Final Test Level =Receiver Reading + Antenna Factor + Cable Loss –Preamplifier Factor.
- 2). As shown in Section, for frequencies above 1000 MHz. the above field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.
- 3). The test only perform the EUT in transmitting status since the test frequencies were over 1GHz only required transmitting status.

**Test result: The unit does meet the FCC requirements.**



### 7.10.2 Radiated Emissions which fall in the restricted bands

**Test Requirement:** FCC Part15 C Section 15.247

(d) In addition, radiated emissions which fall in the restricted bands. as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

**Test Method:** ANSI C63.10: Clause 6.4, 6.5 and 6.6

**Test Status:** Pre-test the EUT in continuous transmitting mode at the lowest (2402 MHz), middle (2441 MHz) and highest (2480 MHz) channel with different data packet. Compliance test in continuous transmitting mode with normal mode (DH5) as the worst case was found.

**Measurement Distance:** 3m (Semi-Anechoic Chamber)

**Limit:**

Section 15.209(a)

40.0 dB $\mu$ V/m between 30MHz & 88MHz;

43.5 dB $\mu$ V/m between 88MHz & 216MHz;

46.0 dB $\mu$ V/m between 216MHz & 960MHz;

54.0 dB $\mu$ V/m above 960MHz.

**Detector:** For PK value:

RBW = 1 MHz for  $f \geq 1$  GHz, 100 kHz for  $f < 1$  GHz

VBW  $\geq$  RBW

Sweep = auto

Detector function = peak

Trace = max hold

For AV value:

RBW = 1 MHz for  $f \geq 1$  GHz, 100 kHz for  $f < 1$  GHz

VBW =10 Hz

Sweep = auto

Detector function = peak

Trace = max hold



Test Result:

1. Low Channel

Frequency (MHz)	Antenna factors (dB/m)	Cable loss(dB)	Preamp factor(dB)	Peak Reading Level (dBμV)	Average Reading Level (dBμV)	Peak Emission Level (dBμV/m)	Average Emission Level (dBμV/m)
2310.00	27.93	5.98	49.46	53.93	49.93	38.38	34.38
2390.00	27.61	6.14	49.43	54.95	50.95	39.27	35.27
2483.00	27.55	6.30	49.41	55.61	51.61	40.05	36.05
2500.00	27.55	6.30	49.40	55.77	50.77	40.22	35.22

2. Middle Channel

Frequency (MHz)	Antenna factors (dB/m)	Cable loss(dB)	Preamp factor(dB)	Peak Reading Level (dBμV)	Average Reading Level (dBμV)	Peak Emission Level (dBμV/m)	Average Emission Level (dBμV/m)
2310.00	27.93	5.98	49.46	54.99	51.99	39.44	36.44
2390.00	27.61	6.14	49.43	54.11	50.11	38.43	34.43
2483.00	27.55	6.30	49.41	55.77	50.77	40.21	35.21
2500.00	27.55	6.30	49.40	54.06	49.06	38.51	33.51

3. High Channel

Frequency (MHz)	Antenna factors (dB/m)	Cable loss(dB)	Preamp factor(dB)	Peak Reading Level (dBμV)	Average Reading Level (dBμV)	Peak Emission Level (dBμV/m)	Average Emission Level (dBμV/m)
2310.00	27.93	5.98	49.46	54.62	50.62	39.07	35.07
2390.00	27.61	6.14	49.43	55.62	51.62	39.94	35.94
2483.00	27.55	6.30	49.41	54.86	50.86	39.30	35.30
2500.00	27.55	6.30	49.40	54.35	50.35	38.80	34.80

Remark: No any other emission which falls in restricted bands can be detected and be reported.

Test result: The unit does meet the FCC requirements.



Section 15.205 Restricted bands of operation.

(a) Except as shown in paragraph (d) of this section. only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
<sup>1</sup> 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	
13.36 - 13.41			

### 7.11 Band Edges Requirement

**Test Requirement:** FCC Part15 C section 15.247


(d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

**Frequency Band:** 2400 MHz to 2483.5 MHz

**Test Method:** ANSI C63.10: Clause 6.9.2

**Test Status:** Pre-test the EUT in continuous transmitting mode at the lowest (2402 MHz), and highest (2480 MHz) channel and hopping mode with different data packet. Compliance test in continuous transmitting mode with normal (DH5) and EDR mode (3DH5) as the worst case was found.

**Test Configuration:**

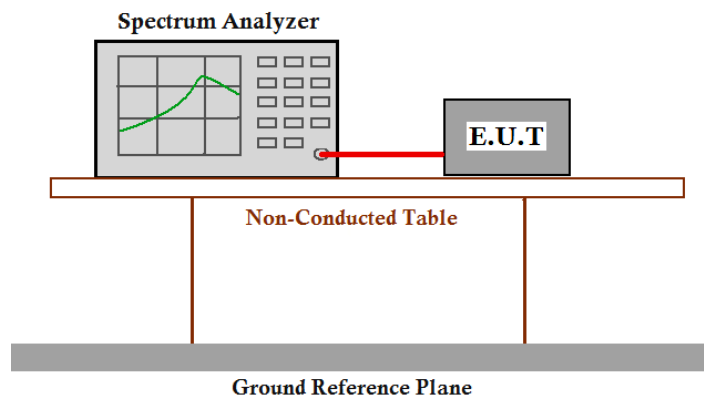

**Test Procedure:** Set RBW of spectrum analyzer to 100 kHz and VBW of spectrum analyzer to 100 kHz with suitable frequency span including 100 kHz bandwidth from band edge.

The band edges was measured and recorded Result:

The Lower Edges attenuated more than 20dB.


The Upper Edges attenuated more than 20dB.

The graph as below. Represents the emissions take for this device.


**Result plot as follows:**

**Normal mode: DH5**

**Lowest channel(2.402 GHz):**

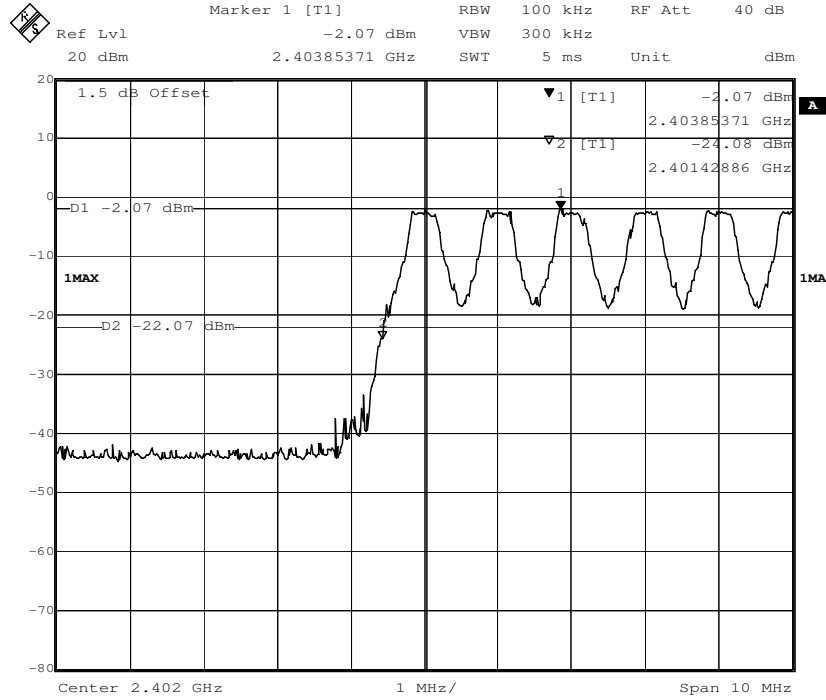


**Highest Channel(2.480 GHz):**

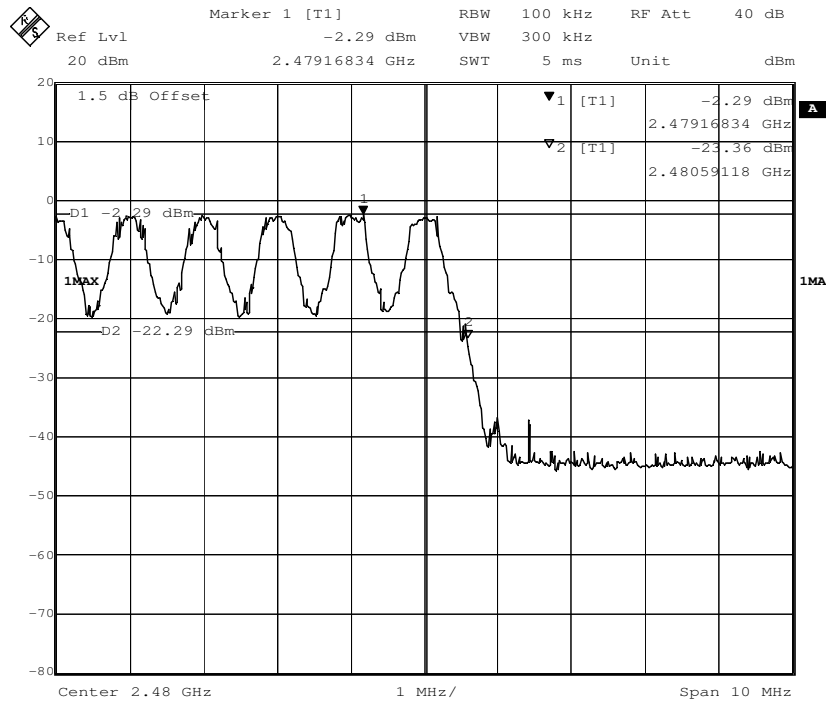


EDR mode: 3DH5

Lowest channel(2.402 GHz):

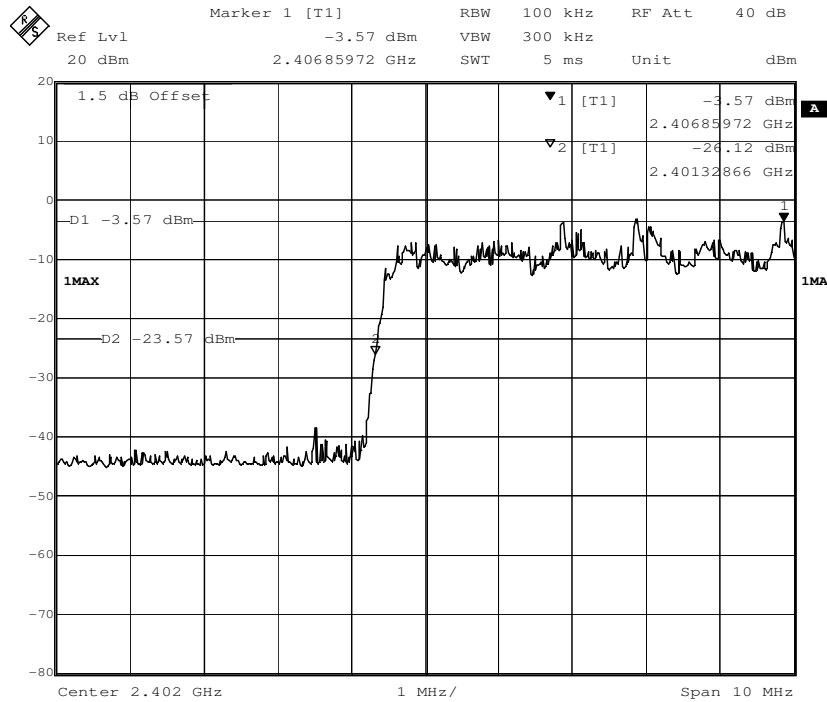

Highest Channel(2.480 GHz):

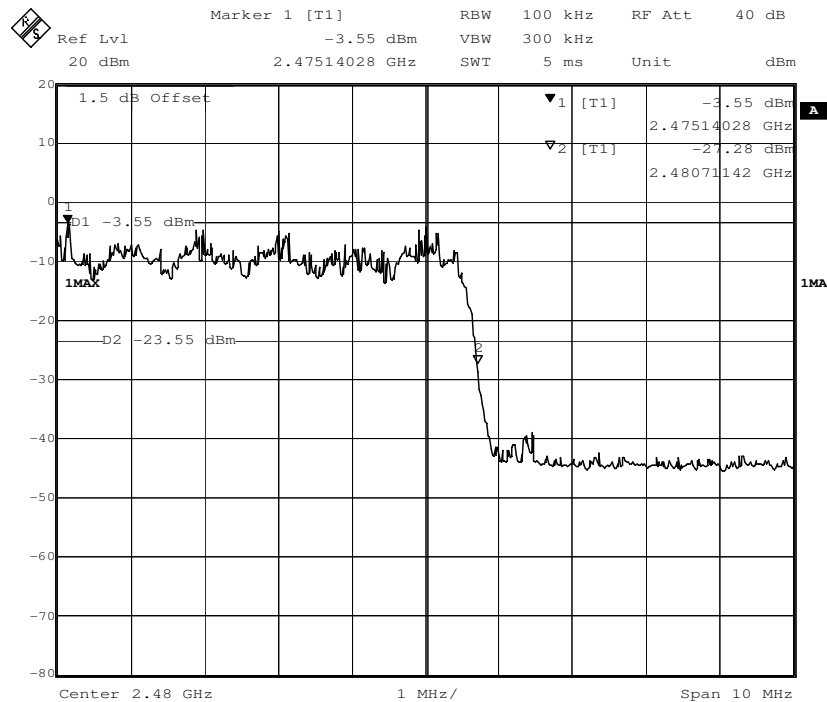

**Test result: The unit does meet the FCC requirements.**





**7.12 Conducted Emissions at Mains Terminals 150 kHz to 30 MHz**

**Test Requirement:** FCC Part 15 C section 15.207  
**Test Method:** ANSI C63.10: Clause 6.2  
**Frequency Range:** 150 kHz to 30 MHz  
**Detector:** Peak for pre-scan (9 kHz Resolution Bandwidth)  
**Test Limit**

**Limits for conducted disturbance at the mains ports of class B**


Frequency Range (MHz)	Class B Limit dB(μV)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5	56	46
5 to 30	60	50

NOTE 1 The limit decreases linearly with the logarithm of the frequency in the range 0,15 MHz to 0,50 MHz.

**EUT Operation:** Test in normal operating mode. For intentional radiators, measurements of the variation of the input power or the radiated signal level of the fundamental frequency component of the emission, as appropriate, shall be performed with the supply voltage varied between 85% and 115% of the nominal rated supply voltage.

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

**Test Configuration:**

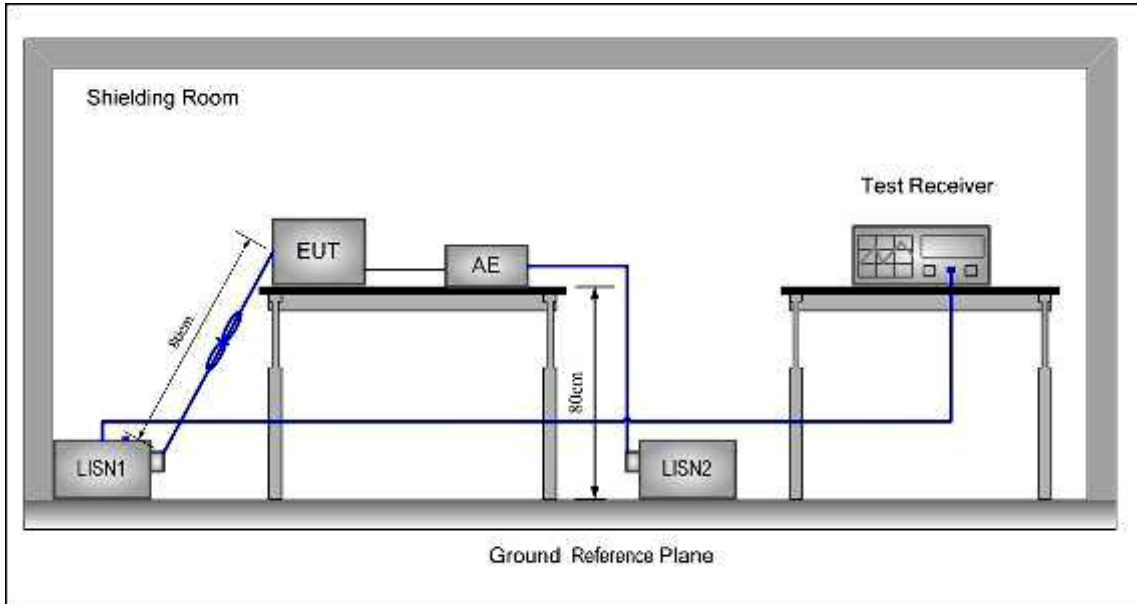

**Test procedure:**

1. The mains terminal disturbance voltage test was conducted in a shielded room.
2. The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a  $50\Omega/50\mu\text{H} + 5\Omega$  linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
3. The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane, but separated from metallic contact with the ground reference plane by 0.1m of insulation.
4. The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0,8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0,8 m from the LISN 2.

### 7.12.1 Measurement Data

An initial pre-scan was performed on the live and neutral lines with peak detector.

Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission were detected. For EUT the communicating was worst case mode.


The following Quasi-Peak and Average measurements were performed on the EUT:

**Model 5172301 with adapter BI20-090200-AdU**

**Live Line:**

Peak Scan:

Level (dBμV)

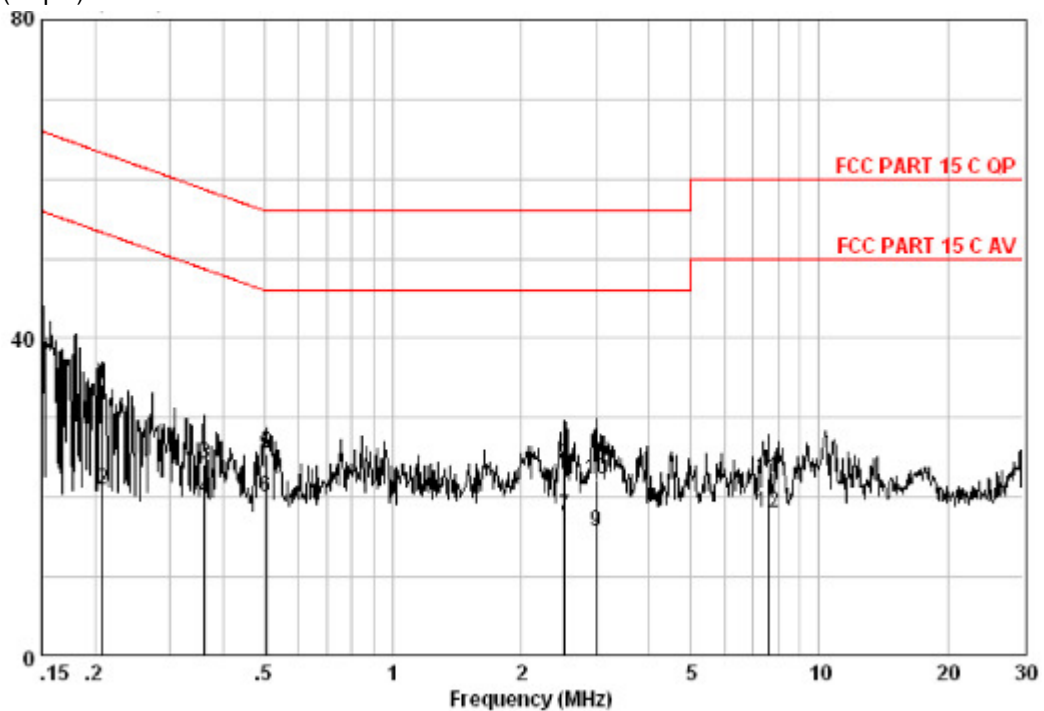

Quasi-peak and Average measurement

Freq	Read Level	Cable Loss	LISN Factor	Level	Limit Line	Over Limit	Remark
MHz	dBμV	dB	dB	dBμV	dBμV	dB	
0.208	24.68	0.12	9.50	34.30	63.27	-28.97	QP
0.208	11.41	0.12	9.50	21.03	53.27	-32.24	AVERAGE
0.361	14.50	0.07	9.53	24.10	58.69	-34.59	QP
0.361	10.29	0.07	9.53	19.89	48.69	-28.80	AVERAGE
0.505	15.80	0.07	9.53	25.40	56.00	-30.60	QP
0.505	10.37	0.07	9.53	19.97	46.00	-26.03	AVERAGE
2.527	7.87	0.11	9.57	17.55	46.00	-28.45	AVERAGE
2.527	14.28	0.11	9.57	23.96	56.00	-32.04	QP
3.009	5.91	0.15	9.57	15.63	46.00	-30.37	AVERAGE
3.009	12.50	0.15	9.57	22.22	56.00	-33.78	QP
7.566	12.68	0.17	9.64	22.49	60.00	-37.51	QP
7.566	8.26	0.17	9.64	18.07	50.00	-31.93	AVERAGE


**Level = Read Level + LISN Factor + Cable Loss.**

**Model 5172301 with adapter BI20-090200-AdU**

**Neutral Line:**

Peak Scan:

Level (dBμV)

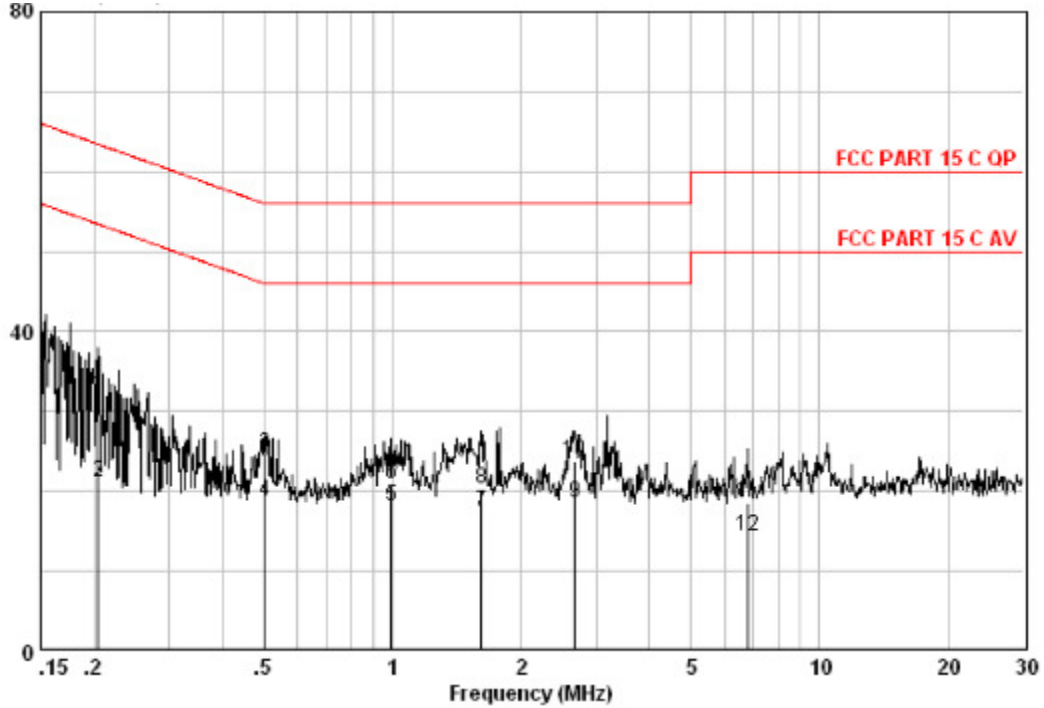

Quasi-peak and Average measurement:

Freq	Read Level	Cable Loss	LISN Factor	Level	Limit Line	Over Limit	Remark
MHz	dBμV	dB	dB	dBμV	dBμV	dB	
0.205	22.50	0.12	9.53	32.15	63.40	-31.26	QP
0.205	11.49	0.12	9.53	21.14	53.40	-32.27	AVERAGE
0.502	14.90	0.07	9.56	24.53	56.00	-31.47	QP
0.502	9.04	0.07	9.56	18.67	46.00	-27.33	AVERAGE
0.994	8.37	0.05	9.59	18.01	46.00	-27.99	AVERAGE
0.994	11.34	0.05	9.59	20.98	56.00	-35.02	QP
1.610	7.76	0.05	9.60	17.41	46.00	-28.59	AVERAGE
1.610	10.66	0.05	9.60	20.31	56.00	-35.69	QP
2.678	8.84	0.12	9.62	18.58	46.00	-27.42	AVERAGE
2.678	14.12	0.12	9.62	23.86	56.00	-32.14	QP
6.769	8.64	0.17	9.72	18.52	60.00	-41.48	QP
6.769	4.52	0.17	9.72	14.40	50.00	-35.60	AVERAGE


**Level = Read Level + LISN Factor + Cable Loss.**

**Model 5172301 with adapter CS18D090200FUF**

Live Line:

Peak Scan:

Level (dBμV)

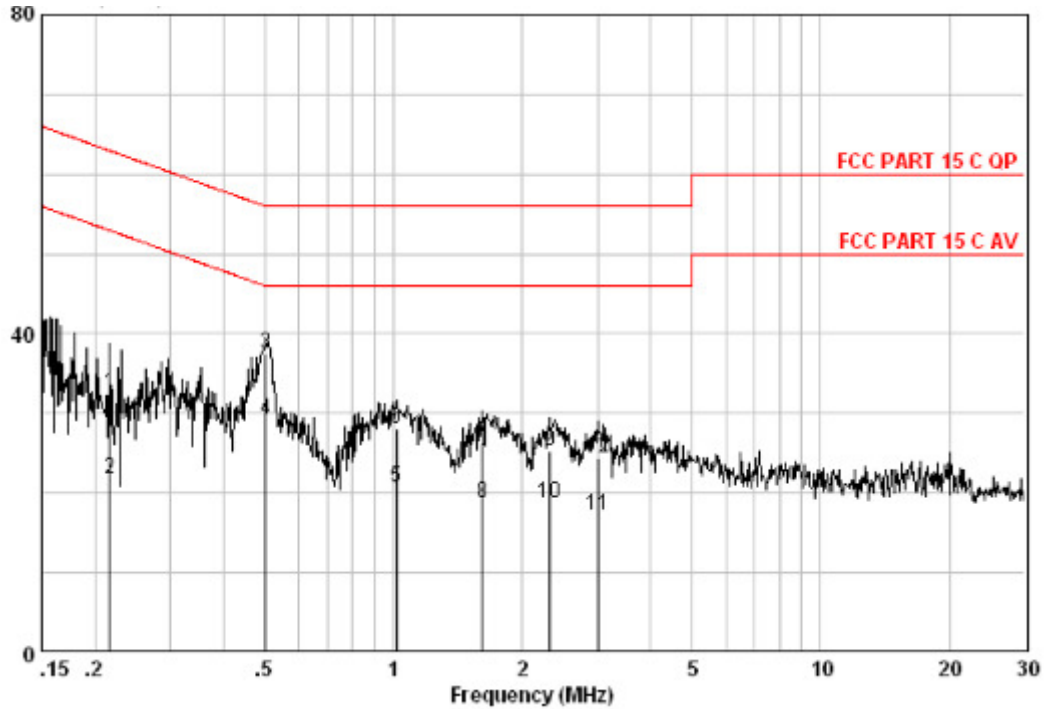

Quasi-peak and Average measurement

Freq MHz	Read Level dBμV	Cable Loss dB	LISN Factor dB	Level dBμV	Limit Line dBμV	Over Limit dB	Remark
0.216	22.88	0.12	9.50	32.50	62.96	-30.46	QP
0.216	12.28	0.12	9.50	21.90	52.96	-31.06	AVERAGE
0.502	27.84	0.07	9.53	37.44	56.00	-18.56	QP
0.502	19.68	0.07	9.53	29.28	46.00	-16.72	AVERAGE
1.016	11.18	0.05	9.55	20.78	46.00	-25.22	AVERAGE
1.016	18.60	0.05	9.55	28.20	56.00	-27.80	QP
1.610	16.66	0.05	9.56	26.27	56.00	-29.73	QP
1.610	9.04	0.05	9.56	18.65	46.00	-27.35	AVERAGE
2.321	15.72	0.09	9.57	25.37	56.00	-30.63	QP
2.321	9.09	0.09	9.57	18.74	46.00	-27.26	AVERAGE
3.009	7.47	0.15	9.57	17.19	46.00	-28.81	AVERAGE
3.009	14.66	0.15	9.57	24.38	56.00	-31.62	QP


**Level = Read Level + LISN Factor + Cable Loss.**

**Model 5172301 with adapter CS18D090200FUF**

**Neutral Line:**

Peak Scan:

Level (dBμV)

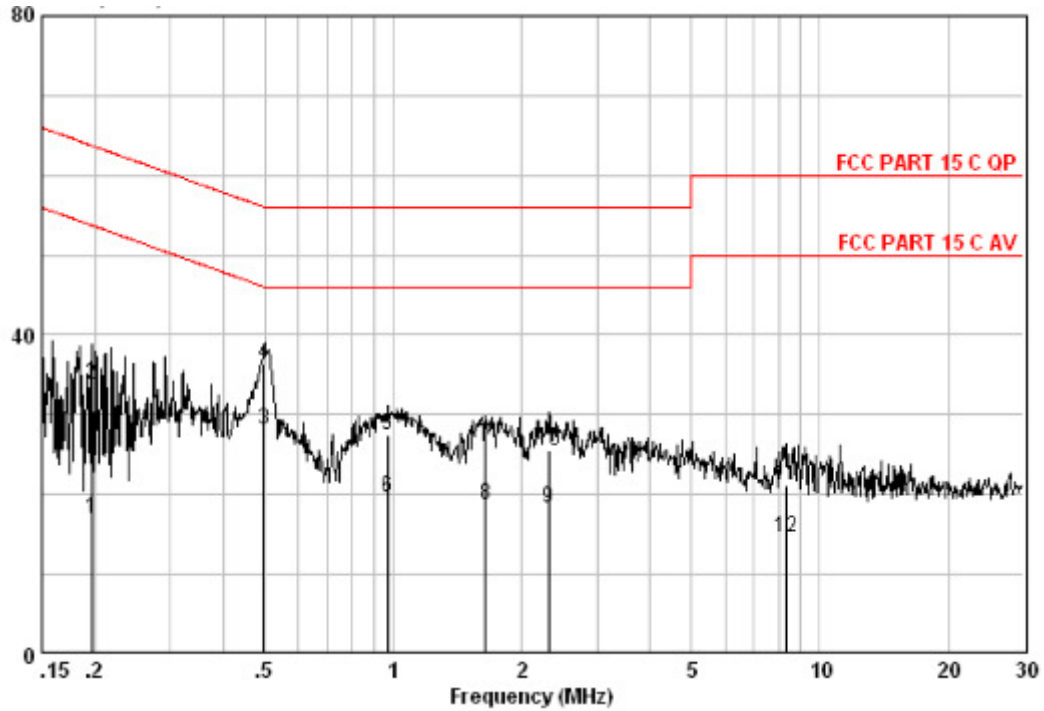

Quasi-peak and Average measurement:

Freq	Read Level	Cable Loss	LISN Factor	Level	Limit Line	Over Limit	Remark
MHz	dBμV	dB	dB	dBμV	dBμV	dB	
0.197	7.41	0.12	9.53	17.06	53.76	-36.70	AVERAGE
0.197	24.04	0.12	9.53	33.69	63.76	-30.07	QP
0.497	18.50	0.07	9.56	28.13	46.05	-17.92	AVERAGE
0.497	26.76	0.07	9.56	36.39	56.05	-19.66	QP
0.968	17.90	0.05	9.59	27.54	56.00	-28.46	QP
0.968	10.07	0.05	9.59	19.71	46.00	-26.29	AVERAGE
1.645	16.50	0.05	9.60	26.15	56.00	-29.85	QP
1.645	9.04	0.05	9.60	18.69	46.00	-27.31	AVERAGE
2.309	8.69	0.09	9.62	18.39	46.00	-27.61	AVERAGE
2.309	15.74	0.09	9.62	25.44	56.00	-30.56	QP
8.367	11.16	0.19	9.77	21.11	60.00	-38.89	QP
8.367	4.60	0.19	9.77	14.55	50.00	-35.45	AVERAGE


**Level = Read Level + LISN Factor + Cable Loss.**

**Model 5173801 with adapter BI30-120200-AdU**

**Live Line:**

Peak Scan:

Level (dBμV)

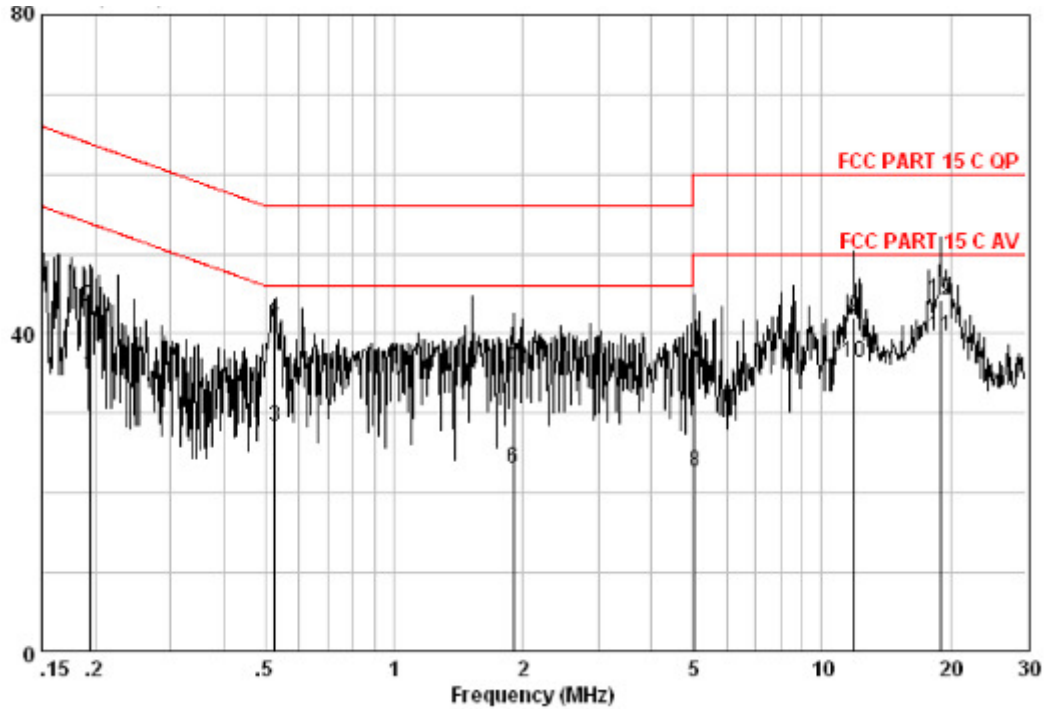

Quasi-peak and Average measurement

Freq MHz	Read Level dBμV	Cable Loss dB	LISN Factor dB	Level dBμV	Limit Line dBμV	Over Limit dB	Remark
0.194	25.22	0.12	9.50	34.83	53.84	-19.01	AVERAGE
0.194	33.66	0.12	9.50	43.27	63.84	-20.57	QP
0.527	18.83	0.07	9.54	28.44	46.00	-17.56	AVERAGE
0.527	32.16	0.07	9.54	41.77	56.00	-14.23	QP
1.898	26.58	0.05	9.56	36.19	56.00	-19.81	QP
1.898	13.55	0.05	9.56	23.16	46.00	-22.84	AVERAGE
5.058	25.28	0.18	9.59	35.05	60.00	-24.95	QP
5.058	13.00	0.18	9.59	22.77	50.00	-27.23	AVERAGE
11.933	32.04	0.20	9.73	41.97	60.00	-18.03	QP
11.933	26.38	0.20	9.73	36.31	50.00	-13.69	AVERAGE
18.920	29.47	0.41	9.76	39.64	50.00	-10.36	AVERAGE
18.920	34.10	0.41	9.76	44.27	60.00	-15.73	QP


**Level = Read Level + LISN Factor + Cable Loss.**

Model 5173801 with adapter BI30-120200-AdU

Neutral Line:

Peak Scan:

Level (dBμV)

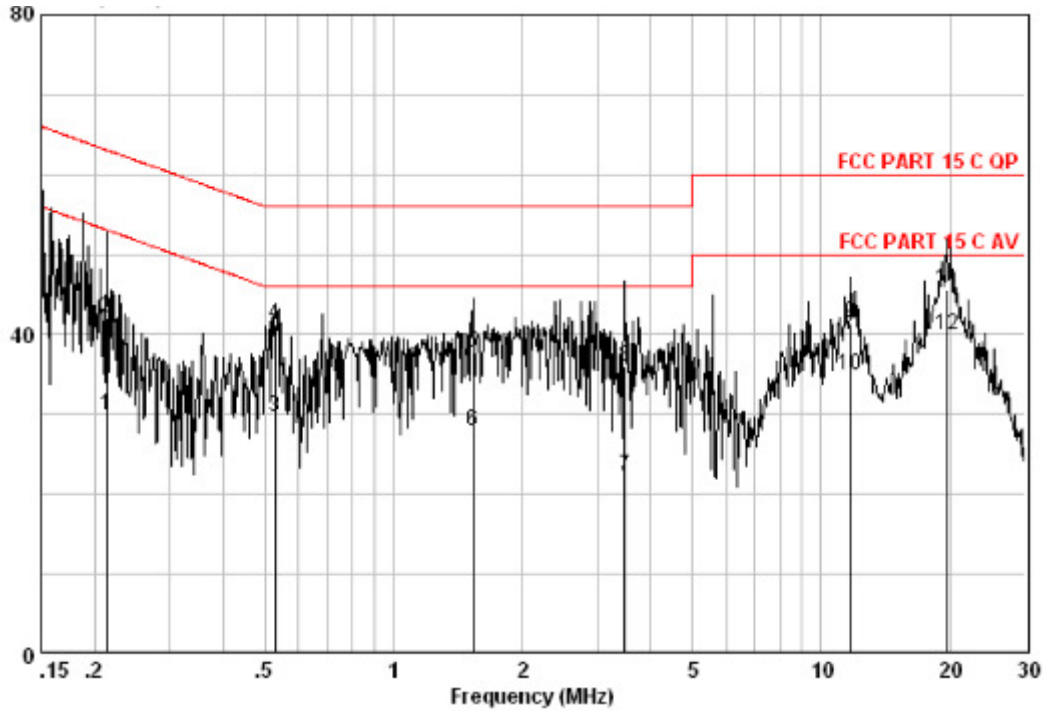

Quasi-peak and Average measurement:

Freq MHz	Read Level dBμV	Cable Loss dB	LISN Factor dB	Level dBμV	Limit Line dBμV	Over Limit dB	Remark
0,214	20,19	0,12	9,53	29,83	53,05	-23,22	AVERAGE
0,214	32,32	0,12	9,53	41,96	63,05	-21,09	QP
0,529	19,91	0,07	9,56	29,54	46,00	-16,46	AVERAGE
0,529	31,60	0,07	9,56	41,23	56,00	-14,77	QP
1,535	28,00	0,05	9,60	37,65	56,00	-18,35	QP
1,535	18,16	0,05	9,60	27,81	46,00	-18,19	AVERAGE
3,472	12,41	0,16	9,63	22,20	46,00	-23,81	AVERAGE
3,472	26,18	0,16	9,63	35,97	56,00	-20,04	QP
11,683	31,28	0,20	9,87	41,35	60,00	-18,65	QP
11,683	24,85	0,20	9,87	34,92	50,00	-15,08	AVERAGE
19,635	34,82	0,42	10,24	45,48	60,00	-14,52	QP
19,635	29,32	0,42	10,24	39,98	50,00	-10,02	AVERAGE

Level = Read Level + LISN Factor + Cable Loss.




**Model 5173801 with adapter CS24E120200FUF**

**Live Line:**

Peak Scan:

Level (dBμV)

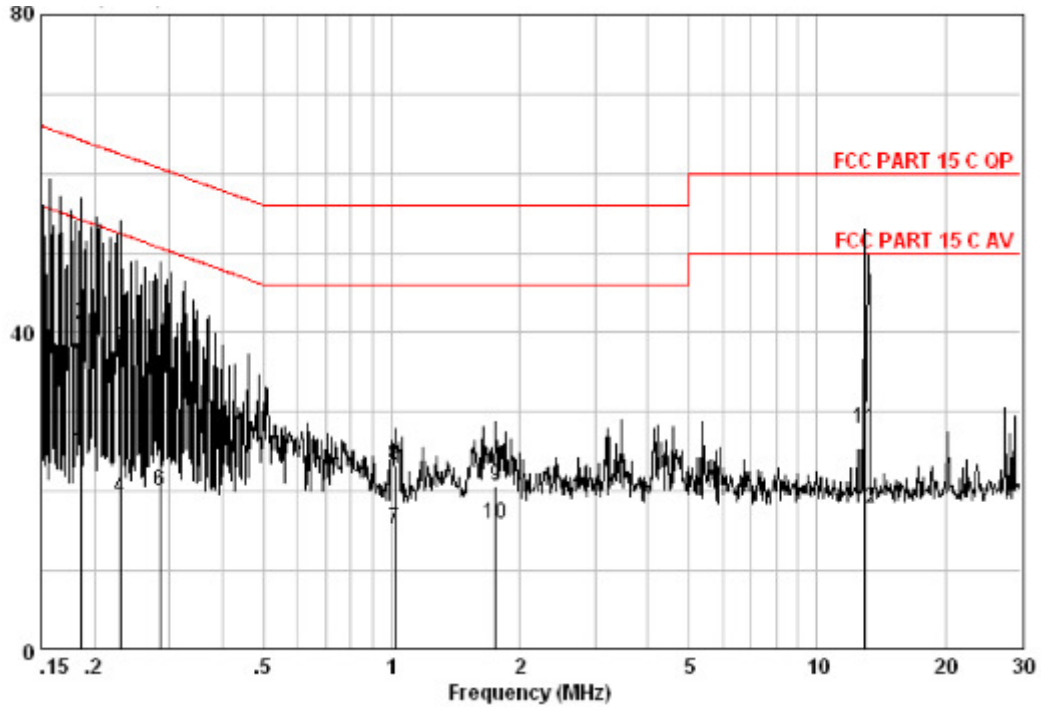

Quasi-peak and Average measurement

Freq MHz	Read Level dBμV	Cable Loss dB	LISN Factor dB	Level dBμV	Limit Line dBμV	Over Limit dB	Remark
0.185	15.50	0.11	9.50	25.10	54.24	-29.14	AVERAGE
0.185	31.38	0.11	9.50	40.98	64.24	-23.26	QP
0.230	28.32	0.11	9.51	37.94	62.44	-24.50	QP
0.230	9.66	0.11	9.51	19.28	52.44	-33.16	AVERAGE
0.285	24.76	0.10	9.51	34.37	60.68	-26.30	QP
0.285	10.54	0.10	9.51	20.15	50.68	-30.52	AVERAGE
1.016	5.57	0.05	9.55	15.17	46.00	-30.83	AVERAGE
1.016	13.80	0.05	9.55	23.40	56.00	-32.60	QP
1.753	11.00	0.05	9.56	20.61	56.00	-35.39	QP
1.753	6.32	0.05	9.56	15.93	46.00	-30.07	AVERAGE
12.920	18.04	0.22	9.75	28.00	60.00	-32.00	QP
12.920	7.96	0.22	9.75	17.92	50.00	-32.08	AVERAGE


**Level = Read Level + LISN Factor + Cable Loss.**

**Model 5173801 with adapter CS24E120200FUF**

**Neutral Line:**

Peak Scan:

Level (dBμV)

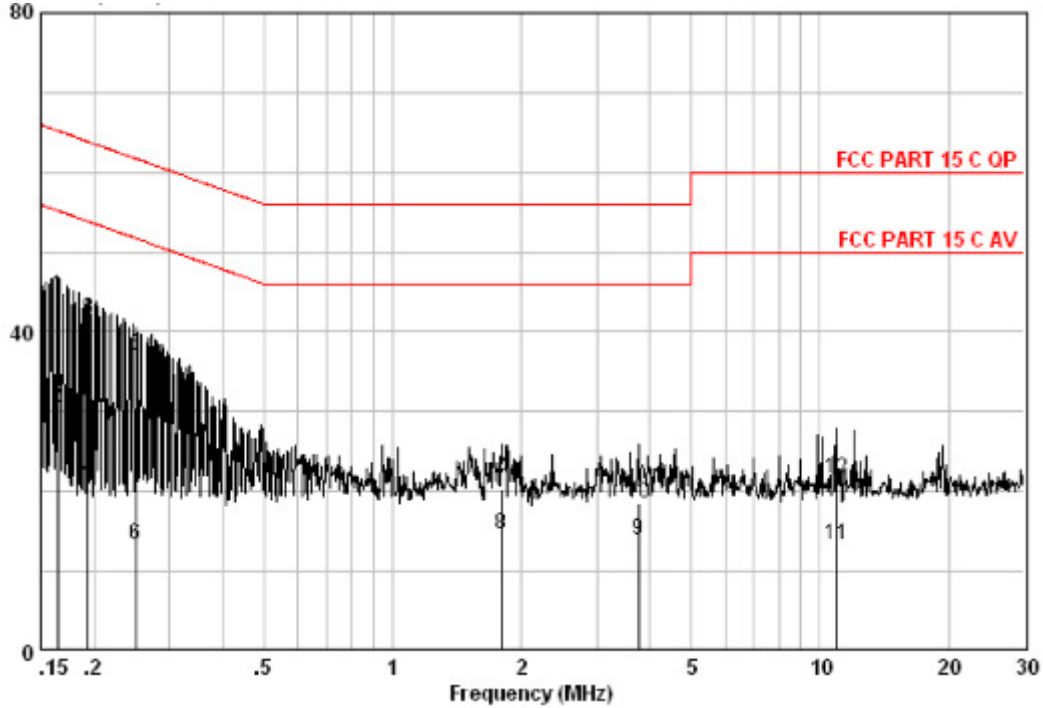

Quasi-peak and Average measurement:

Freq	Read Level	Cable Loss	LISN Factor	Level	Limit Line	Over Limit	Remark
MHz	dBμV	dB	dB	dBμV	dBμV	dB	
0.164	34.98	0.09	9.51	44.58	65.25	-20.68	QP
0.164	20.83	0.09	9.51	30.43	55.25	-24.83	AVERAGE
0.193	32.08	0.11	9.53	41.72	63.89	-22.17	QP
0.193	12.00	0.11	9.53	21.64	53.89	-32.25	AVERAGE
0.251	27.34	0.11	9.52	36.97	61.73	-24.76	QP
0.251	3.69	0.11	9.52	13.32	51.73	-38.41	AVERAGE
1.800	10.68	0.05	9.61	20.34	56.00	-35.66	QP
1.800	4.85	0.05	9.61	14.51	46.00	-31.49	AVERAGE
3.759	4.18	0.16	9.64	13.97	46.00	-32.03	AVERAGE
3.759	8.80	0.16	9.64	18.59	56.00	-37.41	QP
10.905	3.22	0.20	9.84	13.26	50.00	-36.74	AVERAGE
10.905	11.64	0.20	9.84	21.68	60.00	-38.32	QP

Level = Read Level + LISN Factor + Cable Loss.

--End of Report--