



Willow Run Test Labs, LLC  
8501 Beck Road, Building 2227  
Belleville, Michigan 48111 USA  
Tel: (734) 252 9785  
Fax: (734) 926 9785  
e-mail: info@wrtest.com

Testing of  
**802.15.4 and Digital Emissions**

per

**USA: CFR Title 47, Part 15.247**  
**Canada: RSS-GEN and RSS-210**

are herein reported for

**Trane, Inc.**  
**ComfortLink II**

Test Report No.: 20101019-01r1  
Copyright © 2010

Applicant:  
Trane, Inc.  
6200 Troup Highway, Tyler Texas 75707 USA  
Phone: +1 (903) 581-9067, Fax: +1 (903) 581-3280  
Contact Person: William Cotton; kevin.cotton@trane.com

Measurements made by: Joseph D. Brunett, Ph.D. Report Reviewed by: Joseph D. Brunett, Ph.D.  
Report written by: Joseph D. Brunett, Ph.D. Report Date of Issue: October 19, 2010

**Results of equipment under test (EUT) testing completed before October 19, 2010 are as follows.**

The transmitter fundamental emission meets the regulatory limit(s) by no less than 30.7 dB. Transmit chain spurious harmonic emissions comply by no less than 1.7 dB. Radiated spurious emissions associated with the receive chain of this device meet the regulatory limit(s) by no less than 6.2 dB. Unintentional spurious emissions from digital circuitry comply with the radiated emission limit(s) by more than 9.7 dB. AC Power Line conducted emissions comply by more than 1.9 dB.

## Contents

<b>1</b>	<b>Test Specifications, General Procedures, and Location</b>	<b>4</b>
1.1	Test Specification and General Procedures . . . . .	4
1.2	Test Location and Equipment Used . . . . .	5
<b>2</b>	<b>Configuration and Identification of the Equipment Under Test</b>	<b>6</b>
2.1	Description and Declarations . . . . .	6
2.1.1	EUT Configuration . . . . .	6
2.1.2	Modes of Operation . . . . .	6
2.1.3	Variants . . . . .	6
2.1.4	Test Samples . . . . .	7
2.1.5	Functional Exerciser . . . . .	7
2.1.6	Modifications Made . . . . .	7
2.1.7	Production Intent . . . . .	7
2.1.8	Additional Product Notes . . . . .	7
<b>3</b>	<b>Emissions</b>	<b>8</b>
3.1	General Test Procedures . . . . .	8
3.1.1	Radiated Test Setup and Procedures . . . . .	8
3.1.2	Conducted Test Setup and Procedures . . . . .	10
3.1.3	Power Supply Variation . . . . .	10
3.2	Intentional Emissions . . . . .	11
3.2.1	Fundamental Emission Peak to Average Ratio . . . . .	11
3.2.2	Fundamental Emission Bandwidth . . . . .	12
3.2.3	Radiated Power . . . . .	13
3.2.4	Power Spectral Density . . . . .	14
3.3	Unintentional Emissions . . . . .	15
3.3.1	Transmitter Conducted Spurious . . . . .	15
3.3.2	Radiated Transmitter Spurious . . . . .	16
3.3.3	Radiated Receiver Spurious . . . . .	17
3.3.4	Radiated Digital Spurious . . . . .	18
3.3.5	Conducted Emissions Test Results - AC Power Port(s) . . . . .	19

**List of Tables**

1	Willow Run Test Labs, LLC Equipment List. . . . .	5
2	EUT Declarations . . . . .	6
3	Computed Peak to Average Ratio. . . . .	11
4	Measured emission bandwidth. . . . .	12
5	Radiated power test results. . . . .	13
6	Radiated power test results. . . . .	14
7	Transmit Chain Spurious Emissions $\geq$ 30 MHz. . . . .	16
8	Receiver Chain Spurious Emissions $\geq$ 30 MHz. . . . .	17
9	Digital electromagnetic emissions. . . . .	18
10	AC mains conducted emissions results. . . . .	19

**List of Figures**

1	Photographs of the EUT. . . . .	6
2	EUT test configuration diagram. . . . .	7
3	Radiated Emissions Diagram of the EUT. . . . .	8
4	Radiated Emissions Test Setup Photograph(s). . . . .	9
5	Conducted Emissions General Setup Diagram. . . . .	10
6	Conducted Emissions Test Setup Photograph(s). . . . .	10
7	Intentional emission duty cycle measurements. . . . .	11
8	Intentional emissions bandwidth measurements. . . . .	12
9	Fundamental power measurement plots. . . . .	13
10	Conducted power spectral density measurement plots. . . . .	14
11	Transmitter Conducted Spurious Emissions (low+middle+high channels). . . . .	15

# 1 Test Specifications, General Procedures, and Location

## 1.1 Test Specification and General Procedures

The ultimate goal of Trane, Inc. is to demonstrate that the EUT complies with the Rules and/or Directives detailed below. Detailed in this report are the results of testing the Trane, Inc. ComfortLink II for compliance to:

Country/Region	Rules or Directive	Referenced Section(s)
United States	Code of Federal Regulations	CFR Title 47, Part 15.247
Canada	Industry Canada	RSS-GEN and RSS-210

In association with the rules and directives outlined above, the following specifications and procedures are followed herein.

ANSI C63.4-2003	"Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz"
FCC KDB 558074	"Measurement of Digital Transmission Systems Operating under Section 15.247"
FCC KDB 913591	"Measurement of radiated emissions at the edge of the band for a Part 15 RF Device"
Industry Canada	"The Measurement of Occupied Bandwidth"

## 1.2 Test Location and Equipment Used

**Test Location** The EUT was fully tested at **Willow Run Test Labs, LLC**, 8501 Beck Road, Building 2227, Belleville, MI 48111. The site description and attenuation characteristics of the Open Area Test Site are on file with the FCC Laboratory, Columbia, Maryland (FCC Reg. No: 688478) and with Industry Canada, Ottawa, ON (File Ref. No: IC 8719A-1).

**Test Equipment** Pertinent test equipment used for measurements at this facility is listed in Table 1. The quality system employed at Willow Run Test Labs, LLC has been established to ensure all equipment has a clearly identifiable classification, calibration expiry date, and that all calibrations are traceable to the SI through NIST, recognized national laboratories, accepted fundamental or natural physical constants, ratio type of calibration, or by comparison to consensus standards.

**Table 1: Willow Run Test Labs, LLC Equipment List.**

Description	Manufacturer/Model	SN	Quality Number	Last Cal By / Date Due
<b>Antennas</b>				
Shielded Loop (9 kHz - 50 MHz)	EMCO/6502	2855	UMLOOP1	UMRL / July-2011
Dipole Set (20 MHz - 1000 MHz)	EMCO/3121C	9504-1121	DIPEMC001	Liberty Labs / Sept-2011
Bicone (20 MHz - 250 MHz)	JEF	1	BICJEF001	UMRL / July-2011
Bicone (200 MHz - 1000 MHz)	JEF	1	SBICJEF001	UMRL / July-2011
Log-Periodic Array (200 MHz - 1000 MHz)	JEF/Isbell	1	LOGJEF001	UMRL / July-2011
L-Band	JEF		HRNL001	JEF / July-2011*
LS-Band Horns	JEF/NRL	001, 002	HRN15001, HRN15002	JEF / July-2011*
S-Band Horns	Scientific-Atlanta	1854	HRNSB001	JEF / July-2011*
C-Band	JEF/NRL	1	HRNC001	JEF / July-2011*
XN-Band Horns	JEF/NRL	001, 002	HRNXN001, HRNXN002	JEF / July-2011*
X-Band Horns	JEF/NRL	001, 002	HRNXB001, HRNXB002	JEF / July-2011*
Ku-Band Horns	JEF/NRL	001, 002	HRNKU001, HRNKU002	JEF / July-2011*
Ka-Band Horns	JEF/NRL	001, 002	HRNKA001, HRNKA002	JEF / July-2011*
<b>Receiver's / Spectrum Analyzers</b>				
Spectrum Analyzer	HP/8593E	3649A02722	HP8593E001	DTE / Sept-2011
<b>Signal Generators</b>				
Tracking Generator	HP/8593E	3649A02722	HP8593E001	DTE / Sept-2011
<b>Line Impedance Stabilization Networks</b>				
LISN	EMCO	9304-2081	LISNEM001	JEF / Jan-2011

\* Verification Only - Standard Gain Horn Antennas

## 2 Configuration and Identification of the Equipment Under Test

### 2.1 Description and Declarations

The EUT is a Comfort Controller containing a ZigBee (IEEE 802.15.4) home heating and cooling coordinator and WiFi hub with 7" color display. The equipment under test (EUT) is approximately 18.5 x 12.0 x 3.0 cm in dimension, and is depicted in Figure 1. It is powered by a 24 V AC transformer. This device is envisioned for use as a wireless home heating and cooling controller. Table 2 outlines provider declared EUT specifications.

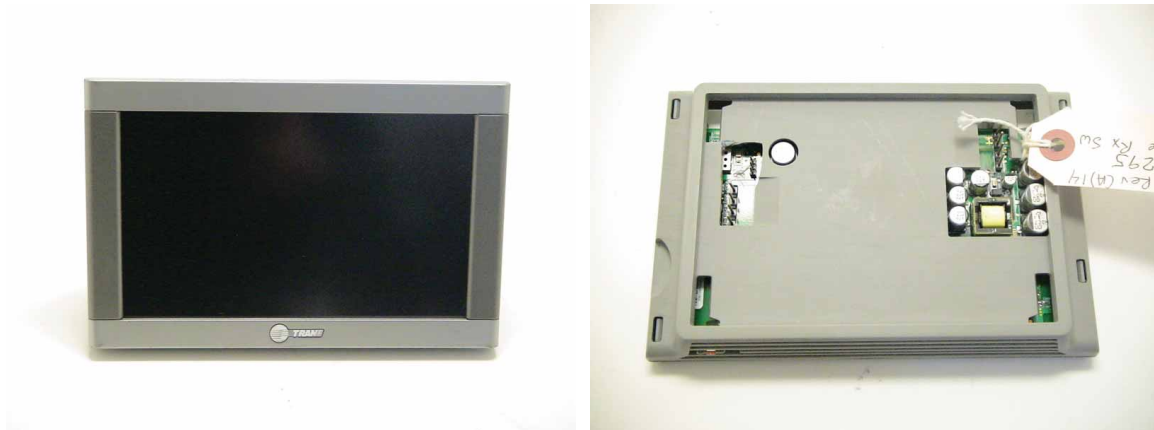


Figure 1: Photographs of the EUT.

Table 2: EUT Declarations

General Declarations			
Equipment Type:	HVAC Controller	Country of Origin:	USA
Nominal Supply:	24 V	Oper. Temp Range:	-20° C to +60° C
Frequency Range:	2405 to 2480 MHz	Antenna Dimension:	2.5 cm (approx.)
Antenna Type:	Integral PCB Antenna	Antenna Gain:	1 dBi
Number of Channels:	16	Channel Spacing:	5 MHz
Alignment Range:	-	Type of Modulation:	802.15.4
United States			
FCC ID Number:	XVRZONE950TRX	Classification:	DSS
Canada			
IC Number:	6178D-ZONE950TRX	Classification:	Spread Spectrum Device

#### 2.1.1 EUT Configuration


The EUT is configured for testing as depicted in Figure 2.

#### 2.1.2 Modes of Operation

The EUT is capable of controlling a residential HVAC system from its display panel and/or commands sent/received over it's ZigBee and WiFi interfaces.

#### 2.1.3 Variants

There are two electrically identical variants of the device tested, sold under different manufacturer trade names.

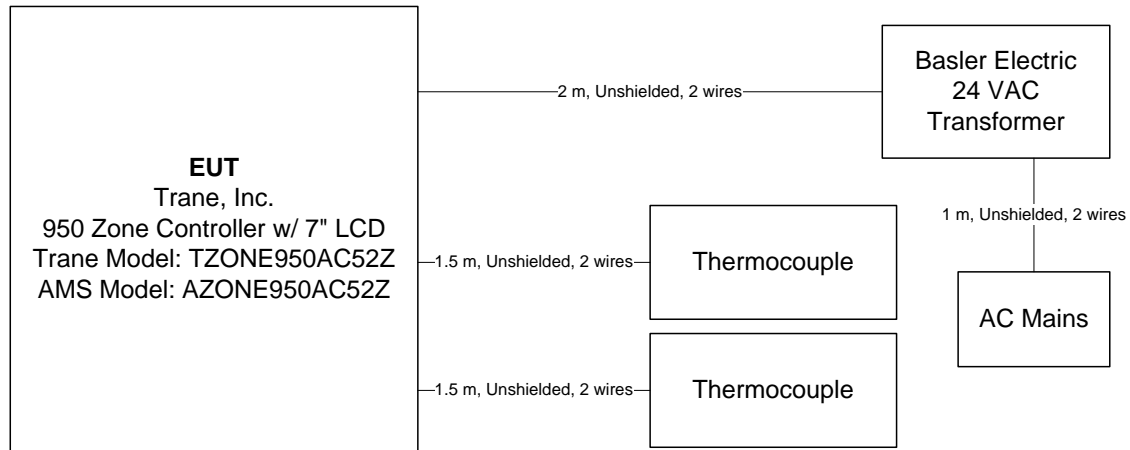

**Figure 2: EUT test configuration diagram.**

#### 2.1.4 Test Samples

One normal operating sample (SN: 275), one sample modified for RF conducted output (SN:279) and one Receive-Only sample (SN: 295) were provided for testing.

#### 2.1.5 Functional Exerciser

Not Applicable

#### 2.1.6 Modifications Made

There were no modifications made to the EUT tested by this laboratory. A Trane engineer programmed the device into various operating modes for testing.

#### 2.1.7 Production Intent

The EUT appears to be a production ready sample.

#### 2.1.8 Additional Product Notes


The EUT also contains an 802.11 b/g WiLAN radio more than 20 cm from its Zigbee radio on the other end of the PCB. Testing pertaining to that radio is provided in a separate test report. Intermodulation products with both radios transmitting on the center channel were examined and found to be below the measurable noise floor.

### 3 Emissions

#### 3.1 General Test Procedures

##### 3.1.1 Radiated Test Setup and Procedures

Radiated electromagnetic emissions from the EUT are first evaluated in our shielded fully anechoic chamber. Spectrum and modulation characteristics of all emissions are recorded, and emissions above 1 GHz are fully characterized. The anechoic chamber contains a set-up similar to that of our outdoor 3-meter site, with a turntable and antenna mast. Instrumentation, including spectrum analyzers and other test equipment as detailed in Section 1.2 are employed. After indoor pre-scans, emission measurements up to 1 GHz are made on our outdoor 3-meter Open Area Test Site (OATS). If the EUT connects to auxiliary equipment and is table or floor standing, the configurations prescribed in ANSI C63.4 / CISPR 22 are followed. Alternatively, a layout closest to normal use (as declared by the provider) is employed if the resulting emissions appear to be worst-case in such a configuration. See Figure 3. All

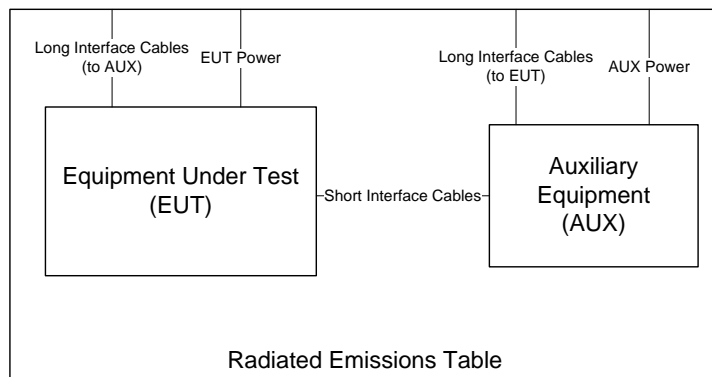

**Figure 3: Radiated Emissions Diagram of the EUT.**

intentionally radiating elements are placed on the test table lying flat, on their side, and on their end (3-axes) and the resulting worst case emissions are recorded. For both horizontal and vertical polarizations, the test antenna is raised and lowered from 1 to 4 m in height until a maximum emission level is detected. The EUT is then rotated through  $360^\circ$  in azimuth until the highest emission is detected. The test antenna is then raised and lowered one last time from 1 to 4 m and the worst case value is recorded.


If the EUT exhibits spurious emissions due to internal receiver circuitry, such emissions are measured with an appropriate carrier signal applied. For devices with intentional emissions below 30 MHz, a shielded loop antenna is used as the test antenna. It is placed at a 1 meter receive height and appropriate low frequency magnetic field extrapolation to the regulatory limit distance is employed. Emissions between 30 MHz and 1 GHz are measured using tuned dipoles and/or calibrated broadband antennas. Emissions above 1 GHz are characterized using standard gain horn antennas. Care is taken to ensure that test receiver resolution and video bandwidths meet the regulatory requirements, and that the emission bandwidth of the EUT is not reduced.

When the regulatory limit is specified as a field strength at a given distance, the dBm values measured on the test receiver / analyzer are converted to  $\text{dB}\mu\text{V}/\text{m}$  at three meters, using

$$E_{3m} = 107 + P_R + K_A - K_G + K_E - C_F$$

where  $P_R$  is the power recorded on spectrum analyzer, in dBm,  $K_A$  is the test antenna factor in dB/m,  $K_G$  is the pre-amplifier gain and cable loss in dB,  $K_E$  is duty correction factor (where applicable) in dB, and  $C_F$  is a distance conversion (employed only if limits are specified at alternate distance) in dB. This value is then compared with the regulatory limit extrapolated to the same distance. When presenting data at each frequency, the highest measured emission under all possible EUT orientations (3-axes) is reported. Photographs of the test setup employed are depicted in Figure 4.



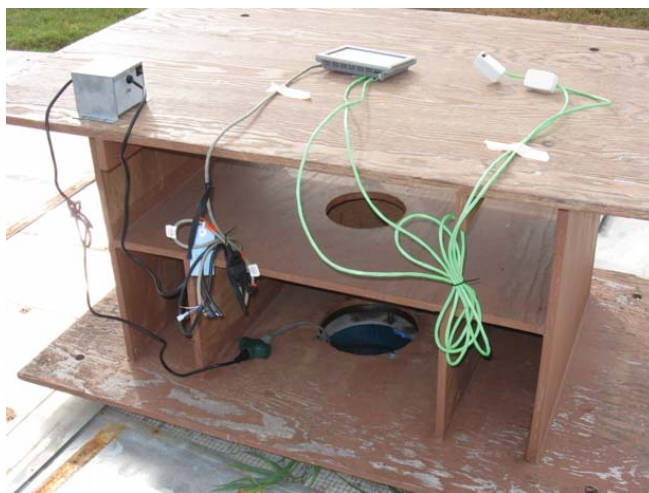


**Figure 4: Radiated Emissions Test Setup Photograph(s).**

### 3.1.2 Conducted Test Setup and Procedures


**Transmit Antenna Port Conducted Emissions** At least one sample EUT supplied for testing employed a removable antenna with 50Ω port. Thus, conducted RF emissions measurements (when applicable) are made by connecting the EUT antenna port directly to the test receiver port.

**AC Port Conducted Spurious** For this device, AC power line conducted emissions are measured in our screen room. If the EUT connects to auxiliary equipment and is table or floor standing, the configurations prescribed in ANSI C63.4 / CISPR 22 are employed. Alternatively, an on-table layout more representative of actual use may be employed if the resulting emissions appear to be worst-case in such a configuration. See Figure 5. Conducted

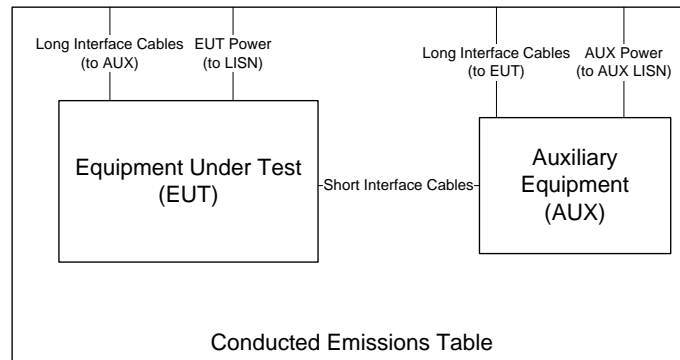

**Figure 5: Conducted Emissions General Setup Diagram.**

emissions are measured and recorded for each AC mains power source over the spectrum 0.15 MHz to 30 MHz for both the ungrounded (HI/PHASE) and grounded (LO/GRND) conductors with the EUT placed in its highest current draw operating mode(s). The test receiver is set to peak-hold mode in order to record the peak emissions throughout the course of functional operation. Only if an emission exceeds or is near the limit are quasi-peak and average detection applied. Photographs of the test setup employed are depicted in Figure 6.

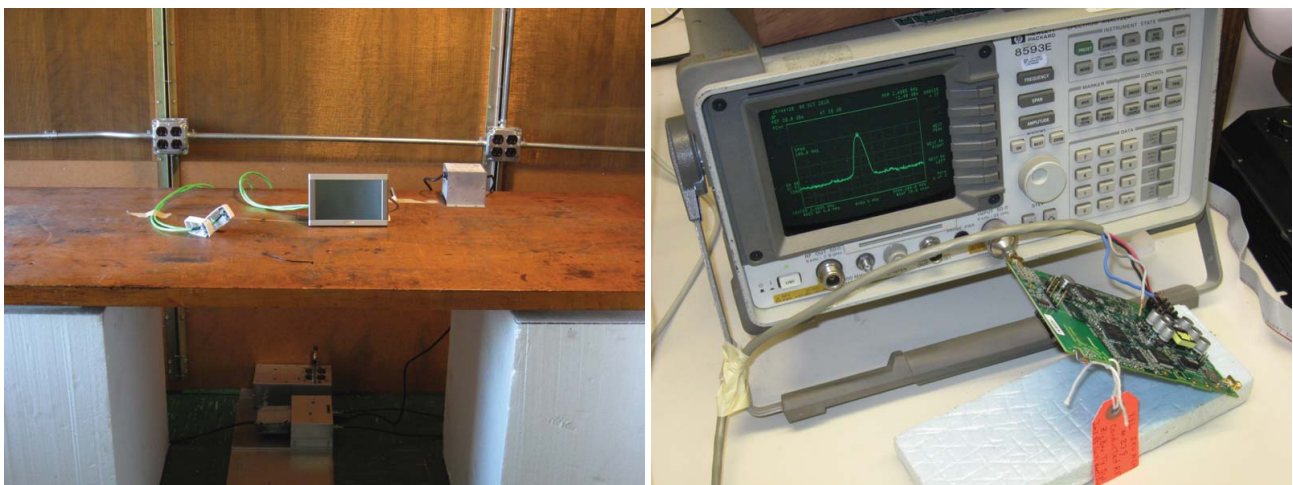

**Figure 6: Conducted Emissions Test Setup Photograph(s).**

### 3.1.3 Power Supply Variation

Measurements of the worst-case radiated emissions are performed with the supply voltage varied by no less than 85% and 115% of the nominal rated value.

### 3.2 Intentional Emissions

#### 3.2.1 Fundamental Emission Peak to Average Ratio

For the measurements presented here, the EUT was set to transmit with the shortest available packet length and minimum packet spacing (i.e. maximum on time) allowed by the radio software for each operating mode. The following modes were measured with the test receiver set to zero-span (time-domain). Plots showing the measurements made to obtain these values are provided in Figure 7.

**Table 3: Computed Peak to Average Ratio.**

Frequency Range	Detector	IF Bandwidth	Video Bandwidth	Test Date: 21-Sep-10
25 MHz ≤ f ≤ 1 000 MHz	Pk/QPk	120 kHz	300 kHz	Test Engineer: Joseph Brunett
f > 1 000 MHz	Pk/Avg	3 MHz	3 MHz/10 kHz	EUT Mode: Cont. Tx.

Trane XXL Zigbee; FCC/IC							
Mode	Data Rate	Channel	Frequency (MHz)	Packet Length (t) (ms)	Packet Period (T) (ms)	Duty Cycle (%) (dB)	
802.15.4	Continuous	1	2405.0	N/A	N/A	N/A	N/A

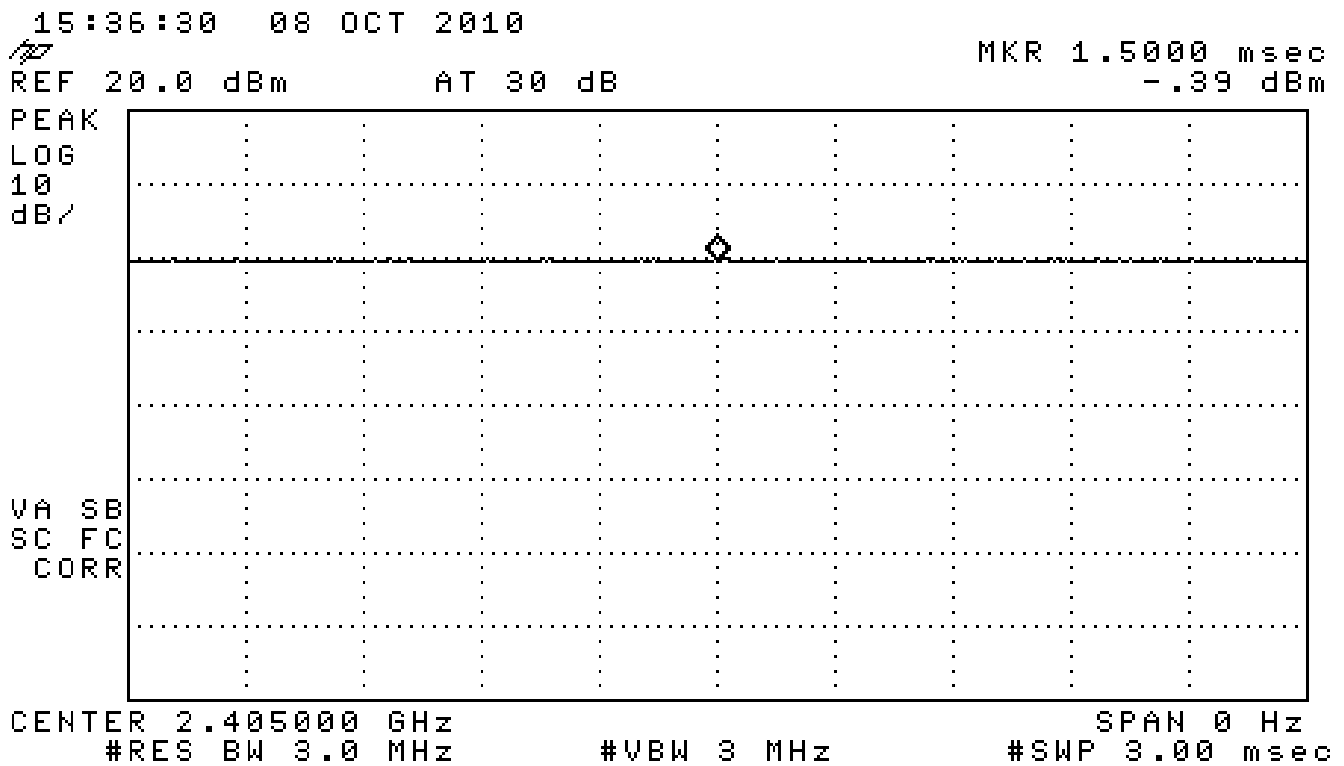


Figure 7: Intentional emission duty cycle measurements.


### 3.2.2 Fundamental Emission Bandwidth

Emission bandwidth of the EUT is measured with the device placed in the test mode(s) with the shortest available packet length and minimum packet spacing. Radiated emissions are recorded following the test procedures listed in Section 1.1 The 6-dB bandwidth and 26 dB EBW are measured for the lowest, middle, and highest channels available. The 99% emission bandwidth per IC test procedures is also reported. Plots showing example measurements employed obtain the emission bandwidths reported are provided in Figure 8.

**Table 4: Measured emission bandwidth.**

**Frequency Range**      **Detector** **IF Bandwidth** **Video Bandwidth** **Test Date:**      16-Sep-10  
**f > 1 000 MHz**      **Pk**      **100 kHz**      **>100 kHz**      **Test Engineer:** Joseph Brunett  
**EUT Mode:**      Cont. Tx.

Trane XXL Zigbee; FCC/IC						
Mode	Data Rate	Channel	Frequency (MHz)	6 dB BW (MHz)	26 dB EBW (MHz)	IC 99% PWR BW (MHz)
802.15.4	Continuous	1	2405.0	1.53	4.80	3.375
		8	2440.0	1.65	4.85	3.563
		16	2480.0	1.55	4.80	3.375

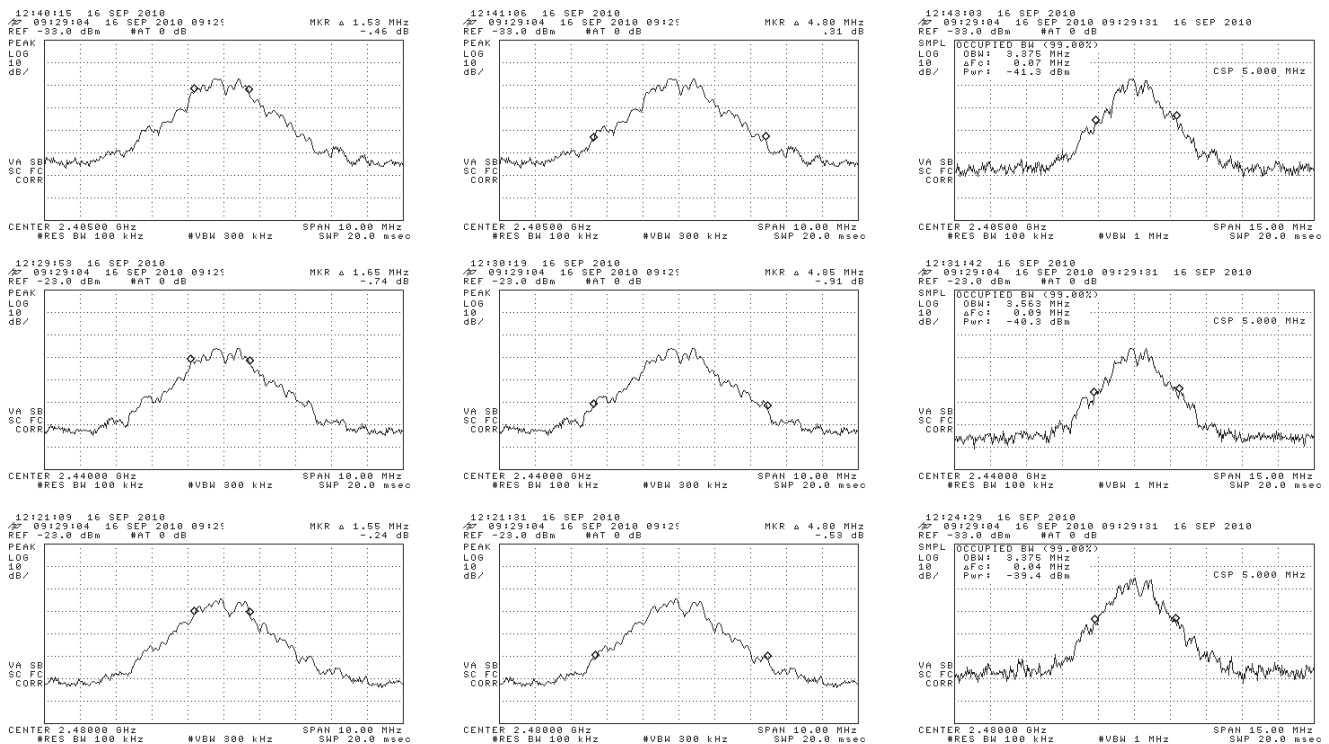

**Figure 8: Intentional emissions bandwidth measurements.**

### 3.2.3 Radiated Power

The EUT's radiated power is computed from antenna port conducted power measurements and the measured gain of the EUT antenna. Where the EUT is not sold with an antenna connector, a modified product has been provided including such. Peak conducted output power is measured directly from the EUT antenna port by setting the test receiver bandwidth greater than the measured emission bandwidth of the EUT. Antenna gain is computed by comparing radiated and conducted fundamental emissions measurements with equivalent test receiver detection bandwidths. Table 5 details the results of these measurements. Plots showing the measurements made to obtain these values are provided in Figure 9.


**Table 5: Radiated power test results.**

<b>Frequency Range</b>	<b>Det</b>	<b>IF Bandwidth</b>	<b>Video Bandwidth</b>	<b>Test Date:</b>	12-Oct-10
25 MHz ≤ f ≤ 1 000 MHz	Pk/QPk	120 kHz	300 kHz	<b>Test Engineer:</b>	Joseph Brunett
f > 1 000 MHz	Pk/Avg	3 MHz	3 MHz/10kHz	<b>EUT Mode:</b>	802.15.4 Continuous Tx

Trane XXL Zigbee; FCC/IC												
Mode	Channel	Freq. MHz	Ant. Used	Ant. Pol.	Pr (Pk)** dBm	Ka dB/m	Kg dB	EIRP (Pk) dBm	Pout (Pk)* dBm	Calc. Ant Gain dB	Pout Limit dBm	
802.15.4	1	2405.0	Horn S	H/V	-38.1	23.5	-1.2	- 1.6	- 0.7	-0.9	30.0	
	8	2440.0	Horn S	H/V	-37.2	23.6	-1.2	- 0.6	- 1.0	0.4	30.0	
	16	2480.0	Horn S	H/V	-37.0	23.8	-1.2	- 0.2	- 1.2	1.0	30.0	
Mode	Channel	Freq. MHz	Supply Voltage							Pout (Pk)* dBm		
802.15.4	8	2440.0	85.0							- 0.9		
		2440.0	100.0							- 1.0		
		2440.0	115.0							- 1.0		
		2440.0	130.0							- 1.0		
		2440.0	145.0							- 1.0		

\* Measured conducted from EUT

\*\* Measured radiated at 3 meter distance

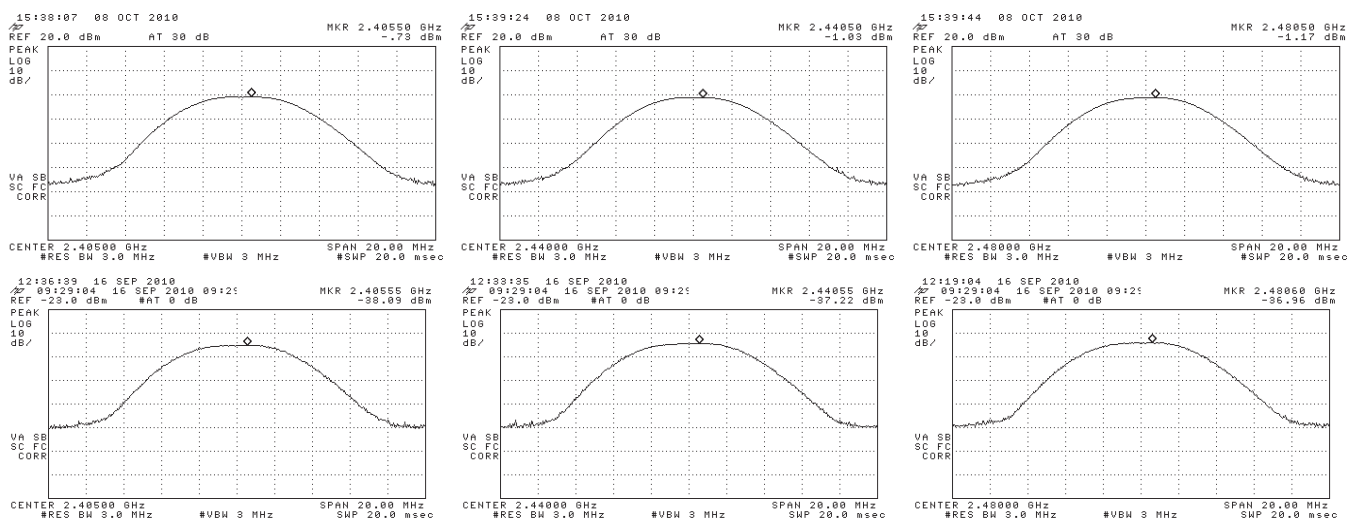

**Figure 9: Fundamental power measurement plots.**


### 3.2.4 Power Spectral Density

For this test, the EUT was set to transmit the shortest available packet length and minimum packet spacing allowed by the radio software. The EUT was attached directly to the test receiver. The emission spectrum is first scanned for maximum spectral peaks, the span and receiver bandwidth are then reduced until the power spectral density is measured in the prescribed receiver bandwidth. A sweep time of 100 seconds is maintained to ensure peak signals are captured in each frequency bin. The results are of this testing are summarized in Table 6. Example plots showing how these measurements were made are depicted in Figure 10.

**Table 6: Radiated power test results.**

**Frequency Range** 2405-2480 MHz    **Detector** Pk    **IF Bandwidth** 3 kHz    **Video Bandwidth** 300 kHz    **Test Date:** 16-Sep-10  
**Test Engineer:** Joseph Brunett  
**EUT Mode:** Cont. Tx.

Trane XXL Zigbee; FCC/IC					
Mode	Data Rate	Channel	Frequency (MHz)	PSD (dBm/3kHz)	Line Spacing (kHz)
802.15.4	Continuous	1	2405.0	-9.15	61.5
		8	2440.0	-10.72	61.5
		16	2480.0	-8.83	61.5

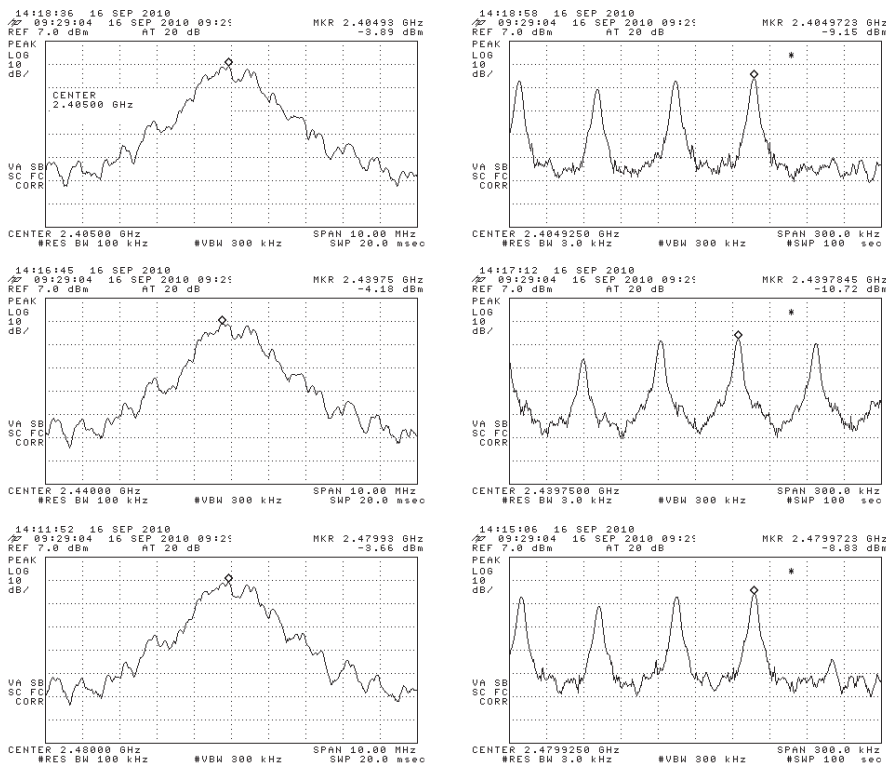

**Figure 10: Conducted power spectral density measurement plots.**

### 3.3 Unintentional Emissions

#### 3.3.1 Transmitter Conducted Spurious

For this test, the EUT was set to transmit the shortest available packet length and minimum packet spacing allowed by the radio software. The EUT was attached directly to the test receiver. Conducted spurious emissions were recorded up to (and beyond) 10 times the highest fundamental operating frequency for each applicable operating mode. In all cases, spurious emissions are more than 30 dB below the carrier level. Plots demonstrating compliance across all channels for each operating mode and max held for low, middle, and high channels are included in Figure 11. Also included are plots demonstrating band-edge compliance at lower and upper edges of the declared operating band for each mode and max held for low, middle, and high channels.

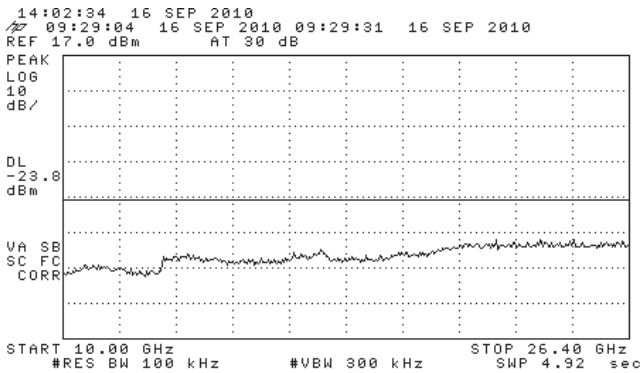
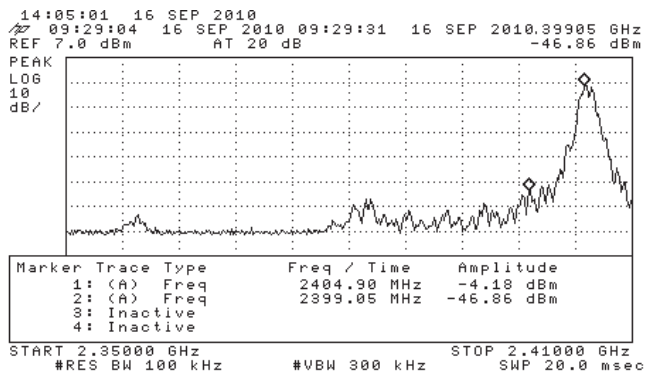
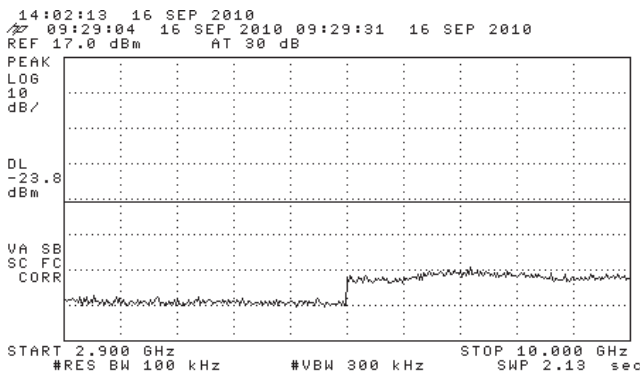
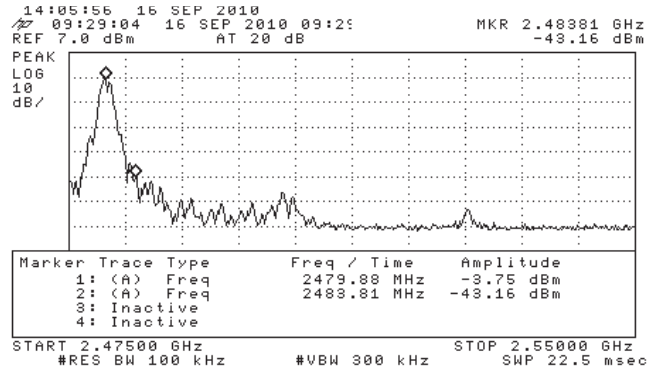
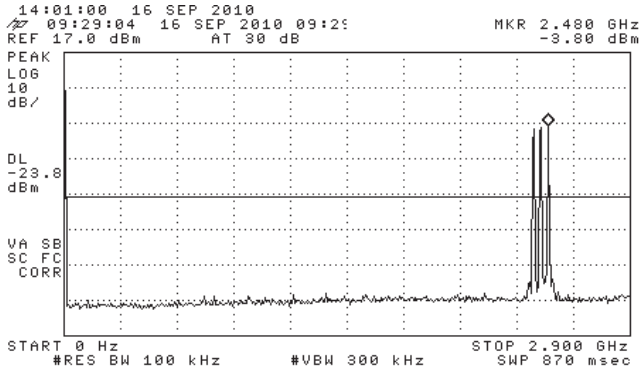


Figure 11: Transmitter Conducted Spurious Emissions (low+middle+high channels).

### 3.3.2 Radiated Transmitter Spurious

**Transmit Chain Spurious Emissions  $\geq$  30 MHz** The results for the measurement of transmitter chain spurious emissions above 30 MHz at the nominal voltage and temperature are provided in Table 7. Measurements are performed to 10 times the highest fundamental operating frequency.

**Table 7: Transmit Chain Spurious Emissions  $\geq$  30 MHz.**

<b>Frequency Range</b>	<b>Det</b>	<b>IF Bandwidth</b>	<b>Video Bandwidth</b>	<b>Test Date:</b>	12-Oct-10
25 MHz $\leq$ f $\leq$ 1 000 MHz	Pk/QPk	120 kHz	300 kHz	<b>Test Engineer:</b>	Joseph Brunett
f > 1 000 MHz	Pk/Avg	1 MHz	3 MHz/10kHz	<b>EUT Mode:</b>	802.15.4 Continuous Tx

Tx Spurious Emissions												Trane XXL Zigbee; FCC/IC
#	Freq. MHz	Ant. Used	Ant. Pol.	Pr (Pk) dBm	Pr (Avg) dBm	Ka dB/m	Kg dB	E3(Pk) dB $\mu$ V/m	E3(Avg) dB $\mu$ V/m	E3 Avg Lim dB $\mu$ V/m	Pass dB	Comments
1	<b>Fundamental Restricted Band Edge (Low Side)</b>											
2	2381.8	Horn S	H/V		-87.4	23.5	-1.2		44.3	54.0	9.7	CH1, 2405 MHz; max all
3	2390.0	Horn S	H/V		-90.6	23.5	-1.2		41.1	54.0	12.9	CH8, 2440 MHz; max all
4	2390.0	Horn S	H/V		-88.1	23.5	-1.2		43.6	54.0	10.4	CH16, 2480 MHz; max all
5	<b>Fundamental Restricted Band Edge High Side)</b>											
6	2483.5	Horn S	H/V		-90.9	23.8	-1.2		41.1	54.0	12.9	CH1, 2405 MHz; max all
7	2483.5	Horn S	H/V		-90.4	23.8	-1.2		41.6	54.0	12.4	CH8, 2440 MHz; max all
8	2498.9	Horn S	H/V		-86.9	23.8	-1.2		45.1	54.0	8.9	CH15, 2475 MHz; max all
9	2483.5	Horn S	H/V	NOTE**	-79.7	23.8	-1.2		52.3	54.0	1.7	CH16, 2480 MHz; max all
10	<b>Harmonic Emissions</b>											
11	4810.0	Horn C	H/V	-64.8	-72.3	24.6	21.1	45.7	38.2	54.0	15.8	Low; max all
12	4880.0	Horn C	H/V	-65.5	-73.4	24.6	20.9	45.2	37.3	54.0	16.7	Mid; max all
13	4960.0	Horn C	H/V	-65.3	-74.4	24.6	20.7	45.7	36.6	54.0	17.4	High; max all
14	7215.0	Horn XN	H/V	-63.1	-75.3	25.1	21.7	47.3	35.1	54.0	18.9	Low, noise; max all
15	7320.0	Horn XN	H/V	-63.1	-75.4	25.2	21.9	47.2	34.9	54.0	19.1	Mid, noise; max all
16	7440.0	Horn XN	H/V	-62.7	-73.8	25.3	22.1	47.5	36.4	54.0	17.6	High, noise; max all
17	9620.0	Horn X	H/V	-64.7	-75.4	27.8	18.0	52.1	41.4	54.0	12.6	Low, noise; max all
18	9760.0	Horn X	H/V	-65.1	-74.9	27.9	17.9	51.9	42.1	54.0	11.9	Mid, noise; max all
19	9920.0	Horn X	H/V	-65.3	-75.4	28.0	17.9	51.7	41.6	54.0	12.4	High, noise; max all
20	12025.0	Horn X	H/V	-65.2	-75.9	31.7	17.0	56.6	45.9	54.0	8.1	Low, noise; max all
21	12200.0	Horn X	H/V	-66.1	-75.9	31.8	16.6	56.1	46.3	54.0	7.7	Mid, noise; max all
22	12400.0	Horn X	H/V	-66.6	-76.6	32.0	16.2	56.1	46.1	54.0	7.9	High, noise; max all
23	14430.0	Horn Ku	H/V	-63.3	-72.8	33.2	20.7	56.2	46.7	54.0	7.3	Low, noise; max all
24	14640.0	Horn Ku	H/V	-62.5	-73.1	33.3	20.9	56.9	46.3	54.0	7.7	Mid, noise; max all
25	14880.0	Horn Ku	H/V	-62.8	-73.3	33.4	21.1	56.5	46.0	54.0	8.0	High, noise; max all
26	16835.0	Horn Ku	H/V	-61.5	-71.7	34.6	21.9	58.2	48.0	54.0	6.0	Low, noise; max all
27	17080.0	Horn Ku	H/V	-62.6	-71.7	34.8	22.0	57.2	48.1	54.0	5.9	Mid, noise; max all
28	17360.0	Horn Ku	H/V	-61.9	-71.4	35.0	22.2	57.9	48.4	54.0	5.6	High, noise; max all
29	19240.0	Horn K	H/V	-61.0	-70.3	32.2	21.5	56.7	47.4	54.0	6.6	Low, noise; max all
30	19520.0	Horn K	H/V	-61.7	-70.5	32.3	20.2	57.4	48.6	54.0	5.4	Mid, noise; max all
31	19840.0	Horn K	H/V	-62.0	-70.7	32.3	17.8	59.5	50.8	54.0	3.2	High, noise; max all
32	21645.0	Horn K	H/V	-59.0	-66.7	32.7	40.0	40.7	33.0	54.0	21.0	Low, noise; max all
33	21960.0	Horn K	H/V	-58.9	-67.9	32.8	40.0	40.9	31.9	54.0	22.1	Mid, noise; max all
34	22320.0	Horn K	H/V	-59.3	-68.0	32.8	40.0	40.5	31.8	54.0	22.2	High, noise; max all
35	24050.0	Horn K	H/V	-59.4	-67.3	33.2	40.0	40.8	32.9	54.0	21.1	Low, noise; max all
36	24400.0	Horn K	H/V	-60.0	-67.9	33.2	40.0	40.2	32.3	54.0	21.7	Mid, noise; max all
37	24800.0	Horn K	H/V	-59.1	-67.9	33.3	40.0	41.2	32.4	54.0	21.6	High, noise; max all

\*QPk detection below 1 GHz, Avg detection at or above 1 GHz with receiver bandwidth as specified at top of table.

\*\*Measured employing the "delta method", with PEAK emission measured in a 3MHz IF bandwidth followed by band-edge delta in a 30kHz IF bandwidth.



### 3.3.3 Radiated Receiver Spurious

The results for the measurement of radiated receiver spurious emissions (emissions from the receiver chain, e.g. LO or VCO) at the nominal voltage and temperature are provided in Table 8. Receive chain emissions are measured to 5 times the highest receive chain frequency employed or 4 GHz, whichever is higher.

**Table 8: Receiver Chain Spurious Emissions  $\geq$  30 MHz.**

<b>Frequency Range</b>	<b>Det</b>	<b>IF Bandwidth</b>	<b>Video Bandwidth</b>	<b>Test Date:</b>	21-Sep-10
25 MHz $\leq$ f $\leq$ 1 000 MHz	Pk/QPk	120 kHz	300 kHz	<b>Test Engineer:</b>	Joseph Brunett
f > 1 000 MHz	Pk/Avg	1 MHz	3 MHz/10kHz	<b>EUT Mode:</b>	Tx & Rx Off

Receive Chain Spurious Emissions													Trane XXL Zigbee; FCC/IC/CISPR	
#	Freq. MHz	Ant. Used	Ant. Pol.	Pr (Pk) dBm	Pr (QPk/Avg) dBm*	Ka dB/m	Kg dB	E3(Pk) dB $\mu$ V/m	E3(Avg) dB $\mu$ V/m	FCC/IC E3lim dB $\mu$ V/m	CE E3lim dB $\mu$ V/m	Pass dB	Comments	
1	2381.0	SL-Horn	H/V	-53.8		23.5	30.4	46.3		54.0		7.7	max all, noise	
2	2429.0	SL-Horn	H/V	-53.2		23.6	30.2	47.2		54.0		6.8	max all, noise	
3	2416.0	S-Horn	H/V	-54.0		23.6	30.2	46.3		54.0		7.7	max all, noise	
4	2464.0	S-Horn	H/V	-52.9		23.7	30.1	47.8		54.0		6.2	max all, noise	
5	2456.0	S-Horn	H/V	-53.5		23.7	30.1	47.1		54.0		6.9	max all, noise	
6	2504.0	S-Horn	H/V	-53.1		23.8	29.9	47.8		54.0		6.2	max all, noise	
7														
8	NOTE: VCO/LO is 24 MHz offset from Rx Channel per IC datasheet. Low, Middle and High Channels tested.													
9														
10														
11														
12														
13														
14														
15														
16														
17														
18														
19														
20														
21														
22														
23														
24														
25														
26														
27														
28														
29														
30														
31														
32														
33														
34														
35														
36														
37														

\*QPk detection below 1 GHz, Avg detection at or above 1 GHz with receiver bandwidth as specified at top of table.

### 3.3.4 Radiated Digital Spurious

The results for the measurement of digital spurious emissions (emissions arising from digital circuitry) at the nominal voltage and temperature are provided in Table 9. Radiation from digital components has been measured to 4 GHz, or to five times the maximum digital component operating frequency, whichever is greater.

**Table 9: Digital electromagnetic emissions.**

<b>Frequency Range</b>	<b>Det</b>	<b>IF Bandwidth</b>	<b>Video Bandwidth</b>	<b>Test Date:</b>	21-Sep-10
25 MHz ≤ f ≤ 1 000 MHz	Pk/QPk	120 kHz	300 kHz	<b>Test Engineer:</b>	Joseph Brunett
f > 1 000 MHz	Pk/Avg	1 MHz	3 MHz/10kHz	<b>EUT Mode:</b>	Tx & Rx Off

Digital Spurious Emissions													Trane XXL Zigbee; FCC/IC/CISPR	
#	Freq. MHz	Ant. Used	Ant. Pol.	Pr (Pk) dBm	Pr (QPk/Avg) dBm*	Ka dB/m	Kg dB	E3(Pk) dBμV/m	E3(Avg) dBμV/m	CC/IC E3lim dBμV/m	CE E3lim dBμV/m	Pass dB	Comments	
1	30.0	Bic	H	-60.8		13.3	25.3	34.1		40.0	47.5	5.9		
2	44.0	Bic	H	-92.5		10.0	25.1	- 0.6		40.0	47.5	40.6		
3	53.4	Bic	H	-87.9		8.7	25.0	2.8		40.0	47.5	37.2		
4	69.1	Bic	H	-67.3		7.6	24.8	22.6		40.0	47.5	17.4		
5	108.2	Bic	H	-78.3		9.0	24.2	13.5		43.5	47.5	30.0		
6	108.2	Bic	V	-57.0		9.0	24.2	34.8		43.5	47.5	8.7		
7	116.3	Bic	V	-67.6		9.7	24.1	25.0		43.5	47.5	18.5		
8	132.9	Bic	H	-71.8		11.1	23.9	22.4		43.5	47.5	21.1		
9	148.1	Bic	V	-68.3		12.3	23.7	27.3		43.5	47.5	16.2		
10	163.4	Bic	H	-66.6		13.4	23.5	30.3		43.5	47.5	13.2		
11	166.1	Bic	H	-85.1		13.5	23.5	12.0		43.5	47.5	31.5		
12	205.0	Bic	H	-68.6		14.7	23.0	30.2		43.5	47.5	13.3		
13	225.0	Bic	H	-74.2		14.7	22.7	24.8		46.0	47.5	21.2		
14	235.7	Bic	V	-66.2		14.7	22.6	32.9		46.0	47.5	13.1		
15	250.0	SBic	H	-68.1		15.6	22.4	32.1		46.0	47.5	13.9		
16	250.0	SBic	V	-68.3		15.6	22.4	31.9		46.0	47.5	14.1		
17	325.0	SBic	H	-75.4		18.8	21.5	28.9		46.0	47.5	17.1		
18	338.1	SBic	H	-74.2		19.3	21.4	30.7		46.0	47.5	15.3		
19	357.1	SBic	H	-77.6		19.9	21.2	28.2		46.0	47.5	17.8		
20	798.1	SBic	V	-84.6		27.4	17.3	32.5		46.0	47.5	13.5		
21	801.6	SBic	H	-83.7		27.5	17.3	33.4		46.0	47.5	12.6		
22	952.9	SBic	H	-80.3		30.3	16.5	40.5		46.0	47.5	5.5		
23	1078.8	L-Horn	H	-65.5		16.8	14.7	43.6		54.0		10.4	noise	
24	1148.1	L-Horn	H	-64.7		16.9	18.0	41.2		54.0		12.8	noise	
25	1212.6	L-Horn	V	-61.8		17.0	20.7	41.5		54.0		12.5	noise	
26	1245.7	L-Horn	H	-62.6		17.1	21.9	39.6		54.0		14.4	noise	
27	1379.6	L-Horn	H	-58.7		17.3	25.8	39.8		54.0		14.2	noise	
28	1538.7	L-Horn	H	-57.6		17.6	28.8	38.2		54.0		15.8	noise	
29	1552.8	L-Horn	H	-57.6		17.6	28.9	38.1		54.0		15.9	noise	
30	1661.0	SL-Horn	V	-55.8		21.4	30.1	42.5		54.0		11.5	noise	
31	1955.0	SL-Horn	H	-52.3		20.6	31.3	44.0		54.0		10.0	noise	
32	1988.0	SL-Horn	H	-53.6		20.6	31.3	42.7		54.0		11.3	noise	
33	2092.0	SL-Horn	H	-54.5		20.6	31.2	41.9		54.0		12.1	noise	
34	2422.0	SL-Horn	H	-53.9		21.4	30.2	44.3		54.0		9.7	noise	
35	2590.0	S-Horn	H/V	-59.4		21.5	21.5	29.6		54.0		24.4	noise	
36	3340.0	S-Horn	H/V	-60.0		21.5	21.5	26.8		54.0		27.2	noise	
37	3980.0	S-Horn	H/V	-59.1		21.5	21.5	24.5		54.0		29.5	noise	

\*QPk detection below 1 GHz, Avg detection at or above 1 GHz with receiver bandwidth as specified at top of table.

### 3.3.5 Conducted Emissions Test Results - AC Power Port(s)

The results of emissions from the EUT's AC mains power port(s) are reported in Table 10.

**Table 10: AC mains conducted emissions results.**

**Frequency Range** 150kHz ≤ f ≤ 30 MHz    
 **Det** Pk/QPk/Avg    
 **IF Bandwidth** 9 kHz    
 **Video Bandwidth** 30 kHz    
 **Test Date:** 20-Sep-10  
**Test Engineer:** Joseph Brunett  
**EUT Mode:** Max Current Draw

Trane XXL Zigbee+WiFi+LCD On; FCC/IC/CISPR														
#	Freq. MHz	Line Side	Peak Det., dBμV			Pass dB*	QP Det., dBμV			Pass dB	Ave. Det., dBμV		Pass dB	Comments
			Vtest	Vlim*			Vtest	Vlim			Vtest	Vlim		
1	0.15	Lo	32.0	56.0	24.0		66.1				56.0			
2	0.18	Lo	30.0	54.3	24.3		64.4				54.3			
3	0.21	Lo	30.0	53.2	23.2		63.2				53.2			
4	0.22	Lo	29.4	52.6	23.2		62.7				52.6			
5	0.80	Lo	28.8	46.0	17.2		56.0				46.0			
6	1.20	Lo	28.9	46.0	17.1		56.0				46.0			
7	1.42	Lo	29.8	46.0	16.2		56.0				46.0			
8	1.50	Lo	31.2	46.0	14.8		56.0				46.0			
9	1.64	Lo	29.0	46.0	17.0		56.0				46.0			
10	1.99	Lo	29.7	46.0	16.3		56.0				46.0			
11	4.47	Lo	35.5	46.0	10.5		56.0				46.0			
12	4.84	Lo	38.8	46.0	7.2		56.0				46.0			
13	5.22	Lo	36.2	50.0	13.8		60.0				50.0			
14	13.58	Lo	35.2	50.0	14.8		60.0				50.0			
15	14.40	Lo	34.1	50.0	15.9		60.0				50.0			
16	15.59	Lo	35.4	50.0	14.6		60.0				50.0			
17	15.97	Lo	33.0	50.0	17.0		60.0				50.0			
18	16.40	Lo	32.8	50.0	17.2		60.0				50.0			
19	16.79	Lo	33.3	50.0	16.7		60.0				50.0			
20	17.16	Lo	33.5	50.0	16.5		60.0				50.0			
21														
22														
23	0.21	Hi	28.0	53.0	25.0		63.1				53.0			
24	0.38	Hi	27.4	48.2	20.8		58.3				48.2			
25	0.80	Hi	28.2	46.0	17.8		56.0				46.0			
26	0.82	Hi	27.5	46.0	18.5		56.0				46.0			
27	0.88	Hi	27.0	46.0	19.0		56.0				46.0			
28	0.97	Hi	27.0	46.0	19.1		56.0				46.0			
29	1.34	Hi	27.1	46.0	18.9		56.0				46.0			
30	1.50	Hi	30.0	46.0	16.0		56.0				46.0			
31	1.57	Hi	26.9	46.0	19.2		56.0				46.0			
32	1.99	Hi	27.0	46.0	19.1		56.0				46.0			
33	3.65	Hi	37.1	46.0	8.9		56.0				46.0			
34	4.02	Hi	38.1	46.0	7.9		56.0				46.0			
35	4.47	Hi	43.5	46.0	2.5		56.0				46.0			
36	4.84	Hi	44.1	46.0	1.9		56.0				46.0			
37	5.22	Hi	38.2	50.0	11.9		60.0				50.0			
38	5.66	Hi	35.8	50.0	14.2		60.0				50.0			
39	14.02	Hi	35.7	50.0	14.3		60.0				50.0			
40	14.40	Hi	35.8	50.0	14.2		60.0				50.0			
41	14.85	Hi	36.7	50.0	13.3		60.0				50.0			
42	15.22	Hi	35.6	50.0	14.4		60.0				50.0			
43														