


MARK	ISSUE	REVISING	DATE	REV
△				



CTF-01
背面背胶
粘性强度不可低于
3.0kg f/inch²

Label Die Line

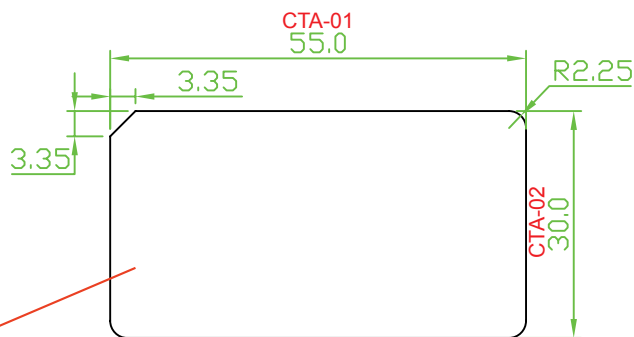


1:1

S/N编码原则
待业务提供

NOTE:

- 1.Material: 80g铜版纸+哑膜
- 2.Print: 黑底白字
- 3.背面背胶, 粘性强度不可低于3.0kg f/inch
- 4.S/N由厂内FCC房膜上打印
- 5.Size: 55*30mm
- 6.Tolerance: +/-0.1mm
- 7.Please refer approver sample
其它细节请参看样品
- 8.CTA=Critical to assemble(01-03)
CTF= Critical to function(01)
- 9.Technique Requirement:
符合旭田电子有限公司禁用物质标准。

SELECT LEVEL	A	B	C	D	PART NO.	DESCRIPTION	QTY	MAT'L	REMARK
DIM.					SCALE: 1:1		SHEET		DK-3318ZM FCC label
~5	±0.03	±0.05	±0.08	±0.10	UNIT: MM				
5~10	±0.05	±0.08	±0.10	±0.15	DRAWN:	黄焕江	01 OF 01		
10~50	±0.08	±0.10	±0.15	±0.20	CHECKED:	祝青	TITLE		
50~100	±0.10	±0.15	±0.20	±0.25	APPROVED:	Steven.Kang	DWG NO.		
100~	±0.10	±0.15	±0.20	±0.25					

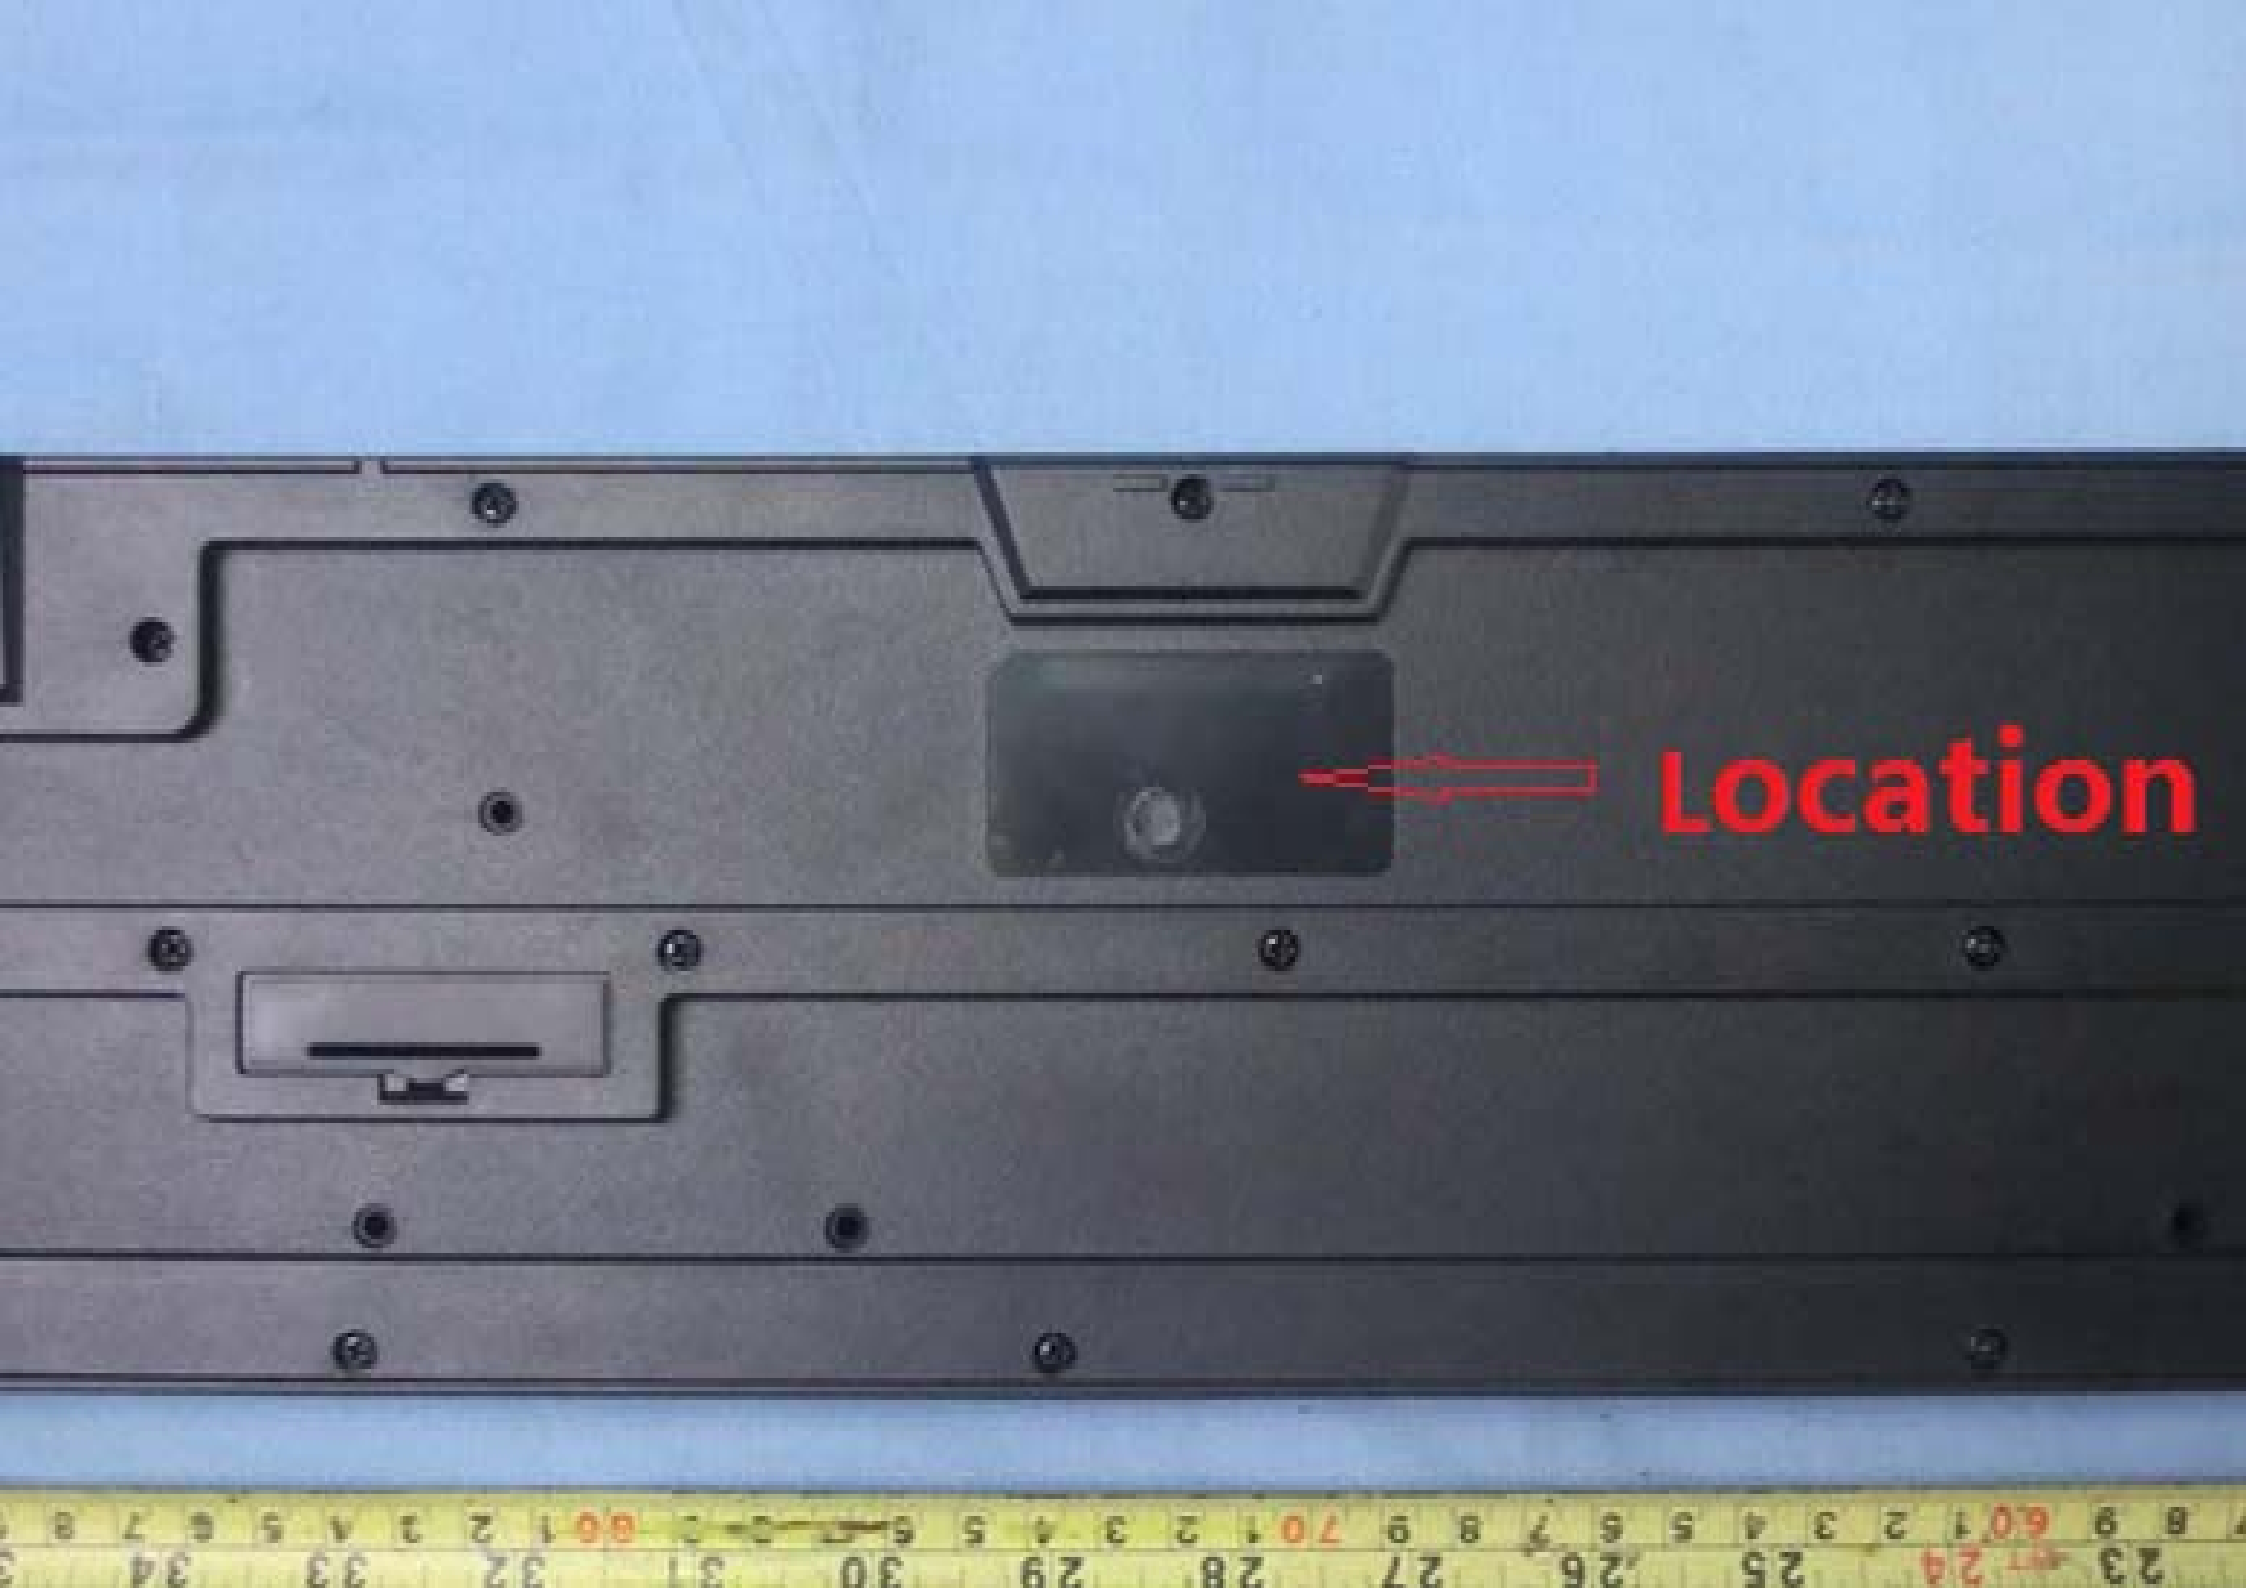

Location