

FCC Test Report

Product Name	Gaming Mouse
Model No.	P705
FCC ID.	XW3DKMSP705

Applicant	Dongguan Siliten Electronics CO.,LTD
Address	Sijia Yewu Industrial estate, Shijie Town, Dongguan, China

Date of Receipt	Sep. 16, 2019
Issued Date	Nov. 01, 2019
Report No.	1990207R-RFUSP01V00-B
Report Version	V1.0



The test results relate only to the samples tested.

The test results shown in the test report are traceable to the national/international standard through the calibration report of the equipment and evaluated measurement uncertainty herein.

This report must not be used to claim product endorsement by TAF or any agency of the government.

The test report shall not be reproduced without the written approval of DEKRA Testing and Certification Co., Ltd..

Test Report

Issued Date: Nov. 01, 2019

Report No.: 1990207R-RFUSP01V00-B



Product Name	Gaming Mouse
Applicant	Dongguan Siliten Electronics CO.,LTD
Address	Sijia Yewu Industrial estate, Shijie Town, Dongguan, China
Manufacturer	Dongguan Siliten Electronics CO.,LTD
Model No.	P705
FCC ID.	XW3DKMSP705
EUT Rated Voltage	DC 3.7V (Power by battery)
EUT Test Voltage	DC 3.7V (Power by battery)
Trade Name	ASUS
Applicable Standard	FCC CFR Title 47 Part 15 Subpart C ANSI C63.4: 2014, ANSI C63.10: 2013
Test Result	Complied

Documented By :



(Senior Adm. Specialist / Genie Chang)

Tested By :



(Engineer / Jason Tuan)

Approved By :



(Director / Vincent Lin)

TABLE OF CONTENTS

Description	Page
1. GENERAL INFORMATION	4
1.1. EUT Description.....	4
1.2. Operational Description.....	6
1.3. Tested System Details.....	7
1.4. Configuration of Tested System	7
1.5. EUT Exercise Software	7
1.6. Test Facility	8
1.7. List of Test Equipment.....	9
2. CONDUCTED EMISSION	11
2.1. Test Setup	11
2.2. Limits.....	12
2.3. Test Procedure	12
2.4. Uncertainty	12
2.5. Test Result of Conducted Emission.....	13
3. PEAK POWER OUTPUT	17
3.1. Test Setup	17
3.2. Limit	17
3.3. Test Procedure	17
3.4. Uncertainty	17
3.5. Test Result of Peak Power Output	18
4. RADIATED EMISSION	19
4.1. Test Setup	19
4.2. Limits.....	21
4.3. Test Procedure	22
4.4. Uncertainty	23
4.5. Test Result of Radiated Emission	24
5. RF ANTENNA CONDUCTED TEST	32
5.1. Test Setup	32
5.2. Limits.....	32
5.3. Test Procedure	32
5.4. Uncertainty	32
5.5. Test Result of RF Antenna Conducted Test	33
6. BAND EDGE	34
6.1. Test Setup	34
6.2. Limit	35
6.3. Test Procedure	35
6.4. Uncertainty	36
6.5. Test Result of Band Edge	37
7. 6DB BANDWIDTH	45
7.1. Test Setup	45
7.2. Limits.....	45
7.3. Test Procedure	45
7.4. Uncertainty	45
7.5. Test Result of 6dB Bandwidth.....	46
8. POWER DENSITY	49
8.1. Test Setup	49
8.2. Limits.....	49
8.3. Test Procedure	49
8.4. Uncertainty	49
8.5. Test Result of Power Density	50
9. DUTY CYCLE	53
9.1. Test Setup	53
9.2. Test Procedure	53
9.3. Uncertainty	53
9.4. Test Result of Duty Cycle.....	54
10. EMI REDUCTION METHOD DURING COMPLIANCE TESTING	55
Attachment 1: EUT Test Photographs	
Attachment 2: EUT Detailed Photographs	

1. GENERAL INFORMATION

1.1. EUT Description

Product Name	Gaming Mouse
Trade Name	ASUS
Model No.	P705
FCC ID.	XW3DKMSP705
Frequency Range	2402 – 2480MHz
Channel Number	V4.2: 40CH
Type of Modulation	V4.2: GFSK(1Mbps)
Antenna Type	Printed on PCB
Antenna Gain	Refer to the table “Antenna List”
Channel Control	Auto
USB to Type C Cable	Shielded, 1.85m

Antenna List

No.	Manufacturer	Part No.	Antenna Type	Peak Gain
1	ASUS	P705	Printed on PCB	-2.76dBi for 2.4 GHz

Note: The antenna of EUT is conforming to FCC 15.203.

Center Frequency of Each Channel: (For V4.2)

Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
Channel 00:	2402 MHz	Channel 01:	2404 MHz	Channel 02:	2406 MHz	Channel 03:	2408 MHz
Channel 04:	2410 MHz	Channel 05:	2412 MHz	Channel 06:	2414 MHz	Channel 07:	2416 MHz
Channel 08:	2418 MHz	Channel 09:	2420 MHz	Channel 10:	2422 MHz	Channel 11:	2424 MHz
Channel 12:	2426 MHz	Channel 13:	2428 MHz	Channel 14:	2430 MHz	Channel 15:	2432 MHz
Channel 16:	2434 MHz	Channel 17:	2436 MHz	Channel 18:	2438 MHz	Channel 19:	2440 MHz
Channel 20:	2442 MHz	Channel 21:	2444 MHz	Channel 22:	2446 MHz	Channel 23:	2448 MHz
Channel 24:	2450 MHz	Channel 25:	2452 MHz	Channel 26:	2454 MHz	Channel 27:	2456 MHz
Channel 28:	2458 MHz	Channel 29:	2460 MHz	Channel 30:	2462 MHz	Channel 31:	2464 MHz
Channel 32:	2466 MHz	Channel 33:	2468 MHz	Channel 34:	2470 MHz	Channel 35:	2472 MHz
Channel 36:	2474 MHz	Channel 37:	2476 MHz	Channel 38:	2478 MHz	Channel 39:	2480 MHz

Note:

1. The EUT is a Gaming Mouse with a built-in Bluetooth V4.2 and 2.4GHz GFSK transceiver , this report for Bluetooth V4.2.
2. These tests were conducted on a sample for the purpose of demonstrating compliance of Bluetooth transmitter with Part 15 Subpart C Paragraph 15.247 for spread spectrum devices.
3. Regarding to the operation frequency, the lowest, middle and highest frequency are selected to perform the test.

Test Mode	Mode 1: Transmit - BLE (GFSK)
-----------	-------------------------------


1.3. Tested System Details

The types for all equipment, plus descriptions of all cables used in the tested system (including inserted cards) are:

Product	Manufacturer	Model No.	Serial No.	Power Cord
1 Notebook PC	DELL	Latitude 5580	GDZN7H2	Non-shielded, 0.8m

Signal Cable Type	Signal cable Description
A USB to Type C Cable	Shielded, 1.85m

1.4. Configuration of Tested System

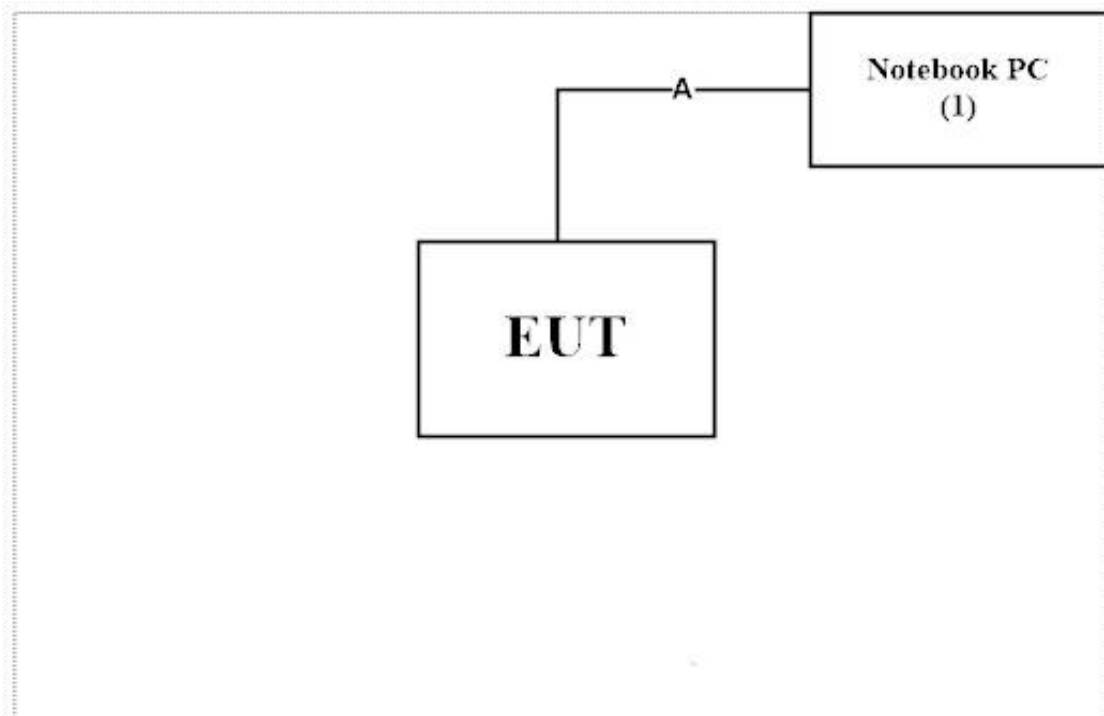

1.5. EUT Exercise Software

1. Setup the EUT as shown in Section 1.4.
2. Execute software “Cmd” on the EUT.
3. Configure the test mode, the test channel, and the data rate.
4. Press “OK” to start the continuous Transmit.
5. Verify that the EUT works properly.

1.6. Test Facility

Ambient conditions in the laboratory:

Items	Required (IEC 68-1)	Actual
Temperature (°C)	15-35	20-35
Humidity (%RH)	25-75	30-65
Barometric pressure (mbar)	860-1060	950-1000

USA : FCC Registration Number: TW3023

Canada : IC Registration Number: 4075A

Site Description: Accredited by TAF
Accredited Number: 3023

Test Laboratory: DEKRA Testing and Certification Co., Ltd
Address: No.5-22, Ruishukeng, Linkou Dist., New Taipei City 24451,
Taiwan, R.O.C.
Phone number: 886-2-8601-3788
Fax number: 886-2-8601-3789
Email address: info.tw@dekra.com
Website: <http://www.dekra.com.tw>

1.7. List of Test Equipment

Conducted measurements /CB3/SR8

	Equipment	Manufacturer	Model No.	Serial No.	Cali. Date	Due. Date
	Temperature Chamber	WIT GROUP	TH-1S-B	EQ-201-00146	2019/02/26	2020/02/25
X	Spectrum Analyzer	Agilent	N9010A	MY53470892	2019/09/25	2020/09/24
X	Peak Power Analyzer	Keysight	8990B	MY51000410	2019/07/30	2020/07/29
X	Wideband Power Sensor	Keysight	N1923A	MY56080003	2019/07/30	2020/07/29
X	Wideband Power Sensor	Keysight	N1923A	MY56080004	2019/07/30	2020/07/29
X	EMI Test Receiver	R&S	ESCS 30	100369	2018/11/19	2019/11/18
X	LISN	R&S	ENV216	101105	2019/04/10	2020/04/09
X	LISN	R&S	ESH3-Z5	836679/014	2019/04/10	2020/04/09
X	Coaxial Cable	DEKRA	RG 400	LC018-RG	2019/06/21	2020/06/20

Note:

1. All equipments are calibrated every one year.
2. The test instruments marked with "X" are used to measure the final test results.
3. Test Software version :DEKRA Conduction Test SystemV9.0.5.

For Radiated measurements /Site3/CB8


	Equipment	Manufacturer	Model No.	Serial No.	Cali. Date	Due. Date
X	Spectrum Analyzer	R&S	FSP40	100170	2019/03/11	2020/03/10
X	Loop Antenna	Teseq	HLA6121	37133	2019/10/15	2021/10/14
X	Bilog Antenna	Schaffner Chase	CBL6112B	2794	2019/06/23	2020/06/22
X	Coaxial Cable	DEKRA	L1907-001C	280280.F141.1 000D	2019/07/10	2020/07/09
X	Amplifier	EMCI	EMC001330	980254	2019/08/22	2020/08/21
X	Horn Antenna	ETS-LINDGREN	3117	00228113	2019/05/02	2020/05/01
X	Coaxial Cable	DEKRA	L1907-002C	280280.F141.1 000D	2019/07/10	2020/07/09
X	Amplifier	EMCI	EMC05820SE	980362	2019/06/26	2020/06/25
X	Amplifier	EMCI	EMC051845SE	SN980632	2019/08/08	2020/08/07
	Horn Antenna	Com-Power	AH-1840	101101	2018/10/19	2019/10/18
	Amplifier + Cable	EMCI	EMC184045SE	980369	2019/04/16	2020/04/15
	Bilog Antenna	Schaffner Chase	CBL6112B	2916	2019/06/23	2020/06/22
	Coaxial Cable	DEKRA	L1907-003C	00100A1B3A 120M	2019/07/10	2020/07/09
	Amplifier	EMCI	EMC001330	980255	2019/06/28	2020/06/27
X	Filter	MICRO-TRONICS	BRM50702	G270	2019/08/08	2020/08/07
	Filter	MICRO-TRONICS	BRM50716	G196	2019/08/08	2020/08/07

Note:

1. All equipments are calibrated every one year.
2. The test instruments marked with "X" are used to measure the final test results.
3. Test Software version :Quietek EMI System V2.1.134.

2. Conducted Emission

2.1. Test Setup

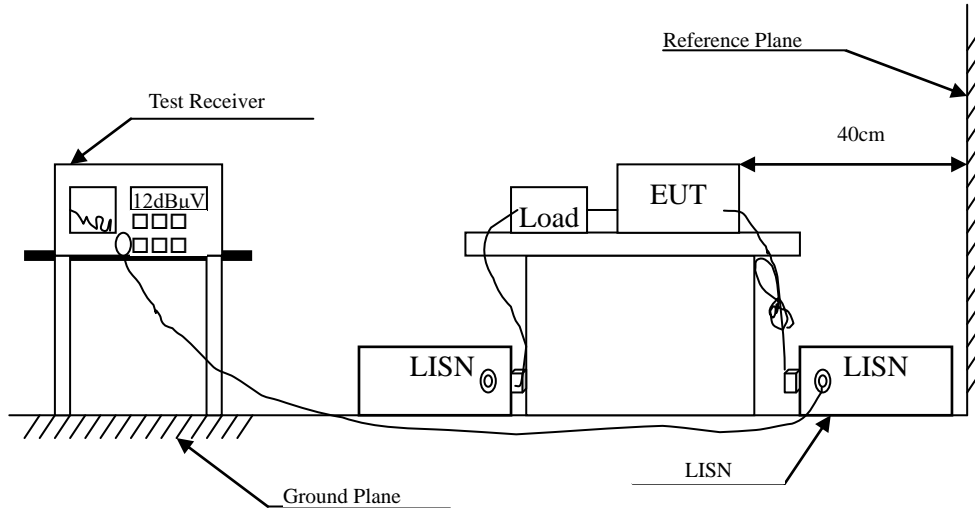

2.2. Limits

FCC Part 15 Subpart C Paragraph 15.207 (dBμV) Limit		
Frequency MHz	Limits	
	QP	AV
0.15 - 0.50	66-56	56-46
0.50-5.0	56	46
5.0 - 30	60	50

Remarks: In the above table, the tighter limit applies at the band edges.

2.3. Test Procedure

The EUT and Peripherals are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50 ohm /50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm /50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs.)

Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all the interface cables must be changed according to ANSI C63.4: 2014 on conducted measurement.

Conducted emissions were investigated over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9kHz.


2.4. Uncertainty

± 2.26 dB

2.5. Test Result of Conducted Emission

Product : Gaming Mouse
 Test Item : Conducted Emission Test
 Test date : 2019/10/15
 Test Mode : Mode 1: Transmit - BLE (GFSK) (2440MHz)

Line1

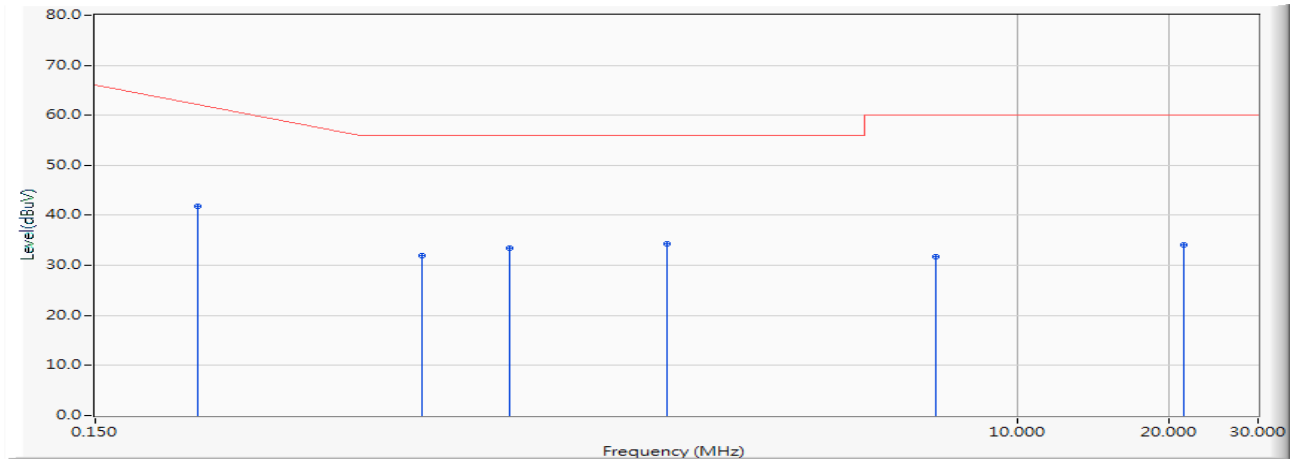


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV)	Margin (dB)	Limit (dBuV)	Detector Type
1	*	0.240	9.673	32.180	41.853	-21.576	63.429	QUASIPeAK
2		0.666	9.696	22.180	31.876	-24.124	56.000	QUASIPeAK
3		0.990	9.714	23.840	33.554	-22.446	56.000	QUASIPeAK
4		2.033	9.780	24.600	34.380	-21.620	56.000	QUASIPeAK
5		6.916	9.927	21.800	31.727	-28.273	60.000	QUASIPeAK
6		21.447	10.195	23.840	34.035	-25.965	60.000	QUASIPeAK

Note:

1. All Reading Levels are Quasi-Peak and average value.
2. " * ", means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor

Product : Gaming Mouse
 Test Item : Conducted Emission Test
 Test date : 2019/10/15
 Test Mode : Mode 1: Transmit - BLE (GFSK) (2440MHz)

Line1

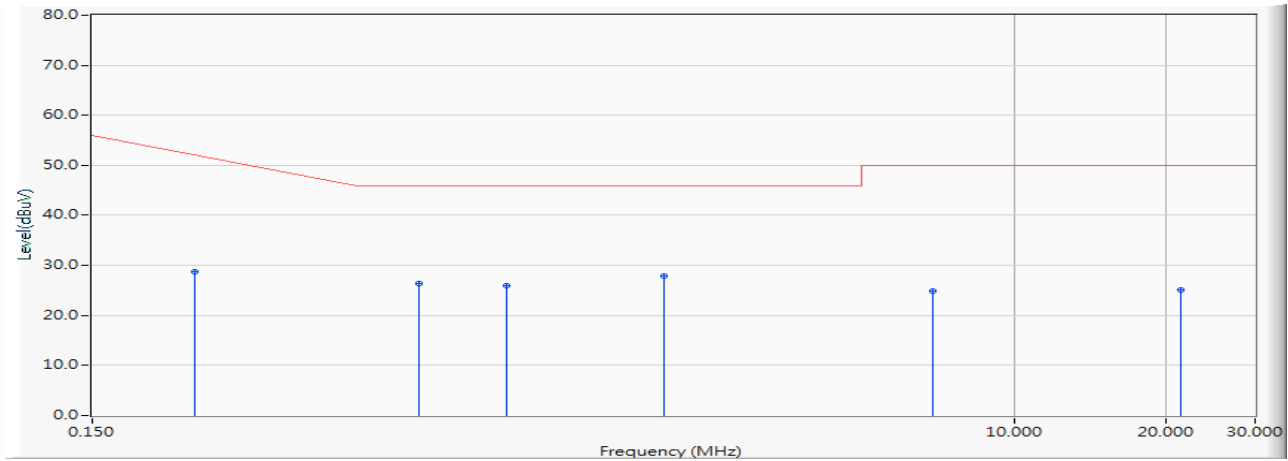


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV)	Margin (dB)	Limit (dBuV)	Detector Type
1		0.240	9.673	19.090	28.763	-24.666	53.429	AVERAGE
2		0.666	9.696	16.640	26.336	-19.664	46.000	AVERAGE
3		0.990	9.714	16.210	25.924	-20.076	46.000	AVERAGE
4	*	2.033	9.780	18.170	27.950	-18.050	46.000	AVERAGE
5		6.916	9.927	15.040	24.967	-25.033	50.000	AVERAGE
6		21.447	10.195	14.910	25.105	-24.895	50.000	AVERAGE

Note:

1. All Reading Levels are Quasi-Peak and average value.
2. " * ", means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor

Product : Gaming Mouse
 Test Item : Conducted Emission Test
 Test date : 2019/10/15
 Test Mode : Mode 1: Transmit - BLE (GFSK) (2440MHz)

Line2

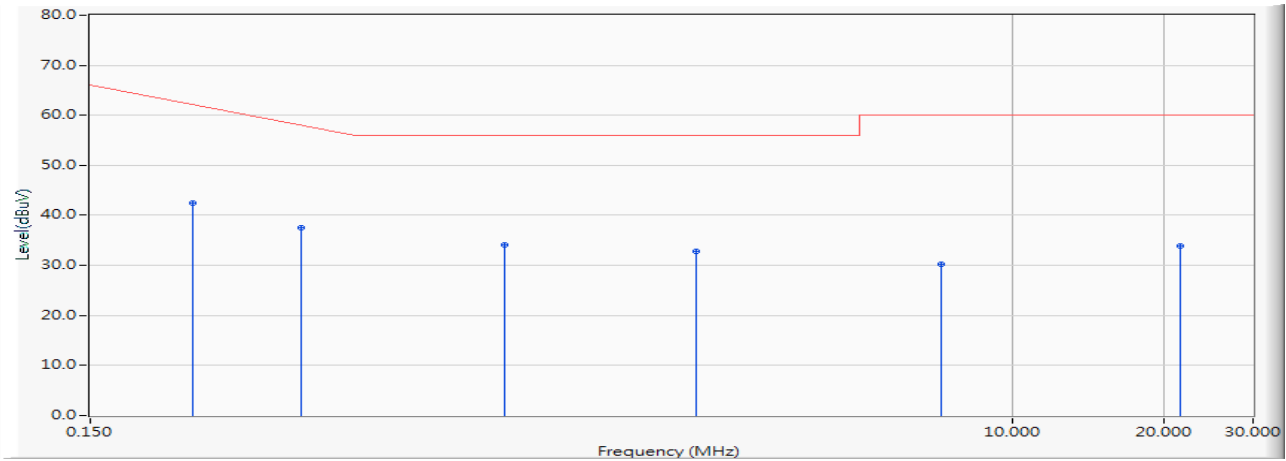


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV)	Margin (dB)	Limit (dBuV)	Detector Type
1	*	0.240	9.703	32.700	42.403	-21.026	63.429	QUASIPeAK
2		0.392	9.711	27.720	37.431	-21.655	59.086	QUASIPeAK
3		0.990	9.754	24.380	34.134	-21.866	56.000	QUASIPeAK
4		2.377	9.834	22.960	32.794	-23.206	56.000	QUASIPeAK
5		7.252	9.995	20.180	30.175	-29.825	60.000	QUASIPeAK
6		21.494	10.385	23.520	33.905	-26.095	60.000	QUASIPeAK

Note:

1. All Reading Levels are Quasi-Peak and average value.
2. " * ", means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor

Product : Gaming Mouse
 Test Item : Conducted Emission Test
 Test date : 2019/10/15
 Test Mode : Mode 1: Transmit - BLE (GFSK) (2440MHz)

Line2

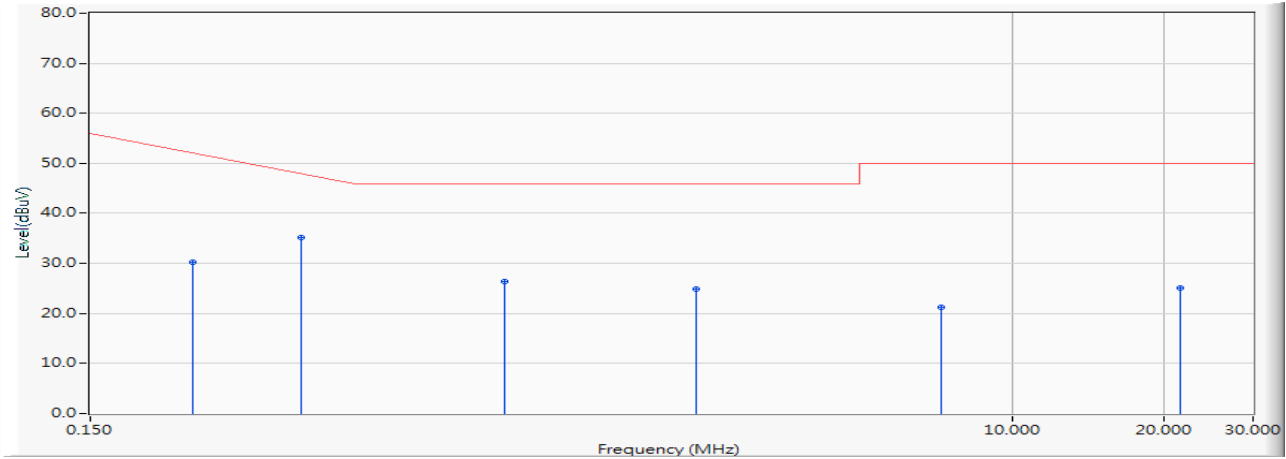


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV)	Margin (dB)	Limit (dBuV)	Detector Type
1		0.240	9.703	20.470	30.173	-23.256	53.429	AVERAGE
2	*	0.392	9.711	25.570	35.281	-13.805	49.086	AVERAGE
3		0.990	9.754	16.690	26.444	-19.556	46.000	AVERAGE
4		2.377	9.834	15.040	24.874	-21.126	46.000	AVERAGE
5		7.252	9.995	11.280	21.275	-28.725	50.000	AVERAGE
6		21.494	10.385	14.650	25.035	-24.965	50.000	AVERAGE

Note:

1. All Reading Levels are Quasi-Peak and average value.
2. " * ", means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor

3. Peak Power Output

3.1. Test Setup

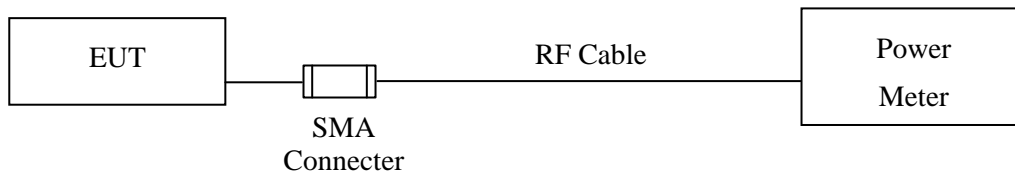

3.2. Limit

The maximum peak power shall be less 1Watt.

3.3. Test Procedure

The EUT was tested according to C63.10:2013 for compliance to FCC 47CFR 15.247 requirements. The maximum peak conducted output power using C63.10:2013 Section 11.9.1.3 PKPM1 Peak power meter method.

3.4. Uncertainty

± 1.19 dB

3.5. Test Result of Peak Power Output


Product : Gaming Mouse
Test Item : Peak Power Output
Test Site : No.3 OATS
Test date : 2019/10/22
Test Mode : Mode 1: Transmit - BLE (GFSK)

Channel No.	Frequency (MHz)	Peak Measurement (dBm)	Required Limit	Result
Channel 00	2402.00	-0.74	1 Watt= 30 dBm	Pass
Channel 19	2440.00	-1.16	1 Watt= 30 dBm	Pass
Channel 39	2480.00	-1.67	1 Watt= 30 dBm	Pass


4. Radiated Emission

4.1. Test Setup


Under 30MHz

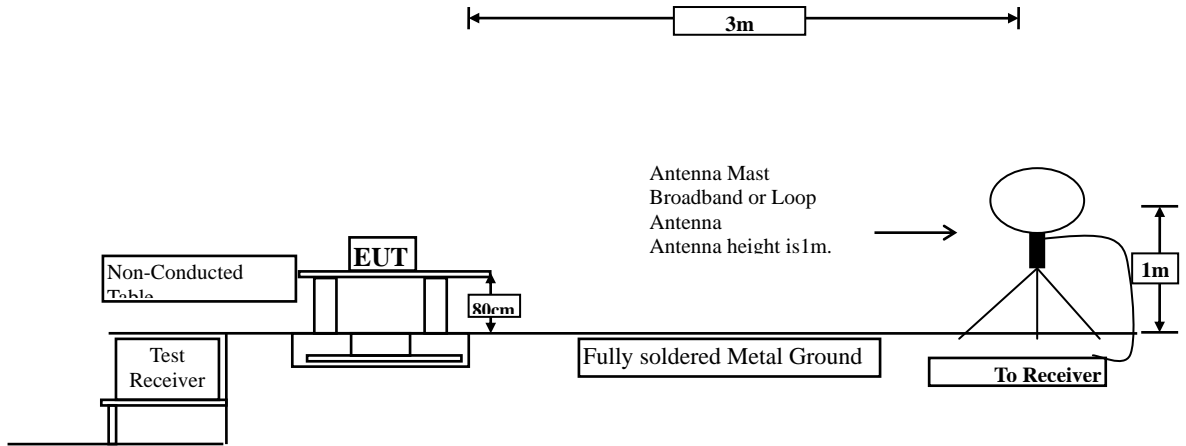

Below 1GHz

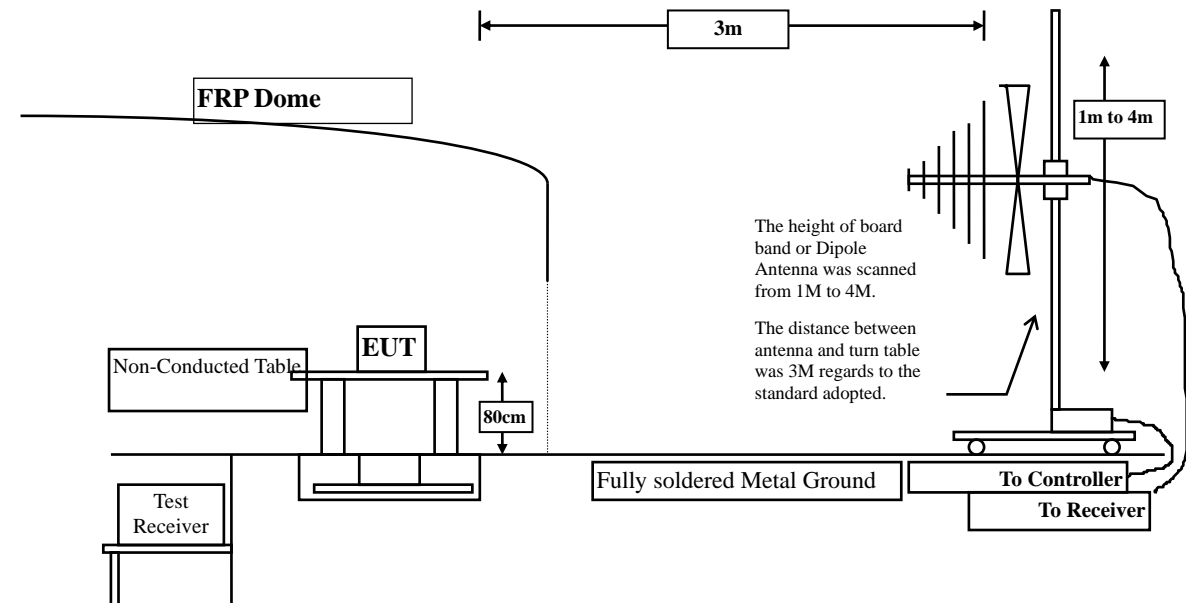

Above 1GHz

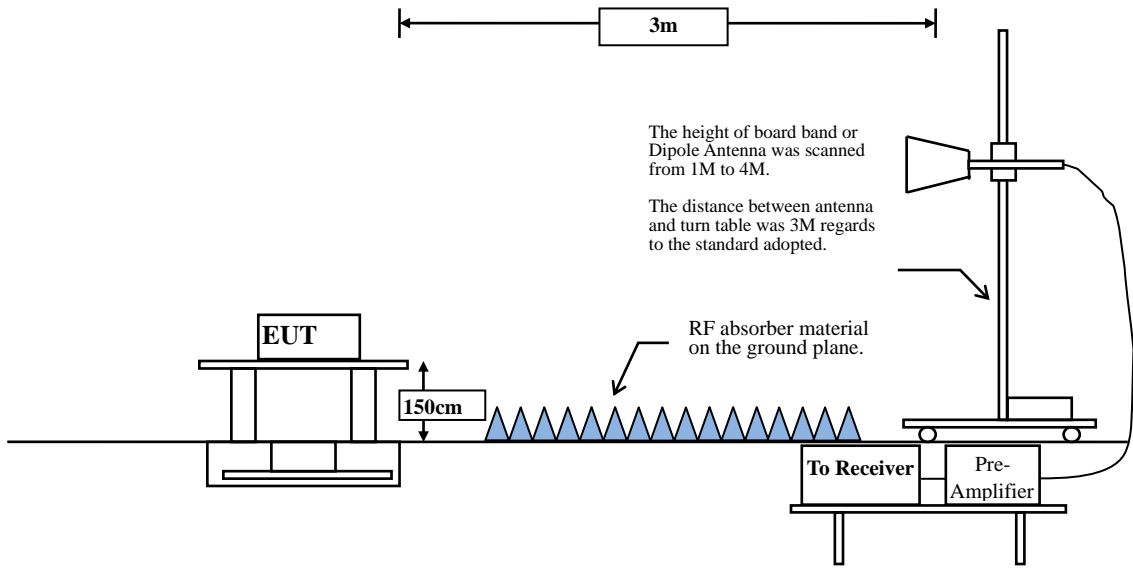

4.2. Limits

➤ General Radiated Emission Limits

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 20dB below the level of the fundamental or to the general radiated emission limits in paragraph 15.209, whichever is the lesser attenuation.

FCC Part 15 Subpart C Paragraph 15.209 Limits		
Frequency MHz	Field strength (microvolts/meter)	Measurement distance (meter)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

- Remarks:
1. RF Voltage (dB μ V) = 20 log RF Voltage (uV)
 2. In the Above Table, the tighter limit applies at the band edges.
 3. Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.

4.3. Test Procedure

The EUT was setup according to ANSI C63.10: 2013 and tested according to C63.10:2013 Section 11.12.1 for compliance to FCC 47CFR 15.247 requirements.

Measuring the frequency range below 1GHz, the EUT is placed on a turn table which is 0.8 meter above ground, when measuring the frequency range above 1GHz, the EUT is placed on a turn table which is 1.5 meter above ground.

The turn table is rotated 360 degrees to determine the position of the maximum emission level.

The EUT was positioned such that the distance from antenna to the EUT was 3 meters.

The antenna is scanned between 1 meter and 4 meters to find out the maximum emission level. This is repeated for both horizontal and vertical polarization of the antenna. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10: 2013 on radiated measurement.

The resolution bandwidth below 30MHz setting on the field strength meter is 9kHz and 30MHz~1GHz is 120kHz and above 1GHz is 1MHz.

Radiated emission measurements below 30MHz are made using Loop Antenna and 30MHz~1GHz are made using broadband Bilog antenna and above 1GHz are made using Horn Antennas.

The measurement is divided into the Preliminary Measurement and the Final Measurement.

The suspected frequencies are searched for in Preliminary Measurement with the measurement antenna kept pointed at the source of the emission both in azimuth and elevation, with the polarization of the antenna oriented for maximum response. The antenna is pointed at an angle towards the source of the emission, and the EUT is rotated in both height and polarization to maximize the measured emission. The emission is kept within the illumination area of the 3 dB bandwidth of the antenna.

The worst radiated emission is measured in the Open Area Test Site on the Final Measurement.

The measurement frequency range from 9kHz - 10th Harmonic of fundamental was investigated.

RBW and VBW Parameter setting:

According to C63.10 Section 11.12.2.4 Peak measurement procedure

RBW = as specified in Table 1.

$VBW \geq 3 \times RBW$.

Table 1 —RBW as a function of frequency

Frequency	RBW
9-150 kHz	200-300 Hz
0.15-30 MHz	9-10 kHz
30-1000 MHz	100-120 kHz
> 1000 MHz	1 MHz

According to C63.10 Section 11.12.2.5 Average measurement procedure

RBW = 1MHz.

VBW = 10Hz, when duty cycle $\geq 98\%$

$VBW \geq 1/T$, when duty cycle $< 98\%$

(T refers to the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.)

2.4GHz band	Duty Cycle (%)	T (ms)	1/T (Hz)	VBW (Hz)
BLE	100	--	--	10

Note: Duty Cycle Refer to Section 9


4.4. Uncertainty

± 4.08 dB above 1GHz

± 4.22 dB below 1GHz

4.5. Test Result of Radiated Emission

Product : Gaming Mouse
 Test Item : Harmonic Radiated Emission
 Test Site : No.3 OATS
 Test date : 2019/10/22
 Test Mode : Mode 1: Transmit - BLE (GFSK)(2402MHz)

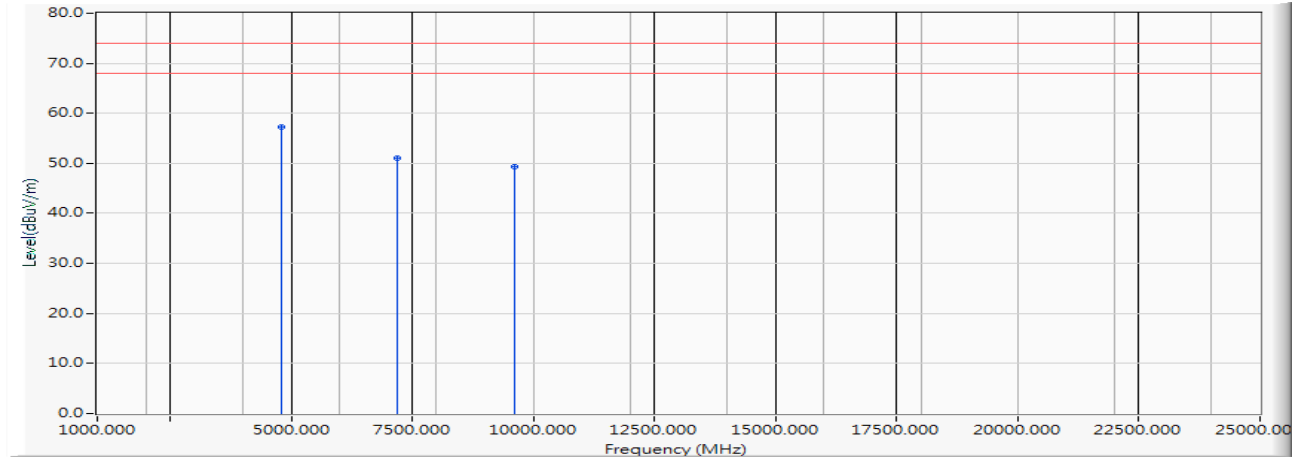


Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV/m	Margin dB	Peak Limit dBuV/m	Average Limit dBuV/m
Horizontal						
Peak Detector:						
4804.000	4.604	52.760	57.364	-16.636	74.000	54.000
7206.000	11.659	39.430	51.089	-22.911	74.000	54.000
9608.000	11.907	37.390	49.297	-24.703	74.000	54.000
Average Detector:						
4804.000	4.604	48.850	53.454	-0.546	74.000	54.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report..

Product : Gaming Mouse
 Test Item : Harmonic Radiated Emission
 Test Site : No.3 OATS
 Test date : 2019/10/22
 Test Mode : Mode 1: Transmit - BLE (GFSK)(2402MHz)

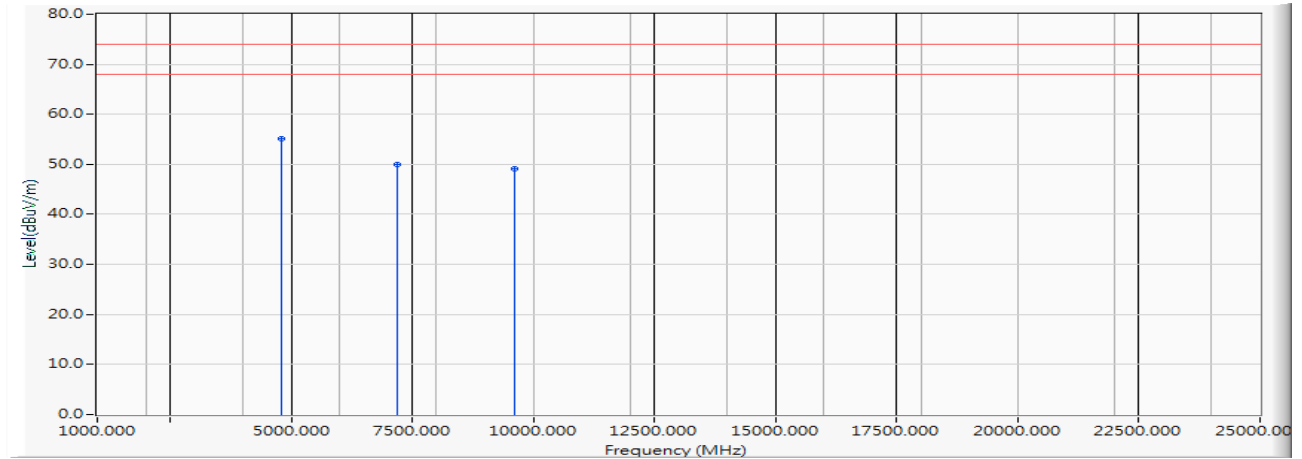


Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV/m	Margin dB	Peak Limit dBuV/m	Average Limit dBuV/m
Vertical						
Peak Detector:						
4804.000	4.604	50.580	55.184	-18.816	74.000	54.000
7206.000	11.659	38.240	49.899	-24.101	74.000	54.000
9608.000	11.907	37.310	49.217	-24.783	74.000	54.000
Average Detector:						
4804.000	4.604	46.920	51.524	-2.476	74.000	54.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report..

Product : Gaming Mouse
 Test Item : Harmonic Radiated Emission
 Test Site : No.3 OATS
 Test date : 2019/10/22
 Test Mode : Mode 1: Transmit - BLE (GFSK) (2440MHz)

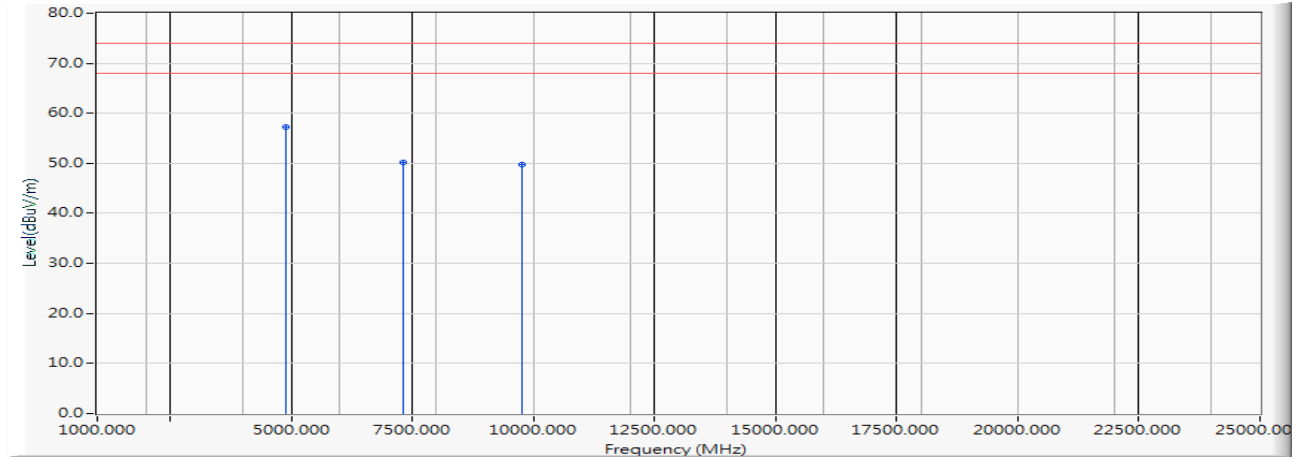


Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV/m	Margin dB	Peak Limit dBuV/m	Average Limit dBuV/m
Horizontal						
Peak Detector:						
4880.000	5.302	51.940	57.242	-16.758	74.000	54.000
7320.000	11.795	38.460	50.255	-23.745	74.000	54.000
9760.000	11.929	37.900	49.830	-24.170	74.000	54.000
Average Detector:						
4880.000	5.302	47.740	53.042	-0.958	74.000	54.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Gaming Mouse
 Test Item : Harmonic Radiated Emission
 Test Site : No.3 OATS
 Test date : 2019/10/22
 Test Mode : Mode 1: Transmit - BLE (GFSK) (2440MHz)

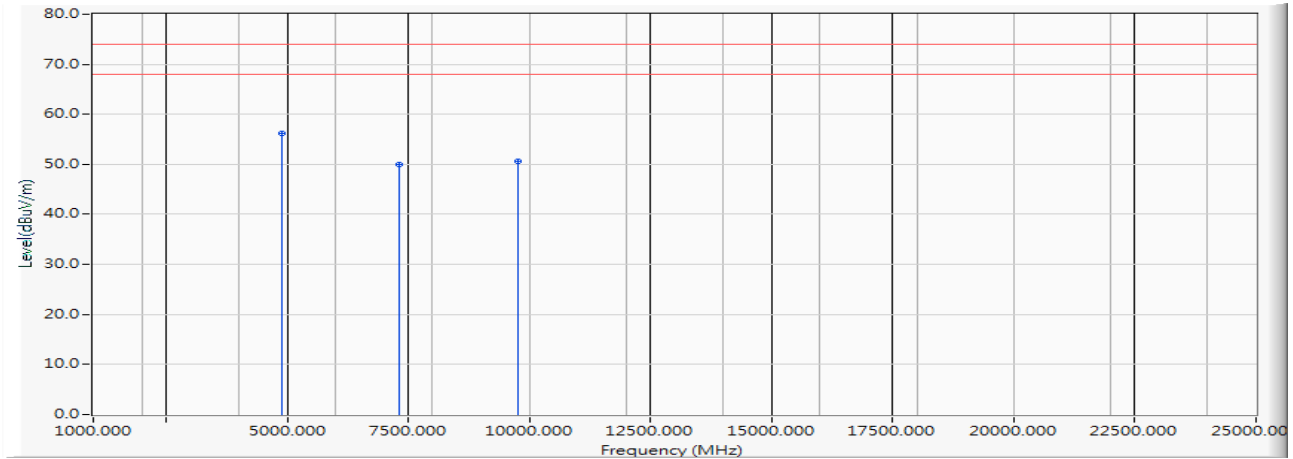


Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV/m	Margin dB	Peak Limit dBuV/m	Average Limit dBuV/m
Vertical						
Peak Detector:						
4880.000	5.302	50.830	56.132	-17.868	74.000	54.000
7320.000	11.795	38.110	49.905	-24.095	74.000	54.000
9760.000	11.929	38.700	50.630	-23.370	74.000	54.000
Average Detector:						
4880.000	5.302	46.180	51.482	-2.518	74.000	54.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Gaming Mouse
 Test Item : Harmonic Radiated Emission
 Test Site : No.3 OATS
 Test date : 2019/10/22
 Test Mode : Mode 1: Transmit - BLE (GFSK) (2480MHz)

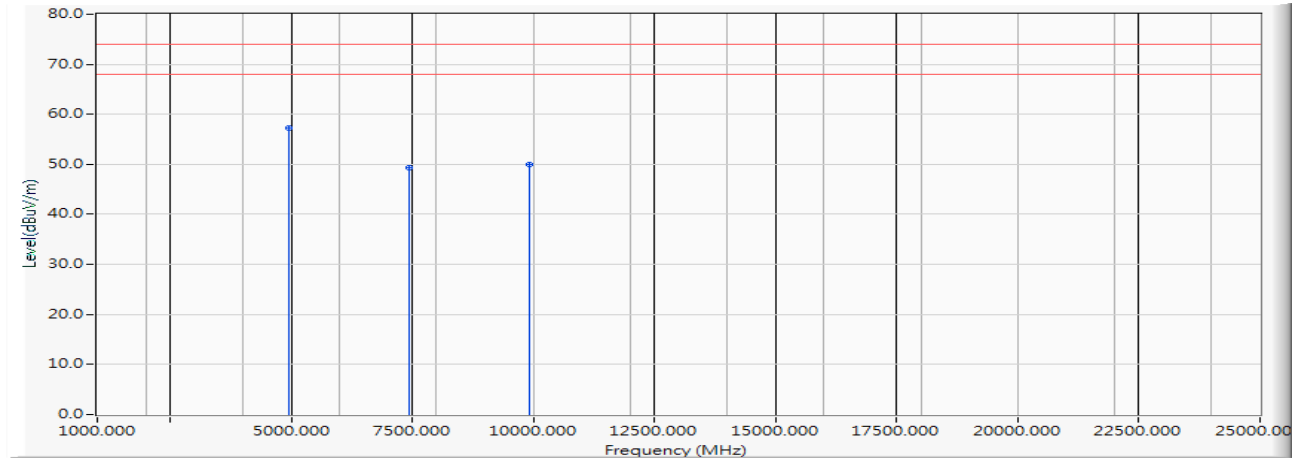


Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV/m	Margin dB	Peak Limit dBuV/m	Average Limit dBuV/m
Horizontal						
Peak Detector:						
4960.000	6.035	51.190	57.225	-16.775	74.000	54.000
7440.000	10.977	38.370	49.347	-24.653	74.000	54.000
9920.000	12.758	37.140	49.897	-24.103	74.000	54.000
Average Detector:						
4960.000	6.035	46.440	52.475	-1.525	74.000	54.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Gaming Mouse
 Test Item : Harmonic Radiated Emission
 Test Site : No.3 OATS
 Test date : 2019/10/22
 Test Mode : Mode 1: Transmit - BLE (GFSK) (2480MHz)

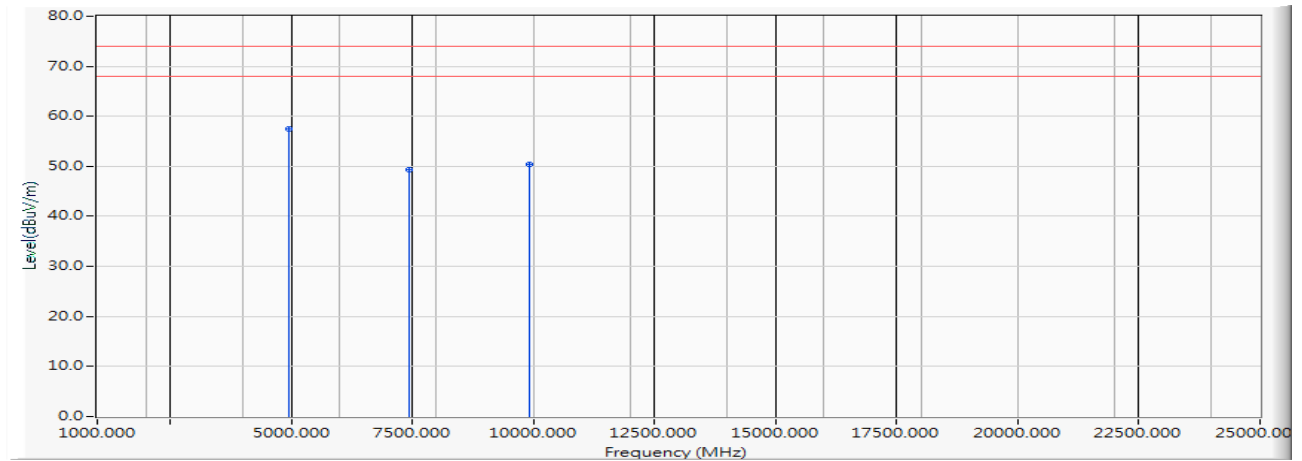


Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV/m	Margin dB	Peak Limit dBuV/m	Average Limit dBuV/m
Vertical						
Peak Detector:						
4960.000	6.035	51.390	57.425	-16.575	74.000	54.000
7440.000	10.977	38.400	49.377	-24.623	74.000	54.000
9920.000	12.758	37.640	50.397	-23.603	74.000	54.000
Average Detector:						
4960.000	6.035	46.800	52.835	-1.165	74.000	54.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Gaming Mouse
 Test Item : General Radiated Emission
 Test Site : No.3 OATS
 Test date : 2019/10/28
 Test Mode : Mode 1: Transmit - BLE (GFSK) (2440MHz)

Horizontal

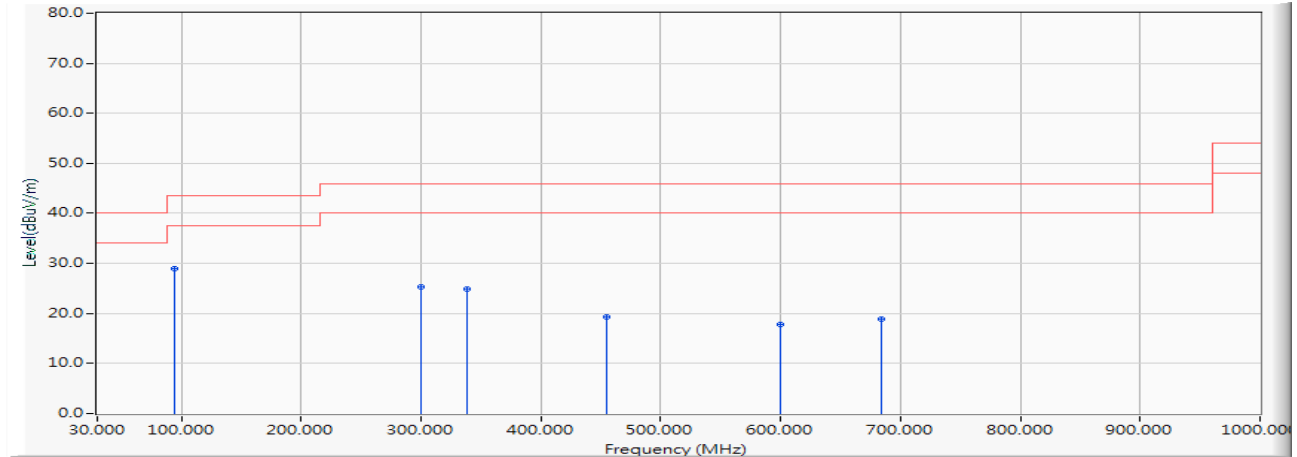


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	94.667	-16.371	45.286	28.915	-14.585	43.500	QUASIPeAK
2		299.913	-13.944	39.301	25.357	-20.643	46.000	QUASIPeAK
3		337.870	-11.931	36.753	24.822	-21.178	46.000	QUASIPeAK
4		454.551	-8.272	27.502	19.230	-26.770	46.000	QUASIPeAK
5		599.348	-5.946	23.753	17.806	-28.194	46.000	QUASIPeAK
6		683.696	-7.898	26.713	18.815	-27.185	46.000	QUASIPeAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : Gaming Mouse
 Test Item : General Radiated Emission
 Test Site : No.3 OATS
 Test date : 2019/10/28
 Test Mode : Mode 1: Transmit - BLE (GFSK) (2440MHz)

Vertical

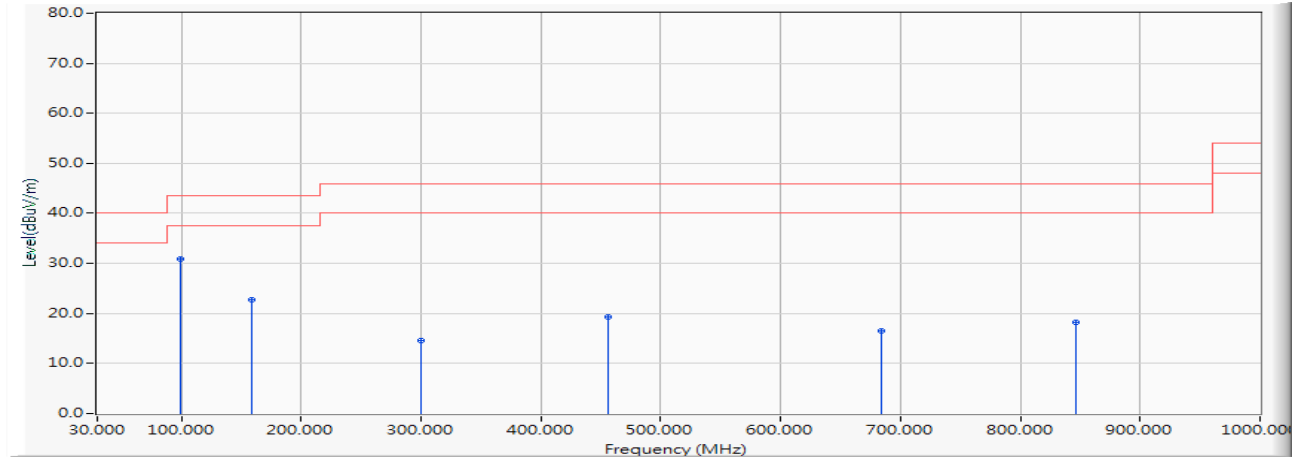


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	98.884	-15.868	46.718	30.850	-12.650	43.500	QUASIPeAK
2		159.333	-18.561	41.397	22.835	-20.665	43.500	QUASIPeAK
3		299.913	-13.944	28.537	14.593	-31.407	46.000	QUASIPeAK
4		455.957	-8.349	27.633	19.284	-26.716	46.000	QUASIPeAK
5		683.696	-7.898	24.508	16.610	-29.390	46.000	QUASIPeAK
6		846.768	-6.727	24.913	18.186	-27.814	46.000	QUASIPeAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

5. RF Antenna Conducted Test

5.1. Test Setup

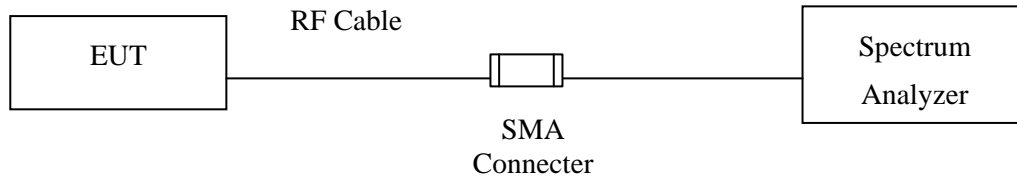

5.2. Limits

According to FCC Section 15.247(d). In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.

5.3. Test Procedure

The EUT was tested according to C63.10:2013 Section 11.11 for compliance to FCC 47CFR 15.247 requirements.

5.4. Uncertainty

$\pm 1.20\text{dB}$

5.5. Test Result of RF Antenna Conducted Test

Product : Gaming Mouse
Test Item : RF Antenna Conducted Test
Test Site : No.3 OATS
Test date : 2019/10/22
Test Mode : Mode 1: Transmit - BLE (GFSK)

Figure Channel 00:

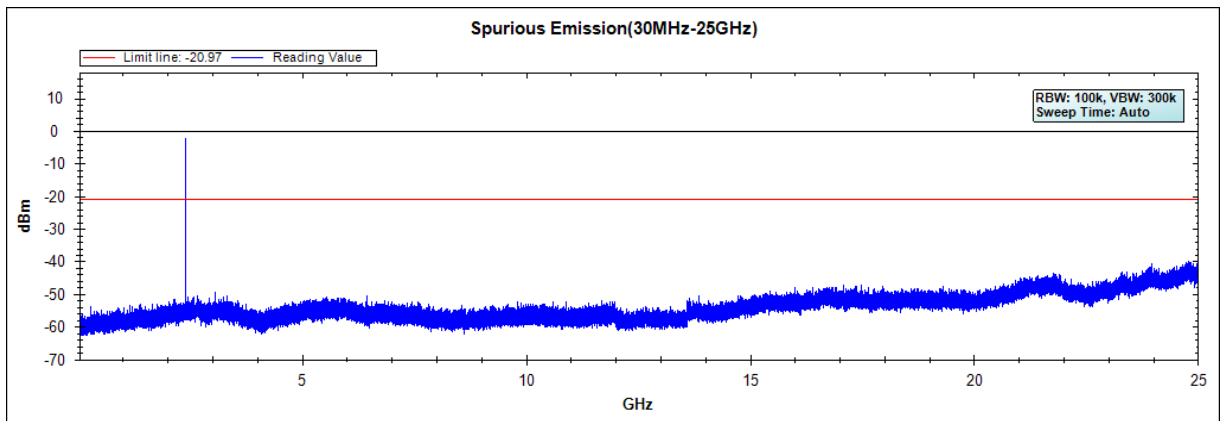


Figure Channel 19:


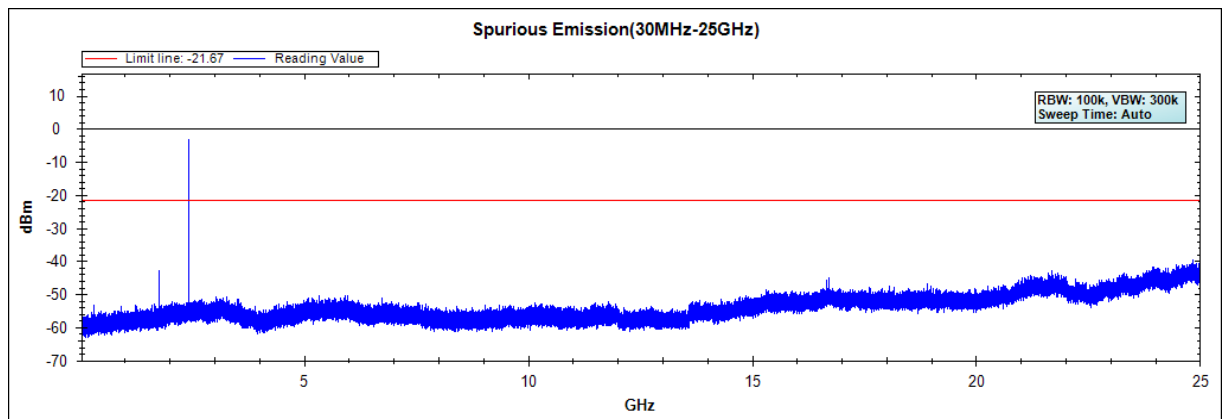



Figure Channel 39:

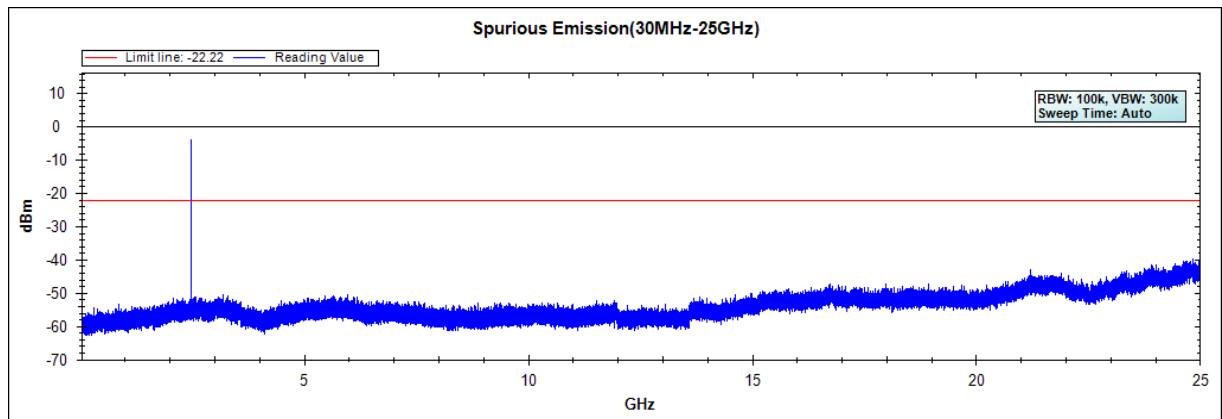

6. Band Edge


6.1. Test Setup

RF Conducted Measurement

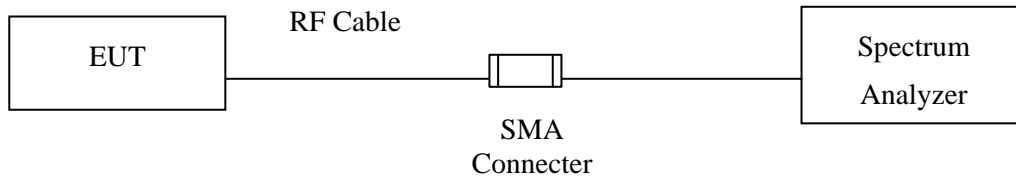

RF Radiated Measurement:

Above 1GHz

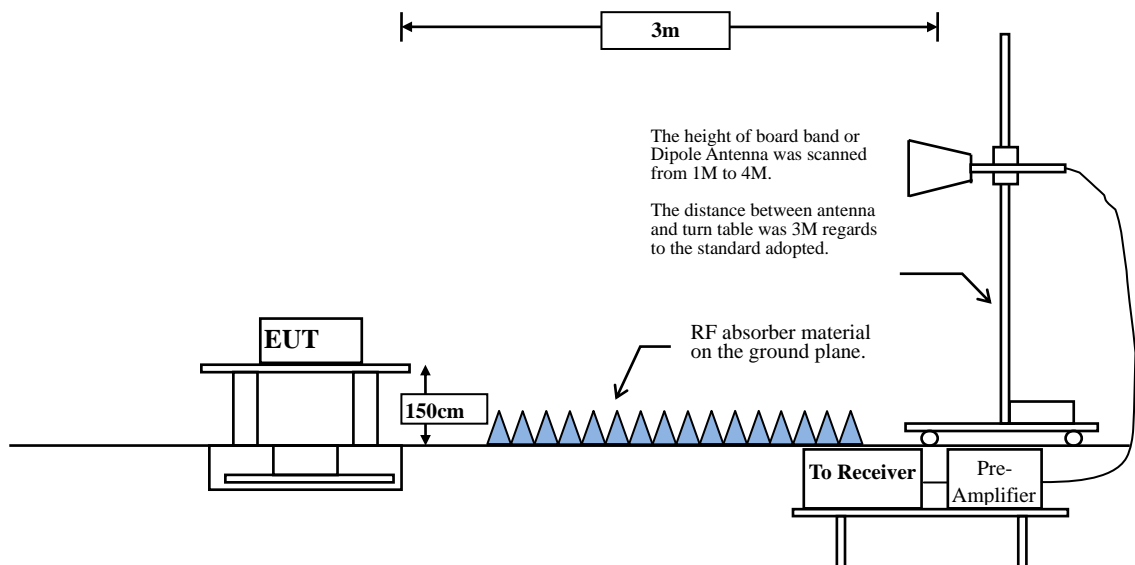

6.2. Limit

According to FCC Section 15.247(d). In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

6.3. Test Procedure

The EUT was setup according to ANSI C63.10, 2013 and tested according to ANSI C63.10, 2013 for compliance to FCC 47CFR 15.247 requirements.

The EUT is placed on a turn table which is 1.5 meter above ground. The turn table is rotated 360 degrees to determine the position of the maximum emission level. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.

The antenna is scanned from 1 meter to 4 meters to find out the maximum emission level. This is repeated for both horizontal and vertical polarization of the antenna. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10:2013 on radiated measurement.

RBW and VBW Parameter setting:

According to C63.10 Section 11.12.2.4 Peak measurement procedure

RBW = as specified in Table 1.

$VBW \geq 3 \times RBW$.

Table 1 —RBW as a function of frequency

Frequency	RBW
9-150 kHz	200-300 Hz
0.15-30 MHz	9-10 kHz
30-1000 MHz	100-120 kHz
> 1000 MHz	1 MHz

According to C63.10 Section 11.12.2.5 Average measurement procedure

RBW = 1MHz.

VBW = 10Hz, when duty cycle $\geq 98\%$

$VBW \geq 1/T$, when duty cycle $< 98\%$

(T refers to the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.)

2.4GHz band	Duty Cycle (%)	T (ms)	1/T (Hz)	VBW (Hz)
BLE	100	--	--	10

Note: Duty Cycle Refer to Section 9

6.4. Uncertainty


± 4.08 dB above 1GHz

± 4.22 dB below 1GHz

6.5. Test Result of Band Edge

Product : Gaming Mouse
 Test Item : Band Edge
 Test Site : No.3 OATS
 Test date : 2019/10/21
 Test Mode : Mode 1: Transmit - BLE (GFSK) (2402MHz)

Horizontal

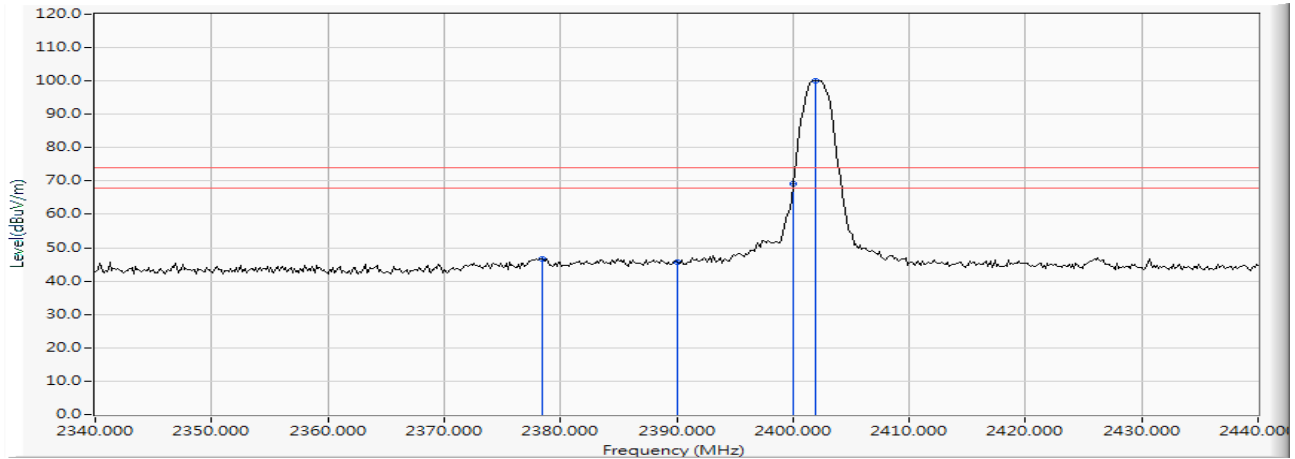


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		2378.406	-1.479	48.264	46.785	-27.215	74.000	PEAK
2		2390.000	-1.550	47.224	45.674	-28.326	74.000	PEAK
3		2400.000	-1.612	70.662	69.050	--	--	PEAK
4	*	2401.884	-1.623	101.627	100.004	--	--	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Gaming Mouse
 Test Item : Band Edge
 Test Site : No.3 OATS
 Test date : 2019/10/21
 Test Mode : Mode 1: Transmit - BLE (GFSK) (2402MHz)

Horizontal

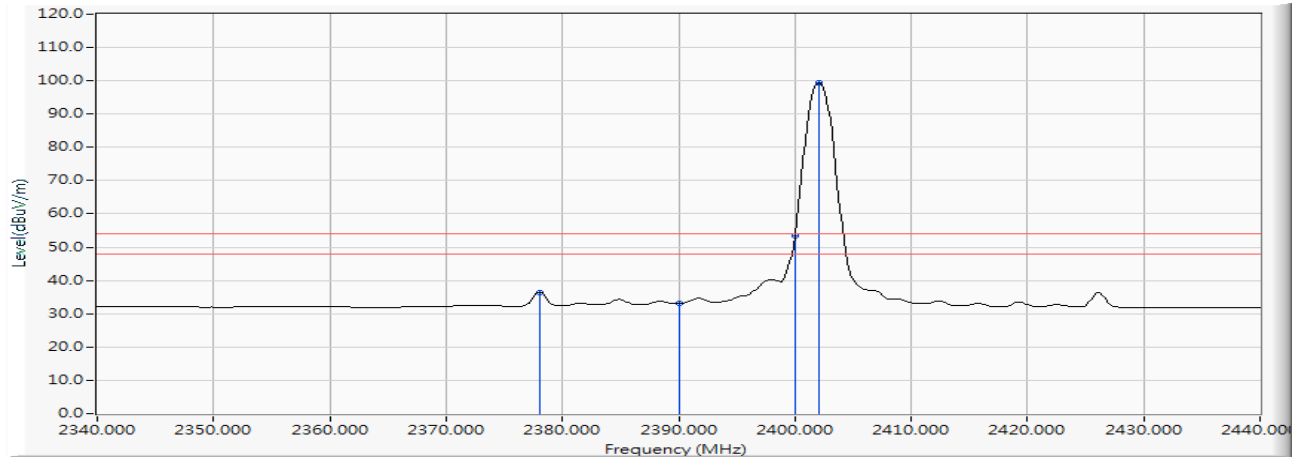


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		2378.116	-1.477	37.942	36.465	-17.535	54.000	AVERAGE
2		2390.000	-1.550	34.630	33.080	-20.920	54.000	AVERAGE
3		2400.000	-1.612	55.097	53.485	--	--	AVERAGE
4	*	2402.029	-1.624	100.961	99.337	--	--	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Gaming Mouse
 Test Item : Band Edge
 Test Site : No.3 OATS
 Test date : 2019/10/21
 Test Mode : Mode 1: Transmit - BLE (GFSK) (2402MHz)

Vertical

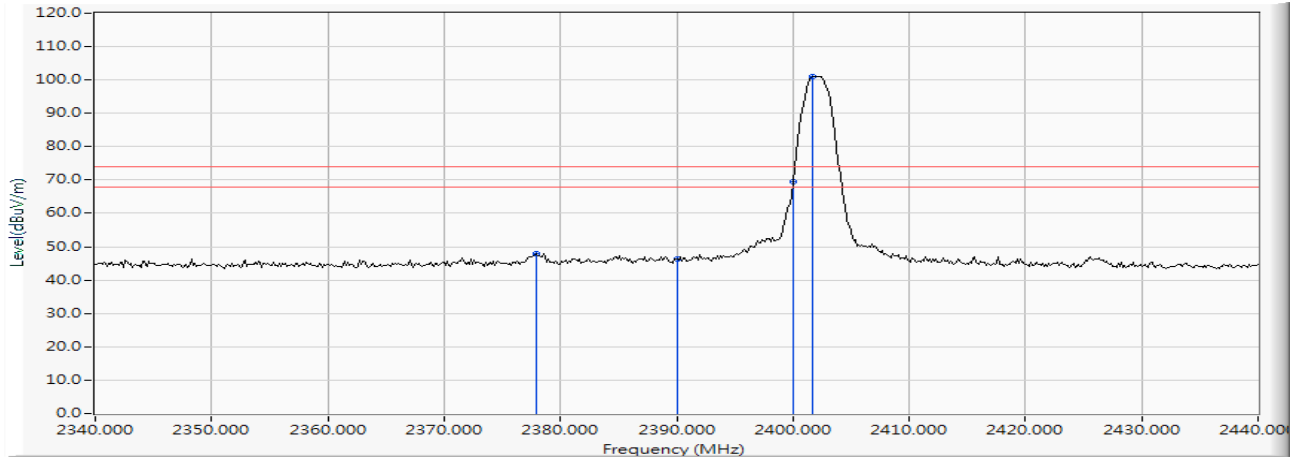


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		2377.971	-1.476	49.257	47.781	-26.219	74.000	PEAK
2		2390.000	-1.550	47.876	46.326	-27.674	74.000	PEAK
3		2400.000	-1.612	71.112	69.500	--	--	PEAK
4	*	2401.739	-1.623	102.608	100.986	--	--	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Gaming Mouse
 Test Item : Band Edge
 Test Site : No.3 OATS
 Test date : 2019/10/21
 Test Mode : Mode 1: Transmit - BLE (GFSK) (2402MHz)

Vertical

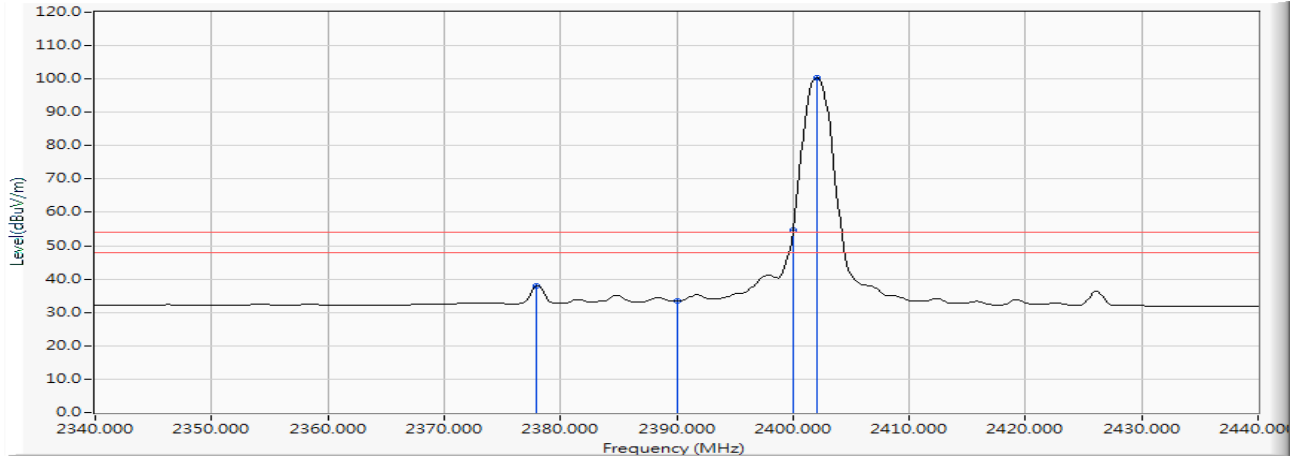


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		2377.971	-1.476	39.340	37.864	-16.136	54.000	AVERAGE
2		2390.000	-1.550	34.952	33.402	-20.598	54.000	AVERAGE
3		2400.000	-1.612	56.146	54.534	--	--	AVERAGE
4	*	2402.029	-1.624	101.931	100.307	--	--	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Gaming Mouse
 Test Item : Band Edge
 Test Site : No.3 OATS
 Test date : 2019/10/21
 Test Mode : Mode 1: Transmit - BLE (GFSK) (2480MHz)

Horizontal

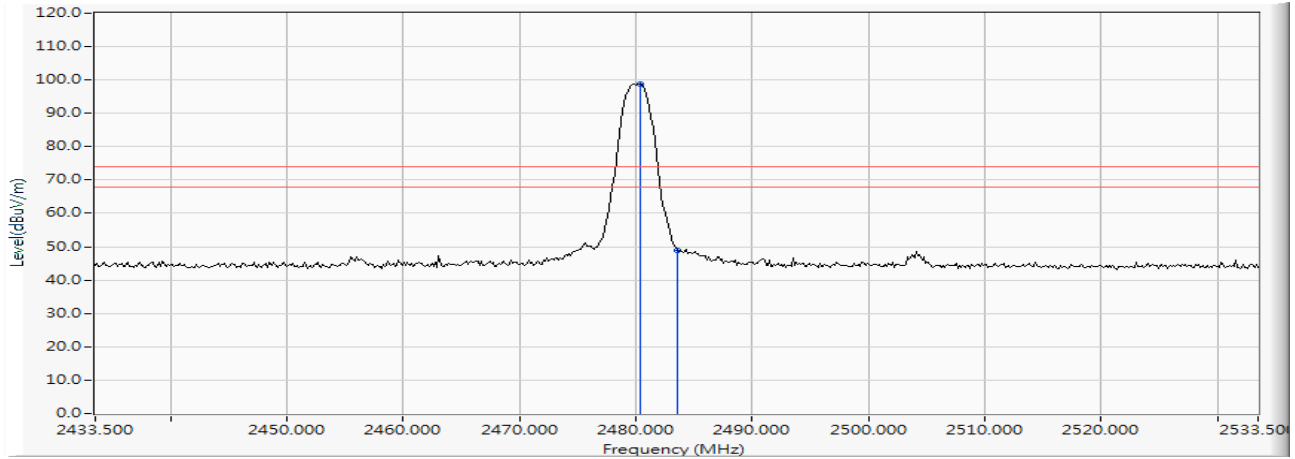


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	2480.312	-2.107	100.818	98.711	--	--	PEAK
2		2483.500	-2.127	50.936	48.809	-25.191	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Gaming Mouse
 Test Item : Band Edge
 Test Site : No.3 OATS
 Test date : 2019/10/21
 Test Mode : Mode 1: Transmit - BLE (GFSK) (2480MHz)

Horizontal

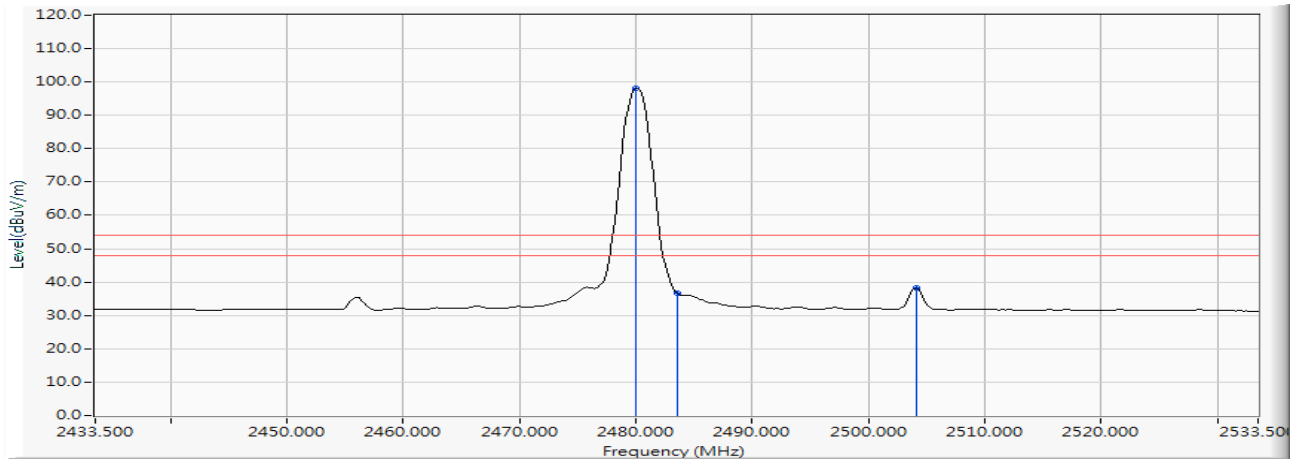


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	2480.022	-2.105	100.266	98.161	--	--	AVERAGE
2		2483.500	-2.127	38.680	36.553	-17.447	54.000	AVERAGE
3		2504.080	-2.192	40.321	38.129	-15.871	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Gaming Mouse
 Test Item : Band Edge
 Test Site : No.3 OATS
 Test date : 2019/10/21
 Test Mode : Mode 1: Transmit - BLE (GFSK) (2480MHz)

Vertical

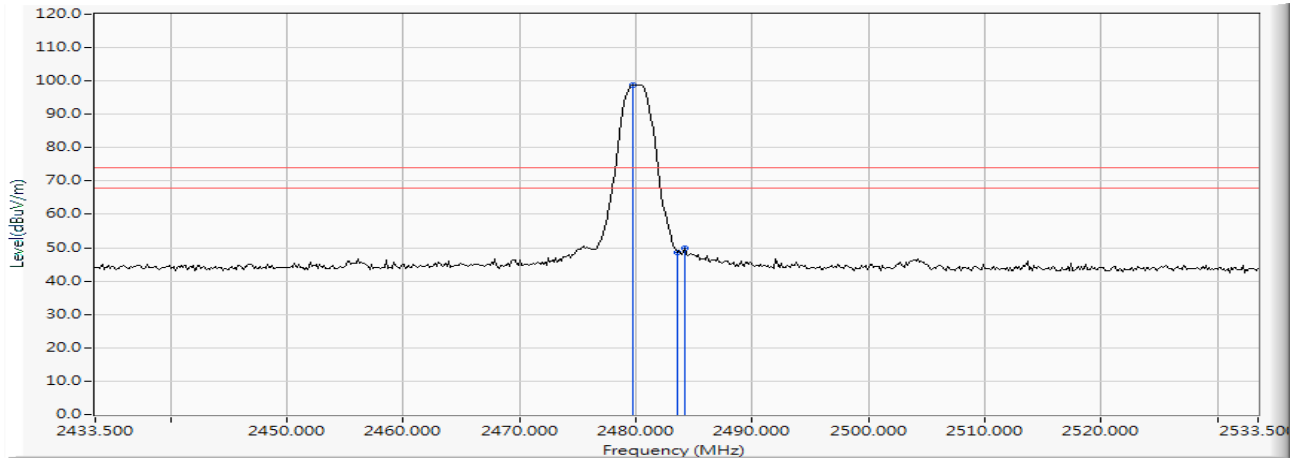


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	2479.732	-2.104	100.994	98.891	--	--	PEAK
2		2483.500	-2.127	50.548	48.421	-25.579	74.000	PEAK
3		2484.225	-2.131	52.109	49.978	-24.022	74.000	PEAK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Gaming Mouse
 Test Item : Band Edge
 Test Site : No.3 OATS
 Test date : 2019/10/21
 Test Mode : Mode 1: Transmit - BLE (GFSK) (2480MHz)

Vertical

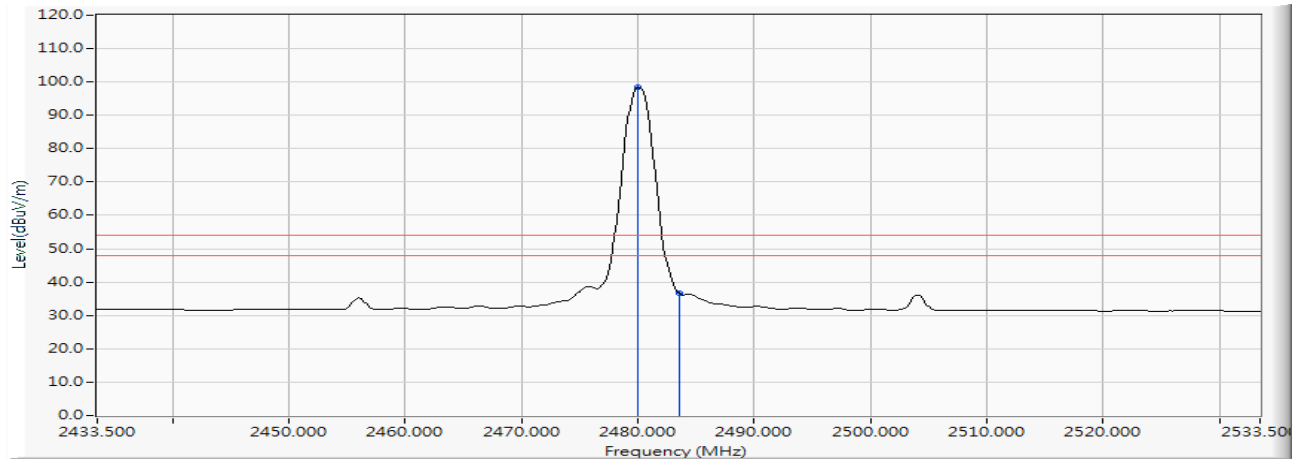


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1	*	2480.022	-2.105	100.451	98.346	--	--	AVERAGE
2		2483.500	-2.127	38.696	36.569	-17.431	54.000	AVERAGE

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

7. 6dB Bandwidth

7.1. Test Setup

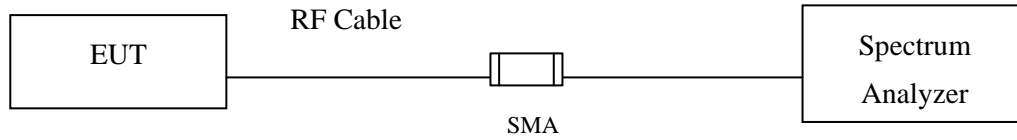

7.2. Limits

The minimum bandwidth shall be at least 500 kHz.

7.3. Test Procedure

The EUT was setup according to ANSI C63.4, 2014; tested according to ANSI C63.10 Section 11.8 for compliance to FCC 47CFR 15.247 requirements.

Set RBW = 1-5% of the emission bandwidth, $VBW \geq 3 * RBW$

7.4. Uncertainty


$\pm 283\text{Hz}$

7.5. Test Result of 6dB Bandwidth

Product : Gaming Mouse
 Test Item : 6dB Bandwidth Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit - BLE (GFSK) (2402MHz)

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
00	2402	760.0	>500	Pass


Figure Channel 00:

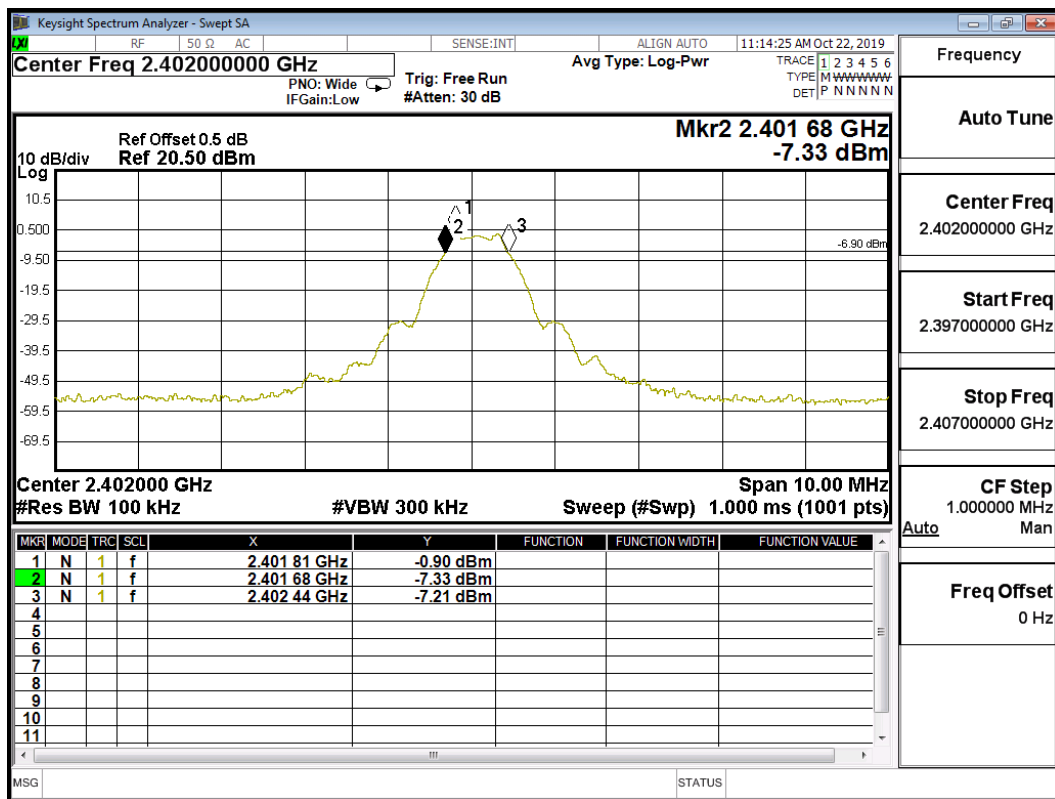

Product : Gaming Mouse
 Test Item : 6dB Bandwidth Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit - BLE (GFSK) (2440MHz)

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
19	2440	780.0	>500	Pass


Figure Channel 19:

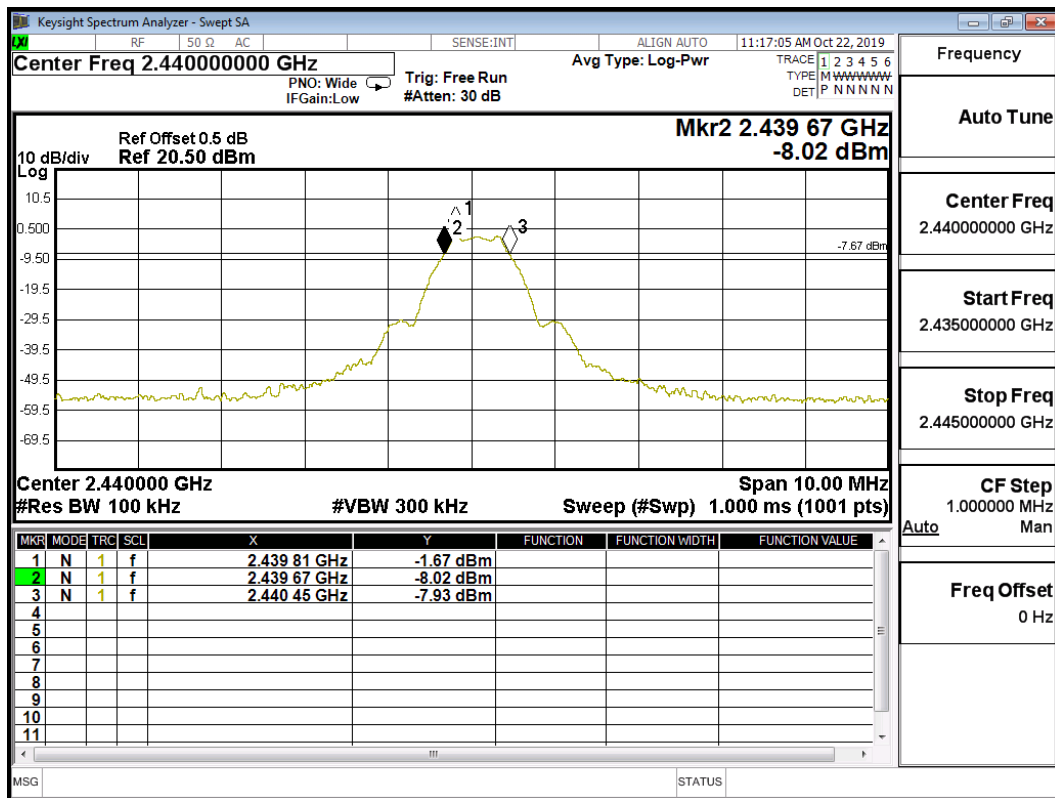

Product : Gaming Mouse
 Test Item : 6dB Bandwidth Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit - BLE (GFSK) (2480MHz)


Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
39	2480	770.0	>500	Pass

Figure Channel 39:

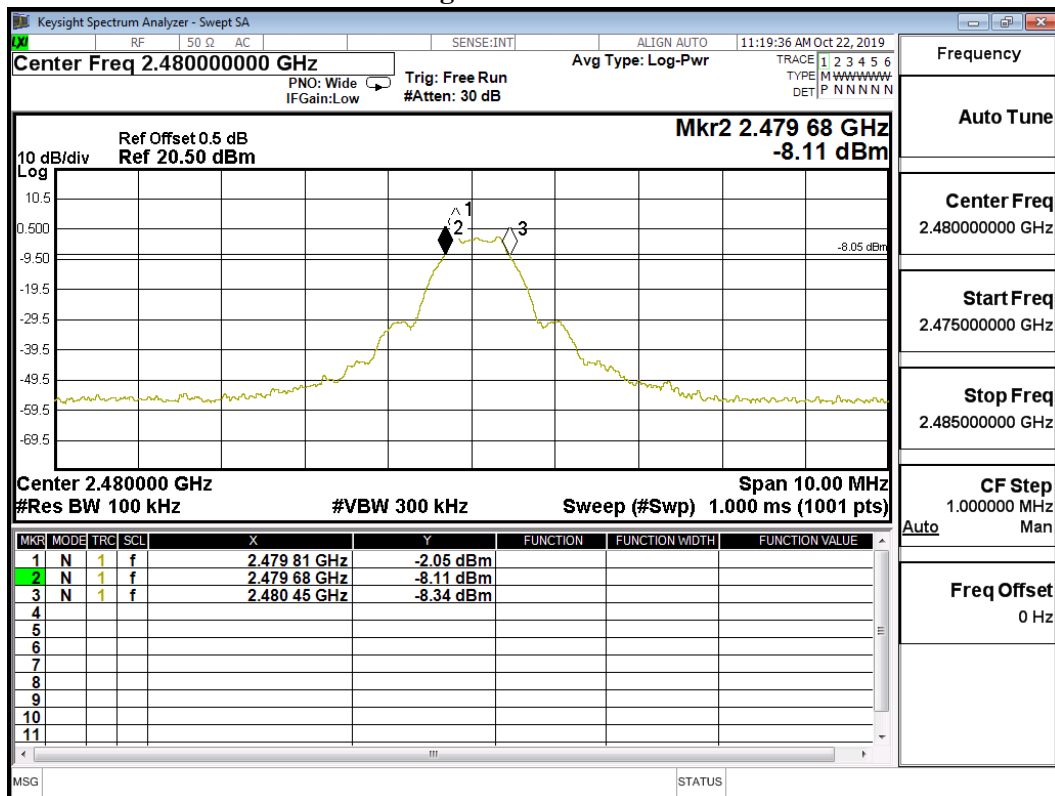

8. Power Density

8.1. Test Setup

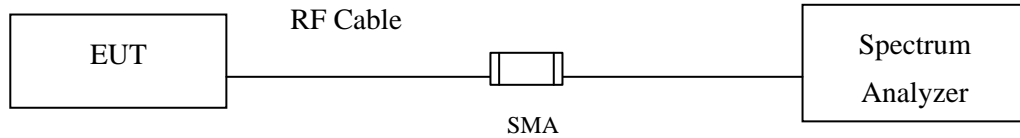

8.2. Limits

The transmitted power density averaged over any 1 second interval shall not be greater +8dBm in any 3kHz bandwidth.

8.3. Test Procedure

The EUT was setup according to ANSI C63.10, 2013; tested according to DTS test procedure of KDB 558074 for compliance to FCC 47CFR 15.247 requirements.

The maximum power spectral density using C63.10 Section 11.10.2 Method PKPSD (peak PSD).

8.4. Uncertainty


± 1.20 dB

8.5. Test Result of Power Density

Product : Gaming Mouse
 Test Item : Power Density Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit - BLE (GFSK) (2402MHz)

Channel No.	Frequency (MHz)	Measure Level (dBm)	Limit (dBm)	Result
00	2402	-0.97	≤ 8dBm	Pass


Figure Channel 00:

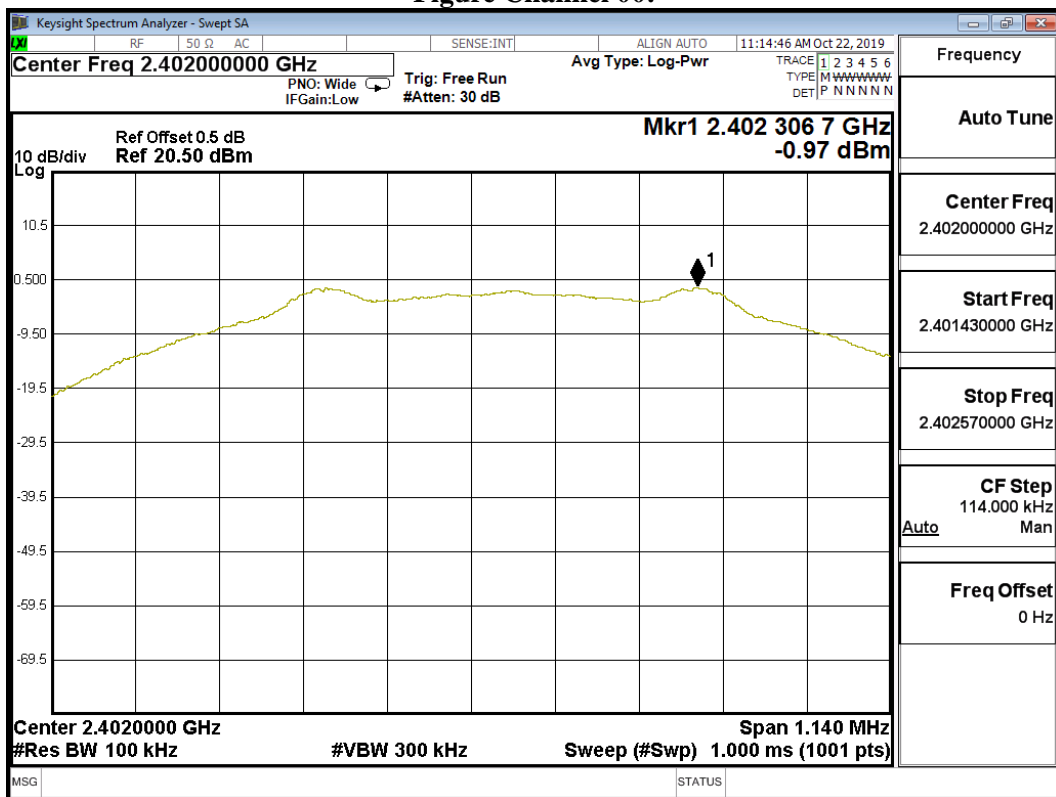

Product : Gaming Mouse
 Test Item : Power Density Data
 Test Site : No.3OATS
 Test Mode : Mode 1: Transmit - BLE (GFSK) (2440MHz)

Channel No.	Frequency (MHz)	Measurement Level (dBm)	Required Limit (dBm)	Result
19	2440	-1.67	≤ 8dBm	Pass


Figure Channel 19:

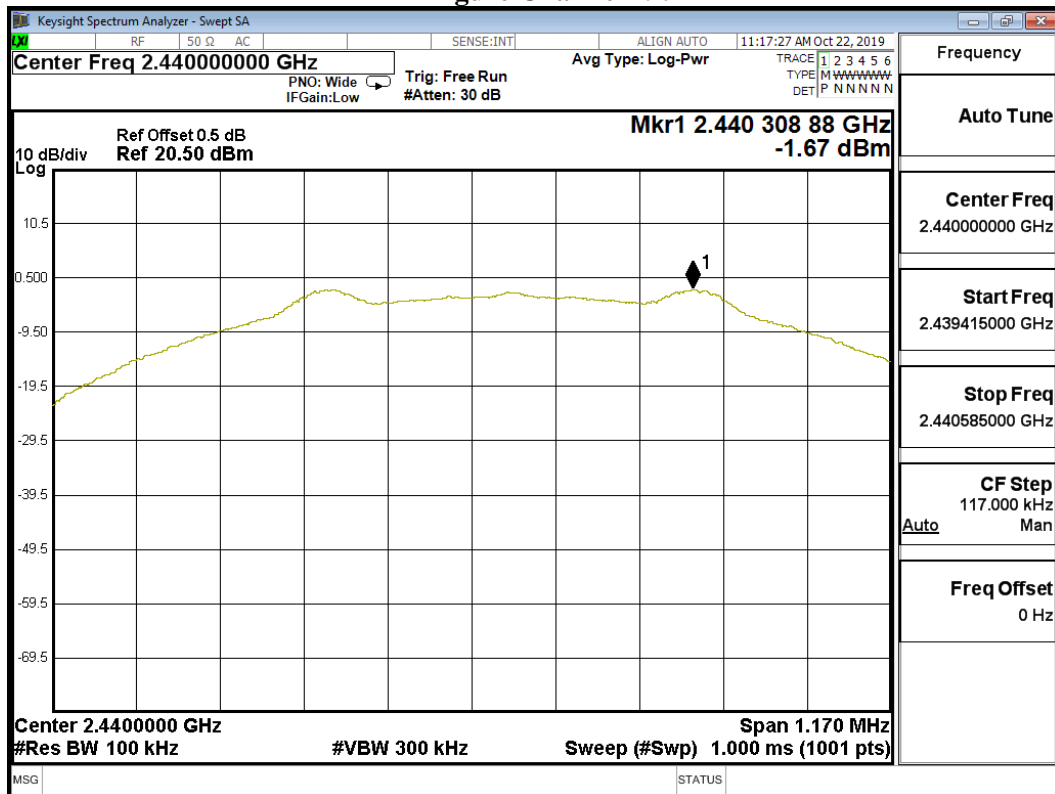

Product : Gaming Mouse
 Test Item : Power Density Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit - BLE (GFSK) (2480MHz)


Channel No.	Frequency (MHz)	Measurement Level (dBm)	Required Limit (dBm)	Result
39	2480	-2.22	≤ 8dBm	Pass

Figure Channel 39:

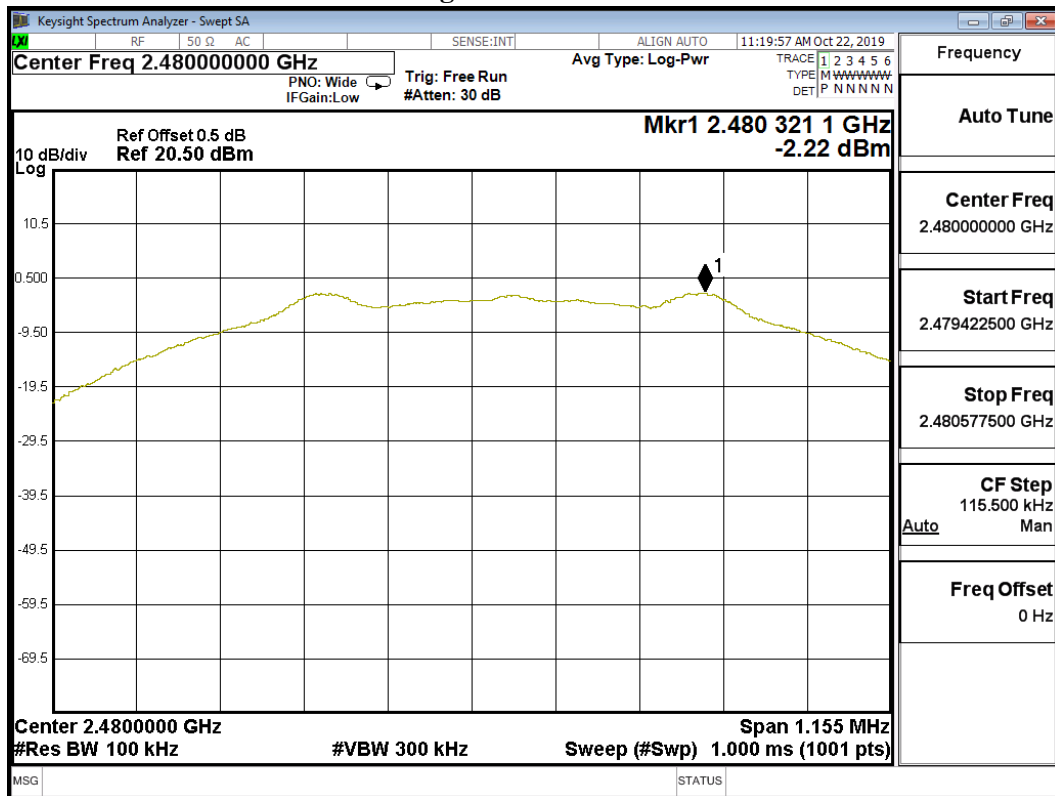

9. Duty Cycle

9.1. Test Setup

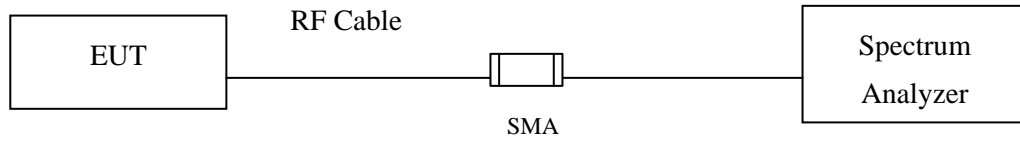

9.2. Test Procedure

The EUT was setup according to ANSI C63.10 2013; tested according to ANSI C63.10 2013 for compliance to FCC 47CFR 15.247 requirements.

9.3. Uncertainty

$\pm 2.31\text{msec}$

9.4. Test Result of Duty Cycle

Product : Gaming Mouse
 Test Item : Duty Cycle
 Test Mode : Mode 1: Transmit - BLE (GFSK)


Duty Cycle Formula:

$$\text{Duty Cycle} = \text{Ton} / (\text{Ton} + \text{Toff})$$

$$\text{Duty Factor} = 10 \text{ Log} (1/\text{Duty Cycle})$$

Results:

2.4GHz band	Ton (ms)	Ton + Toff (ms)	Duty Cycle (%)	Duty Factor (dB)
BLE	--	--	100	--

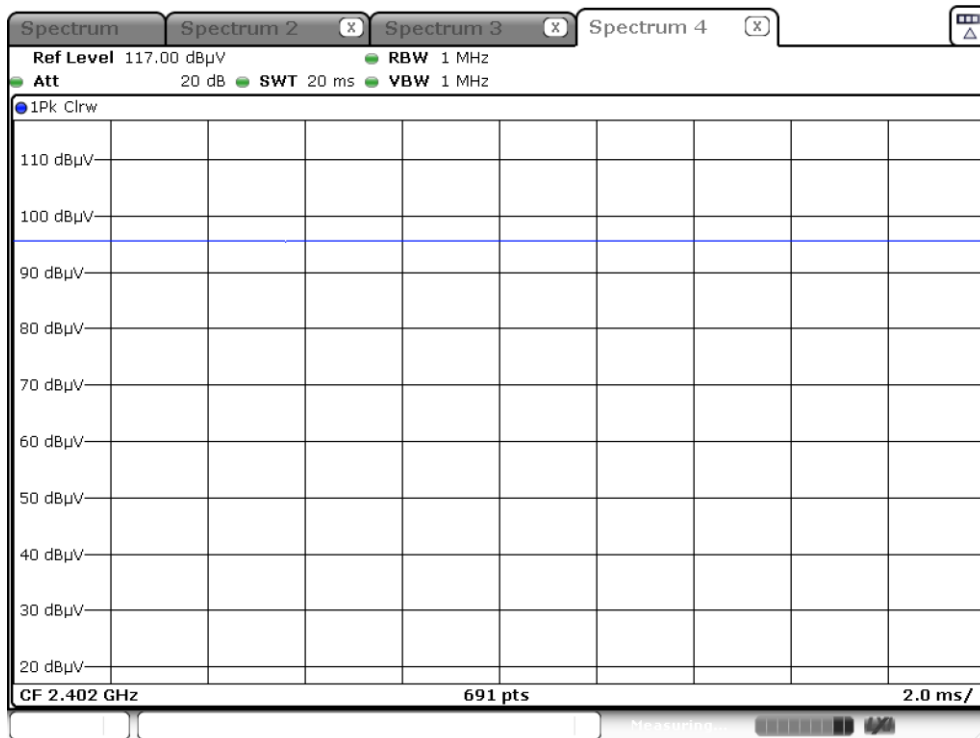

Date: 21.OCT.2019 13:19:53

10. EMI Reduction Method During Compliance Testing

No modification was made during testing.