

**Industrial Internet Innovation Center (Shanghai) Co.,Ltd.****FCC/IC 2.4G WLAN TEST REPORT**

<b>PRODUCT</b>	iHelp Max 4G mobile medical device
<b>BRAND</b>	iHelp
<b>MODEL</b>	EC4WHS
<b>APPLICANT</b>	Wearable Health Solutions, Inc.
<b>FCC ID</b>	XWI-EC4WHS
<b>IC</b>	8730A-EC4WHS
<b>ISSUE DATE</b>	February 28, 2023
<b>STANDARD(S)</b>	FCC Part15, RSS-247 Issue 2, RSS-Gen Issue 5

Prepared by: Tao Lingyan



Reviewed by: Yang Fan



Approved by: Zheng Min

**CAUTION:**

This report shall not be reproduced except in full without the written permission of the test laboratory and shall not be quoted out of context.

## CONTENTS

<b>1. SUMMARY OF TEST REPORT .....</b>	<b>3</b>
1.1 TEST STANDARD(S) .....	3
1.2 REFERENCE DOCUMENTS.....	3
1.3 SUMMARY OF TEST RESULTS.....	3
1.4 DATA PROVIDED BY APPLICANT.....	4
<b>2. GENERAL INFORMATION OF THE LABORATORY .....</b>	<b>5</b>
2.1 TESTING LABORATORY .....	5
2.2 LABORATORY ENVIRONMENTAL REQUIREMENTS .....	5
2.3 PROJECT INFORMATION .....	5
<b>3. GENERAL INFORMATION OF THE CUSTOMER.....</b>	<b>6</b>
3.1 APPLICANT .....	6
3.2 MANUFACTURER .....	6
<b>4. GENERAL INFORMATION OF THE PRODUCT.....</b>	<b>7</b>
4.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	7
4.2 INTERNAL IDENTIFICATION OF AE USED DURING THE TEST.....	7
4.3 ADDITIONAL INFORMATION .....	7
<b>5. TEST CONFIGURATION INFORMATION .....</b>	<b>8</b>
5.1 LABORATORY ENVIRONMENTAL CONDITIONS.....	8
5.2 TEST EQUIPMENTS UTILIZED.....	8
5.3 MEASUREMENT UNCERTAINTY .....	10
<b>6. TEST RESULTS.....</b>	<b>11</b>
6.1 OUTPUT POWER-CONDUCTED .....	11
6.2 PEAK POWER SPECTRAL DENSITY .....	15
6.3 OCCUPIED 6dB BANDWIDTH.....	19
6.4 99% OCCUPIED BANDWIDTH .....	23
6.5 BAND EDGES COMPLIANCE.....	27
6.6 TRANSMITTER SPURIOUS EMISSION-CONDUCTED .....	30
6.7 TRANSMITTER SPURIOUS EMISSION-RADIATED .....	40
6.8 AC POWERLINE CONDUCTED EMISSION .....	53
<b>ANNEX A: REVISED HISTORY .....</b>	<b>56</b>
<b>ANNEX B: ACCREDITATION CERTIFICATE.....</b>	<b>57</b>

## 1. Summary of Test Report

### 1.1 Test Standard(s)

No.	Test Standard(s)	Title	Version
1	FCC Part15	FCC CFR 47, Part 15, Subpart C: 15.205 Restricted bands of operation; 15.209 Radiated emission limits, general requirements; 15.247 Operation within the bands 902-928MHz, 2400-2483.5MHz, and 5725-5850MHz.	2020
2	RSS-247 Issue 2	Digital Transmission Systems (DTSs), Frequency Hopping Systems (FHSs) and Licence-Exempt Local Area Network (LE-LAN) Devices	2017
3	RSS-Gen Issue 5	General Requirements for Compliance of Radio Apparatus	2021

### 1.2 Reference Documents

No.	Reference	Title	Version
1	ANSI C63.10	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices	2013
2	KDB 558074	Guidance for Performing Compliance Measurements on Frequency Hopping Spread Spectrum systems (DSS) Operating Under §15.247	2019

### 1.3 Summary of Test Results

Measurement Items	Sub-clause of Part15C	Sub-clause of IC	Verdict
Maximum Peak Output Power	15.247(b)	RSS-247 5.4	Pass
Peak Power Spectral Density	15.247(e)	RSS-247 5.2	Pass
6dB Occupied Bandwidth	15.247(a)	RSS-247 5.2	Pass
99% Occupied Bandwidth	15.247(a)	RSS-Gen 6.7	Pass
Band Edges Compliance	15.247(d)	RSS-247 5.5	Pass
Transmitter Spurious Emission-Conducted	15.247(d)	RSS-247 5.5	Pass
Transmitter Spurious Emission-Radiated	15.247/15.205/15.209	RSS-Gen 8.9,8.10	Pass
AC Powerline Conducted Emission	15.207	RSS-Gen 8.8	Pass

Note:

The iHelp 4G, manufactured by Shenzhen Ecell Communication Technology Co.,Ltd is a new product for testing.

Industrial Internet Innovation Center (Shanghai) Co., Ltd. only performed test cases which identified with Pass/Fail/Inc result in section 1.3.

Industrial Internet Innovation Center (Shanghai) Co., Ltd. has verified that the compliance of the tested device specified in section 5.3 of this test report is successfully evaluated according to the procedure and test methods as defined in type certification requirement listed in section 6 of this test report.

**1.4 Data Provided by Applicant**

No.	Item(s)	Data
1	Antenna gain of EUT	1.33 dBi

Note: The data of 1.4 is provided by the customer may affect the validity of the test results in this report, and the impact and consequences of this shall be undertaken by the customer.

## 2. General Information of The Laboratory

### 2.1 Testing Laboratory

Lab Name	Industrial Internet Innovation Center (Shanghai) Co.,Ltd.
Address	Building 4, No. 766, Jingang Road, Pudong, Shanghai, China
Telephone	021-68866880
FCC Registration No.	958356
FCC Designation No.	CN1177

### 2.2 Laboratory Environmental Requirements

Temperature	15°C~35°C
Relative Humidity	25%RH~75%RH
Atmospheric Pressure	101kPa

### 2.3 Project Information

Project Manager	Zhang Heng
Test Date	November 07, 2022 to January 31, 2023

### 3. General Information of The Customer

#### 3.1 Applicant

Company	Wearable Health Solutions, Inc.
Address	2901 Pacific Coast Highway Ste. 200 Newport Beach, CA 92663
Telephone	+1 949 270 7460

#### 3.2 Manufacturer

Company	Shenzhen Ecell Communication Technology Co.,Ltd
Address	801-803, Floor 8, West Zone, Block B, Building 7, Gaoxin Nanjiudao Science and Technology Ecological Park, Nanshan District, Shenzhen

## 4. General Information of The Product

### 4.1 Product Description for Equipment under Test (EUT)

Product	iHelp Max 4G mobile medical device
Model	EC4WHS
Date of Receipt	November 07, 2022
EUT ID*	S04aa/S10aa
SN/IMEI	NA
Supported Radio Technology and Bands	LTE Band 2/4/5/7/12/13/17/25/26/41 WLAN 802.11 b/g/n BT4.2 BR/EDR, BLE GPS/GLONASS/BDS
Hardware Version	V1.1
Software Version	iHelp 4G V1.1
FCC ID	XWI-EC4WHS
IC ID	8730A-EC4WHS
NOTE: EUT ID is the internal identification code of the laboratory.	

### 4.2 Internal Identification of AE used during the test

AE ID*	Description	Model	SN/Remark
AE1	RF Cable	N/A	N/A
NOTE: AE ID is the internal identification code of the laboratory.			

### 4.3 Additional Information

WLAN Frequency	2412MHz-2462MHz
Occupied Channel Bandwidth	CH1-11
WLAN type of modulation	802.11b: DSSS 802.11g/n: OFDM

## 5. Test Configuration Information

### 5.1 Laboratory Environmental Conditions

#### 5.1.1 Permanent Facilities

Relative Humidity	Min. = 45 %, Max. = 55 %		
Atmospheric Pressure	101kPa		
Temperature	Normal	Minimum	Maximum
	25°C	-10°C	55°C
Working Voltage of EUT	Normal	Minimum	Maximum
	3.8V	3.4V	4.35V

### 5.2 Test Equipments Utilized

#### 5.2.1 Conducted Test System

No.	Name	Model	S/N	Manufacturer	Cal. Date	Cal. Interval
1	Programmable Power Supply	Keithley 2303	4039070	Starpoint	July 12, 2022	1 Year
2	Temperature box	B-TF-107C	BTF107C-201804107	Boyi	June 30, 2022	1 Year
3	Signal Generator	SMF	104770	R&S	October 18, 2022	1 Year
4	Spectrum analyzer	FSVA	100924	R&S	September 9, 2022	1 Year
5	Vector Signal Generator	SMCV100B	103691	R&S	August 16, 2022	1 Year
6	Wideband Radio Communication tester	CMW500	164865	R&S	August 22, 2022	1 Year
7	Automatic control unit	JS0806-2	2218060623	Tonscend	N/A	N/A
8	Tonscend Automated test software	TS1120	10727	Tonscend	N/A	N/A

### 5.2.2 Radiated Emission Test System

No.	Name	Model	S/N	Manufacturer	Cal. Date	Cal. Interval
1	Universal Radio Communication Tester	CMU200	123123	R&S	October 17, 2022	1 Year
2	Universal Radio Communication Tester	CMW500	104178	R&S	October 17, 2022	1 Year
3	EMI Test Receiver	ESU40	100307	R&S	February 23, 2022	1 Year
4	TRILOG Broadband Antenna	VULB9163-515		Schwarzbeck	March 11, 2022	1 Year
5	Double- ridged Waveguide Antenna	ETS-3117	00135890	ETS	March 9, 2022	2 Years
6	2-Line V-Network	ENV216	101380	R&S	February 21, 2022	1 Year
7	EMI Test Software	EMC32 V9.15.00	N/A	R&S	N/A	N/A

### 5.2.3 Test Environment

**Shielding Room1** (6.0 meters×3.0 meters×2.7 meters) did not exceed following limits along the conducted RF performance testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 20 %, Max. = 75 %
Shielding effectiveness	> 100 dB
Ground system resistance	< 0.5 Ω
Temperature	Min. = 15 °C, Max. = 35 °C

**Control room** did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 30 %, Max. = 60 %
Shielding effectiveness	> 100 dB
Electrical insulation	> 10 kΩ
Ground system resistance	< 0.5 Ω

**Fully-anechoic chamber1** (9.8 meters×6.7 meters×6.7 meters) did not exceed following limits along the EMC testing:

Report No: I22I30128-SRD03-V00

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 25 %, Max. = 75 %
Shielding effectiveness	> 100 dB
Electrical insulation	> 10 kΩ
Ground system resistance	< 0.5 Ω
VSWR	Between 0 and 6 dB, from 1GHz to 18GHz
Site Attenuation Deviation	Between -4 and 4 dB, 30MHz to 1GHz
Uniformity of field strength	Between 0 and 6 dB, from 80MHz to 3000 MHz

### 5.3 Measurement Uncertainty

Item(s)	Range	Confidence Level	Calculated Uncertainty
Peak Output Power-Conducted	2412MHz-2462MHz	95%	0.544dB
Peak Power Spectral Density	2412MHz-2462MHz	95%	0.502dB
Occupied 6dB Bandwidth	2412MHz-2462MHz	95%	69.26kHz
Band Edges-Conducted	2412MHz-2462MHz	95%	0.544dB
Conducted Emission	9KHz-30MHz	95%	0.89dB
Conducted Emission	30MHz-2GHz	95%	0.90dB
Conducted Emission	2GHz-3.6GHz	95%	0.88dB
Conducted Emission	3.6GHz-8GHz	95%	0.96dB
Conducted Emission	8GHz-20GHz	95%	0.94dB
Conducted Emission	20GHz-22GHz	95%	0.88dB
Conducted Emission	22GHz-26GHz	95%	0.86dB
Transmitter Spurious Emission- Radiated	9KHz-30MHz	95%	5.66dB
Transmitter Spurious Emission- Radiated	30MHz-1000MHz	95%	4.98dB
Transmitter Spurious Emission- Radiated	1000MHz -18000MHz	95%	5.06dB
Transmitter Spurious Emission- Radiated	18000MHz -40000MHz	95%	5.20dB
AC Power line Conducted Emission	0.15MHz-30MHz	95%	3.66 dB

## 6. Test Results

### 6.1 Output Power-Conducted

#### 6.1.1. Measurement Limit


Standard	Limit (dBm)	Limit EIRP(dBm)
FCC 47 Part 15.247(b)(3)	<30	<36
RSS-247 5.4(d)	<30	<36

#### 6.1.2. Test Procedure

The measurement is according to ANSI C63.10 clause 11.9.

1. Set span to at least 1.5 times the OBW.
2. Set RBW = 1-5% of the OBW, not to exceed 1 MHz.
3. Set VBW  $\geq 3 \times$  RBW.
4. Number of points in sweep  $\geq 2 \times$  span / RBW. (This gives bin-to-bin spacing  $\leq$  RBW/2, so that narrowband signals are not lost between frequency bins.)
5. Sweep time = auto.
6. Detector = RMS (i.e., power averaging), if available. Otherwise, use sample detector mode.
7. If transmit duty cycle < 98 %, use a sweep trigger with the level set to enable triggering only on full power pulses. The transmitter shall operate at maximum power control level for the entire duration of every sweep. If the EUT transmits continuously (i.e., with no off intervals) or at duty cycle  $\geq 98 \%$ , and if each transmission is entirely at the maximum power control level, then the trigger shall be set to "free run".
8. Trace average at least 100 traces in power averaging (i.e., RMS) mode.i) Compute power by integrating the spectrum across the OBW of the signal using the instrument's band power measurement function, with band limits set equal to the OBW band edges. If the instrument does not have a band power function, sum the spectrum levels (in power units) at intervals equal to the RBW extending across the entire OBW of the spectrum

#### 6.1.3. Test setup

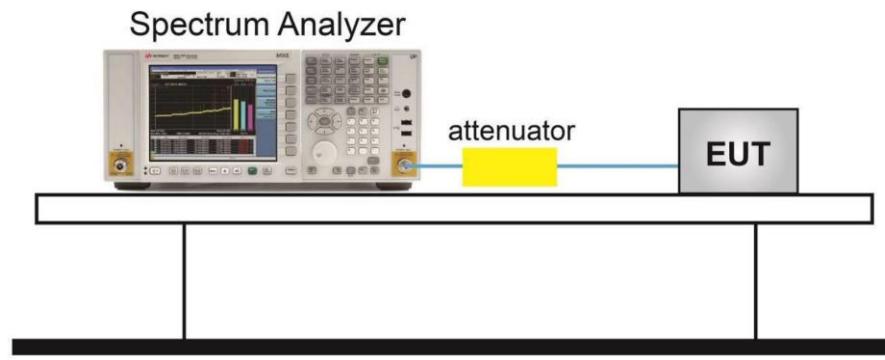

### Maximum Average Output Power-conducted


#### Measurement Results


TestMode	Antenna	Frequency[MHz]	Peak Power[dBm]	Conducted Limit[dBm]	EIRP [dBm]	EIRP Limit[dBm]	Verdict
11B	Ant1	2412	17.13	≤30.00	18.46	≤36.00	PASS
11B	Ant1	2437	14.97	≤30.00	16.3	≤36.00	PASS
11B	Ant1	2462	15.78	≤30.00	17.11	≤36.00	PASS
11G	Ant1	2412	10.15	≤30.00	11.48	≤36.00	PASS
11G	Ant1	2437	7.92	≤30.00	9.25	≤36.00	PASS
11G	Ant1	2462	9.33	≤30.00	10.66	≤36.00	PASS
11N20SISO	Ant1	2412	10.25	≤30.00	11.58	≤36.00	PASS
11N20SISO	Ant1	2437	8.11	≤30.00	9.44	≤36.00	PASS
11N20SISO	Ant1	2462	9.63	≤30.00	10.96	≤36.00	PASS

Conclusion: PASS


#### TEST PLOTS:



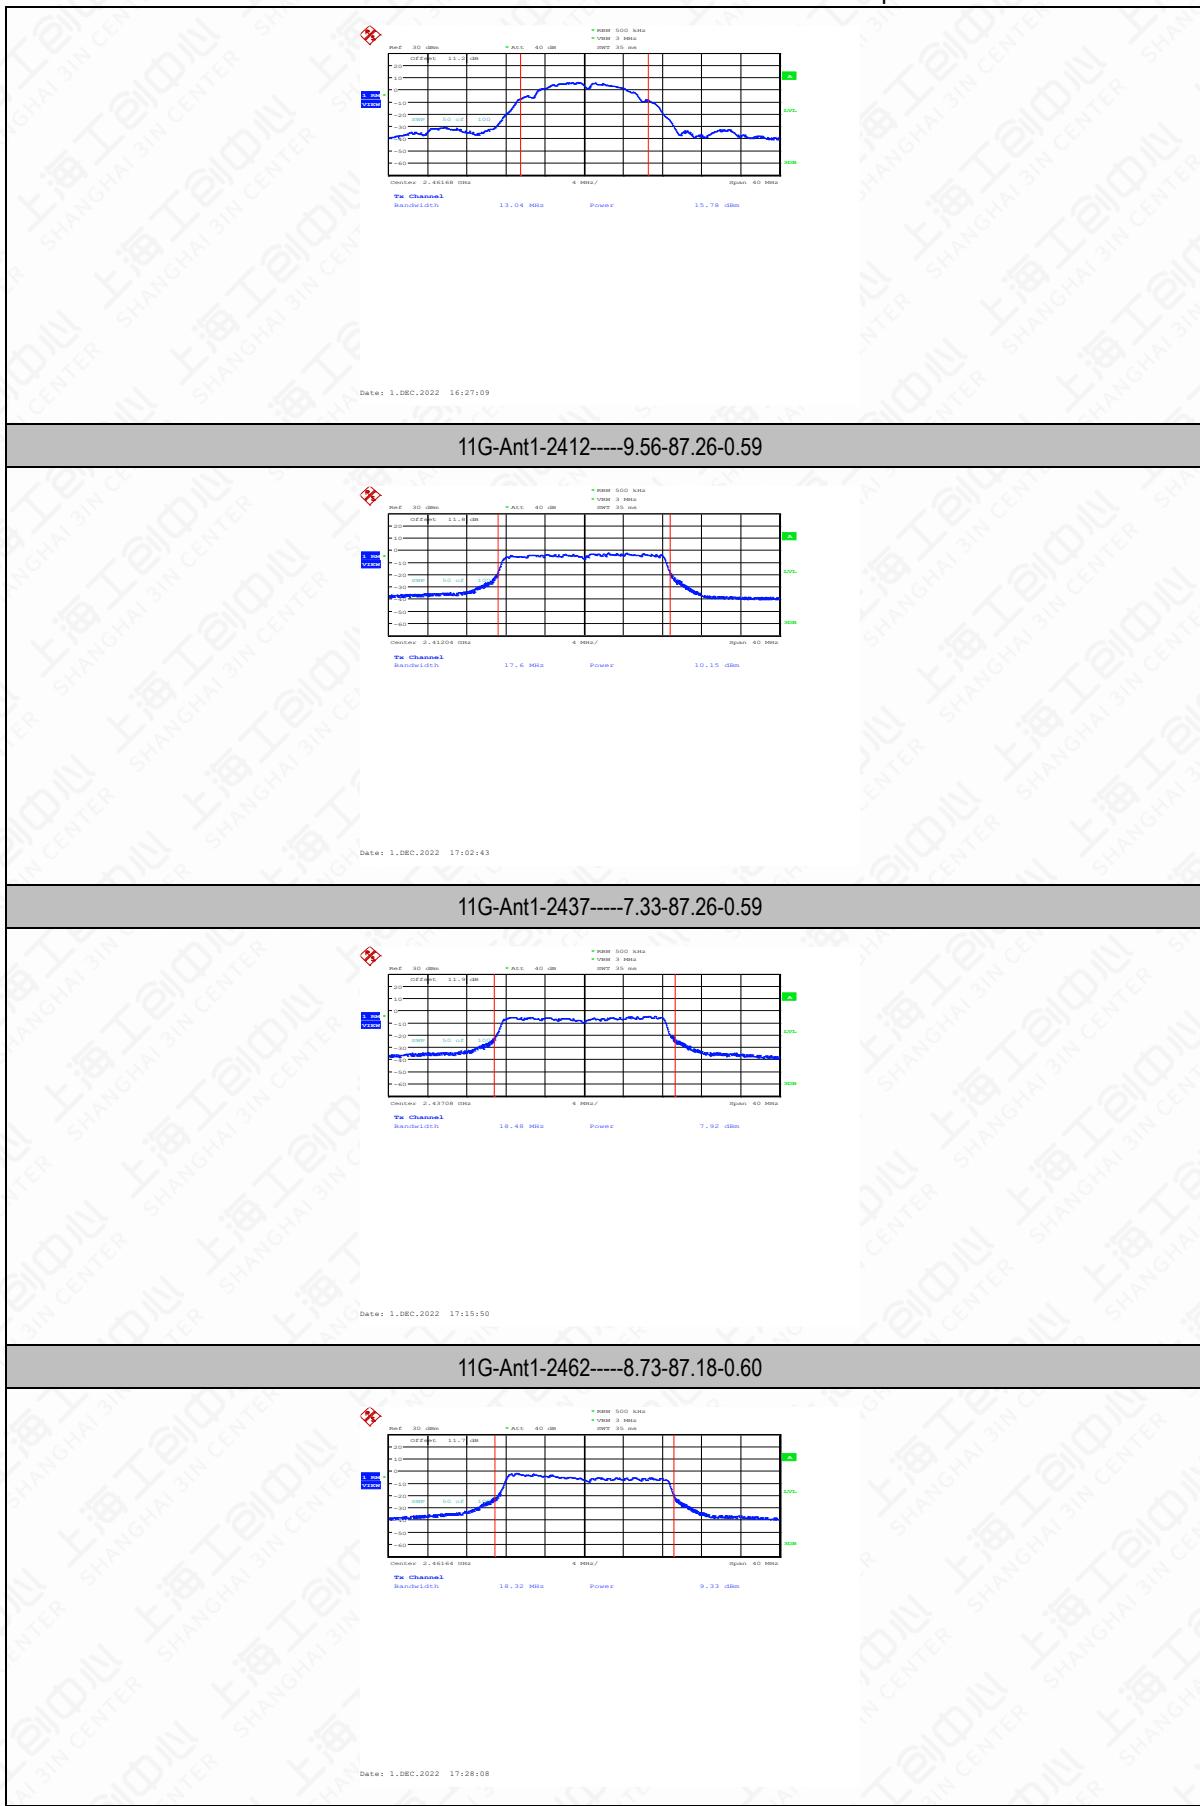


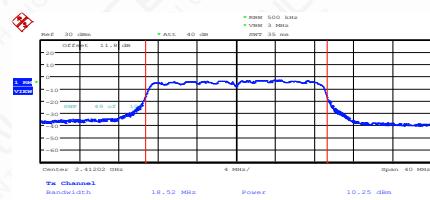**11N20SISO-Ant1-2412----9.62-86.58-0.63**


Date: 1.DEC.2022 17:41:29

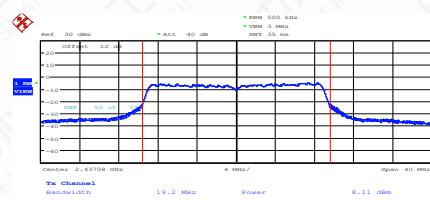**11N20SISO-Ant1-2437----7.48-86.49-0.63**


Date: 1.DEC.2022 17:55:44

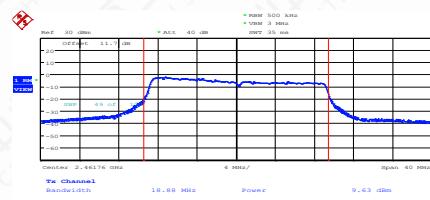**11N20SISO-Ant1-2462----9.00-86.49-0.63**


Date: 1.DEC.2022 18:08:32

## 6.2 Peak Power Spectral Density

### 6.2.1. Measurement Limit


Standard	Limit
FCC 47 Part 15.247(e)	$\leq 8\text{dBm}/3 \text{ KHz}$
RSS-247 5.2(b)	$\leq 8\text{dBm}/3 \text{ kHz}$

### 6.2.2. Test procedures

The measurement is according to ANSI C63.10 clause 11.10.


1. The output power of EUT was connected to the spectrum analyzer. The path loss was compensated to the results for each measurement.
2. Enable EUT transmitter maximum power continuously.
3. Set analyzer center frequency to DTS channel center frequency.
4. Set the span to 1.5 times the DTS bandwidth.
5. Set the RBW=3kHz
6. Set the VBW  $\geq [3 \times \text{RBW}]$ .
7. Detector = peak.
8. Sweep time = auto couple.
9. Trace mode = max hold.
10. Allow trace to fully stabilize.
11. Use the peak marker function to determine the maximum amplitude level within the RBW.
12. If measured value exceeds requirement, then reduce RBW (but no less than 3 kHz) and repeat


### 6.2.3. Test setup

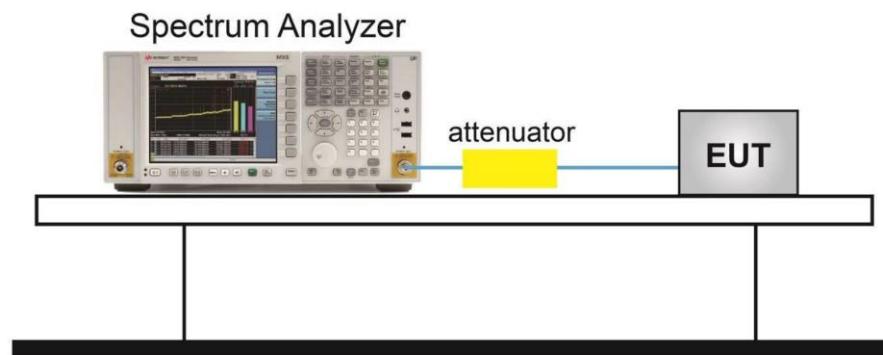


### Measurement Result

TestMode	Antenna	Frequency[MHz]	Result[dBm/3kHz]	Limit[dBm/3kHz]	Verdict
11B	Ant1	2412	-13.96	≤8.00	PASS
11B	Ant1	2437	-16.1	≤8.00	PASS
11B	Ant1	2462	-15.22	≤8.00	PASS
11G	Ant1	2412	-20.27	≤8.00	PASS
11G	Ant1	2437	-25.09	≤8.00	PASS
11G	Ant1	2462	-22.74	≤8.00	PASS
11N20SISO	Ant1	2412	-20.47	≤8.00	PASS
11N20SISO	Ant1	2437	-24.87	≤8.00	PASS
11N20SISO	Ant1	2462	-22.82	≤8.00	PASS

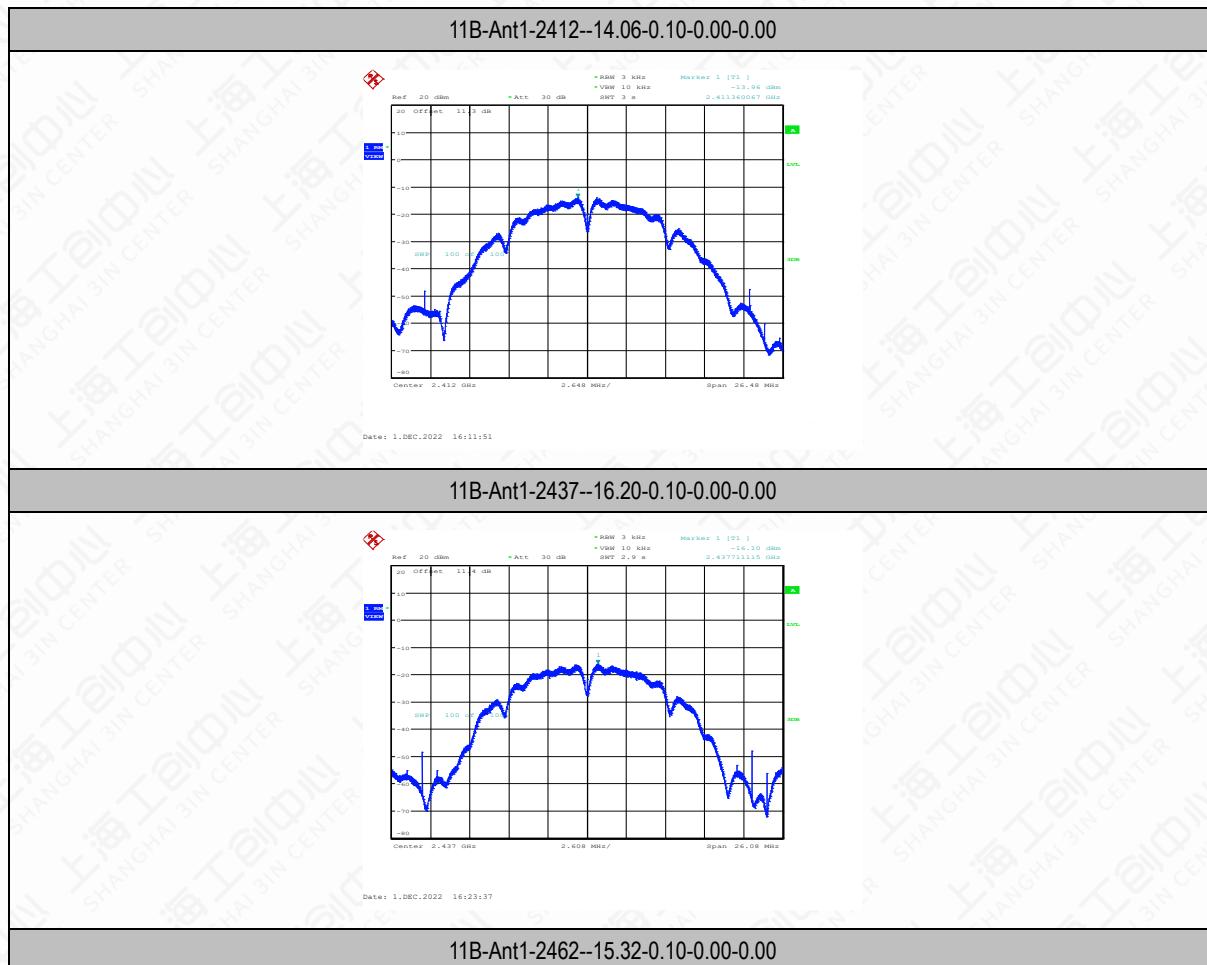


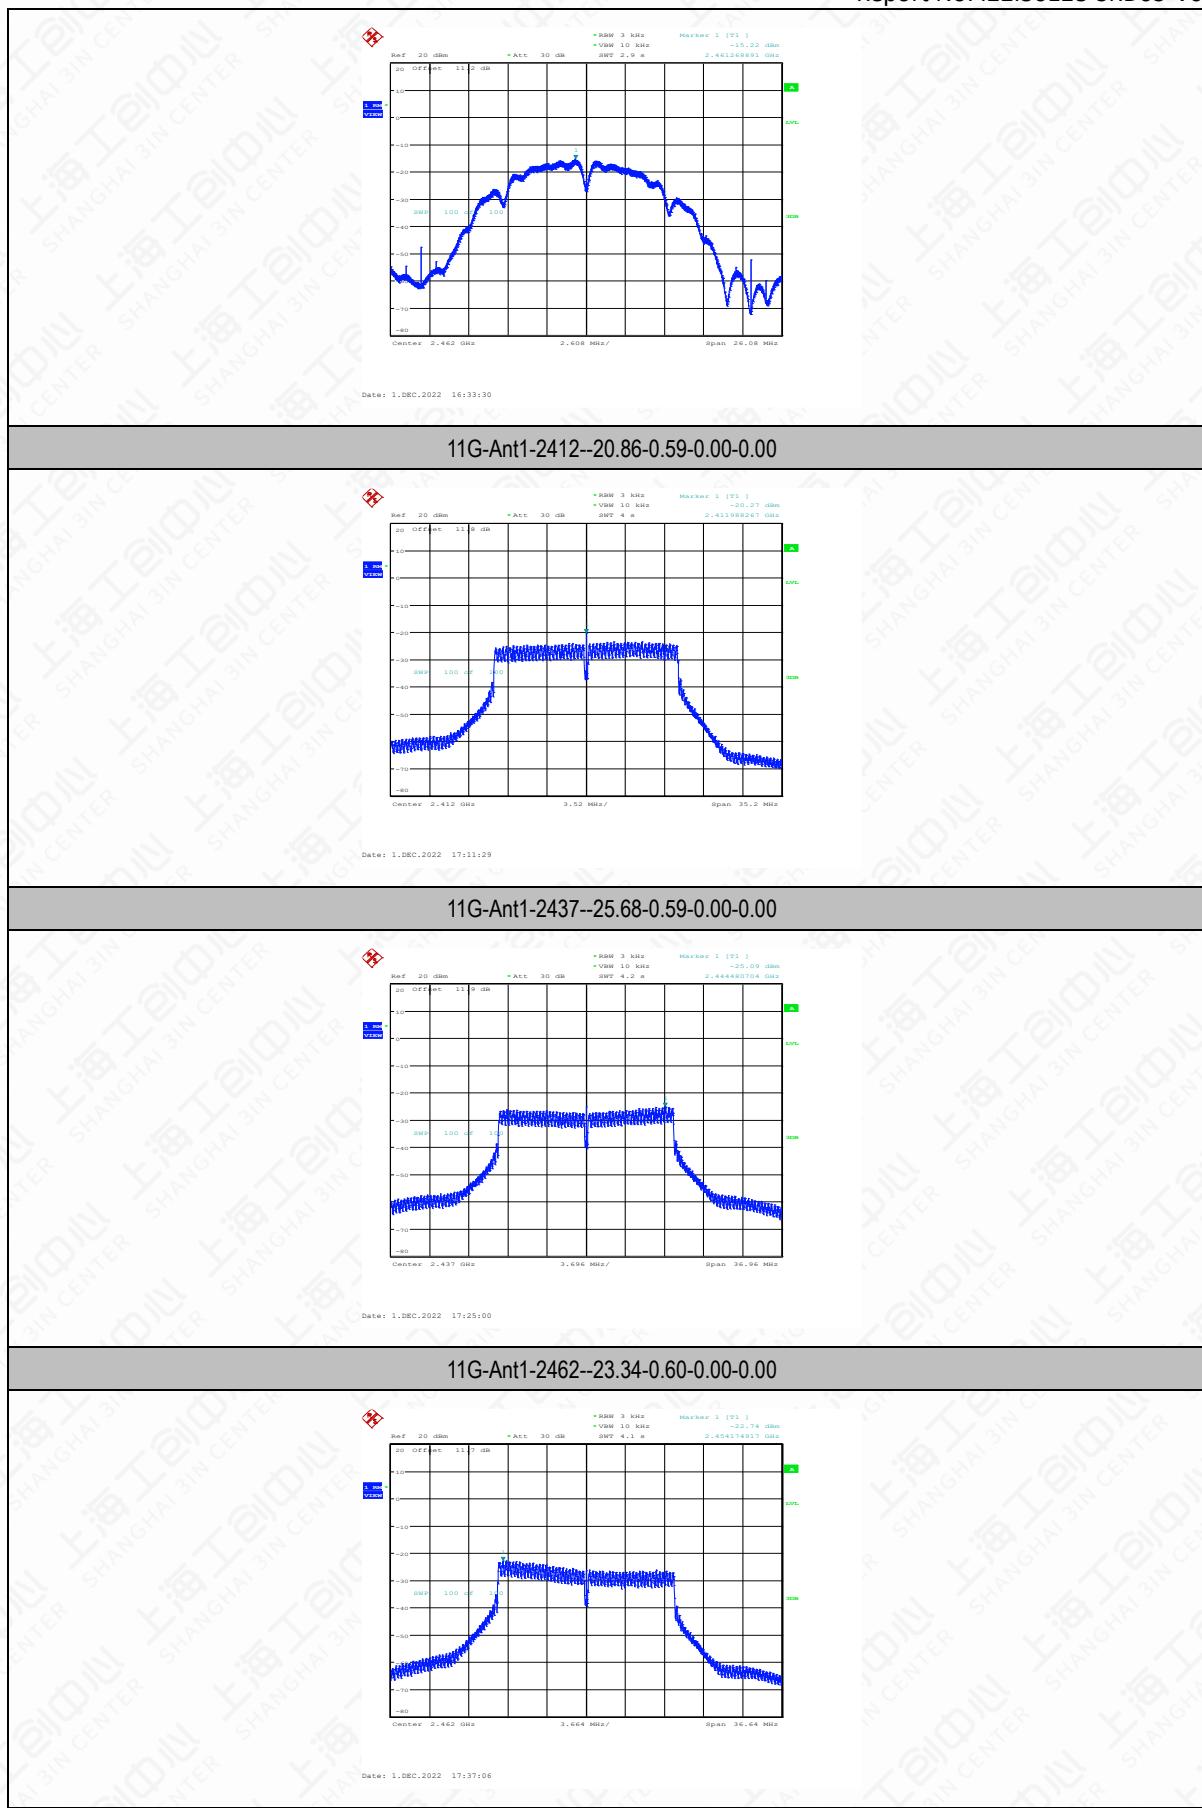


## 11N20SISO-Ant1-2412--21.10-0.63-0.00-0.00

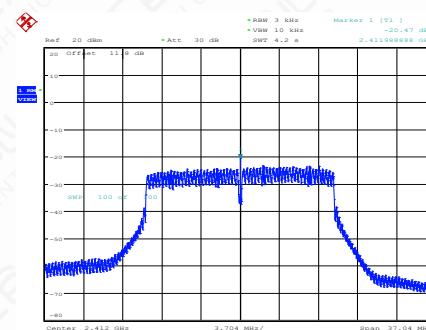

## 11N20SISO-Ant1-2437--25.50-0.63-0.00-0.00

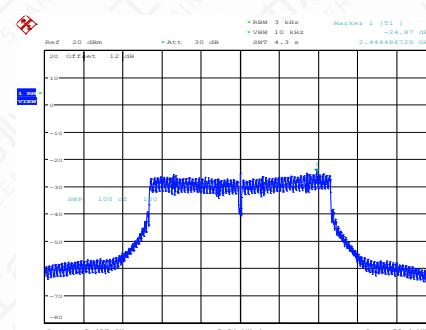

## 11N20SISO-Ant1-2462--23.45-0.63-0.00-0.00

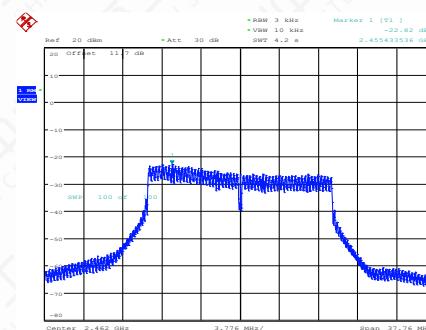

## 6.3 Occupied 6dB Bandwidth


### 6.3.1. Measurement Limit

Standard	Limit(KHz)
FCC 47 Part 15.247(a) (2)	$\geq 500\text{KHz}$
RSS-247 5.2(a)	$\geq 500\text{KHz}$

### 6.3.2. Test procedures

1. The output power of EUT was connected to the spectrum analyzer. The path loss was compensated to the results for each measurement.
2. Enable EUT transmitter maximum power continuously.
3. Set RBW = 100 kHz.
4. Set the VBW  $\geq [3 \times \text{RBW}]$ .
5. Detector = peak.
6. Trace mode = max hold.
7. Sweep = auto couple.
8. Allow the trace to stabilize.
9. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

### 6.3.3. Test Setup

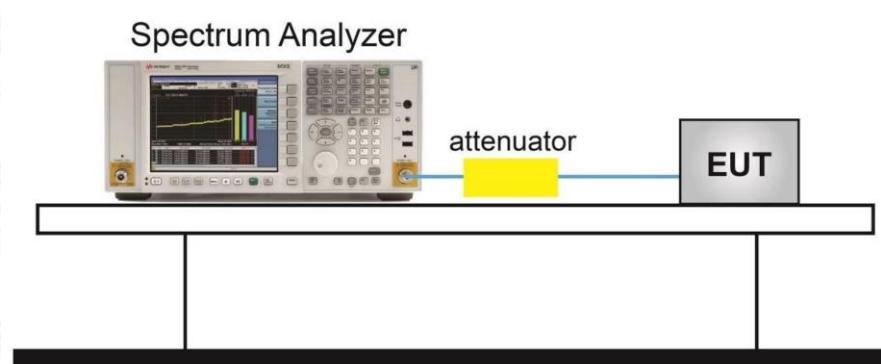



### Measurement Results


TestMode	Antenna	Frequency[MHz]	DTS BW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11B	Ant1	2412	8.04	2408.00	2416.04	0.5	PASS
11B	Ant1	2437	8.56	2432.96	2441.52	0.5	PASS
11B	Ant1	2462	8.08	2457.44	2465.52	0.5	PASS
11G	Ant1	2412	16.32	2403.84	2420.16	0.5	PASS
11G	Ant1	2437	16.32	2428.84	2445.16	0.5	PASS
11G	Ant1	2462	15.76	2453.80	2469.56	0.5	PASS
11N20SISO	Ant1	2412	17.16	2403.60	2420.76	0.5	PASS
11N20SISO	Ant1	2437	17.60	2428.20	2445.80	0.5	PASS
11N20SISO	Ant1	2462	16.36	2453.20	2469.56	0.5	PASS

Conclusion: PASS


Test graphs as below

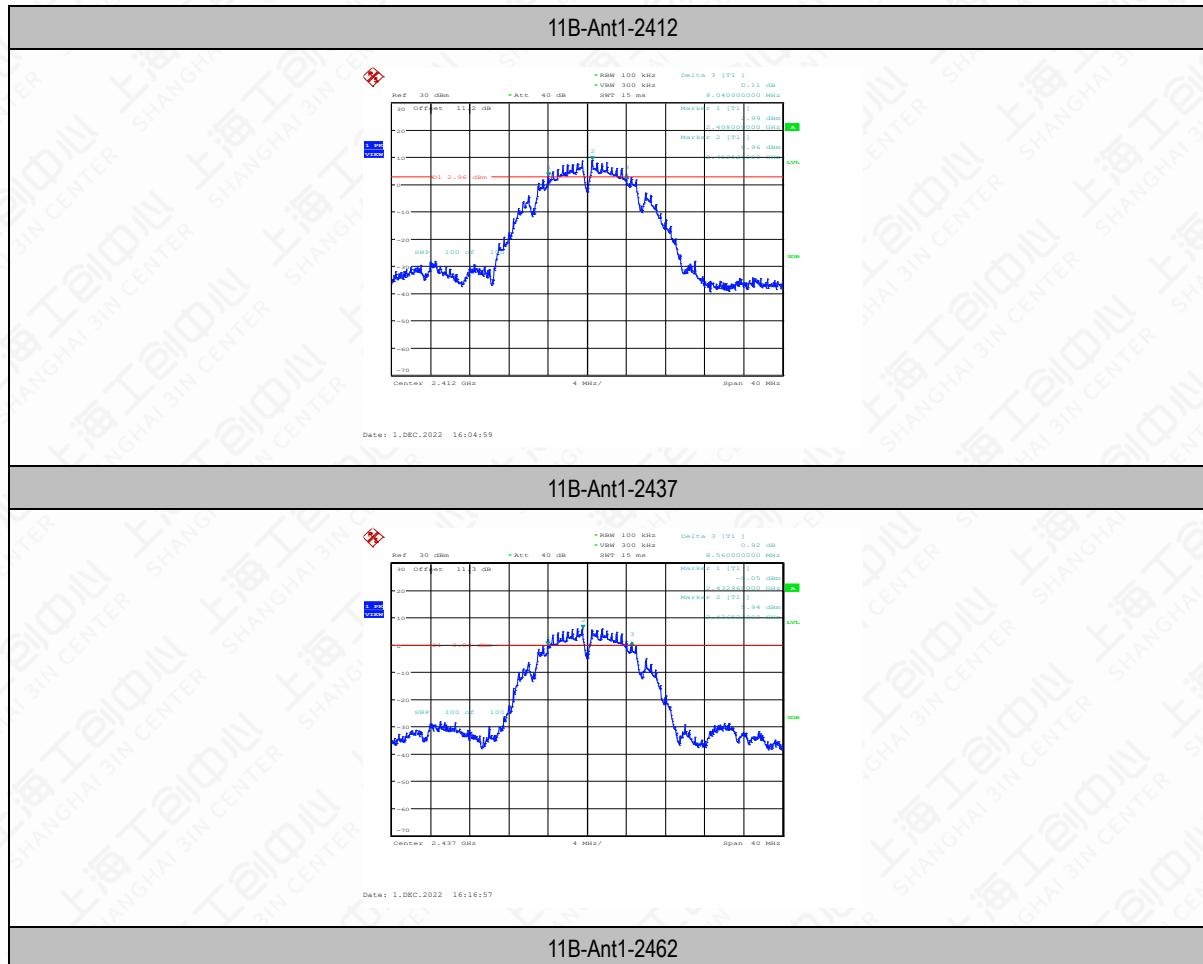

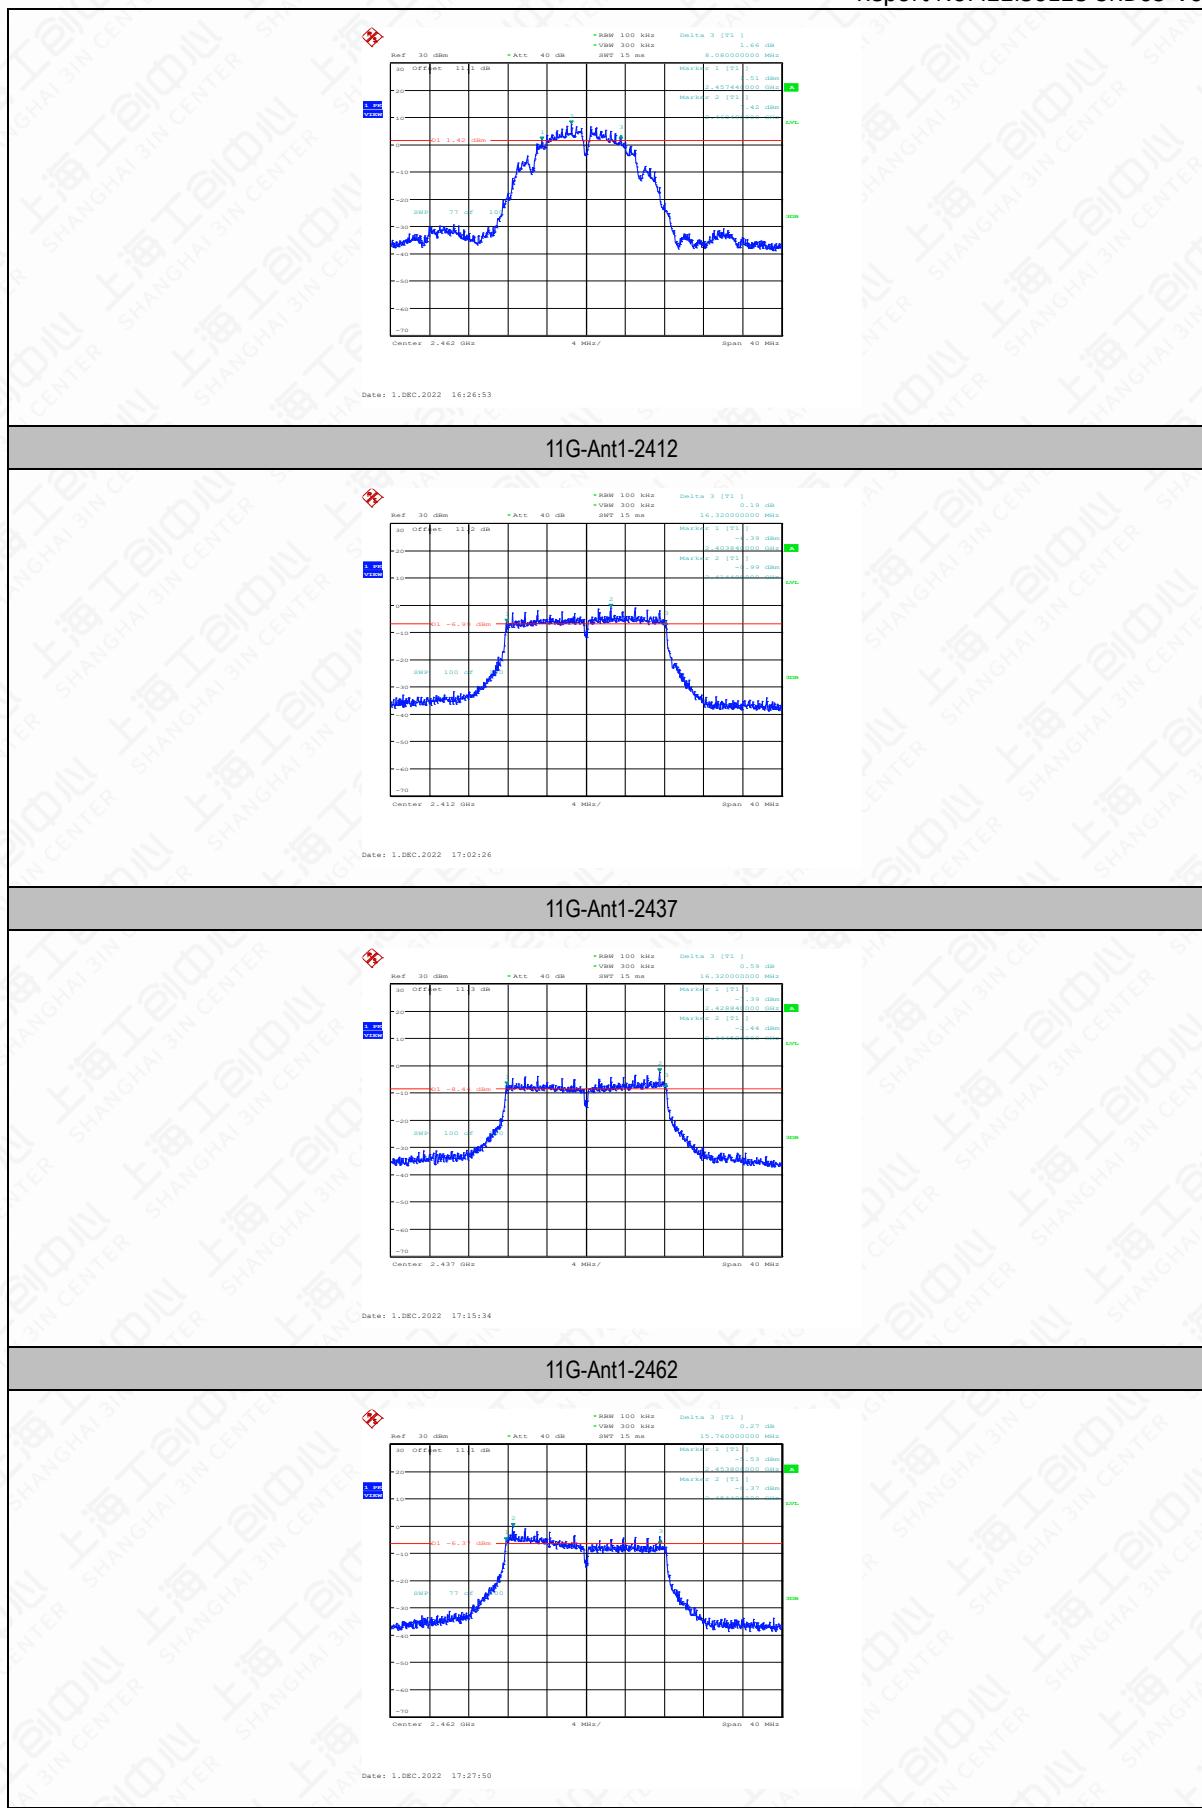


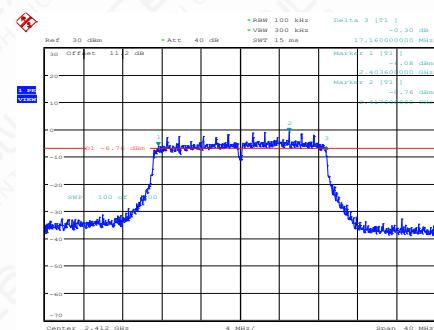**11N20SISO-Ant1-2412**


Date: 1.DEC.2022 17:41:13

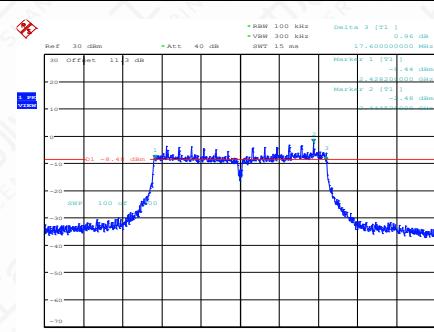**11N20SISO-Ant1-2437**


Date: 1.DEC.2022 17:55:27

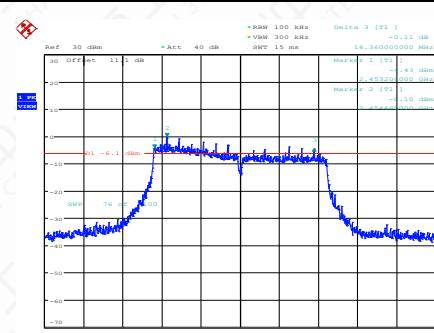**11N20SISO-Ant1-2462**


Date: 1.DEC.2022 18:08:16

## 6.4 99% Occupied Bandwidth

### 6.4.1. Measurement Limit


Standard	Limit
RSS-Gen 6.7	N/A

### 6.4.2. Test procedures

The measurement is according to ANSI C63.10 clause 6.9.3.

1. The output power of EUT was connected to the spectrum analyzer. The path loss was compensated to the results for each measurement.
2. Enable EUT transmitter maximum power continuously.
3. Set RBW shall be in the range of 1% to 5% of the OBW.
4. Set the VBW  $\geq [3 \times \text{RBW}]$ .
5. Detector = peak.
6. Trace mode = max hold.
7. Sweep = auto couple.
8. Allow the trace to stabilize.
9. The occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5% of the total mean power of the given emission.

### 6.4.3. Test setup

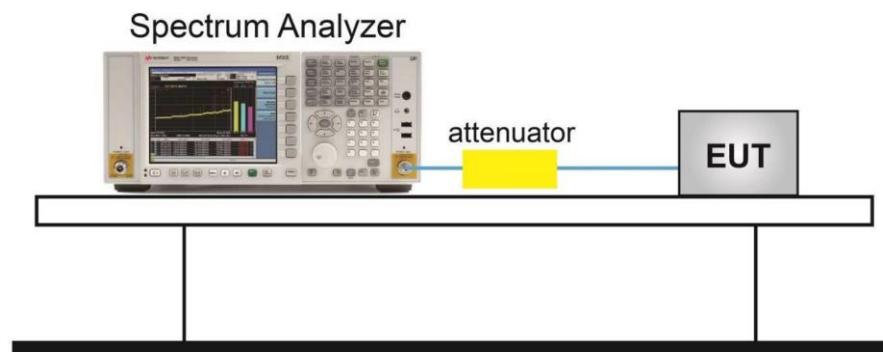


### Measurement Result

TestMode	Antenna	Channel Frequency[MHz]	OCB [MHz]	FL[MHz]	FH[MHz]
11B	Ant1	2412	13.24	2405.5600	2418.8000
11B	Ant1	2437	13.04	2430.6000	2443.6400
11B	Ant1	2462	13.04	2455.1600	2468.2000
11G	Ant1	2412	17.6	2403.2400	2420.8400
11G	Ant1	2437	18.48	2427.8400	2446.3200
11G	Ant1	2462	18.32	2452.4800	2470.8000
11N20SISO	Ant1	2412	18.52	2402.7600	2421.2800
11N20SISO	Ant1	2437	19.2	2427.4800	2446.6800
11N20SISO	Ant1	2462	18.88	2452.3200	2471.2000


Conclusion: PASS

Test graphs as below




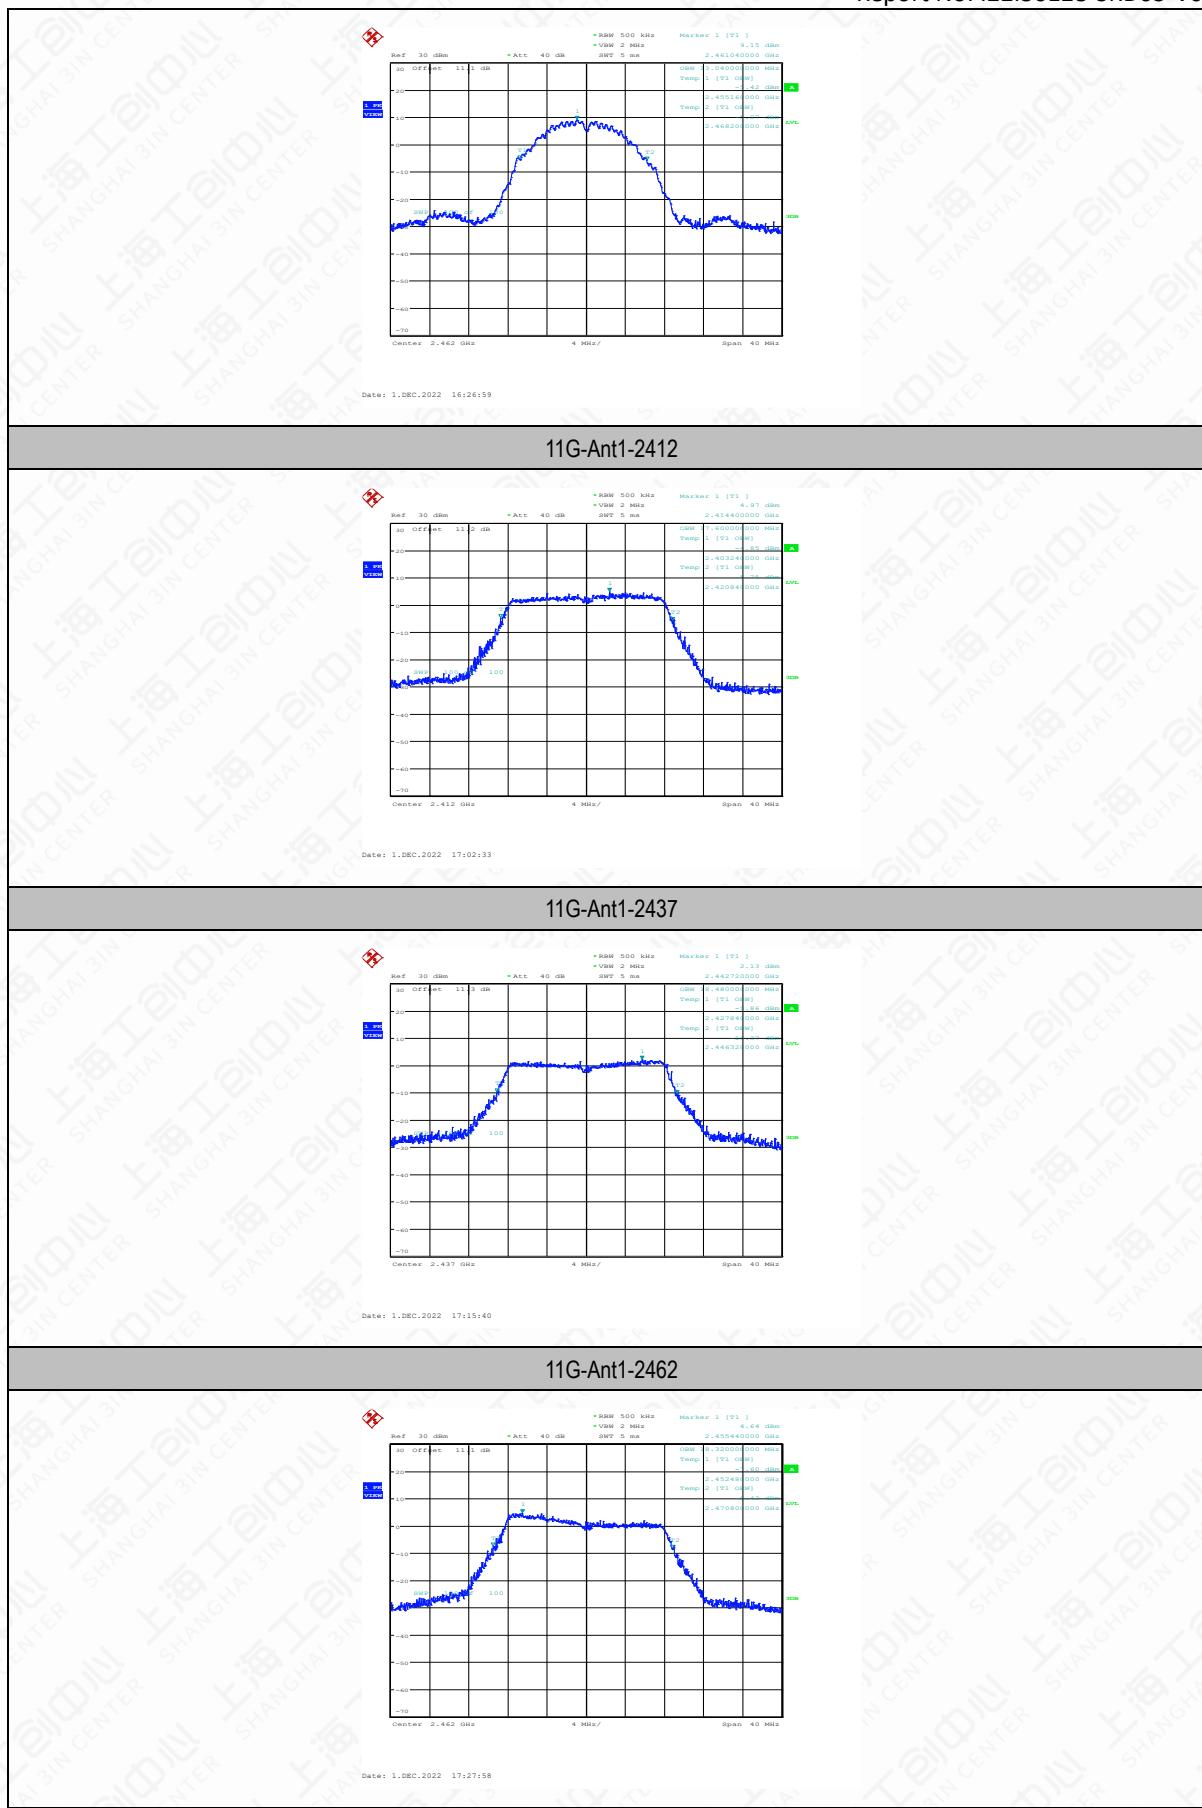


## 11N20SISO-Ant1-2412

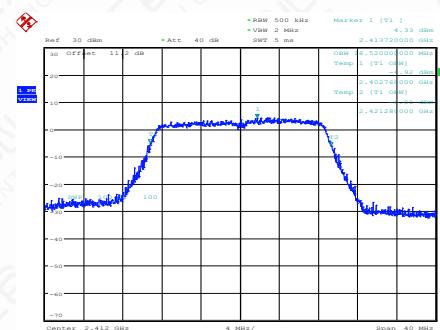

## 11N20SISO-Ant1-2437

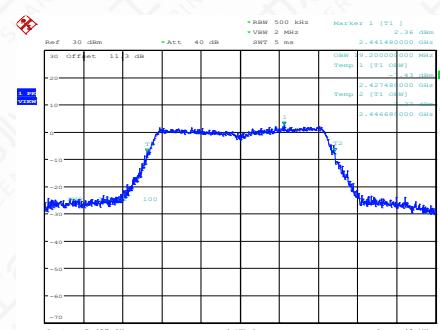

## 11N20SISO-Ant1-2462

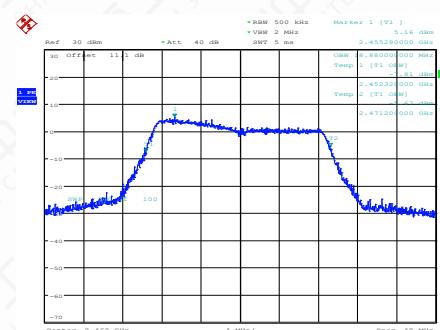

## 6.5 Band Edges Compliance

### 6.5.1. Measurement Limit

Standard	Limit(dBc)
FCC 47 Part 15.247(d)	>30
RSS-247 5.5	>30

### 6.5.2. Test procedures

The measurement is according to ANSI C63.10 clause11.13.


1. The output power of EUT was connected to the spectrum analyzer. The path loss was compensated to the results for each measurement.
2. Enable EUT transmitter maximum power continuously.
3. Set instrument center frequency to the frequency of the emission to be measured (must be within 2MHz of the authorized band edge).
4. Set span to 2 MHz.
5. RBW = 100 kHz.
6. VBW  $\geq [3 \times \text{RBW}]$ .
7. Detector = peak.
8. Sweep time = auto.
9. Trace mode = max hold.
10. Allow sweep to continue until the trace stabilizes

### Measurement results


TestMode	Antenna	ChName	Frequency[MHz]	RefLevel[dBm]	Result[dBm]	Limit[dBm]	Verdict
11B	Ant1	Low	2412	8.60	-29.73	$\leq -21.4$	PASS
11B	Ant1	High	2462	6.51	-44.01	$\leq -23.49$	PASS
11G	Ant1	Low	2412	-1.31	-33.55	$\leq -31.31$	PASS
11G	Ant1	High	2462	-0.84	-44.16	$\leq -30.84$	PASS
11N20SISO	Ant1	Low	2412	-1.05	-32.47	$\leq -31.05$	PASS
11N20SISO	Ant1	High	2462	-0.20	-43.83	$\leq -30.2$	PASS

Conclusion: PASS

11B-Ant1-Low-2412-8.60
------------------------

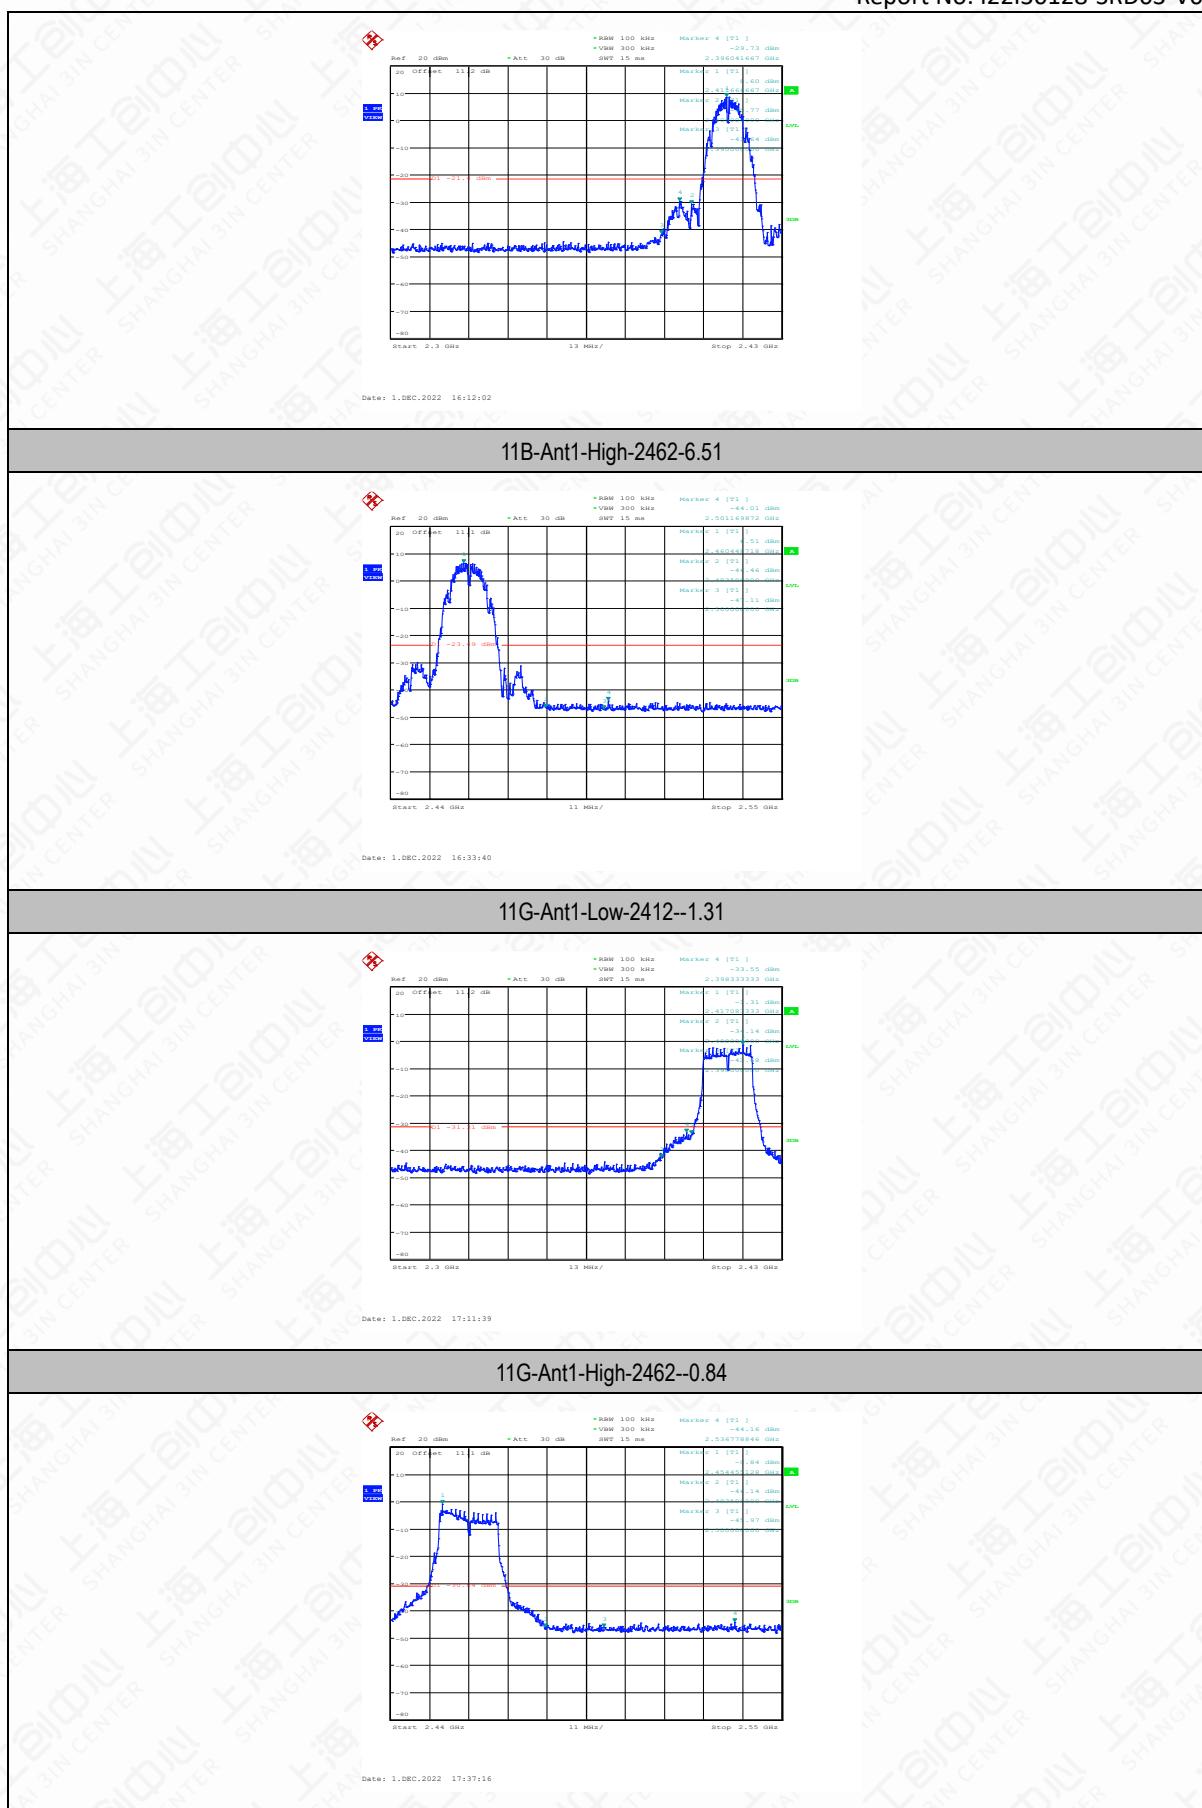


11N20SISO-Ant1-Low-2412--1.05

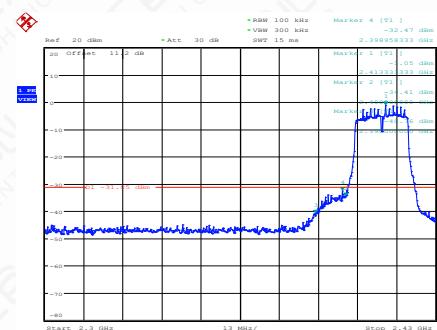

Date: 1.DEC.2022 17:50:50

11N20SISO-Ant1-High-2462--0.20

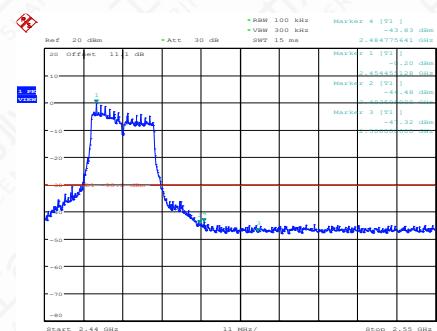

Date: 1.DEC.2022 18:17:53

## 6.6 Transmitter Spurious Emission-conducted

### 6.6.1. Measurement Limit

Standard	Limit
FCC 47 Part 15.247(d)	30dB below highest level power in 100KHz bandwidth
RSS-247 5.5	30dB below highest level power in 100KHz bandwidth

### 6.6.2. Test procedures

This measurement is according to ANSI C63.10 clause 11.11.

1. The output power of EUT was connected to the spectrum analyzer. The path loss was compensated to the results for each measurement.
2. Enable EUT transmitter maximum power continuously.


#### Reference level measurement

3. Set instrument center frequency to DTS channel center frequency.
4. Set the span to  $\geq 1.5$  times the DTS bandwidth.
5. Set the RBW = 100 kHz.
6. Set the VBW  $\geq [3 \times \text{RBW}]$ .
7. Detector = peak.
8. Sweep time = auto couple.
9. Trace mode = max hold.
10. Allow trace to fully stabilize.
11. Use the peak marker function to determine the maximum PSD level.

#### Emission level measurement

1. Set the center frequency and span to encompass frequency range to be measured.
2. Set the RBW = 100 kHz.
3. Set the VBW  $\geq [3 \times \text{RBW}]$ .
4. Detector = peak.
5. Sweep time = auto couple.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.
8. Use the peak marker function to determine the maximum amplitude level.


### 6.6.3. Test Setup

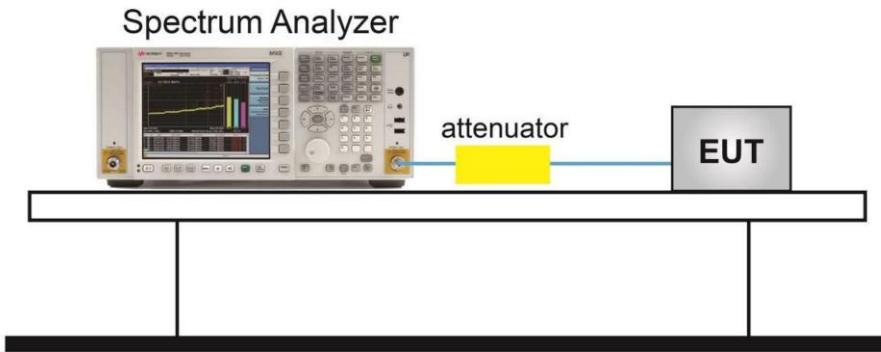





### Measurement Result


TestMode	Antenna	Frequency[MHz]	FreqRange [Mhz]	RefLevel [dBm]	Result [dBm]	Limit [dBm]	Verdict
11B	Ant1	2412	0~Reference	8.44	8.44	---	PASS
11B	Ant1	2412	30~1000	8.44	-38.34	≤-21.56	PASS
11B	Ant1	2412	1000~26500	8.44	-41.77	≤-21.56	PASS
11B	Ant1	2437	0~Reference	6.67	6.67	---	PASS
11B	Ant1	2437	30~1000	6.67	-42.06	≤-23.33	PASS
11B	Ant1	2437	1000~26500	6.67	-45.72	≤-23.33	PASS
11B	Ant1	2462	0~Reference	6.83	6.83	---	PASS
11B	Ant1	2462	30~1000	6.83	-40.28	≤-23.17	PASS
11B	Ant1	2462	1000~26500	6.83	-42.51	≤-23.17	PASS
11G	Ant1	2412	0~Reference	-0.90	-0.90	---	PASS
11G	Ant1	2412	30~1000	-0.90	-54.68	≤-30.9	PASS
11G	Ant1	2412	1000~26500	-0.90	-52.11	≤-30.9	PASS
11G	Ant1	2437	0~Reference	-2.40	-2.40	---	PASS
11G	Ant1	2437	30~1000	-2.40	-55.64	≤-32.4	PASS
11G	Ant1	2437	1000~26500	-2.40	-52.65	≤-32.4	PASS
11G	Ant1	2462	0~Reference	-0.47	-0.47	---	PASS
11G	Ant1	2462	30~1000	-0.47	-55.17	≤-30.47	PASS
11G	Ant1	2462	1000~26500	-0.47	-52.77	≤-30.47	PASS
11N20SISO	Ant1	2412	0~Reference	-0.83	-0.83	---	PASS
11N20SISO	Ant1	2412	30~1000	-0.83	-55.19	≤-30.83	PASS
11N20SISO	Ant1	2412	1000~26500	-0.83	-53.05	≤-30.83	PASS
11N20SISO	Ant1	2437	0~Reference	-2.49	-2.49	---	PASS
11N20SISO	Ant1	2437	30~1000	-2.49	-55.4	≤-32.49	PASS
11N20SISO	Ant1	2437	1000~26500	-2.49	-51.95	≤-32.49	PASS
11N20SISO	Ant1	2462	0~Reference	-0.40	-0.40	---	PASS
11N20SISO	Ant1	2462	30~1000	-0.40	-55.65	≤-30.4	PASS

11N20SISO	Ant1	2462	1000~26500	-0.40	-52.45	$\leq -30.4$	PASS
-----------	------	------	------------	-------	--------	--------------	------

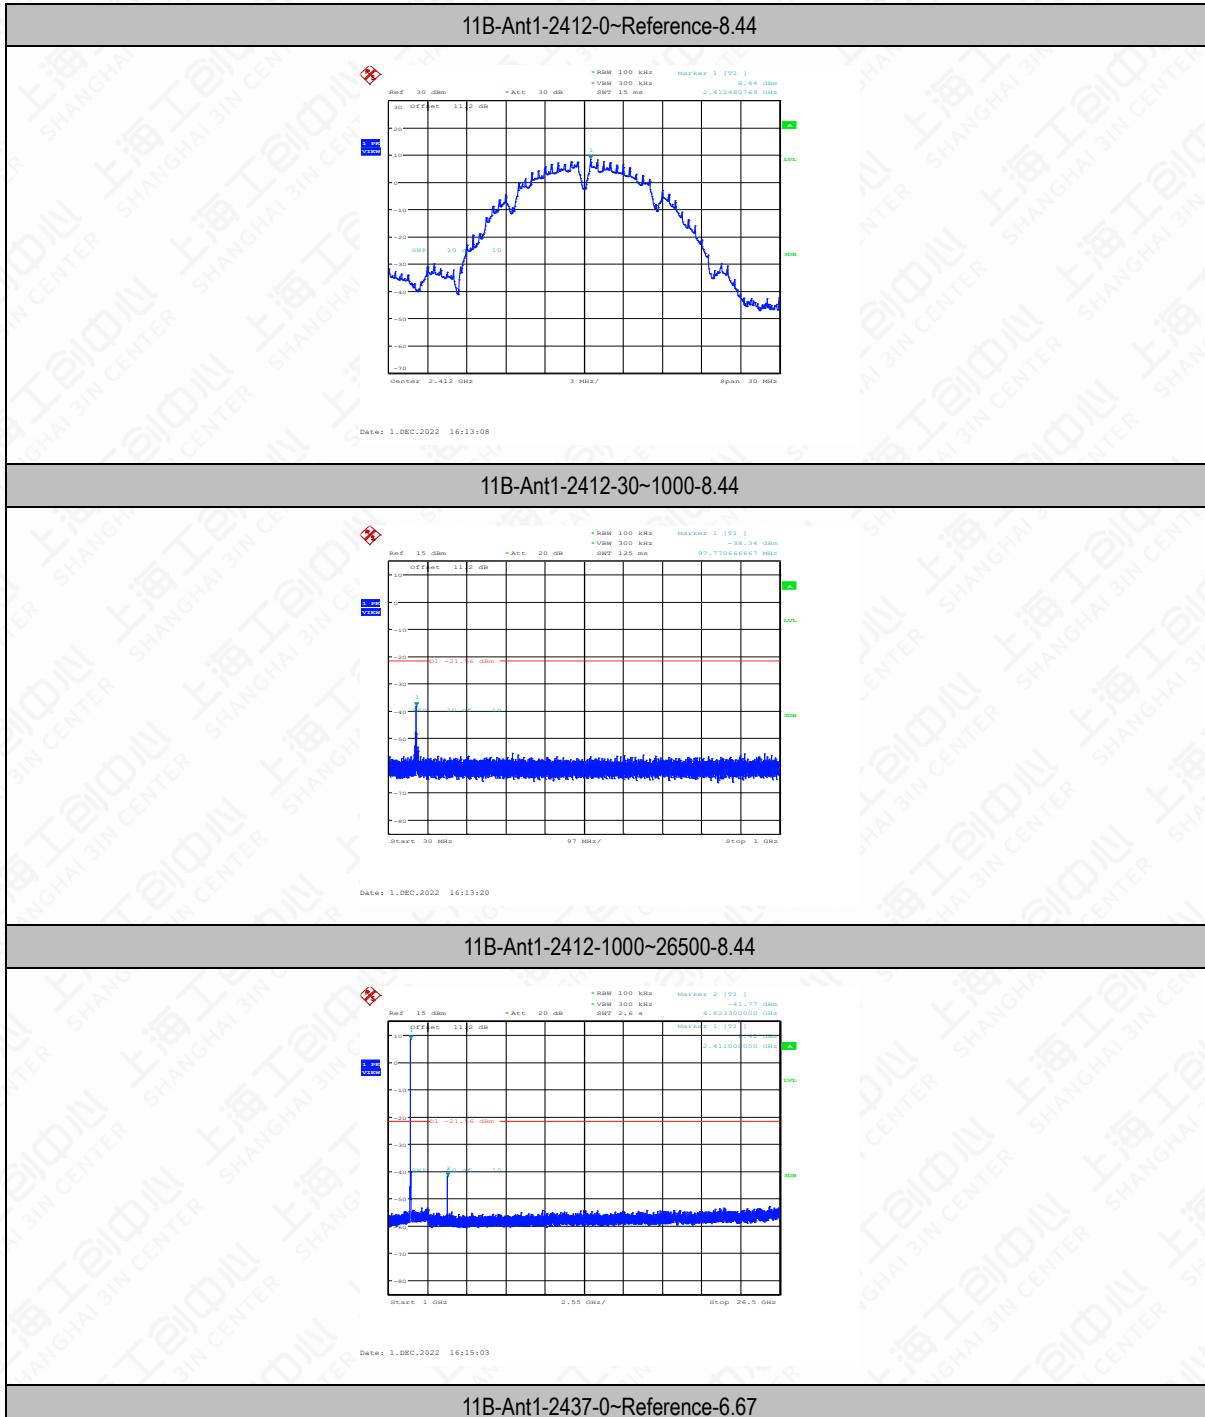


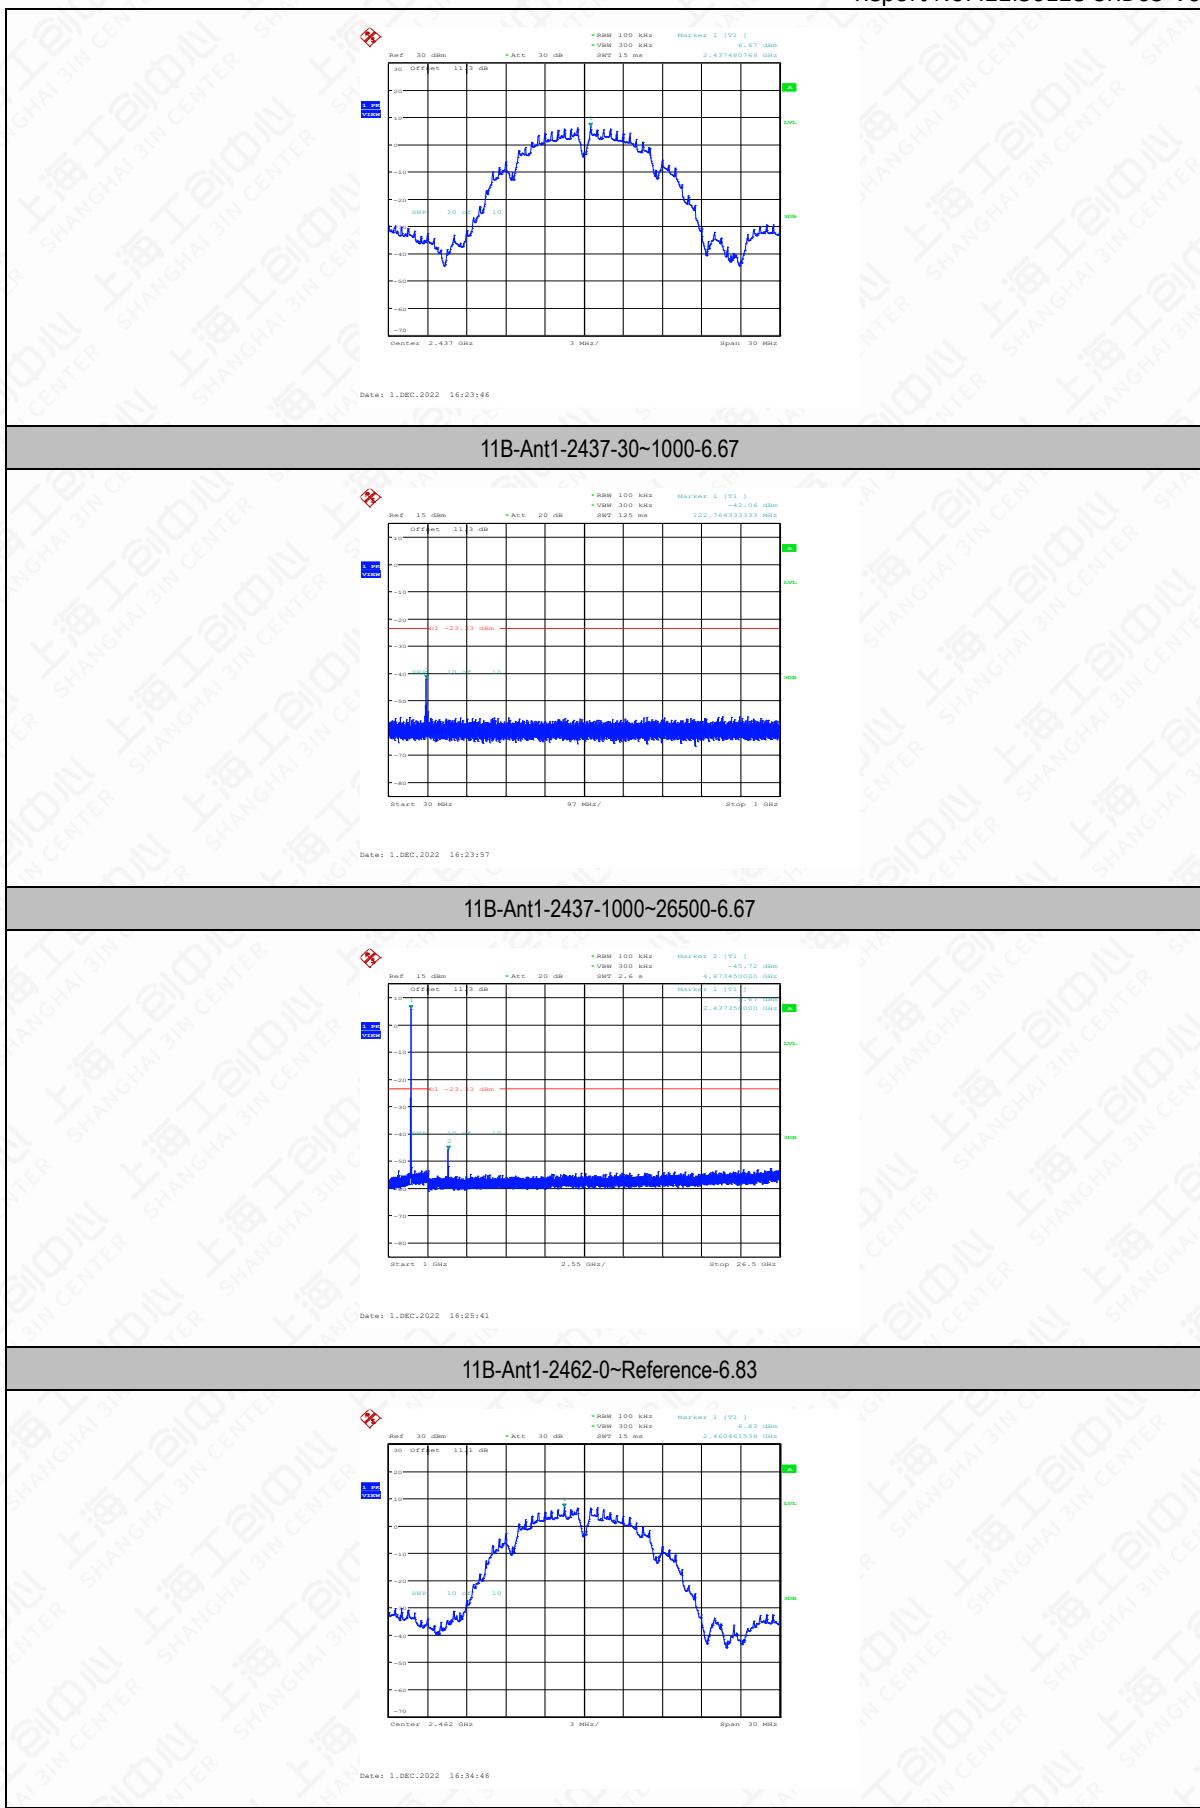

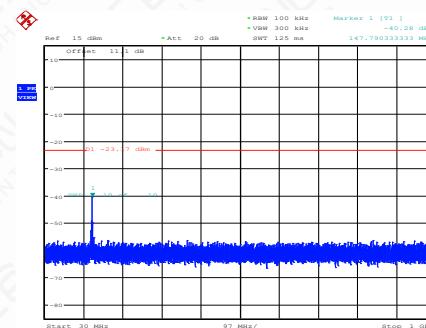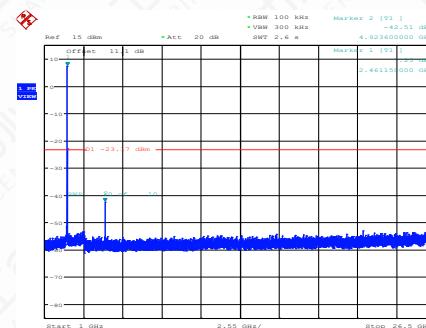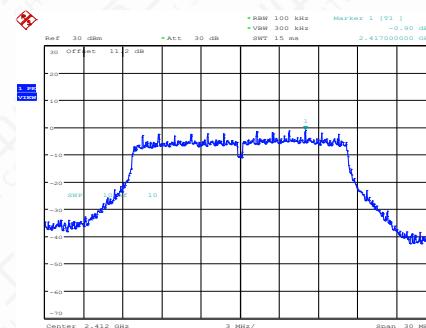
**11B-Ant1-2462-30~1000-6.83**

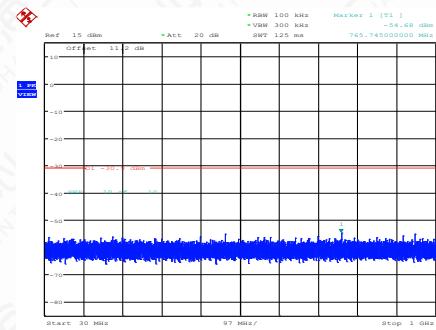**11B-Ant1-2462-1000~26500-6.83**

**11G-Ant1-2412-0-Reference--0.90**

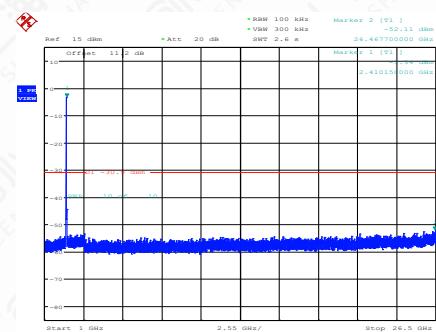**11G-Ant1-2412-30~1000--0.90**

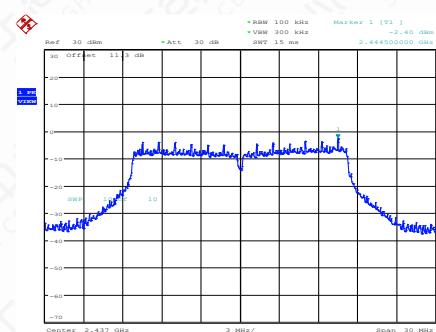


### 11G-Ant1-2412-1000~26500--0.90







### 11G-Ant1-2437-0~Reference--2.40




### 11G-Ant1-2437-30-1000--2.40

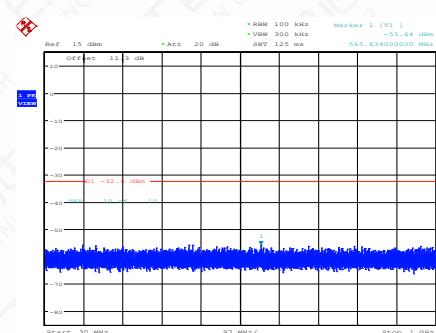

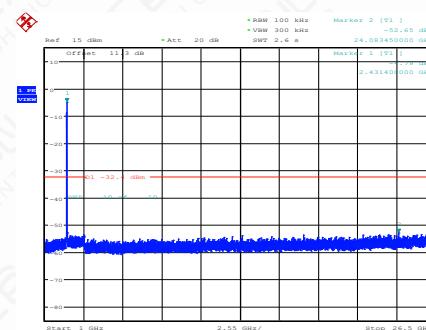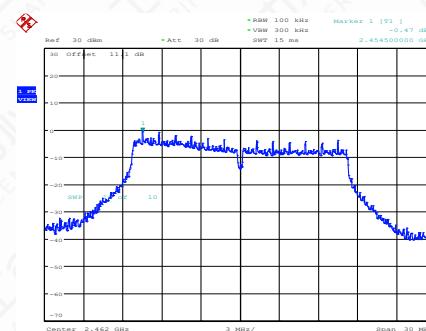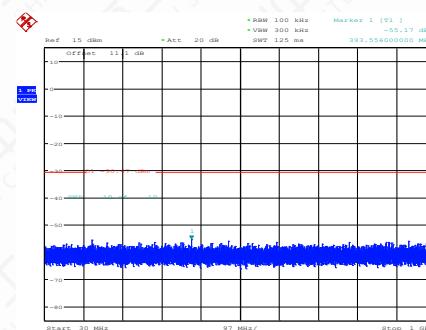
**11G-Ant1-2437-1000~26500--2.40**

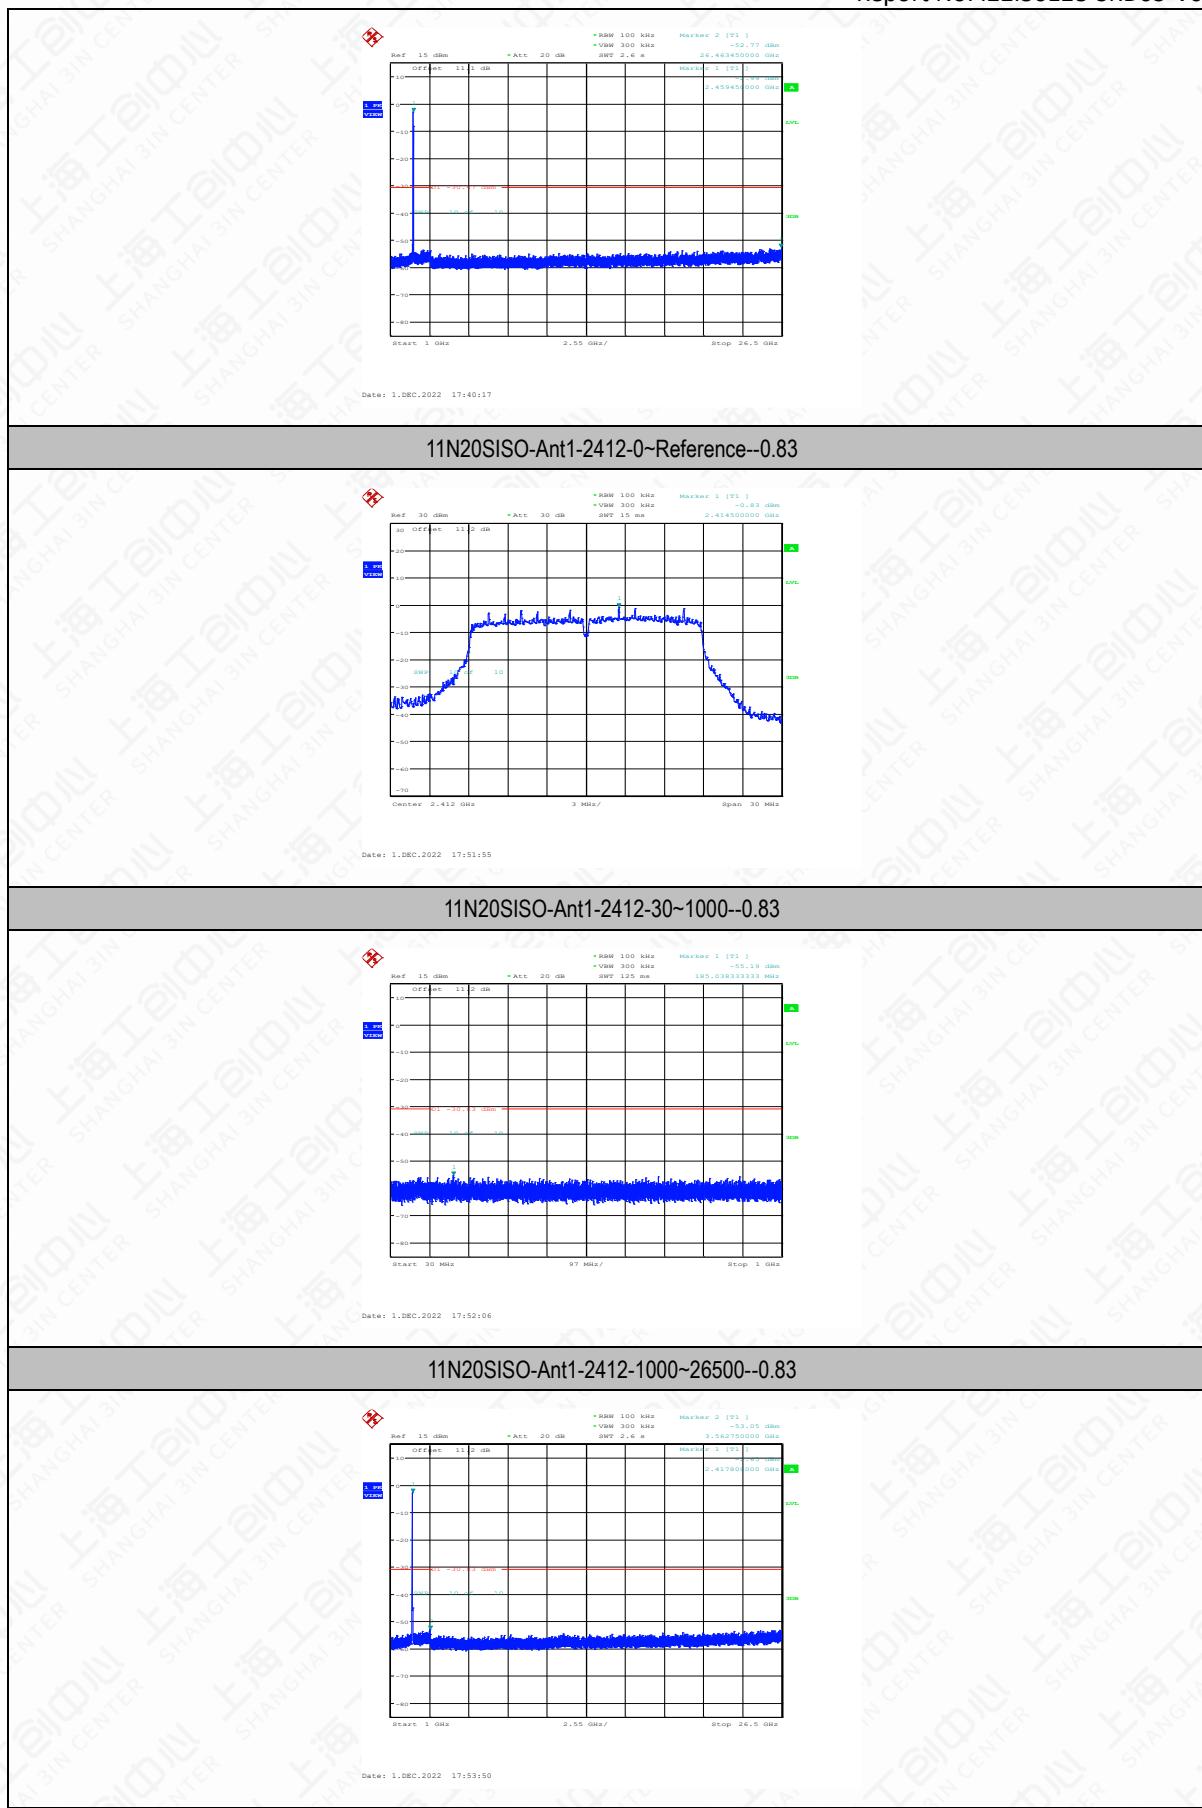**11G-Ant1-2462-0~Reference--0.47**

**11G-Ant1-2462-30~1000--0.47**

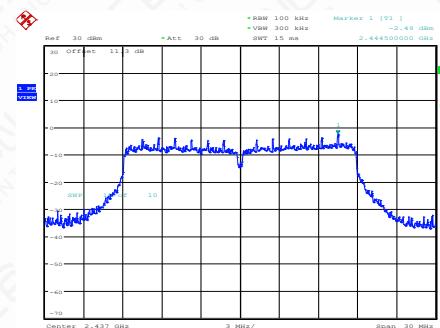**11G-Ant1-2462-1000~26500--0.47**

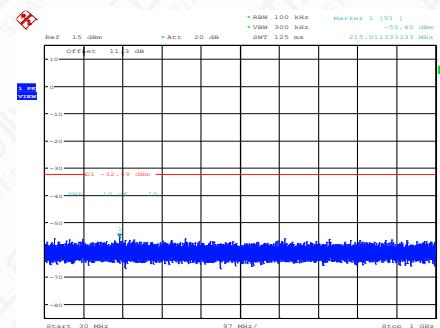


## 11N20SISO-Ant1-2437-0~Reference--2.49




## 11N20SISO-Ant1-2437-30~1000--2.49



## 11N20SISO-Ant1-2437-1000-26500--2.49

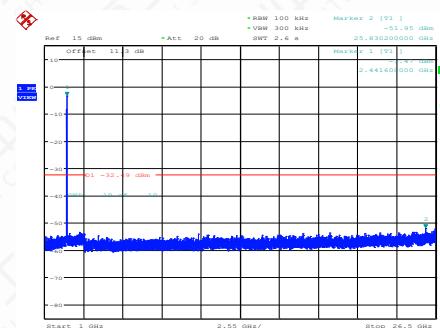

## 11N20SISO-Ant1-2462-0~Reference--0.40

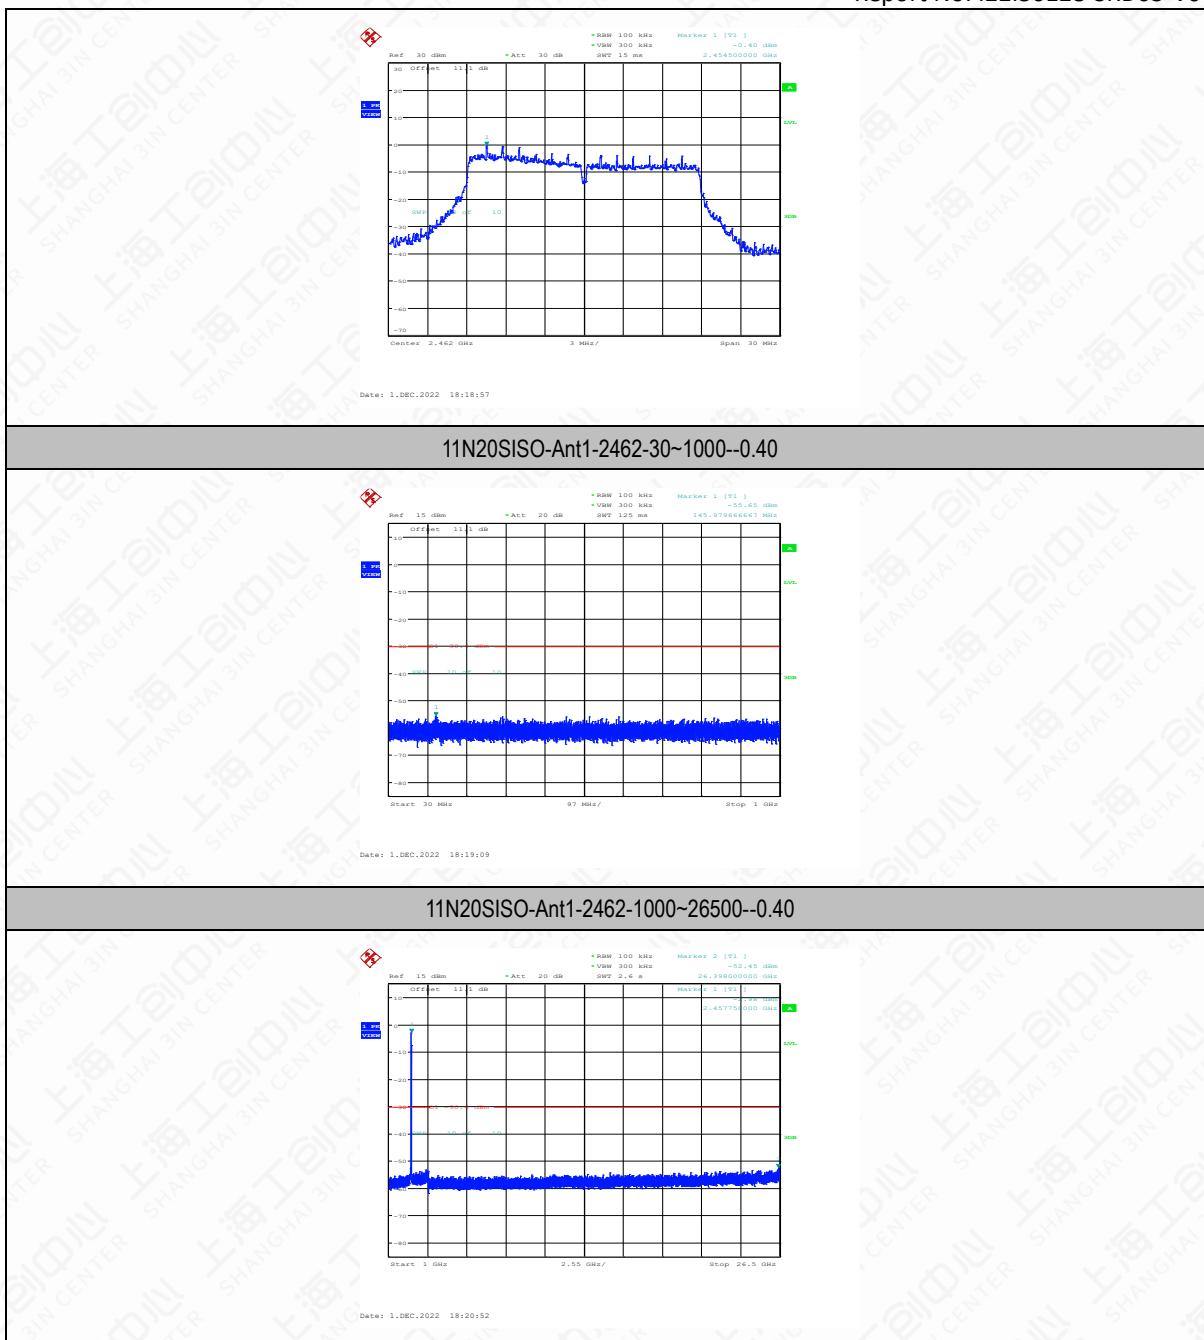

## 6.7 Transmitter Spurious Emission-Radiated

### 6.7.1. Measurement Limit

Standard	Limit
FCC 47 Part 15.247,15.205,15.209	20dB below peak output power
RSS-Gen 8.9,8.10	20dB below peak output power

In addition, radiated emissions which fall in the restricted bands, as defined in 25.205(a), must also comply with the radiated emission limits specified in 15.209(a)(see 15.205(c)).

The measurement is according to ANSI C63.10 clause 11.11 and 11.12.

### 6.7.2. Limit in restricted band

Frequency of emission (MHz)	Field strength(uV/m)	Field strength(dBuV/m)
0.009~0.49	2400/F (kHz)	129-94
0.49~1.705	24000/F (kHz)	74-63
1.705~30	30	70
30~88	100	40
88~216	150	43.5
216~960	200	46
Above 960	500	54

### 6.7.3. Test procedures

Portable, small, lightweight, or modular devices that may be handheld, worn on the body, or placed on a table during operation shall be positioned on a nonconducting platform, the top of which is 80 cm above the reference ground plane. The preferred area occupied by the EUT arrangement is 1 m by 1.5 m, but it may be larger or smaller to accommodate various sized EUTs. For testing purposes, ceiling- and wall-mounted devices also shall be positioned on a tabletop (see also ANSI C63.4-2013 section 6.3.4 and 6.3.5). In making any tests involving handheld, body-worn, or ceiling-mounted equipment, it is essential to recognize that the measured levels may be dependent on the orientation (attitude) of the three orthogonal axes of the EUT. Thus, exploratory tests as specified in 8.3.1 shall be carried out for various axes orientations to determine the attitude having maximum or near-maximum emission level.


The EUT was placed on a non-conductive table. The measurement antenna was placed at a distance of 3 meters from the EUT. During testing, the antenna height and the EUT azimuth were varied in order to identify the maximum level of emission from the EUT. This maximization process was repeated with the EUT positioned in each of its three orthogonal orientations.

Frequency of emission	RBW/VBW	Sweep Time (s)
0.009~30	9KHz/30KHz	Auto
30~1000	100KHz/300KHz	5
1000~4000	1MHz/3MHz	15
4000~18000	1MHz/3MHz	40


18000~26500	1MHz/3MHz	20
-------------	-----------	----

#### 6.7.4. Test Setup

Below 1GHz Test Setup

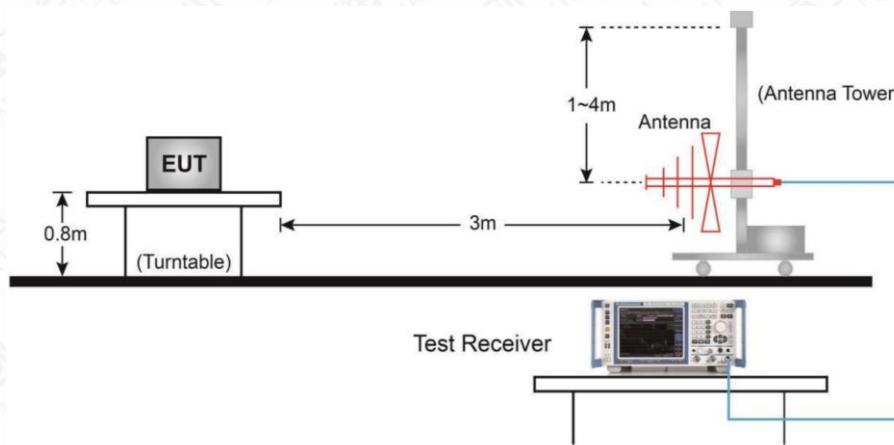

Above 1GHz Test Setup

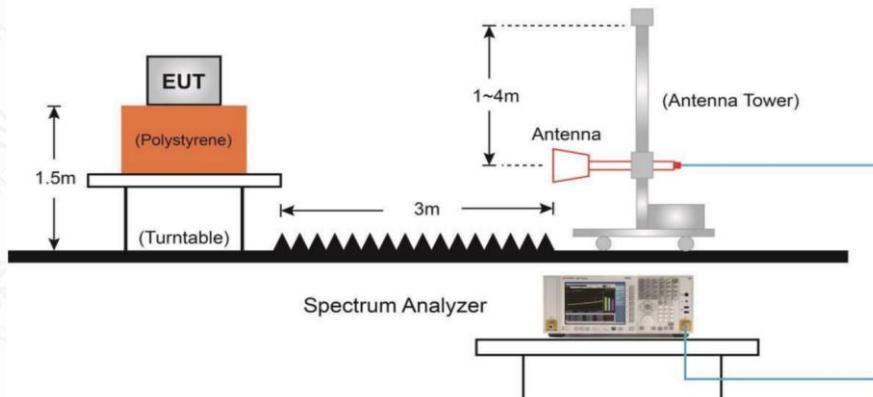

Frequency of emission (MHz)	RBW/VBW	Sweep Times (s)
30~1000	100KHz/300KHz	5
1000~4000	1MHz/3MHz	15
4000~18000	1MHz/3MHz	40
18000~26500	1MHz/3MHz	20

## Measurement Results

A "reference path loss" is established and  $A_{RPI}$  is the attenuation of "reference path loss", and including the gain of receive antenna , the gain of the preamplifier, the cable loss.

$P_{Mea}$  is the field strength recorded from the instrument.


The measurement results are obtained as described below:


$A_{RPI} = \text{Cable loss} + \text{Antenna Factor-Preamplifier gain}$

Result =  $P_{Mea} + \text{Cable loss} + \text{Antenna Factor-Preamplifier gain} = P_{Mea} + A_{RPI}$ .


The test data below 30MHz is more than 20dB lower than the limit value, so it is not provided in the report.


### Main Supply

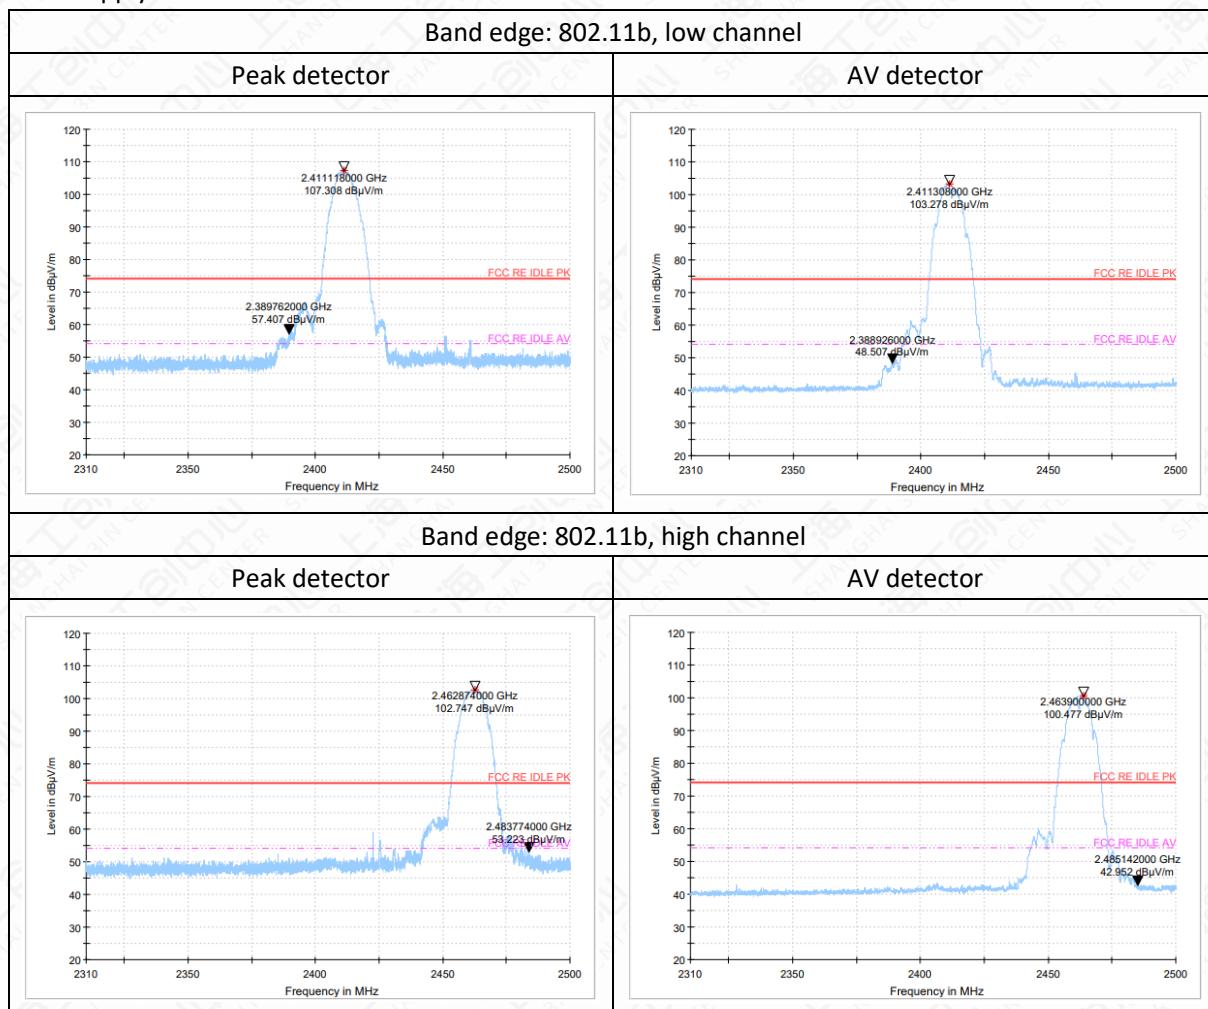

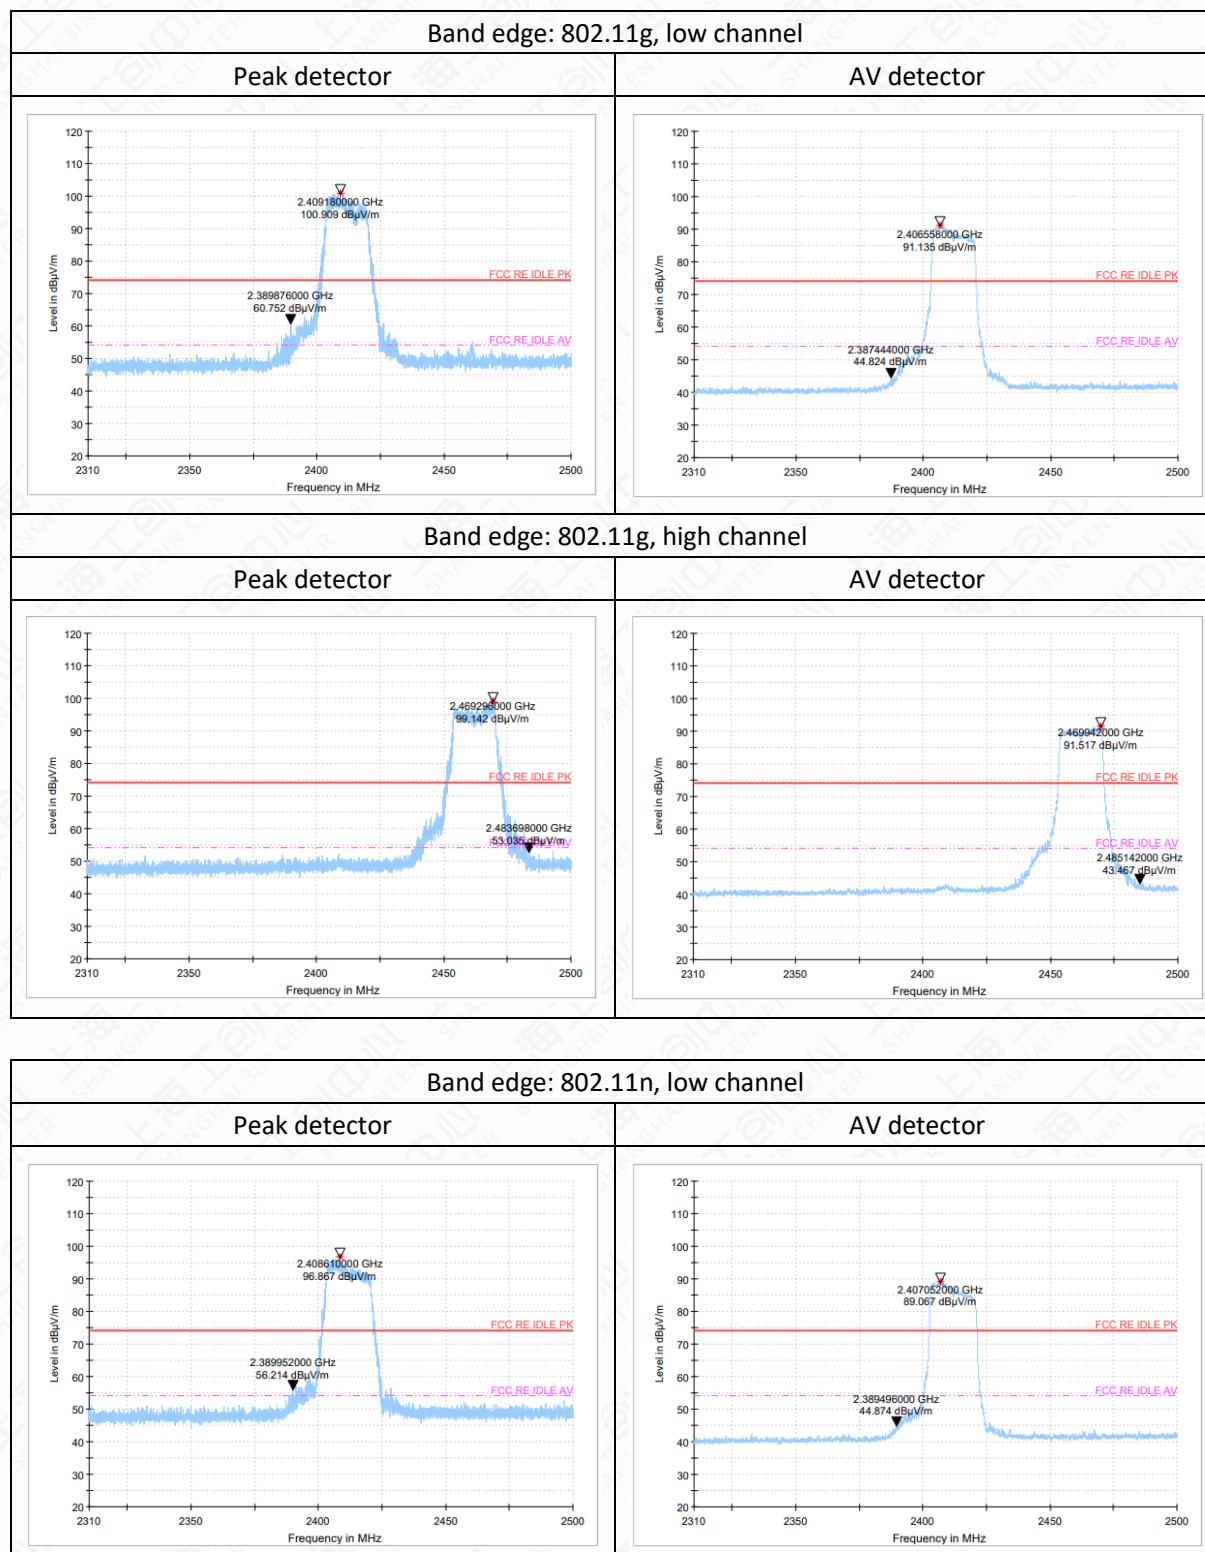


## Band edge: 802.11n, high channel

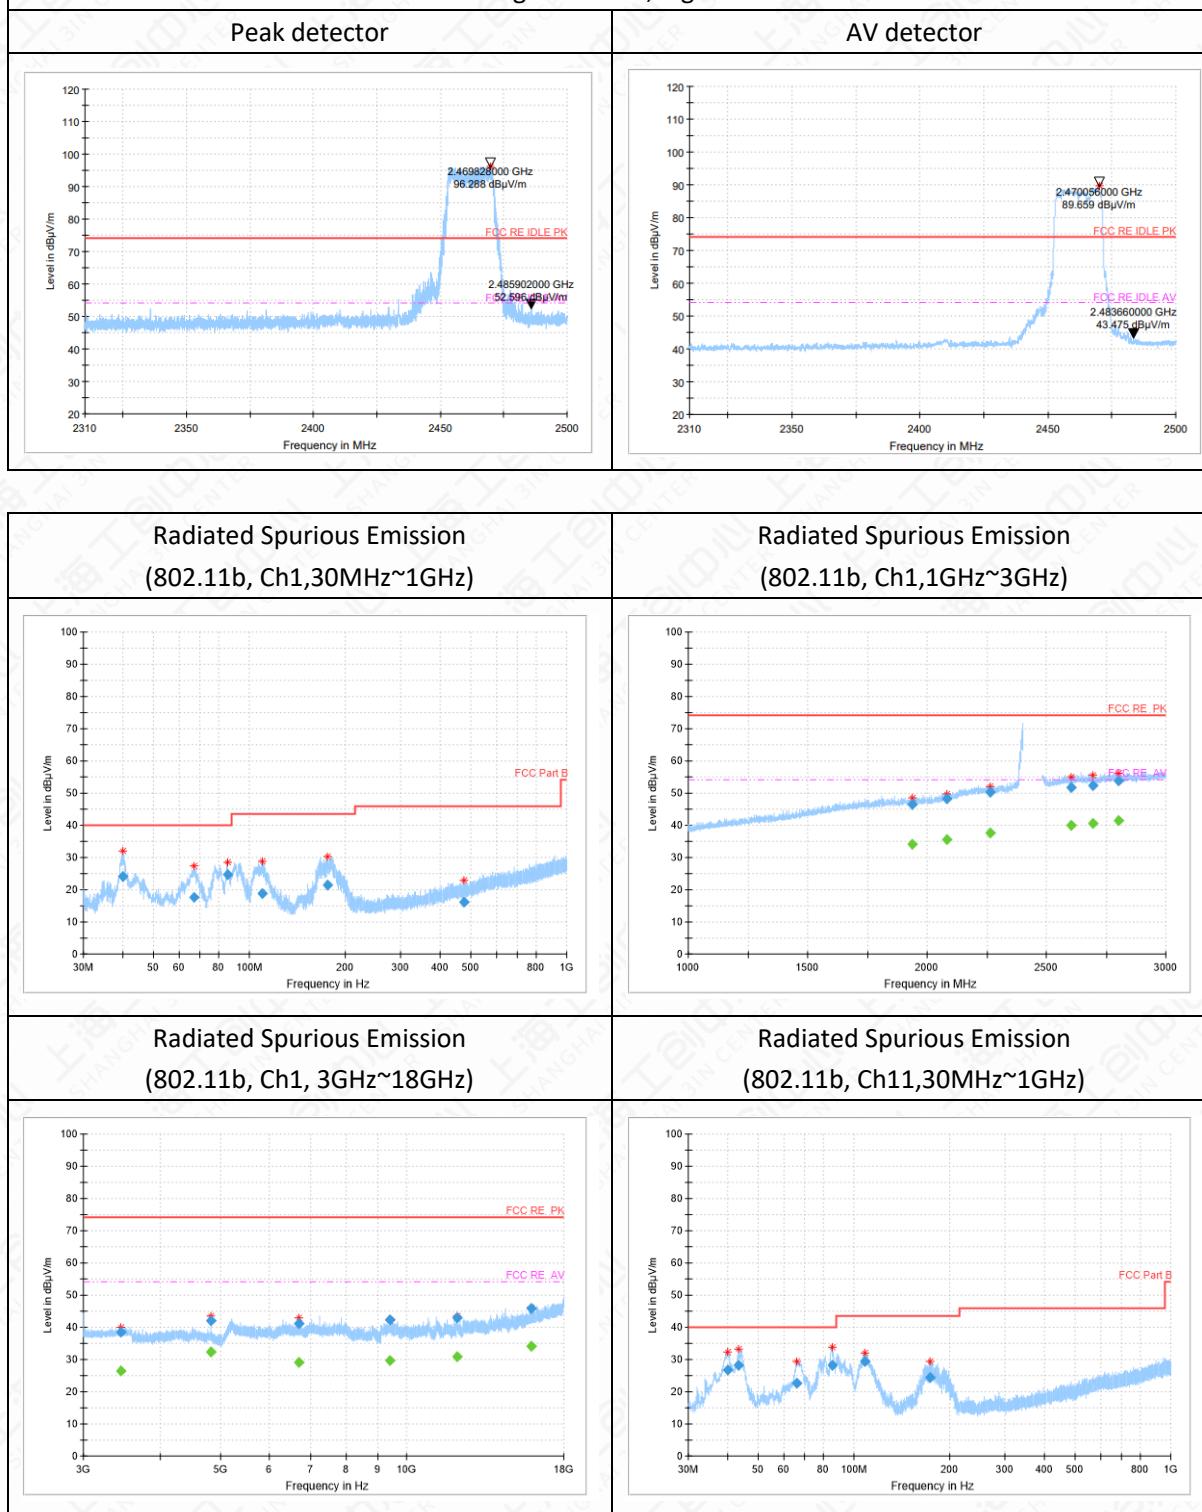

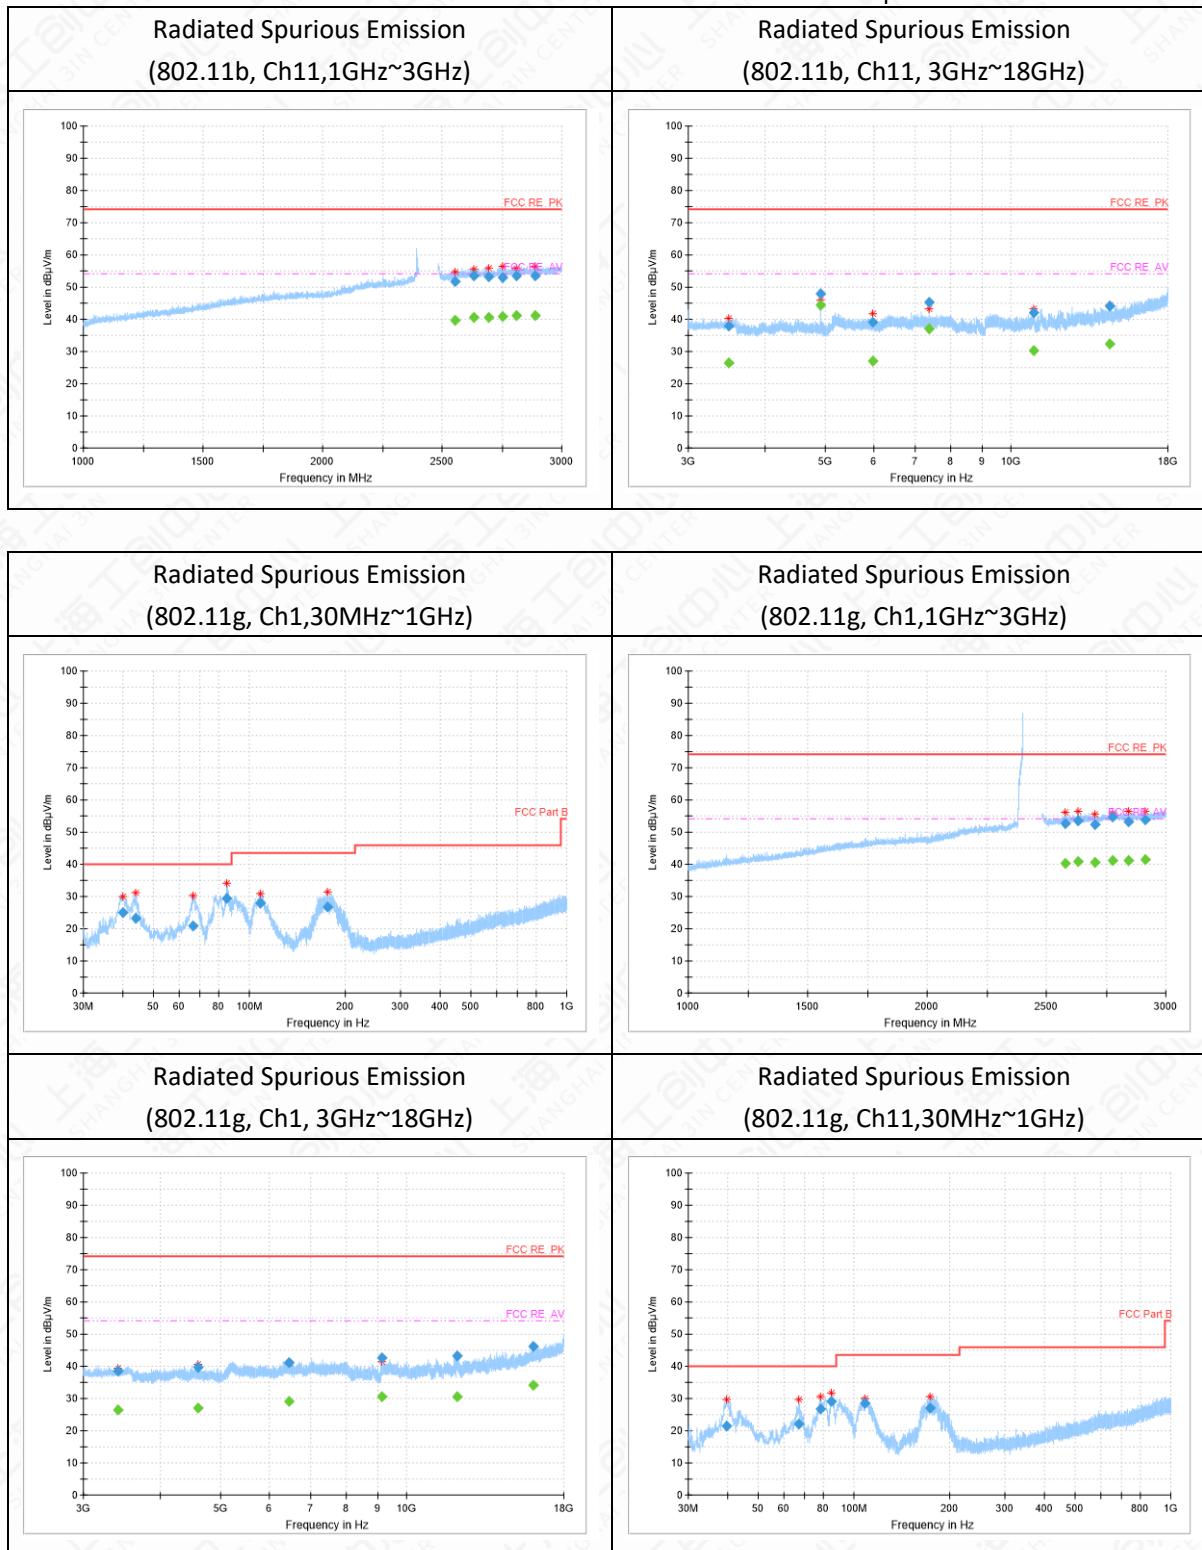



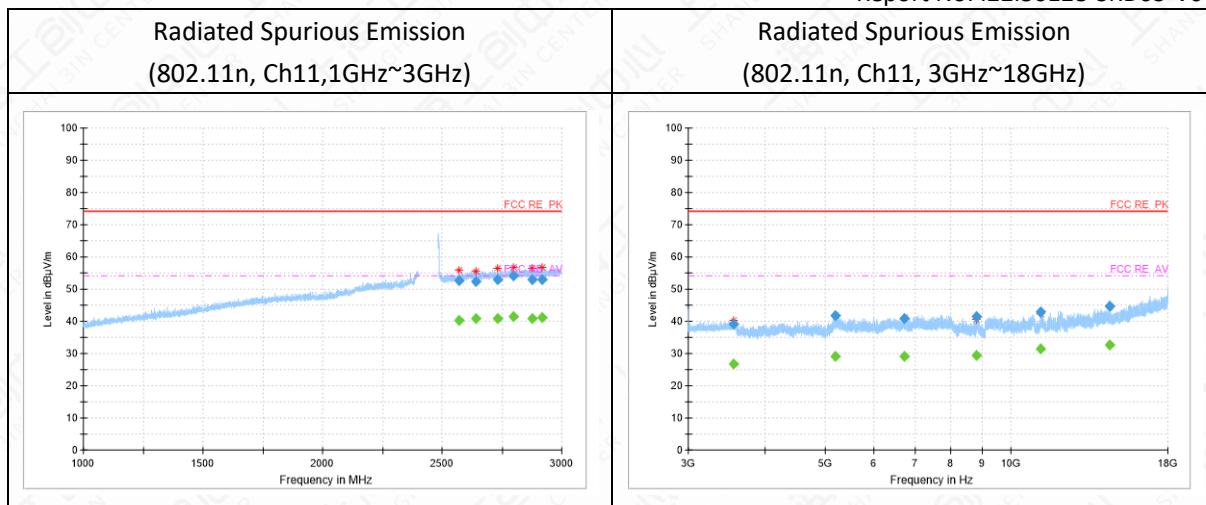

Note1: The out-of-limit signal in the picture is the main frequency signal.

Note2: Sweep the whole frequency band through the range from 30MHz to the 5th harmonic of the carrier, the Emissions in the frequency band 18GHz-40GHz is more than 20dB below the limit are not report.

#### 802.11b

Ch1 30MHz~1GHz

Frequency (MHz)	Result (dB $\mu$ V/m)	ARpl (dB)	PMea (dB $\mu$ V/m)	Polarity
39.9	24.1	-12.9	37	H
67.1	17.51	-14.7	32.21	H
85.2	24.64	-16.7	41.34	H
109.9	18.75	-13.2	31.95	H
175.8	21.57	-14.8	36.37	H
474.5	16.07	-6.7	22.77	H

Ch1 1GHz~3GHz

Frequency (MHz)	Result (dB $\mu$ V/m)	ARpl (dB)	PMea (dB $\mu$ V/m)	Polarity
1937.2	46.57	9	37.57	H
2084.3	48.25	10.6	37.65	V
2265.4	50.4	13	37.4	V
2603.7	51.63	15.5	36.13	V
2694.5	52.42	15.9	36.52	H

2800.0	53.88	16.6	37.28	H
--------	-------	------	-------	---

## Ch1 3GHz~18GHz

Frequency (MHz)	Result (dB $\mu$ V/m)	ARpl (dB)	PMea (dB $\mu$ V/m)	Polarity
3455.7	38.67	-6.7	45.37	H
4824.4	41.94	-4.8	46.74	H
6706.8	41.3	-2.4	43.7	V
9402.7	42.4	-0.1	42.5	V
12096.0	42.88	1.9	40.98	H
15946.7	45.97	7.7	38.27	H

## Ch11 30MHz~1GHz

Frequency (MHz)	Result (dB $\mu$ V/m)	ARpl (dB)	PMea (dB $\mu$ V/m)	Polarity
39.9	26.75	-12.9	39.65	H
43.4	28.11	-12.5	40.61	H
66.1	22.55	-14.4	36.95	H
85.3	28.16	-16.7	44.86	H
108.3	29.49	-13.2	42.69	H
173.4	24.42	-14.9	39.32	H

## Ch11 1GHz~3GHz

Frequency (MHz)	Result (dB $\mu$ V/m)	ARpl (dB)	PMea (dB $\mu$ V/m)	Polarity
2553.2	51.67	15.2	36.47	H
2630.3	53.46	15.7	37.76	V
2695.1	53.17	15.9	37.27	H
2752.5	52.9	16.2	36.7	H
2809.7	53.55	16.6	36.95	V
2887.4	53.39	16.7	36.69	H

## Ch11 3GHz~18GHz

Report No: I22I30128-SRD03-V00

Frequency (MHz)	Result (dB $\mu$ V/m)	ARpl (dB)	PMea (dB $\mu$ V/m)	Polarity
3484.3	38.06	-6.8	44.86	H
4923.9	47.96	-4.5	52.46	H
5982.4	39.11	-4	43.11	H
7386.4	45.25	-2.2	47.45	H
10901.3	41.96	1.1	40.86	V
14489.0	44.25	5.1	39.15	V

802.11g

Ch1 30MHz~1GHz

Frequency (MHz)	Result (dB $\mu$ V/m)	ARpl (dB)	PMea (dB $\mu$ V/m)	Polarity
39.9	25.1	-12.9	38	H
43.9	23.29	-12.5	35.79	H
66.7	20.93	-14.6	35.53	H
85.0	29.27	-16.7	45.97	H
107.9	27.85	-13.2	41.05	H
176.3	26.81	-14.8	41.61	H

Ch1 1GHz~3GHz

Frequency (MHz)	Result (dB $\mu$ V/m)	ARpl (dB)	PMea (dB $\mu$ V/m)	Polarity
2578.7	52.75	15.3	37.45	H
2633.3	53.41	15.8	37.61	V
2702.2	52.4	15.9	36.5	H
2776.1	54.62	16.4	38.22	H
2842.9	53.26	16.6	36.66	V
2911.6	53.75	16.8	36.95	H

Ch1 1GHz~3GHz (Average)

Frequency (MHz)	Result (dB $\mu$ V/m)	ARpl (dB)	PMea (dB $\mu$ V/m)	Polarity
2776.1	41.09	16.4	24.69	H

**Ch1 3GHz~18GHz**

Frequency (MHz)	Result (dB $\mu$ V/m)	ARpl (dB)	PMea (dB $\mu$ V/m)	Polarity
3414.9	38.56	-6.7	45.26	V
4595.9	39.83	-5	44.83	V
6451.0	41.05	-2.6	43.65	V
9147.8	42.76	-0.4	43.16	H
12087.2	43.15	1.9	41.25	H
16031.8	46.06	7.7	38.36	H

**Ch11 30MHz~1GHz**

Frequency (MHz)	Result (dB $\mu$ V/m)	ARpl (dB)	PMea (dB $\mu$ V/m)	Polarity
39.8	21.58	-12.9	34.48	H
66.8	21.95	-14.6	36.55	H
78.4	26.65	-17.7	44.35	H
85.1	29.11	-16.7	45.81	H
108.1	28.53	-13.2	41.73	H
174.2	26.98	-14.9	41.88	H

**Ch11 1GHz~3GHz**

Frequency (MHz)	Result (dB $\mu$ V/m)	ARpl (dB)	PMea (dB $\mu$ V/m)	Polarity
2583.4	52.28	15.4	36.88	V
2656.7	52.51	15.9	36.61	V
2730.6	52.79	16.1	36.69	H
2770.6	53.02	16.4	36.62	H
2834.9	53.76	16.6	37.16	H
2905.2	53.38	16.7	36.68	H

**Ch11 3GHz~18GHz**

Frequency (MHz)	Result (dB $\mu$ V/m)	ARpl (dB)	PMea (dB $\mu$ V/m)	Polarity

Report No: I22I30128-SRD03-V00

3362.6	38.11	-7	45.11	H
4513.7	40.19	-4.9	45.09	H
6277.2	41.61	-2.5	44.11	V
9168.0	43.33	-0.3	43.63	V
11937.8	42.83	2	40.83	V
15304.6	45.34	6.4	38.94	H

802.11n

Ch1 30MHz~1GHz

Frequency (MHz)	Result (dB $\mu$ V/m)	ARpl (dB)	PMea (dB $\mu$ V/m)	Polarity
40.1	25.29	-12.8	38.09	H
68.1	18.58	-15	33.58	H
77.6	19.69	-17.5	37.19	H
85.4	23.5	-16.6	40.1	H
109.3	29.38	-13.2	42.58	H
176.0	30.62	-14.8	45.42	H

Ch1 1GHz~3GHz

Frequency (MHz)	Result (dB $\mu$ V/m)	ARpl (dB)	PMea (dB $\mu$ V/m)	Polarity
2583.0	51.84	15.4	36.44	V
2628.1	52.44	15.7	36.74	V
2742.2	52.94	16.2	36.74	V
2798.2	53.19	16.6	36.59	V
2829.5	53.39	16.6	36.79	H
2908.8	53.74	16.7	37.04	H

Ch1 3GHz~18GHz

Frequency (MHz)	Result (dB $\mu$ V/m)	ARpl (dB)	PMea (dB $\mu$ V/m)	Polarity
3353.5	38.49	-7.1	45.59	H
4589.4	39.69	-5	44.69	H

Report No: I22I30128-SRD03-V00

5994.1	41.12	-4	45.12	V
8794.9	41.58	-1.5	43.08	H
11934.9	42.75	2	40.75	H
17996.2	49.16	12.3	36.86	H

**Ch11 30MHz~1GHz**

Frequency (MHz)	Result (dB $\mu$ V/m)	ARpl (dB)	PMea (dB $\mu$ V/m)	Polarity
39.8	25.49	-12.9	38.39	H
43.6	24.37	-12.5	36.87	H
67.6	25.61	-14.9	40.51	H
81.6	29.64	-17.6	47.24	H
107.7	28.71	-13.2	41.91	H
175.4	26.55	-14.8	41.35	H

**Ch11 1GHz~3GHz**

Frequency (MHz)	Result (dB $\mu$ V/m)	ARpl (dB)	PMea (dB $\mu$ V/m)	Polarity
2570.5	52.74	15.3	37.44	V
2639.0	52.44	15.8	36.64	H
2733.4	52.9	16.1	36.8	V
2796.8	54.25	16.6	37.65	H
2877.2	52.97	16.7	36.27	V
2918.9	53.07	16.8	36.27	V

**Ch11 1GHz~3GHz(Average)**

Frequency (MHz)	Result (dB $\mu$ V/m)	ARpl (dB)	PMea (dB $\mu$ V/m)	Polarity
2796.8	41.38	16.6	24.78	H

**Ch11 3GHz~18GHz**

Frequency (MHz)	Result (dB $\mu$ V/m)	ARpl (dB)	PMea (dB $\mu$ V/m)	Polarity
3559.0	39	-7	46	H

5192.8	41.77	-0.9	42.67	V
6725.5	41.01	-2.4	43.41	V
8799.0	41.52	-1.5	43.02	H
11201.9	43.08	1.7	41.38	V
14486.9	44.59	5.1	39.49	V


## 6.8 AC Powerline Conducted Emission

### 6.8.1. Method of Measurement: ANSI C63.10-2013-clause 6.2

1. The one EUT cable configuration and arrangement and mode of operation that produced the emission with the highest amplitude relative to the limit is selected for the final measurement, while applying the appropriate modulating signal to the EUT.
2. If the EUT is relocated from an exploratory test site to a final test site, the highest emissions shall be remaximized at the final test location before final ac power-line conducted emission measurements are performed.
3. The final test on all current-carrying conductors of all of the power cords to the equipment that comprises the EUT (but not the cords associated with other non-EUT equipment in the system) is then performed for the full frequency range for which the EUT is being tested for compliance without further variation of the EUT arrangement, cable positions, or EUT mode of operation.
4. If the EUT is comprised of equipment units that have their own separate ac power connections, e.g., floor-standing equipment with independent power cords for each shelf that are able to connect directly to the ac power network, each current-carrying conductor of one unit is measured while the other units are connected to a second (or more) LISN(s). All units shall be separately measured. If a power strip is provided by the manufacturer, to supply all of the units making up the EUT, only the conductors in the power cord of the power strip shall be measured.

If the EUT uses a detachable antenna, these measurements shall be made with a suitable dummy load connected to the antenna output terminals; otherwise, the tests shall be made with the antenna connected and, if adjustable, fully extended. When measuring the ac conducted emissions from a device that operates between 150 kHz and 30 MHz a non-detachable antenna may be replaced with a dummy load for the measurements within the fundamental emission band of the transmitter, but only for those measurements.<sup>36</sup> Record the six highest EUT emissions relative to the limit of each of the current-carrying conductors of the power cords of the equipment that comprises the EUT over the frequency range specified by the procuring or regulatory agency. Diagram or photograph the test setup that was used. See Clause 8 for full reporting requirements.

### 6.8.2. Test Setup

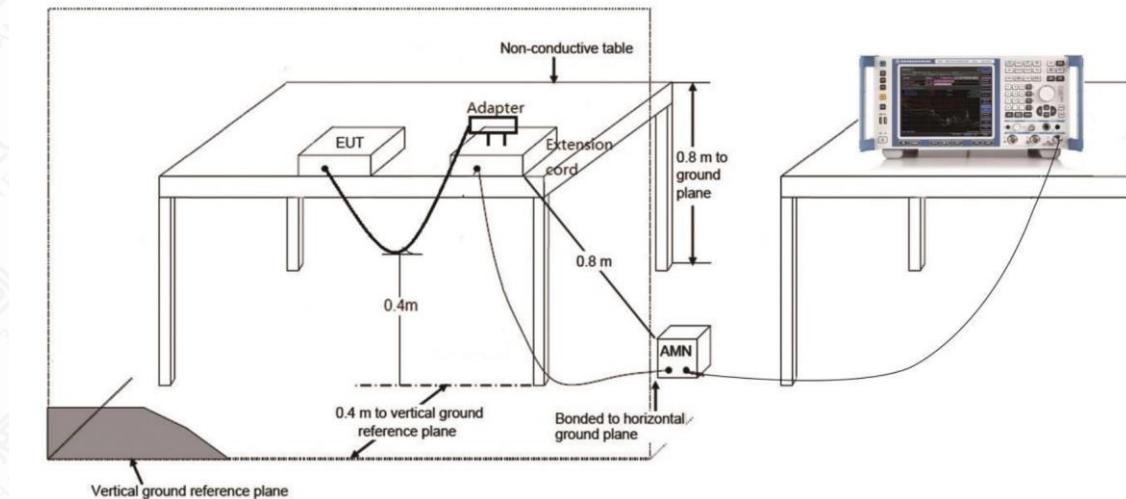

### 6.8.3. Test Condition

Voltage (V)	Frequency (Hz)
120	60

Measurement Result and limit:


(Quasi-peak-average Limit)

Frequency range (MHz)	Quasi-peak Limit (dB $\mu$ V)	Average Limit (dB $\mu$ V)	Conclusion
0.15 to 0.5	66 to 56	56 to 46	P
0.5 to 5	56	46	
5 to 30	60	50	

NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

## Standard version

## Main Supply

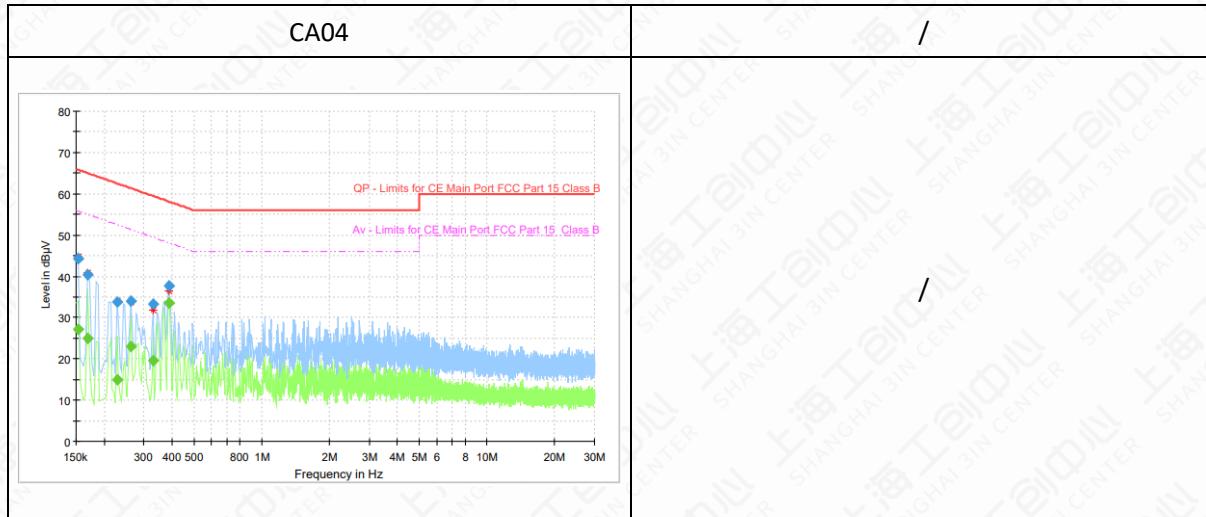

Frequency (MHz)	QuasiPeak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.153731	---	27.05	55.80	28.75	15000.0	9.000	L1	ON	9.6
0.153731	44.39	---	65.80	21.41	15000.0	9.000	L1	ON	9.6
0.168656	---	25.08	55.03	29.95	15000.0	9.000	L1	ON	9.6
0.168656	40.32	---	65.03	24.70	15000.0	9.000	L1	ON	9.6
0.228356	---	14.99	52.51	37.52	15000.0	9.000	L1	ON	9.6
0.228356	33.88	---	62.51	28.63	15000.0	9.000	L1	ON	9.6
0.261938	---	22.89	51.37	28.48	15000.0	9.000	L1	ON	9.6
0.261938	34.06	---	61.37	27.31	15000.0	9.000	L1	ON	9.6
0.329100	---	19.61	49.47	29.86	15000.0	9.000	L1	ON	9.6
0.329100	33.17	---	59.47	26.30	15000.0	9.000	L1	ON	9.6
0.388800	---	33.55	48.09	14.54	15000.0	9.000	L1	ON	9.6
0.388800	37.75	---	58.09	20.34	15000.0	9.000	L1	ON	9.6

## Annex A: Revised History

Version	Revised Content
V00	Initial

## Annex B: Accreditation Certificate

**Accredited Laboratory**

A2LA has accredited

**INDUSTRIAL INTERNET INNOVATION CENTER  
(SHANGHAI) CO., LTD.**

Shanghai, People's Republic of China

for technical competence in the field of

**Electrical Testing**

This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2017 General requirements for the competence of testing and calibration laboratories. This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality management system (refer to joint ISO-ILAC-IAF Communiqué dated April 2017).

Presented this 12<sup>th</sup> day of April 2021.

Vice President, Accreditation Services  
For the Accreditation Council  
Certificate Number 3682.01  
Valid to February 28, 2023



For the tests to which this accreditation applies, please refer to the laboratory's Electrical Scope of Accreditation.

**END OF REPORT**