


Industrial Internet Innovation Center (Shanghai) Co.,Ltd.


SAR TEST REPORT

PRODUCT	iHelp Max 4G mobile medical device
BRAND	iHelp
MARKETING	4G MAX
MODEL	EC4WHS
APPLICANT	Wearable Health Solutions, Inc.
FCC ID	XWI-EC4WHS
IC	8730A-EC4WHS
ISSUE DATE	February 10, 2023
STANDARD(S)	ANSI/IEEE C95.1-1992, IEEE std 1528-2013, RSS 102:2015 Issue 5, IEC/IEEE 62209-1528:2020

Prepared by: Chen Jintao



Reviewed by: Yan Hang



Approved by: Zhang Min

**CAUTION:**

This report shall not be reproduced except in full without the written permission of the test laboratory and shall not be quoted out of context.

CONTENTS

1	SUMMARY OF TEST REPORT	4
1.1	TEST STANDARD (S)	4
1.2	REFERENCE DOCUMENTS.....	4
1.3	SUMMARY OF TEST RESULTS	5
2	GENERAL INFORMATION OF THE LABORATORY.....	7
2.1	TESTING LABORATORY.....	7
2.2	LABORATORY ENVIRONMENTAL REQUIREMENTS.....	7
2.3	PROJECT INFORMATION.....	7
3	GENERAL INFORMATION OF THE CUSTOMER.....	8
3.1	APPLICANT	8
3.2	MANUFACTURER	8
4	GENERAL INFORMATION OF THE PRODUCT	9
4.1	PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	9
4.2	DESCRIPTION FOR AUXILIARY EQUIPMENT (AE)	9
5	TEST CONFIGURATION INFORMATION	10
5.1	TEST EQUIPMENTS UTILIZED	10
5.2	MEASUREMENT UNCERTAINTY	10
5.3	EUT CONNECTION DIAGRAM OF TEST SYSTEM	11
6	SPECIFIC ABSORPTION RATE(SAR)	12
6.1	INTRODUCTION.....	12
6.2	SAR DEFINITION.....	12
7	SAR MEASUREMENT SYSTEM INTRODUCTION	13
7.1	MEASUREMENT SET-UP	13
7.2	E-FIELD PROBE SYSTEM.....	14
7.3	E-FIELD PROBE CALIBRATION.....	15
7.4	OTHER TEST EQUIPMENT	16
8	TEST POSITION IN RELATION TO THE PHANTOM	19
8.1	GENERAL CONSIDERATIONS	19
8.2	BODY-WORN DEVICE	20
8.3	DESKTOP DEVICE.....	21
9	TISSUE SIMULATING LIQUIDS	22
9.1	EQUIVALENT TISSUES COMPOSITION.....	22
9.2	LIQUID DEPTH	24
9.3	DIELECTRIC PERFORMANCE OF TSL	25

10 SYSTEM CHECK.....	27
10.1 SYSTEM CHECK.....	27
10.2 SYSTEM SETUP	27
10.3 SYSTEM CHECK RESULT	28
11 MEASUREMENT PROCEDURES	29
11.1 TEST STEPS	29
11.2 SPATIAL PEAK SAR EVALUATION.....	30
11.3 GENERAL MEASUREMENT PROCEDURE	31
11.4 GSM/GPRS MEASUREMENT PROCEDURES.....	32
11.5 WCDMA MEASUREMENT PROCEDURES.....	32
11.6 LTE MEASUREMENT PROCEDURE.....	33
11.7 BLUETOOTH & Wi-Fi MEASUREMENT PROCEDURES	35
11.8 AREA SCAN BASED 1G SAR	36
12 SIMULTANEOUS TRANSMISSION SAR CONSIDERATIONS	37
12.1 REFERENCE DOCUMENT	37
12.2 ANTENNA SEPARATION DISTANCES	37
12.3 SAR MEASUREMENT POSITIONS.....	38
12.4 LOW POWER TRANSMITTERS SAR CONSIDERATION	38
12.5 SIMULTANEOUS TRANSMISSION ANALYSIS	39
12.6 SIMULTANEOUS TRANSMISSION TABLE	39
13 CONDUCTED OUTPUT POWER	40
13.1 LTE MEASUREMENT RESULT.....	40
13.2 BT MEASUREMENT RESULT	58
13.3 Wi-Fi MEASUREMENT RESULT	59
14 TEST RESULTS.....	60
14.1 STANDALONE SAR TEST RESULT.....	60
14.2 SIMULTANEOUS SAR EVALUATION.....	69
14.3 SAR MEASUREMENT VARIABILITY.....	70
ANNEX A: MEASUREMENT DATA.....	71
A.1 SAR GRAPH RESULTS.....	71
A.2 SYSTEM CHECK GRAPH RESULTS.....	89
ANNEX B: CALIBRATION CERTIFICATE.....	96
ANNEX C: REVISED HISTORY.....	144
ANNEX D: ACCREDITATION CERTIFICATE.....	145

1 Summary of Test Report

1.1 Test Standard(s)

No.	Test Standard(s)	Title	Version
1	ANSI/IEEE C95.1	IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz.	1992
2	IEEE Std 1528	Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Body Due to Wireless Communications Devices: Experimental Techniques.	2013
3	IEC/IEEE 62209-1528	Measurement procedure for the assessment of specific absorption rate of human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices – Part 1528: Human models, instrumentation, and procedures (Frequency range of 4 MHz to 10 GHz)	2020
4	RSS 102	Radio Frequency (RF) Exposure Compliance of Radio communication Apparatus (All Frequency Bands)	2015 Issue 5

1.2 Reference Documents

No.	Reference Document(s)	Title	Version
1	KDB447498	General RF Exposure Guidance	D01 v06
2	KDB865664	SAR Measurement 100 MHz to 6 GHz	D01 v01r04
3	KDB865664	RF Exposure Reporting	D02 v01r02
4	KDB248227	802.11 Wi-Fi SAR	D01 v02r02
5	KDB941225	SAR for LTE Devices	D05 v02r05

1.3 Summary of Test Results

1.3.1 The maximum results of Specific Absorption Rate (SAR) in standalone mode are as follows.

Band	Reported SAR 1g(W/Kg)	Reported SAR 10g(W/Kg)	Detailed Results
	Body(5mm)	Limb(0mm)	
LTE Band 4	0.973	1.299	See section 14.1
LTE Band 7	1.435	2.065	See section 14.1
LTE Band 12	0.404	0.492	See section 14.1
LTE Band 13	0.670	0.528	See section 14.1
LTE Band 25	1.253	1.763	See section 14.1
LTE Band 26	1.093	0.994	See section 14.1
LTE Band 41	1.125	1.575	See section 14.1
Wi-Fi 2.4G	0.474	0.683	See section 14.1
BT	0.017	0.020	See section 14.1

NOTE1:The EC4WHS manufactured by Shenzhen Ecell Communication Technology Co.,Ltd is a new product for testing.

NOTE2:The device supports LTE B2/B5/B17 and LTE B25/B26/B12, Since the supported frequency span for LTE B2/B5/B17 falls completely within the supports frequency span for LTE B25/B26/B12, both LTE bands have the same target power, and both LTE bands share the same transmission path, therefore, SAR was only assessed for LTE B25/B26/B12.

NOTE3:Industrial Internet Innovation Center (Shanghai) Co., Ltd. has verified that the compliance of the tested device specified in section 4 of this test report is successfully evaluated according to the procedure and test methods as defined in type certification requirement listed in section 1 of this test report.

1.3.2 The maximum results of Specific Absorption Rate (SAR) in simultaneous mode are as follows.

Highest Reported SAR 1g(W/kg)			
Mode	Position	Simultaneous Transmission SAR	Detailed Results
LTE B7&BT	Body(5mm)	1.449	See section 14.2
Highest Reported SAR 10g(W/kg)			
LTE B7&BT	Limb(0mm)	2.085	See section 14.2

2 General Information of The Laboratory

2.1 Testing Laboratory

Lab Name	Industrial Internet Innovation Center (Shanghai) Co.,Ltd.
Address	Building 4, No. 766, Jingang Road, Pudong, Shanghai, China
Telephone	021-68866880
FCC Registration No.	958356
FCC Designation No.	CN1177
IC Designation No.	10766A
CAB identifier	CN0067

2.2 Laboratory Environmental Requirements

Temperature	18°C~25°C
Relative Humidity	25%RH~75%RH

2.3 Project Information

Project Manager	Zhang Heng
Test Date	December 20, 2022 to January 5, 2023

3 General Information of The Customer

3.1 Applicant

Company	Wearable Health Solutions, Inc.
Address	2901 Pacific Coast Highway Ste. 200 Newport Beach, CA 92663
Telephone	+1 949 270 7460

3.2 Manufacturer

Company	Shenzhen Ecell Communication Technology Co.,Ltd
Address	801-803, Floor 8, West Zone, Block B, Building 7, Gaoxin Nanjiudao Science and Technology Ecological Park, Nanshan District, Shenzhen

4 General Information of The Product

4.1 Product Description for Equipment under Test (EUT)

Product	iHelp Max 4G mobile medical device
Model	EC4WHS
Date of Receipt	December 19, 2022
EUT ID*	S14aa/S10aa
SN/IMEI	N/A
Supported Radio Technology and Bands	LTE Band2/4/5/7/12/13/17/25/26/41 Wi-Fi 802.11b/g/n BT4.2,BLE
Tx Frequency	1850.7-1909.3 MHz (LTE Band 2) 1710.7-1754.3 MHz (LTE Band 4) 824.7-848.3 MHz (LTE Band 5) 2502.5-2567.5 MHz (LTE Band 7) 699.7-715.3 MHz (LTE Band 12) 779.5-784.5 MHz (LTE Band 13) 706.5-713.5 MHz (LTE Band 17) 1850.7-1914.3 MHz (LTE Band 25) 814.7-848.3 MHz (LTE Band 26) 2555-2655 MHz (LTE Band 41) 2412-2462 MHz (Wi-Fi 2.4G) 2402-2480 MHz (BT)
Hardware Version	V1.1
Software Version	iHelp 4G V1.1
Dimension	57mm*76mm*21mm
NOTE1:814-824MHz are not allocated in Canada.	
NOTE2:EUT ID is the internal identification code of the laboratory.	

4.2 Description for Auxiliary Equipment (AE)

AE ID*	Description	Model	SN/Remark
N/A	N/A	N/A	N/A
NOTE:AE ID is the internal identification code of the laboratory.			

5 Test Configuration Information

5.1 Test Equipments Utilized

No.	Name	Model	S/N	Manufacturer	Cal. Date	Cal. Interval
1	Network analyzer	N5242A	MY51221755	Agilent	Oct.17, 2022	1 Year
2	Power meter	NRX	103851	R&S	Aug.22, 2022	1 Year
3	Power sensor	NRP18S-10	101841	R&S	Aug.22, 2022	1 Year
4	Power sensor	NRP18S-10	101842	R&S	Aug.22, 2022	1 Year
5	Signal Generator	E8247C	MY43000157	Agilent	Aug.22, 2022	1 Year
6	Amplifier	NTWPA-07605	22039018	RFLIGHT	Aug.22, 2022	1 Year
7	BTS	MT8820C	6201240338	Anritsu	Oct.17, 2022	1 Year
8	E-field Probe	EX3DV4	7633	SPEAG	Mar.31, 2022	1 Year
9	DAE	DAE4	1244	SPEAG	Mar.9, 2022	1 Year
10	Dipole Validation Kit	D750V3	1144	SPEAG	Sept.16, 2022	1 Year
11	Dipole Validation Kit	D835V2	4d112	SPEAG	Sept.21, 2022	1 Year
12	Dipole Validation Kit	D1750V2	1044	SPEAG	Sept.20, 2022	1 Year
13	Dipole Validation Kit	D1900V2	5d232	SPEAG	Dec.12, 2022	1 Year
14	Dipole Validation Kit	D2450V2	858	SPEAG	Sept.19, 2022	1 Year
15	Dipole Validation Kit	D2600V2	1031	SPEAG	Sept.21, 2022	1 Year

5.2 Measurement Uncertainty

Item	Uncertainty
SAR	$U_{SAR(1g)}=22.08\%$, $U_{SAR(10g)}=21.82\%$

NOTE: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

5.3 EUT Connection Diagram of Test System

5.3.1 SAR

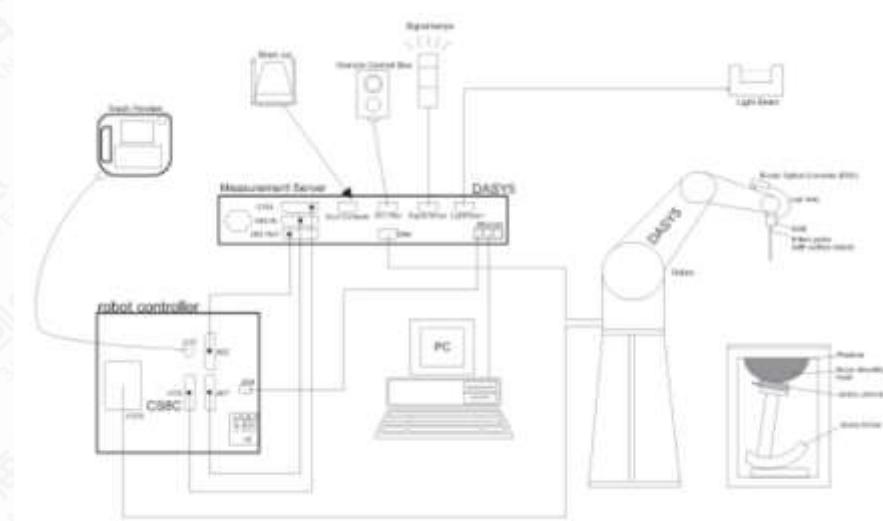


Figure 5.3.1-1 SAR Connection Diagram

6 Specific Absorption Rate(SAR)

6.1 Introduction

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/ controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

6.2 SAR Definition

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$SAR = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dv} \right)$$

SAR is expressed in units of Watts per kilogram (W/kg)

SAR measurement can be either related to the temperature elevation in tissue by:

$$SAR = c \left(\frac{\delta T}{\delta t} \right)$$

Where: C is the specific heat capacity, δT is the temperature rise and δt is the exposure duration, or related to the electrical field in the tissue by:

$$SAR = \frac{\sigma |E|^2}{\rho}$$

Where:

σ is the conductivity of the tissue

ρ is the mass density of tissue, which is normally set to 1g/cm³


E is the RMS electrical field strength

However for evaluating SAR of low power transmitter, electrical field measurement is typically applied.

7 SAR Measurement System Introduction

7.1 Measurement Set-up

The DASY5 system for performing compliance tests is illustrated above graphically. This system consists of the following items:

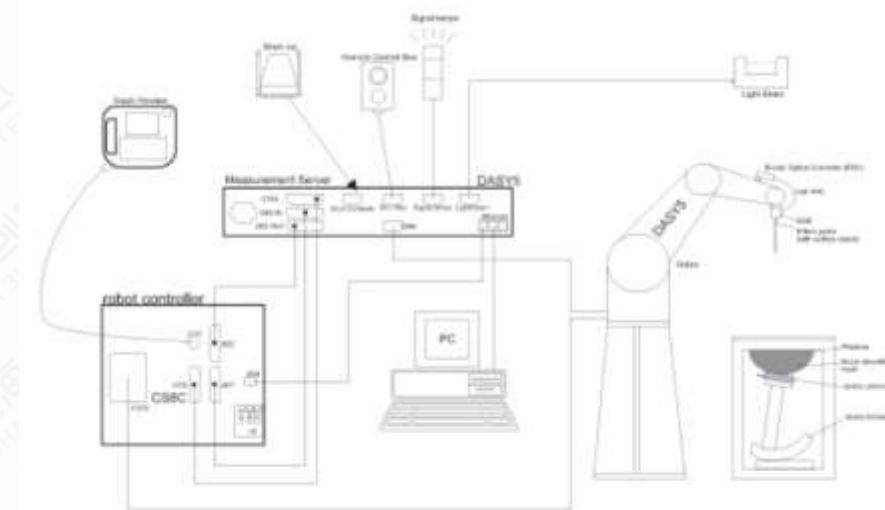

Figures 7.1-1 SAR Measurement Set-up

- A standard high precision 6-axis robot (Stäubli TX=RX family) with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running WinXP and the DASY software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.

The phantom, the device holder and other accessories according to the targeted measurement.

7.2 E-field Probe System

The SAR measurements were conducted with the dosimetric probe designed in the classical triangular configuration and optimized for dosimetric evaluation. The probe is constructed using the thick film technique; with printed resistive lines on ceramic substrates. The probe is equipped with an optical multi-fiber line ending at the front of the probe tip. It is connected to the EOC box on the robot arm and provides an automatic detection of the phantom surface. Half of the fibers are connected to a pulsed infrared transmitter, the other half to a synchronized receiver. As the probe approaches the surface, the reflection from the surface produces a coupling from the transmitting to the receiving fibers. This reflection increases first during the approach, reaches maximum and then decreases. If the probe is flatly touching the surface, the coupling is zero. The distance of the coupling maximum to the surface is independent of the surface reflectivity and largely independent of the surface to probe angle. The DASY software reads the reflection during a software approach and looks for the maximum using 2nd order curve fitting. The approach is stopped at reaching the maximum.

Probe Specifications	
Model	EX3DV4
Frequency Range	4 MHz – 10 GHz
Calibration	In head simulating tissue at frequency from 650MHz to 5900MHz
Linearity	±0.2 dB (30 MHz – 10 GHz)
Dynamic Range	10 µW/g – >100 mW/g
Probe Length	337 mm
Probe Tip Length	20 mm
Body Diameter	12 mm
Tip Diameter	2.5 mm
Tip-Center	1 mm
Application	High precision dosimetric measurements in any exposure scenario (e.g., very strong gradient fields); the only probe that enables compliance testing for frequencies up to 6 GHz with precision of better than 30%.



Figure 7.2-1 Detail of Probe



Figure 7.2-2 E-field Probe

7.3 E-field Probe Calibration

Each E-Probe/Probe Amplifier combination has unique calibration parameters. A TEM cell calibration procedure is conducted to determine the proper amplifier settings to enter in the probe parameters. The amplifier settings are determined for a given frequency by subjecting the probe to a known E-field density (1 mW/cm²) using an RF Signal generator, TEM cell, and RF Power Meter.

The free space E-field from amplified probe outputs is determined in a test chamber. This calibration can be performed in a TEM cell if the frequency is below 1 GHz and in a waveguide or other methodologies above 1 GHz for free space. For the free space calibration, the probe is placed in the volumetric center of the cavity and at the proper orientation with the field. The probe is then rotated 360 degrees until the three channels show the maximum reading. The power density readings equates to 1 mW/cm².

E-field temperature correlation calibration is performed in a flat phantom filled with the appropriate simulated brain tissue. The E-field in the medium correlates with the temperature rise in the dielectric medium. For temperature correlation calibration a RF transparent thermistor-based temperature probe is used in conjunction with the E-field probe.

$$SAR = C \frac{\Delta T}{\Delta t}$$

Where:

Δt = Exposure time (30 seconds),

C = Heat capacity of tissue (brain or muscle),

ΔT = Temperature increase due to RF exposure.

$$SAR = \frac{|E|^2 \cdot \sigma}{\rho}$$

Where:

σ = Simulated tissue conductivity,

ρ = Tissue density (kg/m³).

7.4 Other Test Equipment

7.4.1 Data Acquisition Electronics (DAE)

The data acquisition electronics consist of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder with a control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information, as well as an optical uplink for commands and the clock.



Figure 7.4.1-1: DAE

The mechanical probe mounting device includes two different sensor systems for frontal and sideways probe contacts. They are used for mechanical surface detection and probe collision detection. The input impedance of the DAE is 200M Ohm; the inputs are symmetrical and floating. Common mode rejection is above 80dB.

7.4.2 Robot

The SPEAG DASY system uses the high precision robots (DASY5: TX90) type from Stäubli SA (France).

For the 6-axis controller system, the robot controller version from Stäubli is used. The Stäubli robot series have many features that are important for our application

- High precision (repeatability 0.02mm)
- High reliability (industrial design)
- Low maintenance costs (virtually maintenance free due to direct drive gears; no belt drives)
- Jerk-free straight movements (brushless synchronal motors; no stepper motors)
- Low ELF interference (motor control fields shielded via the closed metallic construction shields)



Figure 7.4.2-1: DASY5

7.4.3 Measurement Server

The DASY5 measurement server is based on a PC/104 CPU board with a 400 MHz intel ULV Celeron, 128 MB chipdisk and 128 MB RAM. The necessary circuits for communication with either the DAE4 (or DAE3) electronics box as well as the 16 bit AD converter system for optical detection and digital I/O interface are contained on the DASY5 I/O board, which is directly connected to the PC/104 bus of the CPU board.



Figure 7.4.3-1 Server for DASY5

The measurement server performs all real-time data evaluation of field measurements and surface detection, controls robot movements and handles safety operation. The PC operating system cannot interfere with these time critical processes. All connections are supervised by a watchdog, and disconnection of any of the cables to the measurement server will automatically disarm the robot and disable all program-controlled robot movements. Furthermore, the measurement server is equipped with an expansion port which is reserved for future applications. Please note that this expansion port does not have a standardized pinout, and therefore only devices provided by SPEAG can be connected. Devices from any other supplier could seriously damage the measurement server.

7.4.4 Device Holder for Phantom

The SAR in the phantom is approximately inversely proportional to the square of the distance between the source and the liquid surface. For a source at 5mm distance, a positioning uncertainty of $\pm 0.5\text{mm}$ would produce a SAR uncertainty of $\pm 20\%$. Accurate device positioning is therefore crucial for accurate and repeatable measurements. The positions in which the devices must be measured are defined by the standards.

The DASY device holder is designed to cope with the different positions given in the standard. It has two scales for device rotation (with respect to the body axis) and device inclination (with respect to the line between the ear reference points). The rotation centers for both scales is the ear reference point (ERP). Thus the device needs no repositioning when changing the angles.



Figure 7.4.4-1: Device Holder

The DASY device holder is constructed of low-loss POM material having the following dielectric parameters: relative permittivity $\epsilon = 3$ and loss tangent $\delta = 0.02$. The amount of dielectric material has been reduced in the closest vicinity of the device, since measurements have suggested that the influence of the clamp on the test results could thus be lowered.

<p>The extension is lightweight and made of POM, acrylic glass and foam. It fits easily on the upper part of the Mounting Device in place of the phone positioner. The extension is fully compatible with the Twin-SAM and ELI phantoms.</p>	
<p>The DASY device holder is constructed of low-loss POM material having the following dielectric parameters: relative permittivity $\epsilon = 3$ and loss tangent $\delta = 0.02$. The amount of dielectric material has been reduced in the closest vicinity of the device, since measurements have suggested that the influence of the clamp on the test results could thus be lowered.</p>	<p>Figure 7.4.4-2: Laptop Extension Kit</p>

7.4.5 Phantom

The SAM Twin Phantom V4.0 is constructed of a fiberglass shell integrated in a table. The shape of the shell is based on data from an anatomical study designed to represent the 90th percentile of the population. The phantom enables the dissymmetric evaluation of SAR for both left and right handed handset usage, as well as body-worn usage using the flat phantom region. Reference markings on the Phantom allow the complete setup of all predefined phantom positions and measurement grids by manually teaching three points in the robot. The shell phantom has a 2mm shell thickness (except the ear region where shell thickness increases to 6 mm).

Shell Thickness	2 ± 0.2 mm	
Available	Special	
Filling Volume	Approx. 25 liters	
Dimensions	810 mm x 1000 mm x 500 mm (H x L x W)	<p>Figure 7.4.5-1: SAM Twin Phantom</p>

8 Test Position in Relation to the Phantom

8.1 General considerations

This standard specifies two handset test positions against the head phantom – the “cheek” position and the “tilt” position.

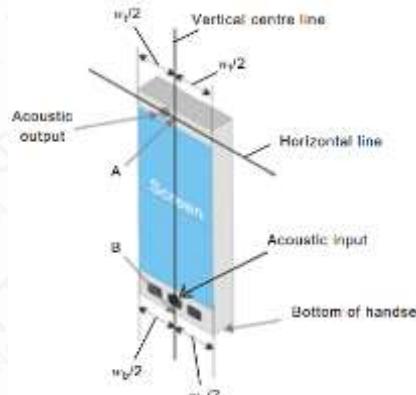


Figure 8.1-1 full touch screen smart phone (top)

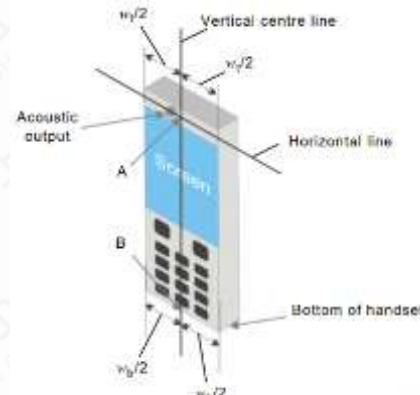


Figure 8.1-2 keyboard handset (bottom)

w_t	Width of the handset at the level of the acoustic output
w_b	Width of the bottom of the handset
A	Midpoint of the width w_t of the DUT at the level of the acoustic output
B	Midpoint of the width w_b of the bottom of the handset



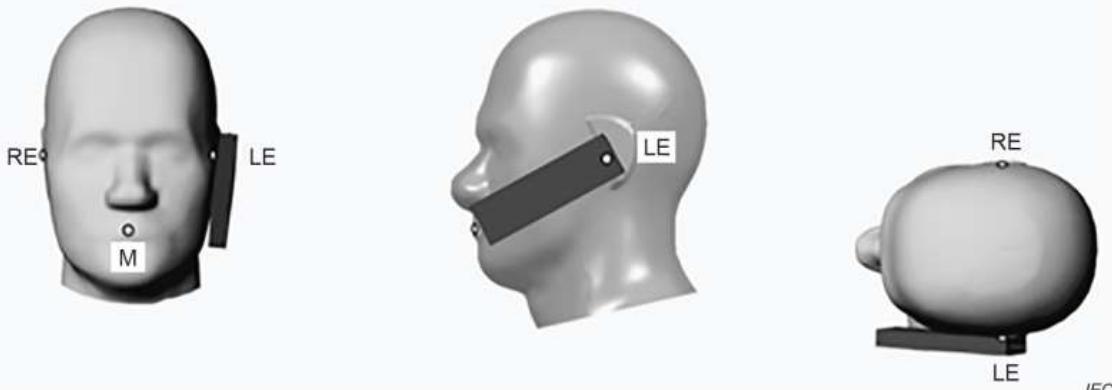


Figure 8.1-3 Cheek position of the wireless device on the left side of SAM

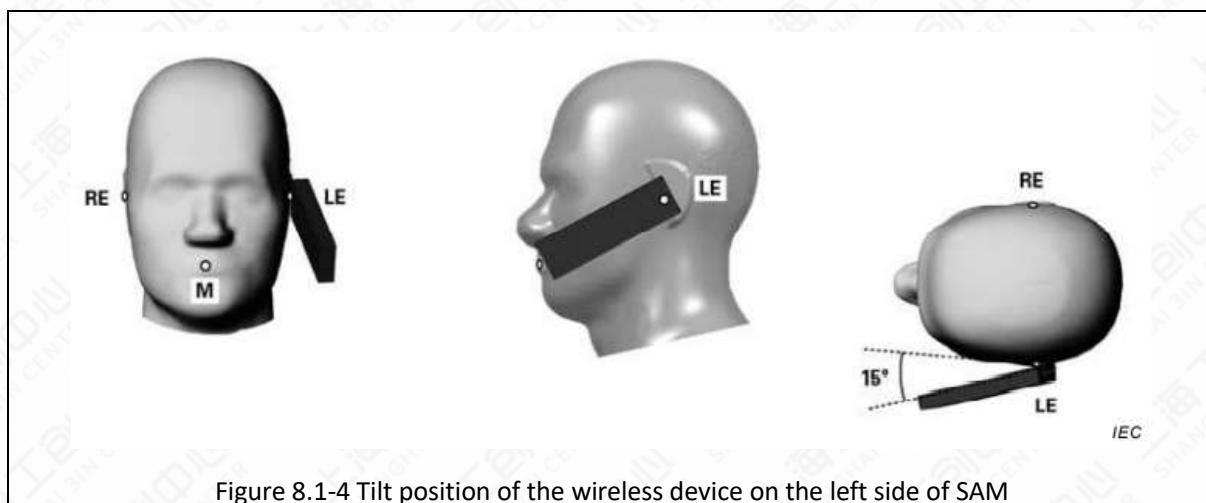

8.2 Body-worn device

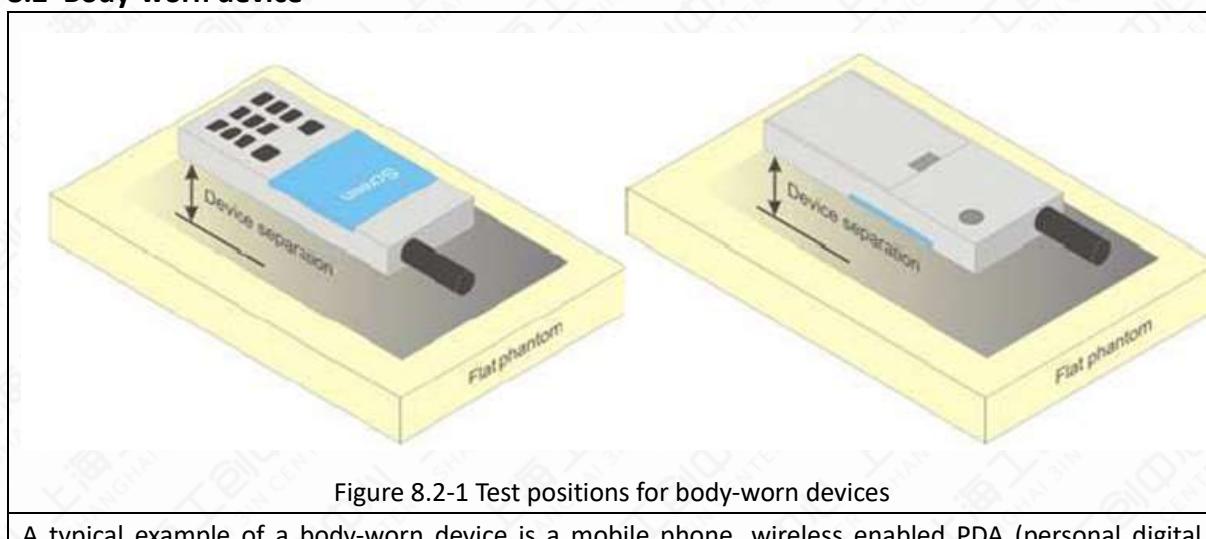

A typical example of a body-worn device is a mobile phone, wireless enabled PDA (personal digital assistant) or other battery operated wireless device with the ability to transmit while mounted on a person's body using a carry accessory approved by the wireless device manufacturer.

8.3 Desktop device

A typical example of a desktop device is a wireless enabled desktop computer placed on a table or desk when used.

The DUT shall be positioned at the distance and in the orientation to the phantom that corresponds to the intended use as specified by the manufacturer in the user instructions. For devices that employ an external antenna with variable positions.

Tests shall be performed for all antenna positions specified.

Picture 8-6 shows positions for desktop device SAR tests. If the intended use is not specified, the device shall be tested directly against the flat

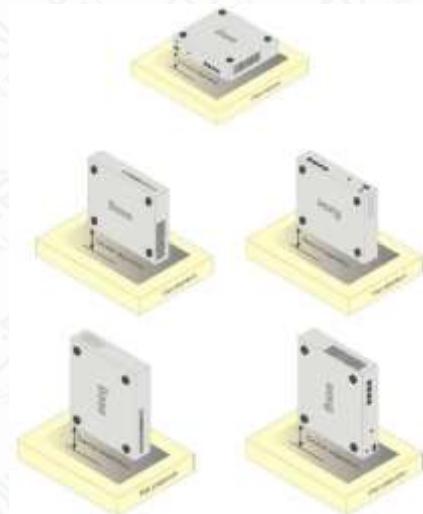


Figure 8.3-1 Test positions for desktop devices

9 Tissue Simulating Liquids

9.1 Equivalent Tissues Composition

The liquid used for the frequency range of 650-6000 MHz consisted of water, sugar, salt, preventol, glycol monobutyl and Cellulose. The liquid has been previously proven to be suited for worst-case. The Table 9.1 shows the detail solution. It's satisfying the latest tissue dielectric parameters requirements proposed by the IEEE Std 1528.

Table 9.1-1: Composition of the Head Tissue Equivalent Matter

Frequency (MHz)	835	900	1800	1950	2300	2450	2600	5800
Ingredients (% by weight)								
Water	41.45	40.92	55.242	54.89	56.34	58.79	58.79	65.53
Sugar	56.0	56.5	/	/	/	/	/	
Salt	1.45	1.48	0.306	0.18	0.14	0.06	0.06	
Preventol	0.1	0.1	/	/	/	/	/	
Cellulose	1.0	1.0	/	/	/	/	/	
GlycolMonobutyl	/	/	44.452	44.93	43.52	41.15	41.15	
Diethylenglycol momohexylether	/	/	/	/	/	/	/	17.24
Triton X-100	/	/	/	/	/	/	/	17.23
Dielectric Parameters Target Value	$\epsilon=41.5$ $\sigma=0.90$	$\epsilon=41.5$ $\sigma=0.97$	$\epsilon=40.0$ $\sigma=1.40$	$\epsilon=40.0$ $\sigma=1.40$	$\epsilon=39.5$ $\sigma=1.67$	$\epsilon=39.2$ $\sigma=1.80$	$\epsilon=39.0$ $\sigma=1.96$	$\epsilon=35.3$ $\sigma=5.27$


Table 9.1-2: Targets for tissue simulating liquid

Frequency (MHz)	Liquid Type	Conductivity (σ)	$\pm 5\%$ Range	Permittivity (ϵ)	$\pm 5\%$ Range
750	Head	0.89	0.846~0.934	41.9	39.805~43.995
835	Head	0.90	0.855~0.945	41.5	39.425~43.575
900	Head	0.97	0.922~1.018	41.5	39.425~43.575
1450	Head	1.20	1.140~1.260	40.5	38.475~42.525
1800	Head	1.40	1.330~1.470	40.0	38.000~42.000
1900	Head	1.40	1.330~1.470	40.0	38.000~42.000
1950	Head	1.40	1.330~1.470	40.0	38.000~42.000
2000	Head	1.40	1.330~1.470	40.0	38.000~42.000
2100	Head	1.49	1.416~1.564	39.8	37.810~41.790
2450	Head	1.80	1.710~1.890	39.2	37.240~41.160
2600	Head	1.96	1.862~2.058	39.0	37.050~40.950
3000	Head	2.40	2.280~2.520	38.5	36.575~40.425
3500	Head	2.91	2.765~3.055	37.9	36.005~39.795
4000	Head	3.43	3.259~3.601	37.4	35.530~39.270
4500	Head	3.94	3.743~4.137	36.8	34.960~38.640
5000	Head	4.45	4.228~4.672	36.2	34.390~38.010
5200	Head	4.66	4.427~4.893	36.0	34.200~37.800
5400	Head	4.86	4.617~5.103	35.8	34.010~37.590
5600	Head	5.07	4.817~5.323	35.5	33.725~37.275
5800	Head	5.27	5.007~5.533	35.3	33.535~37.065
6000	Head	5.48	5.206~5.754	35.1	33.345~36.855


9.2 Liquid depth

The Measurements were performed in the flat section of the TWIN SAM or ELI phantom, shell thickness: 2.0 ± 0.2 mm (bottom Plate) filled with Body or Head simulating Liquid.

The depth of tissue-equivalent liquid in a phantom must be ≥ 15.0 cm with $\leq \pm 0.5$ cm variation for SAR measurements ≤ 3 GHz and ≥ 10.0 cm with $\leq \pm 0.5$ cm variation for measurements > 3 GHz.

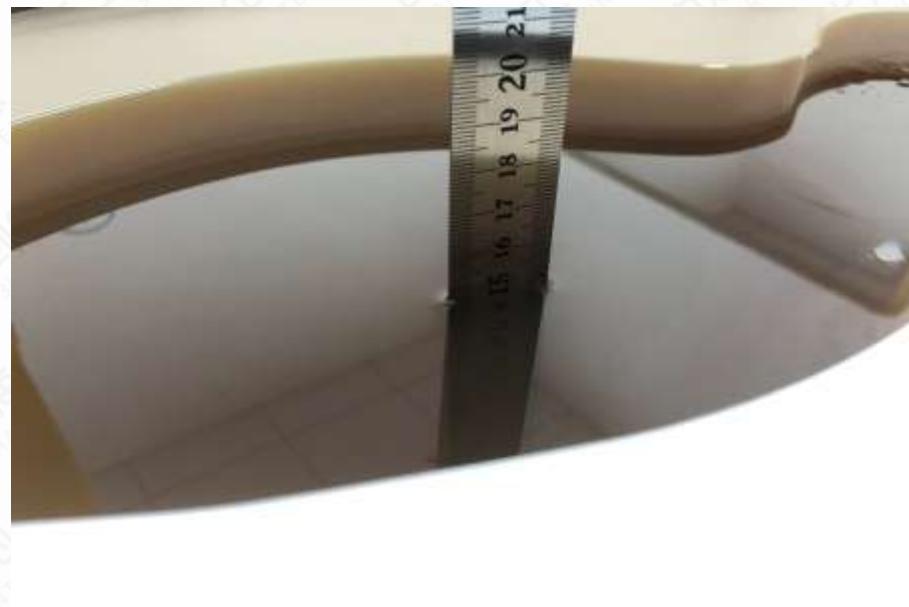

Picture 9.2-1 Liquid depth in the Flat Phantom for SAR measurements ≤ 3 GHz

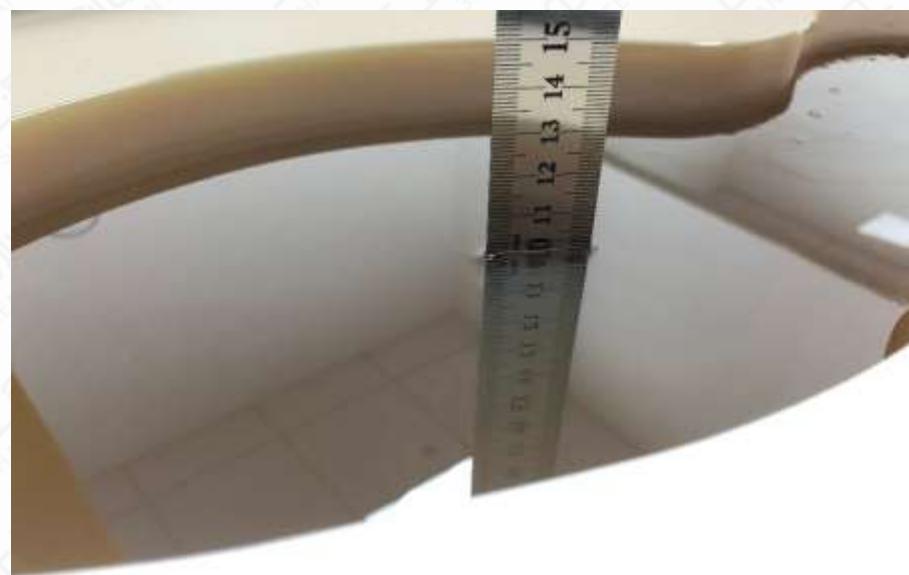

Picture 9.2-2 Liquid depth in the Flat Phantom for SAR measurements > 3 GHz

9.3 Dielectric Performance of TSL

Table 9.3-1: Dielectric Performance of Head Tissue Simulating Liquid

Frequency (MHz)	Head(Standard)		Temperature	Date	Test Result		Deviation (%)	
	Permittivity ε	Conductivity σ			Permittivity ε	Conductivity σ	Permittivity ε	Conductivity σ
704	42.181	0.889	20.1°C	December 22, 2022	42.476	0.883	0.70%	-0.67%
707.5	42.162	0.890	20.1°C	December 22, 2022	42.461	0.884	0.71%	-0.67%
711	42.144	0.890	20.1°C	December 22, 2022	42.447	0.885	0.72%	-0.56%
782	41.775	0.896	20.1°C	December 22, 2022	42.230	0.905	1.09%	1.00%
821.5	41.604	0.905	20.3°C	December 20, 2022	41.284	0.907	-0.77%	0.22%
831.5	41.567	0.909	20.3°C	December 20, 2022	41.267	0.909	-0.72%	0.00%
841.5	41.531	0.913	20.3°C	December 20, 2022	41.274	0.912	-0.62%	-0.11%
1720	40.114	1.354	20.3°C	December 20, 2022	38.562	1.306	-3.87%	-3.55%
1732.5	40.096	1.361	20.3°C	December 20, 2022	38.546	1.314	-3.87%	-3.45%
1745	40.078	1.369	20.3°C	December 20, 2022	38.528	1.321	-3.87%	-3.51%
1860	40.000	1.400	20.3°C	December 20, 2022	38.339	1.390	-4.15%	-0.71%
1882.5	40.000	1.400	20.3°C	December 20, 2022	38.299	1.404	-4.25%	0.29%
1905	40.000	1.400	20.3°C	December 20, 2022	38.260	1.417	-4.35%	1.21%
2402	39.285	1.757	20.0°C	December 28, 2022	38.303	1.771	-2.50%	0.80%
2441	39.216	1.792	20.0°C	December 28, 2022	38.230	1.802	-2.51%	0.56%
2480	39.162	1.833	20.0°C	December 28, 2022	38.162	1.833	-2.55%	0.00%
2412	39.268	1.766	20.0°C	December 28, 2022	38.285	1.779	-2.50%	0.74%
2437	39.223	1.788	20.0°C	December 28, 2022	38.236	1.799	-2.52%	0.62%

2462	39.184	1.813	20.0°C	December 28, 2022	38.196	1.819	-2.52%	0.33%
2565	39.054	1.925	20.0°C	December 28, 2022	38.011	1.900	-2.67%	-1.30%
2605	39.003	1.969	20.0°C	December 28, 2022	37.940	1.933	-2.73%	-1.83%
2645	38.952	2.013	20.0°C	December 28, 2022	37.875	1.965	-2.76%	-2.38%
2510	39.124	1.865	20.2°C	January 5, 2023	40.364	1.914	3.17%	2.63%
2535	39.092	1.893	20.2°C	January 5, 2023	40.318	1.934	3.14%	2.17%
2560	39.060	1.920	20.2°C	January 5, 2023	40.275	1.956	3.11%	1.88%


10 System Check

10.1 System Check

Each DASY system is equipped with one or more system validation kits. These units, together with the predefined measurement procedures within the DASY software, enable the user to conduct the system performance check and system validation. System validation kit includes a dipole, tripod holder to fix it underneath the flat phantom and a corresponding distance holder.

10.2 System Setup

In the simplified setup for system evaluation, the DUT is replaced by a calibrated dipole and the power source is replaced by a continuous wave that comes from a signal generator. The calibrated dipole must be placed beneath the flat phantom section of the SAM twin phantom with the correct distance holder. The distance holder should touch the phantom surface with a light pressure at the reference marking and be oriented parallel to the long side of the phantom. The equipment setup is shown below:

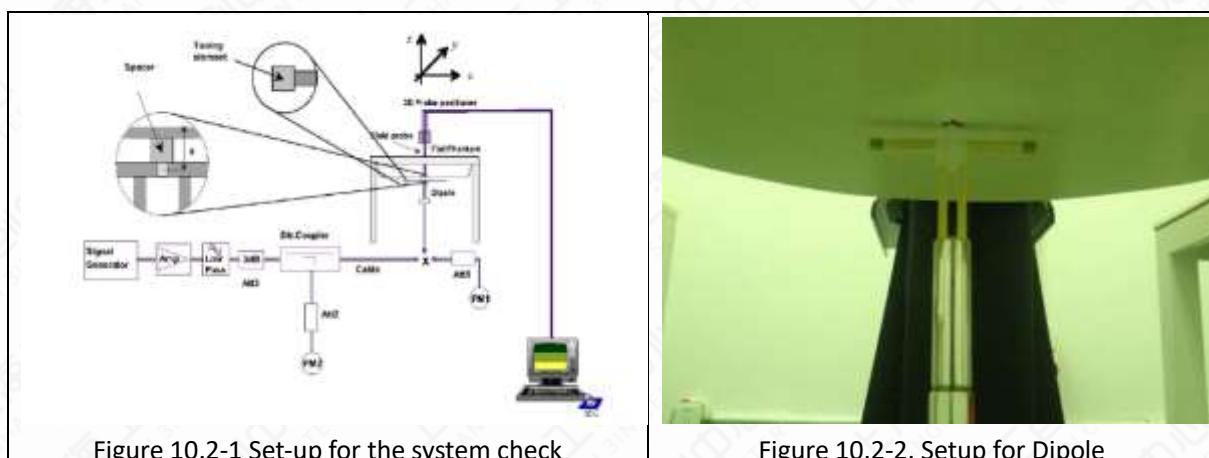

10.3 System Check Result

Table 10.3-1: System Check Result of SAR

SAR System Check								
Frequency (MHz)	Target Value (w/kg)		Temperat ure	Date	Test Result (w/kg)		Deviation (%)	
	10g	1g			10g	1g	10g	1g
750	5.52	8.32	21.5°C	December 22, 2022	1.34	2.01	-2.90%	-3.37%
835	6.29	9.66	21.6°C	December 20, 2022	1.56	2.42	-0.79%	0.21%
1750	19.70	36.80	21.3°C	December 20, 2022	4.69	8.83	-4.77%	-4.02%
1900	20.20	39.70	21.6°C	December 20, 2022	5.33	10.30	3.00%	3.00%
2450	24.90	52.80	21.5°C	December 28, 2022	6.07	13.10	-2.49%	-0.76%
2600	24.80	55.10	21.7°C	December 28, 2022	6.10	13.40	-1.61%	-2.72%
2600	24.80	55.10	21.5°C	January 5, 2023	6.37	14.20	2.74%	3.09%

NOTE: The system verifies that the measured input power level is equivalent to 250mW for 0.6GHz to 3GHz and above 3GHz is equivalent to 100mW, and the measured results are compared with the target value by converting to 1W.

11 Measurement Procedures

11.1 Test Steps

According to the SAR test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

(a) Power reference measurement

The reference and drift jobs are useful for monitoring the power drift of the device under test in the batch process. Both jobs measure the electric field strength at a specified reference position, at a selectable distance from the phantom surface. The reference position can be either the selected section's grid reference point or a user point in this section. The reference job projects the selected point onto the phantom surface, orients the probe perpendicularly to the surface, and approaches the surface using the selected detection method.

(b) Area scan

The area scan is used as a fast scan in two dimensions to find the area of high field values, before doing a finer measurement around the hot spot. The sophisticated interpolation routines implemented in DASY software can find the maximum locations even in relatively coarse grids. The scan area is defined by an editable grid. This grid is anchored at the grid reference point of the selected section in the phantom. When the area scan's property sheet is brought up, grid was at to 15mm * 15mm and can be edited by users.

(c) Zoom scan

Zoom scans are used to assess the peak spatial SAR values within a cubic averaging volume containing 1g and 10g of simulated tissue. The default zoom scan measures 5 * 5 * 7 points within a cube whose base faces are centered around the maximum found in a preceding area scan job within the same procedure. If the preceding Area Scan job indicates more than one maximum, the number of Zoom Scans has to be enlarged accordingly.

(d) Power drift measurement

The drift job measures the field at the same location as the most recent reference job within the same procedure, and with the same setting. The drift measurement gives the field difference in dB from the reading conducted within the last reference measurement. Several drift measurements are possible for one reference measurement. This allows a user to monitor the power drift of the device under within a batch process. In the properties of the drift job, the user can specify a limit for the drift and have DASY software stop the measurements if this limit is exceeded. This ensures that the power drift during one measurement is within 5%.

The SAR measurement procedures for each of test conditions are as follows:

- (a) Make EUT to transmit its maximum output power
- (b) Measure conducted output power through RF cable
- (c) Place the EUT in the specific position of phantom
- (d) Measure SAR results for Middle channel or the highest power channel on each testing position
- (e) Measure SAR results for other channels in worst SAR testing position if the reported SAR of highest power channel is larger than 0.8 W/kg
- (f) Record the SAR value

11.2 Spatial Peak SAR Evaluation

The procedure for spatial peak SAR evaluation has been implemented according to the IEEE Std 1528 standard. It can be conducted for 1g and 10g.

The DASY system allows evaluations that combine measured data and robot positions, such as:

(a) Maximum Search

During a maximum search, global and local maximum searches are automatically performed in 2D after each Area Scan measurement with at least 6 measurement points. It is based on the evaluation of the local SAR gradient calculated by the Quadratic Shepard's method. The algorithm will find the global maximum and all local maxima within -2dB of the global maxima for all SAR distributions.

(b) Extrapolation

Extrapolation routines are used to obtain SAR values between the lowest measurement points and the inner phantom surface. The extrapolation distance is determined by the surface detection distance and the probe sensor offset. Several measurements at different distances are necessary for the extrapolation.

Extrapolation routines require at least 10 measurement points in 3D space. They are used in the Cube Scan to obtain SAR values between the lowest measurement points and the inner phantom surface. The routine uses the modified Quadratic Shepard's method for extrapolation. For a grid using 5*5*5 measurement points with 5mm resolution amounting to 343 measurement points, the uncertainty of the extrapolation routines is less than 1% for 1g and 10 cubes.

(c) Boundary effect

For measurements in the immediate vicinity of a phantom surface, the field coupling effects between the probe and the boundary influence the probe characteristics. Boundary effect errors of different dosi-metric probe types have been analyzed by measurements and using a numerical probe model. As expected, both methods showed an enhanced sensitivity in the immediate vicinity of the boundary. The effect strongly depends on the probe dimensions and disappears with increasing distance from the boundary. The sensitivity can be approximately given as:

$$S \approx S_0 + S_b * \exp\left(-\frac{z}{a}\right) * \cos\left(\pi \frac{z}{\lambda}\right)$$

Since the decay of the boundary effect dominates for small probe ($a \ll \lambda$), the cos-term can be omitted. Factors S_b (parameter Alpha in the DASY software) and a (parameter Delta in the DASY software) are assessed during probe calibration and used for numerical compensation of the boundary effect. Several simulations and measurements have confirmed that the compensation is valid for different field and boundary configurations.

This simple compensation procedure can largely reduce the probe uncertainty near boundaries. It works well as long as:

- The boundary curvature is small
- The probe axis is angled less than 30° to the boundary normal
- The distance between probe and boundary is larger than 25% of the probe diameter
- The probe is symmetric (all sensors have the same offset from the probe tip)

Since all of these requirements are fulfilled in a DASY system, the correction of the probe boundary effect in the vicinity of the phantom surface is performed in a fully automated manner via the

measurement data extraction during post processing.

11.3 General Measurement Procedure

The area and zoom scan resolutions specified in the table below must be applied to the SAR measurements and fully documented in SAR reports to qualify for TCB approval. Probe boundary effect error compensation is required for measurements with the probe tip closer than half a probe tip diameter to the phantom surface. Both the probe tip diameter and sensor offset distance must satisfy measurement protocols; to ensure probe boundary effect errors are minimized and the higher fields closest to the phantom surface can be correctly measured and extrapolated to the phantom surface for computing 1-g SAR. Tolerances of the post-processing algorithms must be verified by the test laboratory for the scan resolutions used in the SAR measurements, according to the reference distribution functions specified in IEEE Std 1528-2013. The results should be documented as part of the system validation records and may be requested to support test results when all the measurement parameters in the following table are not satisfied.

Table 11.3-1: Test Resolution Requirement

Items		$\leq 3\text{GHz}$	$> 3\text{GHz}$
Maximum Distance		$5\text{mm} \pm 1\text{mm}$	$\frac{1}{2} * \delta * \ln(2) \text{ mm} \pm 0.5\text{mm}$
Maximum probe angle		$30 \pm 1^\circ$	$20 \pm 1^\circ$
Maximum Area Scan spatial resolution: $\Delta x_{\text{Area}}, \Delta y_{\text{Area}}$		$\leq 2\text{GHz}: \leq 15\text{mm}$	$3\text{-}4\text{GHz}: \leq 12\text{mm}$
		$2\text{-}3\text{GHz}: \leq 12\text{mm}$	$4\text{-}6\text{GHz}: \leq 10\text{mm}$
when the x or y dimension of the device , in the measurement plane orientation, is smaller than the above, the measurement resolution must be \leq the corresponding x or y dimension of the device with at least one measurement point on the device			
Maximum Zoom Scan spatial resolution: $\Delta x_{\text{Zoom}}, \Delta y_{\text{Zoom}}$		$\leq 2\text{GHz}: \leq 8\text{mm}$	$3\text{-}4\text{GHz}: \leq 5\text{mm}$
		$2\text{-}3\text{GHz}: \leq 5\text{mm}$	$4\text{-}6\text{GHz}: \leq 4\text{mm}$
maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{\text{Zoom}}(n)$		$3\text{-}4\text{GHz}: \leq 4\text{mm}$ $4\text{-}5\text{GHz}: \leq 3\text{mm}$ $5\text{-}6\text{GHz}: \leq 2\text{mm}$
	graded grid	$\Delta z_{\text{Zoom}}(1):$ between 1 st two points closest to phantom surface	$\leq 4\text{mm}$ $3\text{-}4\text{GHz}: \leq 3\text{mm}$ $4\text{-}5\text{GHz}: \leq 2.5\text{mm}$ $5\text{-}6\text{GHz}: \leq 2\text{mm}$
		$\Delta z_{\text{Zoom}}(n > 1)$ between subsequent points	$\leq 1.5^*$
minimum zoom scan volume	x, y, z	$\geq 30\text{mm}$	$3\text{-}4\text{GHz}: \geq 28\text{mm}$ $4\text{-}5\text{GHz}: \geq 25\text{mm}$ $5\text{-}6\text{GHz}: \geq 22\text{mm}$

Notes:

δ is the penetration depth of a plane-wave at normal incidence to the tissue medium in IEEE Std 1528-2013.

When Zoom Scan is required and reported SAR from the Area Scan based 1-g SAR estimation procedure of KDB publication 447498 is ≤ 1.4 W/kg, ≤ 8 mm for 2GHz-3GHz, ≤ 7 mm for 3GHz-4GHz, ≤ 5 mm for 4GHz-6GHz Zoom Scan resolution may be applied.

11.4 GSM/GPRS Measurement Procedures

GSM/GPRS/EDGE modes is determined by the source-based time-averaged output power including tune-up tolerance. The mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested. Other configurations of GSM/GPRS/EDGE are considered as secondary modes. The 3G SAR test reduction procedure is applied, when the maximum output power and tune-up tolerance specified for production units in a secondary mode is $s \leq \frac{1}{4}$ dB higher than the primary mode, SAR measurement is not required for the secondary mode.

11.5 WCDMA Measurement Procedures

The following procedures are applicable to WCDMA handsets operating under 3GPP Release99, Release 5 and Release 6. The default test configuration is to measure SAR with an established radio link between the DUT and a communication test set using a 12.2kbps RMC (reference measurement channel) configured in Test Loop Mode 1. SAR is selectively confirmed for other physical channel configurations (DPCCH & DPDCH), HSDPA and HSPA (HSUPA/HSDPA) modes according to output power, exposure conditions and device operating capabilities. Both uplink and downlink should be configured with the same RMC or AMR, when required. SAR for Release 5 HSDPA and Release 6 HSPA are measured using the applicable FRC (fixed reference channel) and E-DCH reference channel configurations. Maximum output power is verified according to applicable versions of 3GPP TS 34.121 and SAR must be measured according to these maximum output conditions. When Maximum Power Reduction (MPR) is not implemented according to Cubic Metric (CM) requirements for Release 6 HSPA, the following procedures do not apply.

Table 11.5-1: HSDPA setting for Release 5

Sub-test	β_c	β_d	β_d (SF)	β_c / β_d	β_{hs}	CM (dB)	MPR (dB)
1	2/15	15/15	64	2/15	4/15	1.5	0.5
2	12/15	15/15	64	12/15	24/25	2.0	1
3	15/15	8/15	64	15/8	30/15	2.0	1
4	15/15	4/15	64	15/4	30/15	2.0	1

Table 11.5-2: HSUPA setting for Release 6

Sub-test	β_c	β_d	β_d (SF)	β_c / β_d	β_{hs}	β_{ec}	β_{ed}	β_{ed} (SF)	β_{ed} (codes)	CM (dB)	MPR (dB)	AG Index	E-TFCI

1	11/15	15/15	64	11/15	22/15	209/225	1039/225	4	1	2.0	1.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	12/15	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	$\beta_{ed1:47/15}$	4	2	3.0	2.0	15	92
4	2/15	15/15	64	2/15	4/15	4/15	56/75	4	1	2.0	1.0	17	71
5	15/15	15/15	64	15/15	24/15	30/15	134/15	4	1	2.0	1.0	21	81

11.6 LTE Measurement Procedure

SAR tests for LTE are performed with a base station simulator. Closed loop power control was used so the UE transmits with maximum output power during SAR testing.

- (a) KDB 941225 D05, start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
- (b) 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure.
- (c) For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are $\leq 0.8 \text{ W/kg}$. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is $> 1.45 \text{ W/kg}$, the remaining required test channels must also be tested.
- (d) 16QAM/64QAM output power for each RB allocation configuration is $>$ not $\frac{1}{2} \text{ dB}$ higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is $\leq 1.45 \text{ W/kg}$; 16QAM/64QAM SAR testing is not required.
- (e) Smaller bandwidth output power for each RB allocation configuration is $>$ not $\frac{1}{2} \text{ dB}$ higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is $\leq 1.45 \text{ W/kg}$; smaller bandwidth SAR testing is not required.
- (f) For LTE Band 12/26 the maximum bandwidth does not support three non-overlapping channels, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.
- (g) LTE band 17/2/5/38/4 SAR test was covered by Band 12/25/26/41/66; according to TCB workshop, SAR test for overlapping LTE bands can be reduced if
 - The maximum output power, including tolerance, for the smaller band is \leq the larger band to qualify for the SAR test exclusion.
 - The channel bandwidth and other operating parameters for the smaller band are fully supported by the larger band.

11.6.1 LTE Carrier Aggregation Conducted Power (Downlink)

Uplink maximum output power measurement with downlink carrier aggregation active should be measured, using the highest output channel measured without downlink carrier aggregation, to confirm that uplink maximum output power with downlink carrier aggregation active remains within the specified tune-up tolerance limits and not more than $\frac{1}{4}$ dB higher than the maximum output measured without downlink carrier aggregation active.

11.6.2 LTE Carrier Aggregation Conducted Power (Uplink)

UL CA shall be tested based on the worst-case SAR configuration determined from non-CA SAR testing result. The channel BW, channel number, RB allocation, etc. would be selected to allow contiguous CA of PCC and SCC. Uplink output power for UL CA is the total power measured across the PCC and SCC.

UL CA power measurements were performed for each antennas at with QPSK modulation based on the worst-case standalone SAR.

The UL CA mode power measurements represent the total power across both carriers. Measurements were made for all supported PCC bandwidths using the channel/RB combination resulting in the highest standalone output power at the least MPR (0 dB). SCCs were set to use configurations similar to the PCC to establish conservative or worst case equivalent SAR test conditions (highest maximum power with MPR of 0 dB).

The standalone power measurement is the power for the PCC in the non-CA mode (i.e. single carrier power). In all cases the UL CA power is less than or equal to the standalone power.

11.6.3 LTE TDD Considerations

Time-Division Duplex (TDD) systems, SAR must be tested using a fixed periodic duty factor according to the highest transmission duty factor implemented for the device and supported by the defined 3GPP LTE TDD configurations.

SAR was tested with the highest transmission duty factor (63.33%) using Uplink-downlink configuration 0 and Special sub-frame configuration 7.

Table 11.6.3-1 Calculated Duty Cycle for LTE TDD

Uplink-Downlink Configuration		Sub-frame Number										Calculated
Config	Periodicity	1	2	3	4	5	6	7	8	9	10	Duty Cycle (%)
0	5 ms	D	S	U	U	U	D	S	U	U	U	63.33
1	5 ms	D	S	U	U	D	D	S	U	U	D	43.33
2	5 ms	D	S	U	D	D	D	S	U	D	D	23.33
3	10 ms	D	S	U	U	U	D	D	D	D	D	31.67
4	10 ms	D	S	U	U	D	D	D	D	D	D	21.67
5	10 ms	D	S	U	D	D	D	D	D	D	D	11.67

6	5 ms	D	S	U	U	U	D	S	U	U	D	53.33
---	------	---	---	---	---	---	---	---	---	---	---	-------

Example for Calculated Duty Cycle for Uplink-Downlink Configuration 0:

$$\text{Calculated Duty Cycle} = (5120 \times Ts \times 2 + 6 \text{ ms}) / 10\text{ms} = 63.33\%$$

Where

$$Ts = 1/(15000 \times 2048) \text{ seconds}$$

11.7 Bluetooth & Wi-Fi Measurement Procedures

Normal network operating configurations are not suitable for measuring the SAR of IEEE 802.11 transmitters in general. Unpredictable fluctuations in network traffic and antenna diversity conditions can introduce undesirable variations in SAR results. The SAR for these devices should be measured using chipset based test mode software to ensure that the results are consistent and reliable.

Chipset based test mode software is hardware dependent and generally varies among manufacturers. The device operating parameters established in a test mode for SAR measurements must be identical to those programmed in production units, including output power levels, amplifier gain settings and other RF performance tuning parameters. The test frequencies should correspond to actual channel frequencies defined for domestic use. SAR for devices with switched diversity should be measured with only one antenna transmitting at a time during each SAR measurement, according to a fixed modulation and data rate. The same data pattern should be used for all measurements.

11.8 Area Scan Based 1g SAR

According to the KDB447498 D01, a first class of fast SAR techniques is based on a modified measurement procedure and post processing algorithms. In practice, these methods require a special software, for example DASY52 from SPEAG.

When the implementation is based the specific polynomial fit algorithm as presented at the 29th Bio-electromagnetics Society meeting (2007) and the estimated 1-g SAR is $\leq 1.2 \text{ W/kg}$, a zoom scan measurement is not required provided it is also not needed for any other purpose; for example, if the peak SAR location required for simultaneous transmission SAR test exclusion can be determined accurately by the SAR system or manually to discriminate between distinctive peaks and scattered noisy SAR distributions from area scans.

There must not be any warning or alert messages due to various measurement concerns identified by the SAR system; for example, noise in measurements, peaks too close to scan boundary, peaks are too sharp, spatial resolution and uncertainty issues etc. When all the SAR results for each exposure condition in a frequency band and wireless mode are based on estimated 1-g SAR, the 1-g SAR for the highest SAR configuration must be determined by a zoom scan.

The approach is based on the area scan measurement applying a frequency dependent attenuation parameter. This attenuation parameter was empirically determined by analyzing a large number of phones. The MOTOROLA FAST SAR was developed and validated by the MOTOROLA Research Group in Ft. Lauderdale.

In the initial study, an approximation algorithm based on Linear fit was developed. The accuracy of the algorithm has been demonstrated across a broad frequency range (136-2450 MHz) and for both 1-g and 10-g averaged SAR using a sample of 264 SAR measurements from 55 wireless handsets. For the sample size studied, the root-mean-squared errors of the algorithm are 1.2% and 5.8% for 1- and 10-g averaged SAR, respectively. The paper describing the algorithm in detail is expected to be published in August 2004 within the Special Issue of Transactions on MTT.

In the second step, the same research group optimized the fitting algorithm to an Polynomial fit whereby the frequency validity was extended to cover the range 30MHz-6000MHz. Details of this study can be found in the BEMS 2007 Proceedings.

12 Simultaneous Transmission SAR Considerations

12.1 Reference Document

The following procedures adopted from “FCC SAR Considerations for Cell Phones with Multiple Transmitters” are applicable to handsets with built-in unlicensed transmitters such as IEEE 802.11 a/b/g/n/ac/ax and Bluetooth devices which may simultaneously transmit with the licensed transmitter.

12.2 Antenna Separation Distances

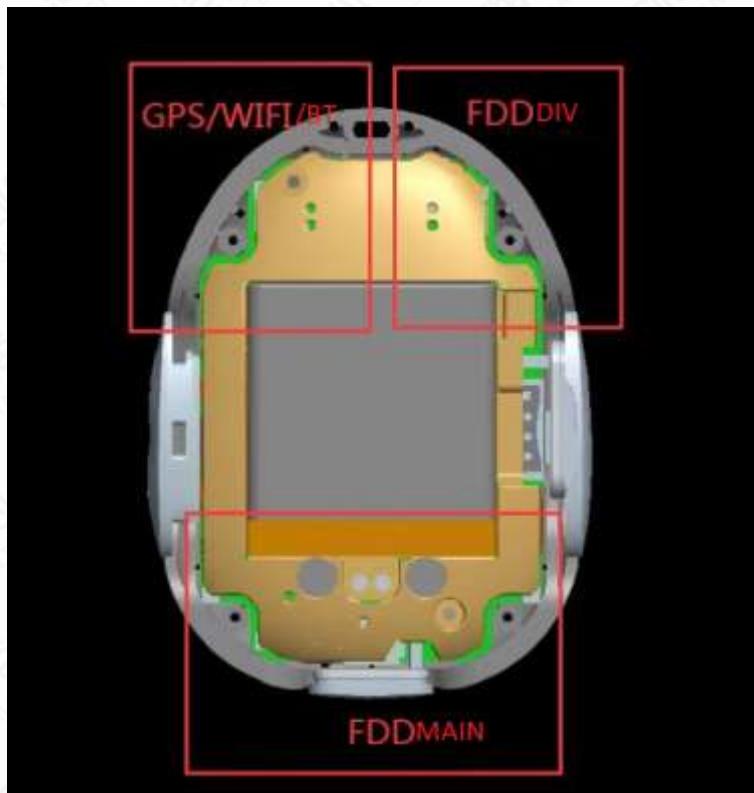


Figure 12.2-1 Antenna Locations

12.3 SAR Measurement Positions

The edges with less than 2.5 cm distance to the antennas need to be tested for SAR.

Table 12.3-1: SAR measurement Positions

Antenna Mode	Front	Back	Left	Right	Top	Bottom
LTE	Yes	Yes	Yes	Yes	Yes	Yes
BT/ Wi-Fi	Yes	Yes	Yes	Yes	Yes	Yes

12.4 Low Power Transmitters SAR Consideration

Standalone 1-g head or body SAR evaluation by measurement or numerical simulation for low power transmitters is not required when the corresponding SAR Exclusion Threshold condition, listed below, is satisfied.

The 1-g SAR test exclusion threshold for 100 MHz to 6 GHz at test separation distances ≤ 50 mm are determined by:

$$\frac{(\text{max. power of channel, including tune-up tolerance, mW})}{(\text{min. test separation distance, mm})} \times \sqrt{\text{Frequency(GHz)}} \leq 3.0$$

Where:

- Frequency (GHz) is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation
- The result is rounded to one decimal place for comparison

According to the KDB447498 appendix A, the SAR test exclusion threshold for 2450MHz at 5mm test separation distances is 10mW. That means the transmitters with tune-up power below 10mW are excluded for SAR measurement.

According to RSS 102 issue5 section 2.5.1 Exemption Limits for Routine Evaluation – SAR Evaluation, BT standalone SAR are required, because tune up output power is greater than 4mW.

Frequency (MHz)	Exemption Limits (mW)				
	At separation distance of ≤5 mm	At separation distance of 10 mm	At separation distance of 15 mm	At separation distance of 20 mm	At separation distance of 25 mm
≤300	71 mW	101 mW	132 mW	162 mW	193 mW
450	52 mW	70 mW	88 mW	106 mW	123 mW
835	17 mW	30 mW	42 mW	55 mW	67 mW
1900	7 mW	10 mW	18 mW	34 mW	60 mW
2450	4 mW	7 mW	15 mW	30 mW	52 mW
3500	2 mW	6 mW	16 mW	32 mW	55 mW
5800	1 mW	6 mW	15 mW	27 mW	41 mW

12.5 Simultaneous Transmission Analysis

KDB 447498 D01 General RF Exposure Guidance introduces a new formula for calculating the SPLSR (SAR to Peak Location Ratio) between pairs of simultaneously transmitting antennas:

$$\text{SPLSR} = \sqrt{(\text{SAR1} + \text{SAR2})^3 / \text{Ri}}$$

Where:

- SAR1 is the highest measured or estimated SAR for the first of a pair of simultaneous transmitting antennas, in a specific test operating mode and exposure condition.
- SAR2 is the highest measured or estimated SAR for the second of a pair of simultaneous transmitting antennas, in the same test operating mode and exposure condition as the first.
- Ri is the separation distance between the pair of simultaneous transmitting antennas. When the SAR is measured, for both antennas in the pair, it is determined by the actual x, y and z coordinates in the 1-g SAR for each SAR peak location , based on the extrapolated and interpolated result in the zoom scan measurement, using the formula of

$$(x_1 - x_2)^2 + (y_1 - y_2)^2 + (z_1 - z_2)^2$$

In order for a pair of simultaneous transmitting antennas with the sum of 1-g SAR $> 1.6 \text{ W/kg}$ to qualify for exemption from Simultaneous Transmission SAR measurements, it has to satisfy the condition of:

$$\sqrt{(\text{SAR1} + \text{SAR2})^3 / \text{Ri}} < 0.04$$

12.6 Simultaneous Transmission Table

Table 12.6-1: Simultaneous Transmission Configurations

Items	Capable Transmit Configurations
1	LTE + BT

NOTE:For the DUT, only simultaneous transmission in the table is supported.

13 Conducted Output Power

13.1 LTE Measurement result

Table 13.1-1: The conducted power for LTE Band 2

LTE			LTE B2			
Modulation	RB	RB Offset	Tune up	1.4MHz		
				18607	18900	19193
QPSK	1	Low	23.00	22.11	22.08	22.06
		Middle		22.51	22.43	22.05
		High		21.90	22.12	21.91
	50%	Low	23.00	21.99	22.03	21.84
		Middle		21.99	21.99	21.86
		High		21.76	22.00	21.80
	100%	/	22.00	20.96	20.95	20.74
	1	Low	22.00	21.14	21.22	21.20
		Middle		21.12	21.24	21.19
		High		21.06	21.05	21.11
16QAM	50%	Low	22.00	20.94	20.80	20.94
		Middle		21.02	21.03	21.01
		High		21.02	21.02	21.01
	100%	/	21.00	19.99	20.13	20.07
Modulation	RB	RB Offset	Tune up	3MHz		
				18615	18900	19185
QPSK	1	Low	23.00	22.13	22.12	22.09
		Middle		22.49	22.46	22.09
		High		21.93	22.17	21.95
	50%	Low	22.00	21.09	21.15	20.97
		Middle		21.11	21.09	20.98
		High		20.86	21.11	20.90
	100%	/	22.00	20.96	20.99	20.77
16QAM	1	Low	22.00	21.17	21.24	21.23
		Middle		21.15	21.24	21.23
		High		21.08	21.09	21.14
	50%	Low	21.00	20.05	19.93	20.06
		Middle		20.13	20.16	20.13
		High		20.12	20.14	20.14
	100%	/	21.00	20.02	20.17	20.10
Modulation	RB	RB Offset	Tune up	5MHz		
				18625	18900	19175
QPSK	1	Low	23.00	22.10	22.10	22.05
		Middle		22.47	22.42	22.06

		High		21.90	22.12	21.91
	50%	Low	22.00	21.06	21.10	20.93
		Middle		21.09	21.05	20.93
		High		20.84	21.09	20.86
	100%	/	22.00	20.96	20.98	20.75
16QAM	1	Low	22.00	21.14	21.20	21.20
		Middle		21.12	21.22	21.20
		High		21.05	21.07	21.10
	50%	Low	21.00	20.03	19.89	20.03
		Middle		20.10	20.11	20.09
		High		20.09	20.09	20.10
	100%	/	21.00	20.00	20.13	20.05
Modulation	RB	RB Offset	Tune up	10MHz		
				18650	18900	19150
QPSK	1	Low	23.00	22.12	22.11	22.08
		Middle		22.50	22.47	22.10
		High		21.92	22.16	21.94
	50%	Low	22.00	21.09	21.15	20.97
		Middle		21.12	21.10	20.97
		High		20.86	21.13	20.91
	100%	/	22.00	21.00	21.00	20.79
16QAM	1	Low	22.00	21.16	21.23	21.22
		Middle		21.15	21.26	21.23
		High		21.08	21.09	21.13
	50%	Low	21.00	20.06	19.94	20.07
		Middle		20.12	20.15	20.12
		High		20.12	20.14	20.14
	100%	/	21.00	20.03	20.18	20.09
Modulation	RB	RB Offset	Tune up	15MHz		
				18675	18900	19125
QPSK	1	Low	23.00	22.11	22.07	22.06
		Middle		22.48	22.46	22.07
		High		21.89	22.11	21.90
	50%	Low	22.00	21.07	21.11	20.94
		Middle		21.09	21.05	20.93
		High		20.83	21.10	20.87
	100%	/	22.00	20.98	20.96	20.74
16QAM	1	Low	22.00	21.11	21.21	21.20
		Middle		21.13	21.23	21.21
		High		21.05	21.05	21.10
	50%	Low	21.00	20.03	19.92	20.04
		Middle		20.09	20.10	20.08

		High		20.10	20.10	20.11
100%	/	21.00	20.00	20.13	20.05	
Modulation	RB	RB Offset	Tune up	20MHz		
				18700	18900	19100
				22.08	22.03	22.03
QPSK	1	Low	23.00	22.47	22.42	22.05
		Middle		21.87	22.10	21.87
		High		21.04	21.06	20.90
	50%	Low	22.00	21.07	21.01	20.90
		Middle		20.80	21.05	20.83
		High		20.95	20.91	20.70
	100%	Low	22.00	21.15	21.17	21.15
		Middle		21.09	21.21	21.17
		High		21.03	21.02	21.08
16QAM	1	Low	22.00	20.00	19.88	20.01
		Middle		20.06	20.08	20.05
		High		20.07	20.05	20.07
	50%	Low	21.00	19.98	20.09	20.02
		Middle				
		High				
	100%	Low				
		Middle				
		High				

Table 13.1-2: The conducted power for LTE Band 4

LTE			LTE B4			
Modulation	RB	RB Offset	Tune up	1.4MHz		
				19957	20175	20393
QPSK	1	Low	23.00	22.51	22.30	22.51
		Middle		22.56	22.61	22.51
		High		22.33	22.02	22.50
	50%	Low	23.00	22.26	22.32	22.22
		Middle		22.25	22.17	22.21
		High		22.13	22.12	22.17
	100%	Low	22.00	21.28	21.34	21.23
		Middle				
		High				
16QAM	1	Low	22.00	21.36	21.46	21.38
		Middle		21.34	21.43	21.33
		High		21.33	21.26	21.41
	50%	Low	22.00	21.35	21.28	21.28
		Middle		21.23	21.13	21.18
		High		21.18	21.07	21.13
	100%	Low	21.00	20.36	20.41	20.38
		Middle				
		High				
Modulation	RB	RB Offset	Tune up	3MHz		
				19965	20175	20385
QPSK	1	Low	23.00	22.53	22.34	22.54
		Middle		22.54	22.64	22.55

		High		22.36	22.07	22.54
	50%	Low	22.00	21.36	21.44	21.35
		Middle		21.37	21.27	21.33
		High		21.23	21.23	21.27
	100%	/	22.00	21.28	21.38	21.26
16QAM	1	Low	22.00	21.39	21.48	21.41
		Middle		21.37	21.43	21.37
		High		21.35	21.30	21.44
	50%	Low	21.00	20.46	20.41	20.40
		Middle		20.34	20.26	20.30
		High		20.28	20.19	20.26
	100%	/	21.00	20.39	20.45	20.41
Modulation	RB	RB Offset	Tune up	5MHz		
				19975	20175	20375
QPSK	1	Low	23.00	22.50	22.32	22.50
		Middle		22.52	22.60	22.52
		High		22.33	22.02	22.50
	50%	Low	22.00	21.33	21.39	21.31
		Middle		21.35	21.23	21.28
		High		21.21	21.21	21.23
	100%	/	22.00	21.28	21.37	21.24
16QAM	1	Low	22.00	21.36	21.44	21.38
		Middle		21.34	21.41	21.34
		High		21.32	21.28	21.40
	50%	Low	21.00	20.44	20.37	20.37
		Middle		20.31	20.21	20.26
		High		20.25	20.14	20.22
	100%	/	21.00	20.37	20.41	20.36
Modulation	RB	RB Offset	Tune up	10MHz		
				20000	20175	20350
QPSK	1	Low	23.00	22.52	22.33	22.53
		Middle		22.55	22.65	22.56
		High		22.35	22.06	22.53
	50%	Low	22.00	21.36	21.44	21.35
		Middle		21.38	21.28	21.32
		High		21.23	21.25	21.28
	100%	/	22.00	21.32	21.39	21.28
16QAM	1	Low	22.00	21.38	21.47	21.40
		Middle		21.37	21.45	21.37
		High		21.35	21.30	21.43
	50%	Low	21.00	20.47	20.42	20.41
		Middle		20.33	20.25	20.29

		High		20.28	20.19	20.26
100%	/	21.00	20.40	20.46	20.40	
Modulation	RB	RB Offset	Tune up	15MHz		
				20025	20175	20325
				22.51	22.29	22.51
QPSK	1	Low	23.00	22.53	22.64	22.53
		Middle		22.32	22.01	22.49
		High		21.34	21.40	21.32
	50%	Low	22.00	21.35	21.23	21.28
		Middle		21.20	21.22	21.24
		High		21.30	21.35	21.23
	100%	/	22.00	21.33	21.45	21.38
	1	Low	22.00	21.35	21.42	21.35
		Middle		21.32	21.26	21.40
16QAM	50%	Low	21.00	20.44	20.40	20.38
		Middle		20.30	20.20	20.25
		High		20.26	20.15	20.23
	100%	/	21.00	20.37	20.41	20.36
Modulation	RB	RB Offset	Tune up	20MHz		
				20050	20175	20300
				22.48	22.25	22.48
QPSK	1	Low	23.00	22.52	22.60	22.51
		Middle		22.30	22.00	22.46
		High		21.31	21.35	21.28
	50%	Low	22.00	21.33	21.19	21.25
		Middle		21.17	21.17	21.20
		High		21.27	21.30	21.19
	1	Low	22.00	21.28	21.41	21.33
		Middle		21.31	21.40	21.31
		High		21.30	21.23	21.38
16QAM	50%	Low	21.00	20.41	20.36	20.35
		Middle		20.27	20.18	20.22
		High		20.23	20.10	20.19
	100%	/	21.00	20.35	20.37	20.33

Table 13.1-3: The conducted power for LTE Band 5

LTE			LTE B5			
Modulation	RB	RB Offset	Tune up	1.4MHz		
				20407	20525	20643
QPSK	1	Low	23.50	22.87	22.97	22.84
		Middle		23.08	23.04	22.70

		High		22.85	22.76	22.65
	50%	Low	23.50	22.60	22.64	22.63
		Middle		22.51	22.56	22.46
		High		22.57	22.50	22.50
	100%	/	22.50	21.59	21.64	21.61
16QAM	1	Low	22.50	21.72	21.85	21.72
		Middle		21.70	21.71	21.72
		High		21.62	21.63	21.63
	50%	Low	22.50	21.58	21.60	21.62
		Middle		21.66	21.58	21.57
		High		21.54	21.53	21.48
	100%	/	21.50	20.57	20.56	20.64
Modulation	RB	RB Offset	Tune up	3MHz		
				20415	20525	20635
QPSK	1	Low	23.50	22.88	23.00	22.86
		Middle		23.07	23.08	22.75
		High		22.87	22.80	22.68
	50%	Low	22.50	21.70	21.76	21.76
		Middle		21.64	21.67	21.57
		High		21.67	21.63	21.61
	100%	/	22.50	21.63	21.69	21.66
16QAM	1	Low	22.50	21.74	21.86	21.74
		Middle		21.73	21.73	21.76
		High		21.64	21.67	21.65
	50%	Low	21.50	20.70	20.74	20.75
		Middle		20.76	20.70	20.68
		High		20.64	20.65	20.61
	100%	/	21.50	20.61	20.61	20.66
Modulation	RB	RB Offset	Tune up	5MHz		
				20425	20525	20625
QPSK	1	Low	23.50	22.87	22.96	22.84
		Middle		23.05	23.07	22.72
		High		22.84	22.75	22.64
	50%	Low	22.50	21.68	21.72	21.73
		Middle		21.61	21.62	21.53
		High		21.64	21.60	21.57
	100%	/	22.50	21.61	21.65	21.61
16QAM	1	Low	22.50	21.69	21.84	21.72
		Middle		21.71	21.70	21.74
		High		21.61	21.63	21.62
	50%	Low	21.50	20.67	20.72	20.72
		Middle		20.73	20.65	20.64

		High		20.62	20.61	20.58
100%	/	21.50	20.58	20.56	20.62	
Modulation	RB	RB Offset	Tune up	10MHz		
				20450	20525	20600
				22.84	22.92	22.81
QPSK	1	Low	23.50	23.04	23.03	22.70
		Middle		22.82	22.74	22.61
		High		21.65	21.67	21.69
	50%	Low	22.50	21.59	21.58	21.50
		Middle		21.61	21.55	21.53
		High		21.58	21.60	21.57
16QAM	1	Low	22.50	21.60	21.80	21.67
		Middle		21.67	21.68	21.70
		High		21.59	21.60	21.60
	50%	Low	21.50	20.64	20.68	20.69
		Middle		20.70	20.63	20.61
		High		20.59	20.56	20.54
	100%	/	21.50	20.56	20.52	20.59

Table 13.1-4: The conducted power for LTE Band 7

LTE			LTE B7		
Modulation	RB	RB Offset	Tune up	5MHz	
				20775	21100
QPSK	1	Low	22.00	21.19	21.17
		Middle		21.19	21.37
		High		20.78	20.90
	50%	Low	21.00	20.06	20.07
		Middle		19.80	20.10
		High		19.98	19.90
16QAM	100%	/	21.00	20.05	19.91
	1	Low	21.00	20.49	20.07
		Middle		20.47	20.54
		High		20.40	20.18
	50%	Low	20.00	19.15	19.02
		Middle		19.13	19.05
		High		19.14	18.98
	100%	/	20.00	19.00	18.96
	Modulation	RB	RB Offset	10MHz	
				20800	21100
QPSK	1	Low	22.00	21.21	21.18
		Middle		21.22	21.42

		High		20.80	20.94	20.85
	50%	Low	21.00	20.09	20.12	19.71
		Middle		19.83	20.15	19.85
		High		20.00	19.94	19.83
	100%	/	21.00	20.09	19.93	19.81
16QAM	1	Low	21.00	20.51	20.10	20.16
		Middle		20.50	20.58	20.37
		High		20.43	20.20	20.27
	50%	Low	20.00	19.18	19.07	19.16
		Middle		19.15	19.09	19.04
		High		19.17	19.03	19.14
	100%	/	20.00	19.03	19.01	19.09
Modulation	RB	RB Offset	Tune up	15MHz		
				20825	21100	21375
QPSK	1	Low	22.00	21.20	21.14	20.83
		Middle		21.20	21.41	21.35
		High		20.77	20.89	20.81
	50%	Low	21.00	20.07	20.08	19.68
		Middle		19.80	20.10	19.81
		High		19.97	19.91	19.79
	100%	/	21.00	20.07	19.89	19.76
16QAM	1	Low	21.00	20.46	20.08	20.14
		Middle		20.48	20.55	20.35
		High		20.40	20.16	20.24
	50%	Low	20.00	19.15	19.05	19.13
		Middle		19.12	19.04	19.00
		High		19.15	18.99	19.11
	100%	/	20.00	19.00	18.96	19.05
Modulation	RB	RB Offset	Tune up	20MHz		
				20850	21100	21350
QPSK	1	Low	22.00	21.17	21.10	20.80
		Middle		21.19	21.37	21.33
		High		20.75	20.88	20.78
	50%	Low	21.00	20.04	20.03	19.64
		Middle		19.78	20.06	19.78
		High		19.94	19.86	19.75
	100%	/	21.00	20.04	19.84	19.72
16QAM	1	Low	21.00	20.11	20.04	20.09
		Middle		20.44	20.53	20.31
		High		20.38	20.13	20.22
	50%	Low	20.00	19.12	19.01	19.10
		Middle		19.09	19.02	18.97

		High		19.12	18.94	19.07
100%	/	20.00	18.98	18.92	19.02	

Table 13.1-5: The conducted power for LTE Band 12

LTE			LTE B12			
Modulation	RB	RB Offset	Tune up	1.4MHz		
				23017	23095	23173
QPSK	1	Low	23.00	22.44	22.65	22.61
		Middle		22.35	22.59	22.56
		High		22.43	22.47	22.59
	50%	Low	23.00	22.21	22.27	22.18
		Middle		22.15	22.26	22.25
		High		22.17	22.22	22.14
	100%	/	22.00	21.31	21.27	21.30
	1	Low	22.00	21.41	21.22	21.25
		Middle		21.39	21.33	21.23
		High		21.33	21.29	21.33
16QAM	50%	Low	22.00	21.38	21.29	21.26
		Middle		21.37	21.45	21.37
		High		21.32	21.31	21.26
	100%	/	21.00	20.31	20.24	20.33
	Modulation	RB	RB Offset	Tune up	3MHz	
					23025	23095
QPSK	1	Low	23.00	22.45	22.68	22.63
		Middle		22.34	22.63	22.61
		High		22.45	22.51	22.62
	50%	Low	22.00	21.31	21.39	21.31
		Middle		21.28	21.37	21.36
		High		21.27	21.35	21.25
	100%	/	22.00	21.35	21.32	21.35
16QAM	1	Low	22.00	21.43	21.23	21.27
		Middle		21.42	21.35	21.27
		High		21.35	21.33	21.35
	50%	Low	21.00	20.50	20.43	20.39
		Middle		20.47	20.57	20.48
		High		20.42	20.43	20.39
	100%	/	21.00	20.35	20.29	20.35
Modulation	RB	RB Offset	Tune up	5MHz		
				23035	23095	23155
QPSK	1	Low	23.00	22.44	22.64	22.61
		Middle		22.32	22.62	22.58

		High		22.42	22.46	22.58
	50%	Low	22.00	21.29	21.35	21.28
		Middle		21.25	21.32	21.32
		High		21.24	21.32	21.21
	100%	/	22.00	21.33	21.28	21.30
16QAM	1	Low	22.00	21.38	21.21	21.25
		Middle		21.40	21.32	21.25
		High		21.32	21.29	21.32
	50%	Low	21.00	20.47	20.41	20.36
		Middle		20.44	20.52	20.44
		High		20.40	20.39	20.36
	100%	/	21.00	20.32	20.24	20.31
Modulation	RB	RB Offset	Tune up	10MHz		
				23060	23095	23130
QPSK	1	Low	23.00	22.41	22.60	22.58
		Middle		22.31	22.58	22.56
		High		22.40	22.45	22.55
	50%	Low	22.00	21.26	21.30	21.24
		Middle		21.23	21.28	21.29
		High		21.21	21.27	21.17
	100%	/	22.00	21.30	21.23	21.26
16QAM	1	Low	22.00	21.25	21.17	21.20
		Middle		21.36	21.30	21.21
		High		21.30	21.26	21.30
	50%	Low	21.00	20.44	20.37	20.33
		Middle		20.41	20.50	20.41
		High		20.37	20.34	20.32
	100%	/	21.00	20.30	20.20	20.28

Table 13.1-6: The conducted power for LTE Band 13

LTE			LTE B13			
Modulation	RB	RB Offset	Tune up	5MHz		
				23205	23230	23255
QPSK	1	Low	23.50	22.83	22.90	22.82
		Middle		22.82	22.92	22.77
		High		22.77	22.83	22.73
	50%	Low	22.50	21.88	21.95	21.83
		Middle		21.68	21.74	21.63
		High		21.74	21.82	21.70
	100%	/	22.50	21.64	21.71	21.62
16QAM	1	Low	22.50	21.81	21.90	21.78

		Middle		21.83	21.91	21.79
		High		21.92	21.99	21.90
	50%	Low	21.50	20.92	20.90	20.87
		Middle		20.87	20.93	20.83
		High		20.97	21.04	20.92
	100%	/	21.50	20.82	20.88	20.77
Modulation	RB	RB Offset	Tune up	10MHz		
				/	23230	/
QPSK	1	Low	23.50	/	22.86	/
		Middle		/	22.88	/
		High		/	22.82	/
	50%	Low	22.50	/	21.90	/
		Middle		/	21.70	/
		High		/	21.77	/
	100%	/	22.50	/	21.66	/
	1	Low	22.50	/	21.86	/
		Middle		/	21.89	/
		High		/	21.96	/
16QAM	50%	Low	21.50	/	20.97	/
		Middle		/	20.91	/
		High		/	20.99	/
	100%	/	21.50	/	20.84	/

Table 13.1-7: The conducted power for LTE Band 17

LTE			LTE B17			
Modulation	RB	RB Offset	Tune up	5MHz		
				23755	23790	23825
QPSK	1	Low	23.00	22.57	22.47	22.48
		Middle		22.56	22.59	22.44
		High		22.33	22.17	22.50
	50%	Low	22.00	21.35	21.38	21.16
		Middle		21.18	21.07	21.06
		High		21.20	21.02	21.00
16QAM	100%	/	22.00	21.24	21.18	21.18
	1	Low	22.00	21.22	21.23	21.16
		Middle		21.24	21.15	21.24
		High		21.01	21.03	21.11
	50%	Low	21.00	20.24	20.19	20.24
		Middle		20.32	20.34	20.27
		High		20.34	20.43	20.35
	100%	/	21.00	20.27	20.23	20.25

Modulation	RB	RB Offset	Tune up	10MHz		
				23780	23790	23800
QPSK	1	Low	23.00	22.54	22.43	22.45
		Middle		22.51	22.55	22.42
		High		22.31	22.16	22.47
	50%	Low	22.00	21.34	21.33	21.12
		Middle		21.16	21.03	21.03
		High		21.17	20.97	20.94
	100%	/	22.00	21.21	21.13	21.14
	1	Low	22.00	21.17	21.19	21.11
		Middle		21.20	21.13	21.20
		High		20.99	21.00	21.09
16QAM	50%	Low	21.00	20.21	20.15	20.21
		Middle		20.29	20.32	20.24
		High		20.31	20.38	20.31
	100%	/	21.00	20.25	20.19	20.22

Table 13.1-8: The conducted power for LTE Band 25

LTE			LTE B25			
Modulation	RB	RB Offset	Tune up	1.4MHz		
				26047	26365	26683
QPSK	1	Low	23.00	22.24	22.21	22.19
		Middle		22.58	22.56	22.18
		High		22.03	22.25	22.04
	50%	Low	23.00	22.12	22.16	21.97
		Middle		22.10	22.12	22.02
		High		21.89	22.13	21.93
	100%	/	22.00	21.09	21.13	20.85
16QAM	1	Low	22.00	21.27	21.35	21.33
		Middle		21.25	21.37	21.32
		High		21.19	21.15	21.24
	50%	Low	22.00	21.01	20.93	21.02
		Middle		21.15	21.16	21.07
		High		21.04	21.15	21.14
	100%	/	21.00	20.12	20.26	20.18
Modulation	RB	RB Offset	Tune up	3MHz		
				26055	26365	26675
QPSK	1	Low	23.00	22.26	22.25	22.22
		Middle		22.56	22.59	22.22
		High		22.06	22.30	22.08
	50%	Low	22.00	21.22	21.28	21.10

		Middle		21.22	21.22	21.14
		High		20.99	21.24	21.03
		100%	/	22.00	21.09	21.17
16QAM	1	Low	22.00	21.30	21.37	21.36
		Middle		21.28	21.37	21.36
		High		21.21	21.19	21.27
	50%	Low	21.00	20.12	20.06	20.14
		Middle		20.26	20.29	20.19
		High		20.14	20.27	20.27
	100%	/	21.00	20.15	20.30	20.21
Modulation	RB	RB Offset	Tune up	5MHz		
				26065	26365	26665
QPSK	1	Low	23.00	22.23	22.23	22.18
		Middle		22.54	22.55	22.19
		High		22.03	22.25	22.04
	50%	Low	22.00	21.19	21.23	21.06
		Middle		21.20	21.18	21.09
		High		20.97	21.22	20.99
	100%	/	22.00	21.09	21.16	20.86
16QAM	1	Low	22.00	21.27	21.33	21.33
		Middle		21.25	21.35	21.33
		High		21.18	21.17	21.23
	50%	Low	21.00	20.10	20.02	20.11
		Middle		20.23	20.24	20.15
		High		20.11	20.22	20.23
	100%	/	21.00	20.13	20.26	20.16
Modulation	RB	RB Offset	Tune up	10MHz		
				26090	26365	26640
QPSK	1	Low	23.00	22.25	22.24	22.21
		Middle		22.57	22.60	22.23
		High		22.05	22.29	22.07
	50%	Low	22.00	21.22	21.28	21.10
		Middle		21.23	21.23	21.13
		High		20.99	21.26	21.04
	100%	/	22.00	21.13	21.18	20.90
16QAM	1	Low	22.00	21.29	21.36	21.35
		Middle		21.28	21.39	21.36
		High		21.21	21.19	21.26
	50%	Low	21.00	20.13	20.07	20.15
		Middle		20.25	20.28	20.18
		High		20.14	20.27	20.27
	100%	/	21.00	20.16	20.31	20.20

Modulation	RB	RB Offset	Tune up	15MHz		
				26115	26365	26615
QPSK	1	Low	23.00	22.24	22.20	22.19
		Middle		22.55	22.59	22.20
		High		22.02	22.24	22.03
	50%	Low	22.00	21.20	21.24	21.07
		Middle		21.20	21.18	21.09
		High		20.96	21.23	21.00
	100%	/	22.00	21.11	21.14	20.85
16QAM	1	Low	22.00	21.24	21.34	21.33
		Middle		21.26	21.36	21.34
		High		21.18	21.15	21.23
	50%	Low	21.00	20.10	20.05	20.12
		Middle		20.22	20.23	20.14
		High		20.12	20.23	20.24
	100%	/	21.00	20.13	20.26	20.16
Modulation	RB	RB Offset	Tune up	20MHz		
				26140	26365	26590
QPSK	1	Low	23.00	22.21	22.16	22.16
		Middle		22.54	22.55	22.18
		High		22.00	22.23	22.00
	50%	Low	22.00	21.17	21.19	21.03
		Middle		21.18	21.14	21.06
		High		20.93	21.18	20.96
	100%	/	22.00	21.08	21.09	20.81
16QAM	1	Low	22.00	21.28	21.30	21.28
		Middle		21.22	21.34	21.30
		High		21.16	21.12	21.21
	50%	Low	21.00	20.07	20.01	20.09
		Middle		20.19	20.21	20.11
		High		20.09	20.18	20.20
	100%	/	21.00	20.11	20.22	20.13

Table 13.1-9: The conducted power for LTE Band 26

LTE			LTE B26		
Modulation	RB	RB Offset	Tune up	1.4MHz	
				26697	26865
QPSK	1	Low	23.50	22.98	23.08
		Middle		23.01	23.12
		High		22.96	22.87
	50%	Low	23.50	22.71	22.75

		Middle		22.62	22.70	22.57
		High		22.68	22.58	22.61
		100%	/	22.50	21.78	21.70
16QAM	1	Low	22.50	21.83	22.05	21.95
		Middle		21.81	21.84	21.80
		High		21.63	21.61	21.71
	50%	Low	22.50	21.69	21.71	21.73
		Middle		21.77	21.69	21.73
		High		21.55	21.49	21.59
	100%	/	21.50	20.68	20.67	20.75
Modulation	RB	RB Offset	Tune up	3MHz		
				26705	26865	27025
QPSK	1	Low	23.50	22.97	23.10	22.83
		Middle		22.97	23.11	22.89
		High		22.96	22.87	22.65
	50%	Low	22.50	21.78	21.82	21.73
		Middle		21.72	21.76	21.64
		High		21.76	21.67	21.67
	100%	/	22.50	21.78	21.73	21.68
16QAM	1	Low	22.50	21.83	22.03	21.95
		Middle		21.81	21.82	21.81
		High		21.62	21.63	21.70
	50%	Low	21.50	20.78	20.80	20.82
		Middle		20.85	20.77	20.81
		High		20.62	20.56	20.68
	100%	/	21.50	20.69	20.67	20.73
Modulation	RB	RB Offset	Tune up	5MHz		
				26715	26865	27015
QPSK	1	Low	23.50	22.99	23.11	22.86
		Middle		23.00	23.08	22.93
		High		22.98	22.91	22.68
	50%	Low	22.50	21.81	21.87	21.77
		Middle		21.75	21.81	21.68
		High		21.78	21.71	21.72
	100%	/	22.50	21.82	21.75	21.72
16QAM	1	Low	22.50	21.85	22.06	21.97
		Middle		21.84	21.86	21.84
		High		21.65	21.65	21.73
	50%	Low	21.50	20.81	20.85	20.86
		Middle		20.87	20.81	20.84
		High		20.65	20.61	20.72
	100%	/	21.50	20.72	20.72	20.77

Modulation	RB	RB Offset	Tune up	10MHz		
				26740	26865	26990
QPSK	1	Low	23.50	22.98	23.07	22.84
		Middle		22.98	23.18	22.90
		High		22.95	22.86	22.64
	50%	Low	22.50	21.79	21.83	21.74
		Middle		21.72	21.76	21.64
		High		21.75	21.68	21.68
	100%	/	22.50	21.80	21.71	21.67
16QAM	1	Low	22.50	21.80	22.04	21.95
		Middle		21.82	21.83	21.82
		High		21.62	21.61	21.70
	50%	Low	21.50	20.78	20.83	20.83
		Middle		20.84	20.76	20.80
		High		20.63	20.57	20.69
	100%	/	21.50	20.69	20.67	20.73
Modulation	RB	RB Offset	Tune up	15MHz		
				26765	26865	26965
QPSK	1	Low	23.50	22.95	23.03	22.81
		Middle		22.97	23.14	22.88
		High		22.93	22.85	22.61
	50%	Low	22.50	21.76	21.78	21.70
		Middle		21.70	21.72	21.61
		High		21.72	21.63	21.64
	100%	/	22.50	21.77	21.66	21.63
16QAM	1	Low	22.50	21.71	22.00	21.90
		Middle		21.78	21.81	21.78
		High		21.60	21.58	21.68
	50%	Low	21.50	20.75	20.79	20.80
		Middle		20.81	20.74	20.77
		High		20.60	20.52	20.65
	100%	/	21.50	20.67	20.63	20.70

Table 13.1-10: The conducted power for LTE Band 41

LTE			LTE B41		
Modulation	RB	RB Offset	Tune up	5MHz	
				40265	40740
QPSK	1	Low	22.00	21.38	21.47
		Middle		21.53	21.62
		High		21.54	21.37
	50%	Low	21.00	19.83	20.20

		Middle		20.04	20.25	19.68
		High		20.02	19.91	19.63
		100%	/	21.00	20.05	19.90
16QAM	1	Low	21.00	20.02	19.93	19.49
		Middle		20.00	20.09	19.48
		High		19.90	19.83	19.51
	50%	Low	20.00	18.85	18.89	18.62
		Middle		18.83	18.84	18.52
		High		18.98	18.98	18.73
	100%	/	20.00	19.00	18.99	18.92
Modulation	RB	RB Offset	Tune up	10MHz		
				40290	40740	41190
QPSK	1	Low	22.00	21.40	21.48	20.85
		Middle		21.56	21.67	20.94
		High		21.56	21.41	20.90
	50%	Low	21.00	19.86	20.25	19.58
		Middle		20.07	20.30	19.72
		High		20.04	19.95	19.68
	100%	/	21.00	20.09	19.92	19.92
16QAM	1	Low	21.00	20.04	19.96	19.51
		Middle		20.03	20.13	19.51
		High		19.93	19.85	19.54
	50%	Low	20.00	18.88	18.94	18.66
		Middle		18.85	18.88	18.55
		High		19.01	19.03	18.77
	100%	/	20.00	19.03	19.04	18.96
Modulation	RB	RB Offset	Tune up	15MHz		
				40315	40740	41165
QPSK	1	Low	22.00	21.39	21.44	20.83
		Middle		21.54	21.66	20.91
		High		21.53	21.36	20.86
	50%	Low	21.00	19.84	20.21	19.55
		Middle		20.04	20.25	19.68
		High		20.01	19.92	19.64
	100%	/	21.00	20.07	19.88	19.87
16QAM	1	Low	21.00	19.99	19.94	19.49
		Middle		20.01	20.07	19.56
		High		19.90	19.81	19.51
	50%	Low	20.00	18.85	18.92	18.63
		Middle		18.82	18.83	18.51
		High		18.99	18.99	18.74
	100%	/	20.00	19.00	18.99	18.92

Modulation	RB	RB Offset	Tune up	20MHz		
				40340	40740	41140
QPSK	1	Low	22.00	21.36	21.40	20.80
		Middle		21.53	21.62	20.89
		High		21.51	21.35	20.83
	50%	Low	21.00	19.81	20.16	19.51
		Middle		20.02	20.21	19.65
		High		19.98	19.87	19.60
	100%	/	21.00	20.04	19.83	19.83
16QAM	1	Low	21.00	19.78	19.90	19.44
		Middle		19.97	20.08	19.45
		High		19.88	19.78	19.49
	50%	Low	20.00	18.82	18.88	18.60
		Middle		18.79	18.81	18.48
		High		18.96	18.94	18.70
	100%	/	20.00	18.98	18.95	18.89

13.2 BT Measurement result

Table 13.2-1: The conducted power for Bluetooth

BlueTooth	Maximum Output Power (dBm)					
Channel	0		39		78	
Mode	Tune up	Output Power	Tune up	Output Power	Tune up	Output Power
GFSK	10.50	10.07	10.50	10.28	9.00	8.44
DQPSK	10.00	9.44	10.00	9.67	9.00	7.67
8DPSK	10.50	9.80	10.50	9.99	9.00	8.01
BlueTooth	Maximum Output Power (dBm)					
Mode	Tune up		Channel		Output Power	
BLE	1.00		0		0.46	
	1.00		19		0.81	
	1.00		39		-0.51	

13.3 Wi-Fi Measurement result

Table 13.3-1: The average conducted power for Wi-Fi 2.4G

Wi-Fi			Wi-Fi 2.4G	
Mode	BW	Channel	Tune up(dBm)	Output Power(dBm)
802.11b	20M	1	18.00	17.13
		6	16.00	14.97
		11	16.50	15.78
802.11g	20M	1	11.00	10.15
		6	9.00	7.92
		11	10.00	9.33
802.11n	20M	1	11.00	10.25
		6	9.00	8.11
		11	11.00	9.63

14 Test Results

14.1 Standalone SAR Test Result

14.1.1 Limit/Criterion

At frequencies between 100 kHz and 6 GHz, the MPE (Maximum Permissible Exposure) in population/uncontrolled environments for electromagnetic field strengths may be exceeded if

- (a) The exposure conditions can be shown by appropriate techniques to produce SARs below 0.08W/kg, as averaged over the whole body, and spatial peak SAR values not exceeding 1.6 W/kg, as averaged over any 1g of tissue (defined as a tissue volume in the shape of a cube), except for the hands, wrists, feet, and ankles where the spatial peak SAR shall not exceed 4 W/kg, as averaged over any 10g of tissue (defined as a tissue volume in the shape of a cube); and
- (b) The induced currents in the body confirm with the MPE in table 2, Part B in ANSI/IEEE C95.1-1992.

14.1.2 Test Results

Table 14.1.2-1: SAR Values for LTE Band4

Test Position	Cover Type	Mode				Channel	Frequency (MHz)	Measured power (dBm)	Tune-up (dBm)	Power Drift (dB)	Limit of 1gSAR 1.6 W/kg (mW/g)			Figure No.
		Modulation	BW(MHz)	RB Allocation	RB Offset						Measured SAR1g	Scaling Factor	Report SAR1g	
Body(5mm)														
Front Side	Standard	QPSK	20	1	mid	20175	1732.5	22.60	23.00	-0.03	0.418	1.10	0.458	/
Back Side	Standard	QPSK	20	1	mid	20175	1732.5	22.60	23.00	-0.07	0.782	1.10	0.857	/
Left Side	Standard	QPSK	20	1	mid	20175	1732.5	22.60	23.00	0.09	0.058	1.10	0.063	/
Right Side	Standard	QPSK	20	1	mid	20175	1732.5	22.60	23.00	-0.03	0.245	1.10	0.269	/
Top Side	Standard	QPSK	20	1	mid	20175	1732.5	22.60	23.00	-0.07	0.045	1.10	0.049	/
Bottom Side	Standard	QPSK	20	1	mid	20175	1732.5	22.60	23.00	0.03	0.677	1.10	0.742	/
Front Side	Standard	QPSK	20	50%	low	20175	1732.5	21.35	22.00	0.03	0.331	1.16	0.384	/
Back Side	Standard	QPSK	20	50%	low	20175	1732.5	21.35	22.00	0.03	0.613	1.16	0.712	/
Left Side	Standard	QPSK	20	50%	low	20175	1732.5	21.35	22.00	-0.10	0.047	1.16	0.054	/
Right Side	Standard	QPSK	20	50%	low	20175	1732.5	21.35	22.00	-0.02	0.199	1.16	0.231	/
Top Side	Standard	QPSK	20	50%	low	20175	1732.5	21.35	22.00	-0.10	0.035	1.16	0.041	/
Bottom Side	Standard	QPSK	20	50%	low	20175	1732.5	21.35	22.00	0.02	0.560	1.16	0.650	/
Back Side	Standard	QPSK	20	1	mid	20050	1720	22.52	23.00	-0.04	0.780	1.12	0.871	/
Back Side	Standard	QPSK	20	1	mid	20300	1745	22.51	23.00	-0.02	0.869	1.12	0.973	A.1-1
Repeat														
Back Side	Standard	QPSK	20	1	mid	20300	1745	22.51	23.00	-0.04	0.799	1.12	0.894	/
Test Position	Cover Type	Mode				Channel	Frequency (MHz)	Measured power (dBm)	Tune-up (dBm)	Power Drift (dB)	Limit of 10gSAR 4.0 W/kg (mW/g)			Figure No.
		Modulation	BW(MHz)	RB Allocation	RB Offset						Measured SAR10g	Scaling Factor	Report SAR10g	
Limb SAR(0mm)														
Front Side	Standard	QPSK	20	1	mid	20175	1732.5	22.60	23.00	0.06	0.405	1.10	0.444	/
Back Side	Standard	QPSK	20	1	mid	20175	1732.5	22.60	23.00	-0.05	1.090	1.10	1.195	/
Left Side	Standard	QPSK	20	1	mid	20175	1732.5	22.60	23.00	0.06	0.054	1.10	0.059	/
Right Side	Standard	QPSK	20	1	mid	20175	1732.5	22.60	23.00	-0.02	0.299	1.10	0.328	/
Top Side	Standard	QPSK	20	1	mid	20175	1732.5	22.60	23.00	-0.08	0.048	1.10	0.053	/
Bottom Side	Standard	QPSK	20	1	mid	20175	1732.5	22.60	23.00	0.11	0.791	1.10	0.867	/
Front Side	Standard	QPSK	20	50%	low	20175	1732.5	21.35	22.00	0.02	0.315	1.16	0.366	/
Back Side	Standard	QPSK	20	50%	low	20175	1732.5	21.35	22.00	-0.02	0.832	1.16	0.966	/
Left Side	Standard	QPSK	20	50%	low	20175	1732.5	21.35	22.00	0.10	0.034	1.16	0.039	/
Right Side	Standard	QPSK	20	50%	low	20175	1732.5	21.35	22.00	0.02	0.277	1.16	0.322	/
Top Side	Standard	QPSK	20	50%	low	20175	1732.5	21.35	22.00	-0.04	0.035	1.16	0.040	/
Bottom Side	Standard	QPSK	20	50%	low	20175	1732.5	21.35	22.00	0.09	0.563	1.16	0.654	/
Back Side	Standard	QPSK	20	1	mid	20050	1720	22.52	23.00	-0.18	0.979	1.12	1.093	/
Back Side	Standard	QPSK	20	1	mid	20300	1745	22.51	23.00	-0.05	1.160	1.12	1.299	A.1-2

Table 14.1.2-2: SAR Values for LTE Band7

Test Position	Cover Type	Mode				Channel	Frequency (MHz)	Measured power (dBm)	Tune-up (dBm)	Power Drift (dB)	Limit of 1gSAR 1.6 W/kg (mW/g)			Figure No.
		Modulation	BW(MHz)	RB Allocation	RB Offset						Measured SAR1g	Scaling Factor	Report SAR1g	
Body(5mm)														
Front Side	Standard	QPSK	20	1	mid	21100	2535	21.37	22.00	0.04	0.348	1.16	0.402	/
Back Side	Standard	QPSK	20	1	mid	21100	2535	21.37	22.00	-0.08	1.110	1.16	1.283	/
Left Side	Standard	QPSK	20	1	mid	21100	2535	21.37	22.00	0.04	0.075	1.16	0.086	/
Right Side	Standard	QPSK	20	1	mid	21100	2535	21.37	22.00	-0.03	0.303	1.16	0.350	/
Top Side	Standard	QPSK	20	1	mid	21100	2535	21.37	22.00	-0.19	0.045	1.16	0.052	/
Bottom Side	Standard	QPSK	20	1	mid	21100	2535	21.37	22.00	-0.03	0.428	1.16	0.495	/
Front Side	Standard	QPSK	20	50%	mid	21100	2535	20.06	21.00	-0.04	0.292	1.24	0.363	/
Back Side	Standard	QPSK	20	50%	mid	21100	2535	20.06	21.00	-0.02	0.866	1.24	1.075	/
Left Side	Standard	QPSK	20	50%	mid	21100	2535	20.06	21.00	0.06	0.055	1.24	0.068	/
Right Side	Standard	QPSK	20	50%	mid	21100	2535	20.06	21.00	-0.09	0.216	1.24	0.268	/
Top Side	Standard	QPSK	20	50%	mid	21100	2535	20.06	21.00	-0.09	0.042	1.24	0.052	/
Bottom Side	Standard	QPSK	20	50%	mid	21100	2535	20.06	21.00	-0.01	0.288	1.24	0.358	/
Back Side	Standard	QPSK	20	1	mid	20850	2510	21.19	22.00	-0.05	1.050	1.21	1.265	/
Back Side	Standard	QPSK	20	1	mid	21350	2560	21.33	22.00	-0.10	1.160	1.17	1.353	/
Repeat														
Back Side	Standard	QPSK	20	1	mid	21350	2560	21.33	22.00	-0.06	1.230	1.17	1.435	A.1-3
Body(5mm)-Accessories (holster)														
Back Side	Standard	QPSK	20	1	mid	21350	2560	21.33	22.00	-0.08	1.190	1.17	1.389	/
Test Position	Cover Type	Mode				Channel	Frequency (MHz)	Measured power (dBm)	Tune-up (dBm)	Power Drift (dB)	Limit of 10gSAR 4.0 W/kg (mW/g)			Figure No.
		Modulation	BW(MHz)	RB Allocation	RB Offset						Measured SAR10g	Scaling Factor	Report SAR10g	
Limb SAR(0mm)														
Front Side	Standard	QPSK	20	1	mid	21100	2535	21.37	22.00	-0.05	0.442	1.16	0.511	/
Back Side	Standard	QPSK	20	1	mid	21100	2535	21.37	22.00	-0.02	1.760	1.16	2.035	/
Left Side	Standard	QPSK	20	1	mid	21100	2535	21.37	22.00	-0.03	0.121	1.16	0.140	/
Right Side	Standard	QPSK	20	1	mid	21100	2535	21.37	22.00	0.06	0.321	1.16	0.371	/
Top Side	Standard	QPSK	20	1	mid	20850	2510	21.37	22.00	-0.08	0.038	1.16	0.044	/
Bottom Side	Standard	QPSK	20	1	mid	21350	2560	21.37	22.00	-0.14	0.396	1.16	0.458	/
Front Side	Standard	QPSK	20	50%	mid	21100	2535	20.06	21.00	0.10	0.323	1.24	0.401	/
Back Side	Standard	QPSK	20	50%	mid	21100	2535	20.06	21.00	-0.10	1.210	1.24	1.502	/
Left Side	Standard	QPSK	20	50%	mid	21100	2535	20.06	21.00	0.11	0.091	1.24	0.113	/
Right Side	Standard	QPSK	20	50%	mid	21100	2535	20.06	21.00	0.16	0.245	1.24	0.304	/
Top Side	Standard	QPSK	20	50%	mid	21100	2535	20.06	21.00	0.05	0.024	1.24	0.030	/
Bottom Side	Standard	QPSK	20	50%	mid	21100	2535	20.06	21.00	0.12	0.327	1.24	0.406	/
Back Side	Standard	QPSK	20	1	mid	20850	2510	21.19	22.00	0.13	1.520	1.21	1.832	/
Back Side	Standard	QPSK	20	1	mid	21350	2560	21.33	22.00	-0.17	1.770	1.17	2.065	A.1-4
Limb SAR(0mm)-Accessories (holster)														
Back Side	Standard	QPSK	20	1	mid	21350	2560	21.33	22.00	-0.04	1.660	1.17	1.937	/

Table 14.1.2-3: SAR Values for LTE Band12

Test Position	Cover Type	Mode				Channel	Frequency (MHz)	Measured power (dBm)	Tune-up (dBm)	Power Drift (dB)	Limit of 1gSAR 1.6 W/kg (mW/g)			Figure No.
		Modulation	BW(MHz)	RB Allocation	RB Offset						Measured SAR1g	Scaling Factor	Report SAR1g	
Body(5mm)														
Front Side	Standard	QPSK	10	1	low	23095	707.5	22.60	23.00	0.19	0.272	1.10	0.298	/
Back Side	Standard	QPSK	10	1	low	23095	707.5	22.60	23.00	-0.03	0.304	1.10	0.333	/
Left Side	Standard	QPSK	10	1	low	23095	707.5	22.60	23.00	-0.04	0.186	1.10	0.204	/
Right Side	Standard	QPSK	10	1	low	23095	707.5	22.60	23.00	0.09	0.081	1.10	0.089	/
Top Side	Standard	QPSK	10	1	low	23095	707.5	22.60	23.00	-0.04	0.018	1.10	0.020	/
Bottom Side	Standard	QPSK	10	1	low	23095	707.5	22.60	23.00	0.04	0.216	1.10	0.237	/
Front Side	Standard	QPSK	10	50%	low	23095	707.5	21.30	22.00	-0.01	0.225	1.17	0.264	/
Back Side	Standard	QPSK	10	50%	low	23095	707.5	21.30	22.00	-0.09	0.249	1.17	0.293	/
Left Side	Standard	QPSK	10	50%	low	23095	707.5	21.30	22.00	0.01	0.143	1.17	0.168	/
Right Side	Standard	QPSK	10	50%	low	23095	707.5	21.30	22.00	-0.08	0.061	1.17	0.072	/
Top Side	Standard	QPSK	10	50%	low	23095	707.5	21.30	22.00	-0.03	0.020	1.17	0.023	/
Bottom Side	Standard	QPSK	10	50%	low	23095	707.5	21.30	22.00	0.02	0.182	1.17	0.214	/
Back Side	Standard	QPSK	10	1	low	23060	704	22.41	23.00	-0.03	0.295	1.15	0.338	/
Back Side	Standard	QPSK	10	1	low	23130	711	22.58	23.00	-0.02	0.367	1.10	0.404	A.1-5
Test Position	Cover Type	Mode				Channel	Frequency (MHz)	Measured power (dBm)	Tune-up (dBm)	Power Drift (dB)	Limit of 10gSAR 4.0 W/kg (mW/g)			Figure No.
		Modulation	BW(MHz)	RB Allocation	RB Offset						Measured SAR10g	Scaling Factor	Report SAR10g	
Limb SAR(0mm)														
Front Side	Standard	QPSK	10	1	low	23095	707.5	22.60	23.00	-0.02	0.339	1.10	0.372	/
Back Side	Standard	QPSK	10	1	low	23095	707.5	22.60	23.00	0.00	0.431	1.10	0.473	/
Left Side	Standard	QPSK	10	1	low	23095	707.5	22.60	23.00	0.16	0.213	1.10	0.234	/
Right Side	Standard	QPSK	10	1	low	23095	707.5	22.60	23.00	0.02	0.098	1.10	0.108	/
Top Side	Standard	QPSK	10	1	low	23095	707.5	22.60	23.00	0.14	0.040	1.10	0.044	/
Bottom Side	Standard	QPSK	10	1	low	23095	707.5	22.60	23.00	0.07	0.251	1.10	0.275	/
Front Side	Standard	QPSK	10	50%	low	23095	707.5	21.30	22.00	-0.07	0.290	1.17	0.341	/
Back Side	Standard	QPSK	10	50%	low	23095	707.5	21.30	22.00	0.06	0.357	1.17	0.419	/
Left Side	Standard	QPSK	10	50%	low	23095	707.5	21.30	22.00	0.00	0.268	1.17	0.315	/
Right Side	Standard	QPSK	10	50%	low	23095	707.5	21.30	22.00	0.19	0.074	1.17	0.086	/
Top Side	Standard	QPSK	10	50%	low	23095	707.5	21.30	22.00	0.02	0.029	1.17	0.034	/
Bottom Side	Standard	QPSK	10	50%	low	23095	707.5	21.30	22.00	0.05	0.211	1.17	0.248	/
Back Side	Standard	QPSK	10	1	low	23060	704	22.41	23.00	-0.02	0.412	1.15	0.472	/
Back Side	Standard	QPSK	10	1	low	23130	711	22.58	23.00	0.05	0.447	1.10	0.492	A.1-6

Table 14.1.2-4: SAR Values for LTE Band13

Test Position	Cover Type	Mode				Channel	Frequency (MHz)	Measured power (dBm)	Tune-up (dBm)	Power Drift (dB)	Limit of 1gSAR 1.6 W/kg (mW/g)			Figure No.
		Modulation	BW(MHz)	RB Allocation	RB Offset						Measured SAR1g	Scaling Factor	Report SAR1g	
Body(5mm)														
Front Side	Standard	QPSK	10	1	mid	23230	782	22.88	23.50	-0.03	0.418	1.15	0.482	/
Back Side	Standard	QPSK	10	1	mid	23230	782	22.88	23.50	-0.08	0.581	1.15	0.670	A.1-7
Left Side	Standard	QPSK	10	1	mid	23230	782	22.88	23.50	-0.06	0.215	1.15	0.248	/
Right Side	Standard	QPSK	10	1	mid	23230	782	22.88	23.50	-0.03	0.216	1.15	0.249	/
Top Side	Standard	QPSK	10	1	mid	23230	782	22.88	23.50	-0.02	0.052	1.15	0.060	/
Bottom Side	Standard	QPSK	10	1	mid	23230	782	22.88	23.50	-0.10	0.380	1.15	0.438	/
Front Side	Standard	QPSK	10	50%	low	23230	782	21.90	22.50	-0.18	0.361	1.15	0.414	/
Back Side	Standard	QPSK	10	50%	low	23230	782	21.90	22.50	-0.07	0.483	1.15	0.555	/
Left Side	Standard	QPSK	10	50%	low	23230	782	21.90	22.50	-0.07	0.189	1.15	0.217	/
Right Side	Standard	QPSK	10	50%	low	23230	782	21.90	22.50	-0.03	0.182	1.15	0.209	/
Top Side	Standard	QPSK	10	50%	low	23230	782	21.90	22.50	-0.03	0.027	1.15	0.031	/
Bottom Side	Standard	QPSK	10	50%	low	23230	782	21.90	22.50	-0.01	0.385	1.15	0.442	/
Test Position	Cover Type	Mode				Channel	Frequency (MHz)	Measured power (dBm)	Tune-up (dBm)	Power Drift (dB)	Limit of 10gSAR 4.0 W/kg (mW/g)			Figure No.
		Modulation	BW(MHz)	RB Allocation	RB Offset						Measured SAR10g	Scaling Factor	Report SAR10g	
Limb SAR(0mm)														
Front Side	Standard	QPSK	10	1	mid	23230	782	22.88	23.50	-0.02	0.400	1.15	0.461	/
Back Side	Standard	QPSK	10	1	mid	23230	782	22.88	23.50	0.17	0.458	1.15	0.528	A.1-8
Left Side	Standard	QPSK	10	1	mid	23230	782	22.88	23.50	-0.07	0.296	1.15	0.341	/
Right Side	Standard	QPSK	10	1	mid	23230	782	22.88	23.50	-0.09	0.208	1.15	0.240	/
Top Side	Standard	QPSK	10	1	mid	23230	782	22.88	23.50	0.02	0.100	1.15	0.115	/
Bottom Side	Standard	QPSK	10	1	mid	23230	782	22.88	23.50	0.04	0.363	1.15	0.419	/
Front Side	Standard	QPSK	10	50%	low	23230	782	21.90	22.50	-0.08	0.344	1.15	0.395	/
Back Side	Standard	QPSK	10	50%	low	23230	782	21.90	22.50	-0.11	0.385	1.15	0.442	/
Left Side	Standard	QPSK	10	50%	low	23230	782	21.90	22.50	-0.16	0.223	1.15	0.256	/
Right Side	Standard	QPSK	10	50%	low	23230	782	21.90	22.50	-0.02	0.174	1.15	0.200	/
Top Side	Standard	QPSK	10	50%	low	23230	782	21.90	22.50	0.03	0.073	1.15	0.084	/
Bottom Side	Standard	QPSK	10	50%	low	23230	782	21.90	22.50	0.03	0.318	1.15	0.365	/

Table 14.1.2-5: SAR Values for LTE Band25

Test Position	Cover Type	Mode				Channel	Frequency (MHz)	Measured power (dBm)	Tune-up (dBm)	Power Drift (dB)	Limit of 1gSAR 1.6 W/kg (mW/g)			Figure No.
		Modulation	BW(MHz)	RB Allocation	RB Offset						Measured SAR1g	Scaling Factor	Report SAR1g	
Body(5mm)														
Front Side	Standard	QPSK	20	1	mid	26365	1882.5	22.55	23.00	-0.03	0.443	1.11	0.491	/
Back Side	Standard	QPSK	20	1	mid	26365	1882.5	22.55	23.00	-0.03	0.984	1.11	1.091	/
Left Side	Standard	QPSK	20	1	mid	26365	1882.5	22.55	23.00	-0.06	0.089	1.11	0.098	/
Right Side	Standard	QPSK	20	1	mid	26365	1882.5	22.55	23.00	-0.02	0.236	1.11	0.262	/
Top Side	Standard	QPSK	20	1	mid	26365	1882.5	22.55	23.00	0.07	0.145	1.11	0.161	/
Bottom Side	Standard	QPSK	20	1	mid	26365	1882.5	22.55	23.00	0.06	1.030	1.11	1.142	/
Front Side	Standard	QPSK	20	50%	low	26365	1882.5	21.19	22.00	-0.10	0.278	1.21	0.335	/
Back Side	Standard	QPSK	20	50%	low	26365	1882.5	21.19	22.00	-0.02	1.040	1.21	1.253	A.1-9
Left Side	Standard	QPSK	20	50%	low	26365	1882.5	21.19	22.00	0.02	0.080	1.21	0.096	/
Right Side	Standard	QPSK	20	50%	low	26365	1882.5	21.19	22.00	0.15	0.177	1.21	0.213	/
Top Side	Standard	QPSK	20	50%	low	26365	1882.5	21.19	22.00	-0.14	0.109	1.21	0.131	/
Bottom Side	Standard	QPSK	20	50%	low	26365	1882.5	21.19	22.00	0.06	0.912	1.21	1.099	/
Back Side	Standard	QPSK	20	50%	mid	26140	1860	21.18	22.00	-0.08	0.900	1.21	1.087	/
Back Side	Standard	QPSK	20	50%	mid	26590	1905	21.06	22.00	-0.03	0.965	1.24	1.198	/
Repeat														
Back Side	Standard	QPSK	20	50%	low	26365	1882.5	21.19	22.00	0.01	0.982	1.21	1.183	/
Test Position	Cover Type	Mode				Channel	Frequency (MHz)	Measured power (dBm)	Tune-up (dBm)	Power Drift (dB)	Limit of 10gSAR 4.0 W/kg (mW/g)			Figure No.
		Modulation	BW(MHz)	RB Allocation	RB Offset						Measured SAR10g	Scaling Factor	Report SAR10g	
Limb SAR(0mm)														
Front Side	Standard	QPSK	20	1	mid	26365	1882.5	22.55	23.00	0.02	0.334	1.11	0.370	/
Back Side	Standard	QPSK	20	1	mid	26365	1882.5	22.55	23.00	-0.04	1.540	1.11	1.708	A.1-10
Left Side	Standard	QPSK	20	1	mid	26365	1882.5	22.55	23.00	0.02	0.131	1.11	0.145	/
Right Side	Standard	QPSK	20	1	mid	26365	1882.5	22.55	23.00	-0.03	0.397	1.11	0.440	/
Top Side	Standard	QPSK	20	1	mid	26365	1882.5	22.55	23.00	0.12	0.122	1.11	0.135	/
Bottom Side	Standard	QPSK	20	1	mid	26365	1882.5	22.55	23.00	-0.10	0.704	1.11	0.781	/
Front Side	Standard	QPSK	20	50%	low	26365	1882.5	21.19	22.00	-0.04	0.272	1.21	0.328	/
Back Side	Standard	QPSK	20	50%	low	26365	1882.5	21.19	22.00	-0.10	1.160	1.21	1.398	/
Left Side	Standard	QPSK	20	50%	low	26365	1882.5	21.19	22.00	-0.12	0.098	1.21	0.118	/
Right Side	Standard	QPSK	20	50%	low	26365	1882.5	21.19	22.00	-0.06	0.326	1.21	0.393	/
Top Side	Standard	QPSK	20	50%	low	26365	1882.5	21.19	22.00	-0.02	0.086	1.21	0.104	/
Bottom Side	Standard	QPSK	20	50%	low	26365	1882.5	21.19	22.00	0.00	0.646	1.21	0.778	/
Back Side	Standard	QPSK	20	1	mid	26140	1860	22.54	23.00	-0.08	1.400	1.11	1.556	/
Back Side	Standard	QPSK	20	1	mid	26590	1905	22.18	23.00	-0.10	1.460	1.21	1.763	/

Table 14.1.2-6: SAR Values for LTE Band26

Test Position	Cover Type	Mode				Channel	Frequency (MHz)	Measured power (dBm)	Tune-up (dBm)	Power Drift (dB)	Limit of 1gSAR 1.6 W/kg (mW/g)			Figure No.
		Modulation	BW(MHz)	RB Allocation	RB Offset						Measured SAR1g	Scaling Factor	Report SAR1g	
Body(5mm)														
Front Side	Standard	QPSK	15	1	mid	26865	831.5	23.14	23.50	-0.06	0.771	1.09	0.838	/
Back Side	Standard	QPSK	15	1	mid	26865	831.5	23.14	23.50	-0.06	0.919	1.09	0.998	/
Left Side	Standard	QPSK	15	1	mid	26865	831.5	23.14	23.50	-0.03	0.373	1.09	0.405	/
Right Side	Standard	QPSK	15	1	mid	26865	831.5	23.14	23.50	0.02	0.223	1.09	0.242	/
Top Side	Standard	QPSK	15	1	mid	26865	831.5	23.14	23.50	0.06	0.037	1.09	0.040	/
Bottom Side	Standard	QPSK	15	1	mid	26865	831.5	23.14	23.50	-0.10	0.393	1.09	0.427	/
Front Side	Standard	QPSK	15	50%	low	26865	831.5	21.78	22.50	-0.08	0.520	1.18	0.614	/
Back Side	Standard	QPSK	15	50%	low	26865	831.5	21.78	22.50	-0.18	0.674	1.18	0.796	/
Left Side	Standard	QPSK	15	50%	low	26865	831.5	21.78	22.50	0.09	0.300	1.18	0.354	/
Right Side	Standard	QPSK	15	50%	low	26865	831.5	21.78	22.50	0.15	0.157	1.18	0.185	/
Top Side	Standard	QPSK	15	50%	low	26865	831.5	21.78	22.50	0.03	0.023	1.18	0.027	/
Bottom Side	Standard	QPSK	15	50%	low	26865	831.5	21.78	22.50	-0.15	0.392	1.18	0.463	/
Back Side	Standard	QPSK	15	1	mid	26765	821.5	22.97	23.50	-0.05	0.967	1.13	1.093	A.1-11
Back Side	Standard	QPSK	15	1	mid	26965	841.5	22.88	23.50	-0.10	0.841	1.15	0.970	/
Repeat														
Back Side	Standard	QPSK	15	1	mid	26765	821.5	22.97	23.50	0.09	0.914	1.13	1.033	/
Next to the mouth(10mm)														
Front Side	Standard	QPSK	15	1	mid	26865	831.5	23.14	23.50	-0.07	0.488	1.09	0.530	/
Test Position	Cover Type	Mode				Channel	Frequency (MHz)	Measured power (dBm)	Tune-up (dBm)	Power Drift (dB)	Limit of 10gSAR 4.0 W/kg (mW/g)			Figure No.
		Modulation	BW(MHz)	RB Allocation	RB Offset						Measured SAR10g	Scaling Factor	Report SAR10g	
Limb SAR(0mm)														
Front Side	Standard	QPSK	15	1	mid	26865	831.5	23.14	23.50	-0.13	0.776	1.09	0.843	/
Back Side	Standard	QPSK	15	1	mid	26865	831.5	23.14	23.50	-0.10	0.593	1.09	0.644	/
Left Side	Standard	QPSK	15	1	mid	26865	831.5	23.14	23.50	-0.06	0.386	1.09	0.419	/
Right Side	Standard	QPSK	15	1	mid	26865	831.5	23.14	23.50	0.09	0.218	1.09	0.237	/
Top Side	Standard	QPSK	15	1	mid	26865	831.5	23.14	23.50	0.06	0.051	1.09	0.056	/
Bottom Side	Standard	QPSK	15	1	mid	26865	831.5	23.14	23.50	0.02	0.380	1.09	0.413	/
Front Side	Standard	QPSK	15	50%	low	26865	831.5	21.78	22.50	-0.02	0.565	1.18	0.667	/
Back Side	Standard	QPSK	15	50%	low	26865	831.5	21.78	22.50	-0.06	0.512	1.18	0.604	/
Left Side	Standard	QPSK	15	50%	low	26865	831.5	21.78	22.50	0.12	0.398	1.18	0.470	/
Right Side	Standard	QPSK	15	50%	low	26865	831.5	21.78	22.50	0.02	0.167	1.18	0.197	/
Top Side	Standard	QPSK	15	50%	low	26865	831.5	21.78	22.50	0.07	0.044	1.18	0.052	/
Bottom Side	Standard	QPSK	15	50%	low	26865	831.5	21.78	22.50	0.11	0.306	1.18	0.361	/
Front Side	Standard	QPSK	15	1	mid	26765	821.5	22.97	23.50	0.16	0.818	1.13	0.924	/
Front Side	Standard	QPSK	15	1	mid	26965	841.5	22.88	23.50	-0.09	0.862	1.15	0.994	A.1-12

Table 14.1.2-7: SAR Values for LTE Band41

Test Position	Cover Type	Mode				Channel	Frequency (MHz)	Measured power (dBm)	Tune-up (dBm)	Power Drift (dB)	Limit of 1gSAR 1.6 W/kg (mW/g)			Figure No.
		Modulation	BW(MHz)	RB Allocation	RB Offset						Measured SAR1g	Scaling Factor	Report SAR1g	
Body(5mm)														
Front Side	Standard	QPSK	20	1	mid	40740	2605	21.62	22.00	-0.03	0.268	1.09	0.293	/
Back Side	Standard	QPSK	20	1	mid	40740	2605	21.62	22.00	-0.02	0.808	1.09	0.882	/
Left Side	Standard	QPSK	20	1	mid	40740	2605	21.62	22.00	-0.12	0.074	1.09	0.081	/
Right Side	Standard	QPSK	20	1	mid	40740	2605	21.62	22.00	-0.05	0.346	1.09	0.378	/
Top Side	Standard	QPSK	20	1	mid	40740	2605	21.62	22.00	-0.02	0.053	1.09	0.058	/
Bottom Side	Standard	QPSK	20	1	mid	40740	2605	21.62	22.00	-0.14	0.390	1.09	0.426	/
Front Side	Standard	QPSK	20	50%	mid	40740	2605	20.21	21.00	0.03	0.198	1.20	0.238	/
Back Side	Standard	QPSK	20	50%	mid	40740	2605	20.21	21.00	-0.13	0.635	1.20	0.762	/
Left Side	Standard	QPSK	20	50%	mid	40740	2605	20.21	21.00	0.15	0.059	1.20	0.070	/
Right Side	Standard	QPSK	20	50%	mid	40740	2605	20.21	21.00	-0.10	0.214	1.20	0.257	/
Top Side	Standard	QPSK	20	50%	mid	40740	2605	20.21	21.00	-0.15	0.041	1.20	0.049	/
Bottom Side	Standard	QPSK	20	50%	mid	40740	2605	20.21	21.00	-0.02	0.235	1.20	0.282	/
Back Side	Standard	QPSK	20	1	mid	40340	2565	21.53	22.00	-0.09	0.636	1.11	0.709	/
Back Side	Standard	QPSK	20	1	mid	41140	2645	20.89	22.00	-0.05	0.871	1.29	1.125	A.1-13
Repeat														
Back Side	Standard	QPSK	20	1	mid	41140	2645	20.89	22.00	-0.02	0.860	1.29	1.110	/
Test Position	Cover Type	Mode				Channel	Frequency (MHz)	Measured power (dBm)	Tune-up (dBm)	Power Drift (dB)	Limit of 10gSAR 4.0 W/kg (mW/g)			Figure No.
		Modulation	BW(MHz)	RB Allocation	RB Offset						Measured SAR10g	Scaling Factor	Report SAR10g	
Limb SAR(0mm)														
Front Side	Standard	QPSK	20	1	mid	40740	2605	21.62	22.00	0.02	0.313	1.09	0.342	/
Back Side	Standard	QPSK	20	1	mid	40740	2605	21.62	22.00	-0.10	1.120	1.09	1.222	/
Left Side	Standard	QPSK	20	1	mid	40740	2605	21.62	22.00	0.07	0.105	1.09	0.115	/
Right Side	Standard	QPSK	20	1	mid	40740	2605	21.62	22.00	0.11	0.405	1.09	0.442	/
Top Side	Standard	QPSK	20	1	mid	40740	2605	21.62	22.00	-0.02	0.040	1.09	0.044	/
Bottom Side	Standard	QPSK	20	1	mid	40740	2605	21.62	22.00	0.09	0.277	1.09	0.302	/
Front Side	Standard	QPSK	20	50%	mid	40740	2605	20.21	21.00	0.02	0.229	1.20	0.275	/
Back Side	Standard	QPSK	20	50%	mid	40740	2605	20.21	21.00	-0.03	0.886	1.20	1.063	/
Left Side	Standard	QPSK	20	50%	mid	40740	2605	20.21	21.00	0.07	0.085	1.20	0.101	/
Right Side	Standard	QPSK	20	50%	mid	40740	2605	20.21	21.00	-0.16	0.275	1.20	0.330	/
Top Side	Standard	QPSK	20	50%	mid	40740	2605	20.21	21.00	-0.01	0.030	1.20	0.036	/
Bottom Side	Standard	QPSK	20	50%	mid	40740	2605	20.21	21.00	0.03	0.237	1.20	0.284	/
Back Side	Standard	QPSK	20	1	mid	40340	2565	21.53	22.00	-0.02	1.000	1.11	1.114	/
Back Side	Standard	QPSK	20	1	mid	41140	2645	20.89	22.00	0.07	1.220	1.29	1.575	A.1-14

Table 14.1.2-8: SAR Values for BT

Test Position	Cover Type	Mode	Duty Cycle	Channel	Frequency (MHz)	Measured power (dBm)	Tune-up (dBm)	Power Drift (dB)	Limit of 1gSAR 1.6 W/kg (mW/g)			Figure No.
									Measured SAR1g	Scaling Factor	Report SAR1g	
Body(5mm)												
Front Side	Standard	BT	1:1	39	2441	10.28	10.50	0.15	0.010	1.05	0.011	/
Back Side	Standard	BT	1:1	39	2441	10.28	10.50	0.02	0.013	1.05	0.013	/
Left Side	Standard	BT	1:1	39	2441	10.28	10.50	0.00	0.000	1.05	0.000	/
Right Side	Standard	BT	1:1	39	2441	10.28	10.50	0.06	0.016	1.05	0.017	A.1-15
Top Side	Standard	BT	1:1	39	2441	10.28	10.50	-0.03	0.005	1.05	0.005	/
Bottom Side	Standard	BT	1:1	39	2441	10.28	10.50	-0.02	0.007	1.05	0.007	/
Right Side	Standard	BT	1:1	0	2402	10.07	10.50	0.17	0.007	1.10	0.008	/
Right Side	Standard	BT	1:1	78	2480	8.44	9.00	0.05	0.012	1.14	0.014	/
Test Position	Cover Type	Mode	Duty Cycle	Channel	Frequency (MHz)	Measured power (dBm)	Tune-up (dBm)	Power Drift (dB)	Limit of 10gSAR 4.0 W/kg (mW/g)			Figure No.
									Measured SAR10g	Scaling Factor	Report SAR10g	
Limb SAR(0mm)												
Front Side	Standard	BT	1:1	39	2441	10.28	10.50	-0.01	0.010	1.05	0.011	/
Back Side	Standard	BT	1:1	39	2441	10.28	10.50	0.10	0.019	1.05	0.020	A.1-16
Left Side	Standard	BT	1:1	39	2441	10.28	10.50	0.00	0.000	1.05	0.000	/
Right Side	Standard	BT	1:1	39	2441	10.28	10.50	-0.02	0.018	1.05	0.019	/
Top Side	Standard	BT	1:1	39	2441	10.28	10.50	-0.03	0.007	1.05	0.007	/
Bottom Side	Standard	BT	1:1	39	2441	10.28	10.50	0.02	0.005	1.05	0.006	/
Back Side	Standard	BT	1:1	0	2402	10.07	10.50	-0.03	0.009	1.10	0.010	/
Back Side	Standard	BT	1:1	78	2480	8.44	9.00	-0.04	0.013	1.14	0.014	/

Table 14.1.2-9: SAR Values for Wi-Fi2.4G

Test Position	Cover Type	Mode	BW(MHz)	Duty Cycle	Channel	Frequency (MHz)	Measured power (dBm)	Tune-up (dBm)	Power Drift (dB)	Limit of 1gSAR 1.6 W/kg (mW/g)			Figure No.
										Measured SAR1g	Scaling Factor	Report SAR1g	
Body(5mm)													
Front Side	Standard	802.11b	20	1:1	1	2412	17.13	18.00	-0.02	0.313	1.22	0.382	/
Back Side	Standard	802.11b	20	1:1	1	2412	17.13	18.00	-0.05	0.388	1.22	0.474	A.1-17
Left Side	Standard	802.11b	20	1:1	1	2412	17.13	18.00	-0.02	0.101	1.22	0.123	/
Right Side	Standard	802.11b	20	1:1	1	2412	17.13	18.00	-0.03	0.363	1.22	0.444	/
Top Side	Standard	802.11b	20	1:1	1	2412	17.13	18.00	-0.02	0.163	1.22	0.199	/
Bottom Side	Standard	802.11b	20	1:1	1	2412	17.13	18.00	0.03	0.220	1.22	0.269	/
Back Side	Standard	802.11b	20	1:1	6	2437	14.97	16.00	-0.07	0.332	1.27	0.421	/
Back Side	Standard	802.11b	20	1:1	11	2462	15.78	16.50	-0.05	0.366	1.18	0.432	/
Test Position	Cover Type	Mode	BW(MHz)	Duty Cycle	Channel	Frequency (MHz)	Measured power (dBm)	Tune-up (dBm)	Power Drift (dB)	Limit of 10gSAR 4.0 W/kg (mW/g)			Figure No.
										Measured SAR10g	Scaling Factor	Report SAR10g	
Limb SAR(0mm)													
Front Side	Standard	802.11b	20	1:1	1	2412	17.13	18.00	0.10	0.327	1.22	0.400	/
Back Side	Standard	802.11b	20	1:1	1	2412	17.13	18.00	-0.12	0.559	1.22	0.683	A.1-18
Left Side	Standard	802.11b	20	1:1	1	2412	17.13	18.00	0.10	0.076	1.22	0.093	/
Right Side	Standard	802.11b	20	1:1	1	2412	17.13	18.00	-0.03	0.409	1.22	0.500	/
Top Side	Standard	802.11b	20	1:1	1	2412	17.13	18.00	-0.18	0.155	1.22	0.189	/
Bottom Side	Standard	802.11b	20	1:1	1	2412	17.13	18.00	0.07	0.164	1.22	0.200	/
Back Side	Standard	802.11b	20	1:1	6	2437	14.97	16.00	-0.18	0.439	1.27	0.556	/
Back Side	Standard	802.11b	20	1:1	11	2462	15.78	16.50	-0.17	0.494	1.18	0.583	/

14.2 Simultaneous SAR Evaluation

Table 14.2-1 Simultaneous transmission SAR

Simultaneous Transmission Table	Report SAR _{1g} (W/kg) Test Position	Cellular							Max.Report SAR _{1g} LTE	Non-Cellular Max.Report SAR _{1g} BT	LTE+BT	MAX.ΣSAR _{1g}	
		LTE B4	LTE B7	LTE B12	LTE B13	LTE B25	LTE B26	LTE B41					
Body SAR (5mm)	Front Side	0.458	0.402	0.298	0.482	0.491	0.838	0.293	0.838	0.011	0.848	0.848	
	Back Side	0.973	1.435	0.404	0.670	1.253	1.093	1.125	1.435	0.013	1.449	1.449	
	Left Side	0.063	0.086	0.204	0.248	0.098	0.405	0.081	0.405	0.000	0.405	0.405	
	Right Side	0.269	0.350	0.089	0.249	0.262	0.242	0.378	0.378	0.017	0.394	0.394	
	Top Side	0.049	0.052	0.023	0.060	0.161	0.040	0.058	0.161	0.005	0.166	0.166	
	Bottom Side	0.742	0.495	0.237	0.442	1.142	0.463	0.426	1.142	0.007	1.150	1.150	
Simultaneous Transmission Table	Report SAR _{10g} (W/kg) Test Position	Cellular							Max.Report SAR _{10g} LTE	Non-Cellular Max.Report SAR _{10g} BT	LTE+BT	MAX.ΣSAR _{10g}	
		LTE B4	LTE B7	LTE B12	LTE B13	LTE B25	LTE B26	LTE B41					
		Front Side	0.444	0.511	0.372	0.461	0.370	0.843	0.342	0.843	0.011	0.854	0.854
		Back Side	1.299	2.065	0.492	0.528	1.763	0.644	1.222	2.065	0.020	2.085	2.085
		Left Side	0.059	0.140	0.315	0.341	0.145	0.470	0.115	0.470	0.000	0.470	0.470
		Right Side	0.328	0.371	0.108	0.240	0.440	0.237	0.442	0.442	0.019	0.461	0.461
Limb SAR(0mm)	Report SAR _{10g} (W/kg) Test Position	Top Side	0.053	0.044	0.044	0.115	0.135	0.056	0.044	0.135	0.007	0.143	0.143
		Bottom Side	0.867	0.458	0.275	0.419	0.781	0.413	0.302	0.867	0.006	0.873	0.873

14.3 SAR Measurement Variability

SAR measurement variability must be assessed for each frequency band, which is determined by the SAR probe calibration point and tissue-equivalent medium used for the device measurements. When both head and body tissue-equivalent media are required for SAR measurements in a frequency band, the variability measurement procedures should be applied to the tissue medium with the highest measured SAR, using the highest measured SAR configuration for that tissue-equivalent medium.

The following procedures are applied to determine if repeated measurements are required.

- (a) Repeated measurement is not required when the original highest measured SAR is < 0.80 W/kg; steps(b) through (d) do not apply.
- (b) When the original highest measured SAR is ≥ 0.80 W/kg, repeat that measurement once.
- (c) Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is ≥ 1.45W/kg (~ 10% from the 1-g SAR limit).
- (d) Perform a third repeated measurement only if the original, first or second repeated measurement is ≥1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20.

Table 14.3-1: SAR Measurement Variability (1g)

Frequency		Configuration	Test Position	Original SAR (W/kg)	First Repeated SAR (W/kg)	The Ratio
Channel	Frequency (MHz)					
20300	1745	QPSK 20MHz 1RB 50offset	Back side 5mm	0.869	0.799	1.088
21350	2560	QPSK 20MHz 1RB 50offset	Back side 5mm	1.160	1.230	1.060
26365	1882.5	QPSK 20MHz 50RB 0offset	Back side 5mm	1.040	0.982	1.059
26765	821.5	QPSK 15MHz 1RB 38offset	Back side 5mm	0.967	0.914	1.058
41140	2645	QPSK 20MHz 1RB 50offset	Back side 5mm	0.871	0.860	1.013

Note: According to the KDB 865664 D01 repeated measurement is not required when the original highest measured SAR is < 0.8 W/kg.

Annex A: Measurement Data

A.1 SAR Graph Results

LTE B4 20MHz 1RB 50offset Back Mode High 5mm

Date/Time: 2022/12/20

Electronics: DAE4 Sn1244

Medium parameters used: $f = 1745$ MHz; $\sigma = 1.321$ S/m; $\epsilon_r = 38.528$; $\rho = 1000$ kg/m³

Ambient Temperature: 21.3°C Liquid Temperature: 20.0°C

Communication System: LTE Band 4 Professional 1900MHz; Duty Cycle: 1:1

Probe: EX3DV4 - SN7633ConvF(8.9, 8.9, 8.9) @ 1745 MHz

LTE B4 20MHz 1RB 50offset Back Mode High 5mm/Area Scan (7x9x1):

Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 1.32 W/kg

LTE B4 20MHz 1RB 50offset Back Mode High 5mm/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 23.36 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 1.65 W/kg

SAR(1 g) = 0.869 W/kg; SAR(10 g) = 0.441 W/kg

Maximum value of SAR (measured) = 1.24 W/kg

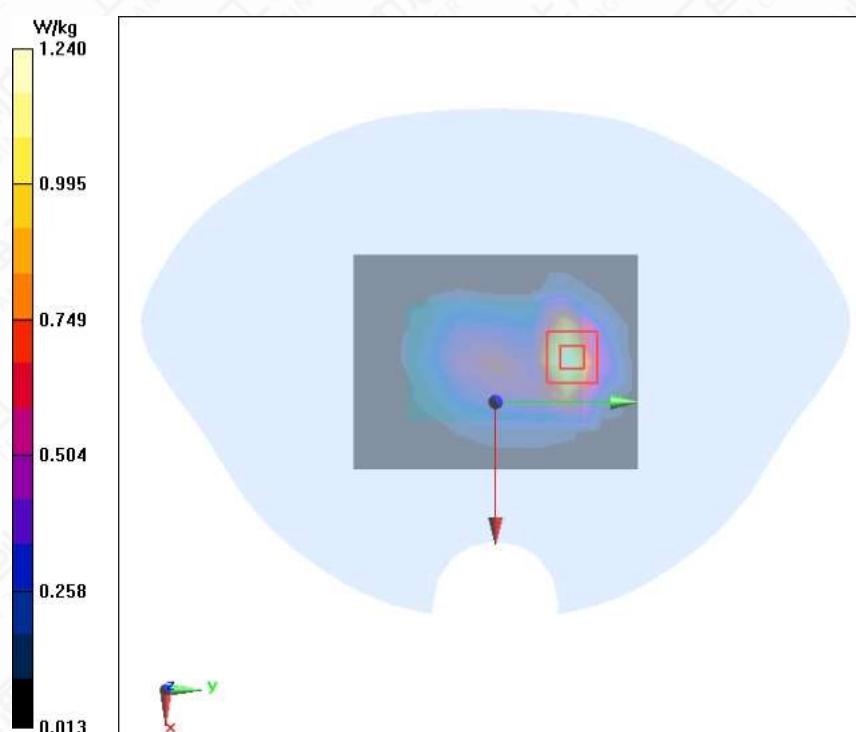


Figure A.1-1 LTE B4 20MHz 1RB 50offset Back Mode High 5mm

LTE B4 20MHz 1RB 50offset Back Mode High 0mm

Date/Time: 2022/12/20

Electronics: DAE4 Sn1244

Medium parameters used: $f = 1745 \text{ MHz}$; $\sigma = 1.321 \text{ S/m}$; $\epsilon_r = 38.528$; $\rho = 1000 \text{ kg/m}^3$ Ambient Temperature: 21.3°C Liquid Temperature: 20.0°C

Communication System: LTE Band 4 Professional 1900MHz; Duty Cycle: 1:1

Probe: EX3DV4 - SN7633ConvF(8.9, 8.9, 8.9) @ 1745 MHz

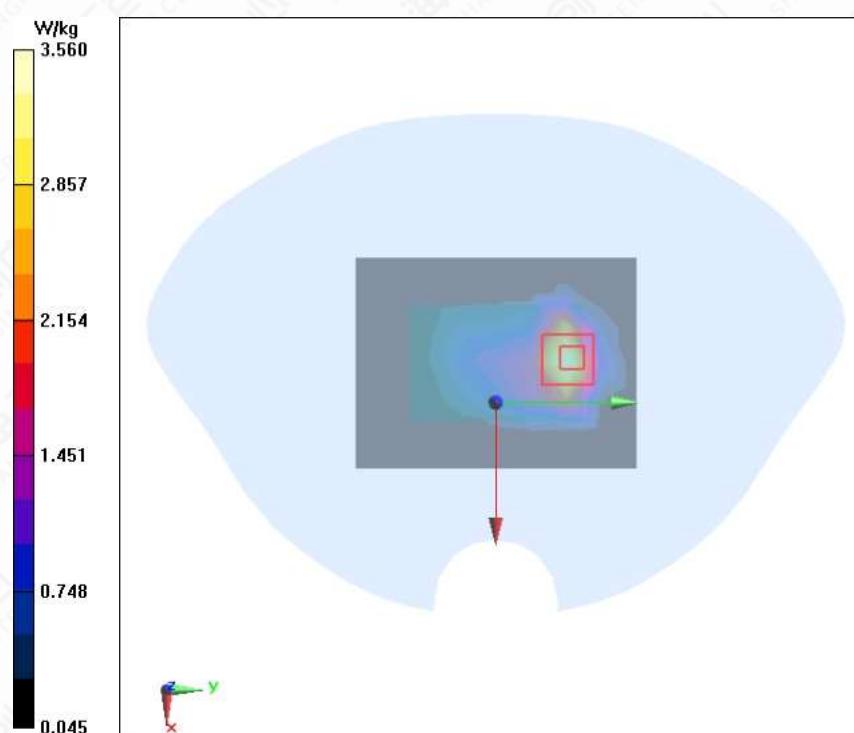
LTE B4 20MHz 1RB 50offset Back Mode High 0mm/Area Scan (7x9x1):Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$ Maximum value of SAR (measured) = 3.74 W/kg **LTE B4 20MHz 1RB 50offset Back Mode High 0mm/Zoom Scan (7x7x7)/Cube 0:**Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 31.40 V/m ; Power Drift = -0.05 dB Peak SAR (extrapolated) = 4.81 W/kg SAR(1 g) = 2.35 W/kg ; SAR(10 g) = 1.16 W/kg Maximum value of SAR (measured) = 3.56 W/kg 

Figure A.1-2 LTE B4 20MHz 1RB 50offset Back Mode High 0mm

LTE B7 20MHz 1RB 50offset Back Mode Middle 5mm

Date/Time: 2023/1/5

Electronics: DAE4 Sn1244

Medium parameters used: $f = 2560$ MHz; $\sigma = 1.956$ S/m; $\epsilon_r = 40.275$; $\rho = 1000$ kg/m³

Ambient Temperature: 21.4°C Liquid Temperature: 20.3°C

Communication System: LTE B7 2450MHz; Frequency: 2560 MHz; Duty Cycle: 1:1

Probe: EX3DV4 - SN7633ConvF(7.73, 7.73, 7.73) @ 2560 MHz

LTE B7 20MHz 1RB 50offset Back Mode Middle 5mm/Area Scan (9x11x1):

Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 1.82 W/kg

LTE B7 20MHz 1RB 50offset Back Mode Middle 5mm/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 27.10 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 2.29 W/kg

SAR(1 g) = 1.23 W/kg; SAR(10 g) = 0.658 W/kg

Maximum value of SAR (measured) = 1.87 W/kg

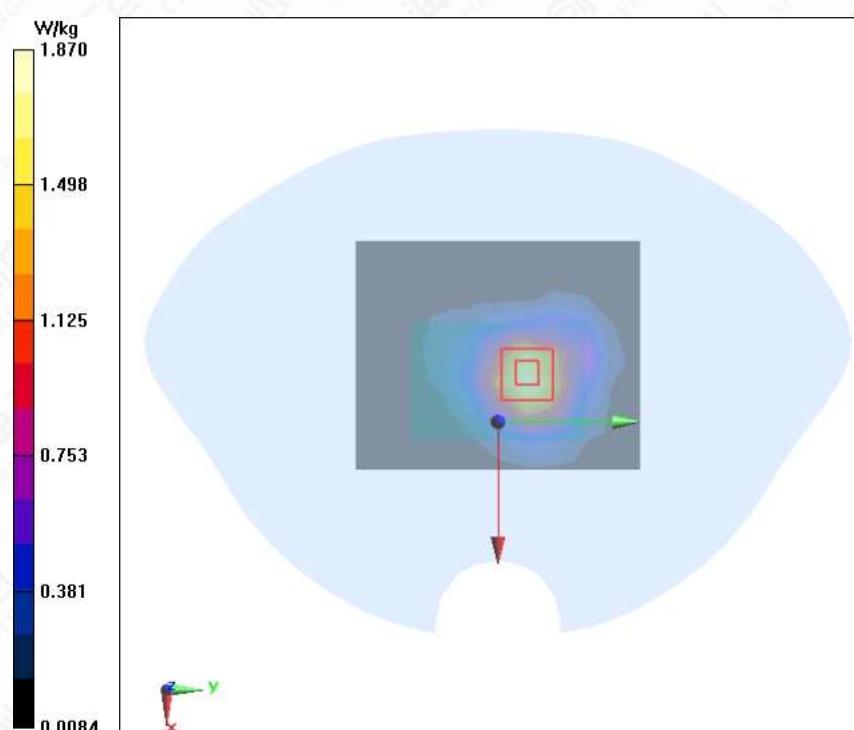


Figure A.1-3 LTE B7 20MHz 1RB 50offset Back Mode Middle 5mm

LTE B7 20MHz 1RB 50offset Back Mode High 0mm

Date/Time: 2023/1/5

Electronics: DAE4 Sn1244

Medium parameters used: $f = 2560$ MHz; $\sigma = 1.956$ S/m; $\epsilon_r = 40.275$; $\rho = 1000$ kg/m³

Ambient Temperature: 21.4°C Liquid Temperature: 20.3°C

Communication System: LTE B7 2450MHz; Frequency: 2560 MHz; Duty Cycle: 1:1

Probe: EX3DV4 - SN7633ConvF(7.73, 7.73, 7.73) @ 2560 MHz

LTE B7 20MHz 1RB 50offset Back Mode High 0mm/Area Scan (9x11x1):

Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 4.72 W/kg

LTE B7 20MHz 1RB 50offset Back Mode High 0mm/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 43.52 V/m; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 5.85 W/kg

SAR(1 g) = 3.41 W/kg; SAR(10 g) = 1.77 W/kg

Maximum value of SAR (measured) = 4.85 W/kg

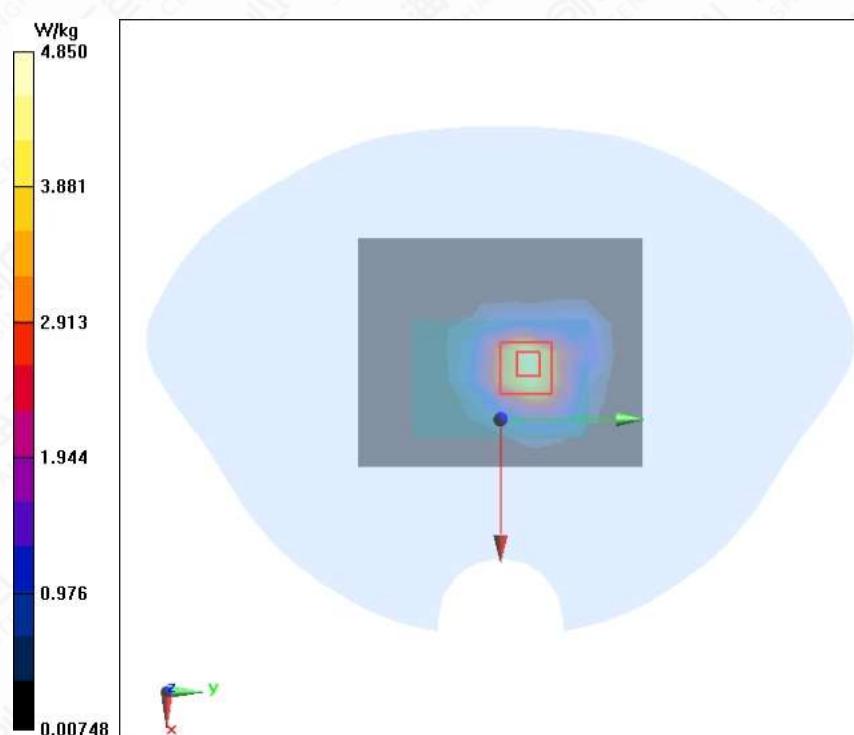


Figure A.1-4 LTE B7 20MHz 1RB 50offset Back Mode High 0mm

LTE B12 10MHz 1RB Offset Back Mode High 5mm

Date/Time: 2022/12/22

Electronics: DAE4 Sn1244

Medium parameters used: $f = 711 \text{ MHz}$; $\sigma = 0.885 \text{ S/m}$; $\epsilon_r = 42.447$; $\rho = 1000 \text{ kg/m}^3$ Ambient Temperature: 21.2°C Liquid Temperature: 19.9°C

Communication System: LTE Band 12 Professional 900MHz; Duty Cycle: 1:1

Probe: EX3DV4 - SN7633ConvF(10.9, 10.9, 10.9) @ 711 MHz

LTE B12 10MHz 1RB Offset Back Mode High 5mm/Area Scan (7x9x1):Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$

Maximum value of SAR (measured) = 0.526 W/kg

LTE B12 10MHz 1RB Offset Back Mode High 5mm/Zoom Scan (7x7x7)/Cube 0:Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 22.36 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.713 W/kg

SAR(1 g) = 0.367 W/kg; SAR(10 g) = 0.229 W/kg

Maximum of SAR (measured) = 0.548 W/kg

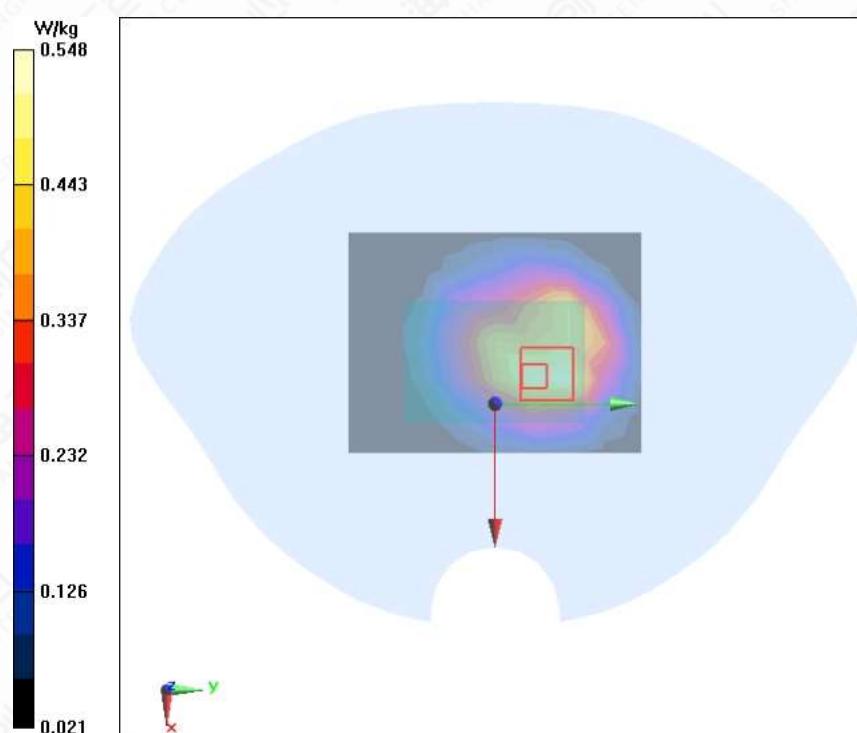


Figure A.1-5 LTE B12 10MHz 1RB Offset Back Mode High 5mm

LTE B12 10MHz 1RB Offset Back Mode High 0mm

Date/Time: 2022/12/22

Electronics: DAE4 Sn1244

Medium parameters used: $f = 711 \text{ MHz}$; $\sigma = 0.885 \text{ S/m}$; $\epsilon_r = 42.447$; $\rho = 1000 \text{ kg/m}^3$ Ambient Temperature: 21.2°C Liquid Temperature: 19.9°C

Communication System: LTE Band 12 Professional 900MHz; Duty Cycle: 1:1

Probe: EX3DV4 - SN7633ConvF(10.9, 10.9, 10.9) @ 711 MHz

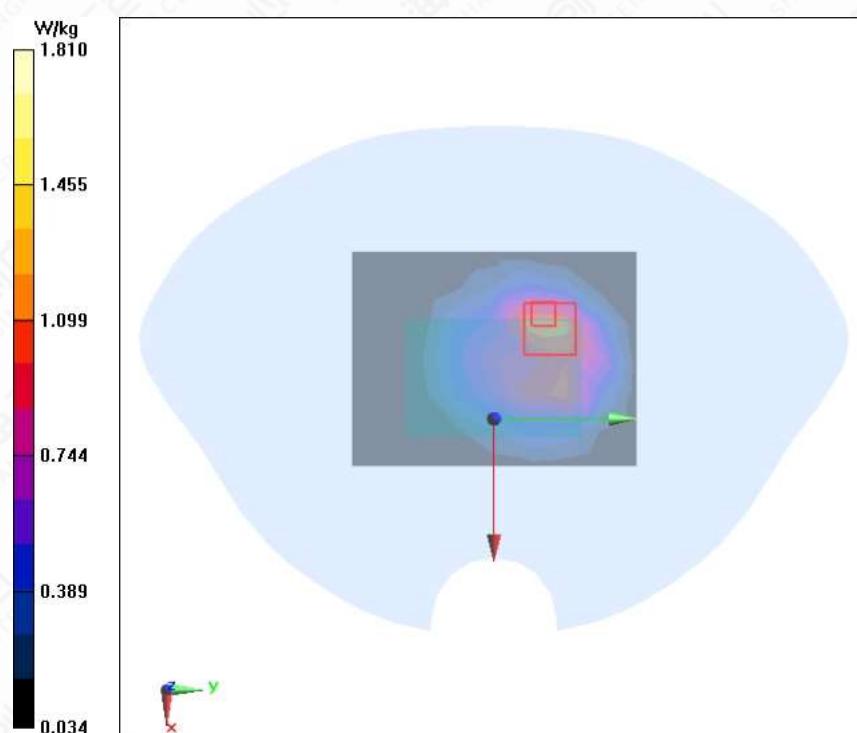
LTE B12 10MHz 1RB Offset Back Mode High 0mm/Area Scan (7x9x1):Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$ Maximum value of SAR (measured) = 1.18 W/kg **LTE B12 10MHz 1RB Offset Back Mode High 0mm/Zoom Scan (7x7x7)/Cube 0:**Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 29.84 V/m ; Power Drift = 0.05 dB Peak SAR (extrapolated) = 2.71 W/kg SAR(1 g) = 0.862 W/kg ; SAR(10 g) = 0.447 W/kg Maximum of SAR (measured) = 1.81 W/kg 

Figure A.1-6 LTE B12 10MHz 1RB Offset Back Mode High 0mm

LTE B13 10MHz 1RB 25offset Back Mode Middle 5mm

Date/Time: 2022/12/22

Electronics: DAE4 Sn1244

Medium parameters used: $f = 782 \text{ MHz}$; $\sigma = 0.905 \text{ S/m}$; $\epsilon_r = 42.23$; $\rho = 1000 \text{ kg/m}^3$ Ambient Temperature: 21.4°C Liquid Temperature: 20.2°C

Communication System: LTE B13 900MHz; Frequency: 782 MHz; Duty Cycle: 1:1

Probe: EX3DV4 - SN7633ConvF(10.9, 10.9, 10.9) @ 782 MHz

LTE B13 10MHz 1RB 25offset Back Mode Middle 5mm/Area Scan (7x9x1):Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$

Maximum value of SAR (measured) = 0.896 W/kg

LTE B13 10MHz 1RB 25offset Back Mode Middle 5mm/Zoom Scan (7x7x7)/Cube 0:Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 31.77 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 1.08 W/kg

SAR(1 g) = 0.581 W/kg; SAR(10 g) = 0.355 W/kg

Maximum of SAR (measured) = 0.838 W/kg

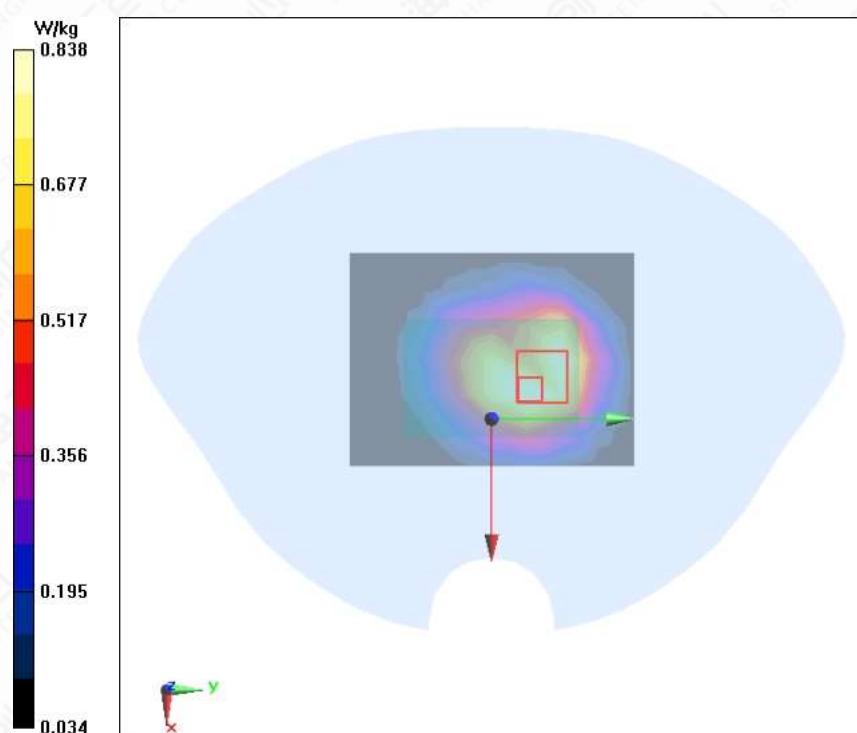


Figure A.1-7 LTE B13 10MHz 1RB 25offset Back Mode Middle 5mm

LTE B13 10MHz 1RB 25offset Back Mode Middle 0mm

Date/Time: 2022/12/22

Electronics: DAE4 Sn1244

Medium parameters used: $f = 782$ MHz; $\sigma = 0.905$ S/m; $\epsilon_r = 42.23$; $\rho = 1000$ kg/m³

Ambient Temperature: 21.4°C Liquid Temperature: 20.3°C

Communication System: LTE B13 900MHz; Frequency: 782 MHz; Duty Cycle: 1:1

Probe: EX3DV4 - SN7633ConvF(10.9, 10.9, 10.9) @ 782 MHz

LTE B13 10MHz 1RB 25offset Back Mode Middle 0mm/Area Scan (7x9x1):

Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 1.24 W/kg

LTE B13 10MHz 1RB 25offset Back Mode Middle 0mm/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 28.96 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 2.68 W/kg

SAR(1 g) = 0.853 W/kg; SAR(10 g) = 0.458 W/kg

Maximum value of SAR (measured) = 1.83 W/kg

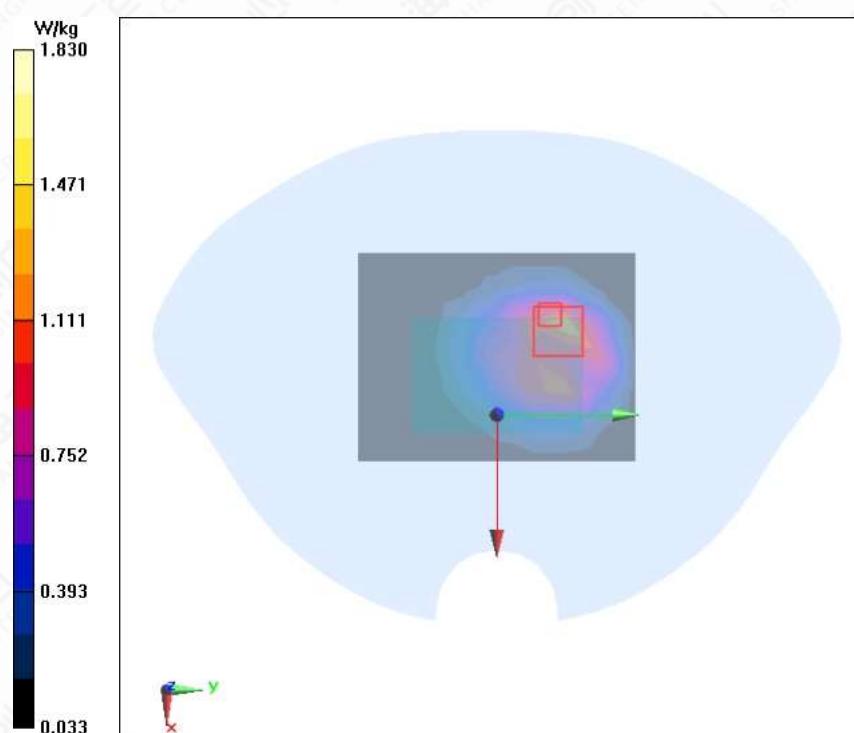


Figure A.1-8 LTE B13 10MHz 1RB 25offset Back Mode Middle 0mm

LTE B25 20MHz 50RB Offset Back Mode Middle 5mm

Date/Time: 2022/12/20

Electronics: DAE4 Sn1244

Medium parameters used (interpolated): $f = 1882.5$ MHz; $\sigma = 1.404$ S/m; $\epsilon_r = 38.299$; $\rho = 1000$ kg/m³

Ambient Temperature: 21.3°C Liquid Temperature: 20.0°C

Communication System: LTE Band 25 Professional 1900MHz; Duty Cycle: 1:1

Probe: EX3DV4 - SN7633ConvF(8.6, 8.6, 8.6) @ 1882.5 MHz

LTE B25 20MHz 50RB Offset Back Mode Middle 5mm/Area Scan (7x9x1):

Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 1.22 W/kg

LTE B25 20MHz 50RB Offset Back Mode Middle 5mm/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.73 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 2.70 W/kg

SAR(1 g) = 1.04 W/kg; SAR(10 g) = 0.357 W/kg

Maximum of SAR (measured) = 1.25 W/kg

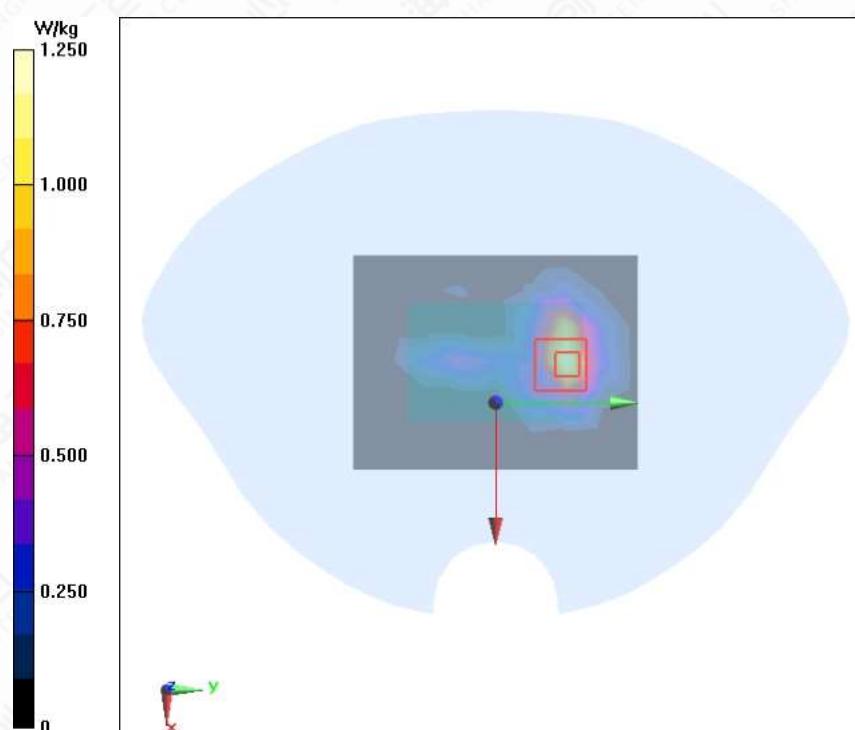


Figure A.1-9 LTE B25 20MHz 50RB Offset Back Mode Middle 5mm

LTE B25 20MHz 1RB 50offset Back Mode Middle 0mm

Date/Time: 2022/12/20

Electronics: DAE4 Sn1244

Medium parameters used (interpolated): $f = 1882.5$ MHz; $\sigma = 1.404$ S/m; $\epsilon_r = 38.299$; $\rho = 1000$ kg/m³

Ambient Temperature: 21.3°C Liquid Temperature: 20.0°C

Communication System: LTE Band 25 Professional 1900MHz; Duty Cycle: 1:1

Probe: EX3DV4 - SN7633ConvF(8.6, 8.6, 8.6) @ 1882.5 MHz

LTE B25 20MHz 1RB 50offset Back Mode Middle 0mm/Area Scan (7x9x1):

Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 4.67 W/kg

LTE B25 20MHz 1RB 50offset Back Mode Middle 0mm/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 21.18 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 5.68 W/kg

SAR(1 g) = 2.98 W/kg; SAR(10 g) = 1.54 W/kg

Maximum value of SAR (measured) = 4.63 W/kg

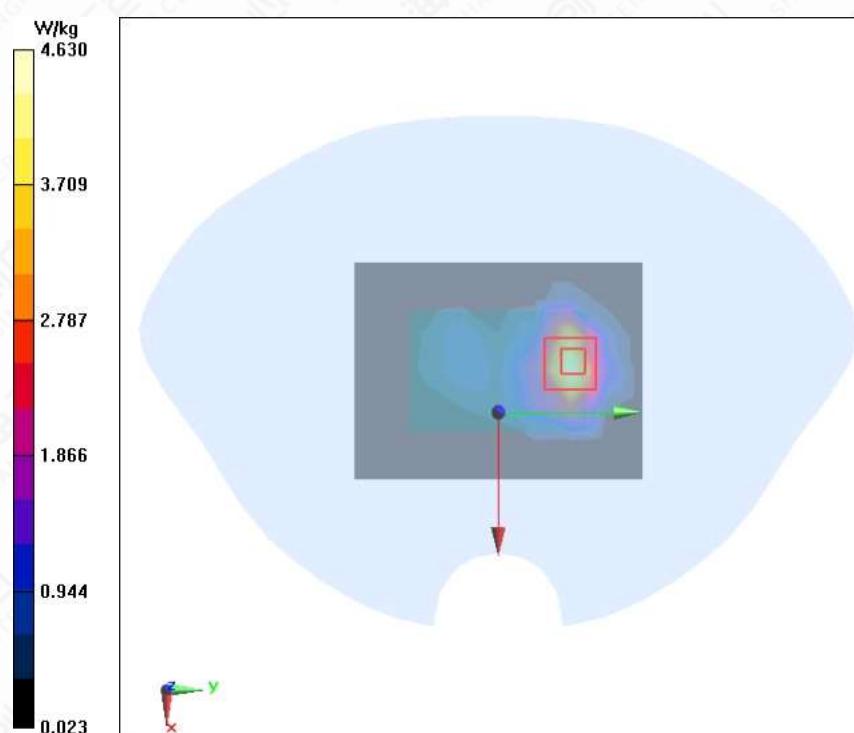


Figure A.1-10 LTE B25 20MHz 1RB 50offset Back Mode Middle 0mm

LTE B26 15MHz 1RB 38offset Back Mode Low 5mm

Date/Time: 2022/12/20

Electronics: DAE4 Sn1244

Medium parameters used (interpolated): $f = 821.5$ MHz; $\sigma = 0.907$ S/m; $\epsilon_r = 41.284$; $\rho = 1000$ kg/m³

Ambient Temperature: 21.3°C Liquid Temperature: 20.0°C

Communication System: LTE Band 26 Professional 900MHz; Duty Cycle: 1:1

Probe: EX3DV4 - SN7633ConvF(10.55, 10.55, 10.55) @ 821.5 MHz

LTE B26 15MHz 1RB 38offset Back Mode Low 5mm/Area Scan (7x9x1):

Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 1.38 W/kg

LTE B26 15MHz 1RB 38offset Back Mode Low 5mm/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 38.52 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 1.66 W/kg

SAR(1 g) = 0.967 W/kg; SAR(10 g) = 0.579 W/kg

Maximum of SAR (measured) = 1.41 W/kg

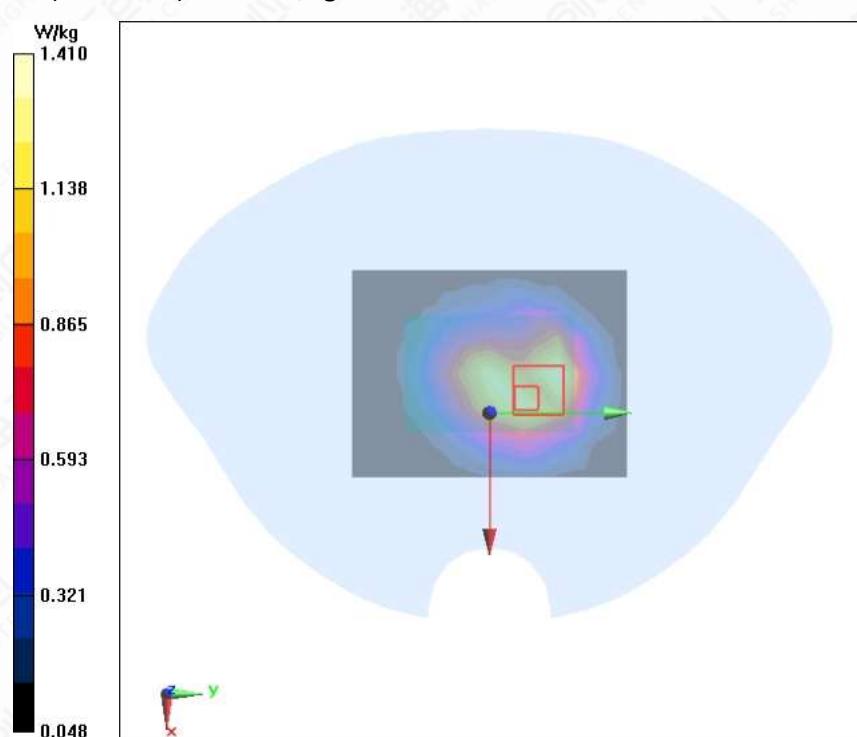


Figure A.1-11 LTE B26 15MHz 1RB 38offset Back Mode Low 5mm

LTE B26 15MHz 1RB 38offset Front Mode High 0mm

Date/Time: 2022/12/20

Electronics: DAE4 Sn1244

Medium parameters used (interpolated): $f = 841.5$ MHz; $\sigma = 0.912$ S/m; $\epsilon_r = 41.274$; $\rho = 1000$ kg/m³

Ambient Temperature: 21.3°C Liquid Temperature: 20.0°C

Communication System: LTE Band 26 Professional 900MHz; Duty Cycle: 1:1

Probe: EX3DV4 - SN7633ConvF(10.55, 10.55, 10.55) @ 841.5 MHz

LTE B26 15MHz 1RB 38offset Front Mode High 0mm/Area Scan (7x9x1):

Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 1.78 W/kg

LTE B26 15MHz 1RB 38offset Front Mode High 0mm/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 39.94 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 2.53 W/kg

SAR(1 g) = 1.41 W/kg; SAR(10 g) = 0.862 W/kg

Maximum value of SAR (measured) = 2.07 W/kg

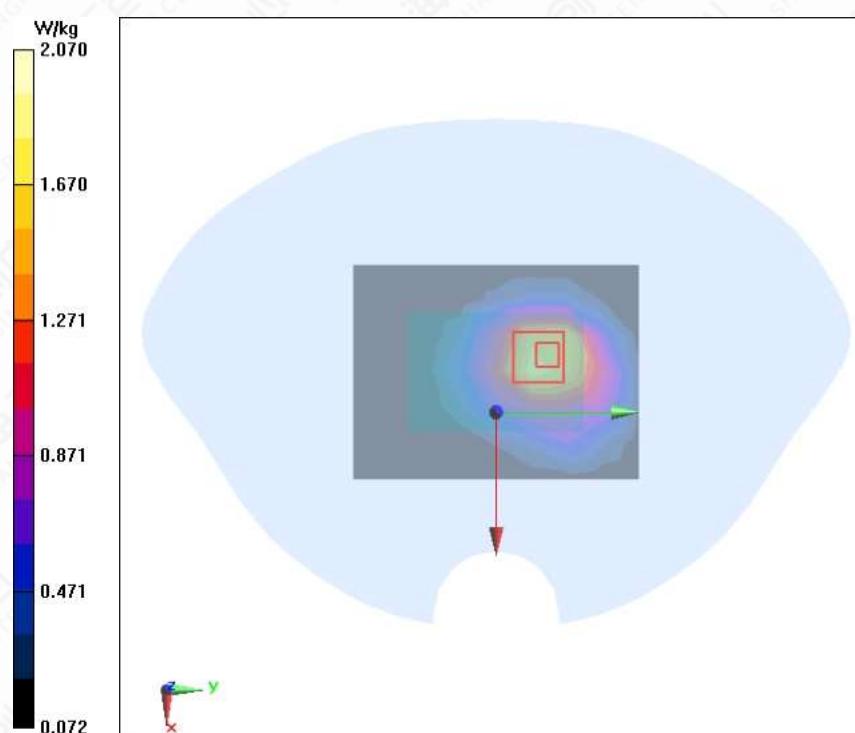


Figure A.1-12 LTE B26 15MHz 1RB 38offset Front Mode High 0mm

LTE B41 20MHz 1RB 50offset Back Mode High 5mm

Date/Time: 2022/12/28

Electronics: DAE4 Sn1244

Medium parameters used: $f = 2645 \text{ MHz}$; $\sigma = 1.965 \text{ S/m}$; $\epsilon_r = 37.875$; $\rho = 1000 \text{ kg/m}^3$ Ambient Temperature: 21.4°C Liquid Temperature: 20.2°C

Communication System: LTE Band 41 Professional nonstandard 2450MHz;

Frequency: 2645 MHz; Duty Cycle: 1:1

Probe: EX3DV4 - SN7633ConvF(7.73, 7.73, 7.73) @ 2645 MHz

LTE B41 20MHz 1RB 50offset Back Mode High 5mm/Area Scan (9x11x1):Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$

Maximum value of SAR (measured) = 1.31 W/kg

LTE B41 20MHz 1RB 50offset Back Mode High 5mm/Zoom Scan (7x7x7)/Cube 0:Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 24.02 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 1.61 W/kg

SAR(1 g) = 0.871 W/kg; SAR(10 g) = 0.477 W/kg

Maximum value of SAR (measured) = 1.30 W/kg

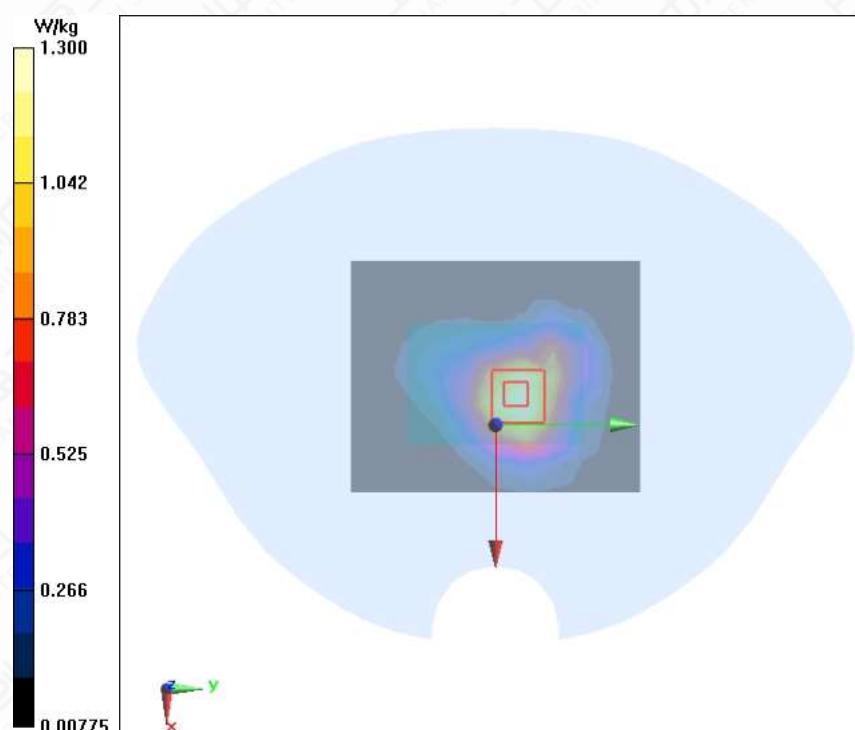


Figure A.1-13 LTE B41 20MHz 1RB 50offset Back Mode High 5mm

LTE B41 20MHz 1RB 50offset Back Mode High 0mm

Date/Time: 2022/12/28

Electronics: DAE4 Sn1244

Medium parameters used: $f = 2645 \text{ MHz}$; $\sigma = 1.965 \text{ S/m}$; $\epsilon_r = 37.875$; $\rho = 1000 \text{ kg/m}^3$ Ambient Temperature: 21.4°C Liquid Temperature: 20.2°C

Communication System: LTE Band 41 Professional nonstandard 2450MHz;

Frequency: 2645 MHz; Duty Cycle: 1:1

Probe: EX3DV4 - SN7633ConvF(7.73, 7.73, 7.73) @ 2645 MHz

LTE B41 20MHz 1RB 50offset Back Mode High 0mm/Area Scan (9x11x1):Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$

Maximum value of SAR (measured) = 2.97 W/kg

LTE B41 20MHz 1RB 50offset Back Mode High 0mm/Zoom Scan (7x7x7)/Cube 0:Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 38.76 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 4.05 W/kg

SAR(1 g) = 2.34 W/kg; SAR(10 g) = 1.22 W/kg

Maximum value of SAR (measured) = 3.35 W/kg

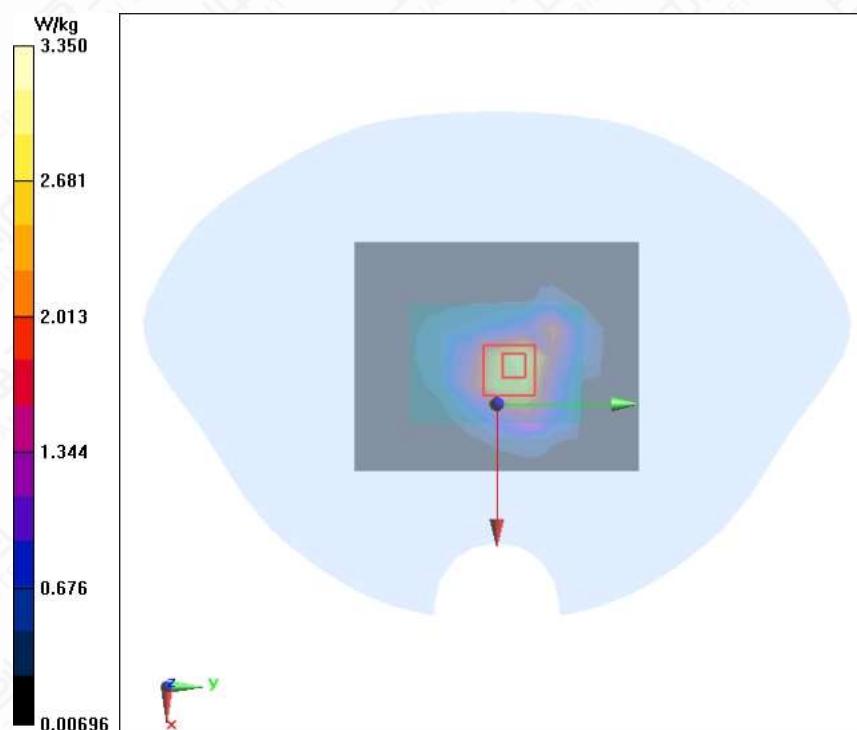


Figure A.1-14 LTE B41 20MHz 1RB 50offset Back Mode High 0mm

BT DH5 Right Mode Middle 5mm

Date/Time: 2022/12/28

Electronics: DAE4 Sn1244

Medium parameters used: $f = 2441 \text{ MHz}$; $\sigma = 1.802 \text{ S/m}$; $\epsilon_r = 38.23$; $\rho = 1000 \text{ kg/m}^3$ Ambient Temperature: 21.3°C Liquid Temperature: 20.1°C

Communication System: BT 2450MHz; Frequency: 2441 MHz; Duty Cycle: 1:1

Probe: EX3DV4 - SN7633ConvF(7.96, 7.96, 7.96) @ 2441 MHz

BT DH5 Right Mode Middle 5mm/Area Scan (5x9x1):Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$

Maximum value of SAR (measured) = 0.0239 W/kg

BT DH5 Right Mode Middle 5mm/Zoom Scan (7x7x7)/Cube 0:Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 3.677 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.0310 W/kg

SAR(1 g) = 0.016 W/kg; SAR(10 g) = 0.00804 W/kg

Maximum value of SAR (measured) = 0.0241 W/kg

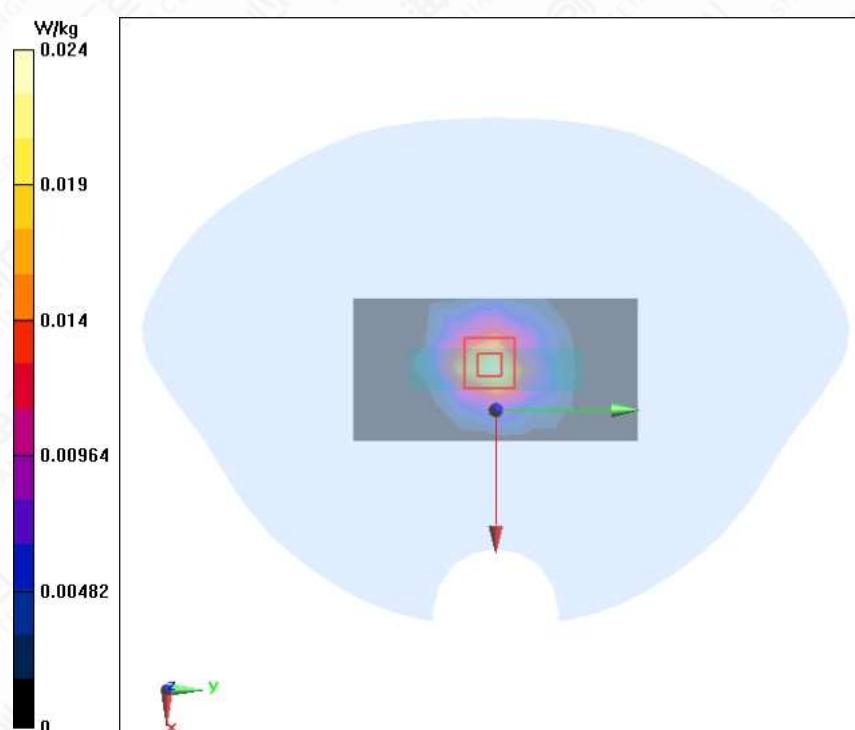


Figure A.1-15 BT DH5 Right Mode Middle 5mm

BT DH5 Back Mode Middle 0mm

Date/Time: 2022/12/28

Electronics: DAE4 Sn1244

Medium parameters used: $f = 2441 \text{ MHz}$; $\sigma = 1.802 \text{ S/m}$; $\epsilon_r = 38.23$; $\rho = 1000 \text{ kg/m}^3$ Ambient Temperature: 21.3°C Liquid Temperature: 20.1°C

Communication System: BT 2450MHz; Frequency: 2441 MHz; Duty Cycle: 1:1

Probe: EX3DV4 - SN7633ConvF(7.96, 7.96, 7.96) @ 2441 MHz

BT DH5 Back Mode Middle 0mm/Area Scan (9x11x1):Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$

Maximum value of SAR (measured) = 0.0528 W/kg

BT DH5 Back Mode Middle 0mm/Zoom Scan (7x7x7)/Cube 0:Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 5.433 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 0.0740 W/kg

SAR(1 g) = 0.039 W/kg; SAR(10 g) = 0.019 W/kg

Maximum of SAR (measured) = 0.0575 W/kg

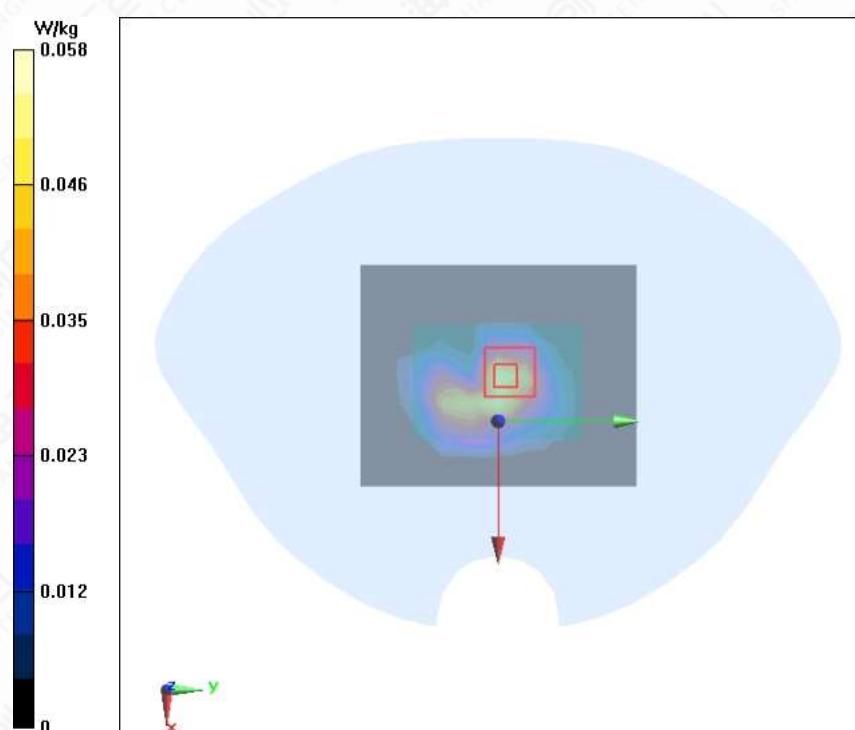


Figure A.1-16 BT DH5 Back Mode Middle 0mm

Wi-Fi2.4G 11b Back Mode Low 5mm

Date/Time: 2022/12/28

Electronics: DAE4 Sn1244

Medium parameters used: $f = 2412 \text{ MHz}$; $\sigma = 1.779 \text{ S/m}$; $\epsilon_r = 38.285$; $\rho = 1000 \text{ kg/m}^3$ Ambient Temperature: 21.4°C Liquid Temperature: 20.3°C

Communication System: Wifi 2450 2450MHz; Frequency: 2412 MHz; Duty Cycle: 1:1

Probe: EX3DV4 - SN7633ConvF(7.96, 7.96, 7.96) @ 2412 MHz

Wi-Fi2.4G 11b Back Mode Low 5mm/Area Scan (9x11x1):Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$

Maximum value of SAR (measured) = 0.580 W/kg

Wi-Fi2.4G 11b Back Mode Low 5mm/Zoom Scan (7x7x7)/Cube 0:Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 17.07 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.669 W/kg

SAR(1 g) = 0.388 W/kg; SAR(10 g) = 0.222 W/kg

Maximum value of SAR (measured) = 0.565 W/kg

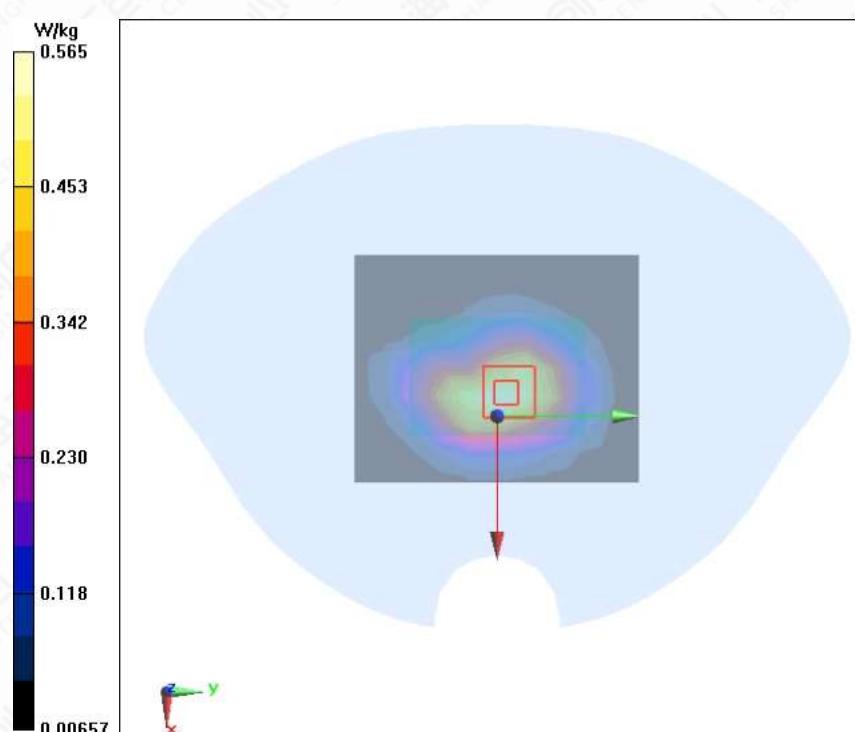


Figure A.1-17 Wi-Fi2.4G 11b Back Mode Low 5mm

Wi-Fi2.4G 11b Back Mode Low 0mm

Date/Time: 2022/12/28

Electronics: DAE4 Sn1244

Medium parameters used: $f = 2412 \text{ MHz}$; $\sigma = 1.779 \text{ S/m}$; $\epsilon_r = 38.285$; $\rho = 1000 \text{ kg/m}^3$ Ambient Temperature: 21.4°C Liquid Temperature: 20.3°C

Communication System: Wifi 2450 2450MHz; Frequency: 2412 MHz; Duty Cycle: 1:1

Probe: EX3DV4 - SN7633ConvF(7.96, 7.96, 7.96) @ 2412 MHz

Wi-Fi2.4G 11b Back Mode Low 0mm/Area Scan (7x9x1):Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$

Maximum value of SAR (measured) = 1.63 W/kg

Wi-Fi2.4G 11b Back Mode Low 0mm/Zoom Scan (7x7x7)/Cube 0:Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 29.82 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 1.94 W/kg

SAR(1 g) = 1.07 W/kg; SAR(10 g) = 0.559 W/kg

Maximum of SAR (measured) = 1.62 W/kg

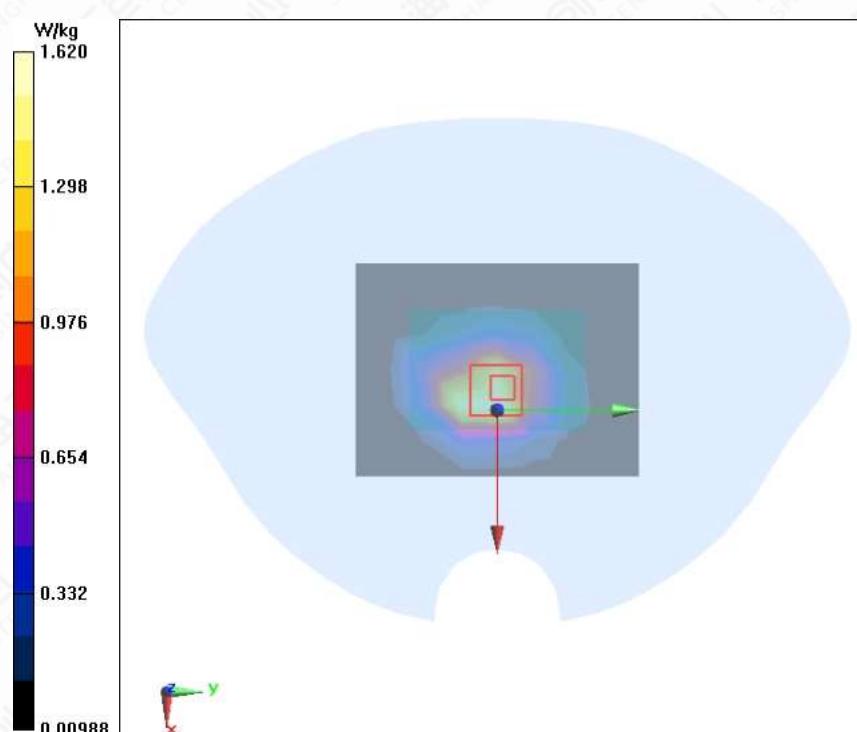


Figure A.1-18 Wi-Fi2.4G 11b Back Mode Low 0mm

A.2 System Check Graph Results

Head 750MHz

Date/Time: 2022/12/22

Electronics: DAE4 Sn1244

Medium parameters used: $f = 750 \text{ MHz}$; $\sigma = 0.894 \text{ S/m}$; $\epsilon_r = 42.288$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature: 21.4°C Liquid Temperature: 20.1°C

Communication System: CW 900MHz; Frequency: 750 MHz; Duty Cycle: 1:1

Probe: EX3DV4 - SN7633ConvF(10.9, 10.9, 10.9) @ 750 MHz

System Check Head 750MHz/Area Scan (7x13x1):

Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$

Maximum value of SAR (measured) = 2.38 W/kg

System Check Head 750MHz/Zoom Scan (7x7x7) (5x5x7)/Cube 0:

Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 56.83 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 3.10 W/kg

SAR(1 g) = 2.01 W/kg; SAR(10 g) = 1.34 W/kg

Maximum value of SAR (measured) = 2.71 W/kg

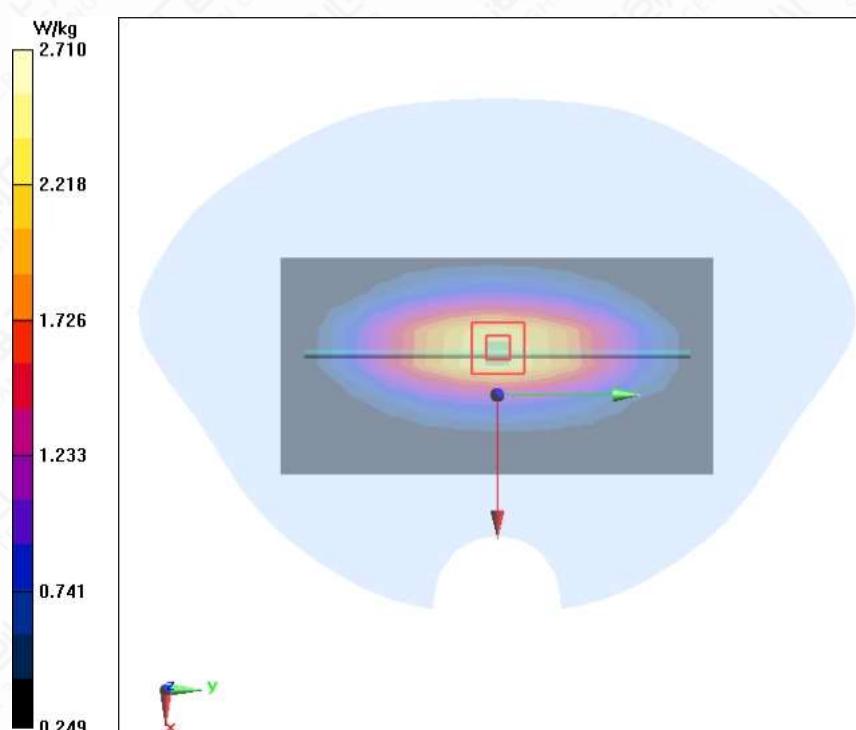


Figure A.2-1 Head 750MHz

Head 835MHz

Date/Time: 2022/12/20

Electronics: DAE4 Sn1244

Medium parameters used: $f = 835 \text{ MHz}$; $\sigma = 0.91 \text{ S/m}$; $\epsilon_r = 41.265$; $\rho = 1000 \text{ kg/m}^3$ Ambient Temperature: 21.4°C Liquid Temperature: 20.3°C

Communication System: CW 900MHz; Frequency: 835 MHz; Duty Cycle: 1:1

Probe: EX3DV4 - SN7633ConvF(10.55, 10.55, 10.55) @ 835 MHz

System Check Head 835MHz/Area Scan (7x13x1):Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$

Maximum value of SAR (measured) = 2.97 W/kg

System Check Head 835MHz/Zoom Scan (7x7x7) (5x5x7)/Cube 0:Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 64.06 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 3.88 W/kg

SAR(1 g) = 2.42 W/kg; SAR(10 g) = 1.56 W/kg

Maximum value of SAR (measured) = 3.36 W/kg

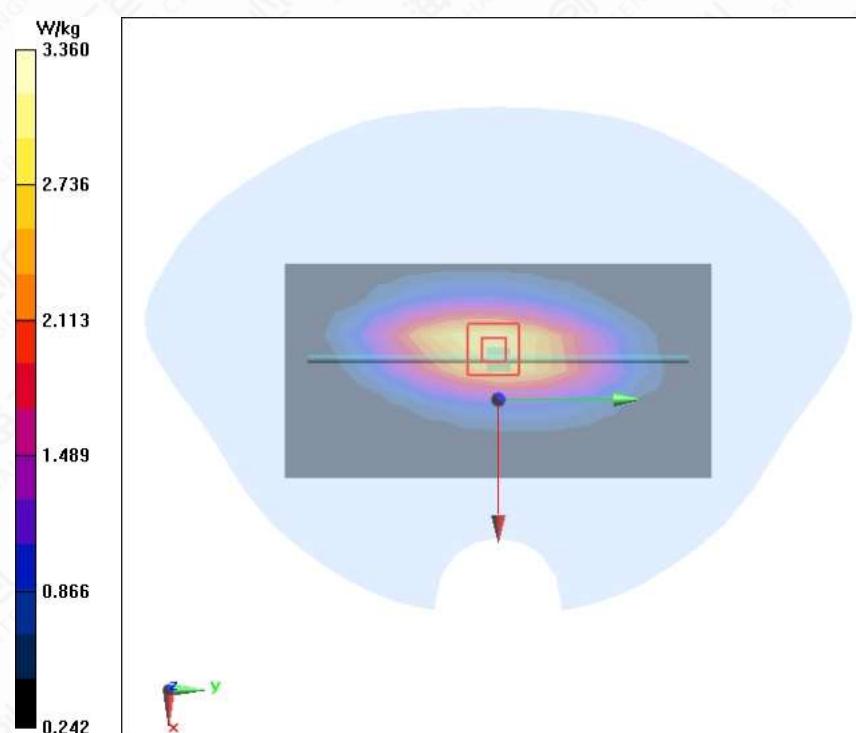


Figure A.2-2 Head 835MHz

Head 1750MHz

Date/Time: 2022/12/20

Electronics: DAE4 Sn1244

Medium parameters used: $f = 1750 \text{ MHz}$; $\sigma = 1.324 \text{ S/m}$; $\epsilon_r = 38.522$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature: 21.2°C Liquid Temperature: 19.9°C

Communication System: CW 1900MHz; Frequency: 1750 MHz; Duty Cycle: 1:1

Probe: EX3DV4 - SN7633ConvF(8.9, 8.9, 8.9) @ 1750 MHz

System Check Head 1750MHz/Area Scan (8x7x1):Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$

Maximum value of SAR (measured) = 9.92 W/kg

System Check Head 1750MHz/Zoom Scan (7x7x7) (7x7x7)/Cube 0:Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 102.1 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 16.4 W/kg

SAR(1 g) = 8.83 W/kg; SAR(10 g) = 4.69 W/kg

Maximum value of SAR (measured) = 13.5 W/kg

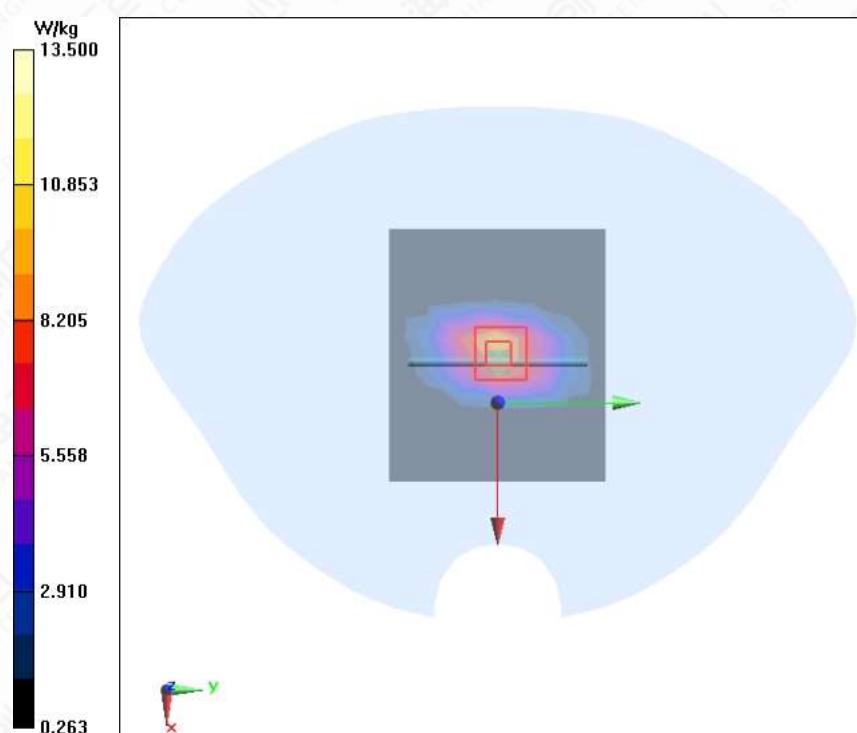


Figure A.2-3 Head 1750MHz

Head 1900MHz

Date/Time: 2022/12/20

Electronics: DAE4 Sn1244

Medium parameters used: $f = 1900 \text{ MHz}$; $\sigma = 1.414 \text{ S/m}$; $\epsilon_r = 38.268$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature: 21.2°C Liquid Temperature: 19.9°C

Communication System: CW 1900MHz; Frequency: 1900 MHz; Duty Cycle: 1:1

Probe: EX3DV4 - SN7633ConvF(8.6, 8.6, 8.6) @ 1900 MHz

System Check Head 1900MHz/Area Scan (8x7x1):Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$

Maximum value of SAR (measured) = 12.7 W/kg

System Check Head 1900MHz/Zoom Scan (7x7x7) (5x5x7)/Cube 0:Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 112.3 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 19.7 W/kg

SAR(1 g) = 10.3 W/kg; SAR(10 g) = 5.33 W/kg

Maximum value of SAR (measured) = 16.2 W/kg

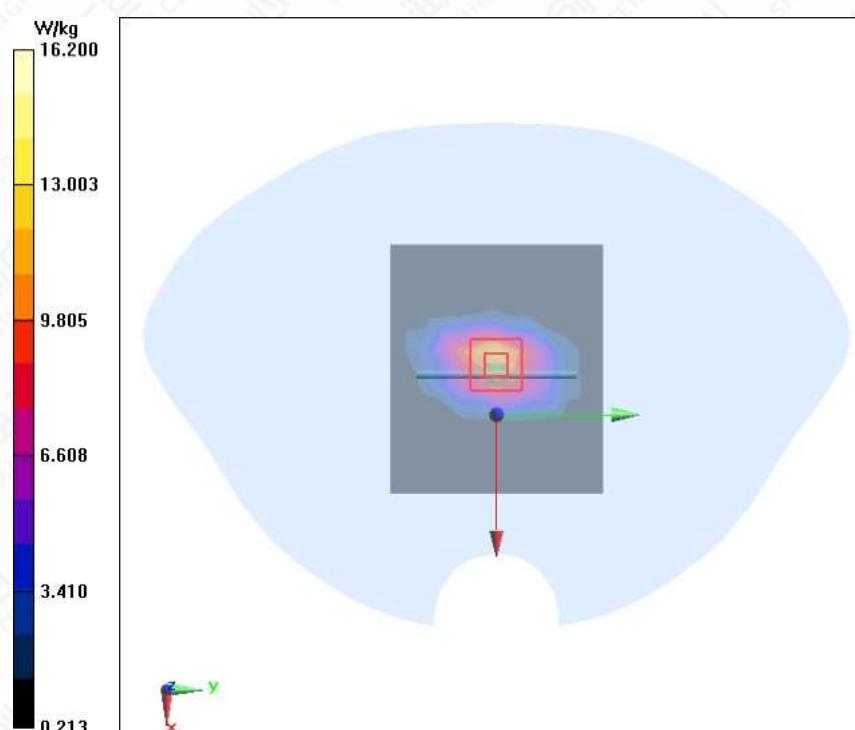


Figure A.2-4 Head 1900MHz

Head 2450MHz

Date/Time: 2022/12/28

Electronics: DAE4 Sn1244

Medium parameters used: $f = 2450$ MHz; $\sigma = 1.809$ S/m; $\epsilon_r = 38.215$; $\rho = 1000$ kg/m³

Ambient Temperature: 21.5°C Liquid Temperature: 20.3°C

Communication System: CW 2450MHz; Frequency: 2450 MHz; Duty Cycle: 1:1

Probe: EX3DV4 - SN7633ConvF(7.96, 7.96, 7.96) @ 2450 MHz

System Check Head 2450MHz/Area Scan (8x8x1):

Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 19.2 W/kg

System Check Head 2450MHz/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 113.3 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 27.4 W/kg

SAR(1 g) = 13.1 W/kg; SAR(10 g) = 6.07 W/kg

Maximum value of SAR (measured) = 22.1 W/kg

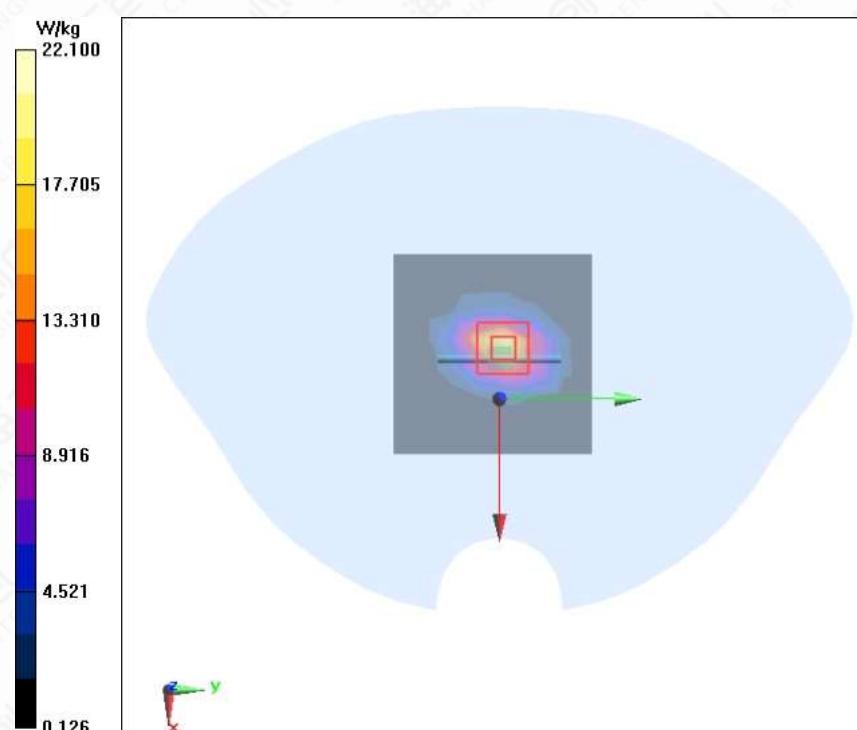


Figure A.2-5 Head 2450MHz

Head 2600MHz

Date/Time: 2022/12/28

Electronics: DAE4 Sn1244

Medium parameters used: $f = 2600 \text{ MHz}$; $\sigma = 1.929 \text{ S/m}$; $\epsilon_r = 37.948$; $\rho = 1000 \text{ kg/m}^3$ Ambient Temperature: 21.2°C Liquid Temperature: 20.1°C

Communication System: CW 2450MHz; Frequency: 2600 MHz; Duty Cycle: 1:1

Probe: EX3DV4 - SN7633ConvF(7.73, 7.73, 7.73) @ 2600 MHz

System Check Head 2600MHz/Area Scan (8x8x1):Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$

Maximum value of SAR (measured) = 18.6 W/kg

System Check Head 2600MHz/Zoom Scan (7x7x7)/Cube 0:Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 106.8 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 27.9 W/kg

SAR(1 g) = 13.4 W/kg; SAR(10 g) = 6.1 W/kg

Maximum value of SAR (measured) = 22.6 W/kg

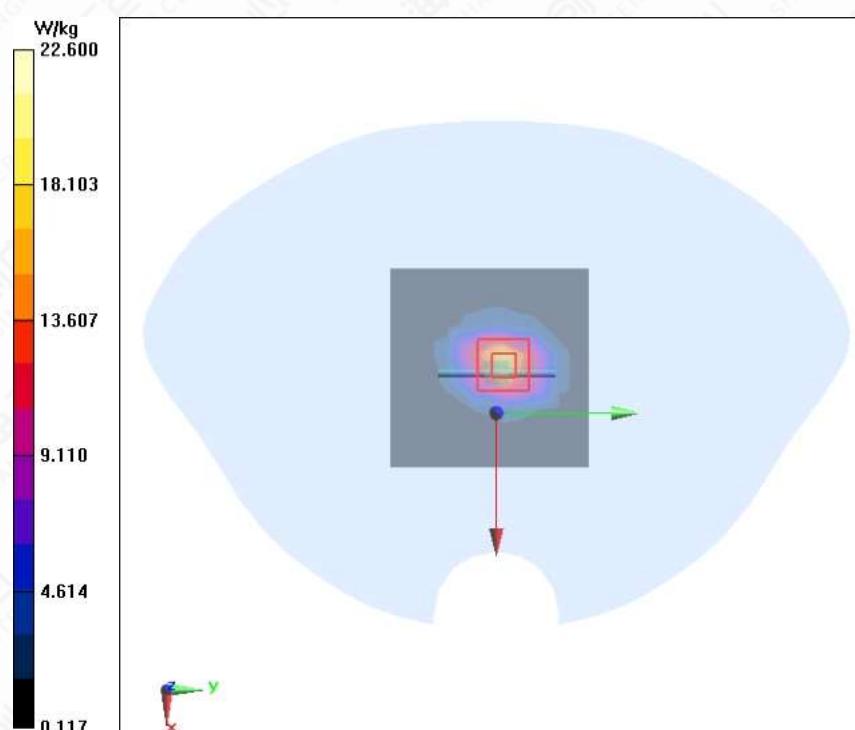


Figure A.2-6 Head 2600MHz

Head 2600MHz

Date/Time: 2023/1/5

Electronics: DAE4 Sn1244

Medium parameters used: $f = 2600 \text{ MHz}$; $\sigma = 1.989 \text{ S/m}$; $\epsilon_r = 40.196$; $\rho = 1000 \text{ kg/m}^3$ Ambient Temperature: 21.4°C Liquid Temperature: 20.3°C

Communication System: CW 2450MHz; Frequency: 2600 MHz; Duty Cycle: 1:1

Probe: EX3DV4 - SN7633ConvF(7.73, 7.73, 7.73) @ 2600 MHz

System Check Head 2600MHz/Area Scan (8x8x1):Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$

Maximum value of SAR (measured) = 20.7 W/kg

System Check Head 2600MHz/Zoom Scan (7x7x7)/Cube 0:Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 111.5 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 30.0 W/kg

SAR(1 g) = 14.2 W/kg; SAR(10 g) = 6.37 W/kg

Maximum value of SAR (measured) = 24.0 W/kg

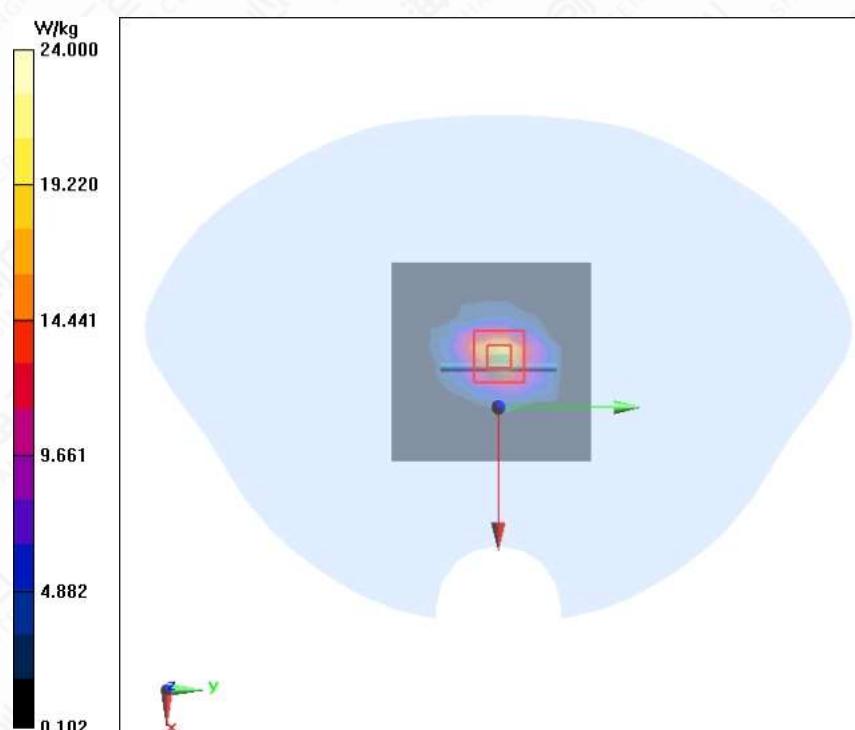


Figure A.2-7 Head 2600MHz

Annex B: Calibration Certificate



Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2512 Fax: +86-10-62304633-2504
E-mail: cn@chinattl.com Http://www.chinattl.cn



Client : 3in

Certificate No: Z22-60063

CALIBRATION CERTIFICATE

Object DAE4 - SN: 1244

Calibration Procedure(s) FF-Z11-002-01
Calibration Procedure for the Data Acquisition Electronics
(DAEx)



Calibration date: March 09, 2022

This calibration Certificate documents the traceability to national standards, which realize the physical units of measurements(SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature(22±3)°C and humidity<70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date(Calibrated by, Certificate No.)	Scheduled Calibration
Process Calibrator 753	1971018	15-Jun-21 (CTTL, No.J21X04465)	Jun-22

Calibrated by:	Name	Function	Signature
	Yu Zongying	SAR Test Engineer	
Reviewed by:	Lin Hao	SAR Test Engineer	
Approved by:	Qi Dianyuan	SAR Project Leader	

Issued: March 11, 2022

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2512 Fax: +86-10-62304633-2504
E-mail: cttl@chinattl.com Http://www.chinattl.cn

**Glossary:**

- DAE data acquisition electronics
Connector angle information used in DASY system to align probe sensor X to the robot coordinate system.

Methods Applied and Interpretation of Parameters:

- *DC Voltage Measurement:* Calibration Factor assessed for use in DASY system by comparison with a calibrated instrument traceable to national standards. The figure given corresponds to the full scale range of the voltmeter in the respective range.
- *Connector angle:* The angle of the connector is assessed measuring the angle mechanically by a tool inserted. Uncertainty is not required.
- The report provide only calibration results for DAE, it does not contain other performance test results.

Certificate No: Z22-60063

Page 2 of 3



Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2512 Fax: +86-10-62304633-2504
E-mail: ctli@chinatll.com Http://www.chinatll.cn

**DC Voltage Measurement**

A/D - Converter Resolution nominal

High Range: 1LSB = $6.1\mu V$, full range = -100...+300 mVLow Range: 1LSB = $61nV$, full range = -1.....+3mV

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

Calibration Factors	X	Y	Z
High Range	$403.832 \pm 0.15\% (k=2)$	$403.556 \pm 0.15\% (k=2)$	$404.475 \pm 0.15\% (k=2)$
Low Range	$3.95285 \pm 0.7\% (k=2)$	$3.96959 \pm 0.7\% (k=2)$	$3.97877 \pm 0.7\% (k=2)$

Connector Angle

Connector Angle to be used in DASY system	$23.5^\circ \pm 1^\circ$
---	--------------------------

Certificate No: Z22-60063

Page 3 of 3



Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2512 Fax: +86-10-62304633-2504
E-mail: ctfl@chinattl.com [Http://www.chinattl.cn](http://www.chinattl.cn)


Client **3in**
Certificate No: Z22-60064

CALIBRATION CERTIFICATE

Object **EX3DV4 - SN : 7633**

Calibration Procedure(s) **FF-Z11-004-02**
Calibration Procedures for Dosimetric E-field Probes



Calibration date: **March 31, 2022**

This calibration Certificate documents the traceability to national standards, which realize the physical units of measurements(SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature(22 ± 3)°C and humidity<70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date(Calibrated by, Certificate No.)	Scheduled Calibration
Power Meter NRP2	101919	15-Jun-21(CTTL, No.J21X04466)	Jun-22
Power sensor NRP-Z91	101547	15-Jun-21(CTTL, No.J21X04466)	Jun-22
Power sensor NRP-Z91	101548	15-Jun-21(CTTL, No.J21X04466)	Jun-22
Reference 10dBAttenuator	18N50W-10dB	20-Jan-21(CTTL, No.J21X00486)	Jan-23
Reference 20dBAttenuator	18N50W-20dB	20-Jan-21(CTTL, No.J21X00485)	Jan-23
Reference Probe EX3DV4	SN 7307	26-May-21(SPEAG, No.EX3-7307_May21)	May-22
Reference Probe EX3DV4	SN 7464	26-Jan-22(SPEAG, No.EX3-7464_Jan22)	Jan-23
DAE4	SN 1555	20-Aug-21(SPEAG, No.DAE4-1555_Aug21/2)	Aug-22
Secondary Standards	ID #	Cal Date(Calibrated by, Certificate No.)	Scheduled Calibration
SignalGenerator MG3700A	6201052605	16-Jun-21(CTTL, No.J21X04467)	Jun-22
Network Analyzer E5071C	MY46110673	14-Jan-22(CTTL, No.J22X00406)	Jan-23

Name	Function	Signature
Calibrated by: Yu Zongying	SAR Test Engineer	
Reviewed by: Lin Hao	SAR Test Engineer	
Approved by: Qi Diaryuan	SAR Project Leader	

Issued: April 06, 2022

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Certificate No: Z22-60064

Page 1 of 9



Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2512 Fax: +86-10-62304633-2504
E-mail: ctt@chinattt.com [Http://www.chinattt.cn](http://www.chinattt.cn)

Glossary:

TSL	tissue simulating liquid
NORMx,y,z	sensitivity in free space
ConvF	sensitivity in TSL / NORMx,y,z
DCP	diode compression point
CF	crest factor (1/duty_cycle) of the RF signal
A,B,C,D	modulation dependent linearization parameters
Polarization Φ	Φ rotation around probe axis
Polarization θ	θ rotation around an axis that is in the plane normal to probe axis (at measurement center), i $\theta=0$ is normal to probe axis
Connector Angle	information used in DASY system to align probe sensor X to the robot coordinate system

Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Measurement procedure for the assessment of Specific Absorption Rate (SAR) from hand-held and body-mounted devices used next to the ear (frequency range of 300 MHz to 6 GHz)", July 2016
- IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Methods Applied and Interpretation of Parameters:

- NORMx,y,z:** Assessed for E-field polarization $\theta=0$ ($f \leq 900$ MHz in TEM-cell; $f > 1800$ MHz: waveguide). NORMx,y,z are only intermediate values, i.e., the uncertainties of NORMx,y,z does not effect the E^2 -field uncertainty inside TSL (see below ConvF).
- NORM(f)x,y,z = NORMx,y,z * frequency_response** (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of ConvF.
- DCPx,y,z:** DCP are numerical linearization parameters assessed based on the data of power sweep (no uncertainty required). DCP does not depend on frequency nor media.
- PAR:** PAR is the Peak to Average Ratio that is not calibrated but determined based on the signal characteristics.
- Ax,y,z; Bx,y,z; Cx,y,z; VRx,y,z; A,B,C** are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. VR is the maximum calibration range expressed in RMS voltage across the diode.
- ConvF and Boundary Effect Parameters:** Assessed in flat phantom using E-field (or Temperature Transfer Standard for $f \leq 800$ MHz) and inside waveguide using analytical field distributions based on power measurements for $f > 800$ MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORMx,y,z*ConvF whereby the uncertainty corresponds to that given for ConvF. A frequency dependent ConvF is used in DASY version 4.4 and higher which allows extending the validity from ± 50 MHz to ± 100 MHz.
- Spherical Isotropy (3D deviation from isotropy):** in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset:** The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.
- Connector Angle:** The angle is assessed using the information gained by determining the NORMx (no uncertainty required).



Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2512 Fax: +86-10-62304633-2504
E-mail: ctli@chinattl.com [Http://www.chinattl.cn](http://www.chinattl.cn)



DASY/EASY – Parameters of Probe: EX3DV4 – SN:7633

Basic Calibration Parameters

	Sensor X	Sensor Y	Sensor Z	Unc (k=2)
Norm($\mu\text{V}/(\text{V}/\text{m})^2$) ^A	0.66	0.65	0.68	$\pm 10.0\%$
DCP(mV) ^B	111.2	112.3	113.8	

Modulation Calibration Parameters

UID	Communication System Name	A dB	B dB/ μV	C	D dB	VR mV	Unc ^E (k=2)
0	CW	X	0.0	0.0	1.0	0.00	214.3
		Y	0.0	0.0	1.0		212.4
		Z	0.0	0.0	1.0		221.3

The reported uncertainty of measurement is stated as the standard uncertainty of Measurement multiplied by the coverage factor k=2, which for a normal distribution Corresponds to a coverage probability of approximately 95%.

^A The uncertainties of Norm X, Y, Z do not affect the E²-field uncertainty inside TSL (see Page 4).

^B Numerical linearization parameter: uncertainty not required.

^E Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.



Add: No.52 HunYuanBei Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2512 Fax: +86-10-62304633-2504
E-mail: cttl@chinattl.com <http://www.chinattl.cn>



DASY/EASY – Parameters of Probe: EX3DV4 – SN:7633

Calibration Parameter Determined in Head Tissue Simulating Media

f [MHz] ^C	Relative Permittivity ^F	Conductivity (S/m) ^F	ConvF X	ConvF Y	ConvF Z	Alpha ^G	Depth ^G (mm)	Unct. (k=2)
750	41.8	0.89	10.90	10.90	10.90	0.14	1.44	±12.1%
835	41.5	0.90	10.55	10.55	10.55	0.13	1.59	±12.1%
900	41.5	0.97	10.53	10.53	10.53	0.15	1.38	±12.1%
1750	40.1	1.37	8.90	8.90	8.90	0.30	0.86	±12.1%
1900	40.0	1.40	8.60	8.60	8.60	0.26	0.98	±12.1%
2000	40.0	1.40	8.63	8.63	8.63	0.23	1.08	±12.1%
2300	39.5	1.67	8.20	8.20	8.20	0.55	0.72	±12.1%
2450	39.2	1.80	7.96	7.96	7.96	0.58	0.71	±12.1%
2600	39.0	1.96	7.73	7.73	7.73	0.65	0.67	±12.1%
3300	38.2	2.71	7.42	7.42	7.42	0.41	0.98	±13.3%
3500	37.9	2.91	7.20	7.20	7.20	0.41	0.95	±13.3%
3700	37.7	3.12	6.83	6.83	6.83	0.44	1.01	±13.3%
3900	37.5	3.32	6.85	6.85	6.85	0.35	1.33	±13.3%
4100	37.2	3.53	6.73	6.73	6.73	0.40	1.15	±13.3%
4200	37.1	3.63	6.65	6.65	6.65	0.35	1.35	±13.3%
4400	36.9	3.84	6.55	6.55	6.55	0.35	1.35	±13.3%
4600	36.7	4.04	6.41	6.41	6.41	0.45	1.25	±13.3%
4800	36.4	4.25	6.37	6.37	6.37	0.40	1.40	±13.3%
4950	36.3	4.40	6.06	6.06	6.06	0.40	1.40	±13.3%
5250	35.9	4.71	5.70	5.70	5.70	0.50	1.20	±13.3%
5600	35.5	5.07	5.13	5.13	5.13	0.50	1.30	±13.3%
5750	35.4	5.22	5.17	5.17	5.17	0.50	1.30	±13.3%

^C Frequency validity above 300 MHz of ±100MHz only applies for DASY v4.4 and higher (Page 2), else it is restricted to ±50MHz. The uncertainty is the RSS of ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Above 5 GHz frequency validity can be extended to ± 110 MHz.

^F At frequency below 3 GHz, the validity of tissue parameters (ϵ and σ) can be relaxed to ±10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ϵ and σ) is restricted to ±5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

^G Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for the frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.

Certificate No:Z22-60064


Page 4 of 9




Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2512 Fax: +86-10-62304633-2504
E-mail: ttl@chinattl.com [Http://www.chinattl.cn](http://www.chinattl.cn)



Frequency Response of E-Field (TEM-Cell: ifi110 EXX, Waveguide: R22)

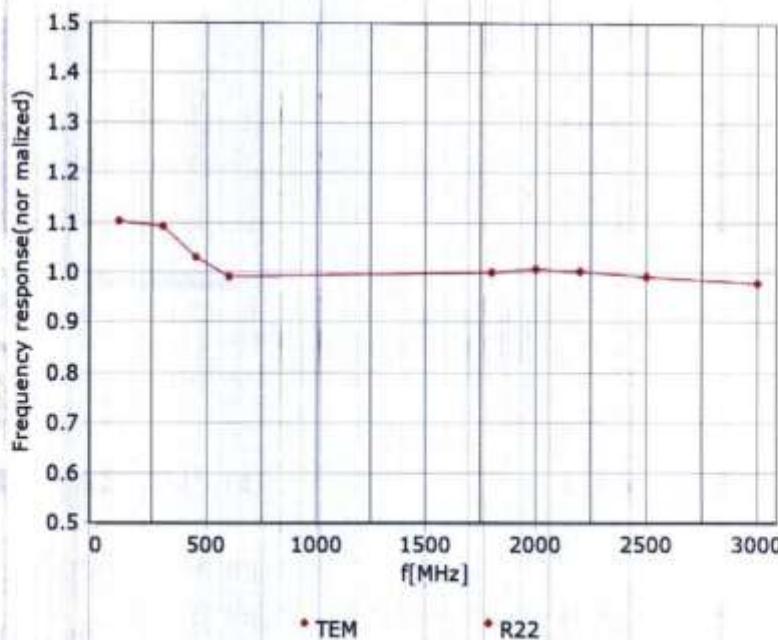


Uncertainty of Frequency Response of E-field: $\pm 7.4\%$ ($k=2$)





Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China
 Tel: +86-10-62304633-2512 Fax: +86-10-62304633-2504
 E-mail: cttl@chinattl.com <http://www.chinattl.cn>

Receiving Pattern (Φ), $\theta=0^\circ$

f=600 MHz, TEM

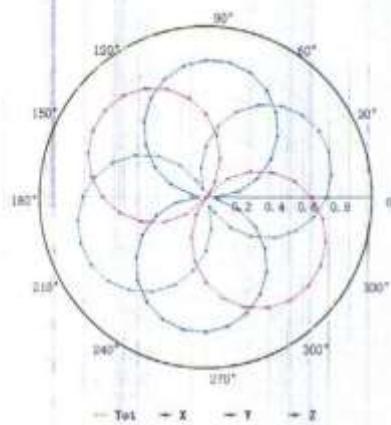


f=1800 MHz, R22

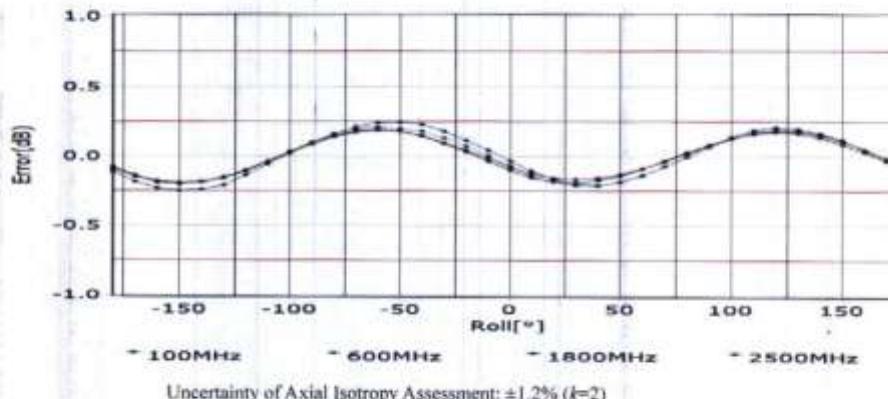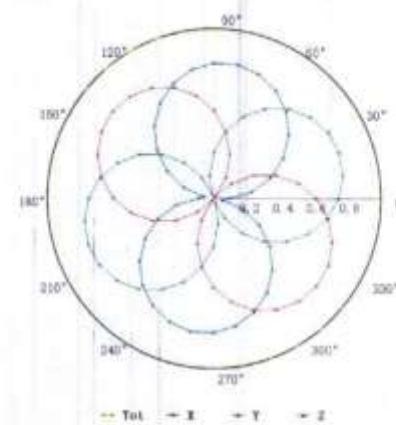

Certificate No:Z22-60064



Page 6 of 9



Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2512 Fax: +86-10-62304633-2504
E-mail: ttl@chinattl.com <http://www.chinattl.ca>



Dynamic Range f(SAR_{head}) (TEM cell, f = 900 MHz)

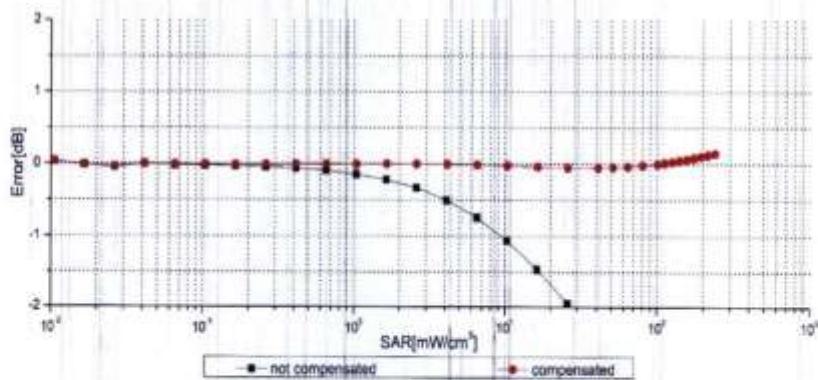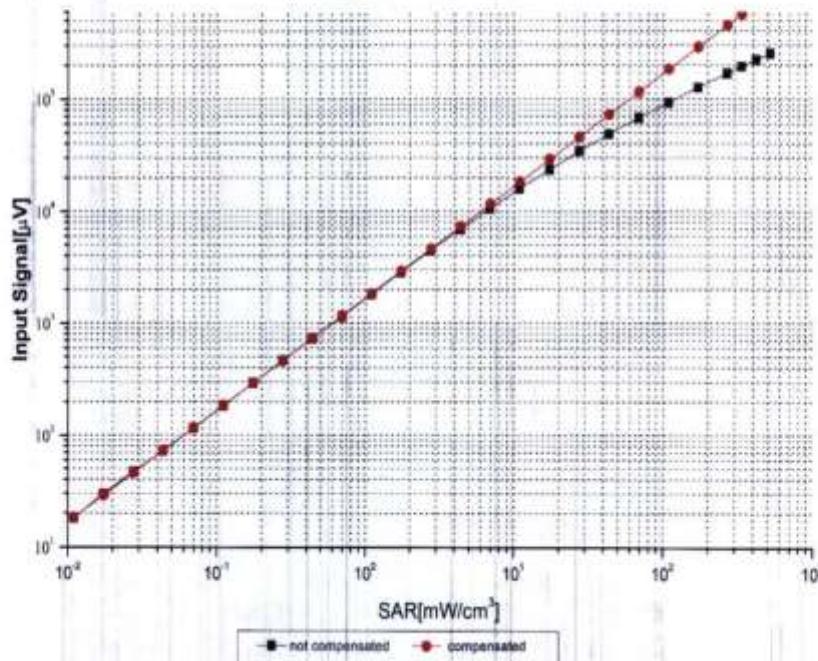

Uncertainty of Linearity Assessment: ±0.9% (k=2)

Certificate No:Z22-60064

Page 7 of 9




Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2512 Fax: +86-10-62304633-2504
E-mail: ctfl@chinattl.com <http://www.chinattl.com>




Conversion Factor Assessment


f=750 MHz,WGLS R9(H_convF)

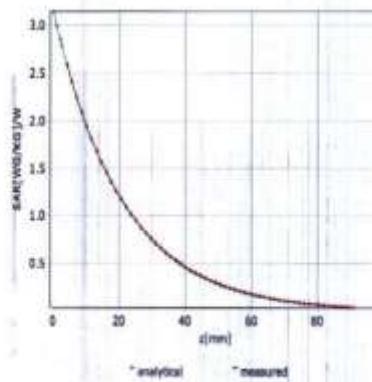

f=1750 MHz,WGLS R22(H_convF)

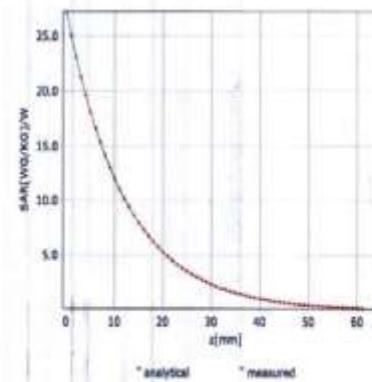

Deviation from Isotropy in Liquid

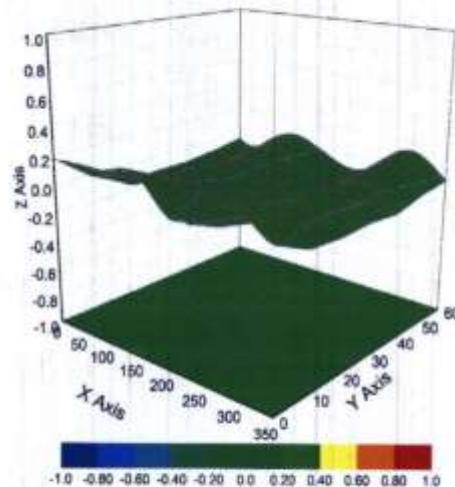

Uncertainty of Spherical Isotropy Assessment: $\pm 3.2\% (k=2)$

Certificate No: Z22-60064

Page 8 of 9



Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2512 Fax: +86-10-62304633-2504
E-mail: ttl@chinattl.com <http://www.chinattl.cn>



DASY/EASY – Parameters of Probe: EX3DV4 – SN:7633

Other Probe Parameters

Sensor Arrangement	Triangular
Connector Angle (°)	26.4
Mechanical Surface Detection Mode	enabled
Optical Surface Detection Mode	disable
Probe Overall Length	337mm
Probe Body Diameter	10mm
Tip Length	9mm
Tip Diameter	2.5mm
Probe Tip to Sensor X Calibration Point	1mm
Probe Tip to Sensor Y Calibration Point	1mm
Probe Tip to Sensor Z Calibration Point	1mm
Recommended Measurement Distance from Surface	1.4mm



Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191
Tel: +86-10-62304633-2117
E-mail: em@caict.ac.cn http://www.caict.ac.cn



中国认可
国际互认
校准
CNAS L0570



Client 3in

Certificate No: Z22-60398

CALIBRATION CERTIFICATE

Object D750V3 - SN: 1144

Calibration Procedure(s) FF-Z11-003-01
Calibration Procedures for dipole validation kits



Calibration date: September 16, 2022

This calibration Certificate documents the traceability to national standards, which realize the physical units of measurements (SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22±3)°C and humidity<70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Calibrated by, Certificate No.)	Scheduled Calibration
Power Meter NRP2	106277	24-Sep-21 (CTTL, No.J21X08326)	Sep-22
Power sensor NRP8S	104291	24-Sep-21 (CTTL, No.J21X08326)	Sep-22
Reference Probe EX3DV4	SN 7464	26-Jan-22(SPEAG, No.EX3-7464_Jan22)	Jan-23
DAE4	SN 1556	12-Jan-22(CTTL-SPEAG, No.Z22-60007)	Jan-23
Secondary Standards	ID #	Cal Date (Calibrated by, Certificate No.)	Scheduled Calibration
Signal Generator E4438C	MY49071430	13-Jan-22 (CTTL, No.J22X00409)	Jan-23
Network Analyzer E5071C	MY46110673	14-Jan-22 (CTTL, No.J22X00406)	Jan-23

Calibrated by:	Name	Function	Signature
Zhao Jing	SAR Test Engineer		
Lin Hao	SAR Test Engineer		
Qi Dianyuan	SAR Project Leader		

Issued: September 23, 2022

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2117
E-mail: emf@caict.ac.cn <http://www.caict.ac.cn>

**Glossary:**

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORMx,y,z
N/A	not applicable or not measured

Calibration is Performed According to the Following Standards:

- IEC/IEEE 62209-1528, "Measurement Procedure for The Assessment of Specific Absorption Rate of Human Exposure to Radio Frequency Fields from Hand-held and Body-mounted Wireless Communication Devices- Part 1528: Human Models, Instrumentation and Procedures (Frequency range of 4 MHz to 10 GHz)", October 2020
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Additional Documentation:

- DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- Measurement Conditions:* Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:* The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:* These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:* One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:* SAR measured at the stated antenna input power.
- SAR normalized:* SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:* The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of Measurement multiplied by the coverage factor k=2, which for a normal distribution Corresponds to a coverage probability of approximately 95%.



Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2117
E-mail: emf@caict.ac.cn <http://www.caict.ac.cn>



Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY52	V52.10.4
Extrapolation	Advanced Extrapolation	
Phantom	Triple Flat Phantom 5.1C	
Distance Dipole Center - TSL	15 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	750 MHz ± 1 MHz	

Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	42.0	0.90 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	42.1 ± 6 %	0.91 mho/m ± 6 %
Head TSL temperature change during test	<1.0 °C	—	—

SAR result with Head TSL

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	2.12 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	8.32 W/kg ± 18.8 % (k=2)
SAR averaged over 10 cm ³ (10 g) of Head TSL	Condition	
SAR measured	250 mW input power	1.40 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	5.52 W/kg ± 18.7 % (k=2)



Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2117
E-mail: emfi@caict.ac.cn <http://www.caict.ac.cn>



Appendix (Additional assessments outside the scope of CNAS L0570)

Antenna Parameters with Head TSL

Impedance, transformed to feed point	52.2Ω- 2.96jΩ
Return Loss	- 28.8dB

General Antenna Parameters and Design

Electrical Delay (one direction)	0.942 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feed-point can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.
No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feed-point may be damaged.

Additional EUT Data

Manufactured by	SPEAG
-----------------	-------



Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2117
E-mail: emf@caict.ac.cn <http://www.caict.ac.cn>

**DASY5 Validation Report for Head TSL**

Date: 2022-09-16

Test Laboratory: CTTL, Beijing, China

DUT: Dipole 750 MHz; Type: D750V3; Serial: D750V3 - SN: 1144

Communication System: UID 0, CW; Frequency: 750 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 750 \text{ MHz}$; $\sigma = 0.913 \text{ S/m}$; $\epsilon_r = 42.07$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN7464; ConvF(10.26, 10.26, 10.26) @ 750 MHz;
Calibrated: 2022-01-26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1556; Calibrated: 2022-01-12
- Phantom: MFP_V5.1C (20deg probe tilt); Type: QD 000 P51 Cx; Serial:
1062
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

Dipole Calibration/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid:
 $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 54.98 V/m; Power Drift = -0.01 dB


Peak SAR (extrapolated) = 3.15 W/kg

SAR(1 g) = 2.12 W/kg; SAR(10 g) = 1.4 W/kg

Smallest distance from peaks to all points 3 dB below = 22.7 mm

Ratio of SAR at M2 to SAR at M1 = 66.8%

Maximum value of SAR (measured) = 2.81 W/kg

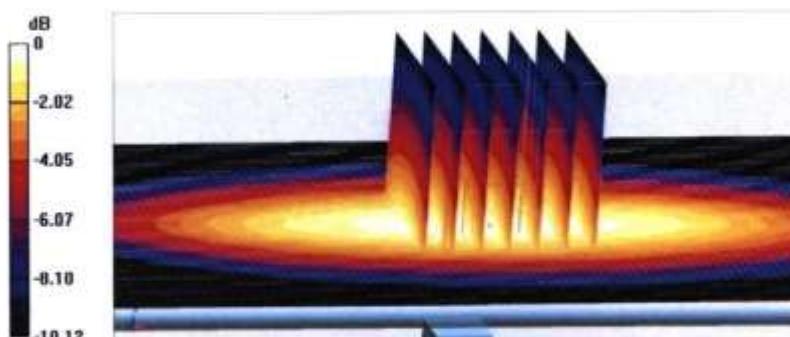**0 dB = 2.81 W/kg = 4.49 dBW/kg**

Certificate No: Z22-60398


Page 5 of 6



Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2117
E-mail: emf@caict.ac.cn <http://www.caict.ac.cn>



Impedance Measurement Plot for Head TSL

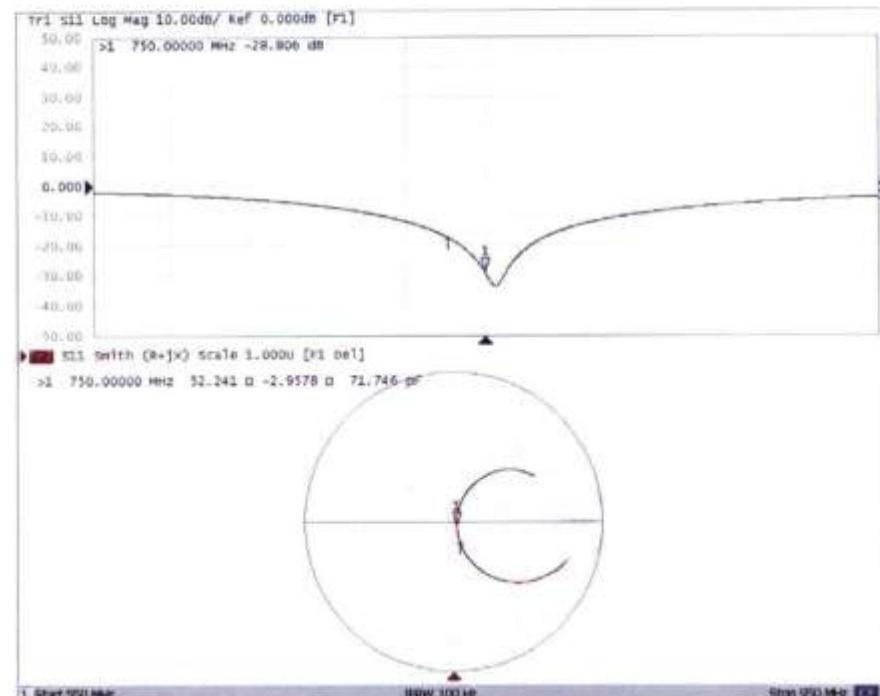

Certificate No: Z22-60398

Page 6 of 6



Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191
Tel: +86-10-62304633-2117
E-mail: emfl@caict.ac.cn http://www.caict.ac.cn



中国认可
国际互认
校准
CALIBRATION
CNAS L0570



Client 3in

Certificate No: Z22-60399

CALIBRATION CERTIFICATE

Object D835V2 - SN: 4d112

Calibration Procedure(s) FF-Z11-003-01
Calibration Procedures for dipole validation kits



Calibration date: September 21, 2022

This calibration Certificate documents the traceability to national standards, which realize the physical units of measurements (SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22±3)°C and humidity<70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Calibrated by, Certificate No.)	Scheduled Calibration
Power Meter NRP2	106277	24-Sep-21 (CTTL, No.J21X08326)	Sep-22
Power sensor NRP8S	104291	24-Sep-21 (CTTL, No.J21X08326)	Sep-22
Reference Probe EX3DV4	SN 7464	26-Jan-22(SPEAG, No.EX3-7464_Jan22)	Jan-23
DAE4	SN 1556	12-Jan-22(CTTL-SPEAG, No.Z22-60007)	Jan-23
Secondary Standards	ID #	Cal Date (Calibrated by, Certificate No.)	Scheduled Calibration
Signal Generator E4438C	MY49071430	13-Jan-22 (CTTL, No.J22X00409)	Jan-23
Network Analyzer E5071C	MY46110673	14-Jan-22 (CTTL, No.J22X00406)	Jan-23

Calibrated by:	Name	Function	Signature
Zhao Jing	SAR Test Engineer		
Reviewed by:	Lin Hao	SAR Test Engineer	
Approved by:	Qi Dianyuan	SAR Project Leader	

Issued: September 27, 2022

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

In Collaboration with
TTL **s p e a g**
CALIBRATION LABORATORY

Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2117
E-mail: emtf@caict.ac.cn <http://www.caict.ac.cn>

Glossary:

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORMx,y,z
N/A	not applicable or not measured

Calibration is Performed According to the Following Standards:

a) IEC/IEEE 62209-1528, "Measurement Procedure for The Assessment of Specific Absorption Rate of Human Exposure to Radio Frequency Fields from Hand-held and Body-mounted Wireless Communication Devices- Part 1528: Human Models, Instrumentation and Procedures (Frequency range of 4 MHz to 10 GHz)", October 2020

b) KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Additional Documentation:

c) DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- *Measurement Conditions:* Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- *Antenna Parameters with TSL:* The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- *Feed Point Impedance and Return Loss:* These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- *Electrical Delay:* One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- *SAR measured:* SAR measured at the stated antenna input power.
- *SAR normalized:* SAR as measured, normalized to an input power of 1 W at the antenna connector.
- *SAR for nominal TSL parameters:* The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of Measurement multiplied by the coverage factor k=2, which for a normal distribution Corresponds to a coverage probability of approximately 95%.

 In Collaboration with s p e a g CALIBRATION LABORATORY		
Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China Tel: +86-10-62304633-2117 E-mail: emf@caict.ac.cn http://www.caict.ac.cn		
Measurement Conditions DASY system configuration, as far as not given on page 1.		
DASY Version	DASY52	
Extrapolation	Advanced Extrapolation	
Phantom	Triple Flat Phantom 5.1C	
Distance Dipole Center - TSL	15 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	835 MHz ± 1 MHz	


Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	41.5	0.90 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	42.3 ± 6 %	0.90 mho/m ± 6 %
Head TSL temperature change during test	<1.0 °C	—	—

SAR result with Head TSL

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	2.41 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	9.66 W/kg ± 18.8 % (k=2)
SAR averaged over 10 cm ³ (10 g) of Head TSL	Condition	
SAR measured	250 mW input power	1.57 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	6.29 W/kg ± 18.7 % (k=2)

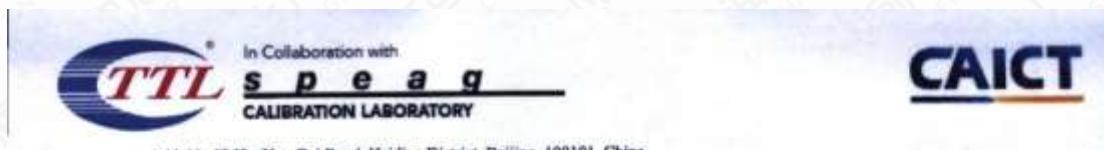

Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2117
E-mail: emf@caict.ac.cn http://www.caict.ac.cn

Appendix (Additional assessments outside the scope of CNAS L0570)

Antenna Parameters with Head TSL

Impedance, transformed to feed point	51.9Ω+ 1.27jΩ
Return Loss	- 33.0dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.301 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feed-point can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.


No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feed-point may be damaged.


Additional EUT Data

Manufactured by	SPEAG
-----------------	-------



Dipole Calibration/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 58.43 V/m; Power Drift = -0.02 dB
Peak SAR (extrapolated) = 3.63 W/kg
SAR(1 g) = 2.41 W/kg; SAR(10 g) = 1.57 W/kg
Smallest distance from peaks to all points 3 dB below = 16.6 mm
Ratio of SAR at M2 to SAR at M1 = 66.4%
Maximum value of SAR (measured) = 3.22 W/kg

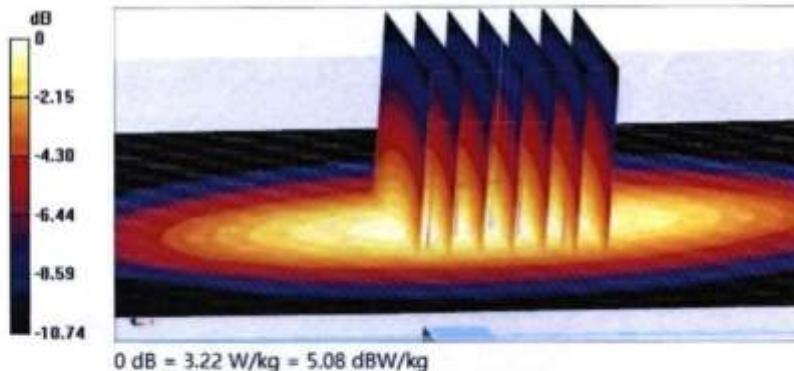

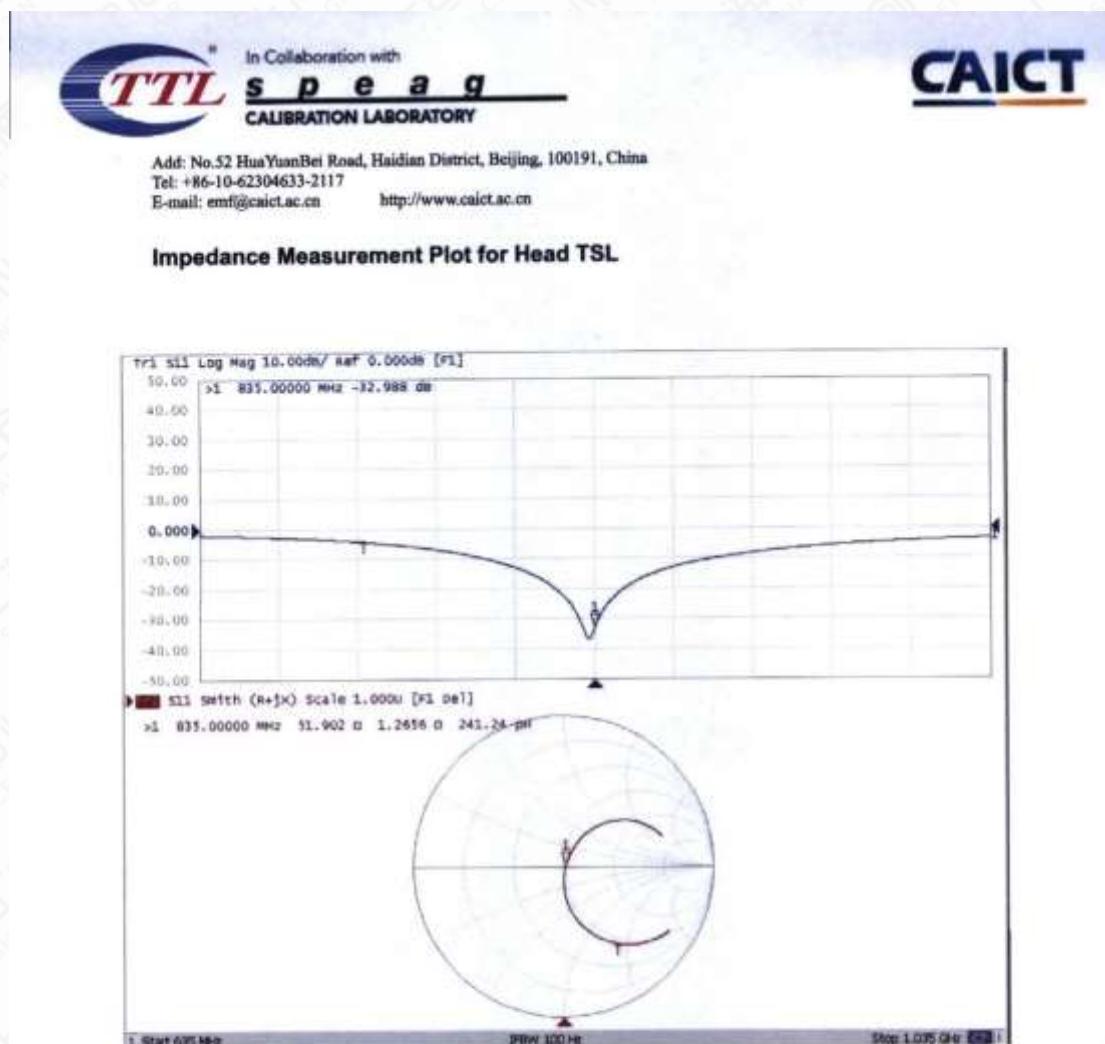

Certificate No: Z22-60399

Page 6 of 6



Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191
Tel: +86-10-62304633-2117
E-mail: emf@caict.ac.cn http://www.caict.ac.cn



中国认可
国际互认
校准
CALIBRATION
CNAS L0570



Client 3in

Certificate No: Z22-60401

CALIBRATION CERTIFICATE

Object D1750V2 - SN: 1044

Calibration Procedure(s) FF-Z11-003-01
Calibration Procedures for dipole validation kits




Calibration date: September 20, 2022

This calibration Certificate documents the traceability to national standards, which realize the physical units of measurements (SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22±3)°C and humidity<70%.


Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Calibrated by, Certificate No.)	Scheduled Calibration
Power Meter NRP2	106277	24-Sep-21 (CTTL, No.J21X08326)	Sep-22
Power sensor NRP8S	104291	24-Sep-21 (CTTL, No.J21X08326)	Sep-22
Reference Probe EX3DV4	SN 7464	26-Jan-22(SPEAG, No.EX3-7464_Jan22)	Jan-23
DAE4	SN 1556	12-Jan-22(CTTL-SPEAG, No.Z22-60007)	Jan-23
Secondary Standards	ID #	Cal Date (Calibrated by, Certificate No.)	Scheduled Calibration
Signal Generator E4438C	MY49071430	13-Jan-22 (CTTL, No.J22X00409)	Jan-23
Network Analyzer E5071C	MY46110673	14-Jan-22 (CTTL, No.J22X00406)	Jan-23

Calibrated by:	Name	Function	Signature
	Zhao Jing	SAR Test Engineer	
Reviewed by:	Lin Hao	SAR Test Engineer	
Approved by:	Qi Dianyuan	SAR Project Leader	

Issued: September 27, 2022

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

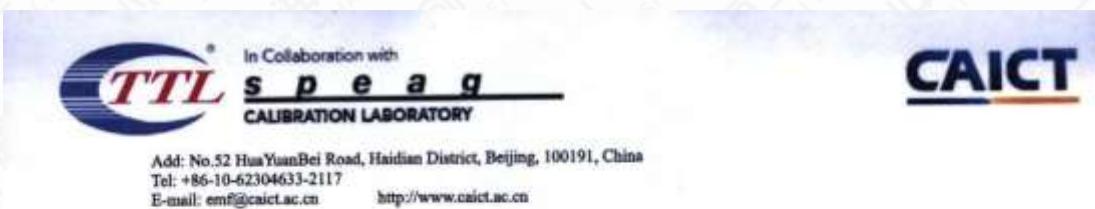**Glossary:**

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORMx,y,z
N/A	not applicable or not measured

Calibration is Performed According to the Following Standards:

- IEC/IEEE 62209-1528, "Measurement Procedure for The Assessment of Specific Absorption Rate of Human Exposure to Radio Frequency Fields from Hand-held and Body-mounted Wireless Communication Devices- Part 1528: Human Models, Instrumentation and Procedures (Frequency range of 4 MHz to 10 GHz)", October 2020
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Additional Documentation:

- DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- Measurement Conditions:** Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:** The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:** These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:** One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:** SAR measured at the stated antenna input power.
- SAR normalized:** SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:** The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of Measurement multiplied by the coverage factor k=2, which for a normal distribution Corresponds to a coverage probability of approximately 95%.

In Collaboration with

TTL **s p e a g**
CALIBRATION LABORATORY

Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2117
E-mail: emf@caict.ac.cn <http://www.caict.ac.cn>

Measurement Conditions
DASY system configuration, as far as not given on page 1.

DASY Version	DASY52	52.10.4
Extrapolation	Advanced Extrapolation	
Phantom	Triple Flat Phantom 5.1C	
Distance Dipole Center - TSL	10 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	1750 MHz ± 1 MHz	


Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	40.1	1.37 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	40.2 ± 6 %	1.36 mho/m ± 6 %
Head TSL temperature change during test	<1.0 °C	—	—

SAR result with Head TSL

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	9.16 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	36.8 W/kg ± 18.8 % (k=2)
SAR averaged over 10 cm ³ (10 g) of Head TSL	Condition	
SAR measured	250 mW input power	4.91 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	19.7 W/kg ± 18.7 % (k=2)

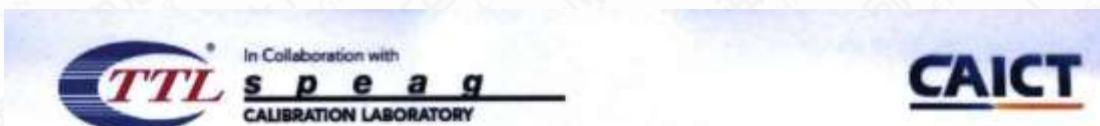

Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2117
E-mail: emf@caict.ac.cn http://www.caict.ac.cn

Appendix (Additional assessments outside the scope of CNAS L0570)

Antenna Parameters with Head TSL

Impedance, transformed to feed point	48.2Ω- 0.02jΩ
Return Loss	-34.7dB

General Antenna Parameters and Design


Electrical Delay (one direction)	1.122 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feed-point can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.
No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feed-point may be damaged.

Additional EUT Data

Manufactured by	SPEAG
-----------------	-------

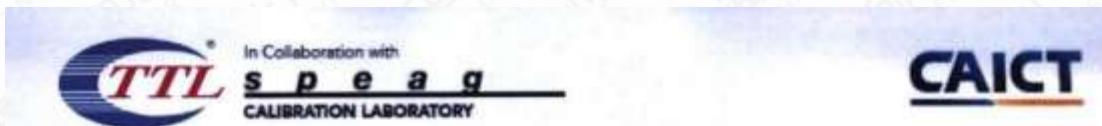

Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2117
E-mail: emsf@caict.ac.cn <http://www.caict.ac.cn>

DASY5 Validation Report for Head TSL

Date: 2022-09-20

Test Laboratory: CTTL, Beijing, China

DUT: Dipole 1750 MHz; Type: D1750V2; Serial: D1750V2 - SN: 1044

Communication System: UID 0, CW; Frequency: 1750 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1750 \text{ MHz}$; $\sigma = 1.362 \text{ S/m}$; $\epsilon_r = 40.22$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN7464; ConvF(8.52, 8.52, 8.52) @ 1750 MHz; Calibrated: 2022-01-26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1556; Calibrated: 2022-01-12
- Phantom: MFP_V5.1C (20deg probe tilt); Type: QD 000 P51 Cx; Serial: 1062
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

Dipole Calibration/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 97.57 V/m; Power Drift = -0.07 dB


Peak SAR (extrapolated) = 16.5 W/kg

SAR(1 g) = 9.16 W/kg; SAR(10 g) = 4.91 W/kg

Smallest distance from peaks to all points 3 dB below = 10 mm


Ratio of SAR at M2 to SAR at M1 = 56%

Maximum value of SAR (measured) = 14.0 W/kg

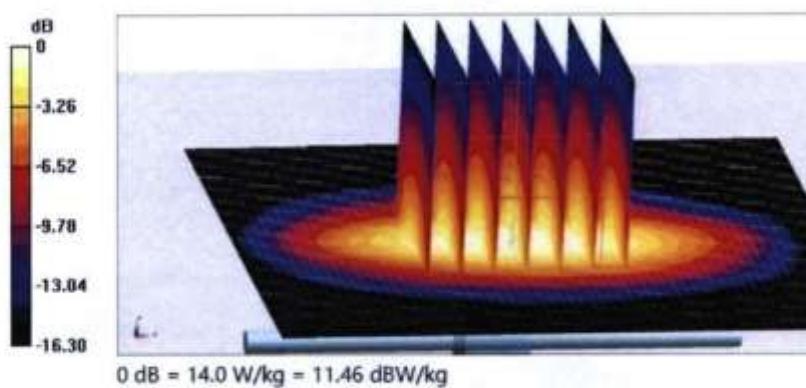

Certificate No: Z22-60401

Page 5 of 6

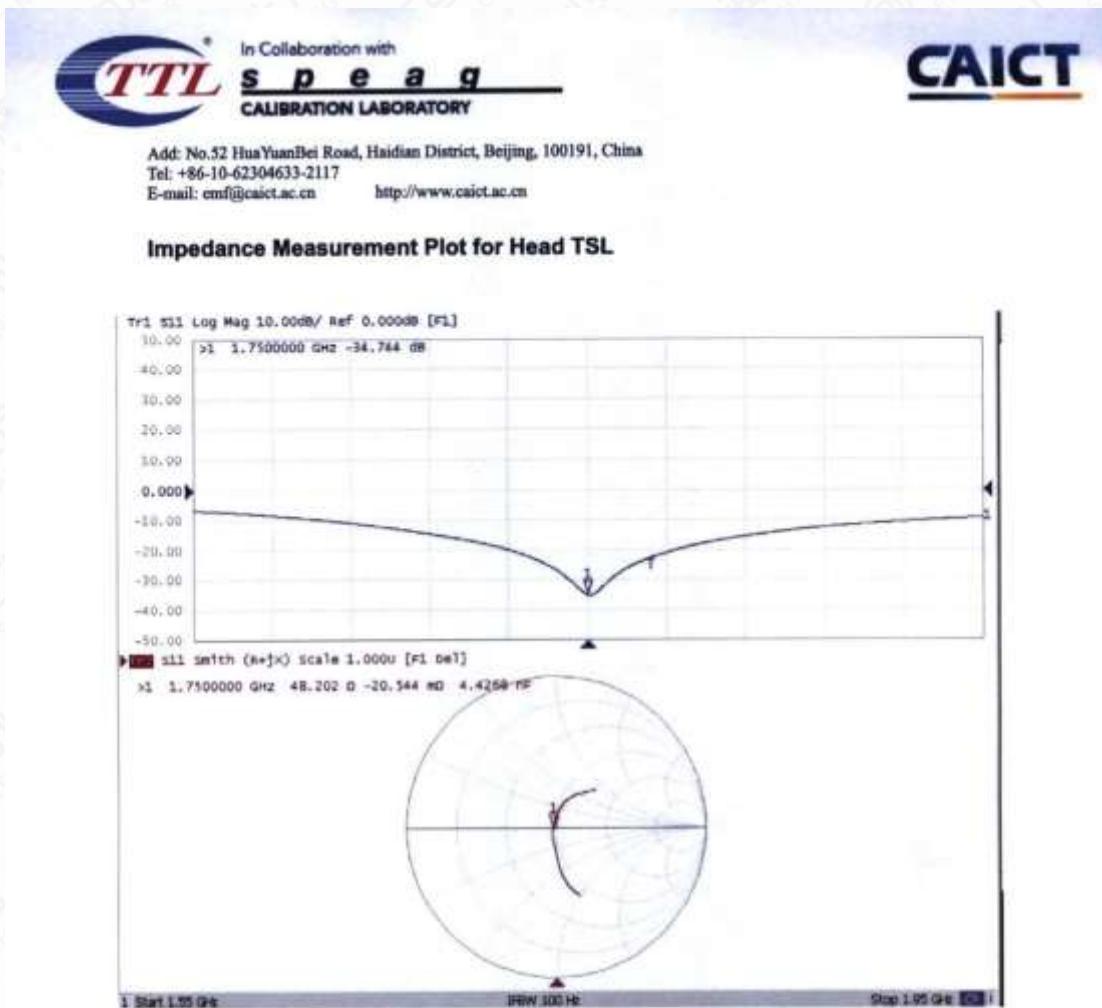

Certificate No: Z22-60401

Page 6 of 6



Add: No.52 HuYuanBei Road, Haidian District, Beijing, 100191
Tel: +86-10-62304633-2117
E-mail: cmf@caict.ac.cn http://www.caict.ac.cn



中国认可
国际互认
校准
CALIBRATION
CNAS L0570



Client 3in

Certificate No: Z22-60536

CALIBRATION CERTIFICATE

Object D1900V2 - SN: 5d232

Calibration Procedure(s) FF-Z11-003-01
Calibration Procedures for dipole validation kits




Calibration date: December 12, 2022

This calibration Certificate documents the traceability to national standards, which realize the physical units of measurements (SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22±3)°C and humidity<70%.


Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Calibrated by, Certificate No.)	Scheduled Calibration
Power Meter NRP2	106276	10-May-22 (CTTL, No.J22X03103)	May-23
Power sensor NRP6A	101369	10-May-22 (CTTL, No.J22X03103)	May-23
Reference Probe EX3DV4	SN 7464	26-Jan-22(SPEAG, No.EX3-7464_Jan22)	Jan-23
DAE4	SN 1556	12-Jan-22(CTTL-SPEAG, No.Z22-60007)	Jan-23
Secondary Standards	ID #	Cal Date (Calibrated by, Certificate No.)	Scheduled Calibration
Signal Generator E4438C	MY49071430	13-Jan-22 (CTTL, No.J22X00409)	Jan-23
Network Analyzer E5071C	MY46110673	14-Jan-22 (CTTL, No.J22X00406)	Jan-23

	Name	Function	Signature
Calibrated by:	Zhao Jing	SAR Test Engineer	
Reviewed by:	Lin Hao	SAR Test Engineer	
Approved by:	Qi Dianyuan	SAR Project Leader	

Issued: December 17, 2022

This calibration certificate shall not be reproduced except in full without written approval of the laboratory



Add: No.52 HuaYunBei Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2117
E-mail: csl@chinattl.com http://www.caict.ac.cn

**Glossary:**

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORMx,y,z
N/A	not applicable or not measured

Calibration is Performed According to the Following Standards:

- a) IEC/IEEE 62209-1528, "Measurement Procedure for The Assessment of Specific Absorption Rate of Human Exposure to Radio Frequency Fields from Hand-held and Body-mounted Wireless Communication Devices- Part 1528: Human Models, Instrumentation and Procedures (Frequency range of 4 MHz to 10 GHz)", October 2020
- b) KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Additional Documentation:

- c) DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- *Measurement Conditions:* Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- *Antenna Parameters with TSL:* The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- *Feed Point Impedance and Return Loss:* These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- *Electrical Delay:* One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- *SAR measured:* SAR measured at the stated antenna input power.
- *SAR normalized:* SAR as measured, normalized to an input power of 1 W at the antenna connector.
- *SAR for nominal TSL parameters:* The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of Measurement multiplied by the coverage factor k=2, which for a normal distribution Corresponds to a coverage probability of approximately 95%.



Add: No.32 HuaYunBei Rond, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2117
E-mail: cttl@chinatll.com <http://www.caict.ac.cn>



Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY52	52.10.4
Extrapolation	Advanced Extrapolation	
Phantom	Triple Flat Phantom 5.1C	
Distance Dipole Center - TSL	10 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	1900 MHz ± 1 MHz	

Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	40.0	1.40 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	40.7 ± 6 %	1.38 mho/m ± 6 %
Head TSL temperature change during test	<1.0 °C	—	—

SAR result with Head TSL

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	9.89 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	40.0 W/kg ± 18.8 % (k=2)
SAR averaged over 10 cm ³ (10 g) of Head TSL	Condition	
SAR measured	250 mW input power	5.14 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	20.7 W/kg ± 18.7 % (k=2)



Addr: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2117
E-mail: csl@chinaitt.com <http://www.caict.ac.cn>



Appendix (Additional assessments outside the scope of CNAS L0570)

Antenna Parameters with Head TSL

Impedance, transformed to feed point	52.8Ω+ 6.58jΩ
Return Loss	-23.2dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.107 ns
----------------------------------	----------


After long term use with 100W radiated power, only a slight warming of the dipole near the feed-point can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feed-point may be damaged.

Additional EUT Data

Manufactured by	SPEAG
-----------------	-------



Add: No.52 HuaYunBei Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2117
E-mail: ctll@chinattl.com http://www.caict.ac.cn

**DASY5 Validation Report for Head TSL**

Date: 2022-12-12

Test Laboratory: CTTL, Beijing, China

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN: 5d232

Communication System: UID 0, CW; Frequency: 1900 MHz

Medium parameters used: $f = 1900 \text{ MHz}$; $\sigma = 1.383 \text{ S/m}$; $\epsilon_r = 40.72$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN7464; ConvF(8.18, 8.18, 8.18) @ 1900 MHz; Calibrated: 2022-01-26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1556; Calibrated: 2022-01-12
- Phantom: MFP_V5.1C (20deg probe tilt); Type: QD 000 P51 Cx; Serial: 1062
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

Dipole Calibration/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 96.24 V/m; Power Drift = -0.04 dB


Peak SAR (extrapolated) = 18.5 W/kg

SAR(1 g) = 9.89 W/kg; SAR(10 g) = 5.14 W/kg

Smallest distance from peaks to all points 3 dB below = 10 mm

Ratio of SAR at M2 to SAR at M1 = 54%

Maximum value of SAR (measured) = 15.5 W/kg

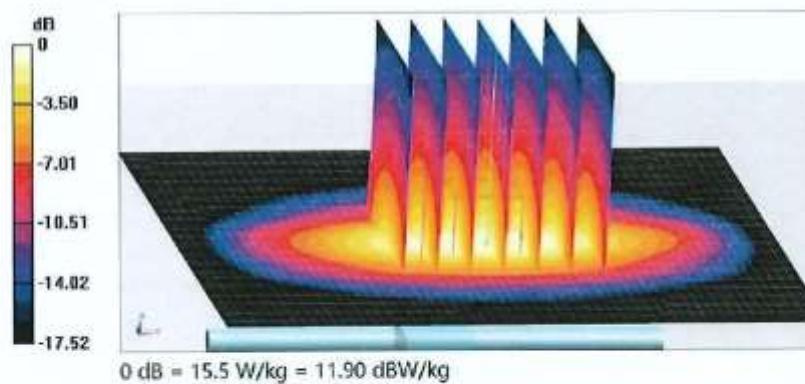




Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2117
E-mail: cftt@chimttl.com http://www.caict.ac.cn




Impedance Measurement Plot for Head TSL

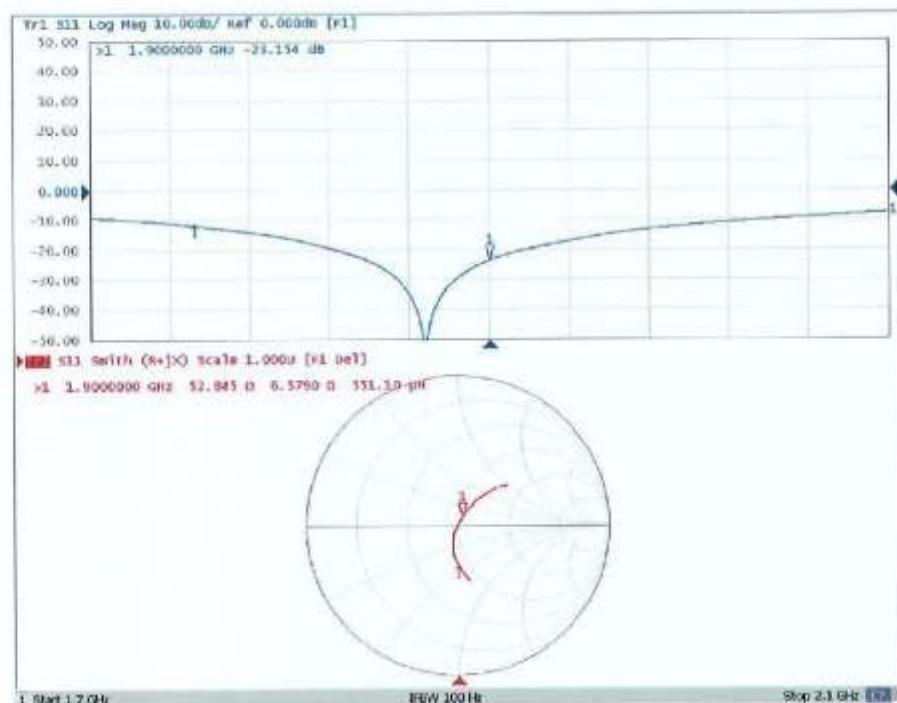

Certificate No: Z22-60536

Page 6 of 6

 In Collaboration with TTL s p e a g CALIBRATION LABORATORY		 CNAS 中国认可 国际互认 校准 CALIBRATION CNAS L0570	
Client	3in	Certificate No: Z22-60404	
CALIBRATION CERTIFICATE			
Object	D2450V2 - SN: 858		
Calibration Procedure(s)	FF-Z11-003-01 Calibration Procedures for dipole validation kits		
Calibration date:	September 19, 2022		
This calibration Certificate documents the traceability to national standards, which realize the physical units of measurements (SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.			
All calibrations have been conducted in the closed laboratory facility: environment temperature (22±3)°C and humidity<70%.			
Calibration Equipment used (M&TE critical for calibration)			
Primary Standards	ID #	Cal Date (Calibrated by, Certificate No.)	Scheduled Calibration
Power Meter NRP2	106277	24-Sep-21 (CTTL, No.J21X08326)	Sep-22
Power sensor NRP8S	104291	24-Sep-21 (CTTL, No.J21X08326)	Sep-22
Reference Probe EX3DV4	SN 7464	26-Jan-22(SPEAG, No.EX3-7464_Jan22)	Jan-23
DAE4	SN 1556	12-Jan-22(CTTL-SPEAG, No.Z22-60007)	Jan-23
Secondary Standards	ID #	Cal Date (Calibrated by, Certificate No.)	Scheduled Calibration
Signal Generator E4438C	MY49071430	13-Jan-22 (CTTL, No. J22X00409)	Jan-23
Network Analyzer E5071C	MY46110673	14-Jan-22 (CTTL, No.J22X00406)	Jan-23
Calibrated by:	Name Zhao Jing	Function SAR Test Engineer	
Reviewed by:	Name Lin Hao	Function SAR Test Engineer	
Approved by:	Name Qi Dianyuan	Function SAR Project Leader	
Issued: September 27, 2022			
This calibration certificate shall not be reproduced except in full without written approval of the laboratory.			

Certificate No: Z22-60404

Page 1 of 6



Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2117
E-mail: cttl@chinattl.com <http://www.caict.ac.cn>

Glossary:

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORMx,y,z
N/A	not applicable or not measured

Calibration is Performed According to the Following Standards:

- IEC/IEEE 62209-1528, "Measurement Procedure for The Assessment of Specific Absorption Rate of Human Exposure to Radio Frequency Fields from Hand-held and Body-mounted Wireless Communication Devices- Part 1528: Human Models, Instrumentation and Procedures (Frequency range of 4 MHz to 10 GHz)", October 2020
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"


Additional Documentation:

- DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- Measurement Conditions:* Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:* The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:* These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:* One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:* SAR measured at the stated antenna input power.
- SAR normalized:* SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:* The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of Measurement multiplied by the coverage factor k=2, which for a normal distribution Corresponds to a coverage probability of approximately 95%.

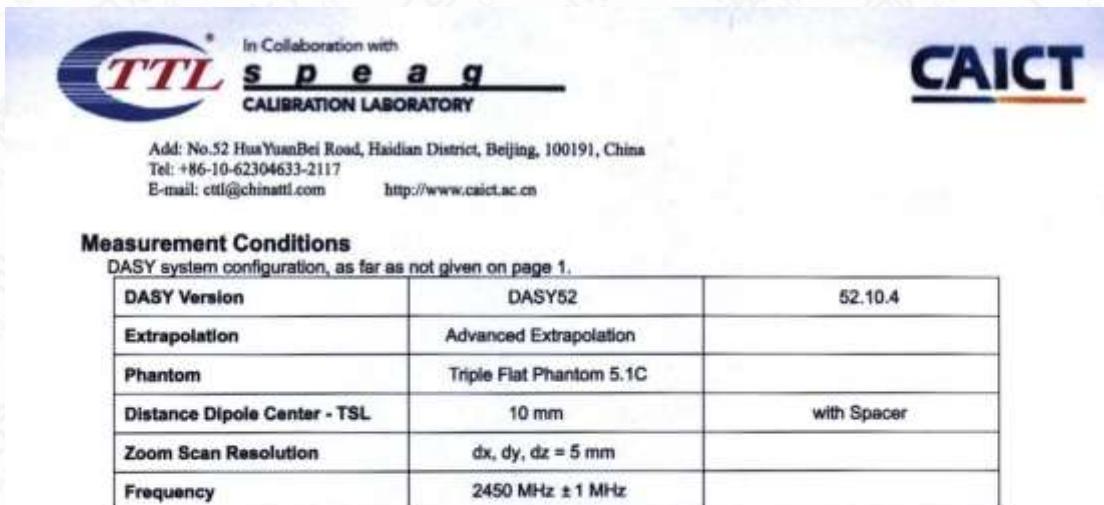**Measurement Conditions**

DASY system configuration, as far as not given on page 1.

DASY Version	DASY52	52.10.4
Extrapolation	Advanced Extrapolation	
Phantom	Triple Flat Phantom 5.1C	
Distance Dipole Center - TSL	10 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	2450 MHz ± 1 MHz	


Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	39.2	1.80 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	39.6 ± 6 %	1.81 mho/m ± 6 %
Head TSL temperature change during test	<1.0 °C	—	—

SAR result with Head TSL

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	13.2 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	52.8 W/kg ± 18.8 % (k=2)
SAR averaged over 10 cm ³ (10 g) of Head TSL	Condition	
SAR measured	250 mW input power	6.21 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	24.9 W/kg ± 18.7 % (k=2)



Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2117
E-mail: ttl@chinattl.com http://www.caict.ac.cn

Appendix (Additional assessments outside the scope of CNAS L0570)

Antenna Parameters with Head TSL

Impedance, transformed to feed point	52.9Ω+ 6.40jΩ
Return Loss	- 23.3dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.066 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feed-point can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.
No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feed-point may be damaged.

Additional EUT Data

Manufactured by	SPEAG
-----------------	-------



Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2117
E-mail: ctli@chinattl.com http://www.caict.ac.cn

DASY5 Validation Report for Head TSL

Date: 2022-09-19

Test Laboratory: CTTL, Beijing, China

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN: 858

Communication System: UID 0, CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2450$ MHz; $\sigma = 1.808$ S/m; $\epsilon_r = 39.63$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN7464; ConvF(7.77, 7.77, 7.77) @ 2450 MHz; Calibrated: 2022-01-26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1556; Calibrated: 2022-01-12
- Phantom: MFP_V5.1C (20deg probe tilt); Type: QD 000 P51 Cx; Serial: 1062
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

Dipole Calibration/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 100.1 V/m; Power Drift = 0.00 dB


Peak SAR (extrapolated) = 26.8 W/kg

SAR(1 g) = 13.2 W/kg; SAR(10 g) = 6.21 W/kg

Smallest distance from peaks to all points 3 dB below = 9 mm


Ratio of SAR at M2 to SAR at M1 = 50%

Maximum value of SAR (measured) = 21.9 W/kg

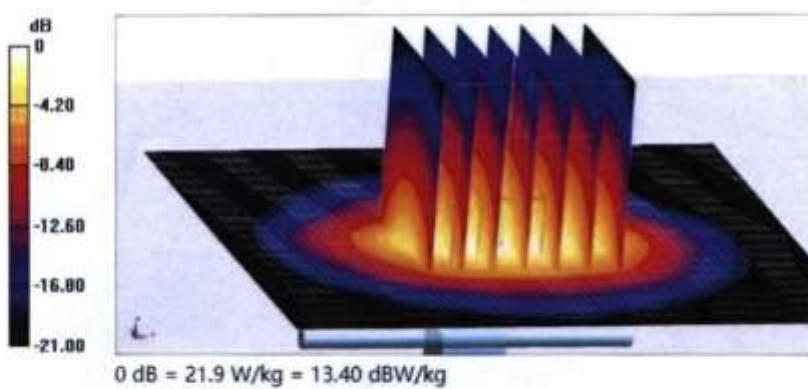


Certificate No: Z22-60404

Page 5 of 6



Add: No.52 Hua YuanBei Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2117
E-mail: cttl@chinattl.com http://www.caict.ac.cn

Impedance Measurement Plot for Head TSL

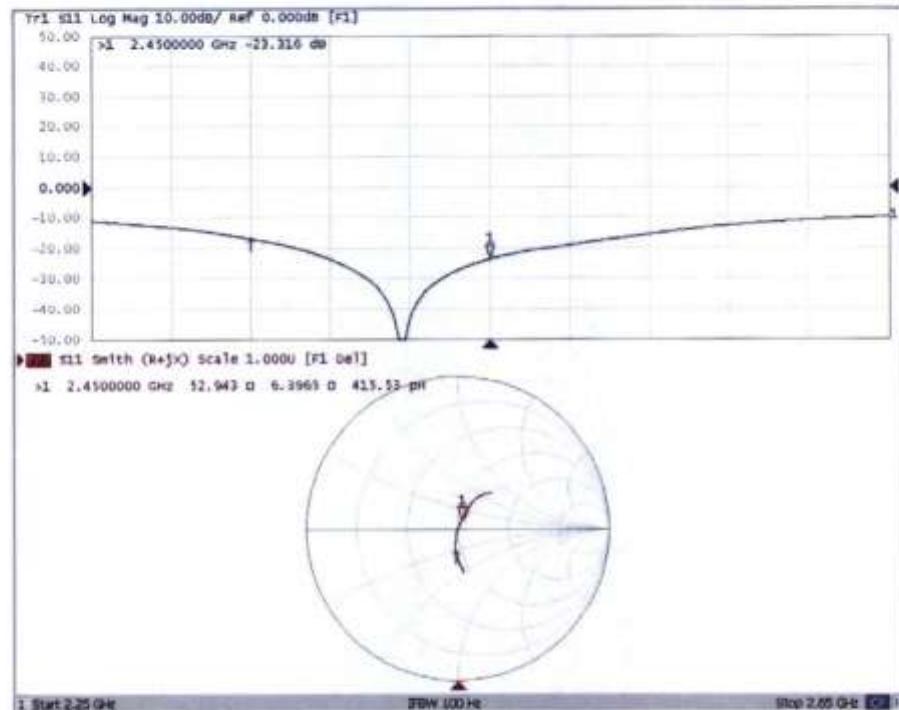

Certificate No: Z22-60404

Page 6 of 6



Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191
Tel: +86-10-62304633-2117
E-mail: emfig@caict.ac.cn http://www.caict.ac.cn



中国认可
国际互认
校准
CALIBRATION
CNAS L0570



Client 3in

Certificate No: Z22-60405

CALIBRATION CERTIFICATE

Object D2600V2 - SN: 1031

Calibration Procedure(s) FF-Z11-003-01
Calibration Procedures for dipole validation kits



Calibration date: September 21, 2022

This calibration Certificate documents the traceability to national standards, which realize the physical units of measurements (SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22±3)°C and humidity<70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Calibrated by, Certificate No.)	Scheduled Calibration
Power Meter NRP2	106277	24-Sep-21 (CTTL, No.J21X08326)	Sep-22
Power sensor NRP8S	104291	24-Sep-21 (CTTL, No.J21X08326)	Sep-22
Reference Probe EX3DV4	SN 7464	26-Jan-22(SPEAG, No.EX3-7464_Jan22)	Jan-23
DAE4	SN 1556	12-Jan-22(CTTL-SPEAG, No.Z22-60007)	Jan-23
Secondary Standards	ID #	Cal Date (Calibrated by, Certificate No.)	Scheduled Calibration
Signal Generator E4438C	MY49071430	13-Jan-22 (CTTL, No.J22X00409)	Jan-23
Network Analyzer E5071C	MY46110673	14-Jan-22 (CTTL, No.J22X00406)	Jan-23

	Name	Function	Signature
Calibrated by:	Zhao Jing	SAR Test Engineer	
Reviewed by:	Lin Hao	SAR Test Engineer	
Approved by:	Qi Dianyuan	SAR Project Leader	

Issued: September 27, 2022

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Certificate No: Z22-60405

Page 1 of 6

**Glossary:**

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORMx,y,z
N/A	not applicable or not measured

Calibration Is Performed According to the Following Standards:

- IEC/IEEE 62209-1528, "Measurement Procedure for The Assessment of Specific Absorption Rate of Human Exposure to Radio Frequency Fields from Hand-held and Body-mounted Wireless Communication Devices- Part 1528: Human Models, Instrumentation and Procedures (Frequency range of 4 MHz to 10 GHz)", October 2020
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"


Additional Documentation:

- DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- Measurement Conditions:* Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:* The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:* These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:* One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:* SAR measured at the stated antenna input power.
- SAR normalized:* SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:* The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of Measurement multiplied by the coverage factor $k=2$, which for a normal distribution Corresponds to a coverage probability of approximately 95%.

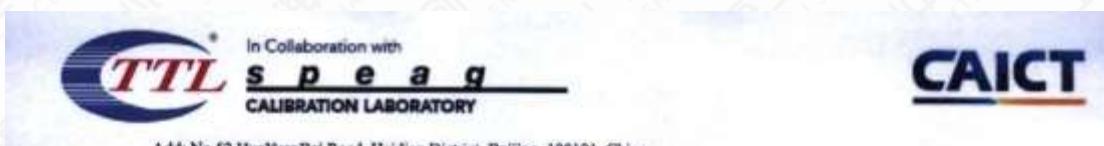

Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2117
E-mail: emtf@caict.ac.cn <http://www.caict.ac.cn>

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY52	52.10.4
Extrapolation	Advanced Extrapolation	
Phantom	Triple Flat Phantom 5.1C	
Distance Dipole Center - TSL	10 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	2600 MHz ± 1 MHz	


Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	39.0	1.98 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	40.1 ± 6 %	1.93 mho/m ± 6 %
Head TSL temperature change during test	<1.0 °C	—	—

SAR result with Head TSL

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	13.6 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	55.1 W/kg ± 18.8 % (k=2)
SAR averaged over 10 cm ³ (10 g) of Head TSL	Condition	
SAR measured	250 mW input power	6.16 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	24.8 W/kg ± 18.7 % (k=2)

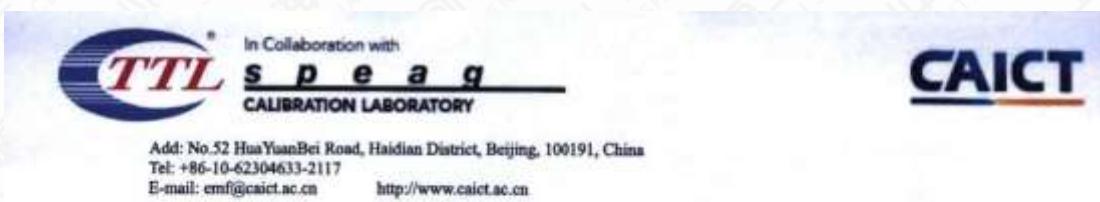**Appendix (Additional assessments outside the scope of CNAS L0570)****Antenna Parameters with Head TSL**

Impedance, transformed to feed point	47.2Ω- 3.06jΩ
Return Loss	-27.5dB

General Antenna Parameters and Design


Electrical Delay (one direction)	1.055 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feed-point can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.
No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feed-point may be damaged.

Additional EUT Data

Manufactured by	SPEAG
-----------------	-------



Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2117
E-mail: emff@caict.ac.cn http://www.caict.ac.cn

DASY5 Validation Report for Head TSL

Date: 2022-09-21

Test Laboratory: CTTL, Beijing, China

DUT: Dipole 2600 MHz; Type: D2600V2; Serial: D2600V2 - SN: 1031

Communication System: UID 0, CW; Frequency: 2600 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2600 \text{ MHz}$; $\sigma = 1.933 \text{ S/m}$; $\epsilon_r = 40.06$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN7464; ConvF(7.64, 7.64, 7.64) @ 2600 MHz; Calibrated: 2022-01-26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1556; Calibrated: 2022-01-12
- Phantom: MFP_V5.1C (20deg probe tilt); Type: QD 000 P51 Cx; Serial: 1062
- DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)

Dipole Calibration/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 102.7 V/m; Power Drift = -0.05 dB


Peak SAR (extrapolated) = 28.4 W/kg

SAR(1 g) = 13.6 W/kg; SAR(10 g) = 6.16 W/kg

Smallest distance from peaks to all points 3 dB below = 9 mm


Ratio of SAR at M2 to SAR at M1 = 48.7%

Maximum value of SAR (measured) = 22.8 W/kg

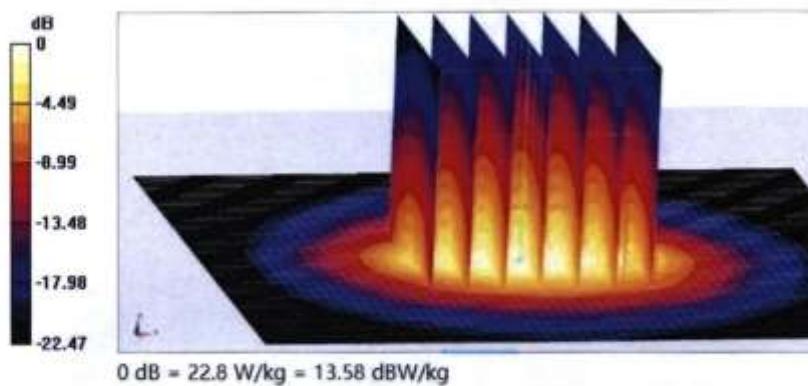


Certificate No: Z22-60405

Page 5 of 6



Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China
Tel: +86-10-62304633-2117
E-mail: emf@caict.ac.cn http://www.caict.ac.cn

Impedance Measurement Plot for Head TSL

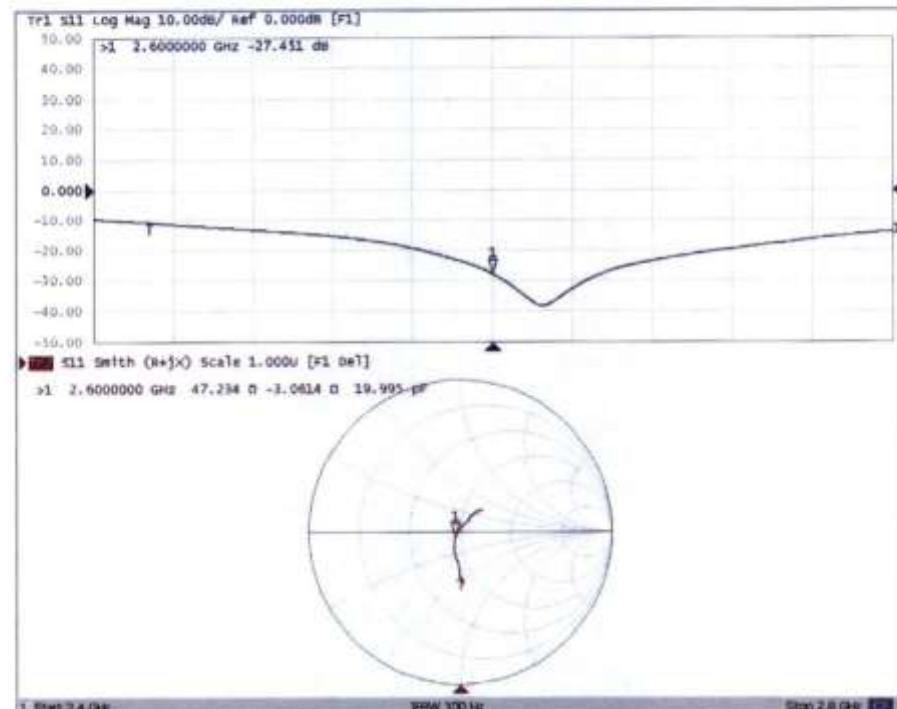

Certificate No: Z22-60405

Page 6 of 6

Annex C: Revised History

Version	Revised Content
V00	Initial
V01	Update sections 1.2, 4.1 and 14.1

Annex D: Accreditation Certificate



Accredited Laboratory

A2LA has accredited

INDUSTRIAL INTERNET INNOVATION CENTER (SHANGHAI) CO., LTD.

Shanghai, People's Republic of China

for technical competence in the field of

Electrical Testing

This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2017 General requirements for the competence of testing and calibration laboratories. This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality management system (refer to joint ISO-ILAC-JAF Communiqué dated April 2017).

Presented this 12th day of April 2021,



Vice President, Accreditation Services
For the Accreditation Council
Certificate Number 3662.01
Valid to February 28, 2023



For the tests to which this accreditation applies, please refer to the laboratory's Electrical Scope of Accreditation.

END OF REPORT