	Report No: R3538 Issue No: 1	FCC ID: XX6SC2024	
	Test No: T5950		
Test Report			Page: 1 of 48



dB Technology
|----- (Cambridge Ltd.) -----|

EMC
Testing

EMC
Consultancy

EMC
Training

23, Headington Drive,
Cambridge.
CB1 9HE
Tel : 01954 251974 (test site)
or : 01223 241140 (accounts)
Fax : 01954 251907
web : www.dbtechnology.co.uk
email: mail@dbtechnology.co.uk

REPORT ON ELECTROMAGNETIC COMPATIBILITY TESTS

Performed at:
TWENTY PENCE TEST SITE

**Twenty Pence Road,
Cottenham,
Cambridge
U.K.
CB24 8PS**

on

Sepura PLC

SC2024

dated


26th January 2016



Document History

Issue	Date	Affected page(s)	Description of modifications	Revised by	Approved by
1	11/02/16		Initial release		

Based on report template:
v090319

*This report shall not be reproduced except in full, without the written approval of:
dB Technology (Cambridge) Ltd.*


	Report No: R3538 Issue No: 1	FCC ID: XX6SC2024	
	Test No: T5950	Test Report	Page: 2 of 48

Equipment Under Test (EUT):	SC2024
Test Commissioned by:	Sepura PLC 9000 Cambridge Research Park Beach Drive Waterbeach Cambridge CB25 9TL
Representative:	Steve Wood
Test Started:	26th November 2016
Test Completed:	22nd January 2016
Test Engineer:	Dave Smith/Mihai Andries
Date of Report:	26th January 2016
Written by: <u> Dave Smith </u>	Checked by: <u> Derek Barlow </u>
Signature: 	Signature: 
Date: <u> 26th January 2016 </u>	Date: <u> 11th February 2016 </u>

dB Technology can only report on the specific unit(s) tested at its site. The responsibility for extrapolating this data to a product line lies solely with the manufacturer.

Test Standards Applied

Part 90 of CFR47	<i>Private Land Mobile Radio Services</i>
---------------------------------	---

	Report No: R3538 Issue No: 1	FCC ID: XX6SC2024	
	Test No: T5950		Test Report

Emissions Test Results Summary


Part 90

PASS

Test	Port	Method	Limit	PASS/FAIL	Notes
Output Power Radiated		90.205	90.205(h)	No Limit	#1
Output Power Conducted	antenna	90.205 2.1046	90.205(h)	No Limit	#1
Types of Emissions	antenna	90.207 2.1047	Specified by manufacturer		
Bandwidth	antenna	90.209 2.1049	90.209(b)(5)	PASS	#2
Emissions Masks Radiated		90.210 2.1051	90.221(d)	PASS	#3
Emissions Masks Conducted	antenna	90.210 2.1051	90.221(d)	PASS	#3
Frequency Stability	antenna	90.213 2.1055	90.213	PASS	
Frequency Transient Behaviour	antenna	90.214	90.214	PASS	
Adjacent Channel Power		90.221	90.221(b)	PASS	


- #1 There is no specific limit on output power.
- #2 The additional note 6 was applied which allows a bandwidth of up to 22kHz providing the additional Adjacent Channel Power requirements are met.
- #3 The additional note 5 was applied which only stipulates limits 75kHz from the carrier providing the additional Adjacent Channel Power requirements are met.

This Report shows that the EUT met all of the requirements for the tests performed - as shown above.


	Report No: R3538 Issue No: 1	FCC ID: XX6SC2024	
	Test No: T5950		Test Report

Contents

1 EUT Details	6
1.1 General	6
1.2 Modifications to EUT and Peripherals	7
1.3 EUT Operating Modes	7
1.4 Measurement Uncertainty	7
<i>Figure 1 Charger and RSM Configuration</i>	8
<i>Photograph 1 Connected to Analyser</i>	9
<i>Photograph 2 In Environmental Chamber</i>	9
<i>Photograph 3 Standalone: Radiated Emissions - Upright</i>	10
<i>Photograph 4 Standalone: Radiated Emissions - Flat</i>	10
<i>Photograph 5 With RSM and Charger - Radiated Emissions - Upright</i>	11
<i>Photograph 6 With RSM and Charger - Showing measuring antenna</i>	11
2 Test Equipment	12
3 Test Methods	13
3.1 Antenna Conducted Carrier Power	13
3.2 Antenna Conducted Transmitter Unwanted Emissions	13
3.3 Antenna Conducted Occupied Bandwidth	13
3.4 Antenna Conducted Adjacent Channel Power	13
3.5 Frequency Stability	13
3.6 Transient Frequency Behaviour	14
3.7 Radiated Transmitter Emissions (Substitution Method)	15
4 Test Results	15
4.1 Conducted Antenna Output Power	16
4.2 Conducted Antenna Occupied Bandwidth	17
4.3 Frequency Stability - DMO Mode - Absolute Frequency Measurements	18
4.4 Frequency Stability - DMO Mode - Deviations from Nominal Volt/Temp - ppm	19
4.5 Frequency Stability - TMO Mode - Frequency Error Hz	20
4.6 Frequency Stability - TMO Mode - Deviation from nominal volt/temp - ppm	21
4.7 Conducted Emission Antenna Adjacent Channel Power	22
4.8 Conducted Emission Antenna - Frequency transient	23
4.9 Conducted Emission Antenna Spurious Emissions	24
4.10 Radiated Emissions - Transmit Carrier ERP - Standalone	25
4.11 Radiated Emissions - Transmit Carrier ERP - RSM	26
4.12 Radiated Emissions - Transmit Spurious - Standalone - Below 1GHz	27
4.13 Radiated Emissions - Transmit Spurious - RSM + Charger - Below 1GHz	28
4.14 Radiated Emissions - Transmit Spurious - Standalone - Above 1GHz	29
4.15 Radiated Emissions - Transmit Spurious - RSM + Charger - Above 1GHz	30
<i>PLOT 1 Conducted Antenna Power - 450MHz</i>	31
<i>PLOT 2 Conducted Antenna Power - 460MHz</i>	32
<i>PLOT 3 Conducted Antenna Power - 470MHz</i>	33
<i>PLOT 4 Occupied Bandwidth - 450MHz</i>	34
<i>PLOT 5 Occupied Bandwidth - 460MHz</i>	35
<i>PLOT 6 Occupied Bandwidth - 470MHz</i>	36
<i>PLOT 7 Adjacent Channel Power 450MHz - as an alternative to Masks of 90.210</i>	37
<i>PLOT 8 Adjacent Channel Power 460MHz - as an alternative to Masks of 90.210</i>	38
<i>PLOT 9 Adjacent Channel Power 470MHz - as an alternative to Masks of 90.210</i>	39
<i>PLOT 10 Frequency Transient - 450MHz - On</i>	40
<i>PLOT 11 Frequency Transient - 450MHz - Off</i>	40
<i>PLOT 12 Frequency Transient - 460MHz - On</i>	41
<i>PLOT 13 Frequency Transient - 460MHz - Off</i>	41
<i>PLOT 14 Frequency Transient - 470MHz - On</i>	42
<i>PLOT 15 Frequency Transient - 470MHz - Off</i>	42
<i>PLOT 16 Antenna Cond Spurious Emissions: 9kHz-500MHz - Mask of 90.221(d)</i>	43
<i>PLOT 17 Antenna Cond Spurious Emissions: 500M-800MHz - Mask of 90.221(d)</i>	44
<i>PLOT 18 Antenna Cond Spurious Emissions: 800MHz-1GHz - Mask of 90.221(d)</i>	45
<i>PLOT 19 Antenna Cond Spurious Emissions: 1GHz-5GHz - Mask of 90.221(d)</i>	46

	Report No: R3538 Issue No: 1	FCC ID: XX6SC2024	
	Test No: T5950	Test Report	Page: 5 of 48

<i>PLOT 20</i>	<i>Radiated Emissions - Tx Mode - 25MHz to 1GHz</i>	<i>47</i>
<i>PLOT 21</i>	<i>Radiated Emissions - Tx Mode - 1GHz to 5GHz</i>	<i>48</i>

	Report No: R3538 Issue No: 1	FCC ID: XX6SC2024	
	Test No: T5950		Test Report

1 EUT Details

1.1 General

The EUT was a TETRA Voice + Data Hand Portable. The transmitter can operate over the following frequency bands:

450MHz to 470MHz - in Trunked-Mode Operation (TMO) or Direct-Mode Operation (DMO).

Measurements were made at the top, near middle and bottom of the appropriate frequency ranges:

Bottom: 450 MHz
Middle: 460 MHz
Top: 470 MHz

The nominal output power is 35dBm (3.1W).

The product can be used on a standalone basis in which case it is powered from an internal battery. It can also be used when placed in a charging unit.

This report additionally includes radiated emissions measurements with a Remote Speaker Microphone (RSM) connected.

Unless otherwise stated, tests were performed with nominal power supply voltage.

The product is intended to comply with the FCC part 90 requirements - specifically the sections applicable to Tetra devices.


Radiated field strength tests were performed at the dB Technology Test Site Registered with the FCC: Registration number: 90528.

Output Stage Settings:

With reference to the requirements of **2.1046(a)** and **2.1033(c)(8)**, the DC voltages and currents in the elements of the final radio are regulated within the product and not user variable.

Modulation Characteristics:

With reference to the requirements of **2.1047**, the device uses digital modulation which is not proportional in any way to the level or frequency of the audio signal. We consider that compliance with the relevant Mask of Part 90 using pseudo random digital data is sufficient to adequately demonstrate the Modulation Characteristics as per Section 2.1047.

	Report No: R3538 Issue No: 1	FCC ID: XX6SC2024	
	Test No: T5950		Test Report

1.2 Modifications to EUT and Peripherals

Details of any modifications that were required to achieve compliance are listed below. The modification numbers are referred to in the results sections as appropriate.

Mod No:	Details	Implemented for
0	Original unmodified unit.	

1.3 EUT Operating Modes

The EUT was tested in the following operating mode or modes. Generally, operating modes are chosen that will exercise the functions of the EUT as fully as possible and in a manner likely to produce maximum emission levels or susceptibility. Individual test result sheets reference the operating mode of the EUT.

Operating Mode	Details
1	Transmit on selected channel.


1.4 Measurement Uncertainty

The following estimations of Measurement Uncertainty have been made:

Description	Estimated Uncertainty
Conducted Output Power Using Power meter	±1dB
Conducted Spurious Emissions	±3dB
Radiated Spurious Emissions	±4dB
Frequency Stability	±15Hz


These measurement uncertainties are based on an expanded uncertainty expressed as the 95% confidence level using a coverage factor of K = 2.

Figure 1 Charger and RSM Configuration

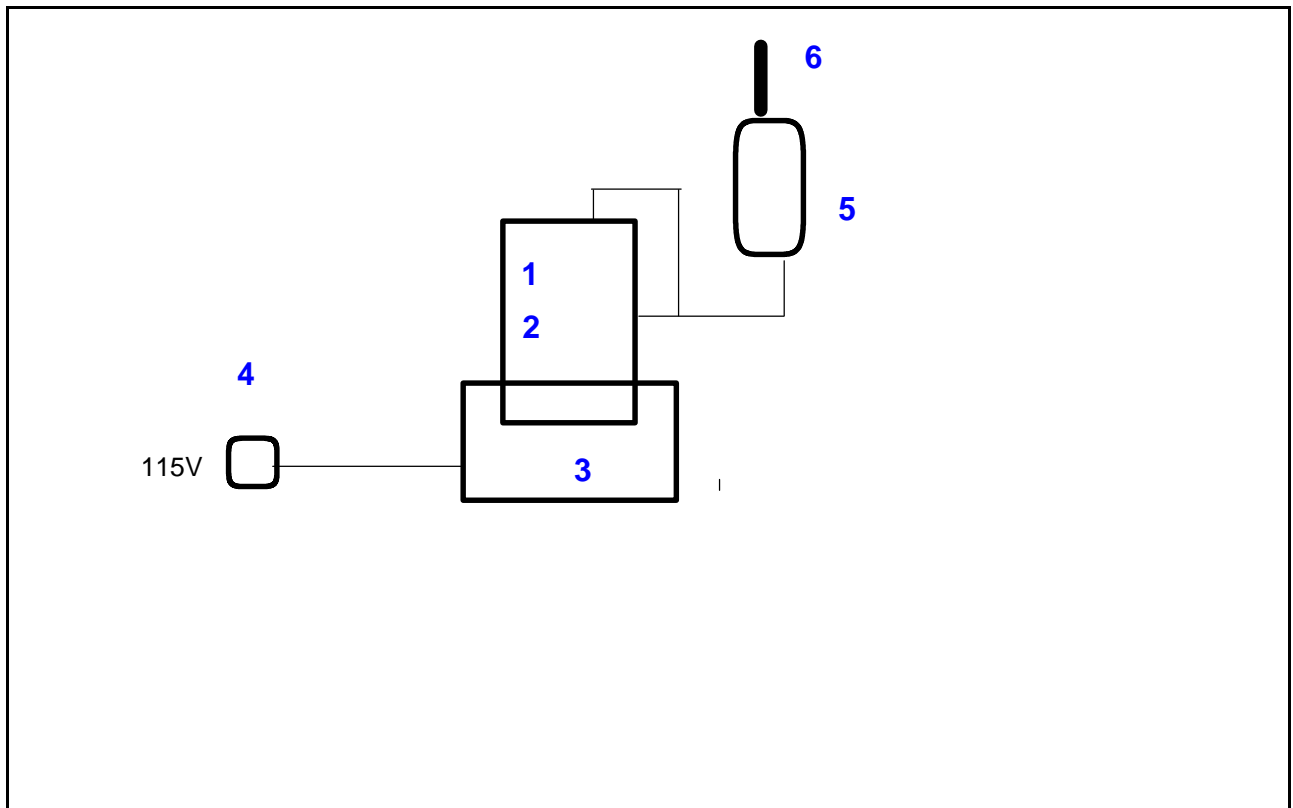


Item	Manufacturer	Model	Description	Serial No:	Notes
1	Sepura	SC2024	EUT	1PR001520GKL317	#1
2	Sepura	SC2024	EUT	1PR001546GKV6YU	#2
3	Sepura	300-01624	STP/SC20 Series 1 + 1 Charger		
4	CLICK	CPS024100240	PSU for Battery Charger		
5	Sepura	300-00388	Advance Remote Speaker Microphone		
6	Sepura	300-00663	450MHz to 470MHz Antenna		

#1 Used for radiated tests.
#2 Used for conducted antenna tests.

	Report No: R3538 Issue No: 1	FCC ID: XX6SC2024	
	Test No: T5950	Test Report	Page: 9 of 48




Photograph 1 Connected to Analyser

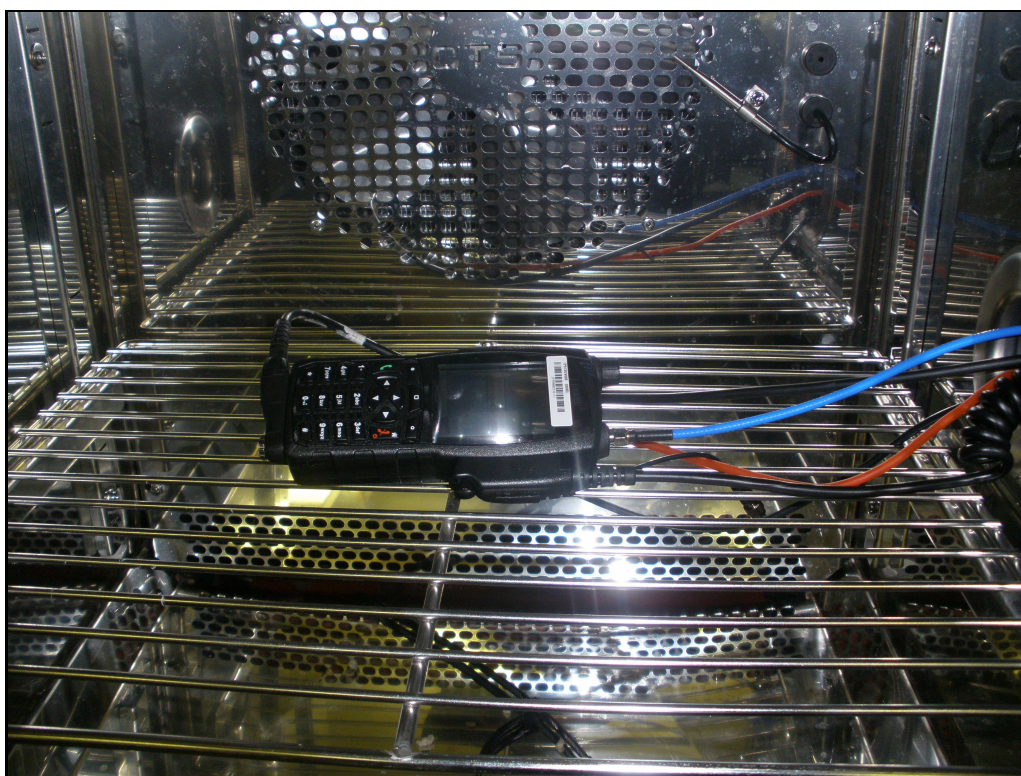

Photograph 2 In Environmental Chamber

*This report shall not be reproduced except in full, without the written approval of:
dB Technology (Cambridge) Ltd.*


	Report No: R3538	FCC ID: XX6SC2024	
	Issue No: 1		
	Test No: T5950	Test Report	Page: 10 of 48




Photograph 3 Standalone: Radiated Emissions - Upright




Photograph 4 Standalone: Radiated Emissions - Flat


	Report No: R3538	FCC ID: XX6SC2024	
	Issue No: 1		
	Test No: T5950	Test Report	Page: 11 of 48

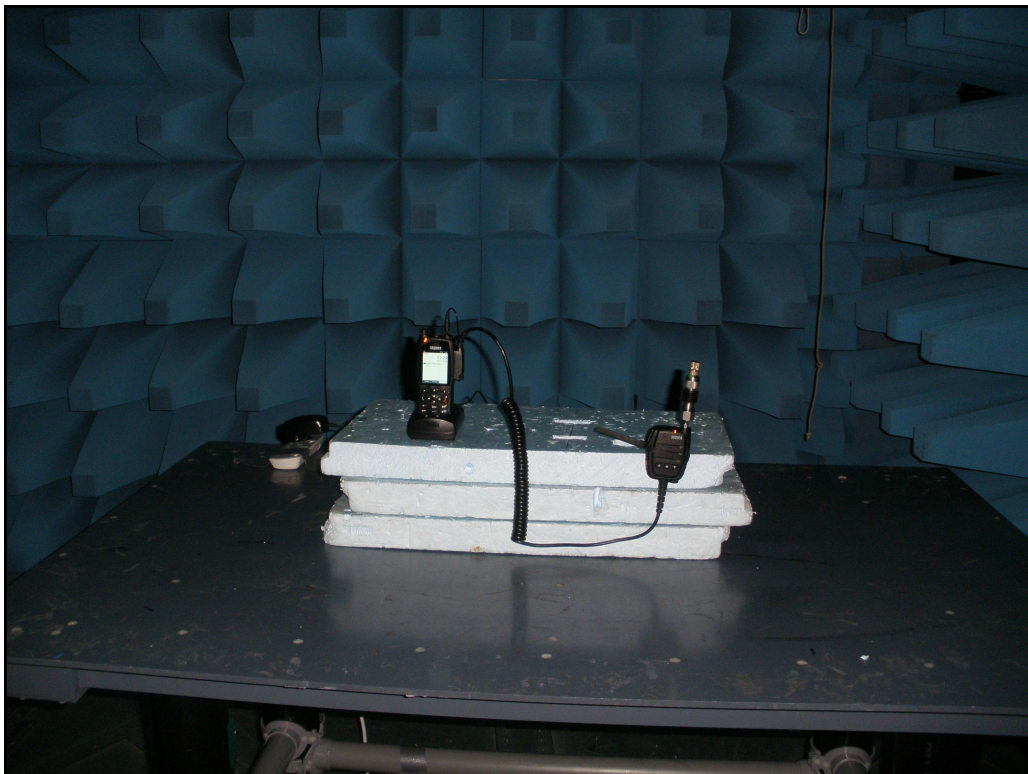

Photograph 5 With RSM and Charger - Radiated Emissions - Upright

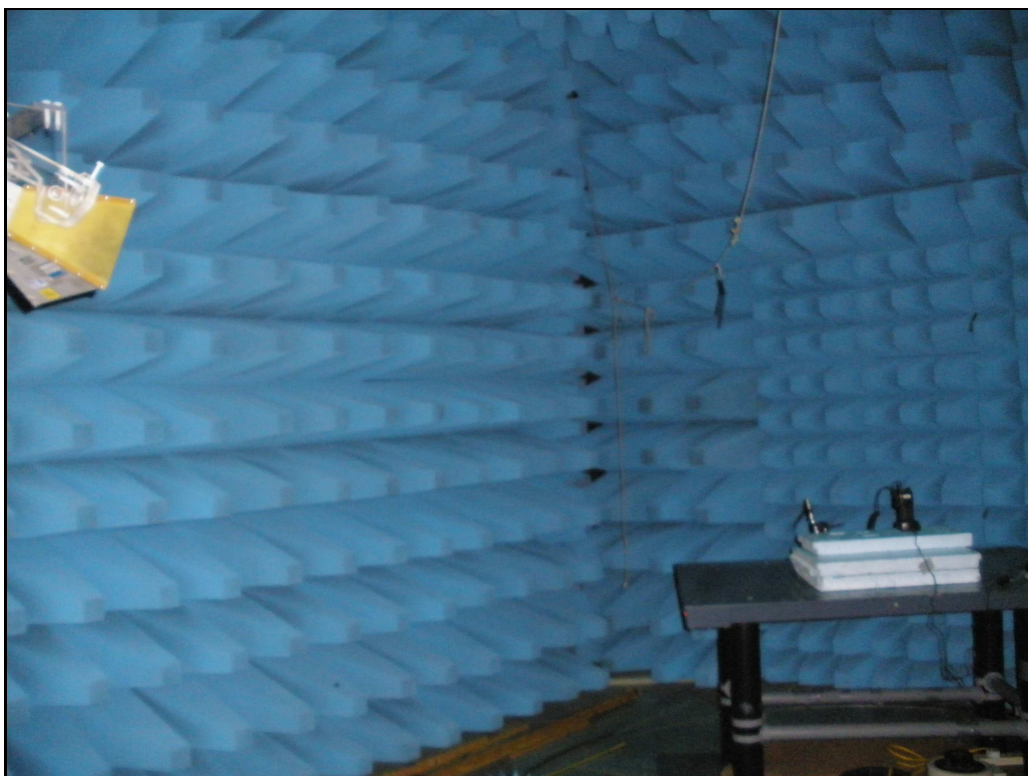

Photograph 6 With RSM and Charger - Showing measuring antenna


	Report No: R3538 Issue No: 1	FCC ID: XX6SC2024	
	Test No: T5950		Test Report

2 Test Equipment

The test equipment used during the tests was one or more of the items listed below. Individual test result sheets indicate which items were used.

The Tetra Test Set and FSU are owned by Sepura.

Ref No:	Details	Serial Number	Cal Date	Cal Interval
A23	EMCO 3115 DR Guide (1-18GHz)	9507-4525	30/01/2015	3 years
A24	Chase X-wing Bilog CBL6144 26MHz-3GHz	27590	28/10/2013	3 years
A30	Schwarzbeck MiniBicon (30MHz to 1GHz)	9115-180	21/01/2013	3 years
A38	Schwarzbeck VULP 9118A Log Periodic	580	21/07/2015	3 years
A8	EMCO 3115 DR Guide	6070	23/07/2015	3 years
PM6	Marconi 6960B RF Power Meter	236923/003	16/12/2014	1 year
PRE20	Mini-Circuits 2 x 20M-6G pre-amp	020	18/11/2015	1 year
PS3	Marconi 6920 RF Power Sensor (-70dBm / -20dBm) 10MHz to 20GHz	890	15/12/2014	1 year
PS9	Marconi 6912 RF Power Sensor (-30dBm / +20dBm) 30kHz to 4.2 GHz	973	16/12/2014	1 year
R13	Anritsu MS2830A	6201180830	21/01/2015	1 year
R8	Agilent E7405A Spectrum Analyser	MY44212494	21/04/2015	1 year
RFF11	High Pass RF Filter 890MHz to 22GHz	11	18/11/2015	1 year
SG13	HP 8648C 150kHz-3.2GHz Signal Generator	3426A01238	01/07/2014	2 years
TTS	IFR 2968 Tetra Test Set	296501/321	02/07/2015	1 year
FSU	R&S FSU Spectrum Analyser	200088	26/10/2447	1 year

	Report No: R3538 Issue No: 1	FCC ID: XX6SC2024	
	Test No: T5950	Test Report	Page: 13 of 48

3 Test Methods

3.1 Antenna Conducted Carrier Power

The antenna output is connected to a spectrum analyser via a suitable PAD. The bandwidth on the spectrum analyser is set to greater than the EUT occupied bandwidth. A peak measurement is recorded. Additional measurements are made with antenna output connected to a power meter providing average measurements.

3.2 Antenna Conducted Transmitter Unwanted Emissions

Measurements are made with the antenna output connected to a spectrum analyser via a suitable PAD. Sweeps are made over the specified frequency ranges. The limit is set relative to the measured carrier power. A peak detector is used.

3.3 Antenna Conducted Occupied Bandwidth

Measurements are made with the antenna output connected to a spectrum analyser via a suitable PAD. Sweeps are made with a 300Hz Resolution Bandwidth and a 1kHz Video Bandwidth. A peak detector is used. Markers are used to determine the 99% power bandwidth.

3.4 Antenna Conducted Adjacent Channel Power

Measurements are made with the antenna output connected to a Tetra Test Set via a suitable PAD. The Analyser is set to make adjacent channel power measurements using the pre-configured settings for Tetra with 25 kHz channel spacing and 18kHz channel bandwidth.

3.5 Frequency Stability


The EUT is placed in an environmental chamber. The temperature inside the chamber is set to the required level and allowed to stabilise.

For DMO mode the antenna output is connected to a spectrum analyser via a suitable PAD. The EUT is set to transmit with constant carrier (at a frequency 2.25kHz above channel centre frequency). The frequency is measured using the frequency counter function of the spectrum analyser.

For TMO mode the antenna output is connected to a Tetra Test Set. The EUT is set to transmit using normal burst operation. the frequency error, as indicated by the Tetra Test Set, is recorded.

Measurements are made at the specified temperature and over the required voltage supply range of the EUT.

3.6 Transient Frequency Behaviour

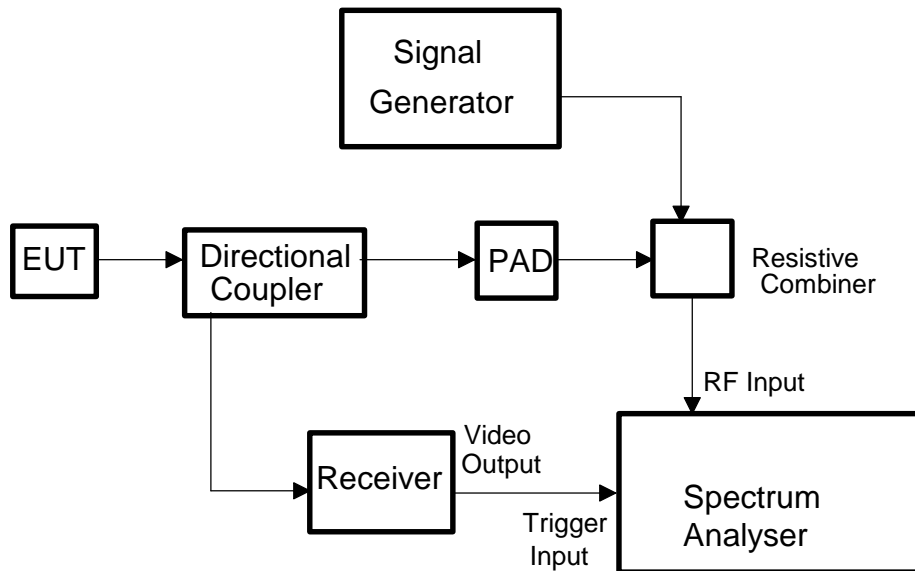

The test equipment was set up as shown above.

The spectrum analyser was set to 0Hz span with its inbuilt FM demodulation function activated.


Initially only the EUT was set to transmit an unmodulated signal and the centre frequency of the analyser adjusted to give 0Hz FM deviation.

The EUT transmitter was then switched off and the signal generator set to provide a carrier only output. The frequency of the signal generator was adjusted to again give 0Hz FM deviation on the spectrum analyser.

The signal generator FM modulation was then switched on and adjusted to give 25kHz FM deviation on the spectrum analyser.

The spectrum analyser was then set to trigger only on video output from the receiver. The directional coupler was used to feed an attenuated portion of the EUT transmitter into the receiver. The receiver was tuned to the transmit frequency and so produced a change on its video output when the transmitter was switched on and off. This signal was used to trigger the spectrum analyser.

FM deviation data was recorded from the spectrum analyser for both carrier switch on and switch off and at all test frequencies.

	Report No: R3538 Issue No: 1	FCC ID: XX6SC2024	
	Test No: T5950		Test Report

3.7 Radiated Transmitter Emissions (Substitution Method)

Initial scans are performed in a semi-anechoic screened room at a distance of 3m. Scans are performed over the frequency range specified in the test standard with the antenna both horizontally and vertically polarised. During these scans the EUT and peripherals are rotated through 360°. Bench top EUTs are placed on a non-conducting bench at a height of 0.8m above the ground plane. Floor standing EUTs are placed 0.1m above the ground plane. The EUT cables were manipulated in an attempt to produce maximum emissions. The results of the scans are shown in the plots included at the end of the report.

Significant emissions identified by the scans are measured using a substitution method. Maximised emission readings are obtained by rotating the EUT through 360° and adjusting the height of the antenna from 1m to 4m. Measurements are made with the antenna both horizontally and vertically polarised and the results tabulated.

The EUT is then replaced with a calibrated reference antenna fed from a signal generator. The level fed into the reference antenna is measured with a power meter. Measurements are made to determine the power output of the signal generator required to give the same emission levels as were observed from the EUT.

The radiated power from the EUT is calculated as:

Signal Level fed into Reference Antenna	+ Gain of Reference Antenna	+ Radiated Level From EUT	- Radiated Level From Reference Antenna
---	-----------------------------------	------------------------------	---


For example, assuming following measurements:

Signal Level fed into Reference Antenna	= -14.3dBm
Gain of Reference Antenna	= 7.1 dBi
Radiated Level from EUT (i.e. Level at Measuring Receiver)	= 37 dBuV
Radiated Level from Reference Antenna (i.e. Level at Measuring Receiver)	= 61.5 dBuV

Then the Radiated Power from the EUT = $-14.3 + 7.1 + 37 - 61.5$ dBm (isotropic)
= -31.7 dBm (isotropic)

4 Test Results

The following sections contain tabulated test results. Plots of various scans are included at the back of this section.


	Report No: R3538 Issue No: 1	FCC ID: XX6SC2024	
	Test No: T5950		
Test Report			Page: 16 of 48

4.1 Conducted Antenna Output Power

Factor Set 1: - - - -
Factor Set 2: - - - -
Factor Set 3: - - - -
Test Equipment: R13

Conducted Antenna Output Power

Company: Sepura PLC		Product: SC2024	
Date: 18/01/2016		Test Eng: Mihai Andries	
Ports: antenna			
Test: 90.205		using limits of	90.205(h)
Ports:			
Test:			
Notes	Comments and Observations		
	Spectrum anlayser results using a peak detector are shown in plots 1 to 3.		
	Average power was measured using the bandpower function.		
	Measurements were made with continuous modulation.		
	Taking into account the loss of the cable and attenuators the following measurements were made:		
	Channel	Peak dBm	Average dBm
	450 MHz	37.2	34.8
	460 MHz	37.1	34.8
470MHz	37.1	34.8	


	Report No: R3538 Issue No: 1	FCC ID: XX6SC2024	
	Test No: T5950		
Test Report			Page: 17 of 48

4.2 Conducted Antenna Occupied Bandwidth

Factor Set 1: - - - -
Factor Set 2: - - - -
Factor Set 3: - - - -
Test Equipment: R13

Conducted Antenna Occupied Bandwidth

Company: Sepura PLC		Product: SC2024										
Date: 18/01/2016		Test Eng: Mihai Andries										
Ports: antenna												
Test: 90.209		using limits of 90.209(b)(5)										
Ports:												
Test:												
Notes	Comments and Observations											
	<p>Measurements were made with continuous modulation applied. Spectrum analyser results are shown in plots 4 to 6.</p> <p>Using the 99% Bandpower function of the spectrum analyser, the following measurements were recorded:</p> <table><tr><td>450 MHz</td><td>21.37</td><td>kHz</td></tr><tr><td>460 MHz</td><td>21.42</td><td>kHz</td></tr><tr><td>470 MHz</td><td>21.42</td><td>kHz</td></tr></table> <p>Limit:</p> <p>Using note 6 of Part 90.209, the limit is 22kHz (providing Adjacent Channel Power requirements are met).</p> <p>PASS</p>			450 MHz	21.37	kHz	460 MHz	21.42	kHz	470 MHz	21.42	kHz
450 MHz	21.37	kHz										
460 MHz	21.42	kHz										
470 MHz	21.42	kHz										


	Report No: R3538 Issue No: 1	FCC ID: XX6SC2024	
	Test No: T5950		
Test Report			Page: 18 of 48

4.3 Frequency Stability - DMO Mode - Absolute Frequency Measurements

Factor Set 1: - - - -
Factor Set 2: - - - -
Factor Set 3: - - - -
Test Equipment: R13

Frequency Stability (DMO)

Company: Sepura PLC		Product: SC2024		
Date: 19/01/2016		Test Eng: Mihai Andries		
Ports: antenna				
Test: 90.213		using limits of 90.213		
Ports:				
Test:		using limits of		
Notes	Comments and Observations			
	DMO Frequency (as recorded from Spectrum Analyser Frequency Counter)			
		450MHz Channel	460MHz Channel	470MHz Channel
	-30.0°C	6.4V 450.001824 7.4V 450.001830	460.001808 460.001803	470.001797 470.001796
	-20.0°C	6.4V 450.001844 7.4V 450.001848	460.001839 460.001838	470.001828 470.001823
	-10.0°C	6.4V 450.001790 7.4V 450.001793	460.001781 460.001778	470.001773 470.001769
	0.0°C	6.4V 450.001756 7.4V 450.001752	460.001754 460.001760	470.001745 470.001743
	10.0°C	6.4V 450.001699 7.4V 450.001696	460.001682 460.001678	470.001666 470.001662
	20.0°C	6.4V 450.001690 7.4V 450.001692	460.001684 460.001685	470.001672 470.001663
	30.0°C	6.4V 450.001620 7.4V 450.001624	460.001601 460.001599	470.001579 470.001576
	40.0°C	6.4V 450.001556 7.4V 450.001549	460.001521 460.001517	470.001481 470.001468
	50.0°C	6.4V 450.001669 7.4V 450.001662	460.001661 460.001664	470.001653 470.001650
	See next page for deviation from nominal voltage/temperature.			


	Report No: R3538 Issue No: 1	FCC ID: XX6SC2024	
	Test No: T5950		Test Report

4.4 Frequency Stability - DMO Mode - Deviations from Nominal Volt/Temp - ppm

Factor Set 1: - - - -
Factor Set 2: - - - -
Factor Set 3: - - - -
Test Equipment: R13

Frequency Stability (DMO)

Company: Sepura PLC		Product: SC2024			
Date: 19/01/2016		Test Eng: Mihai Andries			
Ports: antenna					
Test: 90.213		using limits of	90.213		
Ports:					
Test:		using limits of			
Notes	Comments and Observations				
	DMO Frequency deviation from nominal voltage/temperature - ppm				
		450MHz Channel	460MHz Channel	470MHz Channel	
	-30.0°C	6.4V	0.293	0.267	0.285
		7.4V	0.307	0.257	0.283
	-20.0°C	6.4V	0.338	0.335	0.351
		7.4V	0.347	0.333	0.340
	-10.0°C	6.4V	0.218	0.209	0.234
		7.4V	0.224	0.202	0.226
	0.0°C	6.4V	0.142	0.150	0.174
		7.4V	0.133	0.163	0.170
	10.0°C	6.4V	0.016	-0.007	0.006
		7.4V	0.009	-0.015	-0.002
	20.0°C	6.4V	-0.004	-0.002	0.019
		7.4V	0.000	0.000	0.000
	30.0°C	6.4V	-0.160	-0.183	-0.179
		7.4V	-0.151	-0.187	-0.185
	40.0°C	6.4V	-0.302	-0.357	-0.387
		7.4V	-0.318	-0.365	-0.415
	50.0°C	6.4V	-0.051	-0.052	-0.021
		7.4V	-0.067	-0.046	-0.028
	The part 90 Limit for the 421MHz to 512MHz band mobiles is 5ppm				
	PASS				


	Report No: R3538 Issue No: 1	FCC ID: XX6SC2024	
	Test No: T5950		
Test Report			Page: 20 of 48

4.5 Frequency Stability - TMO Mode - Frequency Error Hz

Factor Set 1: - - - -
Factor Set 2: - - - -
Factor Set 3: - - - -
Test Equipment: TTS

Frequency Stability (TMO)

Company: Sepura PLC		Product: SC2024			
Date: 20/01/2016		Test Eng: Mihai Andries			
Ports:	antenna				
Test:	90.213	using limits of	90.213		
Ports:					
Test:	using limits of				
Notes	Comments and Observations				
	TMO Frequency Error (as recorded from Tetra Test Set) (Hz)				
		450MHz Channel	460MHz Channel	470MHz Channel	
	-30.0°C	6.4V 7.4V	10.2 11.4	11.3 9.4	10.8 12.3
	-20.0°C	6.4V 7.4V	10.2 7.8	8.7 8.9	9.6 10.7
	-10.0°C	6.4V 7.4V	8.5 9.8	10.4 8.1	9.9 11.1
	0.0°C	6.4V 7.4V	14.0 10.1	12.4 12.8	12.7 13.3
	10.0°C	6.4V 7.4V	11.9 7.2	8.4 8.6	9.4 8.5
	20.0°C	6.4V 7.4V	12.1 13.7	11.1 9.3	13.7 11.7
	30.0°C	6.4V 7.4V	12.0 14.5	15.3 15.5	12.5 14.8
	40.0°C	6.4V 7.4V	13.2 14.9	15.9 11.7	14.4 15.6
	50.0°C	6.4V 7.4V	14.0 13.7	14.8 15.2	13.1 14.8
	See next page for deviation in ppm.				


	Report No: R3538 Issue No: 1	FCC ID: XX6SC2024	
	Test No: T5950		
Test Report			Page: 21 of 48

4.6 Frequency Stability - TMO Mode - Deviation from nominal volt/temp - ppm

Factor Set 1: - - - -
Factor Set 2: - - - -
Factor Set 3: - - - -
Test Equipment: TTS

Frequency Stability (TMO)

Company: Sepura PLC		Product: SC2024		
Date: 20/01/2016		Test Eng: Mihai Andries		
Ports: antenna				
Test: 90.213		using limits of	90.213	
Ports:				
Test:		using limits of		
Notes	Comments and Observations			
	TMO Frequency deviation - ppm			
		450MHz Channel	460MHz Channel	470MHz Channel
	-30.0°C	6.4V	-0.008	0.004
		7.4V	-0.005	0.000
	-20.0°C	6.4V	-0.008	-0.001
		7.4V	-0.013	-0.001
	-10.0°C	6.4V	-0.012	0.002
		7.4V	-0.009	-0.003
	0.0°C	6.4V	0.001	0.007
		7.4V	-0.008	0.008
	10.0°C	6.4V	-0.004	-0.002
		7.4V	-0.014	-0.002
	20.0°C	6.4V	-0.004	0.004
		7.4V	0.000	0.000
	30.0°C	6.4V	-0.004	0.013
		7.4V	0.002	0.013
	40.0°C	6.4V	-0.001	0.014
		7.4V	0.003	0.005
	50.0°C	6.4V	0.001	0.012
		7.4V	0.000	0.013
	The part 90 Limit for the 421MHz to 512MHz band mobiles is 5ppm			
	PASS			

	Report No: R3538 Issue No: 1	FCC ID: XX6SC2024	
	Test No: T5950		
Test Report			Page: 22 of 48


4.7 Conducted Emission Antenna Adjacent Channel Power

Factor Set 1: - - - -
Factor Set 2: - - - -
Factor Set 3: - - - -
Test Equipment: FSU

Conducted Antenna - Mask Y close to carrier

<i>Company:</i> Sepura PLC	<i>Product:</i> SC2024
<i>Date:</i> 19/01/2016	<i>Test Eng:</i> Dave Smith
<i>Ports:</i>	
<i>Test:</i> 90.221	using limits of 90.221(b)
<i>Ports:</i>	
<i>Test:</i>	using limits of

Notes	Comments and Observations																																																							
	<p>Using a spectrum analyser with the appropriate Tetra adjacent channel power settings. Captured results are shown in plots 7 to 9.</p> <p>Readings in dBc</p> <table><thead><tr><th></th><th colspan="6">Channel</th></tr><tr><th></th><th>-75kHz</th><th>-50kHz</th><th>-25kHz</th><th>+ 25kHz</th><th>+ 50kHz</th><th>+ 75kHz</th></tr></thead><tbody><tr><td>450 MHz</td><td>-77.60</td><td>-72.61</td><td>-63.56</td><td>-64.24</td><td>-72.76</td><td>-77.83</td></tr><tr><td>460 MHz</td><td>-77.96</td><td>-72.11</td><td>-63.08</td><td>-63.98</td><td>-72.72</td><td>-78.02</td></tr><tr><td>470 MHz</td><td>-77.37</td><td>-72.520</td><td>-62.3</td><td>-62.75</td><td>-72.52</td><td>-77.69</td></tr><tr><td>Limit (dBc)</td><td>-65</td><td>-65</td><td>-55</td><td>-55</td><td>-65</td><td>-65</td></tr><tr><td></td><td>PASS</td><td>PASS</td><td>PASS</td><td>PASS</td><td>PASS</td><td>PASS</td></tr></tbody></table> <p>Limit shown is the maximum allowed level (dBc) for a product with output power more than 1 W and operating in the 450MHz to 470MHz bands (Part 90.221(b))</p> <p>PASS</p>								Channel							-75kHz	-50kHz	-25kHz	+ 25kHz	+ 50kHz	+ 75kHz	450 MHz	-77.60	-72.61	-63.56	-64.24	-72.76	-77.83	460 MHz	-77.96	-72.11	-63.08	-63.98	-72.72	-78.02	470 MHz	-77.37	-72.520	-62.3	-62.75	-72.52	-77.69	Limit (dBc)	-65	-65	-55	-55	-65	-65		PASS	PASS	PASS	PASS	PASS	PASS
	Channel																																																							
	-75kHz	-50kHz	-25kHz	+ 25kHz	+ 50kHz	+ 75kHz																																																		
450 MHz	-77.60	-72.61	-63.56	-64.24	-72.76	-77.83																																																		
460 MHz	-77.96	-72.11	-63.08	-63.98	-72.72	-78.02																																																		
470 MHz	-77.37	-72.520	-62.3	-62.75	-72.52	-77.69																																																		
Limit (dBc)	-65	-65	-55	-55	-65	-65																																																		
	PASS	PASS	PASS	PASS	PASS	PASS																																																		


	Report No: R3538 Issue No: 1	FCC ID: XX6SC2024	
	Test No: T5950		
Test Report			Page: 23 of 48

4.8 Conducted Emission Antenna - Frequency transient

Factor Set 1: - - - -
Factor Set 2: - - - -
Factor Set 3: - - - -
Test Equipment: R8

Conducted Antenna - Mask Y close to carrier

Company: Sepura PLC		Product: SC2024													
Date: 19/01/2016		Test Eng: Dave Smith													
Ports:	antenna														
Test:	90.214	using limits of	90.214												
Ports:															
Test:	using limits of														
Notes	Comments and Observations														
	<p>The output of the antenna port of the EUT was fed through a Directional Coupler and then combined with the output of a signal generator.</p> <p>The spectrum analyser has an FM demodulation function.</p> <p>The EUT was initially set to produce a constant carrier output and the tuning of the spectrum analyser adjusted to give 0Hz FM deviation.</p> <p>The output of the EUT was turned off and a carrier only signal output from the signal generator set at approximately the same frequency as the EUT. This frequency was adjusted to again give 0Hz FM deviation on the spectrum analyser.</p> <p>The signal generator was then set to give 25kHz FM deviation (with 1kHz signal).</p> <p>The forward power output of the directional coupler was fed into a receiver tuned to the carrier frequency. The video output of this receiver was used to trigger the spectrum analyser when the EUT RF is turned on or off.</p> <p>The results of sweeps captured from the spectrum analyser are shown in plots 10 to 15.</p> <p>All of the plots show the EUT comfortably meets the Transient Frequency Behaviour limits for a 25kHz channel spacing transmitter as shown below:</p> <table><tr><td></td><td>Frequency</td><td>Duration</td></tr><tr><td>t1</td><td>± 25 kHz</td><td>10 msec</td></tr><tr><td>t2</td><td>± 12.5 kHz</td><td>25 msec</td></tr><tr><td>t3</td><td>± 25 kHz</td><td>10 msec</td></tr></table> <p>PASS</p>				Frequency	Duration	t1	± 25 kHz	10 msec	t2	± 12.5 kHz	25 msec	t3	± 25 kHz	10 msec
	Frequency	Duration													
t1	± 25 kHz	10 msec													
t2	± 12.5 kHz	25 msec													
t3	± 25 kHz	10 msec													


	Report No: R3538 Issue No: 1	FCC ID: XX6SC2024	
	Test No: T5950		
Test Report			Page: 24 of 48

4.9 Conducted Emission Antenna Spurious Emissions

Factor Set 1: - - - -
Factor Set 2: - - - -
Factor Set 3: - - - -
Test Equipment: R13

Conducted Antenna Spurious

Company: Sepura PLC		Product: SC2024	
Date: 14/01/2016		Test Eng: Dave Smith	
Ports:	antenna		
Test:	90.210	using limits of	90.221(d)
Ports:			
Test:	using limits of		
Notes	Comments and Observations		
	<p>Results of scans shown in plots 16 to 19.</p> <p>The limit line shown on the plots is at -13dBm.</p> <p>All spurious emissions were below this limit.</p> <p>The limit of -13dBm was derived as follows:</p> <p>The applicable Mask is taken from part 90.221(d) which specifies an attenuation of:</p> <p>$43 + 10 \log (P)$</p> <p>If the output is P Watts, the absolute limit is given by:</p> <p>$10 \log (P) - (43 + 10 \log (P)) = -43\text{dBW}$</p> <p>converting to dBm:</p> <p>$-43\text{dBW} = -13 \text{ dBm}$</p> <p>This absolute limit is therefore the same (-13dBm) regardless of the actual measured output power P.</p> <p>PASS</p>		


	Report No: R3538	FCC ID: XX6SC2024	
	Issue No: 1		
	Test No: T5950	Test Report	Page: 25 of 48

4.10 Radiated Emissions - Transmit Carrier ERP - Standalone

Factor Set 1: A30_dBi_14A - - -
Factor Set 2: - - - -
Factor Set 3: - - - -
Test Equipment: R13 A38 A30 SG13 PM6 PS9

Substitution Emissions

Company: Sepura PLC						Product: SC2024								
Date: 27/11/2015						Test Eng: Dave Smith								
Ports:														
Test: 90.205						using limits of				90.205(h)				
Ports:														
Test:						using limits of								
Op Mode	Mod State	CF Set	Freq. MHz	Sig Gen Level Cable dBuV	Rec'vr Level Cable dBuV	Ant Pol	Rec'vr Level EUT dBm	Sig Gen Level Sub'n Ant dBm	Rec'vr Level Sub'n Ant dBm	Sub'n Ant Gain dBi	ERP dBm	Limit dBm	Margin dB	Note
1	0	1	450.000	115.0	115.0	V	-0.3	-3.6	-40.4	-0.0	36.5			
1	0	1	450.000	115.0	115.0	H	1.1	-3.6	-39.4	-0.0	36.9			
1	0	1	460.000	115.0	115.0	V	0.4	-3.6	-39.3	-0.1	36.1			
1	0	1	460.000	115.0	115.0	H	1.4	-3.6	-39.6	-0.1	37.3			
1	0	1	470.000	115.0	115.0	V	0.4	-3.7	-39.9	0.1	36.8			
1	0	1	470.000	115.0	115.0	H	-0.1	-3.7	-39.7	0.1	36.0			
Results			Minimum Margin PASS/FAIL					N/A						
Notes														
Standalone The results above are radiated measurements using the substitution method. There are no specific limits in the standard for this test.														


	Report No: R3538	FCC ID: XX6SC2024	
	Issue No: 1		
	Test No: T5950	Test Report	Page: 26 of 48

4.11 Radiated Emissions - Transmit Carrier ERP - RSM

Factor Set 1: A30_dBi_14A - - -
Factor Set 2: - - - -
Factor Set 3: - - - -
Test Equipment: R13 A38 A30 SG13 PM6 PS9

Substitution Emissions

Company: Sepura PLC						Product: SC2024								
Date: 27/11/2015						Test Eng: Dave Smith								
Ports:														
Test: 90.205						using limits of				90.205(h)				
Ports:														
Test:						using limits of								
Op Mode	Mod State	CF Set	Freq. MHz	Sig Gen Level Cable dBuV	Rec'vr Level Cable dBuV	Ant Pol	Rec'vr Level EUT dBm	Sig Gen Level Sub'n Ant dBm	Rec'vr Level Sub'n Ant dBm	Sub'n Ant Gain dBi	ERP dBm	Limit dBm	Margin dB	Note
1	0	1	450.000	115.0	115.0	V	-8.6	-3.6	-40.4	-0.0	28.2			
1	0	1	450.000	115.0	115.0	H	-14.2	-3.6	-39.4	-0.0	21.6			
1	0	1	460.000	115.0	115.0	V	-11.0	-3.6	-39.3	-0.1	24.6			
1	0	1	460.000	115.0	115.0	H	-12.4	-3.6	-39.6	-0.1	23.5			
1	0	1	470.000	115.0	115.0	V	-9.9	-3.7	-39.9	0.1	26.4			
1	0	1	470.000	115.0	115.0	H	-12.7	-3.7	-39.7	0.1	23.4			
Results			Minimum Margin PASS/FAIL					N/A						
Notes														
Charger + RSM. The results above are radiated measurements using the substitution method. There are no specific limits in the standard for this test.														


	Report No: R3538	FCC ID: XX6SC2024	
	Issue No: 1		
	Test No: T5950	Test Report	Page: 27 of 48

4.12 Radiated Emissions - Transmit Spurious - Standalone - Below 1GHz

Factor Set 1: A30_dBi_14A - - -
Factor Set 2: - - - -
Factor Set 3: - - - -
Test Equipment: R13 A38 A30 SG13 RFF11 PM6 PS9

Substitution Emissions

Company: Sepura PLC						Product: SC2024								
Date: 27/11/2015						Test Eng: Dave Smith								
Ports:														
Test: 90.210						using limits of				90.221(d)				
Ports:														
Test:						using limits of								
Op Mode	Mod State	CF Set	Freq. MHz	Sig Gen Level Cable dBuV	Rec'vr Level Cable dBuV	Ant Pol	Rec'vr Level EUT dBm	Sig Gen Level Sub'n Ant dBm	Rec'vr Level Sub'n Ant dBm	Sub'n Ant Gain dBi	ERP dBm	Limit dBm	Margin dB	Note
1	0	1	900.000	100.0	100.0	V	-90.4	-21.4	-71.3	-6.6	-47.2	-13.0	34.2	
1	0	1	900.000	100.0	100.0	H	-92.2	-21.4	-69.3	-6.6	-51.0	-13.0	38.0	
1	0	1	920.000	100.0	100.0	V	-86.2	-21.5	-72.0	-6.4	-42.1	-13.0	29.1	
1	0	1	920.000	100.0	100.0	H	-89.6	-21.5	-68.8	-6.4	-48.7	-13.0	35.7	
1	0	1	940.000	100.0	100.0	V	-84.6	-21.6	-71.6	-6.2	-40.8	-13.0	27.8	
1	0	1	940.000	100.0	100.0	H	-84.4	-21.6	-69.8	-6.2	-42.4	-13.0	29.4	
Results			Minimum Margin PASS/FAIL					27.8 dB PASS						
Notes														
Standalone. Dummy antenna.														


	Report No: R3538	FCC ID: XX6SC2024	
	Issue No: 1		
	Test No: T5950	Test Report	Page: 28 of 48

4.13 Radiated Emissions - Transmit Spurious - RSM + Charger - Below 1GHz

Factor Set 1: A30_dBi_14A - - -
Factor Set 2: - - - -
Factor Set 3: - - - -
Test Equipment: R13 A38 A30 SG13 RFF11 PM6 PS9

Substitution Emissions

Company: Sepura PLC				Product: SC2024										
Date: 27/11/2015				Test Eng: Dave Smith										
Ports:														
Test: 90.210				using limits of					90.221(d)					
Ports:														
Test:				using limits of										
Op Mode	Mod State	CF Set	Freq. MHz	Sig Gen Level Cable dBuV	Rec'vr Level Cable dBuV	Ant Pol	Rec'vr Level EUT dBm	Sig Gen Level Sub'n Ant dBm	Rec'vr Level Sub'n Ant dBm	Sub'n Ant Gain dBi	ERP dBm	Limit dBm	Margin dB	Note
1	0	1	900.000	100.0	100.0	V	-91.9	-21.4	-71.3	-6.6	-48.7	-13.0	35.7	
1	0	1	900.000	100.0	100.0	H	-89.3	-21.4	-69.3	-6.6	-48.2	-13.0	35.2	
1	0	1	920.000	100.0	100.0	V	-91.9	-21.5	-72.0	-6.4	-47.8	-13.0	34.8	
1	0	1	920.000	100.0	100.0	H	-90.0	-21.5	-68.8	-6.4	-49.0	-13.0	36.0	
1	0	1	940.000	100.0	100.0	V	-92.8	-21.6	-71.6	-6.2	-49.0	-13.0	36.0	
1	0	1	940.000	100.0	100.0	H	-91.8	-21.6	-69.8	-6.2	-49.8	-13.0	36.8	
Results				Minimum Margin PASS/FAIL					34.8 dB PASS					
Notes														
Charger + RSM. Dummy antenna.														
See plot 20														


	Report No: R3538 Issue No: 1	FCC ID: XX6SC2024	
	Test No: T5950		
Test Report			Page: 29 of 48

4.14 Radiated Emissions - Transmit Spurious - Standalone - Above 1GHz

Factor Set 1: A23_dBi_15A - - -
Factor Set 2: - - - -
Factor Set 3: - - - -
Test Equipment: R13 A8 A23 SG13 RFF11 PM6 PS3

Substitution Emissions

Company: Sepura PLC						Product: SC2024								
Date: 30/11/2015						Test Eng: Dave Smith								
Ports:														
Test: 90.210						using limits of				90.221(d)				
Ports:														
Test:						using limits of								
Op Mode	Mod State	CF Set	Freq. MHz	Sig Gen Level Cable	Rec'vr Level Cable	Ant Pol	Rec'vr Level EUT	Sig Gen Level Sub'n Ant	Rec'vr Level Sub'n Ant	Sub'n Ant Gain	ERP	Limit	Margin	Note
				dBuV	dBuV		dBm	dBm	dBm	dB	dBm	dBm	dB	
1	0	1	1800.000	100.0	100.0	V	-54.4	-23.1	-27.9	8.7	-40.9	-13.0	27.9	
1	0	1	1800.000	100.0	100.0	H	-50.8	-23.1	-26.7	8.7	-38.5	-13.0	25.5	
1	0	1	1840.000	100.0	100.0	V	-53.3	-23.4	-28.2	8.7	-39.8	-13.0	26.8	
1	0	1	1840.000	100.0	100.0	H	-47.8	-23.4	-26.8	8.7	-35.7	-13.0	22.7	
1	0	1	1880.000	100.0	100.0	V	-56.2	-23.4	-28.3	8.7	-42.6	-13.0	29.6	
1	0	1	1880.000	100.0	100.0	H	-51.1	-23.4	-27.9	8.7	-37.9	-13.0	24.9	
Results				Minimum Margin					22.7 dB					
				PASS/FAIL					PASS					
Notes														
Standalone. Dummy antenna.														


	Report No: R3538	FCC ID: XX6SC2024	
	Issue No: 1		
	Test No: T5950	Test Report	Page: 30 of 48

4.15 Radiated Emissions - Transmit Spurious - RSM + Charger - Above 1GHz

Factor Set 1: A23_dBi_15A - - -
Factor Set 2: - - - -
Factor Set 3: - - - -
Test Equipment: R13 A8 A23 SG13 RFF11 PM6 PS9

Substitution Emissions


Company: Sepura PLC						Product: SC2024								
Date: 30/11/2015						Test Eng: Dave Smith								
Ports:														
Test: 90.210						using limits of				90.221(d)				
Ports:														
Test:						using limits of								
Op Mode	Mod State	CF Set	Freq. MHz	Sig Gen Level Cable dBuV	Rec'vr Level Cable dBuV	Ant Pol	Rec'vr Level EUT dBm	Sig Gen Level Sub'n Ant dBm	Rec'vr Level Sub'n Ant dBm	Sub'n Ant Gain dBi	ERP dBm	Limit dBm	Margin dB	Note
1	0	1	1800.000	100.0	100.0	V	-54.7	-23.1	-27.9	8.7	-41.2	-13.0	28.2	
1	0	1	1800.000	100.0	100.0	H	-58.0	-23.1	-26.7	8.7	-45.7	-13.0	32.7	
1	0	1	1840.000	100.0	100.0	V	-53.0	-23.4	-28.2	8.7	-39.5	-13.0	26.5	
1	0	1	1840.000	100.0	100.0	H	-56.0	-23.4	-26.8	8.7	-43.9	-13.0	30.9	
1	0	1	1880.000	100.0	100.0	V	-56.3	-23.4	-28.3	8.7	-42.6	-13.0	29.6	
1	0	1	1880.000	100.0	100.0	H	-60.1	-23.4	-27.9	8.7	-46.9	-13.0	33.9	
Results				Minimum Margin PASS/FAIL					26.5 dB PASS					
Notes														
Charger + RSM. Dummy antenna.														
See plot 21														

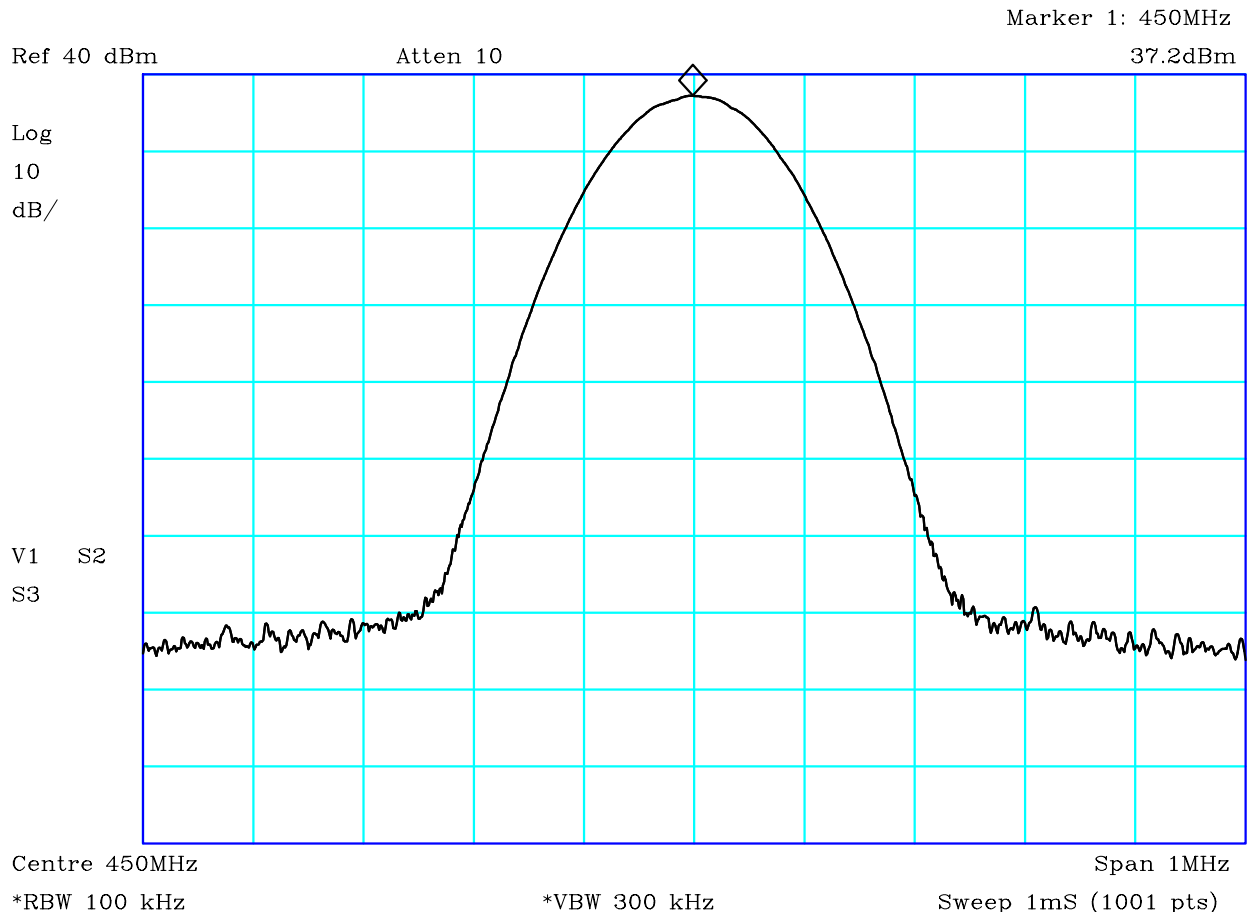

CF1:30dB Pad

PLOT 1 Conducted Antenna Power - 450MHz


Company:	Sepura	Product:	SM2024
Date:	18/01/2016	Test Eng:	Mihai Andries
Method:	FCC Part 90	Method:	
Limit1:		Limit2:	
Limit3:		Limit4:	
Peak Search result=37.2dBm The average power using the signal analyser was found to be 34.82dBm			
Facility:		Mode:	Tx
		Modification State:	0
File:	H601858E.txt	Analyser:	R13

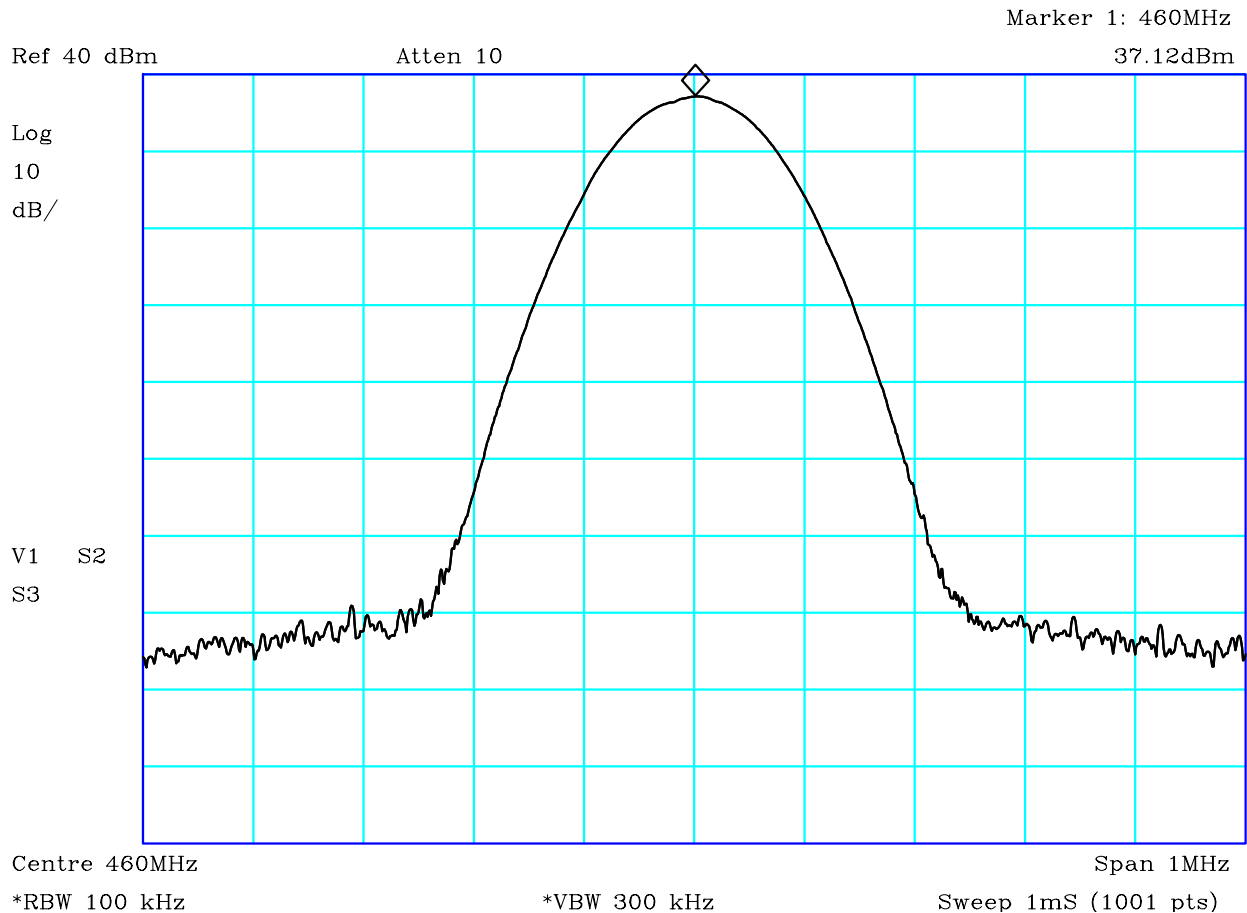


CF1:30dB Pad

PLOT 2 Conducted Antenna Power - 460MHz

Company:	Sepura	Product:	SM2024
Date:	18/01/2016	Test Eng:	Mihai Andries
Method:	FCC Part 90	Method:	
Limit1:		Limit2:	
Limit3:		Limit4:	
Peak Search result=37.12dBm The average power using the signal analyser was found to be 34.8dBm			
Facility:		Mode:	Tx
		Modification State:	0
File:	H6018597.txt	Analysar:	R13

	Report No: R3538	FCC ID: XX6SC2024	
	Issue No: 1		
	Test No: T5950	Test Report	Page: 33 of 48

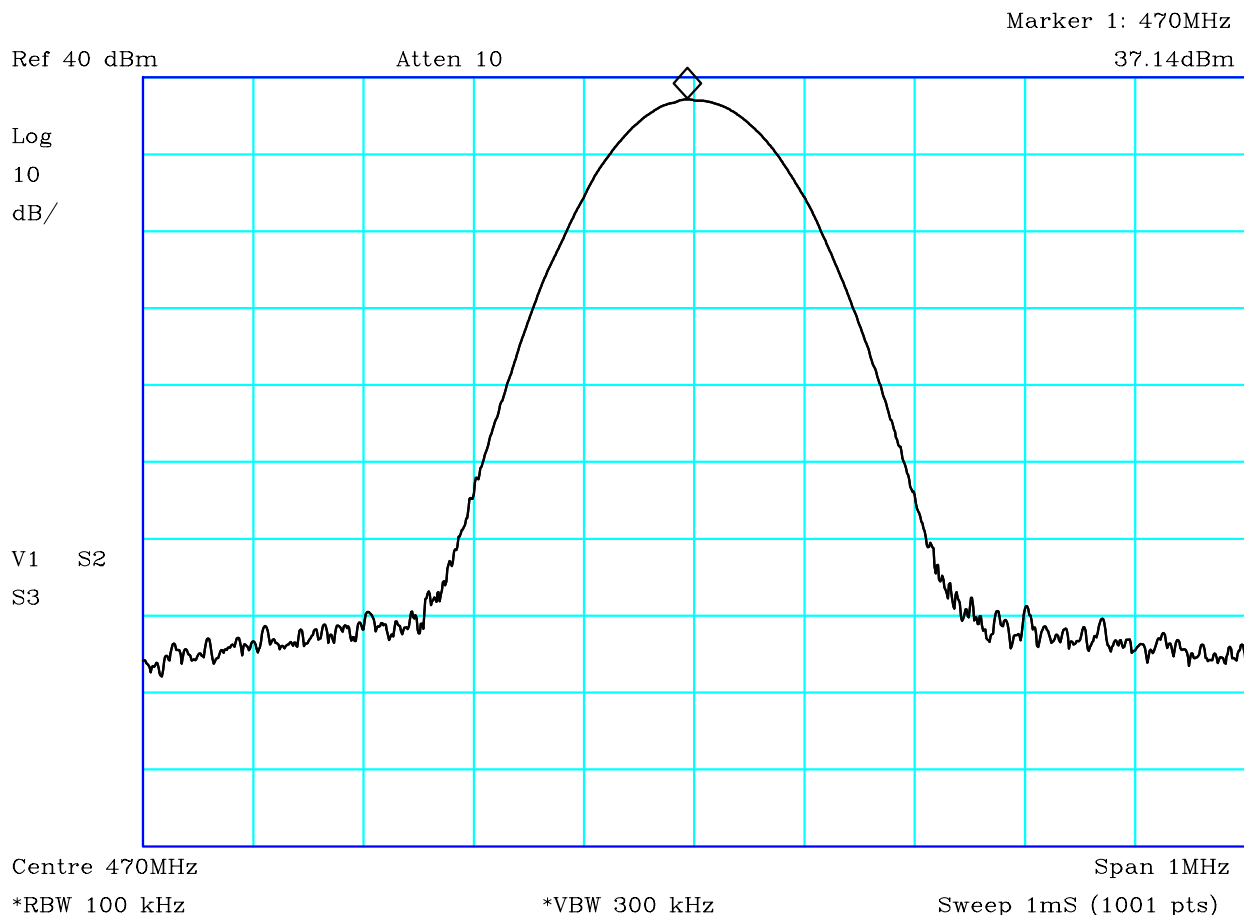


CF1:30dB Pad

PLOT 3 Conducted Antenna Power - 470MHz

Company:	Sepura	Product:	SM2024
Date:	18/01/2016	Test Eng:	Mihai Andries
Method:	FCC Part 90	Method:	
Limit1:		Limit2:	
Limit3:		Limit4:	

Peak Search result=37.14dBm
The average power using the signal analyser was found to be 34.8dBm


Facility:	Mode:	Tx
	Modification State:	0
File:	H601859D.txt	Analysar:
		R13

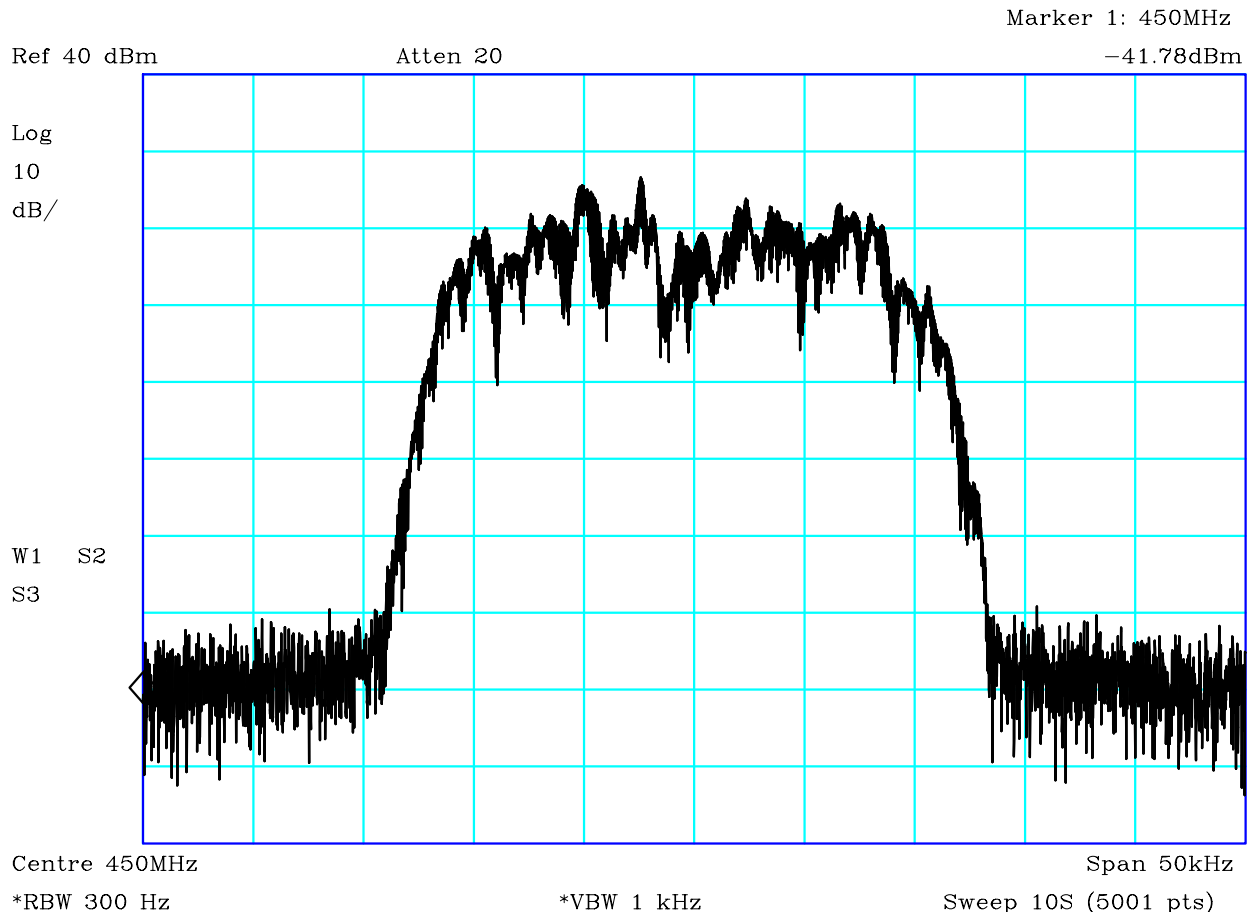

CF1:30dB Pad

PLOT 4 Occupied Bandwidth - 450MHz


Company:	Sepura	Product:	SM2024
Date:	18/01/2016	Test Eng:	Mihai Andries
Method:	FCC Part 90	Method:	
Limit1:		Limit2:	
Limit3:		Limit4:	
99% Occupied Bandwidth=21.370kHz			
Facility:		Mode:	Tx
		Modification State:	0
File:	H60185B9.txt	Analyser:	R13

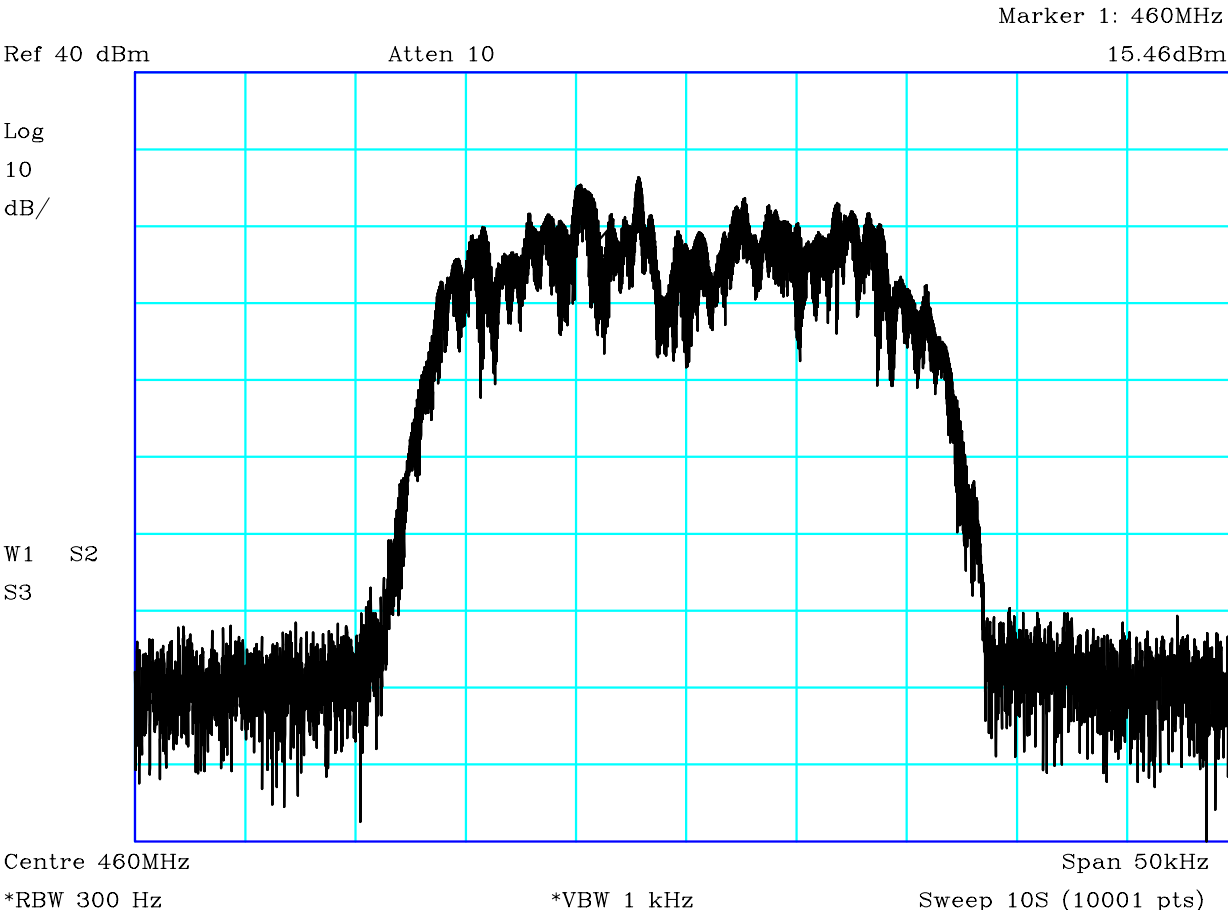


CF1:30dB Pad

PLOT 5 Occupied Bandwidth - 460MHz

Company:	Sepura	Product:	SM2024
Date:	18/01/2016	Test Eng:	Mihai Andries
Method:	FCC Part 90	Method:	
Limit1:		Limit2:	
Limit3:		Limit4:	
99% Occupied Bandwidth=21.42kHz			
		Mode:	Tx
		Modification State:	0
File:	H60276A0.txt	Analyser:	R13

	Report No: R3538	FCC ID: XX6SC2024	
	Issue No: 1		
	Test No: T5950	Test Report	Page: 36 of 48

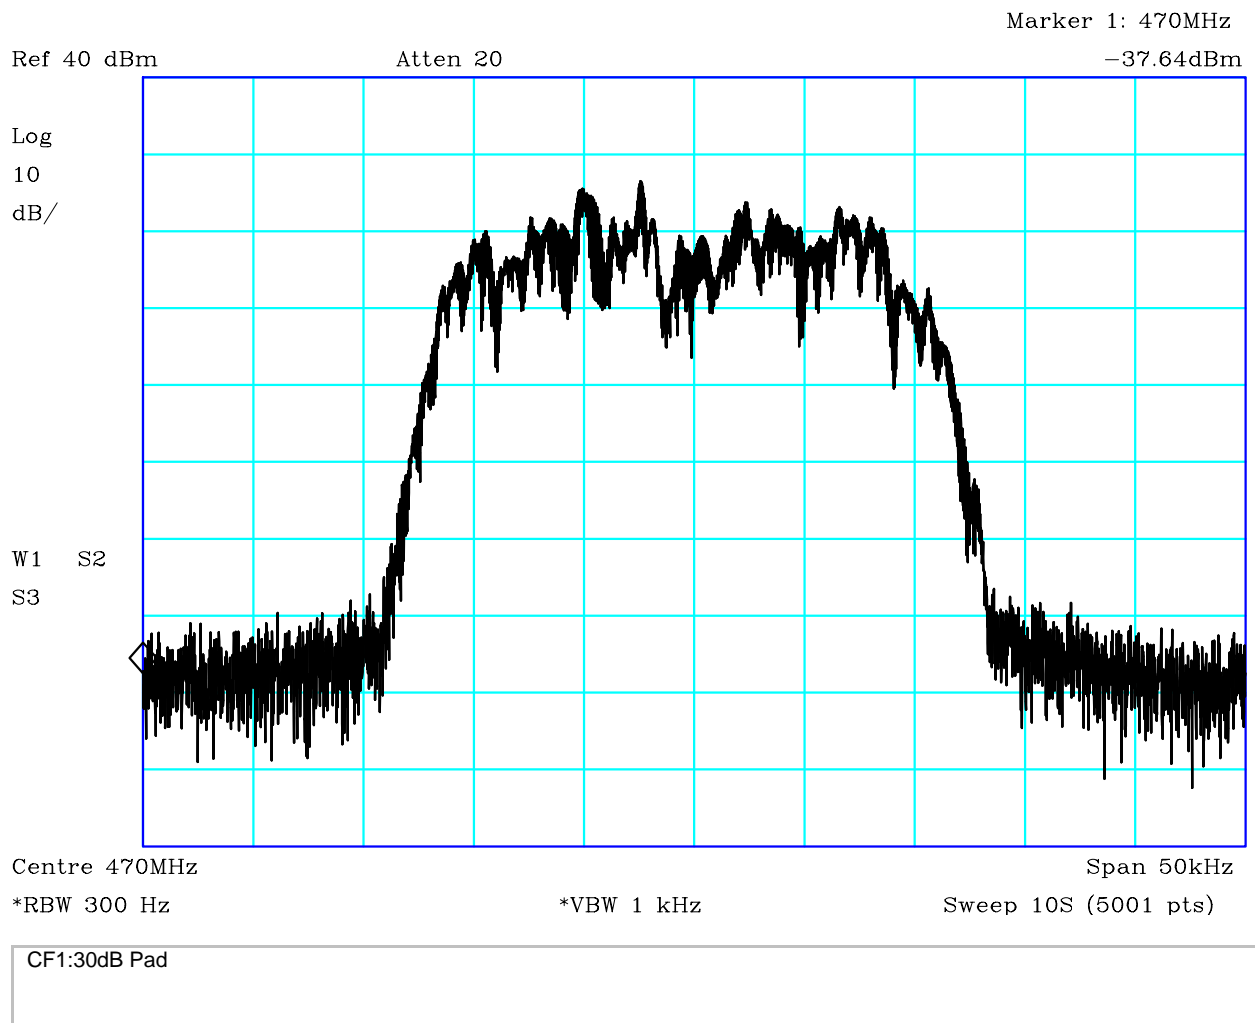


PLOT 6 Occupied Bandwidth - 470MHz

Company:	Sepura	Product:	SM2024
Date:	18/01/2016	Test Eng:	Mihai Andries
Method:	FCC Part 90	Method:	
Limit1:		Limit2:	
Limit3:		Limit4:	
99% Occupied Bandwidth=21.420kHz			
Facility:		Mode:	Tx
		Modification State:	0
File:	H60185BC.txt	Analyser:	R13



*
B
GAT
TRG
LVL


PLOT 7 Adjacent Channel Power 450MHz - as an alternative to Masks of 90.210

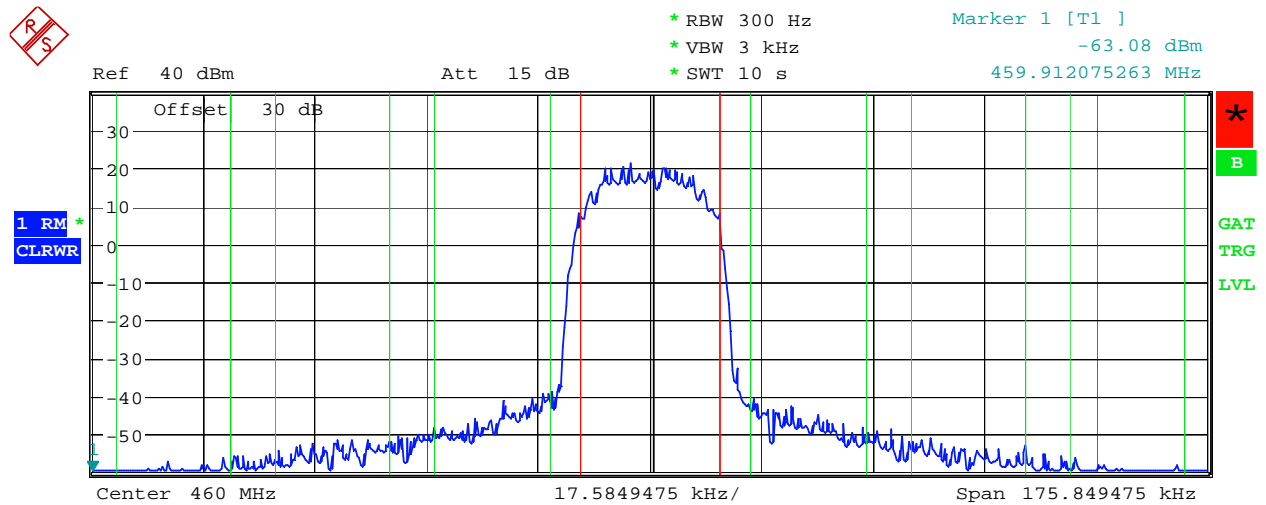

Tx Channel		TETRA	
Bandwidth	22 kHz	Power	34.79 dBm
Adjacent Channel		Lower	-63.08 dB
Bandwidth	18 kHz	Upper	-63.98 dB
Spacing	25 kHz		
Alternate Channel		Lower	-72.11 dB
Bandwidth	18 kHz	Upper	-72.72 dB
Spacing	50 kHz		
2nd Alternate Channel		Lower	-77.96 dB
Bandwidth	18 kHz	Upper	-78.02 dB
Spacing	75 kHz		

Date: 18.JAN.2016 16:27:24


PLOT 8 Adjacent Channel Power 460MHz - as an alternative to Masks of 90.210

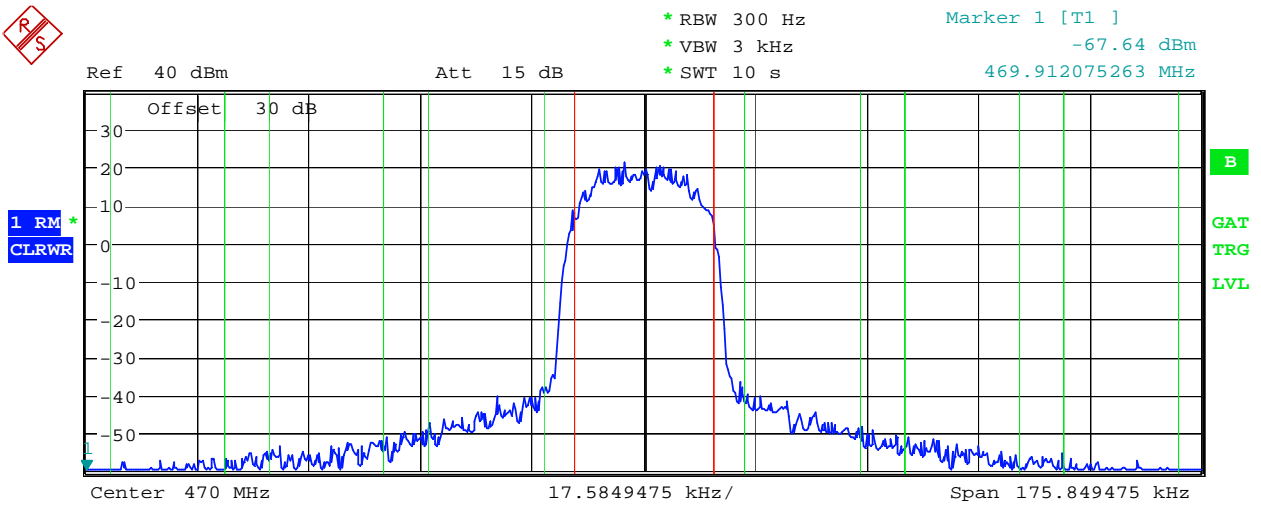


Tx Channel		TETRA	
Bandwidth	22 kHz	Power	34.83 dBm
Adjacent Channel		Lower	-62.30 dB
Bandwidth	18 kHz	Upper	-62.75 dB
Spacing	25 kHz		
Alternate Channel		Lower	-72.81 dB
Bandwidth	18 kHz	Upper	-72.52 dB
Spacing	50 kHz		
2nd Alternate Channel		Lower	-77.37 dB
Bandwidth	18 kHz	Upper	-77.69 dB
Spacing	75 kHz		

Date: 18.JAN.2016 16:29:34


PLOT 9 Adjacent Channel Power 470MHz - as an alternative to Masks of 90.210

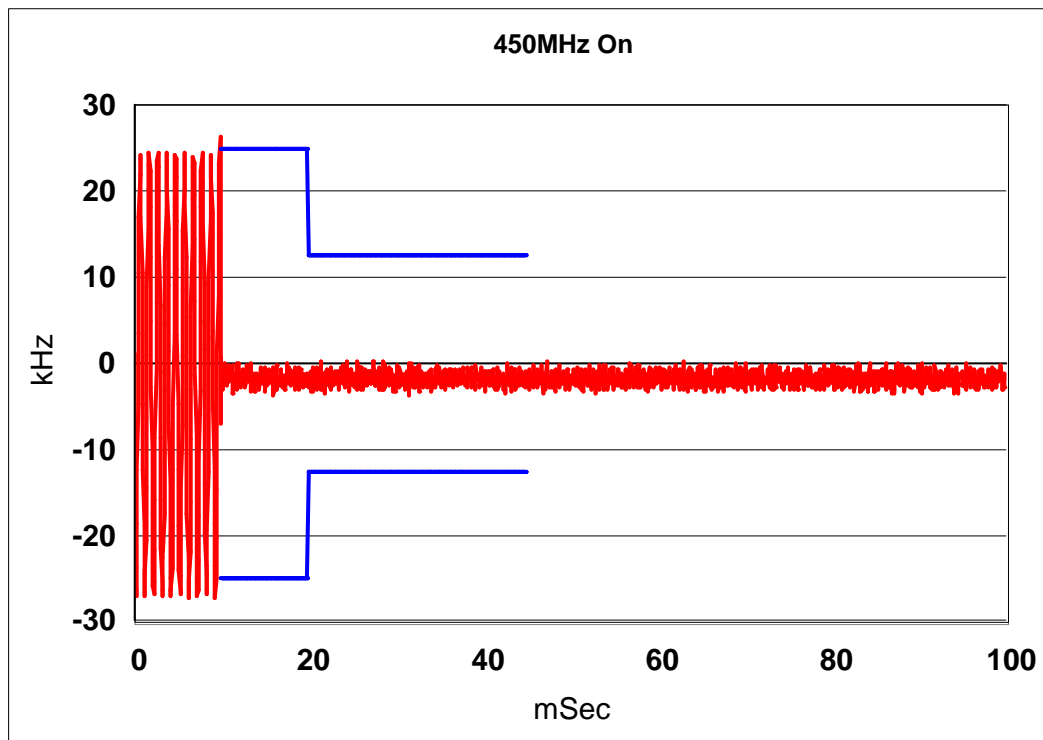


PLOT 10 Frequency Transient - 450MHz - On

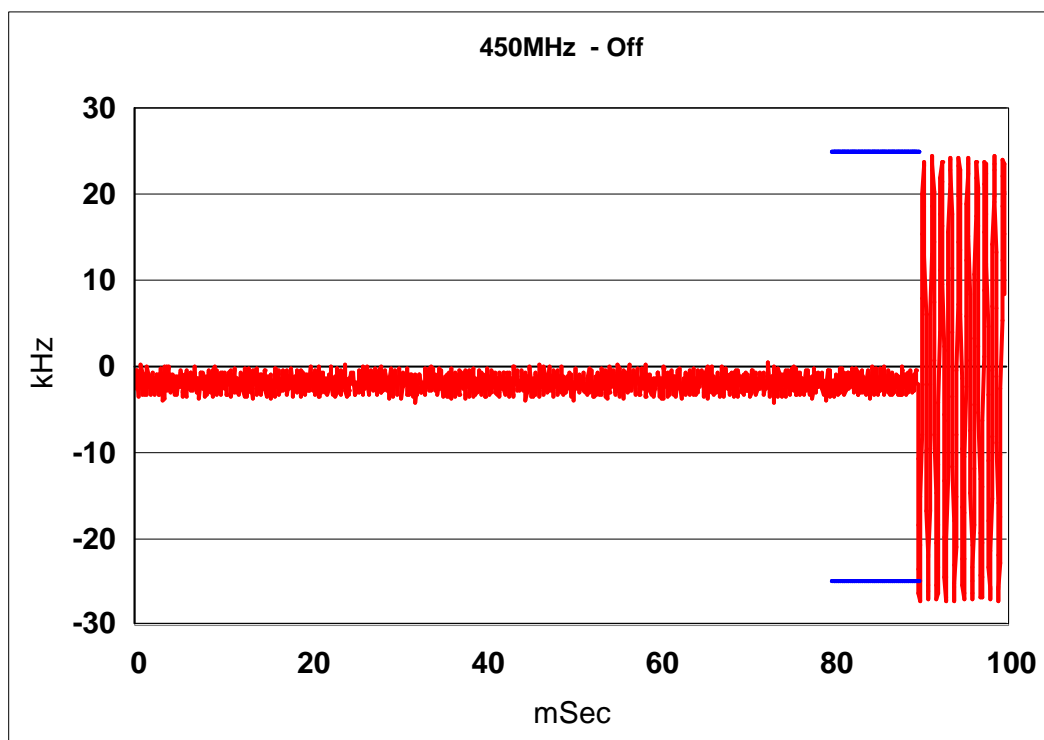


PLOT 11 Frequency Transient - 450MHz - Off

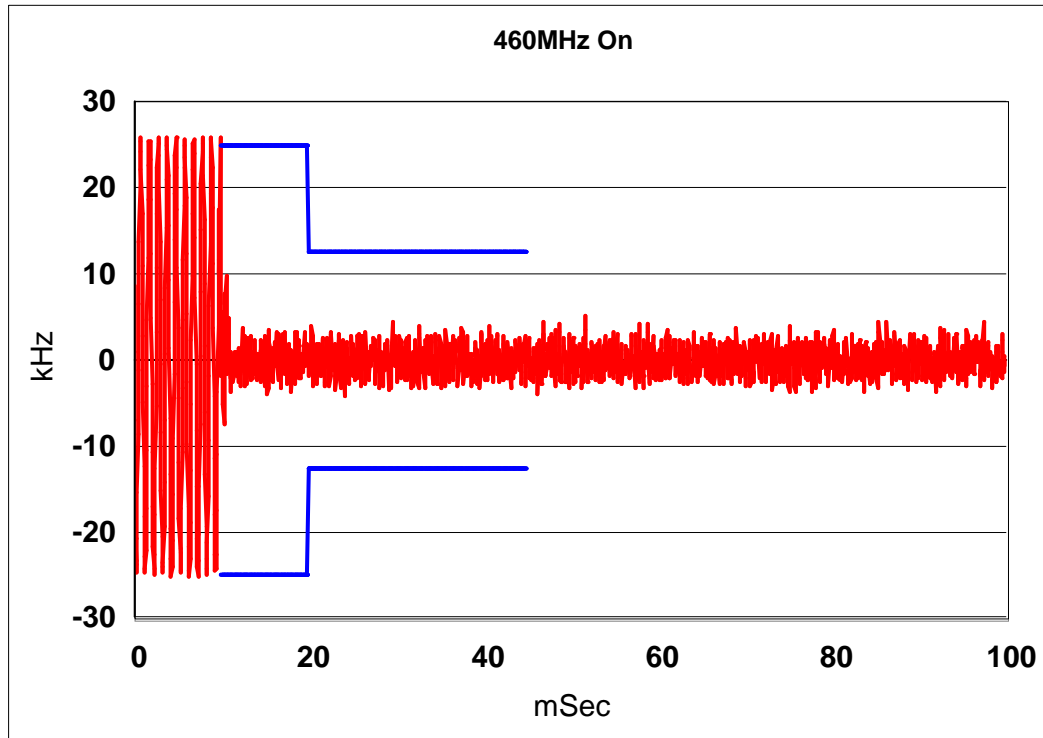


PLOT 12 Frequency Transient - 460MHz - On

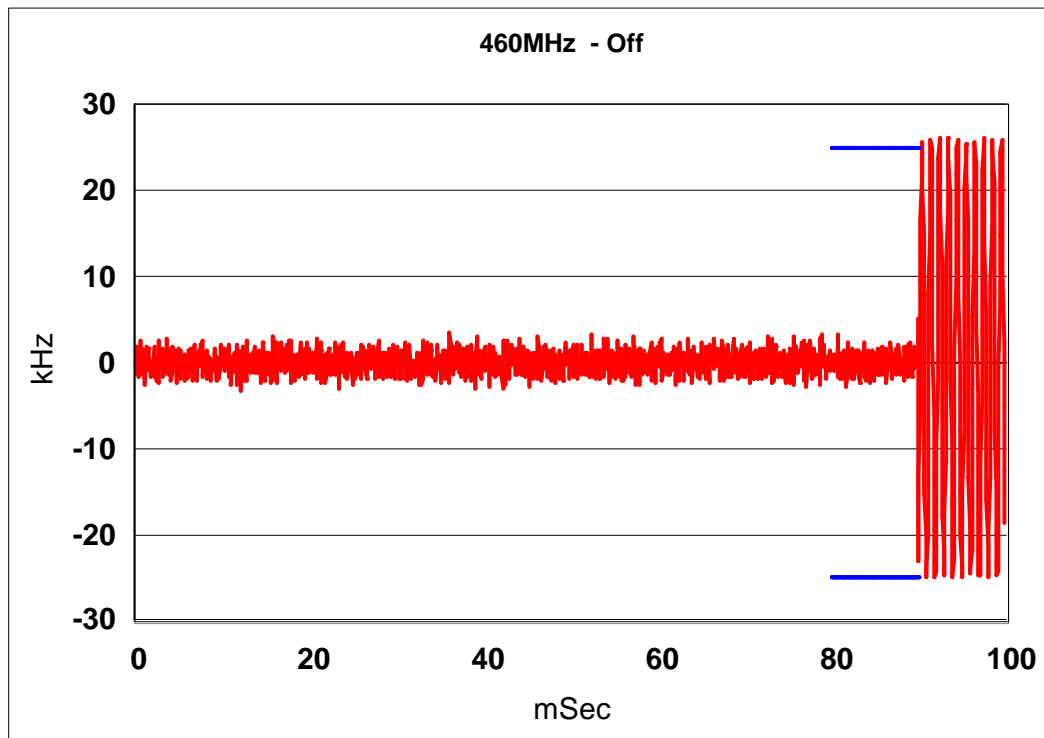


PLOT 13 Frequency Transient - 460MHz - Off

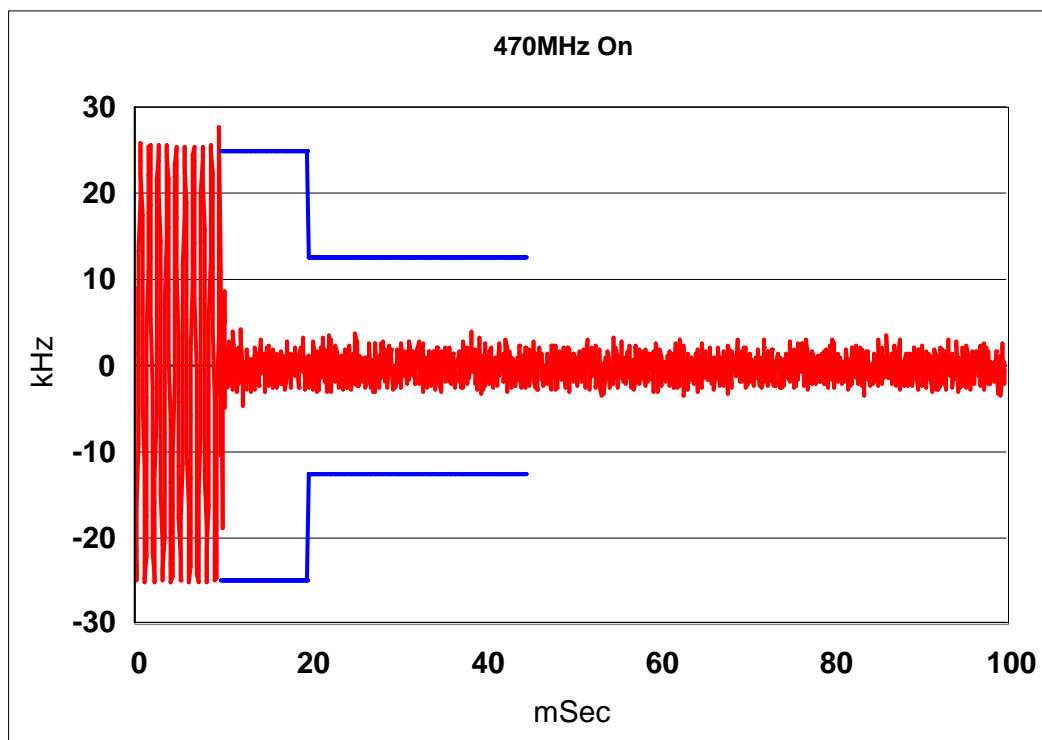


PLOT 14 Frequency Transient - 470MHz - On

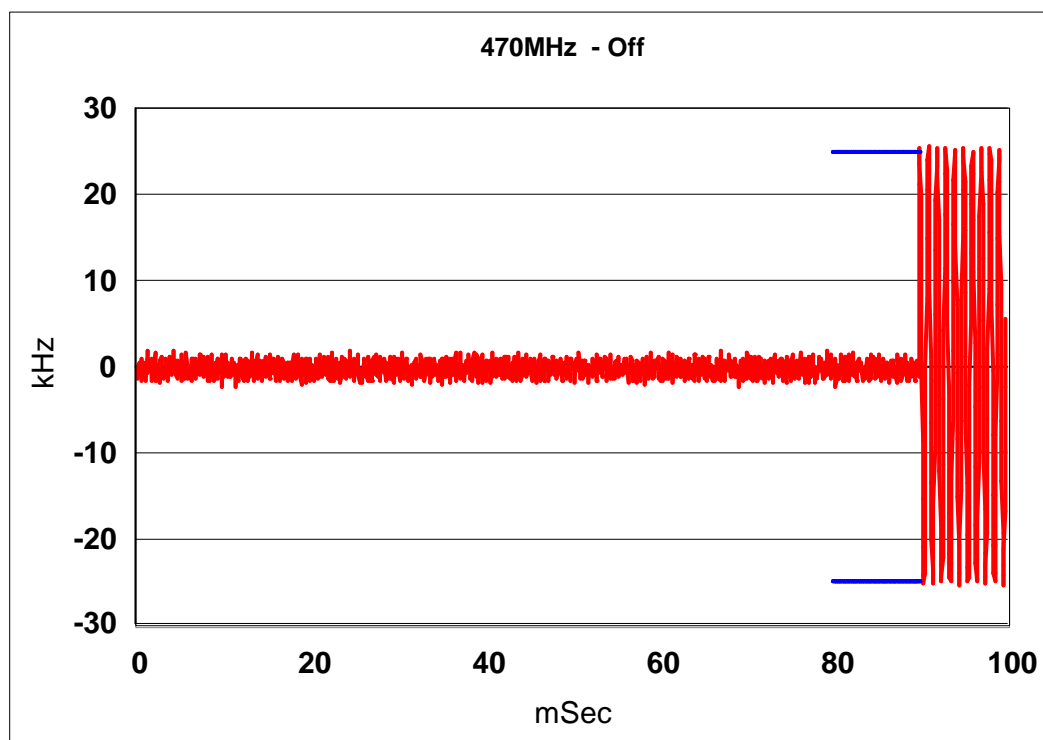

PLOT 15 Frequency Transient - 470MHz - Off

	Report No: R3538	FCC ID: XX6SC2024	
	Issue No: 1		
	Test No: T5950	Test Report	Page: 43 of 48

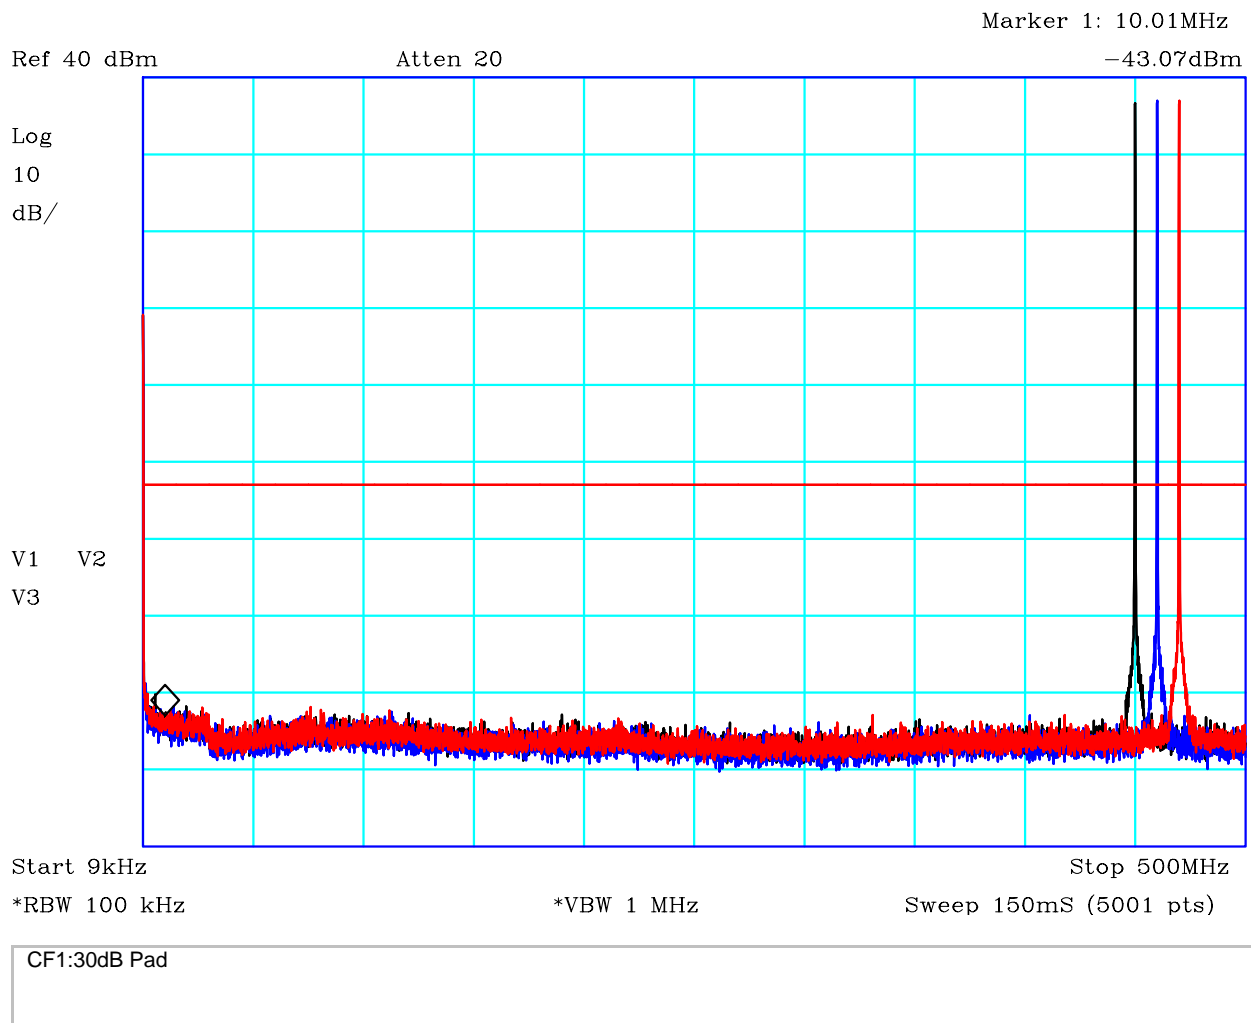


PLOT 16 Antenna Cond Spurious Emissions: 9kHz-500MHz - Mask of 90.221(d)

Company:	Sepura	Product:	SM2024
Date:	18/01/2016	Test Eng:	Mihai Andries
Method:	FCC Part90	Method:	
Limit1:(RED)	-13dBm	Limit2:	
Limit3:		Limit4:	


Black: Tx 450MHz
 Blue: Tx 460MHz
 Red: Tx 470MHz
 Limit = -13dBmCalculation of limit shown in section 4.8. Mask of 90.221(d) used as an alternative to 90.210 as permitted in note 5.

	Mode:	Tx
	Modification State:	0
File: H60195B4.txt	Analyser:	R13

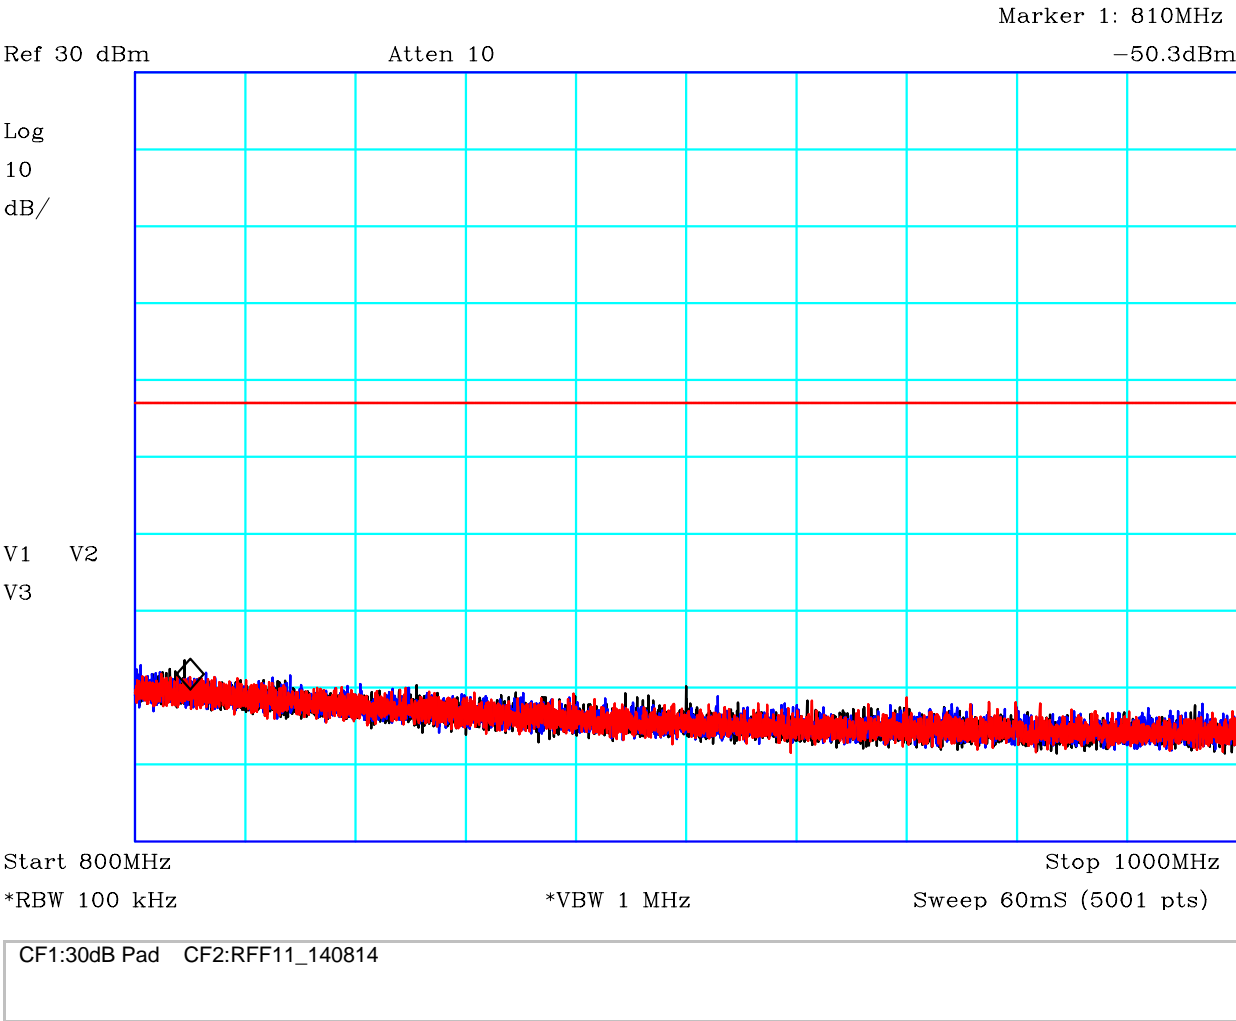


PLOT 18 Antenna Cond Spurious Emissions: 800MHz-1GHz - Mask of 90.221(d)

Company:	Sepura	Product:	SM2024
Date:	18/01/2016	Test Eng:	Mihai Andries
Method:	FCC Part90	Method:	
Limit1:(RED)	-13dBm	Limit2:	
Limit3:		Limit4:	
Black: Tx 450MHz Blue: Tx 460MHz Red: Tx 470MHz Limit = -13dBmCalculation of limit shown in section 4.8. Mask of 90.221(d) used as an alternative to 90.210 as permitted in note 5.			
		Mode:	Tx
		Modification State:	0
File:	H60195EA.txt	Analyser:	R13

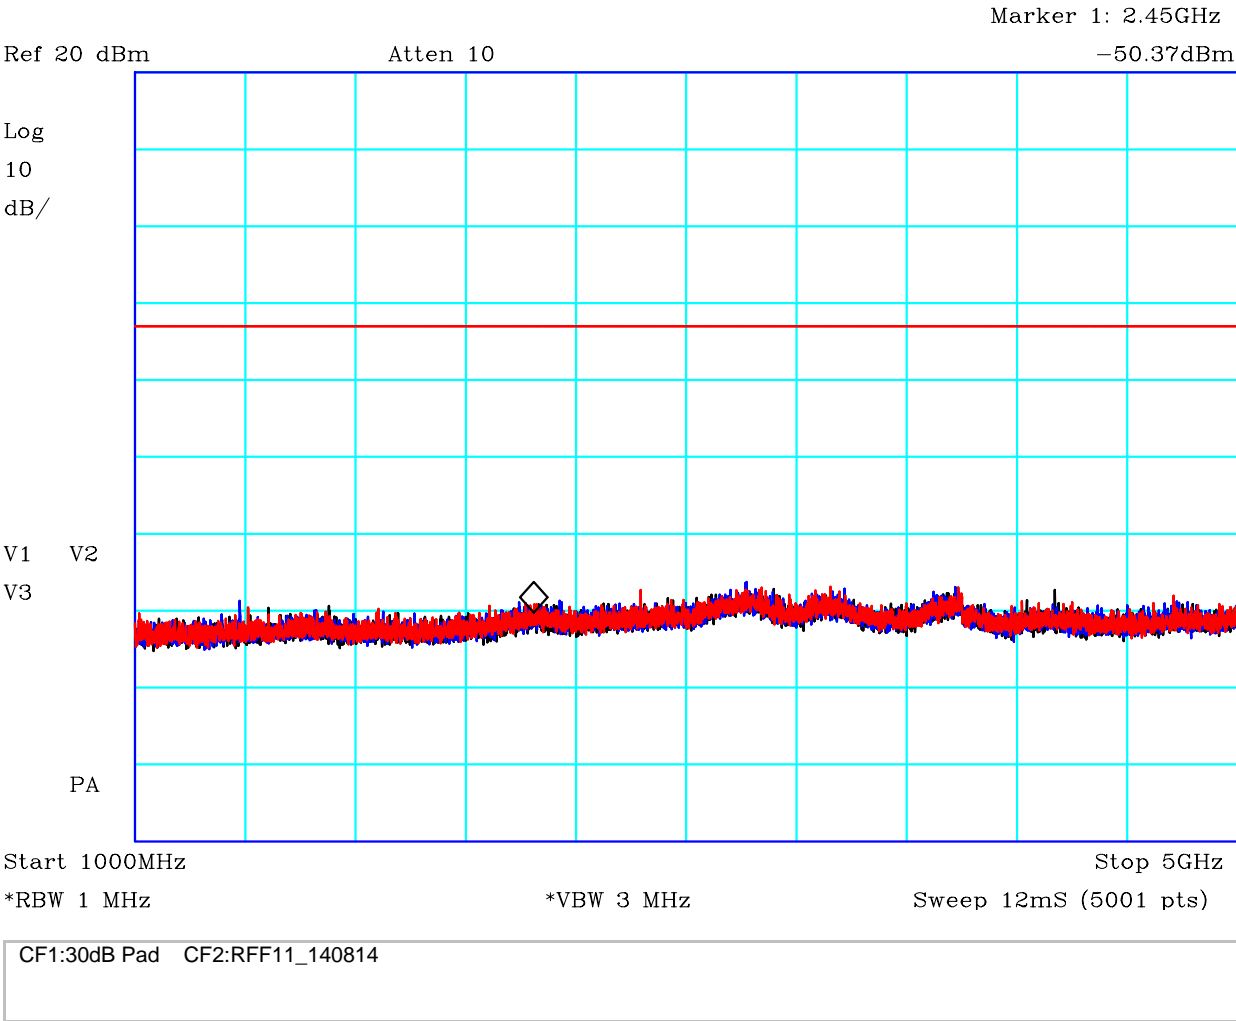

PLOT 19 Antenna Cond Spurious Emissions: 1GHz-5GHz - Mask of 90.221(d)


Company:	Sepura	Product:	SM2024
Date:	18/01/2016	Test Eng:	Mihai Andries
Method:	FCC Part90	Method:	
Limit1:(RED)	-13dBm	Limit2:	
Limit3:		Limit4:	
Black: Tx 450MHz Blue: Tx 460MHz Red: Tx 470MHz Limit = -13dBmCalculation of limit shown in section 4.8. Mask of 90.221(d) used as an alternative to 90.210 as permitted in note 5.			
		Mode:	Tx
		Modification State:	0
File:	H60195EB.txt	Analyser:	R13

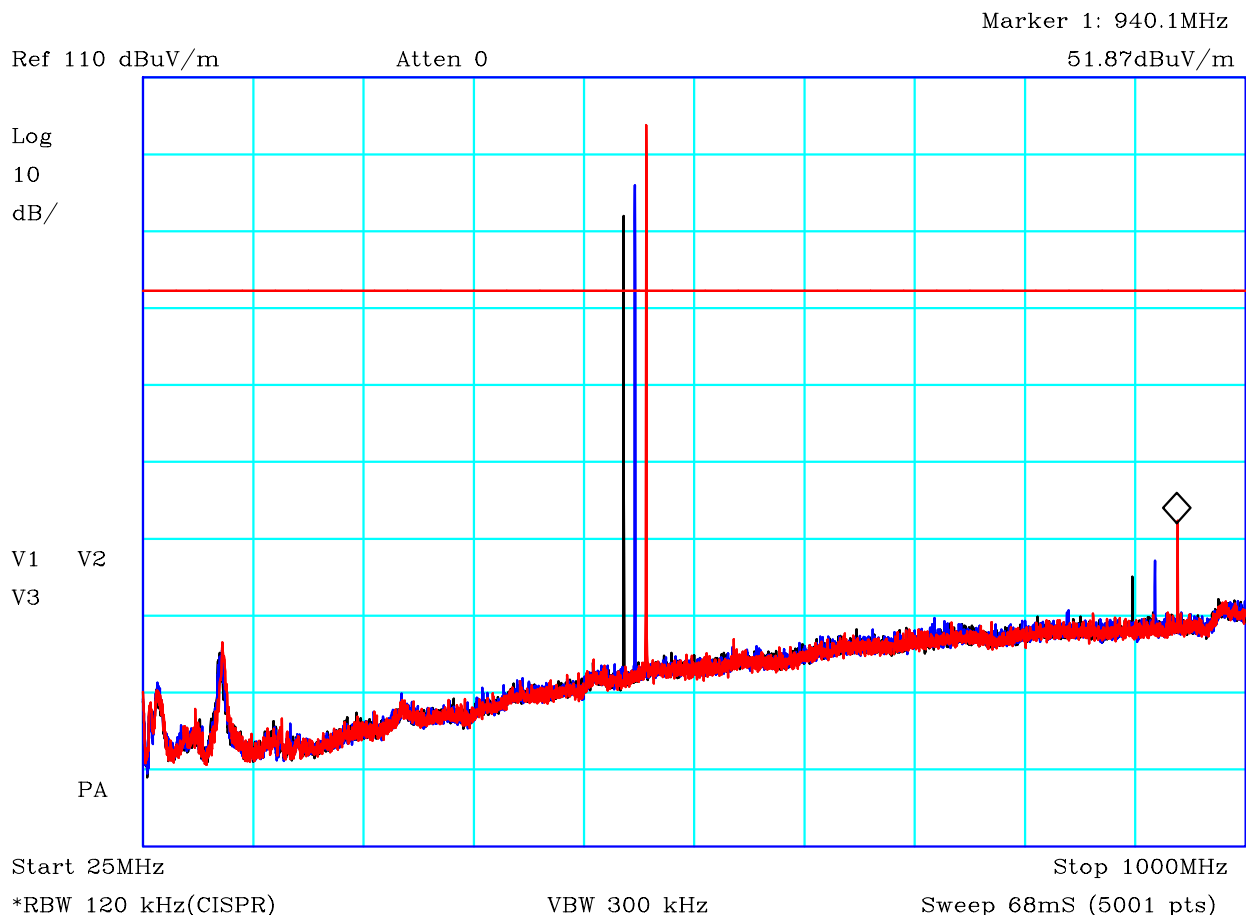

CF1:A24_140528 CF2:CBL059_CBL018_CBL065_CBL060_140528 CF3:10db_PAD_140528

PLOT 20 Radiated Emissions - Tx Mode - 25MHz to 1GHz

Company:	Sepura	Product:	SC2024
Date:	26/11/2015	Test Eng:	Dave Smith
Method:	FCC Part 90	Method:	
Limit1:(RED)	-13dBm	Limit2:	
Limit3:		Limit4:	
Black: Tx at 450MHz Blue: Tx at 460MHz Red: Tx at 470MHz Maximisation of vertical + horizontal polarisation. Placed in charger. RSM connected. Dummy load on antenna. Normal pulse Tetra modulation.			
Facility:	Anech_2	Height	1m,1.5m,2m
Distance	3m	Polarisation	V+H
Angle	0-360	File:	H5A265B3.txt
		Mode:	Tx
		Modification State:	0
		Analysers:	R13

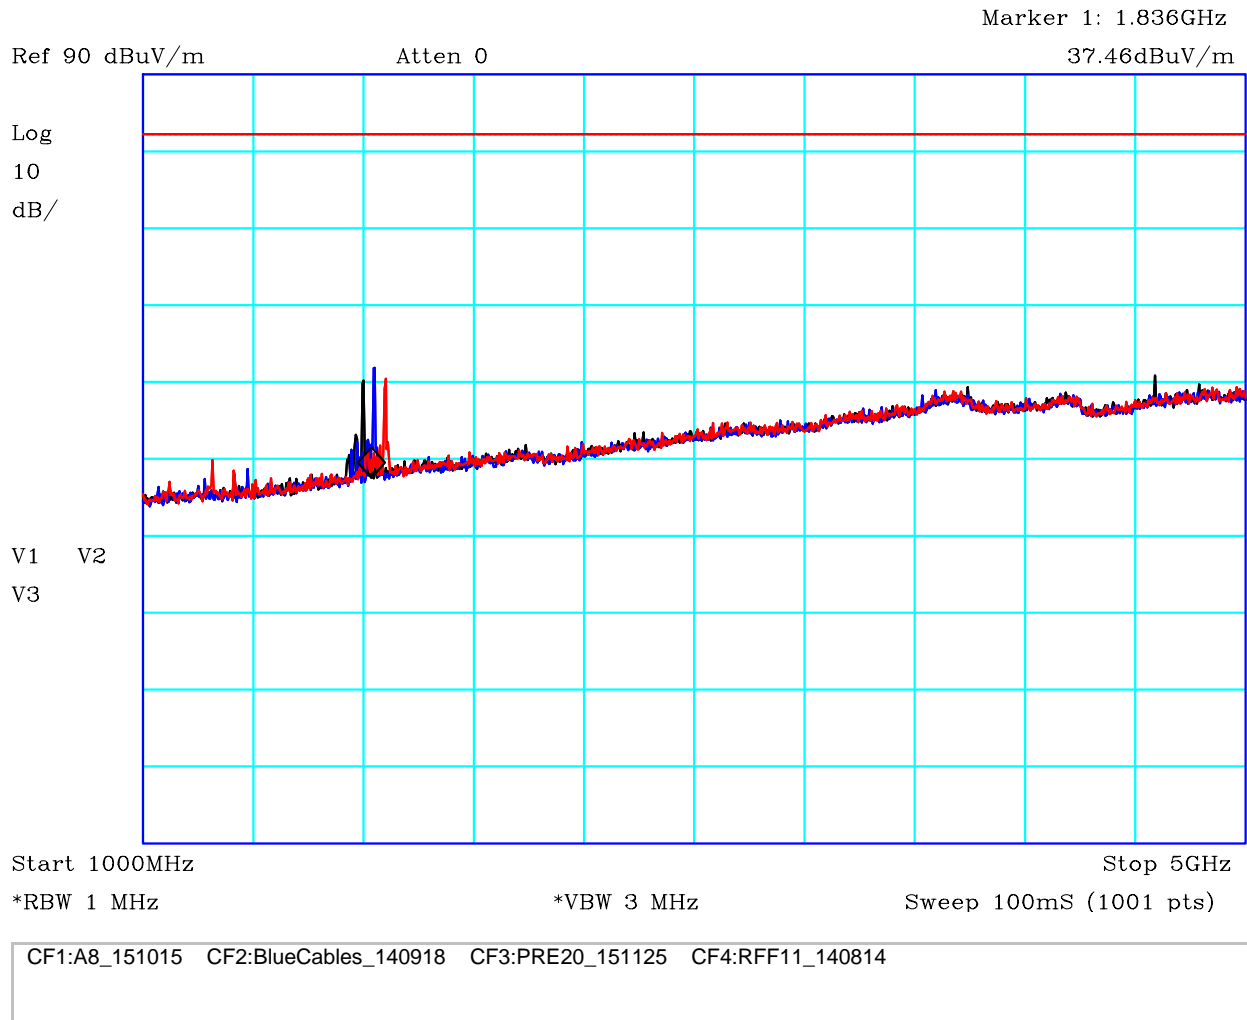

PLOT 21 Radiated Emissions - Tx Mode - 1GHz to 5GHz

Company:	Sepura	Product:	SC2024
Date:	30/11/2015	Test Eng:	Dave Smith
Method:	FCC part 90	Method:	
Limit1:(RED)	-13dBm	Limit2:	
Limit3:		Limit4:	
Black: Tx at 450MHz Blue: Tx at 460MHz Red: Tx at 470MHz Maximisation of vertical + horizontal polarisation. Placed in charger. RSM connected. Dummy load on antenna. Normal pulse Tetra modulation.			
Facility:	Anech_2	Height	1m,1.4m,2m
Distance	3m	Polarisation	V+H
Angle	0-360	File:	H602741C.txt
		Mode:	Tx
		Modification State:	0
		Analysers:	R13