



Frequency (MHz)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector	Angle (°)	Height (cm)	Polarisation	Orientation
*								

Table 43 - 2462 MHz - 1 GHz to 25 GHz Emissions Results

*No emissions were detected within 10 dB of the limit.

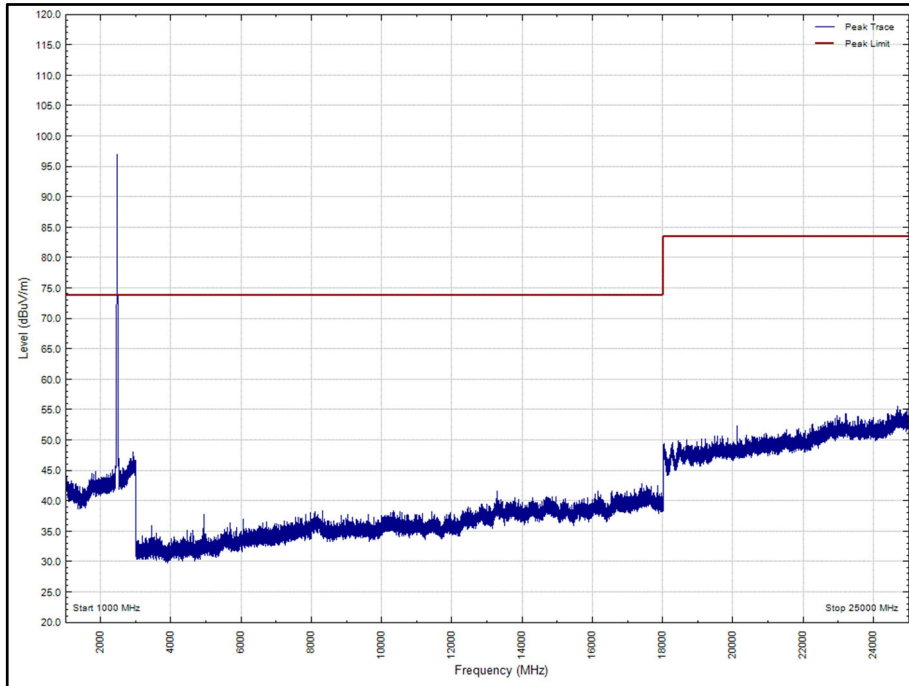


Figure 134 - 2462 MHz - 1 GHz to 25 GHz, Vertical, EUT Orientation: X, Peak

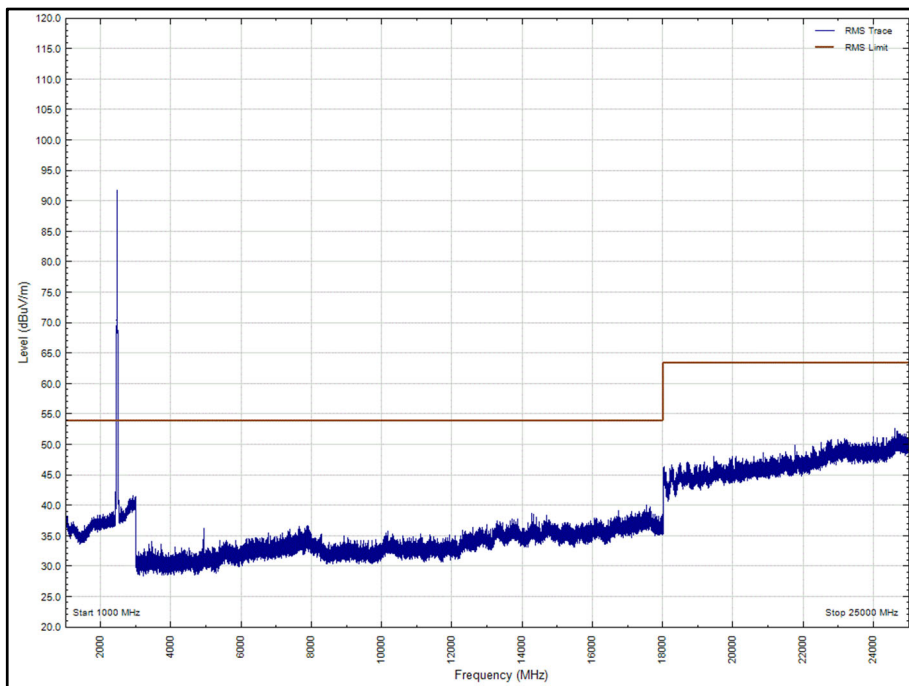


Figure 135 - 2462 MHz - 1 GHz to 25 GHz, Vertical, EUT Orientation: X, Average

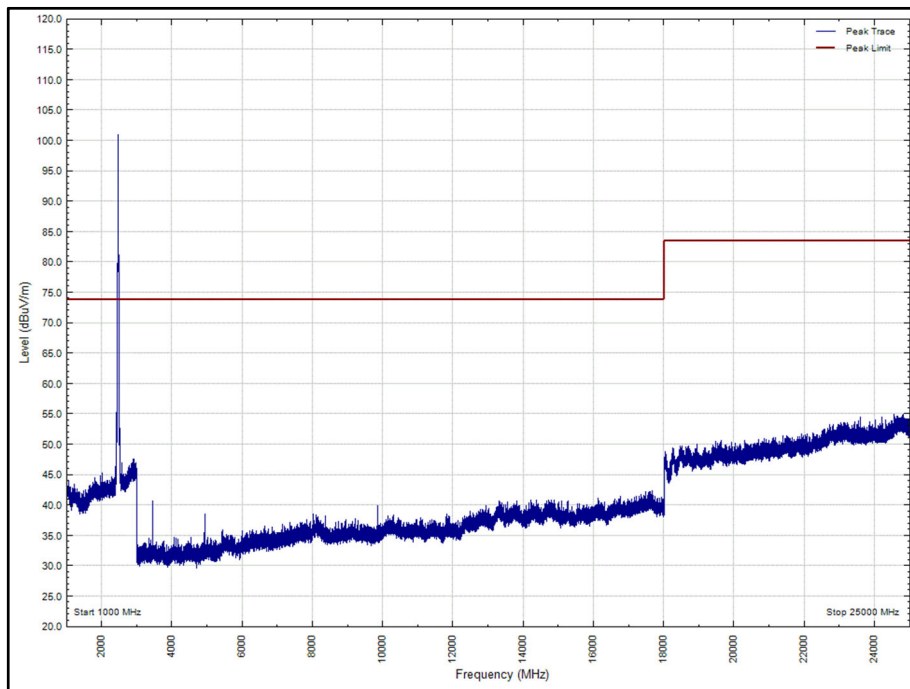


Figure 136 - 2462 MHz - 1 GHz to 25 GHz, Horizontal, EUT Orientation: X, Peak

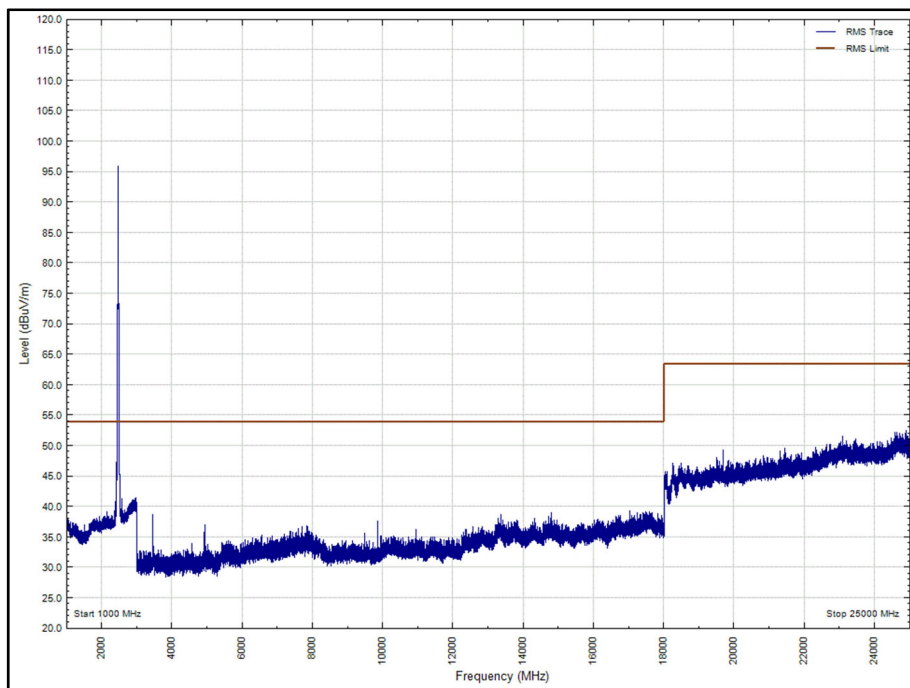


Figure 137 - 2462 MHz - 1 GHz to 25 GHz, Horizontal, EUT Orientation: X, Average

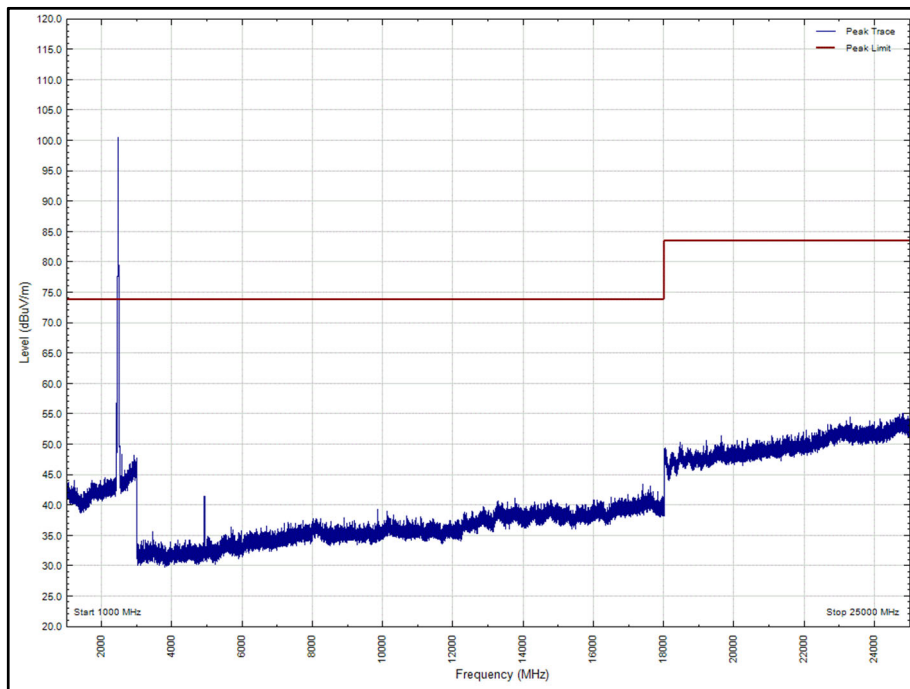


Figure 138 - 2462 MHz - 1 GHz to 25 GHz, Vertical, EUT Orientation: Y, Peak

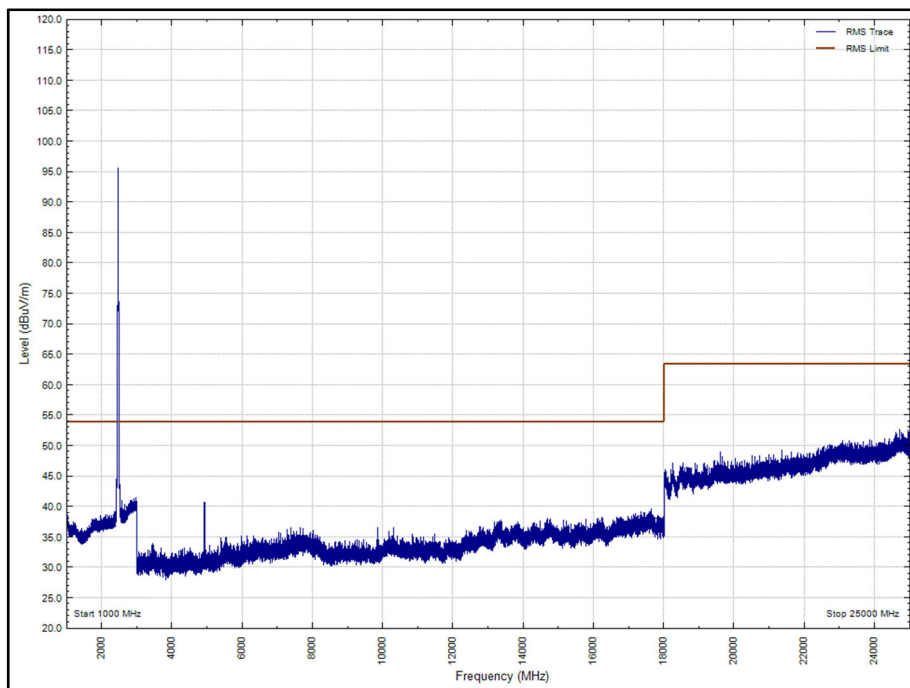


Figure 139 - 2462 MHz - 1 GHz to 25 GHz, Vertical, EUT Orientation: Y, Average

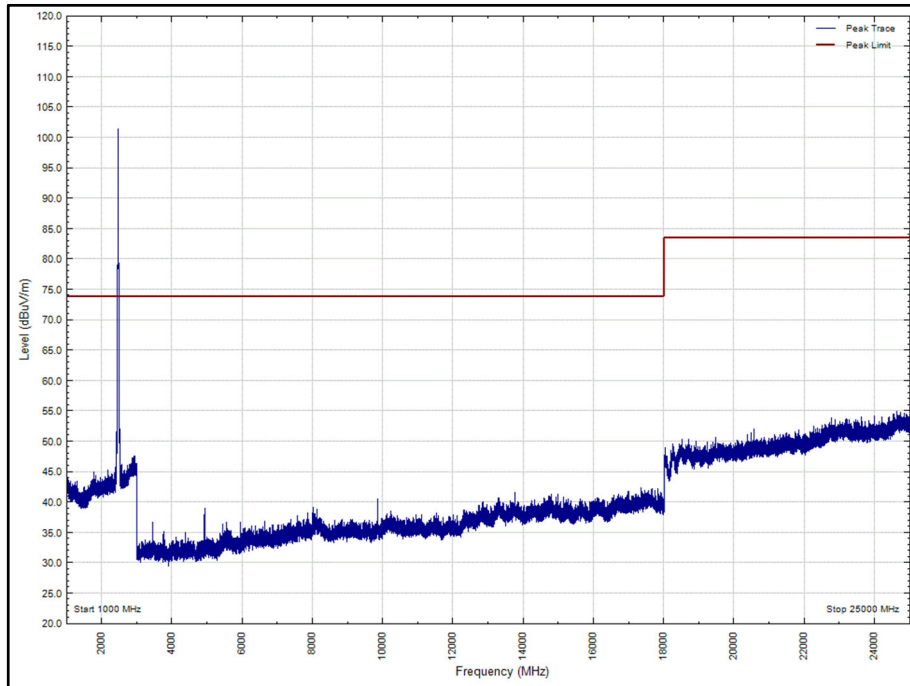


Figure 140 - 2462 MHz - 1 GHz to 25 GHz, Horizontal, EUT Orientation: Y, Peak

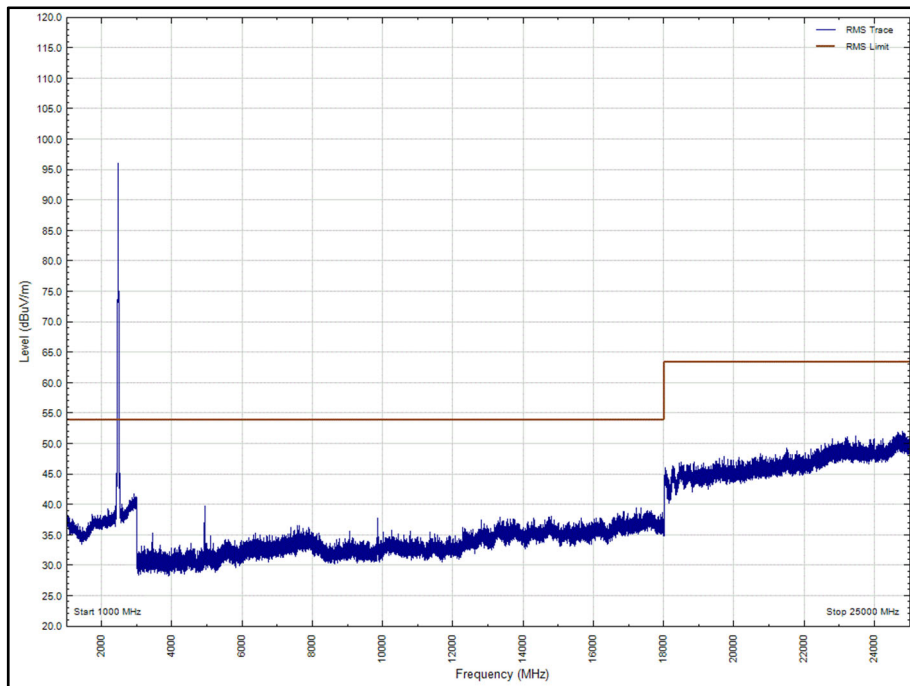


Figure 141 - 2462 MHz - 1 GHz to 25 GHz, Horizontal, EUT Orientation: Y, Average

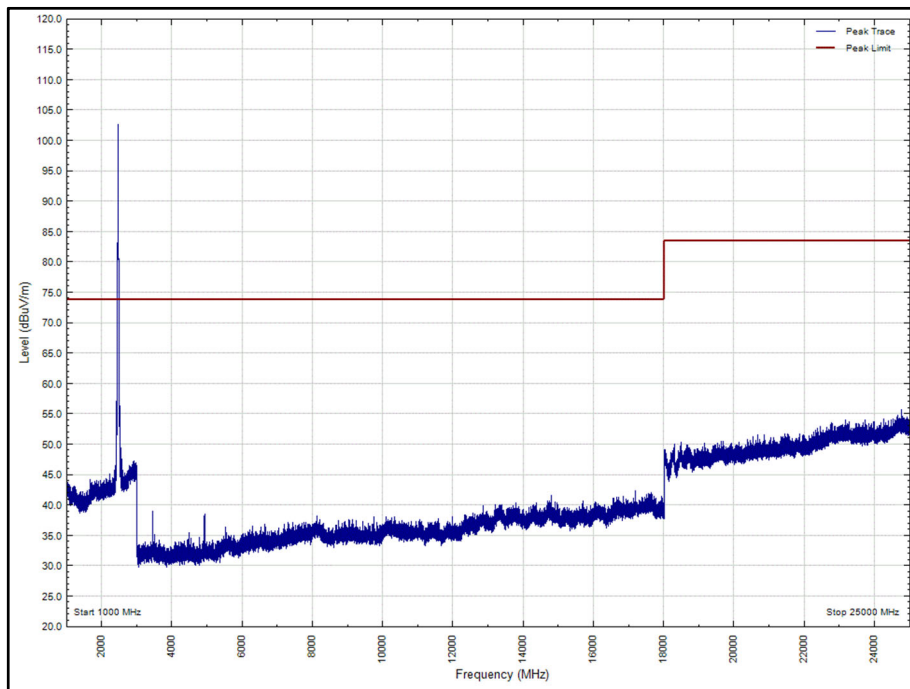


Figure 142 - 2462 MHz - 1 GHz to 25 GHz, Vertical, EUT Orientation: Z, Peak

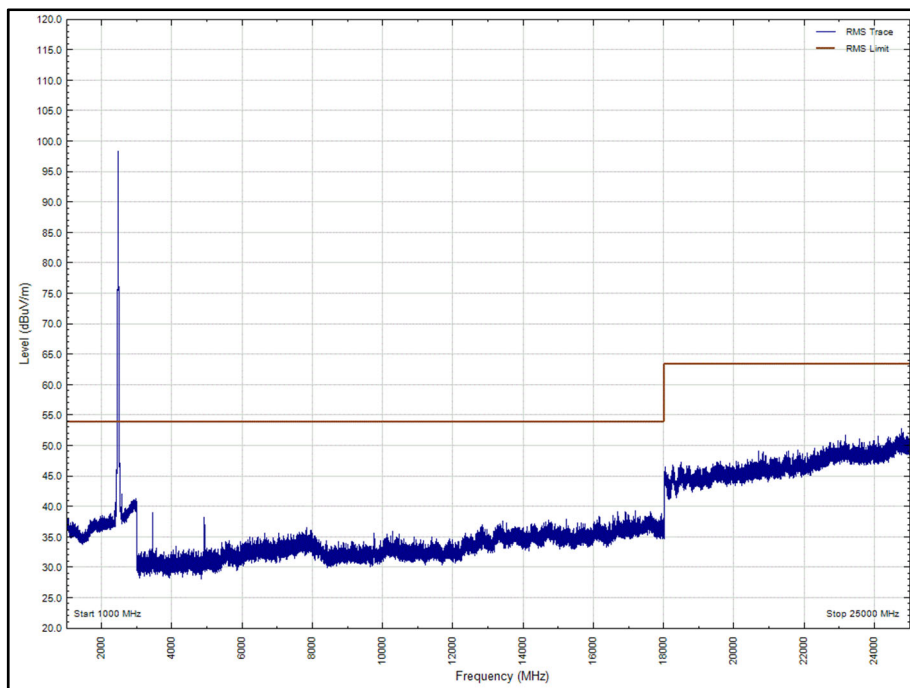


Figure 143 - 2462 MHz - 1 GHz to 25 GHz, Vertical, EUT Orientation: Z, Average

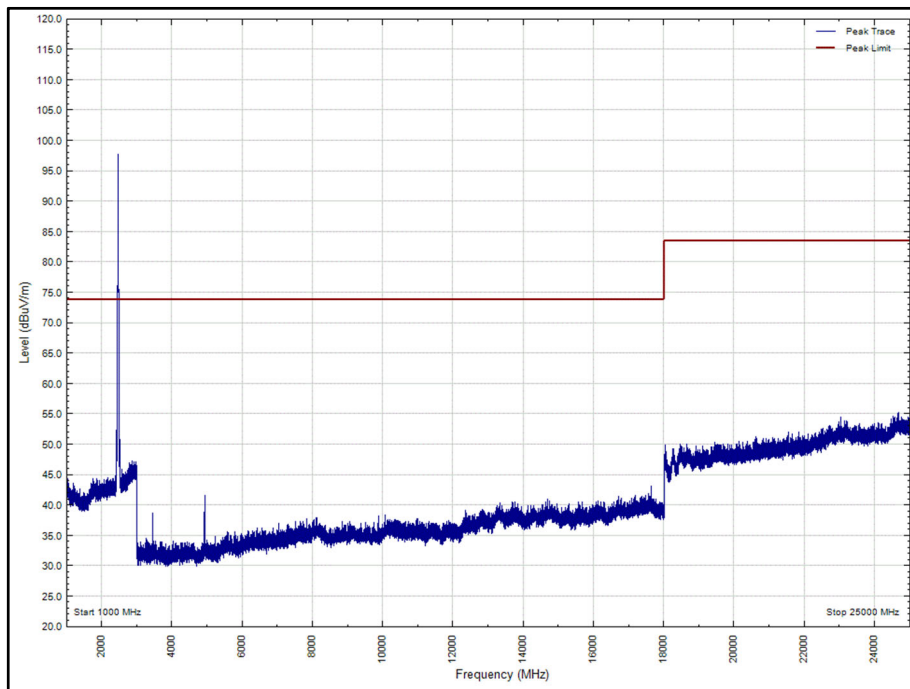


Figure 144 - 2462 MHz - 1 GHz to 25 GHz, Horizontal, EUT Orientation: Z, Peak

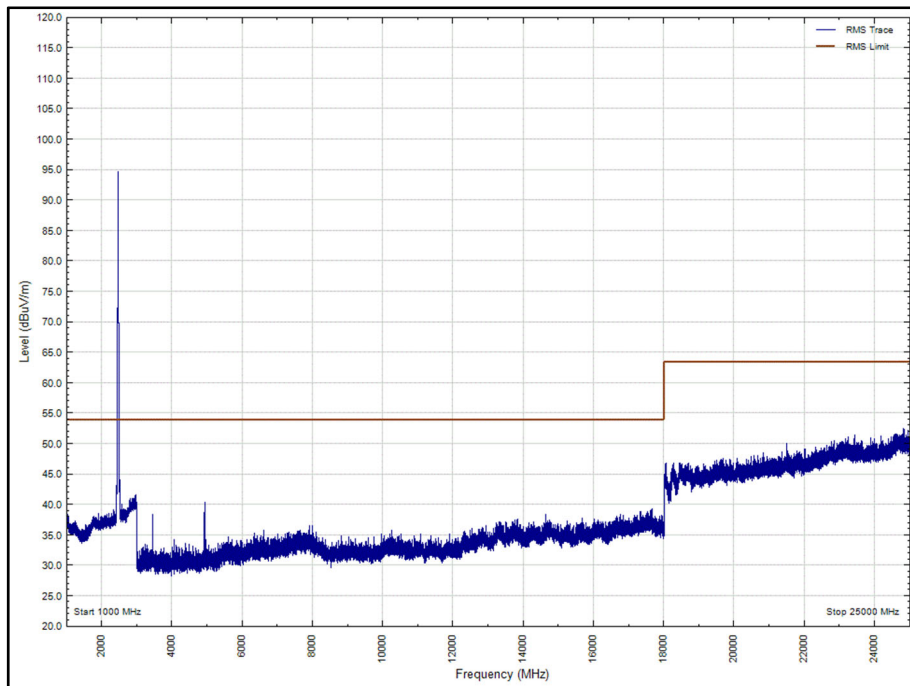


Figure 145 - 2462 MHz - 1 GHz to 25 GHz, Horizontal, EUT Orientation: Z, Average

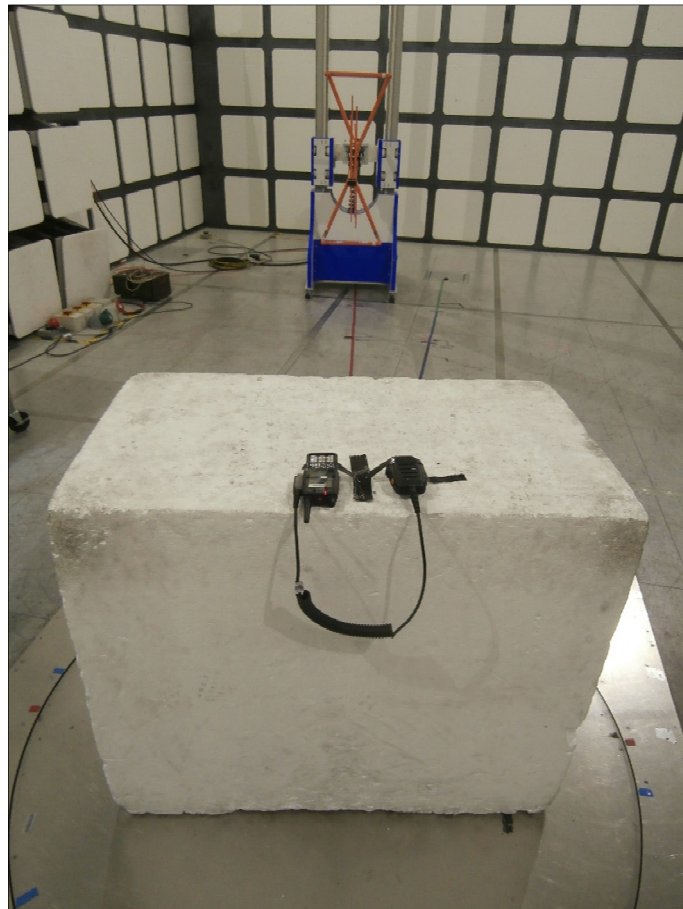


Figure 146 - Test Setup - 30 MHz to 1 GHz



Figure 147 - Test Setup – 1 GHz to 18 GHz



Figure 148 - Test Setup - 18 GHz to 25 GHz



FCC 47 CFR Part 15, Limit Clause 15.247 (d)

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.

Attenuation below the general limits specified in § 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in 15.209(a)

ISED RSS-247, Limit Clause 5.5

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, as permitted under Section 5.4(4), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general field strength limits specified in RSS-Gen is not required.



2.6.7 Test Location and Test Equipment Used

This test was carried out in EMC Chamber 5.

Instrument	Manufacturer	Type No	TE No	Calibration Period (months)	Calibration Due
Antenna 18-40GHz (Double Ridge Guide)	Link Microtek Ltd	AM180HA-K-TU2	230	24	02-May-2020
Screened Room (5)	Rainford	Rainford	1545	36	23-Jan-2021
Turntable Controller	Inn-Co GmbH	CO 1000	1606	-	TU
Hygromer	Rotronic	A1	2677	12	20-Feb-2020
Antenna with permanent attenuator (Bilog)	Chase	CBL6143	2904	24	30-Sep-2021
Comb Generator	Schaffner	RSG1000	3034	-	TU
Antenna (DRG Horn)	ETS-Lindgren	3115	3125	12	13-Oct-2020
EMI Test Receiver	Rohde & Schwarz	ESU40	3506	12	03-Jan-2021
'2.92mm' - '2.92mm' RF Cable (2m)	Rhophase	KPS-1503-2000-KPS	3695	12	11-Jun-2020
Cable 1503 2M 2.92(P)m 2.92(P)m	Rhophase	KPS-1503A-2000-KPS	4293	12	08-Nov-2020
1GHz to 8GHz Low Noise Amplifier	Wright Technologies	APS04-0085	4365	12	14-Nov-2020
Cable (Yellow, Rx, Km-Km 2m)	Scott Cables	KPS-1501-2000-KPS	4527	6	09-Jun-2020
Double Ridged Waveguide Horn Antenna	ETS-Lindgren	3117	4722	12	05-Mar-2020
1 - 18GHz DRG Antenna	ETS-Lindgren	3117	4738	12	05-Mar-2020
Mast Controller	Maturo GmbH	NCD	4810	-	TU
Tilt Antenna Mast	Maturo GmbH	TAM 4.0-P	4811	-	TU
Double Ridge Broadband Horn Antenna	Schwarzbeck	BBHA 9120 B	4848	12	11-Mar-2020
4dB Attenuator	Pasternack	PE7047-4	4935	24	30-Sep-2021
8 - 18 GHz pre amp	Wright Technologies	PS06-0061	4971	12	23-Jan-2021
Hygrometer	Rotronic	HP21	4989	12	02-May-2020
EmX Emissions Software	TUV SUD	EmX	5125	-	Software
8 Meter Cable	Teledyne	PR90-088-8MTR	5212	12	30-Aug-2020
Horn Antenna (15-40GHz)	Schwarzbeck	BBHA 9170	5217	12	09-Apr-2020
Preamplifier (30dB 18-40GHz)	Schwarzbeck	BBV 9721	5218	12	09-Apr-2020
3 GHz High pass filter	Wainwright	WHKX12-2580-3000-18000-80SS	5220	12	15-Mar-2020
Antenna (DRG Horn 7.5-18GHz)	Schwarzbeck	HWRD750	5348	12	04-Sep-2020
EMI Test Receiver	Rohde & Schwarz	ESW44	5382	12	08-Oct-2020

Table 44



TU - Traceability Unscheduled



3 Measurement Uncertainty

For a 95% confidence level, the measurement uncertainties for defined systems are:

Test Name	Measurement Uncertainty
Spurious Radiated Emissions	30 MHz to 1 GHz: ± 5.2 dB 1 GHz to 40 GHz: ± 6.3 dB
Restricted Band Edges	30 MHz to 1 GHz: ± 5.2 dB 1 GHz to 40 GHz: ± 6.3 dB
Authorised Band Edges	30 MHz to 1 GHz: ± 5.2 dB 1 GHz to 40 GHz: ± 6.3 dB
Emission Bandwidth	± 358.56 kHz
Power Spectral Density	± 3.2 dB
Maximum Conducted Output Power	± 3.2 dB

Table 45

Measurement Uncertainty Decision Rule

Determination of conformity with the specification limits is based on the decision rule according to IEC Guide 115: 2007, clause 4.4.3 and 4.5.1.