



Product Service

---

**Choose certainty.  
Add value.**

# Report On

Specific Absorption Rate Testing of the  
Sepura SC2128 TETRA Radio

FCC ID: XX6SC2128

IC: 8739A-SC2128

**COMMERCIAL-IN-CONFIDENCE**



Product Service

TÜV SÜD Product Service, Octagon House, Concorde Way, Segensworth North,  
Fareham, Hampshire, United Kingdom, PO15 5RL  
Tel: +44 (0) 1489 558100. Website: [www.tuv-sud.co.uk](http://www.tuv-sud.co.uk)

COMMERCIAL-IN-CONFIDENCE

**REPORT ON**

Specific Absorption Rate Testing of the  
Sepura SC2128 TETRA Radio

Document 75941492 Report 03 Issue 1

June 2018

**PREPARED FOR**

Sepura plc  
9000 Cambridge Research Park  
Beach Drive  
Waterbeach  
Cambridge  
Cambridgeshire  
CB25 9TL

**PREPARED BY**

A handwritten signature in black ink, appearing to read 'S. Dodd'.

---

**Stephen Dodd**  
SAR Engineer

**APPROVED BY**

A handwritten signature in black ink, appearing to read 'Nigel Grigbsy'.

---

**Nigel Grigbsy**  
Authorised Signatory

**DATED**

---

21 June 2018



**CONTENTS**

<b>Section</b>	<b>Page No</b>
<b>1 REPORT SUMMARY .....</b>	<b>3</b>
1.1 Introduction .....	4
1.2 Brief Summary of Results .....	5
1.3 Test Results Summary .....	6
1.4 PTT Duty cycle Measurements / Power Measurements .....	14
<b>2 TEST DETAILS .....</b>	<b>19</b>
2.1 DASY5 Measurement System .....	20
2.2 TETRA 806 - 824 MHz - Head SAR Test Results .....	26
2.3 TETRA 851 - 869 MHz - Head SAR Test Results .....	30
2.4 TETRA 806 - 824 MHz - Front Of Face PTT SAR Test Results .....	34
2.5 TETRA 851 - 869 MHz - Front Of Face PTT SAR Test Results .....	35
2.6 TETRA 806 - 824 MHz - Body SAR Test Results .....	36
2.7 TETRA 851 - 869 MHz - Body SAR Test Results .....	40
<b>3 TEST EQUIPMENT USED .....</b>	<b>44</b>
3.1 Test Equipment Used .....	45
3.2 Test Software .....	46
3.3 Dielectric Properties of Simulant Liquids .....	47
3.4 Test Conditions .....	47
3.5 Measurement Uncertainty .....	48
<b>4 ACCREDITATION, DISCLAIMERS AND COPYRIGHT .....</b>	<b>50</b>
4.1 Accreditation, Disclaimers and Copyright .....	51
<b>ANNEX A Probe Calibration Reports .....</b>	<b>A.2</b>
<b>ANNEX B Dipole Calibration Reports .....</b>	<b>B.2</b>



Product Service

## **SECTION 1**

### **REPORT SUMMARY**

Specific Absorption Rate Testing of the  
Sepura SC2128 TETRA Radio



## 1.1 INTRODUCTION

The information contained in this report is intended to show verification of the Specific Absorption Rate Testing of the Sepura SC2128 TETRA Radio to the requirements of KDB 447498 D01 v06 General RF Exposure Guidance.

Objective	To perform Specific Absorption Rate Testing to determine the Equipment Under Test's (EUT's) compliance with the requirements specified of KDB 447498 D01 v06 General RF Exposure Guidance, for the series of tests carried out.
Applicant	Sepura plc
Manufacturer	Sepura plc
Manufacturing Description	TETRA Radio
Model Number	SC2128
Serial/IMEI Number(s)	1PR001745GMQ311
Number of Samples Tested	1
Hardware Version	Production
Software Version	174600307367
Antenna Part Number	300-01924 (Extended Helical Antenna)
Battery Cell Manufacturer	Varta
Battery Model Number	300-01852 (1160mAh) 300-01853 (1880mAh)
Test Specification/Issue/Date	KDB 447498 D01 v06 General RF Exposure Guidance
Start of Test	17 April 2018
Finish of Test	20 April 2018
Related Document(s)	FCC 47CFR 2.1093: 2015 KDB 865664 – D01 v01r04 KDB 865664 – D02 v01r02 KDB 648474 – D04 v01r03 IEEE 1528 – 2013
Name of Engineer	Stephen Dodd



**1.2 BRIEF SUMMARY OF RESULTS**

The measurements shown in this report were made in accordance with the procedures specified KDB 447498 D01 v06 General RF Exposure Guidance.

The maximum 1 g volume averaged stand-alone SAR found during this Assessment:

Max 1 g SAR (W/kg) Head	2.73 (Measured)	<b>2.80</b> (Scaled)
Max 1 g SAR (W/kg) Body	2.26 (Measured)	<b>2.32</b> (Scaled)
The maximum 1 g volume averaged SAR level measured for all the tests performed did not exceed the limits for Occupational Use/ Controlled Exposure (W/kg) Partial Body of 8.0 W/kg.		

The maximum 1 g volume averaged stand-alone Reported SAR found during this Assessment for each supported mode:

Band	Test Configuration	Max Reported SAR (W/kg)
TETRA 806 – 824 MHz	Head	<b>2.80</b>
TETRA 851 – 869 MHz	Head	2.79
TETRA 806 – 824 MHz	Body	<b>2.32</b>
TETRA 851 – 869 MHz	Body	2.13
The maximum 1 g volume averaged SAR level measured for all the tests performed did not exceed the limits for Occupational Use/ Controlled Exposure (W/kg) Partial Body of 8.0 W/kg.		



### 1.3 TEST RESULTS SUMMARY

#### 1.3.1 System Performance / Validation Check Results

Prior to formal testing being performed a System Check was performed in accordance with KDB 865664 and the results were compared against published data in Standard IEEE 1528-2013. The following results were obtained: -

##### System performance / Validation results

Date	Frequency (MHz)	Max 1 g SAR (W/kg)*	Percentage Drift on Reference
17/04/2018	850 MHz	9.55	-1.65
18/04/2018	850 MHz	9.36	-3.60
19/04/2018	850 MHz	9.36	-2.09
20/04/2018	850 MHz	9.36	-2.09

\*Normalised to a forward power of 1W



**1.3.2 Results Summary Tables**

Tetra 806 - 824 MHz band, 1160 mAh Battery 300-01852: Head Specific Absorption Rate (Maximum SAR) 1 g Results

Test Position	Channel	Frequency (MHz)	Measured Average Power (dBm)	Tune Up (dBm)	Measured 1 g SAR (W/kg)	Scaled 1 g SAR (W/kg)	Scan Figure Number
Left Cheek	Middle	815	34.39	34.50	2.72	2.79	5
Left 15°	Middle	815	34.39	34.50	2.44	2.50	6
Right Cheek	Middle	815	34.39	34.50	2.57	2.64	7
Right 15°	Middle	815	34.39	34.50	2.09	2.14	8
Limit for Occupation (controlled Exposure) 8.0 W/kg (1 g)							
KDB 643646 D01 - Testing of other required channels was not necessary as the SAR was ≤ 3.5 W/kg							

Tetra 806 - 824 MHz band, 1880 mAh Battery 300-01853: Head Specific Absorption Rate (Maximum SAR) 1 g Results

Test Position	Channel	Frequency (MHz)	Measured Average Power (dBm)	Tune Up (dBm)	Measured 1 g SAR (W/kg)	Scaled 1 g SAR (W/kg)	Scan Figure Number
Left Cheek	Middle	815	34.39	34.50	2.73	<b>2.80</b>	9
Left 15°	Middle	815	34.39	34.50	2.43	2.49	10
Right Cheek	Middle	815	34.39	34.50	2.72	2.79	11
Right 15°	Middle	815	34.39	34.50	1.98	2.03	12
Limit for Occupation (controlled Exposure) 8.0 W/kg (1 g)							
KDB 643646 D01 - Testing of other required channels was not necessary as the SAR was ≤ 3.5 W/kg							

Tetra 851 - 869 MHz band, 1160 mAh Battery 300-01852: Head Specific Absorption Rate (Maximum SAR) 1 g Results

Test Position	Channel	Frequency (MHz)	Measured Average Power (dBm)	Tune Up (dBm)	Measured 1 g SAR (W/kg)	Scaled 1 g SAR (W/kg)	Scan Figure Number
Left Cheek	Bottom	851	34.35	34.50	2.64	2.73	13
Left 15°	Bottom	851	34.35	34.50	2.37	2.45	14
Right Cheek	Bottom	851	34.35	34.50	2.48	2.57	15
Right 15°	Bottom	851	34.35	34.50	2.02	2.09	16
Limit for Occupation (controlled Exposure) 8.0 W/kg (1 g)							
KDB 643646 D01 - Testing of other required channels was not necessary as the SAR was ≤ 3.5 W/kg							





Tetra 851 - 869 MHz band, 1880 mAh Battery 300-01853: Head Specific Absorption Rate (Maximum SAR) 1 g Results

Test Position	Channel	Frequency (MHz)	Measured Average Power (dBm)	Tune Up (dBm)	Measured 1 g SAR (W/kg)	Scaled 1 g SAR (W/kg)	Scan Figure Number
Left Cheek	Bottom	851	34.35	34.50	2.70	2.79	17
Left 15°	Bottom	851	34.35	34.50	2.51	2.60	18
Right Cheek	Bottom	851	34.35	34.50	2.66	2.66	19
Right 15°	Bottom	851	34.35	34.50	1.98	2.05	20
Limit for Occupation (controlled Exposure) 8.0 W/kg (1 g) KDB 643646 D01 - Testing of other required channels was not necessary as the SAR was ≤ 3.5 W/kg							

Tetra 806 - 824 MHz band, 1160 mAh Battery 300-01852: Head – Front Of Face PTT Specific Absorption Rate (Maximum SAR) 1 g Results

Test Position	Channel	Frequency (MHz)	Measured Average Power (dBm)	Tune Up (dBm)	Measured 1 g SAR (W/kg)	Scaled 1 g SAR (W/kg)	Scan Figure Number
25 mm Front Facing	Middle	815	34.39	34.50	1.00	1.03	21
Limit for Occupation (controlled Exposure) 8.0 W/kg (1 g) KDB 643646 D01 - Testing of other required channels was not necessary as the SAR was ≤ 3.5 W/kg							

Tetra 806 - 824 MHz band, 1880 mAh Battery 300-01853: Head – Front Of Face PTT Specific Absorption Rate (Maximum SAR) 1 g Results

Test Position	Channel	Frequency (MHz)	Measured Average Power (dBm)	Tune Up (dBm)	Measured 1 g SAR (W/kg)	Scaled 1 g SAR (W/kg)	Scan Figure Number
25 mm Front Facing	Middle	815	34.39	34.50	1.01	1.04	22
Limit for Occupation (controlled Exposure) 8.0 W/kg (1 g) KDB 643646 D01 - Testing of other required channels was not necessary as the SAR was ≤ 3.5 W/kg							

Tetra 851 - 869 MHz band, 1160 mAh Battery 300-01852: Head – Front Of Face PTT Specific Absorption Rate (Maximum SAR) 1 g Results

Test Position	Channel	Frequency (MHz)	Measured Average Power (dBm)	Tune Up (dBm)	Measured 1 g SAR (W/kg)	Scaled 1 g SAR (W/kg)	Scan Figure Number
25 mm Front Facing	Bottom	851	34.35	34.50	0.95	0.98	23
Limit for Occupation (controlled Exposure) 8.0 W/kg (1 g) KDB 643646 D01 - Testing of other required channels was not necessary as the SAR was ≤ 3.5 W/kg							

Tetra 851 - 869 MHz band, 1880 mAh Battery 300-01853: Head – Front Of Face PTT Specific Absorption Rate (Maximum SAR) 1 g Results

Test Position	Channel	Frequency (MHz)	Measured Average Power (dBm)	Tune Up (dBm)	Measured 1 g SAR (W/kg)	Scaled 1 g SAR (W/kg)	Scan Figure Number
25 mm Front Facing	Bottom	851	34.35	34.50	0.97	1.01	24
Limit for Occupation (controlled Exposure) 8.0 W/kg (1 g) KDB 643646 D01 - Testing of other required channels was not necessary as the SAR was ≤ 3.5 W/kg							



Product Service

Tetra 806 - 824 MHz band, 1160 mAh Battery 300-01852, Holster 300-01916: Body Specific Absorption Rate (Maximum SAR) 1 g Results

Test Position	Channel	Frequency (MHz)	Measured Average Power (dBm)	Tune Up (dBm)	Measured 1 g SAR (W/kg)	Scaled 1 g SAR (W/kg)	Scan Figure Number
0mm Rear Facing	Middle	815	34.39	34.50	2.23	2.29	25
Limit for Occupation (controlled Exposure) 8.0 W/kg (1 g) KDB 643646 D01 - Testing of other required channels was not necessary as the SAR was $\leq$ 3.5 W/kg							

Tetra 806 - 824 MHz band, 1160 mAh Battery 300-01852, Holster 300-01915: Body Specific Absorption Rate (Maximum SAR) 1 g Results

Test Position	Channel	Frequency (MHz)	Measured Average Power (dBm)	Tune Up (dBm)	Measured 1 g SAR (W/kg)	Scaled 1 g SAR (W/kg)	Scan Figure Number
0mm Rear Facing	Middle	815	34.39	34.50	1.87	1.92	26
Limit for Occupation (controlled Exposure) 8.0 W/kg (1 g) KDB 643646 D01 - Testing of other required channels was not necessary as the SAR was $\leq$ 3.5 W/kg							

Tetra 806 - 824 MHz band, 1160 mAh Battery 300-01852, Holster 300-01917: Body Specific Absorption Rate (Maximum SAR) 1 g Results

Test Position	Channel	Frequency (MHz)	Measured Average Power (dBm)	Tune Up (dBm)	Measured 1 g SAR (W/kg)	Scaled 1 g SAR (W/kg)	Scan Figure Number
0mm Rear Facing	Middle	815	34.39	34.50	1.36	1.40	27
Limit for Occupation (controlled Exposure) 8.0 W/kg (1 g) KDB 643646 D01 - Testing of other required channels was not necessary as the SAR was $\leq$ 3.5 W/kg							

Tetra 806 - 824 MHz band, 1160 mAh Battery 300-01852, Clip 300-01923: Body Specific Absorption Rate (Maximum SAR) 1 g Results

Test Position	Channel	Frequency (MHz)	Measured Average Power (dBm)	Tune Up (dBm)	Measured 1 g SAR (W/kg)	Scaled 1 g SAR (W/kg)	Scan Figure Number
0mm Rear Facing	Middle	815	34.39	34.50	1.27	1.30	28
Limit for Occupation (controlled Exposure) 8.0 W/kg (1 g) KDB 643646 D01 - Testing of other required channels was not necessary as the SAR was $\leq$ 3.5 W/kg							

Tetra 806 - 824 MHz band, 1160 mAh Battery 300-01852, Clip 300-01922: Body Specific Absorption Rate (Maximum SAR) 1 g Results

Test Position	Channel	Frequency (MHz)	Measured Average Power (dBm)	Tune Up (dBm)	Measured 1 g SAR (W/kg)	Scaled 1 g SAR (W/kg)	Scan Figure Number
0mm Rear Facing	Middle	815	34.39	34.50	1.64	1.68	29
Limit for Occupation (controlled Exposure) 8.0 W/kg (1 g) KDB 643646 D01 - Testing of other required channels was not necessary as the SAR was $\leq$ 3.5 W/kg							



Tetra 806 - 824 MHz band, 1880 mAh Battery 300-01853, Holster 300-01916: Body Specific Absorption Rate (Maximum SAR) 1 g Results

Test Position	Channel	Frequency (MHz)	Measured Average Power (dBm)	Tune Up (dBm)	Measured 1 g SAR (W/kg)	Scaled 1 g SAR (W/kg)	Scan Figure Number
Omm Rear Facing	Middle	815	34.39	34.50	1.98	2.03	30
Limit for Occupation (controlled Exposure) 8.0 W/kg (1 g) KDB 643646 D01 - Testing of other required channels was not necessary as the SAR was $\leq 3.5$ W/kg							

Tetra 806 - 824 MHz band, 1160 mAh Battery 300-01852, Holster 300-01916, RSM 300-00389: Body Specific Absorption Rate (Maximum SAR) 1 g Results

Test Position	Channel	Frequency (MHz)	Measured Average Power (dBm)	Tune Up (dBm)	Measured 1 g SAR (W/kg)	Scaled 1 g SAR (W/kg)	Scan Figure Number
Omm Rear Face	Middle	815	34.39	34.50	2.26	<b>2.32</b>	31
Limit for Occupation (controlled Exposure) 8.0 W/kg (1 g) KDB 643646 D01 - Testing of other required channels was not necessary as the SAR was $\leq 3.5$ W/kg							

Tetra 851 - 869 MHz band, 1160 mAh Battery 300-01852, Holster 300-01916: Body Specific Absorption Rate (Maximum SAR) 1 g Results

Test Position	Channel	Frequency (MHz)	Measured Average Power (dBm)	Tune Up (dBm)	Measured 1 g SAR (W/kg)	Scaled 1 g SAR (W/kg)	Scan Figure Number
Omm Rear Facing	Bottom	851	34.35	34.50	2.06	2.13	32
Limit for Occupation (controlled Exposure) 8.0 W/kg (1 g) KDB 643646 D01 - Testing of other required channels was not necessary as the SAR was $\leq 3.5$ W/kg							

Tetra 851 - 869 MHz band, 1160 mAh Battery 300-01852, Holster 300-01915: Body Specific Absorption Rate (Maximum SAR) 1 g Results

Test Position	Channel	Frequency (MHz)	Measured Average Power (dBm)	Tune Up (dBm)	Measured 1 g SAR (W/kg)	Scaled 1 g SAR (W/kg)	Scan Figure Number
Omm Rear Facing	Bottom	851	34.35	34.50	1.73	1.79	33
Limit for Occupation (controlled Exposure) 8.0 W/kg (1 g) KDB 643646 D01 - Testing of other required channels was not necessary as the SAR was $\leq 3.5$ W/kg							

Tetra 851 - 869 MHz band, 1160 mAh Battery 300-01852, Holster 300-01917: Body Specific Absorption Rate (Maximum SAR) 1 g Results

Test Position	Channel	Frequency (MHz)	Measured Average Power (dBm)	Tune Up (dBm)	Measured 1 g SAR (W/kg)	Scaled 1 g SAR (W/kg)	Scan Figure Number
Omm Rear Facing	Bottom	851	34.35	34.50	1.27	1.32	34
Limit for Occupation (controlled Exposure) 8.0 W/kg (1 g) KDB 643646 D01 - Testing of other required channels was not necessary as the SAR was $\leq 3.5$ W/kg							



Product Service

Tetra 851 - 869 MHz band, 1160 mAh Battery 300-01852, Clip 300-01923: Body Specific Absorption Rate (Maximum SAR) 1 g Results

Test Position	Channel	Frequency (MHz)	Measured Average Power (dBm)	Tune Up (dBm)	Measured 1 g SAR (W/kg)	Scaled 1 g SAR (W/kg)	Scan Figure Number
0mm Rear Facing	Bottom	851	34.35	34.50	1.03	1.07	35
Limit for Occupation (controlled Exposure) 8.0 W/kg (1 g) KDB 643646 D01 - Testing of other required channels was not necessary as the SAR was $\leq 3.5$ W/kg							

Tetra 851 - 869 MHz band, 1160 mAh Battery 300-01852, Clip 300-01922: Body Specific Absorption Rate (Maximum SAR) 1 g Results

Test Position	Channel	Frequency (MHz)	Measured Average Power (dBm)	Tune Up (dBm)	Measured 1 g SAR (W/kg)	Scaled 1 g SAR (W/kg)	Scan Figure Number
0mm Rear Facing	Bottom	851	34.35	34.50	1.47	1.52	36
Limit for Occupation (controlled Exposure) 8.0 W/kg (1 g) KDB 643646 D01 - Testing of other required channels was not necessary as the SAR was $\leq 3.5$ W/kg							

Tetra 851 - 869 MHz band, 1880 mAh Battery 300-01853, Holster 300-01916: Body Specific Absorption Rate (Maximum SAR) 1 g Results

Test Position	Channel	Frequency (MHz)	Measured Average Power (dBm)	Tune Up (dBm)	Measured 1 g SAR (W/kg)	Scaled 1 g SAR (W/kg)	Scan Figure Number
0mm Rear Facing	Bottom	851	34.35	34.50	1.87	1.94	37
Limit for Occupation (controlled Exposure) 8.0 W/kg (1 g) KDB 643646 D01 - Testing of other required channels was not necessary as the SAR was $\leq 3.5$ W/kg							

Tetra 851 - 869 MHz band, 1160 mAh Battery 300-01852, Holster 300-01916, ,RSM 300-00389: Body Specific Absorption Rate (Maximum SAR) 1 g Results

Test Position	Channel	Frequency (MHz)	Measured Average Power (dBm)	Tune Up (dBm)	Measured 1 g SAR (W/kg)	Scaled 1 g SAR (W/kg)	Scan Figure Number
0mm Rear Facing	Bottom	851	34.35	34.50	2.05	2.12	38
Limit for Occupation (controlled Exposure) 8.0 W/kg (1 g) KDB 643646 D01 - Testing of other required channels was not necessary as the SAR was $\leq 3.5$ W/kg							

### 1.3.3 Standalone SAR Test Exclusion Considerations (KDB 447498 D01)

The 1 g SAR Test exclusion thresholds for 100 MHz to 6 GHz *test separation distances* ≤ 50 mm are determined by:

$[(\text{max power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] [\sqrt{f (\text{GHz})}] \leq 3.0$ , where

- $f (\text{GHz})$  is the RF channel transmit frequency in GHz.
- Power and distance are rounded to the nearest mW and mm before calculation.
- The result is rounded to one decimal place for comparison.
- When the maximum test separation distance is < 5 mm, a distance of 5 mm is applied.

RAT & Band	Frequency (MHz)	Power (dBm)	Power (mW)	Test Position	Distance (mm)	Threshold	Test Exclusion
Tetra 806 – 824 MHz	815	34.5	2818.38	Head	< 5	508.9	No
Tetra 806 – 824 MHz	815	34.5	2818.38	Front Of Face	25	101.8	No
Tetra 806 – 824 MHz	815	34.5	2818.38	Body	27	110.6	No
Tetra 851 – 869 MHz	851	34.5	2818.38	Head	< 5	520.0	No
Tetra 851 – 869 MHz	851	34.5	2818.38	Front Of Face	25	104.0	No
Tetra 851 – 869 MHz	851	34.5	2818.38	Body	23	113.0	No

### 1.3.4 Technical Description

The equipment under test (EUT) was a Sepura SC2128 Portable TETRA Radio for Occupational use. A full technical description can be found in the manufacturer's documentation.

### 1.3.5 Test Configuration and Modes of Operation

The testing was performed with two battery variants (1160 mAh and 1880 mAh) which were supplied by Sepura plc and manufactured by Varta. The batteries were fully charged before each measurement and there were no external connections.

For head SAR assessment, testing was performed with the EUT in the declared normal position of operation for the 806 MHz – 824 MHz and 851 – 869 MHz frequency bands at the maximum specified power level. The EUT was placed against a Specific Anthropomorphic Mannequin (SAM) phantom. The phantom was filled with simulant liquid appropriate to the frequency band. The dielectric properties were measured and found to be in accordance with the requirements for the dielectric properties specified in KDB 865665. Testing was performed at both the left and right ear of the phantom at both handset positions stated in the applied specification.

For front of face SAR assessment, testing was performed with the device in the intended normal position of operation for the 806 MHz – 824 MHz and 851 – 869 MHz frequency bands at maximum power. The handset was placed at a distance of 25 mm from the bottom of the flat phantom for all front of face testing. The phantom was filled to a depth of 150 mm with the appropriate head simulant liquid. The dielectric properties were in accordance with the requirements specified in KDB 865664 D01



For body SAR assessment, testing was performed for the 806 MHz – 824 MHz and 851 – 869 MHz frequency bands at the maximum specified power levels, using various body worn accessories, of which all contain metal components. Model Numbers: 300-01916, 300-01922, 300-01923, 300-01922, 300-01917 (Klick fast holder with belt attachment (300-00322) fitted.) Body SAR testing was carried out with the device inside the holsters or with a belt clip attached at 0 mm separation distance between the accessory and the Elliptical Flat Phantom. The separation distances caused by each accessory configuration is tabulated below.

Body Accessory	Battery	Separation distance EUT to phantom (mm)	Separation distance antenna to phantom (mm)
300-01916-Nylon holster with belt clip	300-01852 (1160 mAh )	11	15
300-1915- Lightweight leather case	300-01852 (1160 mAh )	14	18
300-1917- Leather Klick fast holster (300-00322 Belt attachment fitted)	300-01852 (1160 mAh )	17	21
300-01923- Large belt clip	300-01852 (1160 mAh )	23	27
300-01922- Shirt pocket clip (small)	300-01852 (1160 mAh )	13	17
300-01916-Nylon holster with belt clip	300-01852 (1160 mAh )	11	15
300-01916-Nylon holster with belt clip	300-01853 (1880 mAh )	11	19.7

For the body worn accessory that resulted in the highest measured SAR, a scan was repeated with a remote speaker/ microphone (300-00389) fitted to the EUT. The remote speaker / microphone (RSM ) is of a non-radiating type.

The Elliptical Flat Phantom dimensions are 600 mm major axis and 400 mm minor axis with a shell thickness of 2.00 mm. The phantom was filled to a minimum depth of 150 mm with the appropriate Body simulant liquid. The dielectric properties were measured and found to be in accordance with the requirements specified in KDB 865664 D01.

For each scan, the EUT was configured into a continuous transmission test mode using software provided by Sepura plc.

Included in this report are descriptions of the test method; the equipment used and an analysis of the test uncertainties applicable and diagrams indicating the locations of maximum SAR for each test position.



**1.4 PTT DUTY CYCLE MEASUREMENTS / POWER MEASUREMENTS**

**1.4.1 Requirement**

If a device has push-to-talk capability, a minimum duty cycle of 50% (on-time) shall be used in the evaluation. A lower duty cycle is permitted only if the transmission duty cycle is an inherent property of the technology or of the design of the equipment and not under user control. Proof of the various on-off durations and a detailed method of calculation of the average power shall be included in the SAR evaluation.


The EUT was operated in continuous transmit (100 % PTT on). However, due to the characteristics of the EUT’s TETRA technology the transmitter is only active for 25 % of the time due to the single time slot inherent duty factor.

**SC2128**

Measurement Parameter	EUT Test Frequency (MHz)					
	806	815	824	851	860	869
Burst Average Power (dBm)**	34.39	<b>34.39</b>	34.38	<b>34.35</b>	34.28	34.30
Frame Average Power (dBm)**	27.87	28.00	27.99	27.93	27.91	27.90
Transmit On Time (ms)*	12.75	12.70	12.70	12.70	12.70	12.70
Transmit Off + On Time (ms)	56.67	56.60	56.80	56.80	56.60	56.80
Transmission Burst Cycle (%)	22.50	22.40	22.40	22.40	22.40	22.40


\*\* 0.25 dBm difference between tabulated results and plots, due to 0.25 dB path loss of customer supplied cable not accounted for when measurements were taken.

Duty Cycle 806 MHz

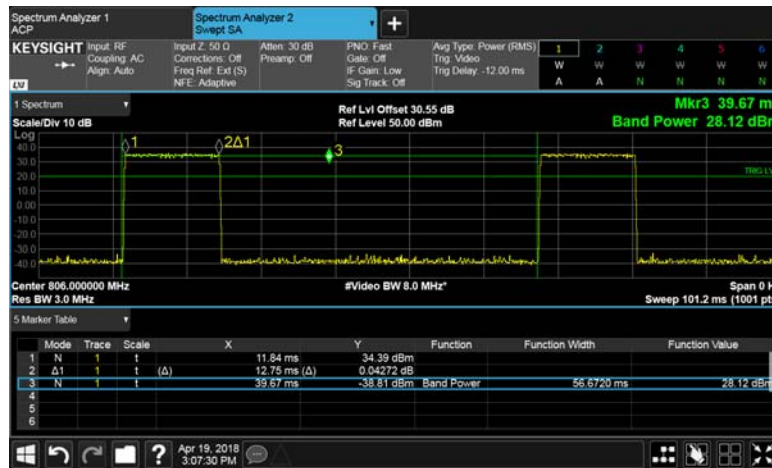





Burst Power 806 MHz

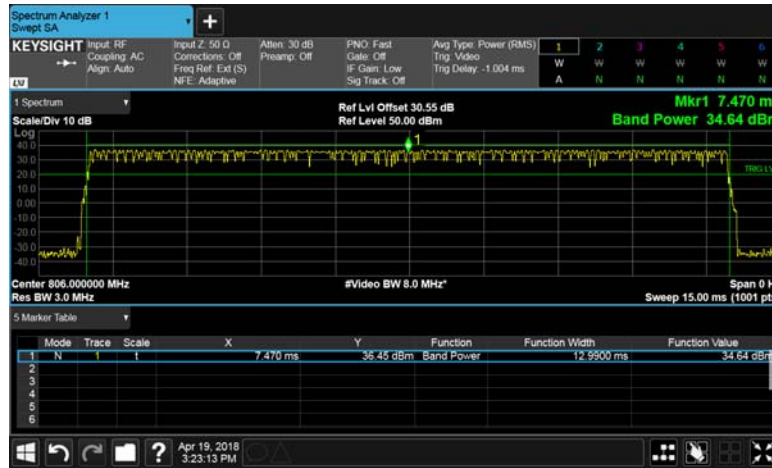

Duty Cycle 815 MHz

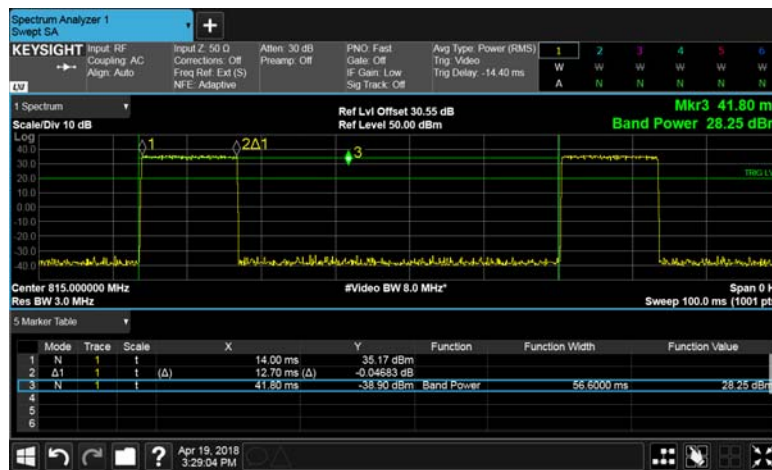


Burst Power 815 MHz

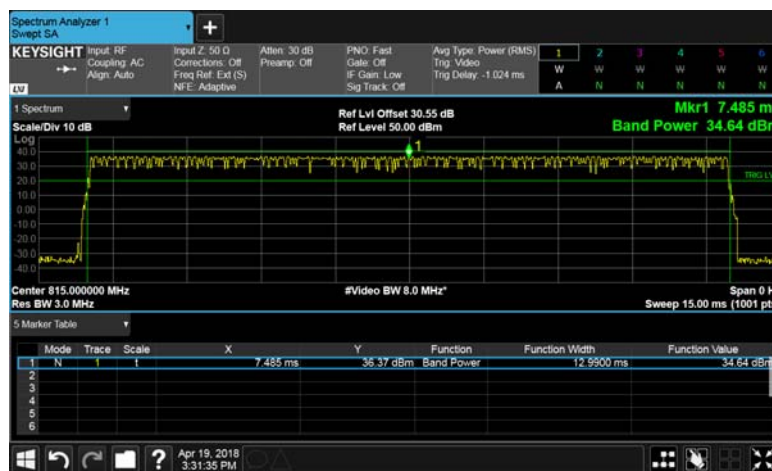







Duty Cycle 824 MHz

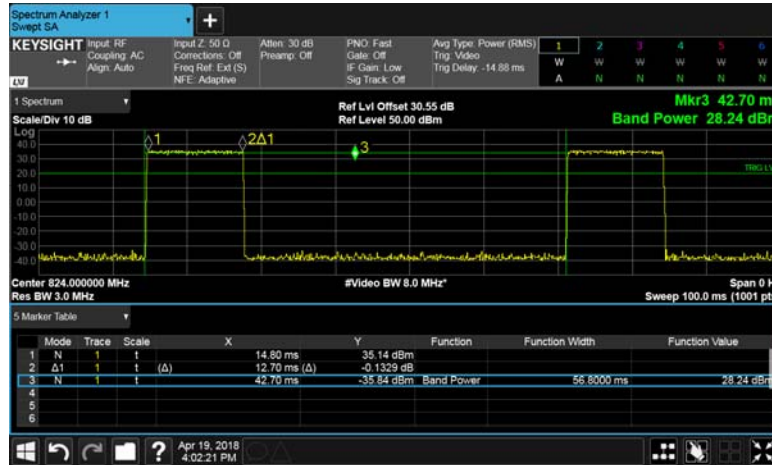

Burst Power 824 MHz

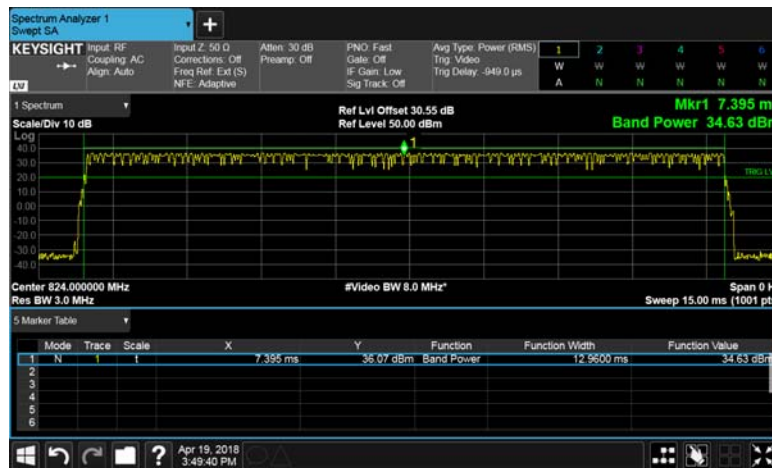


Duty Cycle 851 MHz

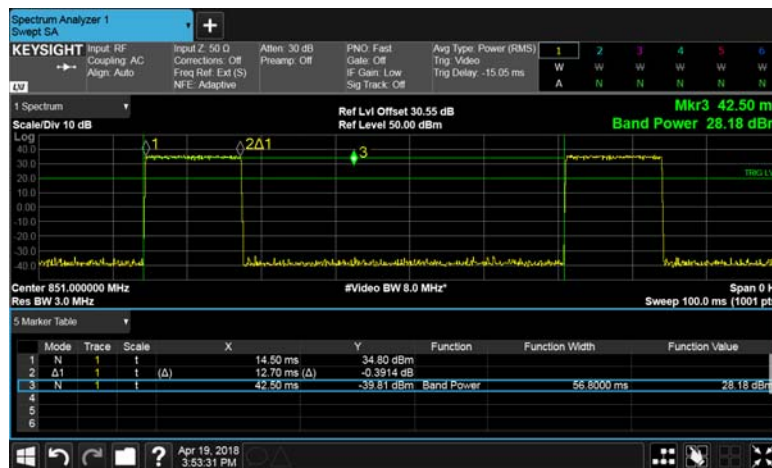





Burst Power 851 MHz

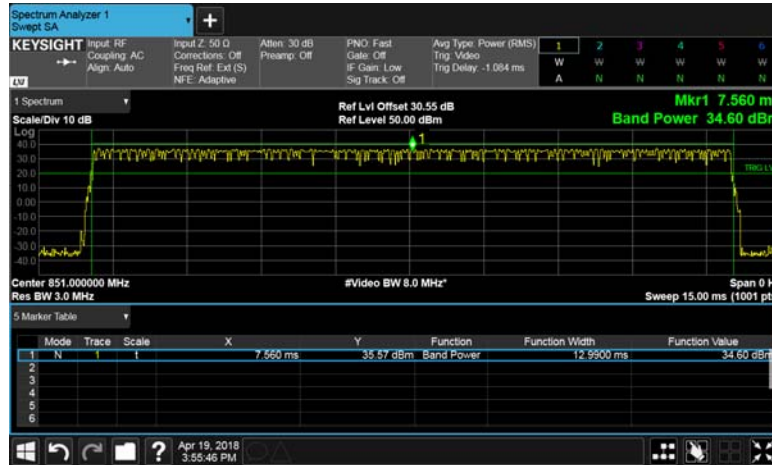

Duty Cycle 860 MHz

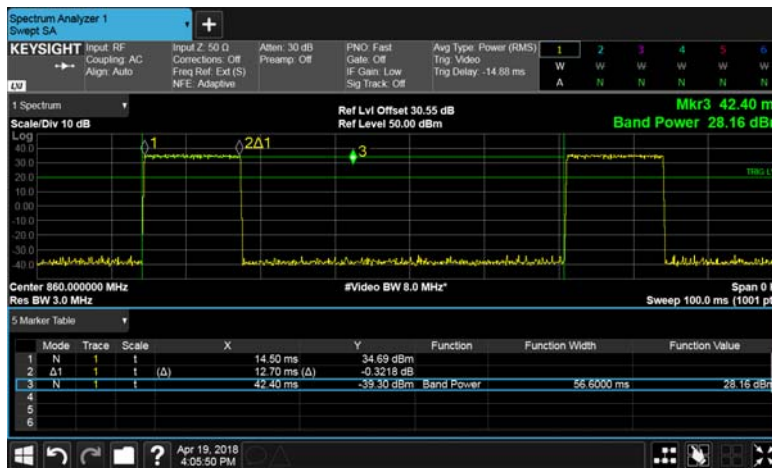


Burst Power 860 MHz

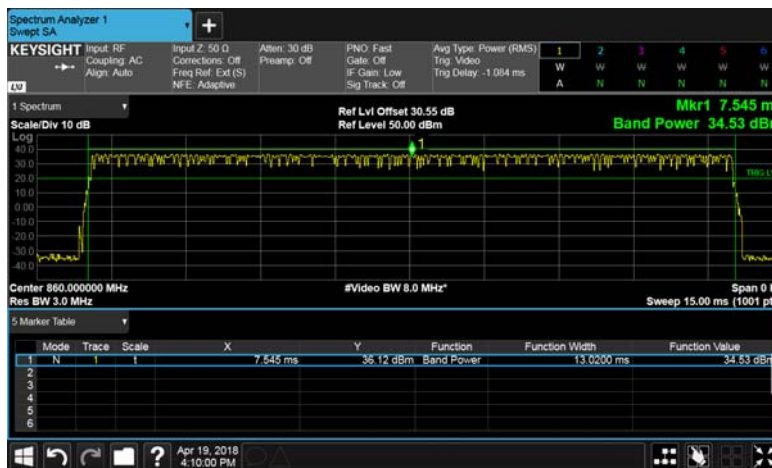



Duty Cycle 869 MHz

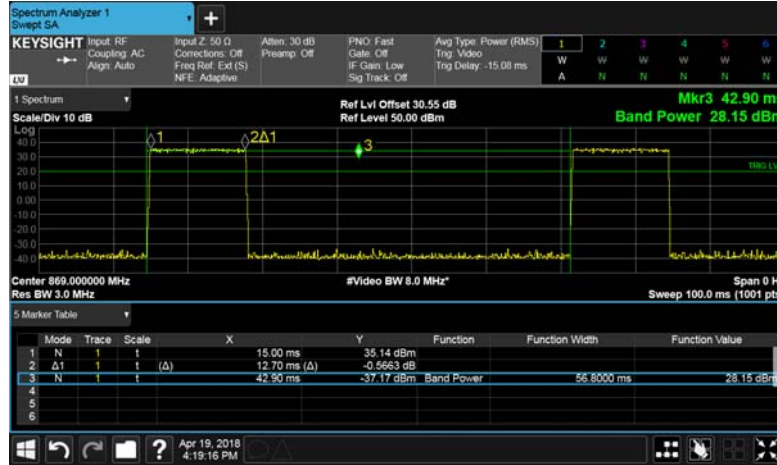

Burst Power 869 MHz





## **SECTION 2**


### **TEST DETAILS**

Specific Absorption Rate Testing of the  
Sepura SC2128 TETRA Radio

## 2.1 DASY5 MEASUREMENT SYSTEM

### 2.1.1 System Description

The DASY5 system for performing compliance tests consists of the following items:

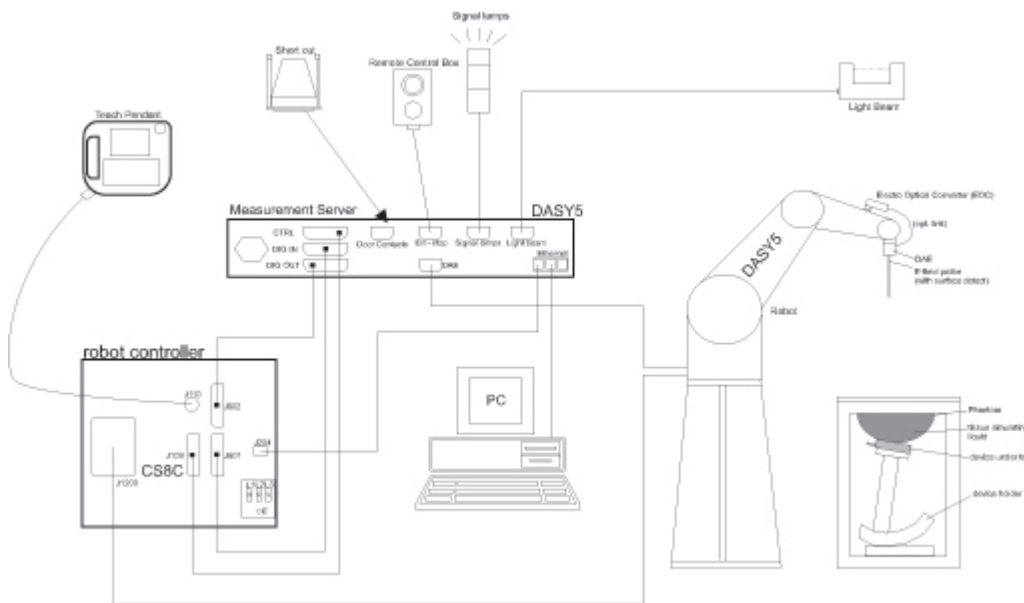

**Figure 1 System Description Diagram**

A standard high precision 6-axis robot (Stäubli TX=RX family) with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).

An isotropic field probe optimized and calibrated for the targeted measurement.

A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.

The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.

The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.

The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.

A computer running Win7 professional operating system and the DASY5 software.

Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.

The phantom, the device holder and other accessories according to the targeted measurement.



### 2.1.2 Probe Specification

The probes used by the DASY system are isotropic E-field probes, constructed with a symmetric design and a triangular core. The probes have built-in shielding against static charges and are contained within a PEEK enclosure material. These probes are specially designed and calibrated for use in liquids with high permittivities. The frequency range of the probes are from 6 MHz to 6 GHz.

### 2.1.3 Data Acquisition Electronics

The data acquisition electronics (DAE4 or DAE3) consist of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder with a control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information, as well as an optical uplink for commands and the clock.

The mechanical probe mounting device includes two different sensor systems for frontal and sideways probe contacts. They are used for mechanical surface detection and probe collision detection. The input impedance of both the DAE4 as well as of the DAE3 box is 200 MOhm; the inputs are symmetrical and floating. Common mode rejection is above 80 dB.

### 2.1.4 SAR Evaluation Description

The DASY5 software includes all numerical procedures necessary to evaluate the spatial peak SAR values.

Based on the IEEE 1528 standard, a new algorithm has been implemented. The spatial-peak SAR can be computed over any required mass.

The base for the evaluation is a "cube" measurement in a volume of 30 mm<sup>3</sup> (7x7x7 points). The measured volume must include the 1 g and 10 g cubes with the highest averaged SAR values. For that purpose, the centre of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan. If the 10 g cube or both cubes are not entirely inside the measured volumes, the system issues a warning regarding the evaluated spatial peak values within the Post processing engine (SEMCAD X). This means that if the measured volume is shifted, higher values might be possible. To get the correct values you can use a finer measurement grid for the area scan. In complicated field distributions, a large grid spacing for the area scan might miss some details and give an incorrectly interpolated peak location.

The entire evaluation of the spatial peak values is performed within the Post-processing engine (SEMCAD X). The system always gives the maximum values for the 1 g and 10 g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

1. extraction of the measured data (grid and values) from the Zoom Scan
2. calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
3. generation of a high-resolution mesh within the measured volume
4. interpolation of all measured values from the measurement grid to the high-resolution grid
5. extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
6. calculation of the averaged SAR within masses of 1 g and 10 g

### 2.1.5 Interpolation, Extrapolation and Detection of Maxima

The probe is calibrated at the centre of the dipole sensors which is located 1 to 2.7 mm away from the probe tip. During measurements, the probe stops shortly above the phantom surface, depending on the probe and the surface detecting system. Both distances are included as parameters in the probe configuration file. The software always knows exactly how far away the measured point is from the surface. As the probe cannot directly measure at the surface, the values between the deepest measured point and the surface must be extrapolated.

In DASY5, the choice of the coordinate system defining the location of the measurement points has no influence on the uncertainty of the interpolation, Maxima Search and extrapolation routines. The interpolation, extrapolation and maximum search routines are all based on the modified Quadratic Shepard's method [1]. Thereby, the interpolation scheme combines a least-square fitted function method and a weighted average method which are the two basic types of computational interpolation and approximation. The DASY5 routines construct a once-continuously differentiable function that interpolates the measurement values as follows:

For each measurement point a trivariate (3-D) / bivariate (2-D) quadratic is computed. It interpolates the measurement values at the data point and forms a least-square fit to neighbouring measurement values. The spatial location of the quadratic with respect to the measurement values is attenuated by an inverse distance weighting. This is performed since the calculated quadratic will fit measurement values at nearby points more accurately than at points located further away.

After the quadratics are calculated for all measurement points, the interpolating function is calculated as a weighted average of the quadratics.

There are two control parameters that govern the behaviour of the interpolation method. One specifies the number of measurement points to be used in computing the least-square fits for the local quadratics. These measurement points are the ones nearest the input point for which the quadratic is being computed. The second parameter specifies the number of measurement points that will be used in calculating the weights for the quadratics to produce the final function. The input data points used there are the ones nearest the point at which the interpolation is desired. Appropriate defaults are chosen for each of the control parameters.

The trivariate quadratics that have been previously computed for the 3-D interpolation and whose input data are at the closest distance from the phantom surface, are used in order to extrapolate the fields to the surface of the phantom.

In order to determine all the field maxima in 2-D (Area Scan) and 3-D (Zoom Scan), the measurement grid is refined by a default factor of 10 and the interpolation function is used to evaluate all field values between corresponding measurement points. Subsequently, a linear search is applied to find all the candidate maxima. In a last step, non-physical maxima are removed and only those maxima which are within 2 dB of the global maximum value are retained.

In the Area Scan, the gradient of the interpolation function is evaluated to find all the extrema of the SAR distribution. The uncertainty on the locations of the extrema is less than 1/20 of the grid size. Only local maxima within 2 dB of the global maximum are searched and passed for the Zoom Scan measurement.

In the Zoom Scan, the interpolation function is used to extrapolate the Peak SAR from the lowest measurement points to the inner phantom surface (the extrapolation distance). The uncertainty increases with the extrapolation distance. To keep the uncertainty within 1 % for the 1 g and 10 g cubes, the extrapolation distance should not be larger than 5 mm.

### 2.1.6 Averaging and Determination of Spatial Peak SAR

The interpolated data is used to average the SAR over the 1 g and 10 g cubes by spatially discretising the entire measured volume. The resolution of this spatial grid used to calculate the averaged SAR is 1mm or about 42875 interpolated points. The resulting volumes are defined as cubical volumes containing the appropriate tissue parameters that are centered at the location. The location is defined as the centre of the incremental volume (voxel).

The spatial-peak SAR must be evaluated in cubical volumes containing a mass that is within 5% of the required mass. The cubical volume centred at each location, as defined above, should be expanded in all directions until the desired value for the mass is reached, with no surface boundaries of the averaging volume extending beyond the outermost surface of the considered region. In addition, the cubical volume should not consist of more than 10 % of air. If these conditions are not satisfied then the centre of the averaging volume is moved to the next location. Otherwise, the exact size of the final sampling cube is found using an inverse polynomial approximation algorithm, leading to results with improved accuracy. If one boundary of the averaging volume reaches the boundary of the measured volume during its expansion, it will not be evaluated at all. Reference is kept of all locations used and those not used for averaging the SAR. All average SAR values are finally assigned to the centred location in each valid averaging volume.


All locations included in an averaging volume are marked to indicate that they have been used at least once. If a location has been marked as used, but has never been assigned to the centre of a cube, the highest averaged SAR value of all other cubical volumes which have used this location for averaging is assigned to this location. Only those locations that are not part of any valid averaging volume should be marked as unused. For the case of an unused location, a new averaging volume must be constructed which will have the unused location centred at one surface of the cube. The remaining five surfaces are expanded evenly in all directions until the required mass is enclosed, regardless of the amount of included air. Of the six possible cubes with one surface centred on the unused location, the smallest cube is used, which still contains the required mass.

If the final cube containing the highest averaged SAR touches the surface of the measured volume, an appropriate warning is issued within the Post-processing engine.



### 2.1.7 Head Test Positions

This recommended practice specifies exactly two test positions for the handset against the head phantom, the “Cheek” position and the “tilted” position. The handset should be tested in both positions on the left and right sides of the SAM phantom. In each test position the centre of the earpiece of the device is placed directly at the entrance of the auditory canal. The angles mentioned in the test positions used are referenced to the line connecting both auditory canal openings. The plane this line is on is known as the reference plane. Testing is performed on the right and left-hand sides of the generic phantom head.

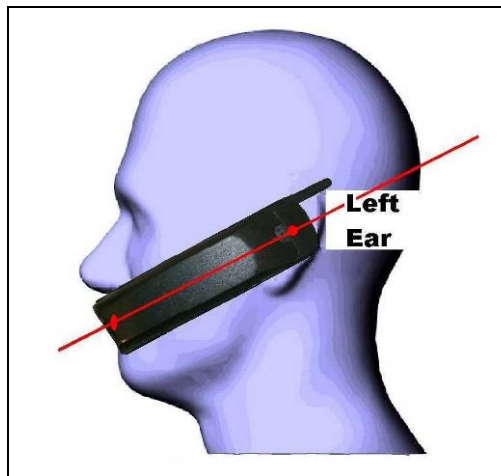

**Figure 2 Side view of mobile next to head showing alignment**

#### The Cheek Position

The Cheek Position is where the mobile is in the reference plane and the line between the mobile and the line connecting both auditory canal openings is reduced until any part of the mobile touches any part of the generic twin phantom head.

#### The 15° Position

The 15° Position is where the mobile is in the reference Cheek position and the phone is kept in contact with the auditory canal at the earpiece; the bottom of the phone is then tilted away from the phantom mouth by 15°.

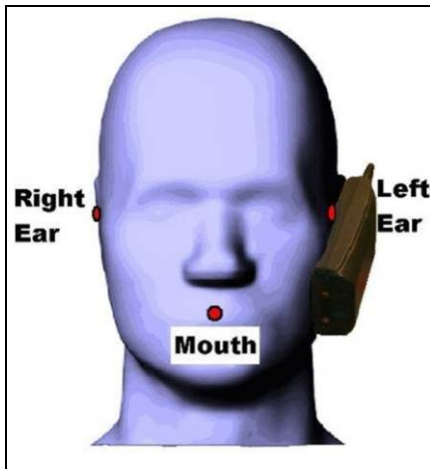


Figure 3 Cheek position

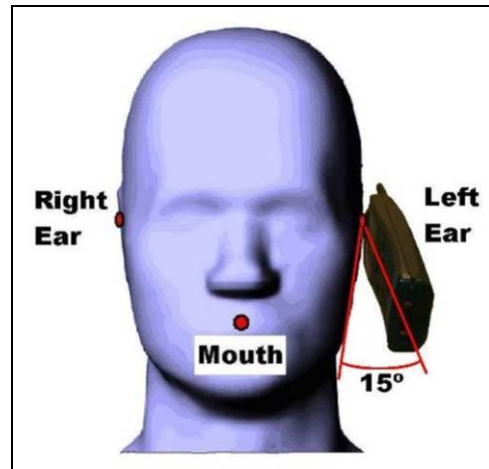


Figure 4 15° Tilt Position

2.2 TETRA 806 - 824 MHz - HEAD SAR TEST RESULTS

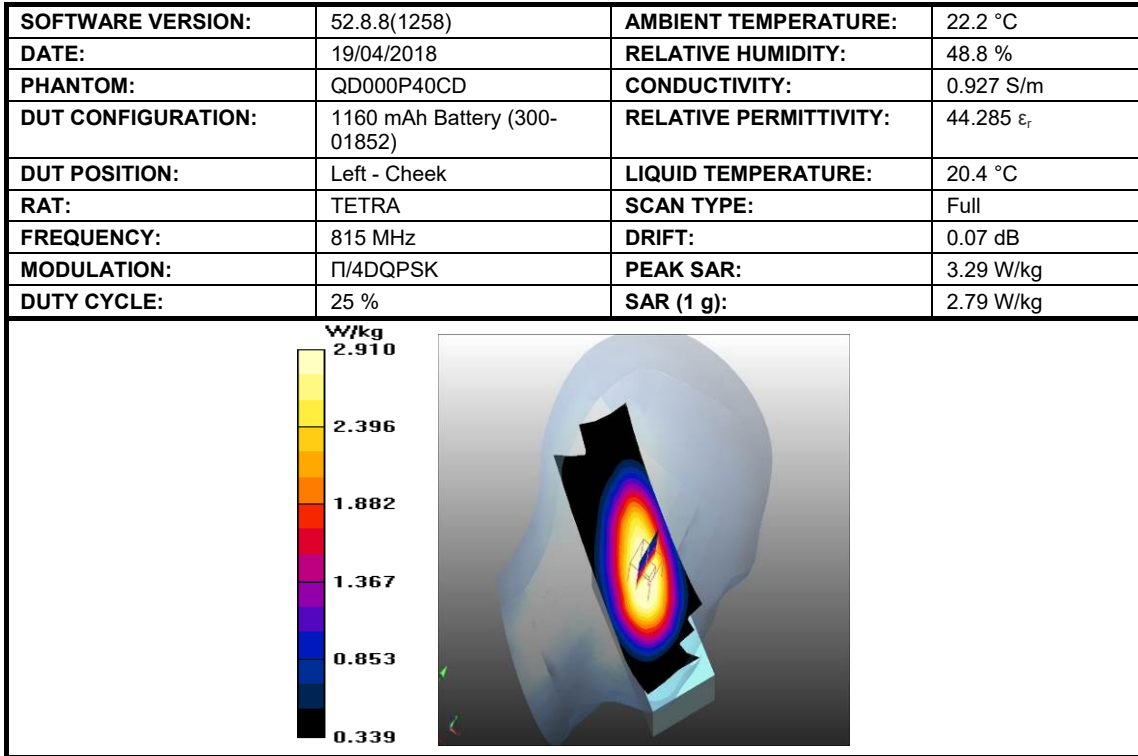


Figure 5: SAR Head Testing Results for the SC2128 TETRA Radio at 815 MHz.

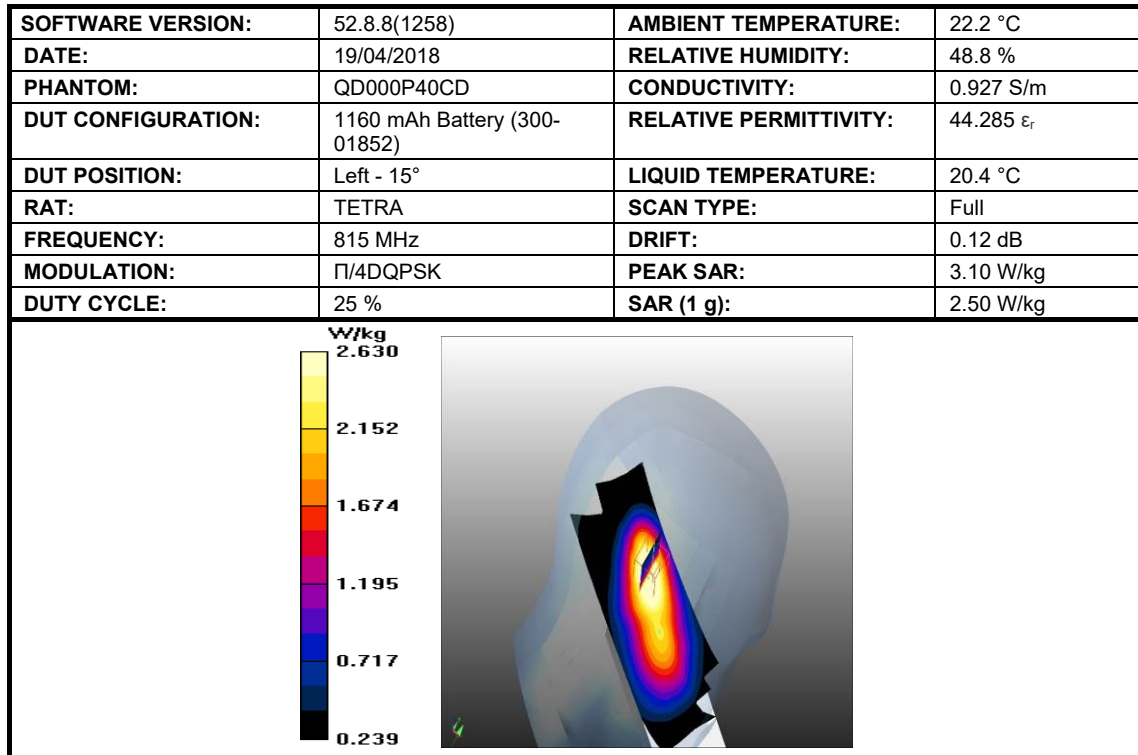


Figure 6: SAR Head Testing Results for the SC2128 TETRA Radio at 815 MHz

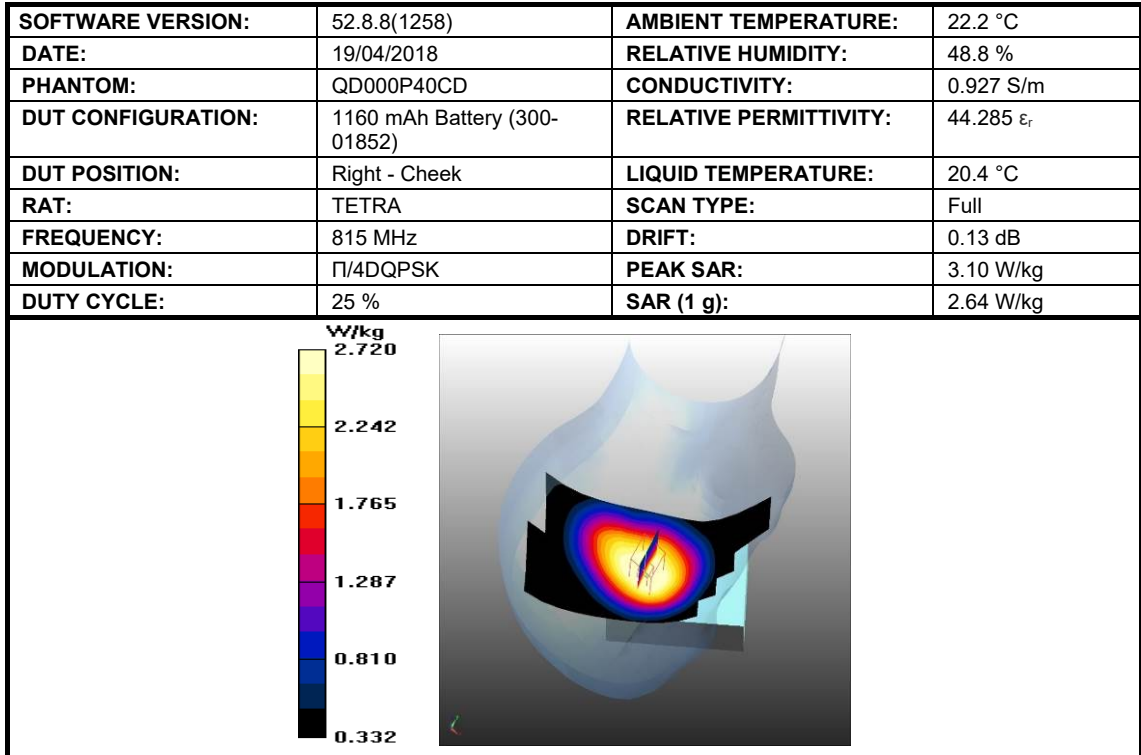


Figure 7: SAR Head Testing Results for the SC2128 TETRA Radio at 815 MHz.

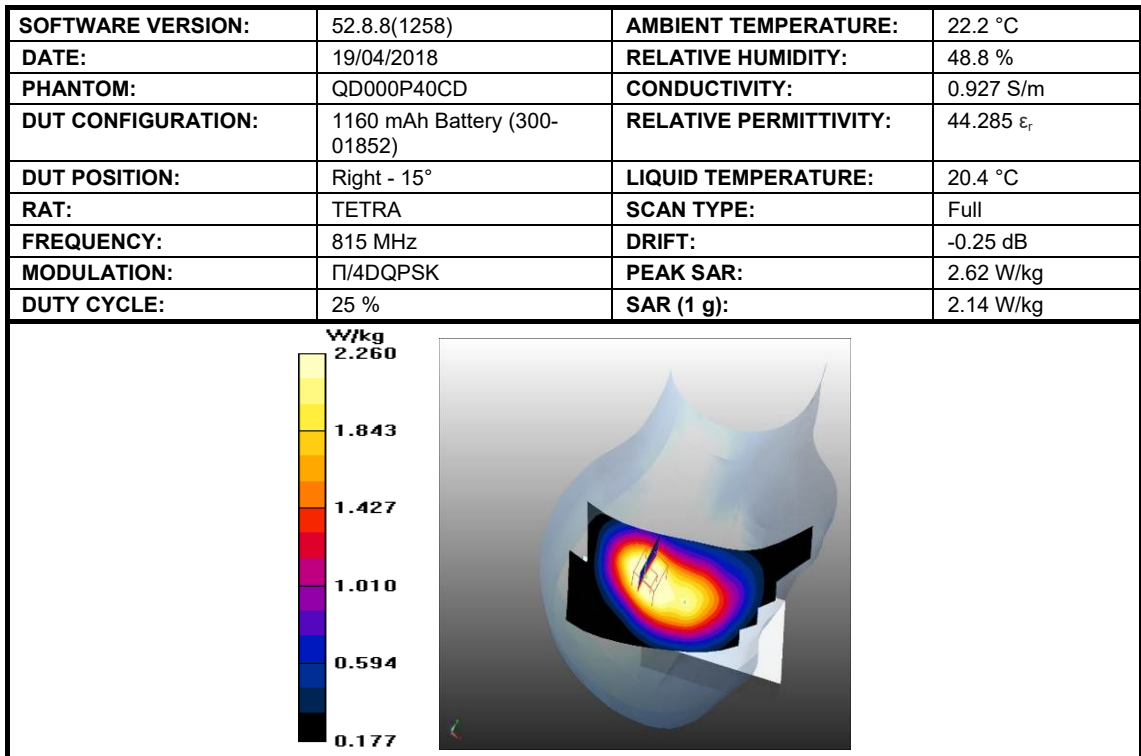


Figure 8: SAR Head Testing Results for the SC2128 TETRA Radio at 815 MHz

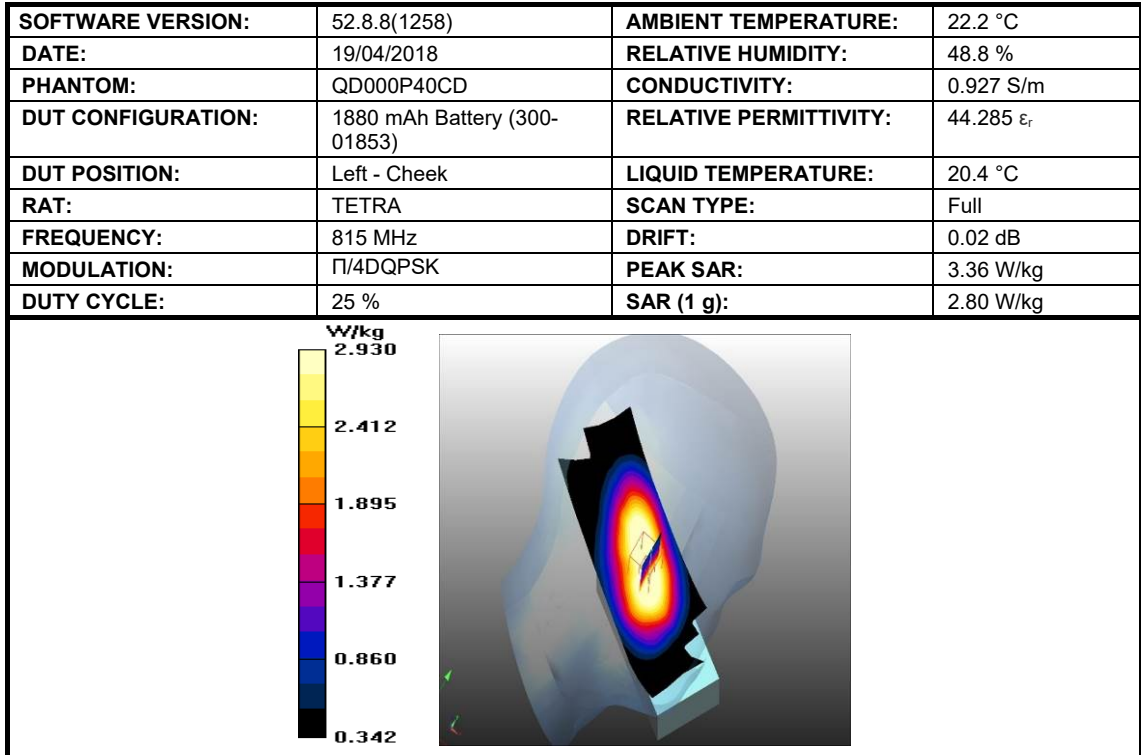


Figure 9: SAR Head Testing Results for the SC2128 TETRA Radio at 815 MHz.

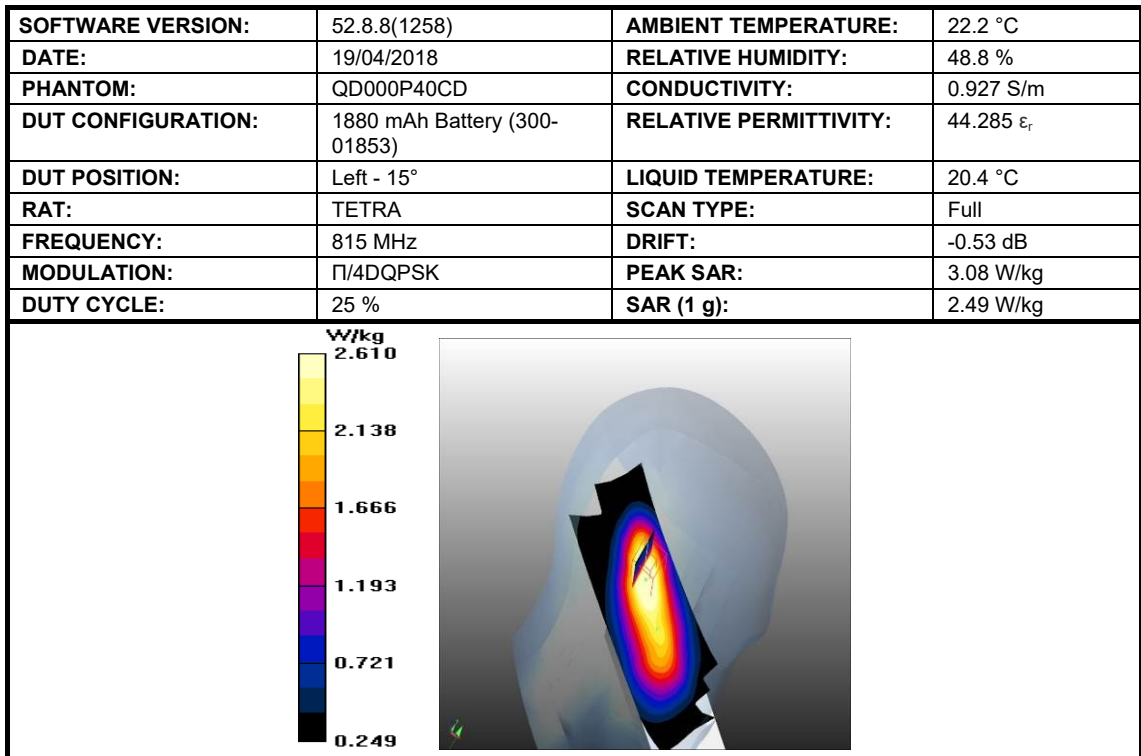


Figure 10: SAR Head Testing Results for the SC2128 TETRA Radio at 815 MHz.

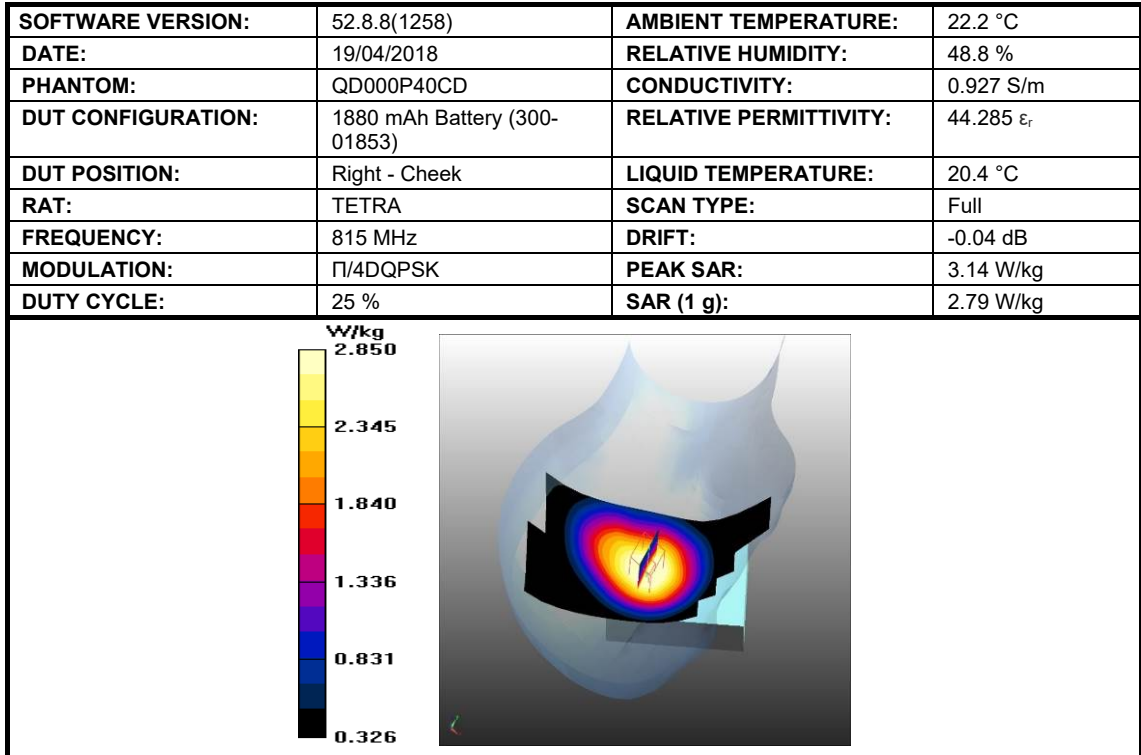


Figure 11: SAR Head Testing Results for the SC2128 TETRA Radio at 815 MHz.

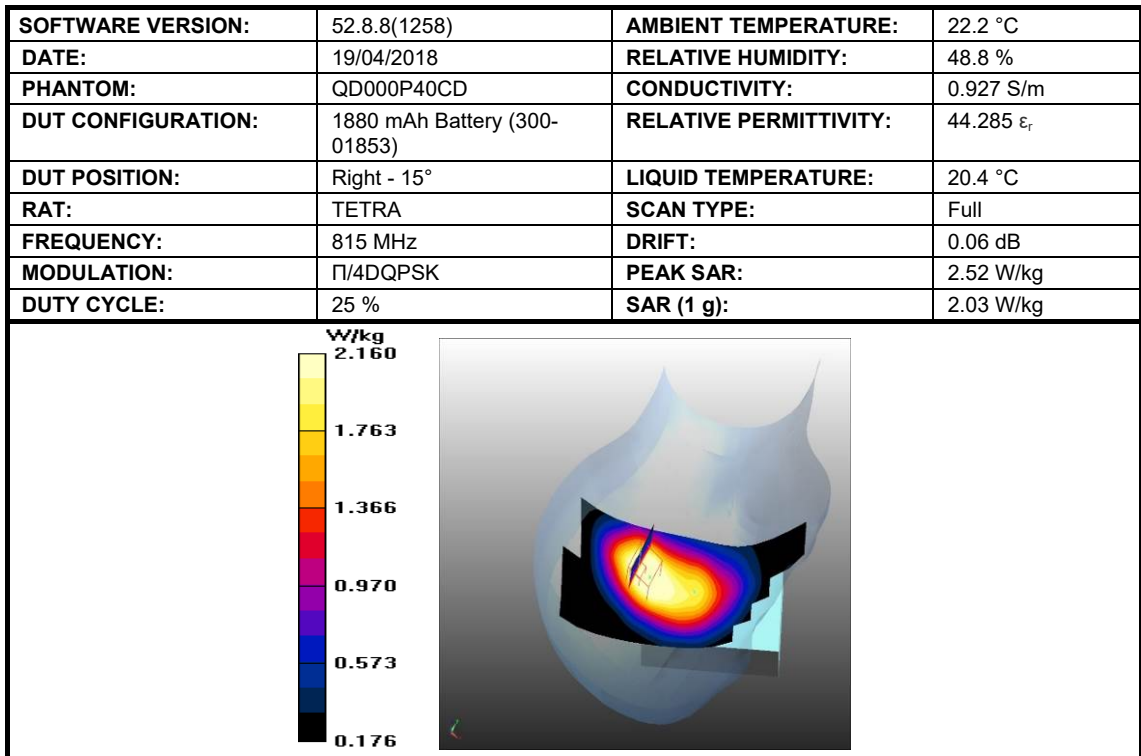


Figure 12: SAR Head Testing Results for the SC2128 TETRA Radio at 815 MHz.

2.3 TETRA 851 - 869 MHz - HEAD SAR TEST RESULTS

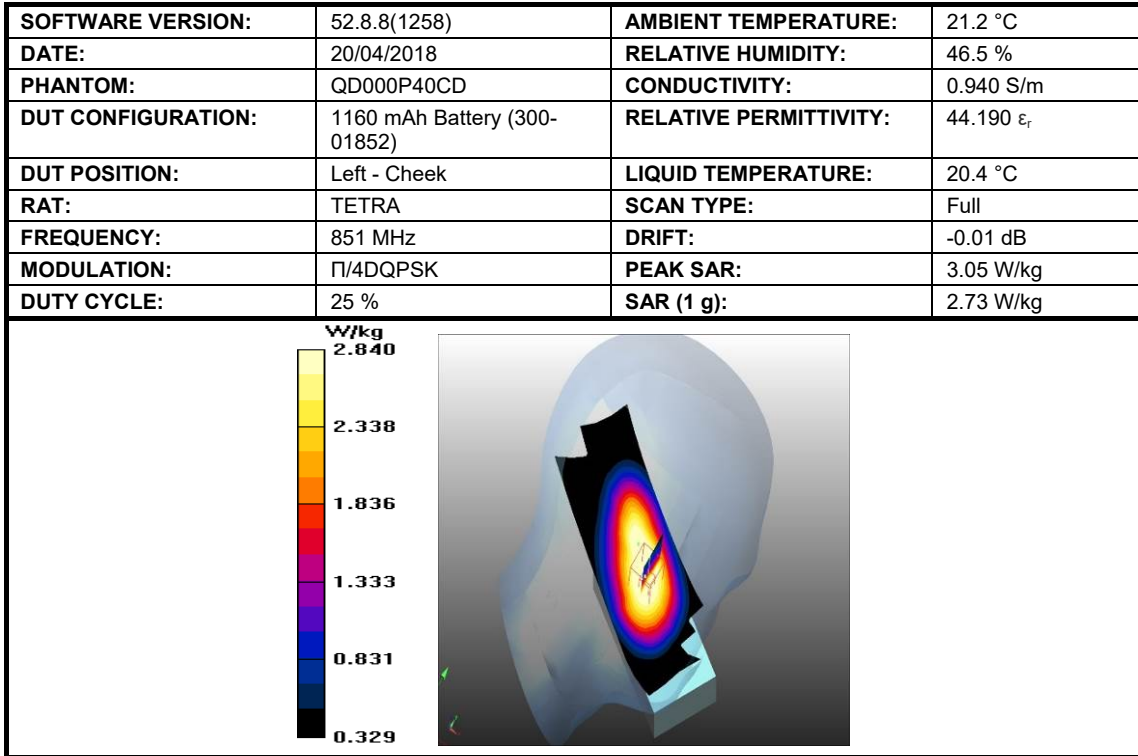


Figure 13: SAR Head Testing Results for the SC2128 TETRA Radio at 851 MHz.

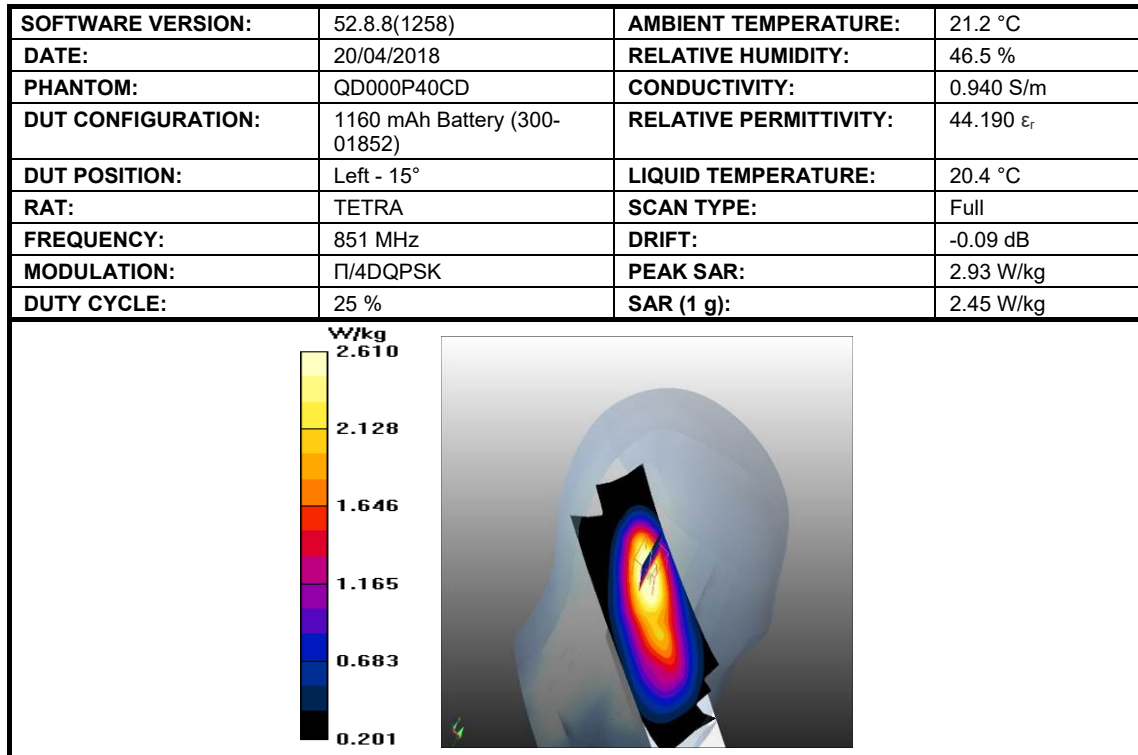


Figure 14: SAR Head Testing Results for the SC2128 TETRA Radio at 851 MHz.

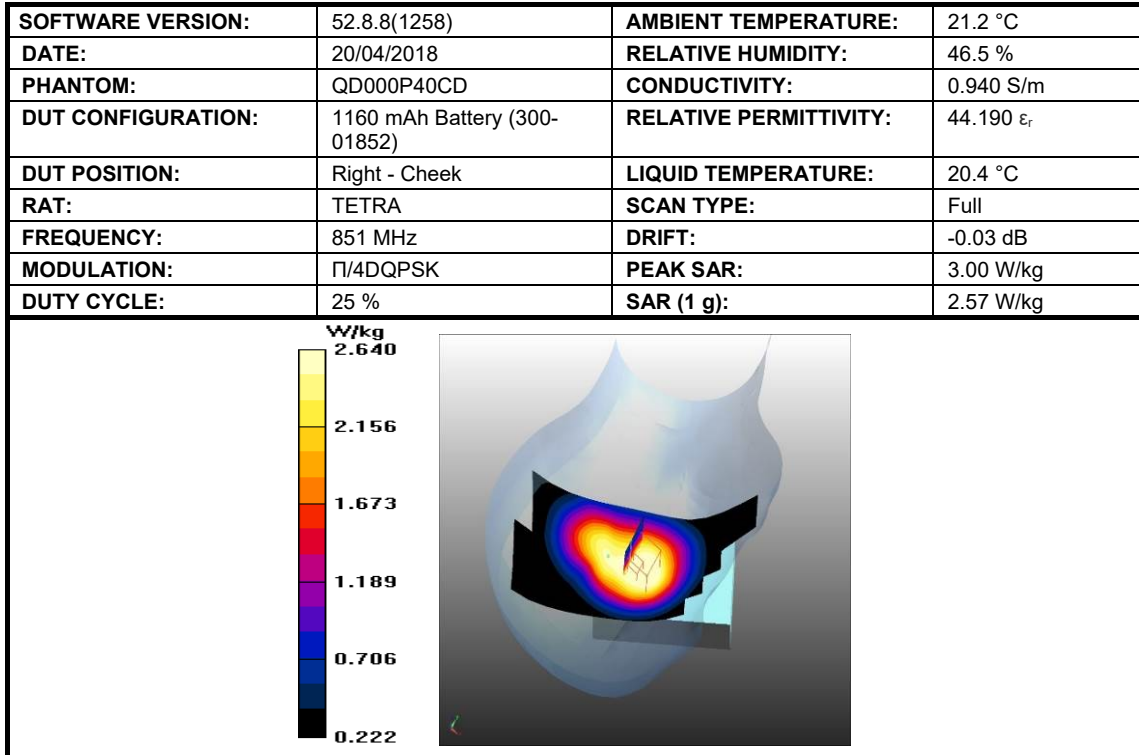


Figure 15: SAR Head Testing Results for the SC2128 TETRA Radio at 851 MHz.

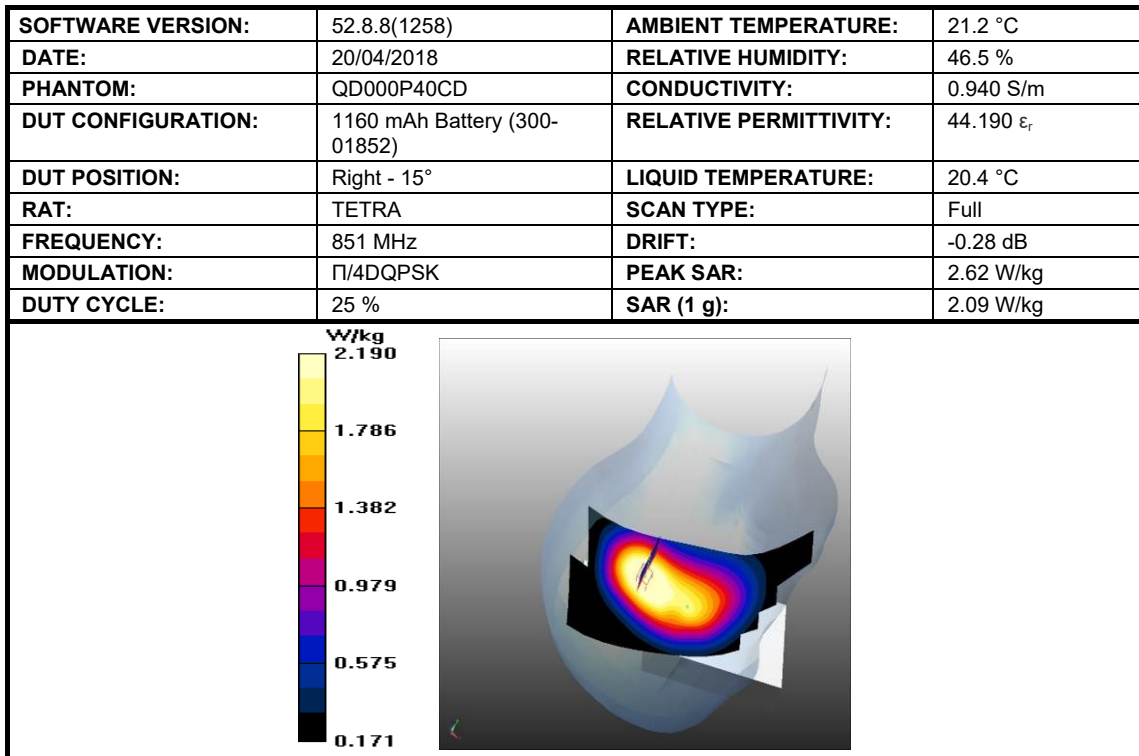


Figure 16: SAR Head Testing Results for the SC2128 TETRA Radio at 851 MHz.



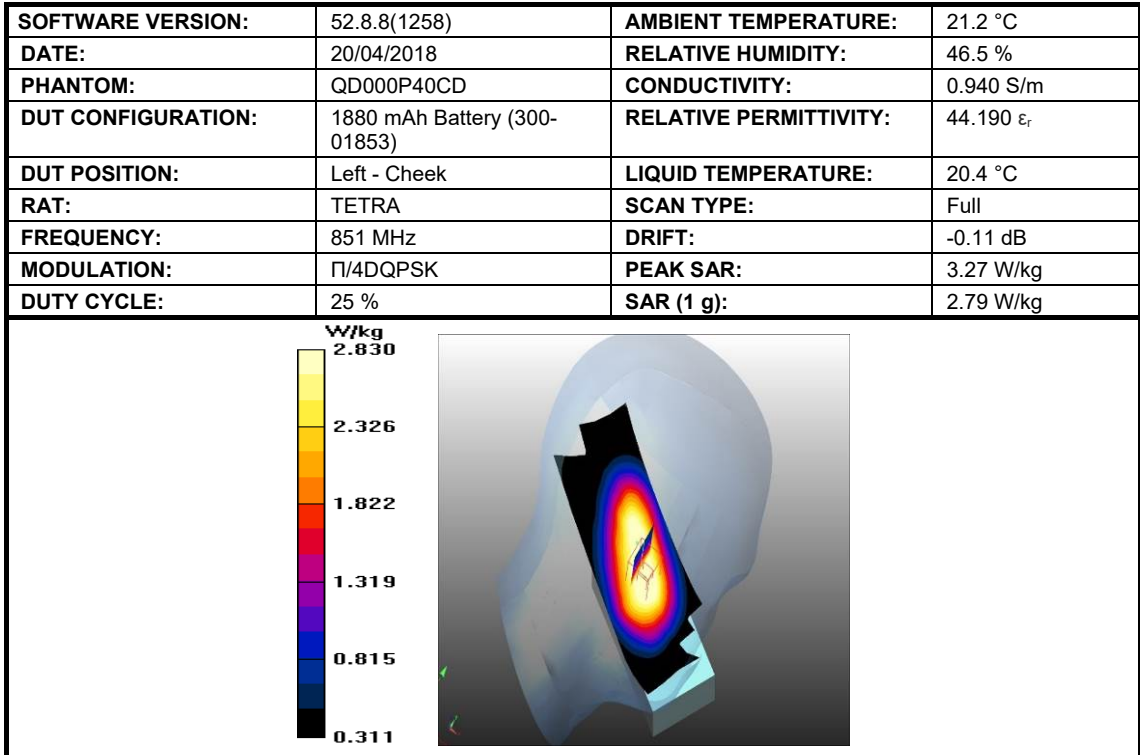


Figure 17: SAR Head Testing Results for the SC2128 TETRA Radio at 851 MHz.

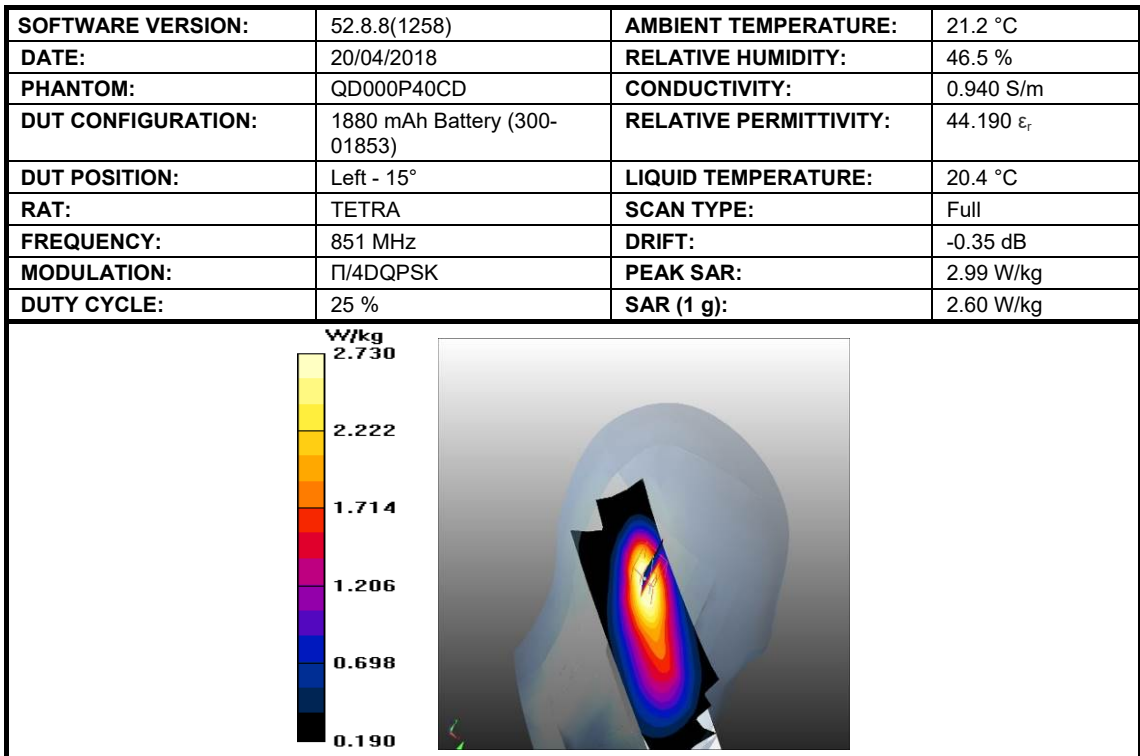


Figure 18: SAR Head Testing Results for the SC2128 TETRA Radio at 851 MHz.

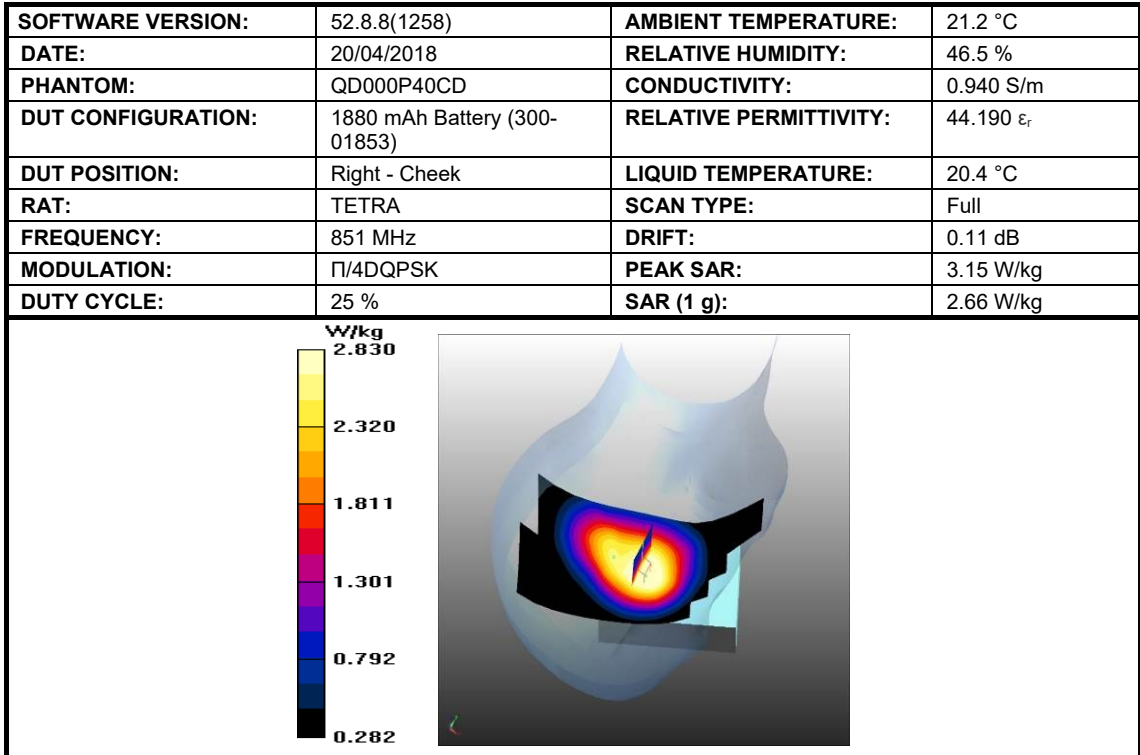


Figure 19: SAR Head Testing Results for the SC2128 TETRA Radio at 851 MHz.

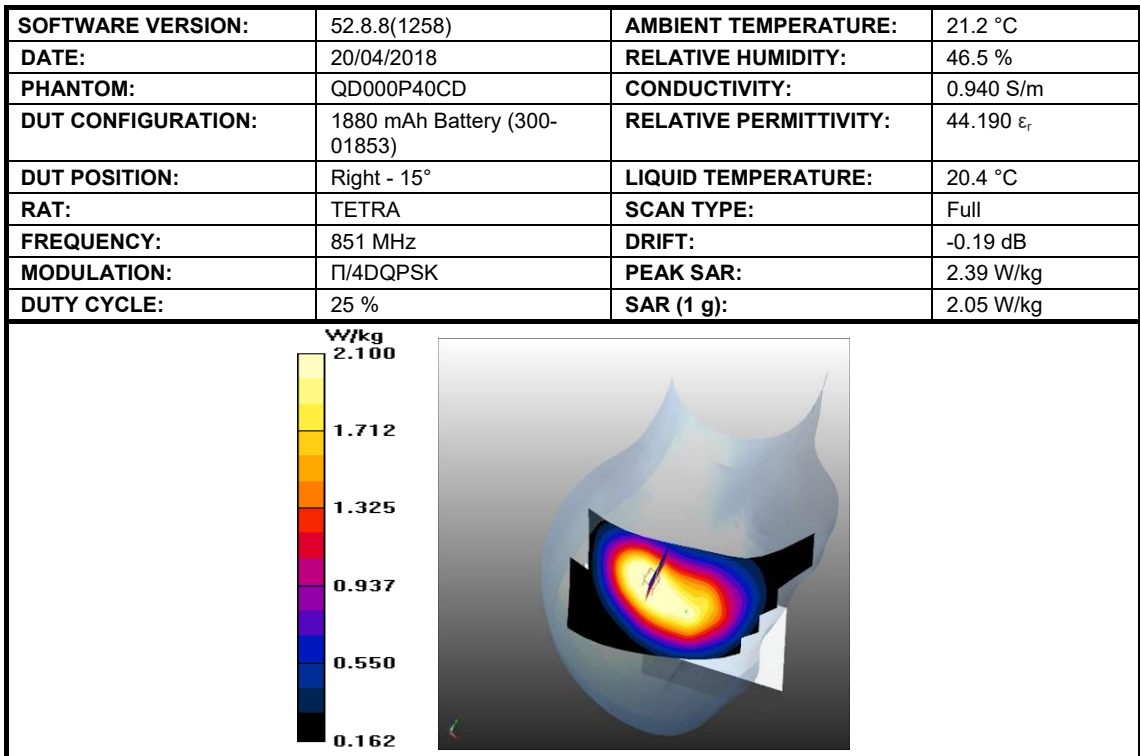


Figure 20: SAR Head Testing Results for the SC2128 TETRA Radio at 851 MHz

2.4 TETRA 806 - 824 MHz - FRONT OF FACE PTT SAR TEST RESULTS

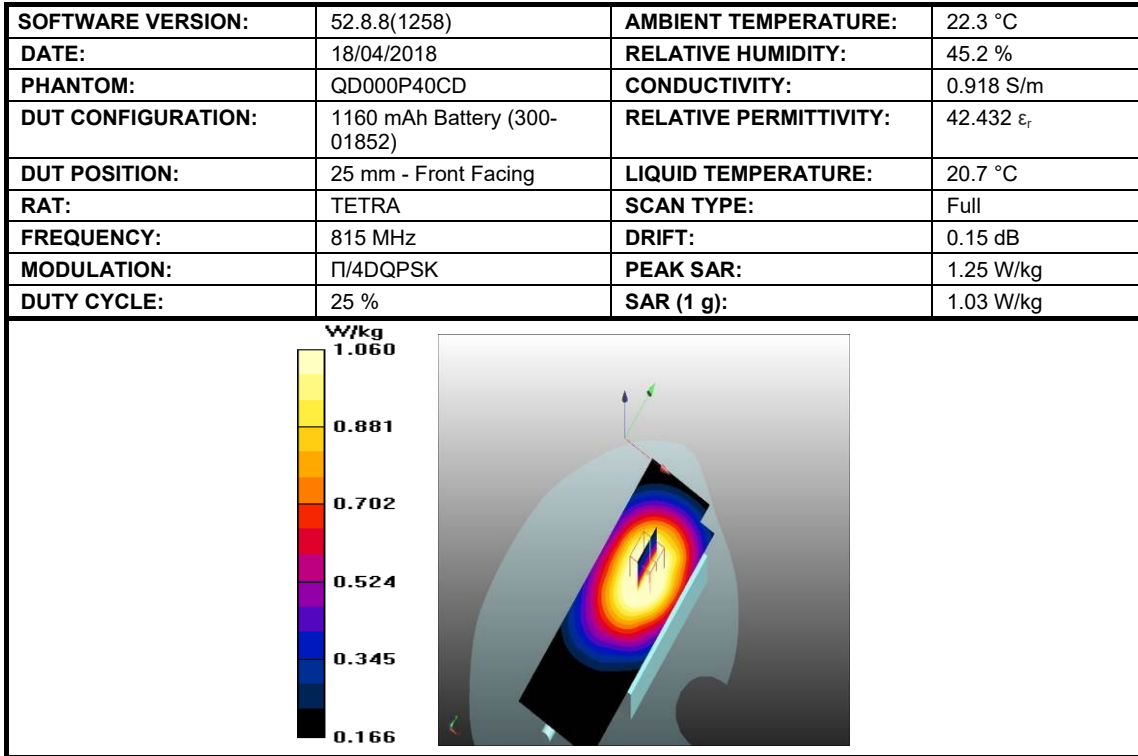


Figure 21: SAR Head Testing Results for the SC2128 TETRA Radio at 815 MHz.



Figure 22: SAR Head Testing Results for the SC2128 TETRA Radio at 815 MHz.



2.5 TETRA 851 - 869 MHz - FRONT OF FACE PTT SAR TEST RESULTS

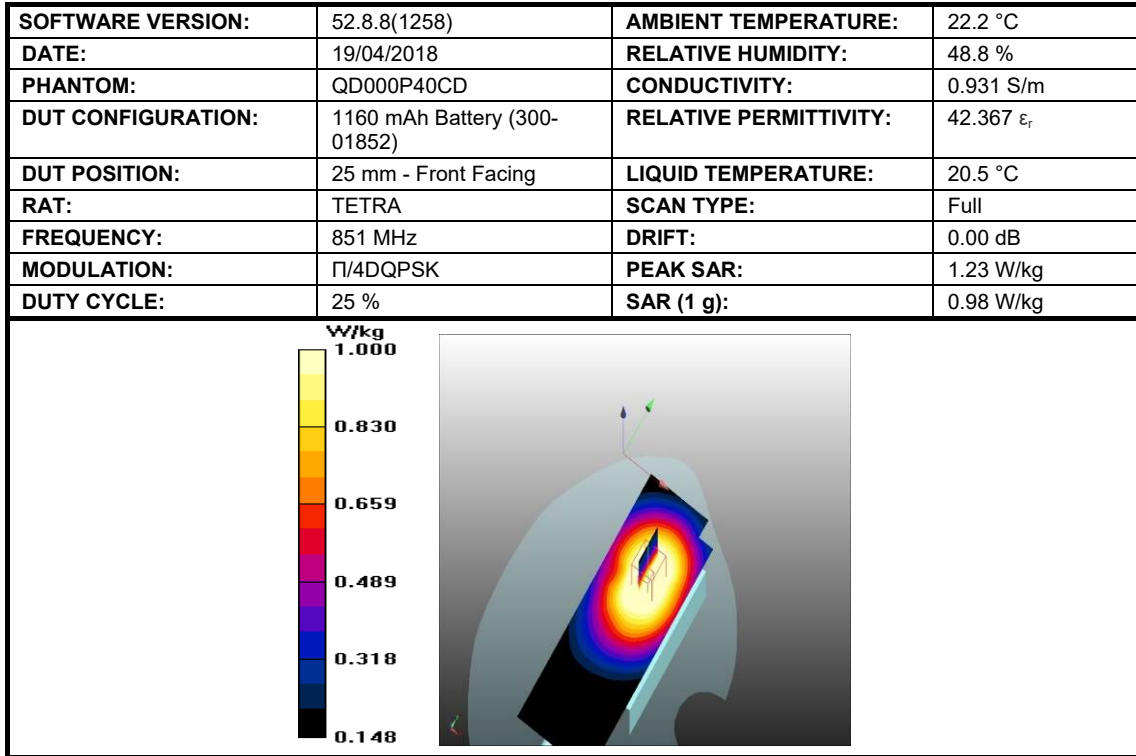


Figure 23: SAR Front Of Face – PTT Testing Results for the SC2128 TETRA Radio at 851 MHz

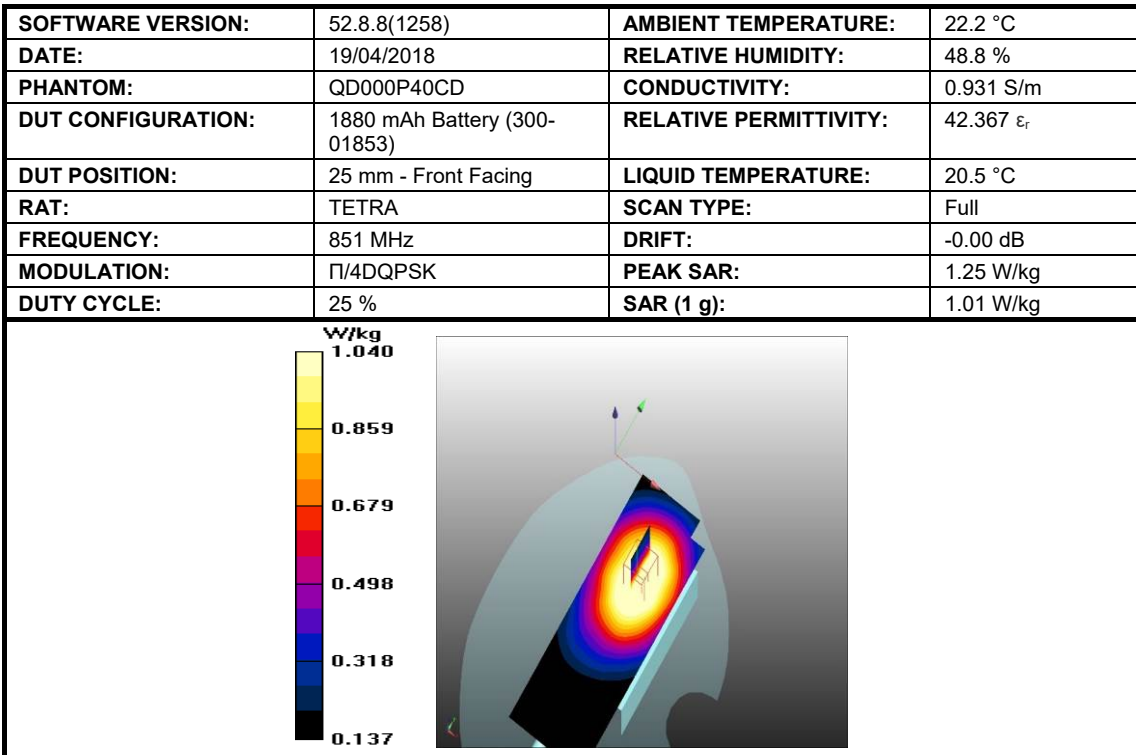


Figure 24: SAR Front Of Face – PTT Testing Results for the SC2128 TETRA Radio at 851 MHz

2.6 TETRA 806 - 824 MHz - BODY SAR TEST RESULTS

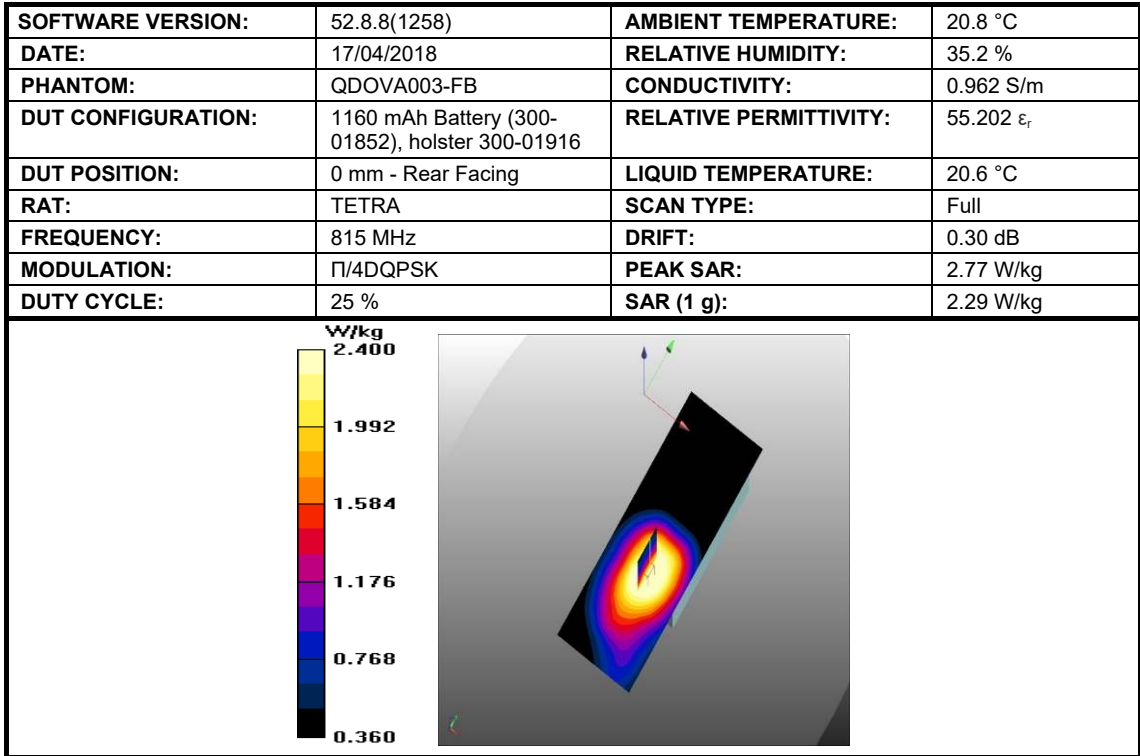


Figure 25: SAR Body Testing Results for the SC2128 TETRA Radio at 815 MHz.

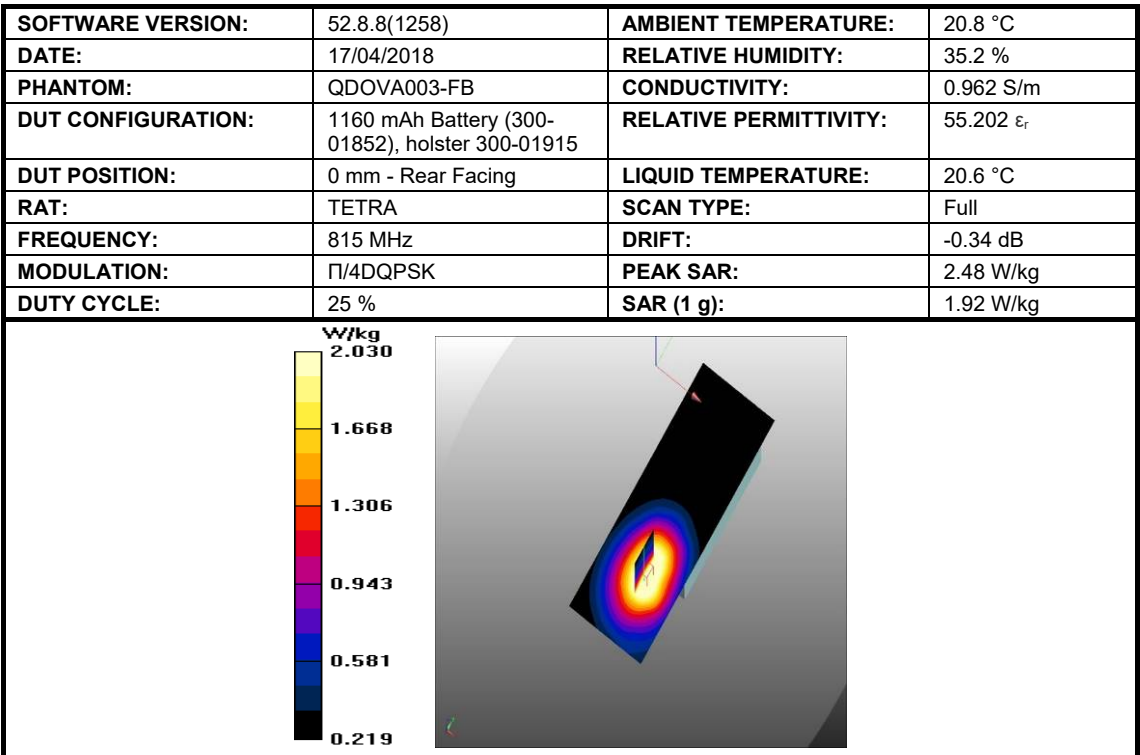


Figure 26: SAR Body Testing Results for the SC2128 TETRA Radio at 815 MHz.

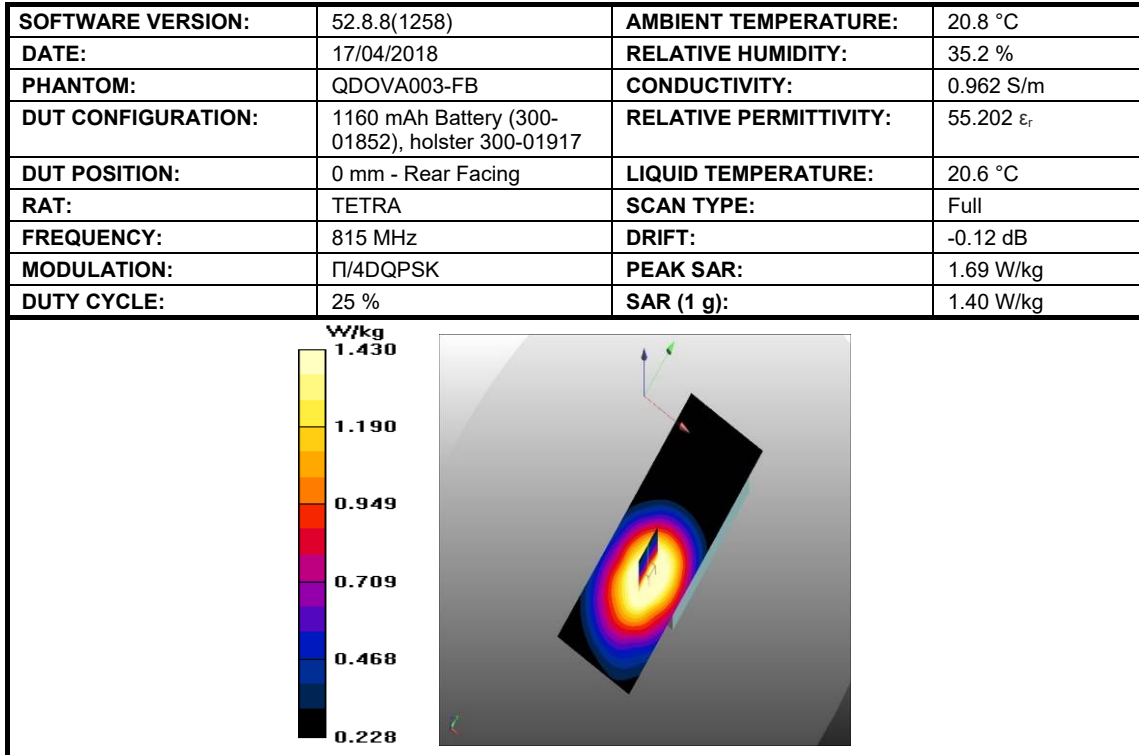


Figure 27: SAR Body Testing Results for the SC2128 TETRA Radio at 815 MHz.

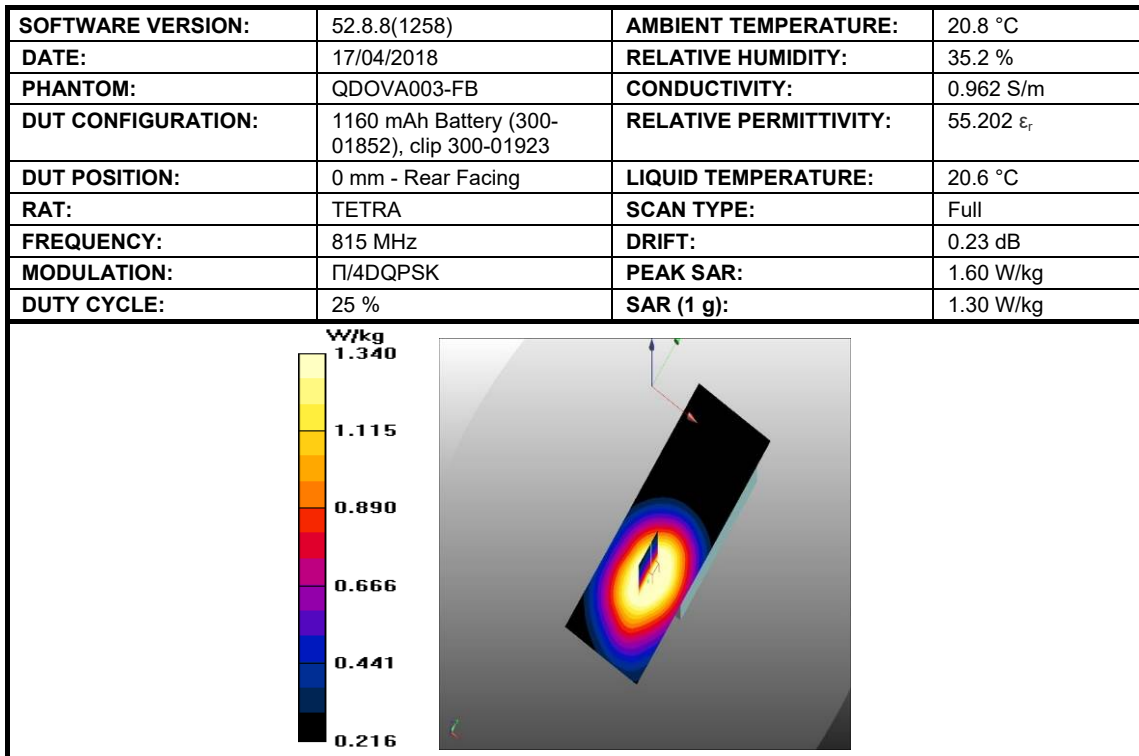


Figure 28: SAR Body Testing Results for the SC2128 TETRA Radio at 815 MHz.

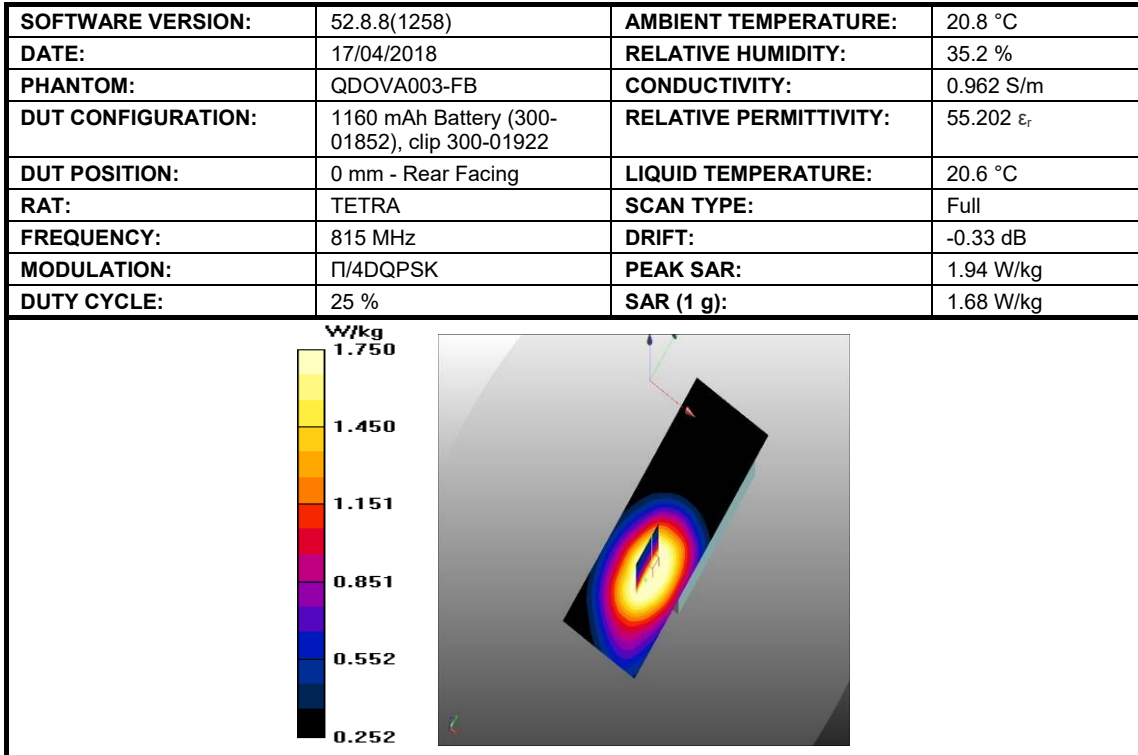


Figure 29: SAR Body Testing Results for the SC2128 TETRA Radio at 815 MHz.

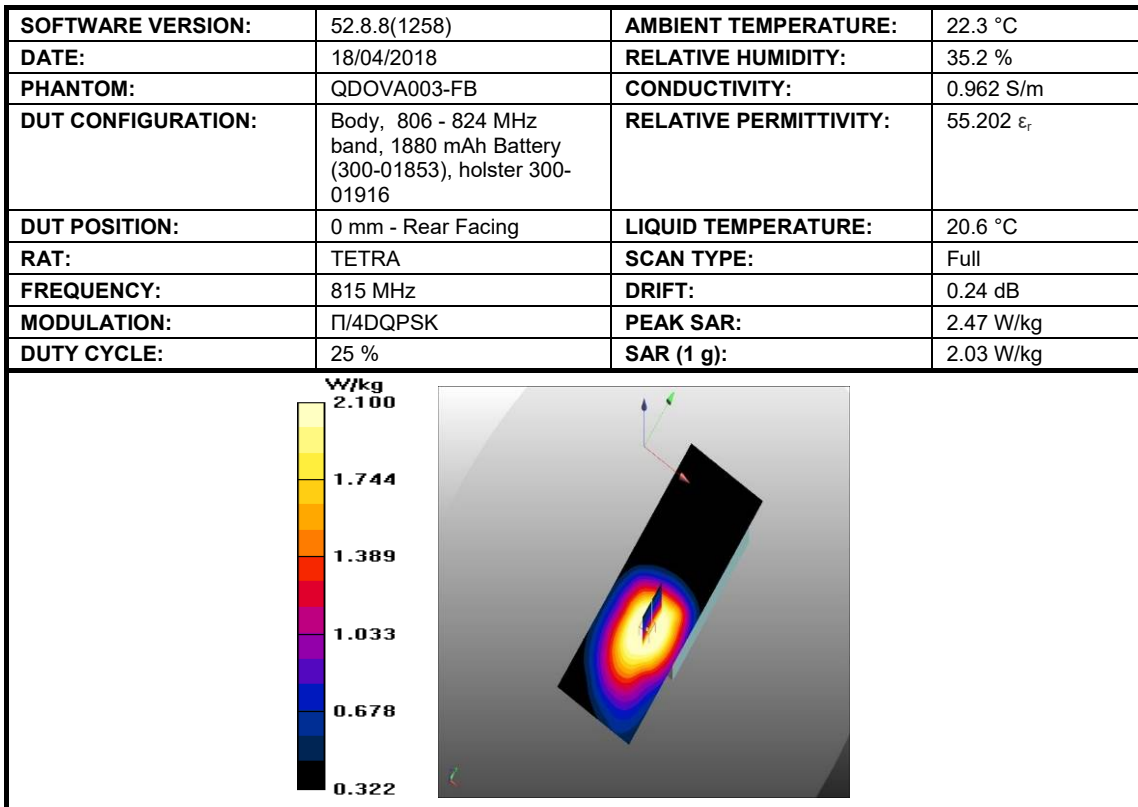


Figure 30: SAR Body Testing Results for the SC2128 TETRA Radio at 815 MHz



<b>SOFTWARE VERSION:</b>	52.8.8(1258)	<b>AMBIENT TEMPERATURE:</b>	22.3 °C
<b>DATE:</b>	18/04/2018	<b>RELATIVE HUMIDITY:</b>	45.2 %
<b>PHANTOM:</b>	QDOVA003-FB	<b>CONDUCTIVITY:</b>	0.962 S/m
<b>DUT CONFIGURATION:</b>	1160 mAh Battery (300-01852), holster 300-01916, RSM 300-00389	<b>RELATIVE PERMITTIVITY:</b>	55.202 $\epsilon_r$
<b>DUT POSITION:</b>	0 mm - Rear Face	<b>LIQUID TEMPERATURE:</b>	20.7 °C
<b>RAT:</b>	TETRA	<b>SCAN TYPE:</b>	Full
<b>FREQUENCY:</b>	815 MHz	<b>DRIFT:</b>	-0.20 dB
<b>MODULATION:</b>	$\pi/4$ DQPSK	<b>PEAK SAR:</b>	2.81 W/kg
<b>DUTY CYCLE:</b>	25 %	<b>SAR (1 g):</b>	2.32 W/kg

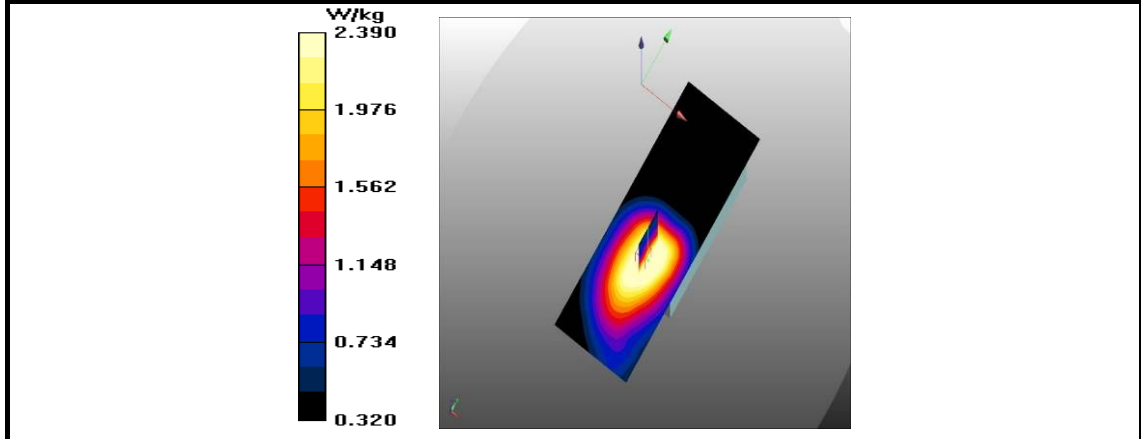


Figure 31: SAR Body Testing Results for the SC2128 TETRA Radio at 815 MHz



2.7 TETRA 851 - 869 MHz - BODY SAR TEST RESULTS

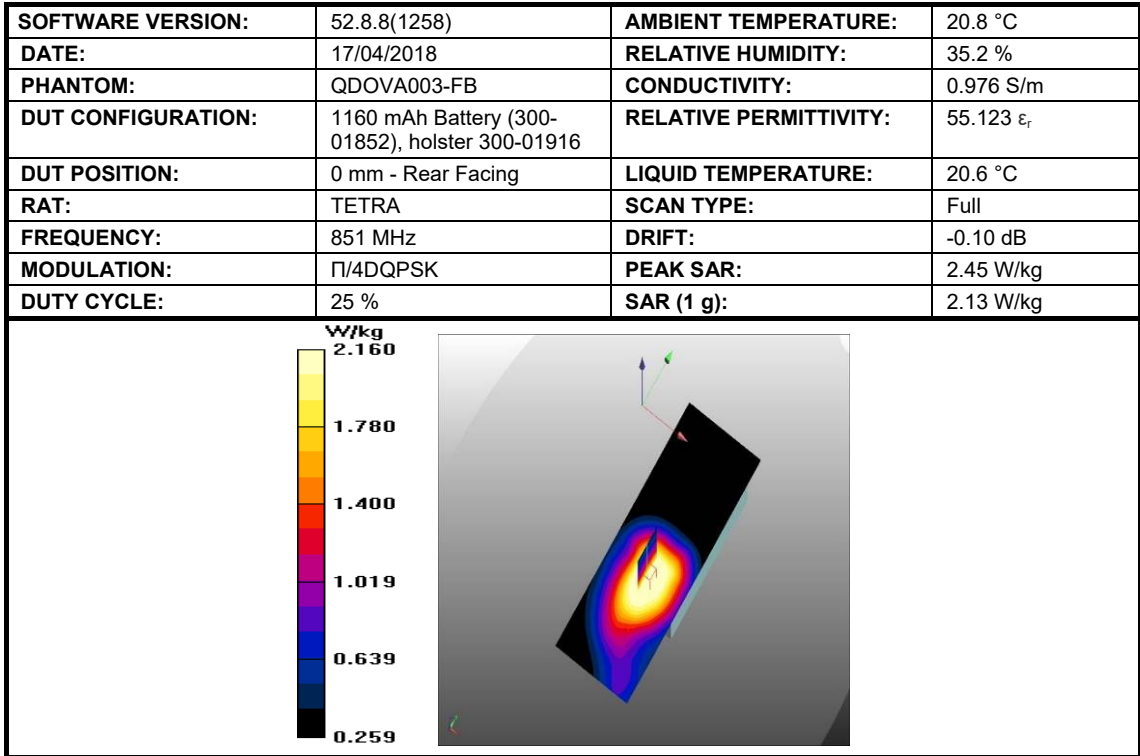


Figure 32: SAR Body Testing Results for the SC2128 TETRA Radio at 851 MHz.

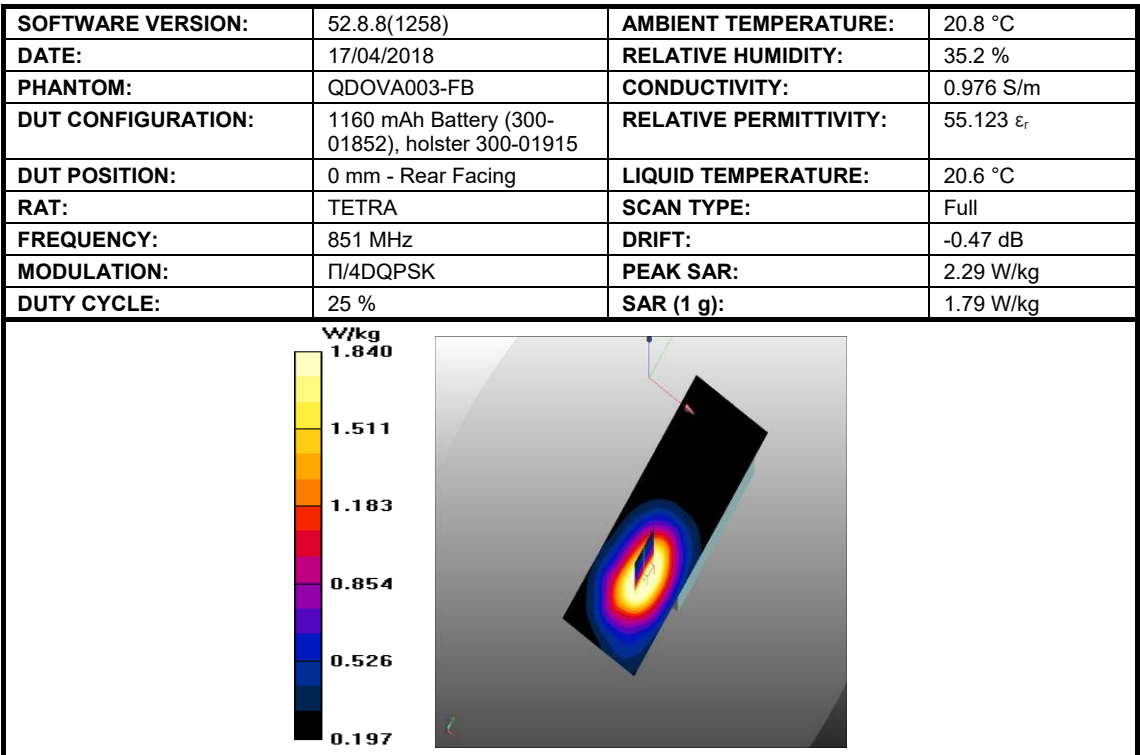


Figure 33: SAR Body Testing Results for the SC2128 TETRA Radio at 851 MHz.

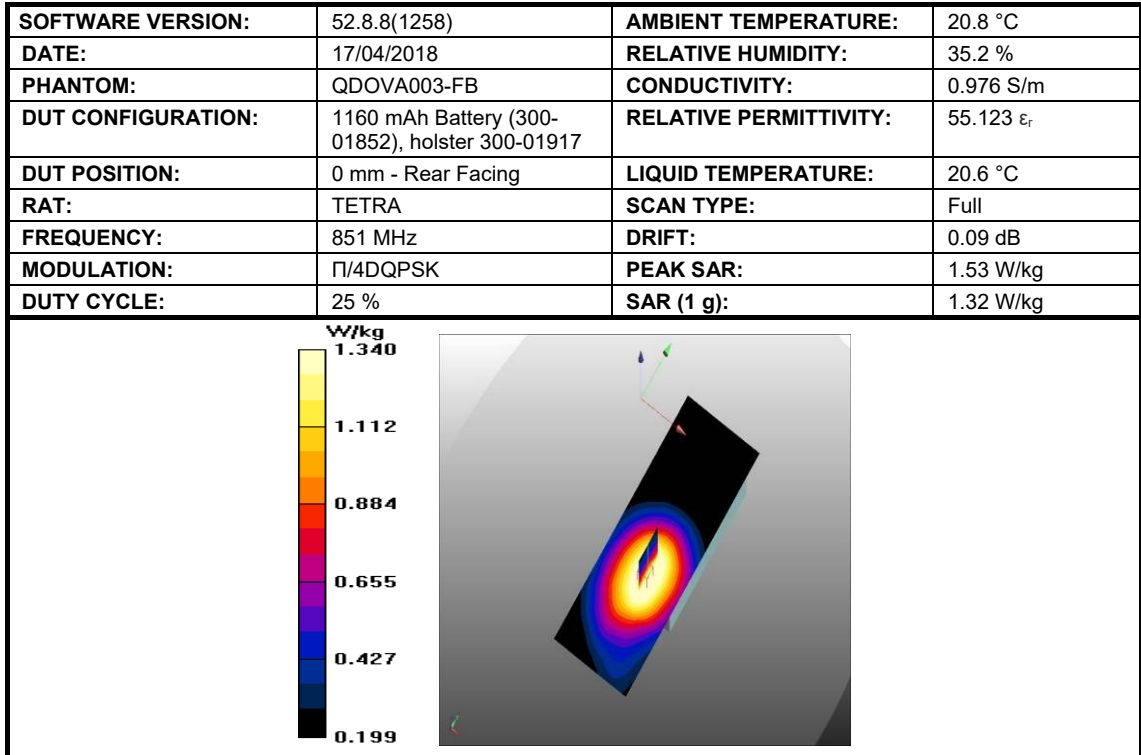


Figure 34: SAR Body Testing Results for the SC2128 TETRA Radio at 851 MHz.

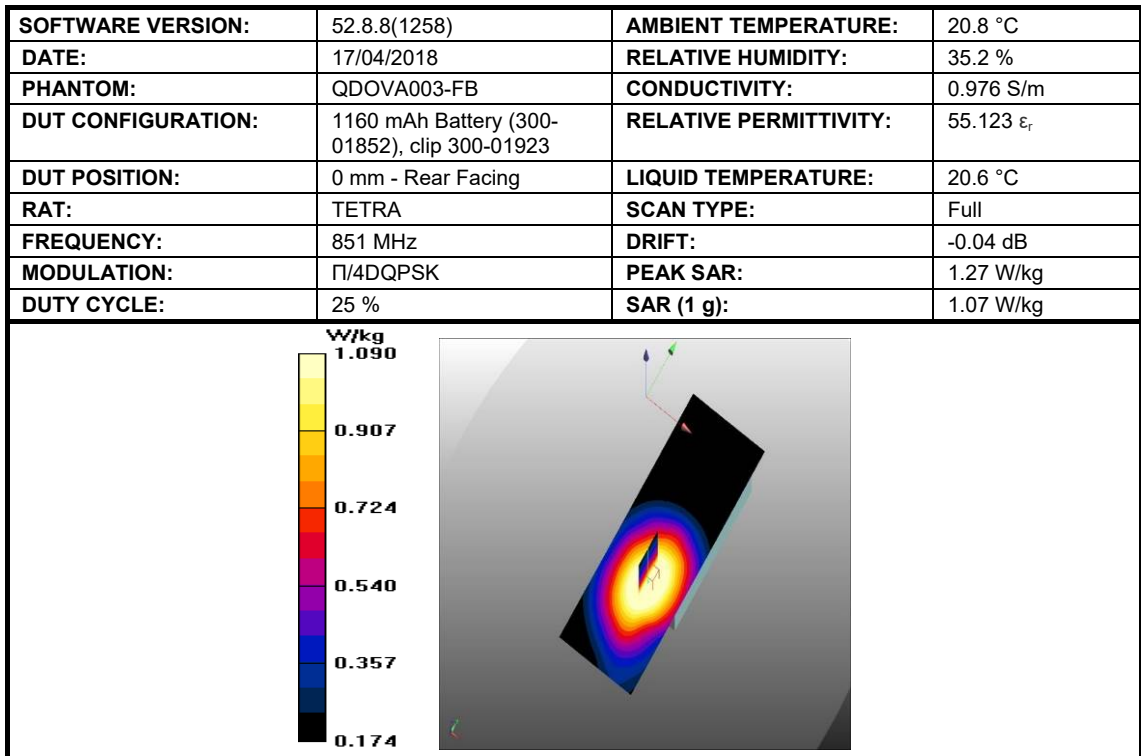


Figure 35: SAR Body Testing Results for the SC2128 TETRA Radio at 851 MHz.

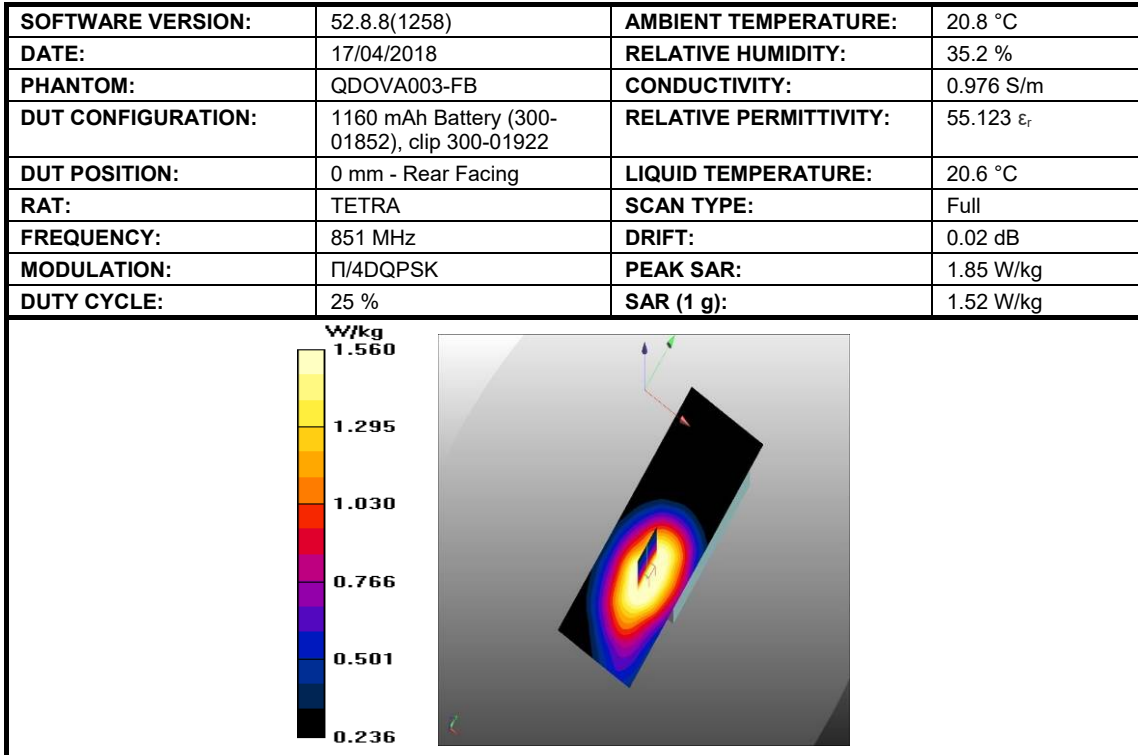


Figure 36: SAR Body Testing Results for the SC2128 TETRA Radio at 851 MHz.

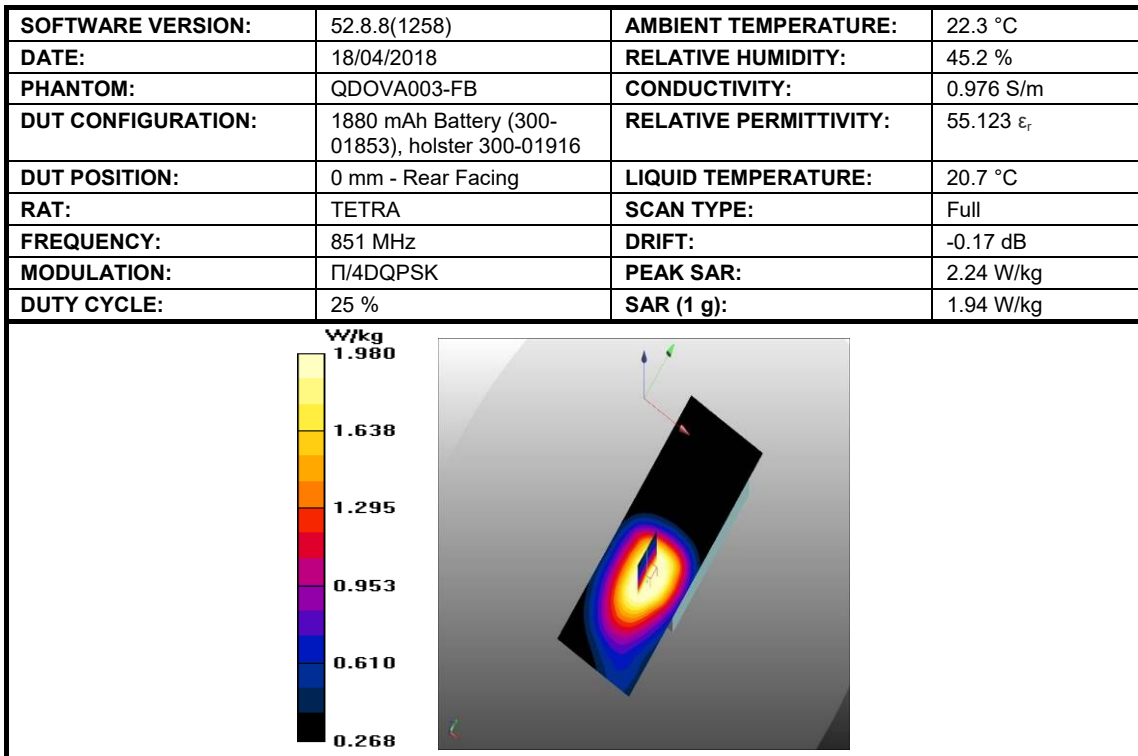


Figure 37: SAR Body Testing Results for the SC2128 TETRA Radio at 851 MHz.



Product Service

<b>SOFTWARE VERSION:</b>	52.8.8(1258)	<b>AMBIENT TEMPERATURE:</b>	22.3 °C
<b>DATE:</b>	18/04/2018	<b>RELATIVE HUMIDITY:</b>	45.2 %
<b>PHANTOM:</b>	QDOVA003-FB	<b>CONDUCTIVITY:</b>	0.976 S/m
<b>DUT CONFIGURATION:</b>	1160 mAh Battery (300-01852), holster 300-01916, RSM 300-00389	<b>RELATIVE PERMITTIVITY:</b>	55.123 $\epsilon_r$
<b>DUT POSITION:</b>	0 mm - Rear Facing	<b>LIQUID TEMPERATURE:</b>	20.7 °C
<b>RAT:</b>	TETRA	<b>SCAN TYPE:</b>	Full
<b>FREQUENCY:</b>	851 MHz	<b>DRIFT:</b>	0.26 dB
<b>MODULATION:</b>	$\pi/4$ DQPSK	<b>PEAK SAR:</b>	2.53 W/kg
<b>DUTY CYCLE:</b>	25 %	<b>SAR (1 g):</b>	2.12 W/kg

The figure displays SAR body testing results. On the left is a vertical color scale legend for SAR density in W/kg, with values: 0.261 (black), 0.649 (dark blue), 1.037 (purple), 1.424 (red), 1.812 (orange), and 2.200 (yellow). On the right is a 3D visualization of the device (SC2128 TETRA Radio) with a color-coded SAR distribution map overlaid on its surface, showing the highest SAR values concentrated near the antenna area.

Figure 38: SAR Body Testing Results for the SC2128 TETRA Radio at 851 MHz.



Product Service

### **SECTION 3**

#### **TEST EQUIPMENT USED**



### 3.1 TEST EQUIPMENT USED

The following test equipment was used at TÜV SÜD Product Service:

Instrument Description	Manufacturer	Model Type	TE Number	Cal Period (months)	Calibration Due Date
10MHz - 2.5GHz, Amplifier	IndexSar Ltd	VBM2500-3	0051	-	O/P Mon
Power Sensor	Rohde & Schwarz	NRV-Z1	0178	12	08-Jun-2018
Power Sensor	Rohde & Schwarz	NRV- Z1	3563	12	08-Jun-2018
Signal Generator	Hewlett Packard	ESG4000A	61	12	14-Jul-2018
Attenuator (20dB, 10W)	Weinschel	37-20-34	482	12	1-Nov -2018
Bi-directional Coupler	IndexSar Ltd	7401 (VDC0830-20)	2414	-	O/P Mon
Cable	Florida Labs	KMS-180SP-39.4-KMS	4519	12	20-Dec-2018
2M SMA Cable	Florida Labs	SMS-235SP-78.8-SMS	4518	12	20-Dec-2018
Thermometer	Digitron	T208	64	12	18-May-2018
K Type Thermocouple	Unknown	TYPE K	65	12	18-May-2018
Hygrometer	Rotronic	I-1000	2784	12	04-May-2018
Dual Channel Power Meter	Rohde & Schwarz	NRVD	2979	12	08-Jun-2018
Data Acquisition Electronics	Speag	DAE 4 - SD 000 D04 BM	4689	12	15-Dec-2018
Measurement Server	Speag	DASY 5 Measurement Server	4692	-	TU
Sam Phantom	Speag	Sam Phantom	4703	-	TU
Elliptical Phantom	Speag	ELI Phantom	4699	-	TU
Dosimetric SAR Probe	Speag	EX3DV4	4700	12	15-Dec-2018
Mounting Platform for TX90XL Robot and Phantoms	Speag	MP6C-TX90XL Mounting Platform Extended	4702	-	TU
Robot	Speag	TX90 XLspeag Robot	4704	-	TU
EUT Holder	Speag	N/A	3870	-	TU
EUT Holder	Speag	MDA4WTV5RLAP	4694	-	TU
HBBL Fluid	Speag	Batch 1	N/A	Weekly	23-April 2018
MBBL Fluid	Speag	Batch 1	N/A	Weekly	23-April 2018
835 MHz Dipole	Speag	D835V2	3857	12	11-Dec-2018

TU - Traceability Unscheduled

O/P Mon - Output Monitored using calibrated equipment



### 3.2 TEST SOFTWARE

The following software was used to control the TÜV SÜD Product Service DASYS System.

Instrument	Version Number
DASY system	52.8.8(1258)



### 3.3 DIELECTRIC PROPERTIES OF SIMULANT LIQUIDS

The fluid properties of the simulant fluids used during routine SAR evaluation meet the dielectric properties required KDB 865665.

The dielectric properties of the tissue simulant liquids used for the SAR testing at TÜV SÜD Product Service are as follows:-

Fluid type and Frequency	Relative Permittivity Target	Relative Permittivity Measured	Conductivity Target	Conductivity Measured
835 MHz Body	55.21	55.16	0.98	0.97
835 MHz Head	41.55	44.23	0.91	0.93

### 3.4 TEST CONDITIONS

#### 3.4.1 Test Laboratory Conditions

Ambient temperature: Within +15°C to +35°C.

The actual temperature during the testing ranged from 20.8°C to 22.3°C.

The actual humidity during the testing ranged from 35.2% to 48.8% RH.

#### 3.4.2 Test Fluid Temperature Range

Frequency (MHz)	Body / Head Fluid	Min Temperature °C	Max Temperature °C
806 – 824	Body	20.6	20.7
806 – 824	Head	20.4	20.7
851 – 869	Body	20.6	20.7
851 – 869	Head	20.4	20.5

#### 3.4.3 SAR Drift

The maximum SAR Drift was recorded as 0.530 dB for head and 0.470 dB for body.





3.5 MEASUREMENT UNCERTAINTY

Head, Full SAR Measurements, 300 MHz to 3 GHz Using Probe EX3DV4 - SN3759

Source of Uncertainty	Uncertainty ± %	Probability distribution	Div	c <sub>i</sub> (1 g)	Standard Uncertainty ± % (1 g)	V <sub>i</sub> (V <sub>eff</sub> )
<b>Measurement System</b>						
Probe calibration	6.0	N	1.00	1.00	6.0	Infinity
Axial Isotropy	4.7	R	1.73	0.70	1.9	Infinity
Hemispherical Isotropy	9.6	R	1.73	0.70	3.9	Infinity
Boundary effect	1.0	R	1.73	1.00	0.6	Infinity
Linearity	4.7	R	1.73	1.00	2.7	Infinity
System Detection limits	1.0	R	1.73	1.00	0.6	Infinity
Modulation response	2.4	R	1.73	1.00	1.4	Infinity
Readout electronics	0.3	N	1.00	1.00	0.3	Infinity
Response time	0.8	R	1.73	1.00	0.5	Infinity
Integration time	2.6	R	1.73	1.00	1.5	Infinity
RF ambient noise	3.0	R	1.73	1.00	1.7	Infinity
RF ambient reflections	3.0	R	1.73	1.00	1.7	Infinity
Probe positioner	0.4	R	1.73	1.00	0.2	Infinity
Probe positioning	2.9	R	1.73	1.00	1.7	Infinity
Max SAR Evaluation	2.0	R	1.73	1.00	1.2	Infinity
<b>Test sample related</b>						
Device Positioning	2.9	N	1.00	1.00	2.9	145
Device Holder	3.6	N	1.00	1.00	3.6	5
Input Power and SAR Drift	5.0	R	1.73	1.00	0.3	Infinity
<b>Phantom and Setup</b>						
Phantom uncertainty	6.1	R	1.73	1.00	3.5	Infinity
SAR Correction	1.9	R	1.73	1.00	1.1	Infinity
Liquid conductivity Meas.	2.5	R	1.73	0.78	1.1	Infinity
Liquid Permittivity Meas.	2.5	R	1.73	0.23	0.3	Infinity
Temp. Unc. Conductivity	3.4	R	1.73	0.78	1.5	Infinity
Temp. Unc. Permittivity	0.4	R	1.73	0.23	0.1	Infinity
<b>Combined Standard Uncertainty</b>		<b>RSS</b>			10.8	361
<b>Expanded Standard Uncertainty</b>		<b>K=2</b>			21.6	



Body, Full SAR Measurements, 300 MHz to 3 GHz Using Probe EX3DV4 - SN3759

Source of Uncertainty	Uncertainty ± %	Probability distribution	Div	c <sub>i</sub> (1 g)	Standard Uncertainty ± % (1 g)	V <sub>i</sub> (V <sub>eff</sub> )
<b>Measurement System</b>						
Probe calibration	6.0	N	1.00	1.00	6.0	Infinity
Axial Isotropy	4.7	R	1.73	0.70	1.9	Infinity
Hemispherical Isotropy	9.6	R	1.73	0.70	3.9	Infinity
Boundary effect	1.0	R	1.73	1.00	0.6	Infinity
Linearity	4.7	R	1.73	1.00	2.7	Infinity
System Detection limits	1.0	R	1.73	1.00	0.6	Infinity
Modulation response	2.4	R	1.73	1.00	1.4	Infinity
Readout electronics	0.3	N	1.00	1.00	0.3	Infinity
Response time	0.8	R	1.73	1.00	0.5	Infinity
Integration time	2.6	R	1.73	1.00	1.5	Infinity
RF ambient noise	3.0	R	1.73	1.00	1.7	Infinity
RF ambient reflections	3.0	R	1.73	1.00	1.7	Infinity
Probe positioner	0.4	R	1.73	1.00	0.2	Infinity
Probe positioning	2.9	R	1.73	1.00	1.7	Infinity
Max SAR Evaluation	2.0	R	1.73	1.00	1.2	Infinity
<b>Test sample related</b>						
Device Positioning	2.9	N	1.00	1.00	2.9	145
Device Holder	3.6	N	1.00	1.00	3.6	5
Input Power and SAR Drift	5.0	R	1.73	1.00	0.5	Infinity
<b>Phantom and Setup</b>						
Phantom uncertainty	6.1	R	1.73	1.00	3.5	Infinity
SAR Correction	1.9	R	1.73	1.00	1.1	Infinity
Liquid conductivity Meas.	2.5	R	1.73	0.78	1.1	Infinity
Liquid Permittivity Meas.	2.5	R	1.73	0.23	0.3	Infinity
Temp. Unc. Conductivity	3.4	R	1.73	0.78	1.5	Infinity
Temp. Unc. Permittivity	0.4	R	1.73	0.23	0.1	Infinity
<b>Combined Standard Uncertainty</b>		<b>RSS</b>			10.8	361
<b>Expanded Standard Uncertainty</b>		<b>K=2</b>			21.6	



Product Service

## **SECTION 4**

### **ACCREDITATION, DISCLAIMERS AND COPYRIGHT**



#### 4.1 ACCREDITATION, DISCLAIMERS AND COPYRIGHT



This report relates only to the actual item/items tested.

Our UKAS Accreditation does not cover opinions and interpretations and any expressed are outside the scope of our UKAS Accreditation.

Results of tests not covered by our UKAS Accreditation Schedule are marked NUA (Not UKAS Accredited).

This report must not be reproduced, except in its entirety, without the written permission of TÜV SÜD Product Service

© 2018 TÜV SÜD Product Service



Product Service

**ANNEX A**

**PROBE CALIBRATION REPORT**



Product Service

**Calibration Laboratory of  
Schmid & Partner  
Engineering AG**  
Zeughausstrasse 43, 8004 Zurich, Switzerland



**S** Schweizerischer Kallbrierdienst  
**C** Service suisse d'étalonnage  
**S** Servizio svizzero di taratura  
Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Client **TüV SÜD UK**

Certificate No: **EX3-3759\_Dec17**

**CALIBRATION CERTIFICATE**

Object **EX3DV4 - SN:3759**

Calibration procedure(s) **QA CAL-01.v9, QA CAL-12.v9, QA CAL-14.v4, QA CAL-23.v5,  
QA CAL-25.v6  
Calibration procedure for dosimetric E-field probes**

Calibration date: **December 15, 2017**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID	Cal Date (Certificate No.)	Scheduled Calibration
Power meter NRP	SN: 104778	04-Apr-17 (No. 217-02521/02522)	Apr-18
Power sensor NRP-Z91	SN: 103244	04-Apr-17 (No. 217-02521)	Apr-18
Power sensor NRP-Z91	SN: 103245	04-Apr-17 (No. 217-02525)	Apr-18
Reference 20 dB Attenuator	SN: S5277 (20x)	07-Apr-17 (No. 217-02528)	Apr-18
Reference Probe ES3DV2	SN: 3013	31-Dec-16 (No. ES3-3013_Dec16)	Dec-17
DAE4	SN: 654	24-Jul-17 (No. DAE4-654_Jul17)	Jul-18
Secondary Standards	ID	Check Date (in house)	Scheduled Check
Power meter E4419B	SN: GB41293874	06-Apr-16 (in house check Jun-16)	In house check: Jun-18
Power sensor E4412A	SN: MY41498087	06-Apr-16 (in house check Jun-16)	In house check: Jun-18
Power sensor E4412A	SN: 000110210	06-Apr-16 (in house check Jun-16)	In house check: Jun-18
RF generator HP 8648C	SN: US3642U01700	04-Aug-99 (in house check Jun-16)	In house check: Jun-18
Network Analyzer HP 8753E	SN: US37390585	18-Oct-01 (in house check Oct-17)	In house check: Oct-18

Calibrated by:	Name <b>Michael Weber</b>	Function Laboratory Technician	Signature 
Approved by:	Name <b>Katja Pokovic</b>	Function Technical Manager	

Issued: December 15, 2017

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Product Service

**Calibration Laboratory of**  
Schmid & Partner  
Engineering AG  
Zeughausstrasse 43, 8004 Zurich, Switzerland



**S** Schweizerischer Kalibrierdienst  
**C** Service suisse d'étalonnage  
**S** Servizio svizzero di taratura  
**S** Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108****Glossary:**

TSL	tissue simulating liquid
NORM <sub>x,y,z</sub>	sensitivity in free space
ConvF	sensitivity in TSL / NORM <sub>x,y,z</sub>
DCP	diode compression point
CF	crest factor (1/duty_cycle) of the RF signal
A, B, C, D	modulation dependent linearization parameters
Polarization $\varphi$	$\varphi$ rotation around probe axis
Polarization $\vartheta$	$\vartheta$ rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e., $\vartheta = 0$ is normal to probe axis
Connector Angle	information used in DASY system to align probe sensor X to the robot coordinate system

**Calibration is Performed According to the Following Standards:**

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Measurement procedure for the assessment of Specific Absorption Rate (SAR) from hand-held and body-mounted devices used next to the ear (frequency range of 300 MHz to 6 GHz)", July 2016
- IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

**Methods Applied and Interpretation of Parameters:**

- NORM<sub>x,y,z</sub>:** Assessed for E-field polarization  $\vartheta = 0$  ( $f \leq 900$  MHz in TEM-cell;  $f > 1800$  MHz: R22 waveguide). NORM<sub>x,y,z</sub> are only intermediate values, i.e., the uncertainties of NORM<sub>x,y,z</sub> does not affect the E<sup>2</sup>-field uncertainty inside TSL (see below ConvF).
- NORM(f)<sub>x,y,z</sub> = NORM<sub>x,y,z</sub> \* frequency\_response** (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of ConvF.
- DCP<sub>x,y,z</sub>:** DCP are numerical linearization parameters assessed based on the data of power sweep with CW signal (no uncertainty required). DCP does not depend on frequency nor media.
- PAR:** PAR is the Peak to Average Ratio that is not calibrated but determined based on the signal characteristics
- A<sub>x,y,z</sub>; B<sub>x,y,z</sub>; C<sub>x,y,z</sub>; D<sub>x,y,z</sub>; VR<sub>x,y,z</sub>:** A, B, C, D are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. VR is the maximum calibration range expressed in RMS voltage across the diode.
- ConvF and Boundary Effect Parameters:** Assessed in flat phantom using E-field (or Temperature Transfer Standard for  $f \leq 800$  MHz) and inside waveguide using analytical field distributions based on power measurements for  $f > 800$  MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORM<sub>x,y,z</sub> \* ConvF whereby the uncertainty corresponds to that given for ConvF. A frequency dependent ConvF is used in DASY version 4.4 and higher which allows extending the validity from  $\pm 50$  MHz to  $\pm 100$  MHz.
- Spherical isotropy (3D deviation from isotropy):** in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset:** The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.
- Connector Angle:** The angle is assessed using the information gained by determining the NORM<sub>x</sub> (no uncertainty required).



Product Service

EX3DV4 – SN:3759

December 15, 2017

# Probe EX3DV4

## SN:3759

Manufactured: March 16, 2010  
Calibrated: December 15, 2017

Calibrated for DASY/EASY Systems  
(Note: non-compatible with DASY2 system!)





EX3DV4- SN:3759

December 15, 2017

## DASY/EASY - Parameters of Probe: EX3DV4 - SN:3759

### Basic Calibration Parameters

	Sensor X	Sensor Y	Sensor Z	Unc (k=2)
Norm ( $\mu\text{V}/(\text{V}/\text{m})^2$ ) <sup>A</sup>	0.47	0.43	0.44	$\pm 10.1 \%$
DCP (mV) <sup>B</sup>	96.3	101.3	104.4	

### Modulation Calibration Parameters

UID	Communication System Name		A dB	B dB $\sqrt{\mu\text{V}}$	C	D dB	VR mV	Unc <sup>E</sup> (k=2)
0	CW	X	0.0	0.0	1.0	0.00	175.9	$\pm 2.7 \%$
		Y	0.0	0.0	1.0		176.6	
		Z	0.0	0.0	1.0		190.7	

Note: For details on UID parameters see Appendix.

### Sensor Model Parameters

	C1 fF	C2 fF	$\alpha$ $\text{V}^{-1}$	T1 $\text{ms}\cdot\text{V}^{-2}$	T2 $\text{ms}\cdot\text{V}^{-1}$	T3 ms	T4 $\text{V}^{-2}$	T5 $\text{V}^{-1}$	T6
X	41.32	316.6	37.15	11.64	0.646	5.078	0.000	0.575	1.008
Y	45.97	342.8	35.45	15.74	0.369	5.100	0.925	0.377	1.008
Z	41.91	321.1	37.19	13.86	1.049	5.067	0.000	0.617	1.009

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

<sup>A</sup> The uncertainties of Norm X,Y,Z do not affect the E<sup>2</sup>-field uncertainty inside TSL (see Pages 5 and 6).

<sup>B</sup> Numerical linearization parameter: uncertainty not required.

<sup>E</sup> Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.



EX3DV4- SN:3759

December 15, 2017

## DASY/EASY - Parameters of Probe: EX3DV4 - SN:3759

### Calibration Parameter Determined in Head Tissue Simulating Media

f (MHz) <sup>C</sup>	Relative Permittivity <sup>F</sup>	Conductivity (S/m) <sup>F</sup>	ConvF X	ConvF Y	ConvF Z	Alpha <sup>G</sup>	Depth <sup>G</sup> (mm)	Unc (k=2)
450	43.5	0.87	11.17	11.17	11.17	0.13	1.20	± 13.3 %
750	41.9	0.89	10.54	10.54	10.54	0.26	1.13	± 12.0 %
835	41.5	0.90	10.15	10.15	10.15	0.20	1.15	± 12.0 %
900	41.5	0.97	9.96	9.96	9.96	0.22	1.12	± 12.0 %
1640	40.2	1.31	8.76	8.76	8.76	0.17	1.00	± 12.0 %
1750	40.1	1.37	8.66	8.66	8.66	0.24	0.87	± 12.0 %
1900	40.0	1.40	8.34	8.34	8.34	0.16	0.99	± 12.0 %
2100	39.8	1.49	8.38	8.38	8.38	0.17	0.90	± 12.0 %
2300	39.5	1.67	7.66	7.66	7.66	0.23	0.86	± 12.0 %
2450	39.2	1.80	7.32	7.32	7.32	0.25	0.86	± 12.0 %
2600	39.0	1.96	7.06	7.06	7.06	0.25	0.92	± 12.0 %
5200	36.0	4.66	4.51	4.51	4.51	0.40	1.80	± 13.1 %
5300	35.9	4.76	4.36	4.36	4.36	0.40	1.80	± 13.1 %
5500	35.6	4.96	3.87	3.87	3.87	0.40	1.80	± 13.1 %
5600	35.5	5.07	3.83	3.83	3.83	0.40	1.80	± 13.1 %
5800	35.3	5.27	3.88	3.88	3.88	0.40	1.80	± 13.1 %

<sup>C</sup> Frequency validity above 300 MHz of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Above 5 GHz frequency validity can be extended to ± 110 MHz.

<sup>F</sup> At frequencies below 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

<sup>G</sup> Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.



EX3DV4- SN:3759

December 15, 2017

## DASY/EASY - Parameters of Probe: EX3DV4 - SN:3759

### Calibration Parameter Determined in Body Tissue Simulating Media

f (MHz) <sup>C</sup>	Relative Permittivity <sup>F</sup>	Conductivity (S/m) <sup>F</sup>	ConvF X	ConvF Y	ConvF Z	Alpha <sup>G</sup>	Depth <sup>G</sup> (mm)	Unc (k=2)
450	56.7	0.94	11.45	11.45	11.45	0.05	1.20	± 13.3 %
750	55.5	0.96	10.23	10.23	10.23	0.21	1.15	± 12.0 %
835	55.2	0.97	9.95	9.95	9.95	0.21	1.08	± 12.0 %
900	55.0	1.05	9.83	9.83	9.83	0.17	1.25	± 12.0 %
1640	53.7	1.42	8.79	8.79	8.79	0.26	0.83	± 12.0 %
1750	53.4	1.49	8.24	8.24	8.24	0.28	0.80	± 12.0 %
1900	53.3	1.52	7.95	7.95	7.95	0.14	1.20	± 12.0 %
2100	53.2	1.62	8.35	8.35	8.35	0.22	0.95	± 12.0 %
2300	52.9	1.81	7.64	7.64	7.64	0.26	0.86	± 12.0 %
2450	52.7	1.95	7.49	7.49	7.49	0.25	0.85	± 12.0 %
2600	52.5	2.16	7.20	7.20	7.20	0.22	0.90	± 12.0 %
5200	49.0	5.30	4.03	4.03	4.03	0.40	1.90	± 13.1 %
5300	48.9	5.42	3.88	3.88	3.88	0.40	1.90	± 13.1 %
5500	48.6	5.65	3.38	3.38	3.38	0.45	1.90	± 13.1 %
5600	48.5	5.77	3.29	3.29	3.29	0.45	1.90	± 13.1 %
5800	48.2	6.00	3.34	3.34	3.34	0.45	1.90	± 13.1 %

<sup>C</sup> Frequency validity above 300 MHz of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Above 5 GHz frequency validity can be extended to ± 110 MHz.

<sup>F</sup> At frequencies below 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.


<sup>G</sup> Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.



EX3DV4- SN:3759

December 15, 2017

### Frequency Response of E-Field (TEM-Cell:ifi110 EXX, Waveguide: R22)

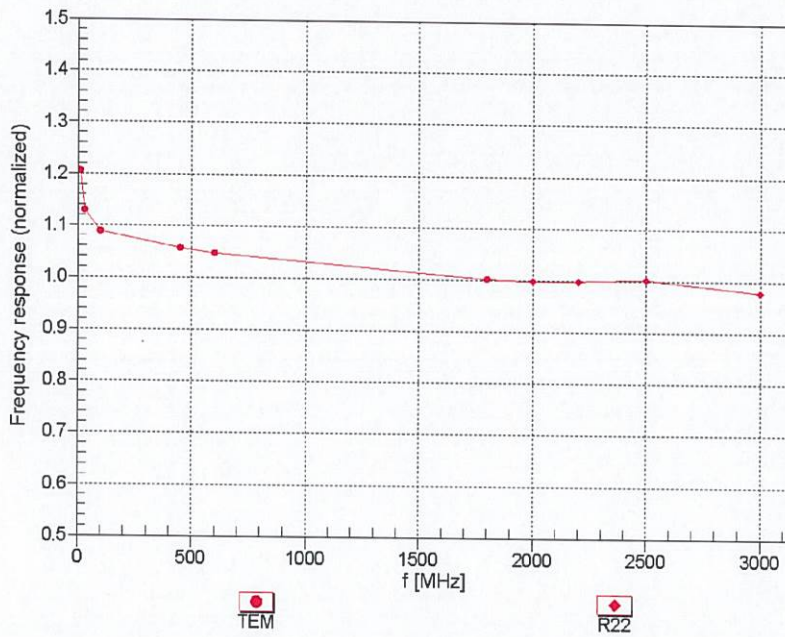

Uncertainty of Frequency Response of E-field:  $\pm 6.3\%$  (k=2)





EX3DV4- SN:3759

December 15, 2017

### Receiving Pattern ( $\phi$ ), $\vartheta = 0^\circ$

f=600 MHz,TEM

f=1800 MHz,R22

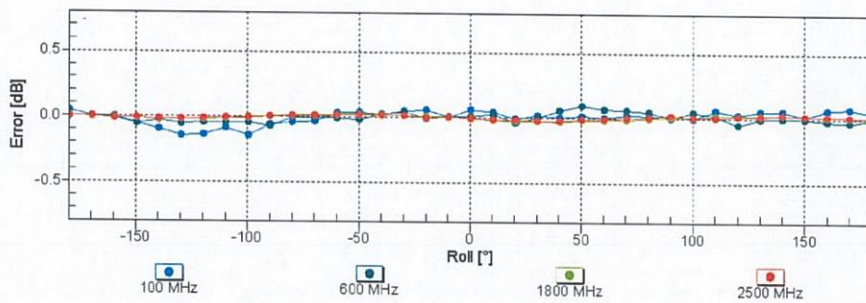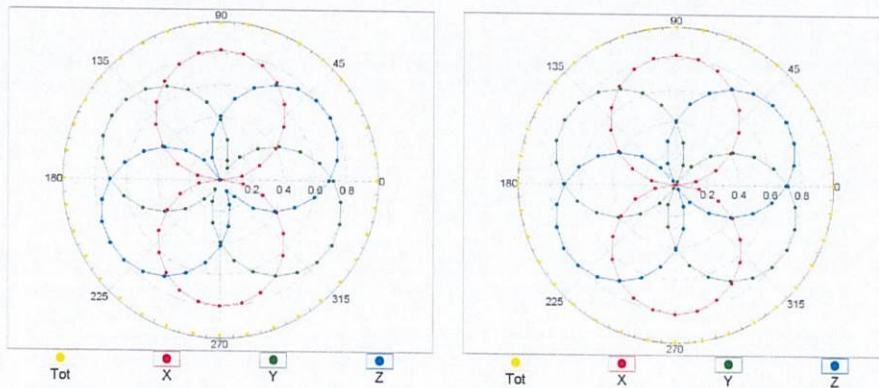



Uncertainty of Axial Isotropy Assessment:  $\pm 0.5\%$  (k=2)



EX3DV4- SN:3759

December 15, 2017

### Dynamic Range $f(SAR_{head})$ (TEM cell , $f_{eval}= 1900$ MHz)

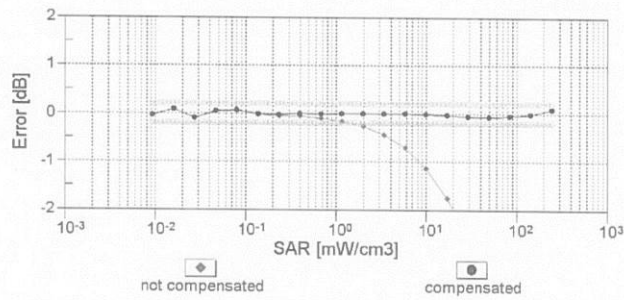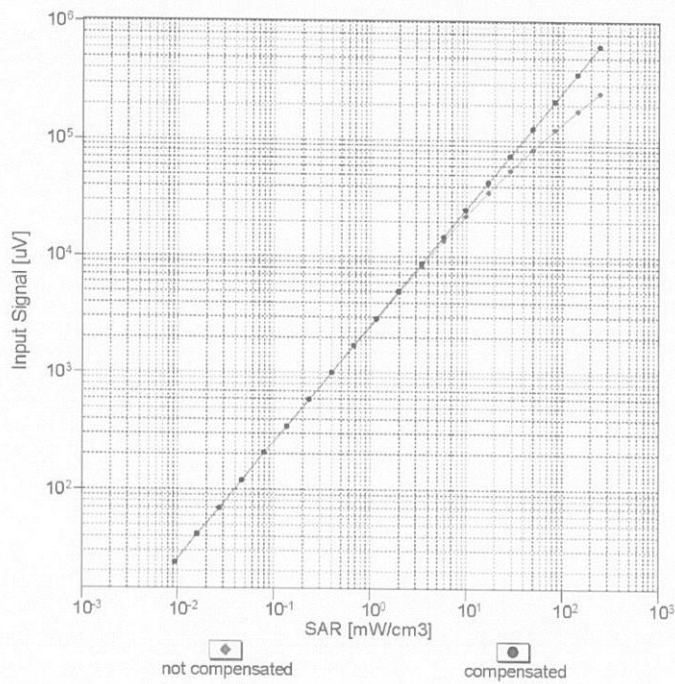


Uncertainty of Linearity Assessment:  $\pm 0.6\%$  (k=2)





EX3DV4- SN:3759

December 15, 2017

### Conversion Factor Assessment

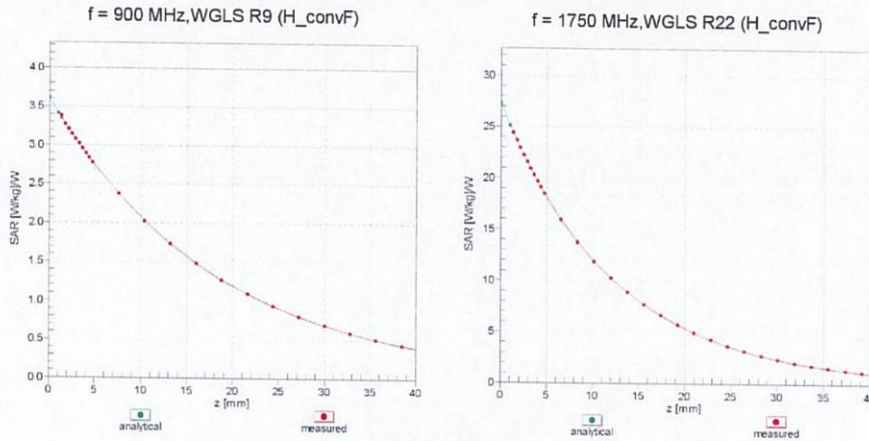

### Deviation from Isotropy in Liquid Error ( $\phi, \vartheta$ ), f = 900 MHz

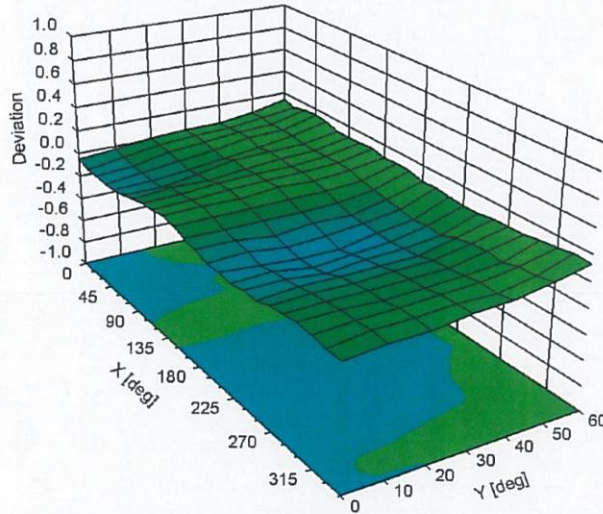



EX3DV4- SN:3759

December 15, 2017

## DASY/EASY - Parameters of Probe: EX3DV4 - SN:3759

### Other Probe Parameters

Sensor Arrangement	Triangular
Connector Angle (°)	0.3
Mechanical Surface Detection Mode	enabled
Optical Surface Detection Mode	disabled
Probe Overall Length	337 mm
Probe Body Diameter	10 mm
Tip Length	9 mm
Tip Diameter	2.5 mm
Probe Tip to Sensor X Calibration Point	1 mm
Probe Tip to Sensor Y Calibration Point	1 mm
Probe Tip to Sensor Z Calibration Point	1 mm
Recommended Measurement Distance from Surface	1.4 mm





EX3DV4– SN:3759

December 15, 2017

**Appendix: Modulation Calibration Parameters**

UID	Communication System Name		A dB	B dB/μV	C	D dB	VR mV	Max Unc <sup>E</sup> (k=2)
0	CW	X	0.00	0.00	1.00	0.00	175.9	± 2.7 %
		Y	0.00	0.00	1.00		176.6	
		Z	0.00	0.00	1.00		190.7	
10010- CAA	SAR Validation (Square, 100ms, 10ms)	X	2.16	64.99	9.77	10.00	20.0	± 9.6 %
		Y	3.58	71.18	12.76		20.0	
		Z	2.56	66.02	10.70		20.0	
10011- CAB	UMTS-FDD (WCDMA)	X	0.82	64.99	13.21	0.00	150.0	± 9.6 %
		Y	0.93	65.90	14.15		150.0	
		Z	0.83	65.44	13.47		150.0	
10012- CAB	IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps)	X	1.05	62.93	14.36	0.41	150.0	± 9.6 %
		Y	1.14	63.57	14.90		150.0	
		Z	1.06	63.23	14.54		150.0	
10013- CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 6 Mbps)	X	4.72	66.54	16.95	1.46	150.0	± 9.6 %
		Y	4.84	66.70	17.07		150.0	
		Z	4.74	66.60	16.98		150.0	
10021- DAC	GSM-FDD (TDMA, GMSK)	X	100.00	112.49	26.59	9.39	50.0	± 9.6 %
		Y	100.00	116.38	28.37		50.0	
		Z	100.00	113.68	27.56		50.0	
10023- DAC	GPRS-FDD (TDMA, GMSK, TN 0)	X	100.00	112.09	26.45	9.57	50.0	± 9.6 %
		Y	100.00	115.90	28.18		50.0	
		Z	100.00	113.42	27.49		50.0	
10024- DAC	GPRS-FDD (TDMA, GMSK, TN 0-1)	X	100.00	110.48	24.56	6.56	60.0	± 9.6 %
		Y	100.00	115.96	27.23		60.0	
		Z	100.00	110.52	24.97		60.0	
10025- DAC	EDGE-FDD (TDMA, 8PSK, TN 0)	X	3.88	67.91	24.69	12.57	50.0	± 9.6 %
		Y	5.94	82.56	33.20		50.0	
		Z	3.91	66.61	23.43		50.0	
10026- DAC	EDGE-FDD (TDMA, 8PSK, TN 0-1)	X	8.32	90.19	32.05	9.56	60.0	± 9.6 %
		Y	12.26	100.74	36.43		60.0	
		Z	9.34	91.12	31.85		60.0	
10027- DAC	GPRS-FDD (TDMA, GMSK, TN 0-1-2)	X	100.00	109.42	23.29	4.80	80.0	± 9.6 %
		Y	100.00	117.00	26.96		80.0	
		Z	100.00	108.73	23.36		80.0	
10028- DAC	GPRS-FDD (TDMA, GMSK, TN 0-1-2-3)	X	100.00	108.14	22.04	3.55	100.0	± 9.6 %
		Y	100.00	118.82	27.05		100.0	
		Z	100.00	107.04	21.91		100.0	
10029- DAC	EDGE-FDD (TDMA, 8PSK, TN 0-1-2)	X	5.36	80.23	26.94	7.80	80.0	± 9.6 %
		Y	6.85	86.01	29.59		80.0	
		Z	6.12	81.98	27.25		80.0	
10030- CAA	IEEE 802.15.1 Bluetooth (GFSK, DH1)	X	100.00	107.97	22.96	5.30	70.0	± 9.6 %
		Y	100.00	114.46	26.13		70.0	
		Z	100.00	107.89	23.28		70.0	
10031- CAA	IEEE 802.15.1 Bluetooth (GFSK, DH3)	X	100.00	94.76	15.26	1.88	100.0	± 9.6 %
		Y	100.00	115.48	24.25		100.0	
		Z	9.25	80.85	12.65		100.0	



EX3DV4- SN:3759

December 15, 2017

10032-CAA	IEEE 802.15.1 Bluetooth (GFSK, DH5)	X	0.19	60.00	4.06	1.17	100.0	± 9.6 %
		Y	100.00	117.02	23.90		100.0	
		Z	0.22	60.00	4.29		100.0	
10033-CAA	IEEE 802.15.1 Bluetooth (PI/4-DQPSK, DH1)	X	17.87	99.83	26.24	5.30	70.0	± 9.6 %
		Y	100.00	129.86	35.03		70.0	
		Z	12.52	92.73	23.92		70.0	
10034-CAA	IEEE 802.15.1 Bluetooth (PI/4-DQPSK, DH3)	X	2.49	74.13	15.92	1.88	100.0	± 9.6 %
		Y	5.30	85.11	20.98		100.0	
		Z	2.68	74.20	15.81		100.0	
10035-CAA	IEEE 802.15.1 Bluetooth (PI/4-DQPSK, DH5)	X	1.53	69.18	13.51	1.17	100.0	± 9.6 %
		Y	2.50	75.76	17.30		100.0	
		Z	1.66	69.63	13.61		100.0	
10036-CAA	IEEE 802.15.1 Bluetooth (8-DPSK, DH1)	X	33.45	109.44	28.89	5.30	70.0	± 9.6 %
		Y	100.00	130.34	35.25		70.0	
		Z	19.06	99.10	25.84		70.0	
10037-CAA	IEEE 802.15.1 Bluetooth (8-DPSK, DH3)	X	2.28	73.14	15.52	1.88	100.0	± 9.6 %
		Y	4.71	83.61	20.45		100.0	
		Z	2.46	73.29	15.43		100.0	
10038-CAA	IEEE 802.15.1 Bluetooth (8-DPSK, DH5)	X	1.55	69.55	13.79	1.17	100.0	± 9.6 %
		Y	2.54	76.23	17.60		100.0	
		Z	1.69	70.07	13.91		100.0	
10039-CAB	CDMA2000 (1xRTT, RC1)	X	1.05	65.59	11.28	0.00	150.0	± 9.6 %
		Y	1.46	69.03	13.93		150.0	
		Z	1.09	66.10	11.54		150.0	
10042-CAB	IS-54 / IS-136 FDD (TDMA/FDM, PI/4-DQPSK, Halfrate)	X	100.00	107.37	23.43	7.78	50.0	± 9.6 %
		Y	100.00	111.98	25.64		50.0	
		Z	100.00	108.29	24.22		50.0	
10044-CAA	IS-91/EIA/TIA-553 FDD (FDMA, FM)	X	0.15	122.74	12.16	0.00	150.0	± 9.6 %
		Y	0.00	114.17	0.26		150.0	
		Z	0.24	126.15	5.88		150.0	
10048-CAA	DECT (TDD, TDMA/FDM, GFSK, Full Slot, 24)	X	35.92	97.18	23.96	13.80	25.0	± 9.6 %
		Y	100.00	115.10	29.09		25.0	
		Z	14.63	86.41	21.72		25.0	
10049-CAA	DECT (TDD, TDMA/FDM, GFSK, Double Slot, 12)	X	78.89	108.38	25.78	10.79	40.0	± 9.6 %
		Y	100.00	114.52	27.83		40.0	
		Z	19.09	91.43	22.08		40.0	
10056-CAA	UMTS-TDD (TD-SCDMA, 1.28 Mcps)	X	30.58	103.53	27.64	9.03	50.0	± 9.6 %
		Y	100.00	125.91	34.38		50.0	
		Z	14.97	91.44	24.12		50.0	
10058-DAC	EDGE-FDD (TDMA, 8PSK, TN 0-1-2-3)	X	4.20	75.52	24.15	6.55	100.0	± 9.6 %
		Y	5.07	79.42	26.03		100.0	
		Z	4.73	77.19	24.56		100.0	
10059-CAB	IEEE 802.11b WiFi 2.4 GHz (DSSS, 2 Mbps)	X	1.08	64.00	14.98	0.61	110.0	± 9.6 %
		Y	1.19	64.87	15.66		110.0	
		Z	1.11	64.48	15.21		110.0	
10060-CAB	IEEE 802.11b WiFi 2.4 GHz (DSSS, 5.5 Mbps)	X	11.06	103.11	26.31	1.30	110.0	± 9.6 %
		Y	100.00	137.46	35.45		110.0	
		Z	23.10	110.82	27.74		110.0	



EX3DV4- SN:3759

December 15, 2017

10061-CAB	IEEE 802.11b WiFi 2.4 GHz (DSSS, 11 Mbps)	X	2.76	80.30	21.89	2.04	110.0	± 9.6 %
		Y	4.09	86.73	24.67		110.0	
		Z	3.43	82.67	22.40		110.0	
10062-CAC	IEEE 802.11a/h WiFi 5 GHz (OFDM, 6 Mbps)	X	4.50	66.42	16.30	0.49	100.0	± 9.6 %
		Y	4.62	66.61	16.42		100.0	
		Z	4.51	66.47	16.33		100.0	
10063-CAC	IEEE 802.11a/h WiFi 5 GHz (OFDM, 9 Mbps)	X	4.52	66.53	16.41	0.72	100.0	± 9.6 %
		Y	4.65	66.72	16.54		100.0	
		Z	4.53	66.58	16.44		100.0	
10064-CAC	IEEE 802.11a/h WiFi 5 GHz (OFDM, 12 Mbps)	X	4.79	66.79	16.65	0.86	100.0	± 9.6 %
		Y	4.93	66.99	16.78		100.0	
		Z	4.80	66.84	16.68		100.0	
10065-CAC	IEEE 802.11a/h WiFi 5 GHz (OFDM, 18 Mbps)	X	4.66	66.69	16.75	1.21	100.0	± 9.6 %
		Y	4.81	66.92	16.91		100.0	
		Z	4.68	66.75	16.78		100.0	
10066-CAC	IEEE 802.11a/h WiFi 5 GHz (OFDM, 24 Mbps)	X	4.69	66.73	16.94	1.46	100.0	± 9.6 %
		Y	4.83	66.96	17.10		100.0	
		Z	4.71	66.81	16.97		100.0	
10067-CAC	IEEE 802.11a/h WiFi 5 GHz (OFDM, 36 Mbps)	X	4.99	67.00	17.44	2.04	100.0	± 9.6 %
		Y	5.13	67.17	17.58		100.0	
		Z	5.02	67.08	17.47		100.0	
10068-CAC	IEEE 802.11a/h WiFi 5 GHz (OFDM, 48 Mbps)	X	5.03	67.00	17.65	2.55	100.0	± 9.6 %
		Y	5.18	67.24	17.83		100.0	
		Z	5.07	67.10	17.68		100.0	
10069-CAC	IEEE 802.11a/h WiFi 5 GHz (OFDM, 54 Mbps)	X	5.11	67.03	17.85	2.67	100.0	± 9.6 %
		Y	5.26	67.24	18.02		100.0	
		Z	5.15	67.14	17.88		100.0	
10071-CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 9 Mbps)	X	4.82	66.65	17.28	1.99	100.0	± 9.6 %
		Y	4.94	66.82	17.41		100.0	
		Z	4.85	66.72	17.30		100.0	
10072-CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 12 Mbps)	X	4.80	66.96	17.50	2.30	100.0	± 9.6 %
		Y	4.93	67.17	17.66		100.0	
		Z	4.83	67.06	17.53		100.0	
10073-CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 18 Mbps)	X	4.87	67.16	17.86	2.83	100.0	± 9.6 %
		Y	5.00	67.37	18.02		100.0	
		Z	4.91	67.29	17.89		100.0	
10074-CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 24 Mbps)	X	4.87	67.10	18.02	3.30	100.0	± 9.6 %
		Y	4.99	67.29	18.20		100.0	
		Z	4.92	67.25	18.06		100.0	
10075-CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 36 Mbps)	X	4.90	67.19	18.33	3.82	90.0	± 9.6 %
		Y	5.03	67.42	18.54		90.0	
		Z	4.97	67.38	18.37		90.0	
10076-CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 48 Mbps)	X	4.93	67.03	18.48	4.15	90.0	± 9.6 %
		Y	5.04	67.21	18.67		90.0	
		Z	5.00	67.24	18.53		90.0	
10077-CAB	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 54 Mbps)	X	4.96	67.11	18.58	4.30	90.0	± 9.6 %
		Y	5.06	67.28	18.77		90.0	
		Z	5.04	67.33	18.64		90.0	



EX3DV4- SN:3759

December 15, 2017

10081-CAB	CDMA2000 (1xRTT, RC3)	X	0.53	61.78	8.60	0.00	150.0	± 9.6 %
		Y	0.71	64.03	11.02		150.0	
		Z	0.52	61.92	8.65		150.0	
10082-CAB	IS-54 / IS-136 FDD (TDMA/FDM, PI/4-DQPSK, Fullrate)	X	3.64	66.77	6.58	4.77	80.0	± 9.6 %
		Y	0.77	60.00	4.67		80.0	
		Z	0.81	60.00	4.63		80.0	
10090-DAC	GPRS-FDD (TDMA, GMSK, TN 0-4)	X	100.00	110.59	24.63	6.56	60.0	± 9.6 %
		Y	100.00	116.02	27.28		60.0	
		Z	100.00	110.63	25.04		60.0	
10097-CAB	UMTS-FDD (HSDPA)	X	1.61	66.33	14.40	0.00	150.0	± 9.6 %
		Y	1.72	66.87	15.01		150.0	
		Z	1.62	66.63	14.60		150.0	
10098-CAB	UMTS-FDD (HSUPA, Subtest 2)	X	1.57	66.26	14.36	0.00	150.0	± 9.6 %
		Y	1.69	66.81	14.97		150.0	
		Z	1.58	66.56	14.55		150.0	
10099-DAC	EDGE-FDD (TDMA, 8PSK, TN 0-4)	X	8.38	90.33	32.10	9.56	60.0	± 9.6 %
		Y	12.39	100.98	36.50		60.0	
		Z	9.40	91.22	31.88		60.0	
10100-CAD	LTE-FDD (SC-FDMA, 100% RB, 20 MHz, QPSK)	X	2.79	68.83	15.78	0.00	150.0	± 9.6 %
		Y	2.97	69.56	16.19		150.0	
		Z	2.82	69.11	15.92		150.0	
10101-CAD	LTE-FDD (SC-FDMA, 100% RB, 20 MHz, 16-QAM)	X	3.01	66.69	15.35	0.00	150.0	± 9.6 %
		Y	3.15	67.12	15.60		150.0	
		Z	3.02	66.82	15.43		150.0	
10102-CAD	LTE-FDD (SC-FDMA, 100% RB, 20 MHz, 64-QAM)	X	3.13	66.73	15.48	0.00	150.0	± 9.6 %
		Y	3.25	67.12	15.71		150.0	
		Z	3.13	66.85	15.57		150.0	
10103-CAD	LTE-TDD (SC-FDMA, 100% RB, 20 MHz, QPSK)	X	5.88	75.21	20.34	3.98	65.0	± 9.6 %
		Y	6.97	77.87	21.50		65.0	
		Z	6.29	75.72	20.38		65.0	
10104-CAD	LTE-TDD (SC-FDMA, 100% RB, 20 MHz, 16-QAM)	X	5.85	73.04	20.17	3.98	65.0	± 9.6 %
		Y	6.55	74.85	21.04		65.0	
		Z	6.18	73.51	20.24		65.0	
10105-CAD	LTE-TDD (SC-FDMA, 100% RB, 20 MHz, 64-QAM)	X	5.43	71.43	19.75	3.98	65.0	± 9.6 %
		Y	6.19	73.62	20.81		65.0	
		Z	5.82	72.23	19.98		65.0	
10108-CAE	LTE-FDD (SC-FDMA, 100% RB, 10 MHz, QPSK)	X	2.41	68.13	15.58	0.00	150.0	± 9.6 %
		Y	2.59	68.78	15.99		150.0	
		Z	2.44	68.41	15.73		150.0	
10109-CAE	LTE-FDD (SC-FDMA, 100% RB, 10 MHz, 16-QAM)	X	2.66	66.50	15.15	0.00	150.0	± 9.6 %
		Y	2.80	66.92	15.46		150.0	
		Z	2.67	66.65	15.25		150.0	
10110-CAE	LTE-FDD (SC-FDMA, 100% RB, 5 MHz, QPSK)	X	1.92	67.16	14.98	0.00	150.0	± 9.6 %
		Y	2.08	67.83	15.51		150.0	
		Z	1.94	67.46	15.16		150.0	
10111-CAE	LTE-FDD (SC-FDMA, 100% RB, 5 MHz, 16-QAM)	X	2.35	67.19	15.19	0.00	150.0	± 9.6 %
		Y	2.50	67.61	15.63		150.0	
		Z	2.37	67.44	15.36		150.0	



EX3DV4- SN:3759

December 15, 2017

10112-CAE	LTE-FDD (SC-FDMA, 100% RB, 10 MHz, 64-QAM)	X	2.79	66.58	15.25	0.00	150.0	± 9.6 %	
		Y	2.93	66.95	15.54			150.0	
		Z	2.80	66.72	15.35			150.0	
10113-CAE	LTE-FDD (SC-FDMA, 100% RB, 5 MHz, 64-QAM)	X	2.50	67.43	15.39	0.00	150.0	± 9.6 %	
		Y	2.65	67.79	15.79			150.0	
		Z	2.52	67.68	15.55			150.0	
10114-CAC	IEEE 802.11n (HT Greenfield, 13.5 Mbps, BPSK)	X	4.95	66.85	16.21	0.00	150.0	± 9.6 %	
		Y	5.06	67.04	16.27			150.0	
		Z	4.95	66.90	16.25			150.0	
10115-CAC	IEEE 802.11n (HT Greenfield, 81 Mbps, 16-QAM)	X	5.21	66.93	16.27	0.00	150.0	± 9.6 %	
		Y	5.33	67.15	16.34			150.0	
		Z	5.21	66.98	16.30			150.0	
10116-CAC	IEEE 802.11n (HT Greenfield, 135 Mbps, 64-QAM)	X	5.04	67.04	16.23	0.00	150.0	± 9.6 %	
		Y	5.14	67.22	16.29			150.0	
		Z	5.04	67.09	16.27			150.0	
10117-CAC	IEEE 802.11n (HT Mixed, 13.5 Mbps, BPSK)	X	4.92	66.74	16.17	0.00	150.0	± 9.6 %	
		Y	5.02	66.90	16.22			150.0	
		Z	4.92	66.78	16.21			150.0	
10118-CAC	IEEE 802.11n (HT Mixed, 81 Mbps, 16-QAM)	X	5.29	67.15	16.38	0.00	150.0	± 9.6 %	
		Y	5.41	67.35	16.45			150.0	
		Z	5.29	67.20	16.42			150.0	
10119-CAC	IEEE 802.11n (HT Mixed, 135 Mbps, 64-QAM)	X	5.02	67.01	16.23	0.00	150.0	± 9.6 %	
		Y	5.12	67.17	16.28			150.0	
		Z	5.03	67.05	16.27			150.0	
10140-CAD	LTE-FDD (SC-FDMA, 100% RB, 15 MHz, 16-QAM)	X	3.15	66.73	15.39	0.00	150.0	± 9.6 %	
		Y	3.29	67.12	15.63			150.0	
		Z	3.16	66.85	15.47			150.0	
10141-CAD	LTE-FDD (SC-FDMA, 100% RB, 15 MHz, 64-QAM)	X	3.28	66.89	15.60	0.00	150.0	± 9.6 %	
		Y	3.41	67.25	15.81			150.0	
		Z	3.29	67.01	15.69			150.0	
10142-CAD	LTE-FDD (SC-FDMA, 100% RB, 3 MHz, QPSK)	X	1.66	66.78	14.23	0.00	150.0	± 9.6 %	
		Y	1.85	67.64	15.04			150.0	
		Z	1.68	67.14	14.44			150.0	
10143-CAD	LTE-FDD (SC-FDMA, 100% RB, 3 MHz, 16-QAM)	X	2.11	67.26	14.31	0.00	150.0	± 9.6 %	
		Y	2.32	68.10	15.16			150.0	
		Z	2.15	67.60	14.52			150.0	
10144-CAD	LTE-FDD (SC-FDMA, 100% RB, 3 MHz, 64-QAM)	X	1.90	65.04	12.67	0.00	150.0	± 9.6 %	
		Y	2.11	65.93	13.60			150.0	
		Z	1.92	65.23	12.81			150.0	
10145-CAE	LTE-FDD (SC-FDMA, 100% RB, 1.4 MHz, QPSK)	X	0.80	61.27	8.23	0.00	150.0	± 9.6 %	
		Y	1.06	63.61	10.59			150.0	
		Z	0.80	61.38	8.31			150.0	
10146-CAE	LTE-FDD (SC-FDMA, 100% RB, 1.4 MHz, 16-QAM)	X	1.28	62.17	8.51	0.00	150.0	± 9.6 %	
		Y	1.77	65.15	10.79			150.0	
		Z	1.35	62.63	8.87			150.0	
10147-CAE	LTE-FDD (SC-FDMA, 100% RB, 1.4 MHz, 64-QAM)	X	1.38	62.84	8.99	0.00	150.0	± 9.6 %	
		Y	2.03	66.75	11.70			150.0	
		Z	1.47	63.45	9.42			150.0	



EX3DV4- SN:3759

December 15, 2017

10149-CAD	LTE-FDD (SC-FDMA, 50% RB, 20 MHz, 16-QAM)	X	2.67	66.56	15.19	0.00	150.0	± 9.6 %
		Y	2.81	66.98	15.50		150.0	
		Z	2.68	66.72	15.30		150.0	
10150-CAD	LTE-FDD (SC-FDMA, 50% RB, 20 MHz, 64-QAM)	X	2.79	66.63	15.30	0.00	150.0	± 9.6 %
		Y	2.93	67.01	15.58		150.0	
		Z	2.81	66.78	15.40		150.0	
10151-CAD	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, QPSK)	X	6.35	78.26	21.62	3.98	65.0	± 9.6 %
		Y	7.58	81.02	22.83		65.0	
		Z	6.73	78.52	21.54		65.0	
10152-CAD	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, 16-QAM)	X	5.38	73.00	19.79	3.98	65.0	± 9.6 %
		Y	6.11	74.99	20.82		65.0	
		Z	5.70	73.46	19.84		65.0	
10153-CAD	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, 64-QAM)	X	5.78	74.16	20.68	3.98	65.0	± 9.6 %
		Y	6.51	76.00	21.62		65.0	
		Z	6.14	74.67	20.75		65.0	
10154-CAE	LTE-FDD (SC-FDMA, 50% RB, 10 MHz, QPSK)	X	1.95	67.52	15.22	0.00	150.0	± 9.6 %
		Y	2.13	68.20	15.75		150.0	
		Z	1.98	67.86	15.41		150.0	
10155-CAE	LTE-FDD (SC-FDMA, 50% RB, 10 MHz, 16-QAM)	X	2.35	67.22	15.22	0.00	150.0	± 9.6 %
		Y	2.50	67.63	15.65		150.0	
		Z	2.37	67.47	15.38		150.0	
10156-CAE	LTE-FDD (SC-FDMA, 50% RB, 5 MHz, QPSK)	X	1.47	66.38	13.62	0.00	150.0	± 9.6 %
		Y	1.68	67.54	14.70		150.0	
		Z	1.50	66.78	13.86		150.0	
10157-CAE	LTE-FDD (SC-FDMA, 50% RB, 5 MHz, 16-QAM)	X	1.69	65.05	12.29	0.00	150.0	± 9.6 %
		Y	1.93	66.27	13.50		150.0	
		Z	1.71	65.29	12.45		150.0	
10158-CAE	LTE-FDD (SC-FDMA, 50% RB, 10 MHz, 64-QAM)	X	2.51	67.50	15.44	0.00	150.0	± 9.6 %
		Y	2.66	67.86	15.84		150.0	
		Z	2.53	67.75	15.60		150.0	
10159-CAE	LTE-FDD (SC-FDMA, 50% RB, 5 MHz, 64-QAM)	X	1.77	65.37	12.51	0.00	150.0	± 9.6 %
		Y	2.03	66.70	13.76		150.0	
		Z	1.79	65.65	12.69		150.0	
10160-CAD	LTE-FDD (SC-FDMA, 50% RB, 15 MHz, QPSK)	X	2.49	67.67	15.54	0.00	150.0	± 9.6 %
		Y	2.62	68.01	15.83		150.0	
		Z	2.51	67.90	15.68		150.0	
10161-CAD	LTE-FDD (SC-FDMA, 50% RB, 15 MHz, 16-QAM)	X	2.68	66.56	15.17	0.00	150.0	± 9.6 %
		Y	2.83	66.94	15.49		150.0	
		Z	2.70	66.71	15.28		150.0	
10162-CAD	LTE-FDD (SC-FDMA, 50% RB, 15 MHz, 64-QAM)	X	2.79	66.77	15.32	0.00	150.0	± 9.6 %
		Y	2.94	67.11	15.61		150.0	
		Z	2.81	66.92	15.43		150.0	
10166-CAE	LTE-FDD (SC-FDMA, 50% RB, 1.4 MHz, QPSK)	X	3.35	69.05	18.82	3.01	150.0	± 9.6 %
		Y	3.55	69.60	19.05		150.0	
		Z	3.42	69.49	19.09		150.0	
10167-CAE	LTE-FDD (SC-FDMA, 50% RB, 1.4 MHz, 16-QAM)	X	4.02	71.54	19.06	3.01	150.0	± 9.6 %
		Y	4.43	72.79	19.60		150.0	
		Z	4.17	72.13	19.36		150.0	



EX3DV4-- SN:3759

December 15, 2017

10168-CAE	LTE-FDD (SC-FDMA, 50% RB, 1.4 MHz, 64-QAM)	X	4.54	74.20	20.62	3.01	150.0	± 9.6 %
		Y	4.98	75.29	21.02		150.0	
		Z	4.76	75.03	21.02		150.0	
10169-CAD	LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK)	X	2.76	67.82	18.24	3.01	150.0	± 9.6 %
		Y	2.98	69.21	18.88		150.0	
		Z	2.85	68.40	18.57		150.0	
10170-CAD	LTE-FDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM)	X	3.64	73.02	20.34	3.01	150.0	± 9.6 %
		Y	4.26	75.86	21.46		150.0	
		Z	3.89	74.12	20.86		150.0	
10171-AAD	LTE-FDD (SC-FDMA, 1 RB, 20 MHz, 64-QAM)	X	3.00	68.98	17.51	3.01	150.0	± 9.6 %
		Y	3.42	71.30	18.53		150.0	
		Z	3.14	69.62	17.83		150.0	
10172-CAD	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK)	X	5.94	85.46	26.73	6.02	65.0	± 9.6 %
		Y	11.21	98.40	31.41		65.0	
		Z	7.76	89.35	27.77		65.0	
10173-CAD	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM)	X	12.18	95.27	28.11	6.02	65.0	± 9.6 %
		Y	41.92	117.86	34.72		65.0	
		Z	14.14	96.40	28.17		65.0	
10174-CAD	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 64-QAM)	X	8.79	88.48	25.35	6.02	65.0	± 9.6 %
		Y	24.68	106.58	31.03		65.0	
		Z	8.87	87.40	24.76		65.0	
10175-CAE	LTE-FDD (SC-FDMA, 1 RB, 10 MHz, QPSK)	X	2.72	67.51	17.98	3.01	150.0	± 9.6 %
		Y	2.94	68.89	18.63		150.0	
		Z	2.81	68.06	18.29		150.0	
10176-CAE	LTE-FDD (SC-FDMA, 1 RB, 10 MHz, 16-QAM)	X	3.65	73.04	20.35	3.01	150.0	± 9.6 %
		Y	4.26	75.89	21.48		150.0	
		Z	3.90	74.15	20.87		150.0	
10177-CAG	LTE-FDD (SC-FDMA, 1 RB, 5 MHz, QPSK)	X	2.74	67.65	18.07	3.01	150.0	± 9.6 %
		Y	2.97	69.04	18.72		150.0	
		Z	2.83	68.22	18.39		150.0	
10178-CAE	LTE-FDD (SC-FDMA, 1 RB, 5 MHz, 16-QAM)	X	3.62	72.86	20.24	3.01	150.0	± 9.6 %
		Y	4.22	75.66	21.36		150.0	
		Z	3.86	73.93	20.75		150.0	
10179-CAE	LTE-FDD (SC-FDMA, 1 RB, 10 MHz, 64-QAM)	X	3.28	70.83	18.77	3.01	150.0	± 9.6 %
		Y	3.79	73.43	19.85		150.0	
		Z	3.47	71.66	19.17		150.0	
10180-CAE	LTE-FDD (SC-FDMA, 1 RB, 5 MHz, 64-QAM)	X	3.00	68.92	17.47	3.01	150.0	± 9.6 %
		Y	3.41	71.23	18.48		150.0	
		Z	3.14	69.56	17.78		150.0	
10181-CAD	LTE-FDD (SC-FDMA, 1 RB, 15 MHz, QPSK)	X	2.74	67.63	18.06	3.01	150.0	± 9.6 %
		Y	2.96	69.02	18.71		150.0	
		Z	2.83	68.20	18.38		150.0	
10182-CAD	LTE-FDD (SC-FDMA, 1 RB, 15 MHz, 16-QAM)	X	3.61	72.84	20.23	3.01	150.0	± 9.6 %
		Y	4.21	75.63	21.34		150.0	
		Z	3.86	73.90	20.74		150.0	
10183-AAC	LTE-FDD (SC-FDMA, 1 RB, 15 MHz, 64-QAM)	X	2.99	68.90	17.46	3.01	150.0	± 9.6 %
		Y	3.40	71.20	18.47		150.0	
		Z	3.13	69.53	17.77		150.0	



EX3DV4- SN:3759

December 15, 2017

10184-CAD	LTE-FDD (SC-FDMA, 1 RB, 3 MHz, QPSK)	X	2.75	67.67	18.09	3.01	150.0	± 9.6 %
		Y	2.97	69.07	18.73		150.0	
		Z	2.84	68.24	18.41		150.0	
10185-CAD	LTE-FDD (SC-FDMA, 1 RB, 3 MHz, 16-QAM)	X	3.63	72.91	20.27	3.01	150.0	± 9.6 %
		Y	4.23	75.71	21.38		150.0	
		Z	3.87	73.98	20.78		150.0	
10186-AAD	LTE-FDD (SC-FDMA, 1 RB, 3 MHz, 64-QAM)	X	3.00	68.96	17.49	3.01	150.0	± 9.6 %
		Y	3.42	71.27	18.50		150.0	
		Z	3.15	69.60	17.80		150.0	
10187-CAE	LTE-FDD (SC-FDMA, 1 RB, 1.4 MHz, QPSK)	X	2.76	67.74	18.16	3.01	150.0	± 9.6 %
		Y	2.98	69.13	18.80		150.0	
		Z	2.85	68.31	18.48		150.0	
10188-CAE	LTE-FDD (SC-FDMA, 1 RB, 1.4 MHz, 16-QAM)	X	3.74	73.54	20.65	3.01	150.0	± 9.6 %
		Y	4.38	76.43	21.78		150.0	
		Z	4.01	74.70	21.19		150.0	
10189-AAE	LTE-FDD (SC-FDMA, 1 RB, 1.4 MHz, 64-QAM)	X	3.06	69.34	17.75	3.01	150.0	± 9.6 %
		Y	3.50	71.73	18.79		150.0	
		Z	3.21	70.02	18.09		150.0	
10193-CAC	IEEE 802.11n (HT Greenfield, 6.5 Mbps, BPSK)	X	4.33	66.30	15.85	0.00	150.0	± 9.6 %
		Y	4.45	66.46	15.96		150.0	
		Z	4.33	66.34	15.90		150.0	
10194-CAC	IEEE 802.11n (HT Greenfield, 39 Mbps, 16-QAM)	X	4.49	66.58	15.99	0.00	150.0	± 9.6 %
		Y	4.62	66.77	16.08		150.0	
		Z	4.49	66.63	16.03		150.0	
10195-CAC	IEEE 802.11n (HT Greenfield, 65 Mbps, 64-QAM)	X	4.53	66.61	16.01	0.00	150.0	± 9.6 %
		Y	4.66	66.80	16.10		150.0	
		Z	4.53	66.66	16.05		150.0	
10196-CAC	IEEE 802.11n (HT Mixed, 6.5 Mbps, BPSK)	X	4.32	66.33	15.86	0.00	150.0	± 9.6 %
		Y	4.45	66.51	15.97		150.0	
		Z	4.33	66.38	15.90		150.0	
10197-CAC	IEEE 802.11n (HT Mixed, 39 Mbps, 16-QAM)	X	4.50	66.60	16.00	0.00	150.0	± 9.6 %
		Y	4.63	66.79	16.10		150.0	
		Z	4.50	66.64	16.04		150.0	
10198-CAC	IEEE 802.11n (HT Mixed, 65 Mbps, 64-QAM)	X	4.52	66.62	16.02	0.00	150.0	± 9.6 %
		Y	4.66	66.81	16.11		150.0	
		Z	4.53	66.67	16.06		150.0	
10219-CAC	IEEE 802.11n (HT Mixed, 7.2 Mbps, BPSK)	X	4.27	66.34	15.81	0.00	150.0	± 9.6 %
		Y	4.40	66.52	15.93		150.0	
		Z	4.28	66.39	15.86		150.0	
10220-CAC	IEEE 802.11n (HT Mixed, 43.3 Mbps, 16-QAM)	X	4.49	66.56	15.99	0.00	150.0	± 9.6 %
		Y	4.62	66.75	16.09		150.0	
		Z	4.49	66.61	16.03		150.0	
10221-CAC	IEEE 802.11n (HT Mixed, 72.2 Mbps, 64-QAM)	X	4.54	66.56	16.01	0.00	150.0	± 9.6 %
		Y	4.67	66.75	16.10		150.0	
		Z	4.54	66.61	16.05		150.0	
10222-CAC	IEEE 802.11n (HT Mixed, 15 Mbps, BPSK)	X	4.89	66.73	16.16	0.00	150.0	± 9.6 %
		Y	5.00	66.91	16.22		150.0	
		Z	4.90	66.77	16.20		150.0	