

# FCC and ISED Test Report

Sepura Limited  
Tetra Mobile Radio, Model: SCG22

In accordance with FCC 47 CFR Part 15C,  
ISED RSS-247 and ISED RSS-GEN

Prepared for: Sepura Limited  
9000 Cambridge Research Park  
Beach Drive  
Waterbeach  
Cambridge  
CB25 9TL  
United Kingdom



Add value.  
Inspire trust.

FCC ID: XX6SCG2229

IC: 8739A-SCG2229

## COMMERCIAL-IN-CONFIDENCE

Document 75948283-03 Issue 02

### SIGNATURE

NAME	JOB TITLE	RESPONSIBLE FOR	ISSUE DATE
Steve Marshall	Senior Engineer	Authorised Signatory	22 June 2020

Signatures in this approval box have checked this document in line with the requirements of TÜV SÜD document control rules.

### ENGINEERING STATEMENT

The measurements shown in this report were made in accordance with the procedures described on test pages. All reported testing was carried out on a sample equipment to demonstrate limited compliance with FCC 47 CFR Part 15C, ISED RSS-247 and ISED RSS-GEN. The sample tested was found to comply with the requirements defined in the applied rules.

RESPONSIBLE FOR	NAME	DATE	SIGNATURE
Testing	Mehadi Choudhury	22 June 2020	
Testing	Graeme Lawler	22 June 2020	

FCC Accreditation  
90987 Octagon House, Fareham Test Laboratory

ISED Accreditation  
12669A Octagon House, Fareham Test Laboratory

### EXECUTIVE SUMMARY

A sample of this product was tested and found to be compliant with FCC 47 CFR Part 15C: 2019, ISED RSS-247: Issue 2 (02-2017) and ISED RSS-GEN: Issue 5 (04-2018) + A1 (03-2019) for the tests detailed in section 1.3.



#### DISCLAIMER AND COPYRIGHT

This non-binding report has been prepared by TÜV SÜD with all reasonable skill and care. The document is confidential to the potential Client and TÜV SÜD. No part of this document may be reproduced without the prior written approval of TÜV SÜD. © 2020 TÜV SÜD. This report relates only to the actual item/items tested.

#### ACCREDITATION

Our UKAS Accreditation does not cover opinions and interpretations and any expressed are outside the scope of our UKAS Accreditation. Results of tests not covered by our UKAS Accreditation Schedule are marked NUA (Not UKAS Accredited).

TÜV SÜD  
is a trading name of TÜV SÜD Ltd  
Registered in Scotland at East Kilbride,  
Glasgow G75 0QF, United Kingdom  
Registered number: SC215164

TÜV SÜD Ltd is a  
TÜV SÜD Group Company

Phone: +44 (0) 1489 558100  
Fax: +44 (0) 1489 558101  
[www.tuv-sud.co.uk](http://www.tuv-sud.co.uk)

TÜV SÜD  
Octagon House  
Concorde Way  
Fareham  
Hampshire PO15 5RL  
United Kingdom



## Contents

<b>1</b>	<b>Report Summary .....</b>	<b>2</b>
1.1	Report Modification Record.....	2
1.2	Introduction.....	2
1.3	Brief Summary of Results .....	3
1.4	Application Form .....	4
1.5	Product Information .....	8
1.6	Deviations from the Standard.....	8
1.7	EUT Modification Record .....	8
1.8	Test Location .....	9
<b>2</b>	<b>Test Details .....</b>	<b>10</b>
2.1	Power Spectral Density .....	10
2.2	Emission Bandwidth .....	14
2.3	Authorised Band Edges .....	17
2.4	Restricted Band Edges.....	19
2.5	Spurious Radiated Emissions .....	23
2.6	Maximum Conducted Output Power .....	46
<b>3</b>	<b>Measurement Uncertainty .....</b>	<b>48</b>



# 1 Report Summary

## 1.1 Report Modification Record

Alterations and additions to this report will be issued to the holders of each copy in the form of a complete document.

Issue	Description of Change	Date of Issue
1	First Issue	06 May 2020
2	To include new results after re-testing was required as the correct matching components were fitted to Bluetooth/Wi-Fi RF circuit.	22 June 2020

**Table 1**

## 1.2 Introduction

Applicant	Sepura Limited
Manufacturer	Sepura Limited
Model Number(s)	SCG22
Serial Number(s)	1PR002007GPH5XV 1PR002007GPH5XU
Hardware Version(s)	Pre-production PLX-89015561_Rev49b
Software Version(s)	1785 004 10138
Number of Samples Tested	2
Test Specification/Issue/Date	FCC 47 CFR Part 15C: 2019 ISED RSS-247: Issue 2 (02-2017) ISED RSS-GEN: Issue 5 (04-2018) + A1 (03-2019)
Order Number	PLC-PO015398-1
Date	12-February-2020
Date of Receipt of EUT	10-March-2020
Start of Test	29-March-2020
Finish of Test	09-June-2020
Name of Engineer(s)	Mehadi Choudhury and Graeme Lawler
Related Document(s)	ANSI C63.10 (2013)



### 1.3 Brief Summary of Results

A brief summary of the tests carried out in accordance with FCC 47 CFR Part 15C, ISED RSS-247 and ISED RSS-GEN is shown below.

Section	Specification Clause			Test Description	Result	Comments/Base Standard
	Part 15C	RSS-247	RSS-GEN			
Configuration and Mode: Vehicle RSM - Bluetooth Low Energy						
2.1	15.247 (e)	5.2	6.12	Power Spectral Density	Pass	ANSI C63.10 (2013)
2.2	15.247 (a)(2)	5.2	6.7	Emission Bandwidth	Pass	ANSI C63.10 (2013)
2.3	15.247 (d)	5.5	-	Authorised Band Edges	Pass	ANSI C63.10 (2013)
2.4	15.205	-	8.10	Restricted Band Edges	Pass	ANSI C63.10 (2013)
2.5	15.247 (d) and 15.205	5.5	6.13	Spurious Radiated Emissions	Pass	ANSI C63.10 (2013)
2.6	15.247 (b)	5.4	6.12	Maximum Conducted Output Power	Pass	ANSI C63.10 (2013)

**Table 2**



## 1.4 Application Form

### Equipment Description

Technical Description: <i>(Please provide a brief description of the intended use of the equipment)</i>	TETRA mobile radio for use within cars, trucks, mobile and fixed control rooms, motorcycles, boats and trains, with Wi-Fi, Bluetooth, GPS and Ethernet functions
Manufacturer:	Sepura
Model:	SCG22
Part Number:	SCG2229
Hardware Version:	Pre-production PLX-89015561_Rev49b
Software Version:	1785 004 10138
FCC ID (if applicable)	XX6SCG2229
IC ID (if applicable)	8739A-SCG2229

### Intentional Radiators

Technology	TETRA	Bluetooth LE	Bluetooth Classic / EDR	Wi-Fi 802.11b, g	Wi-Fi 802.11n	Wi-Fi 802.11n
Frequency Band (MHz)	380 - 470 MHz	2402 - 2480 MHz	2402 - 2480 MHz	2412 - 2462 MHz	2412 - 2462 MHz	2422 - 2452 MHz
Conducted Declared Output Power (dBm)	40	7.4	7.382	16.5	16.5	16.5
Antenna Gain (dBi)	2	Element 3: 2 dBi	Element 3: 2 dBi	Element 3: 2 dBi	Element 3: 2 dBi	Element 3: 2 dBi
Supported Bandwidth(s) (MHz)	0.025 / 0.02	1	1	20	20	40
Modulation Scheme(s)	$\pi/4$ DQPSK	GFSK	GFSK $\pi/4$ DQPSK 8DPSK	802.11b: CCK, DBPSK, DQPSK 802.11g: BPSK, QPSK, 16QAM, 64QAM	BPSK, QPSK, 16QAM, 64QAM	BPSK, QPSK, 16QAM, 64QAM
ITU Emission Designator	22K0DXW 20K0DXW	1181F1D	1M01F1D 1M01G1D	19M7G1D	19M7D1D	36M8D1D
Bottom Frequency (MHz)	380 MHz	2402 MHz	2402 MHz	2412 MHz	2412 MHz	2422 MHz
Middle Frequency (MHz)	425 MHz	2441 MHz	2441 MHz	2437 MHz	2437 MHz	2437 MHz
Top Frequency (MHz)	470 MHz	2480 MHz	2480 MHz	2462 MHz	2462 MHz	2452 MHz



Un-intentional Radiators

Highest frequency generated or used in the device or on which the device operates or tunes	2480 MHz
Lowest frequency generated or used in the device or on which the device operates or tunes	32.768 kHz
Class A Digital Device (Use in commercial, industrial or business environment) <input checked="" type="checkbox"/>	
Class B Digital Device (Use in residential environment only) <input type="checkbox"/>	

AC Power Source

AC supply frequency:		Hz
Voltage		V
Max current:		A
Single Phase <input type="checkbox"/> Three Phase <input type="checkbox"/>		

DC Power Source

Nominal voltage:	12	V
Extreme upper voltage:	15.6	V
Extreme lower voltage:	10.8	V
Max current:	5	A

Battery Power Source None

Voltage:		V
End-point voltage:		V (Point at which the battery will terminate)
Alkaline <input type="checkbox"/> Leclanche <input type="checkbox"/> Lithium <input type="checkbox"/> Nickel Cadmium <input type="checkbox"/> Lead Acid* <input type="checkbox"/> *(Vehicle regulated)		
Other <input type="checkbox"/>	Please detail:	

Charging

Can the EUT transmit whilst being charged	Yes <input type="checkbox"/> No <input type="checkbox"/>
---	--

Temperature

Minimum temperature:	-20	°C
Maximum temperature:	+60	°C

Antenna Characteristics

Antenna connector <input checked="" type="checkbox"/>	State impedance	50	Ohm
Temporary antenna connector <input type="checkbox"/>	State impedance		Ohm
Integral antenna <input type="checkbox"/>	Type:		Gain
External antenna <input checked="" type="checkbox"/>	Type:		Gain
For external antenna only: Standard Antenna Jack <input checked="" type="checkbox"/> If yes, describe how user is prohibited from changing antenna (if not professional installed): Equipment is only ever professionally installed <input checked="" type="checkbox"/>			



Non-standard Antenna Jack

Ancillaries (if applicable)

Manufacturer:	Sepura	Part Number:	GPSB4
Model:	GPSB4 Vehicle Roof Antenna	Country of Origin:	Unknown
Manufacturer:	Sepura	Part Number:	AFB-TET
Model:	AFB-VAR 380-430 MHz antenna	Country of Origin:	Unknown
Manufacturer:	Sepura	Part Number:	AFB-UT
Model:	AFB-VAR 406-472 MHz antenna	Country of Origin:	Unknown
Manufacturer:	Sepura	Part Number:	300-02012 rev001
Model:	Extended SCG Loudspeaker / IO USB Host lead	Country of Origin:	Unknown
Manufacturer:	Sepura	Part Number:	300-02014 rev001
Model:	Extended SCG Expansion Board Loudspeaker / 8 GPIO lead	Country of Origin:	Unknown
Manufacturer:	Sepura	Part Number:	Netgear GS105 ProSAFE Gigabit Switch
Model:	Netgear GS105 ProSAFE Gigabit Switch	Country of Origin:	Unknown
Manufacturer:	Sepura	Part Number:	300-02010
Model:	SCG Power/ignition Lead	Country of Origin:	Unknown
Manufacturer:	Sepura	Part Number:	300-00069
Model:	Mobile Remote Cable 5.0M	Country of Origin:	Unknown
Manufacturer:	Sepura	Part Number:	300-00670
Model:	HBC Interface and Hands-free Box	Country of Origin:	Unknown
Manufacturer:	Sepura	Part Number:	300-00079
Model:	Remote Microphone And Switch Set	Country of Origin:	Unknown
Manufacturer:	Sepura	Part Number:	300-00292
Model:	Remote Microphone (Handsfree Kit) 3m	Country of Origin:	Unknown
Manufacturer:	Sepura	Part Number:	300-01801
Model:	Handset Based Console (HBC3)	Country of Origin:	Unknown
Manufacturer:	Sepura	Part Number:	300-00082
Model:	Detachable Loudspeaker extension Cable	Country of Origin:	Unknown
Manufacturer:	Sepura	Part Number:	300-00062
Model:	Fist microphone	Country of Origin:	Unknown
Manufacturer:	Sepura	Part Number:	300-01808
Model:	SCC3 (colour console)	Country of Origin:	Unknown
Manufacturer:	Sepura	Part Number:	300-01961
Model:	CC VAC RSM (Long Cable)	Country of Origin:	Unknown
Manufacturer:	Sepura	Part Number:	300-00719
Model:	Loudspeaker	Country of Origin:	Unknown
Manufacturer:	Sepura	Part Number:	300-01837
Model:	Loudspeaker	Country of Origin:	Unknown



I hereby declare that the information supplied is correct and complete.

Name: Chris Beecham

Position held: Conformance Engineer

Date: 10 March 2020





**1.5 Product Information**

**1.5.1 Technical Description**

TETRA mobile radio for use within cars, trucks, mobile and fixed control rooms, motorcycles, boats and trains, with Wi-Fi, Bluetooth, GPS and Ethernet functions.

**1.6 Deviations from the Standard**

No deviations from the applicable test standard were made during testing.

**1.7 EUT Modification Record**

The table below details modifications made to the EUT during the test programme.

The modifications incorporated during each test are recorded on the appropriate test pages.

Modification State	Description of Modification still fitted to EUT	Modification Fitted By	Date Modification Fitted
Model: SCG22, Serial Number: 1PR002007GPH5XV			
0	As supplied by the customer	Not Applicable	Not Applicable
1	The correct matching components were fitted to the Bluetooth/Wi-Fi RF circuit. New hardware version: PLX-89015561_Rev49b	Manufacturer	June-2020
Model: SCG22, Serial Number: 1PR002007GPH5XU			
0	As supplied by the customer	Not Applicable	Not Applicable
1	The correct matching components were fitted to the Bluetooth/Wi-Fi RF circuit. New hardware version: PLX-89015561_Rev49b	Manufacturer	June-2020

**Table 3**



## 1.8 Test Location

TÜV SÜD conducted the following tests at our Fareham Test Laboratory.

Test Name	Name of Engineer(s)	Accreditation
Configuration and Mode: Vehicle RSM - Bluetooth Low Energy		
Power Spectral Density	Mehadi Choudhury	UKAS
Emission Bandwidth	Mehadi Choudhury	UKAS
Authorised Band Edges	Graeme Lawler	UKAS
Restricted Band Edges	Graeme Lawler	UKAS
Spurious Radiated Emissions	Graeme Lawler	UKAS
Maximum Conducted Output Power	Mehadi Choudhury	UKAS

**Table 4**

Office Address:

Octagon House  
Concorde Way  
Segensworth North  
Fareham  
Hampshire  
PO15 5RL  
United Kingdom



## 2 Test Details

### 2.1 Power Spectral Density

#### 2.1.1 Specification Reference

FCC 47 CFR Part 15C, Clause 15.247 (e)  
ISED RSS-247, Clause 5.2  
ISED RSS-GEN, Clause 6.12

#### 2.1.2 Equipment Under Test and Modification State

SCG22, S/N: 1PR002007GPH5XU - Modification State 1

#### 2.1.3 Date of Test

09-June-2020

#### 2.1.4 Test Method

This test was performed in accordance with ANSI C63.10, clause 11.10.2.

#### 2.1.5 Environmental Conditions

Ambient Temperature 21.5 °C  
Relative Humidity 46.4 %

#### 2.1.6 Test Results

Vehicle RSM - Bluetooth Low Energy

Frequency (MHz)	Power Spectral Density (dBm)	Measurement Bandwidth (kHz)
2402	3.94	51
2440	4.07	51
2480	4.24	51

**Table 5**

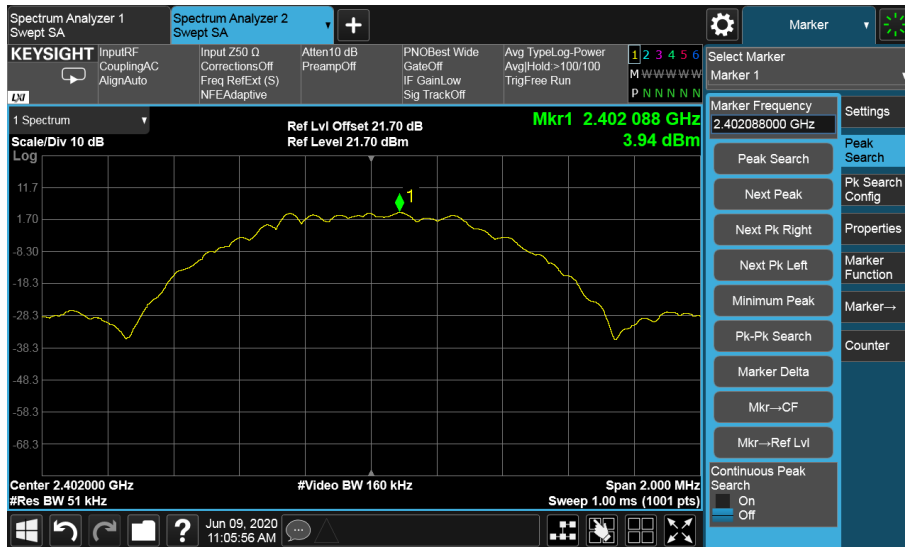


Figure 1 – 2402 MHz

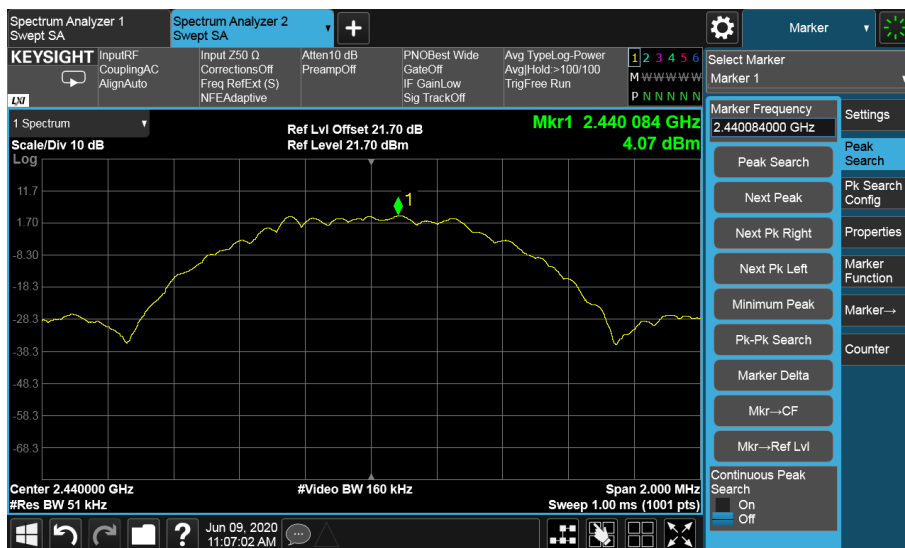


Figure 2 – 2440 MHz

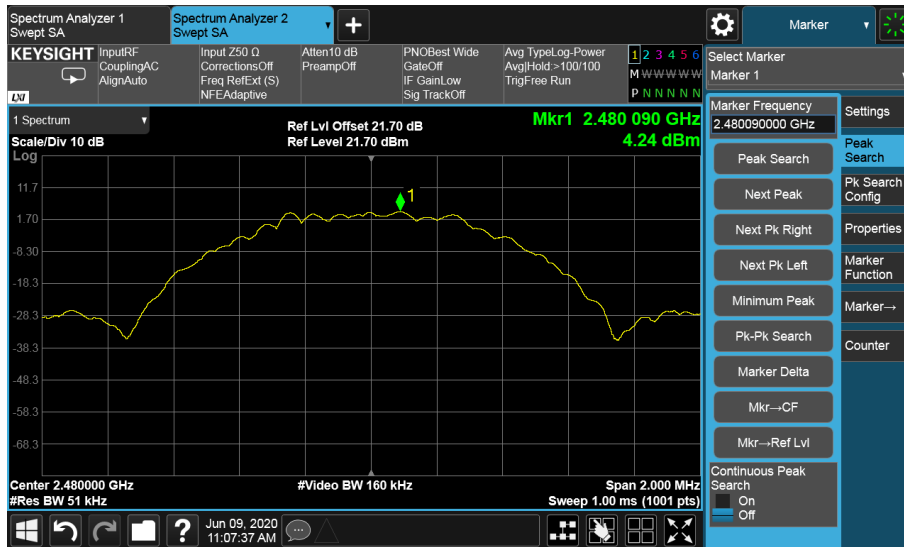


Figure 3 – 2480 MHz

FCC 47 CFR Part 15, Limit Clause 15.247 (e)

The power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

ISED RSS-247, Limit Clause 5.2(b)

The transmitter power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission



### 2.1.7 Test Location and Test Equipment Used

This test was carried out in RF Laboratory 1.

Instrument	Manufacturer	Type No	TE No	Calibration Period (months)	Calibration Due
Hygrometer	Rotronic	I-1000	3220	12	25-Sep-2020
Network Analyser	Rohde & Schwarz	ZVA 40	3548	12	11-Dec-2020
Calibration Unit	Rohde & Schwarz	ZV-Z54	4368	12	28-Nov-2020
Frequency Standard	Spectracom	SecureSync 1200-0408-0601	4393	6	08-Nov-2020
Attenuator (20dB, 100W)	Weinschel	48-20-43	4870	12	18-Jul-2020
EXA	Keysight Technologies	N9010B	4968	24	23-Dec-2021
Cable (18 GHz)	Rosenberger	LU7-071-2000	5108	12	06-Oct-2020

**Table 6**



**2.2 Emission Bandwidth**

**2.2.1 Specification Reference**

FCC 47 CFR Part 15C, Clause 15.247 (a)(2)  
ISED RSS-247, Clause 5.2  
ISED RSS-GEN, Clause 6.7

**2.2.2 Equipment Under Test and Modification State**

SCG22, S/N: 1PR002007GPH5XU - Modification State 0

**2.2.3 Date of Test**

01-April-2020

**2.2.4 Test Method**

This test was performed in accordance with ANSI C63.10, clause 11.8.2.

**2.2.5 Environmental Conditions**

Ambient Temperature 25.9 °C  
Relative Humidity 18.0 %

**2.2.6 Test Results**

Vehicle RSM - Bluetooth Low Energy

Frequency (MHz)	99 % Occupied Bandwidth (kHz)	6 dB Bandwidth (kHz)
2402	1039.7	717.8
2440	1038.7	712.3
2480	1043.8	721.6

**Table 7**

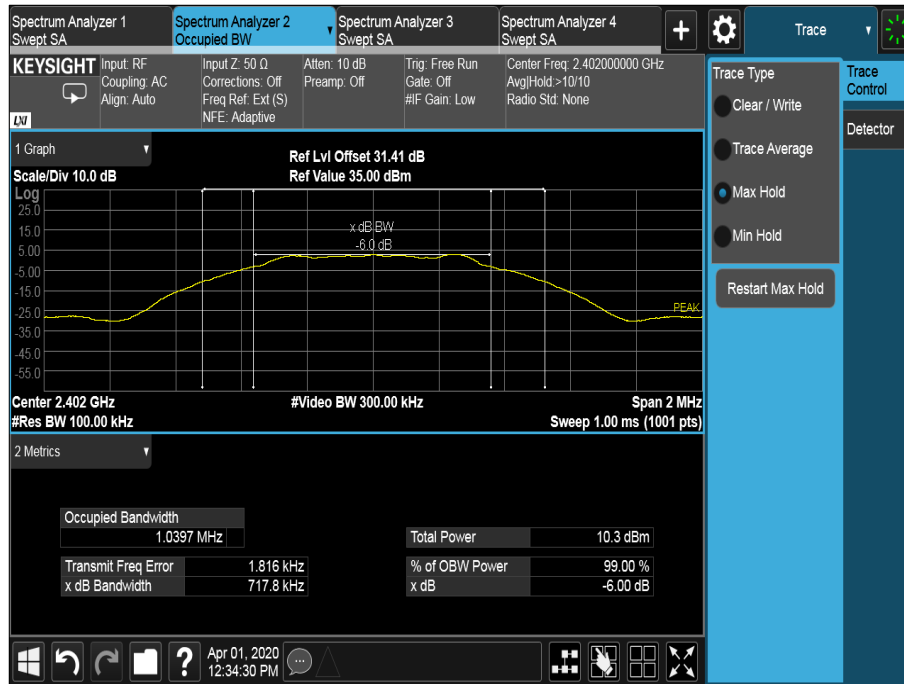


Figure 4 - 2402 MHz

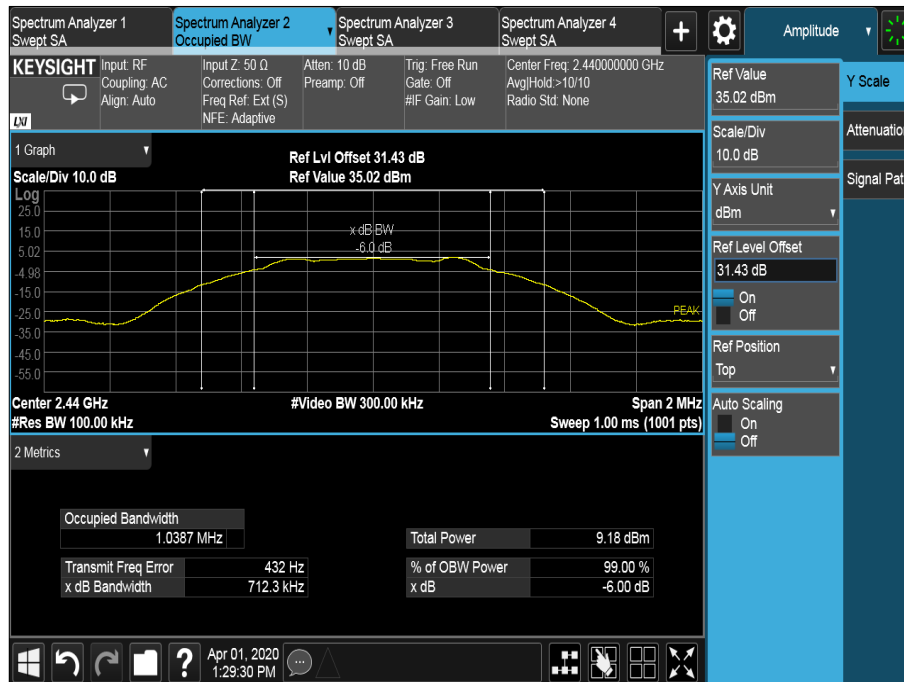


Figure 5 - 2440 MHz



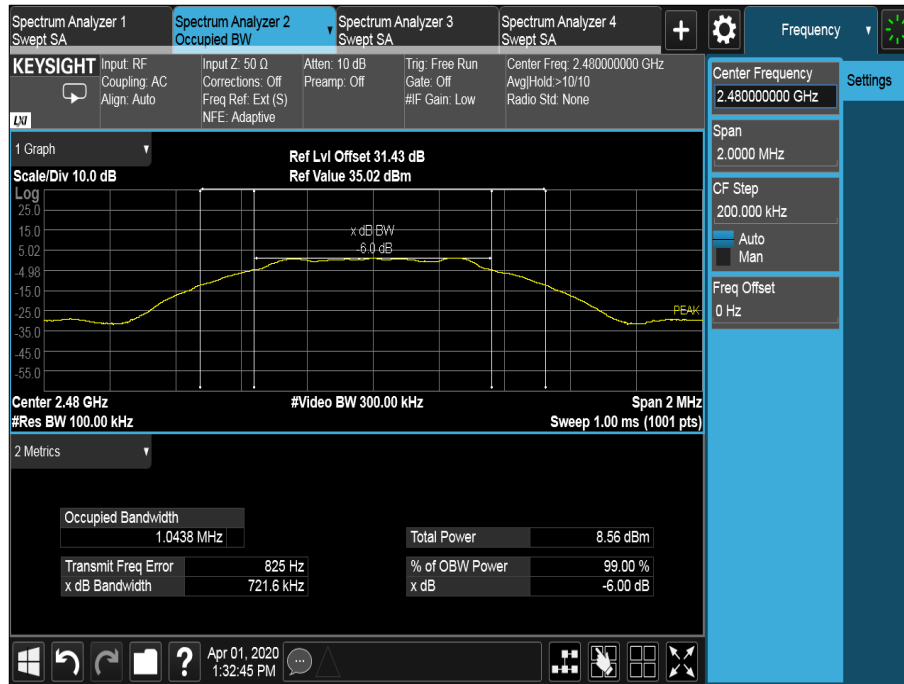


Figure 6 - 2480 MHz

FCC 47 CFR Part 15, Limit Clause 15.247(a)(2) and ISED RSS-247, Clause 5.2(a)

The minimum 6 dB Bandwidth shall be at least 500 kHz.

**2.2.7 Test Location and Test Equipment Used**

This test was carried out in RF Laboratory 1.

Instrument	Manufacturer	Type No	TE No	Calibration Period (months)	Calibration Due
Dual Power Supply Unit	Hewlett Packard	6253A	271	-	O/P Mon
Multimeter	Iso-tech	IDM101	2424	12	12-Dec-2020
Hygrometer	Rotronic	I-1000	3220	12	25-Sep-2020
Frequency Standard	Spectracom	SecureSync 1200-0408-0601	4393	6	16-Apr-2020
30dB Attenuator	Narda	766-30	4783	12	24-Mar-2021
EXA	Keysight Technologies	N9010B	4969	24	03-Feb-2022
Cable (40 GHz)	Rosenberger	LU1-001-1000	5022	12	12-Nov-2020
Cable (18 GHz)	Rosenberger	LU7-071-2000	5108	12	06-Oct-2020
Electronic Calibration Module	Keysight Technologies	85093C	5188	12	21-May-2020

Table 8

O/P Mon – Output Monitored using calibrated equipment



**2.3 Authorised Band Edges**

**2.3.1 Specification Reference**

FCC 47 CFR Part 15C, Clause 15.247 (d)  
 ISSED RSS-247, Clause 5.5

**2.3.2 Equipment Under Test and Modification State**

SCG22, S/N: 1PR002007GPH5XV - Modification State 1

**2.3.3 Date of Test**

08-June-2020

**2.3.4 Test Method**

The test was performed in accordance with ANSI C63.10, clause 6.10.4.

**2.3.5 Environmental Conditions**


Ambient Temperature 20.7 °C  
 Relative Humidity 46.6 %

**2.3.6 Test Results**

Vehicle RSM - Bluetooth Low Energy

Modulation	Frequency (MHz)	Band Edge Frequency (MHz)	Level (dBc)
GFSK	2402	2400	-58.76

**Table 9**

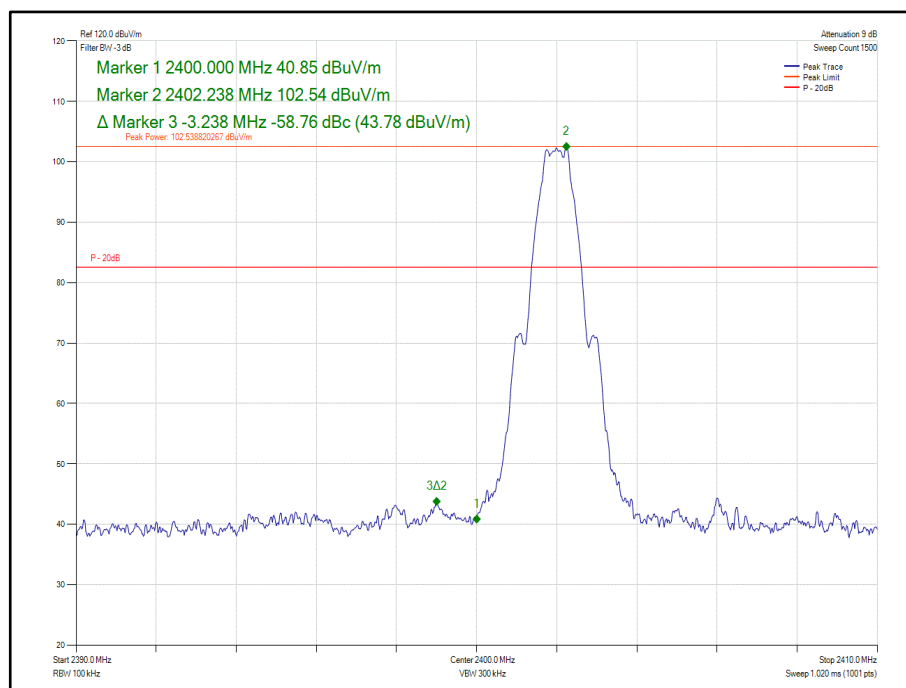

**Figure 7 – GFSK, 2402 MHz - Measured Frequency 2400 MHz**



FCC 47 CFR Part 15, Limit Clause 15.247 (d)

20 dB below the fundamental measured in a 100 kHz bandwidth using a peak detector. If the transmitter complies with the conducted power limits, based on the use of RMS averaging over a time interval, the attenuation required shall be 30 dB below the fundamental instead of 20 dB.

ISED RSS-247, Limit Clause 5.5

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, as permitted under Section 5.4(4), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general field strength limits specified in RSS-Gen is not required.

**2.3.7 Test Location and Test Equipment Used**

This test was carried out in EMC Chamber 5.

Instrument	Manufacturer	Type No	TE No	Calibration Period (months)	Calibration Due
Screened Room (5)	Rainford	Rainford	1545	36	23-Jan-2021
Turntable Controller	Inn-Co GmbH	CO 1000	1606	-	TU
DC Power Supply	Hewlett Packard	6269B	1909	-	TU
Multimeter	Iso-tech	IDM 101	2118	12	07-Feb-2021
Mast Controller	Maturo GmbH	NCD	4810	-	TU
Tilt Antenna Mast	Maturo GmbH	TAM 4.0-P	4811	-	TU
Double Ridge Broadband Horn Antenna	Schwarzbeck	BBHA 9120 B	4848	12	10-Mar-2021
EmX Emissions Software	TUV SUD	EmX	5125	-	Software
Thermo-Hygro-Barometer	PCE Instruments	OCE-THB-40	5470	12	16-Mar-2021
2m SMA Cable	Junkosha	MWX221-02000AMSAMS/A	5517	12	01-Apr-2021
8m N-Type Cable	Junkosha	MWX221-08000NMSNMS/B	5520	12	24-Mar-2021
EMI Test Receiver	Rohde & Schwarz	ESW44	5527	12	06-Feb-2021

**Table 10**

TU - Traceability Unscheduled



**2.4 Restricted Band Edges**

**2.4.1 Specification Reference**

FCC 47 CFR Part 15C, Clause 15.205  
ISED RSS-GEN, Clause 8.10

**2.4.2 Equipment Under Test and Modification State**

SCG22, S/N: 1PR002007GPH5XV - Modification State 1

**2.4.3 Date of Test**

08-June-2020

**2.4.4 Test Method**

This test was performed in accordance with ANSI C63.10, clause 6.10.5.

Plots for average measurements were taken in accordance with ANSI C63.10, clause 4.1.4.2.5. These are shown for information purposes and were used to determine the worst-case measurement point. Final average measurements were then taken in accordance with ANSI C63.10, clause 4.1.4.2.2 to obtain the measurement result recorded in the test results tables. The following conversion can be applied to convert from dBµV/m to µV/m:  
 $10^{(\text{Field Strength in dB}\mu\text{V/m}/20)}$ .

The measured duty cycle was found to be less than 98%, so a duty cycle correction factor was added to the average measurements.

**2.4.5 Environmental Conditions**

Ambient Temperature 20.7 °C  
Relative Humidity 46.6 %

**2.4.6 Test Results**

Vehicle RSM - Bluetooth Low Energy

Modulation	Frequency (MHz)	Band Edge Frequency (MHz)	Peak Level (dBµV/m)	Average Level (dBµV/m)
GFSK	2402	2390.0	51.82	39.99
GFSK	2480	2483.5	55.78	45.23

**Table 11**

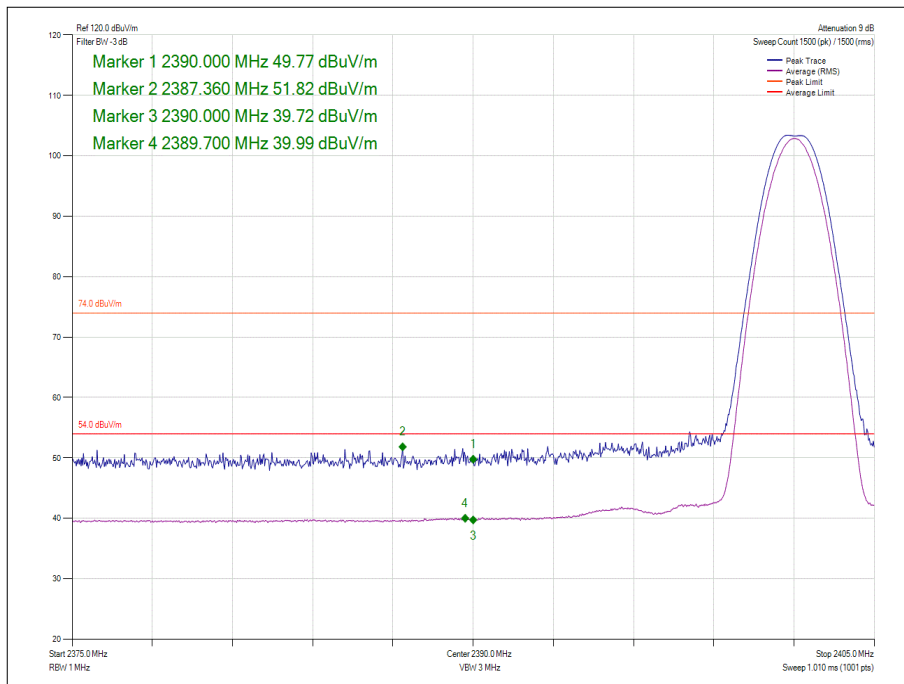


Figure 8 - GFSK - 2402 MHz - Band Edge Frequency 2390.0 MHz

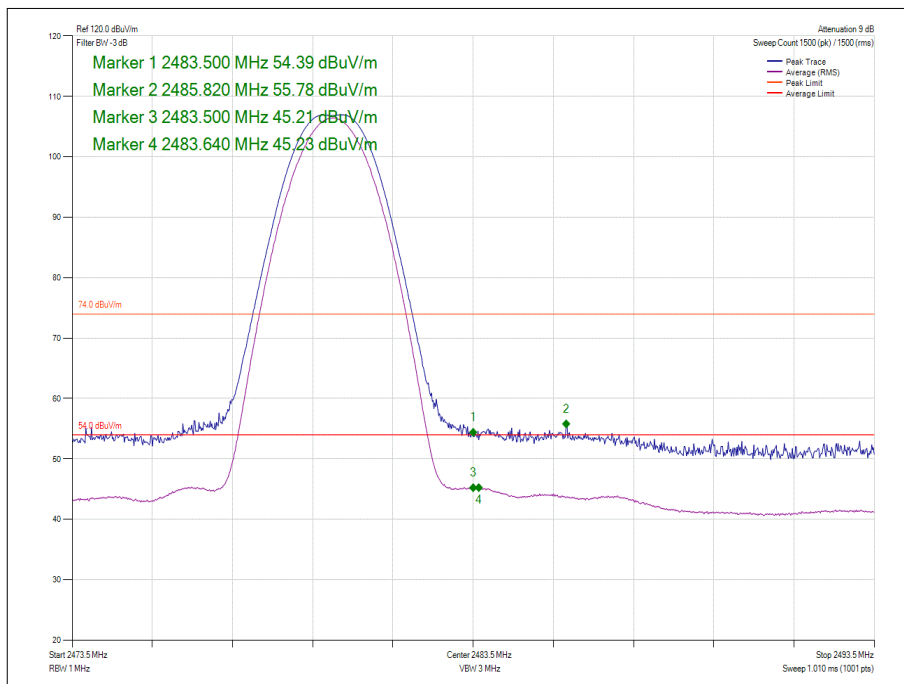


Figure 9 - GFSK - 2480 MHz - Band Edge Frequency 2483.5 MHz



FCC 47 CFR Part 15, Limit Clause 15.209

Frequency (MHz)	Field Strength ( $\mu\text{V}/\text{m}$ at 3 m)
30 to 88	100
88 to 216	150
216 to 960	200
Above 960	500

**Table 12**

ISED RSS-GEN, Limit Clause 8.9

Frequency (MHz)	Field Strength ( $\mu\text{V}/\text{m}$ at 3 m)
30 to 88	100
88 to 216	150
216 to 960	200
Above 960*	500

**Table 13**

\*Unless otherwise specified, for all frequencies greater than 1 GHz, the radiated emission limits for licence-exempt radio apparatus stated in applicable RSSs (including RSS-Gen) are based on measurements using a linear average detector function having a minimum resolution bandwidth of 1 MHz. If an average limit is specified for the EUT, then the peak emission shall also be measured with instrumentation properly adjusted for such factors as pulse desensitization to ensure the peak emission is less than 20 dB above the average limit.



## 2.4.7 Test Location and Test Equipment Used

This test was carried out in EMC Chamber 5.

Instrument	Manufacturer	Type No	TE No	Calibration Period (months)	Calibration Due
Screened Room (5)	Rainford	Rainford	1545	36	23-Jan-2021
Turntable Controller	Inn-Co GmbH	CO 1000	1606	-	TU
DC Power Supply	Hewlett Packard	6269B	1909	-	TU
Multimeter	Iso-tech	IDM 101	2118	12	07-Feb-2021
Mast Controller	Maturo GmbH	NCD	4810	-	TU
Tilt Antenna Mast	Maturo GmbH	TAM 4.0-P	4811	-	TU
Double Ridge Broadband Horn Antenna	Schwarzbeck	BBHA 9120 B	4848	12	10-Mar-2021
EmX Emissions Software	TUV SUD	EmX	5125	-	Software
Thermo-Hygro-Barometer	PCE Instruments	OCE-THB-40	5470	12	16-Mar-2021
2m SMA Cable	Junkosha	MWX221-02000AMSAMS/A	5517	12	01-Apr-2021
8m N-Type Cable	Junkosha	MWX221-08000NMSNMS/B	5520	12	24-Mar-2021
EMI Test Receiver	Rohde & Schwarz	ESW44	5527	12	06-Feb-2021

**Table 14**

TU - Traceability Unscheduled



## **2.5 Spurious Radiated Emissions**

### **2.5.1 Specification Reference**

FCC 47 CFR Part 15C, Clause 15.247 (d) and 15.205  
ISED RSS-247, Clause 5.5  
ISED RSS-GEN, Clause 6.13

### **2.5.2 Equipment Under Test and Modification State**

SCG22, S/N: 1PR002007GPH5XV - Modification State 1

### **2.5.3 Date of Test**

07-June-2020 to 08-June-2020

### **2.5.4 Test Method**

This test was performed in accordance with ANSI C63.10, clause 6.3, 6.5 and 6.6.

The EUT was placed on the non-conducting platform in a manner typical of a normal installation. For an EUT which could reasonable be used in multiple planes, pre-scans were performed with the EUT orientated in X, Y and Z planes with reference to the ground plane.

Port on the EUT were terminated with loads as described in ANSI C63.4 clause 6.2.4. For EUT's with multiple connectors of the same type, additional interconnecting cables were connected, and pre-scans performed to determine whether the level of the emissions were increased by >2 dB.

For frequencies > 1 GHz, plots for average measurements were taken in accordance with ANSI C63.10, clause 4.1.4.2.5 to characterize the EUT. Where emissions were detected, final average measurements were taken in accordance with ANSI C63.10, clause 4.1.4.2.2.

The plots shown are the characterisation of the EUT. The limits on the plots represent the most stringent case for restricted bands, (74/54 dBuV/m) when compared to 20 dBc outside restricted bands. The limits shown have been used as a threshold to determine where further measurements are necessary. Where results are within 10 dB of the limits shown on the plots, further investigation was carried out and reported in results tables.

Above 18 GHz, the measurement distance was reduced to 1 m. Due to the narrow beamwidth of the test antenna and large EUT. Prescans were performed with the test antenna in three positions relative to the EUT. These additional setups are shown in the photos section. At a measurement distance of 1 meter the limit line was increased by  $20 \cdot \text{LOG}(3/1) = 9.54$  dB.

The following conversion can be applied to convert from dB $\mu$ V/m to  $\mu$ V/m:  
 $10^{(\text{Field Strength in dB}\mu\text{V/m}/20)}$ .



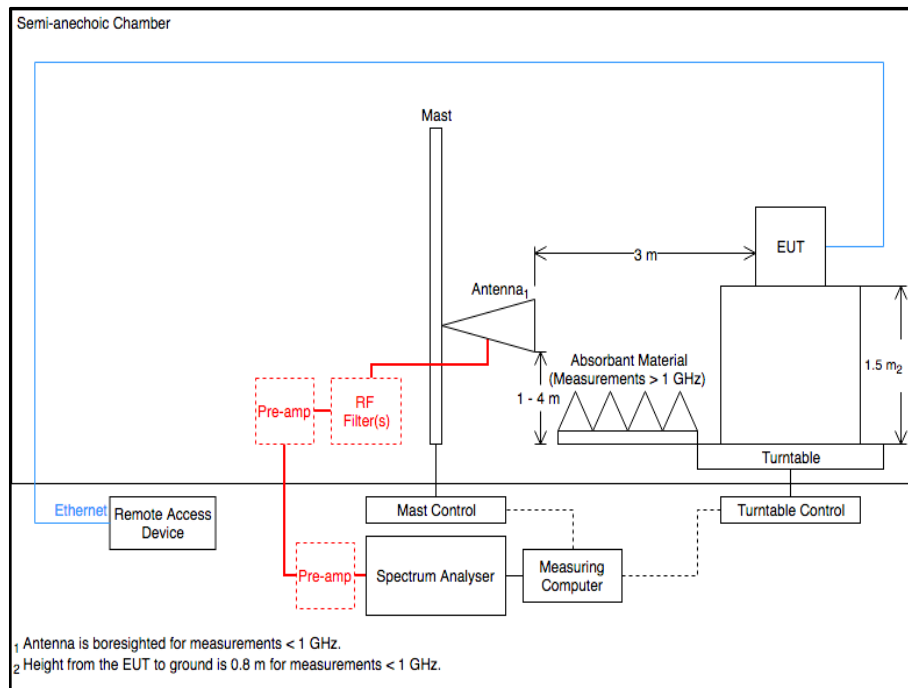


Figure 10 - Test Setup Diagram

**2.5.5 Environmental Conditions**

Ambient Temperature 20.3 - 20.7 °C  
 Relative Humidity 45.9 - 46.6 %

**2.5.6 Test Results**

Vehicle RSM - Bluetooth Low Energy

Modulation/Packet Type: GFSK/DH1

Frequency (MHz)	Level (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Detector	Angle (°)	Height (cm)	Polarisation	Orientation
*								

Table 15 - 2402 MHz, 30 MHz to 1 GHz

\*No emissions were detected within 10 dB of the limit.

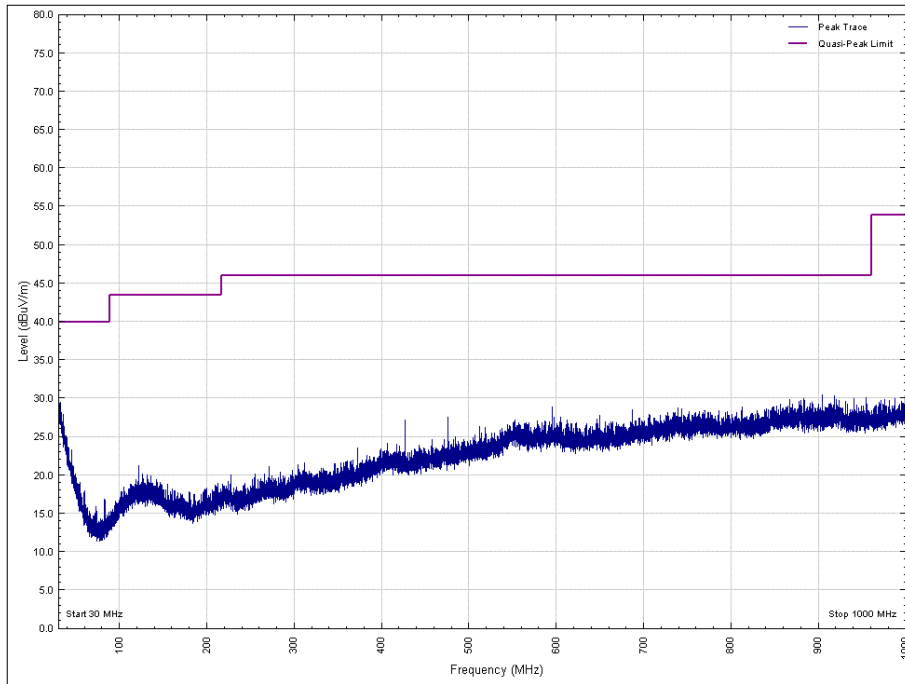


Figure 11 - 2402 MHz, 30 MHz to 1 GHz, Vertical, X Orientation

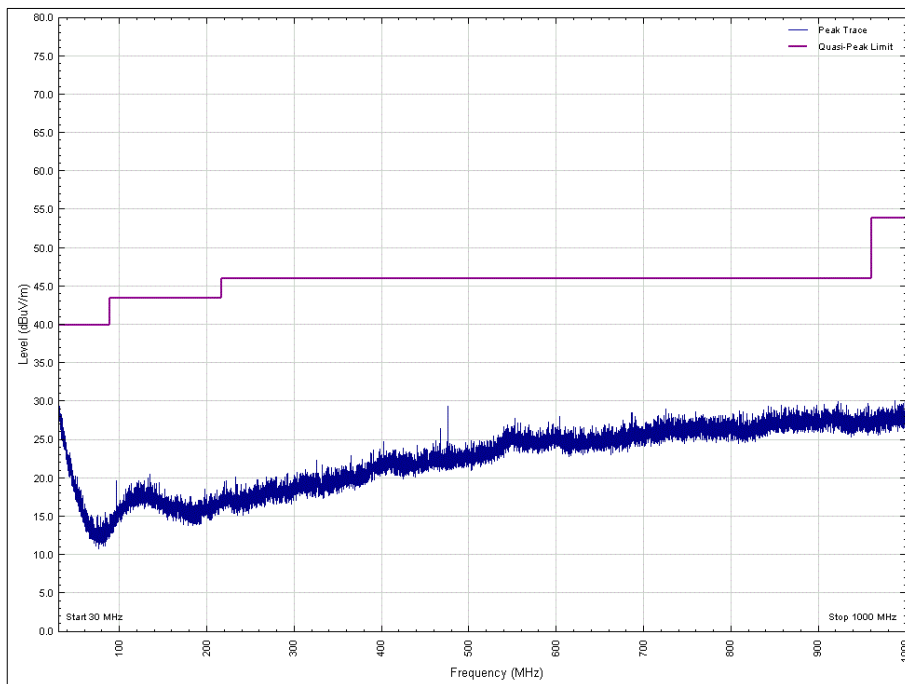



Figure 12 - 2402 MHz, 30 MHz to 1 GHz, Horizontal, X Orientation



Frequency (MHz)	Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector	Angle (°)	Height (cm)	Polarisation	Orientation
*								

**Table 16 - 2402 MHz, 1 GHz to 25 GHz**

\*No emissions were detected within 10 dB of the limit.

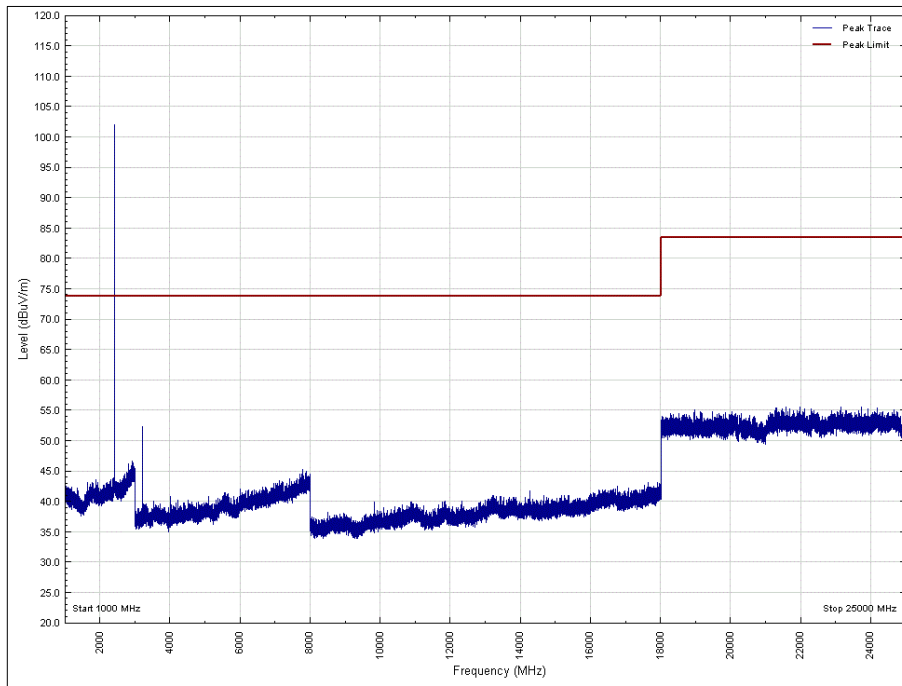

**Figure 13 - 2402 MHz, 1 GHz to 25 GHz, Vertical, X Orientation - Peak**

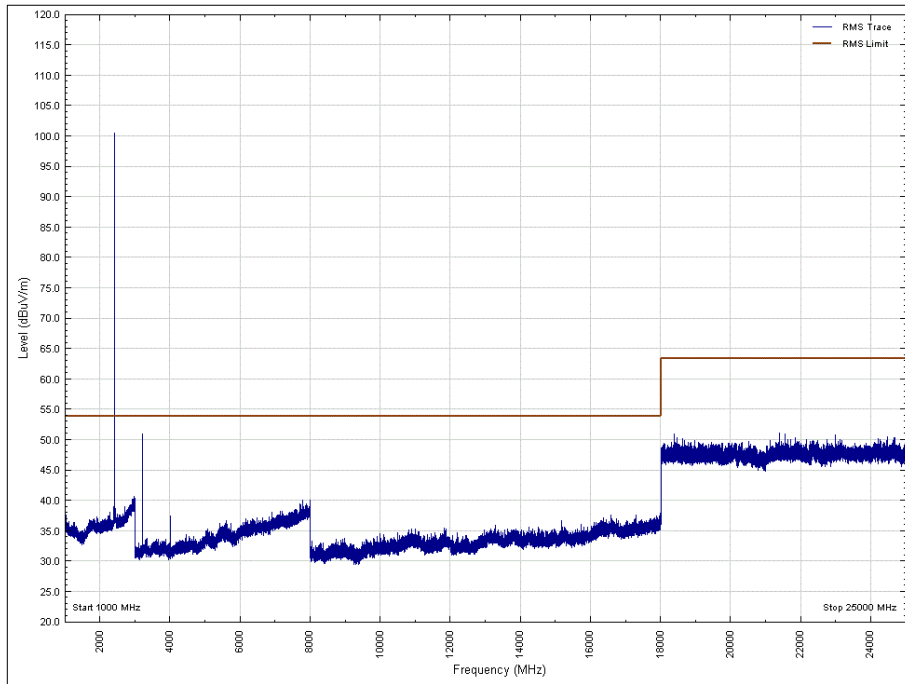


Figure 14 - 2402 MHz, 1 GHz to 25 GHz, Vertical, X Orientation - Average

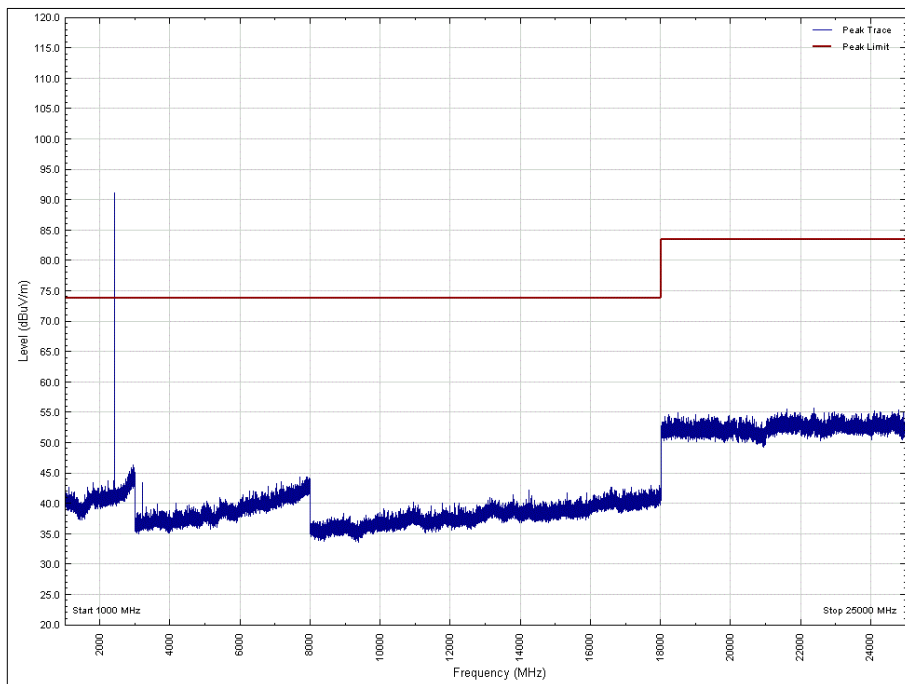


Figure 15 - 2402 MHz, 1 GHz to 25 GHz, Horizontal, X Orientation - Peak

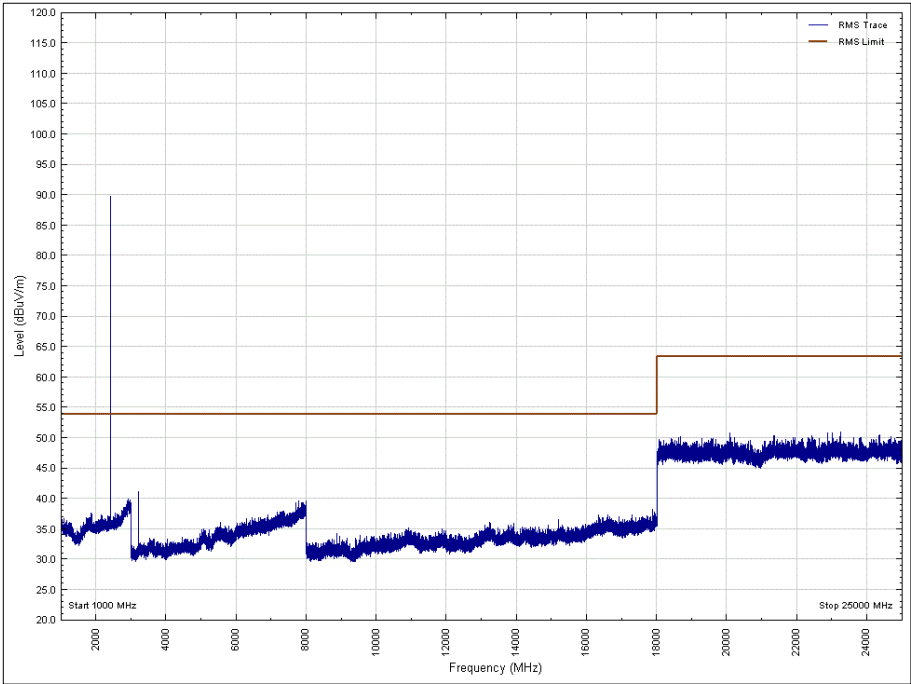



Figure 16 - 2402 MHz, 1 GHz to 25 GHz, Horizontal, X Orientation - Average



Frequency (MHz)	Level (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Detector	Angle (°)	Height (cm)	Polarisation	Orientation
*								

**Table 17 - 2440 MHz, 30 MHz to 1 GHz**

\*No emissions were detected within 10 dB of the limit.

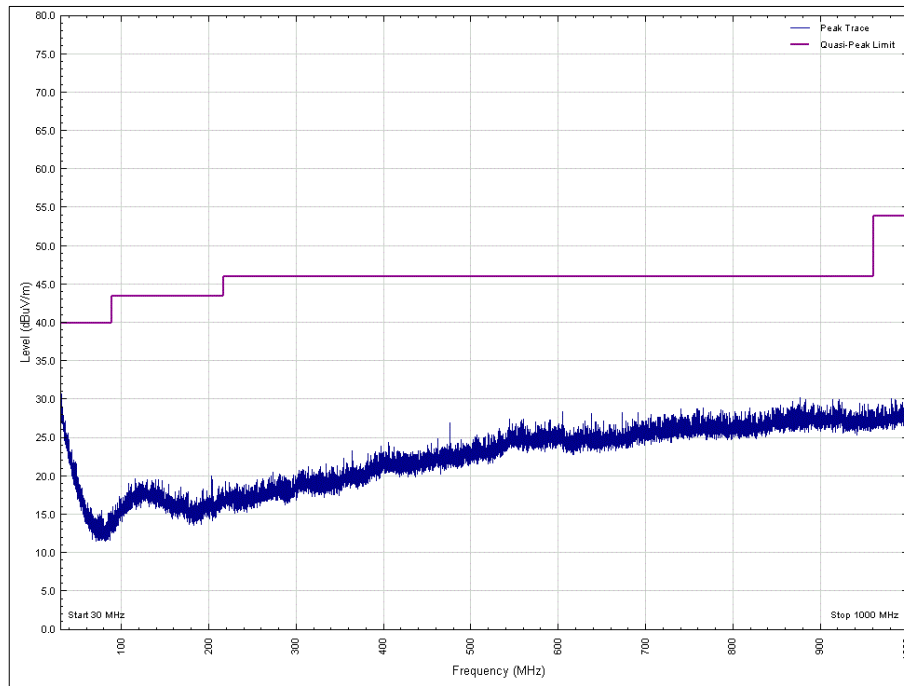

**Figure 17 - 2440 MHz, 30 MHz to 1 GHz, Vertical, X Orientation**

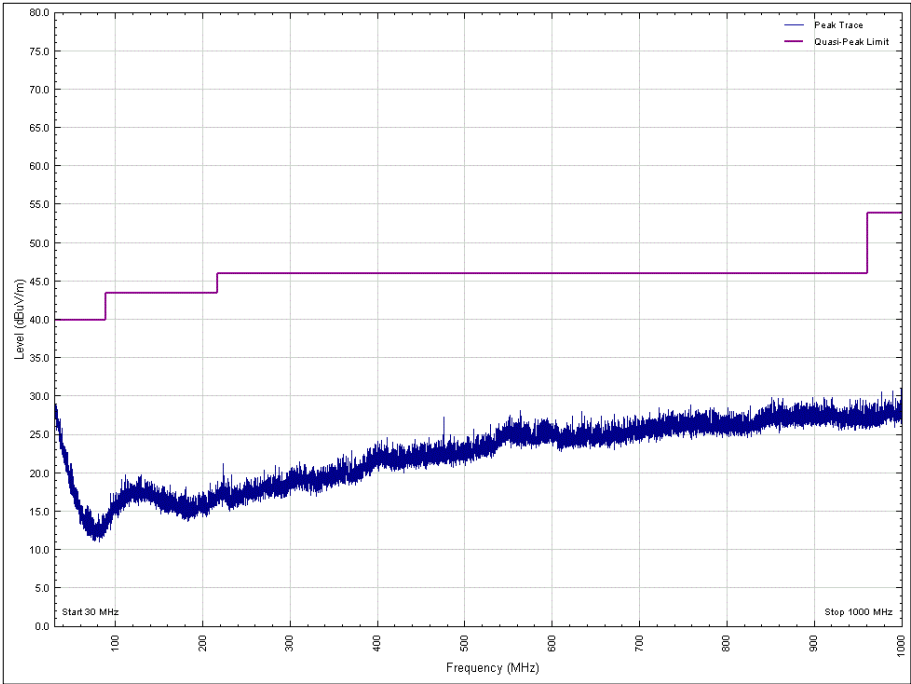



Figure 18 - 2440 MHz, 30 MHz to 1 GHz, Horizontal, X Orientation



Frequency (MHz)	Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector	Angle (°)	Height (cm)	Polarisation	Orientation
*								

**Table 18 - 2440 MHz - 1 GHz to 25 GHz**

\*No emissions were detected within 10 dB of the limit.

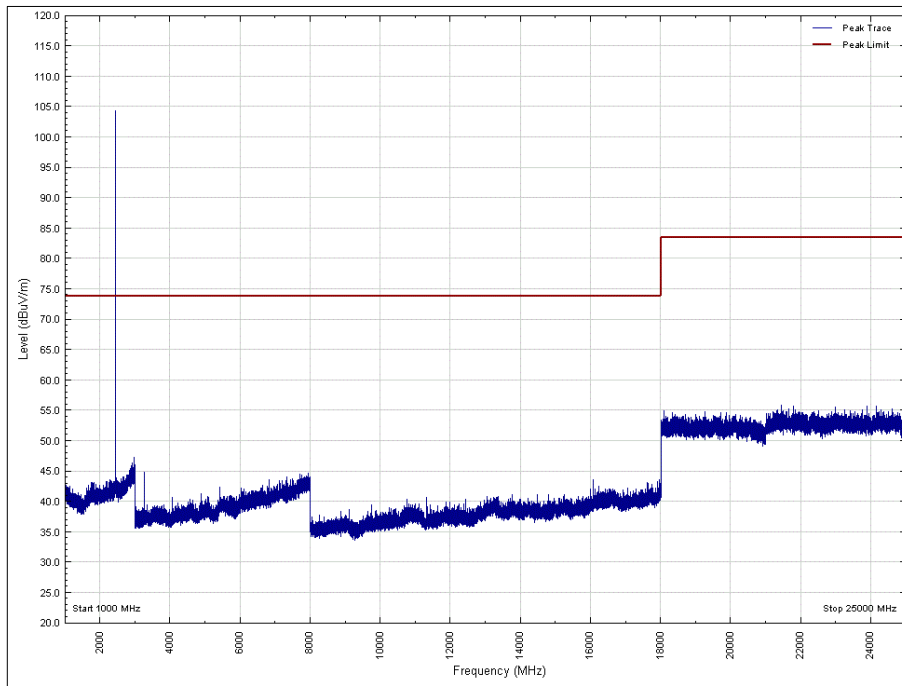

**Figure 19 - 2440 MHz - 1 GHz to 25 GHz, Vertical, X Orientation X - Peak**



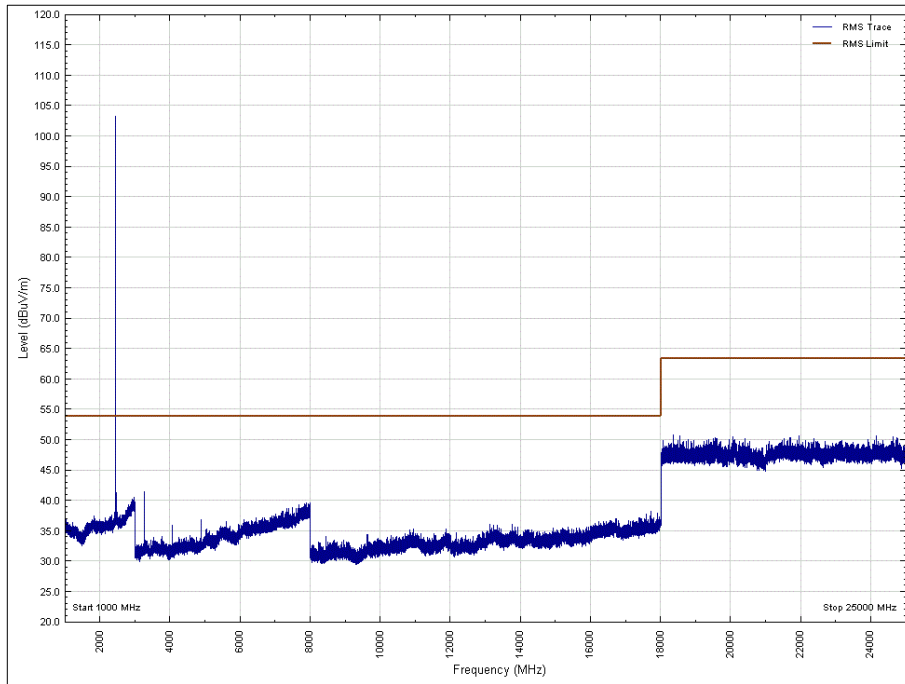


Figure 20 - 2440 MHz - 1 GHz to 25 GHz, Vertical, X Orientation - Average

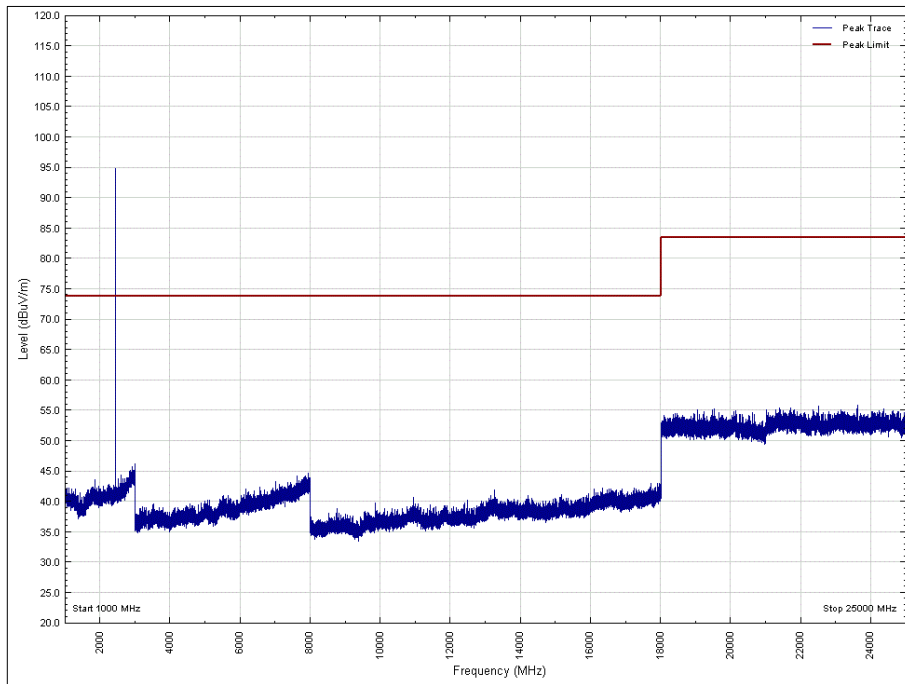


Figure 21 - 2440 MHz - 1 GHz to 25 GHz, Horizontal, EUT Orientation: X, Peak

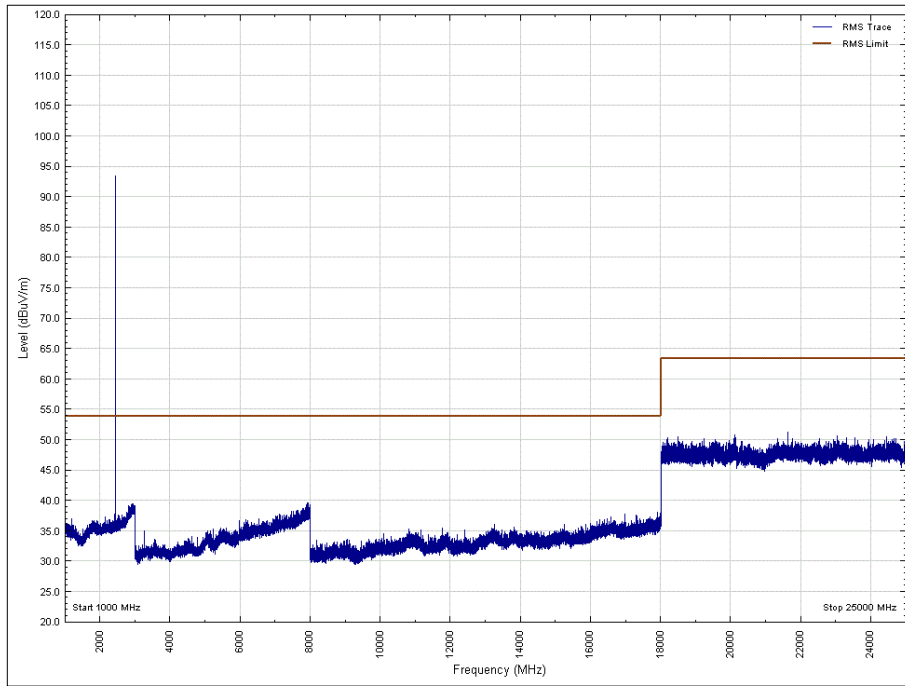



Figure 22 - 2440 MHz - 1 GHz to 25 GHz, Horizontal, X Orientation - Average



Frequency (MHz)	Level (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Detector	Angle (°)	Height (cm)	Polarisation	Orientation
*								

**Table 19 - 2480 MHz, 30 MHz to 1 GHz**

\*No emissions were detected within 10 dB of the limit.

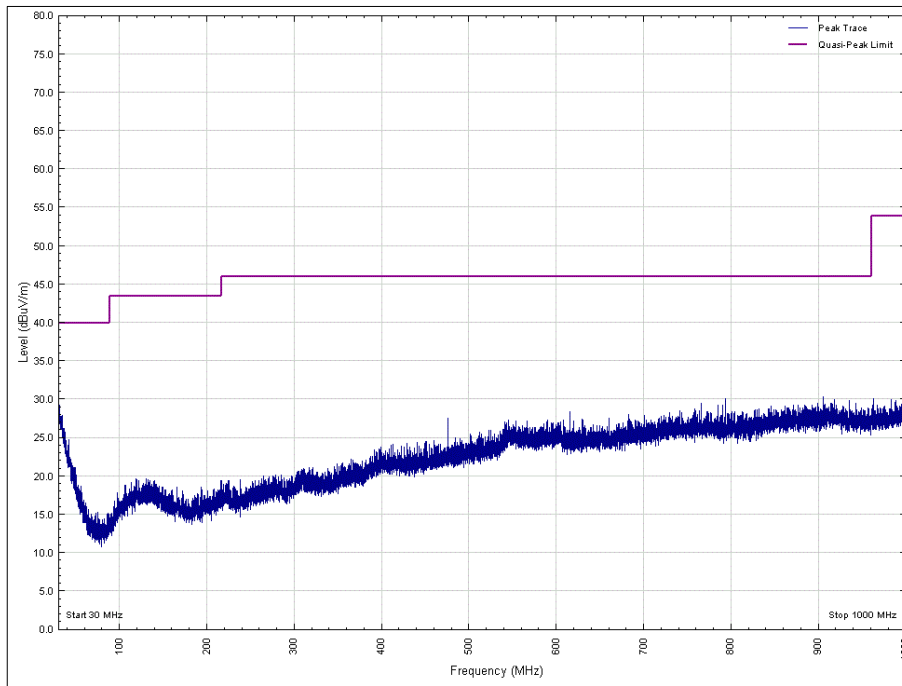

**Figure 23 - 2480 MHz, 30 MHz to 1 GHz, Vertical, X Orientation**

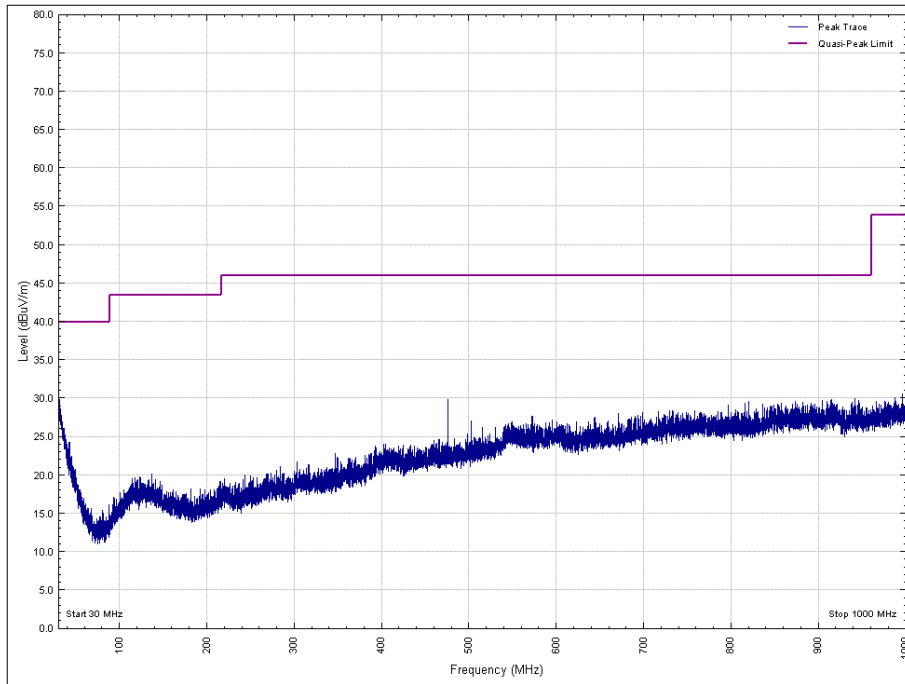



Figure 24 - 2480 MHz, 30 MHz to 1 GHz, Horizontal, X Orientation



Frequency (MHz)	Level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector	Angle (°)	Height (cm)	Polarisation	Orientation
*								

**Table 20 - 2480 MHz - 1 GHz to 25 GHz**

\*No emissions were detected within 10 dB of the limit.

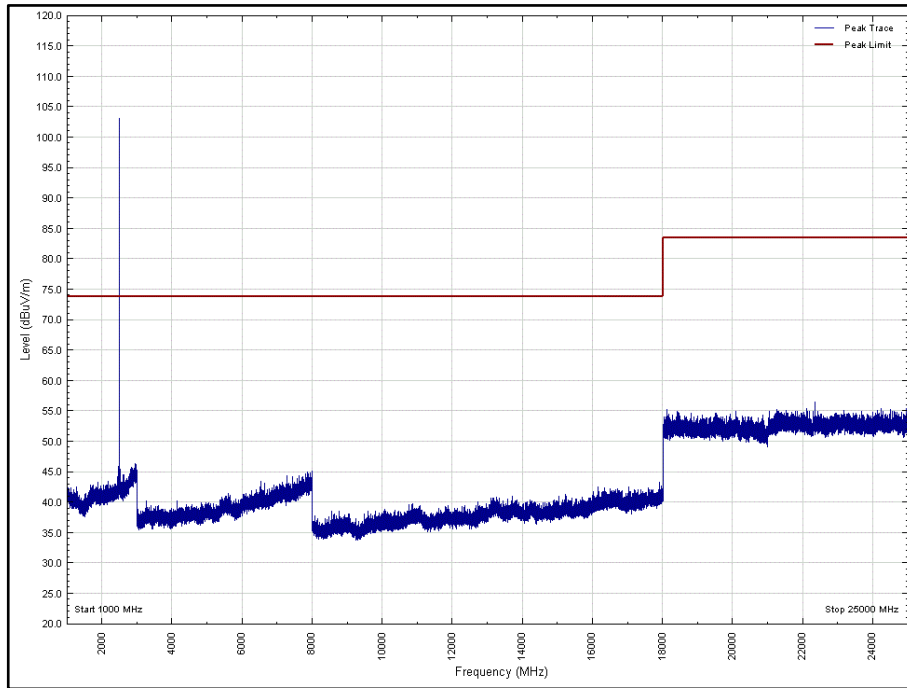

**Figure 25 - 2480 MHz – 1 GHz to 25 GHz, Vertical, X Orientation – Peak**

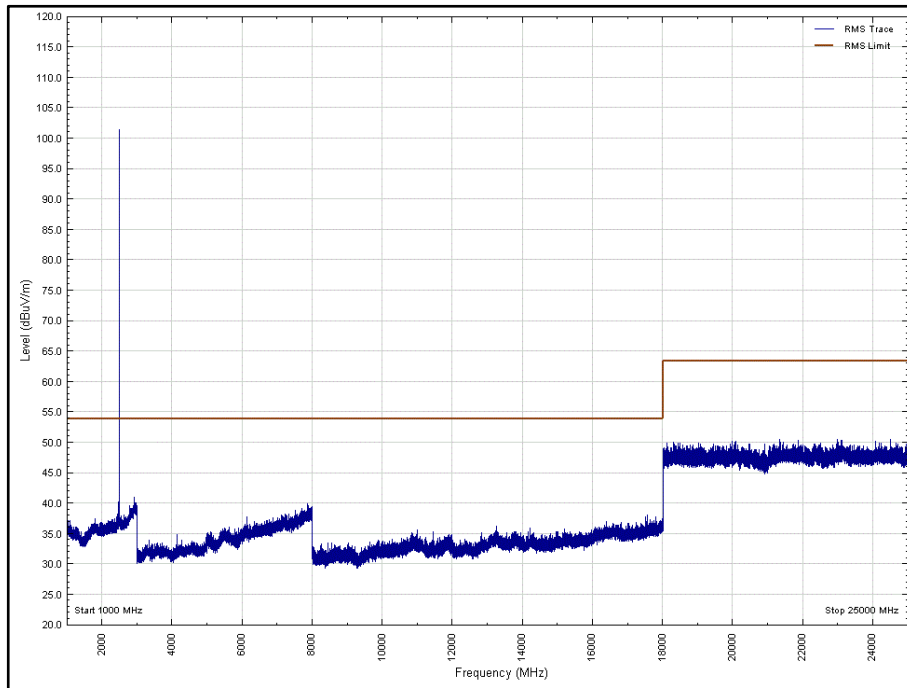


Figure 26 - 2480 MHz – 1 GHz to 25 GHz, Vertical, X Orientation - Average

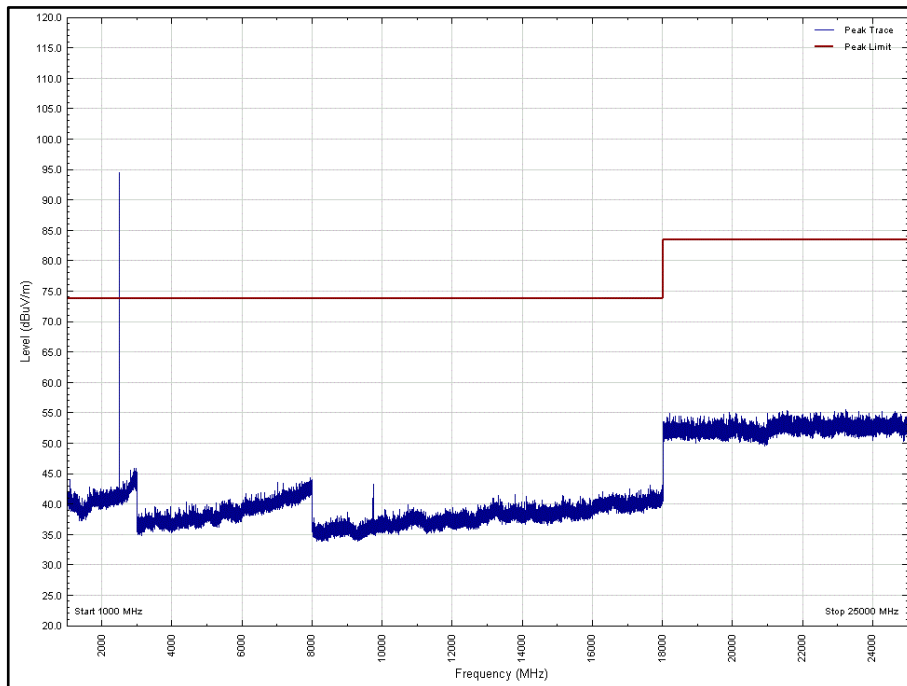


Figure 27 - 2480 MHz – 1 GHz to 25 GHz, Horizontal, X Orientation - Peak



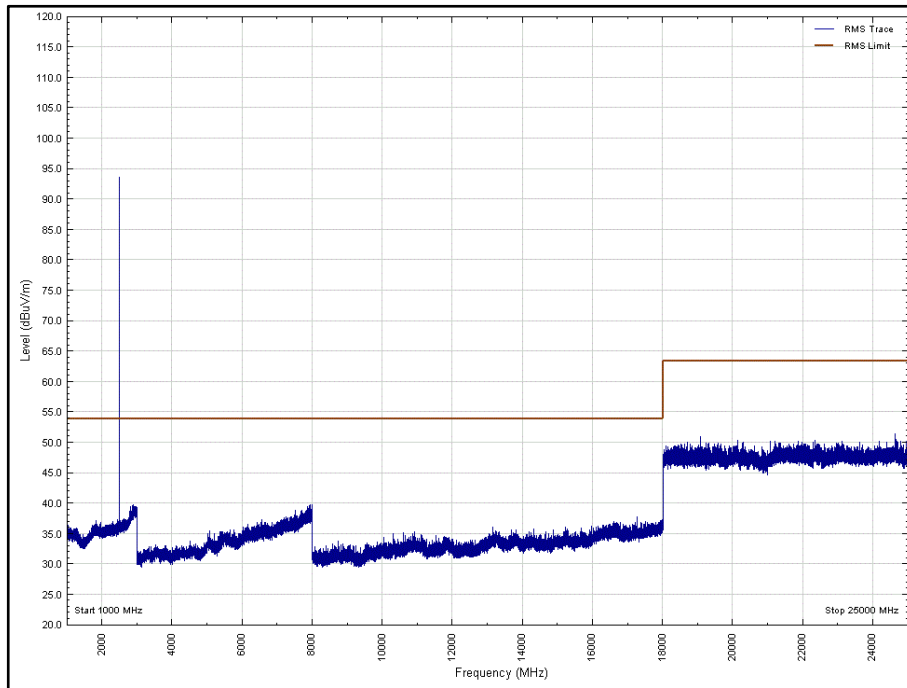


Figure 28 - 2480 MHz – 1 GHz to 25 GHz, Horizontal, X Orientation - Average




**Figure 29 - Test Setup – 30 MHz to 1 GHz – X Orientation**

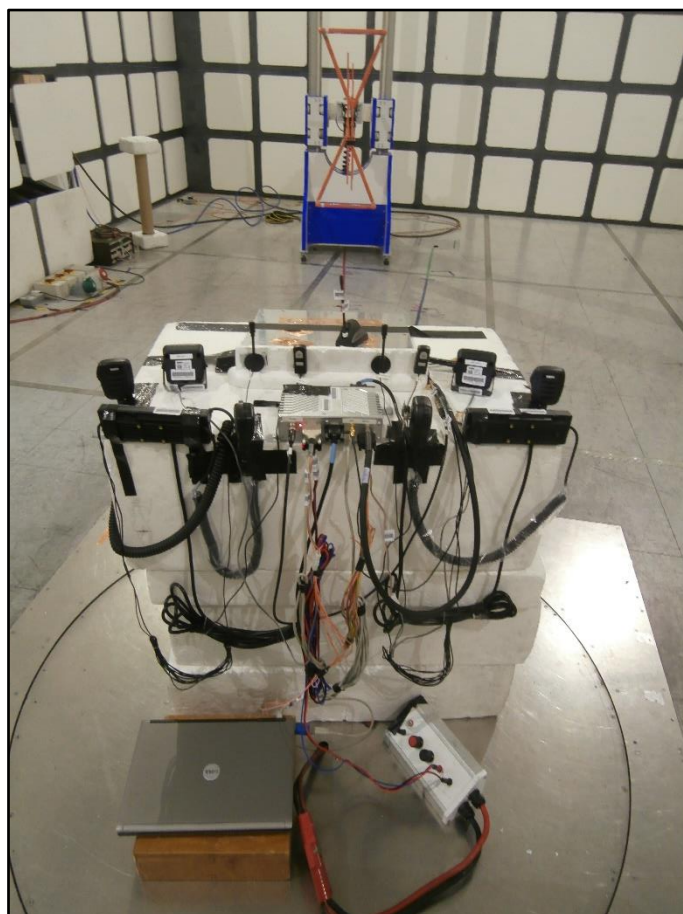


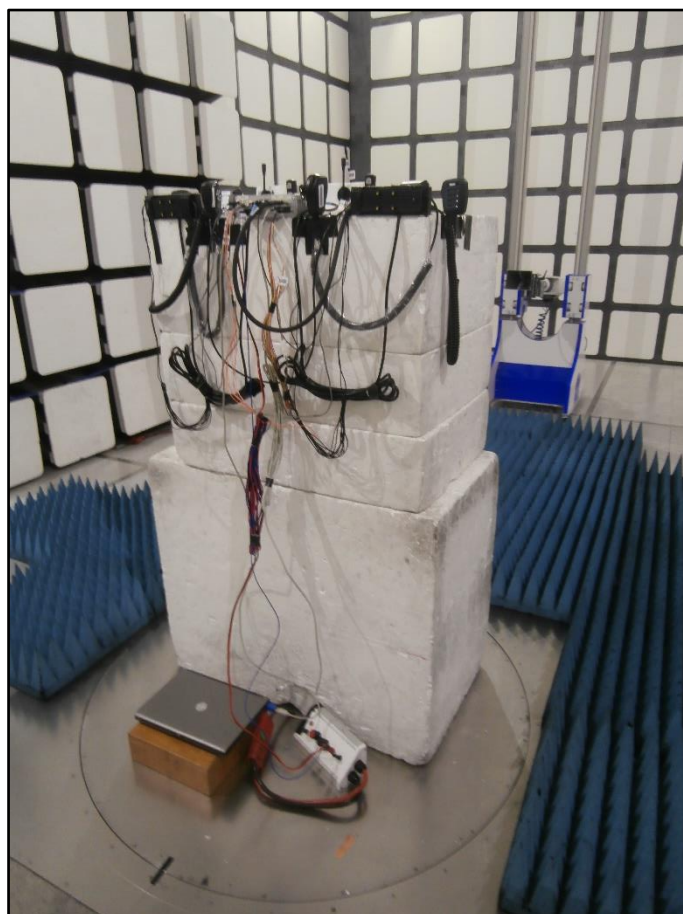

**Figure 30 - Test Setup – 1 GHz to 8 GHz – X Orientation**

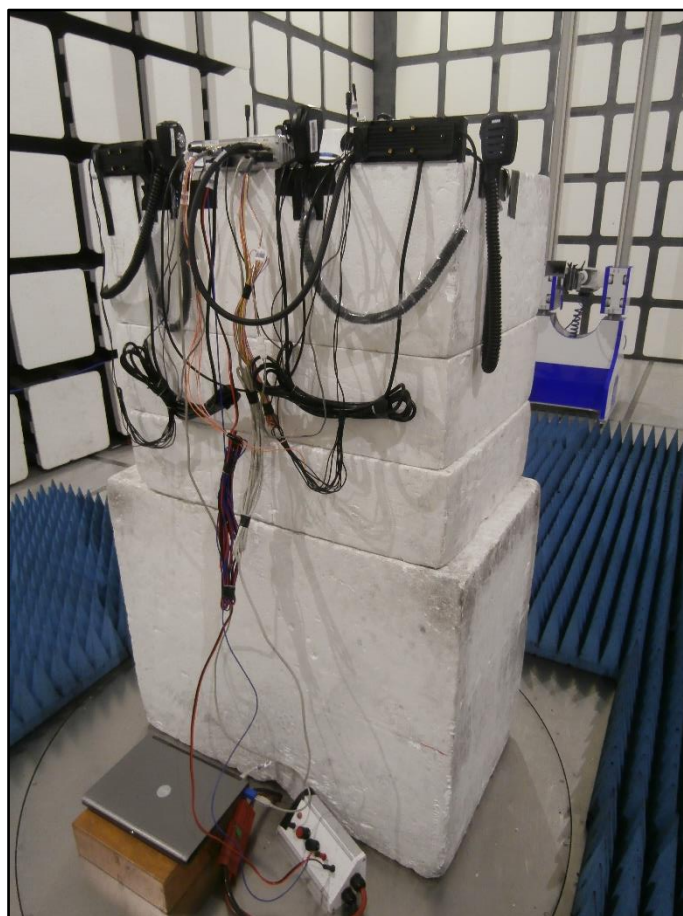

**Figure 31 - Test Setup – 8 GHz to 18 GHz – X Orientation**

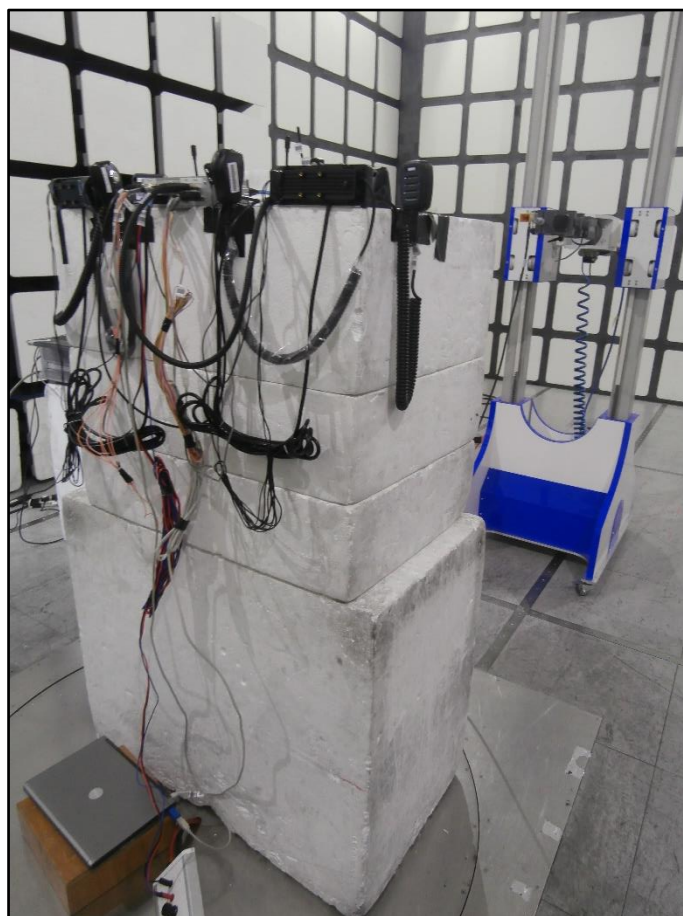

**Figure 32 - Test Setup – 18 GHz to 25 GHz (Left View) – X Orientation**



**Figure 33 - Test Setup – 18 GHz to 25 GHz (Middle View) – X Orientation**





**Figure 34 - Test Setup – 18 GHz to 25 GHz (Right View) – X Orientation**

FCC 47 CFR Part 15, Limit Clause 15.247 (d)

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.

Attenuation below the general limits specified in § 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in 15.209(a)

ISED RSS-247, Limit Clause 5.5

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, as permitted under Section 5.4(4), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general field strength limits specified in RSS-Gen is not required.



## 2.5.7 Test Location and Test Equipment Used

This test was carried out in EMC Chamber 5.

Instrument	Manufacturer	Type No	TE No	Calibration Period (months)	Calibration Due
Antenna 18-40GHz (Double Ridge Guide)	Q-Par Angus Ltd	QSH 180K	1511	24	02-Oct-2021
Pre-Amplifier	Phase One	PS04-0086	1533	12	04-Aug-2020
18GHz - 40GHz Pre-Amplifier	Phase One	PSO4-0087	1534	12	18-Feb-2021
Screened Room (5)	Rainford	Rainford	1545	36	23-Jan-2021
Turntable Controller	Inn-Co GmbH	CO 1000	1606	-	TU
DC Power Supply	Hewlett Packard	6269B	1909	-	TU
Multimeter	Iso-tech	IDM 101	2118	12	07-Feb-2021
Antenna with permanent attenuator (Bilog)	Chase	CBL6143	2904	24	30-Sep-2021
Mast Controller	Maturo GmbH	NCD	4810	-	TU
Tilt Antenna Mast	Maturo GmbH	TAM 4.0-P	4811	-	TU
Double Ridge Broadband Horn Antenna	Schwarzbeck	BBHA 9120 B	4848	12	10-Mar-2021
4dB Attenuator	Pasternack	PE7047-4	4935	24	30-Sep-2021
EmX Emissions Software	TUV SUD	EmX	5125	-	Software
3 GHz High pass filter	Wainwright	WHKX12-2580-3000-18000-80SS	5220	12	25-Mar-2021
Preamplifier (30dB 1GHz to 18GHz)	Schwarzbeck	BBV 9718 C	5261	12	07-Apr-2021
Antenna (DRG Horn 7.5-18GHz)	Schwarzbeck	HWRD750	5348	12	04-Sep-2020
Preamplifier (30dB 1GHz to 18GHz)	Schwarzbeck	BBV 9718 C	5350	12	21-Aug-2020
Thermo-Hygro-Barometer	PCE Instruments	OCE-THB-40	5470	12	16-Mar-2021
1m K-Type Cable	Junkosha	MWX241-01000KMSKMS/A	5511	12	03-Apr-2021
1m -SMA Cable	Junkosha	MWX221-01000AMSAMS/A	5513	12	01-Apr-2021
2m SMA Cable	Junkosha	MWX221-02000AMSAMS/A	5517	12	01-Apr-2021
8m N-Type Cable	Junkosha	MWX221-08000NMSNMS/B	5520	12	24-Mar-2021
2 m K Type Cable	Junkosha	MWX241-02000KMSKMS/A	5523	12	03-Apr-2021
EMI Test Receiver	Rohde & Schwarz	ESW44	5527	12	06-Feb-2021

Table 21

TU - Traceability Unscheduled



**2.6 Maximum Conducted Output Power**

**2.6.1 Specification Reference**

FCC 47 CFR Part 15C, Clause 15.247 (b)  
ISED RSS-247, Clause 5.4  
ISED RSS-GEN, Clause 6.12

**2.6.2 Equipment Under Test and Modification State**

SCG22, S/N: 1PR002007GPH5XU - Modification State 1

**2.6.3 Date of Test**

09-June-2020

**2.6.4 Test Method**

The test was performed in accordance with ANSI C63.10, clause 11.9.1.1.

**2.6.5 Environmental Conditions**

Ambient Temperature 21.5 °C  
Relative Humidity 46.4 %

**2.6.6 Test Results**

Vehicle RSM - Bluetooth Low Energy

Frequency (MHz)	Maximum Output Power	
	dBm	mW
2402	6.94	4.94
2440	7.05	5.07
2480	7.19	5.24

**Table 22 - Maximum Conducted Output Power Results**

FCC 47 CFR Part 15, Limit Clause 15.247 (b)(3)

For systems using digital modulation in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands: 1 Watt.

ISED RSS-247, Limit Clause 5.4 (d)

For DTSS employing digital modulation techniques operating in the bands 902-928 MHz and 2400-2483.5 MHz, the maximum peak conducted output power shall not exceed 1 W. The e.i.r.p. shall not exceed 4 W, except as provided in section 5.4(e) of the specification.



## 2.6.7 Test Location and Test Equipment Used

This test was carried out in RF Laboratory 1.

Instrument	Manufacturer	Type No	TE No	Calibration Period (months)	Calibration Due
Hygrometer	Rotronic	I-1000	3220	12	25-Sep-2020
Network Analyser	Rohde & Schwarz	ZVA 40	3548	12	11-Dec-2020
Calibration Unit	Rohde & Schwarz	ZV-Z54	4368	12	28-Nov-2020
Frequency Standard	Spectracom	SecureSync 1200-0408-0601	4393	6	08-Nov-2020
Attenuator (20dB, 100W)	Weinschel	48-20-43	4870	12	18-Jul-2020
EXA	Keysight Technologies	N9010B	4968	24	23-Dec-2021
Cable (18 GHz)	Rosenberger	LU7-071-2000	5108	12	06-Oct-2020

**Table 23**





### 3 Measurement Uncertainty

For a 95% confidence level, the measurement uncertainties for defined systems are:

Test Name	Measurement Uncertainty
Maximum Conducted Output Power	$\pm 3.2$ dB
Spurious Radiated Emissions	30 MHz to 1 GHz: $\pm 5.2$ dB 1 GHz to 40 GHz: $\pm 6.3$ dB
Restricted Band Edges	30 MHz to 1 GHz: $\pm 5.2$ dB 1 GHz to 40 GHz: $\pm 6.3$ dB
Authorised Band Edges	30 MHz to 1 GHz: $\pm 5.2$ dB 1 GHz to 40 GHz: $\pm 6.3$ dB
Emission Bandwidth	$\pm 33.08$ kHz
Power Spectral Density	$\pm 3.2$ dB

**Table 24**

#### Measurement Uncertainty Decision Rule

Determination of conformity with the specification limits is based on the decision rule according to IEC Guide 115: 2007, clause 4.4.3 and 4.5.1.