





23, Headington Drive, Cambridge. CB1 9HE Tel: 01954 251974 (test site) or: 01223 241140 (accounts) Fax: 01954 251907 web: www.dbtechnology.co.uk email: mail@dbtechnology.co.uk

1 of 14

### REPORT ON ELECTROMAGNETIC COMPATIBILITY TESTS

Performed at: TWENTY PENCE TEST SITE

> Twenty Pence Road, Cottenham, Cambridge U.K. **CB24 8PS**

> > on

Sepura PLC

**SRG3900UW** 

dated

30th January 2015

### **Document History**

Issue	Date	Affected page(s)	Description of modifications	Revised by	Approved by
1	30/01/15		Initial release		
1					

Based on report template: v090319

	Report No: Issue No:	R3432 1	FCC ID: XX6SRG3900UW		
dB	Test No:	T5619	Test Report	Page:	2 of 14

Equipment Under	Гest (EUT):	SRG3900UW	SRG3900UW		
Test Commissione	d by:	Sepura PLC Radio House St Andrews Road Cambridge Cambridgeshire CB4 1GR			
Representative:		Steve Wood			
Test Started:		21st January 20	015		
Test Completed:		21st January 20	015		
Test Engineer:		Dave Smith			
Date of Report:		30th January 20	015		
Written by:	Dave Smith	Checked by:	Derek Barlow		
Signature:	D. A. Snitt	Signature:	D. Barbon		
Date:	30th January 2015	Date:	10th February 2015		

dB Technology can only report on the specific unit(s) tested at its site. The responsibility for extrapolating this data to a product line lies solely with the manufacturer.

	Report No: Issue No:	R3432 1	FCC ID: XX6SRG3900UW		
dB	Test No:	T5619	Test Report	Page:	3 of 14

# **Test Standards Applied**

CFR 47	Code of Federal Regulations: Part 2 and Part 22

# **Emissions Test Results Summary**

CFR 47 PASS

Test	Port	Method	Limit	PASS/FAIL	Notes
Occuoied	antenna	Part 2.1049	20kHz	PASS	
Bandwidth					

specs\_fccv100412

Note: this report only covers the occupied bandwidth test.

This Report shows that the EUT met the 20kHz occupied bandwidth measurement.

	Report No: Issue No:	R3432 1	FCC ID: XX6SRG3900UW		
1 /	Test No:	T5619	Test Report	Page:	4 of 14

# **Contents**

1 EUT Details	5
1.1 General	5
1.2 Modifications to EUT and Peripherals	6
1.3 EUT Operating Modes	6
Figure 1 General Arrangement of EUT and Peripherals	7
Photograph 1 Arrangement of EUT and Peripherals	8
2 Test Equipment	
3 Test Methods	10
3.1 Antenna Conducted Occupied Bandwidth	10
4 Test Results	10
4.1 Conducted Antenna Occupied Bandwidth	
PLOT 1 Occupied Bandwidth - 450MHz	12
PLOT 2 Occupied Bandwidth - 460MHz	13
PLOT 3 Occupied Randwidth 470MHz	1.4

	Report No: Issue No:	R3432 1	FCC ID: XX6SRG3900UW		
(dB)	Test No:	T5619	Test Report	Page:	5 of 14

### 1 EUT Details

#### 1.1 General

The EUT was a TETRA Voice + Data Mobile Station.

The device can transmit and receive over the following frequency band:

450MHz to 470MHz.

The nominal output power is 40dBm (10W).

The device can transmit in Trunked Mode Operation (TMO mode) or Direct Mode Operation (DMO mode)

The device has already been certified to FCC part 90 using the specific parts designed to accomodate Tetra devices. This allows a 22kHz occupied bandwidth.

The manufacturer is now seeking certification for other parts (e.g. Part 22) which specify 25kHz channel spacing but a bandwidth of 20kHz.

This unit tested under this report differs from the Part 90 approved product in that the software has been changed to support a new filter structure thus ensuring the product can meet the FCC requirements for 20kHz bandwidth. In all other aspects the product remains unchanged.

This report is limited to measurements of occupied bandwidth with this new filter structure.

Measurements were made at the top, near middle and bottom of the appropriate frequency range:

Bottom: 450 MHz Middle: 460 MHz Top: 470 MHz

#### This Report shows that the EUT met the 20kHz occupied bandwidth measurement.

Details of the EUT and associated peripherals used during the tests are listed below. Figure 1 shows the interconnections between the EUT and peripherals.

Item	Manufacturer	Model	Description	Serial No:	Notes
1	Sepura	SRG3900UW	TETRA Mobile Station	8PR000351M9	

	Report No: Issue No:	R3432 1	FCC ID: XX6SRG3900UW		
(dB)	Test No:	T5619	Test Report	Page:	6 of 14

# 1.2 Modifications to EUT and Peripherals

Details of any modifications that were required to achieve compliance are listed below. The modification numbers are referred to in the results sections as appropriate.

Mod No:	Details	Implemented for
0	As supplied for testing. No modifications were made. This sample was set to use the new filter structure to allow compliance with 20kHz bandwidth requirement.	


# 1.3 EUT Operating Modes

The EUT was tested in the following operating mode or modes. Generally, operating modes are chosen that will exercise the functions of the EUT as fully as possible and in a manner likely to produce maximum emission levels or susceptibility. Individual test result sheets reference the operating mode of the EUT.

Operating Mode	Details
1	Transmitting at full power on selected channel.

	Report No: Issue No:	R3432 1	FCC ID: XX6SRG3900UW		
(dB)	Test No:	T5619	Test Report	Page:	7 of 14


**Figure 1 General Arrangement of EUT and Peripherals** 

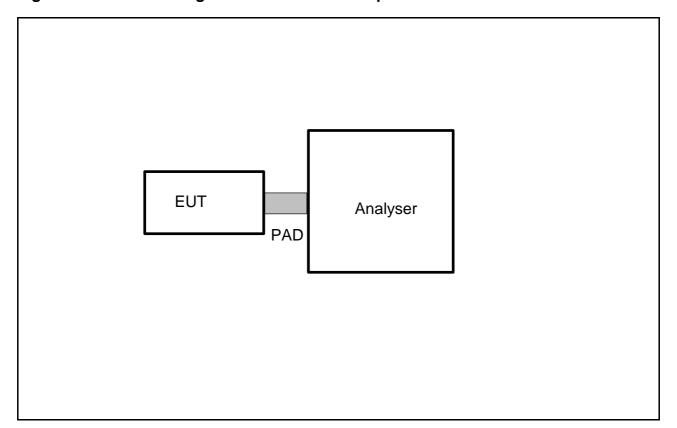

	Report No: Issue No:	R3432 1	FCC ID: XX6SRG3900UW	
dB	Test No:	T5619	Test Report	Page:

# **Photograph 1** Arrangement of EUT and Peripherals

8 of 14

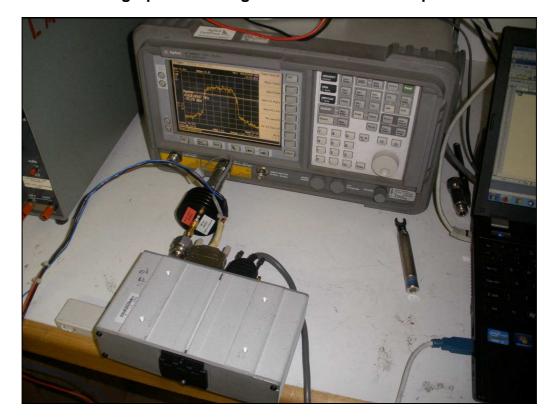

	Report No: Issue No:	R3432 1	FCC ID: XX6SRG3900UW		
dB	Test No:	T5619	Test Report	Page:	9 of 14

# 2 Test Equipment

The test equipment used during the tests was one or more of the items listed below. Individual test result sheets indicate which items were used.

Ref No:	Details	Serial Number	Cal Date	Cal Interva
R8	Agilent E7405A Spectrum Analyser	MY44212494	22/05/2014	1 year

	Report No: Issue No:	R3432 1	FCC ID: XX6SRG3900UW		
1 /	Test No:	T5619	Test Report	Page:	10 of 14

### 3 Test Methods

## 3.1 Antenna Conducted Occupied Bandwidth

Measurements are made with the antenna output connected to a spectrum analyser via a suitable PAD. Sweeps are made with a 300Hz Resolution Bandwidth and a 1kHz Video Bandwidth. A peak detector is used. Markers are used to determine the 99% power bandwidth.

#### 4 Test Results


The following sections contain tabulated test results. Plots of various scans are included at the back of this section.


	Report No: Issue No:	R3432 1	FCC ID: XX6SRG3900UW		
dB	Test No:	T5619	Test Report	Page:	11 of 14

#### **Conducted Antenna Occupied Bandwidth** 4.1

Factor Set 1:		
Factor Set 2:		
Factor Set 3:		
Test Equipment: R8		


Factor Set						
Test Equip	ment: R8					
Conducted L	Emissions (Signal)			D / /		
Company:	Sepura PLC			Product	SF	RG3900UW
Date:	21/01/2015			Test Eng	g: Da	ve Smith
Ports:	antenna					
Test:	Part 2.1049	using	g limits of	20kHz		
Ports:						
Test:		using	g limits of			
Notes			Com	ments and 0	Obser	vations
	Spectrum ar	nalyser re Bandwidt	esults are sh h Power" fu	own in plots	1 to	ation applied. 3. ctrum analyser, the following
	450MHz	19.24	kHz			
	460MHz	19.11	kHz			
	470MHz	19.34	kHz			
	Limit:					
	20kHz					
	PASS					




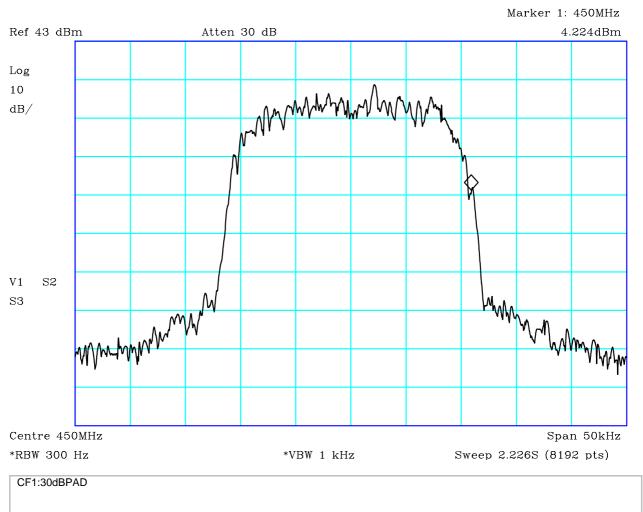

## PLOT 1 Occupied Bandwidth - 450MHz


Company:	Sepura	Product:	SG3900UW
Date:	21/01/2014	Test Eng:	Dave Smith
Method:	FCC part 2.1049	Method:	
Limit1:		Limit2:	
Limit3:		Limit4:	
99% Occupied b	andwidth = 19.24kHz		
		N	Mode: 1
		N	Modification State: 0
	File:	H50305E1 A	nalyser: R8




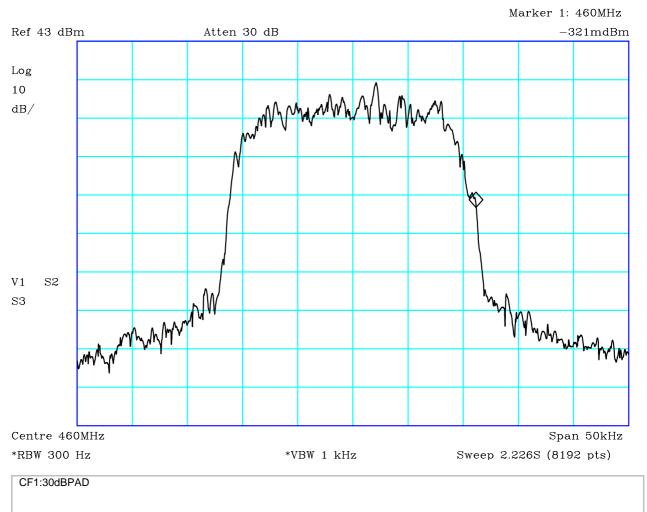

## PLOT 2 Occupied Bandwidth - 460MHz

Company:	Sepura	Product:	SG3900UW	
Date:	21/01/2014	Test Eng:	Dave Smith	
Method:	FCC part 2.1049	Method:		
Limit1:		Limit2:		
Limit3:		Limit4:		
			-	
99% Occupied	bandwidth = 19.11kHz			
			Mode:	1
			Modification State:	0
	File:	H50305E2	Analyser:	R8



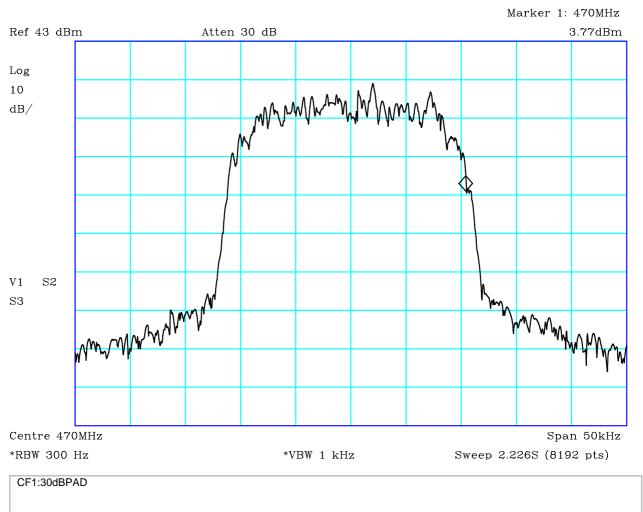

## PLOT 3 Occupied Bandwidth - 470MHz

Company:	Sepura	Product:	SG3900UW	
Date:	21/01/2014	Test Eng:	Dave Smith	
Method:	FCC part 2.1049	Method:		
Limit1:		Limit2:		
Limit3:		Limit4:		
99% Occupied b	pandwidth = 19.34kHz			
			Mode:	1
			Modification State:	0
	File:	H50305E4	Analyser:	R8