

# Annex D



This test report annex is electronically signed and valid without handwritten signature. For verification of the electronic signatures, the public keys can be requested at the testing laboratory.

**Test report annex authorized:**

Thomas Vogler  
Lab Manager  
Radio Communications & EMC


## 1 Table of contents

1	Table of contents.....	2
2	Measurement results, FCC Part 25 .....	3
3	Measurement results, Spurious emissions 30MHz - 18 GHz .....	94
4	Document history .....	96

## 2 Measurement results, FCC Part 25

This chapter consists of 91 pages including this page.

Plot No. 1

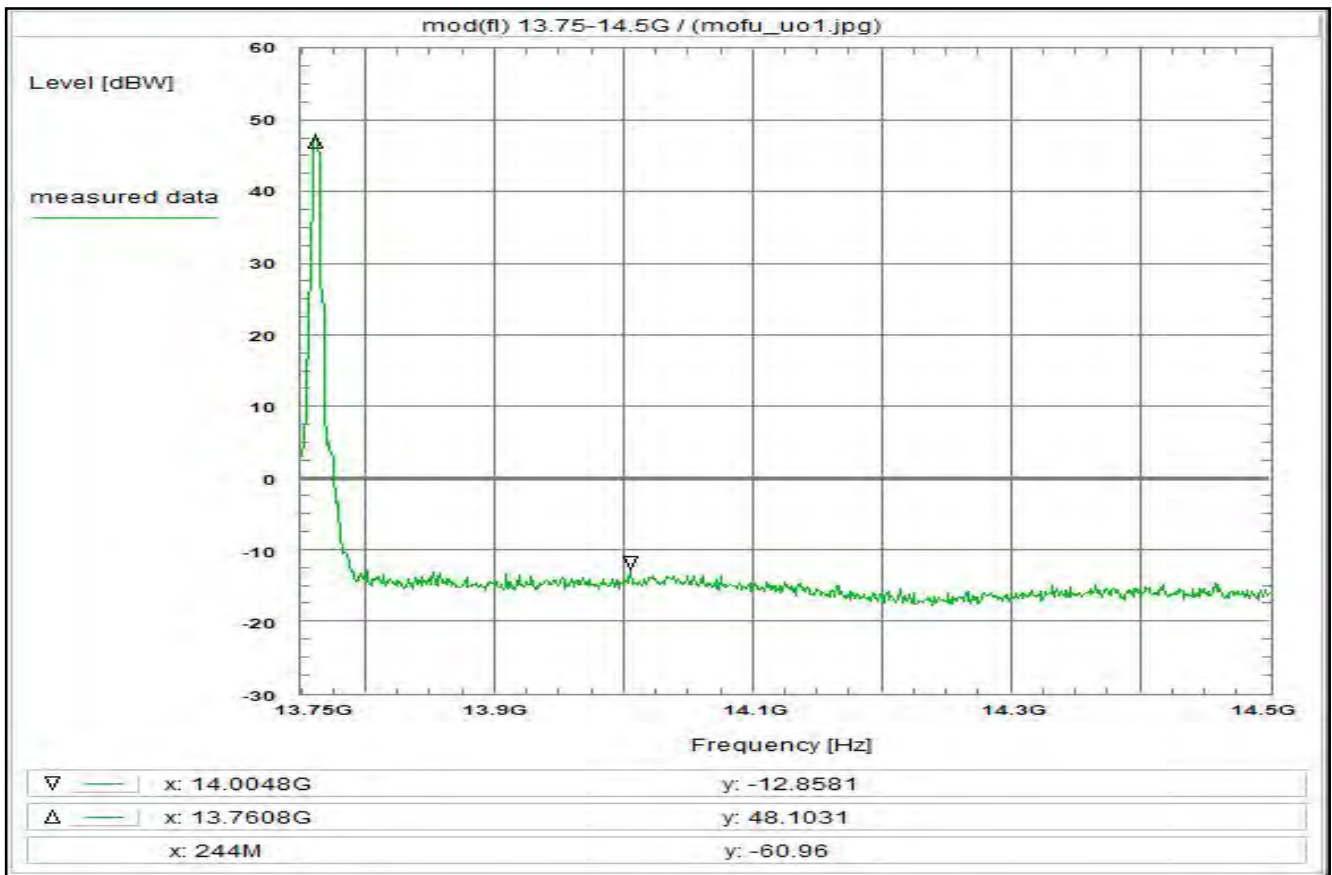

**Subclause:** -/- Function test  
Modulated rf-carrier at the lower edge of the band (f)  
Measurement within the band

**Limit:**  
no limits defined  
This test serves to verify the general function of the EUT and for orientation regarding to the spurious emissions which are expected within the band, furthermore for comparison of the actual power with the rated value at modulated carrier adjusted as close to the lower edge of the operating frequency band.

**Test results:**  
see plot (an explicit table was not generated)

**Operating condition of DUT:**  
operating condition 1, see test report chapter 6.4  
QPSK single carrier

**Test setup:**  
see test report chapter 7.3: cdgj

**Test equipment:**  
see test report chapter 7.x: C220, R001, W009, W019, W053

**Remark:**

**Test result:** Measurement for orientation


**Environment condition:**  
Date & Time: Mon 21/Dec/2020 13:38:56  
Location: CTC advanced GmbH, Laboratory RC-SYS  
Temperature: 22 °C  
Humidity: 55 %  
Voltage: 120 Vac

**Setup of measurement equipment:**  
Start frequency: 13.75 GHz  
Stop frequency: 14.5 GHz  
Center frequency: 14.125 GHz  
Frequency span: 750 MHz  
Resolution-BW: 100 kHz  
Video-BW: 300 kHz  
Input attenuation: 0 dB  
Trace-Mode: Max-Hold  
Detector-Mode: Pos Peak

**Correction:**  
Directional coupler (W009) + 39.5 dB  
Coaxial cable (C220) + 2.7 dB  
DUT-Antenna (on-axis) + 40.0 dBi  
Test antenna + 0.0 dB  
BW correction factor + 0.0 dB  
Atten. between HPA and feedhorn + 0.0 dB  
Freefield attenuation + 0.0 dB  
TOTAL CORRECTION: + 82.2 dB

**Remarks:**  
Test of general function of the EUT and measurement for orientation

Plot No. 2

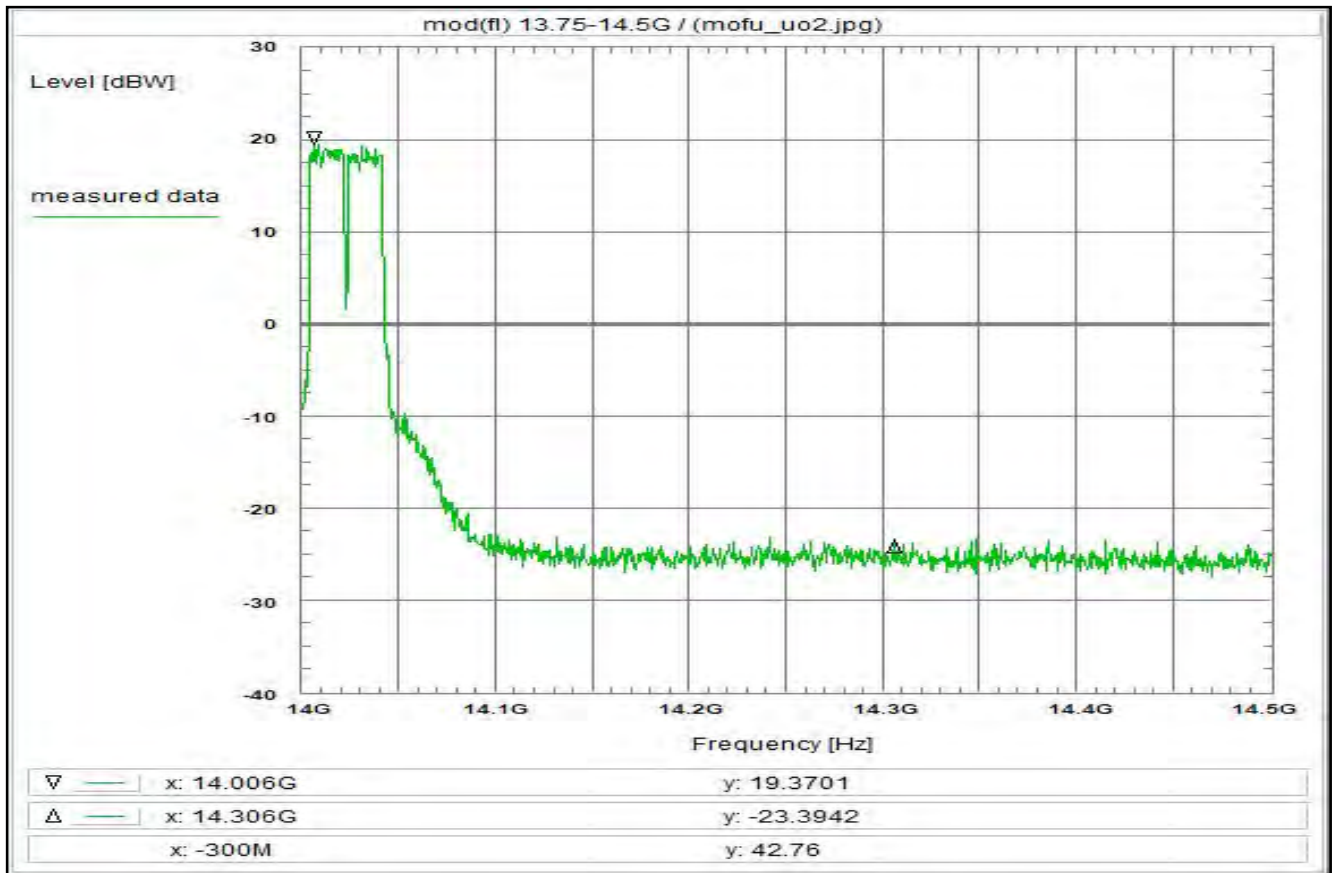

**Subclause:** -/- Function test  
Modulated rf-carrier at the lower edge of the band (fl)  
Measurement within the band

**Limit:**  
no limits defined  
This test serves to verify the general function of the EUT and for orientation regarding to the spurious emissions which are expected within the band, furthermore for comparison of the actual power with the rated value at modulated carrier adjusted as close to the lower edge of the operating frequency band.

**Test results:**  
see plot (an explicit table was not generated)

**Operating condition of DUT:**  
operating condition 4, see test report chapter 6.4  
QPSK dual carrier

**Test setup:**  
see test report chapter 7.3: cdgj

**Test equipment:**  
see test report chapter 7.x: C107, R001, W009, W019, W053

**Remark:**

**Test result:** measurement for orientation


**Environment condition:**  
Date & Time: Wed 19/May/2021 13:35:13  
Location: CTC advanced GmbH, Laboratory RC-SYS  
Temperature: 22 °C  
Humidity: 55 %  
Voltage: 120 Vac

**Setup of measurement equipment:**  
Start frequency: 14 GHz  
Stop frequency: 14.5 GHz  
Center frequency: 14.25 GHz  
Frequency span: 500 MHz  
Resolution-BW: 100 kHz  
Video-BW: 300 kHz  
Input attenuation: 10 dB  
Trace-Mode: Max-Hold  
Detector-Mode: Pos Peak

**Correction:**  
Directional coupler (W009) + 39.5 dB  
Coaxial cable (C107) + 4.0 dB  
DUT-Antenna (on-axis) + 38.2 dBi  
Test antenna + 0.0 dB  
BW correction factor + 0.0 dB  
Atten. between HPA and feedhorn + 0.0 dB  
Freefield attenuation + 0.0 dB  
TOTAL CORRECTION: + 81.7 dB

**Remarks:**  
Test of general function of the EUT and measurement for orientation

Plot No. 3

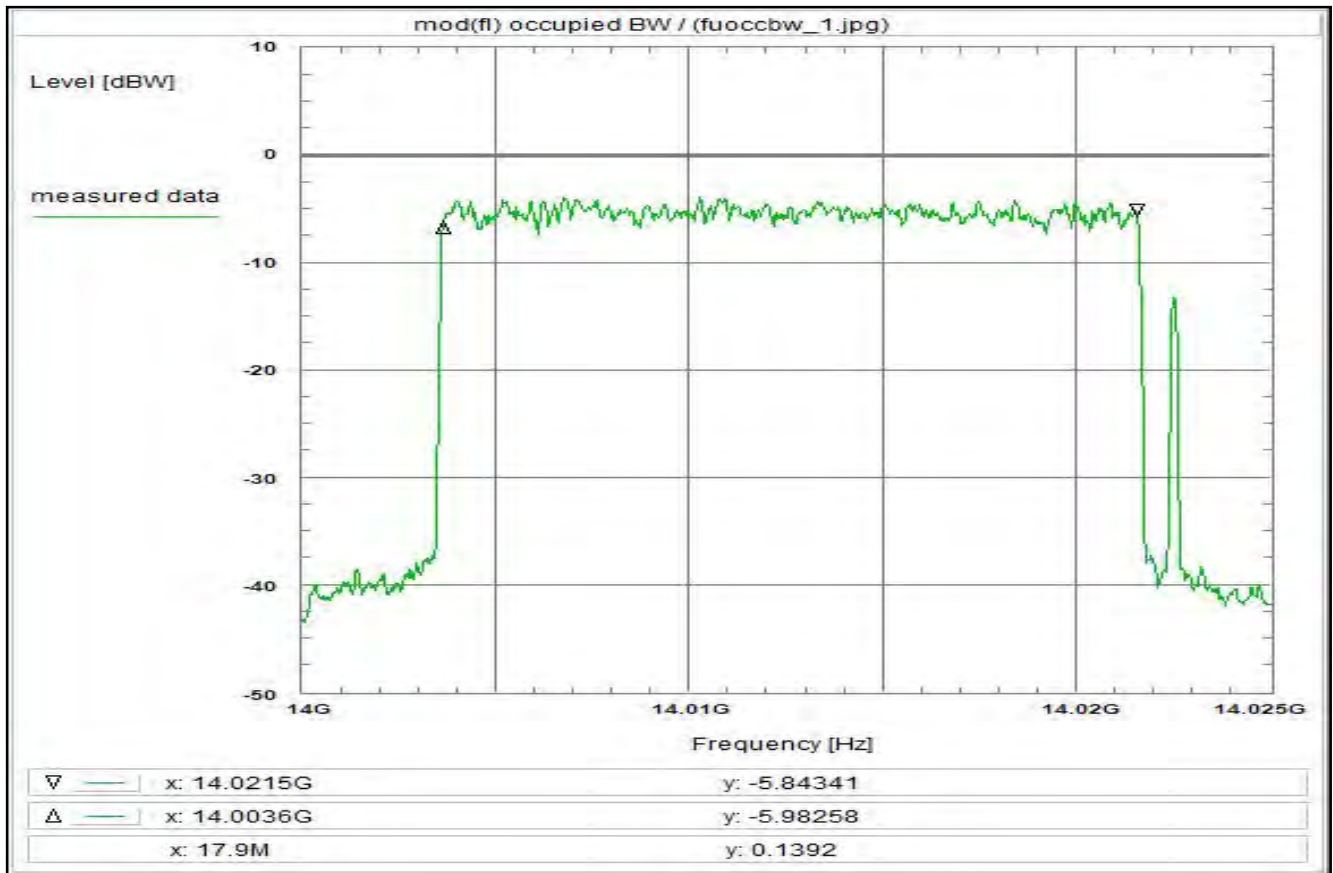

**Subclause:** -/- Function test  
Modulated rf-carrier at the lower edge of the band (f)  
Determination of the occupied bandwidth

**Limit:**  
no limits defined

The frequency range in the plot is about 3 times the expected occupied bandwidth.

**Test results:**  
see plot (an explicit table was not generated)

**Operating condition of DUT:**  
operating condition 1, see test report chapter 6.4  
QPSK single carrier

**Test setup:**  
see test report chapter 7.3: cdgj

**Test equipment:**  
see test report chapter 7.x: C107, R001, W009, W019, W053

**Remark:**

**Test result:** determination of the occupied bandwidth


**Environment condition:**  
Date & Time: Wed 19/May/2021 13:58:35  
Location: CTC advanced GmbH, Laboratory RC-SYS  
Temperature: 22 °C  
Humidity: 55 %  
Voltage: 120 Vac

**Setup of measurement equipment:**  
Start frequency: 14 GHz  
Stop frequency: 14.025 GHz  
Center frequency: 14.0125 GHz  
Frequency span: 25 MHz  
Resolution-BW: 100 kHz  
Video-BW: 300 kHz  
Input attenuation: 10 dB  
Trace-Mode: Average  
Detector-Mode: Pos Peak

**Correction:**  
Directional coupler (W009) + 39.6 dB  
Coaxial cable (C107) + 4.0 dB  
DUT-Antenna (on-axis) + 38.2 dBi  
Test antenna + 0.0 dB  
BW correction factor (100k -> 4k) - 14.0 dB  
Atten. between HPA and feedhorn + 0.0 dB  
Freefield attenuation + 0.0 dB  
TOTAL CORRECTION: + 67.8 dB


**Remarks:**  
Determination of the occupied bandwidth.  
The measured value is about 17.9 MHz (delta marker)  
(according to the definition: 99% of the total mean power)  
The internal function of the analyzer was used for determination.

Plot No. 4

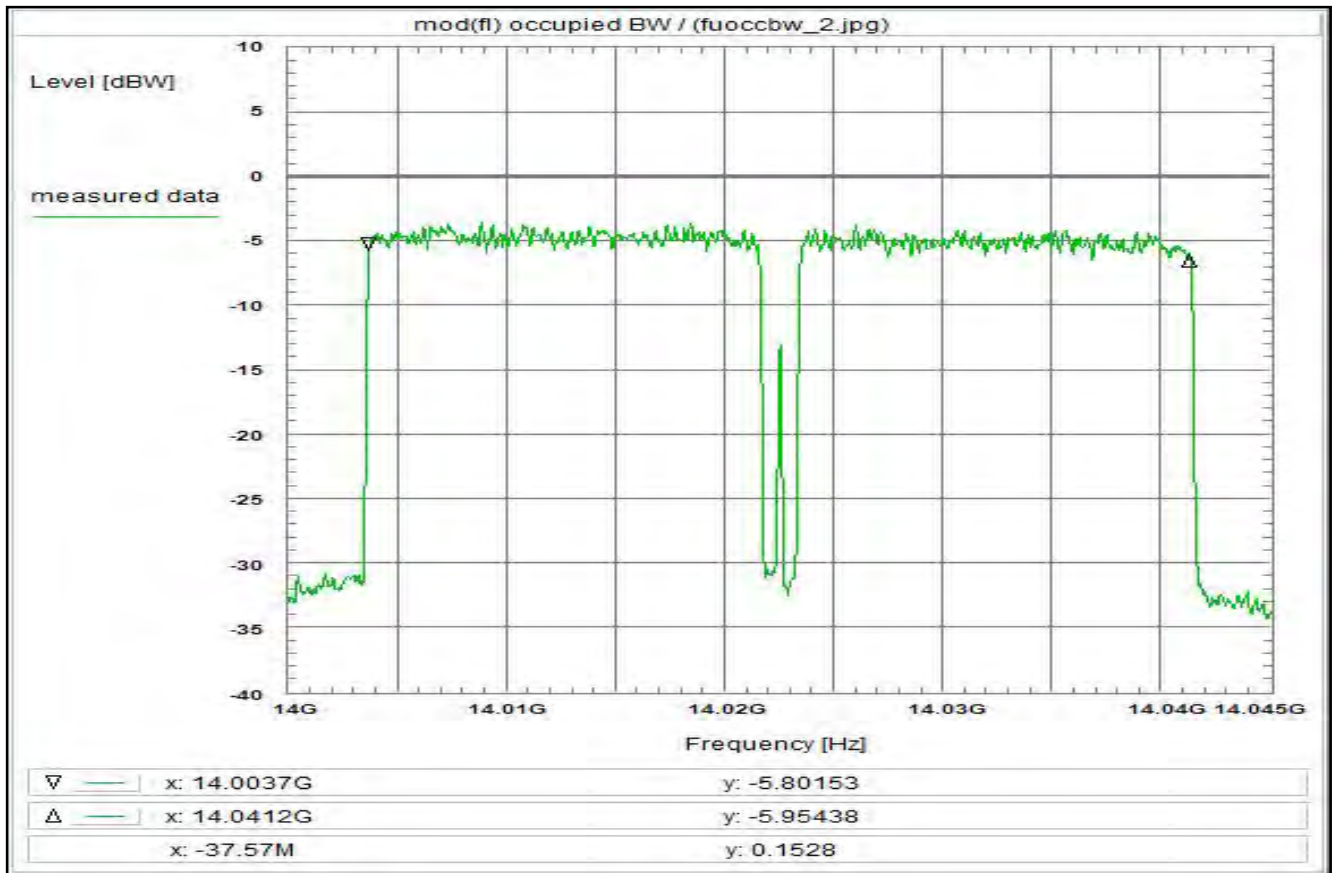

<p><b>Subclause:</b> -/- Function test Modulated rf-carrier at the lower edge of the band (f) Determination of the occupied bandwidth</p> <p><b>Limit:</b> no limits defined</p> <p>The frequency range in the plot is about 3 times the expected occupied bandwidth.</p> <p><b>Test results:</b> see plot (an explicit table was not generated)</p> <p><b>Operating condition of DUT:</b> operating condition 4, see test report chapter 6.4 QPSK dual carrier</p> <p><b>Test setup:</b> see test report chapter 7.3: cdgj</p> <p><b>Test equipment:</b> see test report chapter 7.x: C107, R001, W009, W019, W053</p> <p><b>Remark:</b> determination of the occupied bandwidth</p> <p><b>Test result:</b> determination of the occupied bandwidth</p>	<p><b>Environment condition:</b> Date &amp; Time: Wed 19/May/2021 14:23:32 Location: CTC advanced GmbH, Laboratory RC-SYS Temperature: 22 °C Humidity: 55 % Voltage: 120 Vac</p> <p><b>Setup of measurement equipment:</b> Start frequency: 14 GHz Stop frequency: 14.045 GHz Center frequency: 14.0225 GHz Frequency span: 45 MHz Resolution-BW: 100 kHz Video-BW: 300 kHz Input attenuation: 10 dB Trace-Mode: Average Detector-Mode: Pos Peak</p> <p><b>Correction:</b> Directional coupler (W009) + 39.6 dB Coaxial cable (C107) + 4.0 dB DUT-Antenna (on-axis) + 38.2 dBi Test antenna + 0.0 dB BW correction factor (100k -&gt; 4k) - 14.0 dB Atten. between HPA and feedhorn + 0.0 dB Freefield attenuation + 0.0 dB TOTAL CORRECTION: + 67.8 dB</p> <p><b>Remarks:</b> Determination of the occupied bandwidth. The measured value is about 37.5 MHz (delta marker) (according to the definition: 99% of the total mean power) The internal function of the analyzer was used for determination.</p>
--	--

Plot No. 5

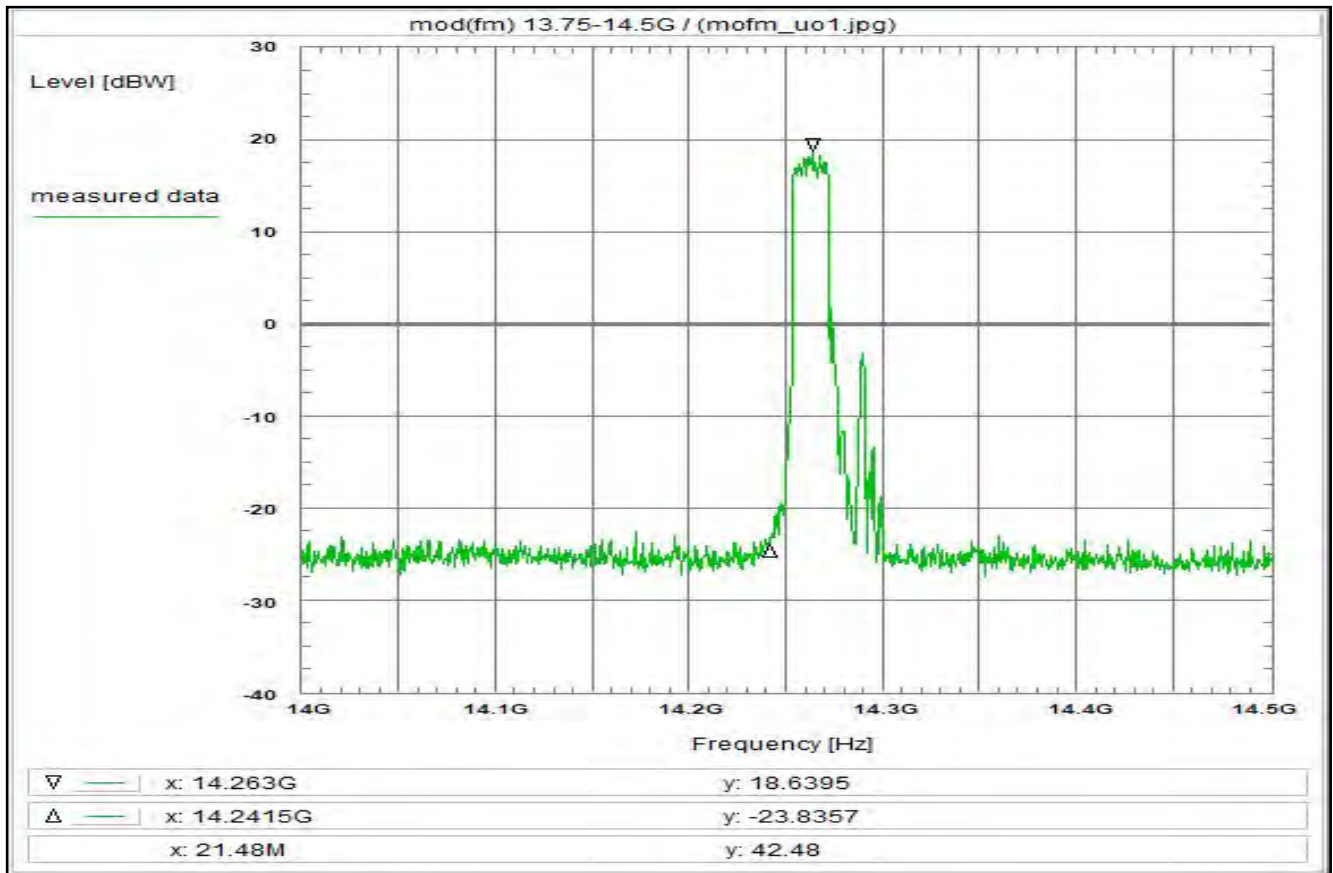

**Subclause:** -/- Function test  
Modulated rf-carrier in the middle of the band (fm)  
Measurement within the band

**Limit:**  
no limits defined  
This test serves to verify the general function of the EUT and for orientation regarding to the spurious emissions which are expected within the band, furthermore for comparison of the actual power with the rated value at modulated carrier adjusted in the middle of the band (EIRP).

**Test results:**  
see plot (an explicit table was not generated)

**Operating condition of DUT:**  
operating condition 1, see test report chapter 6.4  
QPSK single carrier

**Test setup:**  
see test report chapter 7.3: cdgj

**Test equipment:**  
see test report chapter 7.x: C107, R001, W009, W019, W053

**Remark:**

**Test result:** measurement for orientation

**Environment condition:**  
Date & Time: Wed 19/May/2021 13:28:24  
Location: CTC advanced GmbH, Laboratory RC-SYS  
Temperature: 22 °C  
Humidity: 55 %  
Voltage: 120 Vac


**Setup of measurement equipment:**  
Start frequency: 14 GHz  
Stop frequency: 14.5 GHz  
Center frequency: 14.25 GHz  
Frequency span: 500 MHz  
Resolution-BW: 100 kHz  
Video-BW: 300 kHz  
Input attenuation: 10 dB  
Trace-Mode: Max-Hold  
Detector-Mode: Pos Peak

**Correction:**  
Directional coupler (W009) + 39.5 dB  
Coaxial cable (C107) + 4.0 dB  
DUT-Antenna (on-axis) + 38.5 dBi  
Test antenna + 0.0 dB  
BW correction factor + 0.0 dB  
Atten. between HPA and feedhorn + 0.0 dB  
Freefield attenuation + 0.0 dB  
TOTAL CORRECTION: + 82.0 dB

**Remarks:**  
Test of general function of the EUT and measurement for orientation



Plot No. 6

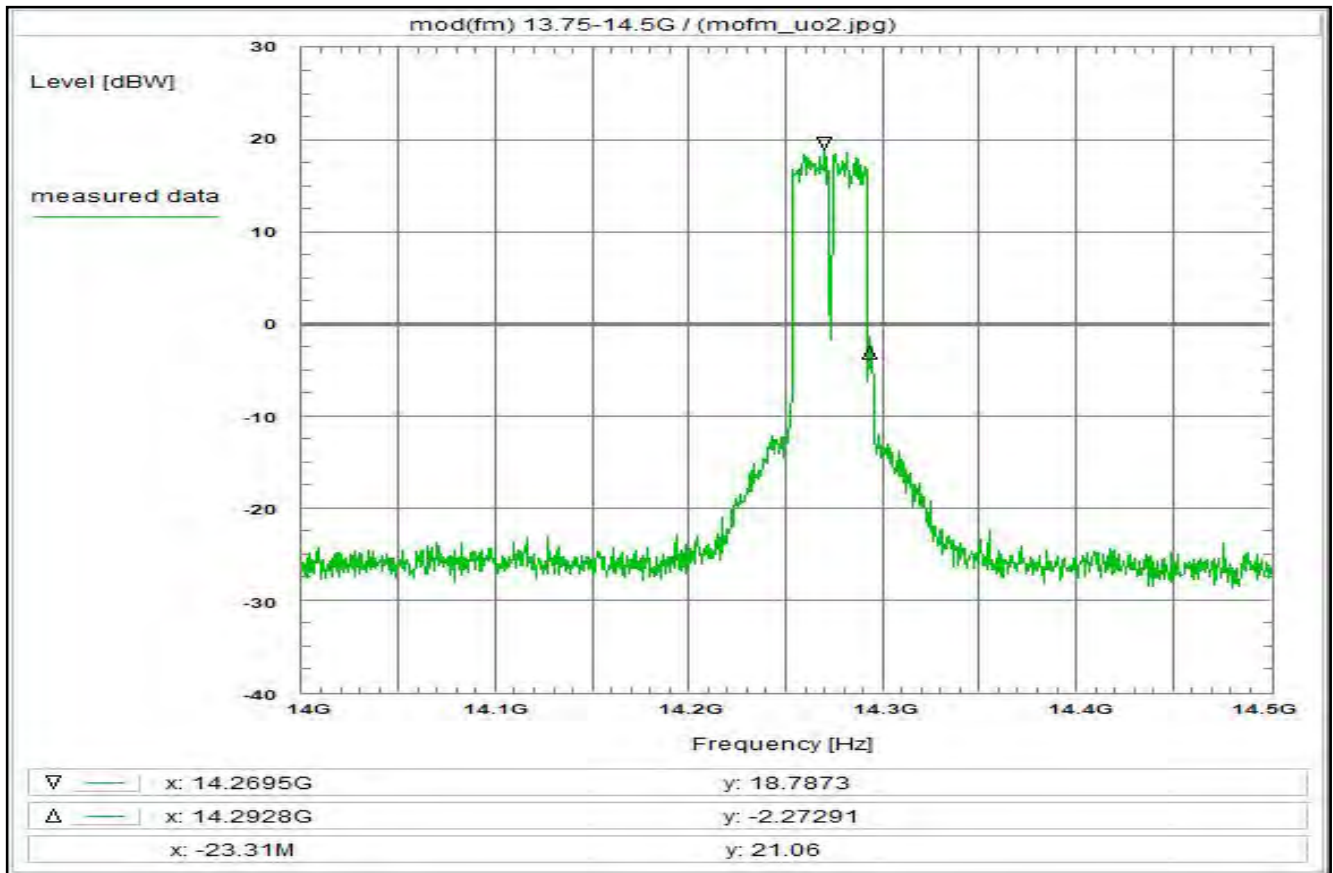

**Subclause:** -/- Function test  
Modulated rf-carrier in the middle of the band (fm)  
Measurement within the band

**Limit:**  
no limits defined  
This test serves to verify the general function of the EUT and for orientation regarding to the spurious emissions which are expected within the band, furthermore for comparison of the actual power with the rated value at modulated carrier adjusted in the middle of the band (EIRP).

**Test results:**  
see plot (an explicit table was not generated)

**Operating condition of DUT:**  
operating condition 4, see test report chapter 6.4  
QPSK dual carrier

**Test setup:**  
see test report chapter 7.3: cdgj

**Test equipment:**  
see test report chapter 7.x: C107, R001, W009, W019, W053

**Remark:**

**Test result:** measurement for orientation


**Environment condition:**  
Date & Time: Wed 19/May/2021 13:33:35  
Location: CTC advanced GmbH, Laboratory RC-SYS  
Temperature: 22 °C  
Humidity: 55 %  
Voltage: 120 Vac

**Setup of measurement equipment:**  
Start frequency: 14 GHz  
Stop frequency: 14.5 GHz  
Center frequency: 14.25 GHz  
Frequency span: 500 MHz  
Resolution-BW: 100 kHz  
Video-BW: 300 kHz  
Input attenuation: 10 dB  
Trace-Mode: Max-Hold  
Detector-Mode: Pos Peak

**Correction:**  
Directional coupler (W009) + 39.5 dB  
Coaxial cable (C107) + 4.0 dB  
DUT-Antenna (on-axis) + 38.5 dBi  
Test antenna + 0.0 dB  
BW correction factor + 0.0 dB  
Atten. between HPA and feedhorn + 0.0 dB  
Freefield attenuation + 0.0 dB  
TOTAL CORRECTION: + 82.0 dB

**Remarks:**  
Test of general function of the EUT and measurement for orientation

Plot No. 7

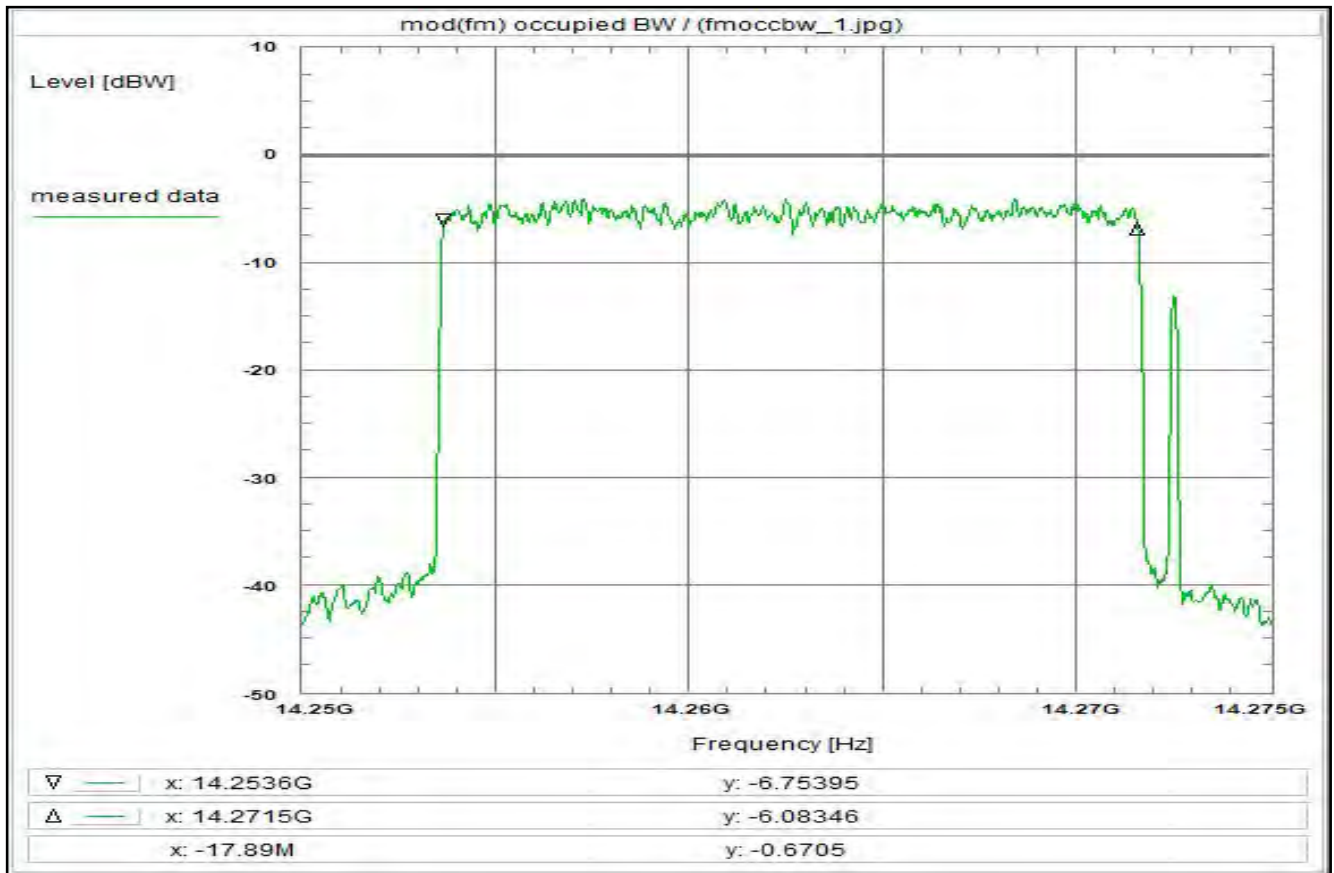

**Subclause:** -/- Function test  
Modulated rf-carrier in the middle of the band (fm)  
Determination of the occupied bandwidth

**Limit:**  
no limits defined

The frequency range in the plot is about 3 times the expected occupied bandwidth.

**Test results:**  
see plot (an explicit table was not generated)

**Operating condition of DUT:**  
operating condition 1, see test report chapter 6.4  
QPSK single carrier

**Test setup:**  
see test report chapter 7.3: cdgj

**Test equipment:**  
see test report chapter 7.x: C107, R001, W009, W019, W053

**Remark:**

**Test result:** determination of the occupied bandwidth


**Environment condition:**  
Date & Time: Wed 19/May/2021 13:48:23  
Location: CTC advanced GmbH, Laboratory RC-SYS  
Temperature: 22 °C  
Humidity: 55 %  
Voltage: 120 Vac

**Setup of measurement equipment:**  
Start frequency: 14.25 GHz  
Stop frequency: 14.275 GHz  
Center frequency: 14.2625 GHz  
Frequency span: 25 MHz  
Resolution-BW: 100 kHz  
Video-BW: 300 kHz  
Input attenuation: 10 dB  
Trace-Mode: Average  
Detector-Mode: Pos Peak

**Correction:**  
Directional coupler (W009) + 39.5 dB  
Coaxial cable (C107) + 4.0 dB  
DUT-Antenna (on-axis) + 38.5 dBi  
Test antenna + 0.0 dB  
BW correction factor (100k -> 4k) - 14.0 dB  
Atten. between HPA and feedhorn + 0.0 dB  
Freefield attenuation + 0.0 dB  
TOTAL CORRECTION: + 68.0 dB

**Remarks:**  
Determination of the occupied bandwidth.  
The measured value is about 17.9 MHz (delta marker)  
(according to the definition: 99% of the total mean power)  
The internal function of the analyzer was used for determination.

Plot No. 8

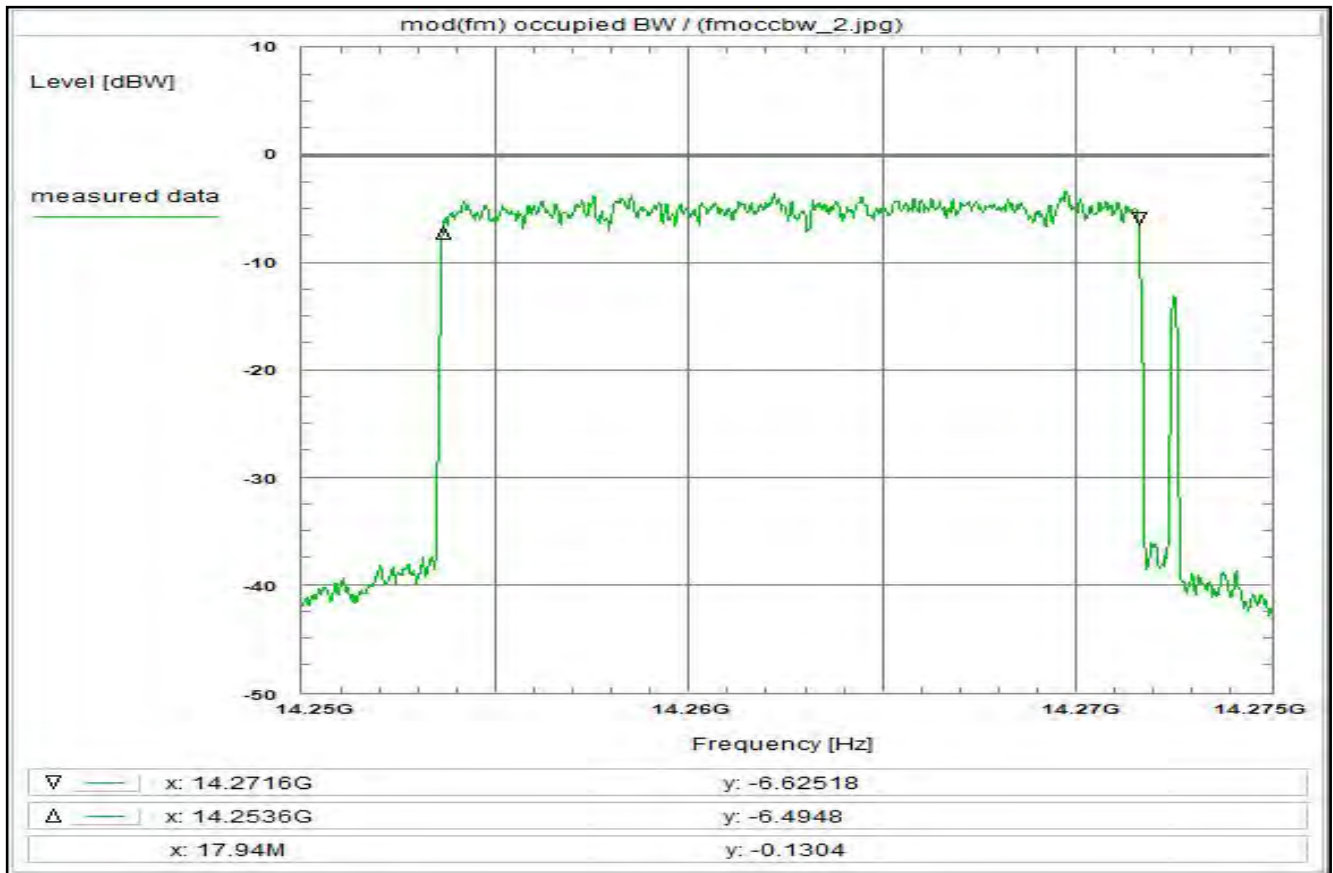

**Subclause:** -/- Function test  
Modulated rf-carrier in the middle of the band (fm)  
Determination of the occupied bandwidth

**Limit:**  
no limits defined

The frequency range in the plot is about 3 times the expected occupied bandwidth.

**Test results:**  
see plot (an explicit table was not generated)

**Operating condition of DUT:**  
operating condition 2, see test report chapter 6.4  
8PSK single carrier

**Test setup:**  
see test report chapter 7.3: cdgj

**Test equipment:**  
see test report chapter 7.x: C107, R001, W009, W019, W053

**Remark:**  
determination of the occupied bandwidth

**Test result:** determination of the occupied bandwidth


**Environment condition:**  
Date & Time: Wed 19/May/2021 13:51:04  
Location: CTC advanced GmbH, Laboratory RC-SYS  
Temperature: 22 °C  
Humidity: 55 %  
Voltage: 120 Vac

**Setup of measurement equipment:**  
Start frequency: 14.25 GHz  
Stop frequency: 14.275 GHz  
Center frequency: 14.2625 GHz  
Frequency span: 25 MHz  
Resolution-BW: 100 kHz  
Video-BW: 300 kHz  
Input attenuation: 10 dB  
Trace-Mode: Average  
Detector-Mode: Pos Peak

**Correction:**  
Directional coupler (W009) + 39.5 dB  
Coaxial cable (C107) + 4.0 dB  
DUT-Antenna (on-axis) + 38.5 dBi  
Test antenna + 0.0 dB  
BW correction factor (100k -> 4k) - 14.0 dB  
Atten. between HPA and feedhorn + 0.0 dB  
Freefield attenuation + 0.0 dB  
TOTAL CORRECTION: + 68.0 dB

**Remarks:**  
Determination of the occupied bandwidth.  
The measured value is about 17.9 MHz (delta marker)  
(according to the definition: 99% of the total mean power)  
The internal function of the analyzer was used for determination.

Plot No. 9

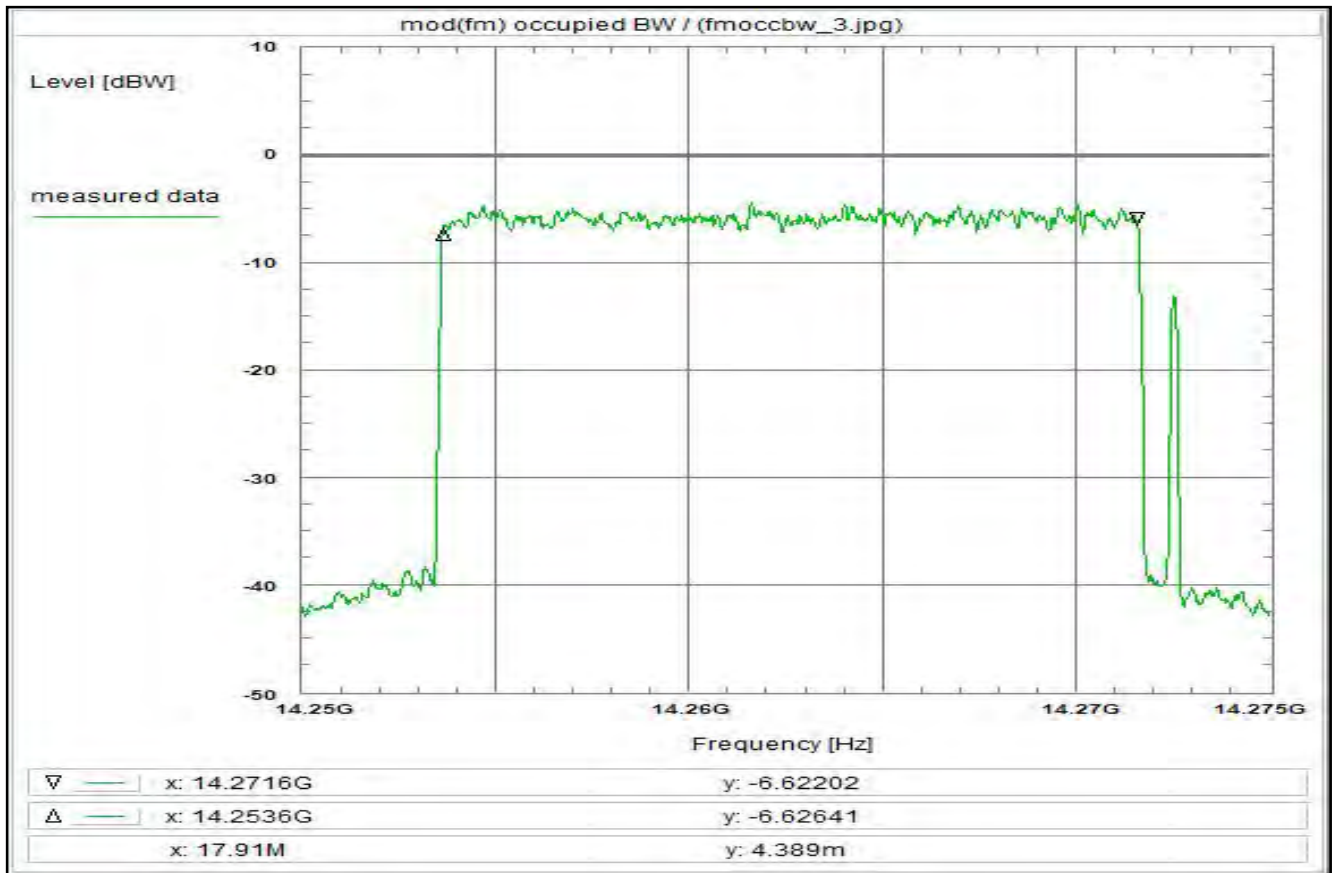

**Subclause:** -/- Function test  
Modulated rf-carrier in the middle of the band (fm)  
Determination of the occupied bandwidth

**Limit:**  
no limits defined

The frequency range in the plot is about 3 times the expected occupied bandwidth.

**Test results:**  
see plot (an explicit table was not generated)

**Operating condition of DUT:**  
operating condition 3, see test report chapter 6.4  
16QAM single carrier

**Test setup:**  
see test report chapter 7.3: cdgj

**Test equipment:**  
see test report chapter 7.x: C107, R001, W009, W019, W053

**Remark:**

**Test result:** determination of the occupied bandwidth


**Environment condition:**  
Date & Time: Wed 19/May/2021 13:53:18  
Location: CTC advanced GmbH, Laboratory RC-SYS  
Temperature: 22 °C  
Humidity: 55 %  
Voltage: 120 Vac

**Setup of measurement equipment:**  
Start frequency: 14.25 GHz  
Stop frequency: 14.275 GHz  
Center frequency: 14.2625 GHz  
Frequency span: 25 MHz  
Resolution-BW: 100 kHz  
Video-BW: 300 kHz  
Input attenuation: 10 dB  
Trace-Mode: Average  
Detector-Mode: Pos Peak

**Correction:**  
Directional coupler (W009) + 39.5 dB  
Coaxial cable (C107) + 4.0 dB  
DUT-Antenna (on-axis) + 38.5 dBi  
Test antenna + 0.0 dB  
BW correction factor (100k -> 4k) - 14.0 dB  
Atten. between HPA and feedhorn + 0.0 dB  
Freefield attenuation + 0.0 dB  
TOTAL CORRECTION: + 68.0 dB

**Remarks:**  
Determination of the occupied bandwidth.  
The measured value is about 17.9 MHz (delta marker)  
(according to the definition: 99% of the total mean power)  
The internal function of the analyzer was used for determination.

Plot No. 10

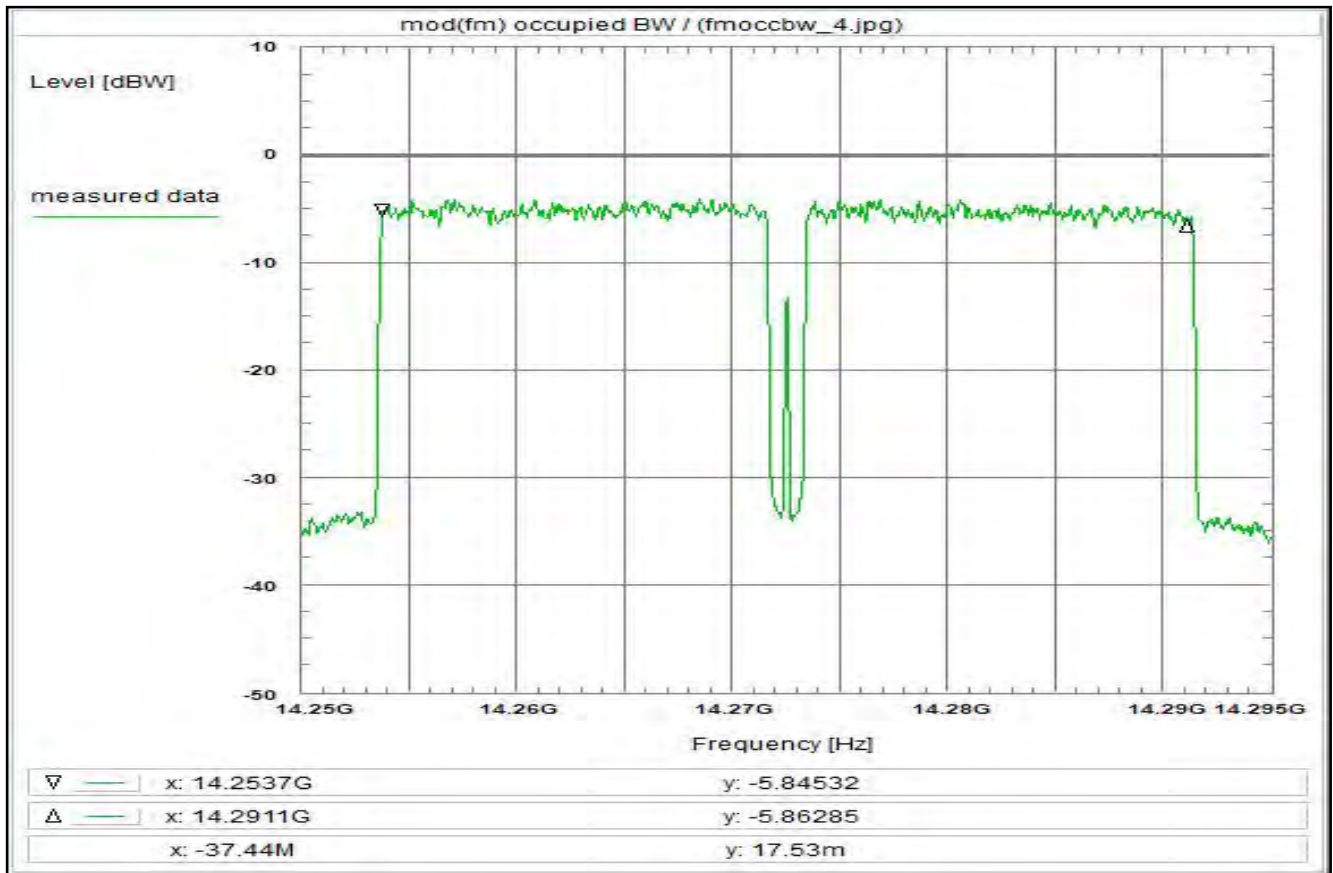

**Subclause:** -/- Function test  
Modulated rf-carrier in the middle of the band (fm)  
Determination of the occupied bandwidth

**Limit:**  
no limits defined

The frequency range in the plot is about 3 times the expected occupied bandwidth.

**Test results:**  
see plot (an explicit table was not generated)

**Operating condition of DUT:**  
operating condition 4, see test report chapter 6.4  
QPSK dual carrier

**Test setup:**  
see test report chapter 7.3: cdgj

**Test equipment:**  
see test report chapter 7.x: C107, R001, W009, W019, W053

**Remark:**  
determination of the occupied bandwidth

**Test result:** determination of the occupied bandwidth


**Environment condition:**  
Date & Time: Wed 19/May/2021 14:12:55  
Location: CTC advanced GmbH, Laboratory RC-SYS  
Temperature: 22 °C  
Humidity: 55 %  
Voltage: 120 Vac

**Setup of measurement equipment:**  
Start frequency: 14.25 GHz  
Stop frequency: 14.295 GHz  
Center frequency: 14.2725 GHz  
Frequency span: 45 MHz  
Resolution-BW: 100 kHz  
Video-BW: 300 kHz  
Input attenuation: 10 dB  
Trace-Mode: Average  
Detector-Mode: Pos Peak

**Correction:**  
Directional coupler (W009) + 39.5 dB  
Coaxial cable (C107) + 4.0 dB  
DUT-Antenna (on-axis) + 38.5 dBi  
Test antenna + 0.0 dB  
BW correction factor (100k -> 4k) - 14.0 dB  
Atten. between HPA and feedhorn + 0.0 dB  
Freefield attenuation + 0.0 dB  
TOTAL CORRECTION: + 68.0 dB

**Remarks:**  
Determination of the occupied bandwidth.  
The measured value is about 37.5 MHz (delta marker)  
(according to the definition: 99% of the total mean power)  
The internal function of the analyzer was used for determination.

Plot No. 11

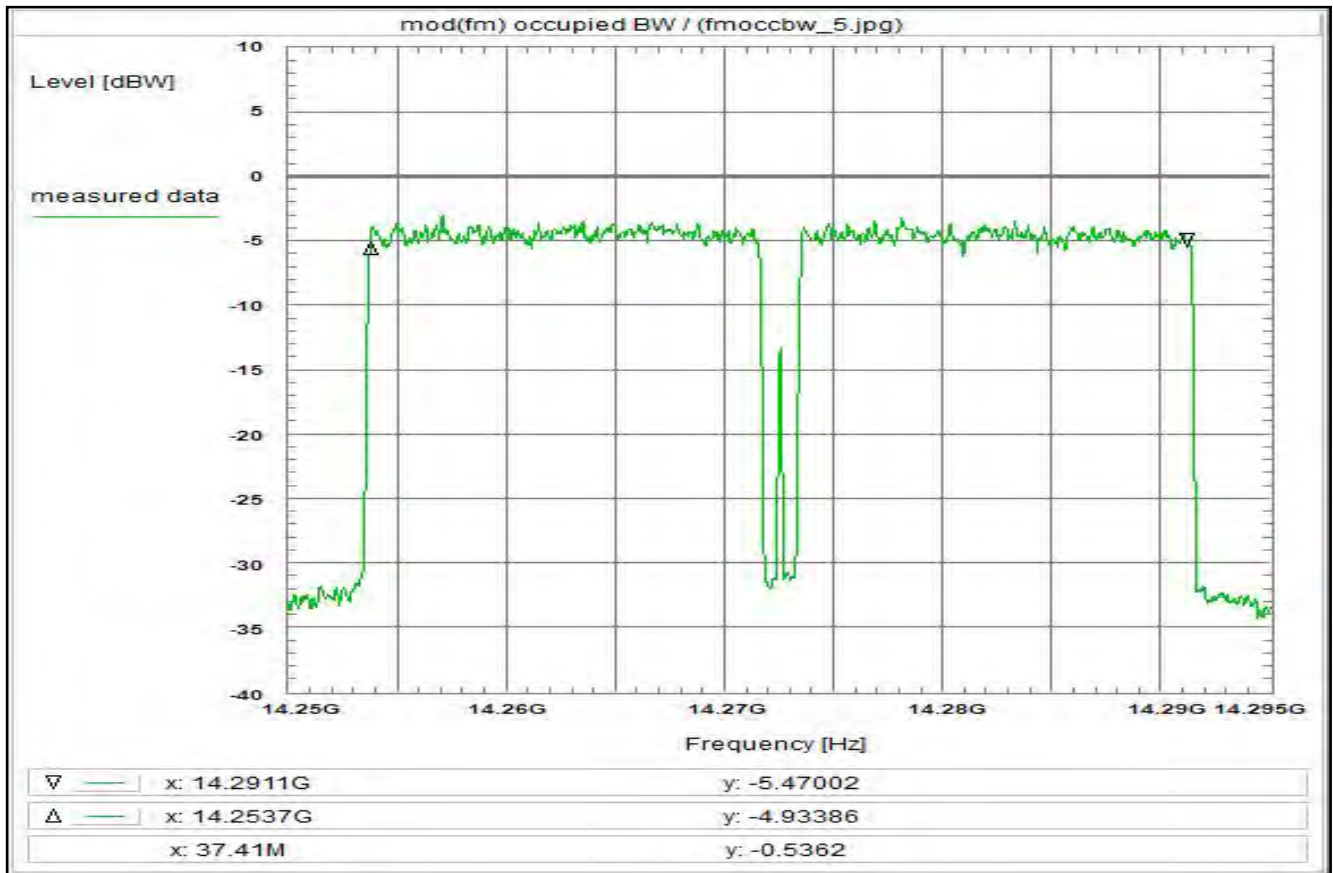

**Subclause:** -/- Function test  
Modulated rf-carrier in the middle of the band (fm)  
Determination of the occupied bandwidth

**Limit:**  
no limits defined

The frequency range in the plot is about 3 times the expected occupied bandwidth.

**Test results:**  
see plot (an explicit table was not generated)

**Operating condition of DUT:**  
operating condition 5, see test report chapter 6.4  
8PSK dual carrier

**Test setup:**  
see test report chapter 7.3: cdgj

**Test equipment:**  
see test report chapter 7.x: C107, R001, W009, W019, W053

**Remark:**

**Test result:** determination of the occupied bandwidth


**Environment condition:**  
Date & Time: Wed 19/May/2021 14:16:14  
Location: CTC advanced GmbH, Laboratory RC-SYS  
Temperature: 22 °C  
Humidity: 55 %  
Voltage: 120 Vac

**Setup of measurement equipment:**  
Start frequency: 14.25 GHz  
Stop frequency: 14.295 GHz  
Center frequency: 14.2725 GHz  
Frequency span: 45 MHz  
Resolution-BW: 100 kHz  
Video-BW: 300 kHz  
Input attenuation: 10 dB  
Trace-Mode: Average  
Detector-Mode: Pos Peak

**Correction:**  
Directional coupler (W009) + 39.5 dB  
Coaxial cable (C107) + 4.0 dB  
DUT-Antenna (on-axis) + 38.5 dBi  
Test antenna + 0.0 dB  
BW correction factor (100k -> 4k) - 14.0 dB  
Atten. between HPA and feedhorn + 0.0 dB  
Freefield attenuation + 0.0 dB  
TOTAL CORRECTION: + 68.0 dB

**Remarks:**  
Determination of the occupied bandwidth.  
The measured value is about 37.5 MHz (delta marker)  
(according to the definition: 99% of the total mean power)  
The internal function of the analyzer was used for determination.

Plot No. 12

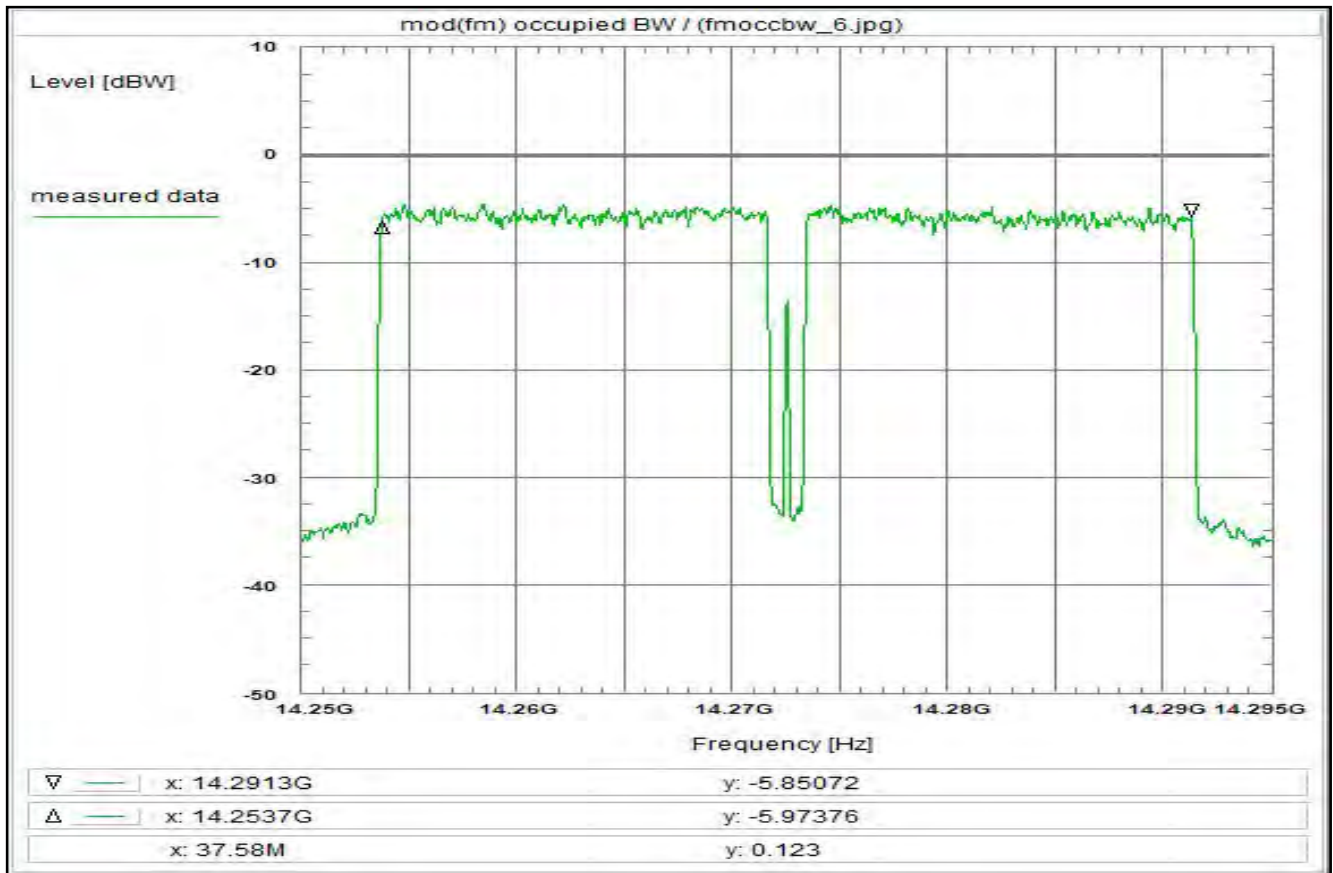

**Subclause:** -/- Function test  
Modulated rf-carrier in the middle of the band (fm)  
Determination of the occupied bandwidth

**Limit:**  
no limits defined

The frequency range in the plot is about 3 times the expected occupied bandwidth.

**Test results:**  
see plot (an explicit table was not generated)

**Operating condition of DUT:**  
operating condition 6, see test report chapter 6.4  
16QAM dual carrier

**Test setup:**  
see test report chapter 7.3: cdgj

**Test equipment:**  
see test report chapter 7.x: C107, R001, W009, W019, W053

**Remark:**  
determination of the occupied bandwidth

**Test result:** determination of the occupied bandwidth


**Environment condition:**  
Date & Time: Wed 19/May/2021 14:20:55  
Location: CTC advanced GmbH, Laboratory RC-SYS  
Temperature: 22 °C  
Humidity: 55 %  
Voltage: 120 Vac

**Setup of measurement equipment:**  
Start frequency: 14.25 GHz  
Stop frequency: 14.295 GHz  
Center frequency: 14.2725 GHz  
Frequency span: 45 MHz  
Resolution-BW: 100 kHz  
Video-BW: 300 kHz  
Input attenuation: 10 dB  
Trace-Mode: Average  
Detector-Mode: Pos Peak

**Correction:**  
Directional coupler (W009) + 39.5 dB  
Coaxial cable (C107) + 4.0 dB  
DUT-Antenna (on-axis) + 38.5 dBi  
Test antenna + 0.0 dB  
BW correction factor (100k -> 4k) - 14.0 dB  
Atten. between HPA and feedhorn + 0.0 dB  
Freefield attenuation + 0.0 dB  
TOTAL CORRECTION: + 68.0 dB

**Remarks:**  
Determination of the occupied bandwidth.  
The measured value is about 37.5 MHz (delta marker)  
(according to the definition: 99% of the total mean power)  
The internal function of the analyzer was used for determination.

Plot No. 13

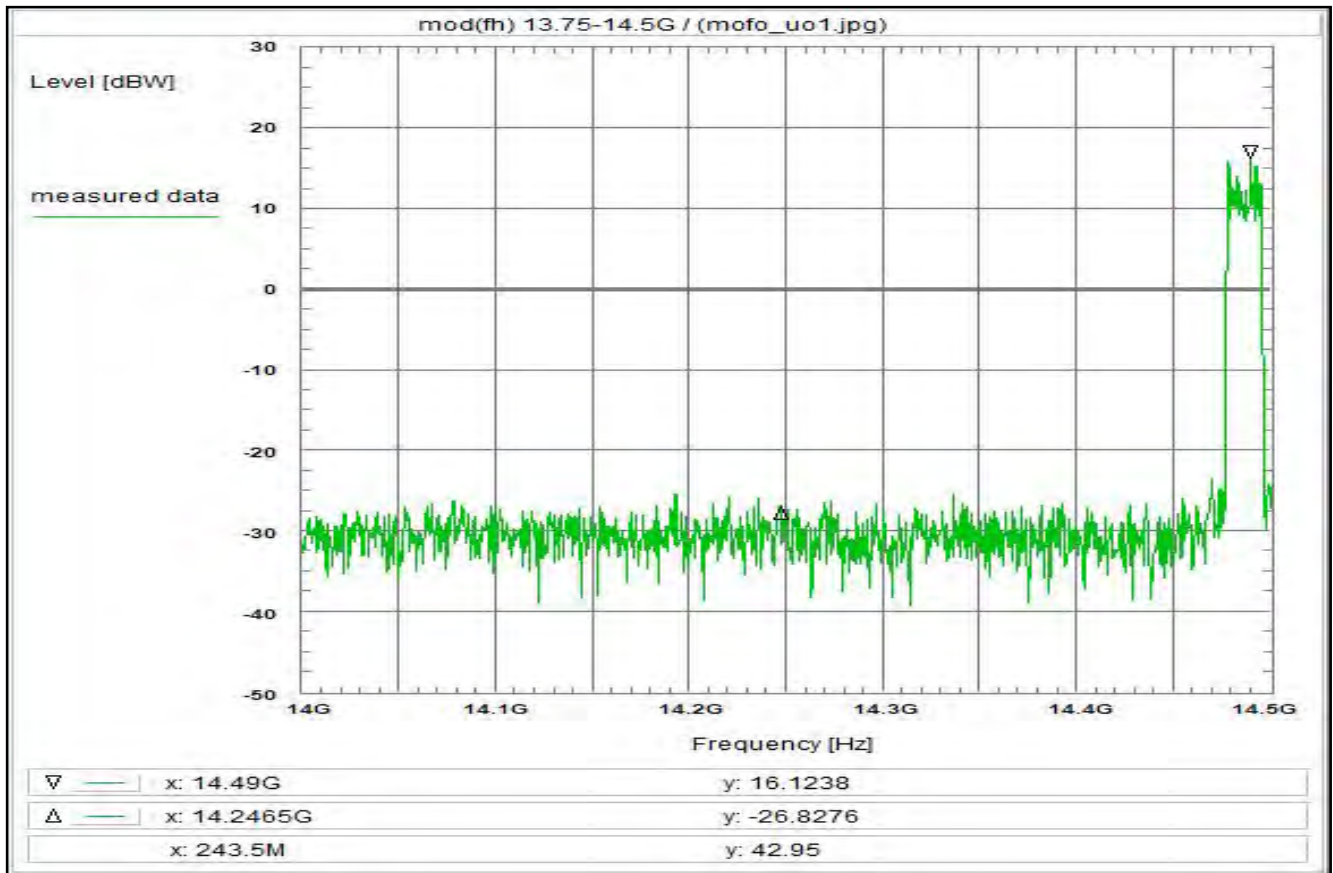

**Subclause:** -/- Function test  
Modulated rf-carrier at the upper edge of the band (fh)  
Measurement within the band

**Limit:**  
no limits defined  
This test serves to verify the general function of the EUT and for orientation regarding to the spurious emissions which are expected within the band, furthermore for comparison of the actual power with the rated value at modulated carrier adjusted as close to the upper edge of the operating frequency band.

**Test results:**  
see plot (an explicit table was not generated)

**Operating condition of DUT:**  
operating condition 1, see test report chapter 6.4  
QPSK single carrier

**Test setup:**  
see test report chapter 7.3: cdgj

**Test equipment:**  
see test report chapter 7.x: C107, R001, W009, W019, W053

**Remark:**

**Test result:** measurement for orientation

**Environment condition:**  
Date & Time: Wed 19/May/2021 13:31:07  
Location: CTC advanced GmbH, Laboratory RC-SYS  
Temperature: 22 °C  
Humidity: 55 %  
Voltage: 120 Vac


**Setup of measurement equipment:**  
Start frequency: 14 GHz  
Stop frequency: 14.5 GHz  
Center frequency: 14.25 GHz  
Frequency span: 500 MHz  
Resolution-BW: 100 kHz  
Video-BW: 300 kHz  
Input attenuation: 10 dB  
Trace-Mode: Clear Write  
Detector-Mode: Pos Peak

**Correction:**  
Directional coupler (W009) + 39.5 dB  
Coaxial cable (C107) + 4.0 dB  
DUT-Antenna (on-axis) + 38.3 dBi  
Test antenna + 0.0 dB  
BW correction factor + 0.0 dB  
Atten. between HPA and feedhorn + 0.0 dB  
Freefield attenuation + 0.0 dB  
TOTAL CORRECTION: + 81.8 dB

**Remarks:**  
Test of general function of the EUT and measurement for orientation



Plot No. 14

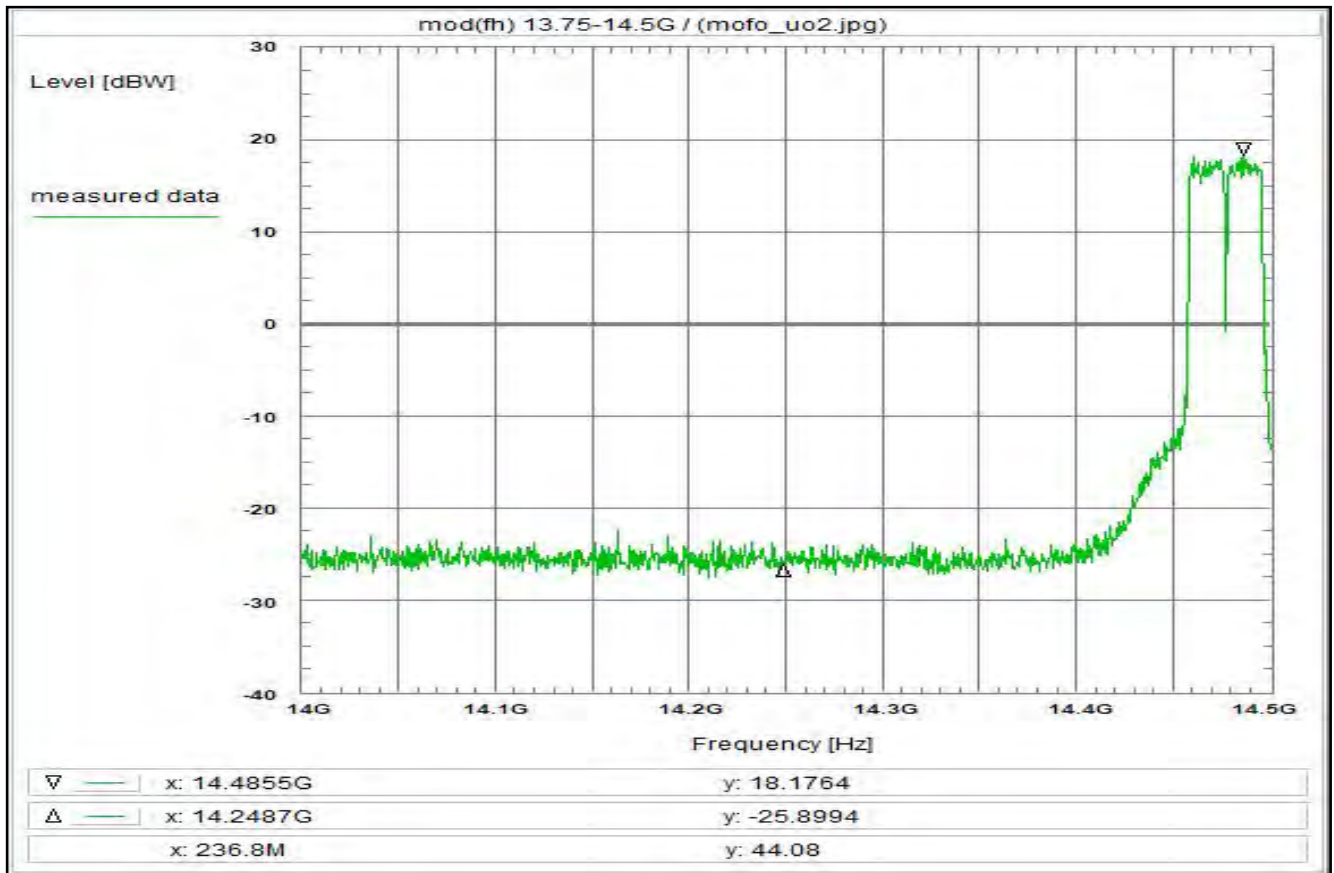

**Subclause:** -/- Function test  
Modulated rf-carrier at the upper edge of the band (fh)  
Measurement within the band

**Limit:**  
no limits defined  
This test serves to verify the general function of the EUT and for orientation regarding to the spurious emissions which are expected within the band, furthermore for comparison of the actual power with the rated value at modulated carrier adjusted as close to the upper edge of the operating frequency band.

**Test results:**  
see plot (an explicit table was not generated)

**Operating condition of DUT:**  
operating condition 4, see test report chapter 6.4  
QPSK dual carrier

**Test setup:**  
see test report chapter 7.3: cdgj

**Test equipment:**  
see test report chapter 7.x: C107, R001, W009, W019, W053

**Remark:**

**Test result:** measurement for orientation


**Environment condition:**  
Date & Time: Wed 19/May/2021 13:32:20  
Location: CTC advanced GmbH, Laboratory RC-SYS  
Temperature: 22 °C  
Humidity: 55 %  
Voltage: 120 Vac

**Setup of measurement equipment:**  
Start frequency: 14 GHz  
Stop frequency: 14.5 GHz  
Center frequency: 14.25 GHz  
Frequency span: 500 MHz  
Resolution-BW: 100 kHz  
Video-BW: 300 kHz  
Input attenuation: 10 dB  
Trace-Mode: Max-Hold  
Detector-Mode: Pos Peak

**Correction:**  
Directional coupler (W009) + 39.5 dB  
Coaxial cable (C107) + 4.0 dB  
DUT-Antenna (on-axis) + 38.3 dBi  
Test antenna + 0.0 dB  
BW correction factor + 0.0 dB  
Atten. between HPA and feedhorn + 0.0 dB  
Freefield attenuation + 0.0 dB  
TOTAL CORRECTION: + 81.8 dB

**Remarks:**  
Test of general function of the EUT and measurement for orientation

Plot No. 15

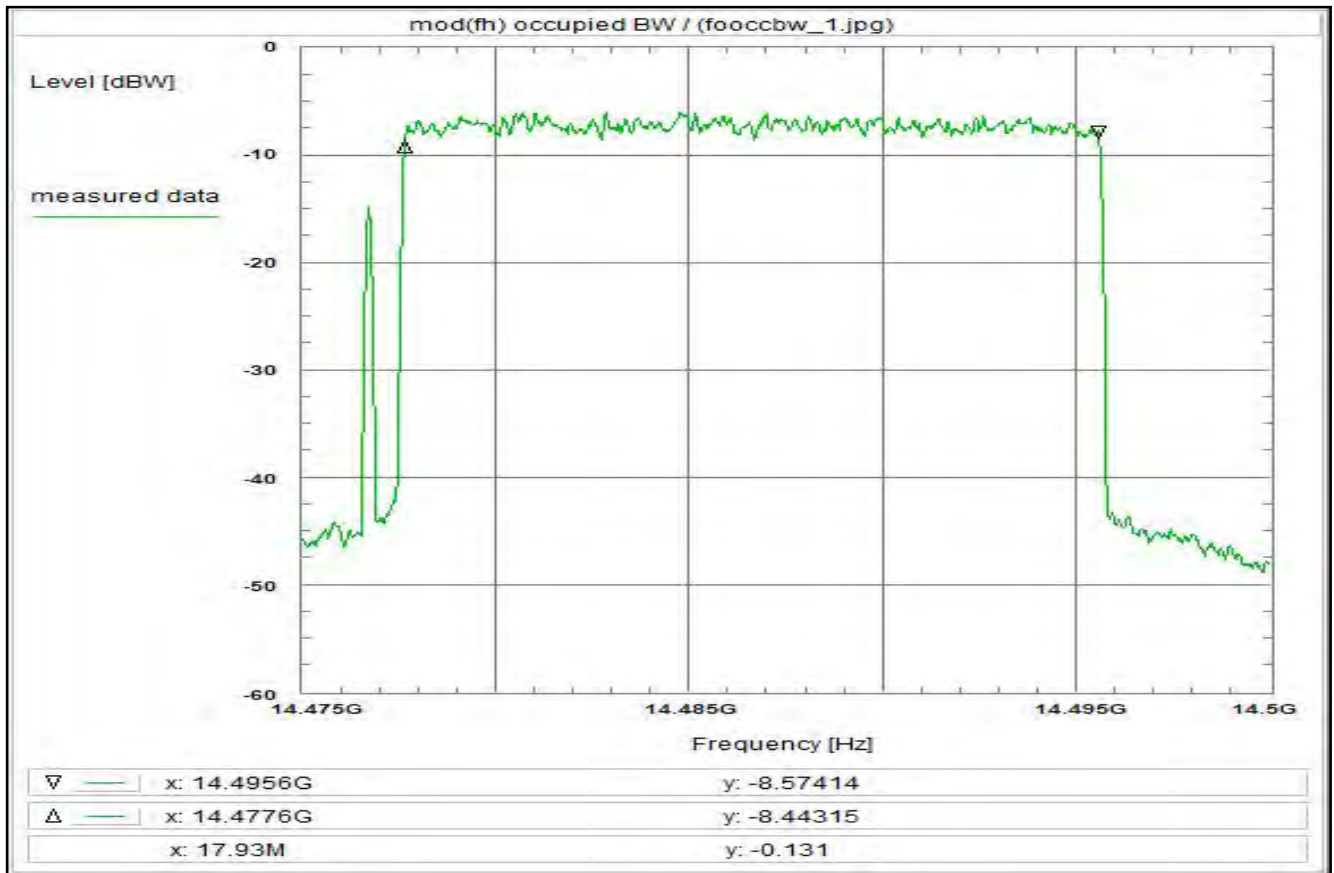

**Subclause:** -/- Function test  
Modulated rf-carrier at the upper edge of the band (fh)  
Determination of the occupied bandwidth

**Limit:**  
no limits defined

The frequency range in the plot is about 3 times the expected occupied bandwidth.

**Test results:**  
see plot (an explicit table was not generated)

**Operating condition of DUT:**  
operating condition 1, see test report chapter 6.4  
QPSK single carrier

**Test setup:**  
see test report chapter 7.3: cdgj

**Test equipment:**  
see test report chapter 7.x: C107, R001, W009, W019, W053

**Remark:**  
determination of the occupied bandwidth

**Test result:** determination of the occupied bandwidth


**Environment condition:**  
Date & Time: Wed 19/May/2021 14:06:28  
Location: CTC advanced GmbH, Laboratory RC-SYS  
Temperature: 22 °C  
Humidity: 55 %  
Voltage: 120 Vac

**Setup of measurement equipment:**  
Start frequency: 14.475 GHz  
Stop frequency: 14.5 GHz  
Center frequency: 14.4875 GHz  
Frequency span: 25 MHz  
Resolution-BW: 100 kHz  
Video-BW: 300 kHz  
Input attenuation: 10 dB  
Trace-Mode: Average  
Detector-Mode: Pos Peak

**Correction:**  
Directional coupler (W009) + 39.4 dB  
Coaxial cable (C107) + 4.0 dB  
DUT-Antenna (on-axis) + 38.3 dBi  
Test antenna + 0.0 dB  
BW correction factor (100k -> 4k) - 14.0 dB  
Atten. between HPA and feedhorn + 0.0 dB  
Freefield attenuation + 0.0 dB  
TOTAL CORRECTION: + 67.7 dB

**Remarks:**  
Determination of the occupied bandwidth.  
The measured value is about 17.9 MHz (delta marker)  
(according to the definition: 99% of the total mean power)  
The internal function of the analyzer was used for determination.

Plot No. 16

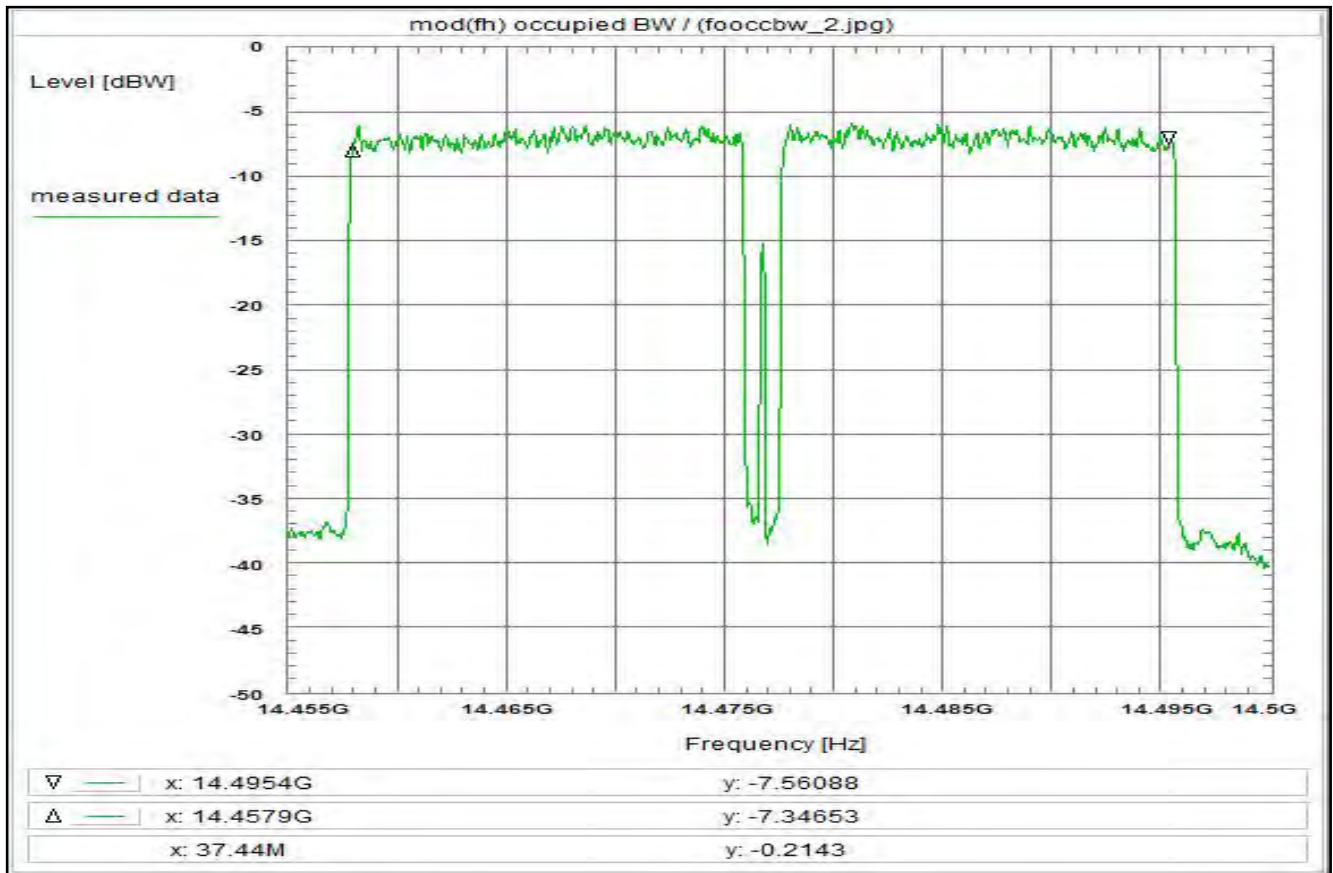

**Subclause:** -/- Function test  
Modulated rf-carrier at the upper edge of the band (fh)  
Determination of the occupied bandwidth

**Limit:**  
no limits defined

The frequency range in the plot is about 3 times the expected occupied bandwidth.

**Test results:**  
see plot (an explicit table was not generated)

**Operating condition of DUT:**  
operating condition 4, see test report chapter 6.4  
QPSK dual carrier

**Test setup:**  
see test report chapter 7.3: cdgj

**Test equipment:**  
see test report chapter 7.x: C107, R001, W009, W019, W053

**Remark:**  
determination of the occupied bandwidth

**Test result:** determination of the occupied bandwidth


**Environment condition:**  
Date & Time: Wed 19/May/2021 14:26:43  
Location: CTC advanced GmbH, Laboratory RC-SYS  
Temperature: 22 °C  
Humidity: 55 %  
Voltage: 120 Vac

**Setup of measurement equipment:**  
Start frequency: 14.455 GHz  
Stop frequency: 14.5 GHz  
Center frequency: 14.4775 GHz  
Frequency span: 45 MHz  
Resolution-BW: 100 kHz  
Video-BW: 300 kHz  
Input attenuation: 10 dB  
Trace-Mode: Average  
Detector-Mode: Pos Peak

**Correction:**  
Directional coupler (W009) + 39.4 dB  
Coaxial cable (C107) + 4.0 dB  
DUT-Antenna (on-axis) + 38.3 dBi  
Test antenna + 0.0 dB  
BW correction factor (100k -> 4k) - 14.0 dB  
Atten. between HPA and feedhorn + 0.0 dB  
Freefield attenuation + 0.0 dB  
TOTAL CORRECTION: + 67.7 dB

**Remarks:**  
Determination of the occupied bandwidth.  
The measured value is about 37.5 MHz (delta marker)  
(according to the definition: 99% of the total mean power)  
The internal function of the analyzer was used for determination.

Plot No. 17

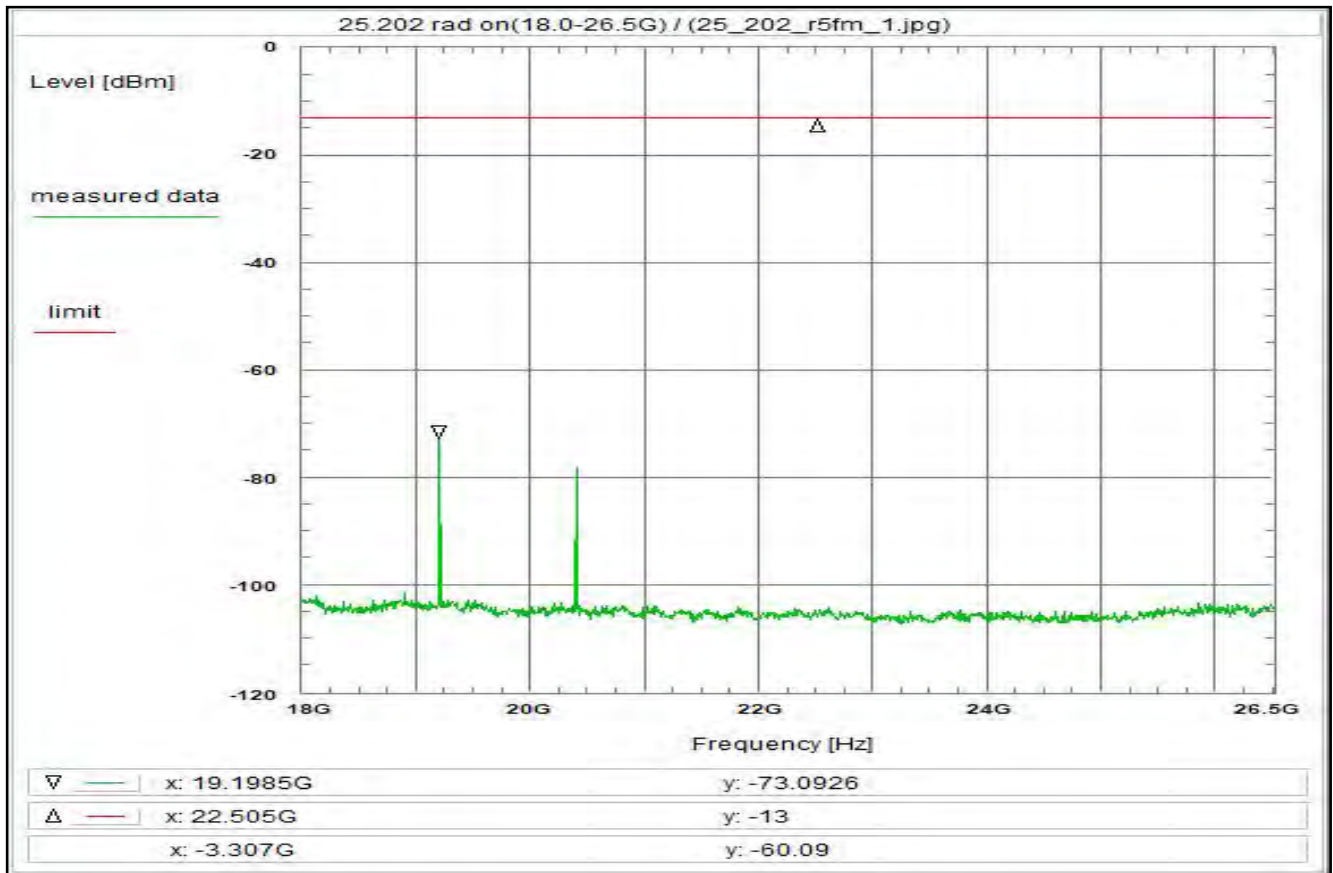

**Subclause:** 25.202 Emission limitations  
Modulated rf-carrier within the band (fl/fm/fh)  
Radiation coming out of DUT-cabinet(s): 18.0 GHz - 26.5 GHz

**Limit:**  
Limit acc. to 25.202): -13.0 dBm

**Test results:**  
see plot (an explicit table was not generated)

**Operating condition of DUT:**  
operating condition 1, see test report chapter 6.4  
QPSK single carrier, valid for all frequencies and modulations

**Test setup:**  
see test report chapter 7.2

**Test equipment:**  
see test report chapter 7.x: A019, BCBL, C107, R001, W065, W073, W074

**Remark:**

**Test result:** Test passed


**Environment condition:**  
Date & Time: Fri 21/May/2021 14:07:59  
Location: CTC advanced GmbH, Laboratory RC-SYS  
Temperature: 22 °C  
Humidity: 55 %  
Voltage: 120 Vac

**Setup of measurement equipment:**  
Start frequency: 18 GHz  
Stop frequency: 26.5 GHz  
Center frequency: 22.25 GHz  
Frequency span: 8.5 GHz  
Resolution-BW: 100 kHz  
Video-BW: 300 kHz  
Input attenuation: 0 dB  
Trace-Mode: Max-Hold  
Detector-Mode: Pos Peak

**Correction:**  
Directional coupler + 0.0 dB  
Coaxial cable (C107) + 5.0 dB  
DUT-Antenna + 0.0 dBi  
Test antenna (A019) - 19.3 dB  
BW correction factor (100k -> 4k) - 14.0 dB  
Atten. between HPA and feedhorn - 0.0 dB  
Freefield attenuation (22.25GHz, 0.3m) + 48.9 dB  
(BCBL) - 46.0 dB  
TOTAL CORRECTION: - 25.4 dB

**Remarks:**  
Carrier-on state / Carrier within the the band (fl/fm/fh)  
Measurement for orientation with a measuring antenna close to the DUT-cabinets.  
If any critical spurious radiations are detected a measurement in an exactly defined distance will be carried out.

Plot No. 18

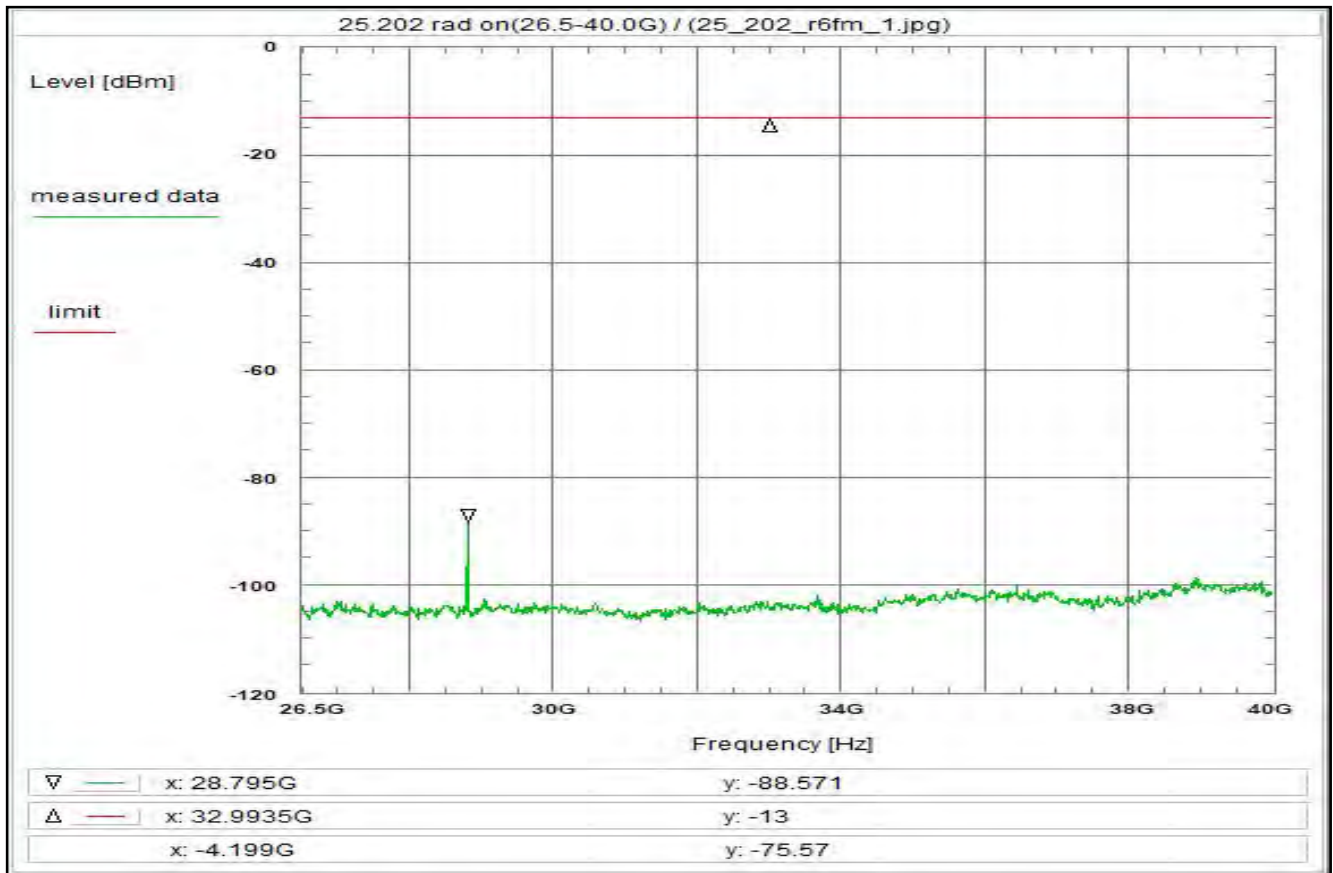

**Subclause:** 25.202 Emission limitations  
Modulated rf-carrier within the band (fl/fm/fh)  
Radiation coming out of DUT-cabinet(s): 26.5 GHz - 40.0 GHz

**Limit:**  
Limit acc. to 25.202): -13.0 dBm

**Test results:**  
see plot (an explicit table was not generated)

**Operating condition of DUT:**  
operating condition 1, see test report chapter 6.4  
QPSK single carrier, valid for all frequencies and modulations

**Test setup:**  
see test report chapter 7.2

**Test equipment:**  
see test report chapter 7.x: A021, BCBL, C107, R001, W065, W073, W074

**Remark:**

**Test result: Test passed**


**Environment condition:**  
Date & Time: Fri 21/May/2021 14:14:09  
Location: CTC advanced GmbH, Laboratory RC-SYS  
Temperature: 22 °C  
Humidity: 55 %  
Voltage: 120 Vac

**Setup of measurement equipment:**  
Start frequency: 26.5 GHz  
Stop frequency: 40 GHz  
Center frequency: 33.25 GHz  
Frequency span: 13.5 GHz  
Resolution-BW: 100 kHz  
Video-BW: 300 kHz  
Input attenuation: 0 dB  
Trace-Mode: Max-Hold  
Detector-Mode: Pos Peak

**Correction:**  
Directional coupler + 0.0 dB  
Coaxial cable (C107) + 6.3 dB  
DUT-Antenna + 0.0 dBi  
Test antenna (A021) - 19.6 dB  
BW correction factor (100k -> 4k) - 14.0 dB  
Atten. between HPA and feedhorn - 0.0 dB  
Freefield attenuation (33.25GHz, 0.2m) + 48.9 dB  
(BCBL) - 47.7 dB  
TOTAL CORRECTION: - 26.1 dB


**Remarks:**  
Carrier-on state / Carrier within the the band (fl/fm/fh)  
Measurement for orientation with a measuring antenna close to the DUT-cabinets.  
If any critical spurious radiations are detected a measurement in an exactly defined distance will be carried out.

Plot No. 19

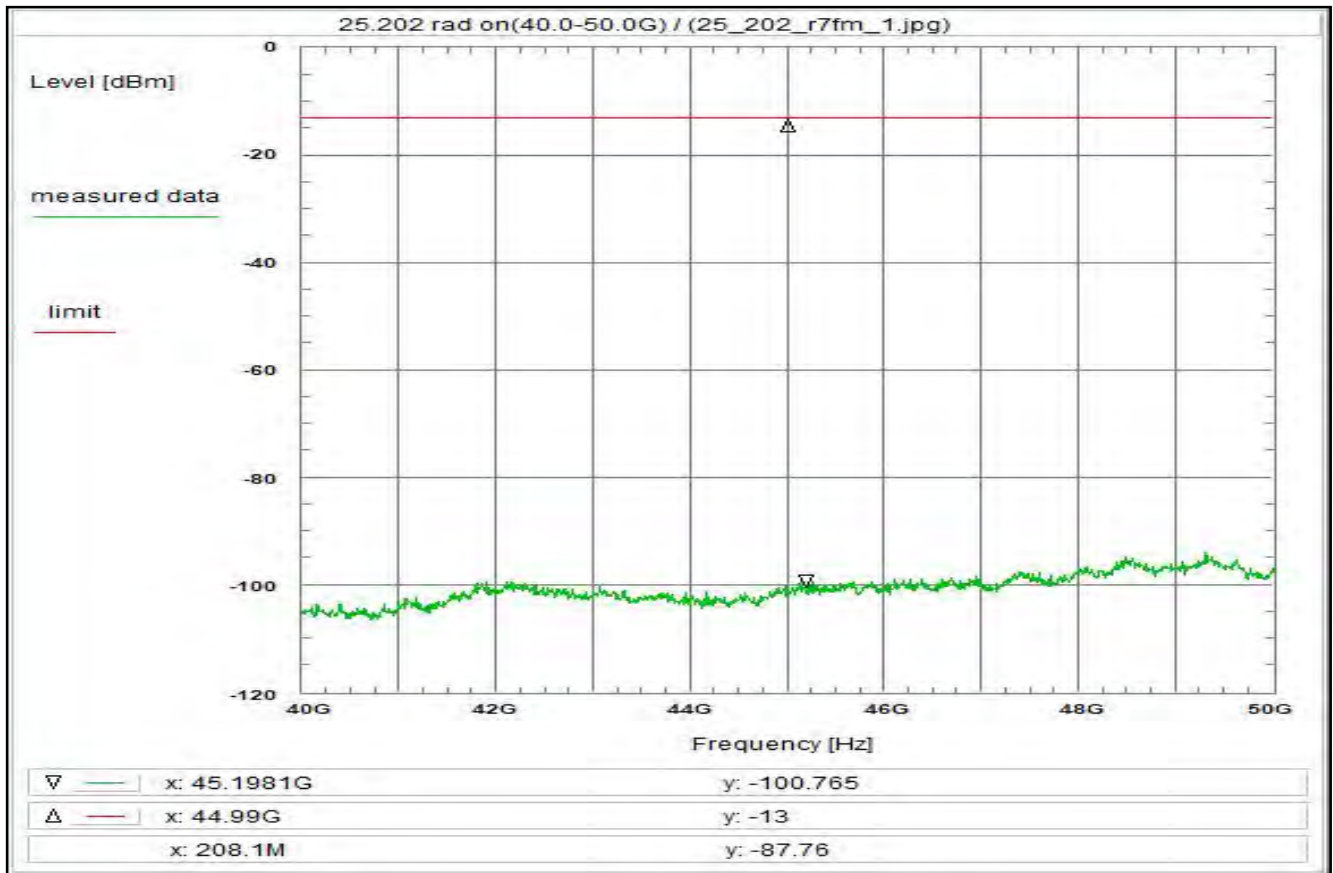

<p><b>Subclause:</b> 25.202 Emission limitations Modulated rf-carrier within the band (fl/fm/fh) Radiation coming out of DUT-cabinet(s): 40.0 GHz - 50.0 GHz</p> <p><b>Limit:</b> Limit acc. to 25.202): -13.0 dBm</p> <p><b>Test results:</b> see plot (an explicit table was not generated)</p> <p><b>Operating condition of DUT:</b> operating condition 1, see test report chapter 6.4 QPSK single carrier, valid for all frequencies and modulations</p> <p><b>Test setup:</b> see test report chapter 7.2</p> <p><b>Test equipment:</b> see test report chapter 7.x: A023, BCBL, C107, R001, W022, W074, W077</p> <p><b>Remark:</b></p> <p><b>Test result:</b> Test passed</p>	<p><b>Environment condition:</b> Date &amp; Time: Fri 21/May/2021 14:17:25 Location: CTC advanced GmbH, Laboratory RC-SYS Temperature: 22 °C Humidity: 55 % Voltage: 120 Vac</p> <p><b>Setup of measurement equipment:</b> Start frequency: 40 GHz Stop frequency: 50 GHz Center frequency: 45 GHz Frequency span: 10 GHz Resolution-BW: 100 kHz Video-BW: 300 kHz Input attenuation: 0 dB Trace-Mode: Max-Hold Detector-Mode: Pos Peak</p> <p><b>Correction:</b> Directional coupler + 0.0 dB Coaxial cable (C107) + 7.4 dB DUT-Antenna + 0.0 dBi Test antenna (A023) - 18.9 dB BW correction factor (100k -&gt; 4k) - 14.0 dB Atten. between HPA and feedhorn - 0.0 dB Freefield attenuation (45.00GHz, 0.1m) + 45.5 dB (BCBL) - 46.8 dB TOTAL CORRECTION: - 26.8 dB</p> <p><b>Remarks:</b> Carrier-on state / Carrier within the the band (fl/fm/fh) Measurement for orientation with a measuring antenna close to the DUT-cabinets. If any critical spurious radiations are detected a measurement in an exactly defined distance will be carried out.</p>
--	--

Plot No. 20

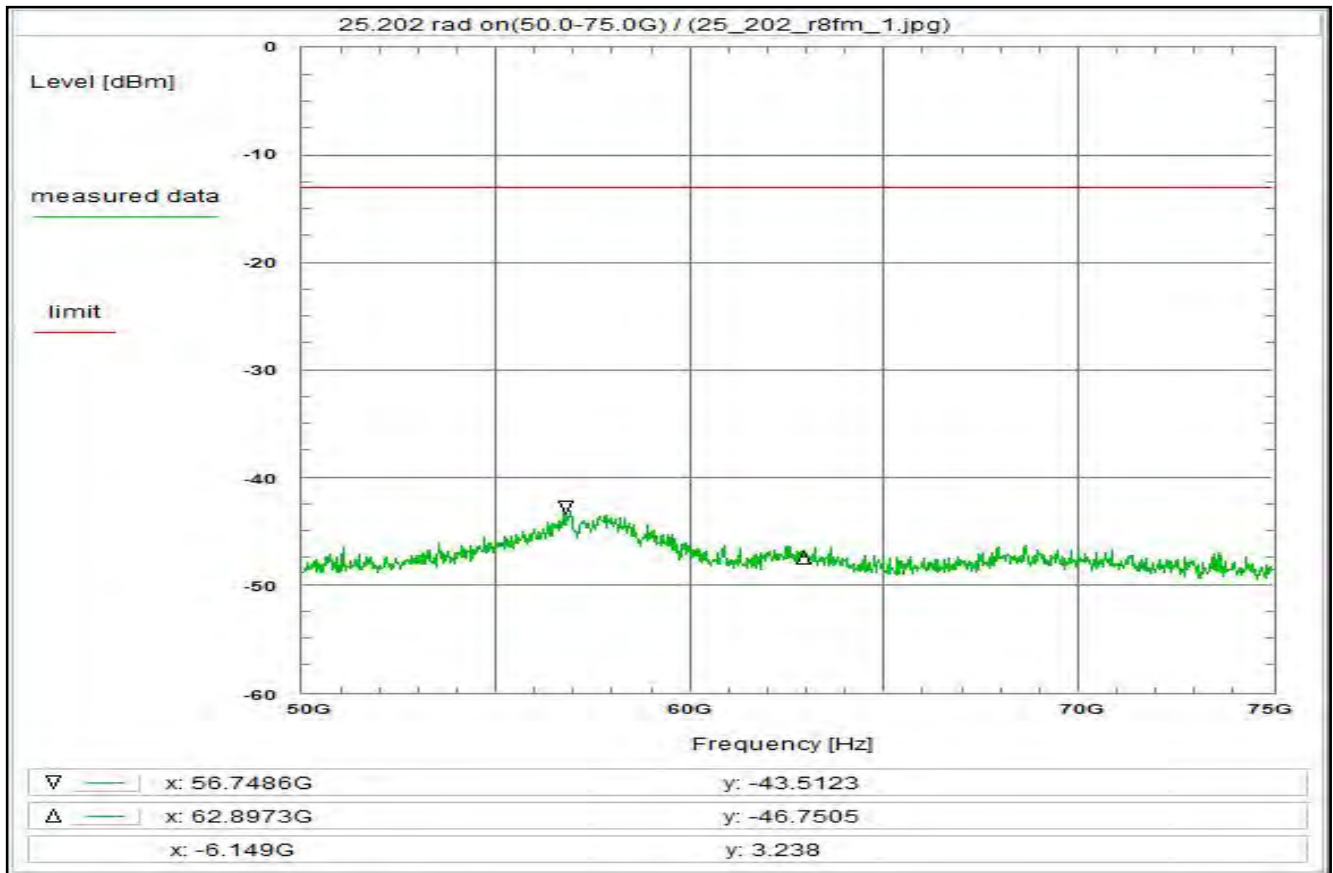

**Subclause:** 25.202 Emission limitations  
Modulated rf-carrier within the band (fl/fm/fh)  
Radiation coming out of DUT-cabinet(s): 50.0 GHz - 75.0 GHz

**Limit:**  
Limit acc. to 25.202): -13.0 dBm

**Test results:**  
see plot (an explicit table was not generated)

**Operating condition of DUT:**  
operating condition 1, see test report chapter 6.4  
QPSK single carrier, valid for all frequencies and modulations

**Test setup:**  
see test report chapter 7.4

**Test equipment:**  
see test report chapter 6.x: R001, R025, W022, W074, W077

**Remark:**

**Test result: Test passed**


**Environment condition:**  
Date & Time: Fri 21/May/2021 14:24:09  
Location: CTC advanced GmbH, Laboratory RC-SYS  
Temperature: 22 °C  
Humidity: 55 %  
Voltage: 120 Vac

**Setup of measurement equipment:**  
Start frequency: 50 GHz  
Stop frequency: 75 GHz  
Center frequency: 62.5 GHz  
Frequency span: 25 GHz  
Resolution-BW: 100 kHz  
Video-BW: 300 kHz  
Input attenuation: 0 dB  
Trace-Mode: Max-Hold  
Detector-Mode: Pos Peak

**Correction:**  
Directional coupler + 0.0 dB  
Coaxial cable + 0.0 dB  
DUT-Antenna + 0.0 dBi  
Test antenna + 0.0 dB  
BW correction factor (100k -> 4k) - 14.0 dB  
Atten. between HPA and feedhorn - 0.0 dB  
Freefield attenuation (62.50GHz, 0.1m) + 48.4 dB  
TOTAL CORRECTION: + 34.4 dB

**Remarks:**  
Carrier-on state / Carrier within the the band (fl/fm/fh)  
Measurement for orientation with a measuring antenna close to the DUT-cabinets.  
If any critical spurious radiations are detected a measurement in an exactly defined distance will be carried out.

Plot No. 21

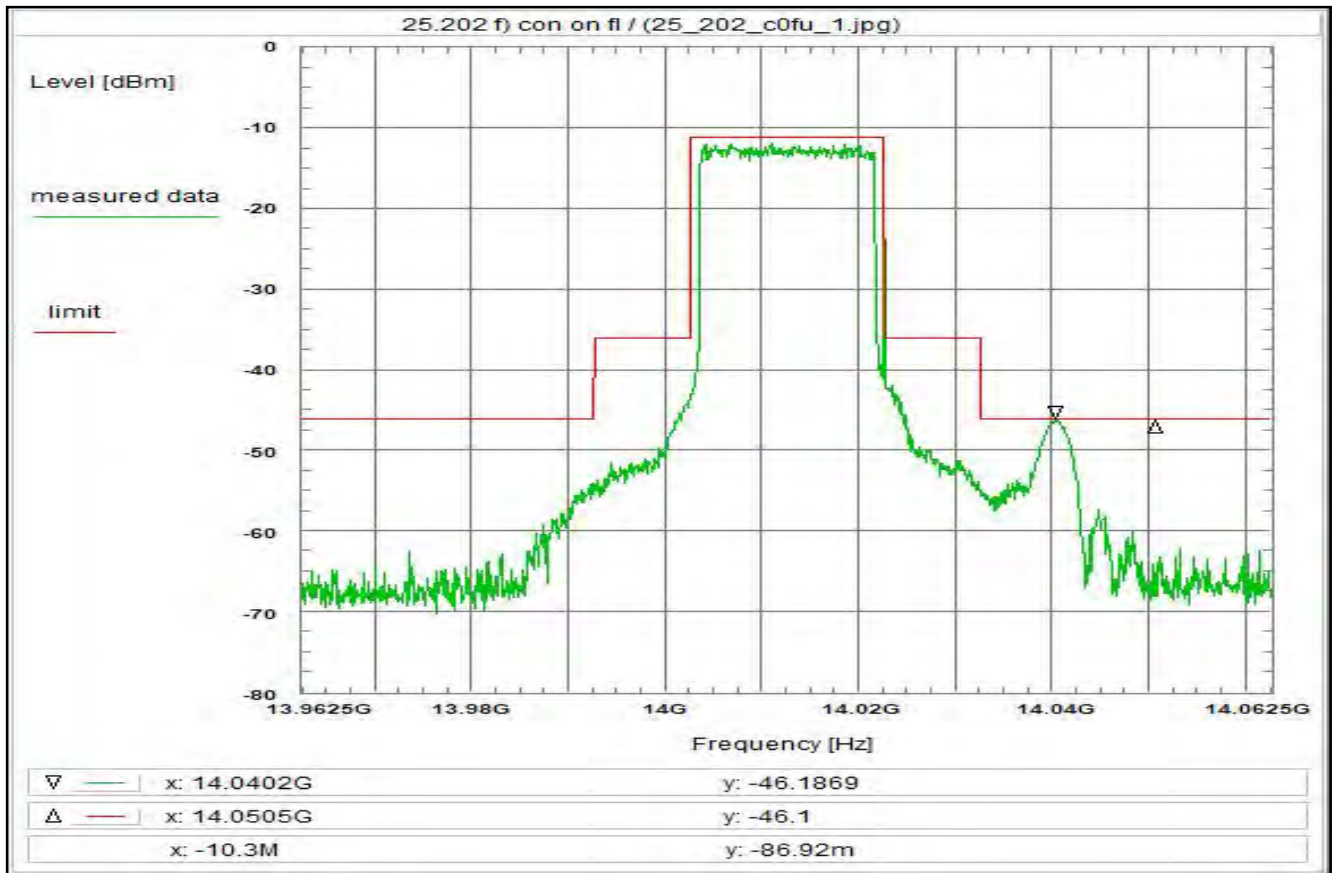

**Subclause:** 25.202 f) Frequencies, frequency tolerance and emission limitations  
Emission limitations  
Modulated rf-carrier at the lower edge of the band (fl)

**Limit:**  
Limit acc. to 25.202 f):  
50-100% of assigned bw: -25 dBc/4 kHz  
100-250% of assigned bw: -35 dBc/4 kHz  
> 250% of assigned bw: -43+10log(Pmax) dBc/4 kHz

**Test results:**  
see plot (an explicit table was not generated)

**Operating condition of DUT:**  
operating condition 1, see test report chapter 6.4  
QPSK single carrier

**Test setup:**  
see test report chapter 7.3: cdjg

**Test equipment:**  
see test report chapter 7.x: C107, R001, W009, W019, W053

Remark:

**Test result:** Test passed

**Environment condition:**

Date & Time: Wed 19/May/2021 16:53:56  
Location: CTC advanced GmbH, Laboratory RC-SYS  
Temperature: 22 °C  
Humidity: 55 %  
Voltage: 120 Vac

**Setup of measurement equipment:**

Start frequency: 13.9625 GHz  
Stop frequency: 14.0625 GHz  
Center frequency: 14.0125 GHz  
Frequency span: 100 MHz  
Resolution-BW: 10 kHz  
Video-BW: 30 kHz  
Input attenuation: 10 dB  
Trace-Mode: Clear Write  
Detector-Mode: AVG

**Correction:**


Directional coupler (W009) + 39.6 dB  
Coaxial cable (C107) + 4.0 dB  
DUT-Antenna + 0.0 dBi  
Test antenna + 0.0 dB  
BW correction factor (10k -> 4k) - 4.0 dB  
Atten. between HPA and feedhorn - 0.0 dB  
Freefield attenuation + 0.0 dB  
TOTAL CORRECTION: + 39.6 dB

**Remarks:**

Carrier-on state / Carrier at the lower edge of the band (fl)



Plot No. 22

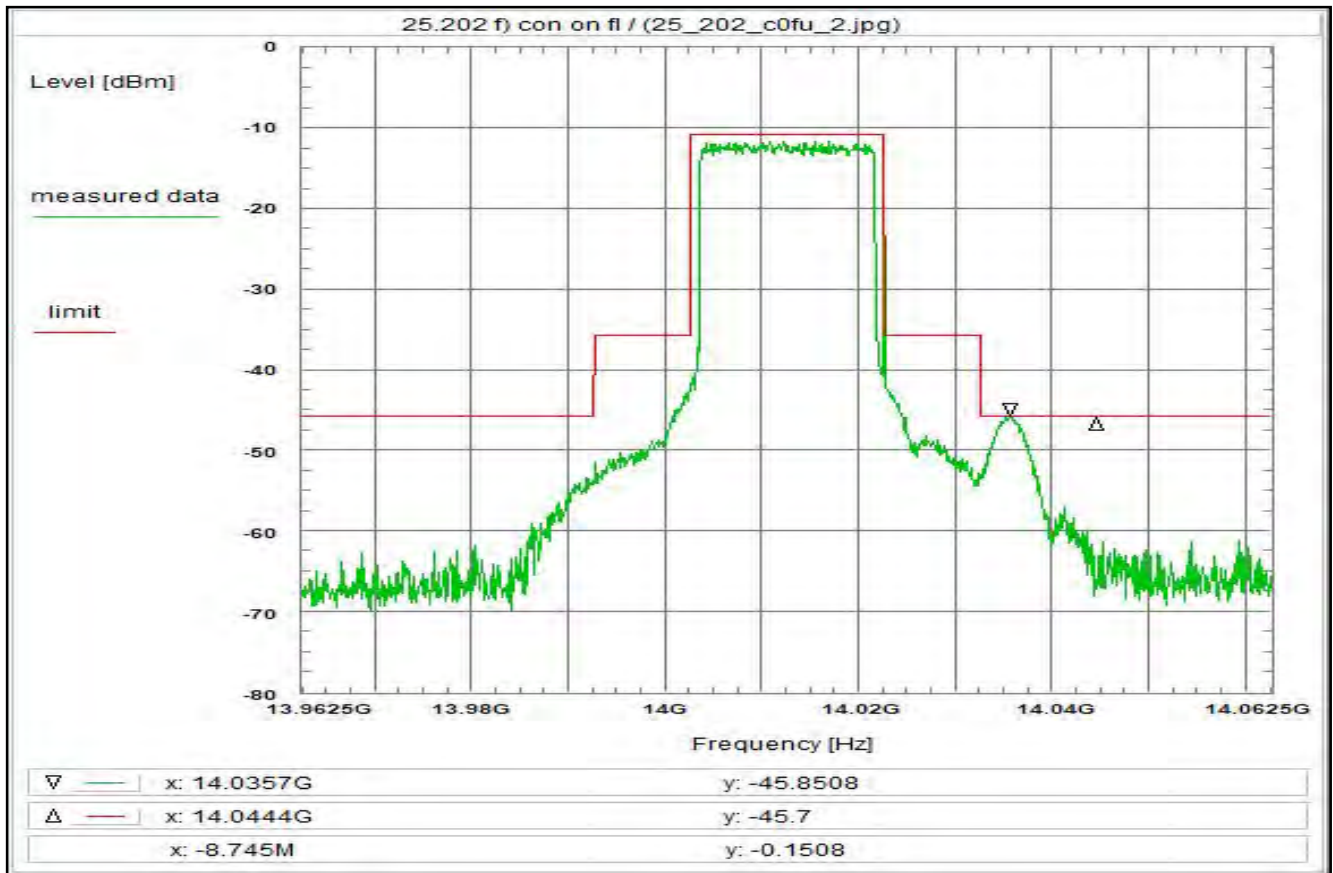

**Subclause:** 25.202 f) Frequencies, frequency tolerance and emission limitations  
Emission limitations  
Modulated rf-carrier at the lower edge of the band (fl)

**Limit:**  
Limit acc. to 25.202 f):  
50-100% of assigned bw: -25 dBc/4 kHz  
100-250% of assigned bw: -35 dBc/4 kHz  
> 250% of assigned bw: -43+10log(Pmax) dBc/4 kHz

**Test results:**  
see plot (an explicit table was not generated)

**Operating condition of DUT:**  
operating condition 2, see test report chapter 6.4  
8PSK single carrier

**Test setup:**  
see test report chapter 7.3: cdjg

**Test equipment:**  
see test report chapter 7.x: C107, R001, W009, W019, W053

Remark:

**Test result:** Test passed

**Environment condition:**

Date & Time: Wed 19/May/2021 17:00:03  
Location: CTC advanced GmbH, Laboratory RC-SYS  
Temperature: 22 °C  
Humidity: 55 %  
Voltage: 120 Vac

**Setup of measurement equipment:**

Start frequency: 13.9625 GHz  
Stop frequency: 14.0625 GHz  
Center frequency: 14.0125 GHz  
Frequency span: 100 MHz  
Resolution-BW: 10 kHz  
Video-BW: 30 kHz  
Input attenuation: 10 dB  
Trace-Mode: Clear Write  
Detector-Mode: AVG


**Correction:**

Directional coupler (W009) + 39.6 dB  
Coaxial cable (C107) + 4.0 dB  
DUT-Antenna + 0.0 dBi  
Test antenna + 0.0 dB  
BW correction factor (10k -> 4k) - 4.0 dB  
Atten. between HPA and feedhorn - 0.0 dB  
Freefield attenuation + 0.0 dB  
TOTAL CORRECTION: + 39.6 dB

**Remarks:**

Carrier-on state / Carrier at the lower edge of the band (fl)

Plot No. 23

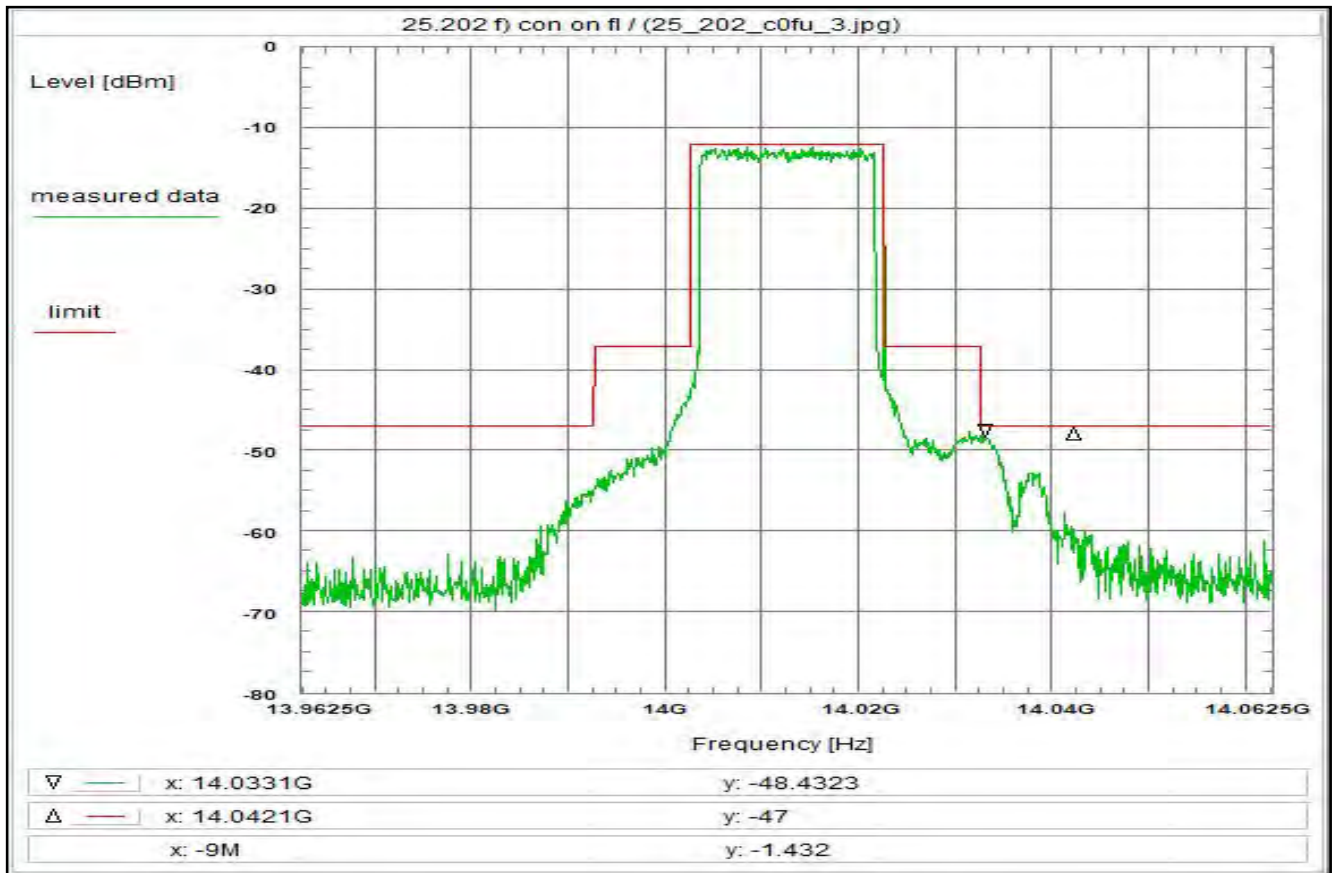

**Subclause:** 25.202 f) Frequencies, frequency tolerance and emission limitations  
Emission limitations  
Modulated rf-carrier at the lower edge of the band (fl)

**Limit:**  
Limit acc. to 25.202 f):  
50-100% of assigned bw: -25 dBc/4 kHz  
100-250% of assigned bw: -35 dBc/4 kHz  
> 250% of assigned bw: -43+10log(Pmax) dBc/4 kHz

**Test results:**  
see plot (an explicit table was not generated)

**Operating condition of DUT:**  
operating condition 3, see test report chapter 6.4  
16QAM single carrier

**Test setup:**  
see test report chapter 7.3: cdjg

**Test equipment:**  
see test report chapter 7.x: C107, R001, W009, W019, W053

Remark:

**Test result:** Test passed

**Environment condition:**

Date & Time: Wed 19/May/2021 17:02:52  
Location: CTC advanced GmbH, Laboratory RC-SYS  
Temperature: 22 °C  
Humidity: 55 %  
Voltage: 120 Vac

**Setup of measurement equipment:**

Start frequency: 13.9625 GHz  
Stop frequency: 14.0625 GHz  
Center frequency: 14.0125 GHz  
Frequency span: 100 MHz  
Resolution-BW: 10 kHz  
Video-BW: 30 kHz  
Input attenuation: 10 dB  
Trace-Mode: Clear Write  
Detector-Mode: AVG


**Correction:**

Directional coupler (W009) + 39.6 dB  
Coaxial cable (C107) + 4.0 dB  
DUT-Antenna + 0.0 dBi  
Test antenna + 0.0 dB  
BW correction factor (10k -> 4k) - 4.0 dB  
Atten. between HPA and feedhorn - 0.0 dB  
Freefield attenuation + 0.0 dB  
TOTAL CORRECTION: + 39.6 dB

**Remarks:**


Carrier-on state / Carrier at the lower edge of the band (fl)

Plot No. 24

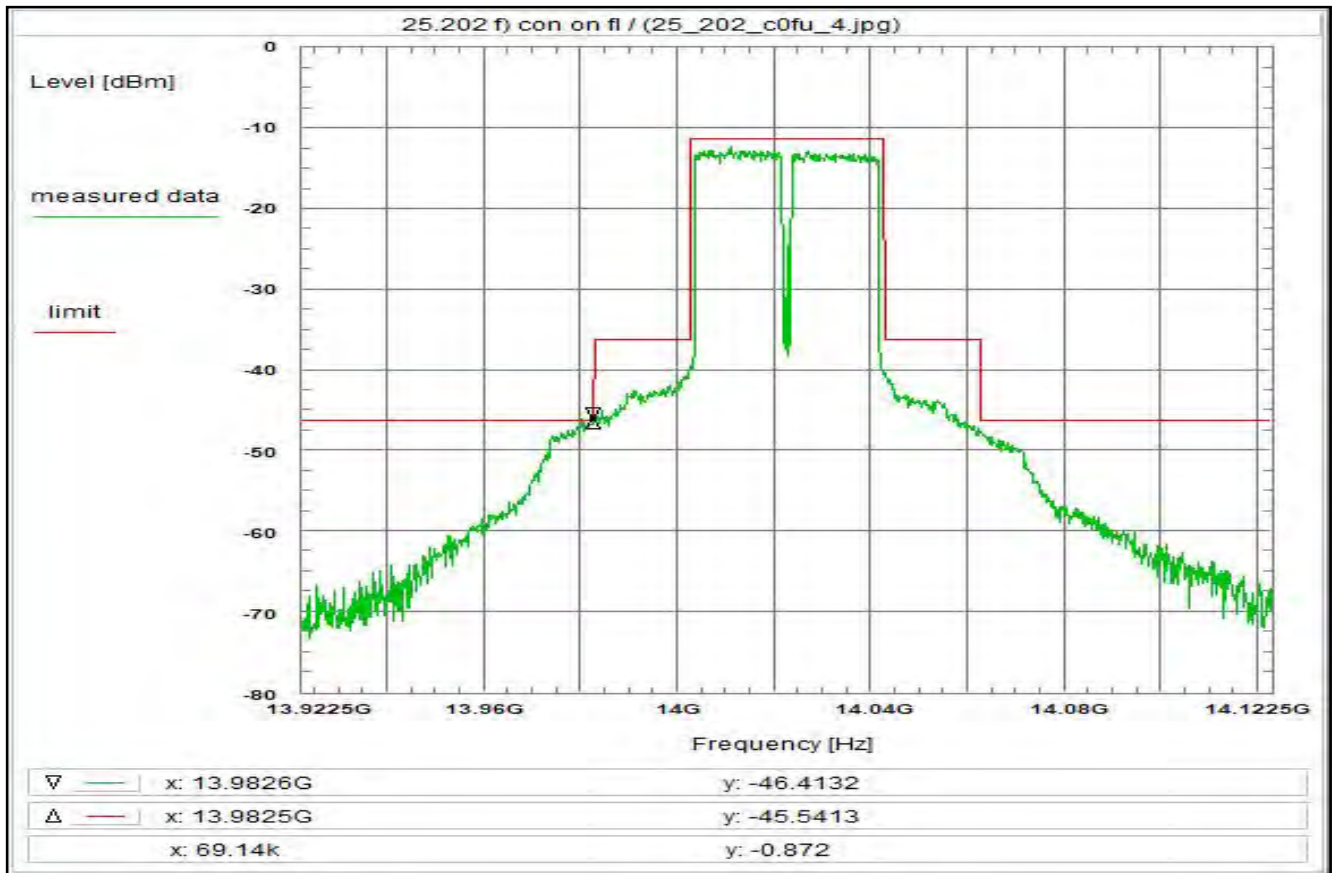

<p><b>Subclause:</b> 25.202 f) Frequencies, frequency tolerance and emission limitations Emission limitations Modulated rf-carrier at the lower edge of the band (fl)</p> <p><b>Limit:</b> <u>Limit acc. to 25.202 f):</u> 50-100% of assigned bw: -25 dBc/4 kHz 100-250% of assigned bw: -35 dBc/4 kHz &gt; 250% of assigned bw: -43+10log(Pmax) dBc/4 kHz</p> <p><b>Test results:</b> see plot (an explicit table was not generated)</p> <p><b>Operating condition of DUT:</b> operating condition 4, see test report chapter 6.4 QPSK dual carrier</p> <p><b>Test setup:</b> see test report chapter 7.3: cdjg</p> <p><b>Test equipment:</b> see test report chapter 7.x: C107, R001, W009, W019, W053</p> <p>Remark:</p> <p><b>Test result:</b> Test passed</p>	<p><b>Environment condition:</b> Date &amp; Time: Thu 20/May/2021 14:44:56 Location: CTC advanced GmbH, Laboratory RC-SYS Temperature: 22 °C Humidity: 55 % Voltage: 120 Vac</p> <p><b>Setup of measurement equipment:</b> Start frequency: 13.9225 GHz Stop frequency: 14.1225 GHz Center frequency: 14.0225 GHz Frequency span: 200 MHz Resolution-BW: 10 kHz Video-BW: 30 kHz Input attenuation: 6 dB Trace-Mode: Clear Write Detector-Mode: AVG</p> <p><b>Correction:</b> Directional coupler (W009) + 39.6 dB Coaxial cable (C107) + 4.0 dB DUT-Antenna + 0.0 dBi Test antenna + 0.0 dB BW correction factor (10k -&gt; 4k) - 4.0 dB Atten. between HPA and feedhorn - 0.0 dB Freefield attenuation + 0.0 dB TOTAL CORRECTION: + 39.6 dB</p> <p><b>Remarks:</b> Carrier-on state / Carrier at the lower edge of the band (fl)</p>
---	--

Plot No. 25

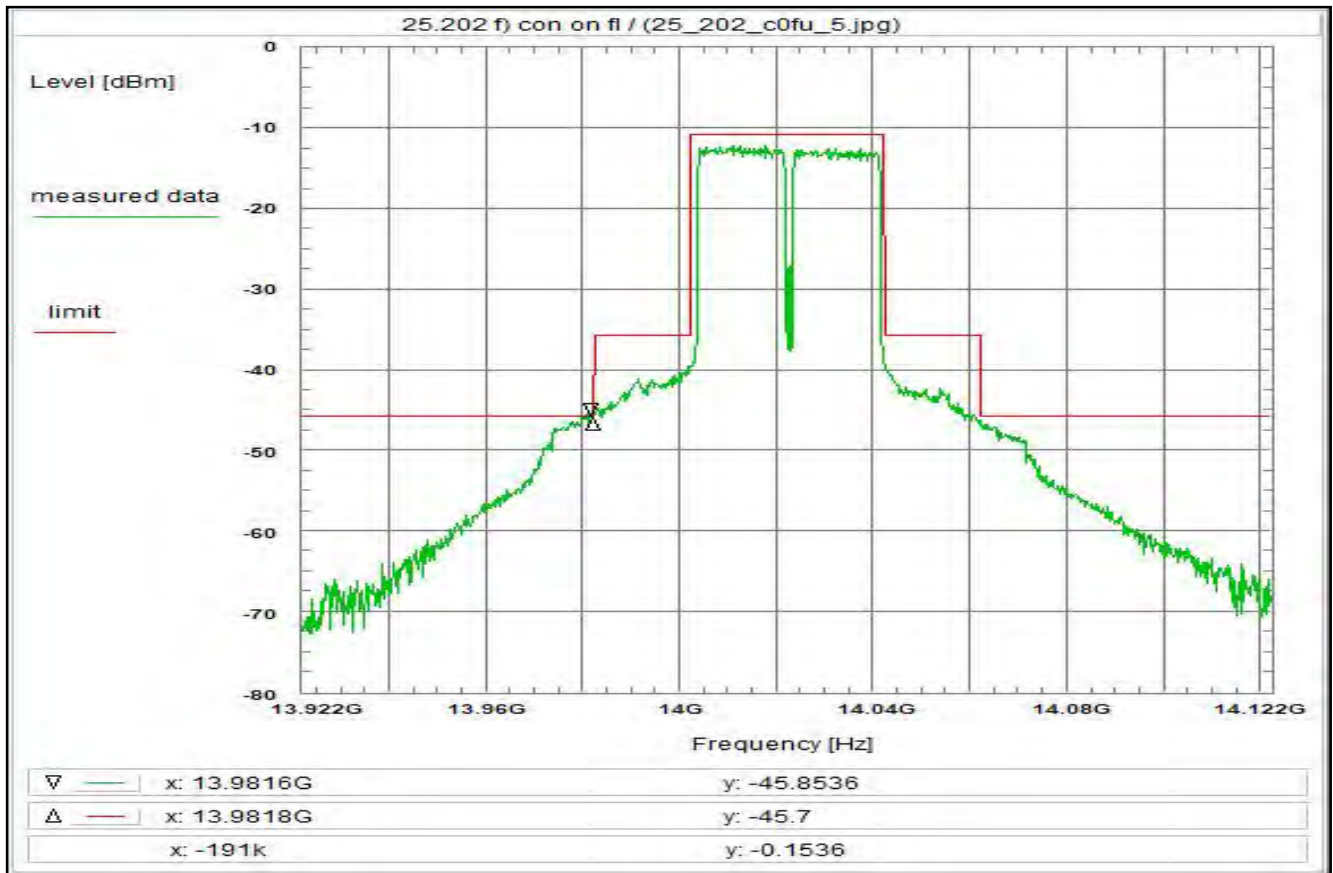

**Subclause:** 25.202 f) Frequencies, frequency tolerance and emission limitations  
Emission limitations  
Modulated rf-carrier at the lower edge of the band (fl)

**Limit:**  
Limit acc. to 25.202 f):  
50-100% of assigned bw: -25 dBc/4 kHz  
100-250% of assigned bw: -35 dBc/4 kHz  
> 250% of assigned bw: -43+10log(Pmax) dBc/4 kHz

**Test results:**  
see plot (an explicit table was not generated)

**Operating condition of DUT:**  
operating condition 5, see test report chapter 6.4  
8PSK dual carrier

**Test setup:**  
see test report chapter 7.3: cdjg

**Test equipment:**  
see test report chapter 7.x: C107, R001, W009, W019, W053

Remark:

**Test result:** Test passed

**Environment condition:**

Date & Time: Thu 20/May/2021 16:04:27  
Location: CTC advanced GmbH, Laboratory RC-SYS  
Temperature: 22 °C  
Humidity: 55 %  
Voltage: 120 Vac

**Setup of measurement equipment:**

Start frequency: 13.922 GHz  
Stop frequency: 14.122 GHz  
Center frequency: 14.022 GHz  
Frequency span: 200 MHz  
Resolution-BW: 10 kHz  
Video-BW: 30 kHz  
Input attenuation: 6 dB  
Trace-Mode: Clear Write  
Detector-Mode: AVG


**Correction:**

Directional coupler (W009) + 39.6 dB  
Coaxial cable (C107) + 4.0 dB  
DUT-Antenna + 0.0 dBi  
Test antenna + 0.0 dB  
BW correction factor (10k -> 4k) - 4.0 dB  
Atten. between HPA and feedhorn - 0.0 dB  
Freefield attenuation + 0.0 dB  
TOTAL CORRECTION: + 39.6 dB

**Remarks:**

Carrier-on state / Carrier at the lower edge of the band (fl)

Plot No. 26

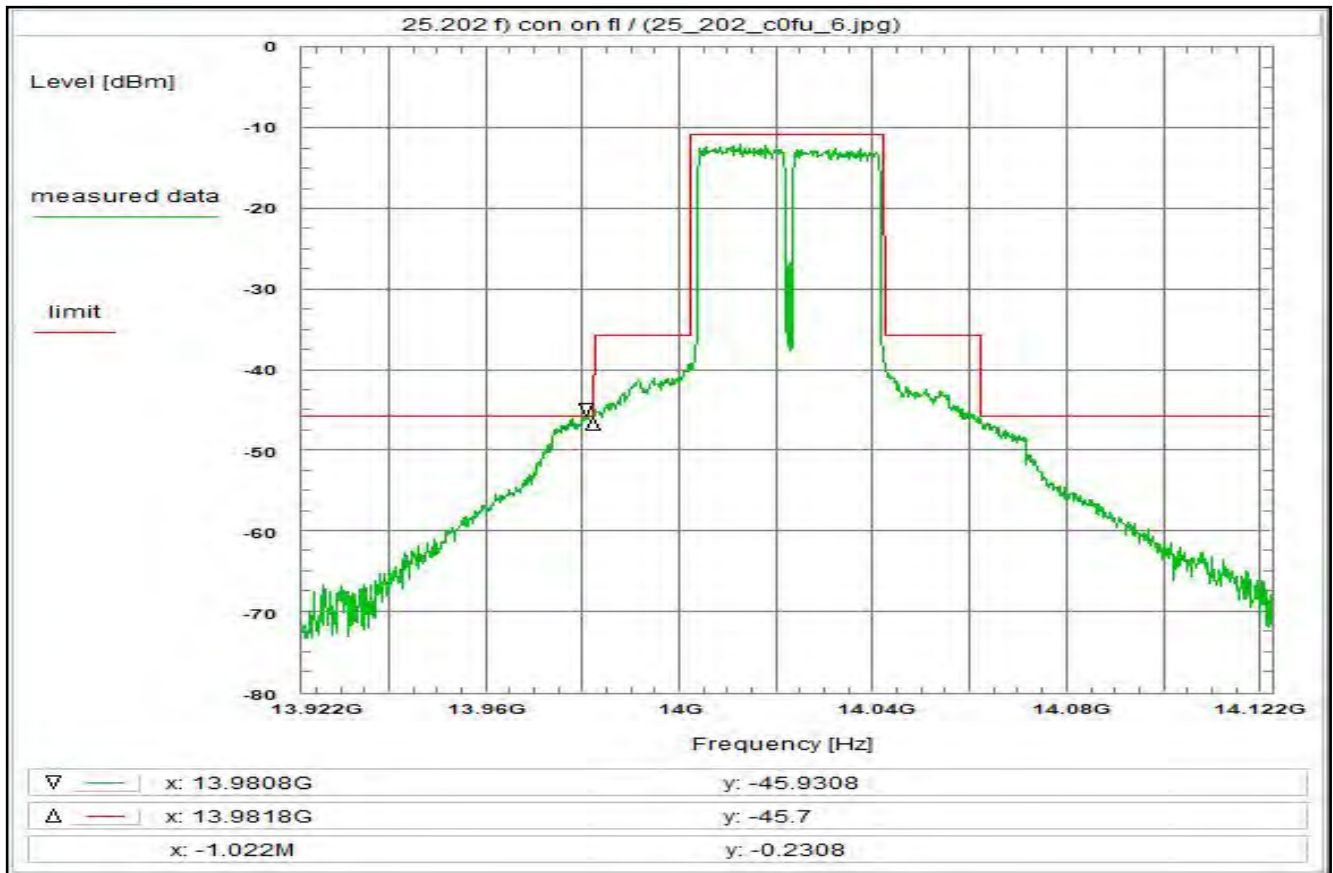

**Subclause:** 25.202 f) Frequencies, frequency tolerance and emission limitations  
Emission limitations  
Modulated rf-carrier at the lower edge of the band (fl)

**Limit:**  
Limit acc. to 25.202 f):  
50-100% of assigned bw: -25 dBc/4 kHz  
100-250% of assigned bw: -35 dBc/4 kHz  
> 250% of assigned bw: -43+10log(Pmax) dBc/4 kHz

**Test results:**  
see plot (an explicit table was not generated)

**Operating condition of DUT:**  
operating condition 6, see test report chapter 6.4  
16QAM dual carrier

**Test setup:**  
see test report chapter 7.3: cdjg

**Test equipment:**  
see test report chapter 7.x: C107, R001, W009, W019, W053

Remark:

**Test result:** Test passed

**Environment condition:**

Date & Time: Thu 20/May/2021 16:06:32  
Location: CTC advanced GmbH, Laboratory RC-SYS  
Temperature: 22 °C  
Humidity: 55 %  
Voltage: 120 Vac

**Setup of measurement equipment:**

Start frequency: 13.922 GHz  
Stop frequency: 14.122 GHz  
Center frequency: 14.022 GHz  
Frequency span: 200 MHz  
Resolution-BW: 10 kHz  
Video-BW: 30 kHz  
Input attenuation: 6 dB  
Trace-Mode: Clear Write  
Detector-Mode: AVG


**Correction:**

Directional coupler (W009) + 39.6 dB  
Coaxial cable (C107) + 4.0 dB  
DUT-Antenna + 0.0 dBi  
Test antenna + 0.0 dB  
BW correction factor (10k -> 4k) - 4.0 dB  
Atten. between HPA and feedhorn - 0.0 dB  
Freefield attenuation + 0.0 dB  
TOTAL CORRECTION: + 39.6 dB

**Remarks:**

Carrier-on state / Carrier at the lower edge of the band (fl)

Plot No. 27

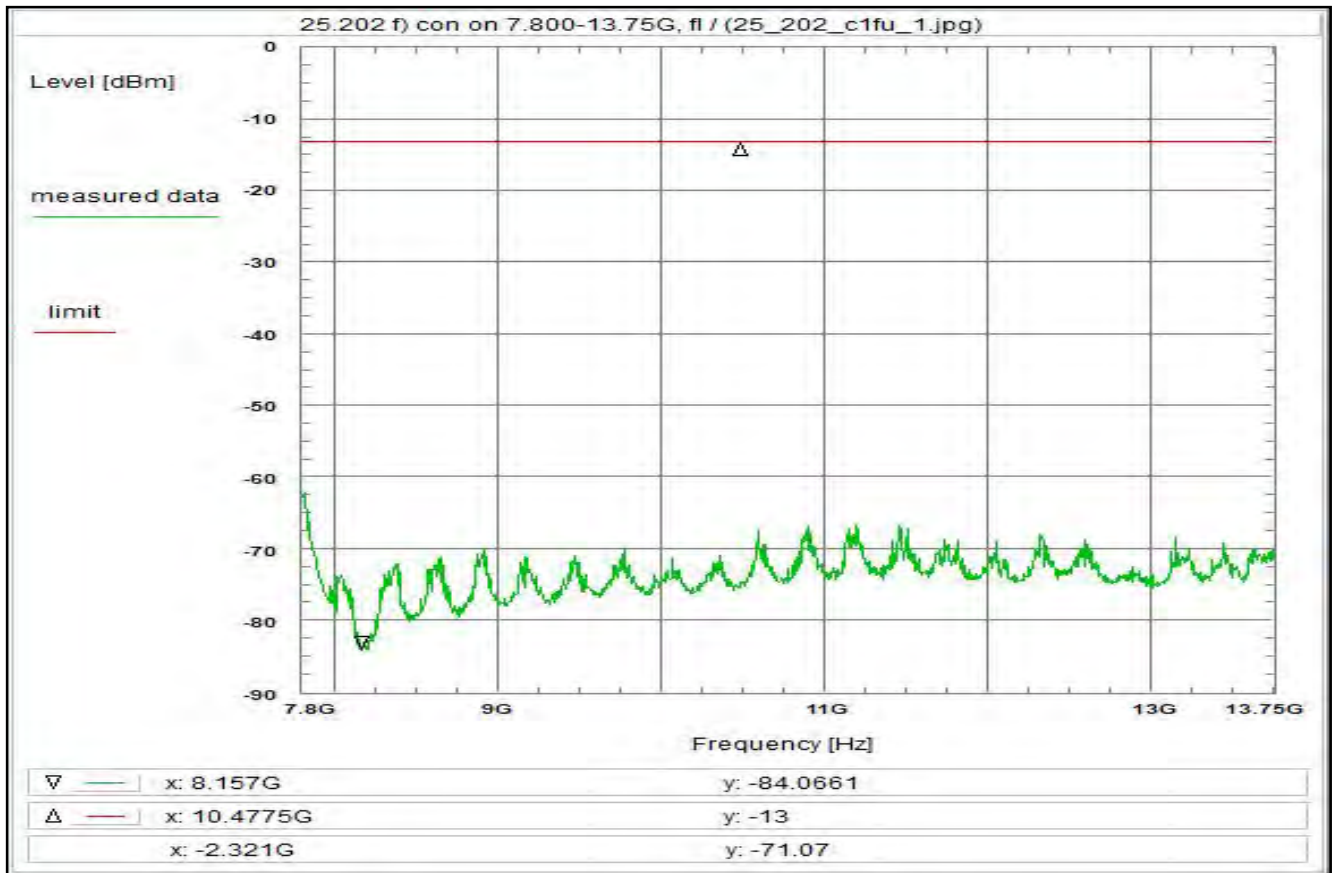

**Subclause:** 25.202 f) Frequencies, frequency tolerance and emission limitations  
Emission limitations  
Modulated rf-carrier at the lower edge of the band (fl)

**Limit:**  
Limit acc. to 25.202 f):  $-43+10\log(P_{max})$  dBc  
This corresponds to a limit of -13 dBm.

**Test results:**  
see plot (an explicit table was not generated)

**Operating condition of DUT:**  
operating condition 1, see test report chapter 6.4  
QPSK single carrier, valid for all modulations

**Test setup:**  
see test report chapter 7.3: cdgj

**Test equipment:**  
see test report chapter 7.x: C107, R001, W009, W019, W053

**Remark:**

**Test result:** Test passed

**Environment condition:**

Date & Time: Wed 19/May/2021 17:05:46  
Location: CTC advanced GmbH, Laboratory RC-SYS  
Temperature: 22 °C  
Humidity: 55 %  
Voltage: 120 Vac

**Setup of measurement equipment:**

Start frequency: 7.8 GHz  
Stop frequency: 13.75 GHz  
Center frequency: 10.775 GHz  
Frequency span: 5.95 GHz  
Resolution-BW: 100 kHz  
Video-BW: 300 kHz  
Input attenuation: 10 dB  
Trace-Mode: Max-Hold  
Detector-Mode: AVG


**Correction:**

Directional coupler (W009) + 38.6 dB  
Coaxial cable (C107) + 3.5 dB  
DUT-Antenna + 0.0 dBi  
Test antenna + 0.0 dB  
BW correction factor (100k -> 4k) - 14.0 dB  
Atten. between HPA and feedhorn - 0.0 dB  
Freefield attenuation + 0.0 dB  
TOTAL CORRECTION: + 28.1 dB

**Remarks:**


Carrier-on state / Carrier at the lower edge of the band (fl)

Plot No. 28

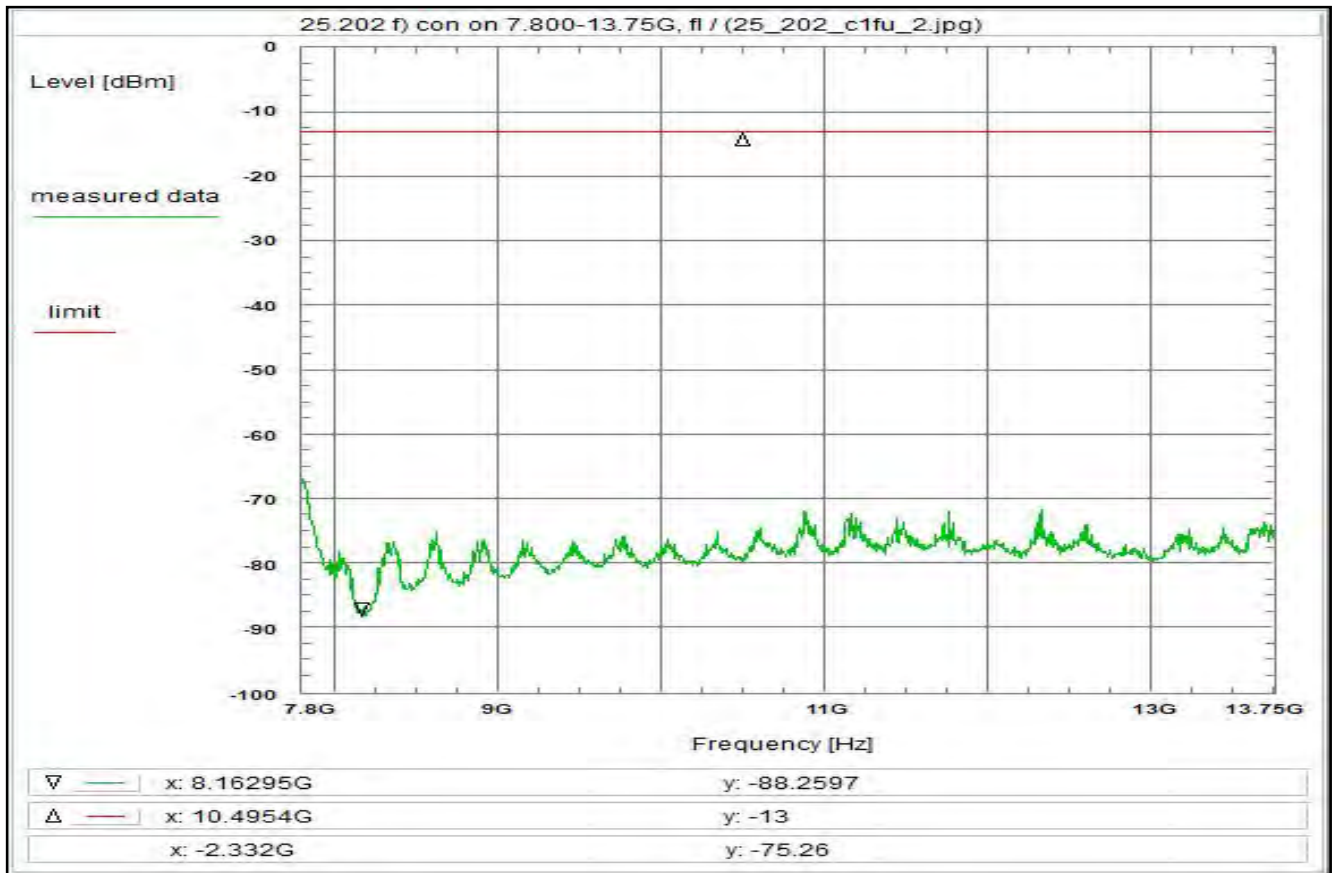

<p><b>Subclause:</b> 25.202 f) Frequencies, frequency tolerance and emission limitations Emission limitations Modulated rf-carrier at the lower edge of the band (fl)</p> <p><b>Limit:</b> Limit acc. to 25.202 f): <math>-43+10\log(P_{max})</math> dBc This corresponds to a limit of -13 dBm.</p> <p><b>Test results:</b> see plot (an explicit table was not generated)</p> <p><b>Operating condition of DUT:</b> operating condition 4, see test report chapter 6.4 QPSK dual carrier, valid for all modulations</p> <p><b>Test setup:</b> see test report chapter 7.3: cdjg</p> <p><b>Test equipment:</b> see test report chapter 7.x: C107, R001, W009, W019, W053</p> <p><b>Remark:</b></p> <p><b>Test result:</b> Test passed</p>	<p><b>Environment condition:</b> Date &amp; Time: Thu 20/May/2021 15:19:31 Location: CTC advanced GmbH, Laboratory RC-SYS Temperature: 22 °C Humidity: 55 % Voltage: 120 Vac</p> <p><b>Setup of measurement equipment:</b> Start frequency: 7.8 GHz Stop frequency: 13.75 GHz Center frequency: 10.775 GHz Frequency span: 5.95 GHz Resolution-BW: 100 kHz Video-BW: 300 kHz Input attenuation: 6 dB Trace-Mode: Max-Hold Detector-Mode: AVG</p> <p><b>Correction:</b> Directional coupler (W009) + 38.6 dB Coaxial cable (C107) + 3.5 dB DUT-Antenna + 0.0 dBi Test antenna + 0.0 dB BW correction factor (100k -&gt; 4k) - 14.0 dB Atten. between HPA and feedhorn - 0.0 dB Freefield attenuation + 0.0 dB TOTAL CORRECTION: + 28.1 dB</p> <p><b>Remarks:</b> Carrier-on state / Carrier at the lower edge of the band (fl)</p>
--	---

Plot No. 29

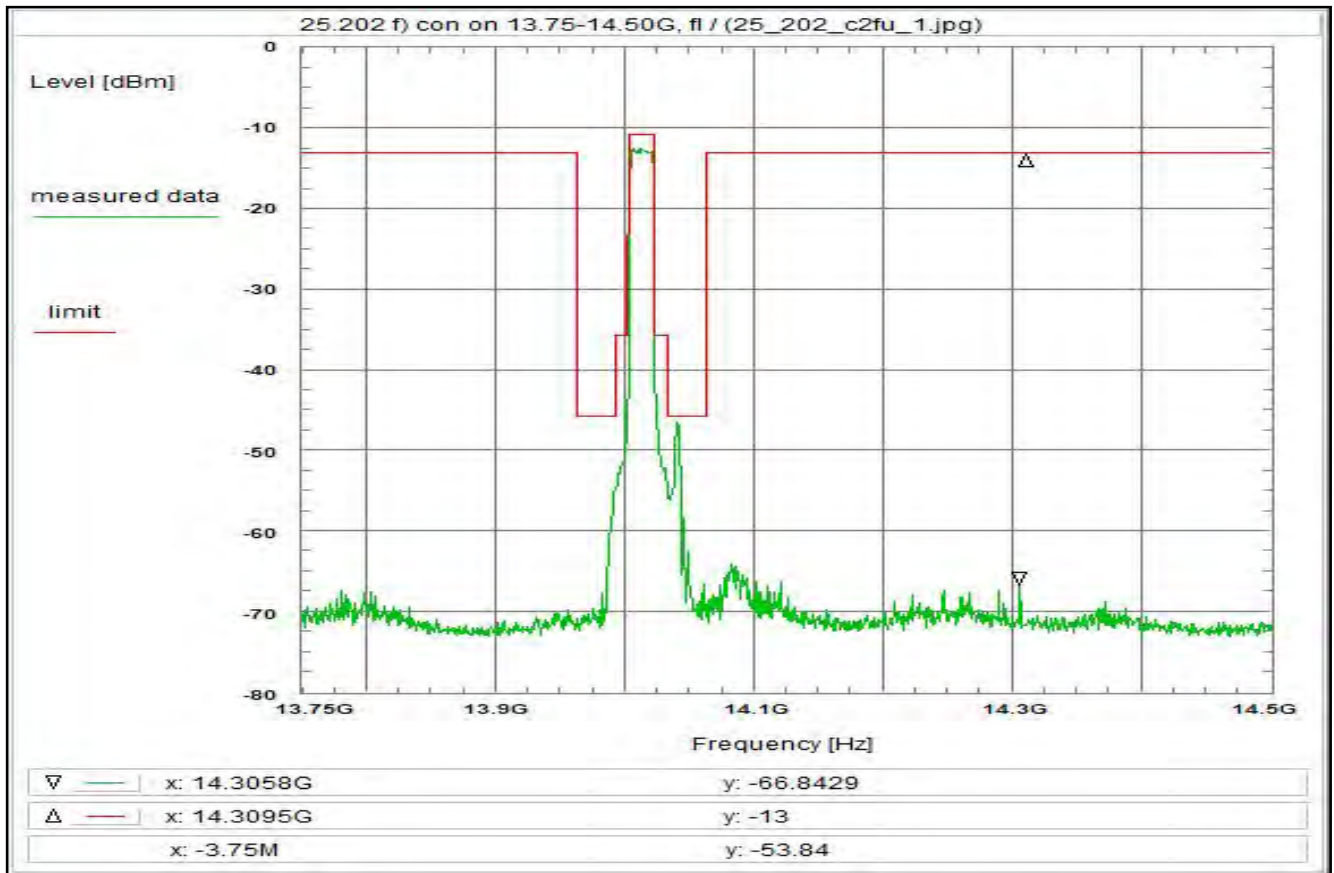

**Subclause:** 25.202 f) Frequencies, frequency tolerance and emission limitations  
Emission limitations  
Modulated rf-carrier at the lower edge of the band (fl)

**Limit:**  
Limit acc. to 25.202 f):  $-43+10\log(P_{max})$  dBc  
This corresponds to a limit of -13 dBm.

**Test results:**  
see plot (an explicit table was not generated)

**Operating condition of DUT:**  
operating condition 1, see test report chapter 6.4  
QPSK single carrier, valid for all modulations

**Test setup:**  
see test report chapter 7.3: cdjg

**Test equipment:**  
see test report chapter 7.x: R001, W019, W053

**Remark:**

**Test result:** Test passed

**Environment condition:**

Date & Time: Wed 19/May/2021 17:08:13  
Location: CTC advanced GmbH, Laboratory RC-SYS  
Temperature: 22 °C  
Humidity: 55 %  
Voltage: 120 Vac

**Setup of measurement equipment:**

Start frequency: 13.75 GHz  
Stop frequency: 14.5 GHz  
Center frequency: 14.125 GHz  
Frequency span: 750 MHz  
Resolution-BW: 100 kHz  
Video-BW: 300 kHz  
Input attenuation: 10 dB  
Trace-Mode: Max-Hold  
Detector-Mode: AVG

**Correction:**


Directional coupler (W009) + 39.5 dB  
Coaxial cable (C107) + 4.0 dB  
DUT-Antenna + 0.0 dBi  
Test antenna + 0.0 dB  
BW correction factor (100k -> 4k) - 14.0 dB  
Atten. between HPA and feedhorn - 0.0 dB  
Freefield attenuation + 0.0 dB  
TOTAL CORRECTION: + 29.5 dB

**Remarks:**

Carrier-on state / Carrier at the lower edge of the band (fl)



Plot No. 30

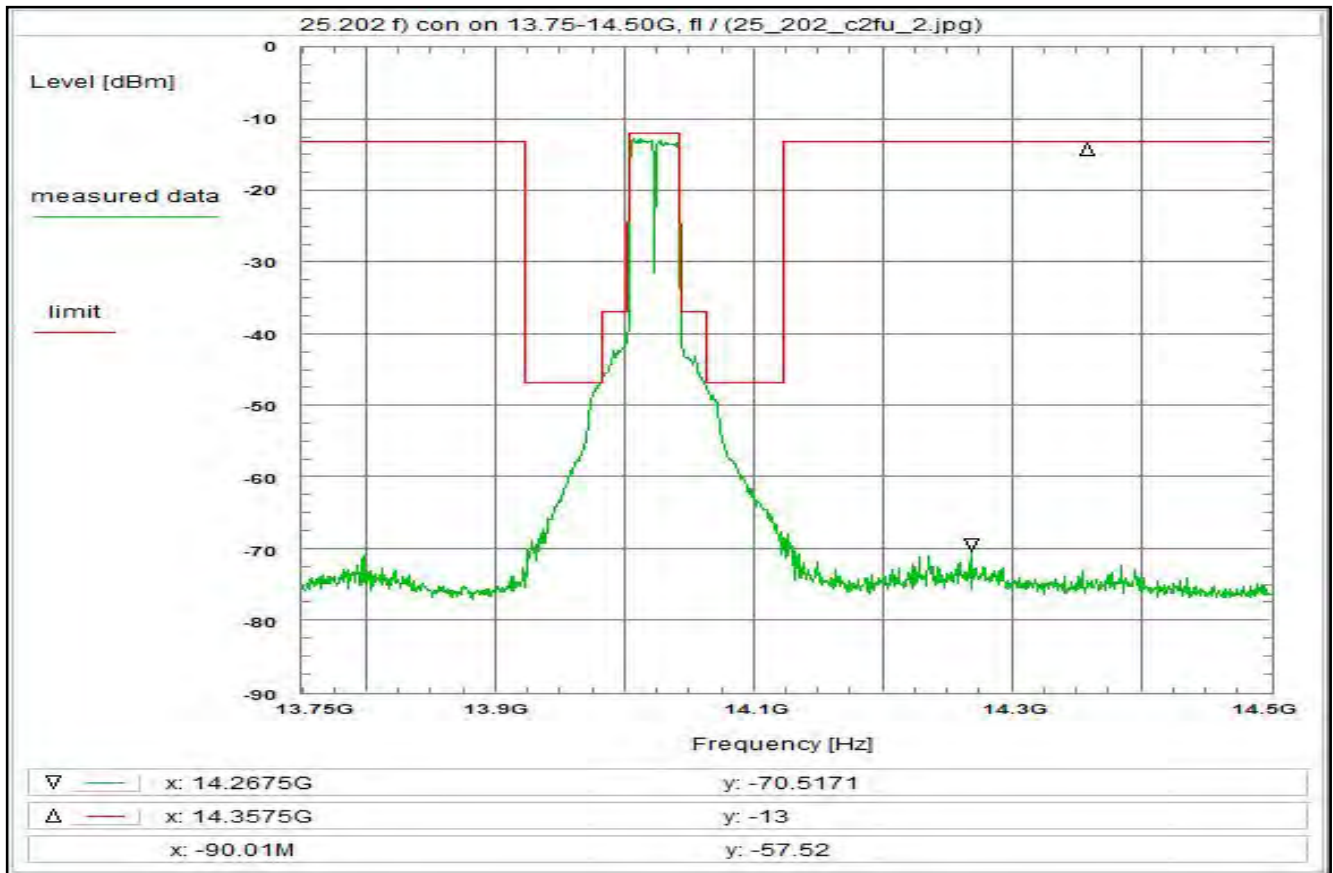

**Subclause:** 25.202 f) Frequencies, frequency tolerance and emission limitations  
Emission limitations  
Modulated rf-carrier at the lower edge of the band (fl)

**Limit:**  
Limit acc. to 25.202 f):  $-43+10\log(P_{max})$  dBc  
This corresponds to a limit of -13 dBm.

**Test results:**  
see plot (an explicit table was not generated)

**Operating condition of DUT:**  
operating condition 4, see test report chapter 6.4  
QPSK dual carrier, valid for all modulations

**Test setup:**  
see test report chapter 7.3: cdgj

**Test equipment:**  
see test report chapter 7.x: C107, R001, W009, W019, W053

**Remark:**

**Test result:** Test passed

**Environment condition:**

Date & Time: Thu 20/May/2021 15:20:19  
Location: CTC advanced GmbH, Laboratory RC-SYS  
Temperature: 22 °C  
Humidity: 55 %  
Voltage: 120 Vac

**Setup of measurement equipment:**

Start frequency: 13.75 GHz  
Stop frequency: 14.5 GHz  
Center frequency: 14.125 GHz  
Frequency span: 750 MHz  
Resolution-BW: 100 kHz  
Video-BW: 300 kHz  
Input attenuation: 6 dB  
Trace-Mode: Max-Hold  
Detector-Mode: AVG


**Correction:**

Directional coupler (W009) + 39.5 dB  
Coaxial cable (C107) + 4.0 dB  
DUT-Antenna + 0.0 dBi  
Test antenna + 0.0 dB  
BW correction factor (100k -> 4k) - 14.0 dB  
Atten. between HPA and feedhorn - 0.0 dB  
Freefield attenuation + 0.0 dB  
TOTAL CORRECTION: + 29.5 dB

**Remarks:**

Carrier-on state / Carrier at the lower edge of the band (fl)

Plot No. 31

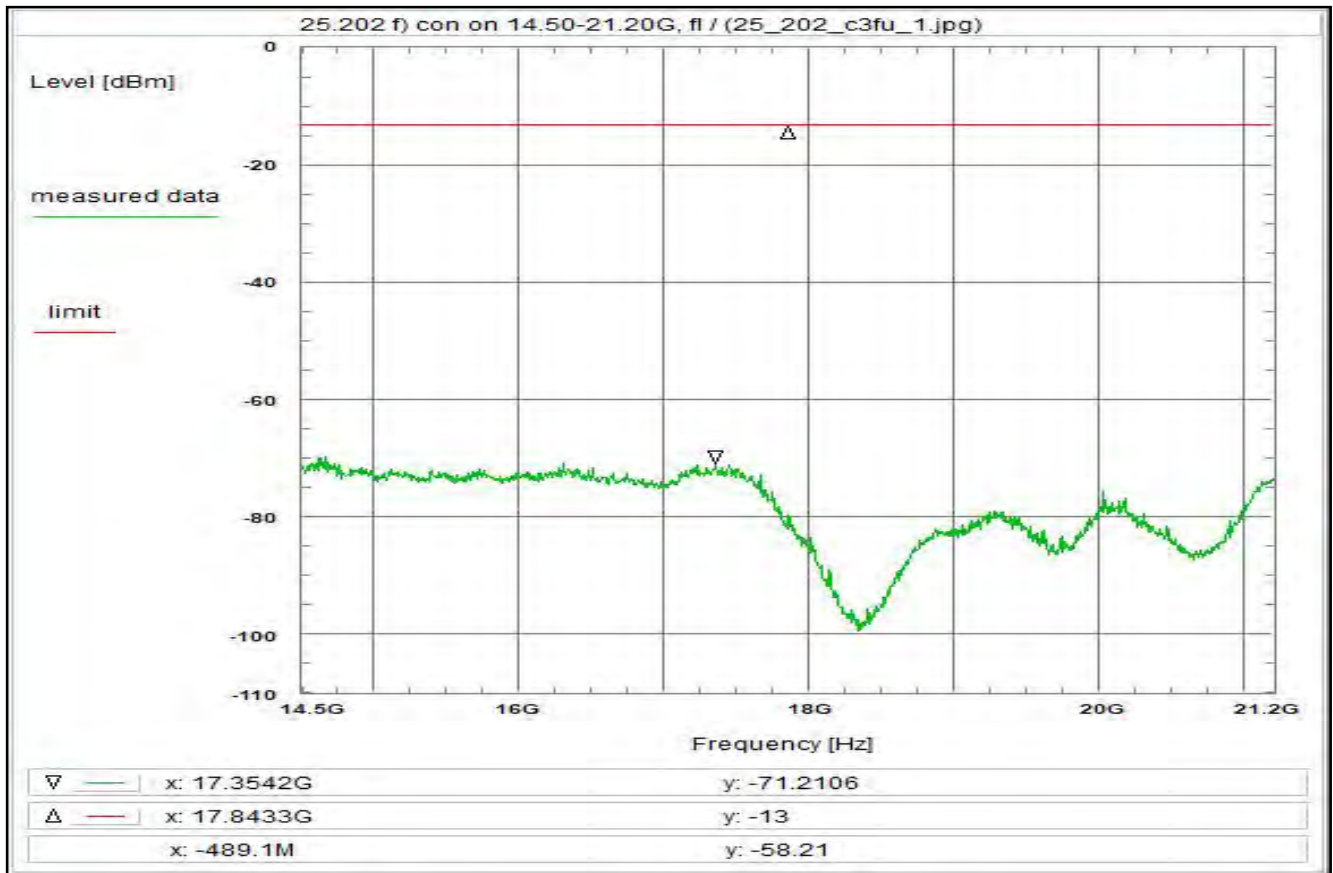

**Subclause:** 25.202 f) Frequencies, frequency tolerance and emission limitations  
Emission limitations  
Modulated rf-carrier at the lower edge of the band (fl)

**Limit:**  
Limit acc. to 25.202 f):  $-43+10\log(P_{max})$  dBc  
This corresponds to a limit of -13 dBm.

**Test results:**  
see plot (an explicit table was not generated)

**Operating condition of DUT:**  
operating condition 1, see test report chapter 6.4  
QPSK single carrier, valid for all modulations

**Test setup:**  
see test report chapter 7.3: cdgj

**Test equipment:**  
see test report chapter 7.x: R001, W019, W053

**Remark:**

**Test result:** Test passed

**Environment condition:**

Date & Time: Wed 19/May/2021 17:09:35  
Location: CTC advanced GmbH, Laboratory RC-SYS  
Temperature: 22 °C  
Humidity: 55 %  
Voltage: 120 Vac

**Setup of measurement equipment:**

Start frequency: 14.5 GHz  
Stop frequency: 21.2 GHz  
Center frequency: 17.85 GHz  
Frequency span: 6.7 GHz  
Resolution-BW: 100 kHz  
Video-BW: 300 kHz  
Input attenuation: 10 dB  
Trace-Mode: Max-Hold  
Detector-Mode: AVG


**Correction:**

Directional coupler (W009) + 31.5 dB  
Coaxial cable (C107) + 4.5 dB  
DUT-Antenna + 0.0 dBi  
Test antenna + 0.0 dB  
BW correction factor (100k -> 4k) - 14.0 dB  
Atten. between HPA and feedhorn - 0.0 dB  
Freefield attenuation + 0.0 dB  
TOTAL CORRECTION: + 22.0 dB

**Remarks:**


Carrier-on state / Carrier at the lower edge of the band (fl)

Plot No. 32

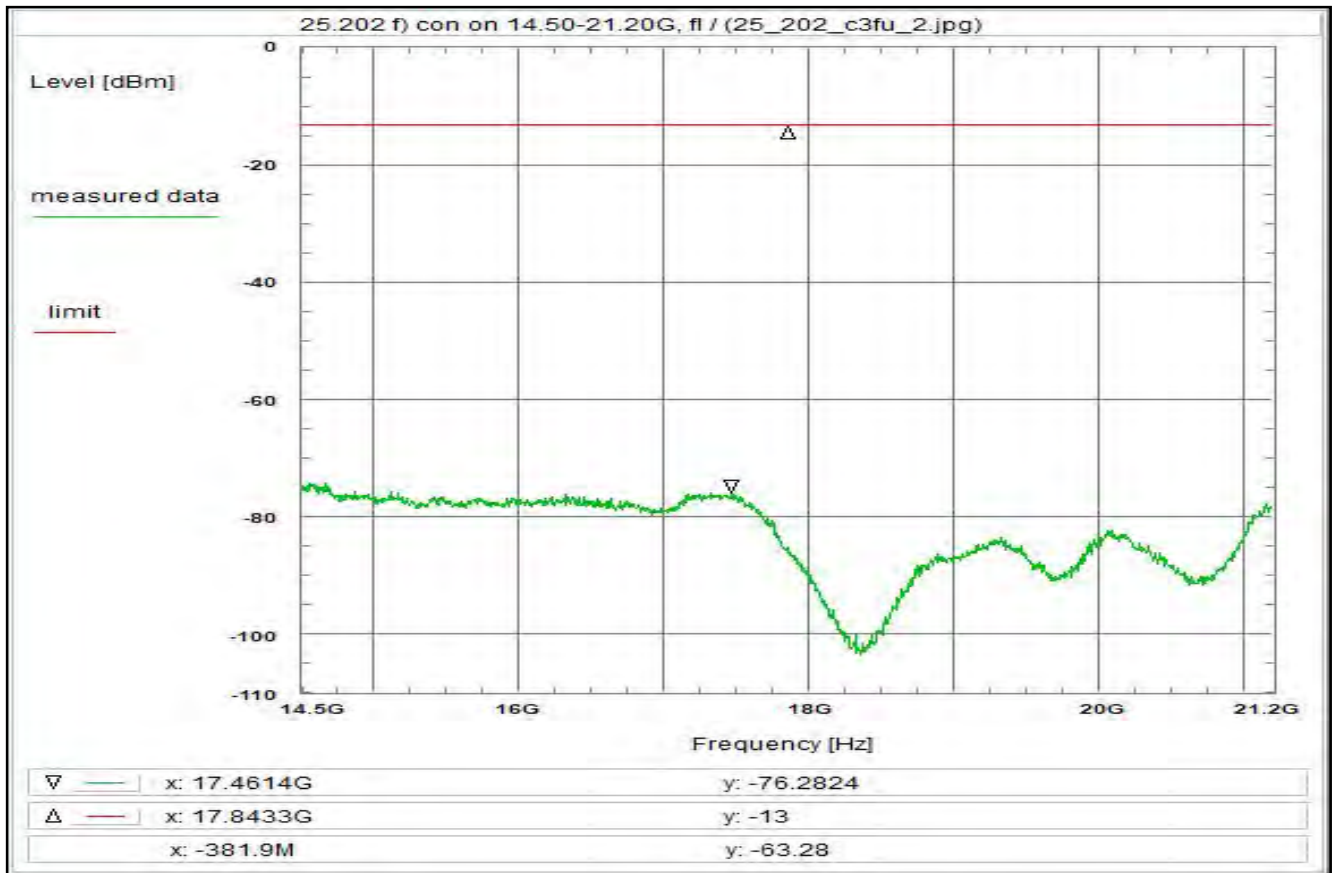


<p><b>Subclause:</b> 25.202 f) Frequencies, frequency tolerance and emission limitations Emission limitations Modulated rf-carrier at the lower edge of the band (fl)</p> <p><b>Limit:</b> Limit acc. to 25.202 f): <math>-43+10\log(P_{max})</math> dBc This corresponds to a limit of -13 dBm.</p> <p><b>Test results:</b> see plot (an explicit table was not generated)</p> <p><b>Operating condition of DUT:</b> operating condition 4, see test report chapter 6.4 QPSK dual carrier, valid for all modulations</p> <p><b>Test setup:</b> see test report chapter 7.3: cdgj</p> <p><b>Test equipment:</b> see test report chapter 7.x: C107, R001, W009, W019, W053</p> <p><b>Remark:</b></p> <p><b>Test result:</b> Test passed</p>	<p><b>Environment condition:</b> Date &amp; Time: Thu 20/May/2021 15:21:26 Location: CTC advanced GmbH, Laboratory RC-SYS Temperature: 22 °C Humidity: 55 % Voltage: 120 Vac</p> <p><b>Setup of measurement equipment:</b> Start frequency: 14.5 GHz Stop frequency: 21.2 GHz Center frequency: 17.85 GHz Frequency span: 6.7 GHz Resolution-BW: 100 kHz Video-BW: 300 kHz Input attenuation: 6 dB Trace-Mode: Max-Hold Detector-Mode: AVG</p> <p><b>Correction:</b> Directional coupler (W009) + 31.5 dB Coaxial cable (C107) + 4.5 dB DUT-Antenna + 0.0 dBi Test antenna + 0.0 dB BW correction factor (100k -&gt; 4k) - 14.0 dB Atten. between HPA and feedhorn - 0.0 dB Freefield attenuation + 0.0 dB TOTAL CORRECTION: + 22.0 dB</p> <p><b>Remarks:</b> Carrier-on state / Carrier at the lower edge of the band (fl)</p>
--	---

Plot No. 33

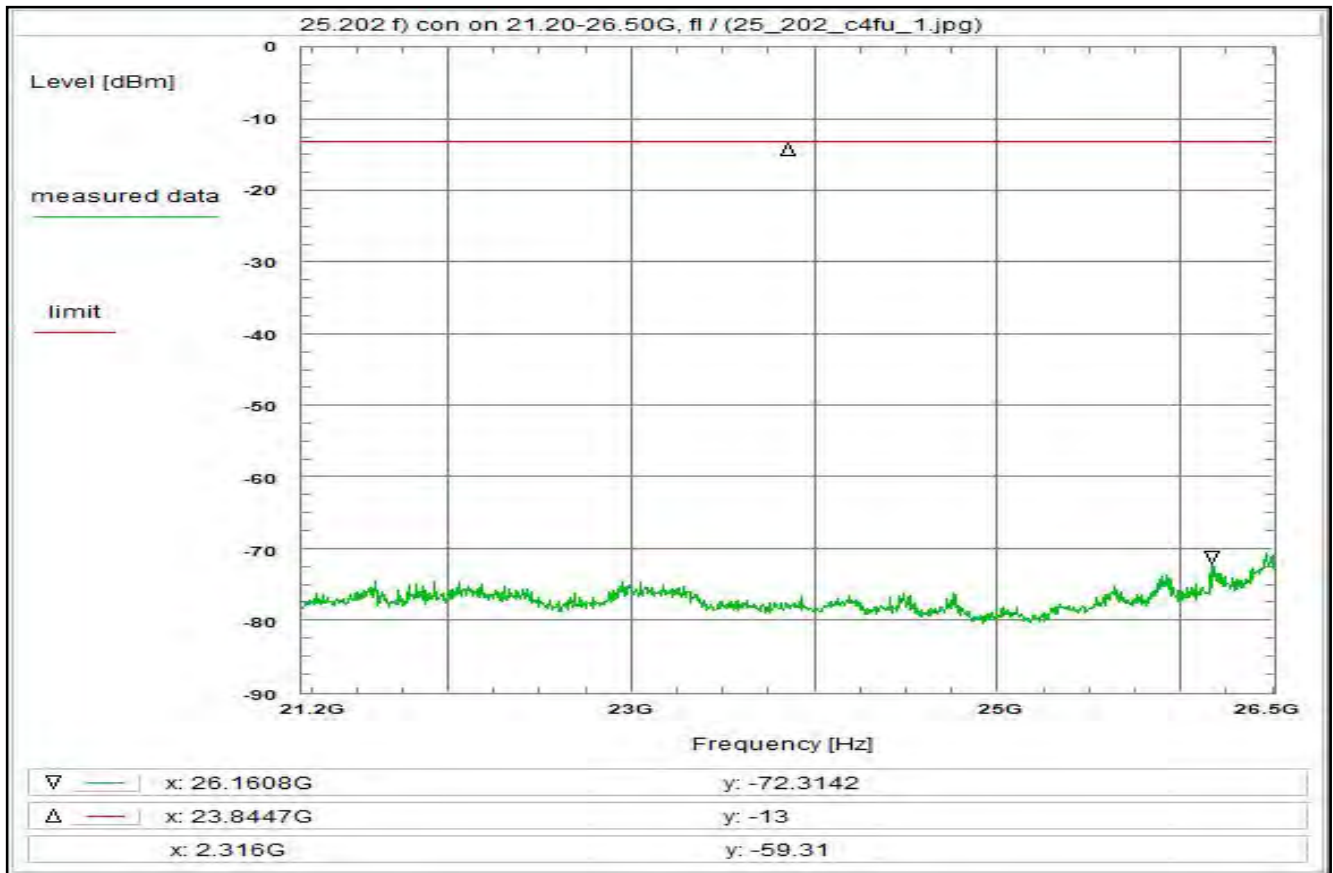

<p><b>Subclause:</b> 25.202 f) Frequencies, frequency tolerance and emission limitations Emission limitations Modulated rf-carrier at the lower edge of the band (fl)</p> <p><b>Limit:</b> Limit acc. to 25.202 f): <math>-43+10\log(P_{max})</math> dBc This corresponds to a limit of -13 dBm.</p> <p><b>Test results:</b> see plot (an explicit table was not generated)</p> <p><b>Operating condition of DUT:</b> operating condition 1, see test report chapter 6.4 QPSK single carrier, valid for all modulations</p> <p><b>Test setup:</b> see test report chapter 7.3: cegj</p> <p><b>Test equipment:</b> see test report chapter 7.x: C107, R001, W009, W019, W022, W063</p> <p><b>Remark:</b></p> <p><b>Test result:</b> Test passed</p>	<p><b>Environment condition:</b> Date &amp; Time: Thu 20/May/2021 16:16:38 Location: CTC advanced GmbH, Laboratory RC-SYS Temperature: 22 °C Humidity: 55 % Voltage: 120 Vac</p> <p><b>Setup of measurement equipment:</b> Start frequency: 21.2 GHz Stop frequency: 26.5 GHz Center frequency: 23.85 GHz Frequency span: 5.3 GHz Resolution-BW: 100 kHz Video-BW: 300 kHz Input attenuation: 6 dB Trace-Mode: Max-Hold Detector-Mode: AVG</p> <p><b>Correction:</b> Directional coupler (W009) + 34.2 dB Coaxial cable (C107) + 5.2 dB DUT-Antenna + 0.0 dBi Test antenna + 0.0 dB BW correction factor (100k -&gt; 4k) - 14.0 dB Atten. between HPA and feedhorn - 0.0 dB Freefield attenuation + 0.0 dB TOTAL CORRECTION: + 25.4 dB</p> <p><b>Remarks:</b> Carrier-on state / Carrier at the lower edge of the band (fl)</p>
--	---

Plot No. 34

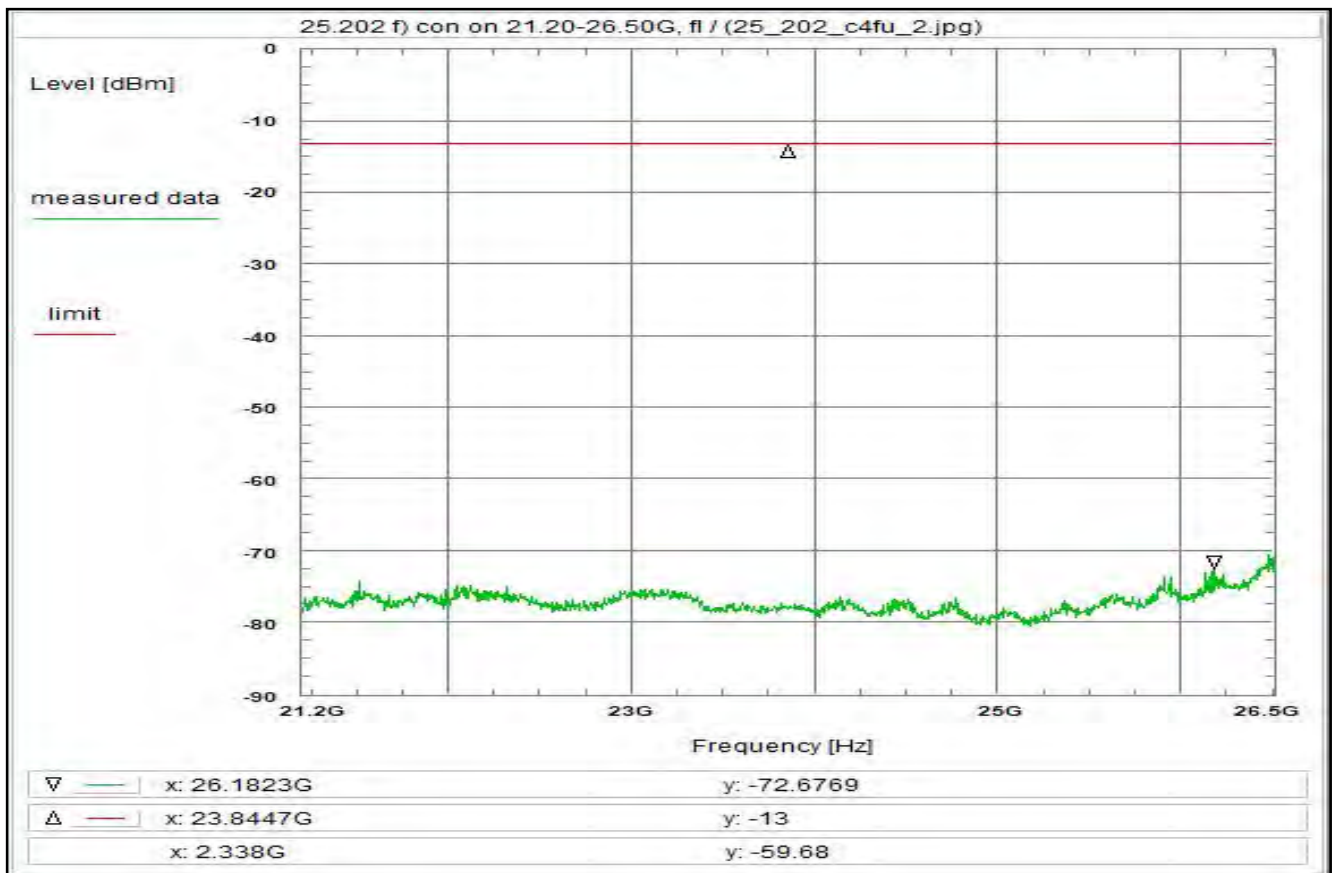

**Subclause:** 25.202 f) Frequencies, frequency tolerance and emission limitations  
Emission limitations  
Modulated rf-carrier at the lower edge of the band (fl)

**Limit:**  
Limit acc. to 25.202 f):  $-43+10\log(P_{max})$  dBc  
This corresponds to a limit of -13 dBm.

**Test results:**  
see plot (an explicit table was not generated)

**Operating condition of DUT:**  
operating condition 4, see test report chapter 6.4  
QPSK dual carrier, valid for all modulations

**Test setup:**  
see test report chapter 7.3: cegj

**Test equipment:**  
see test report chapter 7.x: C107, R001, W009, W019, W022, W063

**Remark:**

**Test result:** Test passed

**Environment condition:**

Date & Time: Thu 20/May/2021 16:17:33  
Location: CTC advanced GmbH, Laboratory RC-SYS  
Temperature: 22 °C  
Humidity: 55 %  
Voltage: 120 Vac

**Setup of measurement equipment:**

Start frequency: 21.2 GHz  
Stop frequency: 26.5 GHz  
Center frequency: 23.85 GHz  
Frequency span: 5.3 GHz  
Resolution-BW: 100 kHz  
Video-BW: 300 kHz  
Input attenuation: 6 dB  
Trace-Mode: Max-Hold  
Detector-Mode: AVG


**Correction:**

Directional coupler (W009) + 34.2 dB  
Coaxial cable (C107) + 5.2 dB  
DUT-Antenna + 0.0 dBi  
Test antenna + 0.0 dB  
BW correction factor (100k -> 4k) - 14.0 dB  
Atten. between HPA and feedhorn - 0.0 dB  
Freefield attenuation + 0.0 dB  
TOTAL CORRECTION: + 25.4 dB

**Remarks:**

Carrier-on state / Carrier at the lower edge of the band (fl)

Plot No. 35

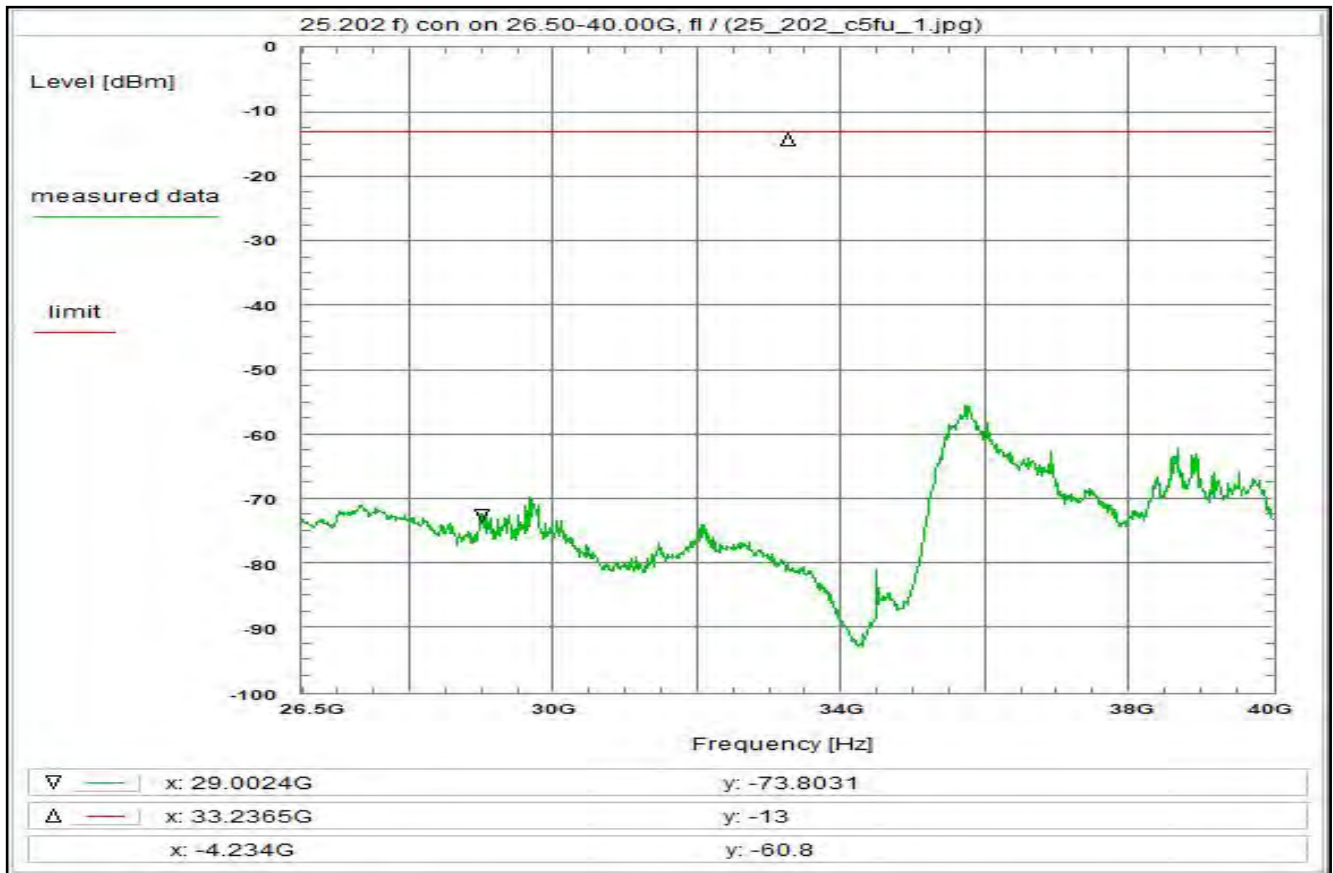

**Subclause:** 25.202 f) Frequencies, frequency tolerance and emission limitations  
Emission limitations  
Modulated rf-carrier at the lower edge of the band (fl)

**Limit:**  
Limit acc. to 25.202 f):  $-43+10\log(P_{max})$  dBc  
This corresponds to a limit of -13 dBm.

**Test results:**  
see plot (an explicit table was not generated)

**Operating condition of DUT:**  
operating condition 1, see test report chapter 6.4  
QPSK single carrier, valid for all modulations

**Test setup:**  
see test report chapter 7.3: cegj

**Test equipment:**  
see test report chapter 7.x: C107, R001, W009, W019, W022, W065

**Remark:**

**Test result:** Test passed

**Environment condition:**

Date & Time: Thu 20/May/2021 16:26:34  
Location: CTC advanced GmbH, Laboratory RC-SYS  
Temperature: 22 °C  
Humidity: 55 %  
Voltage: 120 Vac

**Setup of measurement equipment:**

Start frequency: 26.5 GHz  
Stop frequency: 40 GHz  
Center frequency: 33.25 GHz  
Frequency span: 13.5 GHz  
Resolution-BW: 100 kHz  
Video-BW: 300 kHz  
Input attenuation: 6 dB  
Trace-Mode: Max-Hold  
Detector-Mode: AVG


**Correction:**

Directional coupler (W009) + 33.2 dB  
Coaxial cable (C107) + 6.3 dB  
DUT-Antenna + 0.0 dBi  
Test antenna + 0.0 dB  
BW correction factor (100k -> 4k) - 14.0 dB  
Atten. between HPA and feedhorn - 0.0 dB  
Freefield attenuation + 0.0 dB  
TOTAL CORRECTION: + 25.5 dB

**Remarks:**

Carrier-on state / Carrier at the lower edge of the band (fl)

Plot No. 36

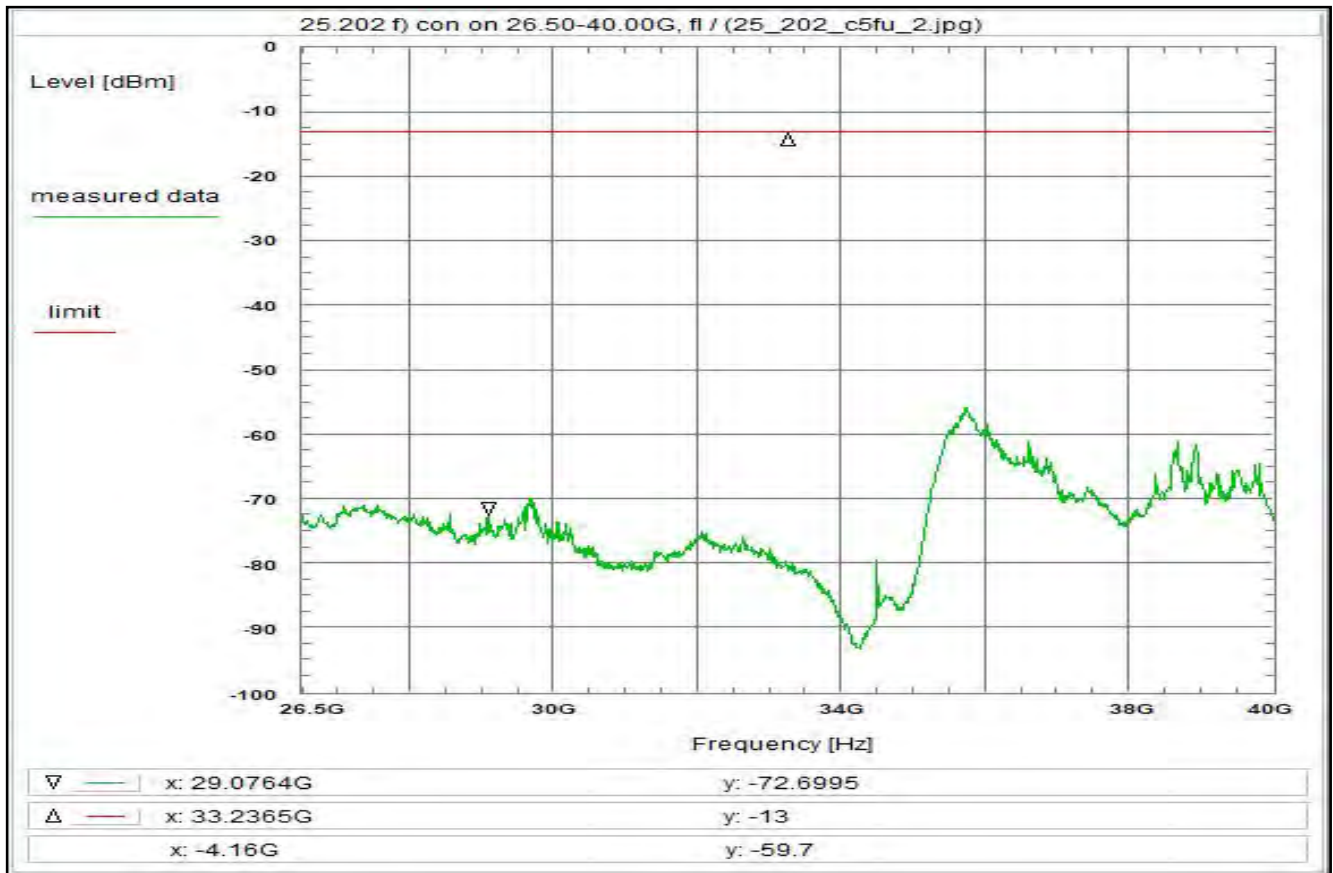

**Subclause:** 25.202 f) Frequencies, frequency tolerance and emission limitations  
Emission limitations  
Modulated rf-carrier at the lower edge of the band (fl)

**Limit:**  
Limit acc. to 25.202 f):  $-43+10\log(P_{max})$  dBc  
This corresponds to a limit of -13 dBm.

**Test results:**  
see plot (an explicit table was not generated)

**Operating condition of DUT:**  
operating condition 4, see test report chapter 6.4  
QPSK dual carrier, valid for all modulations

**Test setup:**  
see test report chapter 7.3: cegj

**Test equipment:**  
see test report chapter 7.x: C107, R001, W009, W019, W022, W065

**Remark:**

**Test result:** Test passed

**Environment condition:**

Date & Time: Thu 20/May/2021 16:28:11  
Location: CTC advanced GmbH, Laboratory RC-SYS  
Temperature: 22 °C  
Humidity: 55 %  
Voltage: 120 Vac

**Setup of measurement equipment:**

Start frequency: 26.5 GHz  
Stop frequency: 40 GHz  
Center frequency: 33.25 GHz  
Frequency span: 13.5 GHz  
Resolution-BW: 100 kHz  
Video-BW: 300 kHz  
Input attenuation: 6 dB  
Trace-Mode: Max-Hold  
Detector-Mode: AVG


**Correction:**

Directional coupler (W009) + 33.2 dB  
Coaxial cable (C107) + 6.3 dB  
DUT-Antenna + 0.0 dBi  
Test antenna + 0.0 dB  
BW correction factor (100k -> 4k) - 14.0 dB  
Atten. between HPA and feedhorn - 0.0 dB  
Freefield attenuation + 0.0 dB  
TOTAL CORRECTION: + 25.5 dB

**Remarks:**

Carrier-on state / Carrier at the lower edge of the band (fl)

Plot No. 37

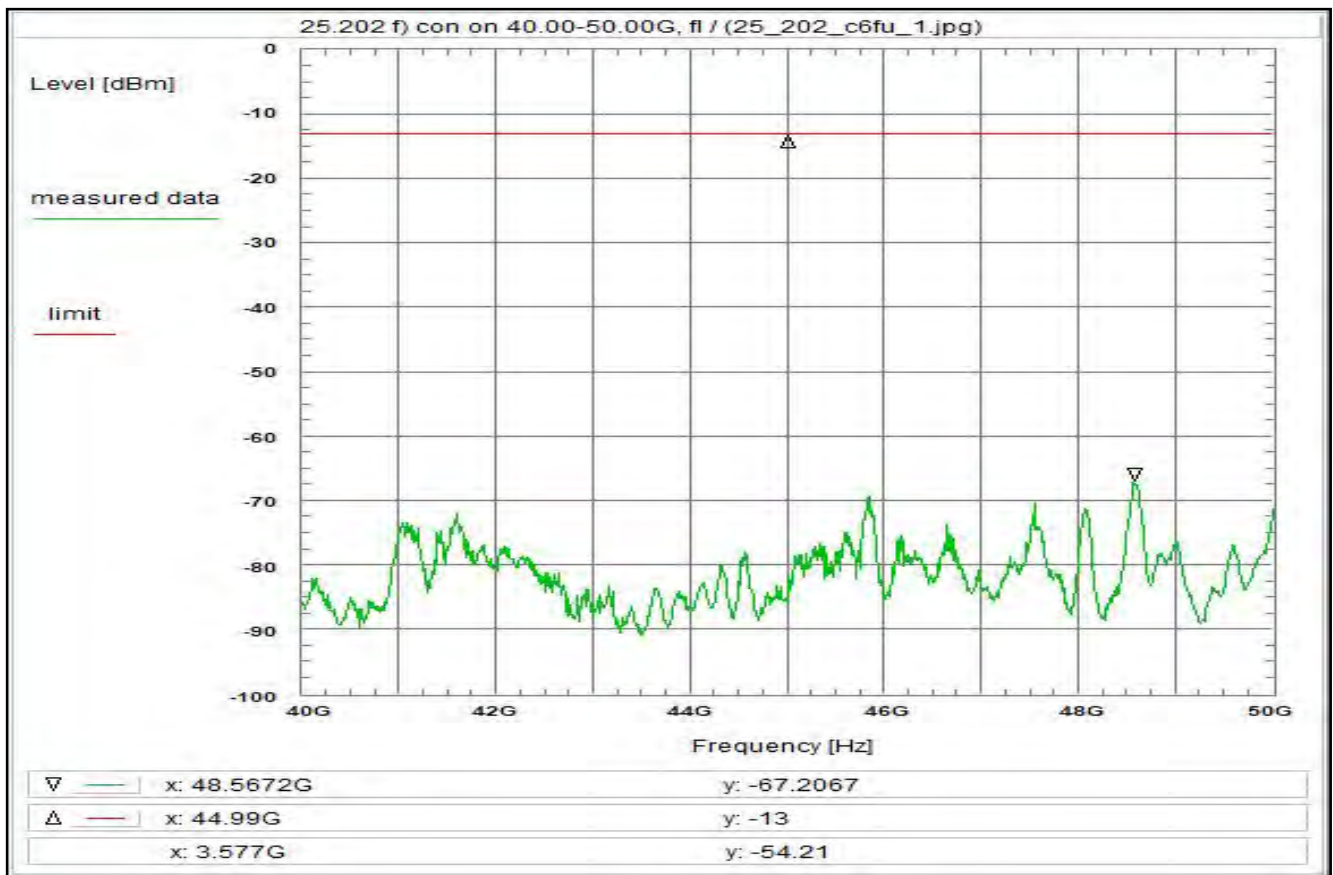

**Subclause:** 25.202 f) Frequencies, frequency tolerance and emission limitations  
Emission limitations  
Modulated rf-carrier at the lower edge of the band (fl)

**Limit:**  
Limit acc. to 25.202 f):  $-43+10\log(P_{max})$  dBc  
This corresponds to a limit of -13 dBm.

**Test results:**  
see plot (an explicit table was not generated)

**Operating condition of DUT:**  
operating condition 1, see test report chapter 6.4  
QPSK single carrier, valid for all modulations

**Test setup:**  
see test report chapter 7.3: cegj

**Test equipment:**  
see test report chapter 7.x: C107, R001, W006, W019, W022, W0xx

**Remark:**

**Test result:** Test passed

**Environment condition:**

Date & Time: Fri 21/May/2021 12:23:41  
Location: CTC advanced GmbH, Laboratory RC-SYS  
Temperature: 22 °C  
Humidity: 55 %  
Voltage: 120 Vac

**Setup of measurement equipment:**

Start frequency: 40 GHz  
Stop frequency: 50 GHz  
Center frequency: 45 GHz  
Frequency span: 10 GHz  
Resolution-BW: 100 kHz  
Video-BW: 300 kHz  
Input attenuation: 10 dB  
Trace-Mode: Max-Hold  
Detector-Mode: AVG

**Correction:**


Directional coupler (W006) + 13.6 dB  
Coaxial cable (C107) + 7.4 dB  
DUT-Antenna + 0.0 dBi  
Test antenna + 0.0 dB  
BW correction factor (100k -> 4k) - 14.0 dB  
Atten. between HPA and feedhorn - 0.0 dB  
Freefield attenuation + 0.0 dB  
TOTAL CORRECTION: + 7.0 dB

**Remarks:**

Carrier-on state / Carrier at the lower edge of the band (fl)



Plot No. 38

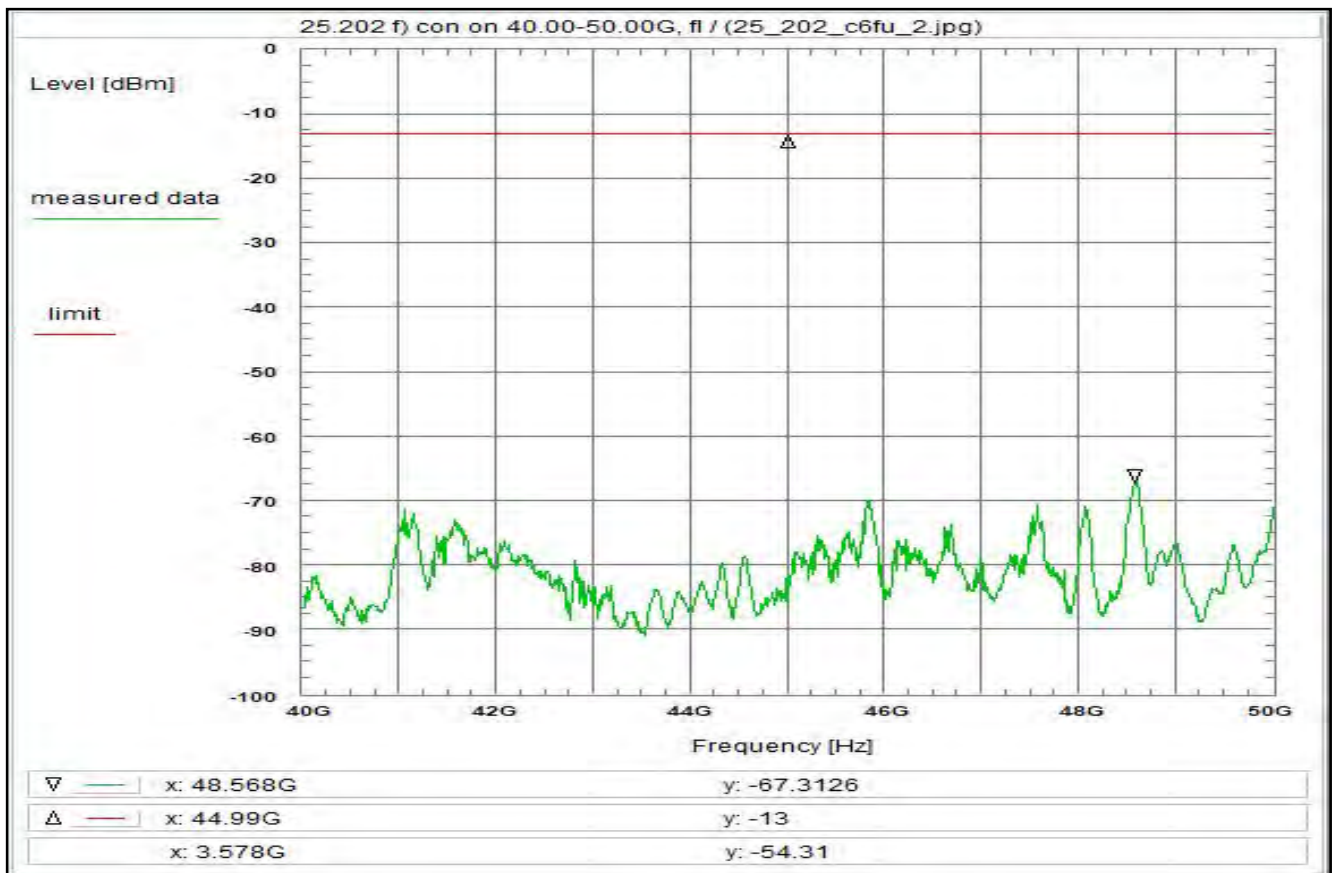

**Subclause:** 25.202 f) Frequencies, frequency tolerance and emission limitations  
Emission limitations  
Modulated rf-carrier at the lower edge of the band (fl)

**Limit:**  
Limit acc. to 25.202 f):  $-43+10\log(P_{max})$  dBc  
This corresponds to a limit of -13 dBm.

**Test results:**  
see plot (an explicit table was not generated)

**Operating condition of DUT:**  
operating condition 4, see test report chapter 6.4  
QPSK dual carrier, valid for all modulations

**Test setup:**  
see test report chapter 7.3: 1cegj

**Test equipment:**  
see test report chapter 7.x: C107, R001, W006, W019, W022, W0xx

**Remark:**

**Test result:** Test passed

**Environment condition:**

Date & Time: Fri 21/May/2021 12:40:53  
Location: CTC advanced GmbH, Laboratory RC-SYS  
Temperature: 22 °C  
Humidity: 55 %  
Voltage: 120 Vac

**Setup of measurement equipment:**

Start frequency: 40 GHz  
Stop frequency: 50 GHz  
Center frequency: 45 GHz  
Frequency span: 10 GHz  
Resolution-BW: 100 kHz  
Video-BW: 300 kHz  
Input attenuation: 10 dB  
Trace-Mode: Max-Hold  
Detector-Mode: AVG


**Correction:**

Directional coupler (W006) + 13.6 dB  
Coaxial cable (C107) + 7.4 dB  
DUT-Antenna + 0.0 dBi  
Test antenna + 0.0 dB  
BW correction factor (100k -> 4k) - 14.0 dB  
Atten. between HPA and feedhorn - 0.0 dB  
Freefield attenuation + 0.0 dB  
TOTAL CORRECTION: + 7.0 dB

**Remarks:**

Carrier-on state / Carrier at the lower edge of the band (fl)

Plot No. 39

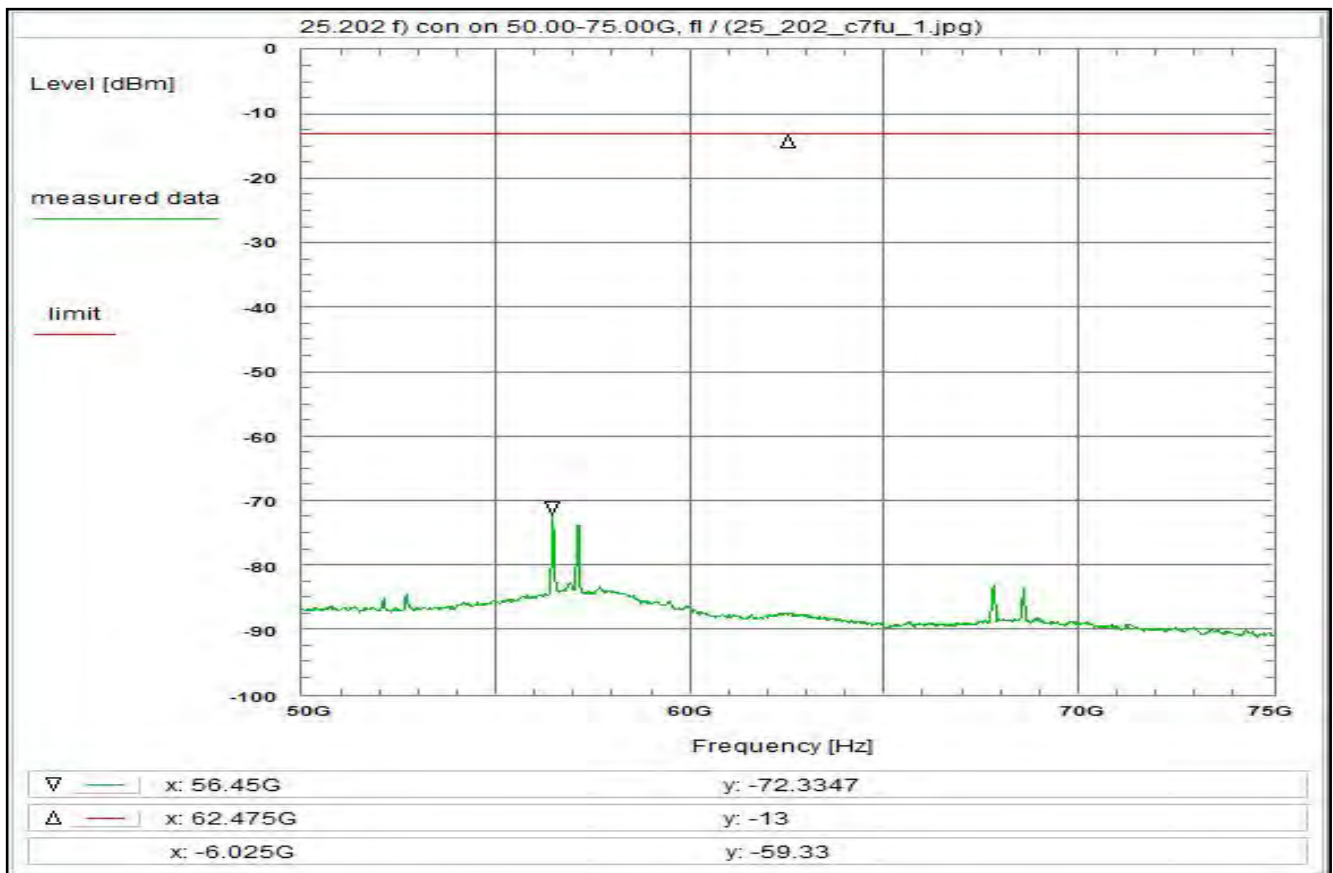

**Subclause:** 25.202 f) Frequencies, frequency tolerance and emission limitations  
Emission limitations  
Modulated rf-carrier at the lower edge of the band (fl)

**Limit:**  
Limit acc. to 25.202 f):  $-43+10\log(P_{max})$  dBc  
This corresponds to a limit of -13 dBm.

**Test results:**  
see plot (an explicit table was not generated)

**Operating condition of DUT:**  
operating condition 4, see test report chapter 6.4  
QPSK dual carrier, valid for all modulations

**Test setup:**  
see test report chapter 7.3: cfjg

**Test equipment:**  
see test report chapter 7.x: C107, R001, W006, W019, W022, W0xx

**Remark:**

**Test result:** Test passed

**Environment condition:**

Date & Time: Fri 21/May/2021 12:58:56  
Location: CTC advanced GmbH, Laboratory RC-SYS  
Temperature: 22 °C  
Humidity: 55 %  
Voltage: 120 Vac

**Setup of measurement equipment:**

Start frequency: 50 GHz  
Stop frequency: 75 GHz  
Center frequency: 62.5 GHz  
Frequency span: 25 GHz  
Resolution-BW: 100 kHz  
Video-BW: 300 kHz  
Input attenuation: 10 dB  
Trace-Mode: Max-Hold  
Detector-Mode: AVG


**Correction:**

Directional coupler (W006) + 19.4 dB  
Coaxial cable (C107) + 0.0 dB  
DUT-Antenna + 0.0 dBi  
Test antenna + 0.0 dB  
BW correction factor (100k -> 4k) - 14.0 dB  
Atten. between HPA and feedhorn - 0.0 dB  
Freefield attenuation + 0.0 dB  
TOTAL CORRECTION: + 5.4 dB

**Remarks:**


Carrier-on state / Carrier at the lower edge of the band (fl)

Plot No. 40

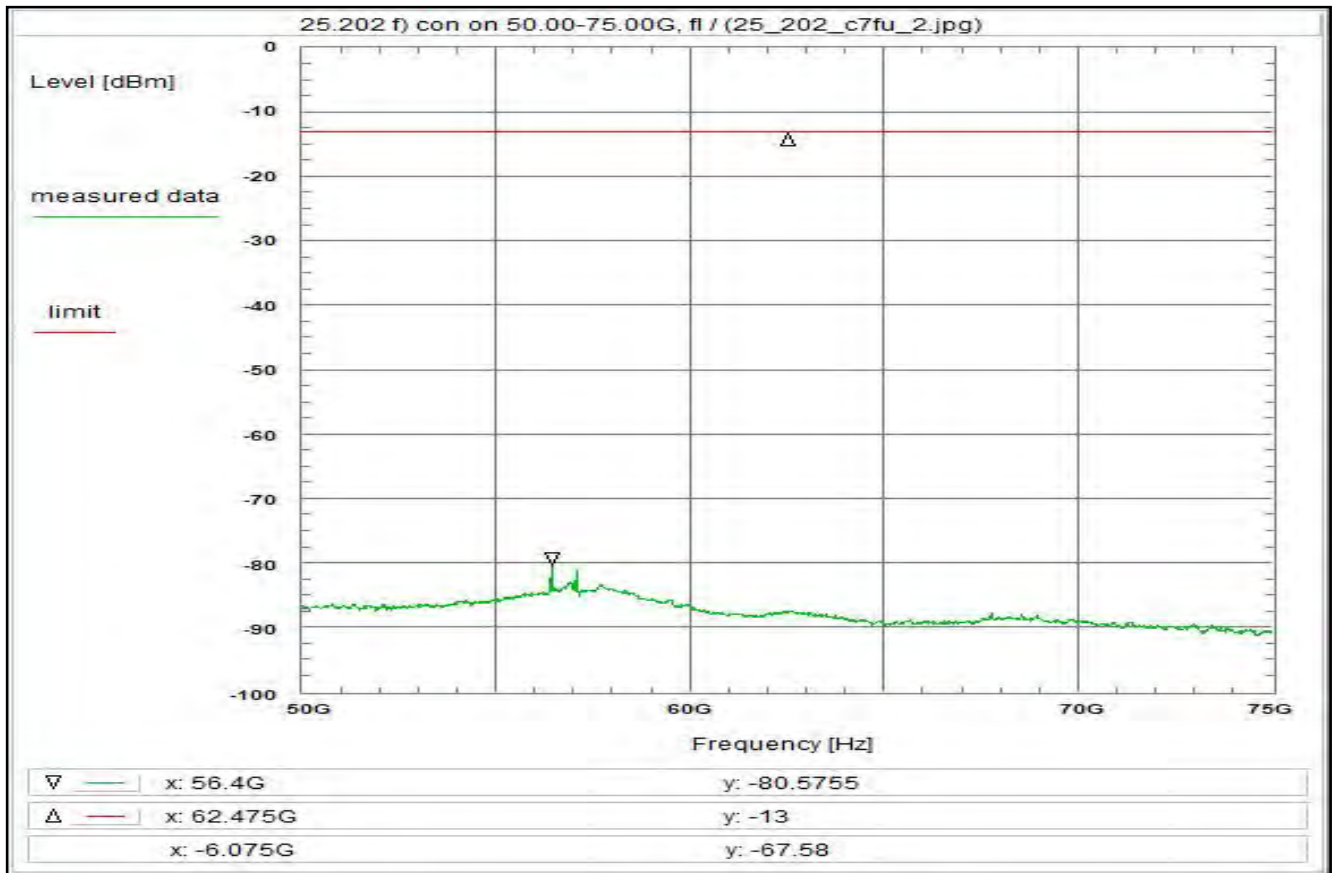

<p><b>Subclause:</b> 25.202 f) Frequencies, frequency tolerance and emission limitations Emission limitations Modulated rf-carrier at the lower edge of the band (fl)</p> <p><b>Limit:</b> Limit acc. to 25.202 f): <math>-43+10\log(P_{max})</math> dBc This corresponds to a limit of -13 dBm.</p> <p><b>Test results:</b> see plot (an explicit table was not generated)</p> <p><b>Operating condition of DUT:</b> operating condition 1, see test report chapter 6.4 QPSK single carrier, valid for all modulations</p> <p><b>Test setup:</b> see test report chapter 7.3: cdgj</p> <p><b>Test equipment:</b> see test report chapter 7.x: C107, R001, W006, W019, W022, W0xx</p> <p><b>Remark:</b></p> <p><b>Test result:</b> Test passed</p>	<p><b>Environment condition:</b> Date &amp; Time: Fri 21/May/2021 13:00:22 Location: CTC advanced GmbH, Laboratory RC-SYS Temperature: 22 °C Humidity: 55 % Voltage: 120 Vac</p> <p><b>Setup of measurement equipment:</b> Start frequency: 50 GHz Stop frequency: 75 GHz Center frequency: 62.5 GHz Frequency span: 25 GHz Resolution-BW: 100 kHz Video-BW: 300 kHz Input attenuation: 10 dB Trace-Mode: Max-Hold Detector-Mode: AVG</p> <p><b>Correction:</b> Directional coupler (W006) + 19.4 dB Coaxial cable (C107) + 0.0 dB DUT-Antenna + 0.0 dBi Test antenna + 0.0 dB BW correction factor (100k -&gt; 4k) - 14.0 dB Atten. between HPA and feedhorn - 0.0 dB Freefield attenuation + 0.0 dB TOTAL CORRECTION: + 5.4 dB</p> <p><b>Remarks:</b> Carrier-on state / Carrier at the lower edge of the band (fl)</p>
--	---

Plot No. 41

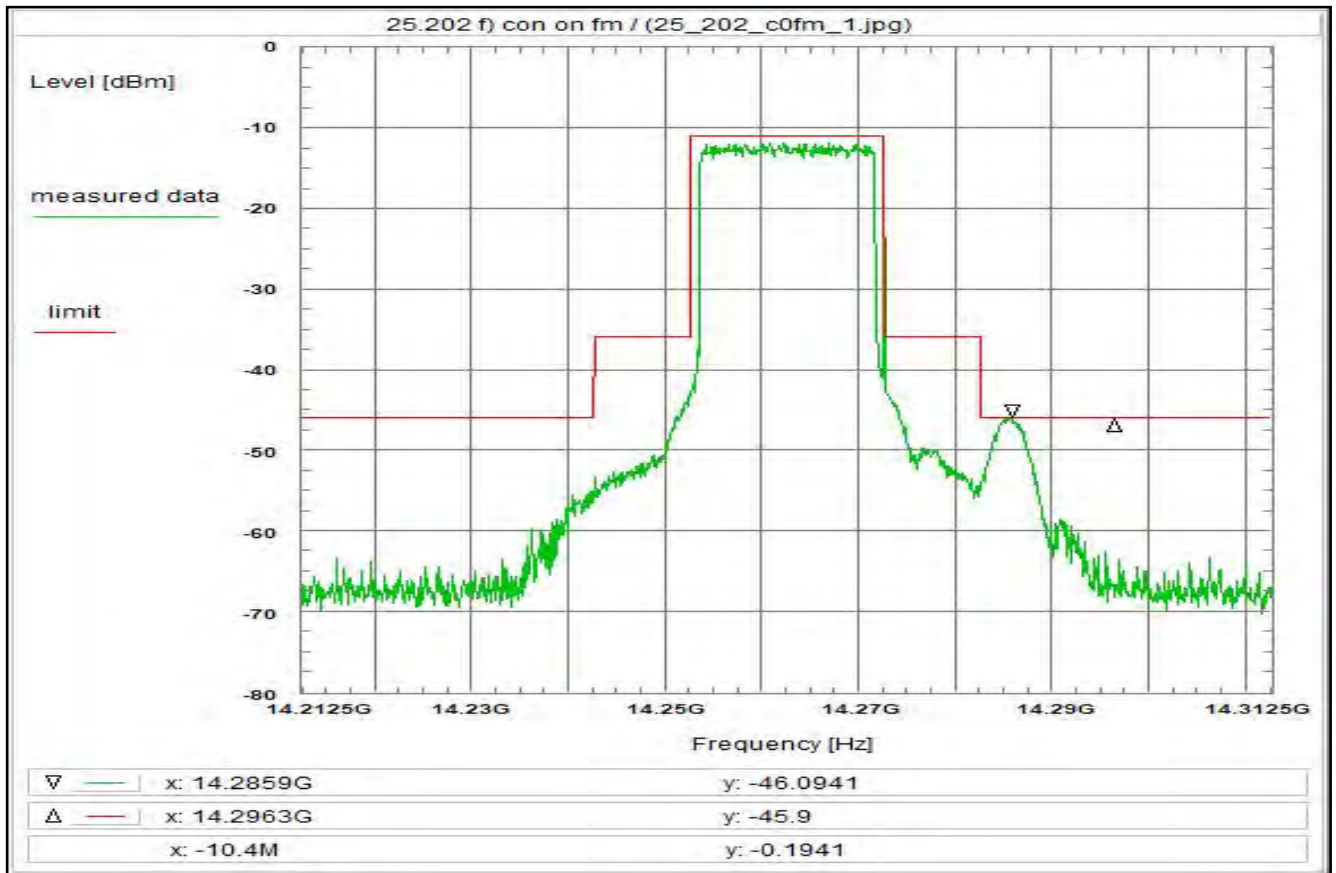

**Subclause:** 25.202 f) Frequencies, frequency tolerance and emission limitations  
Emission limitations  
Modulated rf-carrier in the middle of the band (fm)

**Limit:**  
Limit acc. to 25.202 f):  
50-100% of assigned bw: -25 dBc/4 kHz  
100-250% of assigned bw: -35 dBc/4 kHz  
> 250% of assigned bw: -43+10log(Pmax) dBc/4 kHz

**Test results:**  
see plot (an explicit table was not generated)

**Operating condition of DUT:**  
operating condition 1, see test report chapter 6.4  
QPSK single carrier

**Test setup:**  
see test report chapter 7.3: cdjg

**Test equipment:**  
see test report chapter 7.x: C107, R001, W009, W019, W053

Remark:

**Test result:** Test passed

**Environment condition:**

Date & Time: Wed 19/May/2021 16:23:45  
Location: CTC advanced GmbH, Laboratory RC-SYS  
Temperature: 22 °C  
Humidity: 55 %  
Voltage: 120 Vac

**Setup of measurement equipment:**

Start frequency: 14.2125 GHz  
Stop frequency: 14.3125 GHz  
Center frequency: 14.2625 GHz  
Frequency span: 100 MHz  
Resolution-BW: 10 kHz  
Video-BW: 30 kHz  
Input attenuation: 10 dB  
Trace-Mode: Clear Write  
Detector-Mode: AVG


**Correction:**

Directional coupler (W009) + 39.5 dB  
Coaxial cable (C107) + 4.0 dB  
DUT-Antenna + 0.0 dBi  
Test antenna + 0.0 dB  
BW correction factor (10k -> 4k) - 4.0 dB  
Atten. between HPA and feedhorn - 0.0 dB  
Freefield attenuation + 0.0 dB  
TOTAL CORRECTION: + 39.5 dB

**Remarks:**

Carrier-on state / Carrier in the middle of the band (fm)

Plot No. 42

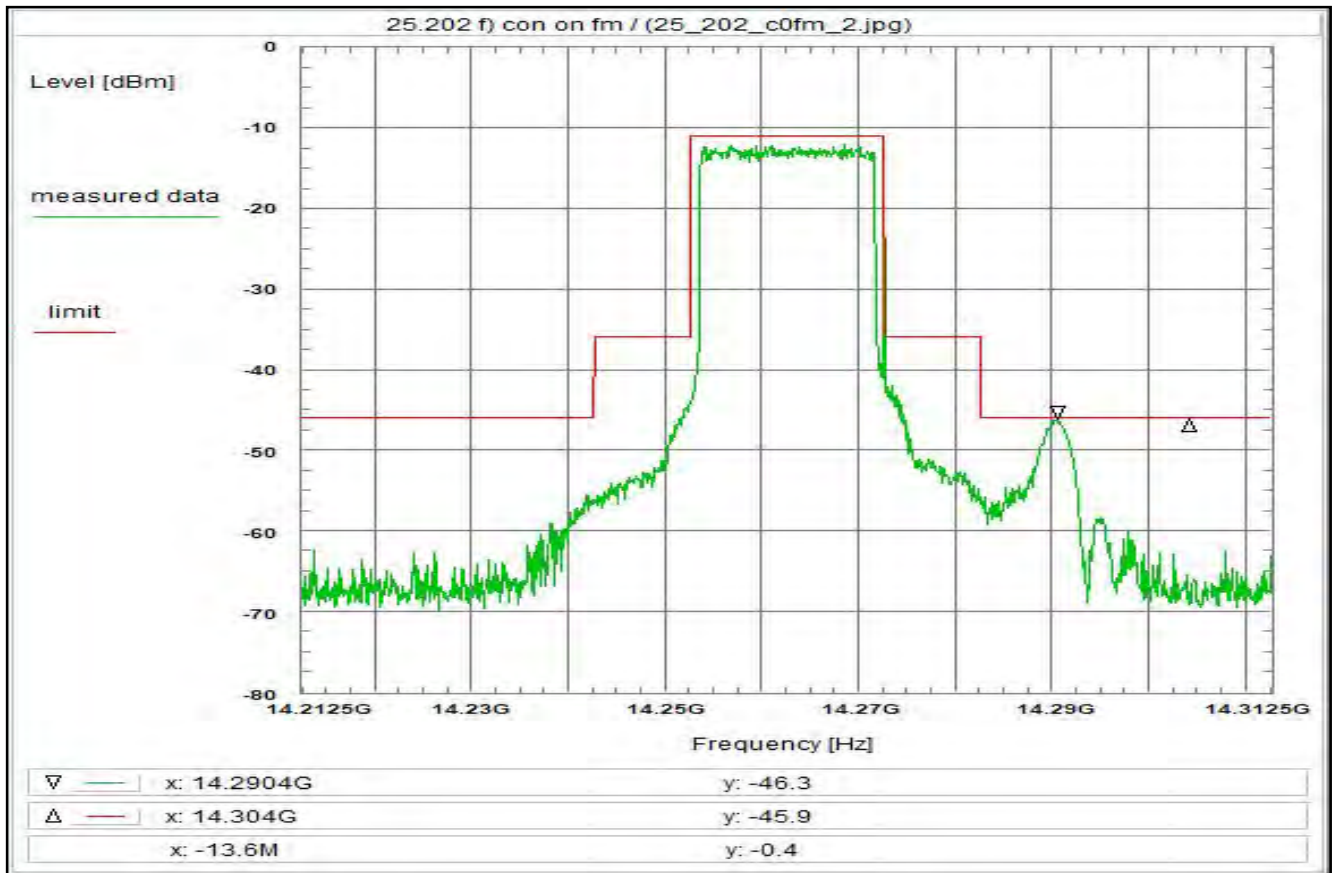

**Subclause:** 25.202 f) Frequencies, frequency tolerance and emission limitations  
Emission limitations  
Modulated rf-carrier in the middle of the band (fm)

**Limit:**  
Limit acc. to 25.202 f):  
50-100% of assigned bw: -25 dBc/4 kHz  
100-250% of assigned bw: -35 dBc/4 kHz  
> 250% of assigned bw: -43+10log(Pmax) dBc/4 kHz

**Test results:**  
see plot (an explicit table was not generated)

**Operating condition of DUT:**  
operating condition 2, see test report chapter 6.4  
8PSK single carrier

**Test setup:**  
see test report chapter 7.3: cdjg

**Test equipment:**  
see test report chapter 7.x: C107, R001, W009, W019, W053

Remark:

**Test result:** Test passed

**Environment condition:**

Date & Time: Wed 19/May/2021 16:42:32  
Location: CTC advanced GmbH, Laboratory RC-SYS  
Temperature: 22 °C  
Humidity: 55 %  
Voltage: 120 Vac

**Setup of measurement equipment:**

Start frequency: 14.2125 GHz  
Stop frequency: 14.3125 GHz  
Center frequency: 14.2625 GHz  
Frequency span: 100 MHz  
Resolution-BW: 10 kHz  
Video-BW: 30 kHz  
Input attenuation: 10 dB  
Trace-Mode: Clear Write  
Detector-Mode: AVG


**Correction:**

Directional coupler (W009) + 39.5 dB  
Coaxial cable (C107) + 4.0 dB  
DUT-Antenna + 0.0 dBi  
Test antenna + 0.0 dB  
BW correction factor (10k -> 4k) - 4.0 dB  
Atten. between HPA and feedhorn - 0.0 dB  
Freefield attenuation + 0.0 dB  
TOTAL CORRECTION: + 39.5 dB

**Remarks:**

Carrier-on state / Carrier in the middle of the band (fm)

Plot No. 43

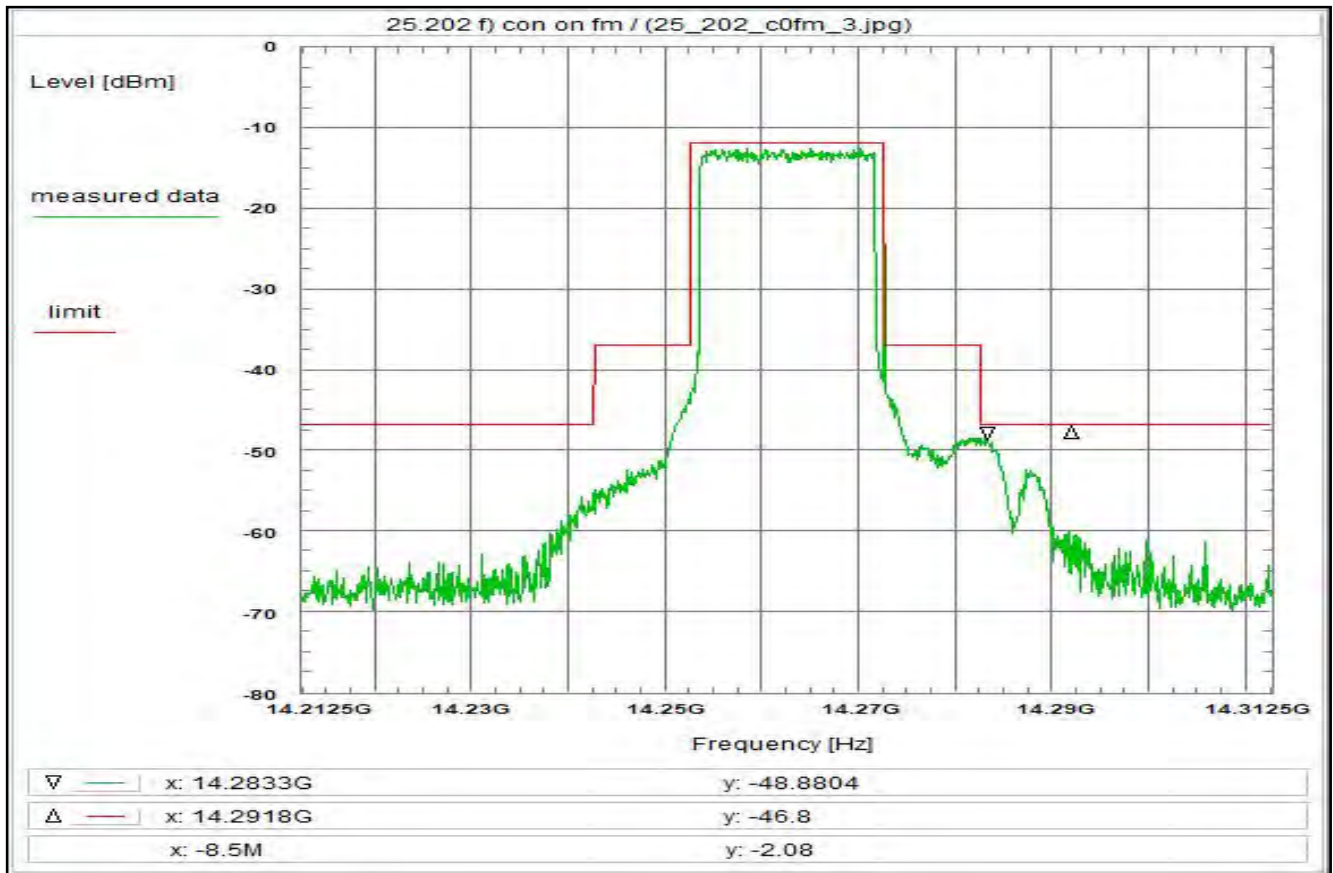

**Subclause:** 25.202 f) Frequencies, frequency tolerance and emission limitations  
Emission limitations  
Modulated rf-carrier in the middle of the band (fm)

**Limit:**  
Limit acc. to 25.202 f):  
50-100% of assigned bw: -25 dBc/4 kHz  
100-250% of assigned bw: -35 dBc/4 kHz  
> 250% of assigned bw: -43+10log(Pmax) dBc/4 kHz

**Test results:**  
see plot (an explicit table was not generated)

**Operating condition of DUT:**  
operating condition 3, see test report chapter 6.4  
16QAM single carrier

**Test setup:**  
see test report chapter 7.3: cdjg

**Test equipment:**  
see test report chapter 7.x: R001, W019, W053

Remark:

**Test result:** Test passed

**Environment condition:**

Date & Time: Wed 19/May/2021 16:37:35  
Location: CTC advanced GmbH, Laboratory RC-SYS  
Temperature: 22 °C  
Humidity: 55 %  
Voltage: 120 Vac

**Setup of measurement equipment:**

Start frequency: 14.2125 GHz  
Stop frequency: 14.3125 GHz  
Center frequency: 14.2625 GHz  
Frequency span: 100 MHz  
Resolution-BW: 10 kHz  
Video-BW: 30 kHz  
Input attenuation: 10 dB  
Trace-Mode: Clear Write  
Detector-Mode: AVG


**Correction:**

Directional coupler (W009) + 39.5 dB  
Coaxial cable (C107) + 4.0 dB  
DUT-Antenna + 0.0 dBi  
Test antenna + 0.0 dB  
BW correction factor (10k -> 4k) - 4.0 dB  
Atten. between HPA and feedhorn - 0.0 dB  
Freefield attenuation + 0.0 dB  
TOTAL CORRECTION: + 39.5 dB

**Remarks:**

Carrier-on state / Carrier in the middle of the band (fm)

Plot No. 44

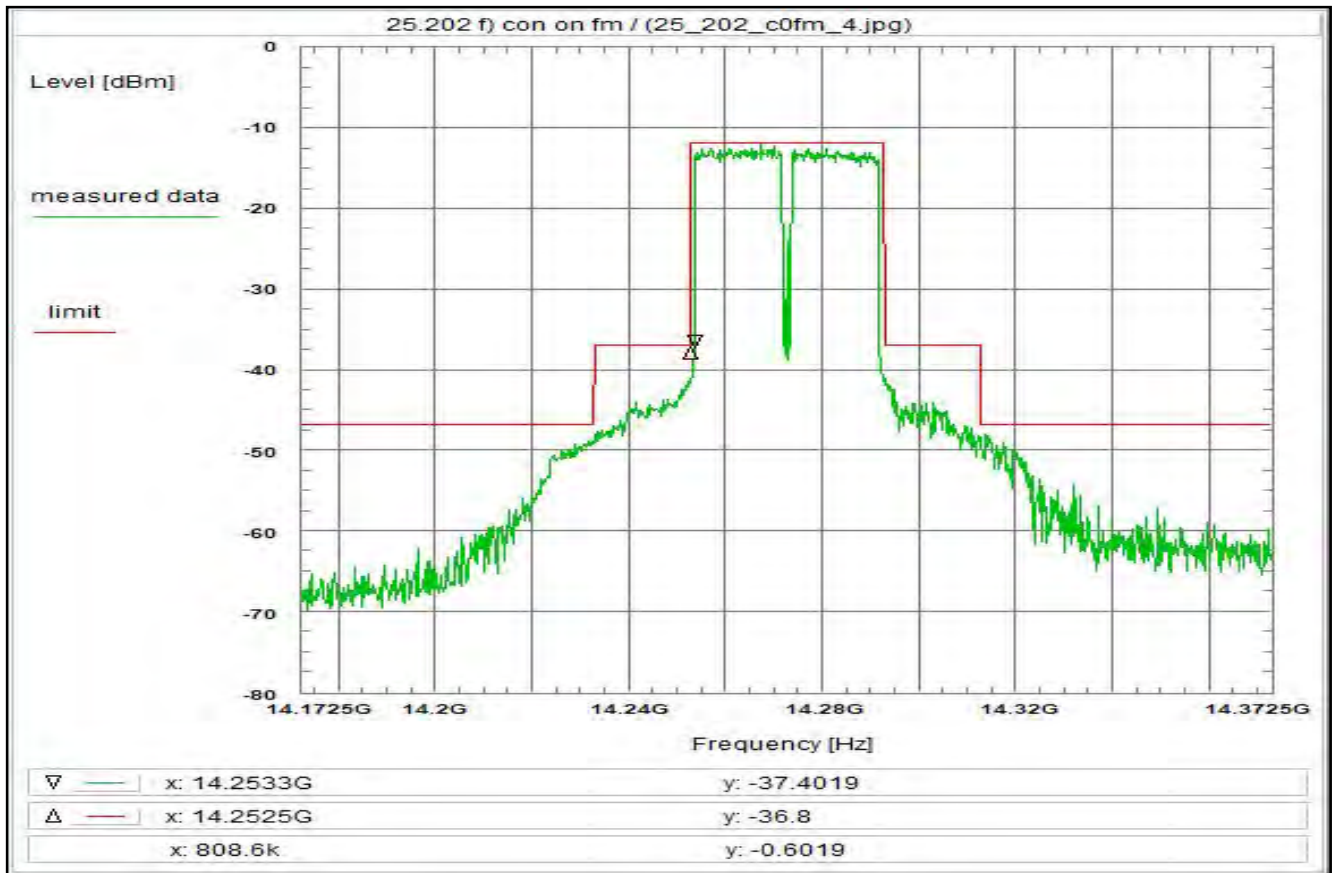

**Subclause:** 25.202 f) Frequencies, frequency tolerance and emission limitations  
Emission limitations  
Modulated rf-carrier in the middle of the band (fm)

**Limit:**  
Limit acc. to 25.202 f):  
50-100% of assigned bw: -25 dBc/4 kHz  
100-250% of assigned bw: -35 dBc/4 kHz  
> 250% of assigned bw: -43+10log(Pmax) dBc/4 kHz

**Test results:**  
see plot (an explicit table was not generated)

**Operating condition of DUT:**  
operating condition 4, see test report chapter 6.4  
QPSK dual carrier

**Test setup:**  
see test report chapter 7.3: cdjg

**Test equipment:**  
see test report chapter 7.x: C107, R001, W009, W019, W053

Remark:

**Test result:** Test passed

**Environment condition:**

Date & Time: Thu 20/May/2021 14:29:53  
Location: CTC advanced GmbH, Laboratory RC-SYS  
Temperature: 22 °C  
Humidity: 55 %  
Voltage: 120 Vac

**Setup of measurement equipment:**

Start frequency: 14.1725 GHz  
Stop frequency: 14.3725 GHz  
Center frequency: 14.2725 GHz  
Frequency span: 200 MHz  
Resolution-BW: 10 kHz  
Video-BW: 30 kHz  
Input attenuation: 10 dB  
Trace-Mode: Clear Write  
Detector-Mode: AVG


**Correction:**

Directional coupler (W009) + 39.5 dB  
Coaxial cable (C107) + 4.0 dB  
DUT-Antenna + 0.0 dBi  
Test antenna + 0.0 dB  
BW correction factor (10k -> 4k) - 4.0 dB  
Atten. between HPA and feedhorn - 0.0 dB  
Freefield attenuation + 0.0 dB  
TOTAL CORRECTION: + 39.5 dB

**Remarks:**

Carrier-on state / Carrier in the middle of the band (fm)

Plot No. 45

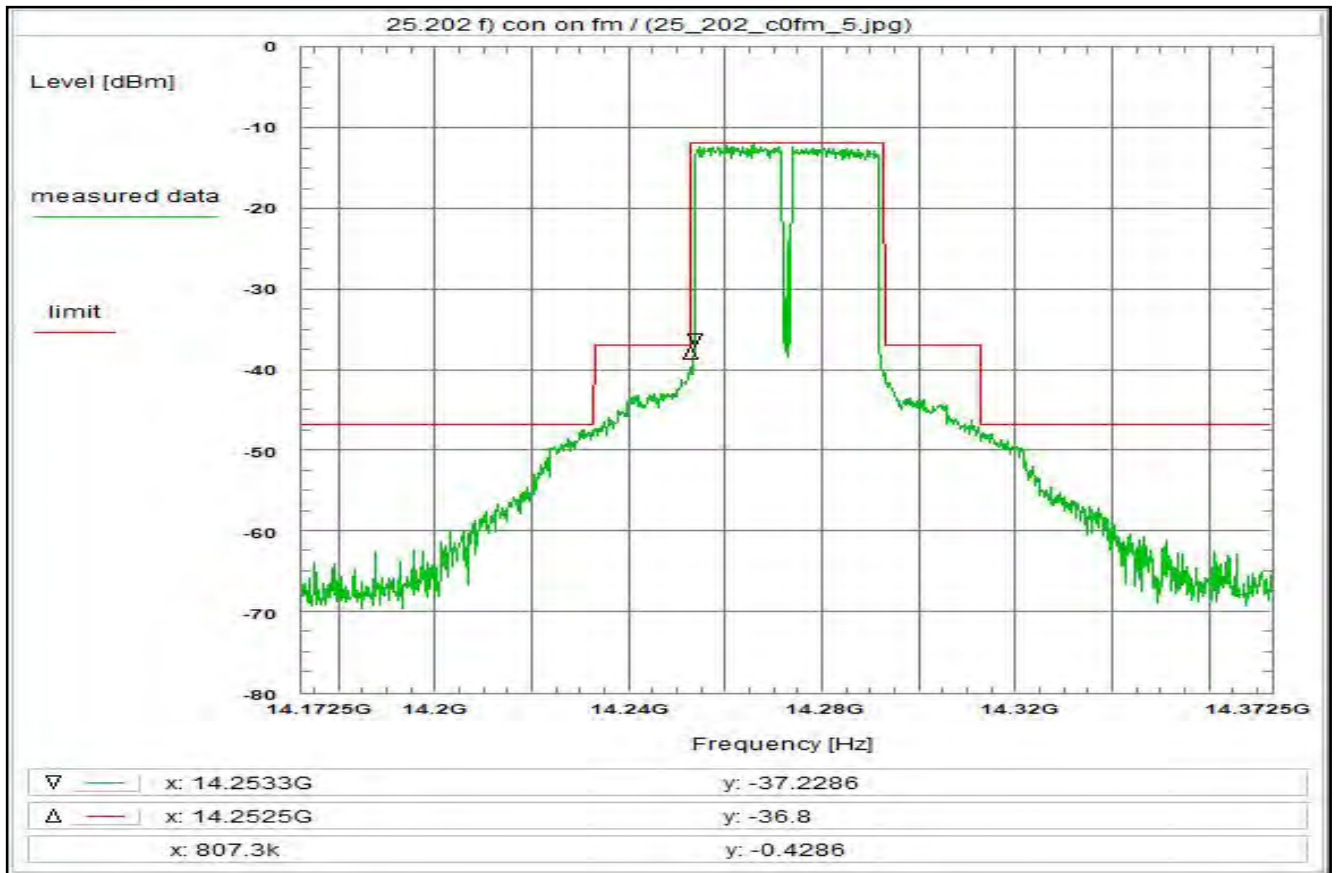

**Subclause:** 25.202 f) Frequencies, frequency tolerance and emission limitations  
Emission limitations  
Modulated rf-carrier in the middle of the band (fm)

**Limit:**  
Limit acc. to 25.202 f):  
50-100% of assigned bw: -25 dBc/4 kHz  
100-250% of assigned bw: -35 dBc/4 kHz  
> 250% of assigned bw: -43+10log(Pmax) dBc/4 kHz

**Test results:**  
see plot (an explicit table was not generated)

**Operating condition of DUT:**  
operating condition 5, see test report chapter 6.4  
8PSK dual carrier

**Test setup:**  
see test report chapter 7.3: cdjg

**Test equipment:**  
see test report chapter 7.x: C107, R001, W009, W019, W053

Remark:

**Test result:** Test passed

**Environment condition:**

Date & Time: Thu 20/May/2021 14:31:30  
Location: CTC advanced GmbH, Laboratory RC-SYS  
Temperature: 22 °C  
Humidity: 55 %  
Voltage: 120 Vac

**Setup of measurement equipment:**

Start frequency: 14.1725 GHz  
Stop frequency: 14.3725 GHz  
Center frequency: 14.2725 GHz  
Frequency span: 200 MHz  
Resolution-BW: 10 kHz  
Video-BW: 30 kHz  
Input attenuation: 10 dB  
Trace-Mode: Clear Write  
Detector-Mode: AVG

**Correction:**


Directional coupler (W009) + 39.5 dB  
Coaxial cable (C107) + 4.0 dB  
DUT-Antenna + 0.0 dBi  
Test antenna + 0.0 dB  
BW correction factor (10k -> 4k) - 4.0 dB  
Atten. between HPA and feedhorn - 0.0 dB  
Freefield attenuation + 0.0 dB  
TOTAL CORRECTION: + 39.5 dB

**Remarks:**

Carrier-on state / Carrier in the middle of the band (fm)



Plot No. 46

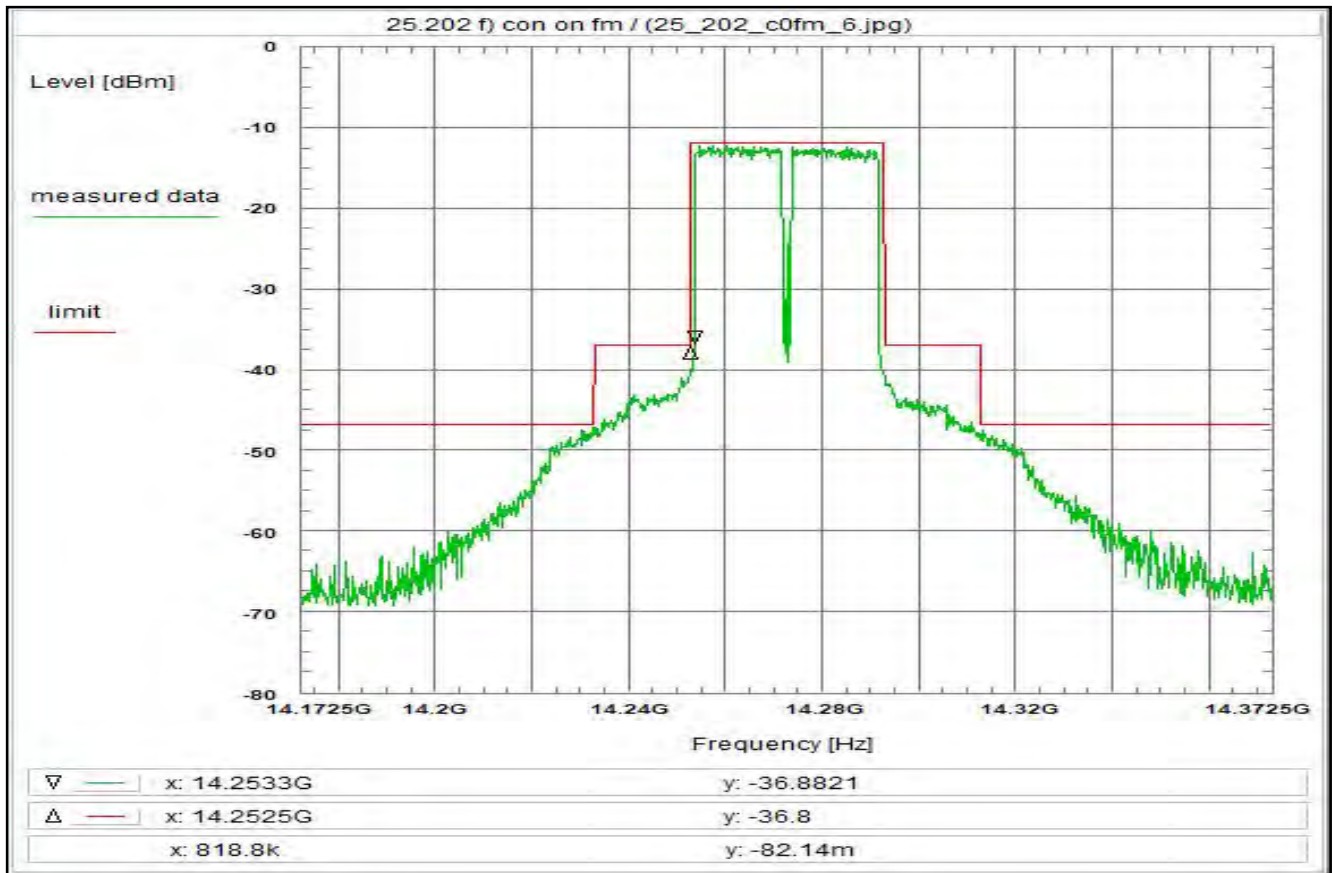

**Subclause:** 25.202 f) Frequencies, frequency tolerance and emission limitations  
Emission limitations  
Modulated rf-carrier in the middle of the band (fm)

**Limit:**  
Limit acc. to 25.202 f):  
50-100% of assigned bw: -25 dBc/4 kHz  
100-250% of assigned bw: -35 dBc/4 kHz  
> 250% of assigned bw: -43+10log(Pmax) dBc/4 kHz

**Test results:**  
see plot (an explicit table was not generated)

**Operating condition of DUT:**  
operating condition 6, see test report chapter 6.4  
16APSK dual carrier

**Test setup:**  
see test report chapter 7.3: cdjg

**Test equipment:**  
see test report chapter 7.x: C107, R001, W009, W019, W053

Remark:

**Test result:** Test passed

**Environment condition:**

Date & Time: Thu 20/May/2021 14:33:07  
Location: CTC advanced GmbH, Laboratory RC-SYS  
Temperature: 22 °C  
Humidity: 55 %  
Voltage: 120 Vac

**Setup of measurement equipment:**

Start frequency: 14.1725 GHz  
Stop frequency: 14.3725 GHz  
Center frequency: 14.2725 GHz  
Frequency span: 200 MHz  
Resolution-BW: 10 kHz  
Video-BW: 30 kHz  
Input attenuation: 10 dB  
Trace-Mode: Clear Write  
Detector-Mode: AVG


**Correction:**

Directional coupler (W009) + 39.5 dB  
Coaxial cable (C107) + 4.0 dB  
DUT-Antenna + 0.0 dBi  
Test antenna + 0.0 dB  
BW correction factor (10k -> 4k) - 4.0 dB  
Atten. between HPA and feedhorn - 0.0 dB  
Freefield attenuation + 0.0 dB  
TOTAL CORRECTION: + 39.5 dB

**Remarks:**

Carrier-on state / Carrier in the middle of the band (fm)

Plot No. 47

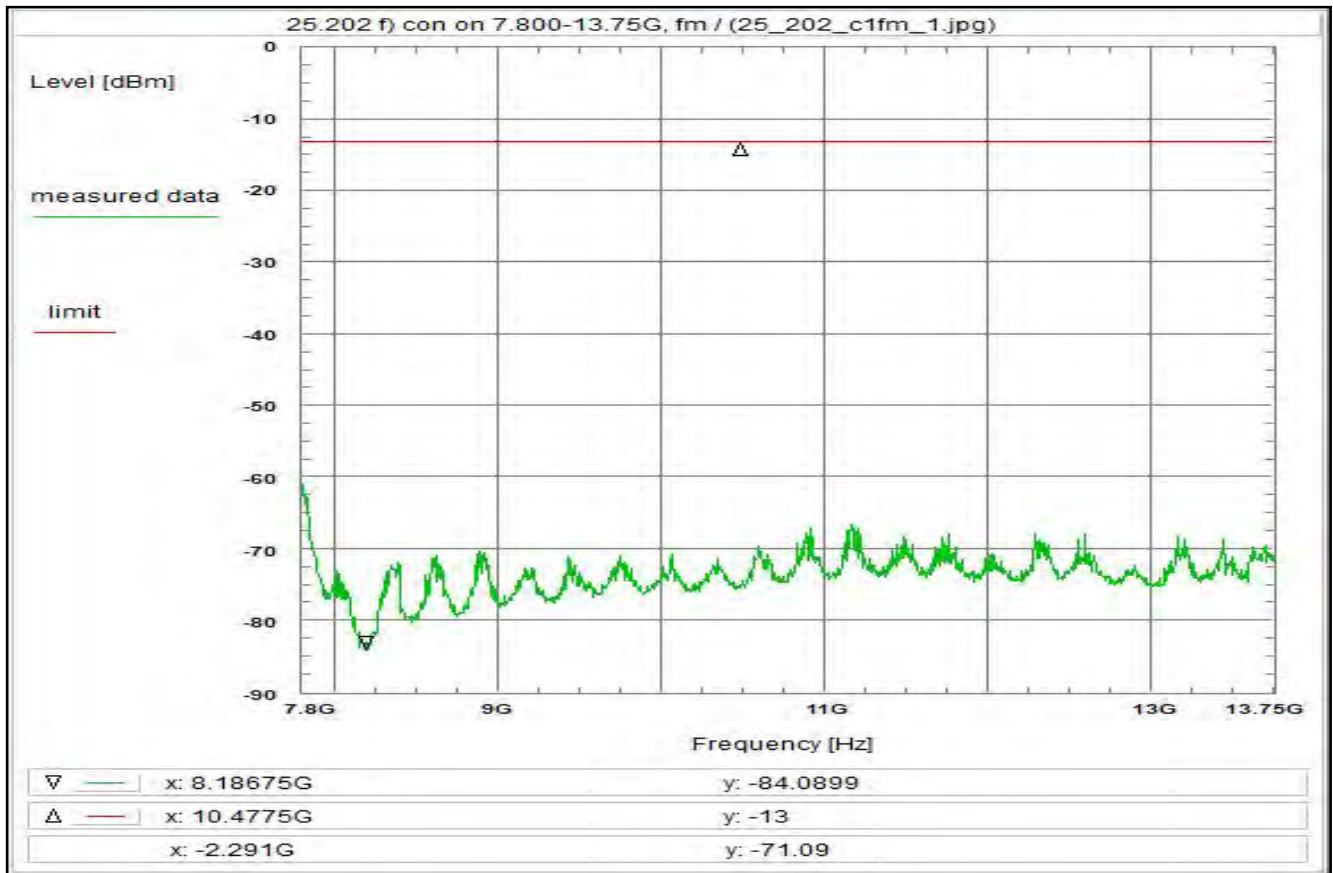

**Subclause:** 25.202 f) Frequencies, frequency tolerance and emission limitations  
Emission limitations  
Modulated rf-carrier in the middle of the band (fm)

**Limit:**  
Limit acc. to 25.202 f):  $-43+10\log(P_{max})$  dBc  
This corresponds to a limit of -13 dBm.

**Test results:**  
see plot (an explicit table was not generated)

**Operating condition of DUT:**  
operating condition 1, see test report chapter 6.4  
QPSK single carrier, valid for all modulations

**Test setup:**  
see test report chapter 7.3: cdgj

**Test equipment:**  
see test report chapter 7.x: C107, R001, W009, W019, W053

**Remark:**

**Test result:** Test passed

**Environment condition:**

Date & Time: Wed 19/May/2021 16:47:29  
Location: CTC advanced GmbH, Laboratory RC-SYS  
Temperature: 22 °C  
Humidity: 55 %  
Voltage: 120 Vac

**Setup of measurement equipment:**

Start frequency: 7.8 GHz  
Stop frequency: 13.75 GHz  
Center frequency: 10.775 GHz  
Frequency span: 5.95 GHz  
Resolution-BW: 100 kHz  
Video-BW: 300 kHz  
Input attenuation: 10 dB  
Trace-Mode: Max-Hold  
Detector-Mode: AVG


**Correction:**

Directional coupler (W009) + 38.6 dB  
Coaxial cable (C107) + 3.5 dB  
DUT-Antenna + 0.0 dBi  
Test antenna + 0.0 dB  
BW correction factor (100k -> 4k) - 14.0 dB  
Atten. between HPA and feedhorn - 0.0 dB  
Freefield attenuation + 0.0 dB  
TOTAL CORRECTION: + 28.1 dB

**Remarks:**

Carrier-on state / Carrier in the middle of the band (fm)

Plot No. 48

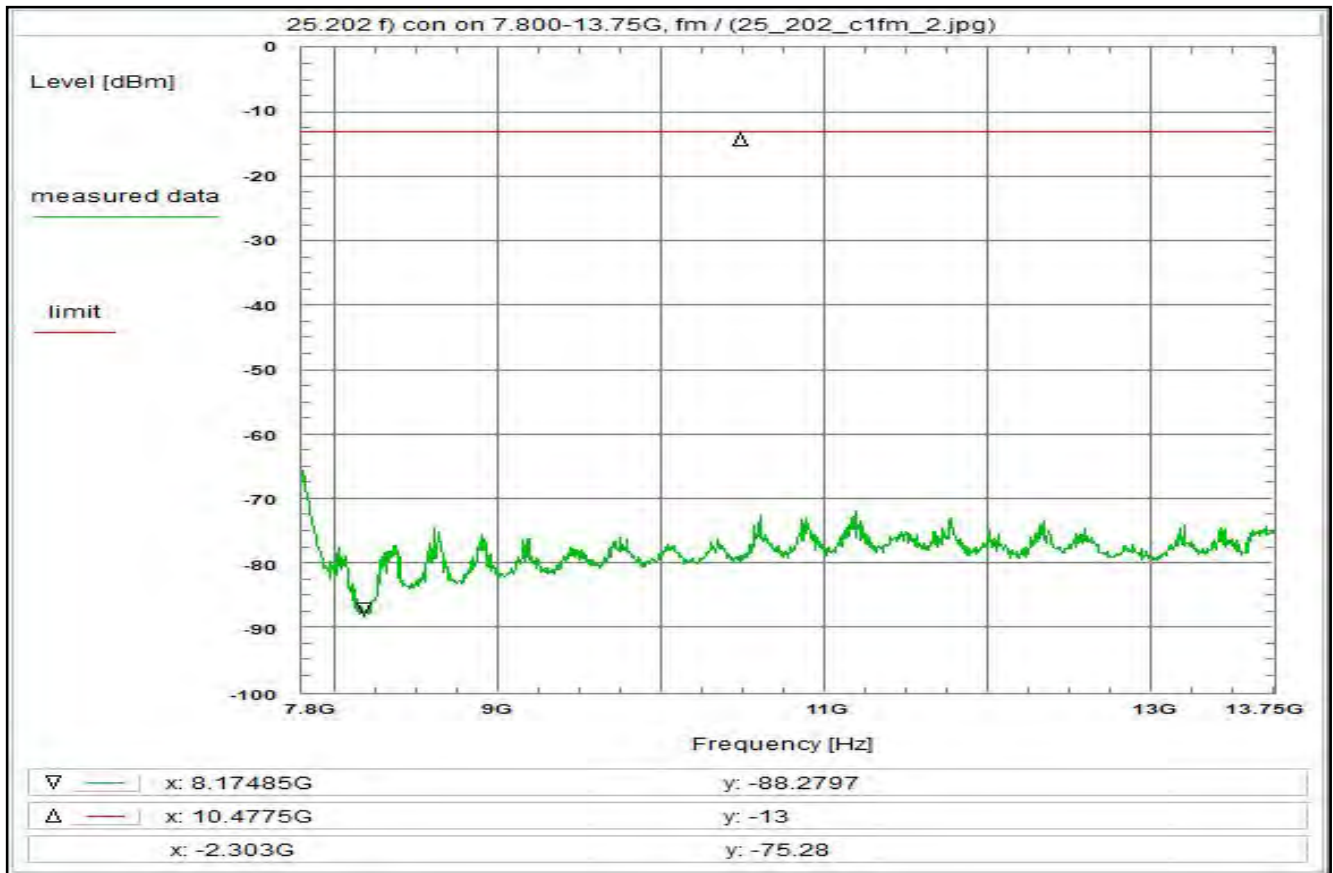

**Subclause:** 25.202 f) Frequencies, frequency tolerance and emission limitations  
Emission limitations  
Modulated rf-carrier in the middle of the band (fm)

**Limit:**  
Limit acc. to 25.202 f):  $-43+10\log(P_{max})$  dBc  
This corresponds to a limit of -13 dBm.

**Test results:**  
see plot (an explicit table was not generated)

**Operating condition of DUT:**  
operating condition 4, see test report chapter 6.4  
QPSK dual carrier, valid for all modulations

**Test setup:**  
see test report chapter 7.3: cdjg

**Test equipment:**  
see test report chapter 7.x: C107, R001, W009, W019, W053

**Remark:**

**Test result:** Test passed

**Environment condition:**

Date & Time: Thu 20/May/2021 15:15:49  
Location: CTC advanced GmbH, Laboratory RC-SYS  
Temperature: 22 °C  
Humidity: 55 %  
Voltage: 120 Vac

**Setup of measurement equipment:**

Start frequency: 7.8 GHz  
Stop frequency: 13.75 GHz  
Center frequency: 10.775 GHz  
Frequency span: 5.95 GHz  
Resolution-BW: 100 kHz  
Video-BW: 300 kHz  
Input attenuation: 6 dB  
Trace-Mode: Max-Hold  
Detector-Mode: AVG


**Correction:**

Directional coupler (W009) + 38.6 dB  
Coaxial cable (C107) + 3.5 dB  
DUT-Antenna + 0.0 dBi  
Test antenna + 0.0 dB  
BW correction factor (100k -> 4k) - 14.0 dB  
Atten. between HPA and feedhorn - 0.0 dB  
Freefield attenuation + 0.0 dB  
TOTAL CORRECTION: + 28.1 dB

**Remarks:**

Carrier-on state / Carrier in the middle of the band (fm)

Plot No. 49

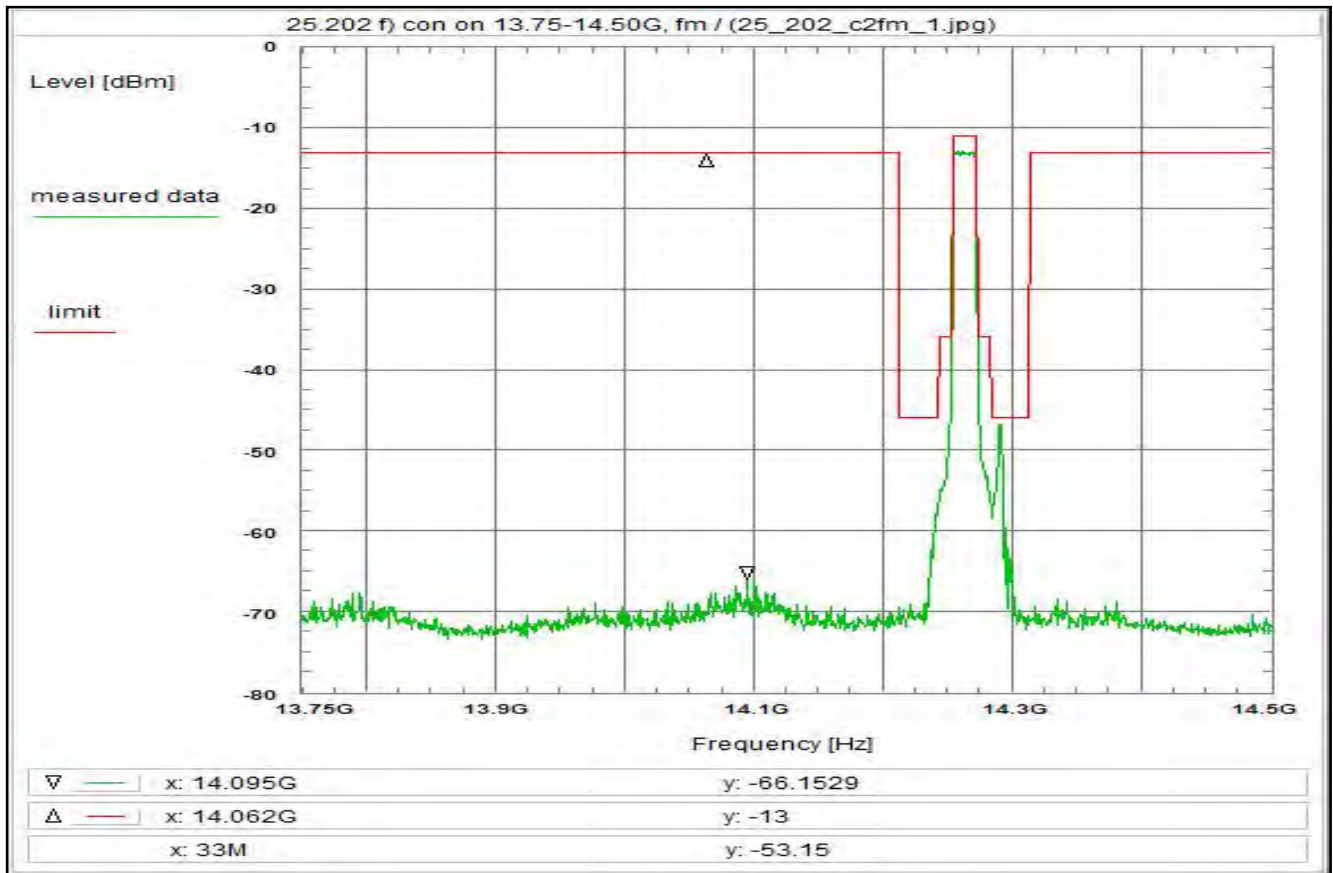

**Subclause:** 25.202 f) Frequencies, frequency tolerance and emission limitations  
Emission limitations  
Modulated rf-carrier in the middle of the band (fm)

**Limit:**  
Limit acc. to 25.202 f):  $-43+10\log(P_{max})$  dBc  
This corresponds to a limit of -13 dBm.

**Test results:**  
see plot (an explicit table was not generated)

**Operating condition of DUT:**  
operating condition 1, see test report chapter 6.4  
QPSK single carrier, valid for all modulations

**Test setup:**  
see test report chapter 7.3: cdgj

**Test equipment:**  
see test report chapter 7.x: C107, R001, W009, W019, W053

**Remark:**

**Test result:** Test passed

**Environment condition:**

Date & Time: Wed 19/May/2021 16:48:22  
Location: CTC advanced GmbH, Laboratory RC-SYS  
Temperature: 22 °C  
Humidity: 55 %  
Voltage: 120 Vac

**Setup of measurement equipment:**

Start frequency: 13.75 GHz  
Stop frequency: 14.5 GHz  
Center frequency: 14.125 GHz  
Frequency span: 750 MHz  
Resolution-BW: 100 kHz  
Video-BW: 300 kHz  
Input attenuation: 10 dB  
Trace-Mode: Max-Hold  
Detector-Mode: AVG


**Correction:**

Directional coupler (W009) + 39.5 dB  
Coaxial cable (C107) + 4.0 dB  
DUT-Antenna + 0.0 dBi  
Test antenna + 0.0 dB  
BW correction factor (100k -> 4k) - 14.0 dB  
Atten. between HPA and feedhorn - 0.0 dB  
Freefield attenuation + 0.0 dB  
TOTAL CORRECTION: + 29.5 dB

**Remarks:**

Carrier-on state / Carrier in the middle of the band (fm)

Plot No. 50

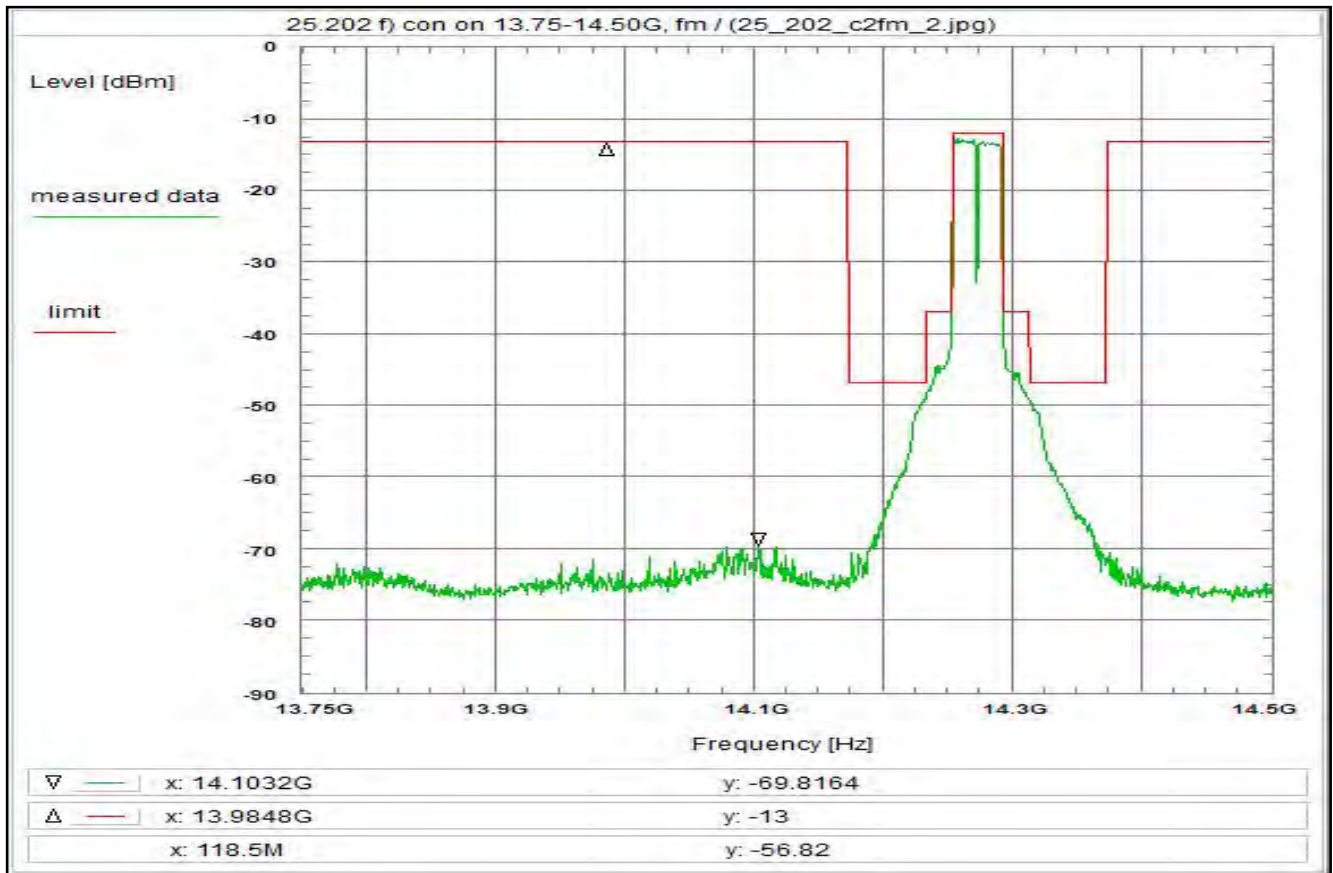

**Subclause:** 25.202 f) Frequencies, frequency tolerance and emission limitations  
Emission limitations  
Modulated rf-carrier in the middle of the band (fm)

**Limit:**  
Limit acc. to 25.202 f):  $-43+10\log(P_{max})$  dBc  
This corresponds to a limit of -13 dBm.

**Test results:**  
see plot (an explicit table was not generated)

**Operating condition of DUT:**  
operating condition 4, see test report chapter 6.4  
QPSK dual carrier, valid for all modulations

**Test setup:**  
see test report chapter 7.3: cdgj

**Test equipment:**  
see test report chapter 7.x: C107, R001, W009, W019, W053

**Remark:**

**Test result:** Test passed

**Environment condition:**

Date & Time: Thu 20/May/2021 15:17:52  
Location: CTC advanced GmbH, Laboratory RC-SYS  
Temperature: 22 °C  
Humidity: 55 %  
Voltage: 120 Vac

**Setup of measurement equipment:**

Start frequency: 13.75 GHz  
Stop frequency: 14.5 GHz  
Center frequency: 14.125 GHz  
Frequency span: 750 MHz  
Resolution-BW: 100 kHz  
Video-BW: 300 kHz  
Input attenuation: 6 dB  
Trace-Mode: Max-Hold  
Detector-Mode: AVG


**Correction:**

Directional coupler (W009) + 39.5 dB  
Coaxial cable (C107) + 4.0 dB  
DUT-Antenna + 0.0 dBi  
Test antenna + 0.0 dB  
BW correction factor (100k -> 4k) - 14.0 dB  
Atten. between HPA and feedhorn - 0.0 dB  
Freefield attenuation + 0.0 dB  
TOTAL CORRECTION: + 29.5 dB

**Remarks:**

Carrier-on state / Carrier in the middle of the band (fm)

Plot No. 51

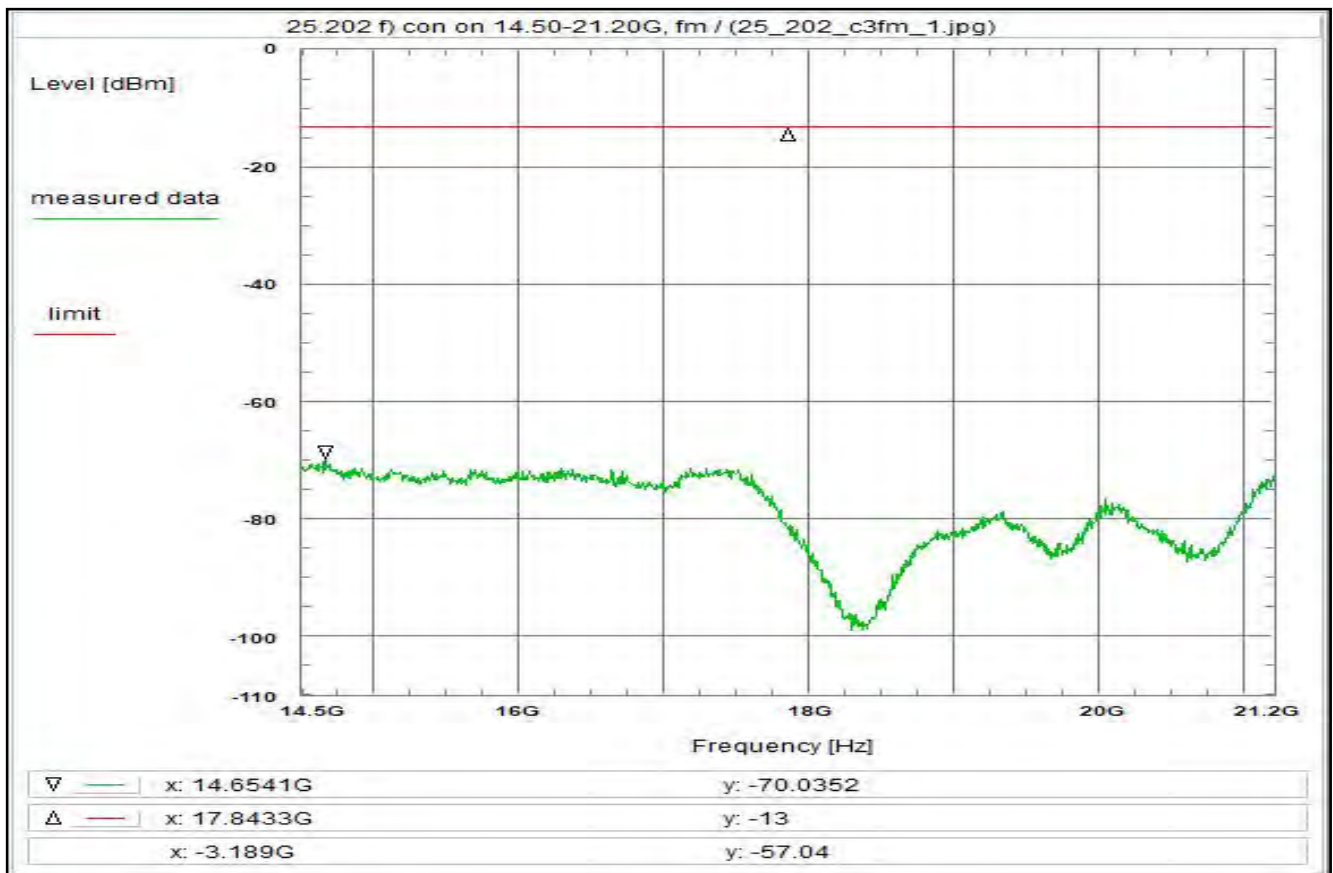

**Subclause:** 25.202 f) Frequencies, frequency tolerance and emission limitations  
Emission limitations  
Modulated rf-carrier in the middle of the band (fm)

**Limit:**  
Limit acc. to 25.202 f):  $-43+10\log(P_{max})$  dBc  
This corresponds to a limit of -13 dBm.

**Test results:**  
see plot (an explicit table was not generated)

**Operating condition of DUT:**  
operating condition 1, see test report chapter 6.4  
QPSK single carrier, valid for all modulations

**Test setup:**  
see test report chapter 7.3: cdgj

**Test equipment:**  
see test report chapter 7.x: C107, R001, W009, W019, W053

**Remark:**

**Test result:** Test passed

**Environment condition:**

Date & Time: Wed 19/May/2021 16:48:57  
Location: CTC advanced GmbH, Laboratory RC-SYS  
Temperature: 22 °C  
Humidity: 55 %  
Voltage: 120 Vac

**Setup of measurement equipment:**

Start frequency: 14.5 GHz  
Stop frequency: 21.2 GHz  
Center frequency: 17.85 GHz  
Frequency span: 6.7 GHz  
Resolution-BW: 100 kHz  
Video-BW: 300 kHz  
Input attenuation: 10 dB  
Trace-Mode: Max-Hold  
Detector-Mode: AVG


**Correction:**

Directional coupler (W009) + 31.5 dB  
Coaxial cable (C107) + 4.5 dB  
DUT-Antenna + 0.0 dBi  
Test antenna + 0.0 dB  
BW correction factor (100k -> 4k) - 14.0 dB  
Atten. between HPA and feedhorn - 0.0 dB  
Freefield attenuation + 0.0 dB  
TOTAL CORRECTION: + 22.0 dB

**Remarks:**


Carrier-on state / Carrier in the middle of the band (fm)

Plot No. 52

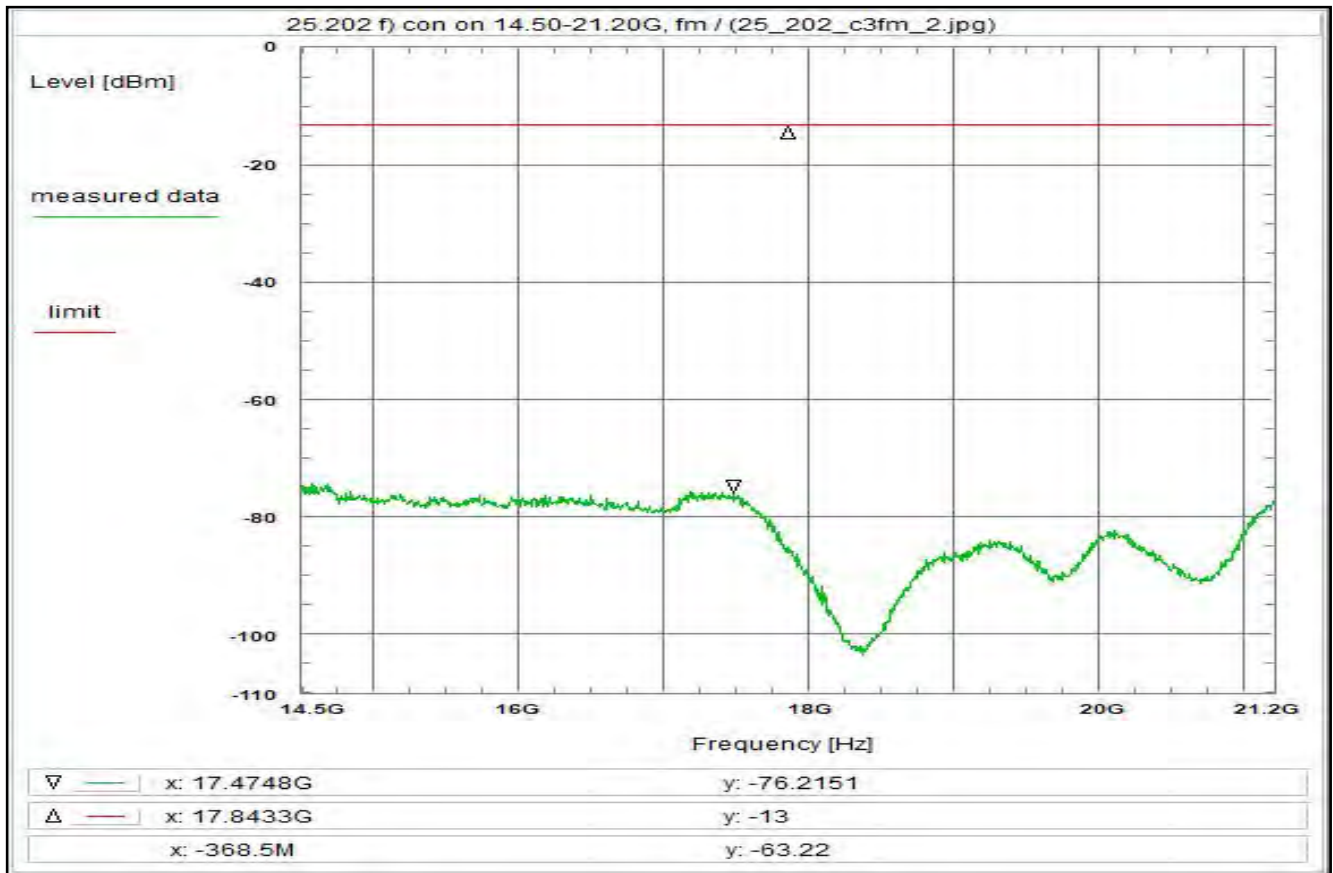

<p><b>Subclause:</b> 25.202 f) Frequencies, frequency tolerance and emission limitations Emission limitations Modulated rf-carrier in the middle of the band (fm)</p> <p><b>Limit:</b> Limit acc. to 25.202 f): <math>-43+10\log(P_{max})</math> dBc This corresponds to a limit of -13 dBm.</p> <p><b>Test results:</b> see plot (an explicit table was not generated)</p> <p><b>Operating condition of DUT:</b> operating condition 4, see test report chapter 6.4 QPSK dual carrier, valid for all modulations</p> <p><b>Test setup:</b> see test report chapter 7.3: cegj</p> <p><b>Test equipment:</b> see test report chapter 7.x: C107, R001, W009, W019, W053</p> <p><b>Remark:</b></p> <p><b>Test result:</b> Test passed</p>	<p><b>Environment condition:</b> Date &amp; Time: Thu 20/May/2021 15:18:24 Location: CTC advanced GmbH, Laboratory RC-SYS Temperature: 22 °C Humidity: 55 % Voltage: 120 Vac</p> <p><b>Setup of measurement equipment:</b> Start frequency: 14.5 GHz Stop frequency: 21.2 GHz Center frequency: 17.85 GHz Frequency span: 6.7 GHz Resolution-BW: 100 kHz Video-BW: 300 kHz Input attenuation: 6 dB Trace-Mode: Max-Hold Detector-Mode: AVG</p> <p><b>Correction:</b> Directional coupler (W009) + 31.5 dB Coaxial cable (C107) + 4.5 dB DUT-Antenna + 0.0 dBi Test antenna + 0.0 dB BW correction factor (100k -&gt; 4k) - 14.0 dB Atten. between HPA and feedhorn - 0.0 dB Freefield attenuation + 0.0 dB TOTAL CORRECTION: + 22.0 dB</p> <p><b>Remarks:</b> Carrier-on state / Carrier in the middle of the band (fm)</p>
--	---

Plot No. 53

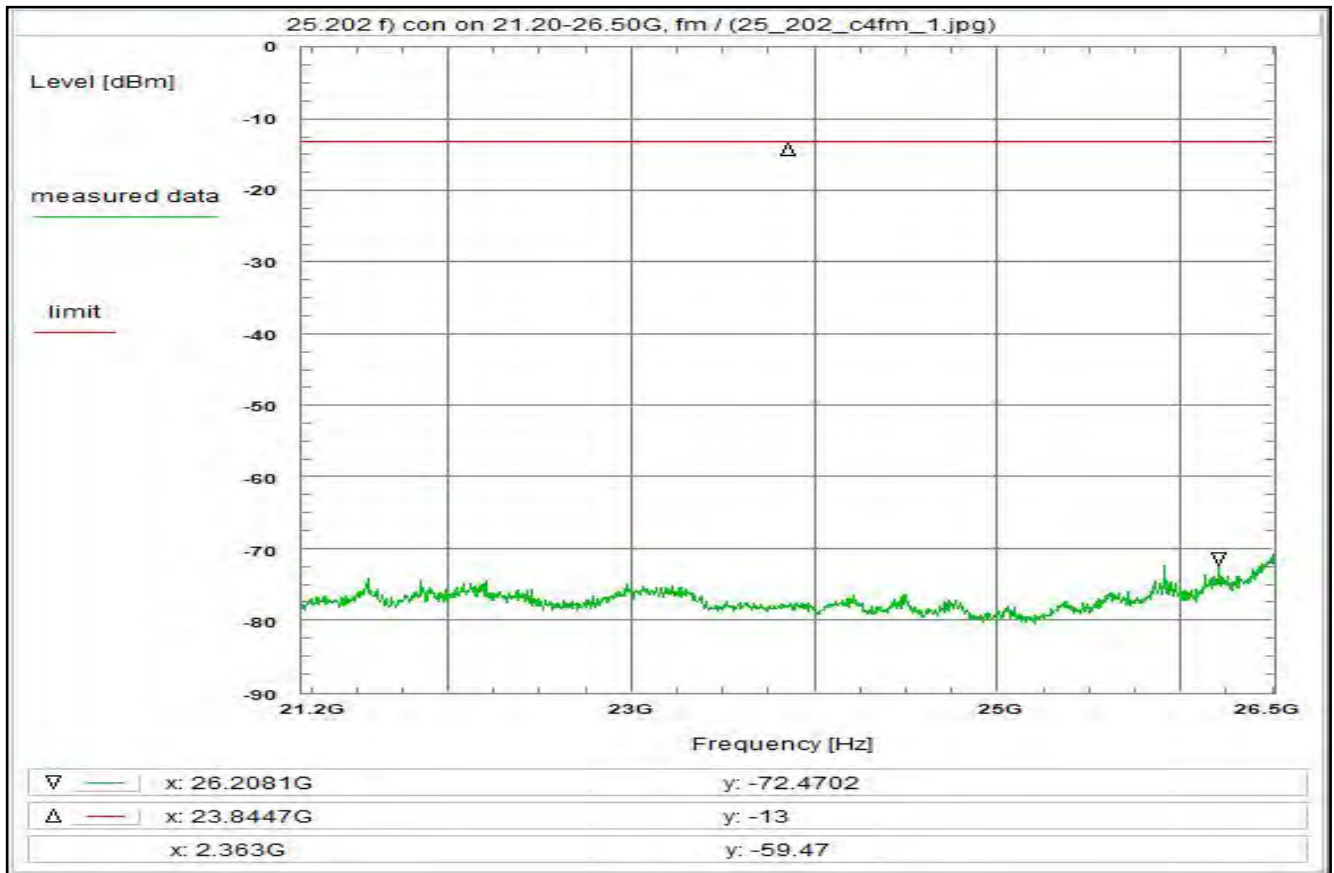

**Subclause:** 25.202 f) Frequencies, frequency tolerance and emission limitations  
Emission limitations  
Modulated rf-carrier in the middle of the band (fm)

**Limit:**  
Limit acc. to 25.202 f):  $-43+10\log(P_{max})$  dBc  
This corresponds to a limit of -13 dBm.

**Test results:**  
see plot (an explicit table was not generated)

**Operating condition of DUT:**  
operating condition 1, see test report chapter 6.4  
QPSK single carrier, valid for all modulations

**Test setup:**  
see test report chapter 7.3: cegj

**Test equipment:**  
see test report chapter 7.x: C107, R001, W009, W019, W022, W063

**Remark:**

**Test result:** Test passed

**Environment condition:**

Date & Time: Thu 20/May/2021 16:15:54  
Location: CTC advanced GmbH, Laboratory RC-SYS  
Temperature: 22 °C  
Humidity: 55 %  
Voltage: 120 Vac

**Setup of measurement equipment:**

Start frequency: 21.2 GHz  
Stop frequency: 26.5 GHz  
Center frequency: 23.85 GHz  
Frequency span: 5.3 GHz  
Resolution-BW: 100 kHz  
Video-BW: 300 kHz  
Input attenuation: 6 dB  
Trace-Mode: Max-Hold  
Detector-Mode: AVG

**Correction:**


Directional coupler (W009) + 34.2 dB  
Coaxial cable (C107) + 5.2 dB  
DUT-Antenna + 0.0 dBi  
Test antenna + 0.0 dB  
BW correction factor (100k -> 4k) - 14.0 dB  
Atten. between HPA and feedhorn - 0.0 dB  
Freefield attenuation + 0.0 dB  
TOTAL CORRECTION: + 25.4 dB

**Remarks:**

Carrier-on state / Carrier in the middle of the band (fm)



Plot No. 54

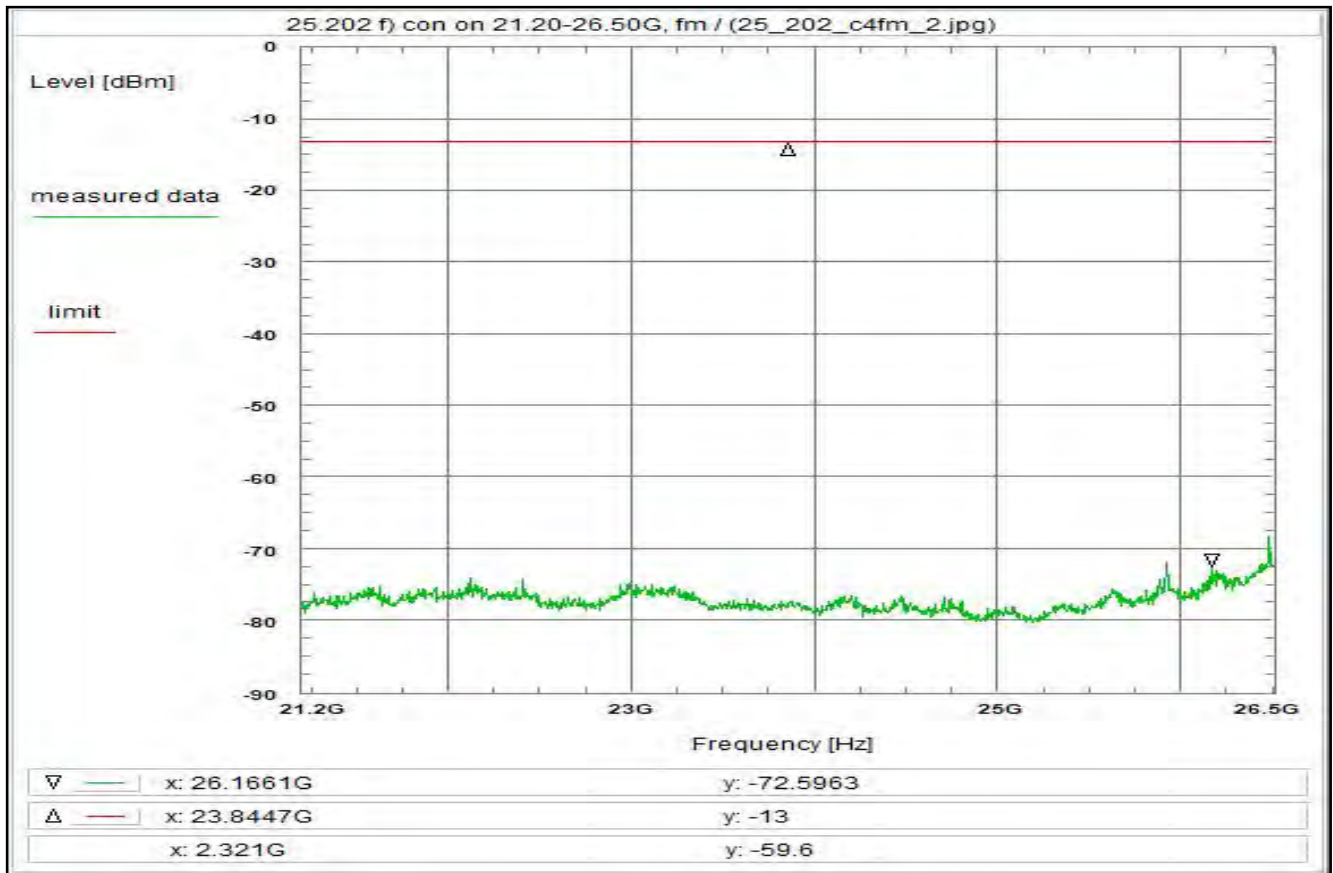

**Subclause:** 25.202 f) Frequencies, frequency tolerance and emission limitations  
Emission limitations  
Modulated rf-carrier in the middle of the band (fm)

**Limit:**  
Limit acc. to 25.202 f):  $-43+10\log(P_{max})$  dBc  
This corresponds to a limit of -13 dBm.

**Test results:**  
see plot (an explicit table was not generated)

**Operating condition of DUT:**  
operating condition 4, see test report chapter 6.4  
QPSK dual carrier, valid for all modulations

**Test setup:**  
see test report chapter 7.3: cegj

**Test equipment:**  
see test report chapter 7.x: C107, R001, W009, W019, W022, W063

**Remark:**

**Test result:** Test passed

**Environment condition:**

Date & Time: Thu 20/May/2021 16:19:50  
Location: CTC advanced GmbH, Laboratory RC-SYS  
Temperature: 22 °C  
Humidity: 55 %  
Voltage: 120 Vac

**Setup of measurement equipment:**

Start frequency: 21.2 GHz  
Stop frequency: 26.5 GHz  
Center frequency: 23.85 GHz  
Frequency span: 5.3 GHz  
Resolution-BW: 100 kHz  
Video-BW: 300 kHz  
Input attenuation: 6 dB  
Trace-Mode: Max-Hold  
Detector-Mode: AVG


**Correction:**

Directional coupler (W009) + 34.2 dB  
Coaxial cable (C107) + 5.2 dB  
DUT-Antenna + 0.0 dBi  
Test antenna + 0.0 dB  
BW correction factor (100k -> 4k) - 14.0 dB  
Atten. between HPA and feedhorn - 0.0 dB  
Freefield attenuation + 0.0 dB  
TOTAL CORRECTION: + 25.4 dB

**Remarks:**

Carrier-on state / Carrier in the middle of the band (fm)

Plot No. 55

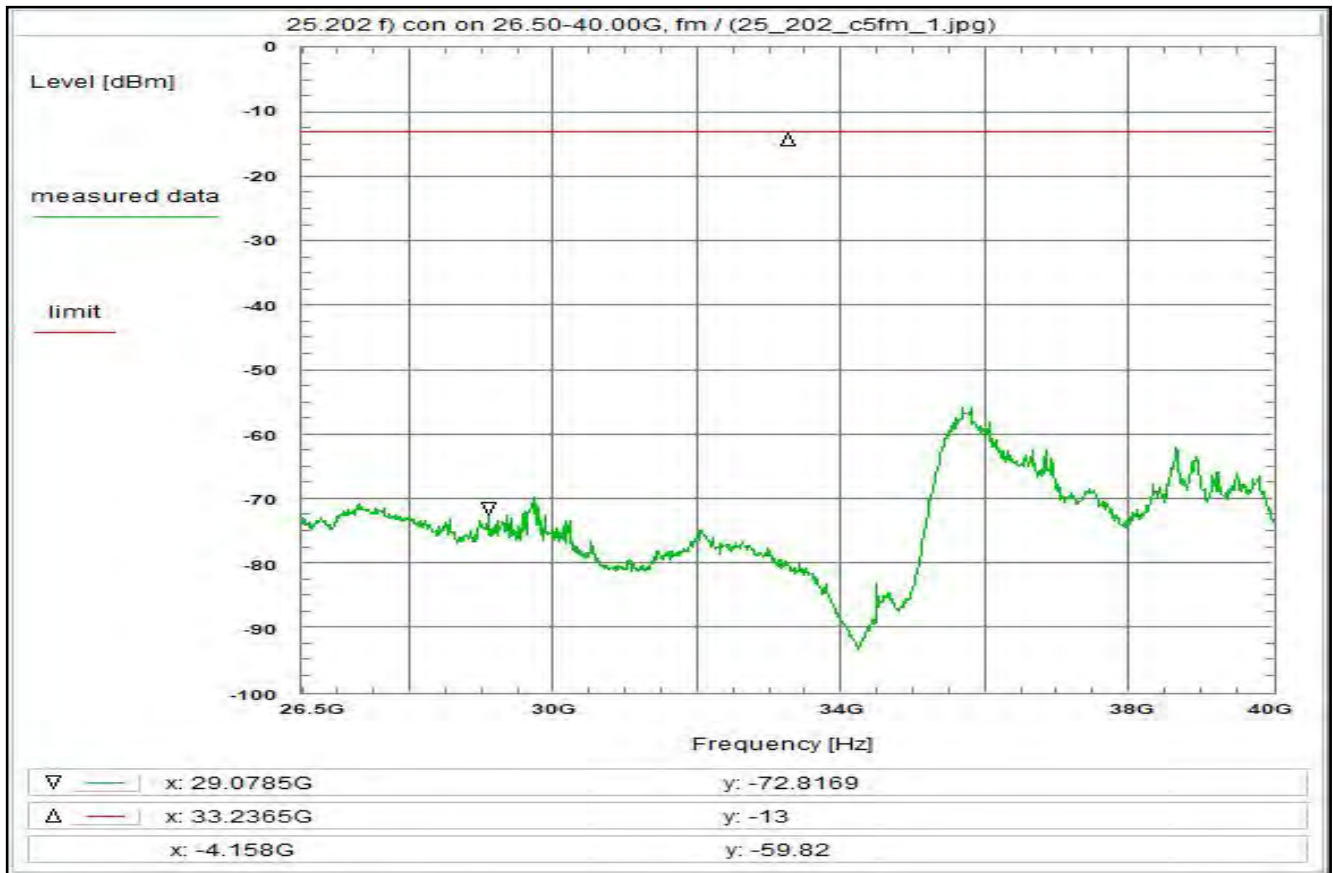

**Subclause:** 25.202 f) Frequencies, frequency tolerance and emission limitations  
Emission limitations  
Modulated rf-carrier in the middle of the band (fm)

**Limit:**  
Limit acc. to 25.202 f):  $-43+10\log(P_{max})$  dBc  
This corresponds to a limit of -13 dBm.

**Test results:**  
see plot (an explicit table was not generated)

**Operating condition of DUT:**  
operating condition 1, see test report chapter 6.4  
QPSK single carrier, valid for all modulations

**Test setup:**  
see test report chapter 7.3: cegj

**Test equipment:**  
see test report chapter 7.x: C107, R001, W009, W019, W022, W065

**Remark:**

**Test result:** Test passed

**Environment condition:**

Date & Time: Thu 20/May/2021 16:25:31  
Location: CTC advanced GmbH, Laboratory RC-SYS  
Temperature: 22 °C  
Humidity: 55 %  
Voltage: 120 Vac

**Setup of measurement equipment:**

Start frequency: 26.5 GHz  
Stop frequency: 40 GHz  
Center frequency: 33.25 GHz  
Frequency span: 13.5 GHz  
Resolution-BW: 100 kHz  
Video-BW: 300 kHz  
Input attenuation: 6 dB  
Trace-Mode: Max-Hold  
Detector-Mode: AVG


**Correction:**

Directional coupler (W009) + 33.2 dB  
Coaxial cable (C107) + 6.3 dB  
DUT-Antenna + 0.0 dBi  
Test antenna + 0.0 dB  
BW correction factor (100k -> 4k) - 14.0 dB  
Atten. between HPA and feedhorn - 0.0 dB  
Freefield attenuation + 0.0 dB  
TOTAL CORRECTION: + 25.5 dB

**Remarks:**

Carrier-on state / Carrier in the middle of the band (fm)

Plot No. 56

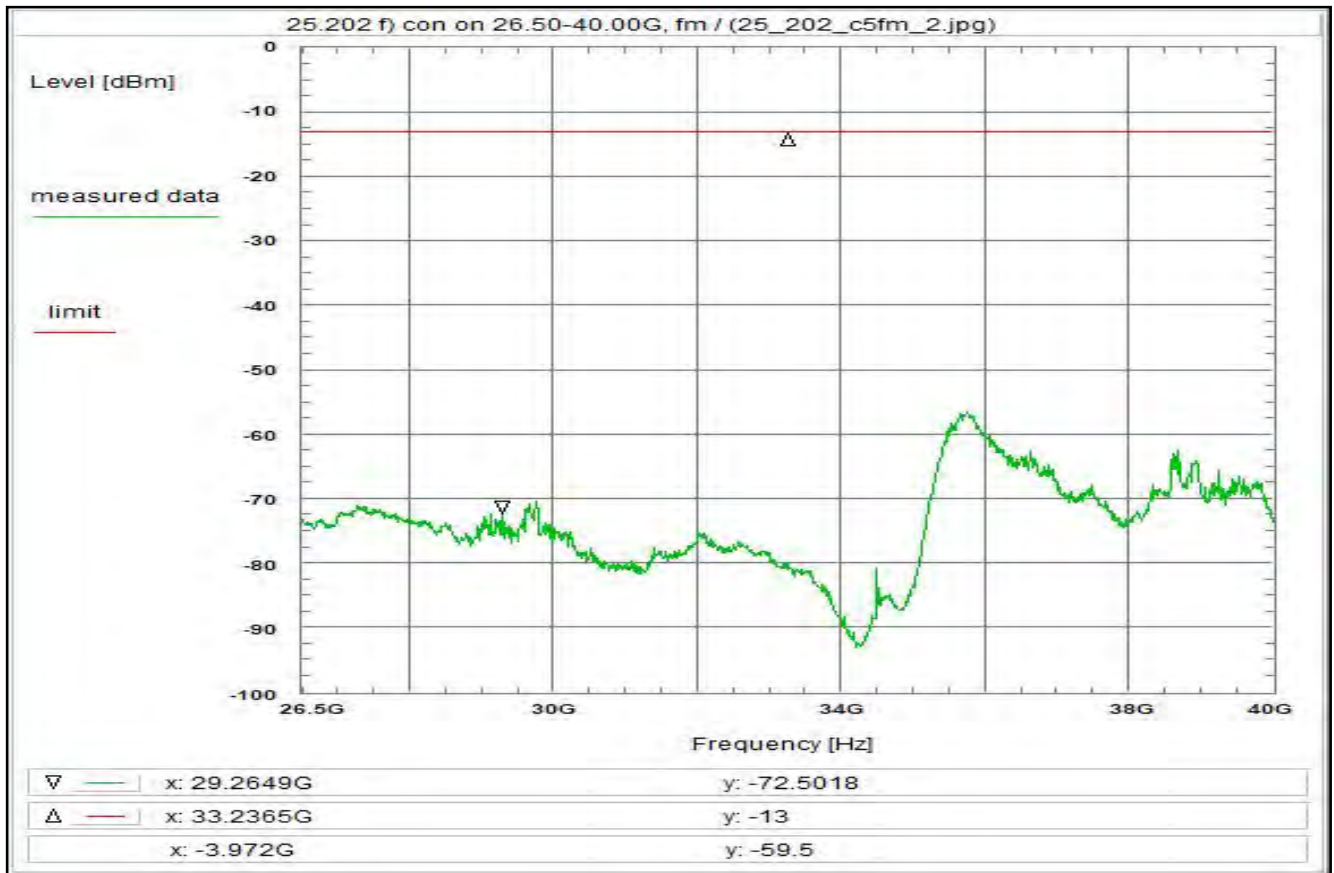

**Subclause:** 25.202 f) Frequencies, frequency tolerance and emission limitations  
Emission limitations  
Modulated rf-carrier in the middle of the band (fm)

**Limit:**  
Limit acc. to 25.202 f):  $-43+10\log(P_{max})$  dBc  
This corresponds to a limit of -13 dBm.

**Test results:**  
see plot (an explicit table was not generated)

**Operating condition of DUT:**  
operating condition 4, see test report chapter 6.4  
QPSK dual carrier, valid for all modulations

**Test setup:**  
see test report chapter 7.3: cegj

**Test equipment:**  
see test report chapter 7.x: C107, R001, W009, W019, W022, W065

**Remark:**

**Test result:** Test passed

**Environment condition:**

Date & Time: Thu 20/May/2021 16:29:02  
Location: CTC advanced GmbH, Laboratory RC-SYS  
Temperature: 22 °C  
Humidity: 55 %  
Voltage: 120 Vac

**Setup of measurement equipment:**

Start frequency: 26.5 GHz  
Stop frequency: 40 GHz  
Center frequency: 33.25 GHz  
Frequency span: 13.5 GHz  
Resolution-BW: 100 kHz  
Video-BW: 300 kHz  
Input attenuation: 6 dB  
Trace-Mode: Max-Hold  
Detector-Mode: AVG


**Correction:**

Directional coupler (W009) + 33.2 dB  
Coaxial cable (C107) + 6.3 dB  
DUT-Antenna + 0.0 dBi  
Test antenna + 0.0 dB  
BW correction factor (100k -> 4k) - 14.0 dB  
Atten. between HPA and feedhorn - 0.0 dB  
Freefield attenuation + 0.0 dB  
TOTAL CORRECTION: + 25.5 dB

**Remarks:**

Carrier-on state / Carrier in the middle of the band (fm)

Plot No. 57

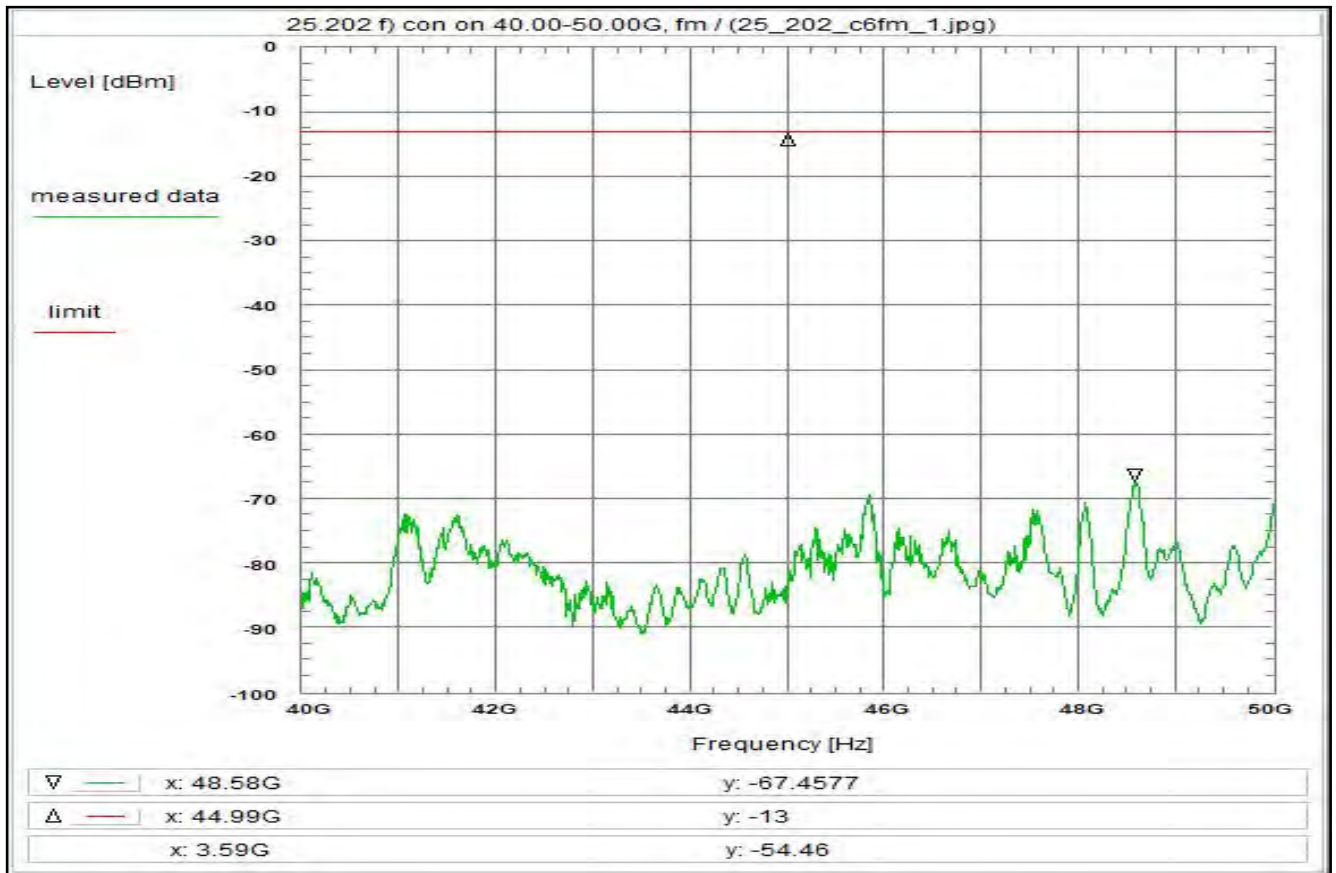

**Subclause:** 25.202 f) Frequencies, frequency tolerance and emission limitations  
Emission limitations  
Modulated rf-carrier in the middle of the band (fm)

**Limit:**  
Limit acc. to 25.202 f):  $-43+10\log(P_{max})$  dBc  
This corresponds to a limit of -13 dBm.

**Test results:**  
see plot (an explicit table was not generated)

**Operating condition of DUT:**  
operating condition 1, see test report chapter 6.4  
QPSK single carrier, valid for all modulations

**Test setup:**  
see test report chapter 7.3: cegj

**Test equipment:**  
see test report chapter 7.x: C107, R001, W006, W019, W022, W0xx

**Remark:**

**Test result:** Test passed

**Environment condition:**

Date & Time: Fri 21/May/2021 12:25:54  
Location: CTC advanced GmbH, Laboratory RC-SYS  
Temperature: 22 °C  
Humidity: 55 %  
Voltage: 120 Vac

**Setup of measurement equipment:**

Start frequency: 40 GHz  
Stop frequency: 50 GHz  
Center frequency: 45 GHz  
Frequency span: 10 GHz  
Resolution-BW: 100 kHz  
Video-BW: 300 kHz  
Input attenuation: 10 dB  
Trace-Mode: Max-Hold  
Detector-Mode: AVG


**Correction:**

Directional coupler (W006) + 13.6 dB  
Coaxial cable (C107) + 7.4 dB  
DUT-Antenna + 0.0 dBi  
Test antenna + 0.0 dB  
BW correction factor (100k -> 4k) - 14.0 dB  
Atten. between HPA and feedhorn - 0.0 dB  
Freefield attenuation + 0.0 dB  
TOTAL CORRECTION: + 7.0 dB

**Remarks:**

Carrier-on state / Carrier in the middle of the band (fm)

Plot No. 58

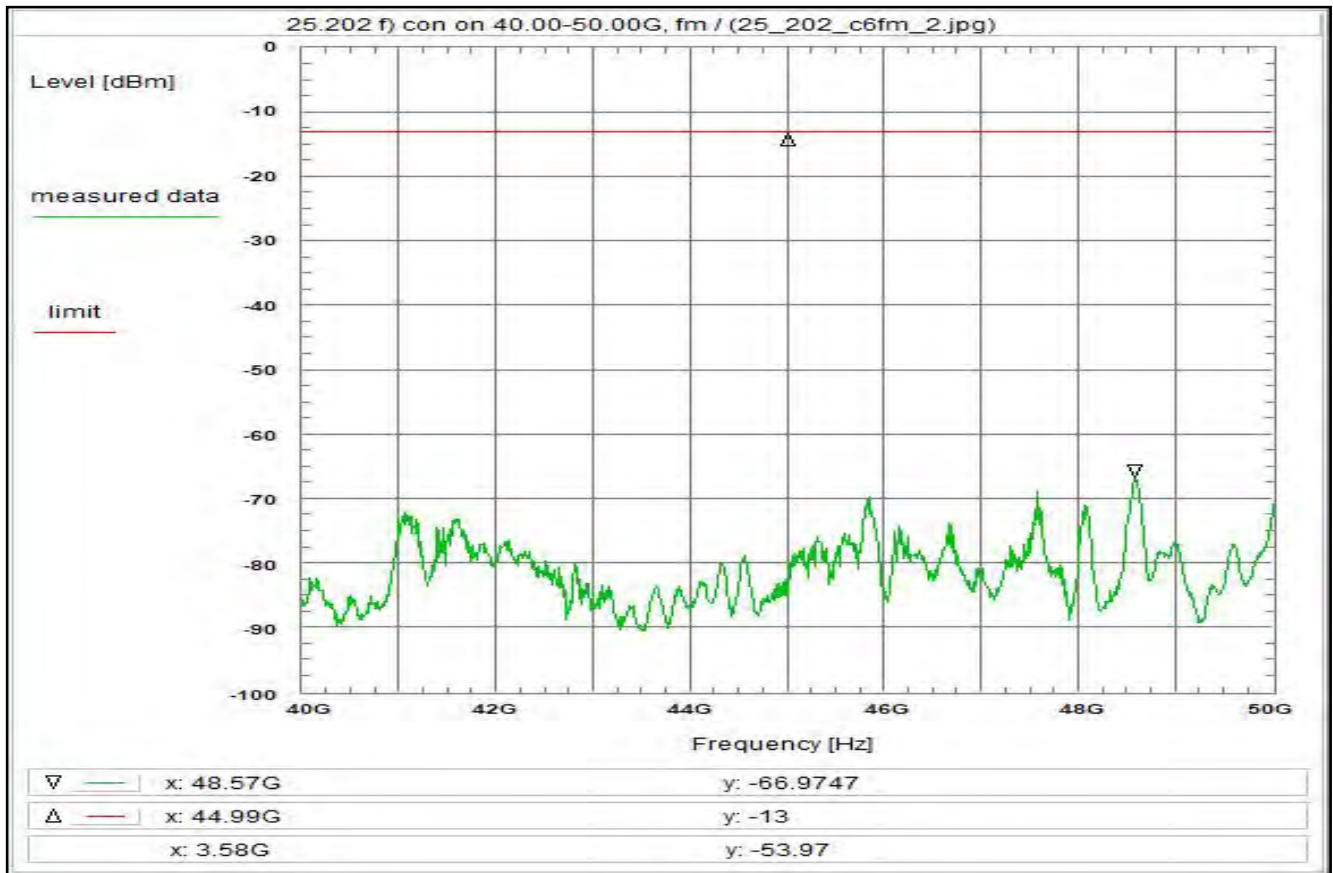

**Subclause:** 25.202 f) Frequencies, frequency tolerance and emission limitations  
Emission limitations  
Modulated rf-carrier in the middle of the band (fm)

**Limit:**  
Limit acc. to 25.202 f):  $-43+10\log(P_{max})$  dBc  
This corresponds to a limit of -13 dBm.

**Test results:**  
see plot (an explicit table was not generated)

**Operating condition of DUT:**  
operating condition 4, see test report chapter 6.4  
QPSK dual carrier, valid for all modulations

**Test setup:**  
see test report chapter 7.3: cegj

**Test equipment:**  
see test report chapter 7.x: C107, R001, W006, W019, W022, W0xx

**Remark:**

**Test result:** Test passed

**Environment condition:**

Date & Time: Fri 21/May/2021 12:31:55  
Location: CTC advanced GmbH, Laboratory RC-SYS  
Temperature: 22 °C  
Humidity: 55 %  
Voltage: 120 Vac

**Setup of measurement equipment:**

Start frequency: 40 GHz  
Stop frequency: 50 GHz  
Center frequency: 45 GHz  
Frequency span: 10 GHz  
Resolution-BW: 100 kHz  
Video-BW: 300 kHz  
Input attenuation: 10 dB  
Trace-Mode: Max-Hold  
Detector-Mode: AVG


**Correction:**

Directional coupler (W006) + 13.6 dB  
Coaxial cable (C107) + 7.4 dB  
DUT-Antenna + 0.0 dBi  
Test antenna + 0.0 dB  
BW correction factor (100k -> 4k) - 14.0 dB  
Atten. between HPA and feedhorn - 0.0 dB  
Freefield attenuation + 0.0 dB  
TOTAL CORRECTION: + 7.0 dB

**Remarks:**


Carrier-on state / Carrier in the middle of the band (fm)

Plot No. 59

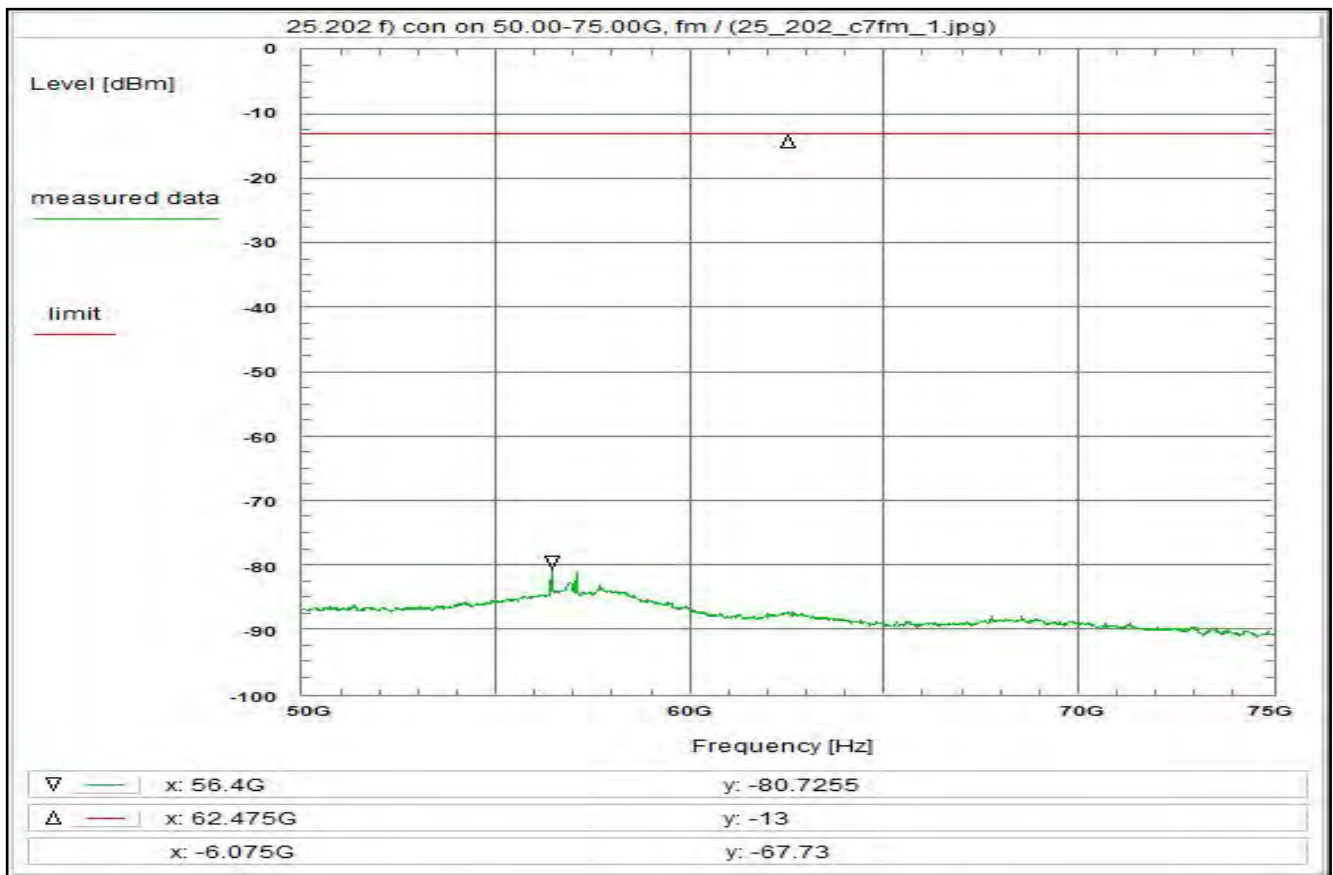


<p><b>Subclause:</b> 25.202 f) Frequencies, frequency tolerance and emission limitations Emission limitations Modulated rf-carrier in the middle of the band (fm)</p> <p><b>Limit:</b> Limit acc. to 25.202 f): <math>-43+10\log(P_{max})</math> dBc This corresponds to a limit of -13 dBm.</p> <p><b>Test results:</b> see plot (an explicit table was not generated)</p> <p><b>Operating condition of DUT:</b> operating condition 1, see test report chapter 6.4 QPSK single carrier, valid for all modulations</p> <p><b>Test setup:</b> see test report chapter 7.3: cfjg</p> <p><b>Test equipment:</b> see test report chapter 7.x: C107, R001, W006, W019, W022, W0xx</p> <p><b>Remark:</b></p> <p><b>Test result:</b> Test passed</p>	<p><b>Environment condition:</b> Date &amp; Time: Fri 21/May/2021 13:01:35 Location: CTC advanced GmbH, Laboratory RC-SYS Temperature: 22 °C Humidity: 55 % Voltage: 120 Vac</p> <p><b>Setup of measurement equipment:</b> Start frequency: 50 GHz Stop frequency: 75 GHz Center frequency: 62.5 GHz Frequency span: 25 GHz Resolution-BW: 100 kHz Video-BW: 300 kHz Input attenuation: 10 dB Trace-Mode: Max-Hold Detector-Mode: AVG</p> <p><b>Correction:</b> Directional coupler (W006) + 19.4 dB Coaxial cable (C107) + 0.0 dB DUT-Antenna + 0.0 dBi Test antenna + 0.0 dB BW correction factor (100k -&gt; 4k) - 14.0 dB Atten. between HPA and feedhorn - 0.0 dB Freefield attenuation + 0.0 dB TOTAL CORRECTION: + 5.4 dB</p> <p><b>Remarks:</b> Carrier-on state / Carrier in the middle of the band (fm)</p>
--	---

Plot No. 60

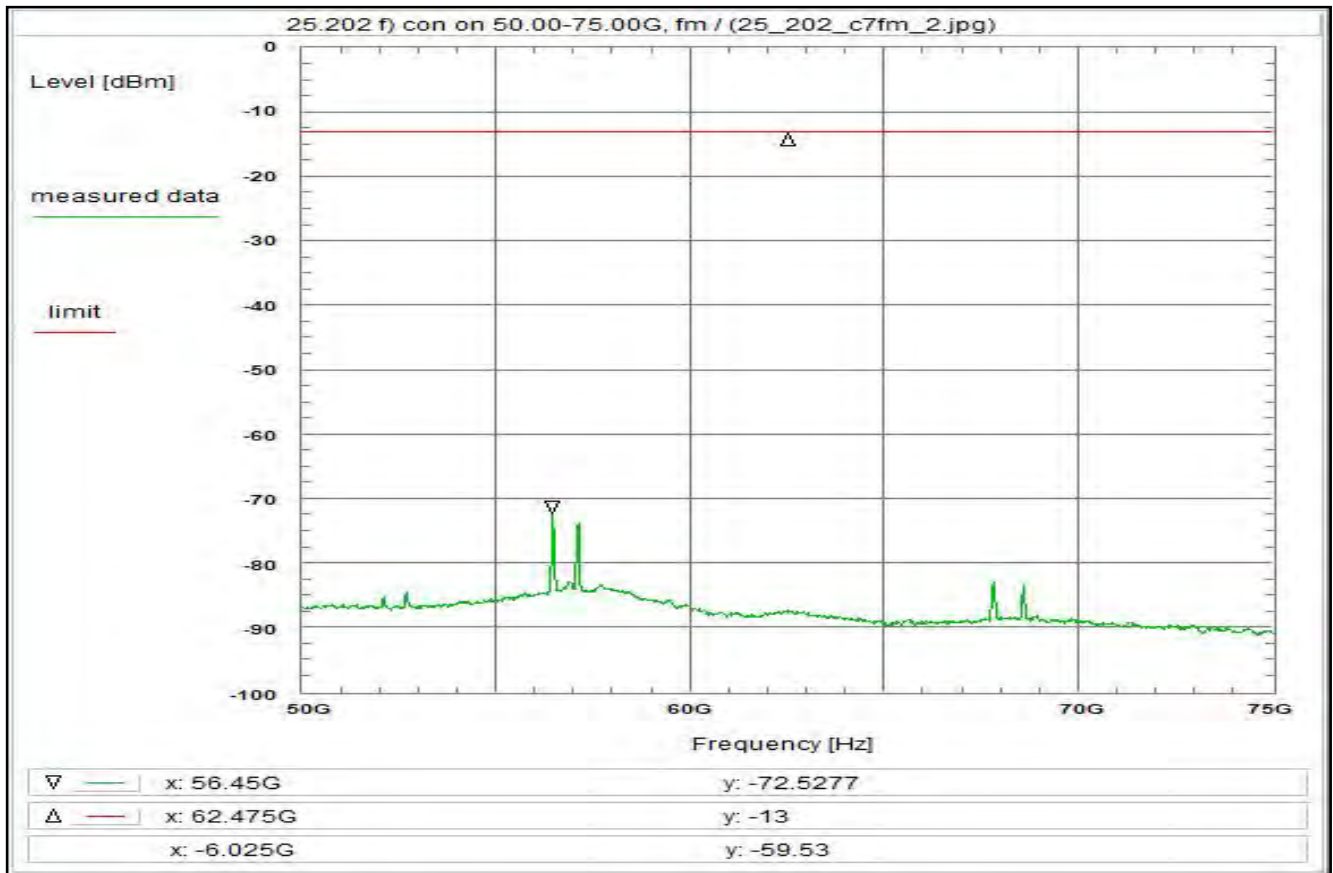

<p><b>Subclause:</b> 25.202 f) Frequencies, frequency tolerance and emission limitations Emission limitations Modulated rf-carrier in the middle of the band (fm)</p> <p><b>Limit:</b> Limit acc. to 25.202 f): <math>-43+10\log(P_{max})</math> dBc This corresponds to a limit of -13 dBm.</p> <p><b>Test results:</b> see plot (an explicit table was not generated)</p> <p><b>Operating condition of DUT:</b> operating condition 4, see test report chapter 6.4 QPSK dual carrier, valid for all modulations</p> <p><b>Test setup:</b> see test report chapter 7.3: cfjg</p> <p><b>Test equipment:</b> see test report chapter 7.x: C107, R001, W006, W019, W022, W0xx</p> <p><b>Remark:</b></p> <p><b>Test result:</b> Test passed</p>	<p><b>Environment condition:</b> Date &amp; Time: Fri 21/May/2021 13:02:32 Location: CTC advanced GmbH, Laboratory RC-SYS Temperature: 22 °C Humidity: 55 % Voltage: 120 Vac</p> <p><b>Setup of measurement equipment:</b> Start frequency: 50 GHz Stop frequency: 75 GHz Center frequency: 62.5 GHz Frequency span: 25 GHz Resolution-BW: 100 kHz Video-BW: 300 kHz Input attenuation: 10 dB Trace-Mode: Max-Hold Detector-Mode: AVG</p> <p><b>Correction:</b> Directional coupler (W006) + 19.4 dB Coaxial cable (C107) + 0.0 dB DUT-Antenna + 0.0 dBi Test antenna + 0.0 dB BW correction factor (100k -&gt; 4k) - 14.0 dB Atten. between HPA and feedhorn - 0.0 dB Freefield attenuation + 0.0 dB TOTAL CORRECTION: + 5.4 dB</p> <p><b>Remarks:</b> Carrier-on state / Carrier in the middle of the band (fm)</p>
--	---

Plot No. 61

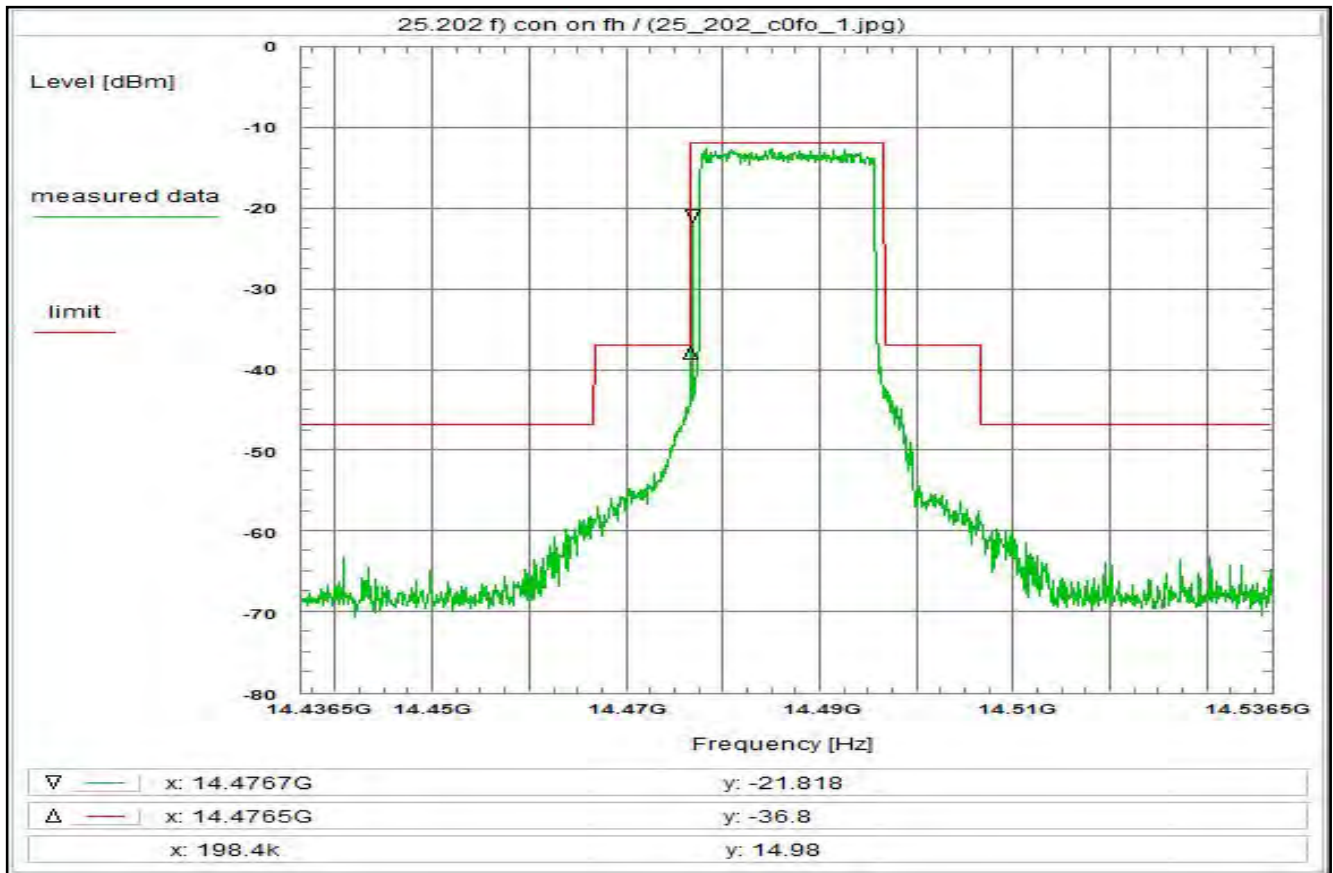

**Subclause:** 25.202 f) Frequencies, frequency tolerance and emission limitations  
Emission limitations  
Modulated rf-carrier at the upper edge of the band (fh)

**Limit:**  
Limit acc. to 25.202 f):  
50-100% of assigned bw: -25 dBc/4 kHz  
100-250% of assigned bw: -35 dBc/4 kHz  
> 250% of assigned bw: -43+10log(Pmax) dBc/4 kHz

**Test results:**  
see plot (an explicit table was not generated)

**Operating condition of DUT:**  
operating condition 1, see test report chapter 6.4  
QPSK single carrier

**Test setup:**  
see test report chapter 7.3: cdjg

**Test equipment:**  
see test report chapter 7.x: C107, R001, W009, W019, W053

Remark:

**Test result:** Test passed

**Environment condition:**

Date & Time: Wed 19/May/2021 17:22:16  
Location: CTC advanced GmbH, Laboratory RC-SYS  
Temperature: 22 °C  
Humidity: 55 %  
Voltage: 120 Vac

**Setup of measurement equipment:**

Start frequency: 14.4365 GHz  
Stop frequency: 14.5365 GHz  
Center frequency: 14.4865 GHz  
Frequency span: 100 MHz  
Resolution-BW: 10 kHz  
Video-BW: 30 kHz  
Input attenuation: 10 dB  
Trace-Mode: Clear Write  
Detector-Mode: AVG

**Correction:**


Directional coupler (W009) + 39.4 dB  
Coaxial cable (C107) + 4.0 dB  
DUT-Antenna + 0.0 dBi  
Test antenna + 0.0 dB  
BW correction factor (10k -> 4k) - 4.0 dB  
Atten. between HPA and feedhorn - 0.0 dB  
Freefield attenuation + 0.0 dB  
TOTAL CORRECTION: + 39.4 dB

**Remarks:**

Carrier-on state / Carrier at the upper edge of the band (fh)



Plot No. 62

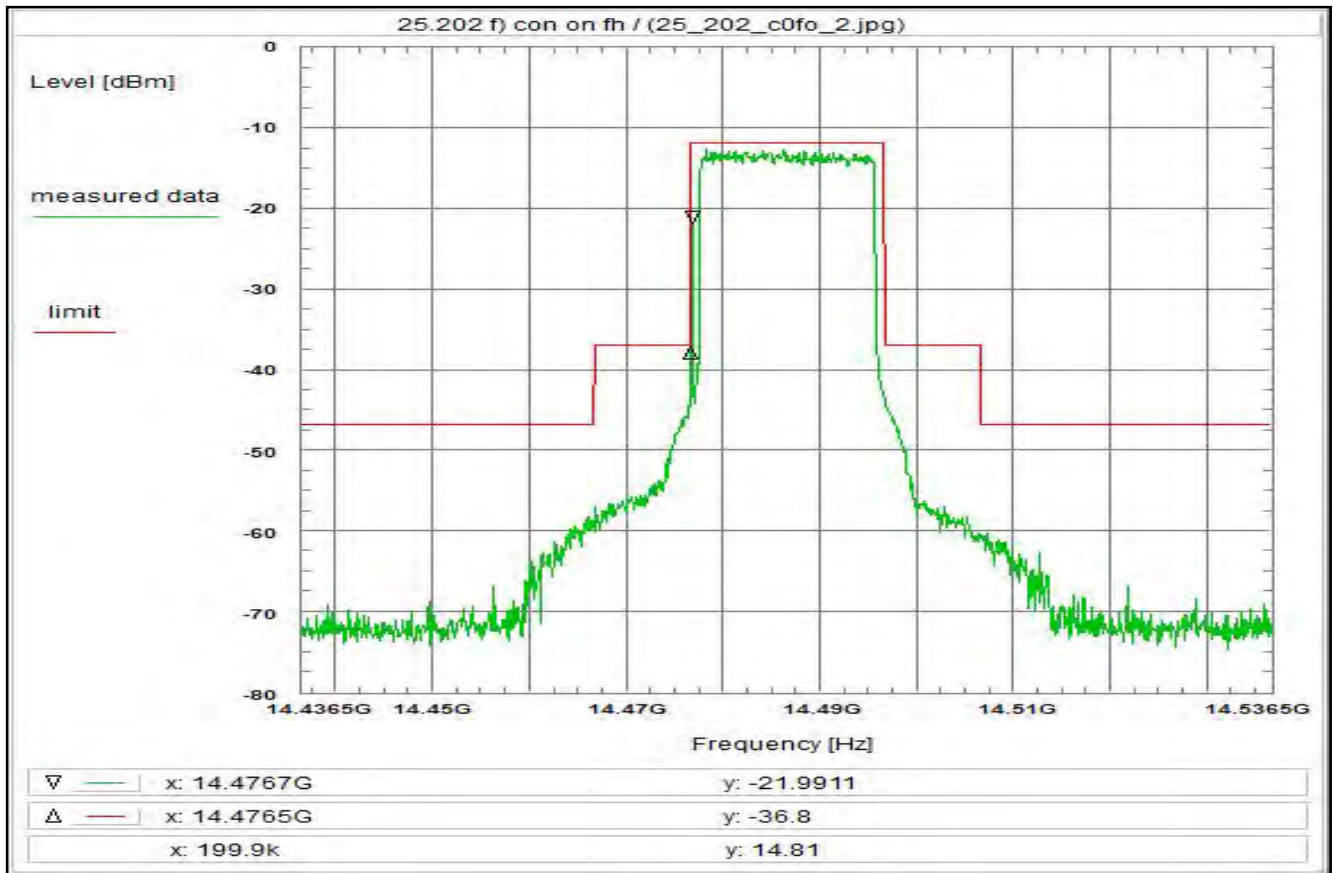

**Subclause:** 25.202 f) Frequencies, frequency tolerance and emission limitations  
Emission limitations  
Modulated rf-carrier at the upper edge of the band (fh)

**Limit:**  
Limit acc. to 25.202 f):  
50-100% of assigned bw: -25 dBc/4 kHz  
100-250% of assigned bw: -35 dBc/4 kHz  
> 250% of assigned bw: -43+10log(Pmax) dBc/4 kHz

**Test results:**  
see plot (an explicit table was not generated)

**Operating condition of DUT:**  
operating condition 2, see test report chapter 6.4  
8PSK single carrier

**Test setup:**  
see test report chapter 7.3: cdjg

**Test equipment:**  
see test report chapter 7.x: C107, R001, W009, W019, W053

Remark:

**Test result:** Test passed

**Environment condition:**

Date & Time: Thu 20/May/2021 15:12:52  
Location: CTC advanced GmbH, Laboratory RC-SYS  
Temperature: 22 °C  
Humidity: 55 %  
Voltage: 120 Vac

**Setup of measurement equipment:**

Start frequency: 14.4365 GHz  
Stop frequency: 14.5365 GHz  
Center frequency: 14.4865 GHz  
Frequency span: 100 MHz  
Resolution-BW: 10 kHz  
Video-BW: 30 kHz  
Input attenuation: 6 dB  
Trace-Mode: Clear Write  
Detector-Mode: AVG


**Correction:**

Directional coupler (W009) + 39.4 dB  
Coaxial cable (C107) + 4.0 dB  
DUT-Antenna + 0.0 dBi  
Test antenna + 0.0 dB  
BW correction factor (10k -> 4k) - 4.0 dB  
Atten. between HPA and feedhorn - 0.0 dB  
Freefield attenuation + 0.0 dB  
TOTAL CORRECTION: + 39.4 dB

**Remarks:**

Carrier-on state / Carrier at the upper edge of the band (fh)

Plot No. 63

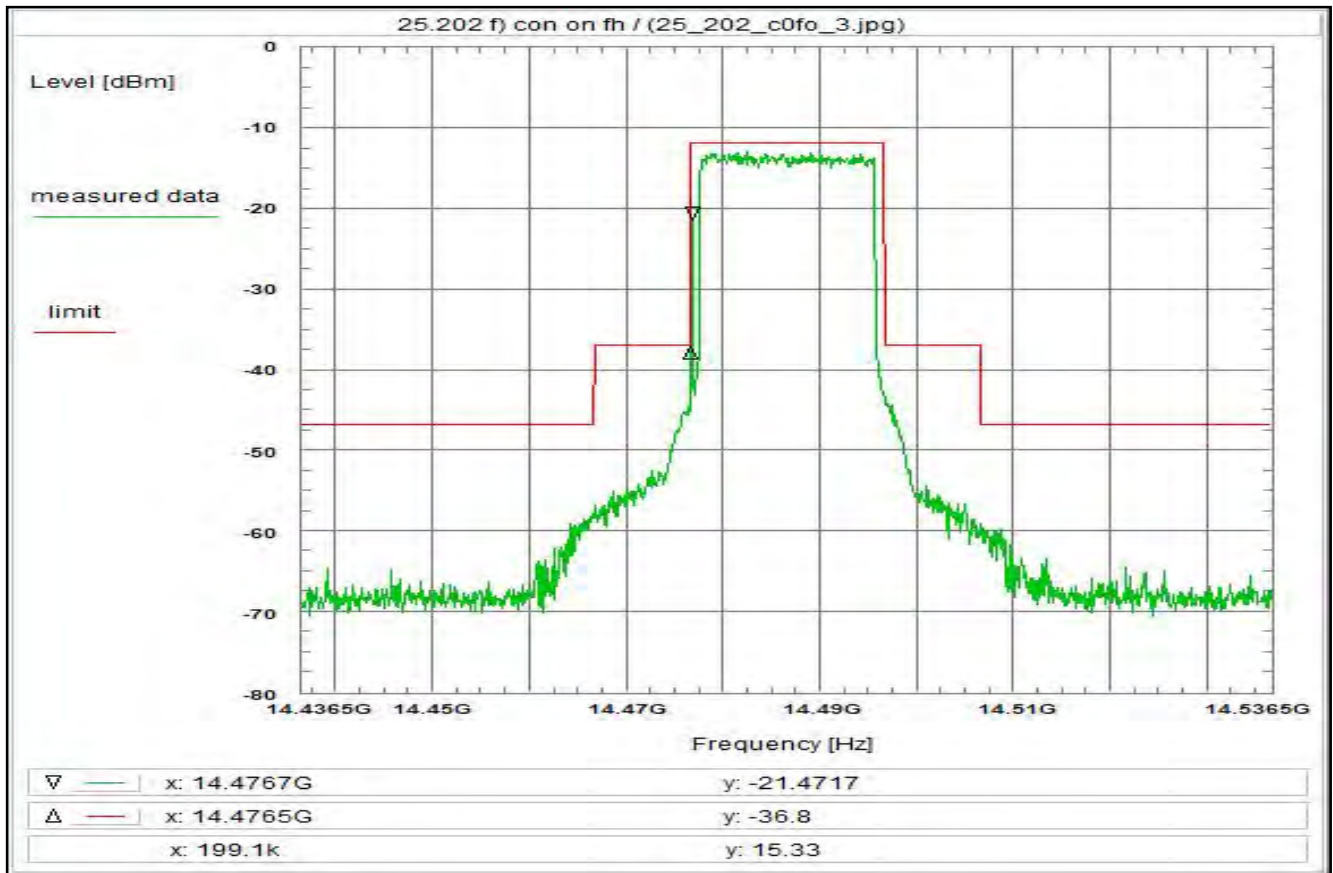

**Subclause:** 25.202 f) Frequencies, frequency tolerance and emission limitations  
Emission limitations  
Modulated rf-carrier at the upper edge of the band (fh)

**Limit:**  
Limit acc. to 25.202 f):  
50-100% of assigned bw: -25 dBc/4 kHz  
100-250% of assigned bw: -35 dBc/4 kHz  
> 250% of assigned bw: -43+10log(Pmax) dBc/4 kHz

**Test results:**  
see plot (an explicit table was not generated)

**Operating condition of DUT:**  
operating condition 3, see test report chapter 6.4  
16QAM single carrier

**Test setup:**  
see test report chapter 7.3: cdjg

**Test equipment:**  
see test report chapter 7.x: C107, R001, W009, W019, W053

Remark:

**Test result:** Test passed

**Environment condition:**

Date & Time: Wed 19/May/2021 17:30:56  
Location: CTC advanced GmbH, Laboratory RC-SYS  
Temperature: 22 °C  
Humidity: 55 %  
Voltage: 120 Vac

**Setup of measurement equipment:**

Start frequency: 14.4365 GHz  
Stop frequency: 14.5365 GHz  
Center frequency: 14.4865 GHz  
Frequency span: 100 MHz  
Resolution-BW: 10 kHz  
Video-BW: 30 kHz  
Input attenuation: 10 dB  
Trace-Mode: Clear Write  
Detector-Mode: AVG


**Correction:**

Directional coupler (W009) + 39.4 dB  
Coaxial cable (C107) + 4.0 dB  
DUT-Antenna + 0.0 dBi  
Test antenna + 0.0 dB  
BW correction factor (10k -> 4k) - 4.0 dB  
Atten. between HPA and feedhorn - 0.0 dB  
Freefield attenuation + 0.0 dB  
TOTAL CORRECTION: + 39.4 dB

**Remarks:**

Carrier-on state / Carrier at the upper edge of the band (fh)

Plot No. 64

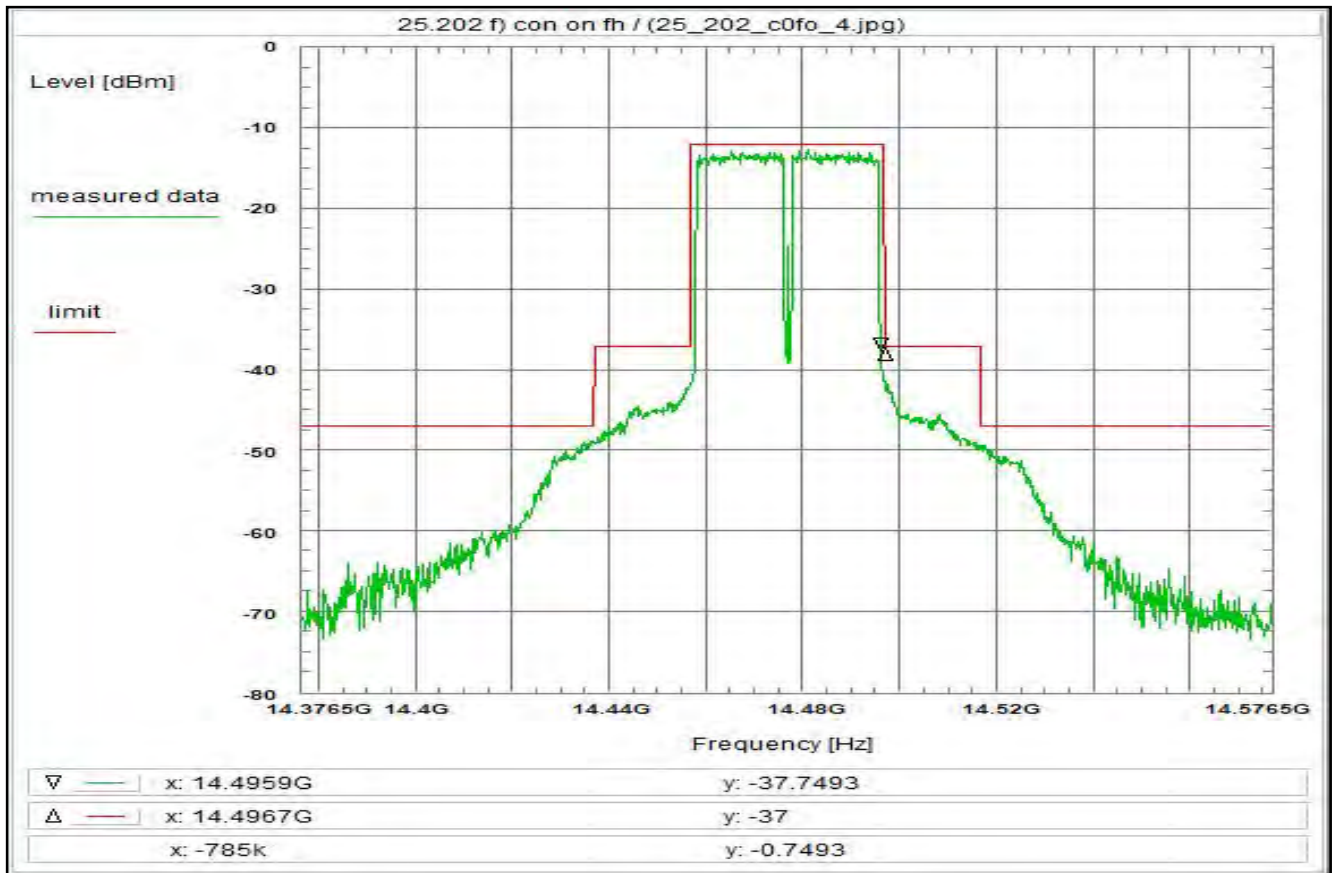

**Subclause:** 25.202 f) Frequencies, frequency tolerance and emission limitations  
Emission limitations  
Modulated rf-carrier at the upper edge of the band (fh)

**Limit:**  
Limit acc. to 25.202 f):  
50-100% of assigned bw: -25 dBc/4 kHz  
100-250% of assigned bw: -35 dBc/4 kHz  
> 250% of assigned bw: -43+10log(Pmax) dBc/4 kHz

**Test results:**  
see plot (an explicit table was not generated)

**Operating condition of DUT:**  
operating condition 4, see test report chapter 6.4  
QPSK dual carrier

**Test setup:**  
see test report chapter 7.3: cdjg

**Test equipment:**  
see test report chapter 7.x: R001, W019, W053

Remark:

**Test result:** Test passed

**Environment condition:**

Date & Time: Thu 20/May/2021 16:10:34  
Location: CTC advanced GmbH, Laboratory RC-SYS  
Temperature: 22 °C  
Humidity: 55 %  
Voltage: 120 Vac

**Setup of measurement equipment:**

Start frequency: 14.3765 GHz  
Stop frequency: 14.5765 GHz  
Center frequency: 14.4765 GHz  
Frequency span: 200 MHz  
Resolution-BW: 10 kHz  
Video-BW: 30 kHz  
Input attenuation: 6 dB  
Trace-Mode: Clear Write  
Detector-Mode: AVG


**Correction:**

Directional coupler (W009) + 39.4 dB  
Coaxial cable (C107) + 4.0 dB  
DUT-Antenna + 0.0 dBi  
Test antenna + 0.0 dB  
BW correction factor (10k -> 4k) - 4.0 dB  
Atten. between HPA and feedhorn - 0.0 dB  
Freefield attenuation + 0.0 dB  
TOTAL CORRECTION: + 39.4 dB

**Remarks:**

Carrier-on state / Carrier at the upper edge of the band (fh)

Plot No. 65

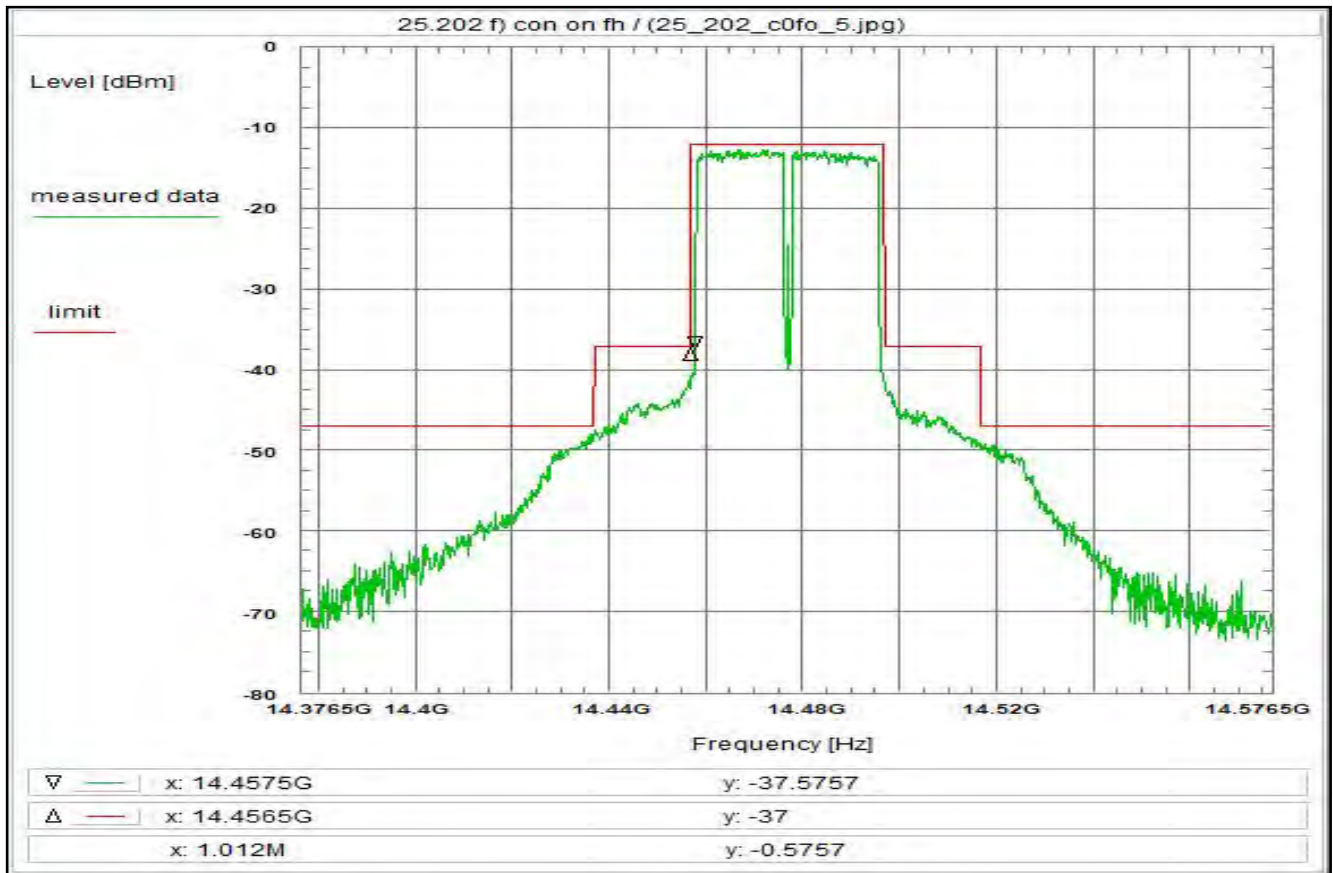

**Subclause:** 25.202 f) Frequencies, frequency tolerance and emission limitations  
Emission limitations  
Modulated rf-carrier at the upper edge of the band (fh)

**Limit:**  
Limit acc. to 25.202 f):  
50-100% of assigned bw: -25 dBc/4 kHz  
100-250% of assigned bw: -35 dBc/4 kHz  
> 250% of assigned bw: -43+10log(Pmax) dBc/4 kHz

**Test results:**  
see plot (an explicit table was not generated)

**Operating condition of DUT:**  
operating condition 5, see test report chapter 6.4  
8PSK dual carrier

**Test setup:**  
see test report chapter 7.3: cdjg

**Test equipment:**  
see test report chapter 7.x: C107, R001, W009, W019, W053

Remark:

**Test result:** Test passed

**Environment condition:**

Date & Time: Thu 20/May/2021 14:57:18  
Location: CTC advanced GmbH, Laboratory RC-SYS  
Temperature: 22 °C  
Humidity: 55 %  
Voltage: 120 Vac

**Setup of measurement equipment:**

Start frequency: 14.3765 GHz  
Stop frequency: 14.5765 GHz  
Center frequency: 14.4765 GHz  
Frequency span: 200 MHz  
Resolution-BW: 10 kHz  
Video-BW: 30 kHz  
Input attenuation: 6 dB  
Trace-Mode: Clear Write  
Detector-Mode: AVG


**Correction:**

Directional coupler (W009) + 39.4 dB  
Coaxial cable (C107) + 4.0 dB  
DUT-Antenna + 0.0 dBi  
Test antenna + 0.0 dB  
BW correction factor (10k -> 4k) - 4.0 dB  
Atten. between HPA and feedhorn - 0.0 dB  
Freefield attenuation + 0.0 dB  
TOTAL CORRECTION: + 39.4 dB

**Remarks:**

Carrier-on state / Carrier at the upper edge of the band (fh)

Plot No. 66

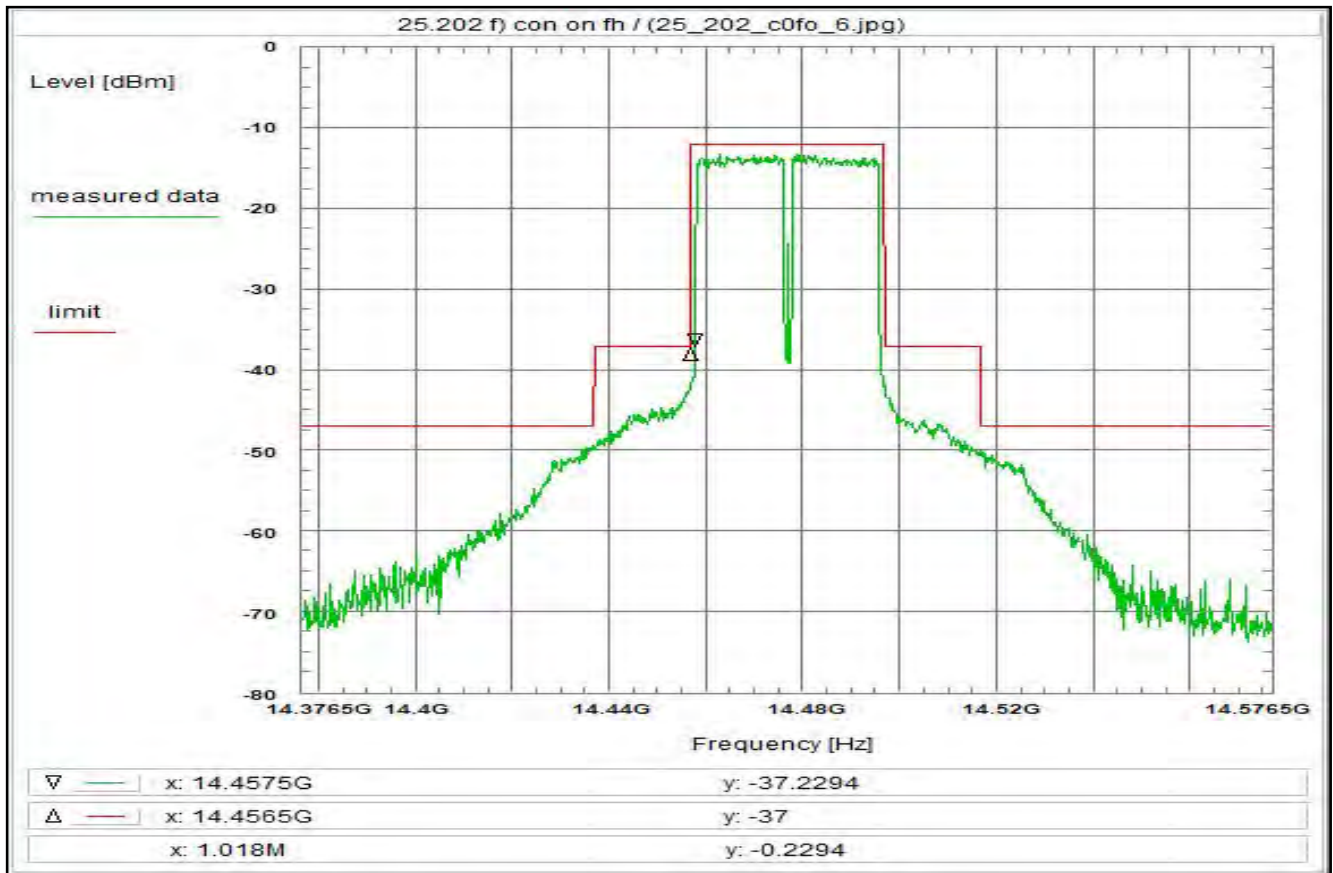

**Subclause:** 25.202 f) Frequencies, frequency tolerance and emission limitations  
Emission limitations  
Modulated rf-carrier at the upper edge of the band (fh)

**Limit:**  
Limit acc. to 25.202 f):  
50-100% of assigned bw: -25 dBc/4 kHz  
100-250% of assigned bw: -35 dBc/4 kHz  
> 250% of assigned bw: -43+10log(Pmax) dBc/4 kHz

**Test results:**  
see plot (an explicit table was not generated)

**Operating condition of DUT:**  
operating condition 6, see test report chapter 6.4  
16QAM dual carrier

**Test setup:**  
see test report chapter 7.3: cdjg

**Test equipment:**  
see test report chapter 7.x: C107, R001, W009, W019, W053

Remark:

**Test result:** Test passed

**Environment condition:**

Date & Time: Thu 20/May/2021 14:59:40  
Location: CTC advanced GmbH, Laboratory RC-SYS  
Temperature: 22 °C  
Humidity: 55 %  
Voltage: 120 Vac

**Setup of measurement equipment:**

Start frequency: 14.3765 GHz  
Stop frequency: 14.5765 GHz  
Center frequency: 14.4765 GHz  
Frequency span: 200 MHz  
Resolution-BW: 10 kHz  
Video-BW: 30 kHz  
Input attenuation: 6 dB  
Trace-Mode: Clear Write  
Detector-Mode: AVG


**Correction:**

Directional coupler (W009) + 39.4 dB  
Coaxial cable (C107) + 4.0 dB  
DUT-Antenna + 0.0 dBi  
Test antenna + 0.0 dB  
BW correction factor (10k -> 4k) - 4.0 dB  
Atten. between HPA and feedhorn - 0.0 dB  
Freefield attenuation + 0.0 dB  
TOTAL CORRECTION: + 39.4 dB

**Remarks:**


Carrier-on state / Carrier at the upper edge of the band (fh)  
1

Plot No. 67

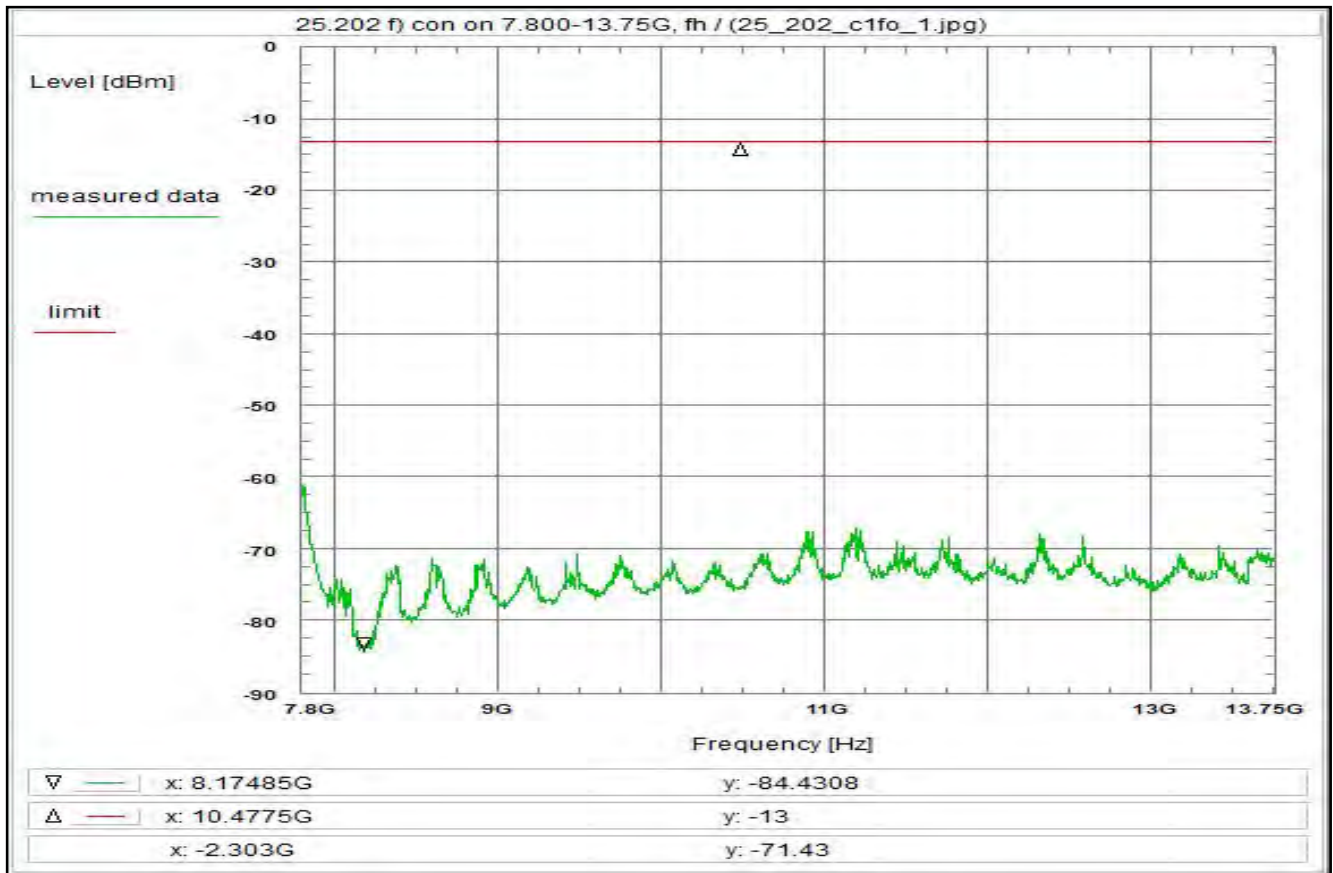

<p><b>Subclause:</b> 25.202 f) Frequencies, frequency tolerance and emission limitations Emission limitations Modulated rf-carrier at the upper edge of the band (fh)</p> <p><b>Limit:</b> Limit acc. to 25.202 f): <math>-43+10\log(P_{max})</math> dBc This corresponds to a limit of -13 dBm.</p> <p><b>Test results:</b> see plot (an explicit table was not generated)</p> <p><b>Operating condition of DUT:</b> operating condition 1, see test report chapter 6.4 QPSK single carrier, valid for all modulations</p> <p><b>Test setup:</b> see test report chapter 7.3: cdgj</p> <p><b>Test equipment:</b> see test report chapter 7.x: C107, R001, W009, W019, W053</p> <p><b>Remark:</b></p> <p><b>Test result:</b> Test passed</p>	<p><b>Environment condition:</b> Date &amp; Time: Wed 19/May/2021 17:34:40 Location: CTC advanced GmbH, Laboratory RC-SYS Temperature: 22 °C Humidity: 55 % Voltage: 120 Vac</p> <p><b>Setup of measurement equipment:</b> Start frequency: 7.8 GHz Stop frequency: 13.75 GHz Center frequency: 10.775 GHz Frequency span: 5.95 GHz Resolution-BW: 100 kHz Video-BW: 300 kHz Input attenuation: 10 dB Trace-Mode: Max-Hold Detector-Mode: AVG</p> <p><b>Correction:</b> Directional coupler (W009) + 38.6 dB Coaxial cable (C107) + 3.5 dB DUT-Antenna + 0.0 dBi Test antenna + 0.0 dB BW correction factor (100k -&gt; 4k) - 14.0 dB Atten. between HPA and feedhorn - 0.0 dB Freefield attenuation + 0.0 dB TOTAL CORRECTION: + 28.1 dB</p> <p><b>Remarks:</b> Carrier-on state / Carrier at the upper edge of the band (fh)</p>
--	--

Plot No. 68

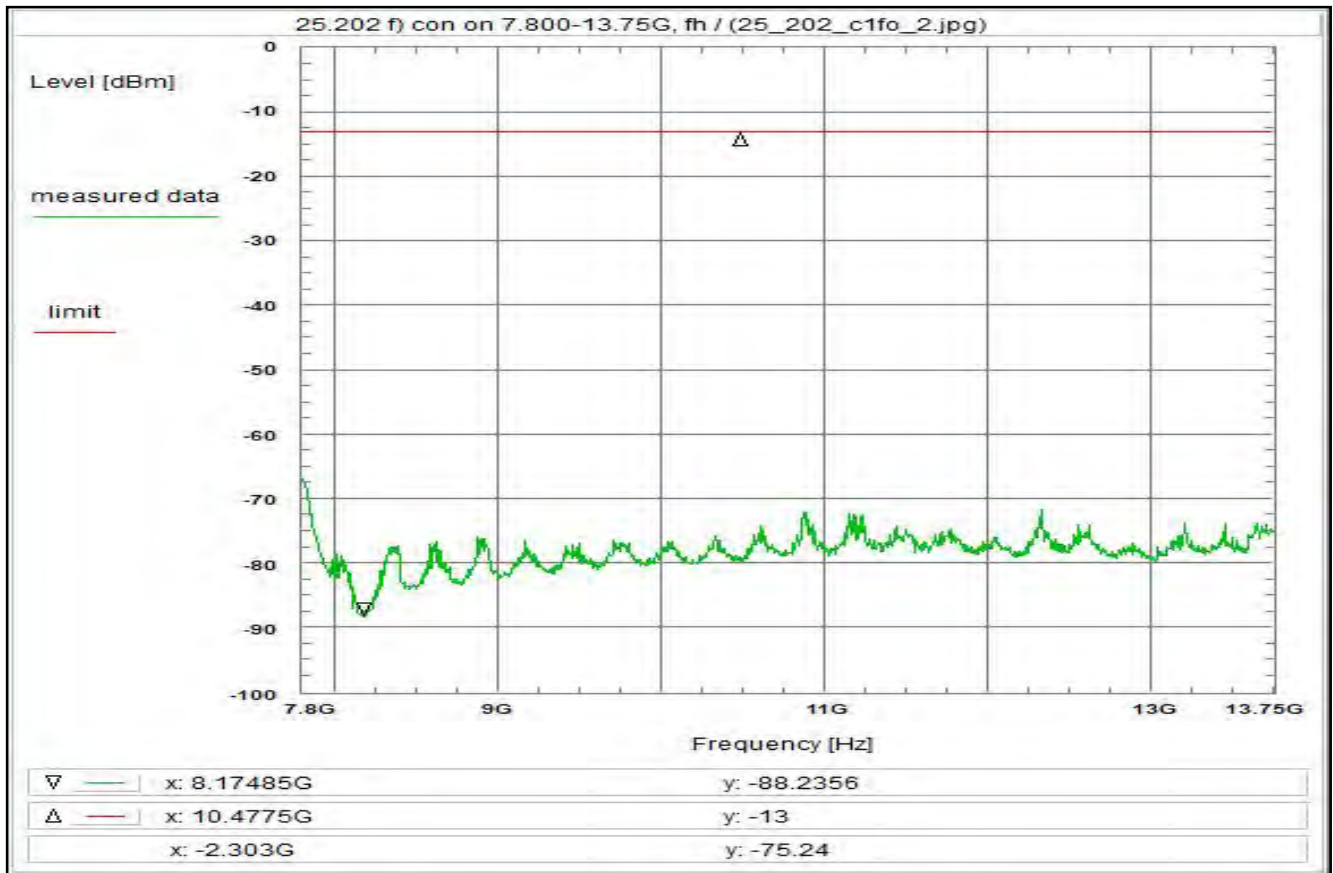

**Subclause:** 25.202 f) Frequencies, frequency tolerance and emission limitations  
Emission limitations  
Modulated rf-carrier at the upper edge of the band (fh)

**Limit:**  
Limit acc. to 25.202 f):  $-43+10\log(P_{max})$  dBc  
This corresponds to a limit of -13 dBm.

**Test results:**  
see plot (an explicit table was not generated)

**Operating condition of DUT:**  
operating condition 4, see test report chapter 6.4  
1QPSK dual carrier, valid for all modulations

**Test setup:**  
see test report chapter 7.3: cdgj

**Test equipment:**  
see test report chapter 7.x: C107, R001, W009, W019, W053

**Remark:**

**Test result:** Test passed

**Environment condition:**

Date & Time: Thu 20/May/2021 15:02:14  
Location: CTC advanced GmbH, Laboratory RC-SYS  
Temperature: 22 °C  
Humidity: 55 %  
Voltage: 120 Vac

**Setup of measurement equipment:**

Start frequency: 7.8 GHz  
Stop frequency: 13.75 GHz  
Center frequency: 10.775 GHz  
Frequency span: 5.95 GHz  
Resolution-BW: 100 kHz  
Video-BW: 300 kHz  
Input attenuation: 6 dB  
Trace-Mode: Max-Hold  
Detector-Mode: AVG


**Correction:**

Directional coupler (W009) + 38.6 dB  
Coaxial cable (C107) + 3.5 dB  
DUT-Antenna + 0.0 dBi  
Test antenna + 0.0 dB  
BW correction factor (100k -> 4k) - 14.0 dB  
Atten. between HPA and feedhorn - 0.0 dB  
Freefield attenuation + 0.0 dB  
TOTAL CORRECTION: + 28.1 dB

**Remarks:**

Carrier-on state / Carrier at the upper edge of the band (fh)

Plot No. 69

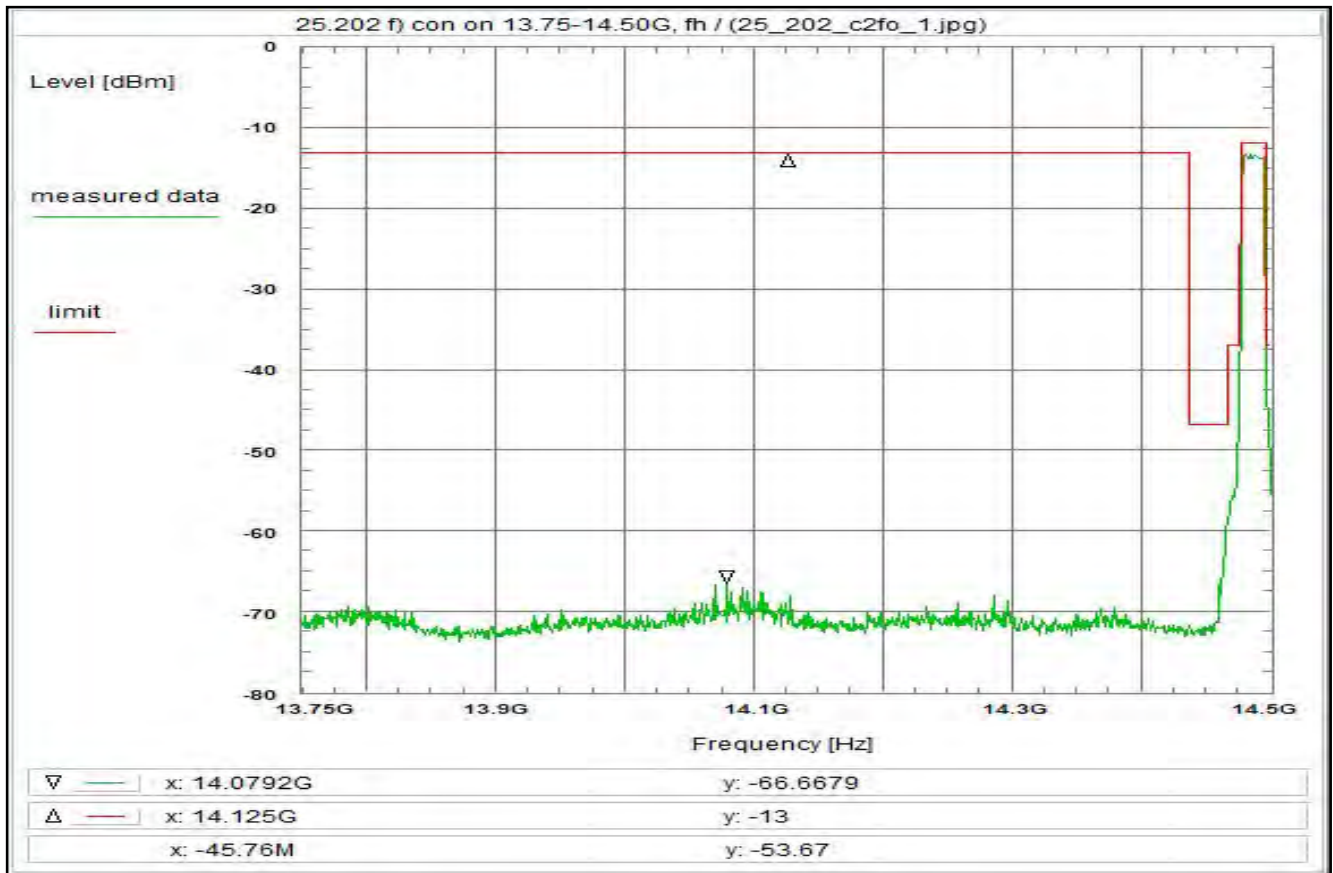

**Subclause:** 25.202 f) Frequencies, frequency tolerance and emission limitations  
Emission limitations  
Modulated rf-carrier at the upper edge of the band (fh)

**Limit:**  
Limit acc. to 25.202 f):  $-43+10\log(P_{max})$  dBc  
This corresponds to a limit of -13 dBm.

**Test results:**  
see plot (an explicit table was not generated)

**Operating condition of DUT:**  
operating condition 1, see test report chapter 6.4  
QPSK single carrier, valid for all modulations

**Test setup:**  
see test report chapter 7.3: cdgj

**Test equipment:**  
see test report chapter 7.x: C107, R001, W009, W019, W053

**Remark:**

**Test result:** Test passed

**Environment condition:**

Date & Time: Wed 19/May/2021 17:35:38  
Location: CTC advanced GmbH, Laboratory RC-SYS  
Temperature: 22 °C  
Humidity: 55 %  
Voltage: 120 Vac

**Setup of measurement equipment:**

Start frequency: 13.75 GHz  
Stop frequency: 14.5 GHz  
Center frequency: 14.125 GHz  
Frequency span: 750 MHz  
Resolution-BW: 100 kHz  
Video-BW: 300 kHz  
Input attenuation: 10 dB  
Trace-Mode: Max-Hold  
Detector-Mode: AVG

**Correction:**


Directional coupler (W009) + 39.5 dB  
Coaxial cable (C107) + 4.0 dB  
DUT-Antenna + 0.0 dBi  
Test antenna + 0.0 dB  
BW correction factor (100k -> 4k) - 14.0 dB  
Atten. between HPA and feedhorn - 0.0 dB  
Freefield attenuation + 0.0 dB  
TOTAL CORRECTION: + 29.5 dB

**Remarks:**

Carrier-on state / Carrier at the upper edge of the band (fh)



Plot No. 70

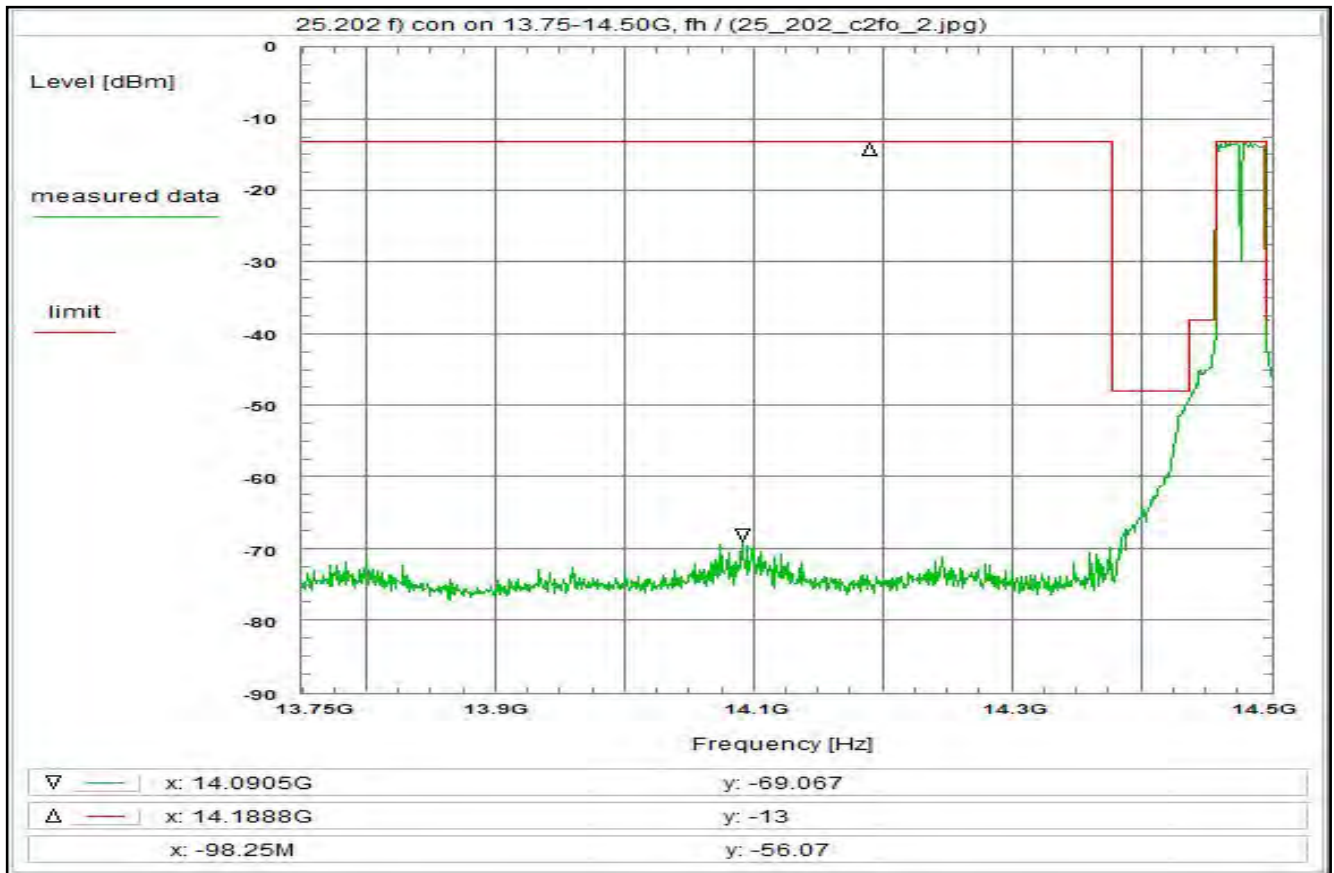

**Subclause:** 25.202 f) Frequencies, frequency tolerance and emission limitations  
Emission limitations  
Modulated rf-carrier at the upper edge of the band (fh)

**Limit:**  
Limit acc. to 25.202 f):  $-43+10\log(P_{max})$  dBc  
This corresponds to a limit of -13 dBm.

**Test results:**  
see plot (an explicit table was not generated)

**Operating condition of DUT:**  
operating condition 4, see test report chapter 6.4  
QPSK dual carrier, valid for all modulations

**Test setup:**  
see test report chapter 7.3: cdjg

**Test equipment:**  
see test report chapter 7.x: C107, R001, W009, W019, W053

**Remark:**

**Test result:** Test passed

**Environment condition:**

Date & Time: Thu 20/May/2021 15:03:02  
Location: CTC advanced GmbH, Laboratory RC-SYS  
Temperature: 22 °C  
Humidity: 55 %  
Voltage: 120 Vac

**Setup of measurement equipment:**

Start frequency: 13.75 GHz  
Stop frequency: 14.5 GHz  
Center frequency: 14.125 GHz  
Frequency span: 750 MHz  
Resolution-BW: 100 kHz  
Video-BW: 300 kHz  
Input attenuation: 6 dB  
Trace-Mode: Max-Hold  
Detector-Mode: AVG


**Correction:**

Directional coupler (W009) + 39.5 dB  
Coaxial cable (C107) + 4.0 dB  
DUT-Antenna + 0.0 dBi  
Test antenna + 0.0 dB  
BW correction factor (100k -> 4k) - 14.0 dB  
Atten. between HPA and feedhorn - 0.0 dB  
Freefield attenuation + 0.0 dB  
TOTAL CORRECTION: + 29.5 dB

**Remarks:**

Carrier-on state / Carrier at the upper edge of the band (fh)

Plot No. 71

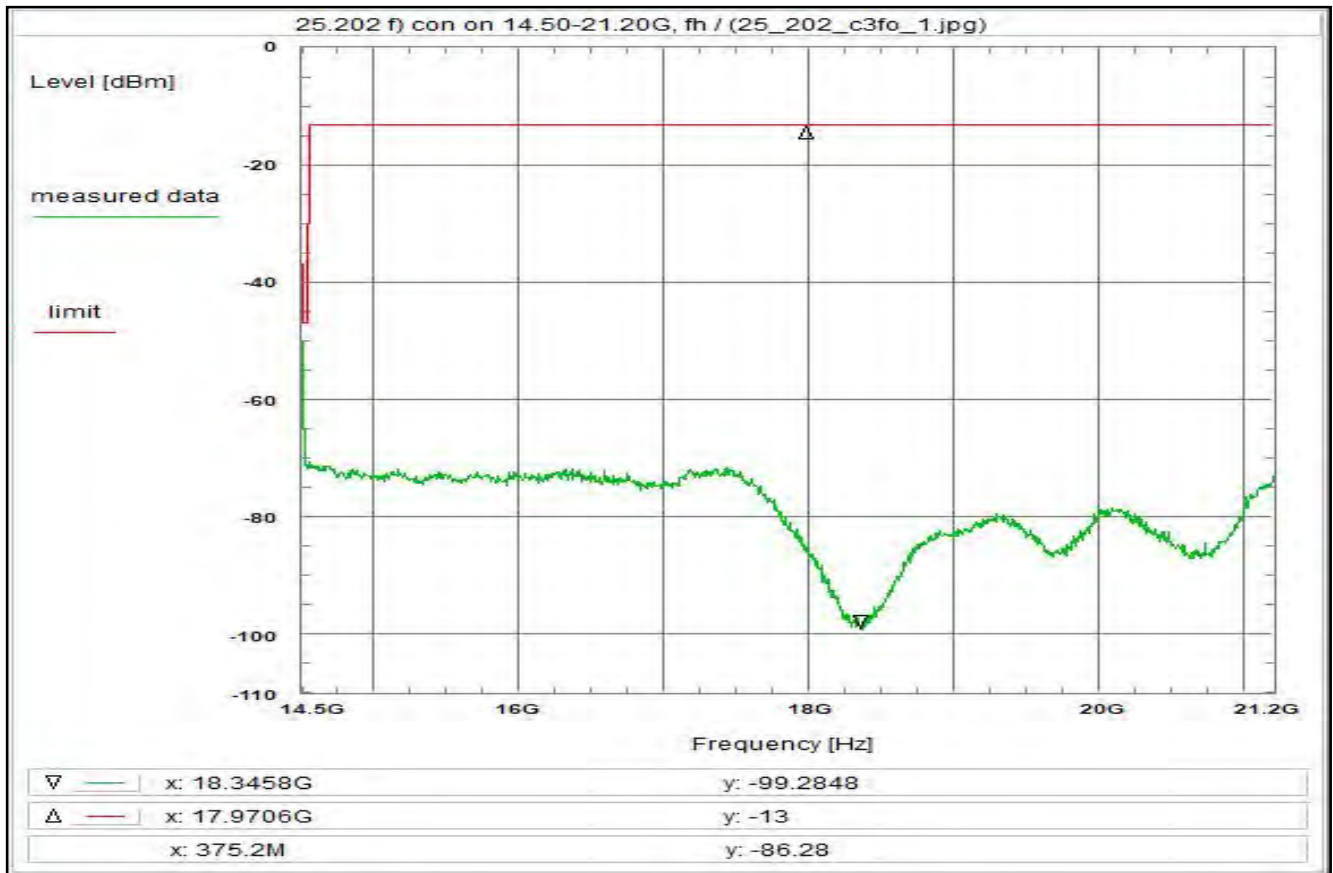

**Subclause:** 25.202 f) Frequencies, frequency tolerance and emission limitations  
Emission limitations  
Modulated rf-carrier at the upper edge of the band (fh)

**Limit:**  
Limit acc. to 25.202 f):  $-43+10\log(P_{max})$  dBc  
This corresponds to a limit of -13 dBm.

**Test results:**  
see plot (an explicit table was not generated)

**Operating condition of DUT:**  
operating condition 1, see test report chapter 6.4  
QPSK single carrier, valid for all modulations

**Test setup:**  
see test report chapter 7.3: cdgj

**Test equipment:**  
see test report chapter 7.x: C107, R001, W009, W019, W053

**Remark:**

**Test result:** Test passed

**Environment condition:**

Date & Time: Wed 19/May/2021 17:37:19  
Location: CTC advanced GmbH, Laboratory RC-SYS  
Temperature: 22 °C  
Humidity: 55 %  
Voltage: 120 Vac

**Setup of measurement equipment:**

Start frequency: 14.5 GHz  
Stop frequency: 21.2 GHz  
Center frequency: 17.85 GHz  
Frequency span: 6.7 GHz  
Resolution-BW: 100 kHz  
Video-BW: 300 kHz  
Input attenuation: 10 dB  
Trace-Mode: Max-Hold  
Detector-Mode: AVG


**Correction:**

Directional coupler (W009) + 31.5 dB  
Coaxial cable (C107) + 4.5 dB  
DUT-Antenna + 0.0 dBi  
Test antenna + 0.0 dB  
BW correction factor (100k -> 4k) - 14.0 dB  
Atten. between HPA and feedhorn - 0.0 dB  
Freefield attenuation + 0.0 dB  
TOTAL CORRECTION: + 22.0 dB

**Remarks:**

Carrier-on state / Carrier at the upper edge of the band (fh)

Plot No. 72

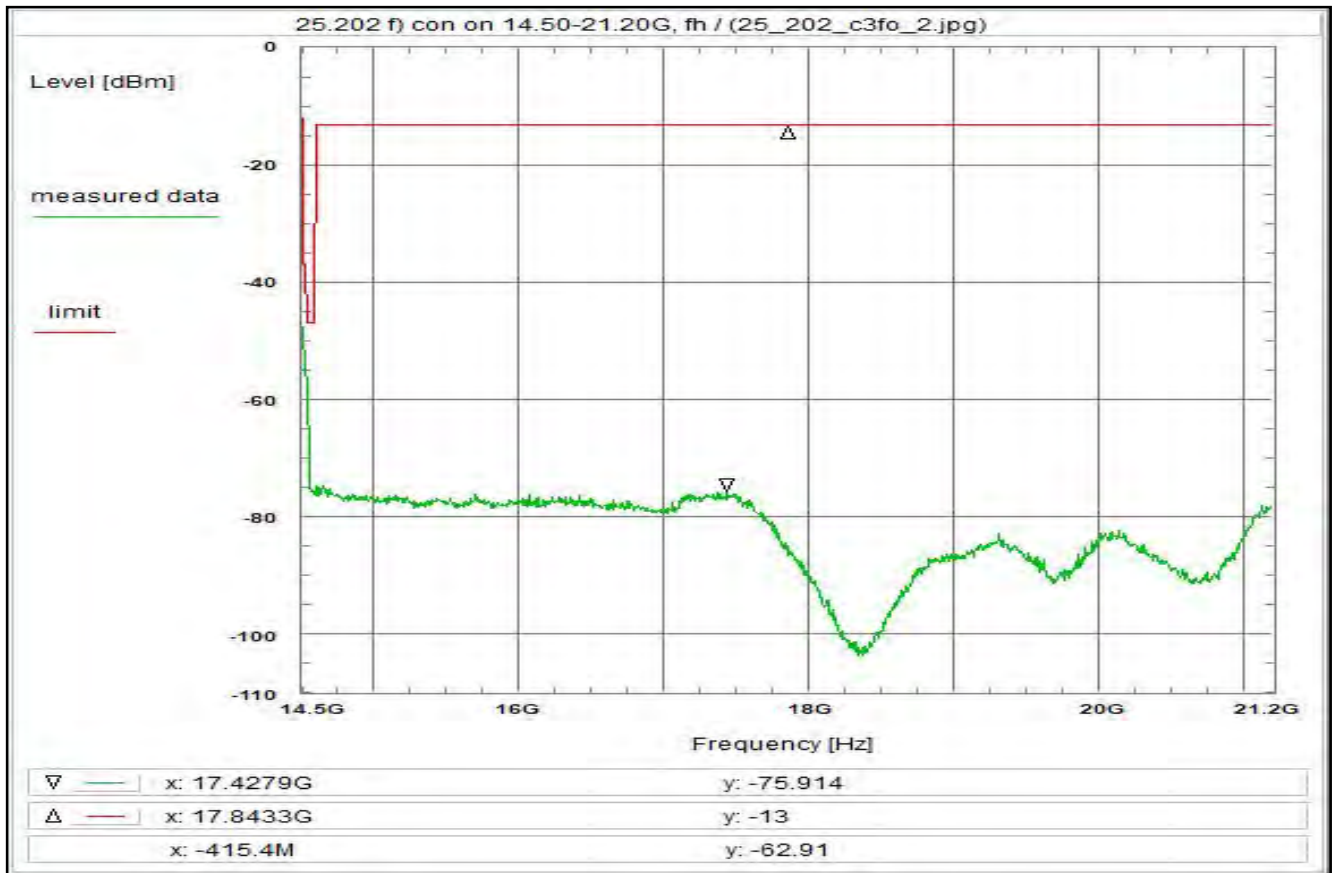

**Subclause:** 25.202 f) Frequencies, frequency tolerance and emission limitations  
Emission limitations  
Modulated rf-carrier at the upper edge of the band (fh)

**Limit:**  
Limit acc. to 25.202 f):  $-43+10\log(P_{max})$  dBc  
This corresponds to a limit of -13 dBm.

**Test results:**  
see plot (an explicit table was not generated)

**Operating condition of DUT:**  
operating condition 4, see test report chapter 6.4  
QPSK dual carrier, valid for all modulations

**Test setup:**  
see test report chapter 7.3: cdjg

**Test equipment:**  
see test report chapter 7.x: C107, R001, W009, W019, W053

**Remark:**

**Test result:** Test passed

**Environment condition:**

Date & Time: Thu 20/May/2021 15:39:49  
Location: CTC advanced GmbH, Laboratory RC-SYS  
Temperature: 22 °C  
Humidity: 55 %  
Voltage: 120 Vac

**Setup of measurement equipment:**

Start frequency: 14.5 GHz  
Stop frequency: 21.2 GHz  
Center frequency: 17.85 GHz  
Frequency span: 6.7 GHz  
Resolution-BW: 100 kHz  
Video-BW: 300 kHz  
Input attenuation: 6 dB  
Trace-Mode: Max-Hold  
Detector-Mode: AVG


**Correction:**

Directional coupler (W009) + 31.5 dB  
Coaxial cable (C107) + 4.5 dB  
DUT-Antenna + 0.0 dBi  
Test antenna + 0.0 dB  
BW correction factor (100k -> 4k) - 14.0 dB  
Atten. between HPA and feedhorn - 0.0 dB  
Freefield attenuation + 0.0 dB  
TOTAL CORRECTION: + 22.0 dB

**Remarks:**

Carrier-on state / Carrier at the upper edge of the band (fh)

Plot No. 73

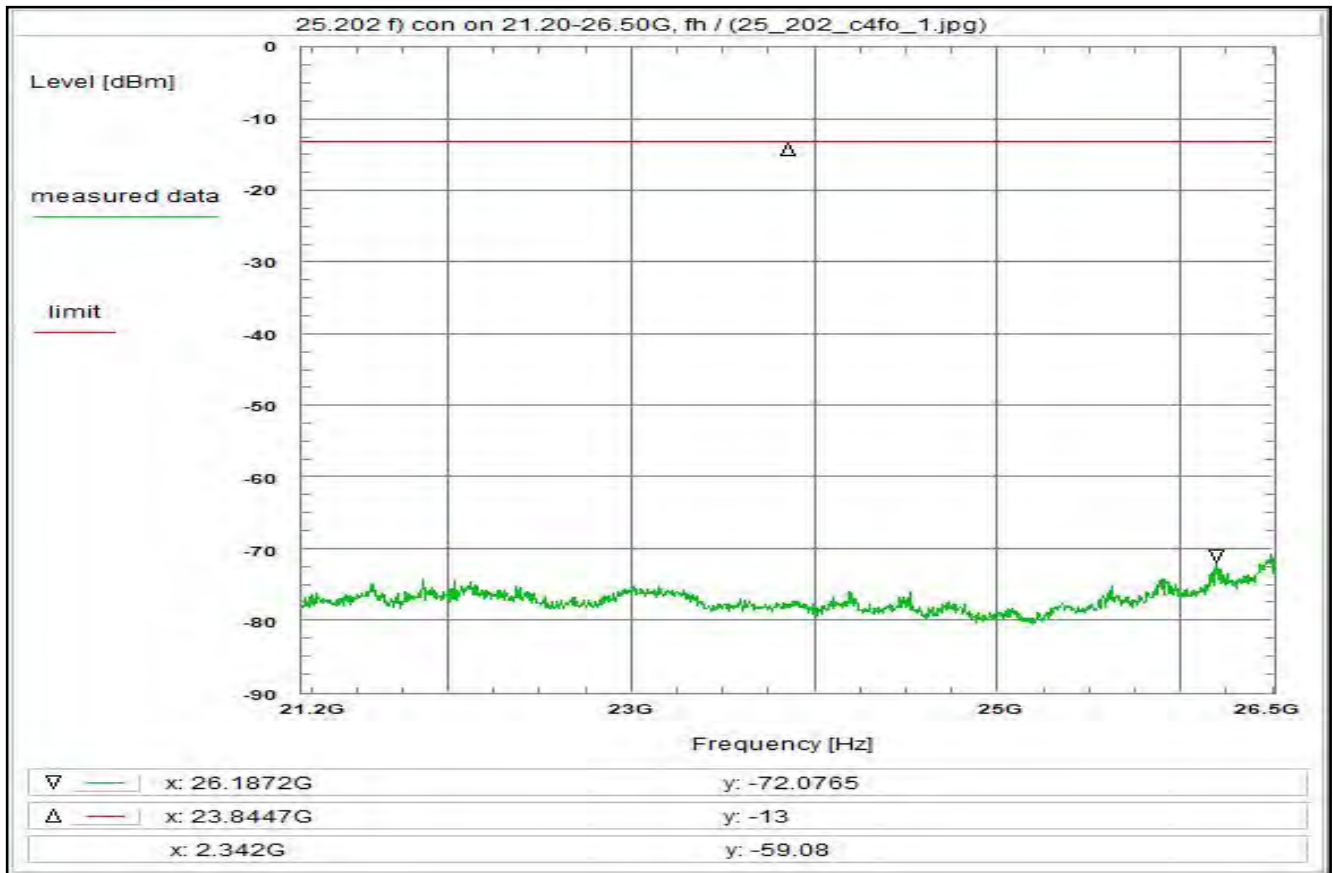

**Subclause:** 25.202 f) Frequencies, frequency tolerance and emission limitations  
Emission limitations  
Modulated rf-carrier at the upper edge of the band (fh)

**Limit:**  
Limit acc. to 25.202 f):  $-43+10\log(P_{max})$  dBc  
This corresponds to a limit of -13 dBm.

**Test results:**  
see plot (an explicit table was not generated)

**Operating condition of DUT:**  
operating condition 1, see test report chapter 6.4  
QPSK single carrier, valid for all modulations

**Test setup:**  
see test report chapter 7.3: cegj

**Test equipment:**  
see test report chapter 7.x: C107, R001, W009, W019, W022, W063

**Remark:**

**Test result:** Test passed

**Environment condition:**

Date & Time: Thu 20/May/2021 16:14:28  
Location: CTC advanced GmbH, Laboratory RC-SYS  
Temperature: 22 °C  
Humidity: 55 %  
Voltage: 120 Vac

**Setup of measurement equipment:**

Start frequency: 21.2 GHz  
Stop frequency: 26.5 GHz  
Center frequency: 23.85 GHz  
Frequency span: 5.3 GHz  
Resolution-BW: 100 kHz  
Video-BW: 300 kHz  
Input attenuation: 6 dB  
Trace-Mode: Max-Hold  
Detector-Mode: AVG


**Correction:**

Directional coupler (W009) + 34.2 dB  
Coaxial cable (C107) + 5.2 dB  
DUT-Antenna + 0.0 dBi  
Test antenna + 0.0 dB  
BW correction factor (100k -> 4k) - 14.0 dB  
Atten. between HPA and feedhorn - 0.0 dB  
Freefield attenuation + 0.0 dB  
TOTAL CORRECTION: + 25.4 dB

**Remarks:**


Carrier-on state / Carrier at the upper edge of the band (fh)

Plot No. 74

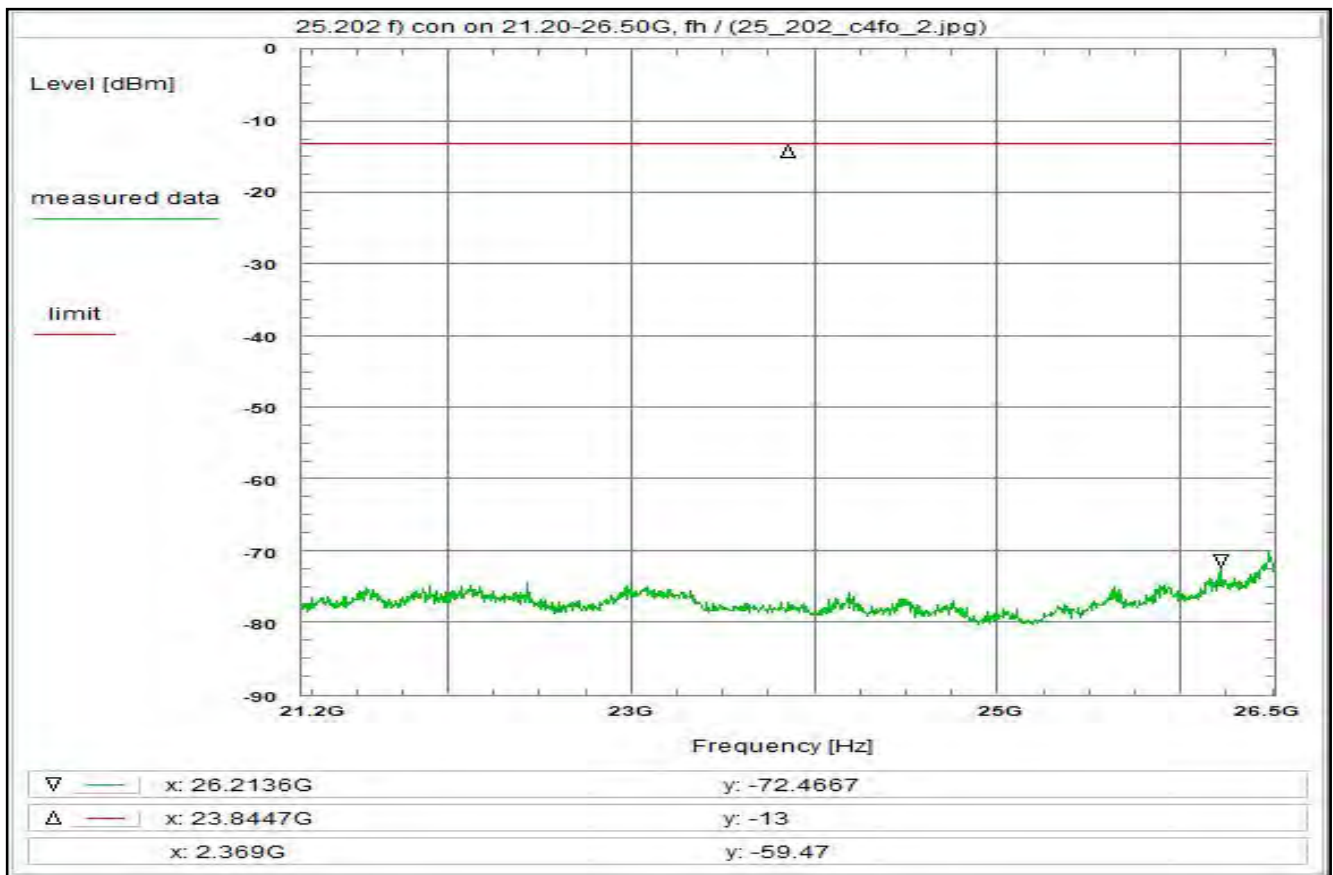

<p><b>Subclause:</b> 25.202 f) Frequencies, frequency tolerance and emission limitations Emission limitations Modulated rf-carrier at the upper edge of the band (fh)</p> <p><b>Limit:</b> Limit acc. to 25.202 f): <math>-43+10\log(P_{max})</math> dBc This corresponds to a limit of -13 dBm.</p> <p><b>Test results:</b> see plot (an explicit table was not generated)</p> <p><b>Operating condition of DUT:</b> operating condition 4, see test report chapter 6.4 QPSK dual carrier, valid for all modulations</p> <p><b>Test setup:</b> see test report chapter 7.3: cegj</p> <p><b>Test equipment:</b> see test report chapter 7.x: C107, R001, W009, W019, W022, W063</p> <p><b>Remark:</b></p> <p><b>Test result:</b> Test passed</p>	<p><b>Environment condition:</b> Date &amp; Time: Thu 20/May/2021 16:21:07 Location: CTC advanced GmbH, Laboratory RC-SYS Temperature: 22 °C Humidity: 55 % Voltage: 120 Vac</p> <p><b>Setup of measurement equipment:</b> Start frequency: 21.2 GHz Stop frequency: 26.5 GHz Center frequency: 23.85 GHz Frequency span: 5.3 GHz Resolution-BW: 100 kHz Video-BW: 300 kHz Input attenuation: 6 dB Trace-Mode: Max-Hold Detector-Mode: AVG</p> <p><b>Correction:</b> Directional coupler (W009) + 34.2 dB Coaxial cable (C107) + 5.2 dB DUT-Antenna + 0.0 dBi Test antenna + 0.0 dB BW correction factor (100k -&gt; 4k) - 14.0 dB Atten. between HPA and feedhorn - 0.0 dB Freefield attenuation + 0.0 dB TOTAL CORRECTION: + 25.4 dB</p> <p><b>Remarks:</b> Carrier-on state / Carrier at the upper edge of the band (fh)</p>
--	---

Plot No. 75

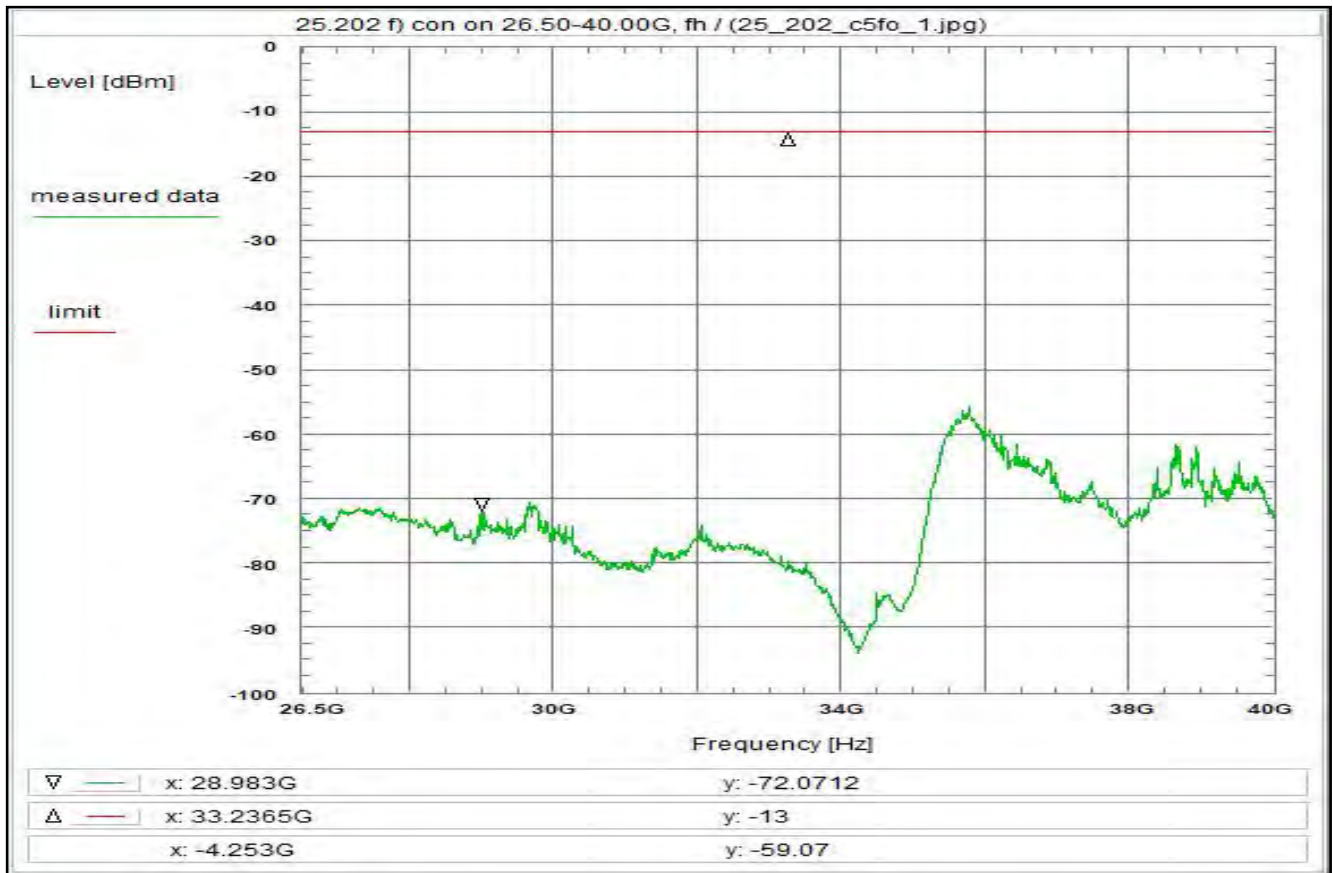

**Subclause:** 25.202 f) Frequencies, frequency tolerance and emission limitations  
Emission limitations  
Modulated rf-carrier at the upper edge of the band (fh)

**Limit:**  
Limit acc. to 25.202 f):  $-43+10\log(P_{max})$  dBc  
This corresponds to a limit of -13 dBm.

**Test results:**  
see plot (an explicit table was not generated)

**Operating condition of DUT:**  
operating condition 1, see test report chapter 6.4  
QPSK single carrier, valid for all modulations

**Test setup:**  
see test report chapter 7.3: cegj

**Test equipment:**  
see test report chapter 7.x: C107, R001, W009, W019, W022, W065

**Remark:**

**Test result:** Test passed

**Environment condition:**

Date & Time: Thu 20/May/2021 16:24:47  
Location: CTC advanced GmbH, Laboratory RC-SYS  
Temperature: 22 °C  
Humidity: 55 %  
Voltage: 120 Vac

**Setup of measurement equipment:**

Start frequency: 26.5 GHz  
Stop frequency: 40 GHz  
Center frequency: 33.25 GHz  
Frequency span: 13.5 GHz  
Resolution-BW: 100 kHz  
Video-BW: 300 kHz  
Input attenuation: 6 dB  
Trace-Mode: Max-Hold  
Detector-Mode: AVG


**Correction:**

Directional coupler (W009) + 33.2 dB  
Coaxial cable (C107) + 6.3 dB  
DUT-Antenna + 0.0 dBi  
Test antenna + 0.0 dB  
BW correction factor (100k -> 4k) - 14.0 dB  
Atten. between HPA and feedhorn - 0.0 dB  
Freefield attenuation + 0.0 dB  
TOTAL CORRECTION: + 25.5 dB

**Remarks:**

Carrier-on state / Carrier at the upper edge of the band (fh)

Plot No. 76

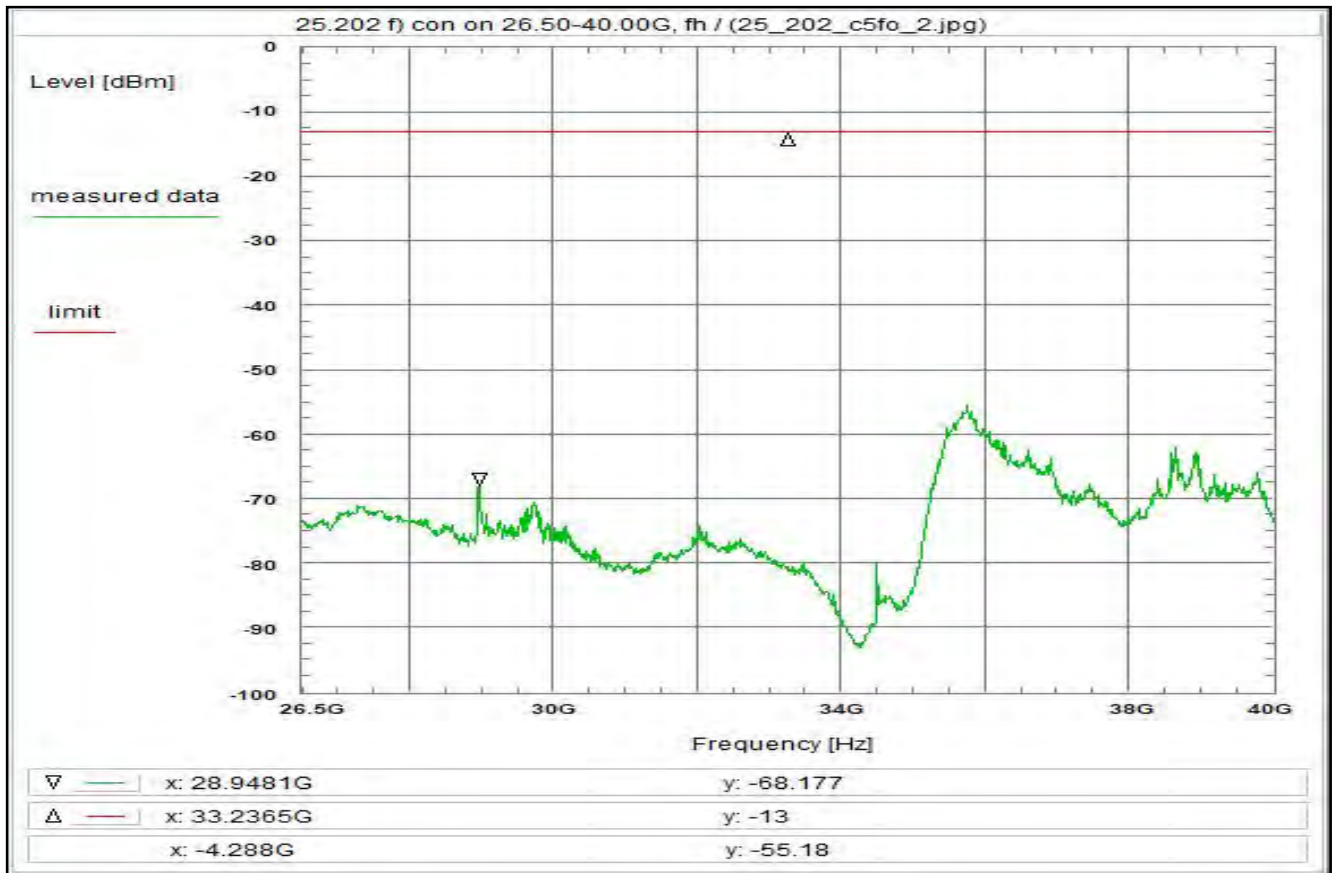

**Subclause:** 25.202 f) Frequencies, frequency tolerance and emission limitations  
Emission limitations  
Modulated rf-carrier at the upper edge of the band (fh)

**Limit:**  
Limit acc. to 25.202 f):  $-43+10\log(P_{max})$  dBc  
This corresponds to a limit of -13 dBm.

**Test results:**  
see plot (an explicit table was not generated)

**Operating condition of DUT:**  
operating condition 4, see test report chapter 6.4  
QPSK dual carrier, valid for all modulations

**Test setup:**  
see test report chapter 7.3: cegj

**Test equipment:**  
see test report chapter 7.x: C107, R001, W009, W019, W022, W065

**Remark:**

**Test result:** Test passed

**Environment condition:**

Date & Time: Thu 20/May/2021 16:30:12  
Location: CTC advanced GmbH, Laboratory RC-SYS  
Temperature: 22 °C  
Humidity: 55 %  
Voltage: 120 Vac

**Setup of measurement equipment:**

Start frequency: 26.5 GHz  
Stop frequency: 40 GHz  
Center frequency: 33.25 GHz  
Frequency span: 13.5 GHz  
Resolution-BW: 100 kHz  
Video-BW: 300 kHz  
Input attenuation: 6 dB  
Trace-Mode: Max-Hold  
Detector-Mode: AVG


**Correction:**

Directional coupler (W009) + 33.2 dB  
Coaxial cable (C107) + 6.3 dB  
DUT-Antenna + 0.0 dBi  
Test antenna + 0.0 dB  
BW correction factor (100k -> 4k) - 14.0 dB  
Atten. between HPA and feedhorn - 0.0 dB  
Freefield attenuation + 0.0 dB  
TOTAL CORRECTION: + 25.5 dB

**Remarks:**

Carrier-on state / Carrier at the upper edge of the band (fh)

Plot No. 77

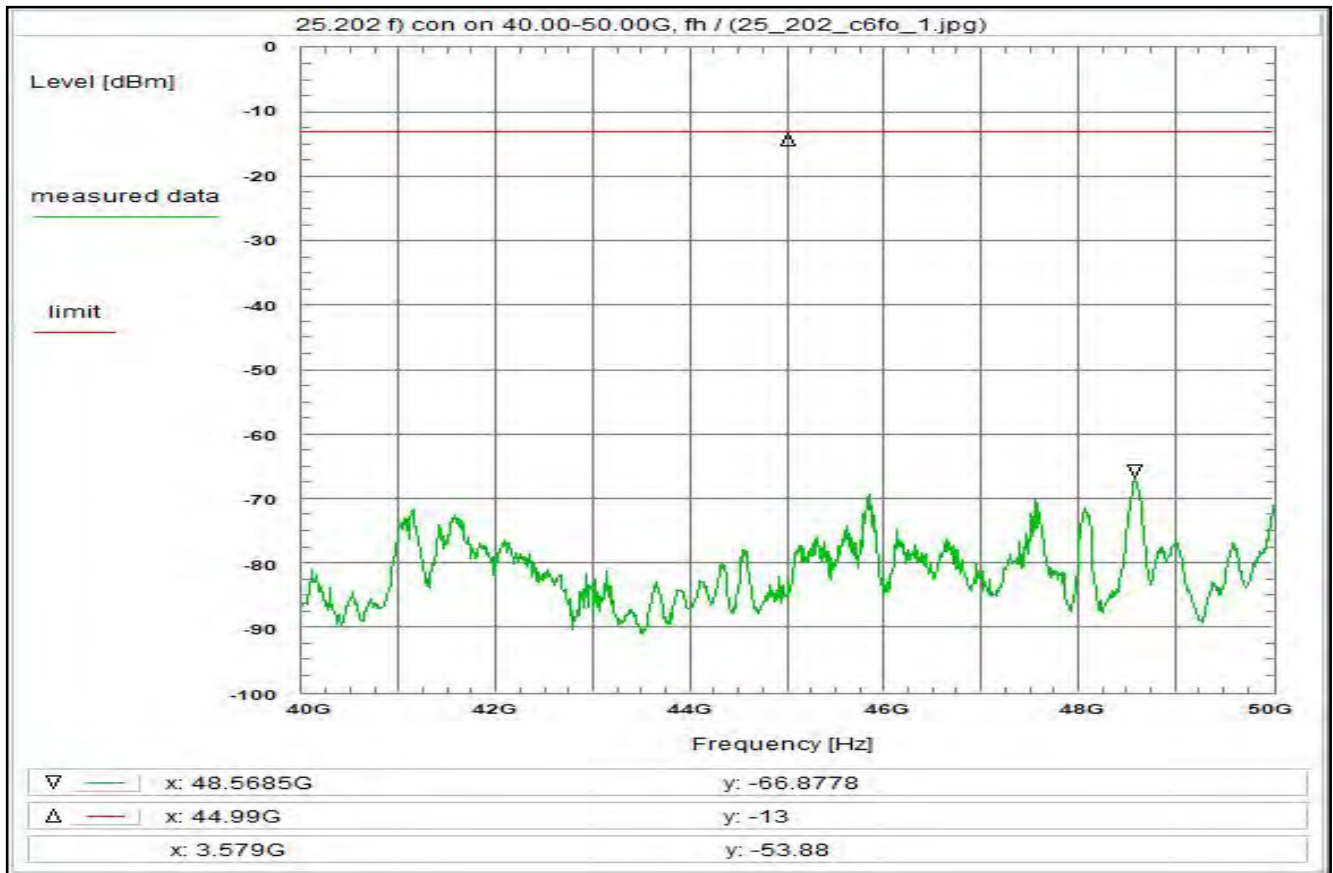

**Subclause:** 25.202 f) Frequencies, frequency tolerance and emission limitations  
Emission limitations  
Modulated rf-carrier at the upper edge of the band (fh)

**Limit:**  
Limit acc. to 25.202 f):  $-43+10\log(P_{max})$  dBc  
This corresponds to a limit of -13 dBm.

**Test results:**  
see plot (an explicit table was not generated)

**Operating condition of DUT:**  
operating condition 1, see test report chapter 6.4  
QPSK single carrier, valid for all modulations

**Test setup:**  
see test report chapter 7.3: cegj

**Test equipment:**  
see test report chapter 7.x: C107, R001, W006, W019, W022, W0xx

**Remark:**

**Test result:** Test passed

**Environment condition:**

Date & Time: Fri 21/May/2021 12:28:31  
Location: CTC advanced GmbH, Laboratory RC-SYS  
Temperature: 22 °C  
Humidity: 55 %  
Voltage: 120 Vac

**Setup of measurement equipment:**

Start frequency: 40 GHz  
Stop frequency: 50 GHz  
Center frequency: 45 GHz  
Frequency span: 10 GHz  
Resolution-BW: 100 kHz  
Video-BW: 300 kHz  
Input attenuation: 10 dB  
Trace-Mode: Max-Hold  
Detector-Mode: AVG

**Correction:**


Directional coupler (W006) + 13.6 dB  
Coaxial cable (C107) + 7.4 dB  
DUT-Antenna + 0.0 dBi  
Test antenna + 0.0 dB  
BW correction factor (100k -> 4k) - 14.0 dB  
Atten. between HPA and feedhorn - 0.0 dB  
Freefield attenuation + 0.0 dB  
TOTAL CORRECTION: + 7.0 dB

**Remarks:**

Carrier-on state / Carrier at the upper edge of the band (fh)



Plot No. 78

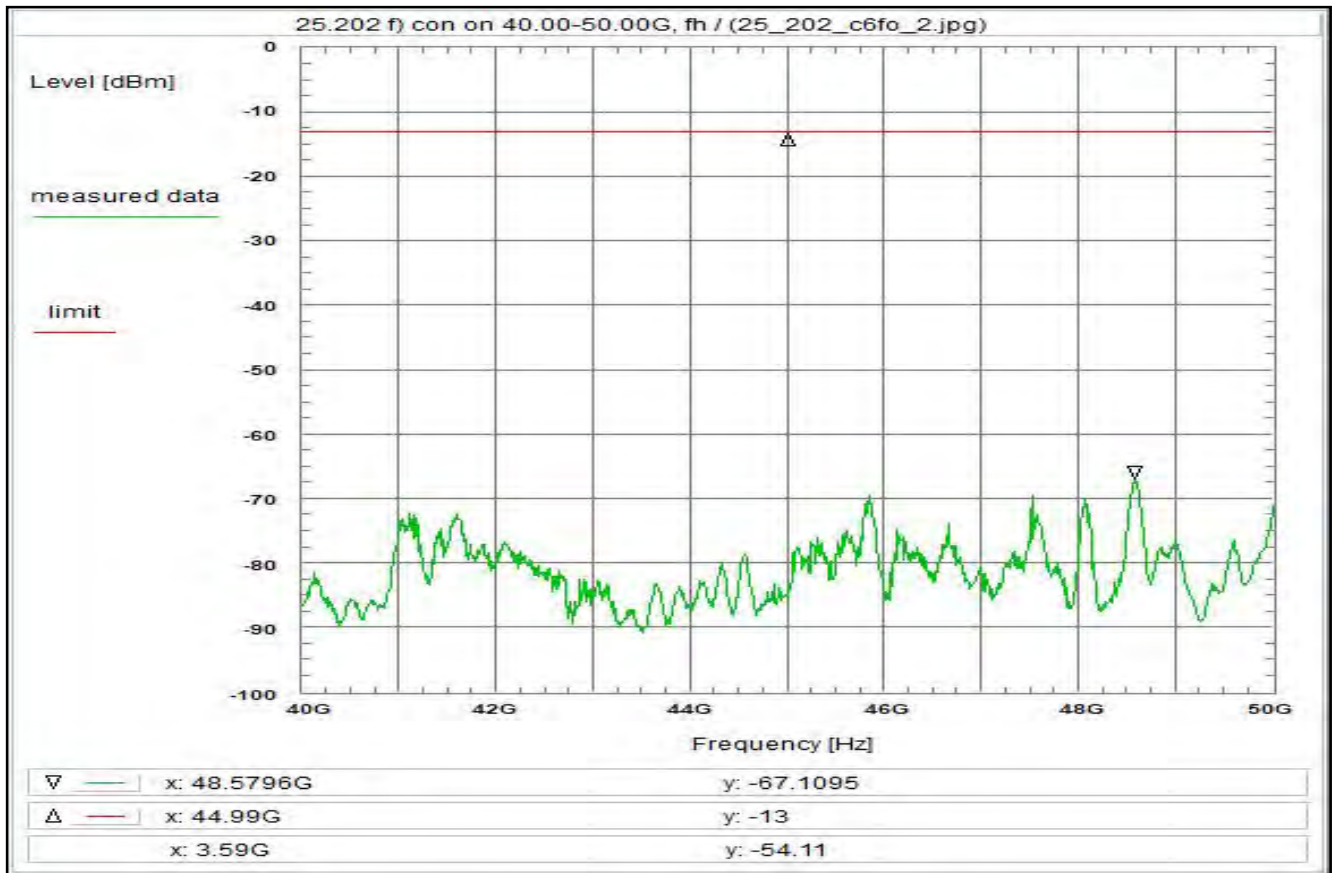

**Subclause:** 25.202 f) Frequencies, frequency tolerance and emission limitations  
Emission limitations  
Modulated rf-carrier at the upper edge of the band (fh)

**Limit:**  
Limit acc. to 25.202 f):  $-43+10\log(P_{max})$  dBc  
This corresponds to a limit of -13 dBm.

**Test results:**  
see plot (an explicit table was not generated)

**Operating condition of DUT:**  
operating condition 4, see test report chapter 6.4  
QPSK dual carrier, valid for all modulations

**Test setup:**  
see test report chapter 7.3: cegj

**Test equipment:**  
see test report chapter 7.x: C107, R001, W006, W019, W022, W0xx

**Remark:**

**Test result:** Test passed

**Environment condition:**

Date & Time: Fri 21/May/2021 12:29:52  
Location: CTC advanced GmbH, Laboratory RC-SYS  
Temperature: 22 °C  
Humidity: 55 %  
Voltage: 120 Vac

**Setup of measurement equipment:**

Start frequency: 40 GHz  
Stop frequency: 50 GHz  
Center frequency: 45 GHz  
Frequency span: 10 GHz  
Resolution-BW: 100 kHz  
Video-BW: 300 kHz  
Input attenuation: 10 dB  
Trace-Mode: Max-Hold  
Detector-Mode: AVG


**Correction:**

Directional coupler (W006) + 13.6 dB  
Coaxial cable (C107) + 7.4 dB  
DUT-Antenna + 0.0 dBi  
Test antenna + 0.0 dB  
BW correction factor (100k -> 4k) - 14.0 dB  
Atten. between HPA and feedhorn - 0.0 dB  
Freefield attenuation + 0.0 dB  
TOTAL CORRECTION: + 7.0 dB

**Remarks:**

Carrier-on state / Carrier at the upper edge of the band (fh)

Plot No. 79

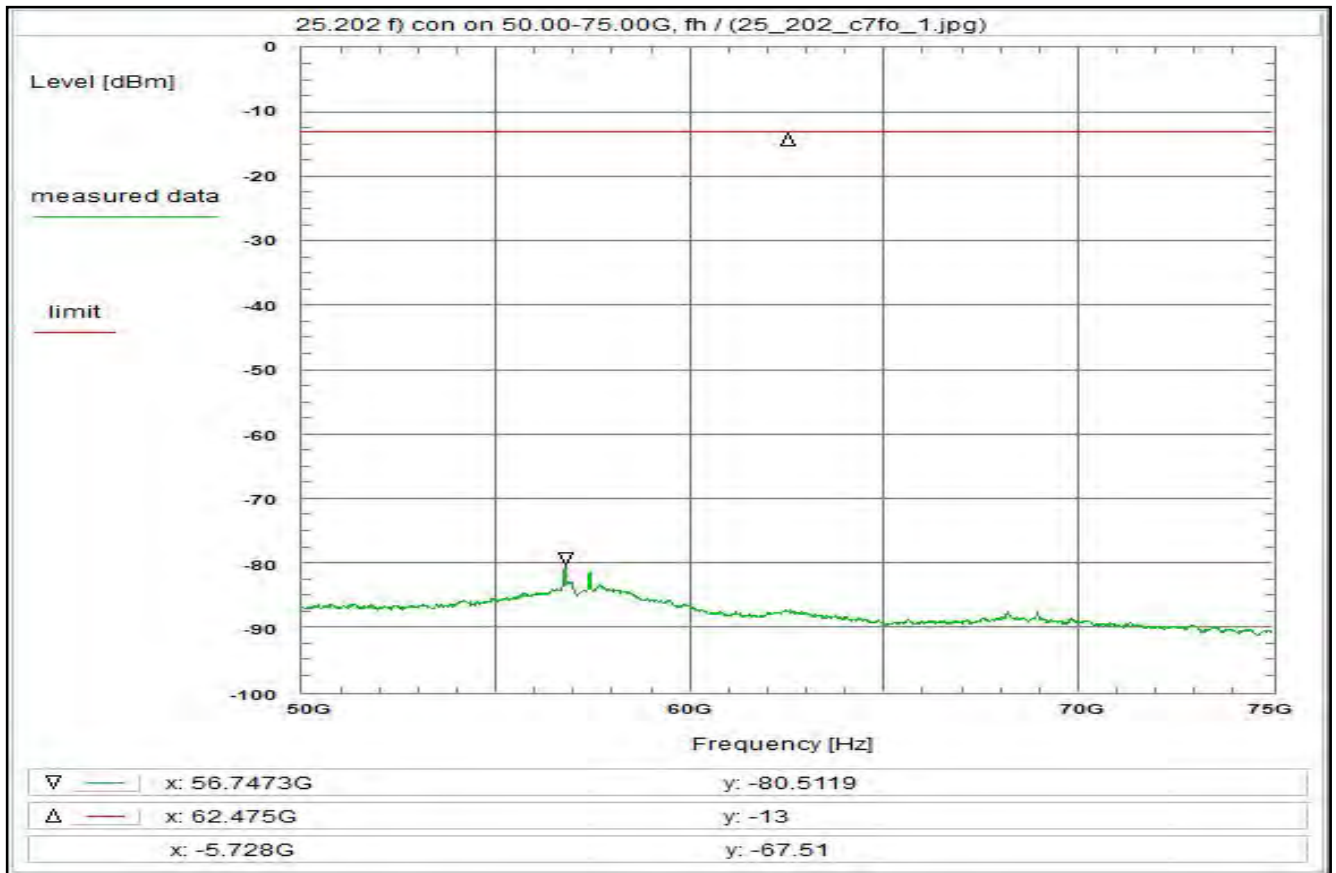

**Subclause:** 25.202 f) Frequencies, frequency tolerance and emission limitations  
Emission limitations  
Modulated rf-carrier at the upper edge of the band (fh)

**Limit:**  
Limit acc. to 25.202 f):  $-43+10\log(P_{max})$  dBc  
This corresponds to a limit of -13 dBm.

**Test results:**  
see plot (an explicit table was not generated)

**Operating condition of DUT:**  
operating condition 4, see test report chapter 6.4  
QPSK dual carrier, valid for all modulations

**Test setup:**  
see test report chapter 7.3: cfjg

**Test equipment:**  
see test report chapter 7.x: C107, R001, W006, W019, W022, W0xx

**Remark:**

**Test result:** Test passed

**Environment condition:**

Date & Time: Fri 21/May/2021 13:03:31  
Location: CTC advanced GmbH, Laboratory RC-SYS  
Temperature: 22 °C  
Humidity: 55 %  
Voltage: 120 Vac

**Setup of measurement equipment:**

Start frequency: 50 GHz  
Stop frequency: 75 GHz  
Center frequency: 62.5 GHz  
Frequency span: 25 GHz  
Resolution-BW: 100 kHz  
Video-BW: 300 kHz  
Input attenuation: 10 dB  
Trace-Mode: Max-Hold  
Detector-Mode: AVG


**Correction:**

Directional coupler (W006) + 19.4 dB  
Coaxial cable (C107) + 0.0 dB  
DUT-Antenna + 0.0 dBi  
Test antenna + 0.0 dB  
BW correction factor (100k -> 4k) - 14.0 dB  
Atten. between HPA and feedhorn - 0.0 dB  
Freefield attenuation + 0.0 dB  
TOTAL CORRECTION: + 5.4 dB

**Remarks:**


Carrier-on state / Carrier at the upper edge of the band (fh)

Plot No. 80

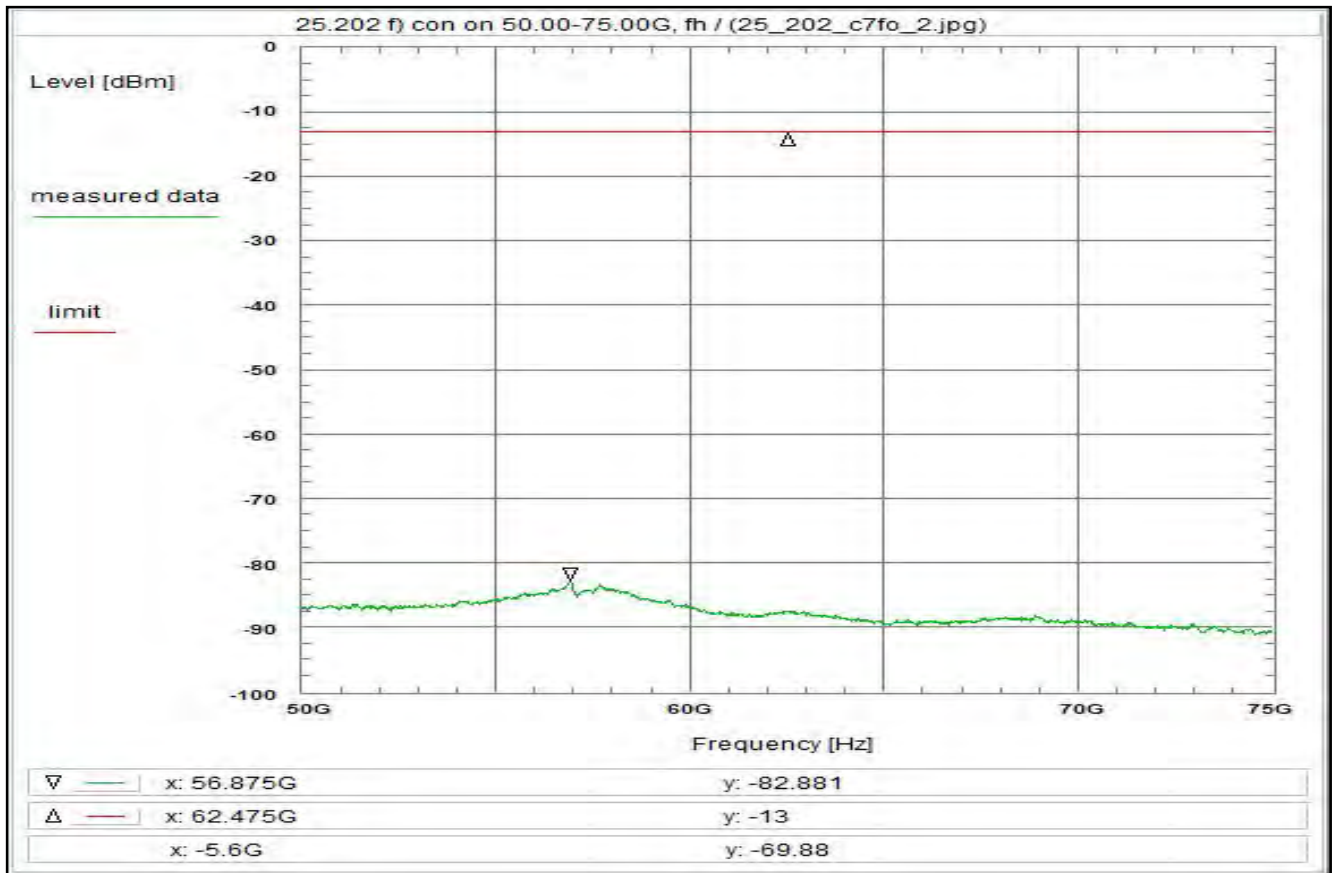


<p><b>Subclause:</b> 25.202 f) Frequencies, frequency tolerance and emission limitations Emission limitations Modulated rf-carrier at the upper edge of the band (fh)</p> <p><b>Limit:</b> Limit acc. to 25.202 f): <math>-43+10\log(P_{max})</math> dBc This corresponds to a limit of -13 dBm.</p> <p><b>Test results:</b> see plot (an explicit table was not generated)</p> <p><b>Operating condition of DUT:</b> operating condition 1, see test report chapter 6.4 QPSK single carrier, valid for all modulations</p> <p><b>Test setup:</b> see test report chapter 7.3: cfjg</p> <p><b>Test equipment:</b> see test report chapter 7.x: C107, R001, W006, W019, W022, W0xx</p> <p><b>Remark:</b></p> <p><b>Test result:</b> Test passed</p>	<p><b>Environment condition:</b> Date &amp; Time: Fri 21/May/2021 13:04:31 Location: CTC advanced GmbH, Laboratory RC-SYS Temperature: 22 °C Humidity: 55 % Voltage: 120 Vac</p> <p><b>Setup of measurement equipment:</b> Start frequency: 50 GHz Stop frequency: 75 GHz Center frequency: 62.5 GHz Frequency span: 25 GHz Resolution-BW: 100 kHz Video-BW: 300 kHz Input attenuation: 10 dB Trace-Mode: Max-Hold Detector-Mode: AVG</p> <p><b>Correction:</b> Directional coupler (W006) + 19.4 dB Coaxial cable (C107) + 0.0 dB DUT-Antenna + 0.0 dBi Test antenna + 0.0 dB BW correction factor (100k -&gt; 4k) - 14.0 dB Atten. between HPA and feedhorn - 0.0 dB Freefield attenuation + 0.0 dB TOTAL CORRECTION: + 5.4 dB</p> <p><b>Remarks:</b> Carrier-on state / Carrier at the upper edge of the band (fh)</p>
--	---

Plot No. 81

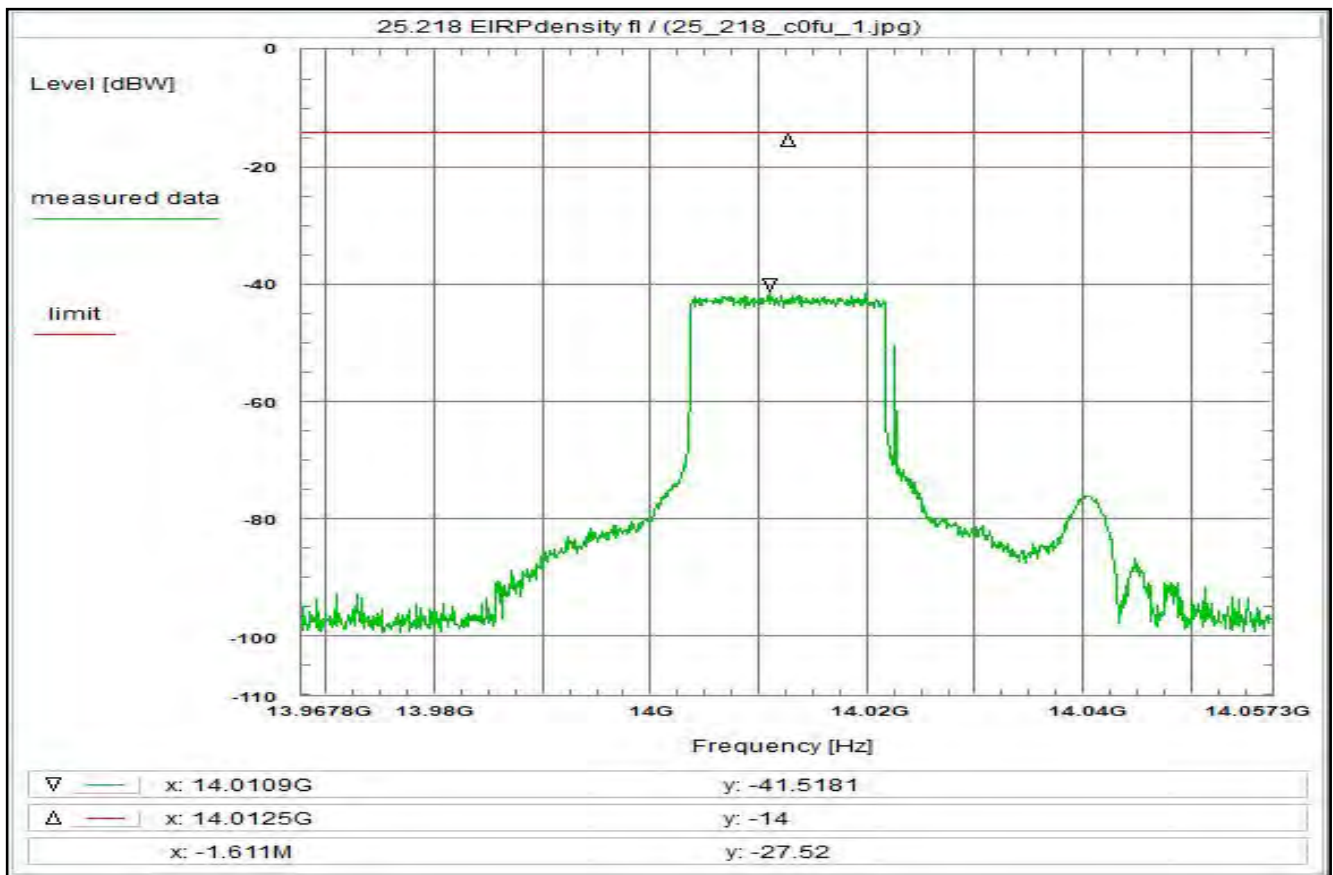


<p><b>Subclause:</b> 25.218 Off-axis EIRP spectral density (co-, cross-polar) within the band Modulated rf-carrier at the lower edge of the band (fl) Measurement of the wanted signal within 5 ° occupied bandwidth</p> <p><b>Limit:</b> Limit acc. to 25.218: 15-25log<sup>2</sup> dBW;4kHz -ant.-pattern envelope: (-29-25log<sup>2</sup> dBi) =&gt;: -14 dBW;4kHz (copolar) (-10*log N for N&gt; 1: consideration in correction data) The subtraction of the terms results in a constant limit. The antenna gain is set to zero in the correction data for this calculation.</p> <p><b>Test results:</b> see plot (an explicit table was not generated)</p> <p><b>Operating condition of DUT:</b> operating condition 1, see test report chapter 6.4 QPSK single carrier</p> <p><b>Test setup:</b> see test report chapter 7.3: cdjg</p> <p><b>Test equipment:</b> see test report chapter 7.x: C107, R001, W009, W065, W074</p> <p><b>Remark:</b></p> <p><b>Test result:</b> Test passed</p>	<p><b>Environment condition:</b> Date &amp; Time: Wed 19/May/2021 15:06:41 Location: CTC advanced GmbH, Laboratory RC-SYS Temperature: 22 °C Humidity: 55 % Voltage: 120 Vac</p> <p><b>Setup of measurement equipment:</b> Start frequency: 13.96775 GHz Stop frequency: 14.05725 GHz Center frequency: 14.0125 GHz Frequency span: 89.5 MHz Resolution-BW: 10 kHz Video-BW: 30 kHz Input attenuation: 10 dB Trace-Mode: Clear Write Detector-Mode: AVG</p> <p><b>Correction:</b> Directional coupler (W009) + 39.6 dB Coaxial cable (C107) + 4.0 dB DUT-Antenna (see under limit) + 0.0 dBi Test antenna + 0.0 dB BW correction factor (10k -&gt; 4k) - 4.0 dB Atten. between HPA and feedhorn - 0.0 dB Freefield attenuation + 0.0 dB TOTAL CORRECTION: + 39.6 dB</p> <p><b>Remarks:</b> The envelope curves for the antenna patterns ('worst case') are used for this calculation - the actual antenna patterns have to fulfill these requirements (co- and crosspolar envelope curves). See the separate plot after the measurement plots, too. Measurement with 30 kHz resolution filter and noise averaging.</p>
---	--

Plot No. 82

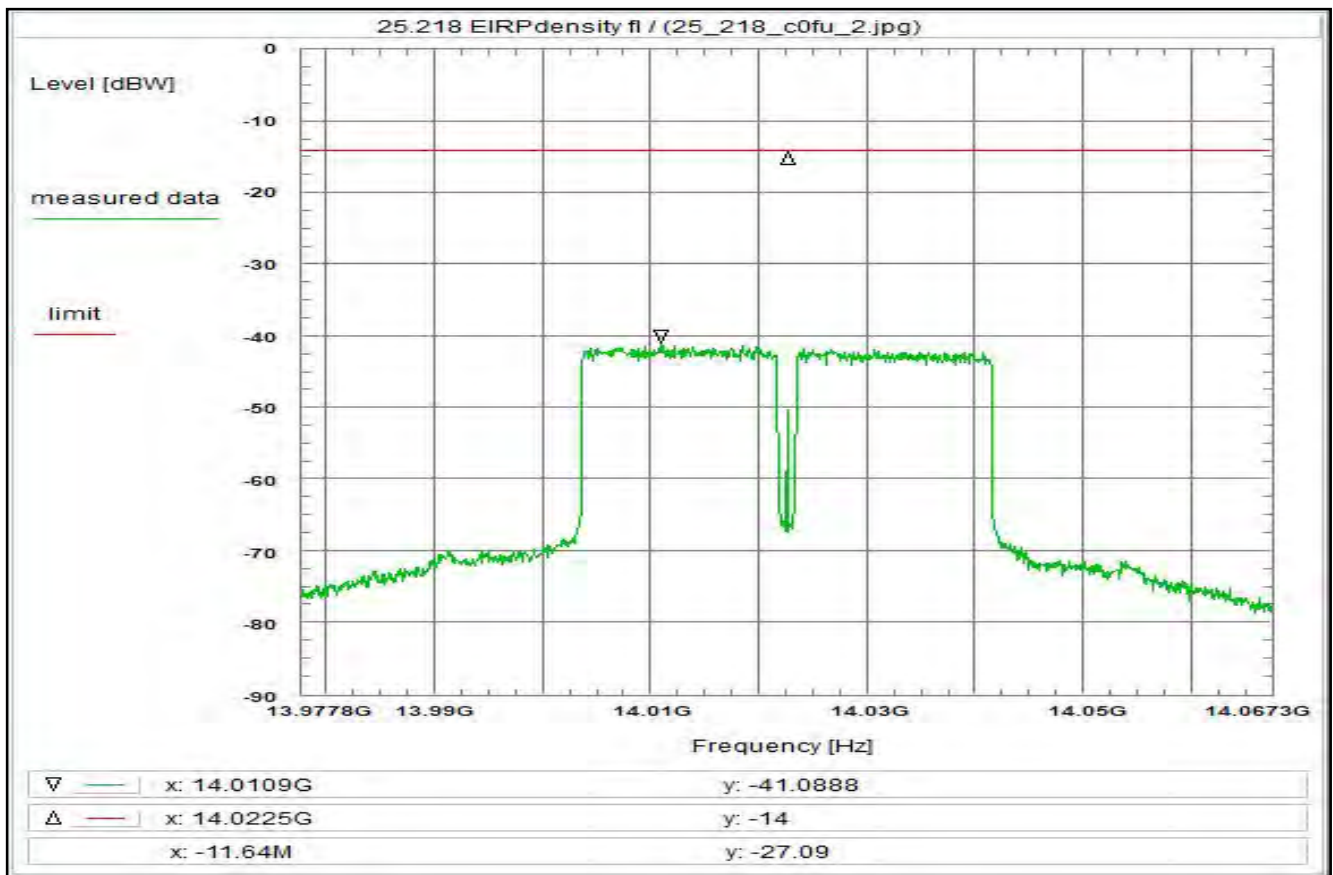


<p><b>Subclause:</b> 25.218 Off-axis EIRP spectral density (co-, cross-polar) within the band Modulated rf-carrier at the lower edge of the band (fl) Measurement of the wanted signal within 5° occupied bandwidth</p> <p><b>Limit:</b> Limit acc. to 25.218: 15-25log2° dBW;4kHz -ant.-pattern envelope: (-29-25log2° dBi) =&gt;: -14 dBW;4kHz (copolar) (-10*log N for N&gt; 1: consideration in correction data) The subtraction of the terms results in a constant limit. The antenna gain is set to zero in the correction data for this calculation.</p> <p><b>Test results:</b> see plot (an explicit table was not generated)</p> <p><b>Operating condition of DUT:</b> operating condition 4, see test report chapter 6.4 QPSK dual carrier</p> <p><b>Test setup:</b> see test report chapter 7.3: cdjg</p> <p><b>Test equipment:</b> see test report chapter 7.x: C107, R001, W009, W065, W074</p> <p><b>Remark:</b></p> <p><b>Test result:</b> Test passed</p>	<p><b>Environment condition:</b> Date &amp; Time: Wed 19/May/2021 15:36:47 Location: CTC advanced GmbH, Laboratory RC-SYS Temperature: 22 °C Humidity: 55 % Voltage: 120 Vac</p> <p><b>Setup of measurement equipment:</b> Start frequency: 13.97775 GHz Stop frequency: 14.06725 GHz Center frequency: 14.0225 GHz Frequency span: 89.5 MHz Resolution-BW: 10 kHz Video-BW: 30 kHz Input attenuation: 10 dB Trace-Mode: Clear Write Detector-Mode: AVG</p> <p><b>Correction:</b> Directional coupler (W009) + 39.6 dB Coaxial cable (C107) + 4.0 dB DUT-Antenna (see under limit) + 0.0 dBi Test antenna + 0.0 dB BW correction factor (10k -&gt; 4k) - 4.0 dB Atten. between HPA and feedhorn - 0.0 dB Freefield attenuation + 0.0 dB TOTAL CORRECTION: + 39.6 dB</p> <p><b>Remarks:</b> The envelope curves for the antenna patterns ('worst case') are used for this calculation - the actual antenna patterns have to fulfill these requirements (co- and crosspolar envelope curves). See the separate plot after the measurement plots, too. Measurement with 30 kHz resolution filter and noise averaging.</p>
--	--

Plot No. 83

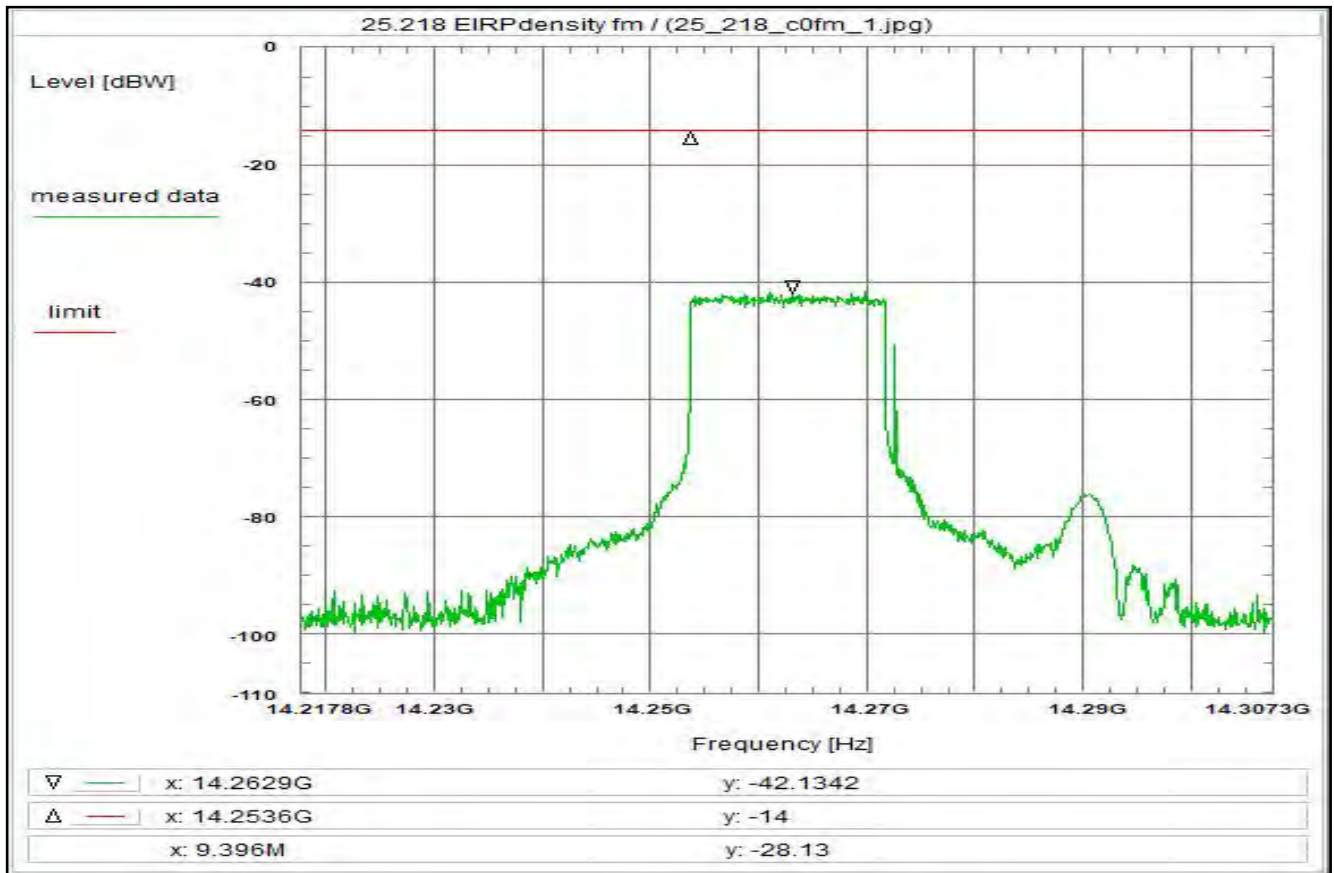


<p><b>Subclause:</b> 25.218 Off-axis EIRP spectral density (co-, cross-polar) within the band Modulated rf-carrier in the middle of the band (fm) Measurement of the wanted signal within 5 * occupied bandwidth</p> <p><b>Limit:</b> Limit acc. to 25.218: 15-25log2° dBW;4kHz -ant.-pattern envelope: (-29-25log2° dBi) =&gt;: -14 dBW;4kHz (copolar) (-10*log N for N&gt; 1: consideration in correction data) The subtraction of the terms results in a constant limit. The antenna gain is set to zero in the correction data for this calculation.</p> <p><b>Test results:</b> see plot (an explicit table was not generated)</p> <p><b>Operating condition of DUT:</b> operating condition 1, see test report chapter 6.4 QPSK single carrier</p> <p><b>Test setup:</b> see test report chapter 7.3: cdgj</p> <p><b>Test equipment:</b> see test report chapter 7.x: C107, R001, W009, W065, W074</p> <p><b>Remark:</b></p> <p><b>Test result:</b> Test passed</p>	<p><b>Environment condition:</b> Date &amp; Time: Wed 19/May/2021 14:55:37 Location: CTC advanced GmbH, Laboratory RC-SYS Temperature: 22 °C Humidity: 55 % Voltage: 120 Vac</p> <p><b>Setup of measurement equipment:</b> Start frequency: 14.21775 GHz Stop frequency: 14.30725 GHz Center frequency: 14.2625 GHz Frequency span: 89.5 MHz Resolution-BW: 10 kHz Video-BW: 30 kHz Input attenuation: 10 dB Trace-Mode: Clear Write Detector-Mode: AVG</p> <p><b>Correction:</b> Directional coupler (W009) + 39.5 dB Coaxial cable (C107) + 4.0 dB DUT-Antenna (see under limit) + 0.0 dBi Test antenna + 0.0 dB BW correction factor (10k -&gt; 4k) - 4.0 dB Atten. between HPA and feedhorn - 0.0 dB Freefield attenuation + 0.0 dB TOTAL CORRECTION: + 39.5 dB</p> <p><b>Remarks:</b> The envelope curves for the antenna patterns ('worst case') are used for this calculation - the actual antenna patterns have to fulfill these requirements (co- and crosspolar envelope curves). See the separate plot after the measurement plots, too. Measurement with 30 kHz resolution filter and noise averaging.</p>
---	--

Plot No. 84

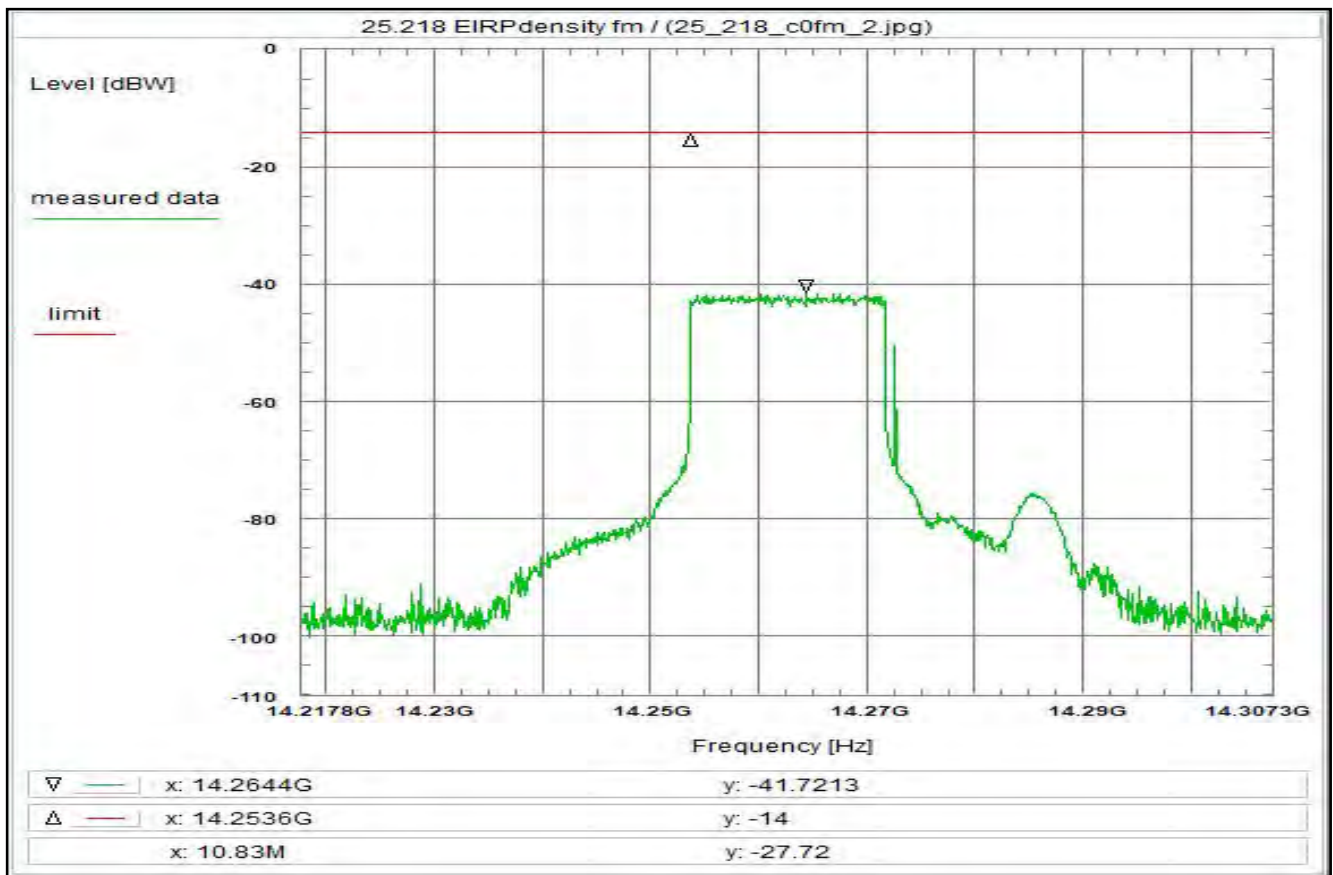

<p><b>Subclause:</b> 25.218 Off-axis EIRP spectral density (co-, cross-polar) within the band Modulated rf-carrier in the middle of the band (fm) Measurement of the wanted signal within 5° occupied bandwidth</p> <p><b>Limit:</b> Limit acc. to 25.218: 15-25log2° dBW;4kHz -ant.-pattern envelope: (-29-25log2° dBi) =&gt;: -14 dBW;4kHz (copolar) (-10*log N for N&gt; 1: consideration in correction data) The subtraction of the terms results in a constant limit. The antenna gain is set to zero in the correction data for this calculation.</p> <p><b>Test results:</b> see plot (an explicit table was not generated)</p> <p><b>Operating condition of DUT:</b> operating condition 2, see test report chapter 6.4 8PSK single carrier</p> <p><b>Test setup:</b> see test report chapter 7.3: cdjg</p> <p><b>Test equipment:</b> see test report chapter 7.x: C107, R001, W009, W065, W074</p> <p><b>Remark:</b></p> <p><b>Test result:</b> Test passed</p>	<p><b>Environment condition:</b> Date &amp; Time: Wed 19/May/2021 14:57:05 Location: CTC advanced GmbH, Laboratory RC-SYS Temperature: 22 °C Humidity: 55 % Voltage: 120 Vac</p> <p><b>Setup of measurement equipment:</b> Start frequency: 14.21775 GHz Stop frequency: 14.30725 GHz Center frequency: 14.2625 GHz Frequency span: 89.5 MHz Resolution-BW: 10 kHz Video-BW: 30 kHz Input attenuation: 10 dB Trace-Mode: Clear Write Detector-Mode: AVG</p> <p><b>Correction:</b> Directional coupler (W009) + 39.5 dB Coaxial cable (C107) + 4.0 dB DUT-Antenna (see under limit) + 0.0 dBi Test antenna + 0.0 dB BW correction factor (10k -&gt; 4k) - 4.0 dB Atten. between HPA and feedhorn - 0.0 dB Freefield attenuation + 0.0 dB TOTAL CORRECTION: + 39.5 dB</p> <p><b>Remarks:</b> The envelope curves for the antenna patterns ('worst case') are used for this calculation - the actual antenna patterns have to fulfill these requirements (co- and crosspolar envelope curves). See the separate plot after the measurement plots, too. Measurement with 30 kHz resolution filter and noise averaging.</p>
--	--

Plot No. 85

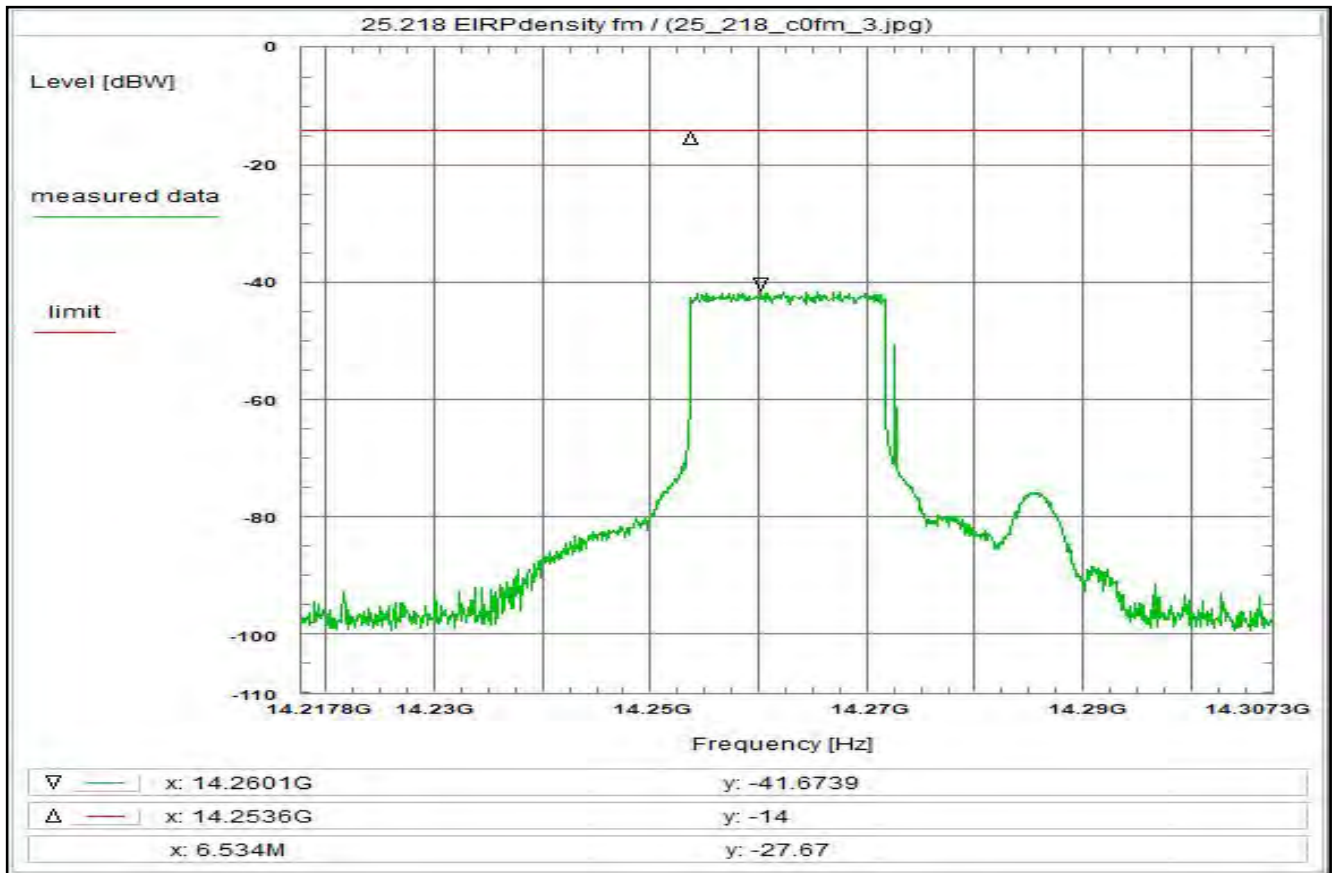

**Subclause:** 25.218 Off-axis EIRP spectral density (co-, cross-polar) within the band  
Modulated rf-carrier in the middle of the band (fm)  
Measurement of the wanted signal within 5° occupied bandwidth

**Limit:**  
Limit acc. to 25.218: 15-25log2° dBW;4kHz  
-ant.-pattern envelope: -(29-25log2° dBi)  
=>: -14 dBW;4kHz (copolar)  
(-10\*log N for N> 1: consideration in correction data)  
The subtraction of the terms results in a constant limit.  
The antenna gain is set to zero in the correction data for this calculation.

**Test results:**  
see plot (an explicit table was not generated)

**Operating condition of DUT:**  
operating condition 3, see test report chapter 6.4  
16QAM single carrier

**Test setup:**  
see test report chapter 7.3: cdgj

**Test equipment:**  
see test report chapter 7.x: C107, R001, W009, W065, W074

**Remark:**

**Test result:** Test passed

**Environment condition:**

Date & Time: Wed 19/May/2021 15:00:17  
Location: CTC advanced GmbH, Laboratory RC-SYS  
Temperature: 22 °C  
Humidity: 55 %  
Voltage: 120 Vac

**Setup of measurement equipment:**

Start frequency: 14.21775 GHz  
Stop frequency: 14.30725 GHz  
Center frequency: 14.2625 GHz  
Frequency span: 89.5 MHz  
Resolution-BW: 10 kHz  
Video-BW: 30 kHz  
Input attenuation: 10 dB  
Trace-Mode: Clear Write  
Detector-Mode: AVG

**Correction:**


Directional coupler (W009) + 39.5 dB  
Coaxial cable (C107) + 4.0 dB  
DUT-Antenna (see under limit) + 0.0 dBi  
Test antenna + 0.0 dB  
BW correction factor (10k -> 4k) - 4.0 dB  
Atten. between HPA and feedhorn - 0.0 dB  
Freefield attenuation + 0.0 dB  
TOTAL CORRECTION: + 39.5 dB

**Remarks:**

The envelope curves for the antenna patterns ('worst case') are used for this calculation - the actual antenna patterns have to fulfill these requirements (co- and crosspolar envelope curves).  
See the separate plot after the measurement plots, too.  
Measurement with 30 kHz resolution filter and noise averaging.




Plot No. 86

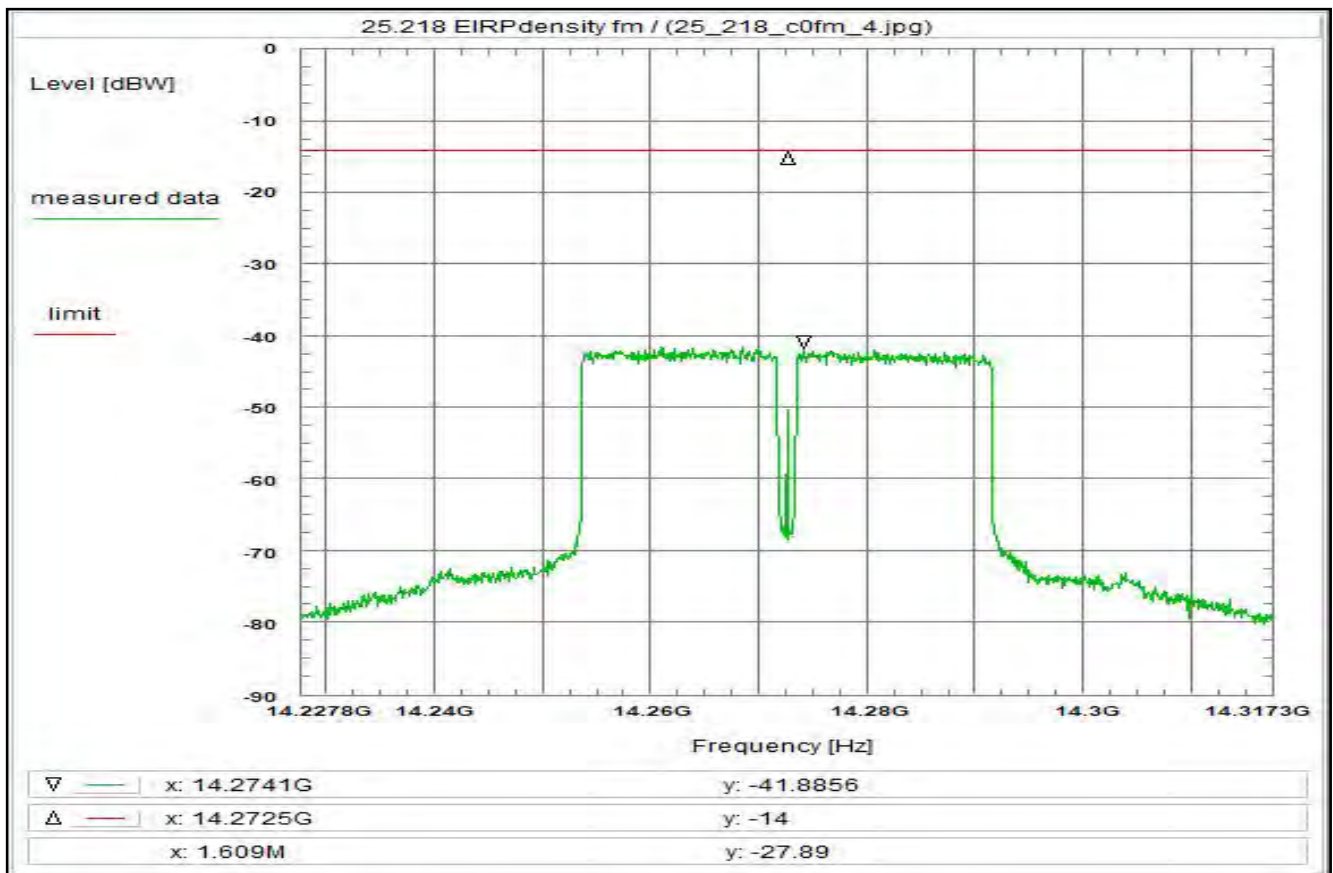


<p><b>Subclause:</b> 25.218 Off-axis EIRP spectral density (co-, cross-polar) within the band Modulated rf-carrier in the middle of the band (fm) Measurement of the wanted signal within 5° occupied bandwidth</p> <p><b>Limit:</b> Limit acc. to 25.218: 15-25log2° dBW;4kHz -ant.-pattern envelope: (-29-25log2° dBi) =&gt;: -14 dBW;4kHz (copolar) (-10*log N for N&gt; 1: consideration in correction data) The subtraction of the terms results in a constant limit. The antenna gain is set to zero in the correction data for this calculation.</p> <p><b>Test results:</b> see plot (an explicit table was not generated)</p> <p><b>Operating condition of DUT:</b> operating condition 4, see test report chapter 6.4 QPSK dual carrier</p> <p><b>Test setup:</b> see test report chapter 7.3: cdjg</p> <p><b>Test equipment:</b> see test report chapter 7.x: C107, R001, W009, W065, W074</p> <p><b>Remark:</b></p> <p><b>Test result:</b> Test passed</p>	<p><b>Environment condition:</b> Date &amp; Time: Wed 19/May/2021 15:37:38 Location: CTC advanced GmbH, Laboratory RC-SYS Temperature: 22 °C Humidity: 55 % Voltage: 120 Vac</p> <p><b>Setup of measurement equipment:</b> Start frequency: 14.22775 GHz Stop frequency: 14.31725 GHz Center frequency: 14.2725 GHz Frequency span: 89.5 MHz Resolution-BW: 10 kHz Video-BW: 30 kHz Input attenuation: 10 dB Trace-Mode: Clear Write Detector-Mode: AVG</p> <p><b>Correction:</b> Directional coupler (W009) + 39.5 dB Coaxial cable (C107) + 4.0 dB DUT-Antenna (see under limit) + 0.0 dBi Test antenna + 0.0 dB BW correction factor (10k -&gt; 4k) - 4.0 dB Atten. between HPA and feedhorn - 0.0 dB Freefield attenuation + 0.0 dB TOTAL CORRECTION: + 39.5 dB</p> <p><b>Remarks:</b> The envelope curves for the antenna patterns ('worst case') are used for this calculation - the actual antenna patterns have to fulfill these requirements (co- and crosspolar envelope curves). See the separate plot after the measurement plots, too. Measurement with 30 kHz resolution filter and noise averaging.</p>
--	--

Plot No. 87

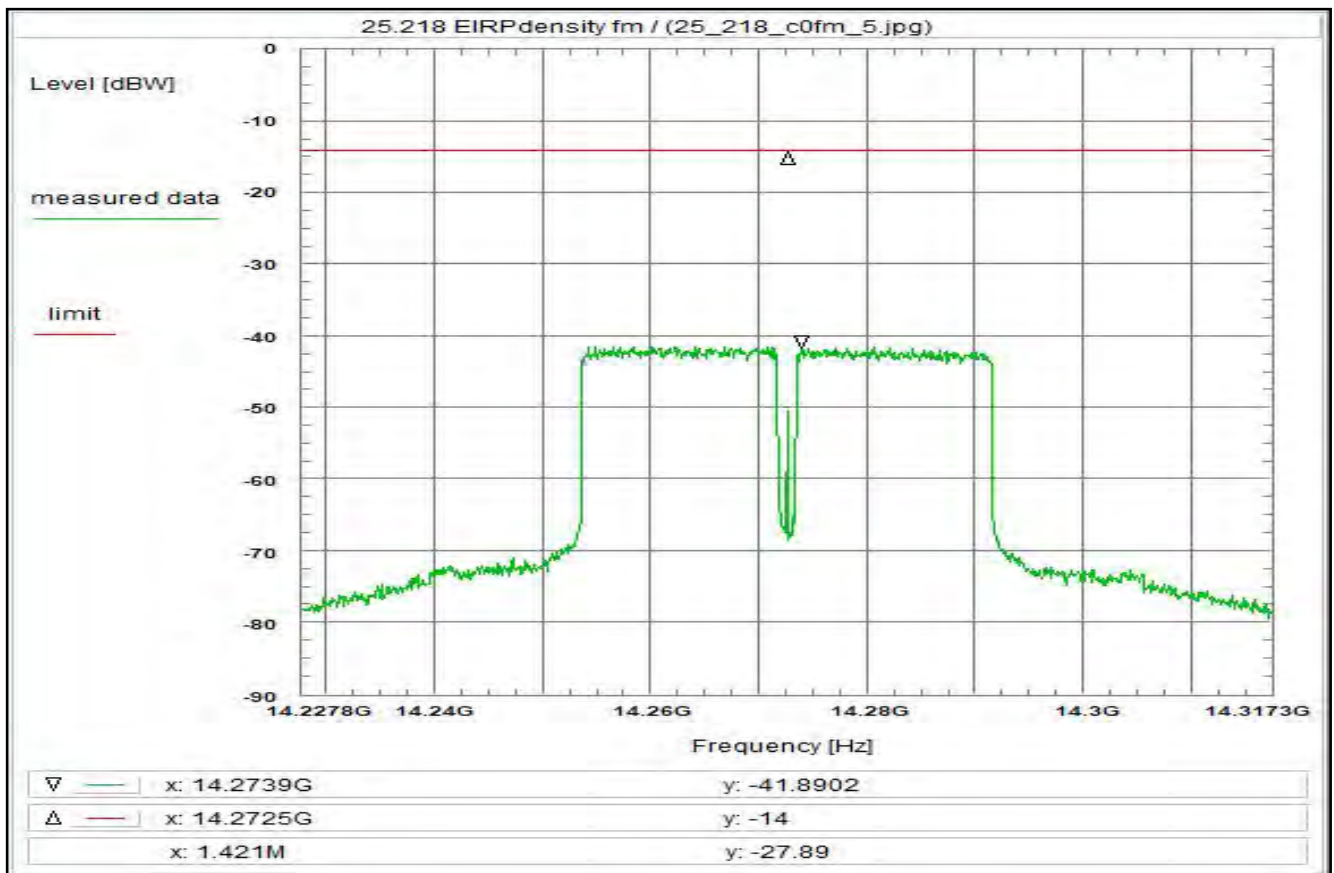

<p><b>Subclause:</b> 25.218 Off-axis EIRP spectral density (co-, cross-polar) within the band Modulated rf-carrier in the middle of the band (fm) Measurement of the wanted signal within 5° occupied bandwidth</p> <p><b>Limit:</b> Limit acc. to 25.218: 15-25log2° dBW;4kHz -ant.-pattern envelope: (-29-25log2° dBi) =&gt;: -14 dBW;4kHz (copolar) (-10*log N for N&gt; 1: consideration in correction data) The subtraction of the terms results in a constant limit. The antenna gain is set to zero in the correction data for this calculation.</p> <p><b>Test results:</b> see plot (an explicit table was not generated)</p> <p><b>Operating condition of DUT:</b> operating condition 5, see test report chapter 6.4 8PSK dual carrier</p> <p><b>Test setup:</b> see test report chapter 7.3: cdjg</p> <p><b>Test equipment:</b> see test report chapter 7.x: C107, R001, W009, W065, W074</p> <p><b>Remark:</b></p> <p><b>Test result:</b> Test passed</p>	<p><b>Environment condition:</b> Date &amp; Time: Wed 19/May/2021 15:39:22 Location: CTC advanced GmbH, Laboratory RC-SYS Temperature: 22 °C Humidity: 55 % Voltage: 120 Vac</p> <p><b>Setup of measurement equipment:</b> Start frequency: 14.22775 GHz Stop frequency: 14.31725 GHz Center frequency: 14.2725 GHz Frequency span: 89.5 MHz Resolution-BW: 10 kHz Video-BW: 30 kHz Input attenuation: 10 dB Trace-Mode: Clear Write Detector-Mode: AVG</p> <p><b>Correction:</b> Directional coupler (W009) + 39.5 dB Coaxial cable (C107) + 4.0 dB DUT-Antenna (see under limit) + 0.0 dBi Test antenna + 0.0 dB BW correction factor (10k -&gt; 4k) - 4.0 dB Atten. between HPA and feedhorn - 0.0 dB Freefield attenuation + 0.0 dB TOTAL CORRECTION: + 39.5 dB</p> <p><b>Remarks:</b> The envelope curves for the antenna patterns ('worst case') are used for this calculation - the actual antenna patterns have to fulfill these requirements (co- and crosspolar envelope curves). See the separate plot after the measurement plots, too. Measurement with 30 kHz resolution filter and noise averaging.</p>
--	--

Plot No. 88

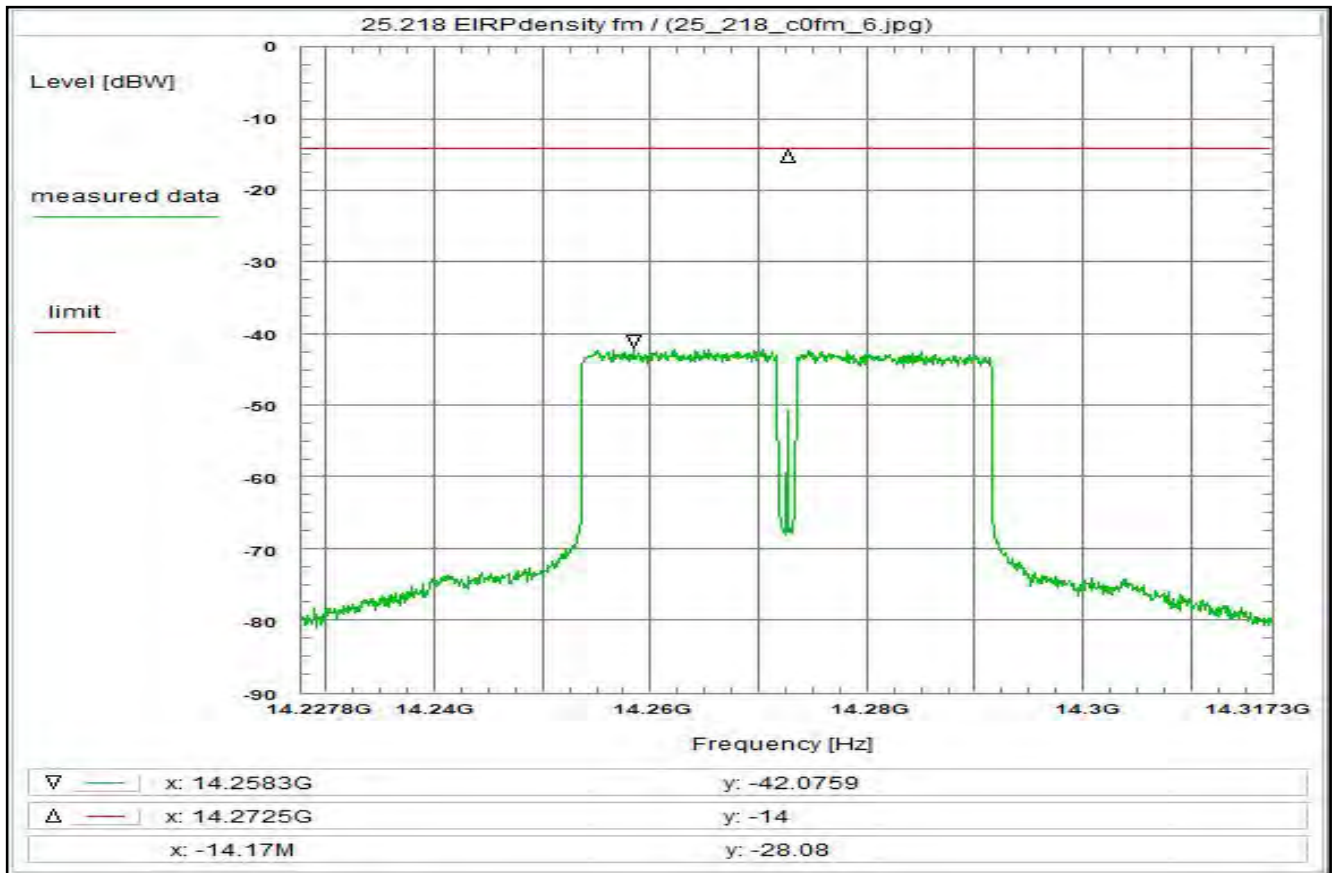

**Subclause:** 25.218 Off-axis EIRP spectral density (co-, cross-polar) within the band  
Modulated rf-carrier in the middle of the band (fm)  
Measurement of the wanted signal within 5° occupied bandwidth

**Limit:**  
Limit acc. to 25.218: 15-25log<sup>2</sup> dBW;4kHz  
-ant.-pattern envelope: (-29-25log<sup>2</sup> dBi)  
=>: -14 dBW;4kHz (copolar)  
(-10\*log N for N> 1: consideration in correction data)  
The subtraction of the terms results in a constant limit.  
The antenna gain is set to zero in the correction data for this calculation.

**Test results:**  
see plot (an explicit table was not generated)

**Operating condition of DUT:**  
operating condition 6, see test report chapter 6.4  
16QAM dual carrier

**Test setup:**  
see test report chapter 7.3: cdjg

**Test equipment:**  
see test report chapter 7.x: C107, R001, W009, W065, W074

**Remark:**

**Test result: Test passed**


**Environment condition:**  
Date & Time: Wed 19/May/2021 15:40:45  
Location: CTC advanced GmbH, Laboratory RC-SYS  
Temperature: 22 °C  
Humidity: 55 %  
Voltage: 120 Vac

**Setup of measurement equipment:**  
Start frequency: 14.22775 GHz  
Stop frequency: 14.31725 GHz  
Center frequency: 14.2725 GHz  
Frequency span: 89.5 MHz  
Resolution-BW: 10 kHz  
Video-BW: 30 kHz  
Input attenuation: 10 dB  
Trace-Mode: Clear Write  
Detector-Mode: AVG

**Correction:**  
Directional coupler (W009) + 39.5 dB  
Coaxial cable (C107) + 4.0 dB  
DUT-Antenna (see under limit) + 0.0 dBi  
Test antenna + 0.0 dB  
BW correction factor (10k -> 4k) - 4.0 dB  
Atten. between HPA and feedhorn - 0.0 dB  
Freefield attenuation + 0.0 dB  
TOTAL CORRECTION: + 39.5 dB

**Remarks:**  
The envelope curves for the antenna patterns ('worst case') are used for this calculation - the actual antenna patterns have to fulfill these requirements (co- and crosspolar envelope curves).  
See the separate plot after the measurement plots, too.  
Measurement with 30 kHz resolution filter and noise averaging.

Plot No. 89

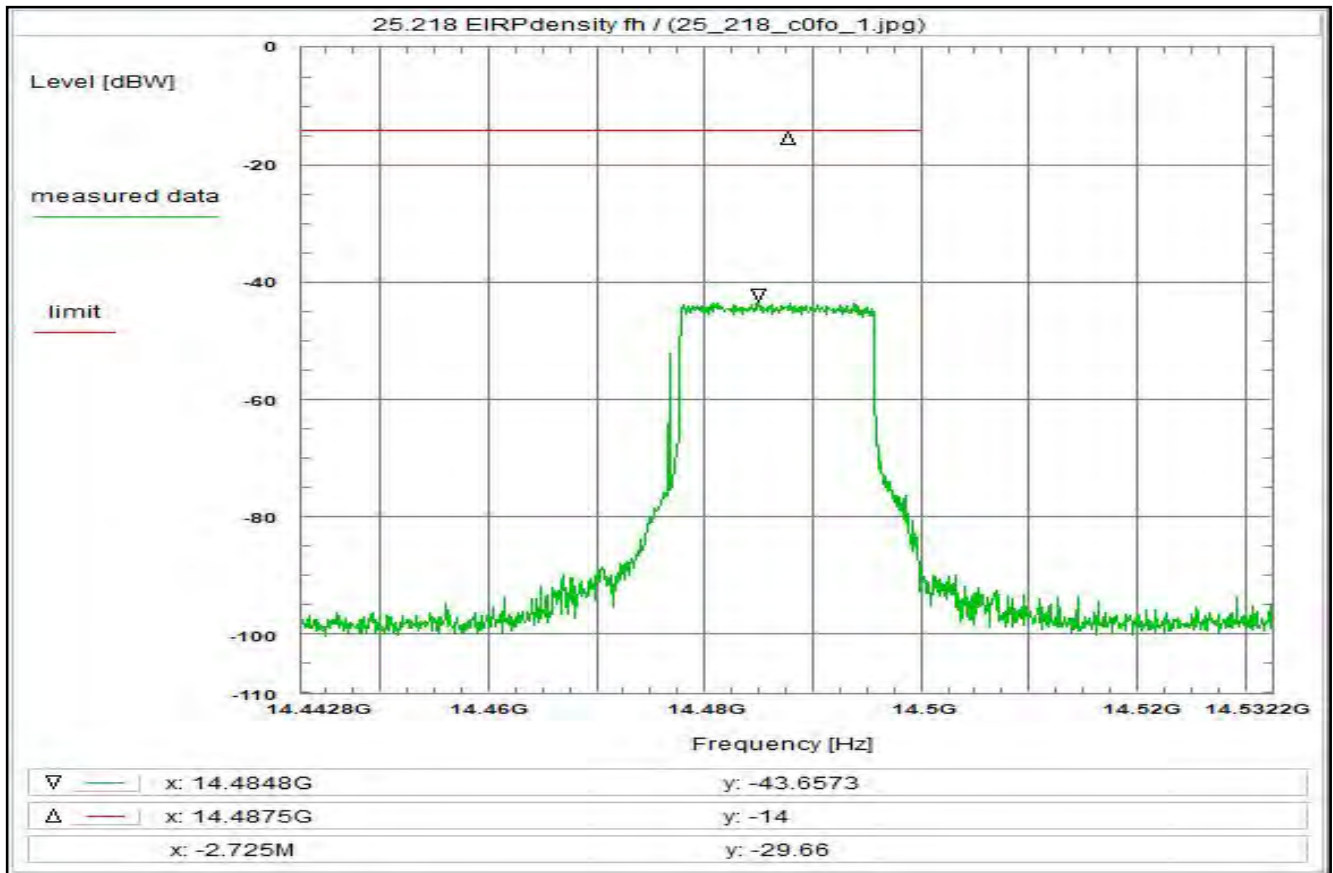

**Subclause:** 25.218 Off-axis EIRP spectral density (co-, cross-polar) within the band  
Modulated rf-carrier at the upper edge of the band (fh)  
Measurement of the wanted signal within 5° occupied bandwidth

**Limit:**  
Limit acc. to 25.218: 15-25log2° dBW;4kHz  
-ant.-pattern envelope: (-29-25log2° dBi)  
=>: -14 dBW;4kHz (copolar)  
(-10\*log N for N> 1: consideration in correction data)  
The subtraction of the terms results in a constant limit.  
The antenna gain is set to zero in the correction data for this calculation.

**Test results:**  
see plot (an explicit table was not generated)

**Operating condition of DUT:**  
operating condition 1, see test report chapter 6.4  
QPSK single carrier

**Test setup:**  
see test report chapter 7.3: cdjg

**Test equipment:**  
see test report chapter 7.x: C107, R001, W009, W065, W074

**Remark:**

**Test result: Test passed**


**Environment condition:**  
Date & Time: Wed 19/May/2021 15:34:22  
Location: CTC advanced GmbH, Laboratory RC-SYS  
Temperature: 22 °C  
Humidity: 55 %  
Voltage: 120 Vac

**Setup of measurement equipment:**  
Start frequency: 14.44275 GHz  
Stop frequency: 14.53225 GHz  
Center frequency: 14.4875 GHz  
Frequency span: 89.5 MHz  
Resolution-BW: 10 kHz  
Video-BW: 30 kHz  
Input attenuation: 10 dB  
Trace-Mode: Clear Write  
Detector-Mode: AVG

**Correction:**  
Directional coupler (W009) + 39.4 dB  
Coaxial cable (C107) + 4.0 dB  
DUT-Antenna (see under limit) + 0.0 dBi  
Test antenna + 0.0 dB  
BW correction factor (10k -> 4k) - 4.0 dB  
Atten. between HPA and feedhorn - 0.0 dB  
Freefield attenuation + 0.0 dB  
TOTAL CORRECTION: + 39.4 dB

**Remarks:**  
The envelope curves for the antenna patterns ('worst case') are used for this calculation - the actual antenna patterns have to fulfill these requirements (co- and crosspolar envelope curves).  
See the separate plot after the measurement plots, too.  
Measurement with 30 kHz resolution filter and noise averaging.

Plot No. 90

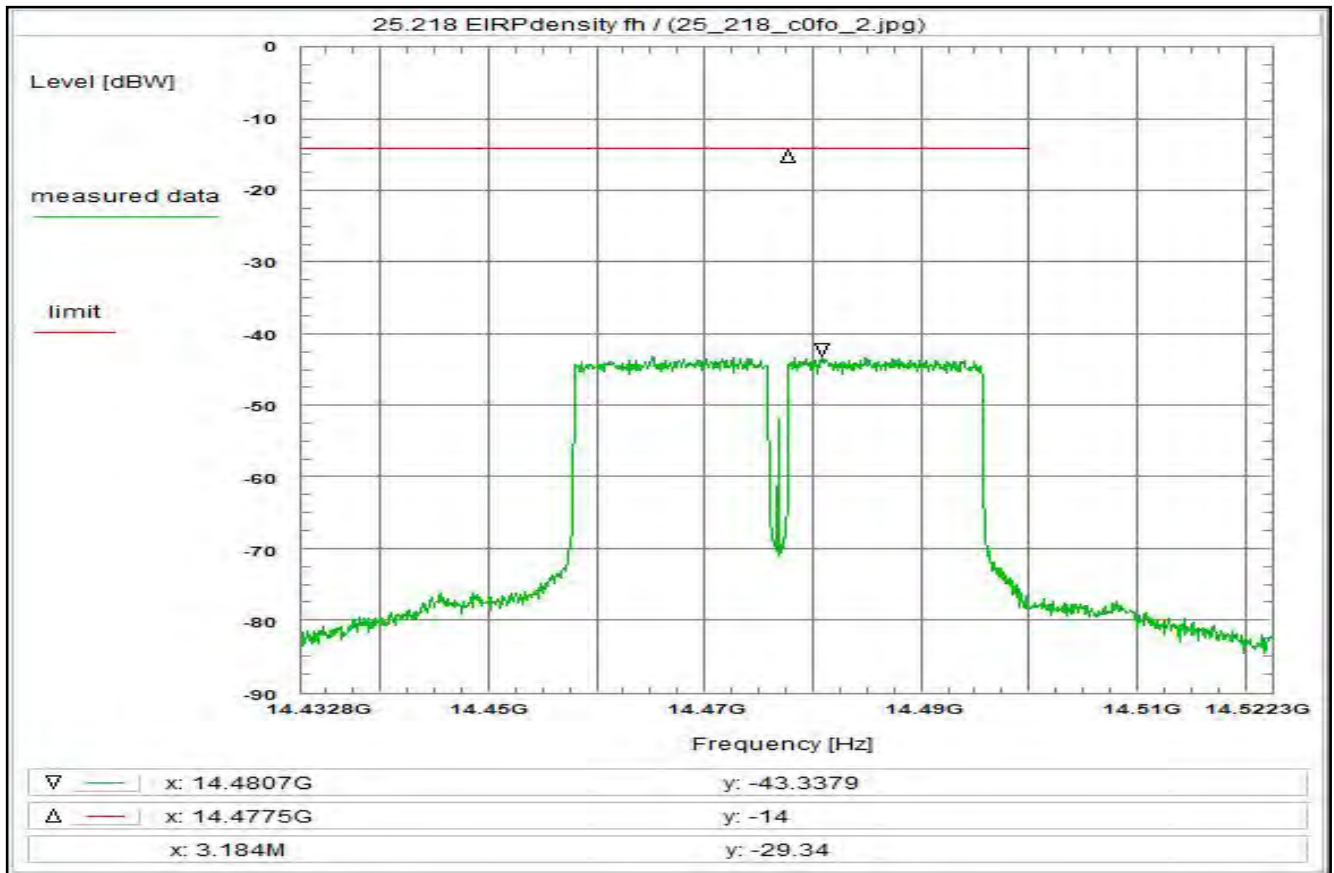


<p><b>Subclause:</b> 25.218 Off-axis EIRP spectral density (co-, cross-polar) within the band Modulated rf-carrier at the upper edge of the band (fh) Measurement of the wanted signal within 5° occupied bandwidth</p> <p><b>Limit:</b> Limit acc. to 25.218: 15-25log2° dBW;4kHz -ant.-pattern envelope: -(29-25log2° dBi) =&gt;: -14 dBW;4kHz (copolar) (-10*log N for N&gt; 1: consideration in correction data) The subtraction of the terms results in a constant limit. The antenna gain is set to zero in the correction data for this calculation.</p> <p><b>Test results:</b> see plot (an explicit table was not generated)</p> <p><b>Operating condition of DUT:</b> operating condition 4, see test report chapter 6.4 QPSK dual carrier</p> <p><b>Test setup:</b> see test report chapter 7.3: cdjg</p> <p><b>Test equipment:</b> see test report chapter 7.x: C107, R001, W009, W065, W074</p> <p><b>Remark:</b></p> <p><b>Test result:</b> Test passed</p>	<p><b>Environment condition:</b> Date &amp; Time: Wed 19/May/2021 15:35:29 Location: CTC advanced GmbH, Laboratory RC-SYS Temperature: 22 °C Humidity: 55 % Voltage: 120 Vac</p> <p><b>Setup of measurement equipment:</b> Start frequency: 14.43275 GHz Stop frequency: 14.52225 GHz Center frequency: 14.4775 GHz Frequency span: 89.5 MHz Resolution-BW: 10 kHz Video-BW: 30 kHz Input attenuation: 10 dB Trace-Mode: Clear Write Detector-Mode: AVG</p> <p><b>Correction:</b> Directional coupler (W009) + 39.4 dB Coaxial cable (C107) + 4.0 dB DUT-Antenna (see under limit) + 0.0 dBi Test antenna + 0.0 dB BW correction factor (10k -&gt; 4k) - 4.0 dB Atten. between HPA and feedhorn - 0.0 dB Freefield attenuation + 0.0 dB TOTAL CORRECTION: + 39.4 dB</p> <p><b>Remarks:</b> The envelope curves for the antenna patterns ('worst case') are used for this calculation - the actual antenna patterns have to fulfill these requirements (co- and crosspolar envelope curves). See the separate plot after the measurement plots, too. Measurement with 30 kHz resolution filter and noise averaging.</p>
--	--


### **3 Measurement results, Spurious emissions 30MHz - 18 GHz**

This Chapter 3 consists of 2 pages including this page.

Plot No. 1: 30 MHz – 18 GHz, antenna vertical / horizontal Tx

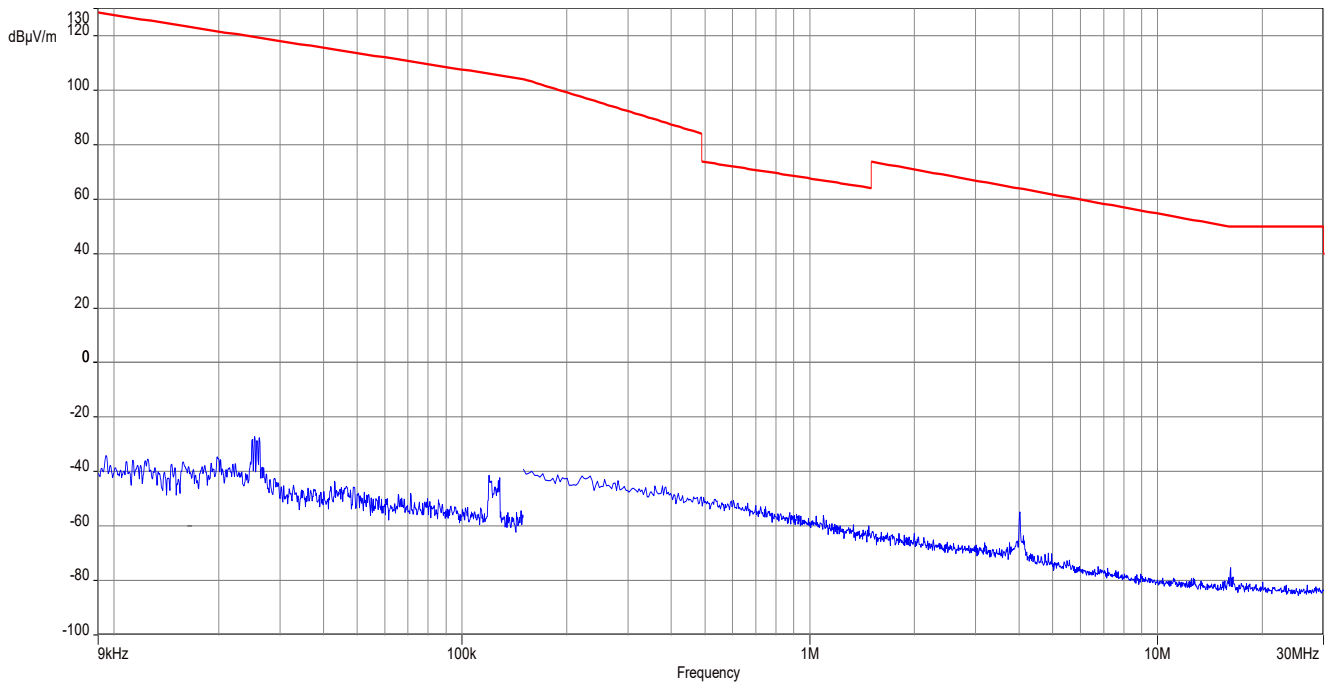

Plot No. 2: 30 MHz – 18 GHz, antenna vertical / horizontal Tx

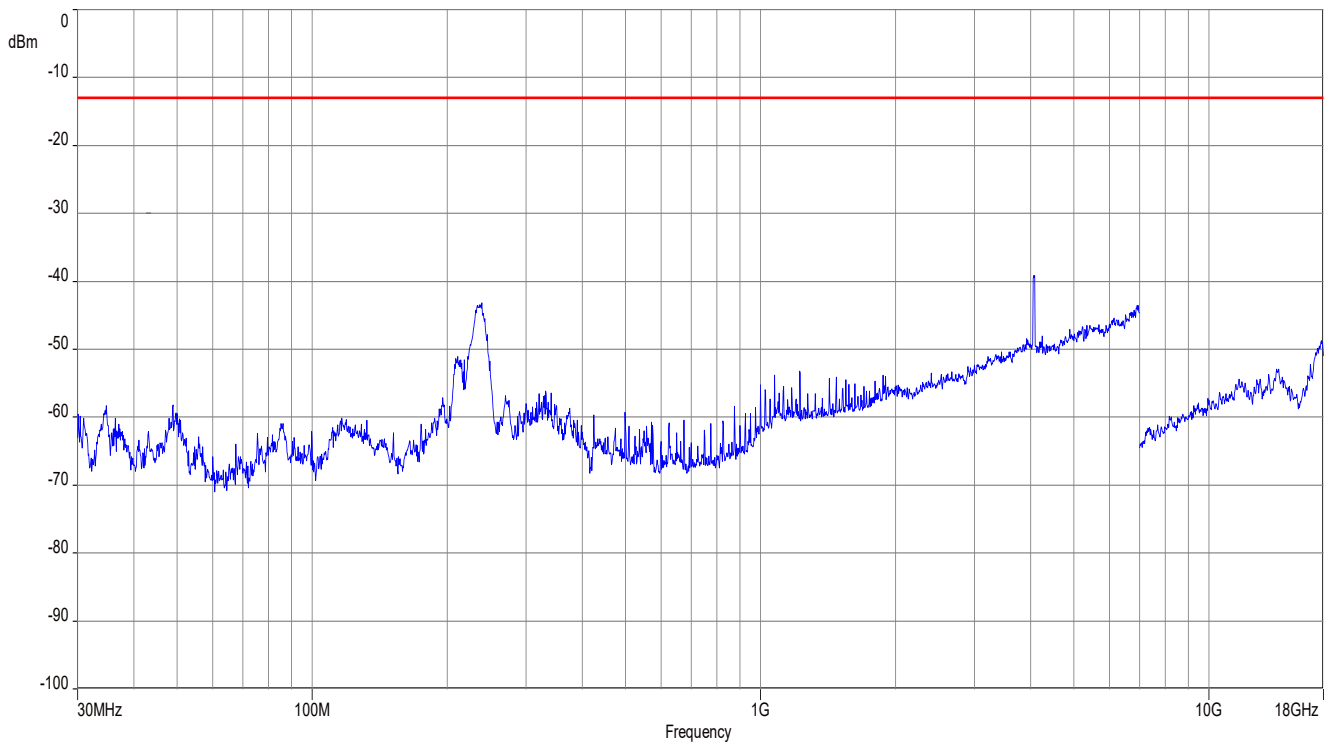

#### 4 Document history

Version	Applied changes	Date of release
	Initial release - DRAFT	2021-03-05