

S

T

S

L

A

B



# RADIO TEST REPORT

Report No: STS1910041W01


Issued for

FrSky Electronic Co., Ltd.

F-4, Building C, Zhongxiu Technology Park, No.3 Yuanxi  
Road, Wuxi, 214125, Jiangsu, China

<b>Product Name:</b>	2.4G Receiver
<b>Brand Name:</b>	FrSky
<b>Model Name:</b>	Archer GR8
<b>Series Model:</b>	Archer GR6, Archer R8, Archer R6, Archer R4, Archer R10 Pro, Archer SR10 Pro, Archer SR8 Pro, Archer S6, Archer RS, Archer M+
<b>FCC ID:</b>	XYFAGR24SRM
<b>Test Standard:</b>	FCC Part 15.247

Any reproduction of this document must be done in full. No single part of this document may be reproduced without permission from STS, All Test Data Presented in this report is only applicable to presented Test sample.





### TEST RESULT CERTIFICATION

Applicant's Name .....: FrSky Electronic Co., Ltd.  
 Address.....: F-4, Building C, Zhongxiu Technology Park, No.3 Yuanxi Road, Wuxi, 214125, Jiangsu, China  
 Manufacture's Name .....: FrSky Electronic Co., Ltd.  
 Address.....: F-4, Building C, Zhongxiu Technology Park, No.3 Yuanxi Road, Wuxi, 214125, Jiangsu, China

#### Product Description

Product Name .....: 2.4G Receiver  
 Brand Name .....: FrSky  
 Model Name.....: Archer GR8  
 Series Model .....: Archer GR6, Archer R8, Archer R6, Archer R4, Archer R10 Pro, Archer SR10 Pro, Archer SR8 Pro, Archer S6, Archer RS, Archer M+  
 Test Standards .....: FCC Part 15.247  
 Test Procedure.....: ANSI C63.10-2013

This device described above has been tested by STS, the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.  
 This report shall not be reproduced except in full, without the written approval of STS, this document may be altered or revised by STS, personal only, and shall be noted in the revision of the document..

#### Date of Test.....:

Date (s) of performance of tests : 17 Oct. 2019 ~ 08 Nov. 2019  
 Date of Issue .....: 08 Nov. 2019  
 Test Result .....: Pass

Testing Engineer :

(Chris Chen)

Technical Manager :

(Sunday Hu)

Authorized Signatory :

(Vita Li)





Table of Contents	Page
<b>1. SUMMARY OF TEST RESULTS</b>	<b>6</b>
1.1 TEST FACTORY	7
1.2 MEASUREMENT UNCERTAINTY	7
<b>2. GENERAL INFORMATION</b>	<b>8</b>
2.1 GENERAL DESCRIPTION OF THE EUT	8
2.2 DESCRIPTION OF THE TEST MODES	10
2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	11
2.4 DESCRIPTION OF NECESSARY ACCESSORIES AND SUPPORT UNITS	12
2.5 EQUIPMENTS LIST	13
<b>3. EMC EMISSION TEST</b>	<b>14</b>
3.1 CONDUCTED EMISSION MEASUREMENT	14
3.2 RADIATED EMISSION MEASUREMENT	18
<b>4. CONDUCTED SPURIOUS &amp; BAND EDGE EMISSION</b>	<b>33</b>
4.1 LIMIT	33
4.2 TEST PROCEDURE	33
4.3 TEST SETUP	33
4.4 EUT OPERATION CONDITIONS	33
4.5 TEST RESULTS	34
<b>5. NUMBER OF HOPPING CHANNEL</b>	<b>44</b>
5.1 LIMIT	44
5.2 TEST PROCEDURE	44
5.3 TEST SETUP	44
5.4 EUT OPERATION CONDITIONS	44
5.5 TEST RESULTS	45
<b>6. AVERAGE TIME OF OCCUPANCY</b>	<b>47</b>
6.1 LIMIT	47
6.2 TEST PROCEDURE	47
6.3 TEST SETUP	47
6.4 EUT OPERATION CONDITIONS	47
6.5 TEST RESULTS	48
<b>7. HOPPING CHANNEL SEPARATION MEASUREMENT</b>	<b>60</b>
7.1 LIMIT	60
7.2 TEST PROCEDURE	60



Table of Contents	Page
7.3 TEST SETUP	60
7.4 EUT OPERATION CONDITIONS	60
7.5 TEST RESULTS	61
<b>8. BANDWIDTH TEST</b>	<b>65</b>
8.1 LIMIT	65
8.2 TEST PROCEDURE	65
8.3 TEST SETUP	65
8.4 EUT OPERATION CONDITIONS	65
8.5 TEST RESULTS	66
<b>9. OUTPUT POWER TEST</b>	<b>70</b>
9.1 LIMIT	70
9.2 TEST PROCEDURE	70
9.3 TEST SETUP	70
9.4 EUT OPERATION CONDITIONS	70
9.5 TEST RESULTS	71
<b>10. ANTENNA REQUIREMENT</b>	<b>72</b>
10.1 STANDARD REQUIREMENT	72
10.2 EUT ANTENNA	72



**Revision History**

Rev.	Issue Date	Report NO.	Effect Page	Contents
00	08 Nov. 2019	STS1910041W01	ALL	Initial Issue





## 1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:  
KDB 558074 D01 15.247 Meas Guidance v05r02

FCC Part 15.247, Subpart C			
Standard Section	Test Item	Judgment	Remark
15.207	Conducted Emission	PASS	--
15.247(a)(1)	Hopping Channel Separation	PASS	--
15.247(a)(1)&(b)(1)	Output Power	PASS	--
15.209	Radiated Spurious Emission	PASS	--
15.247(d)	Conducted Spurious & Band Edge Emission	PASS	--
15.247(a)(iii)	Number of Hopping Frequency	PASS	--
15.247(a)(iii)	Dwell Time	PASS	--
15.247(a)(1)	Bandwidth	PASS	--
15.205	Restricted bands of operation	PASS	--
Part 15.247(d)/part 15.209(a)	Band Edge Emission	PASS	--
15.203	Antenna Requirement	PASS	--

**NOTE:**

(1) "N/A" denotes test is not applicable in this Test Report

(2) All tests are according to ANSI C63.10-2013



## 1.1 TEST FACTORY

SHENZHEN STS TEST SERVICES CO., LTD

Add. : A 1/F, Building B, Zhuoke Science Park, No.190 Chongqing Road, HepingShequ, Fuyong Sub-District, Bao'an District, Shenzhen, Guang Dong, China

FCC test Firm Registration Number: 625569

IC test Firm Registration Number: 12108A

A2LA Certificate No.: 4338.01

## 1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement  $y \pm U$ , where expanded uncertainty  $U$  is based on a standard uncertainty multiplied by a coverage factor of  $k=2$ , providing a level of confidence of approximately **95 %**.

No.	Item	Uncertainty
1	RF output power, conducted	$\pm 0.68\text{dB}$
2	Unwanted Emissions, conducted	$\pm 2.988\text{dB}$
3	All emissions, radiated 30-200MHz	$\pm 6.7\text{dB}$
4	All emissions, radiated 200MHz-1GHz	$\pm 5.5\text{dB}$
5	All emissions, radiated >1G	$\pm 5.8\text{dB}$
6	Conducted Emission (9KHz-150KHz)	$\pm 4.43\text{dB}$
7	Conducted Emission (150KHz-30MHz)	$\pm 5\text{dB}$



## 2. GENERAL INFORMATION

### 2.1 GENERAL DESCRIPTION OF THE EUT

Product Name	2.4G Receiver
Trade Name	FrSky
Model Name	Archer GR8
Series Model	Archer GR6, Archer R8, Archer R6, Archer R4, Archer R10 Pro, Archer SR10 Pro, Archer SR8 Pro, Archer S6, Archer RS, Archer M+
Model Difference	Only different in model name, appearance and size.
Channel List	Please refer to the Note 2.
Frequency	2404.875 – 2473.8778 MHz
Modulation	FSK
Power Rating	Input: DC3.5V~10V(Normal:DC 3.7V)
Hardware version number	REV1.0
Software version number	V1.0
Connecting I/O Port(s)	Please refer to the User's Manual

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual. The 2 Antenna can not transmit simultaneously. The EUT not support MIMO mode.





2.

Channel List					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2404.875	17	2428.585	33	2452.585
2	2406.085	18	2430.085	34	2454.085
3	2407.585	19	2431.585	35	2455.585
4	2409.085	20	2433.085	36	2457.685
5	2410.585	21	2434.585	37	2458.585
6	2412.085	22	2436.085	38	2460.085
7	2413.585	23	2437.585	39	2461.585
8	2415.085	24	2439.075	40	2463.085
9	2416.585	25	2440.585	41	2464.585
10	2418.685	26	2442.085	42	2466.085
11	2419.585	27	2443.585	43	2467.585
12	2421.085	28	2445.085	44	2469.085
13	2422.585	29	2446.585	45	2470.585
14	2424.085	30	2448.085	46	2472.085
15	2425.585	31	2449.585	47	2473.8778
16	2427.085	32	2451.085		

3.

Ant.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)	NOTE
1	FrSky	Archer GR8	Dipole	N/A	ANT A=2 dBi ANT B=2 dBi	Antenna



## 2.2 DESCRIPTION OF THE TEST MODES

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Worst Mode	Description	Modulation
Mode 1	TX CH01	FSK
Mode 2	TX CH24	FSK
Mode 3	TX CH47	FSK

Note:

(1) The measurements are performed at all Bit Rate of Transmitter, the worst data was reported

(2) We have be tested for all avaiable U.S. voltage and frequencies(For 120V,50/60Hz and 240V, 50/60Hz) for which the device is capable of operation, and the worst case of 120V/ 60Hz is shown in the report


For AC Conducted Emission

Test Case	
AC Conducted Emission	Mode 4: Keeping TX


### 2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

During testing channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product power parameters of FHSS

#### Radiated Spurious Emission Test

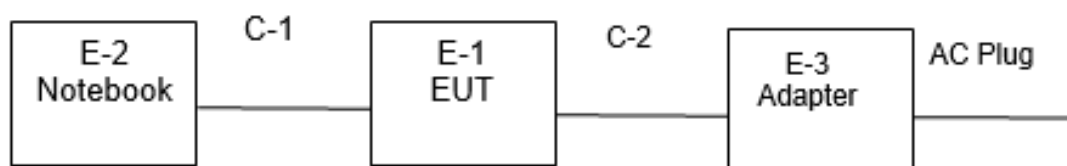

#### Conducted Emission Test

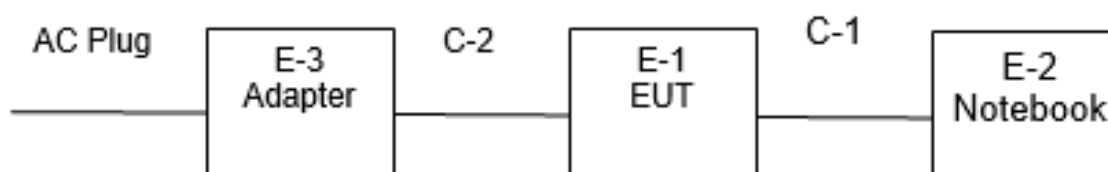



## 2.4 DESCRIPTION OF NECESSARY ACCESSORIES AND SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

### Necessary accessories

Item	Equipment	Mfr/Brand	Model/Type No.	Serial No.	Note
E-3	Adapter	LITEON	PA-1650-86	N/A	N/A
C-2	DC Cable	N/A	110cm	N/A	N/A

### Support units

Item	Equipment	Mfr/Brand	Model/Type No.	Serial No.	Note
E-2	Notebook	DELL	VOSTRO.3800	N/A	N/A
C-1	USB Cable	N/A	100cm	N/A	N/A

#### Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.
- (3) “YES” is means “shielded” “with core”; “NO” is means “unshielded” “without core”.



## 2.5 EQUIPMENTS LIST

### Radiation Test equipment

Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
Test Receiver	R&S	ESCI	101427	2019.7.29	2020.7.28
Signal Analyzer	Agilent	N9020A	MY51110105	2019.03.02	2020.03.01
Active loop Antenna	ZHINAN	ZN30900C	16035	2018.03.11	2021.03.10
Bilog Antenna	TESEQ	CBL6111D	34678	2017.11.02	2020.11.1
Horn Antenna	SCHWARZBECK	BBHA 9120D(1201)	9120D-1343	2018.10.19	2021.10.18
SHF-EHF Horn Antenna (18G-40GHz)	A-INFO	LB-180400-KF	J211020657	2018.03.11	2021.03.10
Pre-Amplifier(0.1M-3G Hz)	EM	EM330	060665	2019.10.9	2020.10.8
Pre-Amplifier (1G-18GHz)	SKET	LNPA-01018G-45	SK201808090 1	2019.10.12	2020.10.11
Temperature & Humidity	HH660	Mieo	N/A	2019.10.12	2020.10.11
turn table	EM	SC100_1	60531	N/A	N/A
Antenna mast	EM	SC100	N/A	N/A	N/A
Test SW	FARAD	EZ-EMC(Ver.STSLAB-03A1 RE)			

### Conduction Test equipment

Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
Test Receiver	R&S	ESCI	101427	2019.7.29	2020.7.28
LISN	R&S	ENV216	101242	2019.10.9	2020.10.8
LISN	EMCO	3810/2NM	23625	2019.10.9	2020.10.8
Temperature & Humidity	HH660	Mieo	N/A	2019.10.12	2020.10.11
Test SW	FARAD	EZ-EMC(Ver.STSLAB-03A1 CE)			

### RF Connected Test

Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
USB RF power sensor	DARE	RPR3006W	15I00041SNO03	2019.10.9	2020.10.8
Signal Analyzer	Agilent	N9020A	MY49100060	2019.10.9	2020.10.8
Temperature & Humidity	HH660	Mieo	N/A	2019.10.12	2020.10.11
Test SW	FARAD	LZ-RF /LzRf-3A3			



### 3. EMC EMISSION TEST

#### 3.1 CONDUCTED EMISSION MEASUREMENT

##### 3.1.1 POWER LINE CONDUCTED EMISSION LIMITS

Operating frequency band. In case the emission fall within the restricted band specified on Part 207(a) limit in the table below has to be followed.

FREQUENCY (MHz)	Conducted Emissionlimit (dBUV)	
	Quasi-peak	Average
0.15 -0.5	66 - 56 *	56 - 46 *
0.50 -5.0	56.00	46.00
5.0 -30.0	60.00	50.00

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " \* " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.


The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

### 3.1.2 TEST PROCEDURE

- a. The EUT was 0.8 meters from the horizontal ground plane and 0.4 meters from the vertical ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

### 3.1.3 TEST SETUP

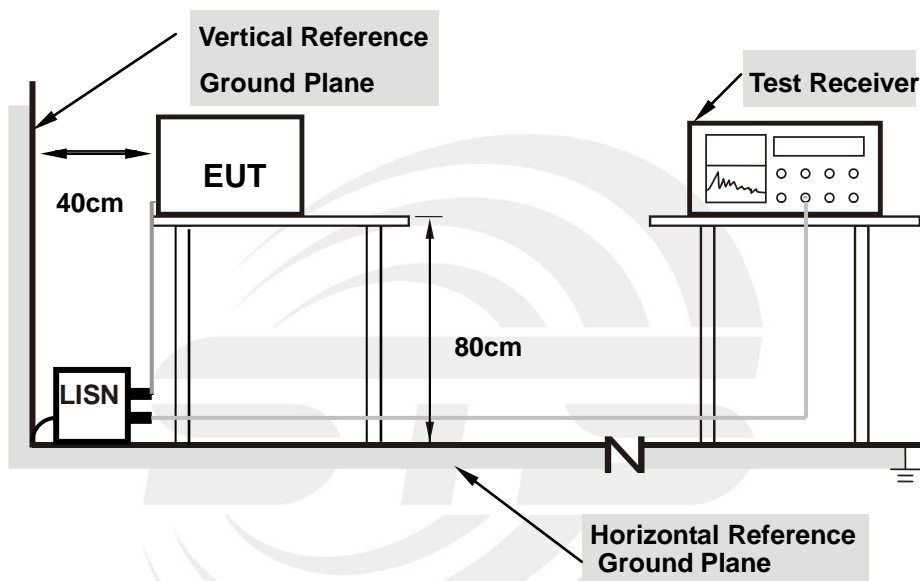

- Note:**
- 1. Support units were connected to second LISN.
  - 2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

### 3.1.4 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.




3.1.5 TEST RESULT

Temperature:	25.2(C)	Relative Humidity:	53%RH
Test Voltage:	AC 120V/60Hz	Phase:	L
Test Mode:	Mode 4		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1540	14.36	20.59	34.95	65.78	-30.83	QP
2	0.1540	0.11	20.59	20.70	55.78	-35.08	AVG
3	0.4860	21.17	20.03	41.20	56.24	-15.04	QP
4	0.4860	5.73	20.03	25.76	46.24	-20.48	AVG
5	0.8740	15.54	20.11	35.65	56.00	-20.35	QP
6	0.8740	2.85	20.11	22.96	46.00	-23.04	AVG
7	3.6780	12.50	20.25	32.75	56.00	-23.25	QP
8	3.6780	0.15	20.25	20.40	46.00	-25.60	AVG
9	7.5860	13.90	20.39	34.29	60.00	-25.71	QP
10	7.5860	1.98	20.39	22.37	50.00	-27.63	AVG
11	14.2980	9.97	20.72	30.69	60.00	-29.31	QP
12	14.2980	-1.93	20.72	18.79	50.00	-31.21	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Margin = Result (Result =Reading + Factor )–Limit

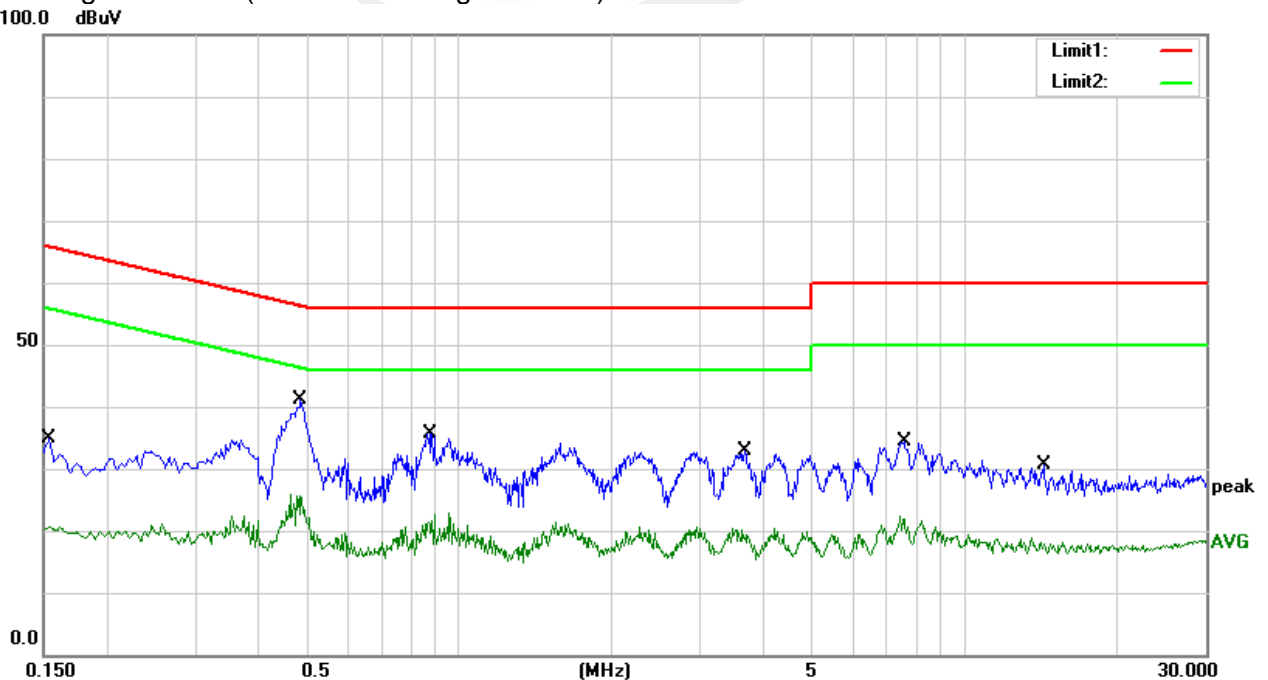






Temperature:	25.2(C)	Relative Humidity:	53%RH
Test Voltage:	AC 120V/60Hz	Phase:	N
Test Mode:	Mode 4		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1580	15.70	20.58	36.28	65.57	-29.29	QP
2	0.1580	0.02	20.58	20.60	55.57	-34.97	AVG
3	0.4900	18.04	20.02	38.06	56.17	-18.11	QP
4	0.4900	7.05	20.02	27.07	46.17	-19.10	AVG
5	1.5780	12.93	19.71	32.64	56.00	-23.36	QP
6	1.5780	-0.18	19.71	19.53	46.00	-26.47	AVG
7	2.8580	12.12	20.14	32.26	56.00	-23.74	QP
8	2.8580	0.16	20.14	20.30	46.00	-25.70	AVG
9	4.8980	11.17	20.40	31.57	56.00	-24.43	QP
10	4.8980	0.21	20.40	20.61	46.00	-25.39	AVG
11	8.4380	10.51	20.45	30.96	60.00	-29.04	QP
12	8.4380	-1.52	20.45	18.93	50.00	-31.07	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Margin = Result (Result =Reading + Factor )–Limit

100.0 dBuV

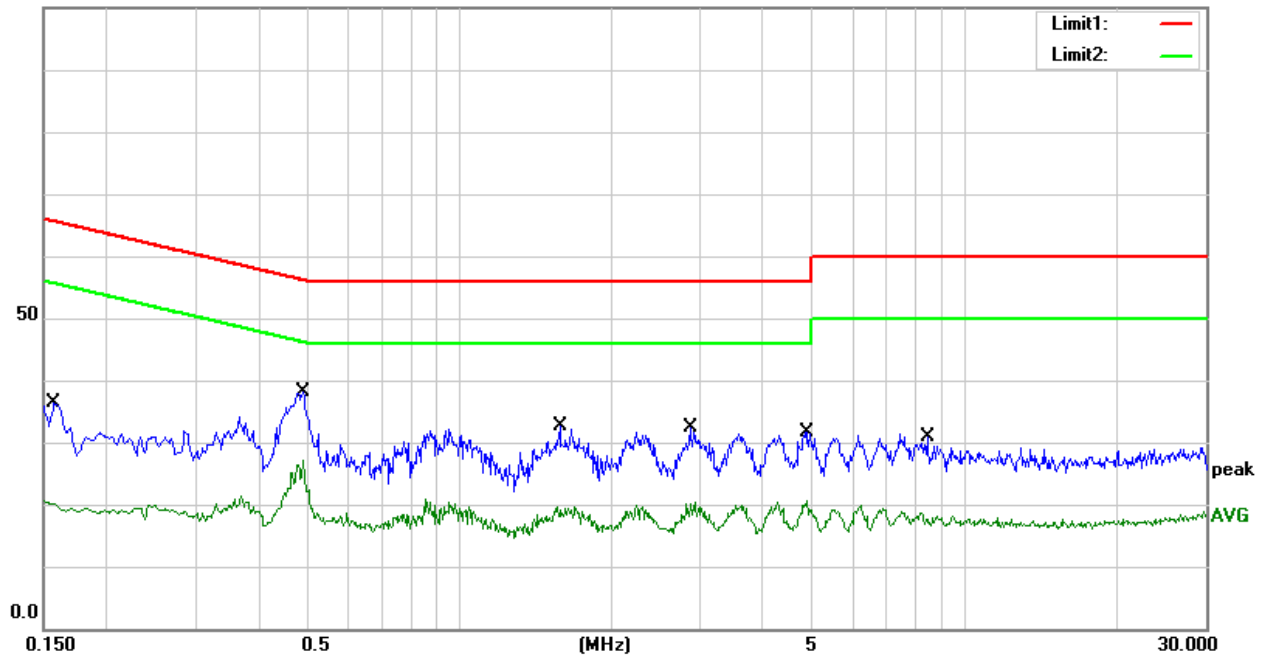



### 3.2 RADIATED EMISSION MEASUREMENT

#### 3.2.1 RADIATED EMISSION LIMITS

In any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the Restricted band specified on Part15.205(a)&209(a) limit in the table and according to ANSI C63.10-2013 below has to be followed

#### LIMITS OF RADIATED EMISSION MEASUREMENT (0.009MHz - 1000MHz)

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

#### LIMITS OF RADIATED EMISSION MEASUREMENT (1GHz-25 GHz)

FREQUENCY (MHz)	(dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

#### LIMITS OF RESTRICTED FREQUENCY BANDS

FREQUENCY (MHz)	FREQUENCY (MHz)	FREQUENCY (MHz)	FREQUENCY (GHz)
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	Above 38.6
13.36-13.41			



## For Radiated Emission

Spectrum Parameter	Setting
Attenuation	Auto
Detector	Peak
Start Frequency	1000 MHz(Peak )
Stop Frequency	10th carrier hamonic(Peak )
RB / VB (emission in restricted band)	PK=1MHz / 1MHz, AV=1 MHz /10 Hz

## For Band edge

Spectrum Parameter	Setting
Detector	Peak
Start/Stop Frequency	Lower Band Edge: 2300 to 2403 MHz Upper Band Edge: 2479 to 2500 MHz
RB / VB (emission in restricted band)	PK=1MHz / 1MHz, AV=1 MHz / 10 Hz

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~90kHz / RB 200Hz for PK & AV
Start ~ Stop Frequency	90kHz~110kHz / RB 200Hz for QP
Start ~ Stop Frequency	110kHz~490kHz / RB 200Hz/ RB 9kHz for PK & AV
Start ~ Stop Frequency	490kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

## 3.2.2 TEST PROCEDURE

- The measuring distance of at 3 m shall be used for measurements at frequency 0.009MHz up to 1GHz, and above 1GHz.
- The EUT was placed on the top of a rotating table 0.8 meters (above 1GHz is 1.5 m) above the ground at a 3 meter anechoic chamber test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- The height of the equipment shall be 0.8 m (above 1GHz is 1.5 m); the height of the test antenna shall vary between 1 m to 4 m. horizontal and vertical polarizations of the antenna are set to make the measurement.
- The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then QuasiPeak detector mode re-measured.
- If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

Note:


Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

## 3.2.3 DEVIATION FROM TEST STANDARD


No deviation

### 3.2.4 TESTSETUP


#### (A) Radiated Emission Test-Up Frequency Below 30MHz

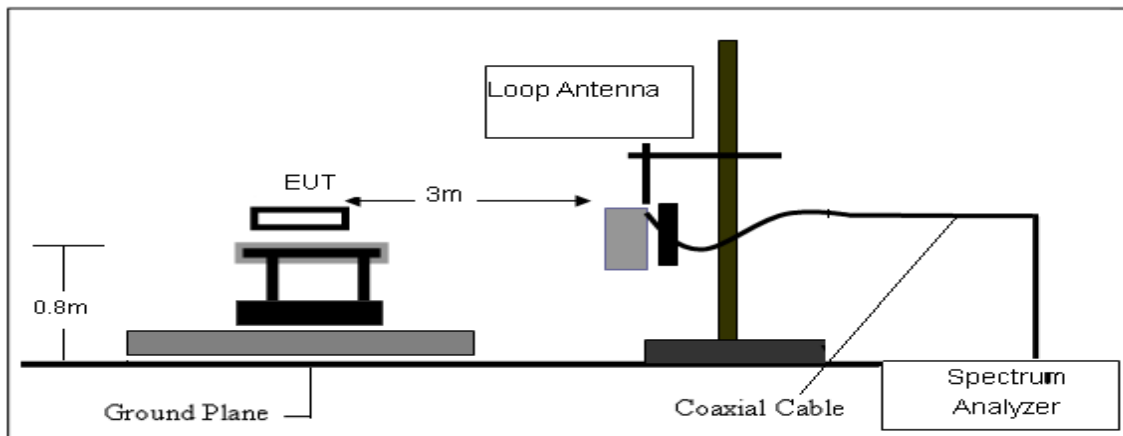

#### (B) Radiated Emission Test-Up Frequency 30MHz~1GHz

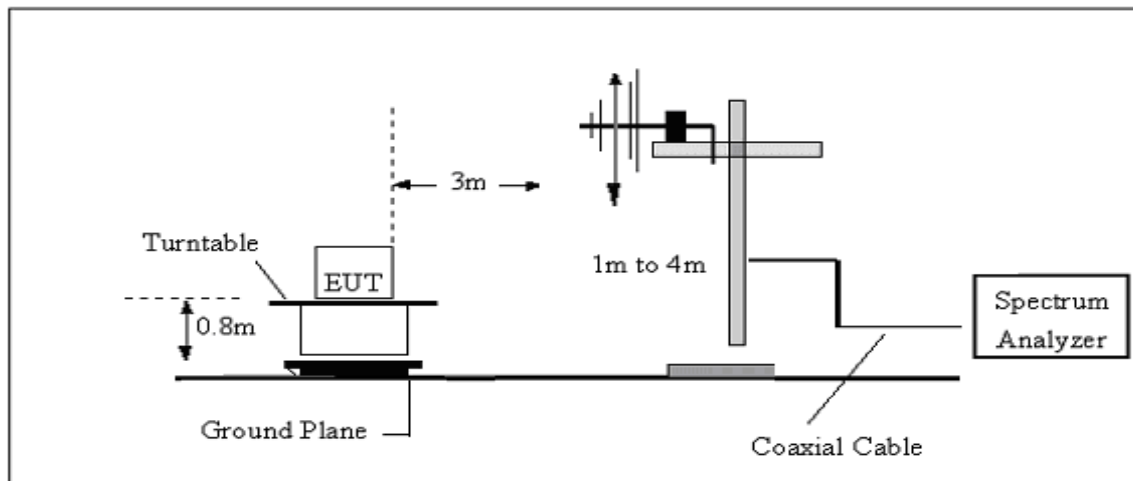

#### (C) Radiated Emission Test-Up Frequency Above 1GHz

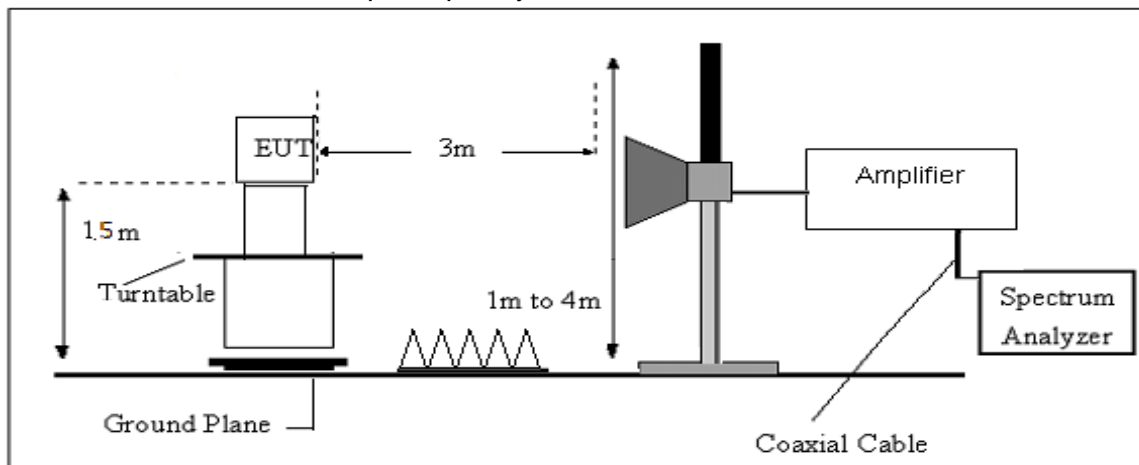

### 3.2.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.



### 3.2.6 FIELD STRENGTH CALCULATION

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CL - AG$$

Where

FS = Field Strength

CL = Cable Attenuation Factor (Cable Loss)

RA = Reading Amplitude

AG = Amplifier Gain

AF = Antenna Factor

For example

Frequency (MHz)	FS (dB $\mu$ V/m)	RA (dB $\mu$ V/m)	AF (dB)	CL (dB)	AG (dB)	Factor (dB)
300	40	58.1	12.2	1.6	31.9	-18.1

$$\text{Factor} = \text{AF} + \text{CL} - \text{AG}$$





## 3.2.7 TEST RESULTS

(9KHz-30MHz)

Temperature:	25.7(C)	Relative Humidity:	60%RH
Test Voltage:	DC 3.7V	Test Mode:	TX Mode

Freq. (MHz)	Reading (dBuV/m)	Limit (dBuV/m)	Margin (dB)	State P/F	Test Result
--	--	--	--	--	PASS
--	--	--	--	--	PASS

## Note:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor =  $40 \log(\text{specific distance}/\text{test distance})$ (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.






(30MHz-1000MHz)

Temperature:	25.7(C)	Relative Humidity:	60%RH
Test Voltage:	DC 3.7V	Phase:	Horizontal
Test Mode:	Mode 1/2/3(Mode 1 worst mode)		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	31.9400	29.34	-13.86	15.48	40.00	-24.52	QP
2	332.6400	30.35	-13.62	16.73	46.00	-29.27	QP
3	581.9300	30.41	-5.78	24.63	46.00	-21.37	QP
4	740.0400	30.43	-2.11	28.32	46.00	-17.68	QP
5	869.0500	30.84	-0.52	30.32	46.00	-15.68	QP
6	951.5000	30.50	1.62	32.12	46.00	-13.88	QP

Remark:

1. Margin = Result (Result =Reading + Factor )-Limit

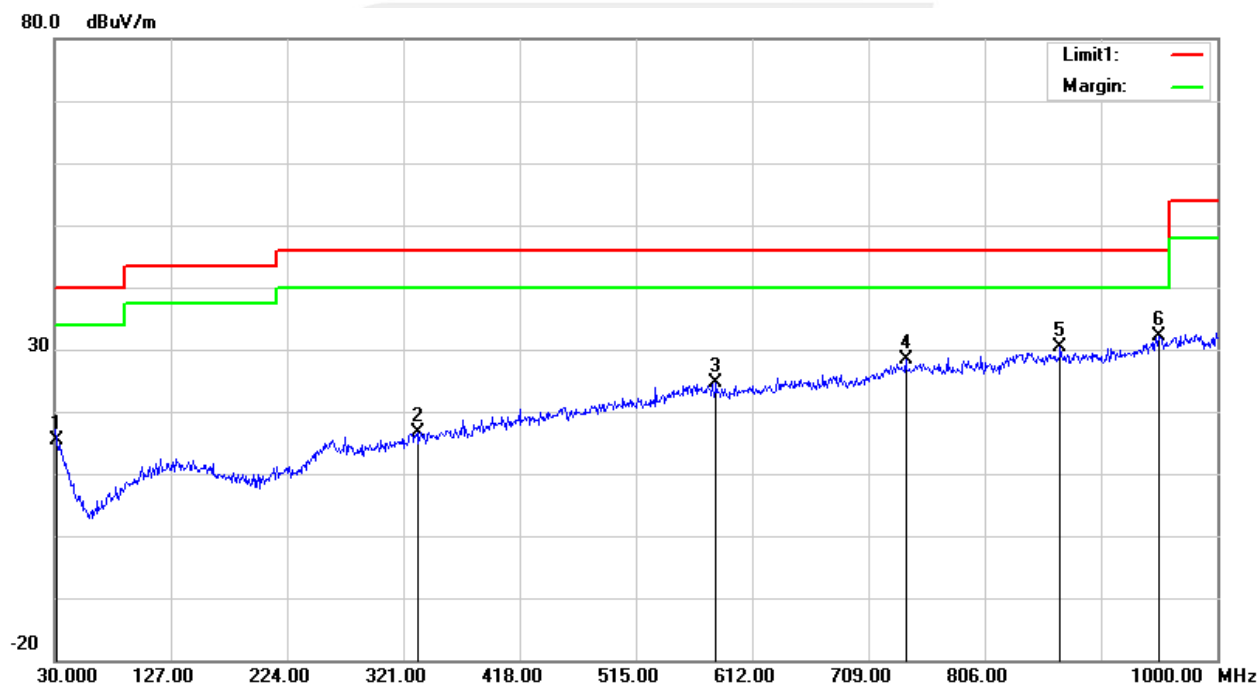




Temperature:	25.7(C)	Relative Humidity:	60%RH
Test Voltage:	DC 3.7V	Phase:	Vertical
Test Mode:	Mode 1/2/3(Mode 1 worst mode)		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	34.8500	30.15	-15.34	14.81	40.00	-25.19	QP
2	260.8600	29.88	-14.78	15.10	46.00	-30.90	QP
3	418.9700	30.53	-10.14	20.39	46.00	-25.61	QP
4	582.9000	30.12	-5.78	24.34	46.00	-21.66	QP
5	735.1900	30.60	-2.28	28.32	46.00	-17.68	QP
6	946.6500	30.01	1.52	31.53	46.00	-14.47	QP

Remark:

1. Margin = Result (Result =Reading + Factor )–Limit

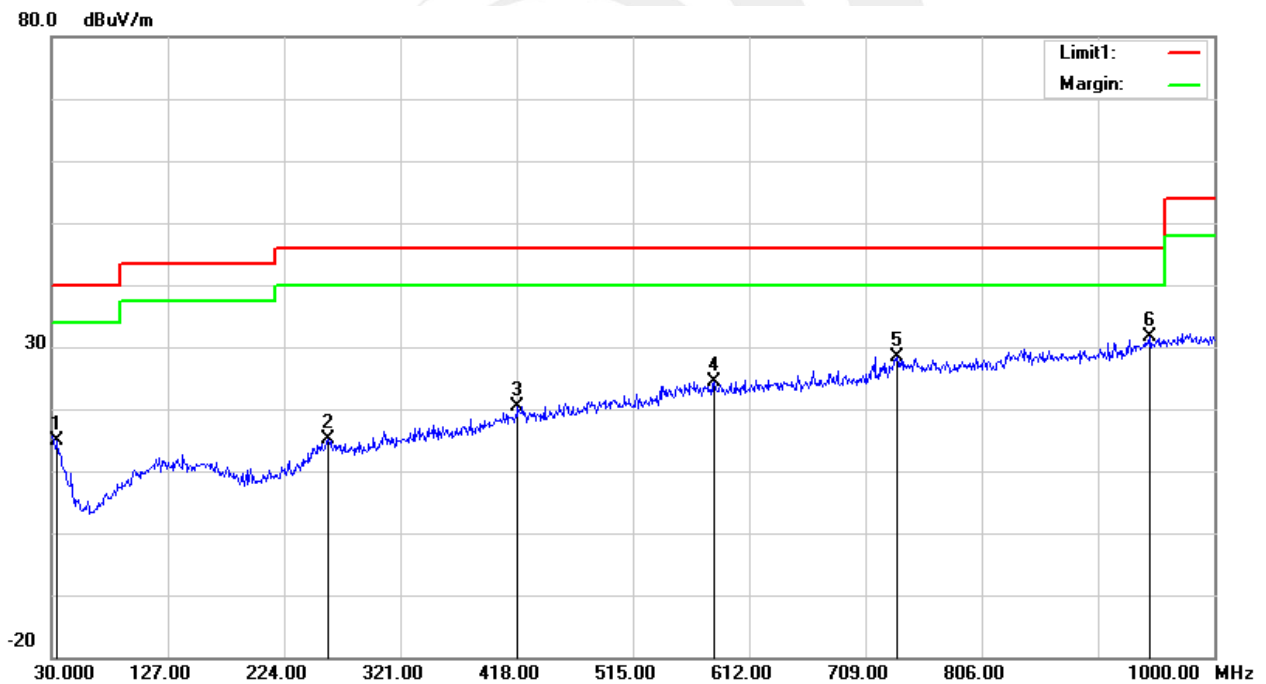





(1GHz~25GHz) Restricted band and Spurious emission Requirements

Ant A

Frequency (MHz)	Meter Reading (dBμV)	Amplifier ( dB )	Loss ( dB )	Antenna Factor ( dB/m )	Orrected Factor ( dB )	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type	Comment
Low Channel (2404.875 MHz)										
3268.56	61.58	44.70	6.70	28.20	-9.80	51.78	74.00	-22.22	PK	Vertical
3268.56	51.64	44.70	6.70	28.20	-9.80	41.84	54.00	-12.16	AV	Vertical
3268.59	61.60	44.70	6.70	28.20	-9.80	51.80	74.00	-22.20	PK	Horizontal
3268.59	50.95	44.70	6.70	28.20	-9.80	41.15	54.00	-12.85	AV	Horizontal
4810.13	58.86	44.20	9.04	31.60	-3.56	55.30	74.00	-18.70	PK	Vertical
4810.13	49.71	44.20	9.04	31.60	-3.56	46.15	54.00	-7.85	AV	Vertical
4810.15	59.06	44.20	9.04	31.60	-3.56	55.50	74.00	-18.50	PK	Horizontal
4810.15	50.41	44.20	9.04	31.60	-3.56	46.85	54.00	-7.15	AV	Horizontal
5366.11	49.34	44.20	9.86	32.00	-2.34	47.00	74.00	-27.00	PK	Vertical
5366.11	39.91	44.20	9.86	32.00	-2.34	37.57	54.00	-16.43	AV	Vertical
5366.26	48.03	44.20	9.86	32.00	-2.34	45.69	74.00	-28.31	PK	Horizontal
5366.26	39.20	44.20	9.86	32.00	-2.34	36.86	54.00	-17.14	AV	Horizontal
7214.43	53.71	43.50	11.40	35.50	3.40	57.11	74.00	-16.89	PK	Vertical
7214.43	43.96	43.50	11.40	35.50	3.40	47.36	54.00	-6.64	AV	Vertical
7214.34	54.91	43.50	11.40	35.50	3.40	58.31	74.00	-15.69	PK	Horizontal
7214.34	44.62	43.50	11.40	35.50	3.40	48.02	54.00	-5.98	AV	Horizontal
Middle Channel (2439.075 MHz)										
3262.17	61.59	44.70	6.70	28.20	-9.80	51.79	74.00	-22.21	PK	Vertical
3262.17	50.52	44.70	6.70	28.20	-9.80	40.72	54.00	-13.28	AV	Vertical
3262.07	62.27	44.70	6.70	28.20	-9.80	52.47	74.00	-21.53	PK	Horizontal
3262.07	50.53	44.70	6.70	28.20	-9.80	40.73	54.00	-13.27	AV	Horizontal
4878.49	58.24	44.20	9.04	31.60	-3.56	54.68	74.00	-19.32	PK	Vertical
4878.49	49.21	44.20	9.04	31.60	-3.56	45.65	54.00	-8.35	AV	Vertical
4878.59	59.45	44.20	9.04	31.60	-3.56	55.89	74.00	-18.11	PK	Horizontal
4878.59	49.98	44.20	9.04	31.60	-3.56	46.42	54.00	-7.58	AV	Horizontal
5355.53	48.40	44.20	9.86	32.00	-2.34	46.06	74.00	-27.94	PK	Vertical
5355.53	40.32	44.20	9.86	32.00	-2.34	37.98	54.00	-16.02	AV	Vertical
5355.42	47.66	44.20	9.86	32.00	-2.34	45.32	74.00	-28.68	PK	Horizontal
5355.42	38.89	44.20	9.86	32.00	-2.34	36.55	54.00	-17.45	AV	Horizontal
7317.92	54.53	43.50	11.40	35.50	3.40	57.93	74.00	-16.07	PK	Vertical
7317.92	44.31	43.50	11.40	35.50	3.40	47.71	54.00	-6.29	AV	Vertical
7318.16	53.94	43.50	11.40	35.50	3.40	57.34	74.00	-16.66	PK	Horizontal
7318.16	43.69	43.50	11.40	35.50	3.40	47.09	54.00	-6.91	AV	Horizontal



High Channel (2473.878 MHz)										
3255.72	61.69	44.70	6.70	28.20	-9.80	51.89	74.00	-22.11	PK	Vertical
3255.72	50.69	44.70	6.70	28.20	-9.80	40.89	54.00	-13.11	AV	Vertical
3255.74	60.96	44.70	6.70	28.20	-9.80	51.16	74.00	-22.84	PK	Horizontal
3255.74	50.10	44.70	6.70	28.20	-9.80	40.30	54.00	-13.70	AV	Horizontal
4946.55	59.50	44.20	9.04	31.60	-3.56	55.94	74.00	-18.06	PK	Vertical
4946.55	50.52	44.20	9.04	31.60	-3.56	46.96	54.00	-7.04	AV	Vertical
4946.51	58.75	44.20	9.04	31.60	-3.56	55.19	74.00	-18.81	PK	Horizontal
4946.51	50.38	44.20	9.04	31.60	-3.56	46.82	54.00	-7.18	AV	Horizontal
5344.84	49.21	44.20	9.86	32.00	-2.34	46.87	74.00	-27.13	PK	Vertical
5344.84	40.42	44.20	9.86	32.00	-2.34	38.08	54.00	-15.92	AV	Vertical
5344.92	48.02	44.20	9.86	32.00	-2.34	45.68	74.00	-28.32	PK	Horizontal
5344.92	38.20	44.20	9.86	32.00	-2.34	35.86	54.00	-18.14	AV	Horizontal
7419.15	54.64	43.50	11.40	35.50	3.40	58.04	74.00	-15.96	PK	Vertical
7419.15	43.61	43.50	11.40	35.50	3.40	47.01	54.00	-6.99	AV	Vertical
7419.01	54.46	43.50	11.40	35.50	3.40	57.86	74.00	-16.14	PK	Horizontal
7419.01	44.34	43.50	11.40	35.50	3.40	47.74	54.00	-6.26	AV	Horizontal





Ant B

Frequency (MHz)	Meter Reading (dBμV)	Amplifier ( dB )	Loss ( dB )	Antenna Factor ( dB/m )	Orrected Factor ( dB )	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type	Comment
Low Channel (2404.875 MHz)										
3268.75	61.44	44.70	6.70	28.20	-9.80	51.64	74.00	-22.36	PK	Vertical
3268.75	51.41	44.70	6.70	28.20	-9.80	41.61	54.00	-12.39	AV	Vertical
3268.52	61.46	44.70	6.70	28.20	-9.80	51.66	74.00	-22.34	PK	Horizontal
3268.52	50.50	44.70	6.70	28.20	-9.80	40.70	54.00	-13.30	AV	Horizontal
4810.05	59.39	44.20	9.04	31.60	-3.56	55.83	74.00	-18.17	PK	Vertical
4810.05	49.54	44.20	9.04	31.60	-3.56	45.98	54.00	-8.02	AV	Vertical
4810.26	59.20	44.20	9.04	31.60	-3.56	55.64	74.00	-18.36	PK	Horizontal
4810.26	49.96	44.20	9.04	31.60	-3.56	46.40	54.00	-7.60	AV	Horizontal
5366.13	48.14	44.20	9.86	32.00	-2.34	45.80	74.00	-28.20	PK	Vertical
5366.13	40.28	44.20	9.86	32.00	-2.34	37.94	54.00	-16.06	AV	Vertical
5366.02	47.64	44.20	9.86	32.00	-2.34	45.30	74.00	-28.70	PK	Horizontal
5366.02	38.18	44.20	9.86	32.00	-2.34	35.84	54.00	-18.16	AV	Horizontal
7214.42	54.01	43.50	11.40	35.50	3.40	57.41	74.00	-16.59	PK	Vertical
7214.42	44.24	43.50	11.40	35.50	3.40	47.64	54.00	-6.36	AV	Vertical
7214.57	53.70	43.50	11.40	35.50	3.40	57.10	74.00	-16.90	PK	Horizontal
7214.57	43.71	43.50	11.40	35.50	3.40	47.11	54.00	-6.89	AV	Horizontal
Middle Channel (2439.075 MHz)										
3262.22	61.50	44.70	6.70	28.20	-9.80	51.70	74.00	-22.30	PK	Vertical
3262.22	50.34	44.70	6.70	28.20	-9.80	40.54	54.00	-13.46	AV	Vertical
3262.22	62.22	44.70	6.70	28.20	-9.80	52.42	74.00	-21.58	PK	Horizontal
3262.22	49.91	44.70	6.70	28.20	-9.80	40.11	54.00	-13.89	AV	Horizontal
4878.53	59.51	44.20	9.04	31.60	-3.56	55.95	74.00	-18.05	PK	Vertical
4878.53	49.79	44.20	9.04	31.60	-3.56	46.23	54.00	-7.77	AV	Vertical
4878.71	58.74	44.20	9.04	31.60	-3.56	55.18	74.00	-18.82	PK	Horizontal
4878.71	49.97	44.20	9.04	31.60	-3.56	46.41	54.00	-7.59	AV	Horizontal
5355.43	49.18	44.20	9.86	32.00	-2.34	46.84	74.00	-27.16	PK	Vertical
5355.43	39.33	44.20	9.86	32.00	-2.34	36.99	54.00	-17.01	AV	Vertical
5355.41	48.28	44.20	9.86	32.00	-2.34	45.94	74.00	-28.06	PK	Horizontal
5355.41	38.76	44.20	9.86	32.00	-2.34	36.42	54.00	-17.58	AV	Horizontal
7318.06	54.40	43.50	11.40	35.50	3.40	57.80	74.00	-16.20	PK	Vertical
7318.06	44.02	43.50	11.40	35.50	3.40	47.42	54.00	-6.58	AV	Vertical
7318.14	53.69	43.50	11.40	35.50	3.40	57.09	74.00	-16.91	PK	Horizontal
7318.14	44.86	43.50	11.40	35.50	3.40	48.26	54.00	-5.74	AV	Horizontal



High Channel (2473.878 MHz)										
3256.74	61.45	44.70	6.70	28.20	-9.80	51.65	74.00	-22.35	PK	Vertical
3256.74	50.56	44.70	6.70	28.20	-9.80	40.76	54.00	-13.24	AV	Vertical
3256.60	61.08	44.70	6.70	28.20	-9.80	51.28	74.00	-22.72	PK	Horizontal
3256.60	50.54	44.70	6.70	28.20	-9.80	40.74	54.00	-13.26	AV	Horizontal
4948.17	58.21	44.20	9.04	31.60	-3.56	54.65	74.00	-19.35	PK	Vertical
4948.17	50.09	44.20	9.04	31.60	-3.56	46.53	54.00	-7.47	AV	Vertical
4948.29	58.30	44.20	9.04	31.60	-3.56	54.74	74.00	-19.26	PK	Horizontal
4948.29	49.79	44.20	9.04	31.60	-3.56	46.23	54.00	-7.77	AV	Horizontal
5346.51	49.42	44.20	9.86	32.00	-2.34	47.08	74.00	-26.92	PK	Vertical
5346.51	40.22	44.20	9.86	32.00	-2.34	37.88	54.00	-16.12	AV	Vertical
5346.38	47.26	44.20	9.86	32.00	-2.34	44.92	74.00	-29.08	PK	Horizontal
5346.38	38.77	44.20	9.86	32.00	-2.34	36.43	54.00	-17.57	AV	Horizontal
7421.47	53.70	43.50	11.40	35.50	3.40	57.10	74.00	-16.90	PK	Vertical
7421.47	43.49	43.50	11.40	35.50	3.40	46.89	54.00	-7.11	AV	Vertical
7421.39	54.84	43.50	11.40	35.50	3.40	58.24	74.00	-15.76	PK	Horizontal
7421.39	44.89	43.50	11.40	35.50	3.40	48.29	54.00	-5.71	AV	Horizontal

Note:

- 1) Factor = Antenna Factor + Cable Loss – Pre-amplifier.


Emission Level = Reading + Factor

- 2) The frequency emission of peak points that did not show above the forms are at least 20dB below the limit, the frequency emission is mainly from the environment noise.




Restricted band Requirements

**Ant A**  
**Low channel**  
**Horizontal**

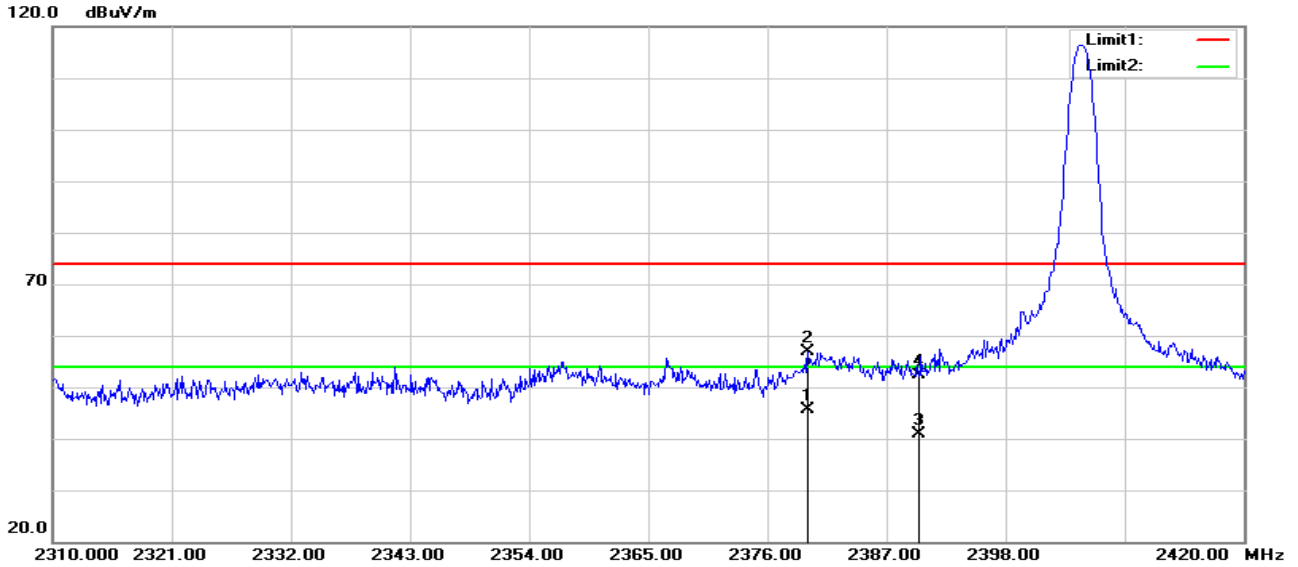

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2379.740	41.48	4.18	45.66	54.00	-8.34	AVG
2	2379.740	52.70	4.18	56.88	74.00	-17.12	peak
3	2390.000	36.60	4.34	40.94	54.00	-13.06	AVG
4	2390.000	48.03	4.34	52.37	74.00	-21.63	peak


**Vertical**

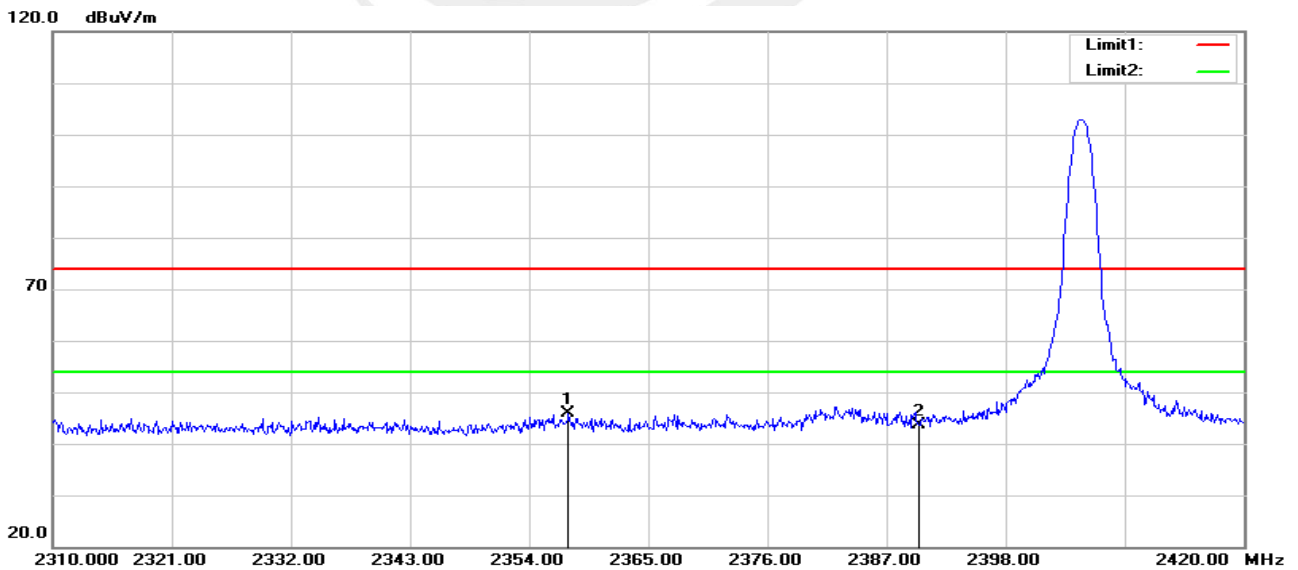

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2357.630	42.05	3.86	45.91	74.00	-28.09	peak
2	2390.000	39.26	4.34	43.60	74.00	-30.40	peak




High channel  
Horizontal

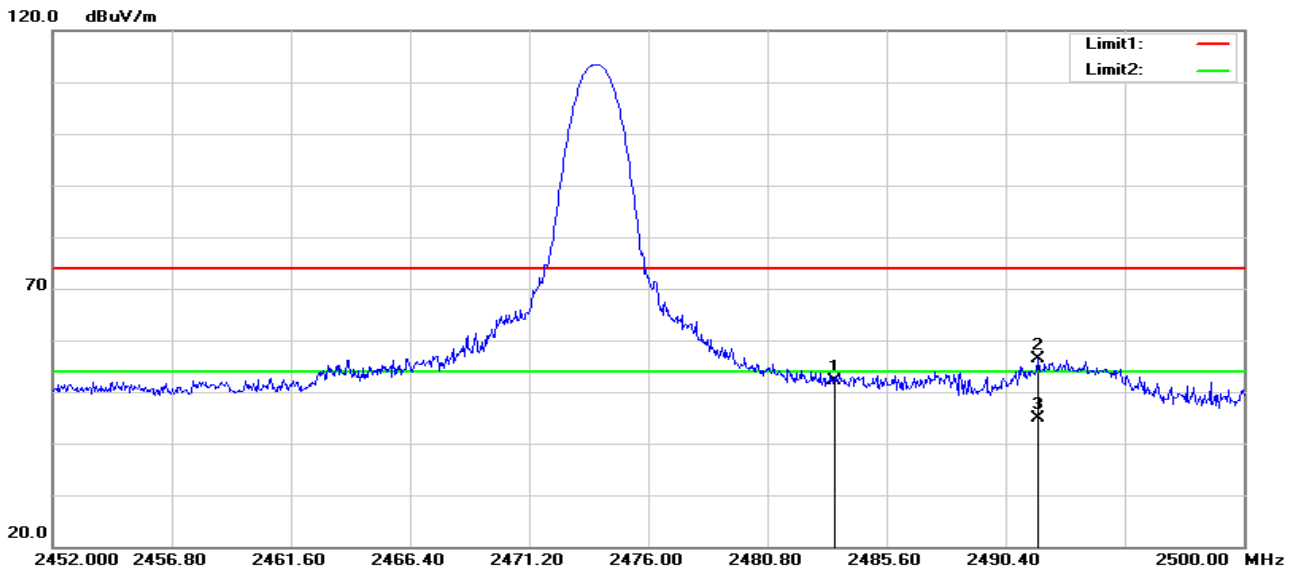

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	47.48	4.60	52.08	74.00	-21.92	peak
2	2491.696	51.64	4.63	56.27	74.00	-17.73	peak
3	2491.696	40.23	4.63	44.86	54.00	-9.14	AVG


Vertical

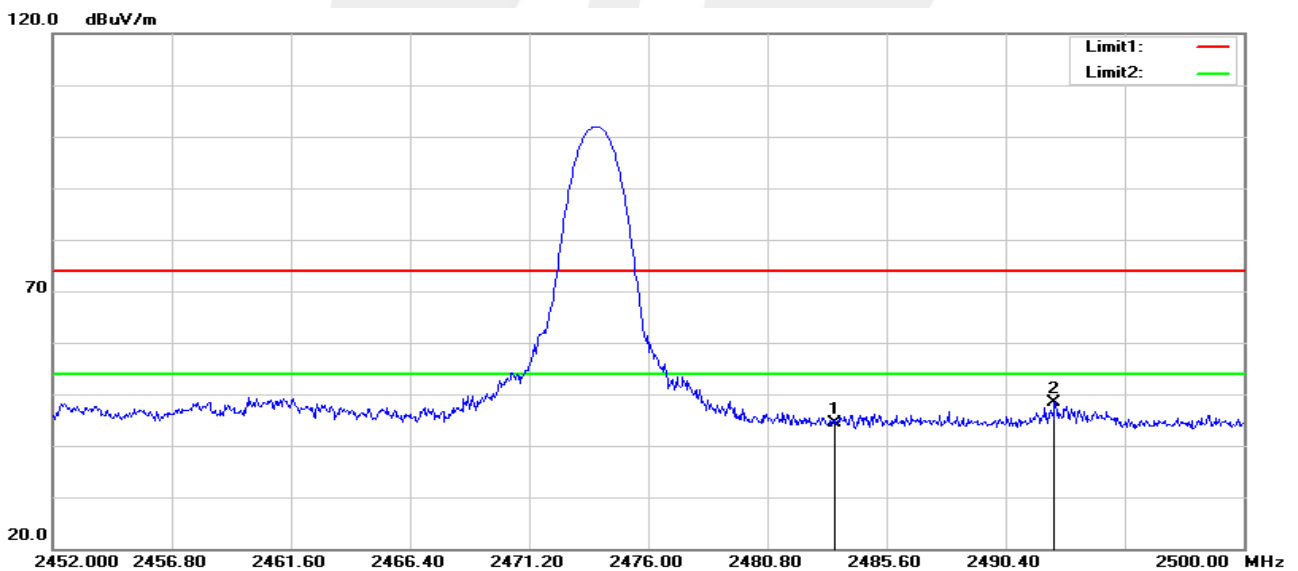

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	39.80	4.60	44.40	74.00	-29.60	peak
2	2492.368	43.69	4.63	48.32	74.00	-25.68	peak




**Ant B**  
**Low channel**  
**Horizontal**

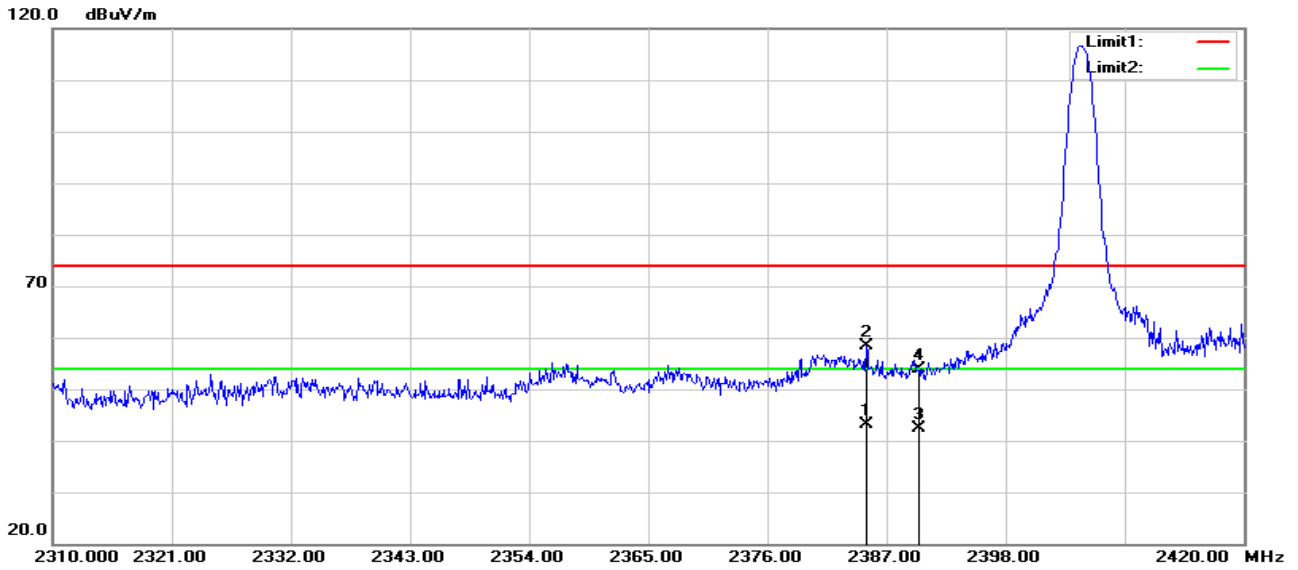

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2385.130	38.97	4.27	43.24	54.00	-10.76	AVG
2	2385.130	54.03	4.27	58.30	74.00	-15.70	peak
3	2390.000	37.96	4.34	42.30	54.00	-11.70	AVG
4	2390.000	49.65	4.34	53.99	74.00	-20.01	peak


**Vertical**

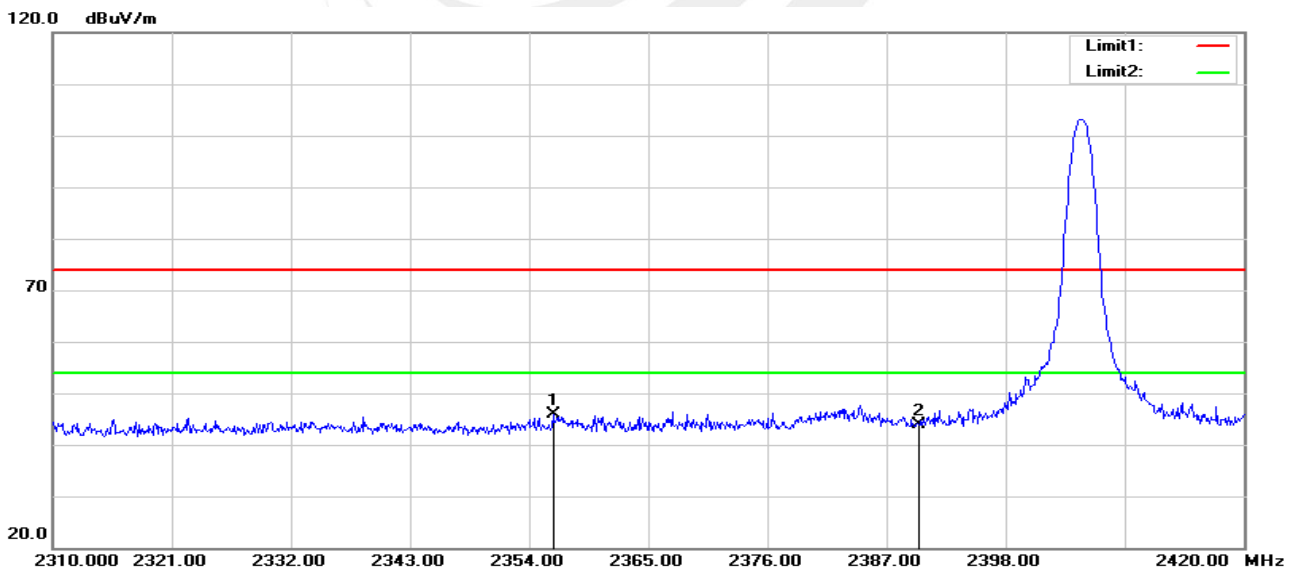

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2356.200	41.95	3.83	45.78	74.00	-28.22	peak
2	2390.000	39.53	4.34	43.87	74.00	-30.13	peak




### High channel Horizontal

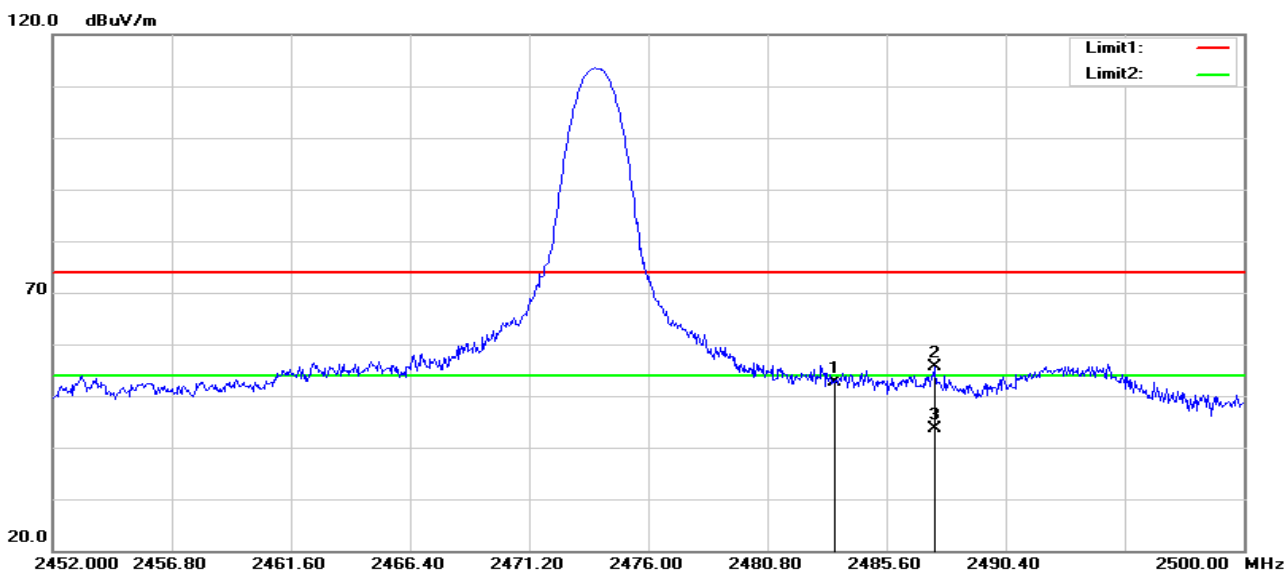

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	48.13	4.60	52.73	74.00	-21.27	peak
2	2487.520	51.08	4.62	55.70	74.00	-18.30	peak
3	2487.520	39.07	4.62	43.69	54.00	-10.31	AVG

### Vertical

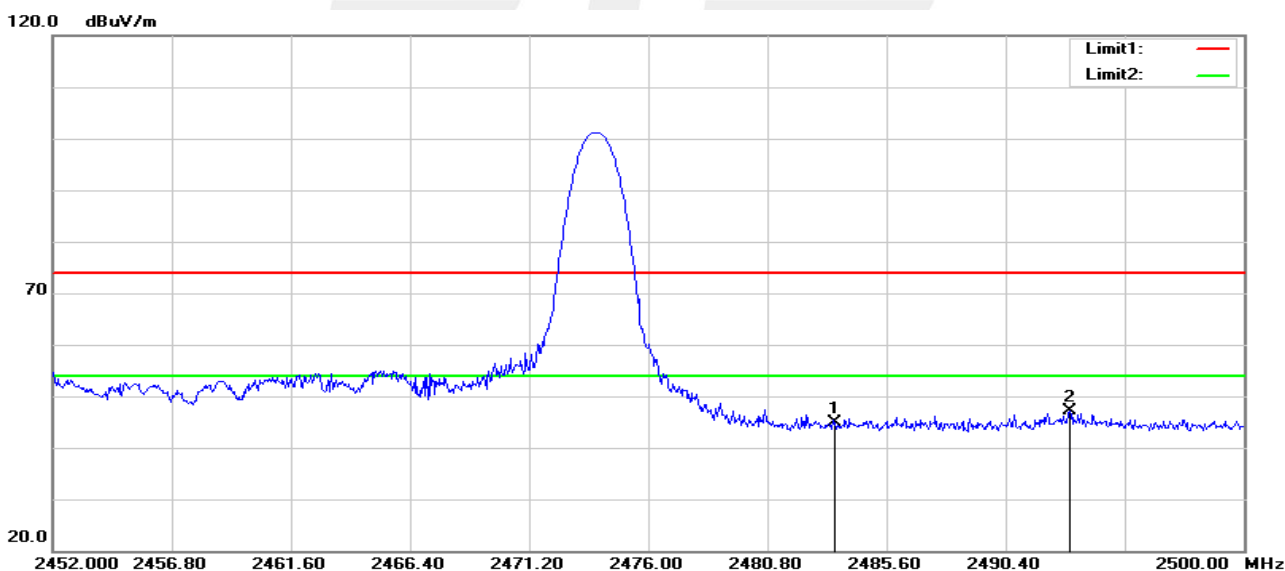

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	40.18	4.60	44.78	74.00	-29.22	peak
2	2492.992	42.46	4.64	47.10	74.00	-26.90	peak

Note: The nohopping and hopping mode all have been test, the worst case is the nohopping mode, this report only show the worst case.



#### 4. CONDUCTED SPURIOUS & BAND EDGE EMISSION

##### 4.1 LIMIT

According to FCC section 15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

##### 4.2 TEST PROCEDURE


Spectrum Parameter	Setting
Detector	Peak
Start/Stop Frequency	30 MHz to 10th carrier harmonic
RB / VB (emission in restricted band)	100 KHz/300 KHz
Trace-Mode:	Max hold

For Band edge

Spectrum Parameter	Setting
Detector	Peak
Start/Stop Frequency	Lower Band Edge: 2350– 2407 MHz Upper Band Edge: 2471 – 2500 MHz
RB / VB (emission in restricted band)	100 KHz/300 KHz
Trace-Mode:	Max hold

Remark: Hopping on and Hopping off mode all have been tested, only worst case hopping off is reported.

##### 4.3 TEST SETUP

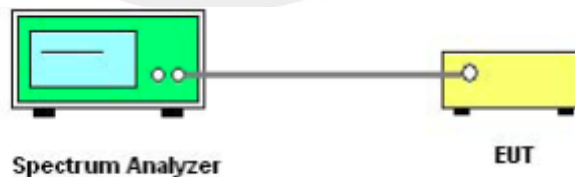

The EUT is connected to the Spectrum Analyzer; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. In order to make an accurate measurement, set the span greater than RBW.

##### 4.4 EUT OPERATION CONDITIONS


The EUT tested system was configured as the statements of 2.3 Unless otherwise a special operating condition is specified in the follows during the testing.




4.5 TEST RESULTS

Temperature:	25°C	Relative Humidity:	50%
Test Mode:	CH 01/24/47	Test Voltage:	DC 3.7V/Ant A

01 CH

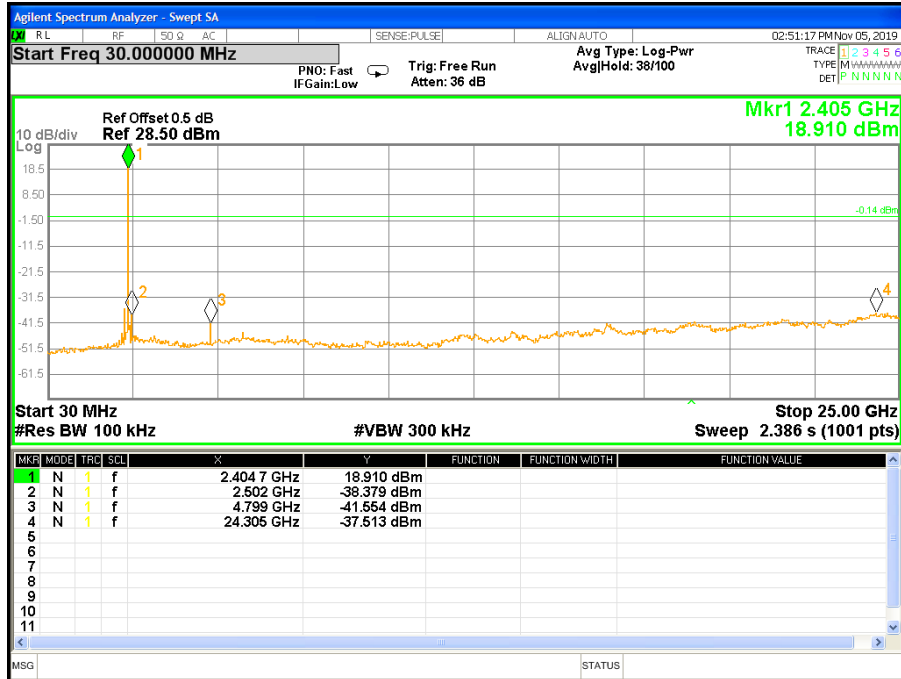


24 CH

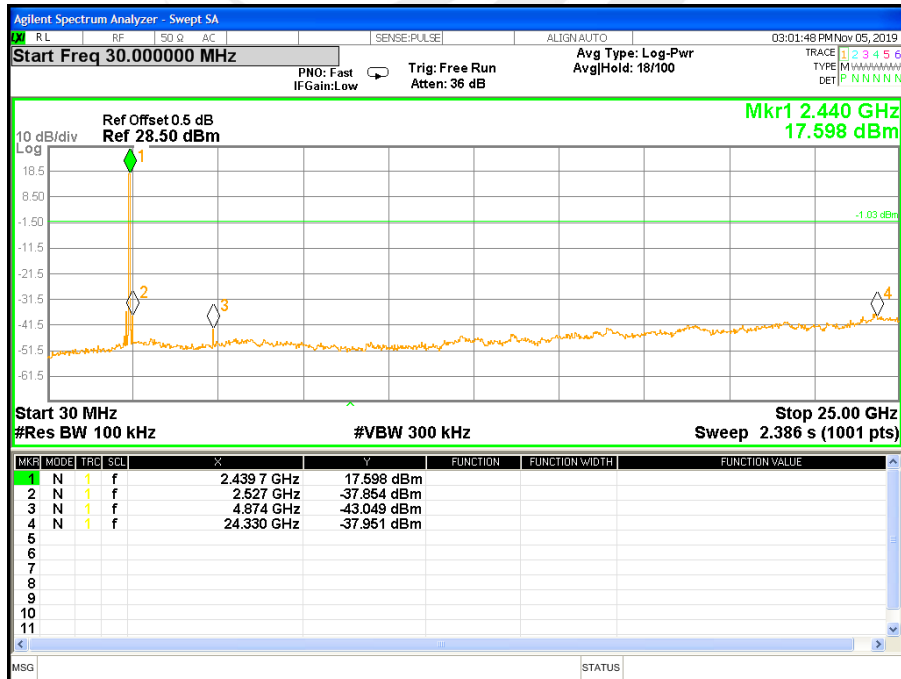




47 CH

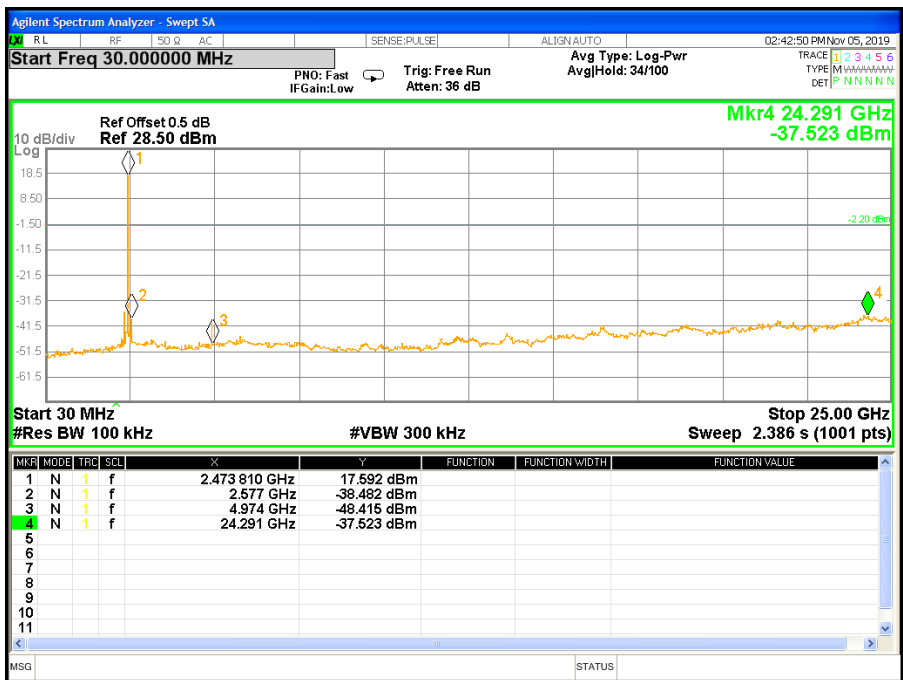




For Band edge

01 CH

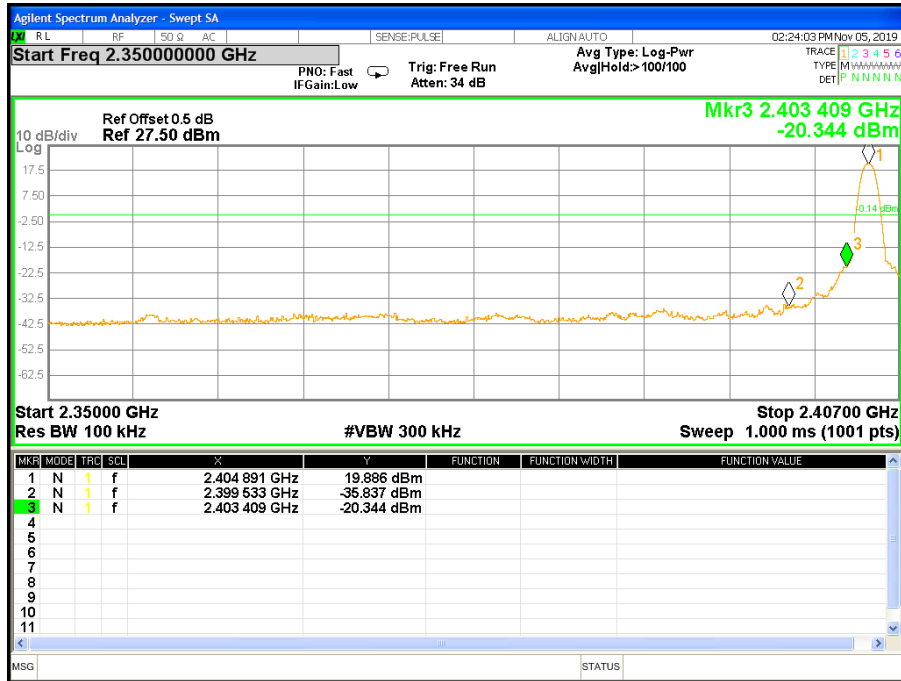


24 CH

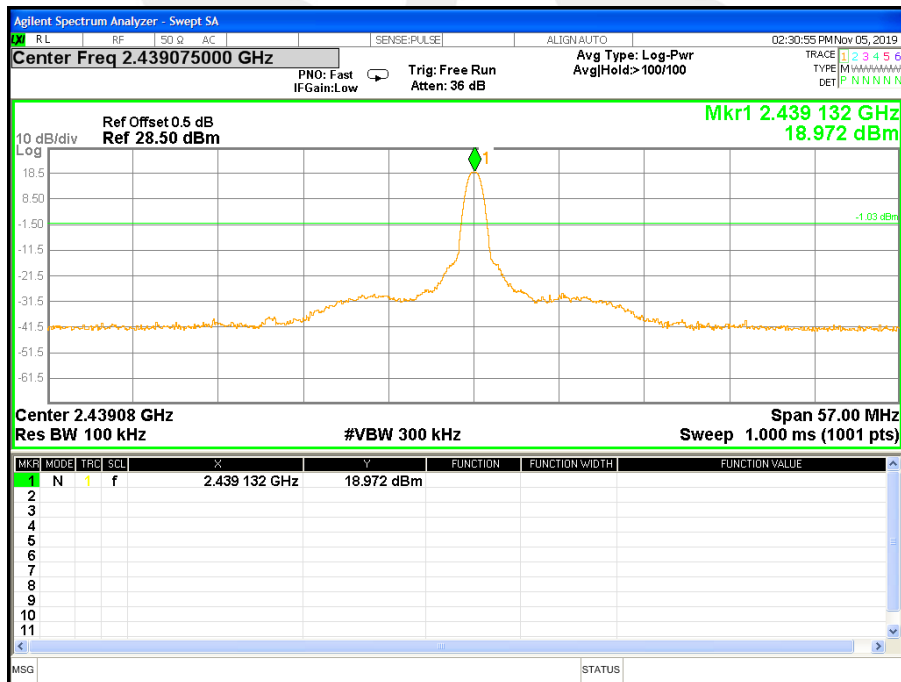




47 CH

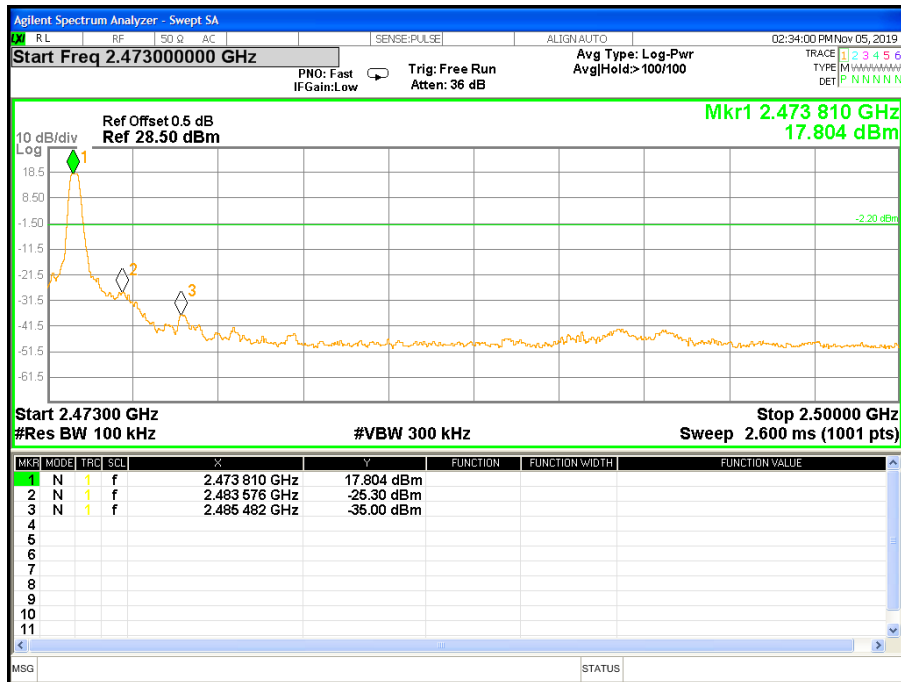




For Hopping Band edge

01 CH

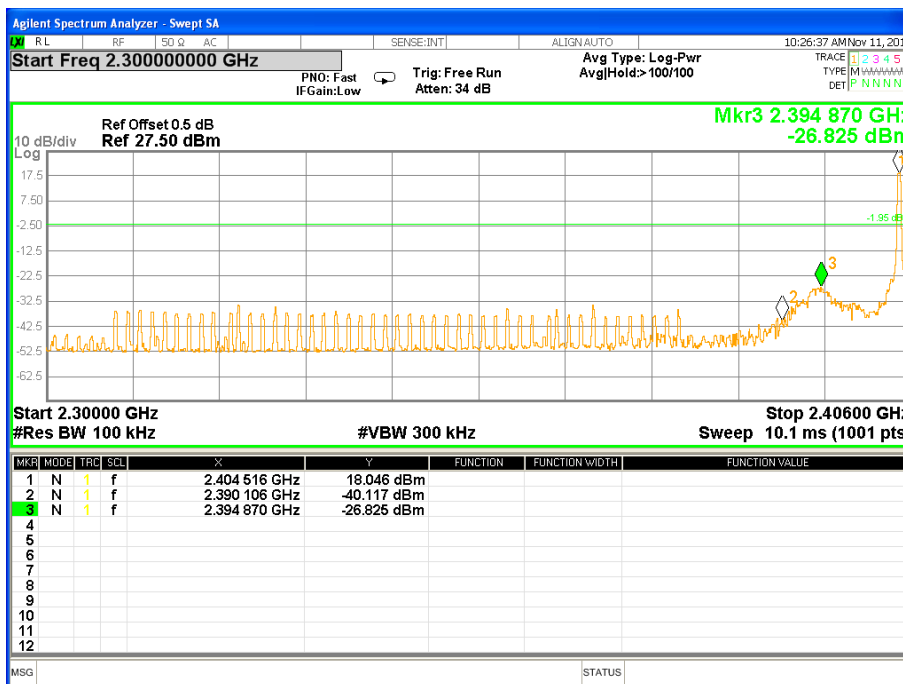


47 CH

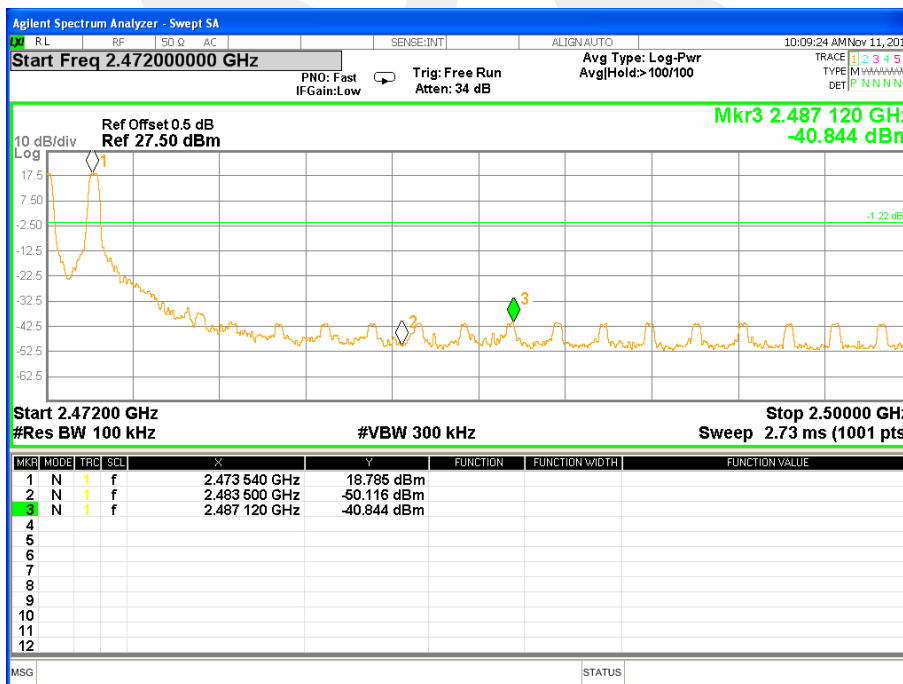




Temperature:	25°C	Relative Humidity:	50%
Test Mode:	CH 01/24/47	Test Voltage:	DC 3.7V/Ant B

01 CH

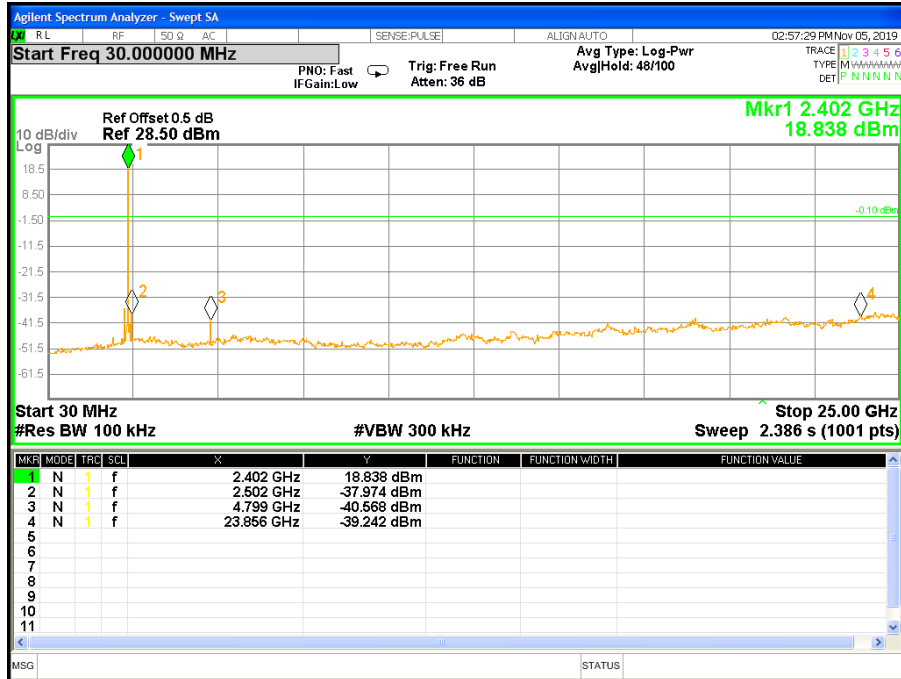


24 CH

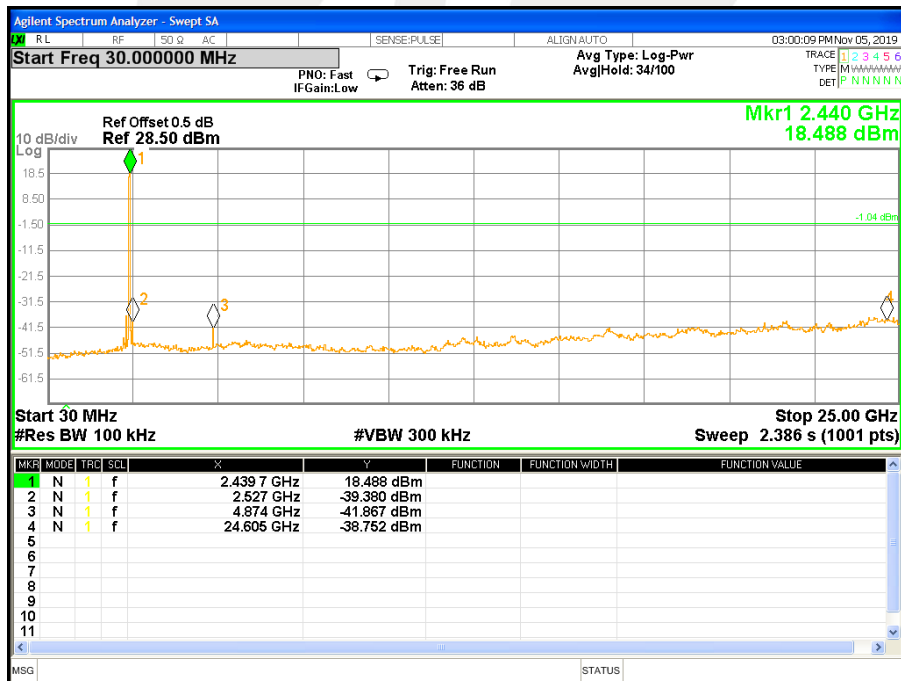



47 CH

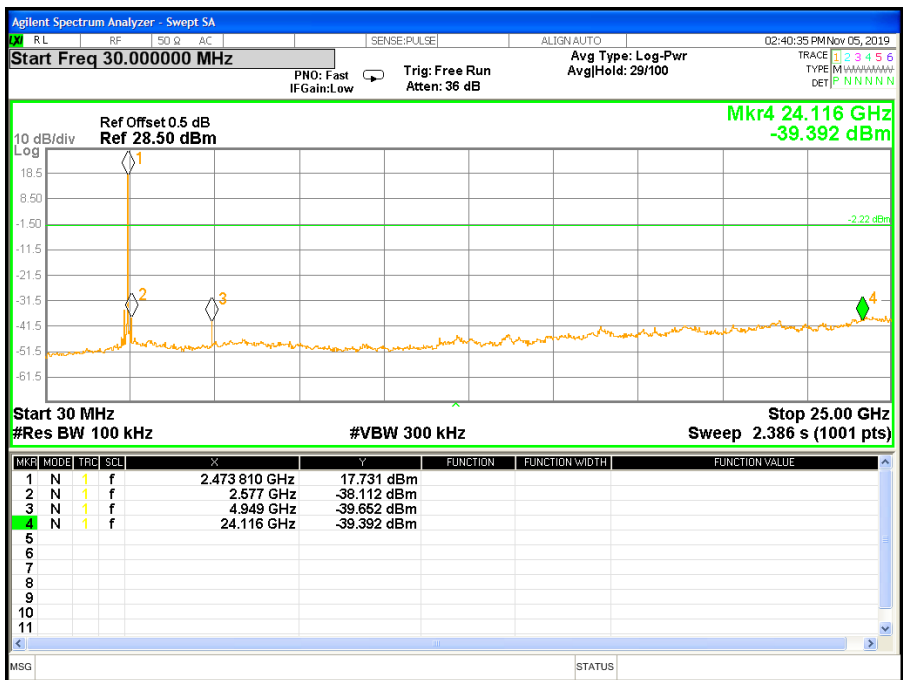







For Band edge

01 CH

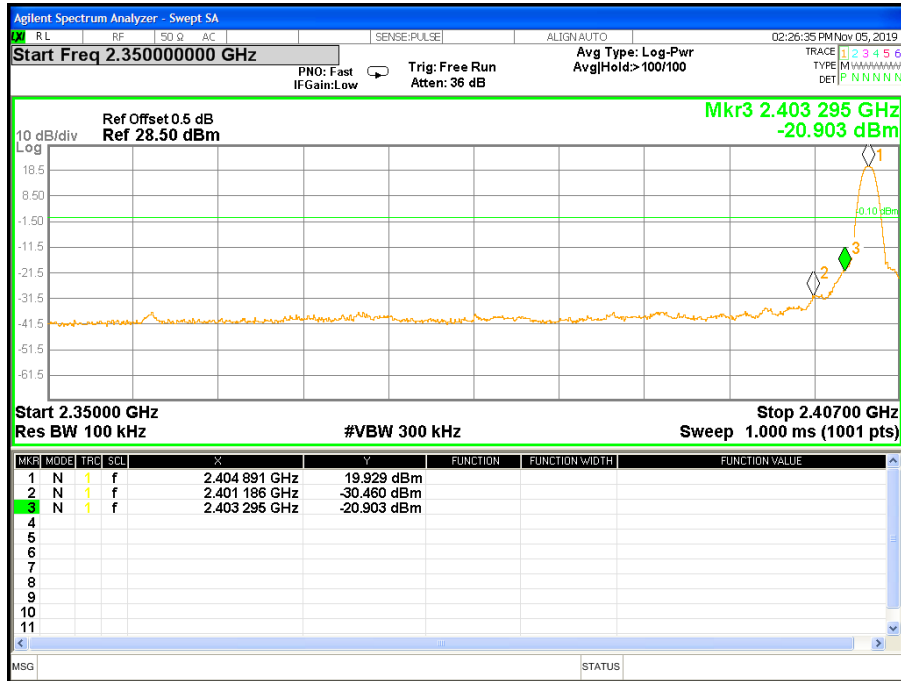


24 CH

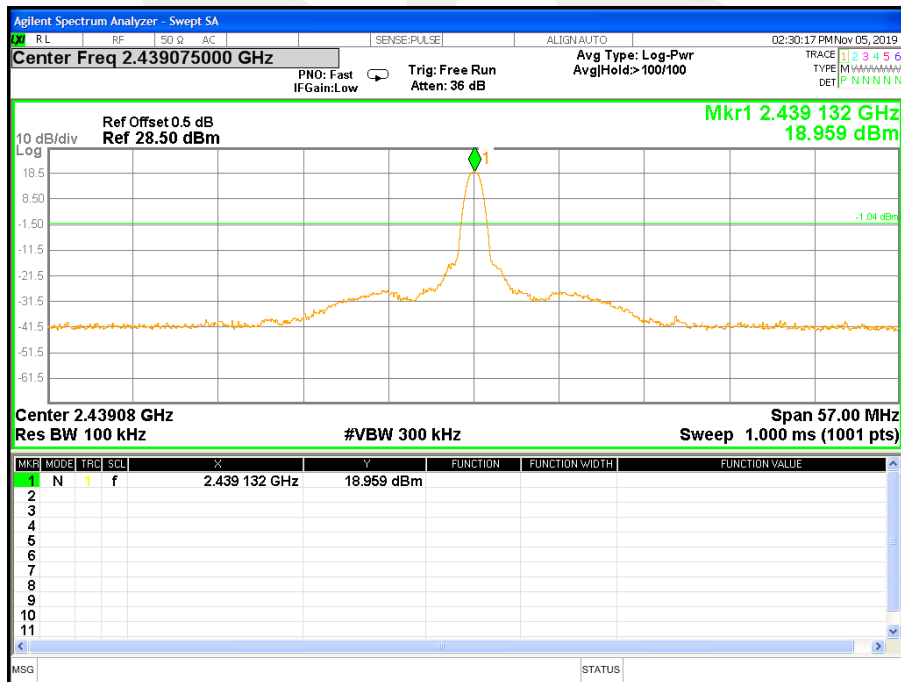




47 CH

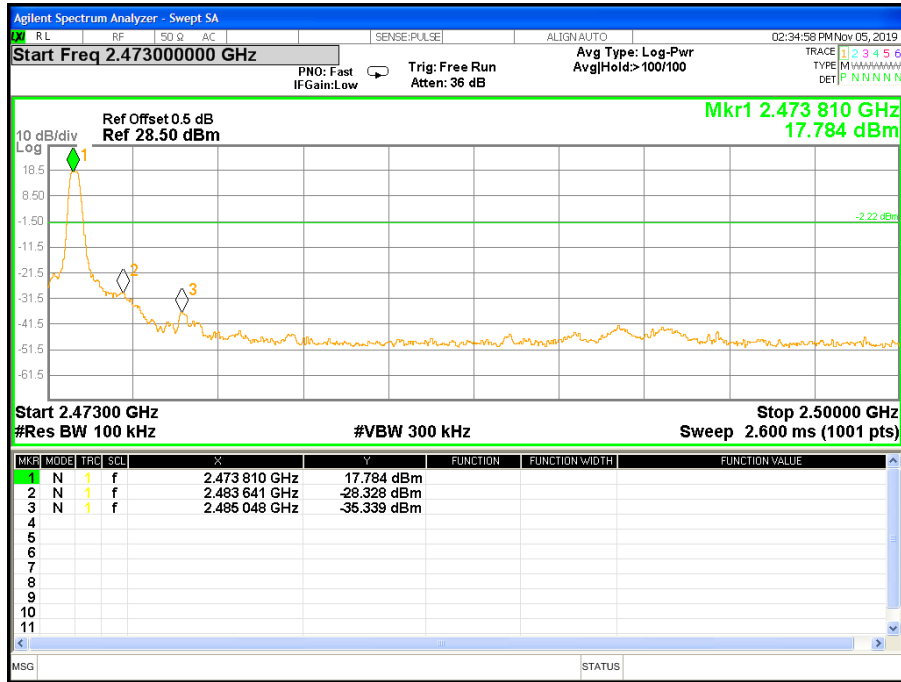




For Hopping Band edge

01 CH

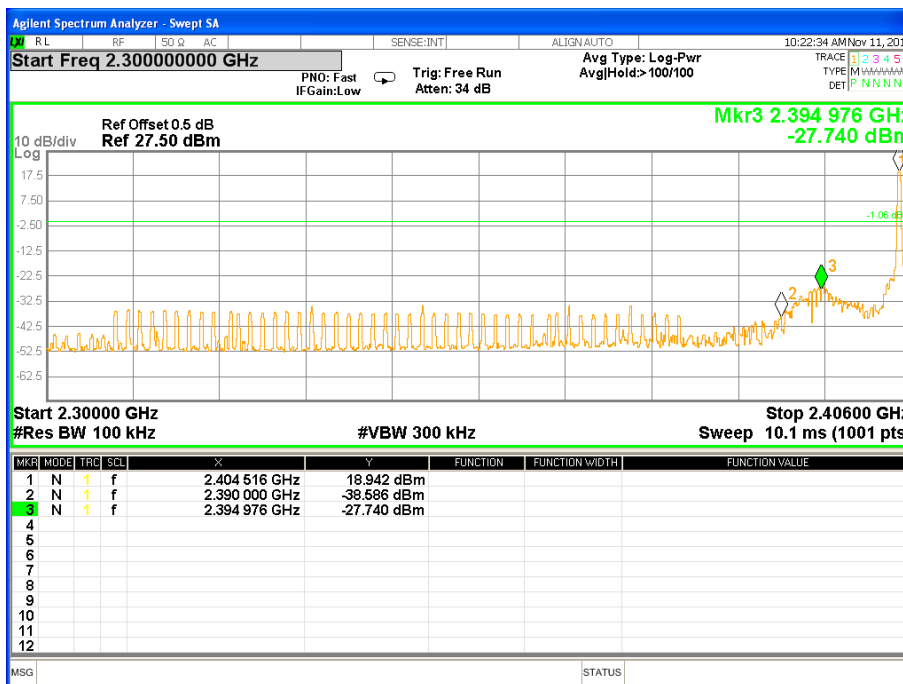

47 CH

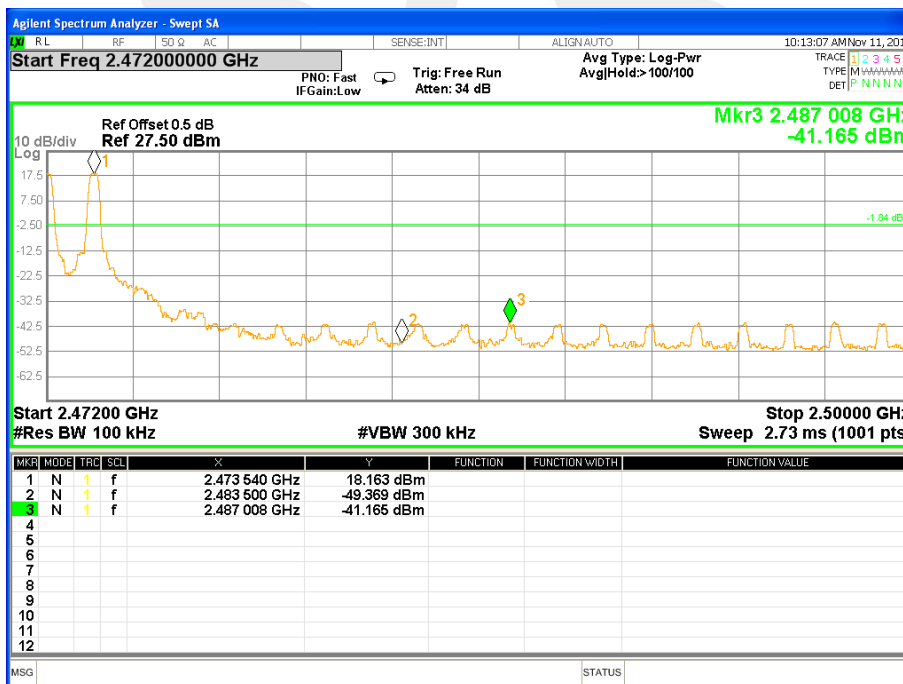



## 5. NUMBER OF HOPPING CHANNEL

### 5.1 LIMIT


FCC Part 15.247, Subpart C				
Section	Test Item	Limit	FrequencyRange (MHz)	Result
15.247 (a)(1)(iii)	Number of Hopping Channel	≥15	2400-2483.5	PASS

Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	> Operating FrequencyRange
RB	300KHz
VB	300KHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

### 5.2 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- Spectrum Setting: RBW= 300KHz, VBW=300KHz, Sweep time = Auto.

### 5.3 TEST SETUP

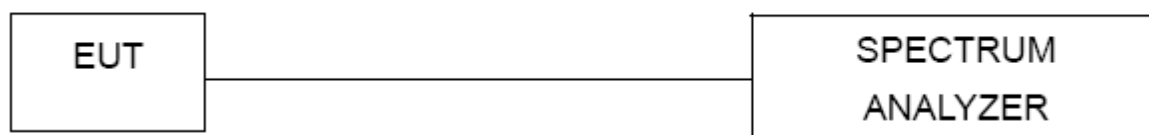

### 5.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.




5.5 TEST RESULTS

Temperature:	25°C	Relative Humidity:	60%
Test Mode:	Hopping Mode	Test Voltage:	DC 3.7V/Ant A

Number of Hopping Channel

47

Hopping channel

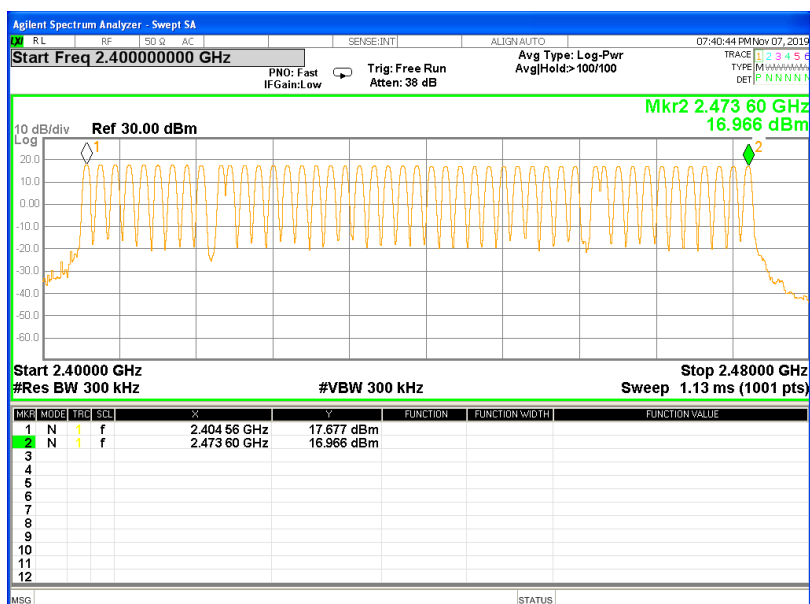




Temperature:	25°C	Relative Humidity:	60%
Test Mode:	Hopping Mode	Test Voltage:	DC 3.7V/Ant B

Number of Hopping Channel

47

### Hopping channel

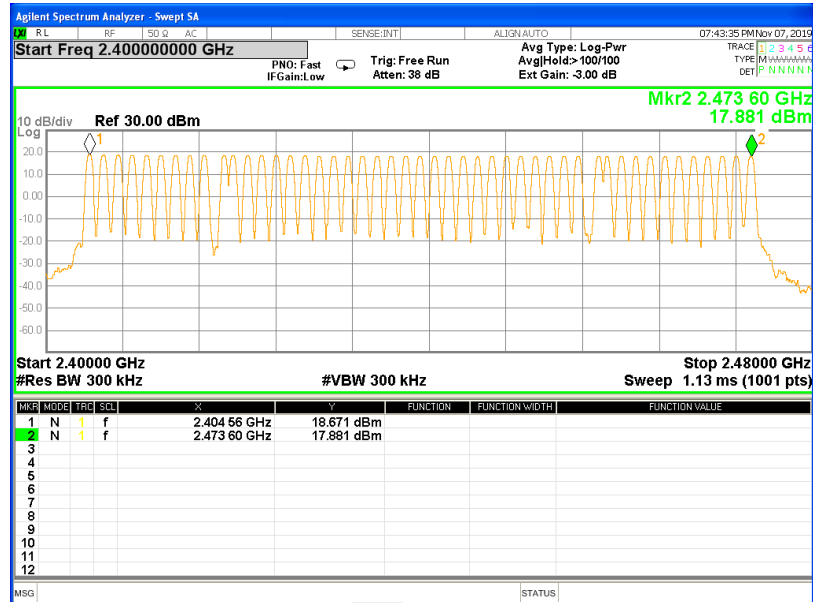

## 6. AVERAGE TIME OF OCCUPANCY


### 6.1 LIMIT

FCC Part 15.247, Subpart C				
Section	Test Item	Limit	FrequencyRange (MHz)	Result
15.247 (a)(1)(iii)	Average Time of Occupancy	0.4sec	2400-2483.5	PASS

### 6.2 TEST PROCEDURE

- a. The transmitter output (antenna port) was connected to the spectrum analyzer
- b. Set RBW =1MHz/VBW =3MHz.
- c. Use a video trigger with the trigger level set to enable triggering only on full pulses.
- d. Sweep Time is more than once pulse time.
- e. Set the center frequency on any frequency would be measure and set the frequency span to zero span.
- f. Measure the maximum time duration of one single pulse.
- g. Set the EUT for DH5, DH3 and DH1 packet transmitting.
- h. Measure the maximum time duration of one single pulse.
- i. DH5 Packet permit maximum  $1600 / 79 / 6 = 3.37$  hops per second in each channel (5 time slots RX, 1 time slot TX). So the dwell time is the time duration of the pulse times  $3.37 \times 31.6 = 106.6$  within 31.6 seconds.
- j. DH3 Packet permit maximum  $1600 / 79 / 4 = 5.06$  hops per second in each channel (3 time slots RX, 1 time slot TX). So the dwell time is the time duration of the pulse times  $5.06 \times 31.6 = 160$  within 31.6 seconds.
- k. DH1 Packet permit maximum  $1600 / 79 / 2 = 10.12$  hops per second in each channel (1 time slot RX, 1 time slot TX). So the dwell time is the time duration of the pulse times  $10.12 \times 31.6 = 320$  within 31.6 seconds.

### 6.3 TEST SETUP

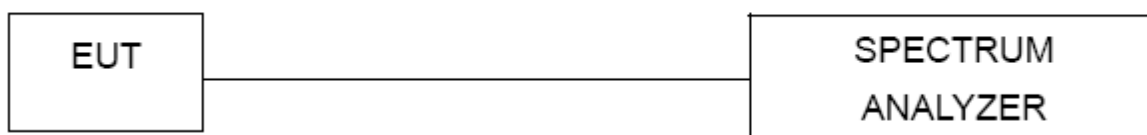

### 6.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.



## 6.5 TEST RESULTS

Temperature:	25°C	Relative Humidity:	50%
Test Mode:	CH 01/24/47/Ant A	Test Voltage:	DC 3.7V



Modulation	Channel Number	pulse time(ms)	Burst Number	Dwell Time(s)	Limits(s)
FSK	1	1.870	52	0.097	0.4
	24	1.870	48	0.090	0.4
	47	1.870	52	0.097	0.4









Dwell time  
01 CH

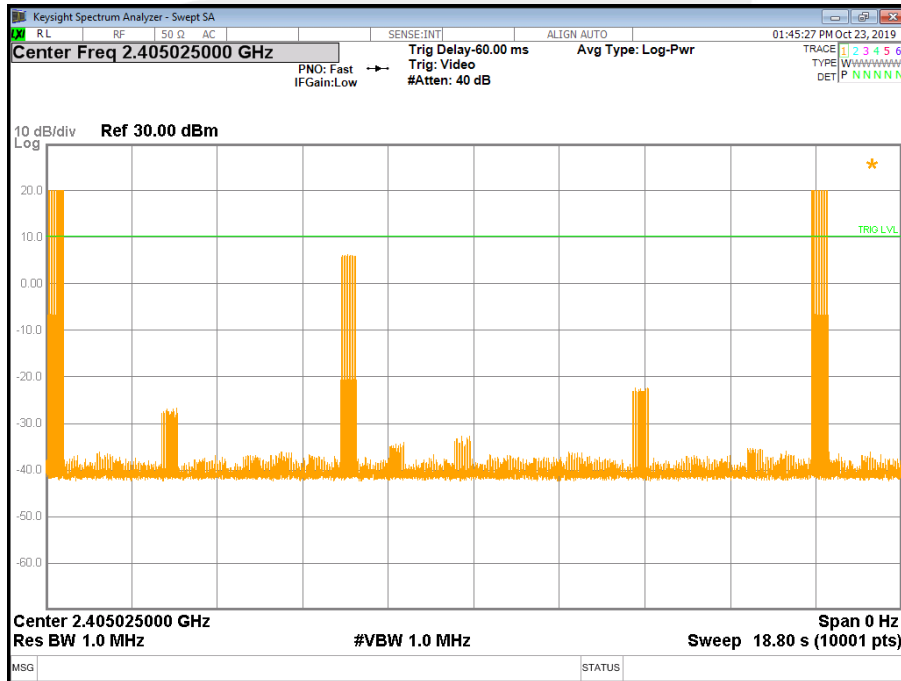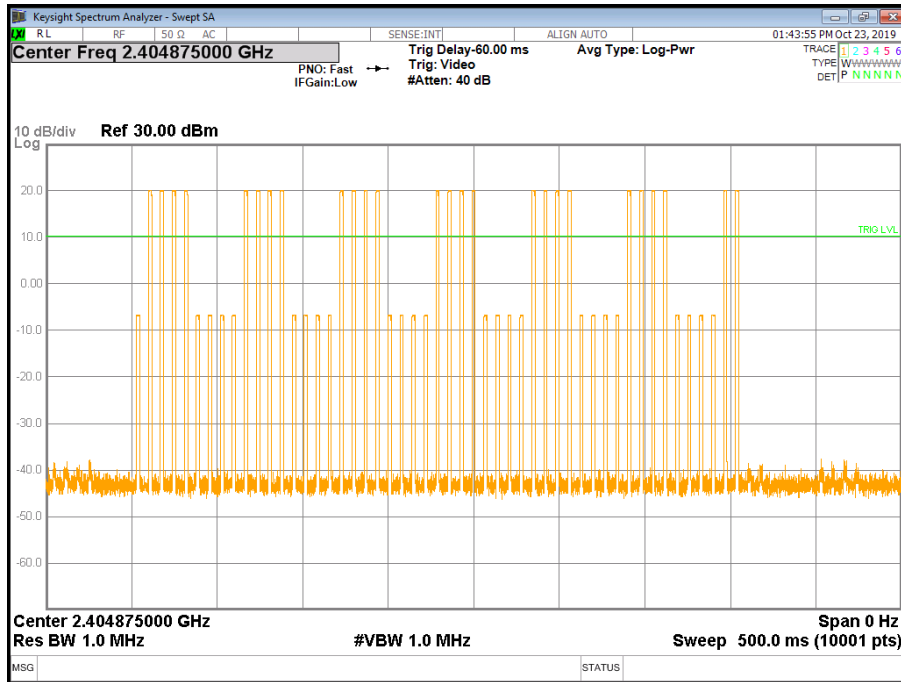





24 CH

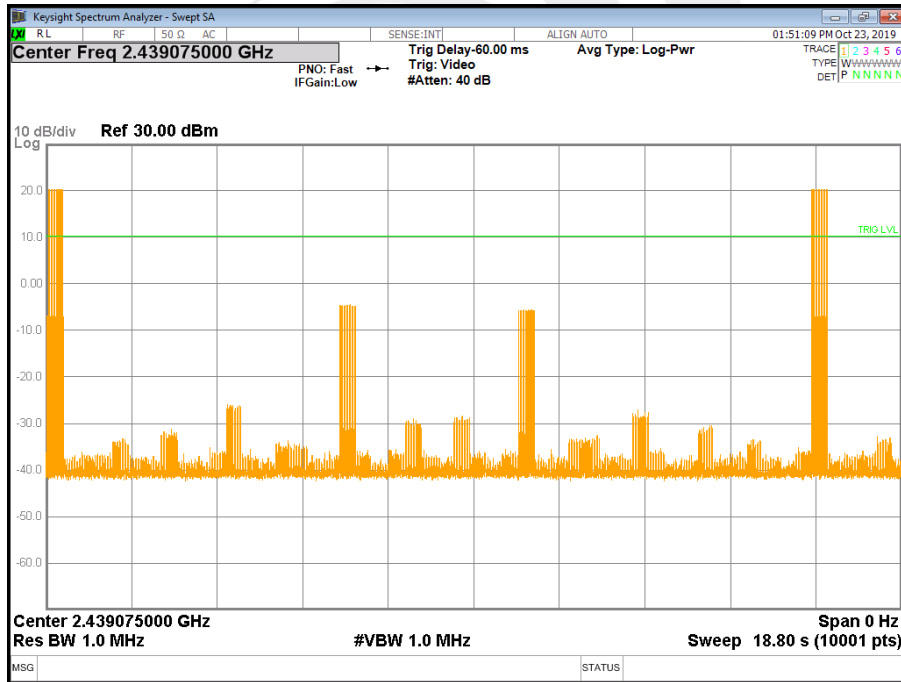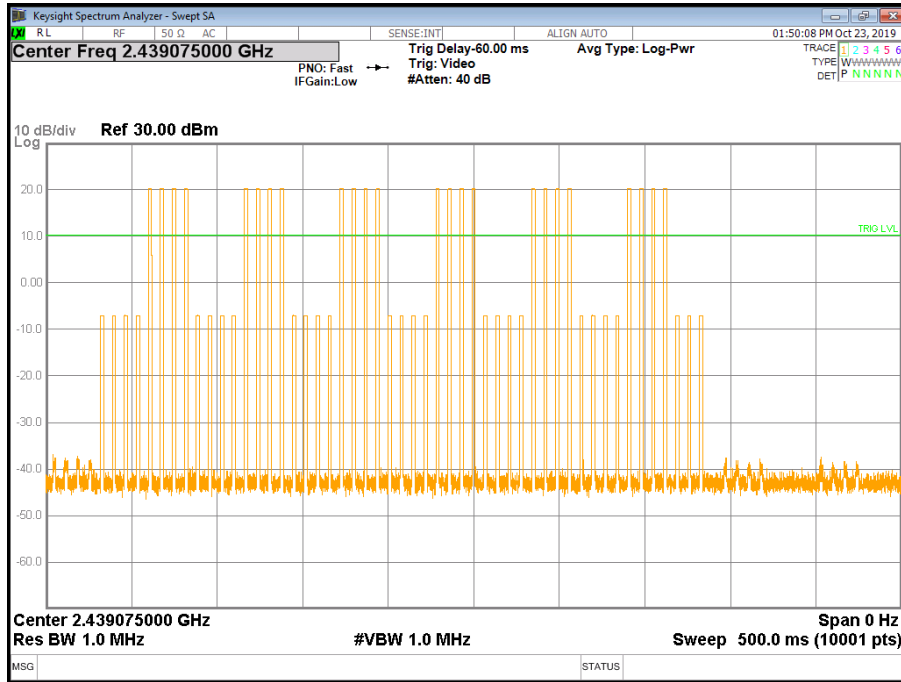




47 CH

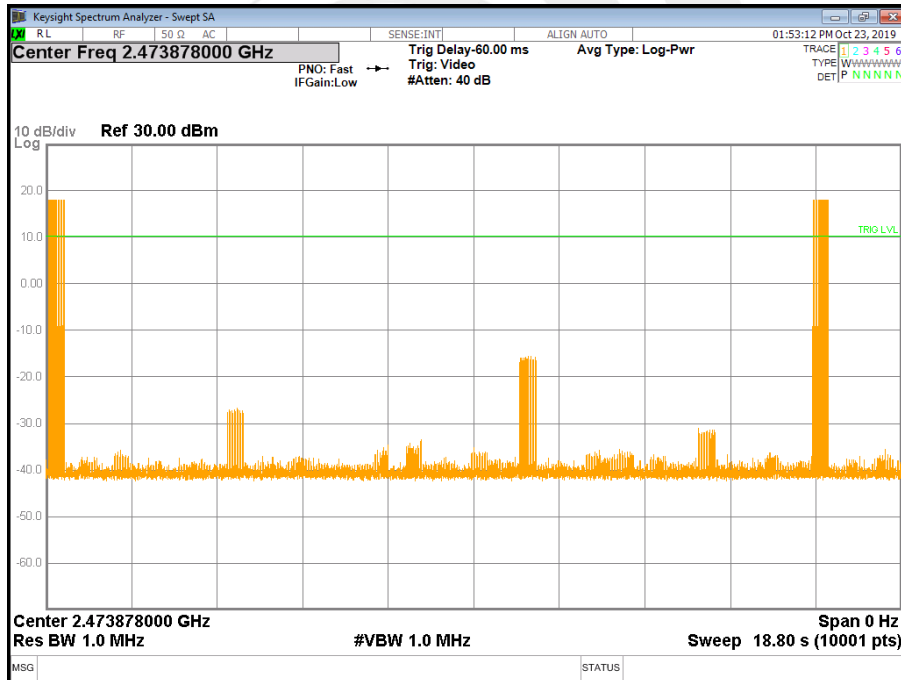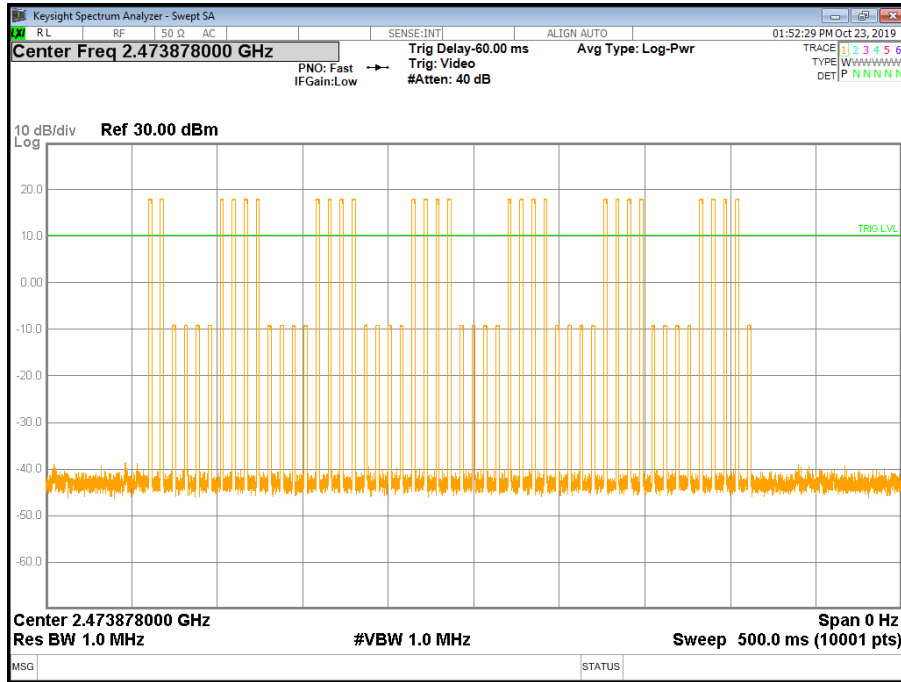




One pulse  
01 CH

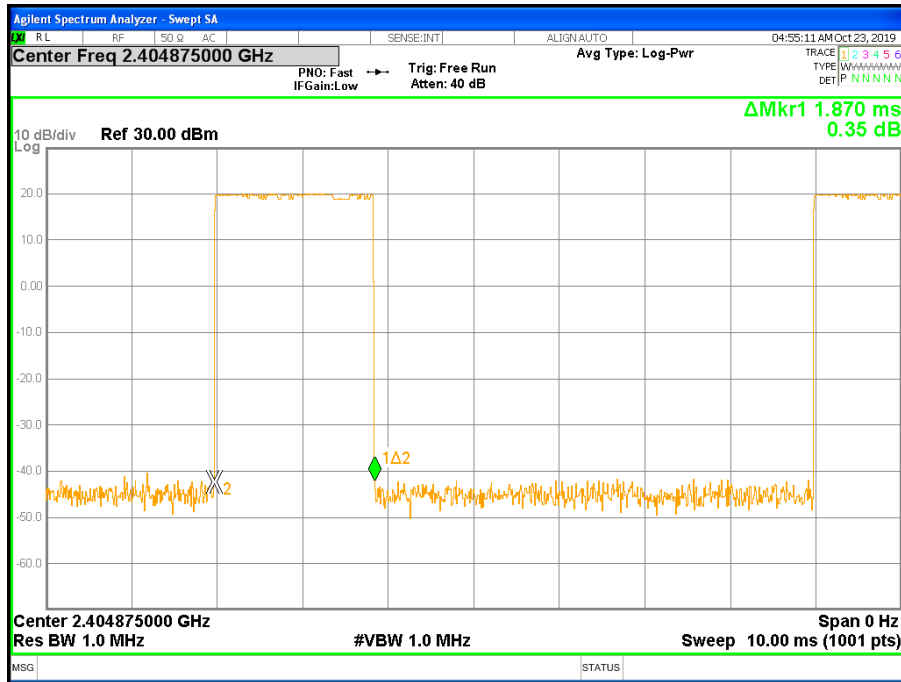


24 CH

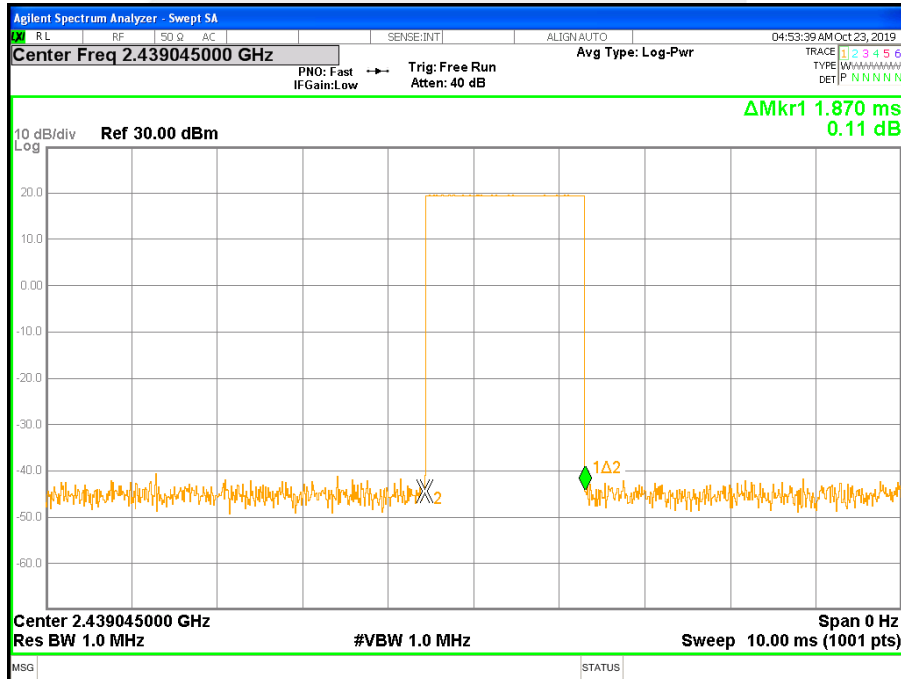



47 CH

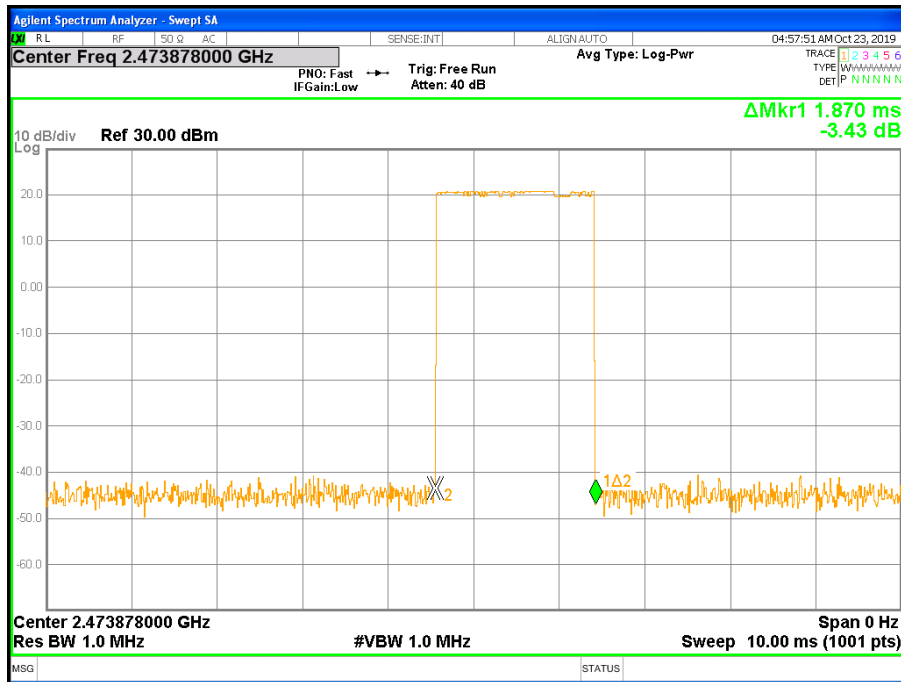




Temperature:	25°C	Relative Humidity:	50%
Test Mode:	CH 01/24/47/Ant B	Test Voltage:	DC 3.7V

Modulation	Channel Number	pulse time(ms)	Burst Number	Dwell Time(s)	Limits(s)
FSK	1	1.860	50	0.093	0.4
	24	1.870	50	0.094	0.4
	47	1.870	48	0.090	0.4







Dwell time  
01 CH

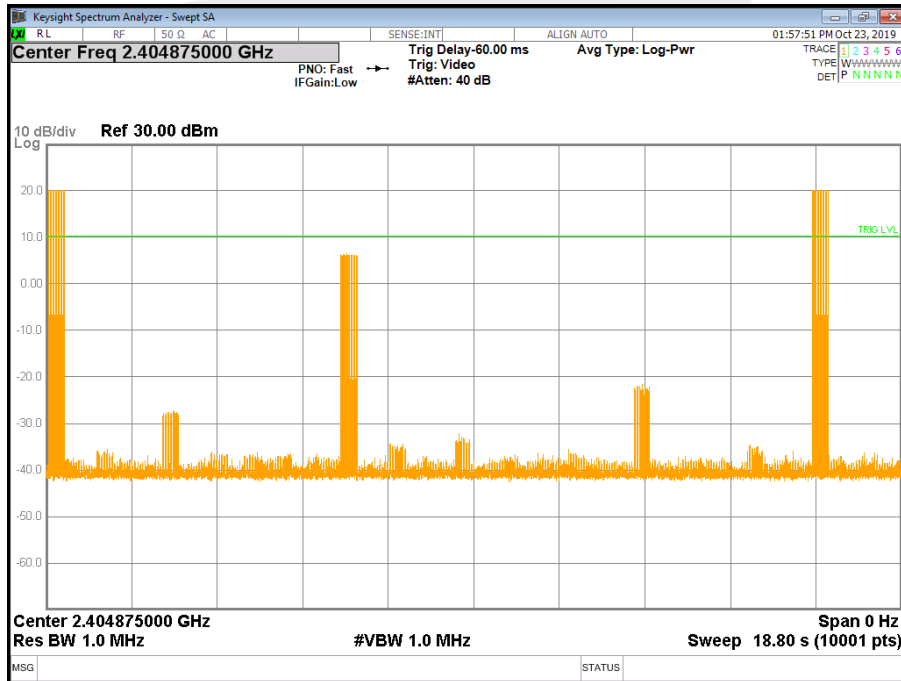





24 CH

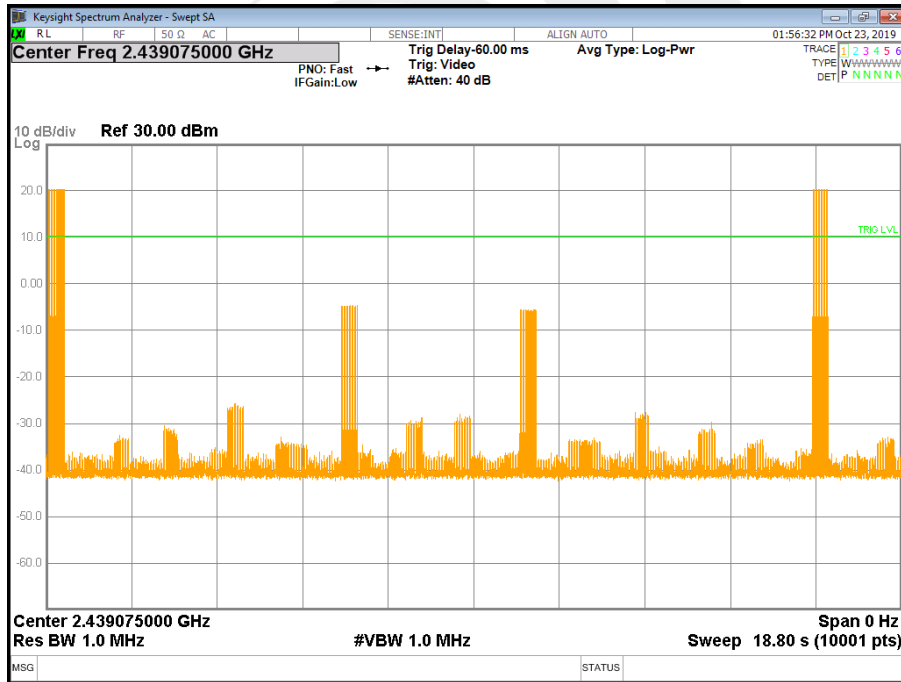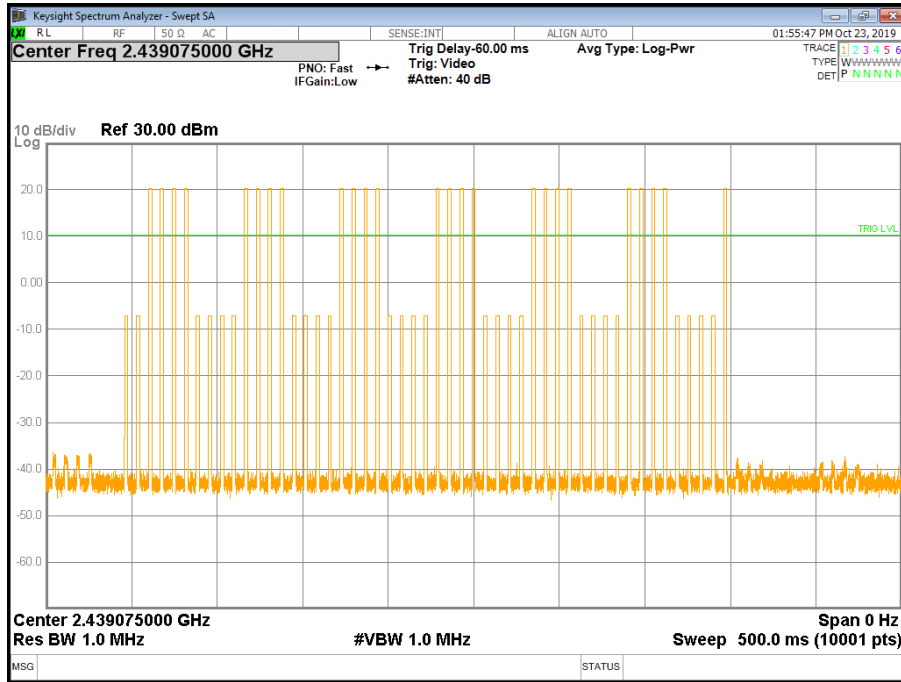






47 CH

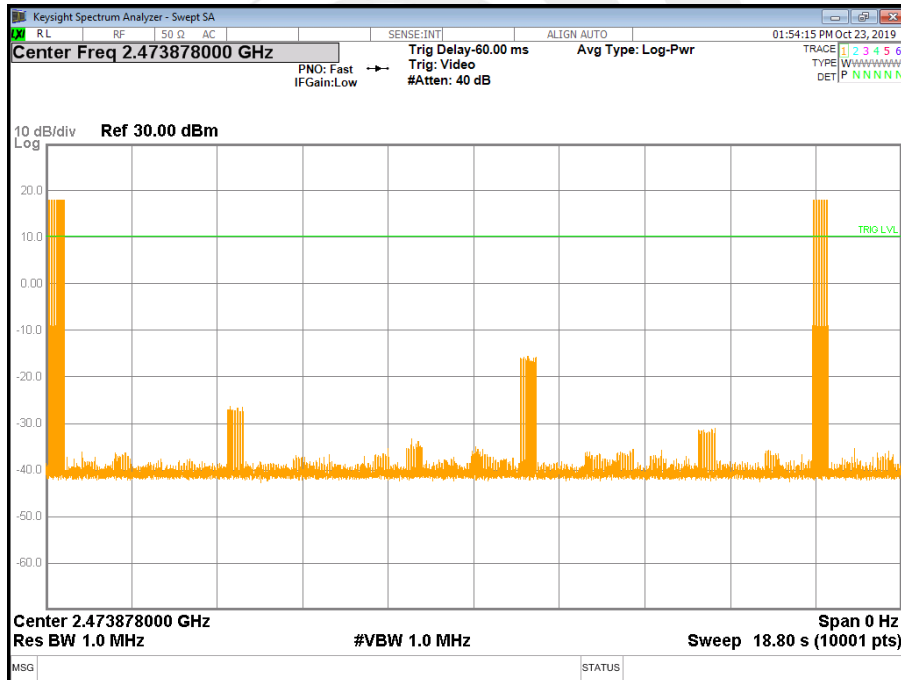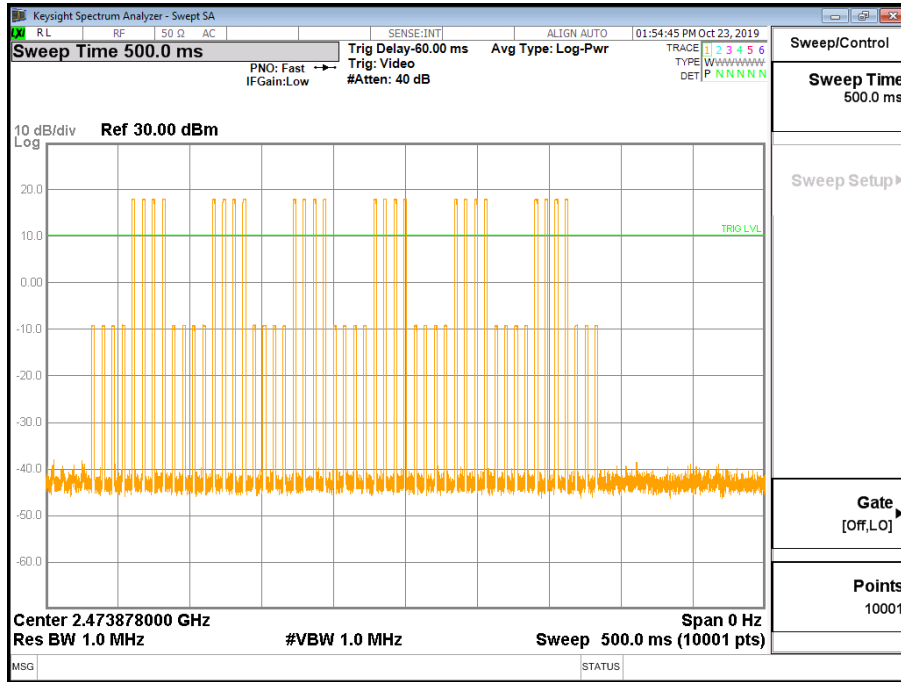




One pulse

01 CH

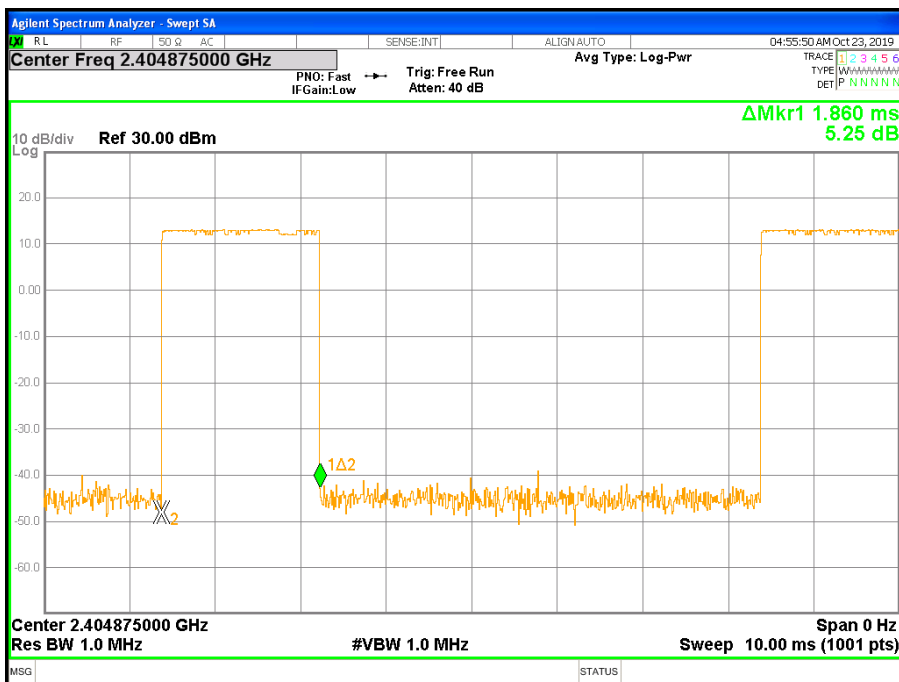


24 CH

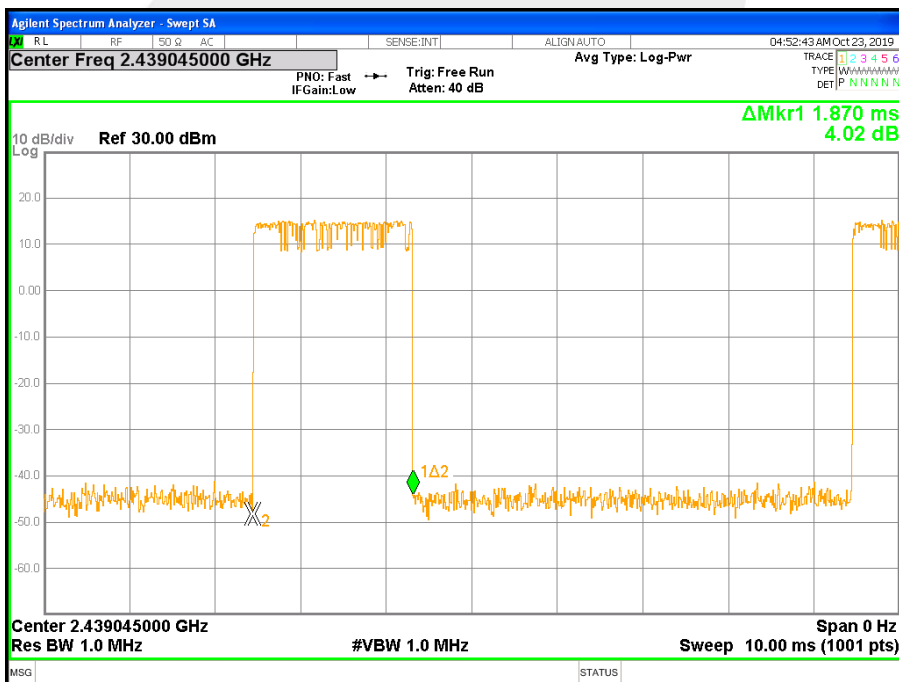



47 CH

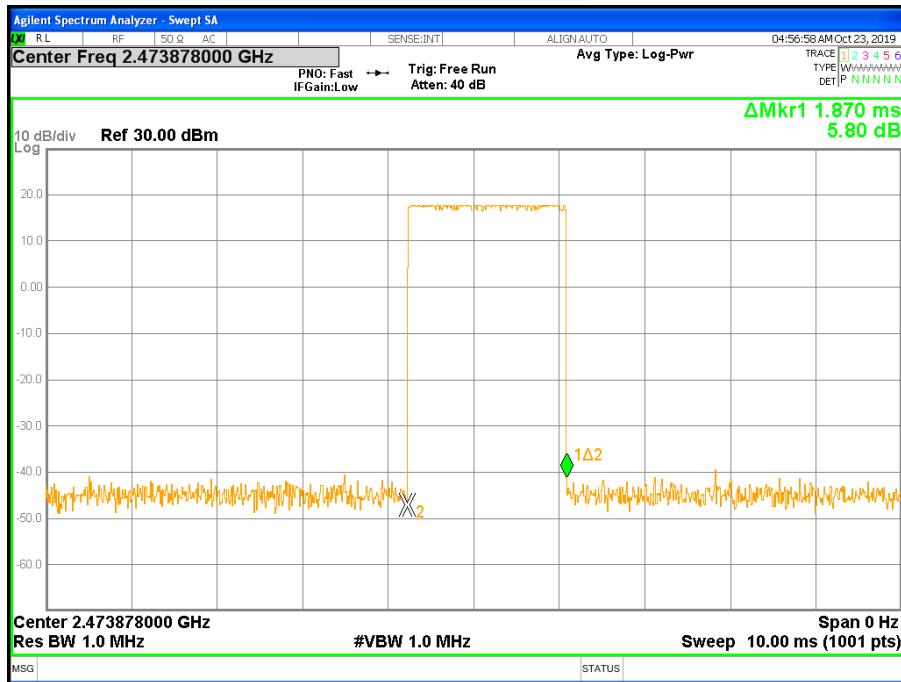

## 7. HOPPING CHANNEL SEPARATION MEASUREMENT

### 7.1 LIMIT


Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	> 20 dB Bandwidth or Channel Separation
RB	30 kHz (20dB Bandwidth) / 30 kHz (Channel Separation)
VB	100 kHz (20dB Bandwidth) / 100 kHz (Channel Separation)
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

### 7.2 TEST PROCEDURE

- The transmitter output (antenna port) was connected to the spectrum analyser in peak hold mode.
- The resolution bandwidth of 30 kHz and the video bandwidth of 100 kHz were utilised for 20 dB bandwidth measurement.
- The resolution bandwidth of 30 kHz and the video bandwidth of 100 kHz were utilised for channel separation measurement.

### 7.3 TEST SETUP

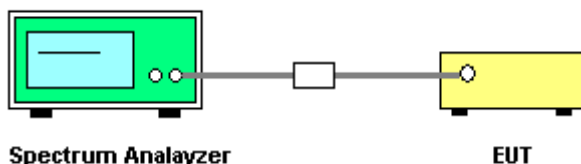

### 7.4 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.




7.5 TEST RESULTS

Temperature:	25°C	Relative Humidity:	50%
Test Mode:	CH01 / CH24 / CH47/Ant A	Test Voltage:	DC 3.7V

Frequency	Mark1 Frequency (MHz)	Mark2 Frequency (MHz)	Ch. Separation (MHz)	Limit (MHz)	Result
2404.875 MHz	2404.465	2405.968	1.503	0.263	Complies
2439.075 MHz	2439.113	2440.613	1.500	0.299	Complies
2473.878 MHz	2472.113	2473.613	1.500	0.260	Complies


For GFSK: Ch. Separation Limits: > 20dB bandwidth

CH01

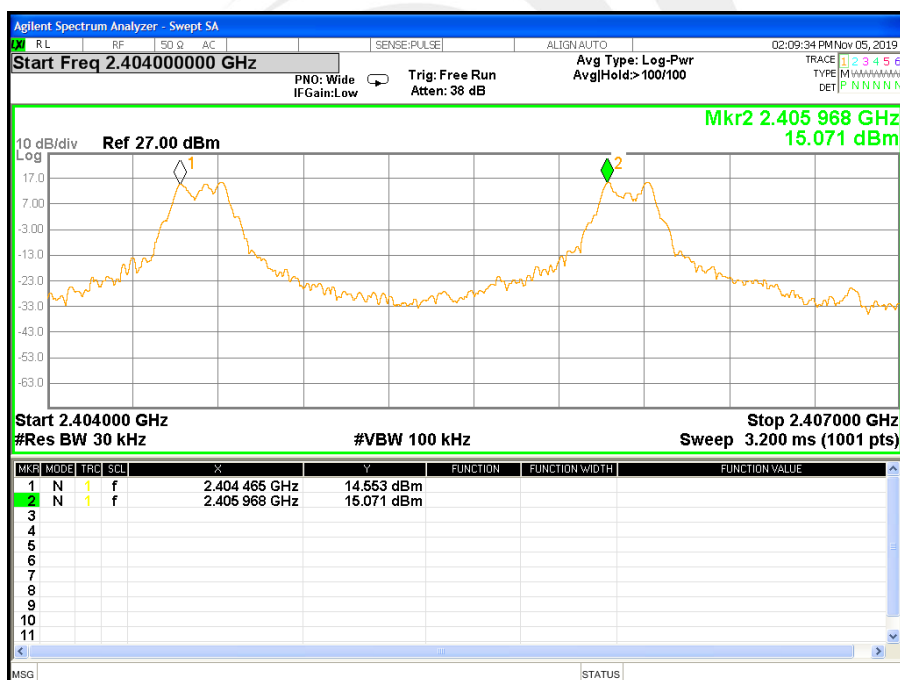



### CH24

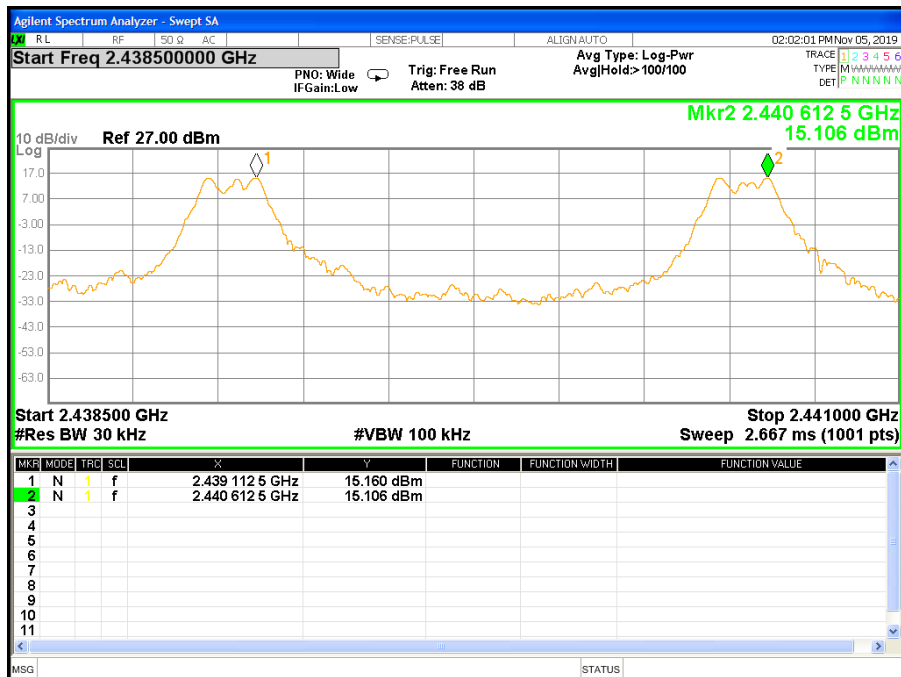

### CH47






Temperature:	25°C	Relative Humidity:	50%
Test Mode:	CH01 / CH24 / CH47/Ant B	Test Voltage:	DC 3.7V

Frequency	Mark1 Frequency (MHz)	Mark2 Frequency (MHz)	Ch. Separation (MHz)	Limit (MHz)	Result
2404.875 MHz	2404.612	2406.112	1.500	0.263	Complies
2439.075 MHz	2438.973	2440.473	1.500	0.298	Complies
2473.878 MHz	2472.113	2473.613	1.500	0.260	Complies


For GFSK: Ch. Separation Limits: > 20dB bandwidth

CH01

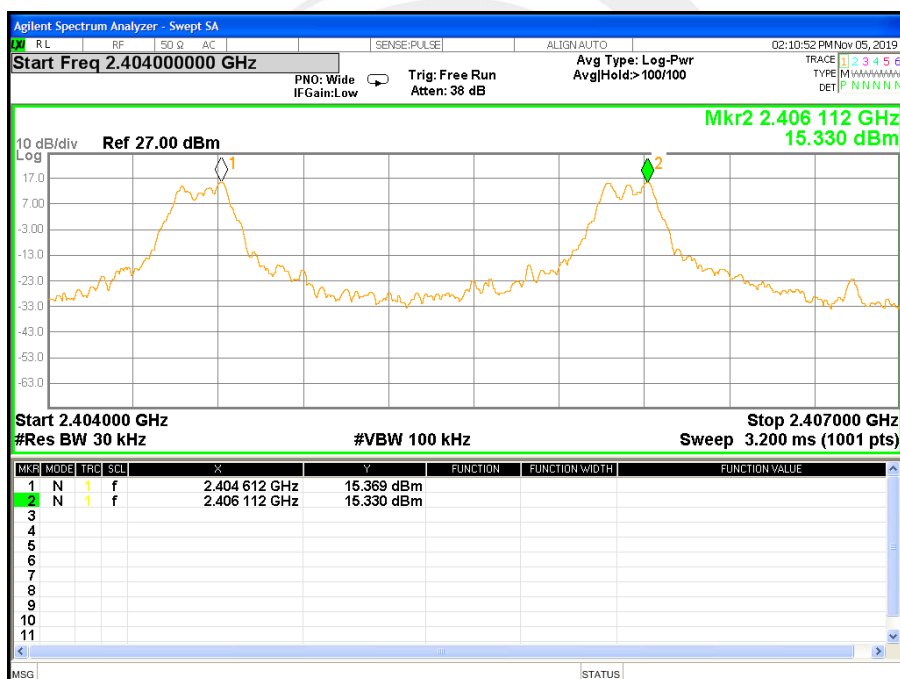



### CH24

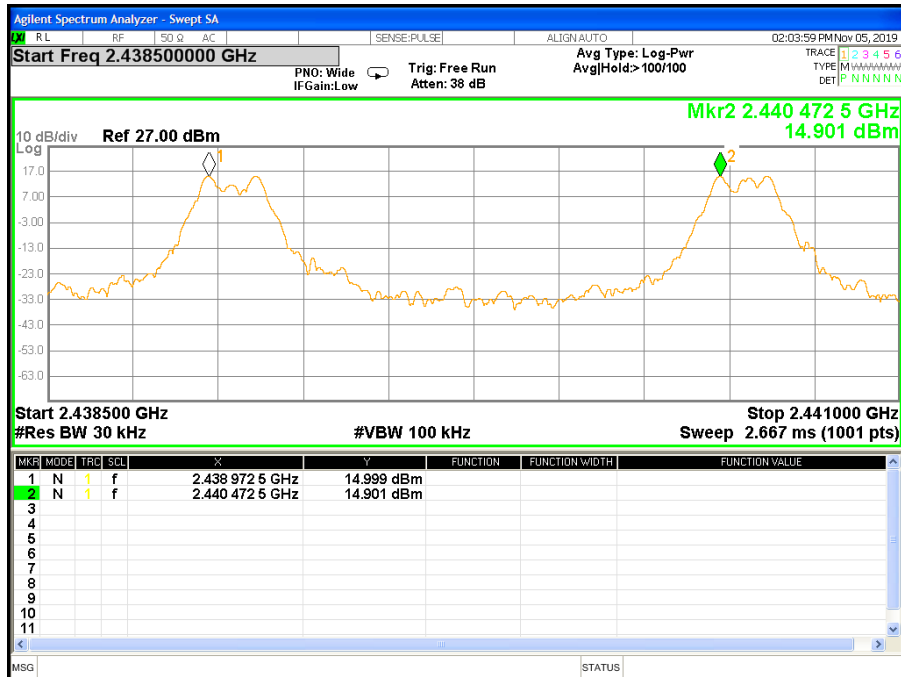

### CH47







## 8. BANDWIDTH TEST

### 8.1 LIMIT

FCC Part15 15.247,Subpart C				
Section	Test Item	Limit	FrequencyRange (MHz)	Result
15.247 (a)(1)	Bandwidth	(20dB bandwidth)	2400-2483.5	PASS

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	> Measurement Bandwidth or Channel Separation
RB	30 kHz (20dB Bandwidth) / 30 kHz (Channel Separation)
VB	100 kHz (20dB Bandwidth) / 100 kHz (Channel Separation)
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

### 8.2 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- Spectrum Setting: RBW= 30KHz, VBW=100KHz, Sweep time = Auto.

### 8.3 TEST SETUP



### 8.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.




8.5 TEST RESULTS

Temperature:	25°C	Relative Humidity:	50%
Test Mode:	CH01 / CH24/ CH47/Ant A	Test Voltage:	DC 3.7V


Frequency	20dB Bandwidth (KHz)	Result
2404.875 MHz	0.299	PASS
2439.075 MHz	0.306	PASS
2473.878 MHz	0.294	PASS

CH01

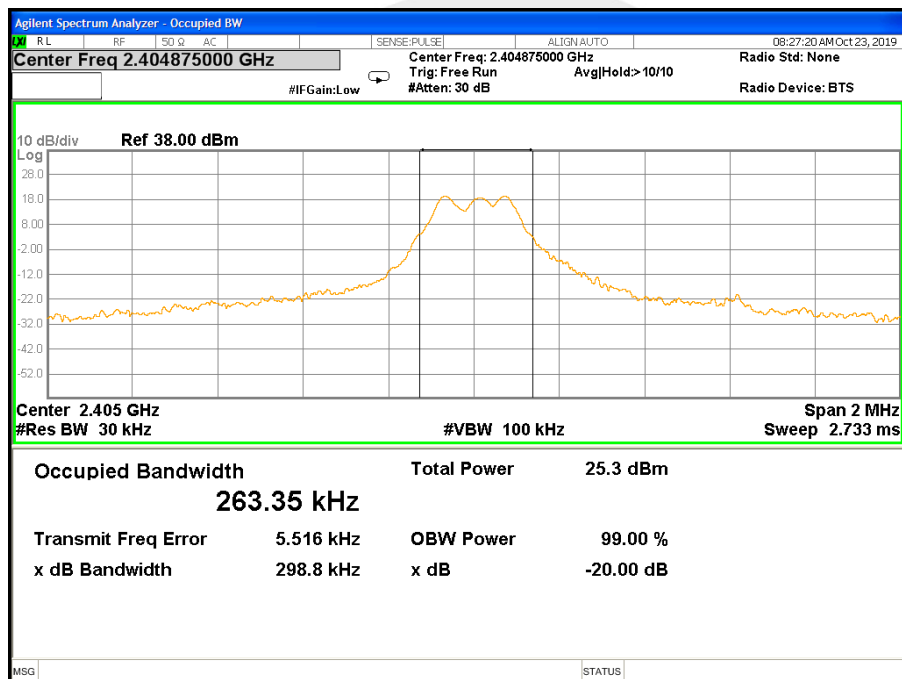




### CH24

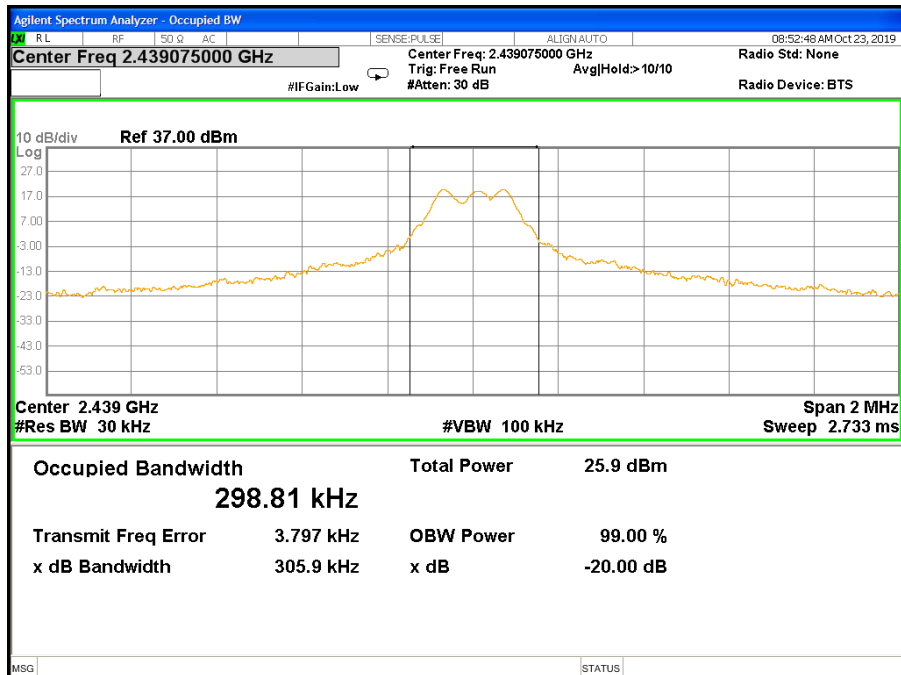

### CH47

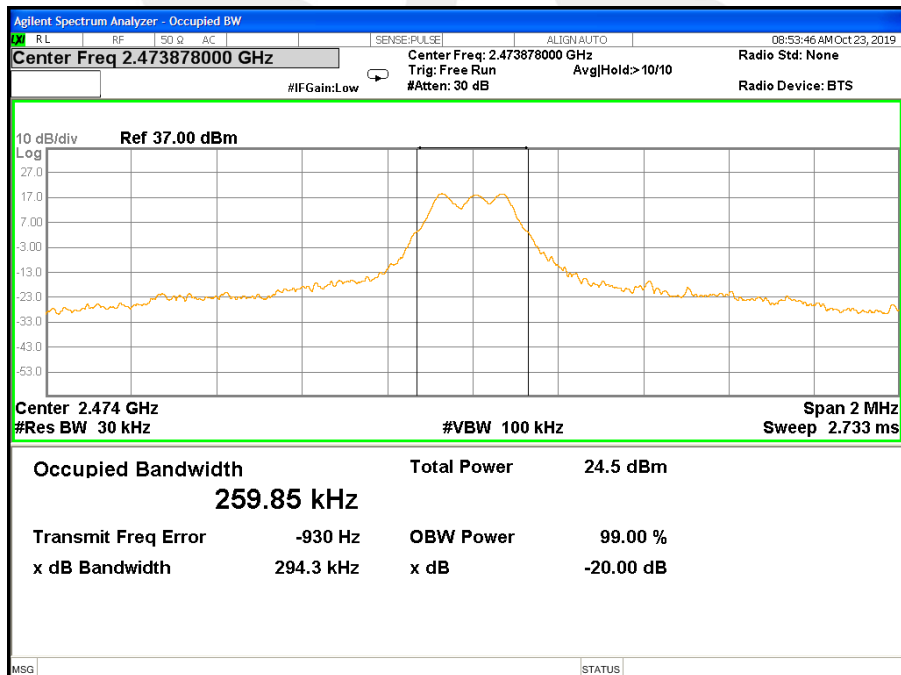




Temperature:	25°C	Relative Humidity:	50%
Test Mode:	CH01 / CH24/ CH47/Ant B	Test Voltage:	DC 3.7V


Frequency	20dB Bandwidth (KHz)	Result
2404.875 MHz	0.297	PASS
2439.075 MHz	0.320	PASS
2473.878 MHz	0.293	PASS

CH01

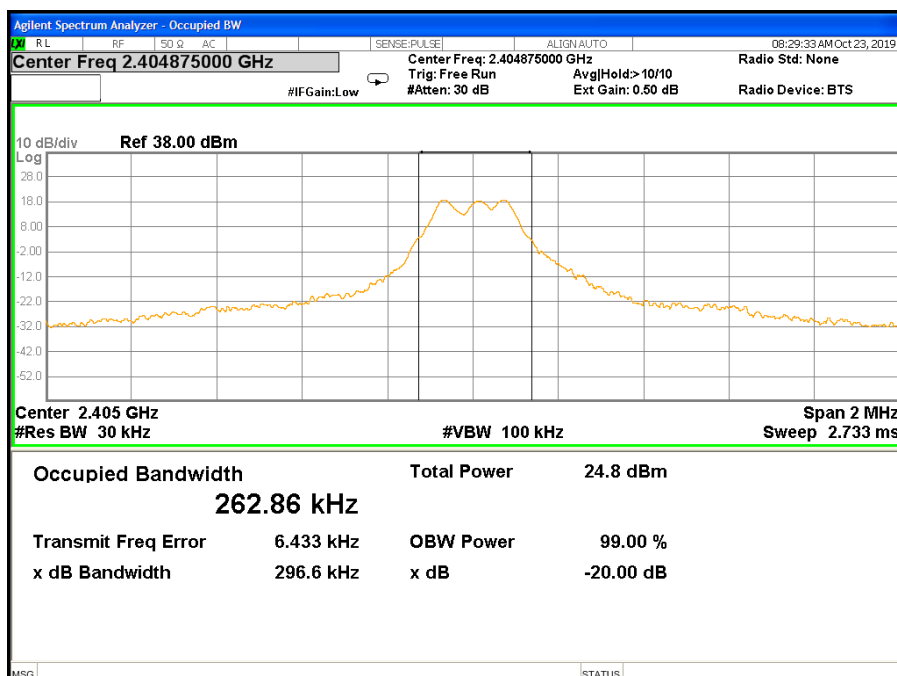




### CH24

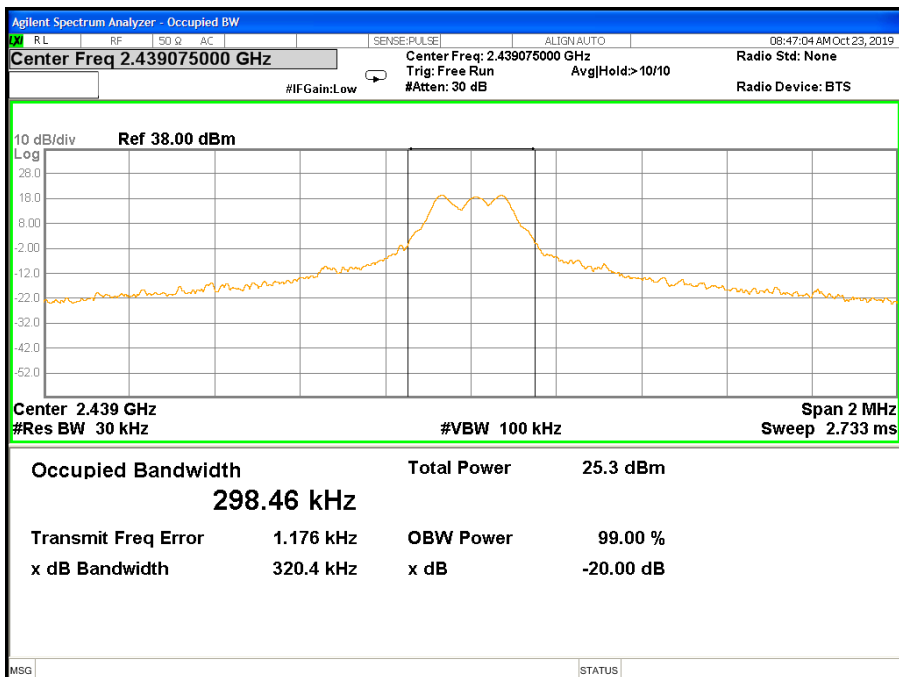

### CH47

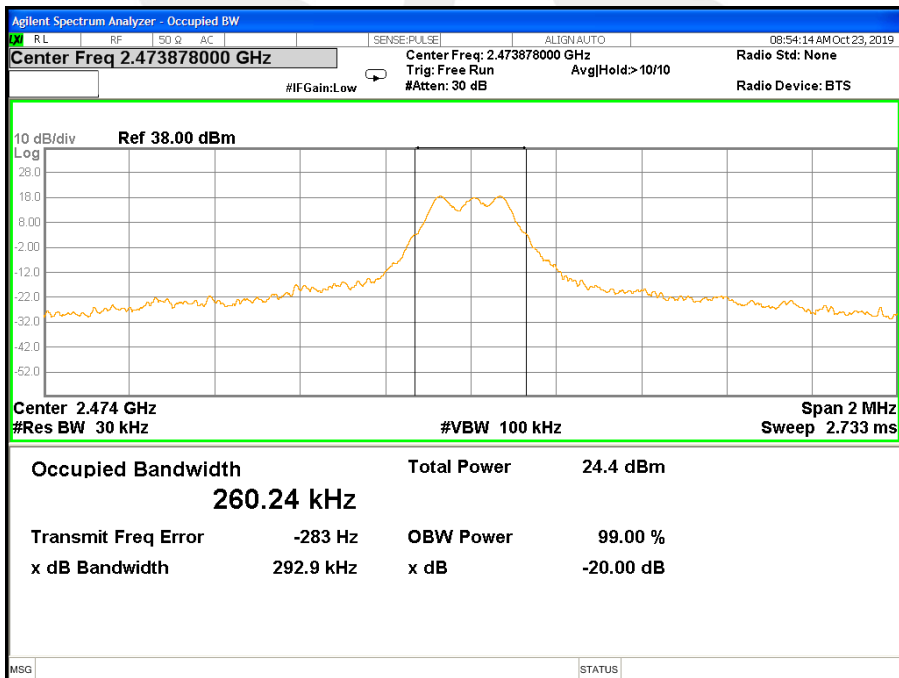



## 9. OUTPUT POWER TEST

### 9.1 LIMIT

FCC Part 15.247, Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247 (a)(1)&(b)(1)	Output Power	1 W or 0.125W	2400-2483.5	PASS
		if channel separation > 2/3 bandwidth provided the systems operate with an output power no greater than 125 mW (20.97dBm)		

### 9.2 TEST PROCEDURE

- a. The EUT was directly connected to the Power Sensor & PC

### 9.3 TEST SETUP



### 9.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.



## 9.5 TEST RESULTS

Temperature:	25°C	Relative Humidity:	60%
Test Voltage:	DC 3.7V		

Ant A:

Channel Number	Frequency (MHz)	Peak Power	Average Power	Limit
		(dBm)	(dBm)	(dBm)
1	2404.875	20.32	15.01	21.00
24	2439.075	19.97	14.17	21.00
47	2473.878	19.85	14.06	21.00

Ant B:

Channel Number	Frequency (MHz)	Peak Power	Average Power	Limit
		(dBm)	(dBm)	(dBm)
1	2404.875	20.34	14.61	21.00
24	2439.075	19.89	14.06	21.00
47	2473.878	19.28	13.88	21.00

Note: the channel separation &gt;20dB bandwidth



## 10. ANTENNA REQUIREMENT

### 10.1 STANDARD REQUIREMENT

15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

### 10.2 EUT ANTENNA

The EUT antenna is Dipole Antenna. It comply with the standard requirement.







## APPENDIX-PHOTOS OF TEST SETUP

Note: See test photos in setup photo document for the actual connections between Product and support equipment.

\*\*\*\*\*END OF THE REPORT\*\*\*\*\*

