



# FCC Test Report

**FOR:**

**Model Name: WC0G1M01  
Wellcore Activity Monitor**

**FCC ID: XYG-1**

**47 CFR Part 15.247 for FHSS Systems**

**TEST REPORT #: EMC\_WELLC\_001\_15.247BT\_XYG-1  
DATE: 2010-06-14**



**FCC listed  
A2LA Accredited**

**IC recognized #  
3462B**

***CETECOM Inc.***

411 Dixon Landing Road ♦ Milpitas, CA 95035 ♦ U.S.A.

Phone: + 1 (408) 586 6200 ♦ Fax: + 1 (408) 586 6299 ♦ E-mail: [info@cetecomusa.com](mailto:info@cetecomusa.com) ♦ <http://www.cetecom.com>

CETECOM Inc. is a Delaware Corporation with Corporation number: 2113686

Board of Directors: Dr. Harald Ansorge, Dr. Klaus Matkey, Hans Peter May

**TABLE OF CONTENTS**

|          |  |           |
|----------|--|-----------|
| <b>1</b> | <b>Assessment</b>  | <b>3</b>  |
| <b>2</b> | <b>Administrative Data</b>   | <b>4</b>  |
| 2.1      | Identification of the Testing Laboratory Issuing the EMC Test Report | 4         |
| 2.2      | Identification of the Client   | 4         |
| 2.3      | Identification of the Manufacturer                                   | 4         |
| <b>3</b> | <b>Equipment under Test (EUT)</b>                                    | <b>5</b>  |
| 3.1      | Specification of the Equipment under Test                            | 5         |
| 3.2      | Identification of the Equipment Under Test (EUT)                     | 5         |
| <b>4</b> | <b>Subject Of Investigation</b>                                      | <b>6</b>  |
| <b>5</b> | <b>Measurements</b>  | <b>7</b>  |
| 5.1      | Radiated Measurement Procedure                                       | 7         |
| 5.2      | Conducted Measurement Procedure                                      | 10        |
| 5.3      | Maximum Peak Output Power  | 11        |
| 5.3.1    | Limits:  | 11        |
| 5.3.2    | Test Conditions:   | 11        |
| 5.3.3    | Test Result:   | 11        |
| 5.3.4    | Test Data/plots:   | 12        |
| 5.4      | Restricted Band Edge Compliance                                      | 15        |
| 5.4.1    | Limits: §15.247/15.205   | 15        |
| 5.4.2    | Test Data/plots:   | 16        |
| 5.5      | Transmitter Spurious Emissions- Radiated                             | 20        |
| 5.5.1    | Limits:  | 20        |
| 5.5.2    | Limits: §15.209  | 20        |
| 5.5.3    | Limits: §15.209  | 21        |
| 5.5.4    | Test Result:   | 21        |
| 5.5.5    | Test data/ plots:  | 22        |
| 5.6      | Receiver Spurious Emissions- Radiated                                | 27        |
| 5.6.1    | Limits: §15.109  | 27        |
| 5.6.2    | Test Result:   | 27        |
| 5.6.3    | Test data/ plots:  | 28        |
| 5.7      | AC Power Line Conducted Emissions                                    | 30        |
| 5.7.1    | Limits: §15.107/15.207   | 30        |
| 5.7.2    | Test Result:   | 30        |
| <b>6</b> | <b>Test Equipment and Ancillaries used for tests</b>                 | <b>31</b> |
| <b>7</b> | <b>BLOCK DIAGRAMS</b>  | <b>32</b> |
| <b>8</b> | <b>Revision History</b>  | <b>34</b> |

## 1 Assessment

The following is in compliance with the applicable criteria specified in FCC rules Parts 15.247 of Title 47 of the Code of Federal Regulations.

| Company              | Description                         | Model #  |
|----------------------|-------------------------------------|----------|
| Wellcore Corporation | Accelerometer based motion detector | WC0G1M01 |

### Responsible for Testing Laboratory:

| 2010-06-14 | Compliance | Heiko Strehlow<br>(Director) |           |
|------------|------------|------------------------------|-----------|
| Date       | Section    | Name                         | Signature |

### Responsible for the Report:

| 2010-06-14 | Compliance | Marc Douat<br>(Test Lab Manager) |           |
|------------|------------|----------------------------------|-----------|
| Date       | Section    | Name                             | Signature |

The test results of this test report relate exclusively to the test item specified in Section 3.  
CETECOM Inc. USA does not assume responsibility for any conclusions and generalizations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item. The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of the CETECOM Inc USA.

## 2 Administrative Data

### 2.1 Identification of the Testing Laboratory Issuing the EMC Test Report

|                                      |  |
|--------------------------------------|--|
| <b>Company Name:</b>                 | CETECOM Inc.   |
| <b>Department:</b>                   | Compliance   |
| <b>Address:</b>                      | 411 Dixon Landing Road<br>Milpitas, CA 95035<br>U.S.A. |
| <b>Telephone:</b>                    | +1 (408) 586 6200                                      |
| <b>Fax:</b>                          | +1 (408) 586 6299                                      |
| <b>Responsible Test Lab Manager:</b> | Heiko Strehlow   |
| <b>Responsible Project Leader:</b>   | Marc Douat   |

### 2.2 Identification of the Client

|                          |                            |
|--------------------------|----------------------------|
| <b>Applicant's Name:</b> | Wellcore Corporation       |
| <b>Street Address:</b>   | 2870 Zanker Road Suite 130 |
| <b>City/Zip Code</b>     | San Jose, CA 95134         |
| <b>Country</b>           | USA                        |
| <b>Contact Person:</b>   | Van Krueger                |
| <b>Phone No.</b>         | +1 408 216 8362            |
| <b>e-mail:</b>           | van@wellcore.com           |

### 2.3 Identification of the Manufacturer

|                               |               |
|-------------------------------|---------------|
| <b>Manufacturer's Name:</b>   | Same as above |
| <b>Manufacturers Address:</b> |               |
| <b>City/Zip Code</b>          |               |
| <b>Country</b>                |               |

### 3 Equipment under Test (EUT)

#### 3.1 Specification of the Equipment under Test

|                                  |   |
|----------------------------------|---|
| <b>Marketing Name:</b>           | Wellcore Activity Monitor   |
| <b>Model No:</b>                 | WC0G1M01  |
| <b>Product Type:</b>             | Accelerometer based motion detector   |
| <b>Hardware Revision :</b>       | Ver. 3  |
| <b>Software Revision :</b>       | Version 31  |
| <b>FCC-ID:</b>                   | XYG-1   |
| <b>Frequency:</b>                | ISM Band 2400-2483.5 MHz  |
| <b>Type(s) of Modulation:</b>    | GFSK, higher order modulation and data rates are disabled for this implementation.  |
| <b>Number of channels:</b>       | 79  |
| <b>Antenna Type:</b>             | Integral  |
| <b>Equipment Classification:</b> | <input type="checkbox"/> Fixed <input type="checkbox"/> Vehicular <input checked="" type="checkbox"/> Portable<br><input type="checkbox"/> Module |
| <b>Power Supply:</b>             | 3.5 to 4.2 VDC battery  |

#### 3.2 Identification of the Equipment Under Test (EUT)

| EUT # | Model    | HW Version | SW Version |
|-------|----------|------------|------------|
| 1     | WC0G1M01 | Ver. 3     | Version 31 |



#### **4 Subject Of Investigation**

The objective of the measurements done by Cetecom Inc. was to measure the performance of the EUT as specified by requirements listed in FCC rules Part 15.247 of Title 47 of the Code of Federal Regulations.

This test report is to support a request for new equipment authorization under the FCC ID **XYG-1**. All testing was performed on the product referred to in Section 3 as EUT. This test report contains only radiated testing results as per FCC15.247.

During the testing process the EUT was tested on a single channel using PRBS payload using DH5, all data in this report shows the worst case between horizontal and vertical polarization measurements.

## **5 Measurements**

### **5.1 Radiated Measurement Procedure**

#### **ANSI C63.4 Section 8.3.1.1: Exploratory radiated emission measurements**

Exploratory radiated measurements shall be performed at the measurement distance or at a closer distance than that specified for compliance to determine the emission characteristics of the EUT. At near distances, for EUTs of comparably small size, it is relatively easy to determine the spectrum signature of the EUT and, if applicable, the EUT configuration that produces the maximum level of emissions. A shielded room may be used for exploratory testing, but may have anomalies that can lead to significant errors in amplitude measurements.

Broadband antennas and a spectrum analyzer or a radio-noise meter with a panoramic display are often useful in this type of testing. It is recommended that either a headset or loudspeaker be connected as an aid in detecting ambient signals and finding frequencies of significant emission from the EUT when the exploratory and final testing is performed in an OATS with strong ambient signals. Caution should be taken if either antenna height between 1 and 4 meters or EUT azimuth is not fully explored. Not fully exploring these parameters during exploratory testing may require complete testing at the OATS or semi-anechoic chamber when the final full spectrum testing is conducted.

The EUT should be set up in its typical configuration and arrangement, and operated in its various modes. For tabletop systems, cables or wires should be manipulated within the range of likely arrangements. For floor-standing equipment, the cables or wires should be located in the same manner as the user would install them and no further manipulation is made. For combination EUTs, the tabletop and floor-standing portions of the EUT shall follow the procedures for their respective setups and cable manipulation. If the manner of cable installation is not known, or if it changes with each installation, cables or wires for floor-standing equipment shall be manipulated to the extent possible to produce the maximum level of emissions.

For each mode of operation required to be tested, the frequency spectrum shall be monitored. Variations in antenna height between 1 and 4 m, antenna polarization, EUT azimuth, and cable or wire placement (each variable within bounds specified elsewhere) shall be explored to produce the emission that has the highest amplitude relative to the limit. A step-by-step technique for determining this emission can be found in Annex C.

When measuring emissions above 1 GHz, the frequencies of maximum emission shall be determined by manually positioning the antenna close to the EUT and by moving the antenna over all sides of the EUT while observing a spectral display. It will be advantageous to have prior knowledge of the frequencies of emissions above 1 GHz. If the EUT is a device with dimensions approximately equal to that of the measurement antenna beamwidth, the measurement antenna shall be aligned with the EUT.

### **ANSI C63.4 Section 8.3.1.2: Final radiated emission measurements**

Based on the measurement results in 8.3.1.1, the one EUT, cable and wire arrangement, and mode of operation that produces the emission that has the highest amplitude relative to the limit is selected for the final measurement. The final measurement is then performed on a site meeting the requirements of 5.3, 5.4, or 5.5 as appropriate without variation of the EUT arrangement or EUT mode of operation. If the EUT is relocated from an exploratory test site to a final test site, the highest emission shall be remaximized at the final test location before final radiated emissions measurements are performed. However, antenna height and polarity and EUT azimuth are to be varied. In addition, the full frequency spectrum (for the range to be checked for meeting compliance) shall be investigated.

This investigation is performed with the EUT rotated 360°, the antenna height scanned between 1 m and 4 m, and the antenna rotated to repeat the measurements for both the horizontal and vertical antenna polarizations. During the full frequency spectrum investigation, particular focus should be made on those frequencies found in exploratory testing that were used to find the final test configuration, mode of operation, and arrangement (associated with achieving the least margin with respect to the limit). This full spectrum test constitutes the compliance measurement.


For measurements above 1 GHz, use the cable, EUT arrangement, and mode of operation determined in the exploratory testing to produce the emission that has the highest amplitude relative to the limit. Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the antenna in the “cone of radiation” from that area and pointed at the area both in azimuth and elevation, with polarization oriented for maximum response. The antenna may have to be higher or lower than the EUT, depending on the EUT’s size and mounting height, but the antenna should be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane. If the transmission line for the measurement antenna restricts its range of height and polarization, the steps needed to ensure the correct measurement of the maximum emissions, shall be described in detail in the report of measurements. Data collected shall satisfy the report requirements of Clause 10.

### **NOTES**

- 1— Where limits are specified by agencies for both average and peak (or quasi-peak) detection, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement.
- 2—Use of waveguide and flexible waveguide may be necessary at frequencies above 10 GHz to achieve usable signal-to noise ratios at required measurement distances. If so, it may be necessary to restrict the height search of the antenna, and special care should be taken to ensure that maximum emissions are correctly measured.
- 3—All presently known devices causing emissions above 10 GHz are physically small compared with the beam-widths of typical horn antennas used for EMC measurements. For such EUTs and frequencies, it may be preferable to vary the height and polarization of the EUT instead of the receiving antenna to maximize the measured emissions.




**Ref: TIA-603C 2004 -2.2.17.2 Effective Radiated Power (ERP) or Effective Isotropic Radiated Power (EIRP)**

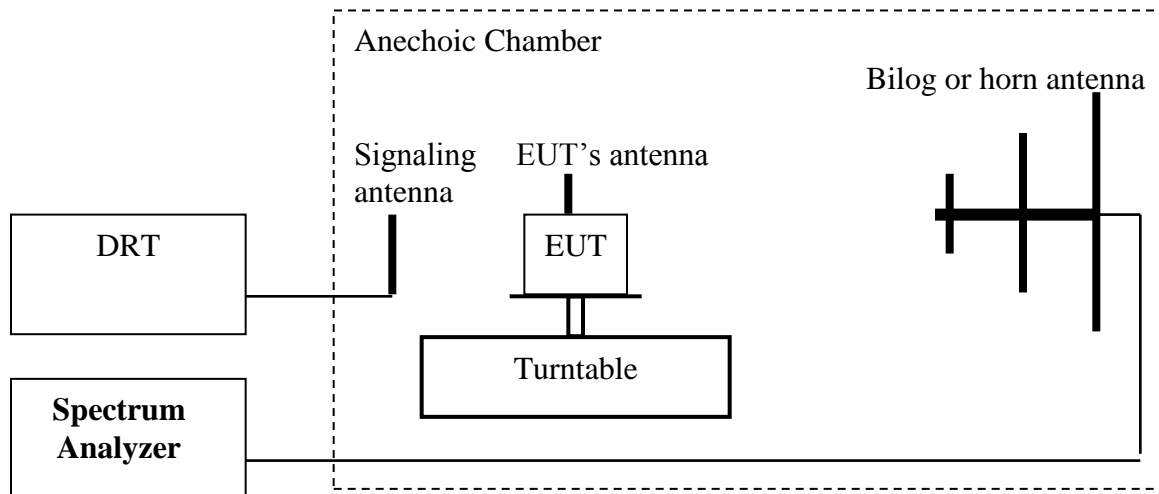

1. Connect the equipment as shown in the above diagram with the EUT's antenna in a vertical orientation.
  2. Adjust the settings of the Digital RadioCommunication Tester (DRT) to set the EUT to its maximum power at the required channel.
  3. Set the spectrum analyzer to the channel frequency. Set the analyzer to measure peak hold with the required settings.
  4. Rotate the EUT 360°. Record the peak level in dBm (**LVL**).
  5. Replace the EUT with a vertically polarized half wave dipole or known gain antenna. The center of the antenna should be at the same location as the center of the EUT's antenna.
  6. Connect the antenna to a signal generator with known output power and record the path loss in dB (**LOSS**). **LOSS** = Generator Output Power (dBm) – Analyzer reading (dBm).
  7. Determine the ERP using the following equation:  
**ERP (dBm) = LVL (dBm) + LOSS (dB)**
  8. Determine the EIRP using the following equation:  
**EIRP (dBm) = ERP (dBm) + 2.14 (dB)**
  9. Measurements are to be performed with the EUT set to the low, middle and high channels.
- Spectrum analyzer settings: RBW=VBW=3MHz**

## 5.2 Conducted Measurement Procedure

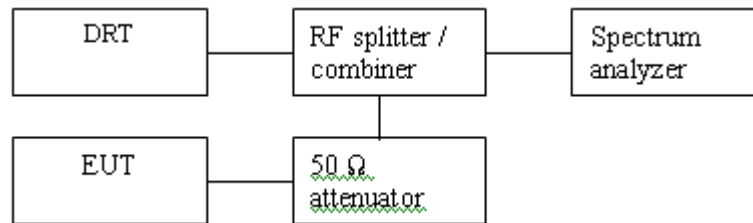

1. Connect the equipment as shown in the above diagram.
2. Adjust the settings of the Digital RadioCommunication Tester (DRT) to set the EUT to its maximum power at the required channel.
3. Measurements are to be performed with the EUT set to the low, middle and high channels.

### 5.3 Maximum Peak Output Power

#### 5.3.1 Limits:

§15.247 (b)(1)

Nominal Peak Output Power < 30 dBm (1W)

#### 5.3.2 Test Conditions:

Tnom: 21°C


#### 5.3.3 Test Result:

| Max Peak Output Power- Radiated (dBm) |                 |      |       |
|---------------------------------------|-----------------|------|-------|
| Modulation                            | Frequency (MHz) |      |       |
|                                       | 2402            | 2441 | 2480  |
| GFSK                                  | 2.55            | 3.15 | -0.14 |
| Measurement Uncertainty: ±3dB         |                 |      |       |

#### 5.3.4 Test Data/plots:


##### Radiated Peak Power GFSK 2402 MHz

EIRPBT L

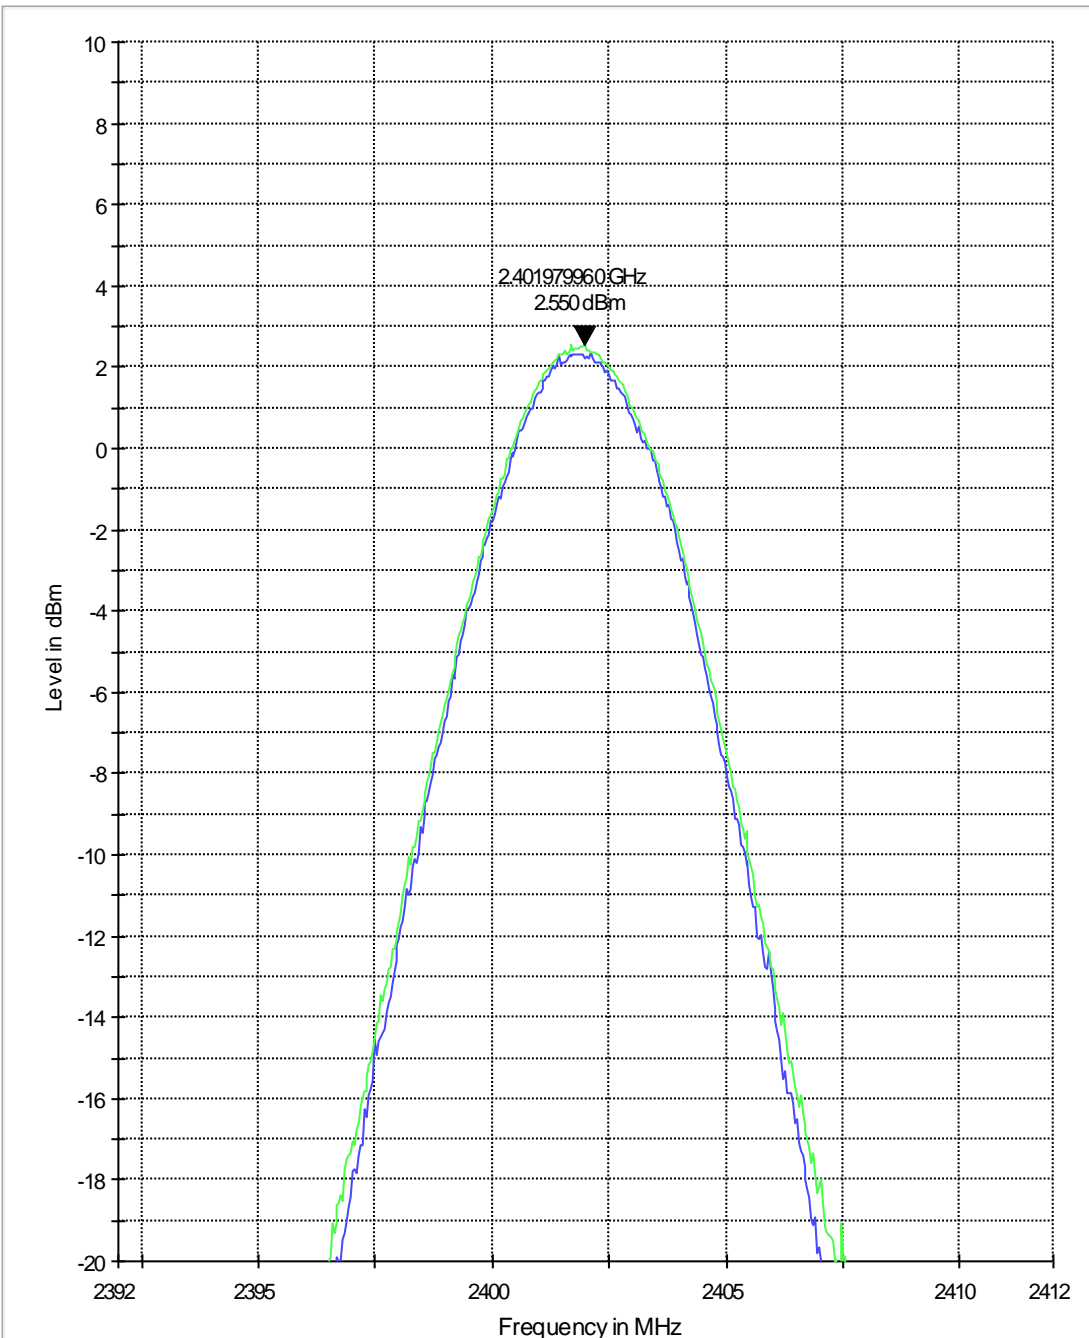


**Radiated Peak Power GFSK 2441 MHz**

EIRPBT M

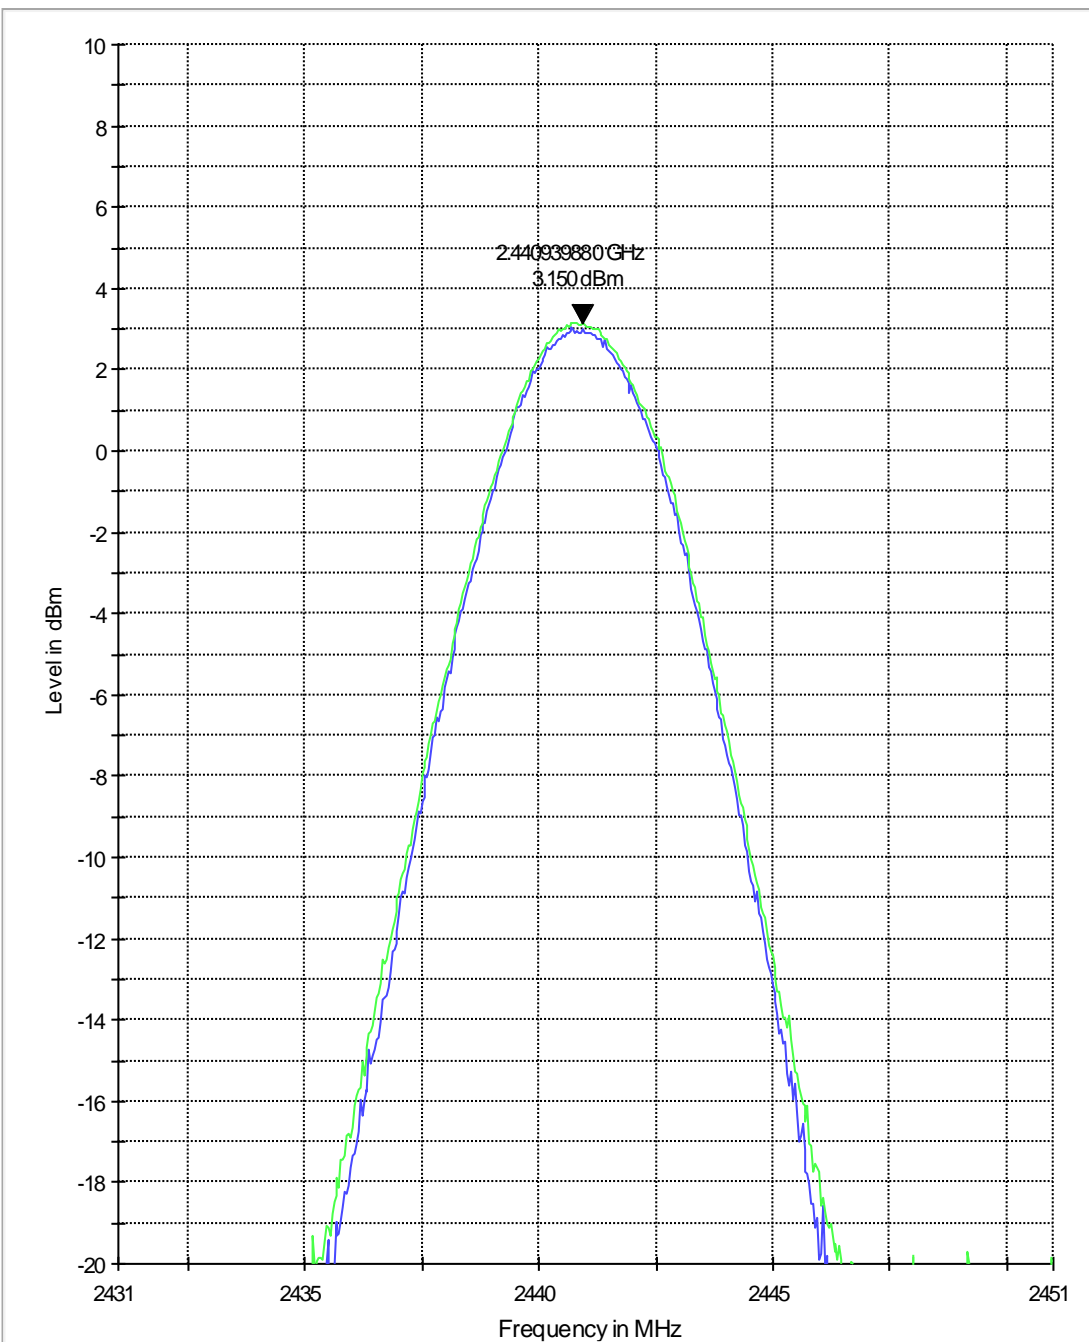

**Radiated Peak Power GFSK 2480 MHz**

EIRPBT H

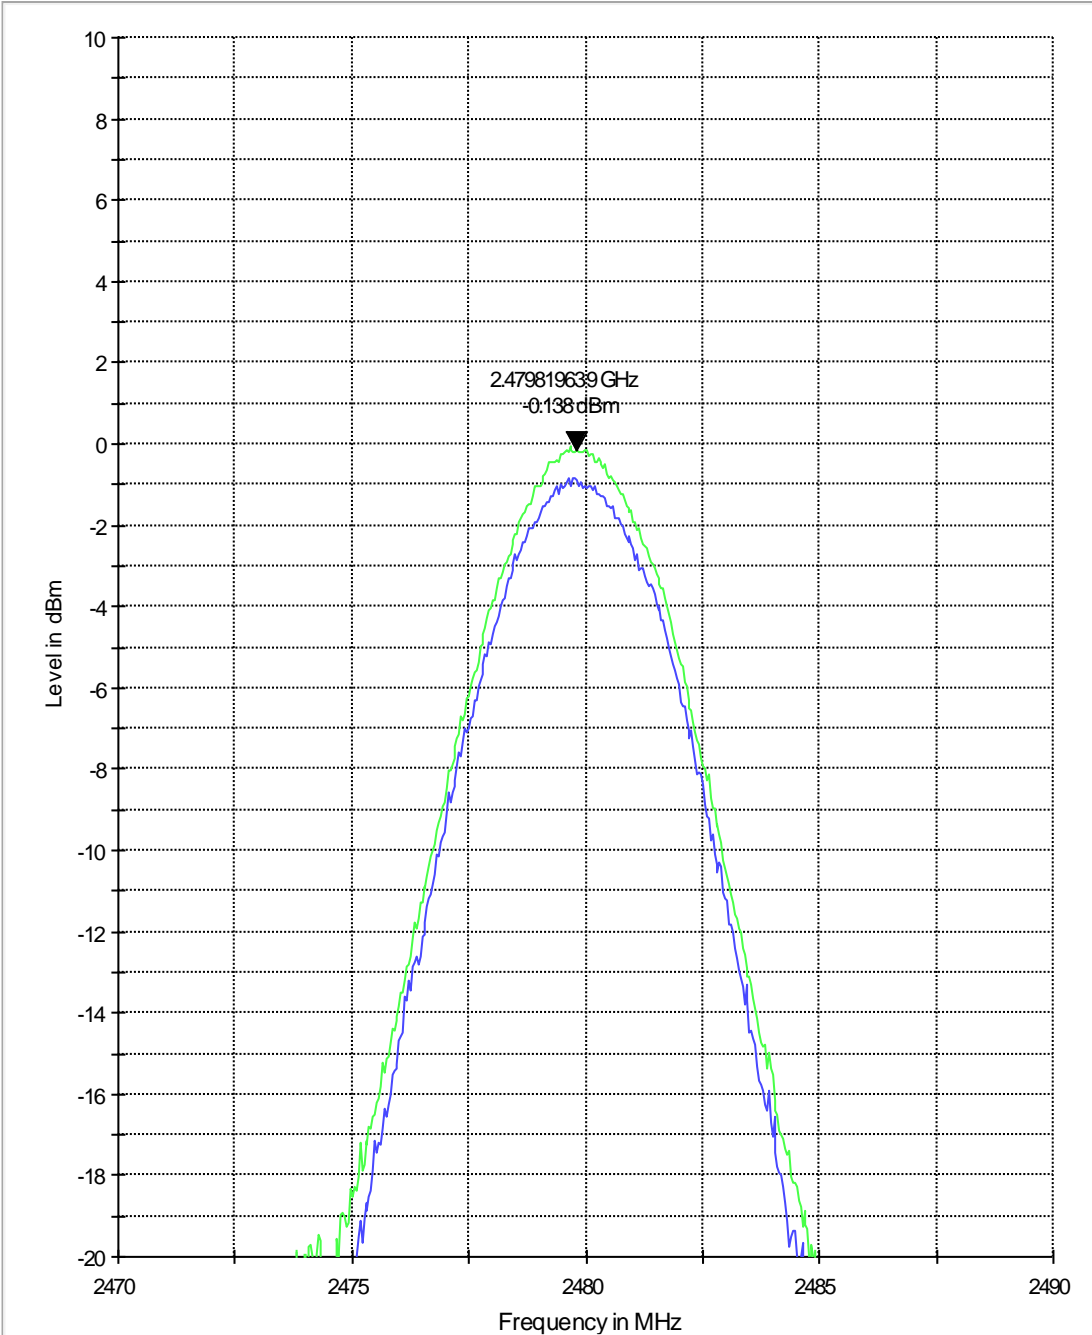

## 5.4 Restricted Band Edge Compliance

### 5.4.1 Limits: §15.247/15.205

(a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

| MHz                        | MHz                   | MHz             | GHz              |
|----------------------------|-----------------------|-----------------|------------------|
| 0.090 - 0.110              | 16.42 - 16.423        | 399.9 - 410     | 4.5 - 5.15       |
| <sup>1</sup> 0.495 - 0.505 | 16.69475 - 16.69525   | 608 - 614       | 5.35 - 5.46      |
| 2.1735 - 2.1905            | 16.80425 - 16.80475   | 960 - 1240      | 7.25 - 7.75      |
| 4.125 - 4.128              | 25.5 - 25.67          | 1300 - 1427     | 8.025 - 8.5      |
| 4.17725 - 4.17775          | 37.5 - 38.25          | 1435 - 1626.5   | 9.0 - 9.2        |
| 4.20725 - 4.20775          | 73 - 74.6             | 1645.5 - 1646.5 | 9.3 - 9.5        |
| 6.215 - 6.218              | 74.8 - 75.2           | 1660 - 1710     | 10.6 - 12.7      |
| 6.26775 - 6.26825          | 108 - 121.94          | 1718.8 - 1722.2 | 13.25 - 13.4     |
| 6.31175 - 6.31225          | 123 - 138             | 2200 - 2300     | 14.47 - 14.5     |
| 8.291 - 8.294              | 149.9 - 150.05        | 2310 - 2390     | 15.35 - 16.2     |
| 8.362 - 8.366              | 156.52475 - 156.52525 | 2483.5 - 2500   | 17.7 - 21.4      |
| 8.37625 - 8.38675          | 156.7 - 156.9         | 2690 - 2900     | 22.01 - 23.12    |
| 8.41425 - 8.41475          | 162.0125 - 167.17     | 3260 - 3267     | 23.6 - 24.0      |
| 12.29 - 12.293             | 167.72 - 173.2        | 3332 - 3339     | 31.2 - 31.8      |
| 12.51975 - 12.52025        | 240 - 285             | 3345.8 - 3358   | 36.43 - 36.5     |
| 12.57675 - 12.57725        | 322 - 335.4           | 3600 - 4400     | ( <sup>2</sup> ) |
| 13.36 - 13.41              |                       |                 |                  |

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).


\*PEAK LIMIT= 74dB $\mu$ V/m

\*AVG. LIMIT= 54dB $\mu$ V/m

## 5.4.2 Test Data/plots:

### Lower band edge peak -GFSK modulation


FCC 15.247 LBE Pk 3m

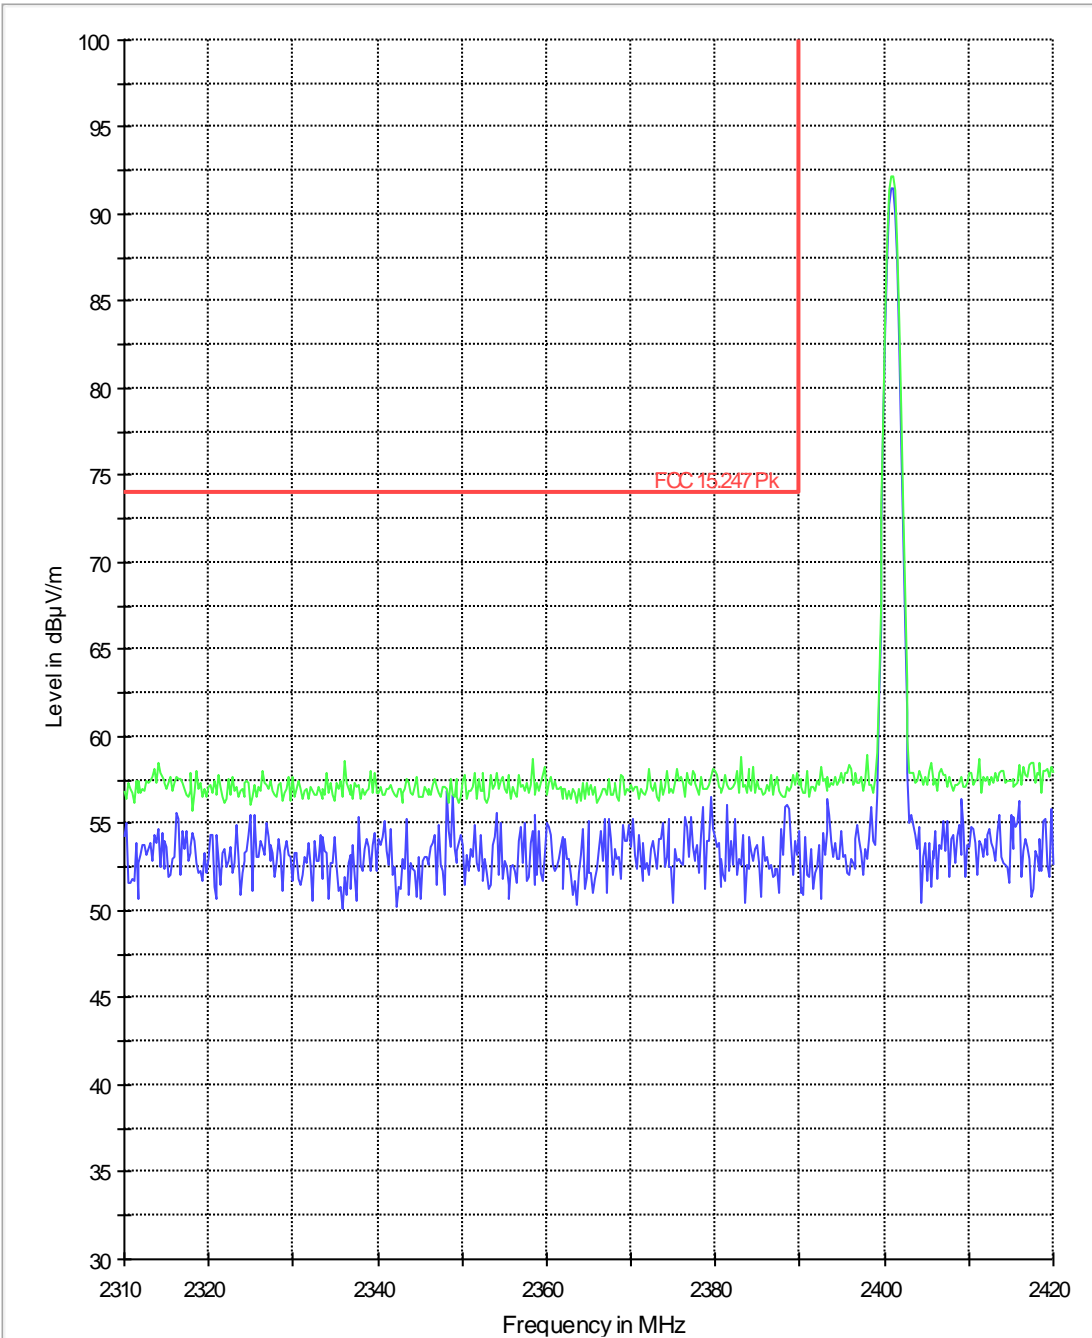




**Lower band edge average -GFSK modulation**

FCC 15.247 LBE Avg 3m

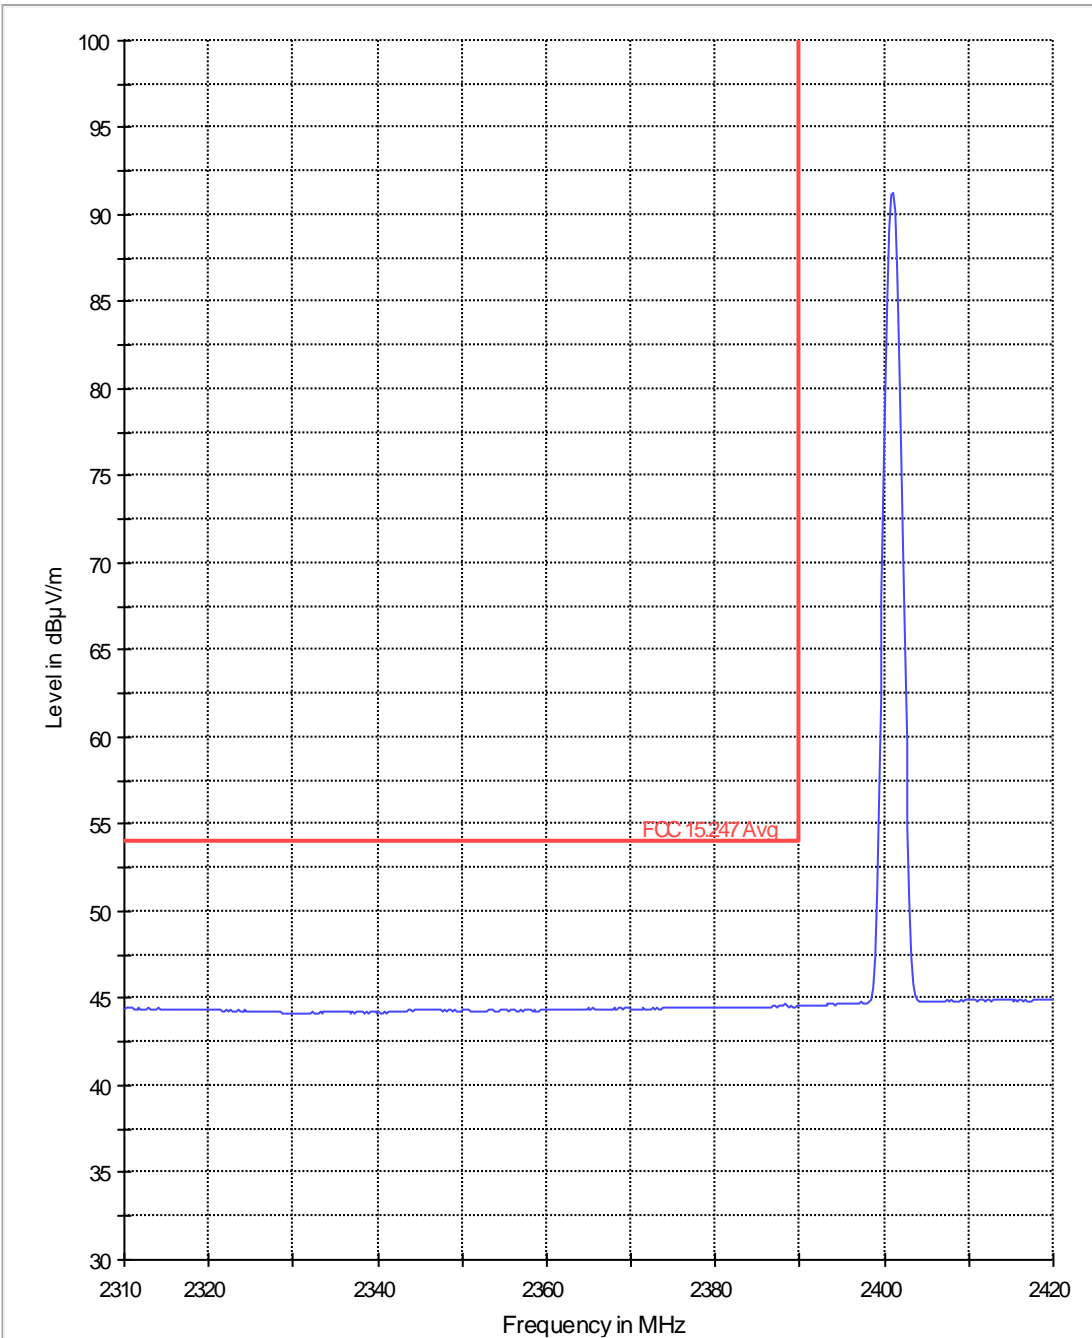


**Higher band edge peak -GFSK modulation**

FCC 15.247 HBE Pk 3m

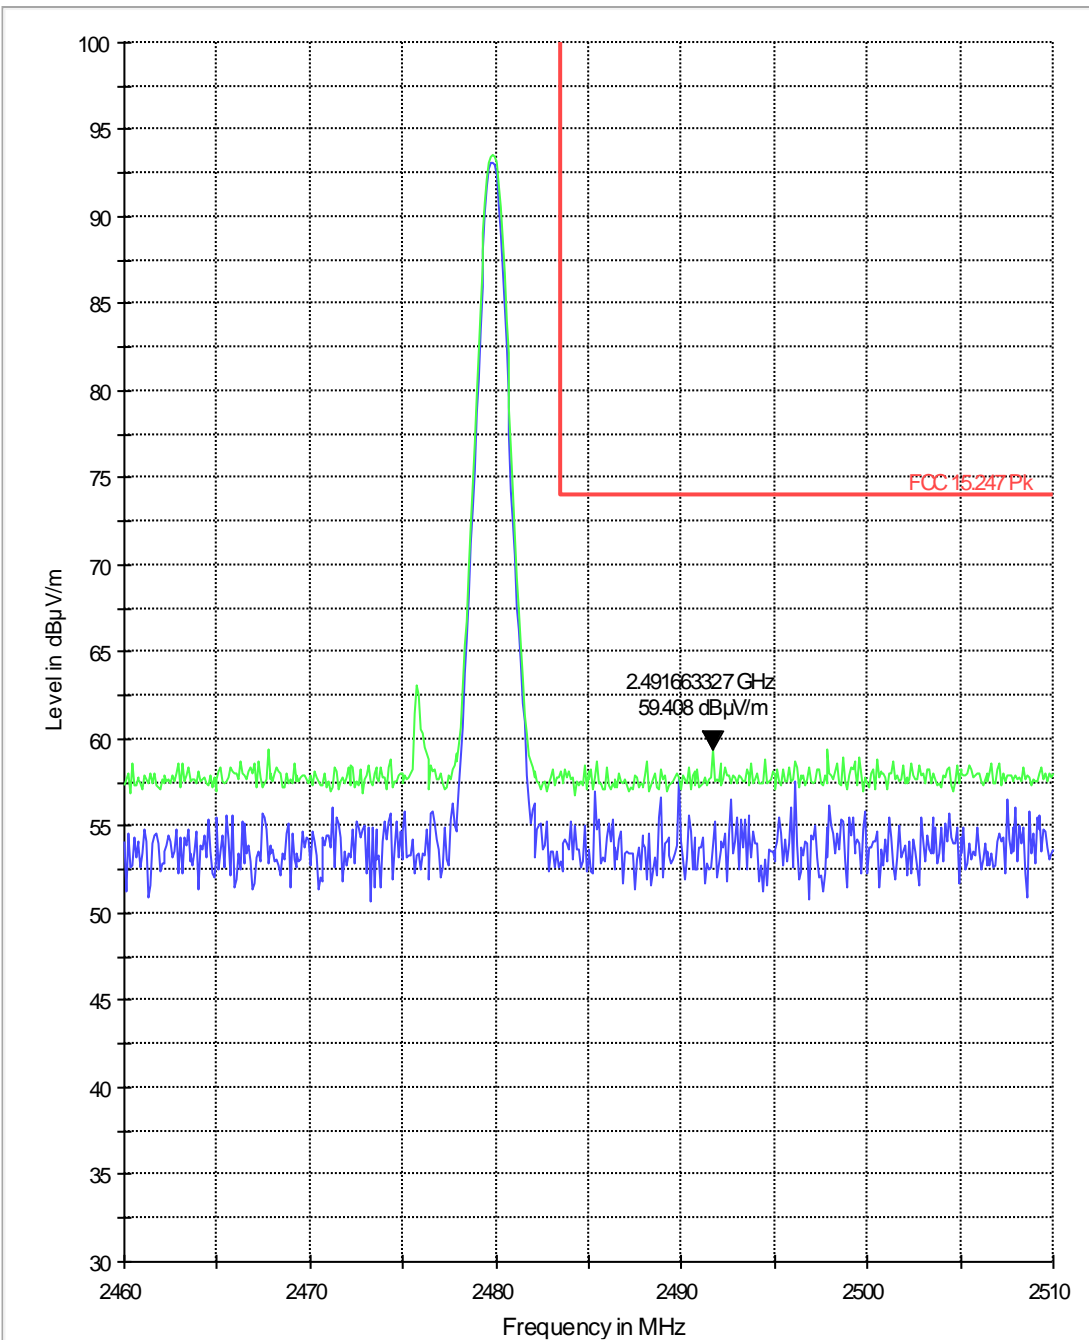

## Higher band edge average-GFSK modulation

FOC 15.247 HBE Avg 3m

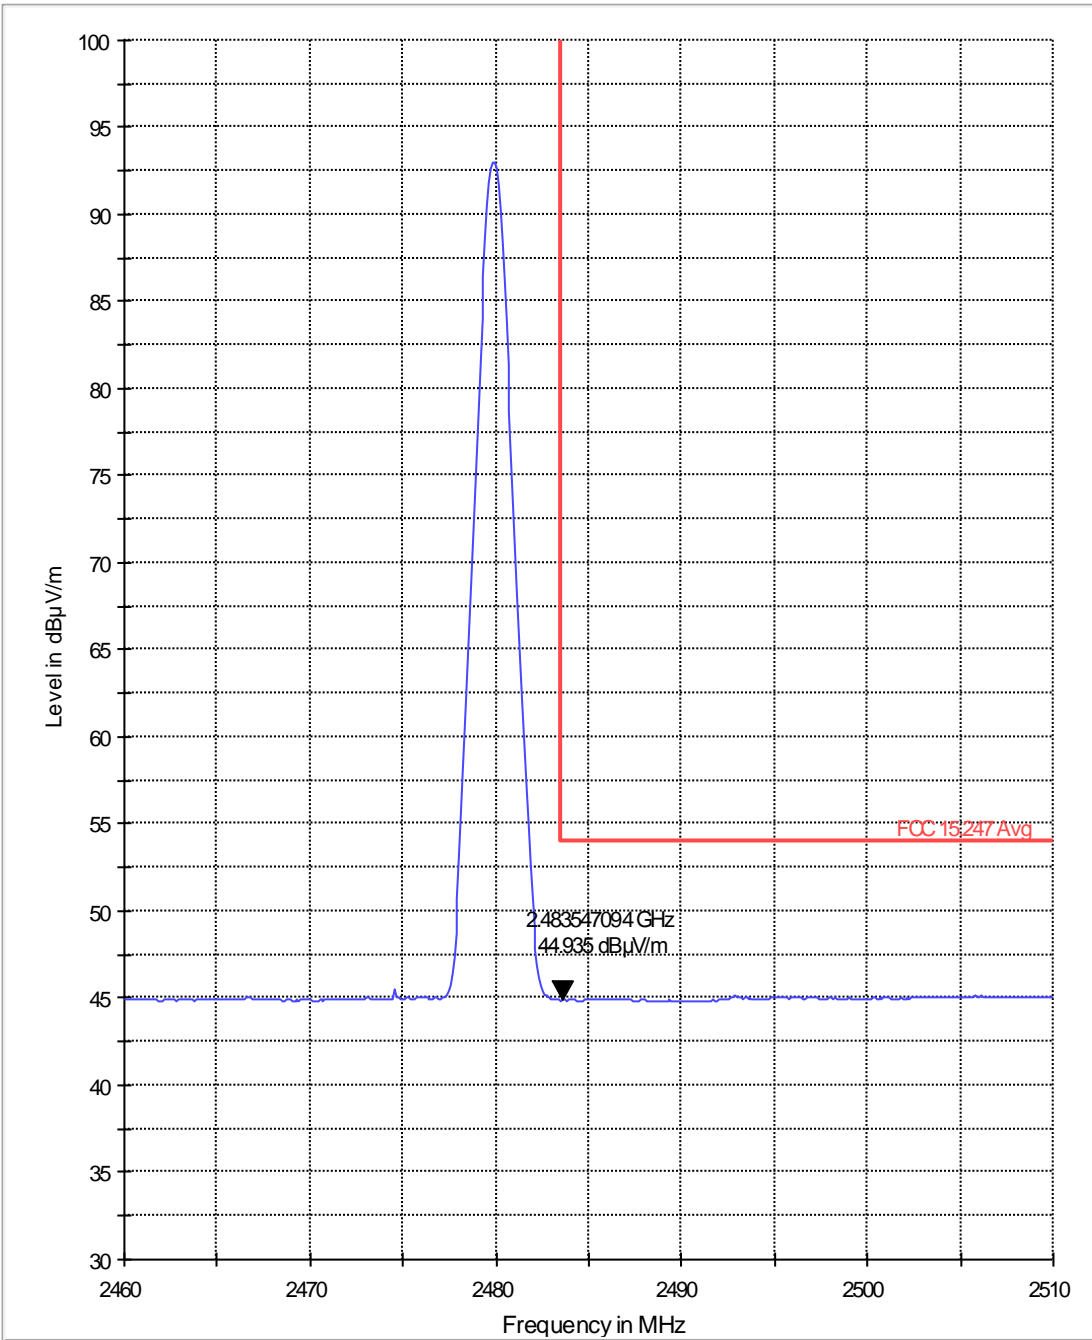

## 5.5 Transmitter Spurious Emissions- Radiated

### 5.5.1 Limits:

#### §15.247/15.205

(a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

| MHz                 | MHz                   | MHz             | GHz              |
|---------------------|-----------------------|-----------------|------------------|
| 0.090 - 0.110       | 16.42 - 16.423        | 399.9 - 410     | 4.5 - 5.15       |
| 0.495 - 0.505       | 16.69475 - 16.69525   | 608 - 614       | 5.35 - 5.46      |
| 2.1735 - 2.1905     | 16.80425 - 16.80475   | 960 - 1240      | 7.25 - 7.75      |
| 4.125 - 4.128       | 25.5 - 25.67          | 1300 - 1427     | 8.025 - 8.5      |
| 4.17725 - 4.17775   | 37.5 - 38.25          | 1435 - 1626.5   | 9.0 - 9.2        |
| 4.20725 - 4.20775   | 73 - 74.6             | 1645.5 - 1646.5 | 9.3 - 9.5        |
| 6.215 - 6.218       | 74.8 - 75.2           | 1660 - 1710     | 10.6 - 12.7      |
| 6.26775 - 6.26825   | 108 - 121.94          | 1718.8 - 1722.2 | 13.25 - 13.4     |
| 6.31175 - 6.31225   | 123 - 138             | 2200 - 2300     | 14.47 - 14.5     |
| 8.291 - 8.294       | 149.9 - 150.05        | 2310 - 2390     | 15.35 - 16.2     |
| 8.362 - 8.366       | 156.52475 - 156.52525 | 2483.5 - 2500   | 17.7 - 21.4      |
| 8.37625 - 8.38675   | 156.7 - 156.9         | 2690 - 2900     | 22.01 - 23.12    |
| 8.41425 - 8.41475   | 162.0125 - 167.17     | 3260 - 3267     | 23.6 - 24.0      |
| 12.29 - 12.293      | 167.72 - 173.2        | 3332 - 3339     | 31.2 - 31.8      |
| 12.51975 - 12.52025 | 240 - 285             | 3345.8 - 3358   | 36.43 - 36.5     |
| 12.57675 - 12.57725 | 322 - 335.4           | 3600 - 4400     | ( <sup>2</sup> ) |
| 13.36 - 13.41       |                       |                 |                  |

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

\*PEAK LIMIT= 74dB $\mu$ V/m

\*AVG. LIMIT= 54dB $\mu$ V/m

### 5.5.2 Limits: §15.209

(For measurement distance of 3m)

| Frequency of emission (MHz) | Field strength ( $\mu$ V/m) |
|-----------------------------|-----------------------------|
| 30–88                       | 100 (40dB $\mu$ V/m)        |
| 88–216                      | 150 (43.5 dB $\mu$ V/m)     |
| 216–960                     | 200 (46 dB $\mu$ V/m)       |
| Above 960                   | 500 (54 dB $\mu$ V/m)       |

**NOTE:**

1. The radiated emissions were done with different settings, using the relevant pre-amplifiers for the relevant frequency ranges. This is the reason that the graphs show different noise levels. In the range between 3 and 25 GHz very short cable connections to the antenna was used to minimize the noise level.

2. All measurements are done in Peak mode using an Average limit, unless specified within the plots.

**5.5.3 Limits: §15.209**


| Frequency of emission (MHz) | Field strength ( $\mu\text{V/m}$ ) | Measurement Distance (m) |
|-----------------------------|------------------------------------|--------------------------|
| 0.009–0.490                 | 2400/F(kHz)                        | 300                      |
| 0.490–1.705                 | 24000/F(kHz)                       | 30                       |
| 1.705–30.0                  | 30                                 | 30                       |

**5.5.4 Test Result:**


No significant emissions measurable. Plots reported here represent the worse case emissions.

### 5.5.5 Test data/ plots:


FCC 15.30-1000MHz

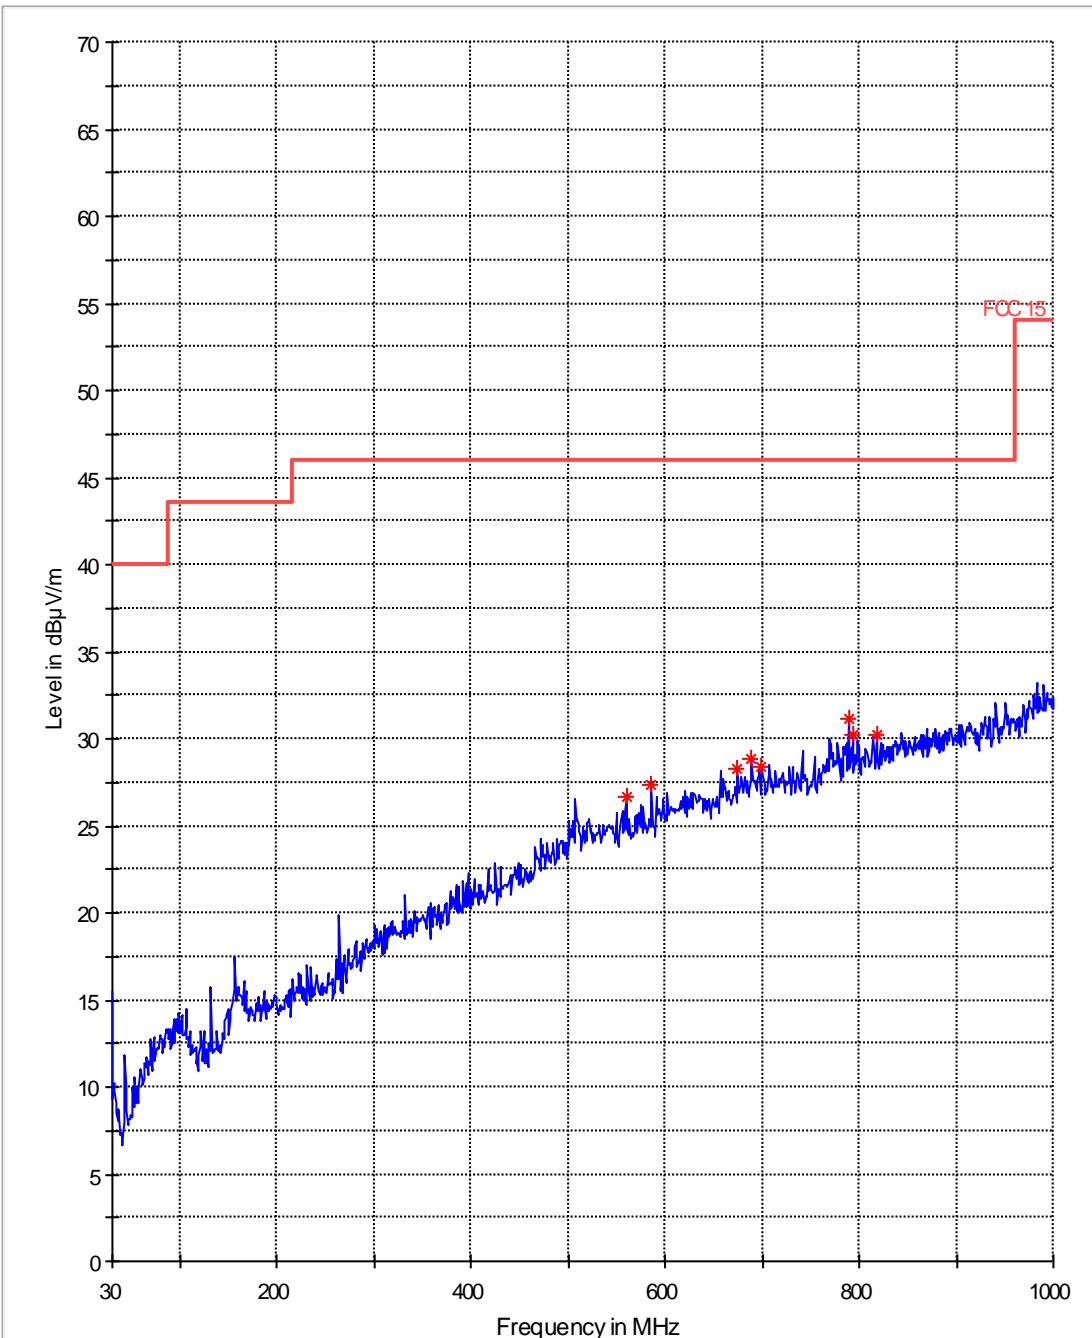

FCC 15.1-18GHz

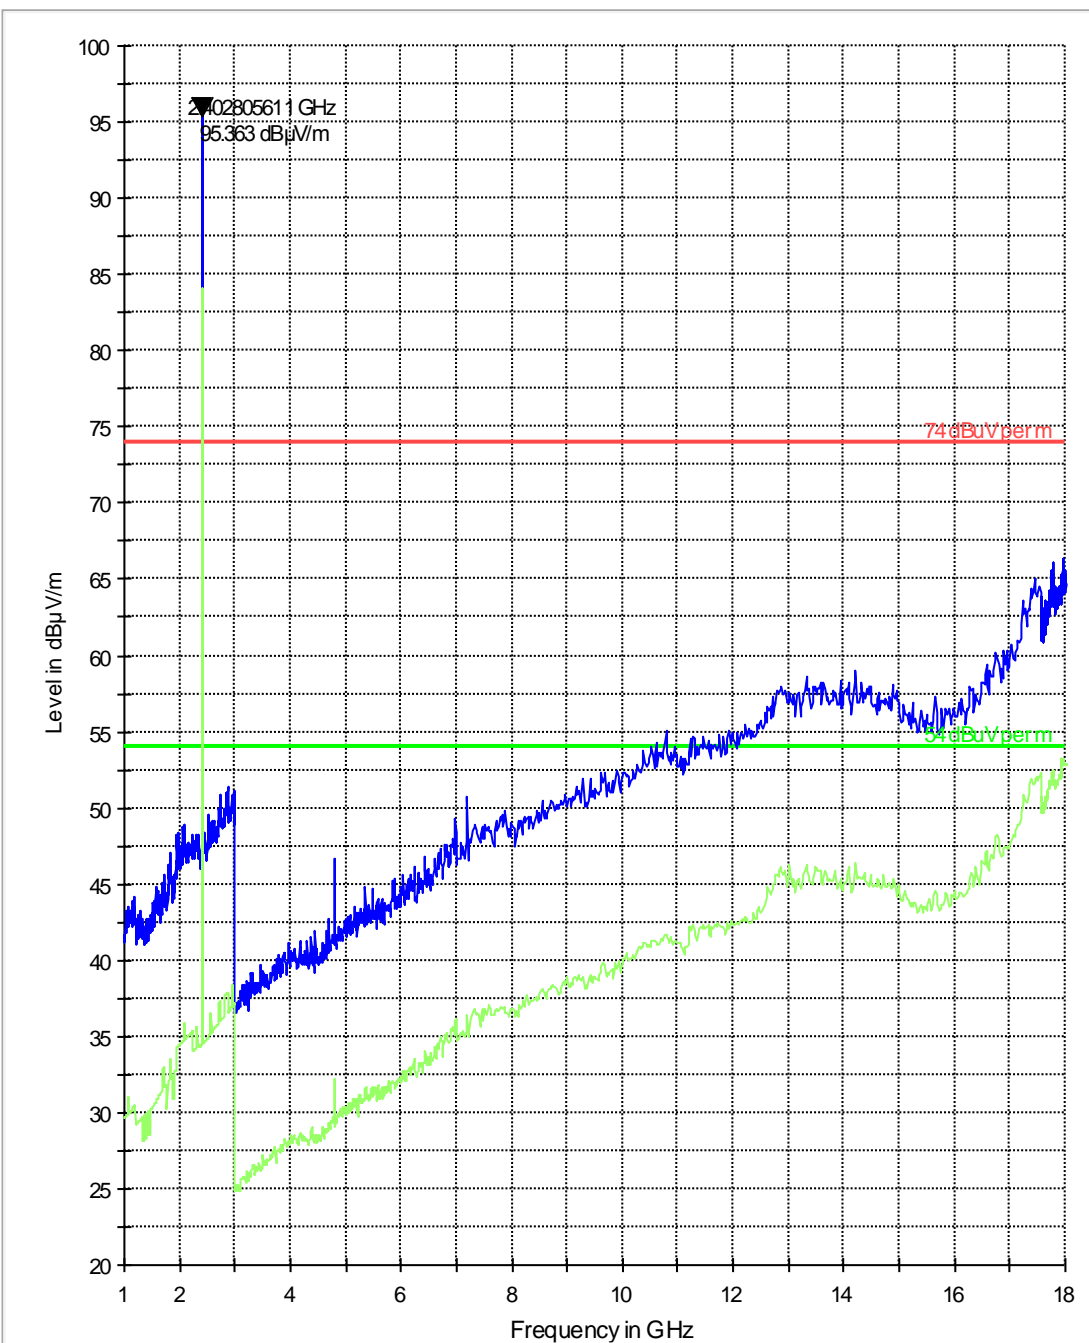


FCC 15.1-18GHz

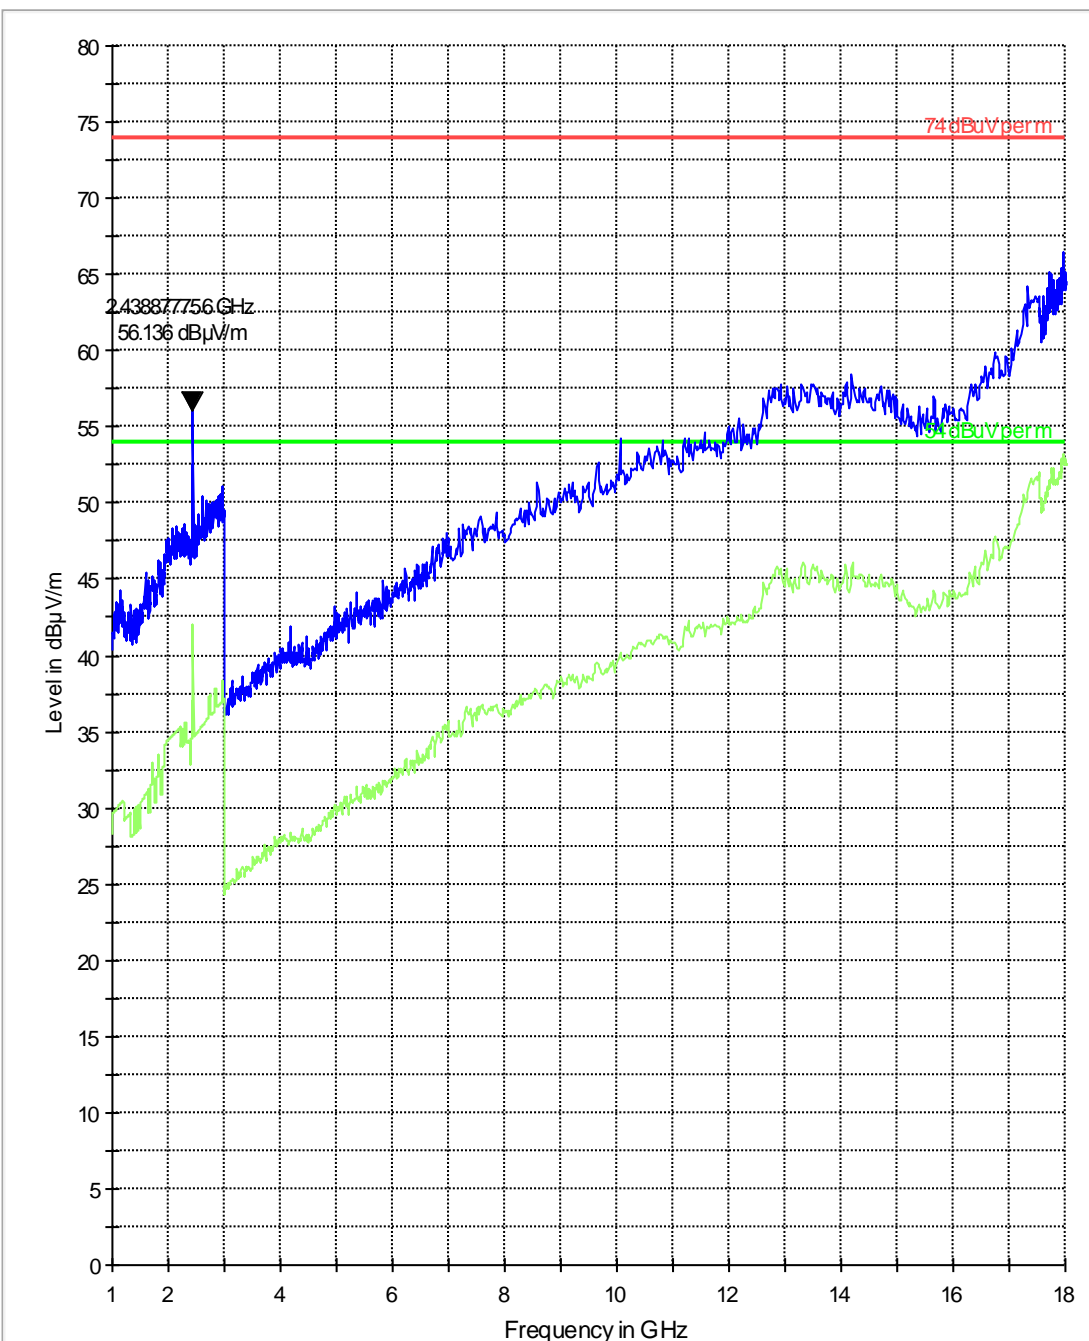




FCC 15.118GHz

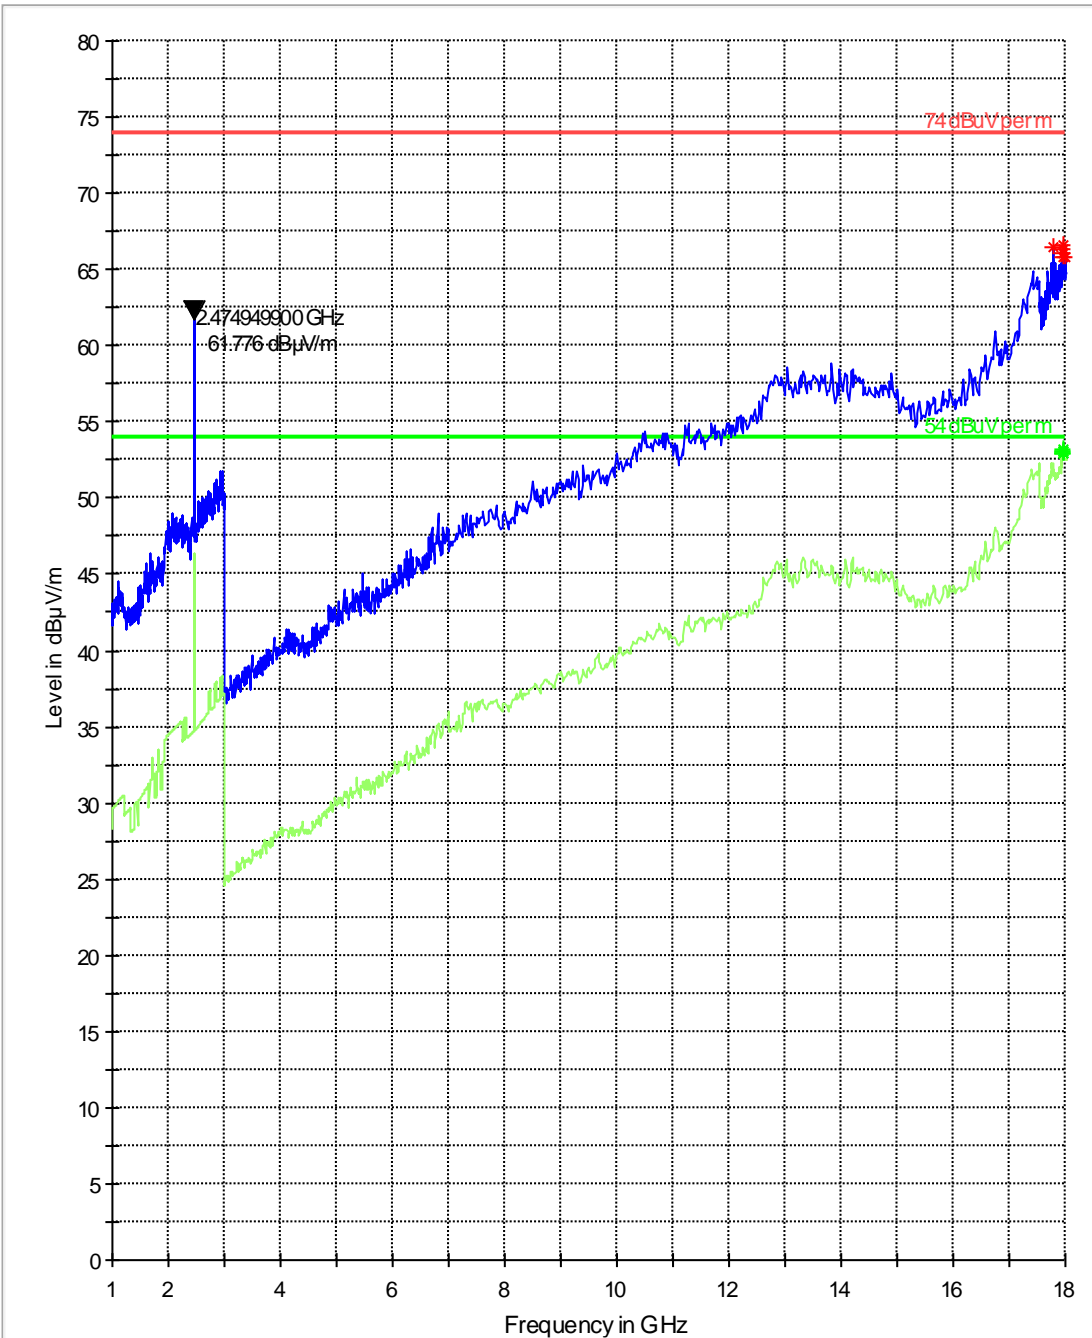

FCC 15 18-26GHz

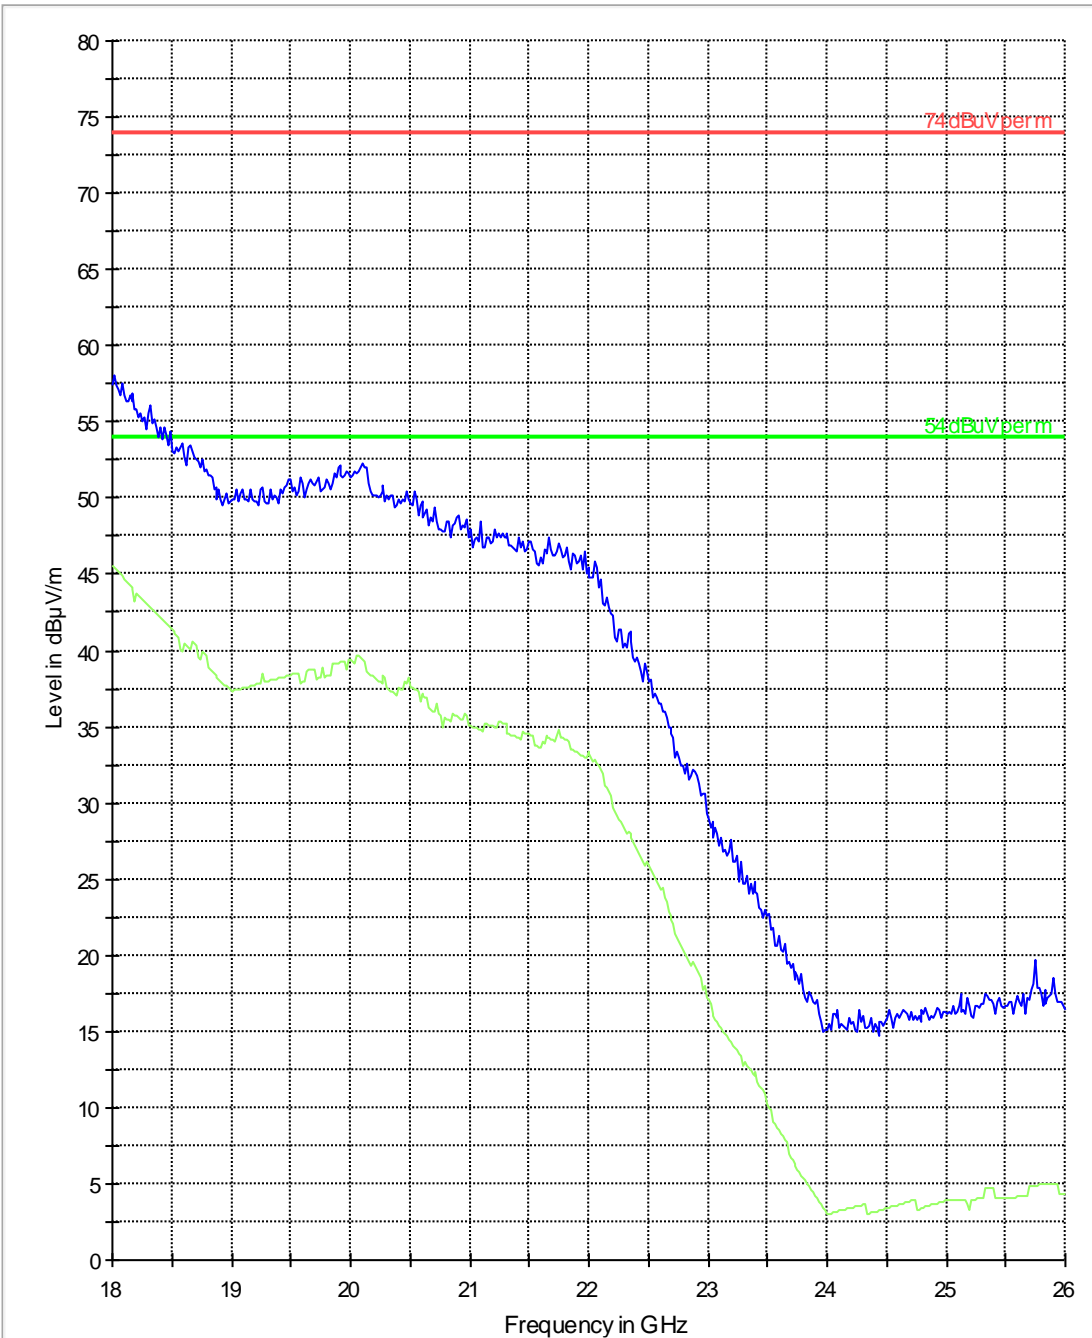

## 5.6 Receiver Spurious Emissions- Radiated

### 5.6.1 Limits: §15.109


| Frequency of emission (MHz) | Field strength ( $\mu\text{V/m}$ ) | Measurement Distance (m) |
|-----------------------------|------------------------------------|--------------------------|
| 0.009–0.490                 | 2400/F(kHz)                        | 300                      |
| 0.490–1.705                 | 24000/F(kHz)                       | 30                       |
| 1.705–30.0                  | 30                                 | 30                       |
| 30–88                       | 100 (40dB $\mu\text{V/m}$ )        | 3                        |
| 88–216                      | 150 (43.5 dB $\mu\text{V/m}$ )     | 3                        |
| 216–960                     | 200 (46 dB $\mu\text{V/m}$ )       | 3                        |
| Above 960                   | 500 (54 dB $\mu\text{V/m}$ )       | 3                        |

### 5.6.2 Test Result:


No significant emissions measurable. Plots reported here represent the worse case emissions.

### 5.6.3 Test data/ plots:

FCC 15.30-1000MHz

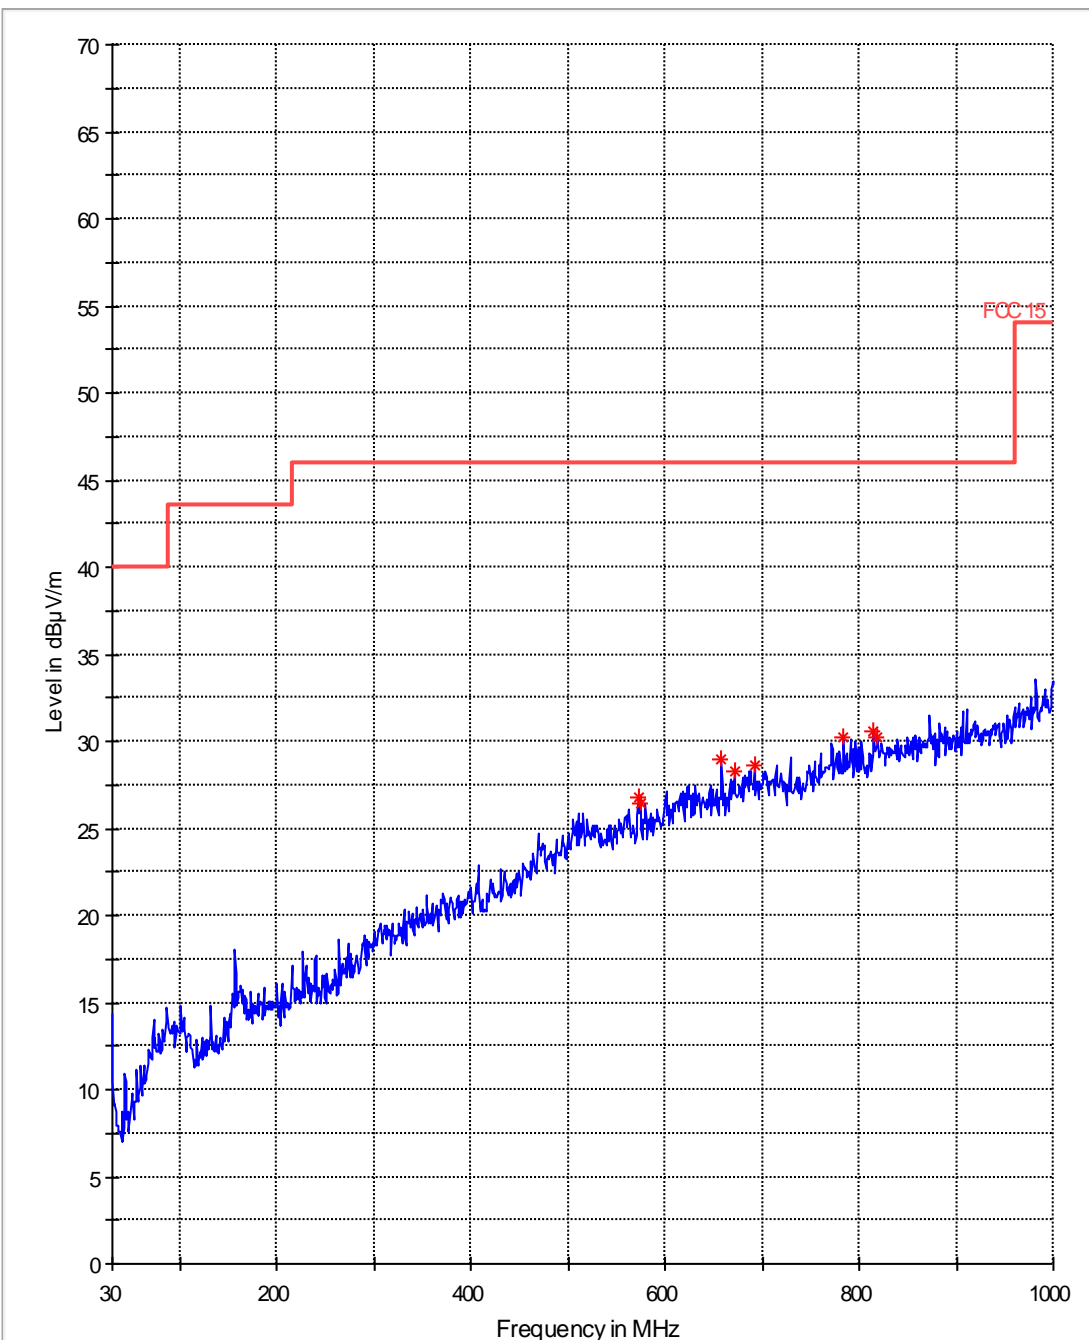

FCC 15.118GHz

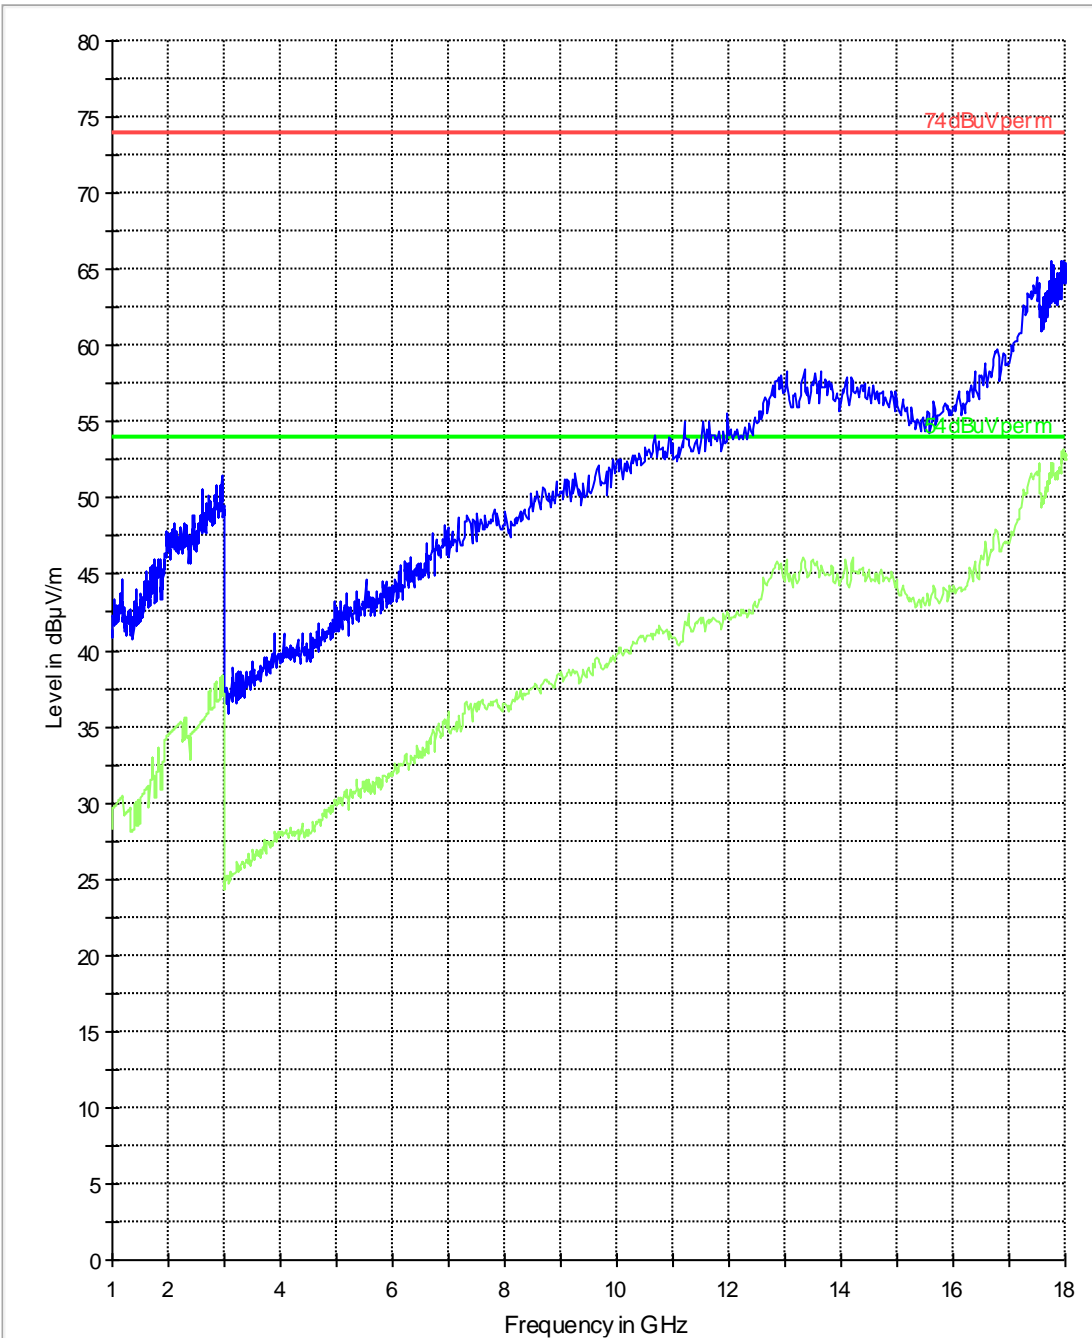

## 5.7 AC Power Line Conducted Emissions

### 5.7.1 Limits: §15.107/15.207

(a) Except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50  $\mu$ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

| Frequency of emission (MHz) | Conducted limit (dB $\mu$ V) |           |
|-----------------------------|------------------------------|-----------|
|                             | Quasi-peak                   | Average   |
| 0.15–0.5                    | 66 to 56*                    | 56 to 46* |
| 0.5–5                       | 56                           | 46        |
| 5–30                        | 60                           | 50        |

\*Decreases with the logarithm of the frequency.

Analyzer Settings: RBW = 10KHz; VBW = 10KHz

### 5.7.2 Test Result:

This test is not applicable.

## 6 Test Equipment and Ancillaries used for tests

| Instrument/Ancillary    | Model         | Manufacturer    | Serial No.  | Cal Date  | Cal Interval |
|-------------------------|---------------|-----------------|-------------|-----------|--------------|
| EMI Receiver/Analyzer   | ESIB 40       | Rohde & Schwarz | 100107      | May 2010  | 1 year       |
| Spectrum Analyzer       | FSU           | Rohde & Schwarz | 200302      | Dec 2009  | 1 year       |
| Loop Antenna            | 6512          | EMCO            | 00049838    | July 2008 | 2 years      |
| Biconilog Antenna       | 3141          | EMCO            | 0005-1186   | June 2009 | 2 years      |
| Horn Antenna (1-18GHz)  | 3115          | ETS             | 00035111    | Jan 2009  | 3 years      |
| Horn Antenna (18-40GHz) | 3116          | ETS             | 00070497    | Jan 2009  | 3 years      |
| Communication Antenna   | IBP5-900/1940 | Kathrein        | n/a         | n/a       | n/a          |
| High Pass Filter        | 5HC2700       | Trilithic Inc.  | 9926013     | n/a       | n/a          |
| High Pass Filter        | 4HC1600       | Trilithic Inc.  | 9922307     | n/a       | n/a          |
| 6GHz High Pass Filter   | HPM50106      | Microtronics    | 001         | n/a       | n/a          |
| Pre-Amplifier           | JS4-00102600  | Miteq           | 00616       | n/a       | n/a          |
| Power Smart Sensor      | R&S           | NRP-Z22         | 100223      | May 2010  | 1 Year       |
| 10dB attenuator         | ATT-0298-10   | MidwestMicrowav | n/a         | n/a       | n/a          |
| Power Splitter          | 11667B        | Hewlett Packard | 645348      | n/a       | n/a          |
| DC Power Supply         | E3610A        | Hewlett Packard | KR83021224  | n/a       | n/a          |
| DC Power Supply         | E3610A        | Hewlett Packard | KR83023316  | n/a       | n/a          |
| DC Power Supply         | 6632A         | Hewlett Packard | 3524A-12822 | n/a       | n/a          |
| DC Power Supply         | 6655A         | Hewlett Packard | 3403A-00487 | n/a       | n/a          |
| Multimeter              | 179           | Fluke           | N/A         | Feb 2010  | 1 Year       |
| Temp Hum Logger         | TM320         | Dickson         | 03280063    | Feb 2010  | 1 Year       |
| Temp Hum Logger         | TM325         | Dickson         | 5285354     | Feb 2010  | 1 Year       |
| Climatic Chamber        | VT4004        | Votsch          | G1115       | May 2010  | 1 year       |


### Note:

Equipment calibration is performed by an accredited calibration lab according to ISO 17025 requirements.


Calibration intervals are determined from manufacturer recommendation and/or lab discretion.

Cetecom Inc takes all measures to calibrate equipment before the due date; for instances when the equipment has to be used beyond the calibration due date, necessary steps are taken for calibration verification and documented to meet the Quality System requirements.

## 7 BLOCK DIAGRAMS

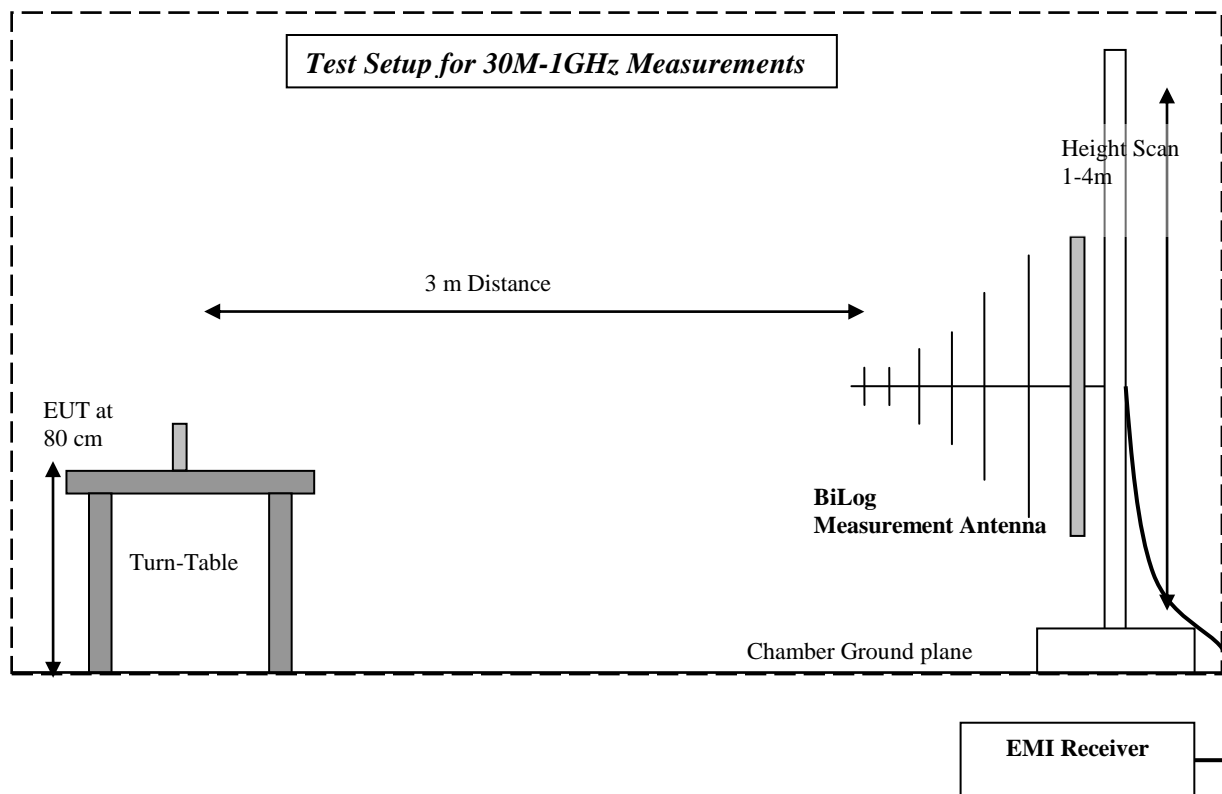



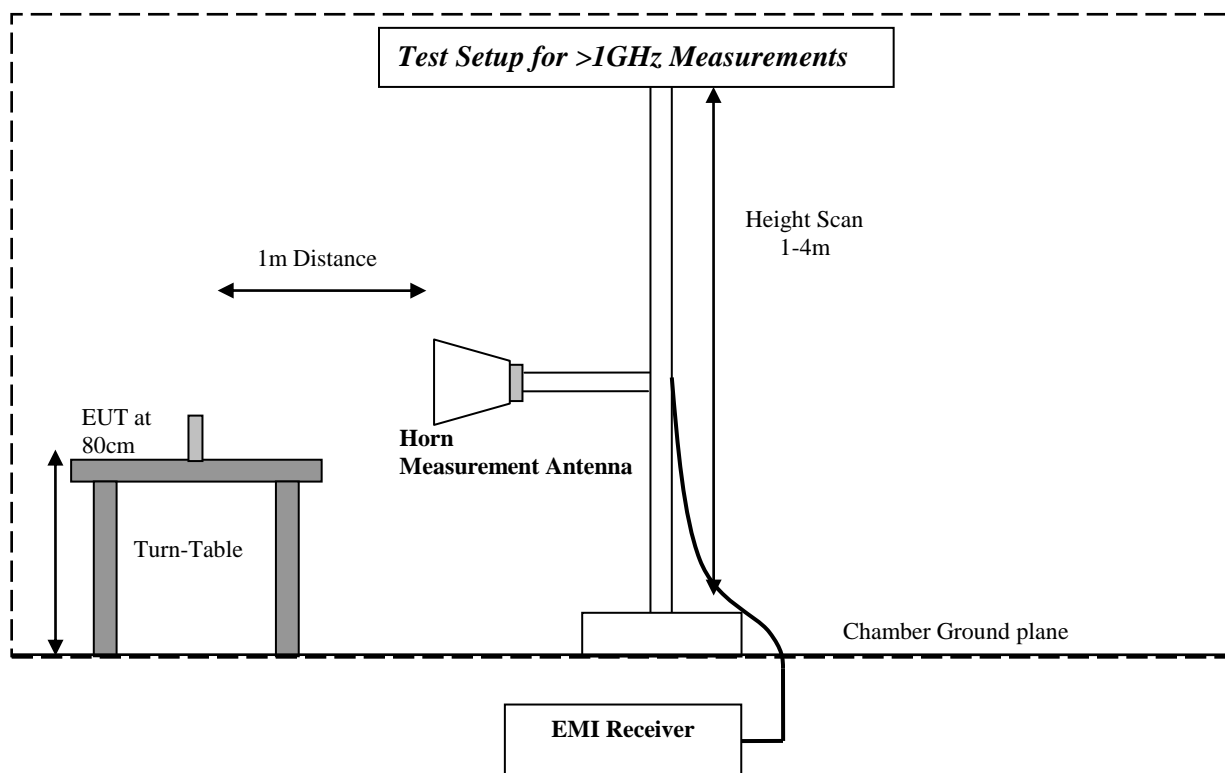

**8 Revision History**

| Date       | Report Name                  | Changes to report | Prepared by |
|------------|------------------------------|-------------------|-------------|
| 2010-06-14 | EMC_WELLC_001_15.247BT_XYG-1 | Original          | Marc        |