

FCC ID: XYN2745

IC ID: 8748A-2745

## EMI - T E S T R E P O R T

- FCC Part 15.249, RSS210 -

<b>Test Report No. :</b>	<b>T36928-00-00KJ</b>	17. June 2013 Date of issue
--------------------------	-----------------------	--------------------------------

**Type / Model Name** : 2745

**Product Description** : RF Remote Control

**Applicant** : ruwido austria gmbh

Address : Koestendorfer Str. 8  
5202 NEUMARKT, AUSTRIA

**Manufacturer** : ruwido austria gmbh

Address : Koestendorfer Str. 8  
5202 NEUMARKT, AUSTRIA

**Licence holder** : ruwido austria gmbh

Address : Koestendorfer Str. 8  
5202 NEUMARKT, AUSTRIA

<b>Test Result</b> according to the standards listed in clause 1 test standards:
--

**POSITIVE**



The test report merely corresponds to the test sample. It is not permitted to copy extracts of these test results without the written permission of the test laboratory.

FCC ID: XYN2745

IC ID: 8748A-2745

## Contents

<b>1 TEST STANDARDS</b>	<b>3</b>
<b>2 SUMMARY</b>	<b>4</b>
2.1 GENERAL REMARKS:	4
2.2 Test result summary	4
2.3 FINAL ASSESSMENT:	5
<b>3 EQUIPMENT UNDER TEST</b>	<b>6</b>
3.1 Photo documentation of the EUT – Internal photos see attachment A	6
3.3 Power supply system utilised	9
3.4 Short description of the equipment under test (EUT)	9
<b>4 TEST ENVIRONMENT</b>	<b>10</b>
4.1 Address of the test laboratory	10
4.2 Environmental conditions	10
4.3 Statement of the measurement uncertainty	10
4.4 Measurement protocol for FCC and IC	11
4.5 Determination of worst case measurement conditions	11
<b>5 TEST CONDITIONS AND RESULTS</b>	<b>12</b>
5.1 Conducted emissions	12
5.2 Radiated emission of the fundamental wave	13
5.3 Spurious emissions radiated	15
5.4 EBW 20 dB and OBW 99%	19
5.5 Correction for pulse operation (duty cycle)	24
5.6 Antenna application	28
5.7 Receiver radiated emissions	29
<b>6 USED TEST EQUIPMENT AND ACCESSORIES</b>	<b>31</b>
<b>7 Attachment A – Internal photos</b>	<b>32</b>

FCC ID: XYN2745

IC ID: 8748A-2745

## 1 TEST STANDARDS

The tests were performed according to following standards:

### FCC Rules and Regulations Part 15, Subpart A - General (September, 2012)

Part 15, Subpart A, Section 15.31	Measurement standards
Part 15, Subpart A, Section 15.33	Frequency range of radiated measurements
Part 15, Subpart A, Section 15.35	Measurement detector functions and bandwidths

### FCC Rules and Regulations Part 15, Subpart B – Unintentional Radiators (September, 2012)

Part 15, Subpart B, Section 15.109	Radiated emission limits.
------------------------------------	---------------------------

### FCC Rules and Regulations Part 15, Subpart C - Intentional Radiators (September, 2012)

Part 15, Subpart C, Section 15.203	Antenna requirement
Part 15, Subpart C, Section 15.204	External radio frequency power amplifiers and antenna modifications
Part 15, Subpart C, Section 15.205	Restricted bands of operation
Part 15, Subpart C, Section 15.207	Conducted limits
Part 15, Subpart C, Section 15.209	Radiated emission limits, general requirements
Part 15, Subpart C, Section 15.215	Additional provisions to the general radiated emission limitations
Part 15, Subpart C, Section 15.249	Operation within the bands 902 - 928 MHz, 2400 - 2483.5 MHz, 5725 - 5875 MHz, and 24.0 - 24.25 GHz
ANSI C63.4: 2003	Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz.
CISPR 16-4-2: 2003	Uncertainty in EMC measurement
CISPR 22: 2005 EN 55022: 2006	Information technology equipment

**FCC ID: XYN2745**
**IC ID: 8748A-2745**

## 2 SUMMARY

### 2.1 GENERAL REMARKS:

The EUT is a 2.4 GHz – transceiver remote control unit for low power data transmission in 3 channels of the operating band of 2.4 GHz to 2.4835 GHz MHz and has an integrated printed antenna.

A temporary connector can not be implemented due to the small size of the module. A suitable test fixture can also not be used to convert radiated measurements to conducted measurements therefore all measurements were performed radiated.

Items	Description
Transceiver Chip	TI CC253364
Power type	3 VDC (2 AAA Batterys)
Modulation	OQPSK
Data rate	250 kbps
Frequency range	2400 MHz to 2483.5 MHz
Channel spacing	25 MHz
Channel numbers	3
Antenna type	Inverted F antenna (PCB)

Channel	Frequency [MHz]
1	2425
2	2450
3	2475

### 2.2 Test result summary

Operating in the 2400 MHz – 2483.5 MHz band:

FCC Rule Part	RSS Rule Part	Description	Result
15.35(c)	RSS-Gen, 4.5	Pulsed operation	passed
15.203	RSS Gen, 7.1.2	Antenna requirement	passed
15.204	RSS Gen, 7.1.1	External radio frequency power amplifiers	passed
15.205(a)	RSS-Gen, 7.2.2	Emissions in restricted bands	passed
15.207(a)	RSS Gen, 7.2.4	AC power line conducted emissions	not applicable
15.215(c)		-20 dBc EBW	passed
	RSS-Gen, 4.6.1	99 % Bandwidth	passed
15.249(a)	RSS-210, A2.9(a)	Field strength of fundamental	passed
15.249(d)	RSS Gen, 7.2.5	Out-of-band emission, radiated	passed
	RSS-Gen, 7.2.6	Transmitter frequency stability	not applicable
15.109 (a)	RSS-Gen, 6.1	Receiver radiated emissions	passed

The mentioned RSS Rule Parts in the above table are related to:

RSS Gen, Issue 3, December 2010

RSS 210, Issue 8, December 2010

RSS 102, Issue 4, March 2010

FCC ID: XYN2745

IC ID: 8748A-2745

## 2.3 FINAL ASSESSMENT:

The equipment under test **fulfills** the EMI requirements cited in clause 1 test standards.

Date of receipt of test sample : acc. to storage records

Testing commenced on : 21 May 2013

Testing concluded on : 12 June 2013

Checked by:

Tested by:

---

Klaus Gegenfurtner  
Dipl. Ing.(FH)  
Manager: Radio Group

---

Josef Knab  
Radio Senior Expert

FCC ID: XYN2745

IC ID: 8748A-2745

### 3 EQUIPMENT UNDER TEST

#### 3.1 Photo documentation of the EUT – Internal photos see attachment A



FCC ID: XYN2745

IC ID: 8748A-2745

front view



rear view




removed battery cover



FCC ID: XYN2745

IC ID: 8748A-2745

**Label placement  
(inside of the battery cover)**

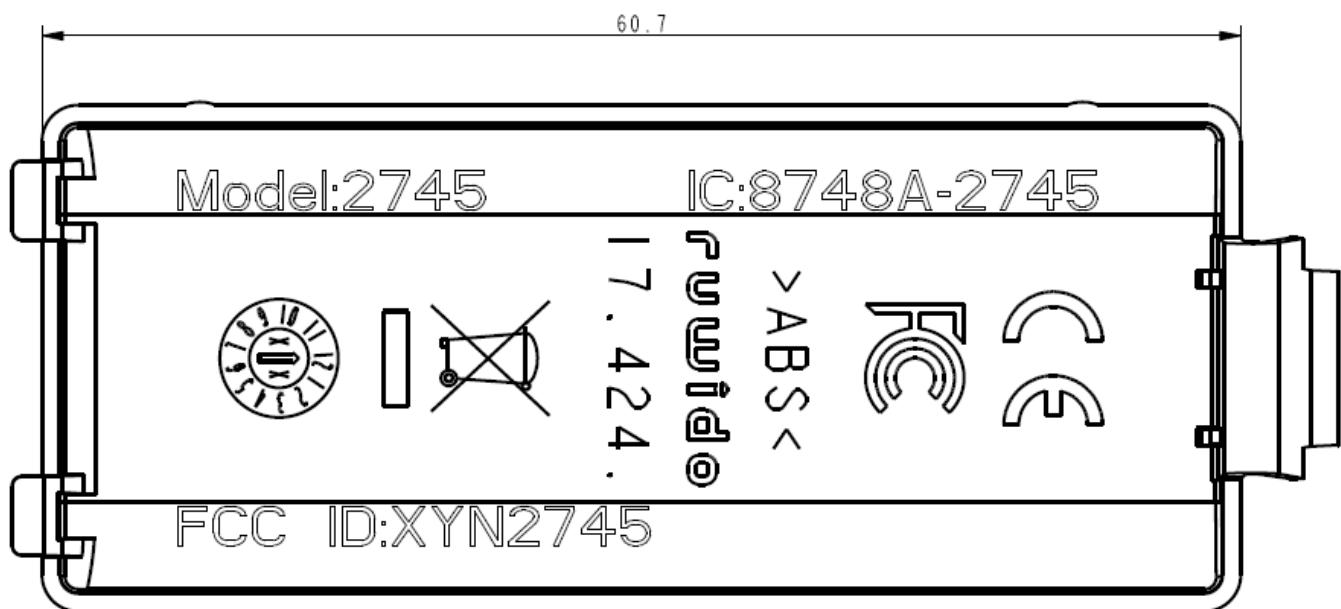

FCC ID: XYN2745

IC ID: 8748A-2745

### 3.3 Power supply system utilised

Power supply voltage : 3.0 V DC ( 2 AAA Batteries)

### 3.4 Short description of the equipment under test (EUT)

The EuT is a Remote control unit for TV set top boxes and operate in the frequency band from 2400 MHz to 2483.5 MHz.

Number of tested samples: 1  
Serial number: Prototype

#### EUT operation mode:

The equipment under test was operated during the measurement under the following conditions:

- cont. TX at CH1, CH2 and CH3 (2425 MHz, 2450 MHz and 2475 MHz)

- standby / cont. RX mode

-

#### EUT configuration:

(The CDF filled by the applicant can be viewed at the test laboratory.)

#### The following peripheral devices and interface cables were connected during the measurements:

- \_\_\_\_\_ Model : \_\_\_\_\_  
- \_\_\_\_\_ Model : \_\_\_\_\_  
- \_\_\_\_\_ Model : \_\_\_\_\_  
- \_\_\_\_\_ Model : \_\_\_\_\_

FCC ID: XYN2745

IC ID: 8748A-2745

## **4 TEST ENVIRONMENT**

### **4.1 Address of the test laboratory**

**mikes-testingpartners gmbh**  
Ohmstrasse 2-4  
94342 STRASSKIRCHEN  
GERMANY

### **4.2 Environmental conditions**

During the measurement the environmental conditions were within the listed ranges:

Temperature: 15-35 ° C

Humidity: 30-60 %

Atmospheric pressure: 86-106 kPa

### **4.3 Statement of the measurement uncertainty**

The data and results referenced in this document are true and accurate. The reader may notice that tolerances within the calibration of the equipment and facilities may cause additional uncertainty. The measurement uncertainty is calculated for all measurements listed in this test report acc. to CISPR 16-4-2 „Uncertainties, statistics and limit modelling – Uncertainty in EMC measurement“ and documented in the mikes-testingpartners gmbh quality system acc. to DIN EN ISO/IEC 17025. For all measurements shown in this report, the measurement uncertainty of the test laboratory, mikes-testingpartners gmbh, is below the measurement uncertainty as defined by CISPR. Therefore, no special measures must be taken into consideration with regard to the limits according to CISPR. Furthermore, component diversity and modifications in production processes may result in additional deviation. If necessary, refer to the test lab for the actual measurement uncertainty for specific tests. The manufacturer has the sole responsibility of continued compliance of the EUT.

FCC ID: XYN2745

IC ID: 8748A-2745

## 4.4 Measurement protocol for FCC and IC

### 4.4.1 General information

#### 4.4.1.1 Test methodology

Conducted and radiated disturbance testing is performed according to the procedures set out by the International Special Committee on Radio Interference (CISPR) Publication 22, European Standard EN 55022 as shown under section 1 of this report.

The Open Area test site is a listed Open Site under the Canadian Test-Sites File-No:

**IC 3009A-1**

In compliance with RSS 210 testing for RSS compliance may be achieved by following the procedures set out in ANSI C63.4 and applying the CISPR 22 limits.

#### 4.4.1.2 Justification


The equipment under test (EUT) is configured in a typical user arrangement in accordance with the manufacturer's instructions. A cable is connected to each available port and either terminated with a peripheral using the appropriate impedance characteristic or left unterminated. Where appropriate, cables are manually manipulated with respect to each other thus obtaining maximum disturbances from the unit.

#### 4.4.1.3 Details of test procedures

The test methods used comply with CISPR Publication 22, EN 55022 - "Information technology equipment - Radio disturbance characteristics - Limits and methods of measurement" and with ANSI C63.4 - "Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz". In compliance with 47 CFR Part 15 Subpart A, Section 15.38 testing for FCC compliance may be achieved by following the procedures set out in ANSI C63.4 and applying the CISPR 22 limits.

## 4.5 Determination of worst case measurement conditions

Measurements have been made in all three orthogonal axes. The worst case results are written down in the respective parts of this test report.

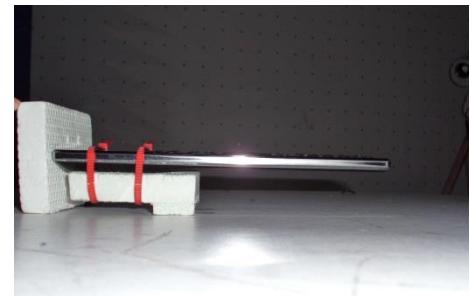

FCC ID: XYN2745

IC ID: 8748A-2745

## **5 TEST CONDITIONS AND RESULTS**

### **5.1 Conducted emissions**

For test instruments and accessories used see section 6 Part A 4.

#### **5.1.1 Description of the test location**

Test location:                   NONE

Remarks:        Not applicable because the EuT is battery powered.

---

FCC ID: XYN2745

IC ID: 8748A-2745


## 5.2 Radiated emission of the fundamental wave

For test instruments and accessories used see section 6 Part **CPR 3**.

### 5.2.1 Description of the test location

Test location: Anechoic chamber 2  
Test distance: 3 m

### 5.2.2 Photo documentation of the test set-up

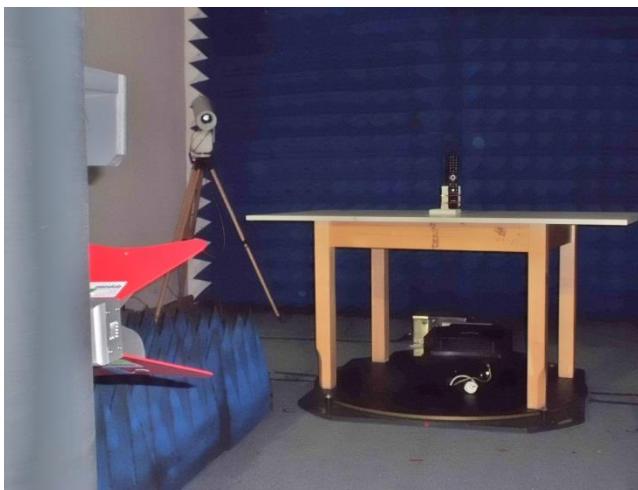

### 5.2.1 Applicable standard

According to FCC Part 15C, Section 15.249(a):

The field strength of emissions from intentional radiators operated within these frequency bands shall comply with the effective limits.

### 5.2.2 Description of Measurement

The radiated emission of the fundamental wave from the EUT is measured using a spectrum analyser and appropriate linear polarized antennas. The set up of the EUT and the measurement procedure is in accordance to ANSI C63.4, Item 8.3. The EUT is measured in TX continuous mode modulated under normal conditions.

Analyser settings:

Peak measurement:	RBW: 1 MHz	VBW: 1 MHz	Detector: Max peak
AV measurement:	RBW: 1 MHz	VBW: 10 Hz	Detector: Max peak

**FCC ID: XYN2745**
**IC ID: 8748A-2745**
**5.2.3 Test result**
**Channel 1**

Frequency (MHz)	Reading level PK (dB $\mu$ V)	Reading level AV (dB $\mu$ V)	Bandwidth (kHz)	Correction factor (dB)	Corrected level PK dB( $\mu$ V/m)	Corrected level AV dB( $\mu$ V/m)	Limit AV dB( $\mu$ V/m)	Delta (dB)
2425	83.9	-	1000	4.1	88.0	-	94.0	6.0

**Channel 2**

Frequency (MHz)	Reading level PK (dB $\mu$ V)	Reading level AV (dB $\mu$ V)	Bandwidth (kHz)	Correction factor (dB)	Corrected level PK dB( $\mu$ V/m)	Corrected level AV dB( $\mu$ V/m)	Limit AV dB( $\mu$ V/m)	Delta (dB)
2450	86.0	-	1000	4.3	90.3	-	94.0	3.7

**Channel 3**

Frequency (MHz)	Reading level PK (dB $\mu$ V)	Reading level AV (dB $\mu$ V)	Bandwidth (kHz)	Correction factor (dB)	Corrected level PK dB( $\mu$ V/m)	Corrected level AV dB( $\mu$ V/m)	Limit AV dB( $\mu$ V/m)	Delta (dB)
2475	83.9	-	1000	4.3	88.2	-	94.0	5.8

Note: The correction factor includes cable loss and antenna factor.

Average-Limit according to FCC Part 15C, Section 15.249(a):

Frequency (MHz)	Field strength of fundamental	
	(mV/m)	dB( $\mu$ V/m)
902 - 928	50	94
<b>2400 - 2483.5</b>	<b>50</b>	<b>94</b>
5725-5875	50	94
24000 - 24250	250	108

Peak-Limit according to FCC Part 15C, Section 15.249(e):

However the peak fieldstrength shall not exceed the maximum permitted average limit by more than 20 dB.

The requirements are **FULFILLED**.

**Remarks:** No average measurement performed, because the peak limits met the average limits.

FCC ID: XYN2745

IC ID: 8748A-2745

### 5.3 Spurious emissions radiated

For test instruments and accessories used see section 6 Part **SER1, SER 2, SER 3**.


#### 5.3.1 Description of the test location

Test location: OATS 1  
Test location: Anechoic chamber 2

Test distance: 3 m (9 kHz to 18 GHz)  
1 m (18GHz to 25 GHz)



#### 5.3.2 Photo documentation of the test set-up

Test setup 9 kHz – 30 MHz

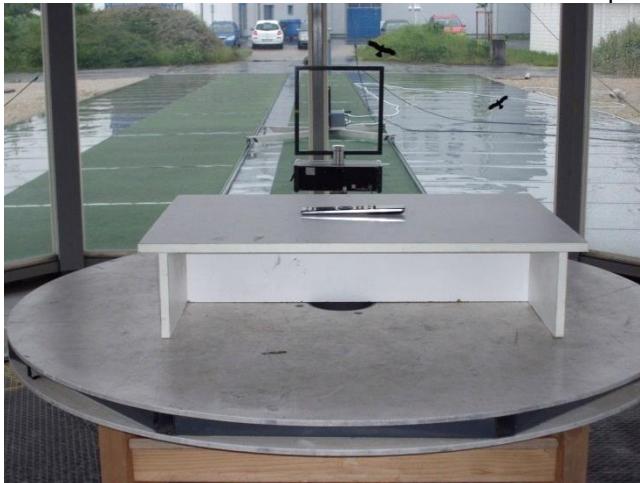

Test setup 30 MHz – 1000 MHz

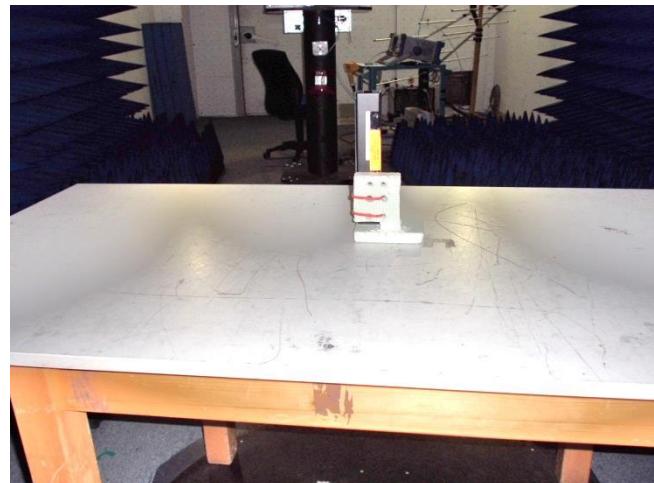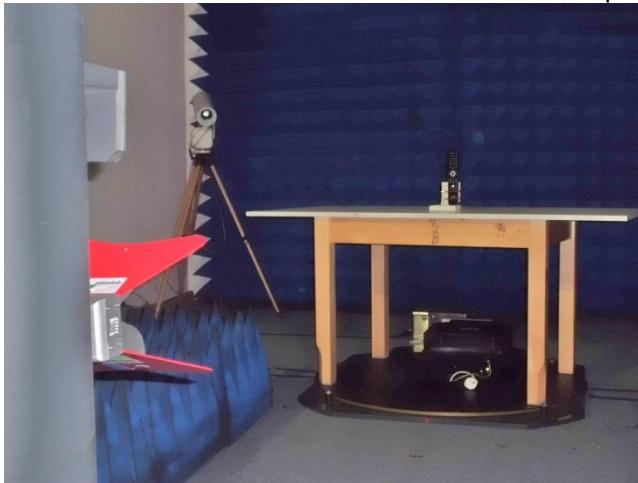

**FCC ID: XYN2745**
**IC ID: 8748A-2745**
**Test setup 1 GHz – 18 GHz**

**Test setup 18 GHz – 40 GHz**


### 5.3.3 Applicable standard

According to FCC Part 15C, Section 15.249 (d):

Emission radiated outside of the specified frequency bands, except harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated limit in FCC Part 15C, Section 15.209, whichever is the lesser attenuation.

### 5.3.4 Description of Measurement

The radiated emissions from the EUT are measured in the frequency range of 9 kHz to 1000 MHz using a tuned receiver and appropriate broadband linearly polarized antennas. The setup of the EUT and the measurement procedure is in accordance to ANSI C63.4, Item 8.3. In the frequency range above 1 GHz a spectrum analyser is used with appropriate linear polarized antennas. If the emission level in peak mode complies with the average limit testing is stopped and peak values will be reported, otherwise, the emission is measured in average mode again and reported. The EUT is measured in TX continuous mode modulated under normal conditions.

**FCC ID: XYN2745**
**IC ID: 8748A-2745**
**Instrument settings:**

9 kHz – 150 kHz	RBW: 200 Hz
150 kHz - 30 MHz	RBW: 9 kHz
30 MHz – 1000 MHz:	RBW: 120 kHz
1000 MHz – 25 GHz	RBW: 1 MHz

**5.3.5 Test result f < 1 GHz**

Frequency (MHz)	Reading level QP (dB $\mu$ V)	Reading level AV (dB $\mu$ V)	Bandwidth (kHz)	Correction factor (dB/m)	Corrected level QP dB( $\mu$ V/m)	Corrected level AV dB( $\mu$ V/m)	Limit dB( $\mu$ V/m)	Delta (dB)
0.5*	25.0	-	9	20.0	45.0	-	73.6	-28.6
2.0*	33.0	-	9	20.0	53.0	-	69.5	-16.5
30*	13.0	-	120	12.3	25.3	-	40.0	-14.7
300*	2.0	-	120	16.5	18.5	-	46.0	-27.5
450*	1.5	-	120	20.4	21.9	-	46.0	-24.1
750*	0.3	-	120	26.8	27.1	-	46.0	-18.9
1000*	0.4	-	120	30.1	30.5	-	54.0	-23.5

\*) Ambient noise

Note: The correction factor includes cable loss and antenna factor.

**5.3.6 Test result f > 1 GHz**
**Channel 1**

Frequency (MHz)	Level PK (dB $\mu$ V)	Duty Cycle Correction (dB)	Level AV (dB $\mu$ V)*	Correction factor (dB/m)	Corrected level PK dB( $\mu$ V/m)	Corrected level AV dB( $\mu$ V/m)	Limit PK dB( $\mu$ V/m)	Limit AV dB( $\mu$ V/m)	Delta (dB)
4850.0	47.4	-20.0	27.4	3.0	50.4	30.4	74.0	54.0	-23.6
7275.5	47.0	-20.0	27.0	6.2	53.2	33.2	74.0	54.0	-20.8
9701.0	46.0	-20.0	26.0	9.5	55.5	35.5	74.0	54.0	-18.5
18000*	39.3	-20.0	19.3	-0.8	38.5	18.5	74.0	54.0	-35.5
24000*	38.4	-20.0	18.4	0.7	39.1	19.1	74.0	54.0	-34.9

\*) Ambient noise

Note: Average values were calculated from the subtraction of peak values minus correction duty cycle factor.

**Channel 2**

Frequency (MHz)	Level PK (dB $\mu$ V)	Duty Cycle Correction (dB)	Level AV (dB $\mu$ V)*	Correction factor (dB/m)	Corrected level PK dB( $\mu$ V/m)	Corrected level AV dB( $\mu$ V/m)	Limit PK dB( $\mu$ V/m)	Limit AV dB( $\mu$ V/m)	Delta (dB)
4899.5	47.3	-20.0	27.3	3.3	50.6	30.6	74.0	54.0	-23.4
7351.1	47.7	-20.0	27.6	6.3	53.9	33.9	74.0	54.0	-20.1
9801.4	44.6	-20.0	24.6	9.8	55.4	34.2	74.0	54.0	-19.8
18000*	39.3	-20.0	19.3	-0.8	38.5	18.5	74.0	54.0	-35.5
24000*	38.4	-20.0	18.4	0.7	39.1	19.1	74.0	54.0	-34.9

\*) Ambient noise

Note: Average values were calculated from the subtraction of peak values minus correction duty cycle factor.

**FCC ID: XYN2745**
**IC ID: 8748A-2745**
**Channel 3**

Frequency (MHz)	Level PK (dB $\mu$ V)	Duty Cycle Correction (dB)	Level AV (dB $\mu$ V)*	Correction factor (dB/m)	Corrected level PK dB( $\mu$ V/m)	Corrected level AV dB( $\mu$ V/m)	Limit PK dB( $\mu$ V/m)	Limit AV dB( $\mu$ V/m)	Delta (dB)
4905.4	47.5	-20.0	27.5	3.5	51.0	31.0	74.0	54.0	-23.0
7425.5	46.8	-20.0	26.8	6.4	53.2	33.2	74.0	54.0	-20.8
9900.3	42.8	-20.0	22.8	9.4	52.2	32.2	74.0	54.0	-21.8
18000*	39.3	-20.0	19.3	-0.8	38.5	18.5	74.0	54.0	-35.5
24000*	38.4	-20.0	18.4	0.7	39.1	19.1	74.0	54.0	-34.9

\*) Ambient noise

Note: Average values were calculated from the subtraction of peak values minus correction duty cycle factor.

Limit according to FCC Part 15C, Section 15.209:

Frequency (MHz)	15.209 Limits ( $\mu$ V/m)	Measurement distance (m)
0.009 - -0.49	2400/f(kHz)	300
0.49 - 1.705	24000/f(kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

Average limit according to FCC Part 15C, Section 15.249(a):

Fundamental frequency (MHz)	Field strength of harmonics	
	( $\mu$ V/m)	dB( $\mu$ V/m)
902 - 928	500	54
<b>2400 - 2483.5</b>	500	54
5725 - 5875	500	54
24000 - 24250	2500	68

The requirements are **FULFILLED**.

**Remarks:** The measurement was performed up to the 10<sup>th</sup> harmonic (25000 MHz). The average values where calculated from the subtraction of peak values minus correction duty cycle factor.

For detailed test result please refer to following test protocols.

FCC ID: XYN2745

IC ID: 8748A-2745



## 5.4 EBW 20 dB and OBW 99%

For test instruments and accessories used see section 6 Part **MB**.

### 5.4.1 Description of the test location

Test location: AREA4

### 5.4.2 Photo documentation of the test set-up

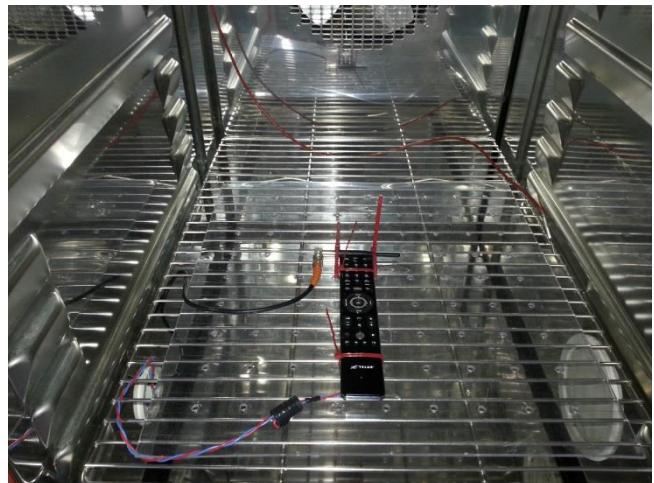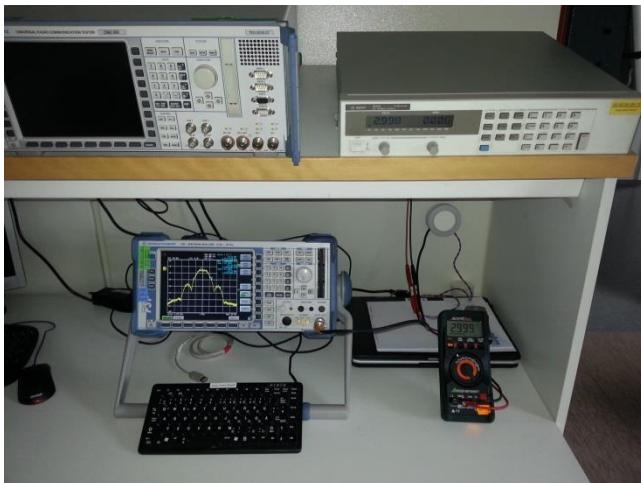

### 5.4.3 Applicable standard

According to FCC Part 15, Section 15.215(c):

Intentional radiators operating under the alternative provisions to the general emission limits, as contained in Section 15.217 through Section 15.257, must be designed to ensure that the 20 dB bandwidth of the emission is contained within the frequency band designated in the rule section under which the equipment is operated.

### 5.4.4 Description of Measurement

The bandwidth is measured at an amplitude level reduced from the reference level by a specified ratio of -20 dB (99%). The x-dB-down (OBW) function of the analyser is used. The measurement is performed with normal modulation in TX continuous mode.

Spectrum analyser settings:

RBW: 100 kHz

Sweep time: 10 s

VBW: 300 kHz

Detector: PK

Span: 10 MHz

**FCC ID: XYN2745**
**IC ID: 8748A-2745**

#### 5.4.5 Test result

Operating frequency band (MHz)	20 dB Bandwidth Channel 1 (MHz)	20 dB Bandwidth Channel 2 (MHz)	20 dB Bandwidth Channel 3 (MHz)
$f_{low} > 2400$	$f_{low} = 2423.67$	$f_{low} = 2448.64$	$f_{low} = 2473.63$
$f_{high} < 2483.5$	$f_{high} = 2426.48$	$f_{high} = 2451.47$	$f_{high} = 2476.39$

80% bandwidth of the permitted band: 66.8 MHz

Maximum frequency drift under extreme conditions: 33.3 kHz

Limit according to FCC Part 15C, Section 15.215(c):

If frequency stability is not specified in the regulations, it is recommended that the fundamental emission be kept within the central 80% of the permitted band in order to minimize the possibility of out-of-band operation.

The requirements are **FULFILLED**.



**Remarks:** For detailed test result please refer to following test protocols.



The OBW99 is measured for RSS only.



To show the compliance under frequency stability, the EuT was tested under extreme voltage and temperature conditions. Due to the fact of the small frequency drift, the measurement were only performed at the worst case conditions.

#### 5.4.6 Test protocols

Test conditions		Test result					
		Channel 1		Channel 2		Channel 3	
		Frequency reading (MHz)	Frequency error (kHz)	Frequency reading (MHz)	Frequency error (kHz)	Frequency reading (MHz)	Frequency error (kHz)
$T_{max}(50^{\circ}C)$	2.5 $V_{min}$	2425.02252	22.52	2450.02284	22.83	2475.02313	23.13
	3.5 $V_{max}$	2425.02284	22.84	2450.02315	23.15	2475.02345	23.45
$T_{nom}(20^{\circ}C)$	3.0 $V_{nom}$	2425.03310	33.10	2450.03328	33.28	2475.03320	33.20
$T_{min}(-20^{\circ}C)$	2.5 $V_{min}$	2425.03001	30.01	2450.03040	30.40	2475.03074	30.74
	3.5 $V_{max}$	2425.03032	30.32	2450.03063	30.63	2475.03106	31.06
Measurement uncertainty		$\pm 3$ dB					

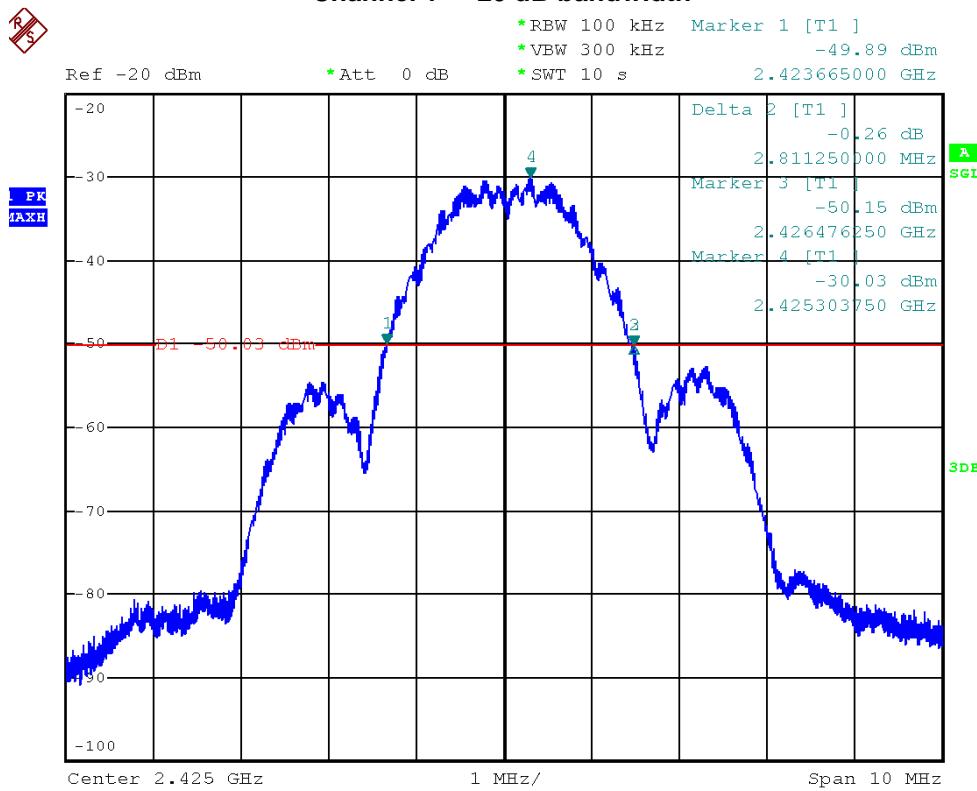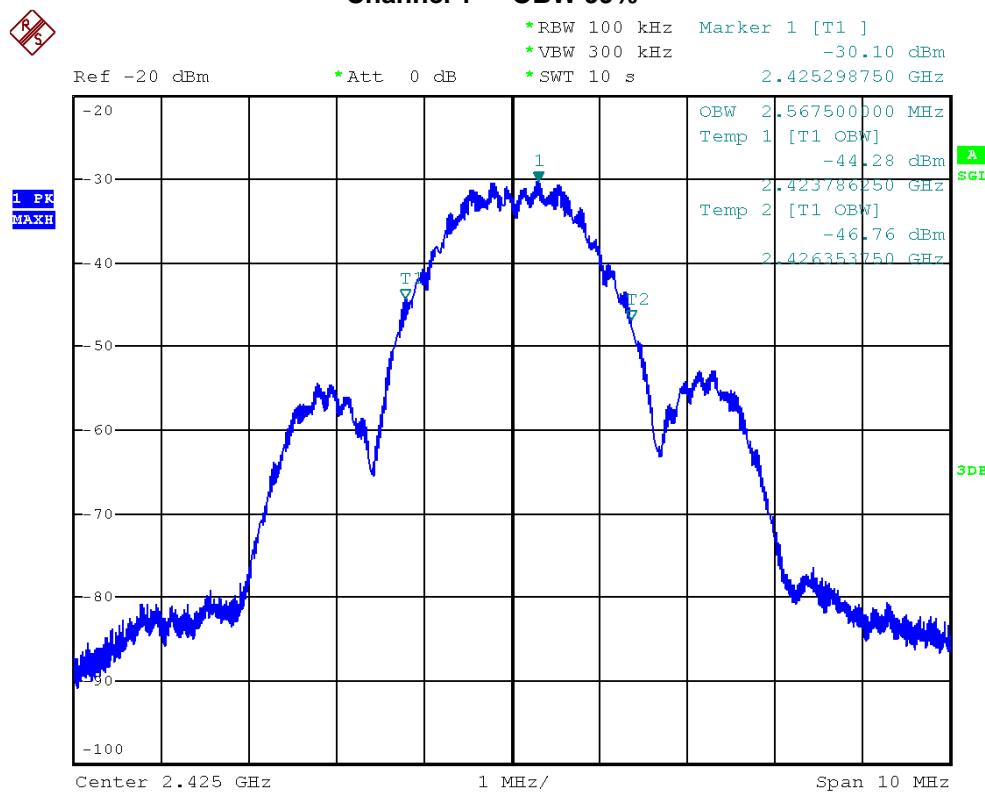**FCC ID: XYN2745**
**IC ID: 8748A-2745**
**Channel 1 - 20 dB bandwidth**

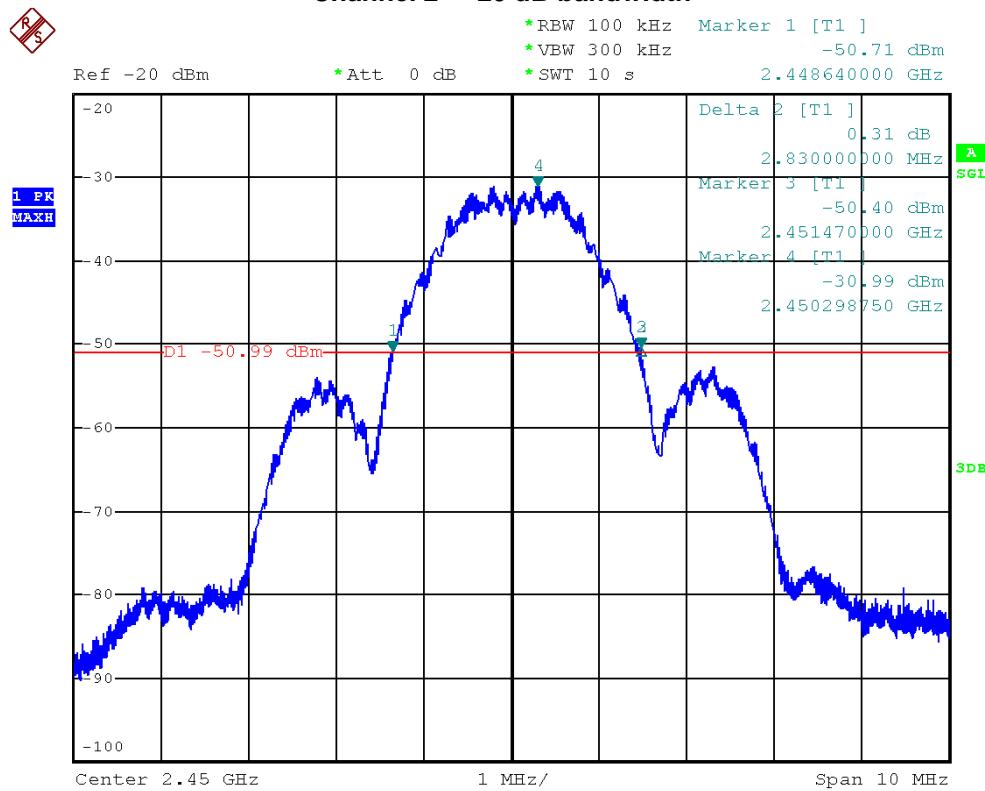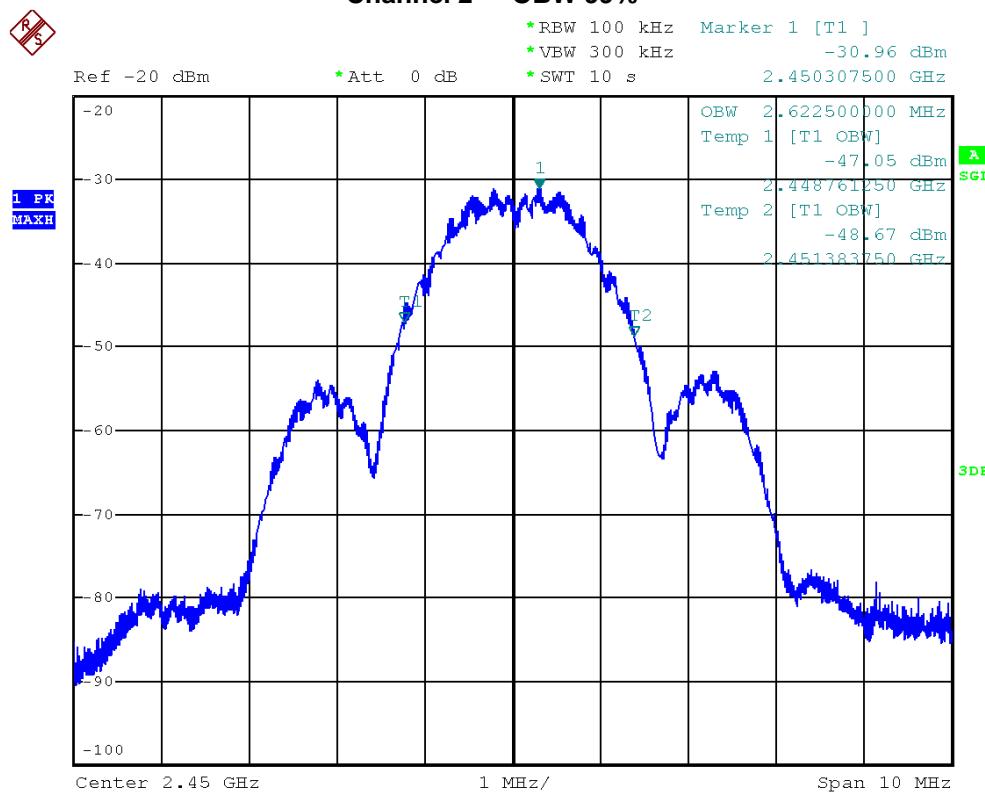**Channel 1 - OBW 99%**

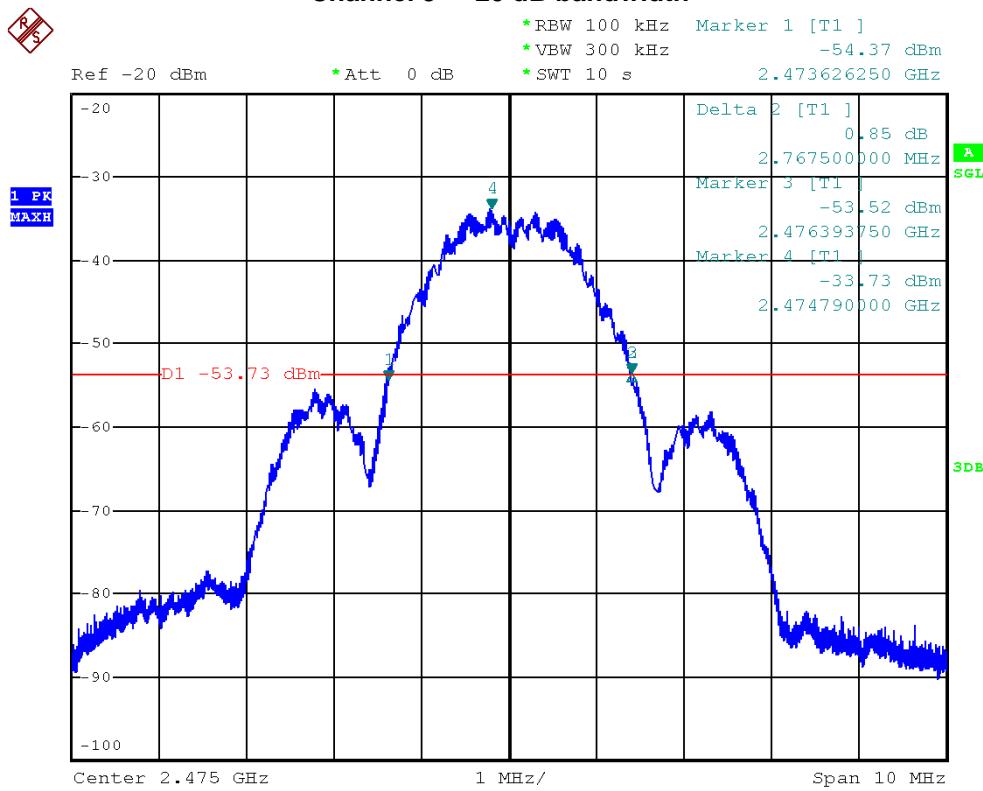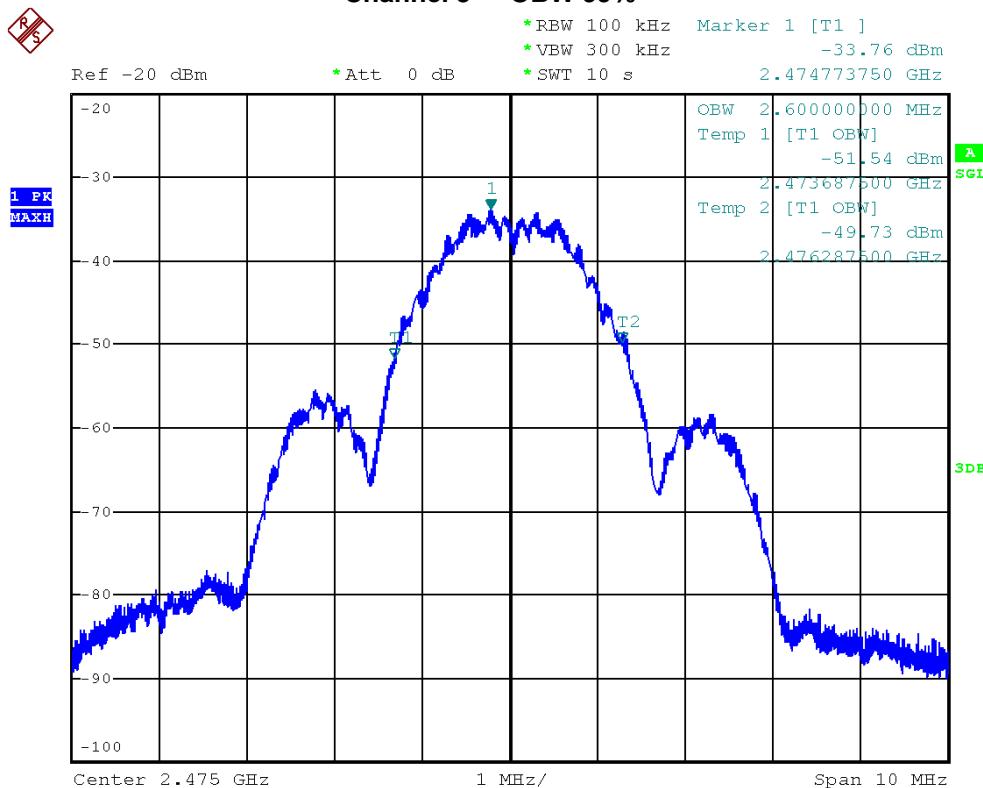
**FCC ID: XYN2745**
**IC ID: 8748A-2745**
**Channel 2 - 20 dB bandwidth**

**Channel 2 - OBW 99%**


**FCC ID: XYN2745**
**IC ID: 8748A-2745**
**Channel 3 - 20 dB bandwidth**

**Channel 3 - OBW 99%**


FCC ID: XYN2745

IC ID: 8748A-2745


## 5.5 Correction for pulse operation (duty cycle)

For test instruments and accessories used see section 6 Part **DC**.

### 5.5.1 Description of the test location

Test location: Shielded Room S4

### 5.5.2 Photo documentation of the test set-up

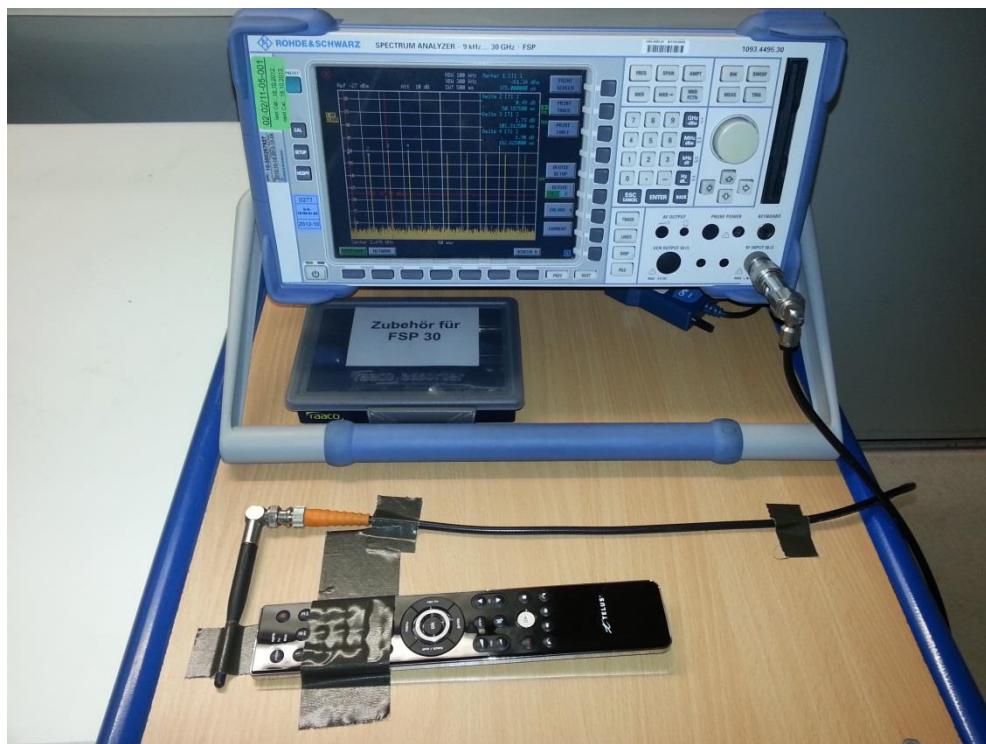

### 5.5.3 Applicable standard

According to FCC Part 15A. Section 15.35(c):

When the radiated emission limits are expressed in terms of average value and pulsed operation is employed. the measurement field strength shall be determined by averaging over one complete puls train. including blanking intervals. as long as the pulse train does not exceed 0.1s. In cases where the puls train exceeds 0.1s. the measured field strength shall be determined from the average absolute voltage during a 0.1s interval during which the field strength is at its maximum. The exact method of calculating the average field strength shall be submitted.

**FCC ID: XYN2745**
**IC ID: 8748A-2745**

#### 5.5.4 Description of Measurement

The duty cycle factor (dB) is calculated applying the following formula:

##### Paring mode:

$$KE = 20 \log \left( \frac{t_{iw}}{T_w} * \frac{t_{iB}}{T_B} \right) = 20 \log \left( (0.813 * 12) / 100 \right) = \underline{\underline{-20.2 \text{ dB}}}$$

##### Operation mode:

$$KE = 20 \log \left( \frac{t_{iw}}{T_w} * \frac{t_{iB}}{T_B} \right) = 20 \log \left( (0.813 * 2) / 100 \right) = \underline{\underline{-35.8 \text{ dB}}}$$

$KE$ : pulse operation correction factor  
 $t_{iw}$ : pulse duration for one complete pulse track  
 $t_{iB}$ : pulse duration for one pulse  
 $T_w$ : a period of the pulse track  
 $T_B$ : a period of one pulse

#### 5.5.5 Test result

##### Paring mode:

Duty cycle	$t_{iw}$ (ms)	$T_w$ (ms)	$t_{iB}$ (ms)	$p$	$KE$ (dB)
Within 100 ms	-	100	0.813	12	-20.2 (max. -20 dB)

##### Operation mode:

Duty cycle	$t_{iw}$ (ms)	$T_w$ (ms)	$t_{iB}$ (ms)	$p$	$KE$ (dB)
Within 100 ms	-	100	0.813	2	-35.8 (max. -20 dB)

##### Remarks:

The pulse train ( $T_w$ ) exceeds 100 ms. Therefore the duty cycle have been calculated by

averaging the sum of the pulse widths over the 100 ms width with the highest average value.

Each data packet was calculated with a maximum length of 813  $\mu$ s (worst case condition).

The maximum correction is limited to 20 dB.

For detailed test result please refer to following test protocols.



**FCC ID: XYN2745**
**IC ID: 8748A-2745**



### 5.5.6 Test protocol

#### Correction for Pulse Operation (Duty Cycle)

FCC Part 15A. Section 15.35(c)

Paring mode

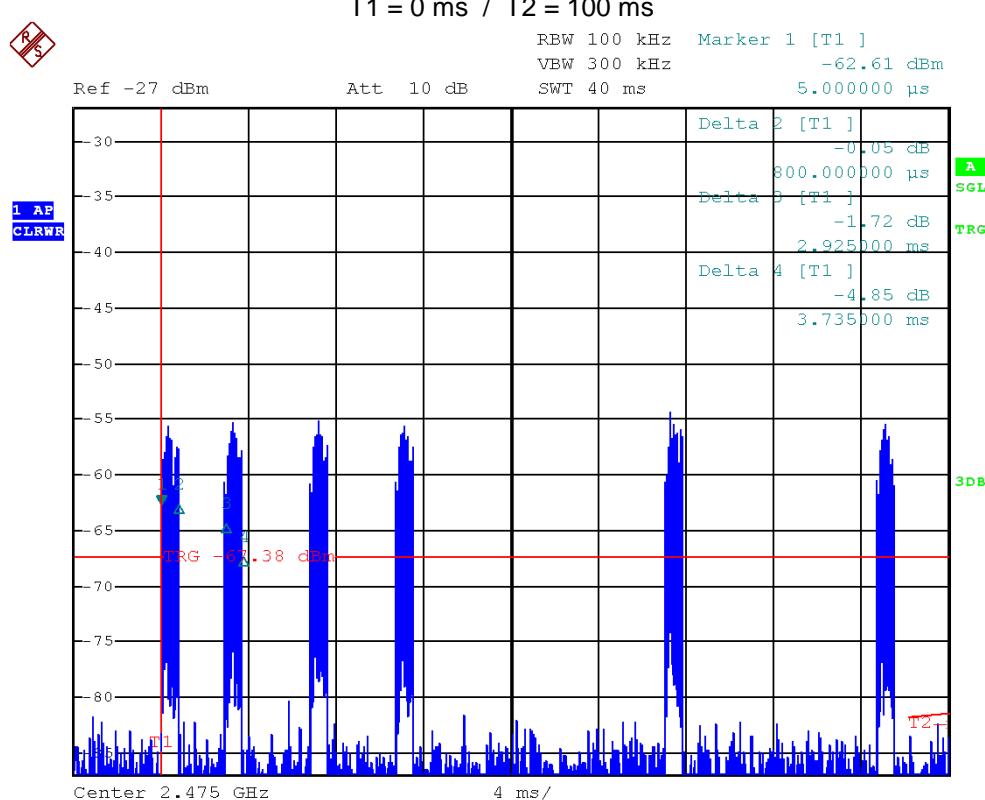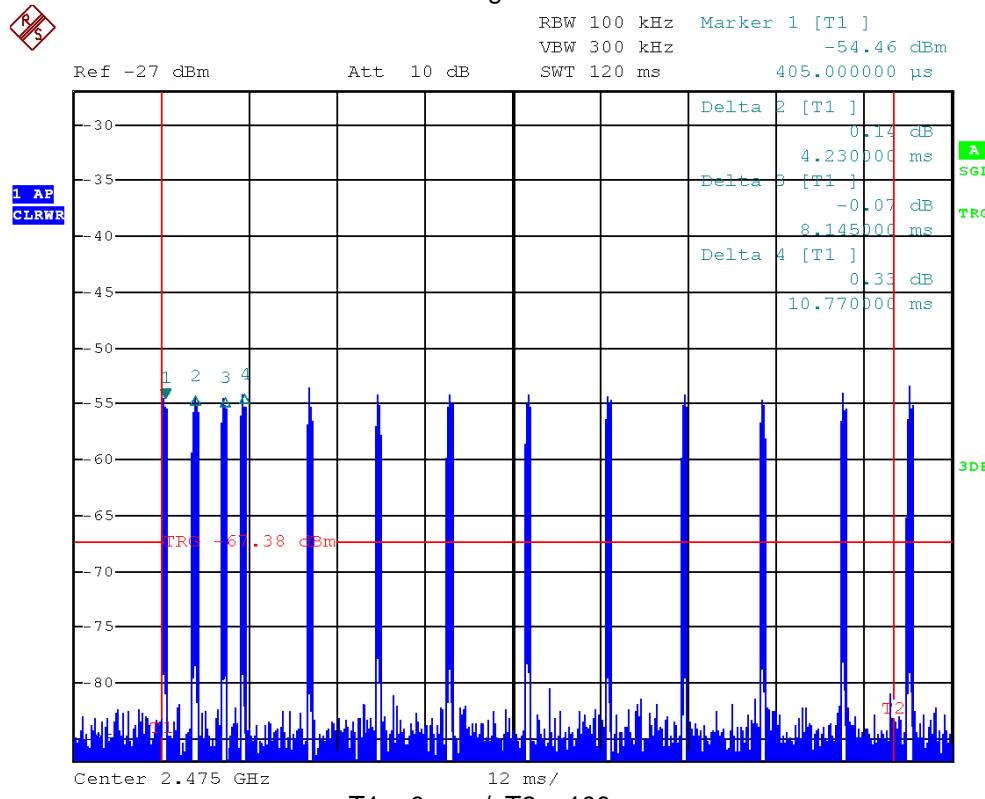

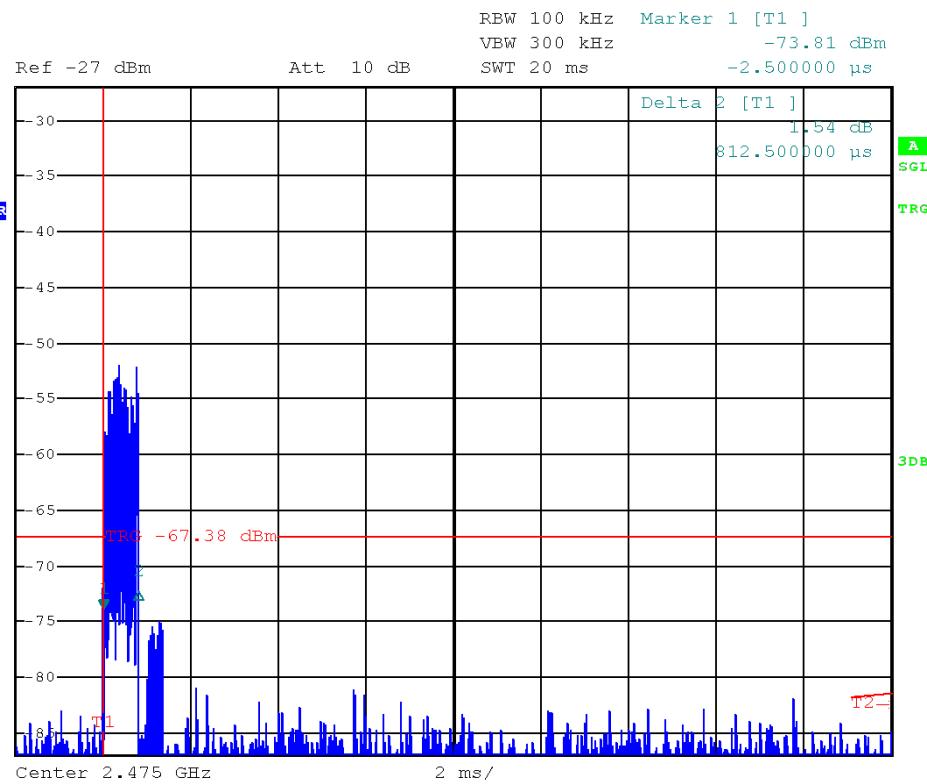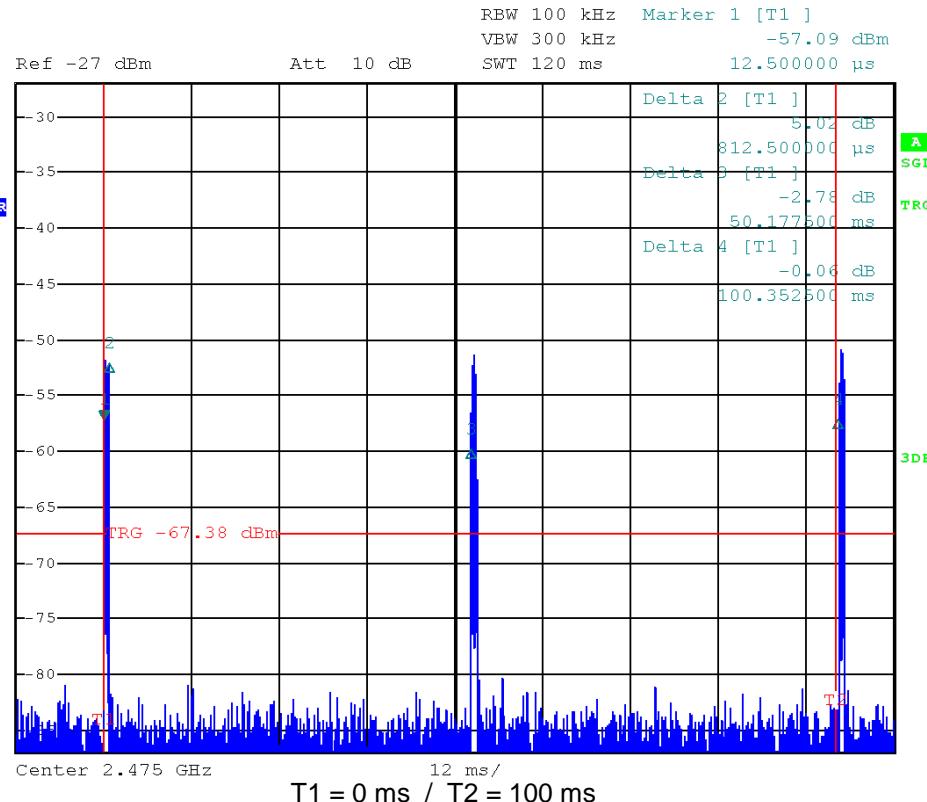**FCC ID: XYN2745**
**IC ID: 8748A-2745**
**Correction for Pulse Operation (Duty Cycle)**
**FCC Part 15A. Section 15.35(c)**
**Operation mode**


FCC ID: XYN2745

IC ID: 8748A-2745

## 5.6 Antenna application

### 5.6.1 Applicable standard

According to FCC Part 15C, Section 15.203(a):

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section.

**Remarks:** The EUT use an integrated PCB antenna. No other antenna than that furnished by the

responsible party or external power amplifier can be applied by a customer.

The antenna of the EUT meets the requirement of FCC Part 15C, Section 15.203 and 15.204.

FCC ID: XYN2745

IC ID: 8748A-2745

## 5.7 Receiver radiated emissions

For test instruments and accessories used see section 6 Part **SER2** and **SER3**.

### 5.7.1 Description of the test location

Test location: OATS 1  
Test location: Anechoic chamber 2  
Test distance: 3 m

### 5.7.2 Photo documentation of the test set-up

Test setup 30 MHz – 1000 MHz



Test setup 1 GHz – 18 GHz



### 5.7.3 Applicable standard

According to FCC Part 15C, Section 15.109(a):

Except for Class A digital devices, the field strength of radiated emissions from unintentional radiators at a distance of 3 m shall not exceed the given limit.

**FCC ID: XYN2745**
**IC ID: 8748A-2745**

#### 5.7.4 Description of Measurement

The radiated emissions from the EUT are measured in the frequency range of 9 kHz to 1000 MHz using a tuned receiver and appropriate broadband linearly polarized antennas. In the frequency range above 1 GHz a spectrum analyser is used with appropriate linear polarized antennas. The set up of the EUT will be in accordance to ANSI C63.4. If the emission level in peak mode complies with the average limit then testing will be stopped and peak values of the EUT will be reported, otherwise, the emission will be measured in average mode again and reported. During the test, the EUT was set into continuous transmitting mode, modulated.

Instrument settings:

30 MHz – 1000 MHz: RBW: 120 kHz  
1000 MHz – 40 GHz RBW = VBW: 1 MHz

#### 5.7.5 Test result f < 1 GHz

Frequency (MHz)	Reading level QP (dB $\mu$ V)	Reading level AV (dB $\mu$ V)	Bandwidth (kHz)	Correction factor (dB/m)	Corrected level QP dB( $\mu$ V/m)	Corrected level AV dB( $\mu$ V/m)	Limit dB( $\mu$ V/m)	Delta (dB)
30*	13.0	-	120	12.3	25.3	-	40.0	-14.7
300*	2.0	-	120	16.5	18.5	-	46.0	-27.5
450*	1.5	-	120	20.4	21.9	-	46.0	-24.1
750*	0.3	-	120	26.8	27.1	-	46.0	-18.9
1000*	0.4	-	120	30.1	30.5	-	54.0	-23.5

\*) Ambient noise

Note: The correction factor includes cable loss and antenna factor.

#### 5.7.6 Test result f > 1 GHz

Frequency (MHz)	Level PK (dB $\mu$ V)	Duty Cycle Correction (dB)	Level AV (dB $\mu$ V)*	Correction factor (dB/m)	Corrected level PK dB( $\mu$ V/m)	Corrected level AV dB( $\mu$ V/m)	Limit PK dB( $\mu$ V/m)	Limit AV dB( $\mu$ V/m)	Delta (dB)
1500*	47.5	-	-	1.2	48.7	-	74.0	54.0	-5.3
2500*	47.2	-	-	4.4	51.6	-	74.0	54.0	-2.4
3500*	47.6	-	-	2.5	50.1	-	74.0	54.0	-3.9
4500*	39.0	-	-	3.0	42.0	-	74.0	54.0	-12.0

\*) Ambient noise

Note: The correction factor includes cable loss and antenna factor.

Limit according to FCC Part 15C, Section 15.109:

Frequency (MHz)	15.109 Limits dB( $\mu$ V/m)	Measurement distance (m)
30-88	40	3
88-216	43,5	3
216-960	46	3
Above 960	54	3

The requirements are **FULFILLED**.

**Remarks:** The measurement was performed up to the 5<sup>th</sup> harmonic (12500 MHz).

**FCC ID: XYN2745**
**IC ID: 8748A-2745**

## **6 USED TEST EQUIPMENT AND ACCESSORIES**

All test instruments used are calibrated and verified regularly. The calibration history is available on request.


<b>Test ID</b>	<b>Model Type</b>	<b>Equipment No.</b>	<b>Next Calib.</b>	<b>Last Calib.</b>	<b>Next Verif.</b>	<b>Last Verif.</b>
CPR 3	FSP 40 AMF-4F-04001200-15-10P AFS5-12001800-18-10P-6 3117 Sucoflex N-1600-SMA Sucoflex N-2000-SMA	02-02/11-11-001 02-02/17-05-004 02-02/17-06-002 02-02/24-05-009 02-02/50-05-073 02-02/50-05-075	18/09/2013	18/09/2012		
DC	FSP 30 RF Antenna	02-02/11-05-001 02-02/24-05-032	18/10/2013	18/10/2012		
MB	FSP 40 RF Antenna MetraHIT World WK-340/40 6543A	02-02/11-11-001 02-02/24-05-032 02-02/32-10-001 02-02/45-05-001 02-02/50-05-157	18/09/2013	18/09/2012		
SER 1	FMZB 1516 ESCI S10162-B KK-EF393-21N-16 NW-2000-NB	01-02/24-01-018 02-02/03-05-005 02-02/50-05-031 02-02/50-05-033 02-02/50-05-113		03/12/2013	03/12/2012	14/02/2014 14/02/2013
SER 2	ESVS 30 VULB 9168 S10162-B NW-2000-NB KK-EF393/U-16N-21N20 m	02-02/03-05-006 02-02/24-05-005 02-02/50-05-031 02-02/50-05-113 02-02/50-12-018	26/06/2013 11/04/2014	26/06/2012 11/04/2013	11/10/2013	11/04/2013
SER 3	FSP 40 AMF-4F-04001200-15-10P AFS5-12001800-18-10P-6 3117 R1 _ 18 - 40 GHz Sucoflex N-1000-SMA Sucoflex N-1600-SMA Sucoflex N-2000-SMA WHK 3.0/18G-10EF	02-02/11-11-001 02-02/17-05-004 02-02/17-06-002 02-02/24-05-009 02-02/30-09-002 02-02/50-05-072 02-02/50-05-073 02-02/50-05-075 02-02/50-05-180	18/09/2013 04/04/2014	18/09/2012 04/04/2013		08/01/2014 08/01/2013

**FCC ID: XYN2745**

IC ID: 8748A-2745

## **7 Attachment A – Internal photos**


### Interior view of housind and PCB

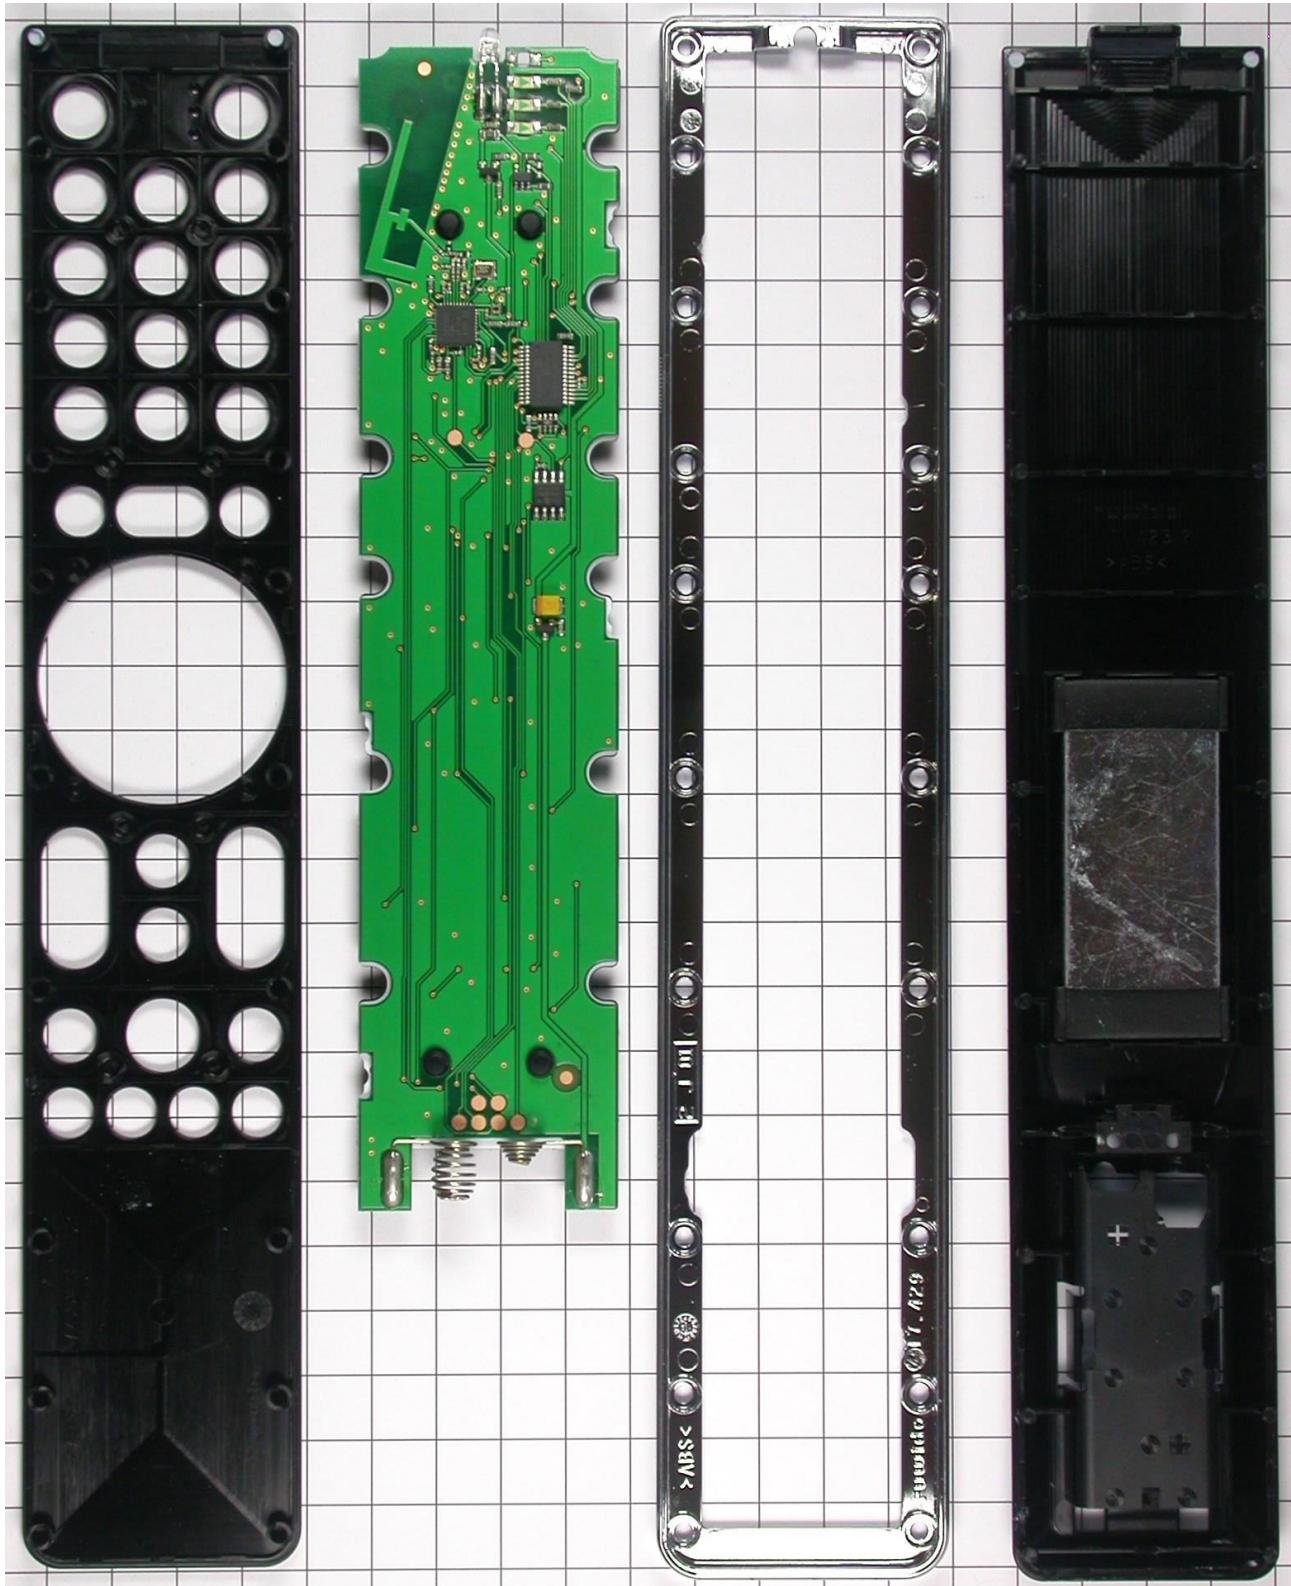

FCC ID: XYN2745

IC ID: 8748A-2745

PCB top view

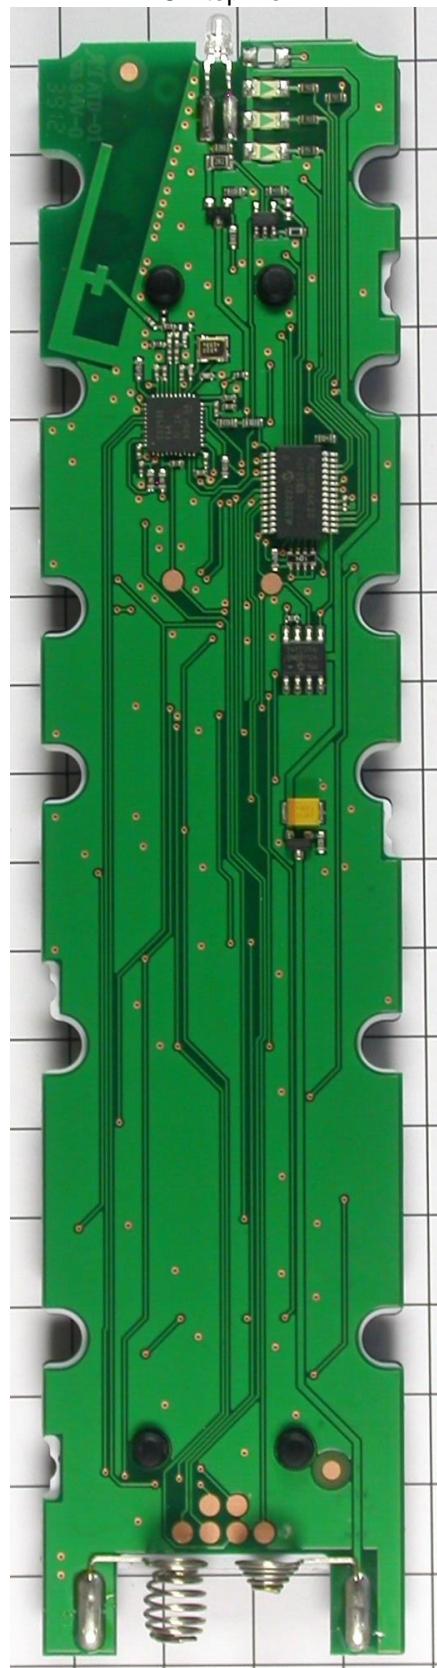

PCB bottom view



FCC ID: XYN2745

IC ID: 8748A-2745

PCB top view (zoom of the rf part)

