

5 TEST CONDITIONS AND RESULTS

5.1 AC power line conducted emissions

For test instruments and accessories used see section 6 Part A 4.

5.1.1 Description of the test location

Test location: NONE

Remarks: Not applicable the EUT is battery driven.

5.2 Field strength of fundamental

For test instruments and accessories used see section 6 Part CPR 3.

5.2.1 Description of the test location

Test location: Anechoic chamber 2

Test distance: 3 m

5.2.2 Photo documentation of the test set-up



5.2.1 Applicable standard

According to FCC Part 15C, Section 15.249(a):

The field strength of emissions from intentional radiators operated within these frequency bands shall comply with the effective limits.

FCC ID: XYN2761

IC ID: 8748A-2761

5.3 Out-of-band emission, radiated


For test instruments and accessories used see section 6 Part **SER1**, **SER 2**, **SER 3**.

5.3.1 Description of the test location

Test location: OATS 1
Test location: Anechoic chamber 2
Test distance: 3 m

5.3.2 Photo documentation of the test set-up

Test setup 9 kHz – 30 MHz:

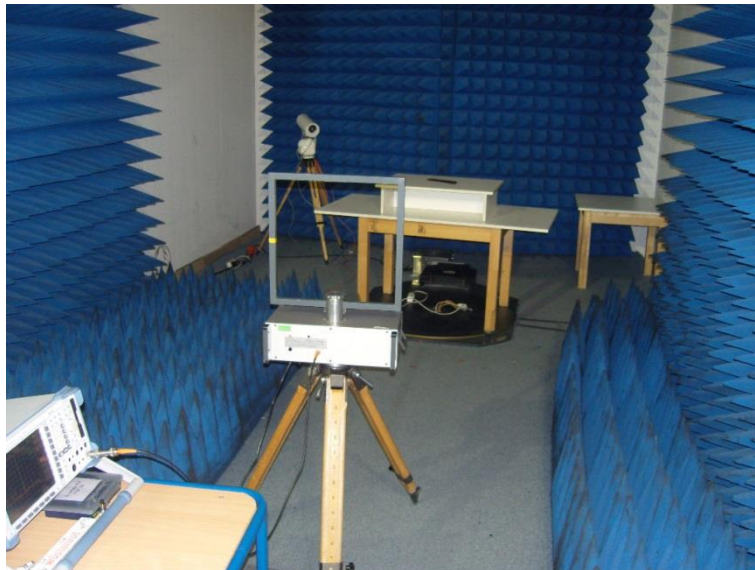


Test setup 30 MHz – 1000 MHz:



FCC ID: XYN2761

IC ID: 8748A-2761

Test setup 1 GHz – 18 GHz:

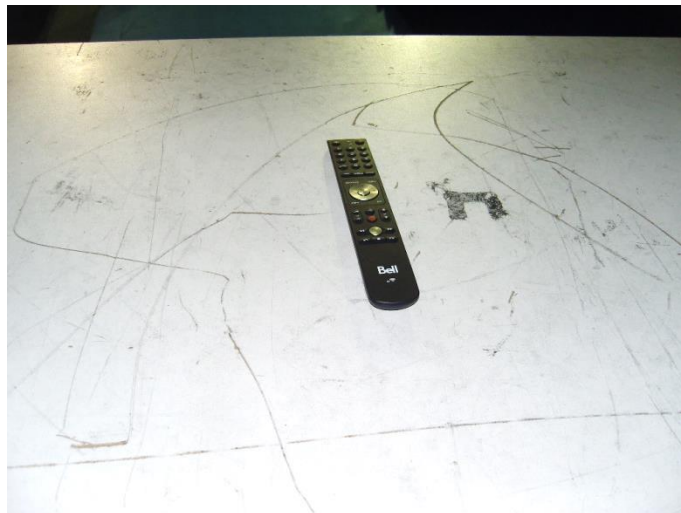

Test setup 18 GHz – 25 GHz:



FCC ID: XYN2761

IC ID: 8748A-2761

5.4 EBW and OBW

For test instruments and accessories used see section 6 Part MB.

5.4.1 Description of the test location

Test location: Anechoic chamber 2
Test distance: 3 m

5.4.2 Photo documentation of the test set-up



5.4.3 Applicable standard

According to FCC Part 15, Section 15.215(c):

Intentional radiators operating under the alternative provisions to the general emission limits, as contained in Section 15.217 through Section 15.257, must be designed to ensure that the 20 dB bandwidth of the emission is contained within the frequency band designated in the rule section under which the equipment is operated.

5.4.4 Description of Measurement

The bandwidth is measured at an amplitude level reduced from the reference level by a specified ratio of -20 dB (99%). The x-dB-down (OBW) function of the analyser is used. The measurement is performed with normal modulation in TX continuous mode.

Spectrum analyser settings:

RBW: 100 kHz, VBW: 300 kHz, Span: 10 MHz, Trace mode: max. hold, Detector: max. peak;