

# EMI – TEST REPORT

- FCC Part 15.249, RSS210 -

**Type / Model Name** : 2795-011 / Model: 795A

**Product Description** : Remote Control with BLE 4.0

**Applicant** : ruwido austria gmbh

**Address** : Koestendorfer Strasse 8

5202 Neumarkt - AUSTRIA

**Manufacturer** : ruwido austria gmbh

**Address** : Koestendorfer Strasse 8

5202 Neumarkt - AUSTRIA

<b>Test Result</b> according to the standards listed in clause 1 test standards:	<b>POSITIVE</b>
--	-----------------

<b>Test Report No. :</b> <b>T44300-00-02KS</b>	22. October 2018 <hr/> Date of issue
--	---



Deutsche  
Akkreditierungsstelle  
D-PL-12030-01-01  
D-PL-12030-01-02

The test report merely corresponds to the test sample. It is not permitted to copy extracts of these test results without the written permission of the test laboratory.

# Contents

<b>1</b>	<b><u>TEST STANDARDS</u></b>	<b>3</b>
<b>2</b>	<b><u>EQUIPMENT UNDER TEST</u></b>	<b>4</b>
2.1	Photo documentation of the EUT – Detailed photos see attachment A	4
2.2	Equipment category	4
2.3	Short description of the equipment under test (EUT)	4
2.4	Variants of the EUT	4
2.5	Operation frequency and channel plan	5
2.6	Transmit operating modes	5
2.7	Antenna	5
2.8	Power supply system utilised	5
2.9	Peripheral devices and interface cables	6
2.10	Determination of worst case conditions for final measurement	6
<b>3</b>	<b><u>TEST RESULT SUMMARY</u></b>	<b>7</b>
3.1	Final assessment	7
<b>4</b>	<b><u>TEST ENVIRONMENT</u></b>	<b>8</b>
4.1	Address of the test laboratory	8
4.2	Environmental conditions	8
4.3	Statement of the measurement uncertainty	9
4.4	Measurement protocol for FCC and ISED	10
<b>5</b>	<b><u>TEST CONDITIONS AND RESULTS</u></b>	<b>12</b>
5.1	AC power line conducted emissions	12
5.2	Correction for pulse operation (duty cycle)	13
5.3	Field strength of fundamental	17
5.4	Out-of-band emission, radiated	19
5.5	EBW and OBW	25
5.6	Antenna application	30
<b>6</b>	<b><u>USED TEST EQUIPMENT AND ACCESSORIES</u></b>	<b>31</b>



## 2 EQUIPMENT UNDER TEST

### 2.1 Photo documentation of the EUT – Detailed photos see attachment A

### 2.2 Equipment category

Bluetooth Low Energy device, portable equipment

### 2.3 Short description of the equipment under test (EUT)

The EUT is a Bluetooth Low Energy wireless remote control. A single PCB antenna is used within the system. The EUT has only one integrated antenna, no temporary connector and no external antenna can be connected. The modulation used by the EUT is GFSK with a data rate of 1 Mbit/s.

Number of tested samples: 1  
Serial number: 168533  
Firmware version: 3.4.2

Items	Description
BT type	4.0 Low Energy
BT chipset type	Texas Instruments CC2541
Modulation	GFSK
Frequency range	2400 MHz to 2483.5 MHz
Channel numbers	40
Data rate (kbps)	1000
Antenna type	PCB

#### EUT configuration:

(The CDF filled by the applicant can be viewed at the test laboratory.)

### 2.4 Variants of the EUT

None.

## 2.5 Operation frequency and channel plan

The operating frequency is 2400 MHz to 2483.5 MHz.

Channel	Frequency	Channel	Frequency
37	2402	18	2442
0	2404	19	2444
1	2406	20	2446
2	2408	21	2448
3	2410	22	2450
4	2412	23	2452
5	2414	24	2454
6	2416	25	2456
7	2418	26	2458
8	2420	27	2460
9	2422	28	2462
10	2424	29	2464
38	2426	30	2466
11	2428	31	2468
12	2430	32	2470
13	2432	33	2472
14	2434	34	2474
15	2436	35	2476
16	2438	36	2478
17	2440	39	2480

Note: the marked frequencies are determined for final testing.

## 2.6 Transmit operating modes

The EUT uses GFSK and provide following data rate:

1000 kbps (kbps = kilobits per second)

## 2.7 Antenna

The following antenna shall be used with the EUT:

Number	Characteristic	Certification name	Plug	Frequency range (GHz)
1	Omni	PCB antenna	none	2.4 - 2.4835

## 2.8 Power supply system utilised

Power supply voltage,  $V_{nom}$  : 1.5 VDC (1 x AAA battery of 1.5 V)

## 2.9 Peripheral devices and interface cables

The following peripheral devices and interface cables are connected during the measurements:

- \_\_\_\_\_ Model : - \_\_\_\_\_
- \_\_\_\_\_ Model : \_\_\_\_\_
- \_\_\_\_\_ Model : \_\_\_\_\_

## 2.10 Determination of worst case conditions for final measurement

Measurements are made in all three orthogonal axes to locate at which position the EUT produces the maximum of the emissions.

BT 4.0 LE	Available channels	Tested channels	Power setting	Modulation	Data rate
802.15.1	00 to 39	37, 18, 39	0 dBm	GFSK	1000 kbps

### 2.10.1 Test jig

No special test jig was used.

### 2.10.2 Test software

The EUT has a special firmware that allows enabling a continuous transmission modulated, unmodulated and receiving mode. The output power is set to 0 dBm by firmware and cannot be changed.

### **3 TEST RESULT SUMMARY**

Operating in the 2400 MHz – 2483.5 MHz band:

FCC Rule Part	RSS Rule Part	Description	Result
15.35(c)	RSS-Gen, 6.10	Pulsed operation	passed
15.203	RSS Gen, 8.3	Antenna requirement	passed
15.204	RSS Gen, 8.2	External radio frequency power amplifiers	not tested
15.205(a)	RSS Gen, 8.1	Emissions in restricted bands	passed
15.207(a)	RSS Gen, 8.8	AC power line conducted emissions	not tested
15.215(c)	-	EBW	passed
-	RSS-Gen, 6.6	OBW	passed
15.249(a)	RSS-210, B10(a)	Field strength of fundamental	passed
15.249(d)	RSS-210, B10(b)	Out-of-band emission, radiated	passed
-	RSS-Gen, 6.11	Transmitter frequency stability	not applicable

The mentioned RSS Rule Parts in the above table are related to:  
 RSS Gen, Issue 4, November 2014  
 RSS 210, Issue 9, August 2016

#### **3.1 Final assessment**

The equipment under test fulfills the EMI requirements cited in clause 1 test standards.

Date of receipt of test sample : acc. to storage records

Testing commenced on : 24 July 2018

Testing concluded on : 02 August 2018

Checked by:

Tested by:

\_\_\_\_\_  
 Klaus Gegenfurtner  
 Teamleader Radio

\_\_\_\_\_  
 Kathrin Schiebl  
 Radio Team

## **4 TEST ENVIRONMENT**

### **4.1 Address of the test laboratory**

**CSA Group Bayern GmbH  
Ohmstrasse 1-4  
94342 STRASSKIRCHEN  
GERMANY**

### **4.2 Environmental conditions**

During the measurement the environmental conditions were within the listed ranges:

Temperature: 15-35 ° C

Humidity: 30-60 %

Atmospheric pressure: 86-106 kPa



### 4.3 Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. It is noted that the expanded measurement uncertainty corresponds to the measurement results from the standard measurement uncertainty multiplied by the coverage factor  $k = 2$ . The true value is located in the corresponding interval with a probability of 95 %. The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16-4-2 / 11.2003 „Uncertainties, statistics and limit modelling – Uncertainty in EMC measurements“ and is documented in the quality system acc. to DIN EN ISO/IEC 17025. For all measurements shown in this report, the measurement uncertainty of the test laboratory, CSA Group Bayern GmbH, is below the measurement uncertainty as defined by CISPR. Therefore, no special measures must be taken into consideration with regard to the limits according to CISPR. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Measurement Type	Range	Confidence Level	Calculated Uncertainty
AC power line conducted emissions	0.15 MHz to 30 MHz	95%	$\pm 3.29$ dB
EBW and OBW	2400 MHz to 3000 MHz	95%	$\pm 2.5 \times 10^{-7}$
Maximum peak conducted output power	2400 MHz to 3000 MHz	95%	$\pm 0.62$ dB
Power spectral density	2400 MHz to 3000 MHz	95%	$\pm 0.62$ dB
Conducted Spurious Emissions	9 kHz to 10000 MHz	95%	$\pm 2.15$ dB
Conducted Spurious Emissions	10000 MHz to 40000 MHz	95%	$\pm 3.47$ dB
Radiated Spurious Emissions	9 kHz to 30 MHz	95%	$\pm 3.53$ dB
Radiated Spurious Emissions	30 MHz to 1000 MHz	95%	$\pm 3.71$ dB
Radiated Spurious Emissions	1000 MHz to 10000 MHz	95%	$\pm 2.34$ dB
Field strength of the fundamental	100 kHz to 100 MHz	95%	$\pm 3.53$ dB

## 4.4 Measurement protocol for FCC and ISED

### 4.4.1 General information

The Open Area test site is a listed Open Site under the Canadian Test-Sites File-No:

**IC 3009A-1**

The Anechoic chamber is a listed test site under the Canadian Test-Sites File-No:

**IC 3009A-2**

### 4.4.2 General Standard information

The test methods used comply with ANSI C63.10 - "Testing Unlicensed Wireless Devices".

#### 4.4.2.1 Justification

The equipment under test (EUT) is configured in a typical user arrangement in accordance with the manufacturer's instructions. A cable is connected to each available port and either terminated with a peripheral using the appropriate impedance characteristic or left unterminated. Where appropriate, cables are manually manipulated with respect to each other thus obtaining maximum disturbances from the unit.

#### 4.4.2.2 Radiated emission (electrical field 30 MHz - 1 GHz)

Spurious emissions from the EUT are measured in the frequency range of 30 MHz to 1000 MHz using a tuned receiver and appropriate broadband linearly polarised antennas. Measurements between 30 MHz and 1000 MHz are made with 120 kHz/6 dB bandwidth and quasi-peak detection. Table top equipment is placed on a 1.0 X 1.5 m non-conducting table 80 centimetres above the ground plane. Floor standing equipment is placed directly on the turntable/ground plane. The setup of the equipment under test is established in accordance with ANSI C63.10. The interface cables that are closer than 40 centimetres to the ground plane are bundled in the center in a serpentine fashion so that they are at least 40 centimetres from the ground plane. Cables to simulators/testers (if used in this test) are routed through the center of the table and to a screened room located outside the test area. The antenna is positioned 3, 10 or 30 metres horizontally from the EUT and is repeated vertically. To locate maximum emissions from the test sample the antenna is varied in height from 1 to 4 metres and the EUT is rotated 360 degrees.

The final level in dBµV/m is calculated by taking the reading from the EMI receiver (Level dBµV) and adding the correction factors and cable loss factor (dB). The FCC or CISPR limit is subtracted from this result in order to provide the limit margin listed in the measurement protocol.

The resolution bandwidth setting:

30 MHz – 1000 MHz: RBW: 120 kHz

Example:

Frequency	Level	+	Factor	=	Level	-	CISPR Limit	=
Delta								
(MHz)	(dBµV)		(dB)		(dBµV/m)		(dBµV/m)	(dB)
719.0	75.0	+	32.6	=	107.6	-	110.0	= -2.4

#### 4.4.2.3 Radiated emission (electrical field 1 GHz - 40 GHz)

Radiated emissions from the EUT are measured in the frequency range 1 GHz up to the maximum frequency as specified in 47 CFR Part 15, Subpart A, Section 15.33, using a spectrum analyser and appropriate linearly polarized antennas. Table top equipment is placed on a 1.0 X 1.5 metre non-conducting table, 1.5 metre above the ground plane. Floor standing equipment is placed directly on the turntable/ground plane. The setup of the equipment under test is following set out in ANSI C63.10. The interface cables that are closer than 40 centimetres to the ground plane are bundled in the center in a serpentine fashion so they are at least 40 centimetres from the ground plane. Cables to simulators/testers (if used in this test) are routed through the center of the table and to a screened room located outside the test area. Measurements are made in both the horizontal and vertical polarization planes in a fully anechoic room using a spectrum analyzer set to max peak detector function and a resolution 1 MHz and video bandwidth 3 MHz for peak measurement. The conditions determined as worst case will then be used for the final measurements. When the EUT is larger than the beam width of the measuring antenna it will be moved over the surface for the four sides of the equipment. Where appropriate, the test distance may be reduced in order to detect emissions under better uncertainty and are calculated at the specified test distance.

## 5 TEST CONDITIONS AND RESULTS

### 5.1 AC power line conducted emissions

#### 5.1.1 Description of the test location

Test location: NONE

**Remarks:** Not applicable, the EUT is battery powered and has no external connectable cables.

---

## 5.2 Correction for pulse operation (duty cycle)

For test instruments and accessories used see section 6 Part DC.

### 5.2.1 Description of the test location

Test location: AREA4

### 5.2.2 Photo documentation of the test set-up



### 5.2.1 Applicable standard

According to FCC Part 15A, Section 15.35(c):

When the radiated emission limits are expressed in terms of average value and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete puls train, including blanking intervals, as long as the pulse train does not exceed 0.1s. In cases where the puls train exceeds 0.1s, the measured field strength shall be determined from the average absolute voltage during a 0.1s interval during which the field strength is at its maximum. The exact method of calculating the average field strength shall be submitted.

### 5.2.2 Description of Measurement


The duty cycle factor (dB) is calculated applying the following formula:

$$KE = 20 \log (t_{iw} / 0.1s)$$

*KE*: pulse operation correction factor



*t<sub>iw</sub>*: pulse duration for one complete pulse track

The pulse train exceeds 0.1s. Thus, the field strength is determined during a 100 ms interval.

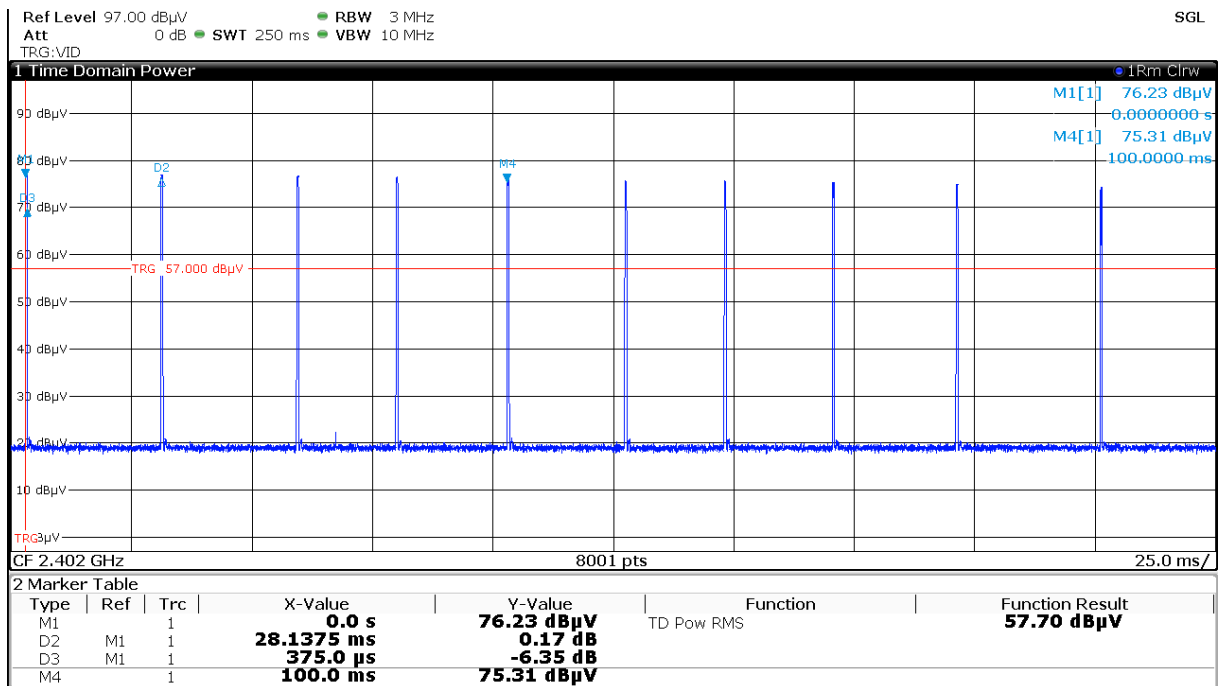

### 5.2.3 Test result

Note: the worst case regarding duty cycle of a BLE device is in advertising mode. Channel 37 was chosen for measurement.

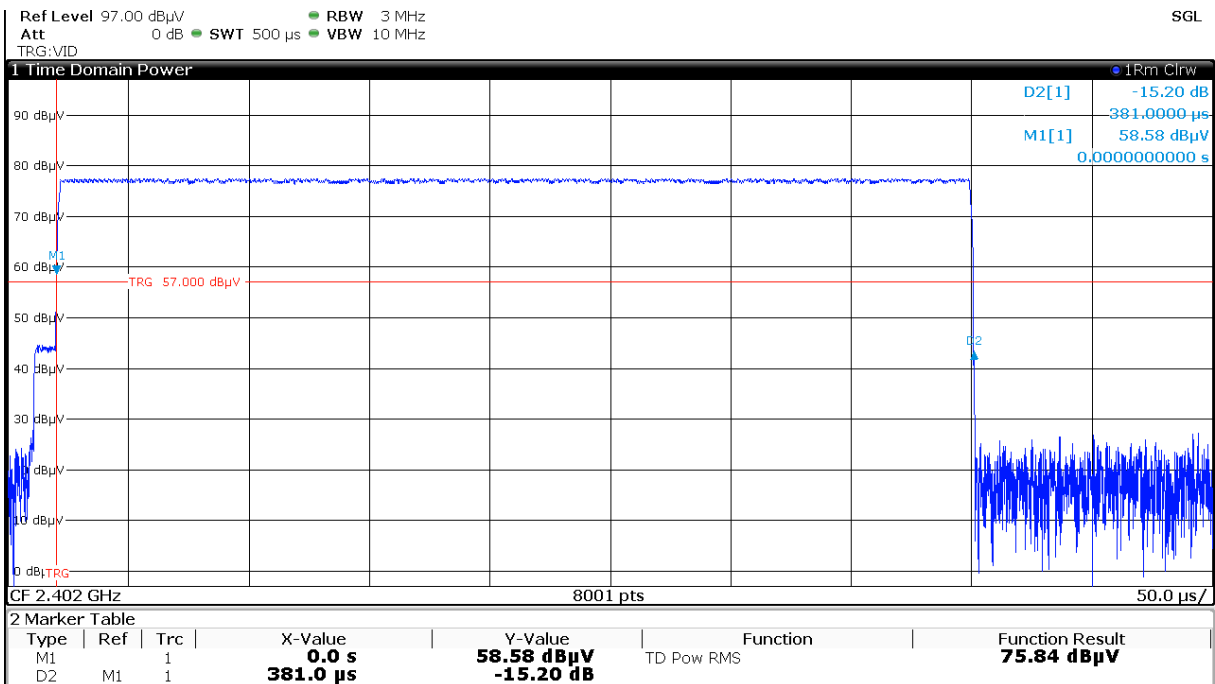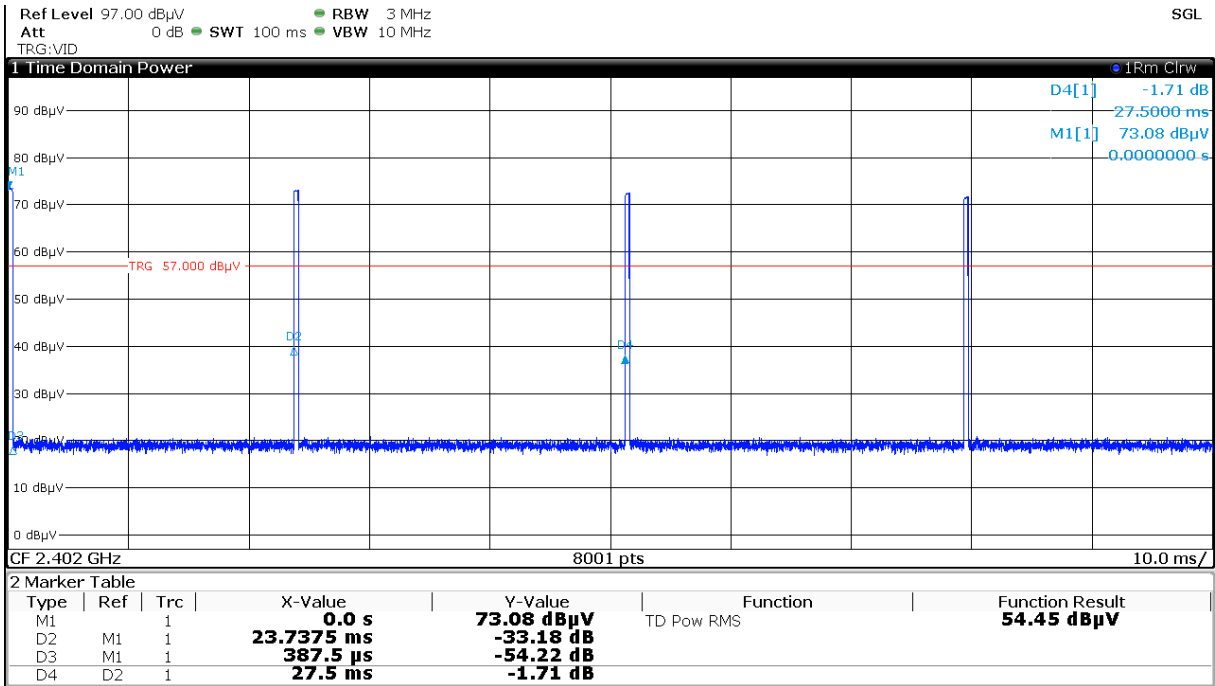

$$K_E = 20 \log (1.524 \text{ ms} / 100 \text{ ms}) = -36.3$$

Total length of period	100 ms
Max. On time	1.524 ms
DC	0.02
Correction factor	-36.3 dB

**Remarks:**

---

---

---




### 5.3 Field strength of fundamental

For test instruments and accessories used see section 6 Part CPR 3.

#### 5.3.1 Description of the test location

Test location: Anechoic chamber 1  
Test distance: 3 m

#### 5.3.2 Photo documentation of the test set-up

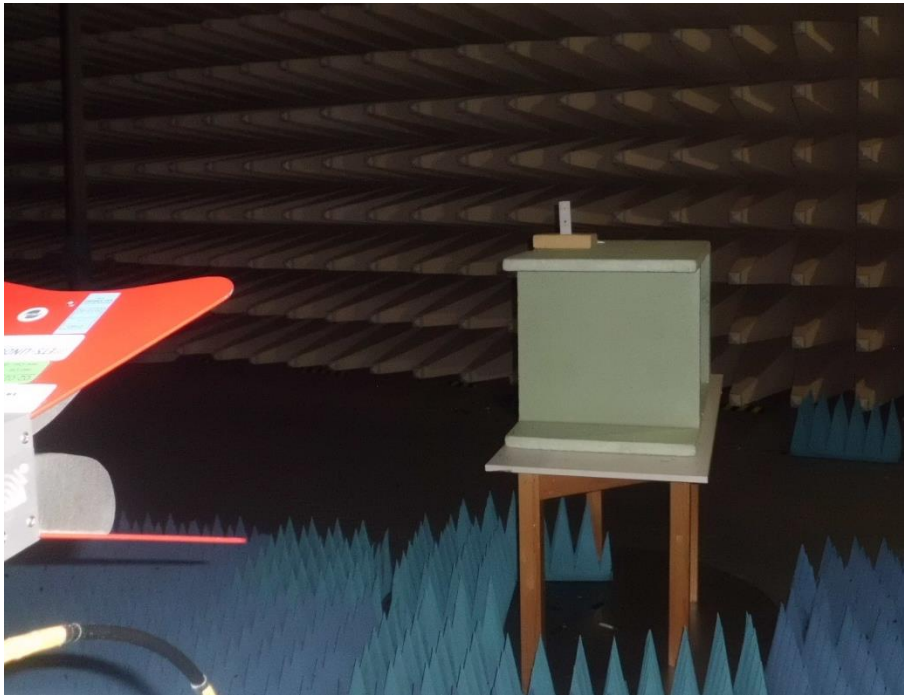

#### 5.3.3 Applicable standard

According to FCC Part 15C, Section 15.249(a):

The field strength of emissions from intentional radiators operated within these frequency bands shall comply with the effective limits.

#### 5.3.4 Description of Measurement

The radiated emission of the fundamental wave from the EUT is measured using a spectrum analyser and appropriate linear polarized antennas. The set up of the EUT and the measurement procedure is in accordance to ANSI C63.10, Item 6.5. The EUT is measured in TX continuous mode modulated under normal conditions.

Analyser settings:

Peak measurement: RBW: 3 MHz

VBW: 10 MHz

Detector: Max peak

5.3.5 Test result

Frequency (MHz)	Level PK dB(μV/m)	Limit PK dB(μV/m)	Margin PK (dB)	Level AV dB(μV/m)	Limit AV dB(μV/m)	Margin AV (dB)
2402	93.9	114.0	-20.1	57.5	94.0	-36.4
2442	92.3	114.0	-21.7	56.0	94.0	-38.0
2480	90.9	114.0	-23.1	54.6	94.0	-39.4

Note: The peak values are corrected with the duty cycle of -36.3 dB to get the average value.

Average-Limit according to FCC Part 15C, Section 15.249(a):

Frequency (MHz)	Field strength of fundamental	
	(mV/m)	dB(μV/m)
902 - 928	50	94
<b>2400 - 2483.5</b>	<b>50</b>	<b>94</b>
5725-5875	50	94
24000 - 24250	250	108

Peak-Limit according to FCC Part 15C, Section 15.249(e):

However, the peak fieldstrength shall not exceed the maximum permitted average limit by more than 20 dB.

The requirements are **FULFILLED**.

Remarks:

---



---

## 5.4 Out-of-band emission, radiated

For test instruments and accessories used see section 6 Part **SER 2**, **SER 3**.

### 5.4.1 Description of the test location

Test location: OATS 1  
Test location: Anechoic chamber 1


Test distance: 3 m

### 5.4.2 Photo documentation of the test set-up


Test setup 30 MHz – 1000 MHz:



Test setup 1 GHz – 18 GHz:

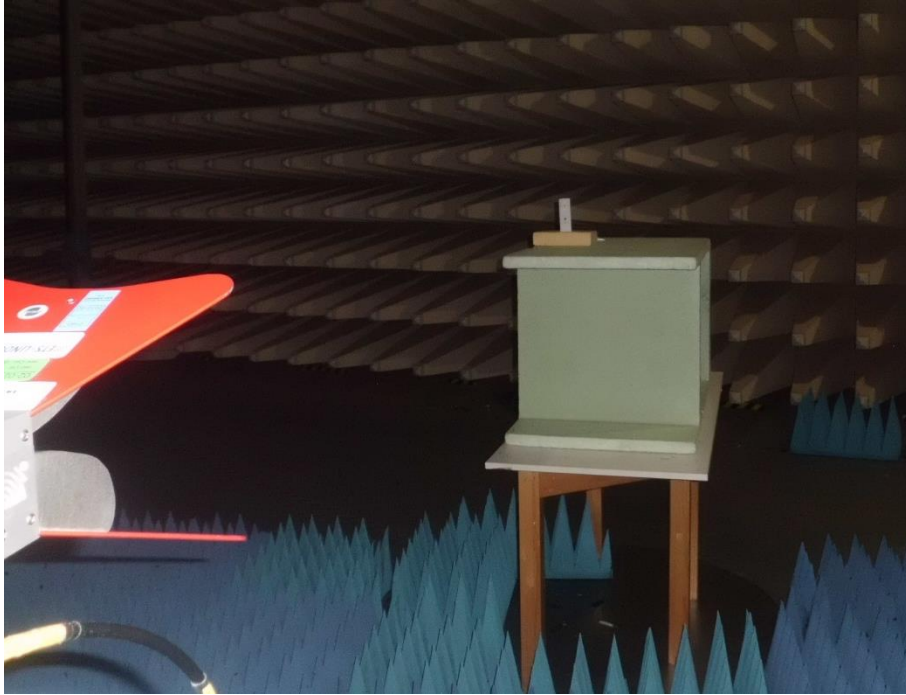

Test setup 18 GHz – 25 GHz:

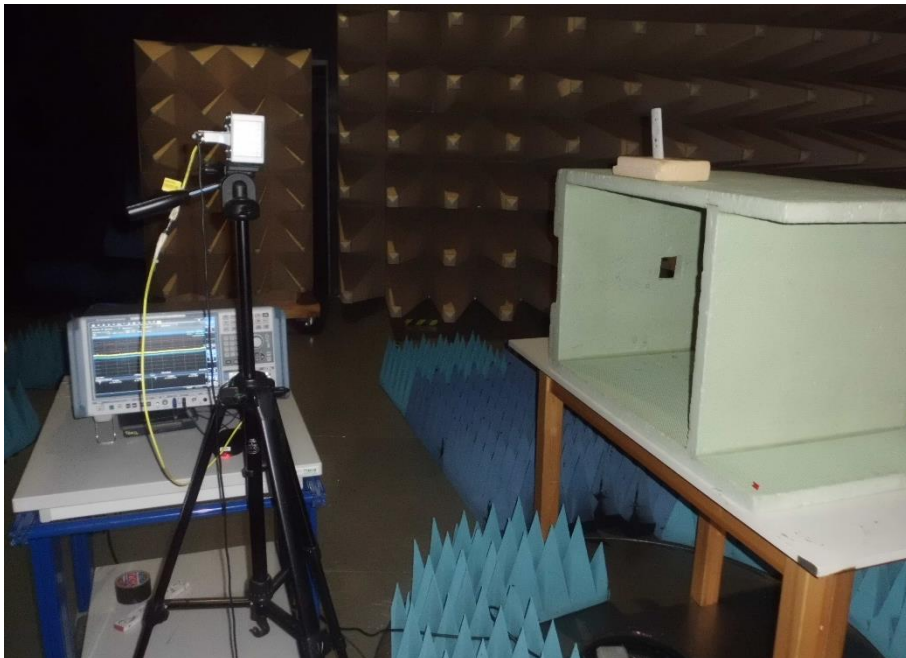

### 5.4.3 Applicable standard

According to FCC Part 15C, Section 15.249 (d):

Emission radiated outside of the specified frequency bands, except harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated limit in FCC Part 15C, Section 15.209, whichever is the lesser attenuation.

### 5.4.4 Description of Measurement

The radiated emissions from the EUT are measured in the frequency range of 30 MHz to 1000 MHz using a tuned receiver and appropriate broadband linearly polarized antennas. The setup of the EUT and the measurement procedure is in accordance to ANSI C63.10, Item 6.3. In the frequency range above 1 GHz a spectrum analyser is used with appropriate linear polarized antennas. If the emission level in peak mode complies with the average limit testing is stopped and peak values will be reported, otherwise, the emission is measured in average mode again and reported. The EUT is measured in TX continuous mode modulated under normal conditions.

Instrument settings:

30 MHz – 1000 MHz:                      RBW:                      120 kHz  
 1000 MHz – 25 GHz                      RBW:                      1 MHz

### 5.4.5 Test result $f < 1$ GHz

Frequency (MHz)	Reading Vert. (dB $\mu$ V)	Reading Hor. (dB $\mu$ V)	Correct. Vert. (dB)	Correct. Hor. (dB)	Level Vert. (dB $\mu$ V/m)	Level Hor. (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Dlimit (dB)
60.30	3.5	3.3	13.8	12.9	17.3	16.2	40.0	-22.7
64.00	7.2	3.9	13.6	12.8	20.8	16.7	40.0	-19.2
127.90	7.6	4.2	12.1	12.7	19.7	16.9	43.5	-23.8

Note: No emissions could be detected in the frequency range 30 MHz to 1 GHz. The recorded values are only noise values of the OATS. No difference could be detected for the intentional radiated frequencies 2402 MHz, 2442 MHz and 2480 MHz in this frequency range.

### 5.4.6 Test result $f > 1$ GHz

Channel 37

Frequency (MHz)	Level PK (dB( $\mu$ V/m))	Level AV (dB( $\mu$ V/m))	Limit PK (dB( $\mu$ V/m))	Margin PK (dB)	Limit AV (dB( $\mu$ V/m))	Margin AV (dB)
2400.00	69.1	32.8	74.0	-4.8	54.0	-21.2
2483.50	39.4	-	74.0	-34.6	54.0	-
4803.75	48.1	-	74.0	-25.9	54.0	-

**Channel 18**

Frequency (MHz)	Level PK dB(μV/m)	Level AV dB(μV/m)	Limit PK dB(μV/m)	Margin PK (dB)	Limit AV dB(μV/m)	Margin AV (dB)
2400.00	40.5	-	74.0	-33.5	54.0	-
2483.50	40.1	-	74.0	-33.9	54.0	-
4883.75	47.2	-	74.0	-26.8	54.0	-

**Channel 39**

Frequency (MHz)	Level PK dB(μV/m)	Level AV dB(μV/m)	Limit PK dB(μV/m)	Margin PK (dB)	Limit AV dB(μV/m)	Margin AV (dB)
2400.00	39.3	-	74.0	-34.7	54.0	-
2483.50	50.6	-	74.0	-23.4	54.0	-
4959.25	45.4	-	74.0	-28.6	54.0	-

**Note:** only when the peak value exceeds the average limit an average measurement is required. Average values are calculated by subtracting the absolute value of the correction duty cycle factor from the peak values. For example, channel 37 at 2400.00 MHz: peak value – DC = average value  
69.1 dBμV/m – 36.3 dB = 32.8 dBμV/m

Limit according to FCC Part 15C, Section 15.209:

Frequency (MHz)	15.209 Limits (μV/m)	Measurement distance (m)
0.009 - -0.49	2400/f(kHz)	300
0.49 – 1.705	24000/f(kHz)	30
1.705 – 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

Average limit according to FCC Part 15C, Section 15.249(a):

Fundamental frequency (MHz)	Field strength of harmonics	
	(μV/m)	dB(μV/m)
902 - 928	500	54
<b>2400 - 2483.5</b>	500	54
5725 - 5875	500	54
24000 - 24250	2500	68

The requirements are **FULFILLED**.


**Remarks:** The measurement was performed up to the 10<sup>th</sup> harmonic (25000 MHz). For detailed test result please refer to following test protocols.




### 5.4.7 Test protocols

For reference the plots from 1 GHz to 18 GHz at 2402 MHz:


#### Spurious emissions from 1 to 4 GHz (incl. Fundamental carrier)

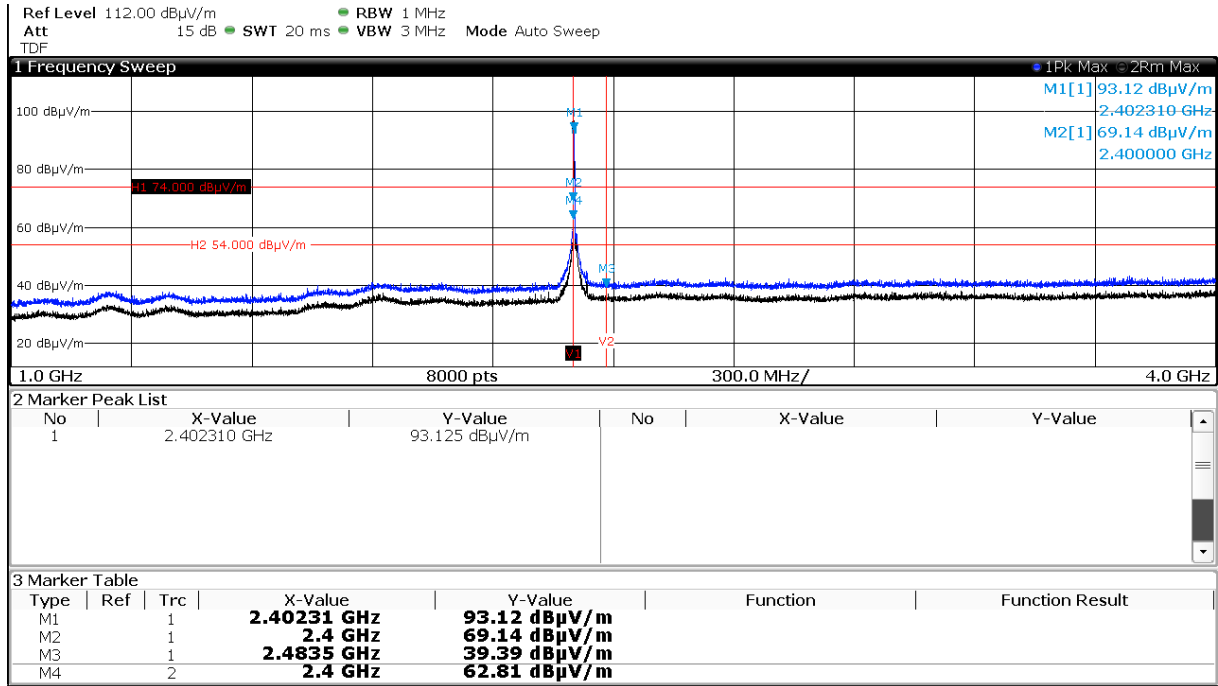

#### Spurious emissions from 4 to 18 GHz

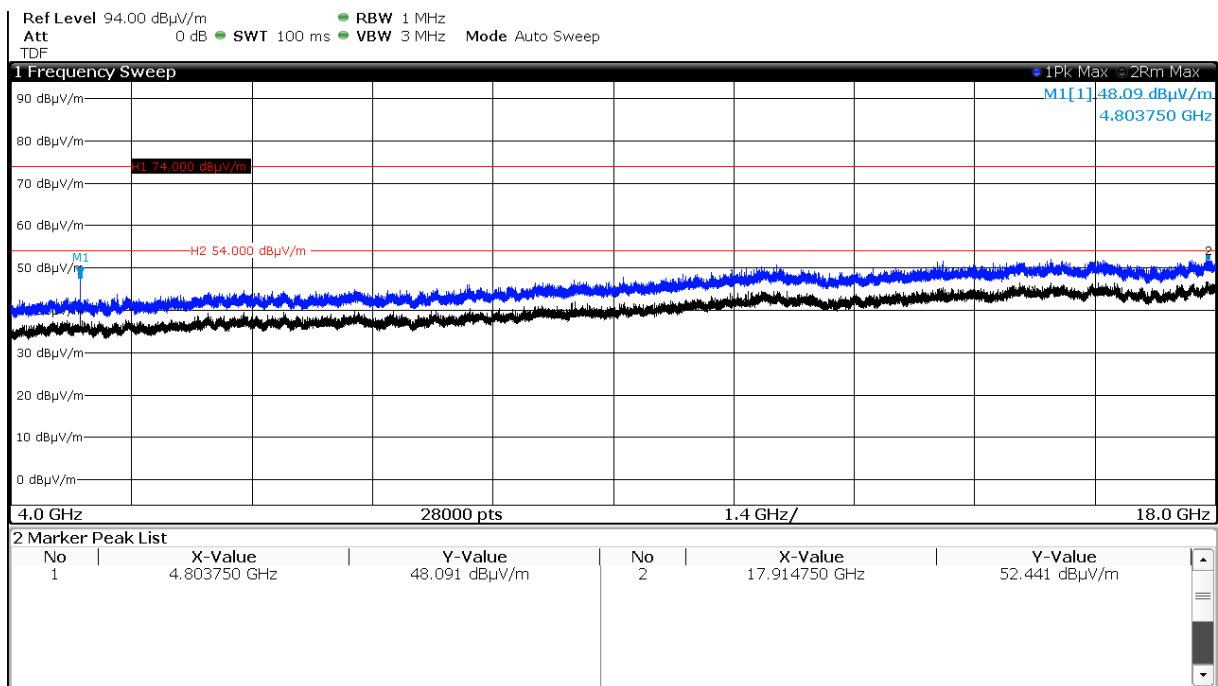

Spurious emissions from 18 to 25 GHz

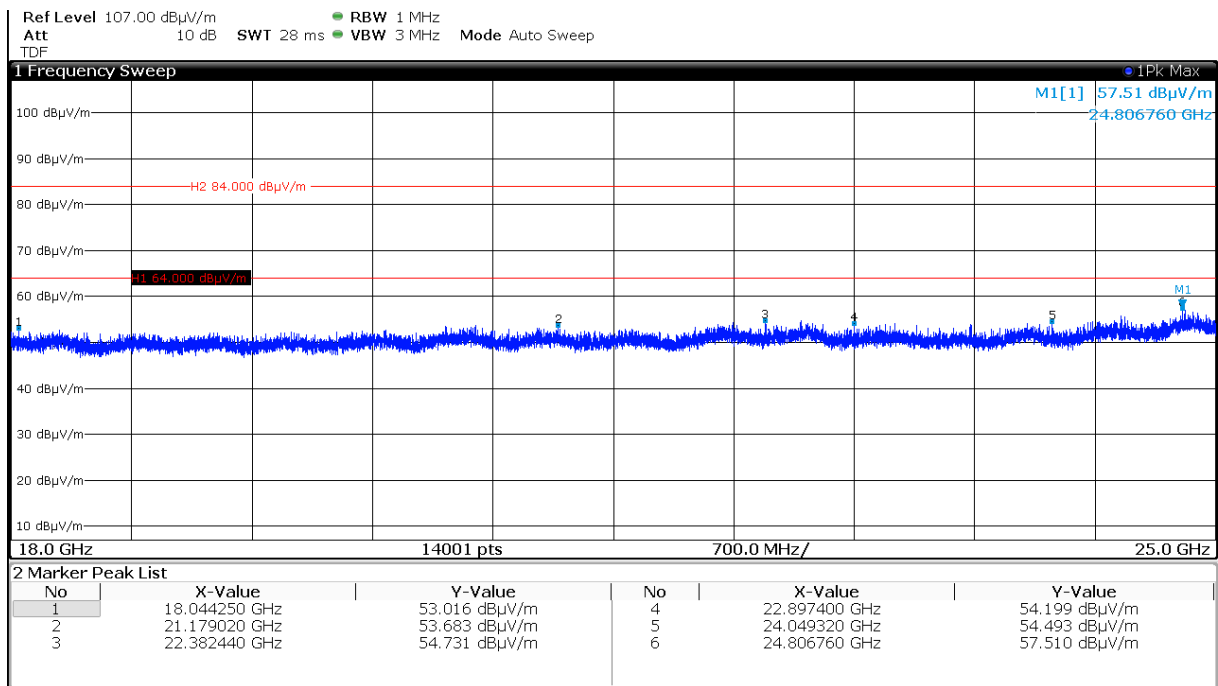

Note: the measurement distance was changed to 1 m for this frequency range, therefore the limit line has to be adjusted and was increased by 10 dB.




## 5.5 EBW and OBW

For test instruments and accessories used see section 6 Part MB.

### 5.5.1 Description of the test location

Test location: AREA4

### 5.5.2 Photo documentation of the test set-up

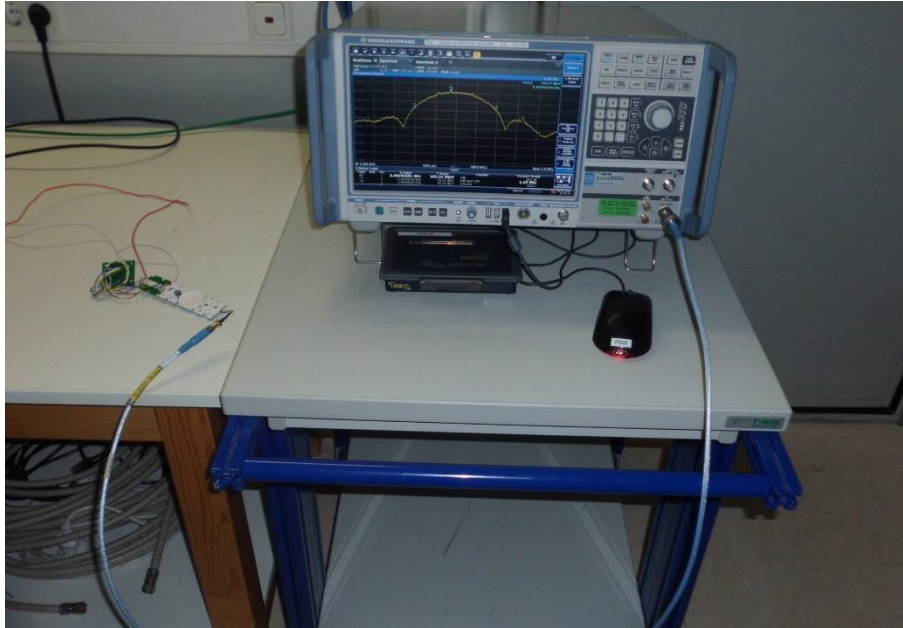

### 5.5.3 Applicable standard

According to FCC Part 15, Section 15.215(c):

Intentional radiators operating under the alternative provisions to the general emission limits, as contained in Section 15.217 through Section 15.257, must be designed to ensure that the 20 dB bandwidth of the emission is contained within the frequency band designated in the rule section under which the equipment is operated.

### 5.5.4 Description of Measurement

The bandwidth is measured at an amplitude level reduced from the reference level by a specified ratio of -20 dB (99%). The x-dB-down (OBW) function of the analyser is used. The measurement is performed with normal modulation in TX continuous mode.

Spectrum analyser settings:

RBW: 20 kHz, VBW: 100 kHz, Span: 3 MHz, Trace mode: max. hold, Detector: max. peak;

**5.5.5 Test result**

Centre $f$ (MHz)	20dB bandwidth $f_1$	20dB bandwidth $f_2$	Measured EBW (MHz)
2401.986505	2401.39258	2402.580430	1.187850
2441.974690	2441.38058	2442.568800	1.188220
2479.979755	2479.37533	2480.584180	1.208850

Centre $f$ (MHz)	99% bandwidth $f_1$	99% bandwidth $f_2$	Measured OBW (MHz)
2401.986504	2401.457454	2402.515553	1.058099
2441.977779	2441.447855	2442.507702	1.059847
2479.976173	2479.445004	2480.507342	1.062338

Operating frequency band (MHz)	20 dB Bandwidth (MHz)	
$f_{low} > 2400$	$f_{low} =$	2401.39258
$f_{high} < 2483.5$	$f_{high} =$	2480.58418
Operating Band occupancy	79.19	

Operating Band occupancy percentage	94.84 %
Operating channel occupancy percentage	60.44 %

Limit according to FCC Part 15C, Section 15.215(c):

If frequency stability is not specified in the regulations, it is recommended that the fundamental emission be kept within the central 80% of the permitted band in order to minimize the possibility of out-of-band operation. Due to the channelising of the operating band into 40 channels with channel bandwidth of 2 MHz the limit central 80% of the permitted band can not be applied. Therefore, the stability of the EUT will be shown staying within the central 80% of the operating channel.

The requirements are **FULFILLED**.


**Remarks:** For detailed test result please refer to following test protocols.

The OBW99 is measured for RSS only.


### 5.5.6 Test protocols

#### 20 dB bandwidth


2402 MHz

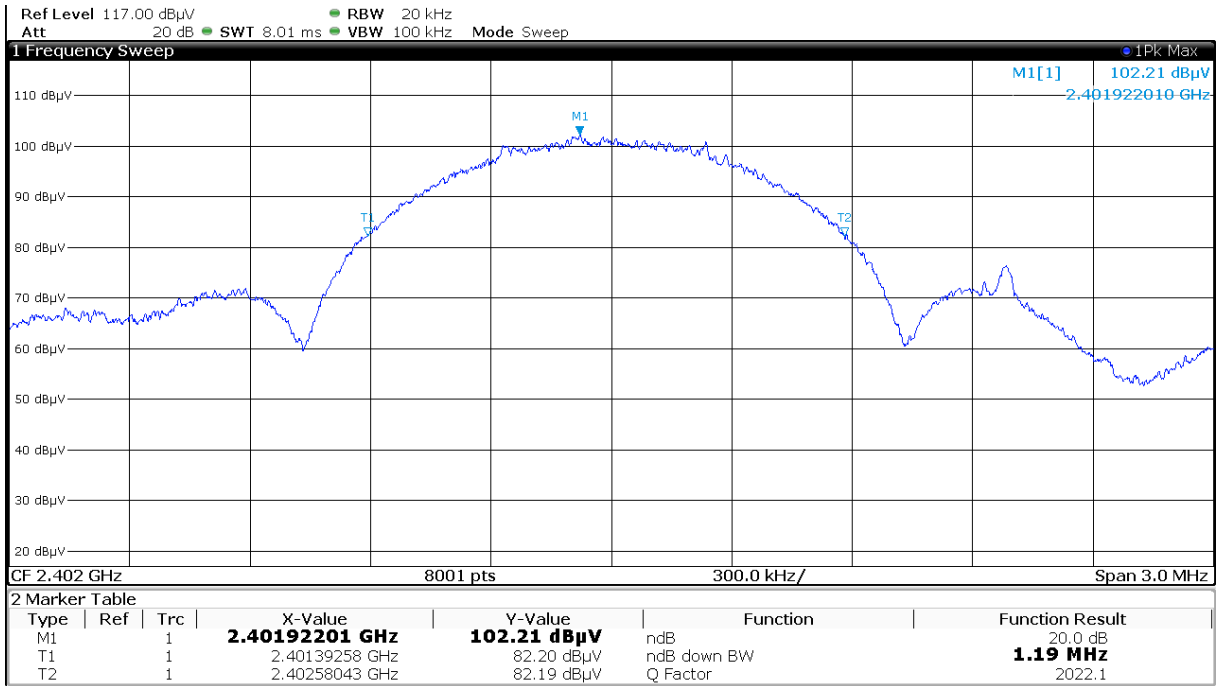

2442 MHz

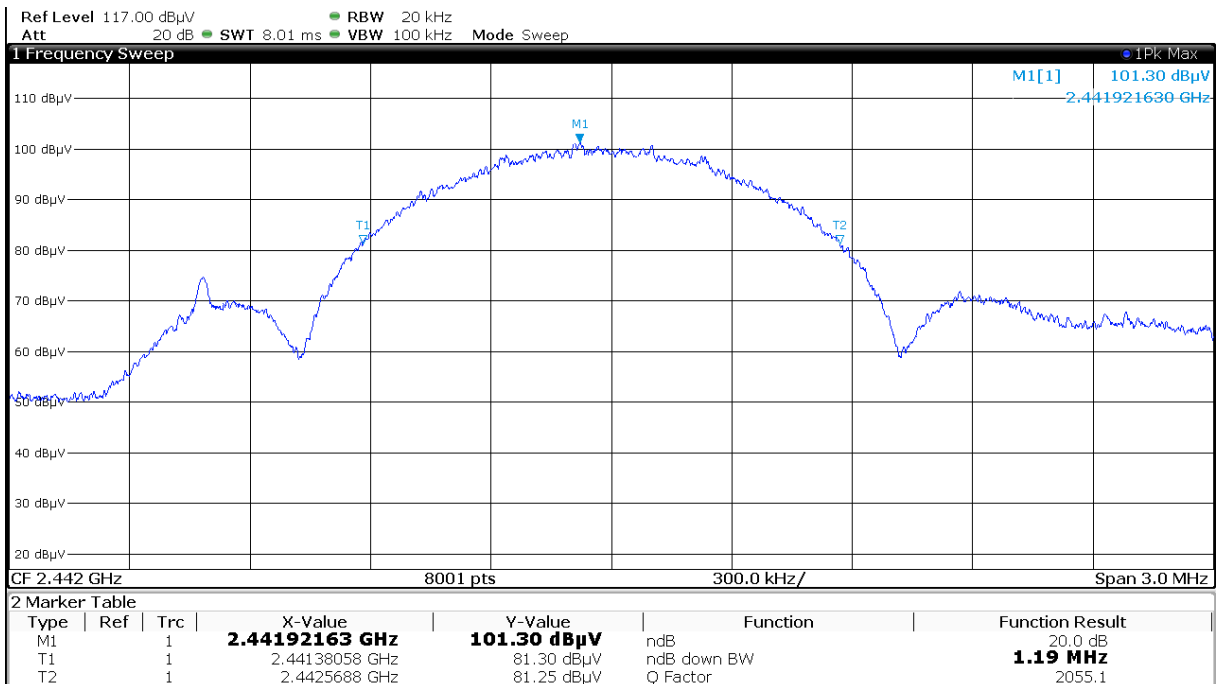


2480 MHz

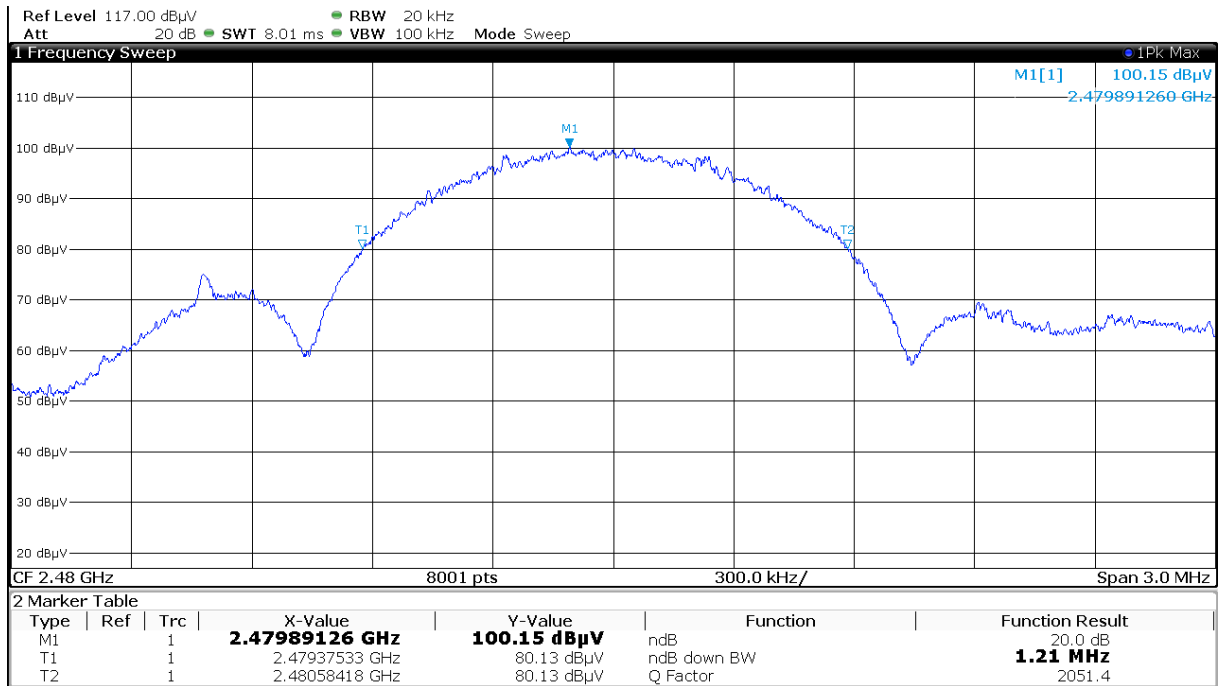


OBW 99%


2402 MHz

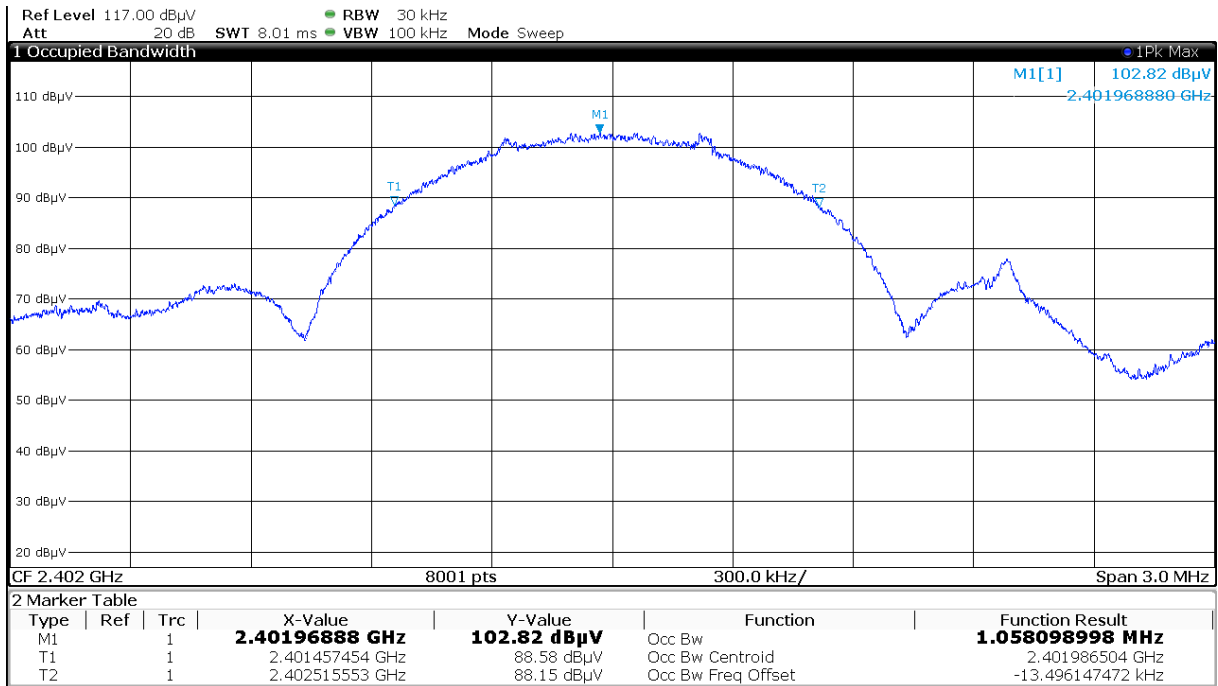

2442 MHz

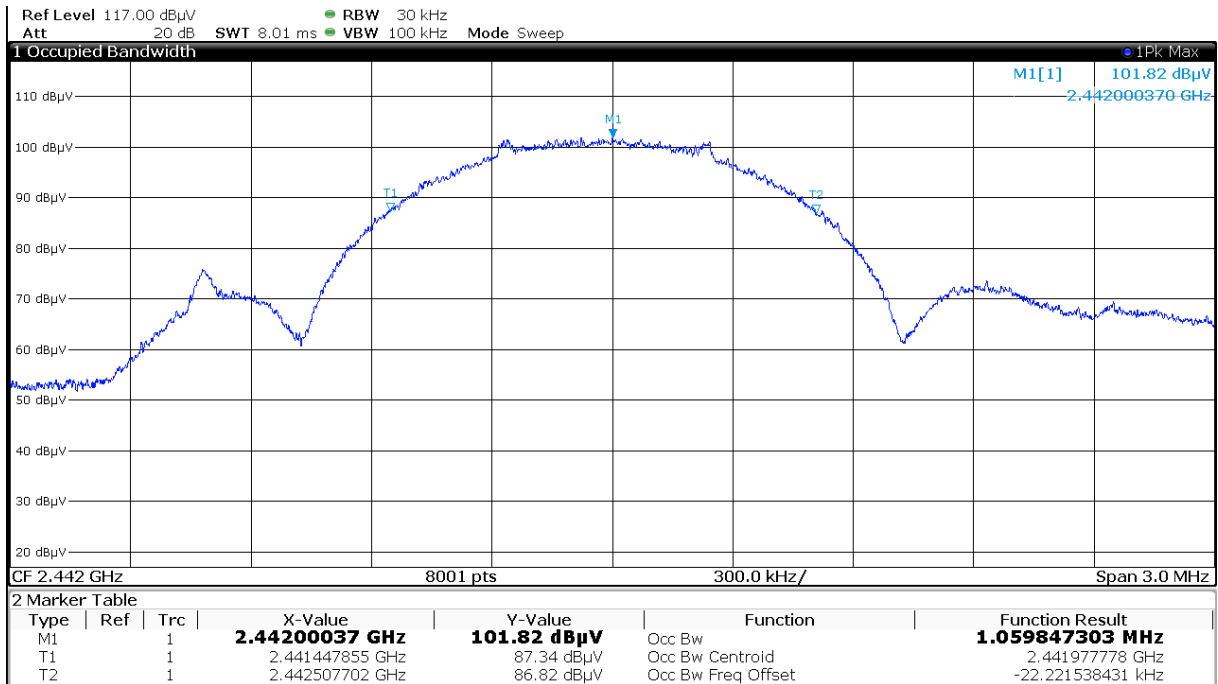

2480 MHz

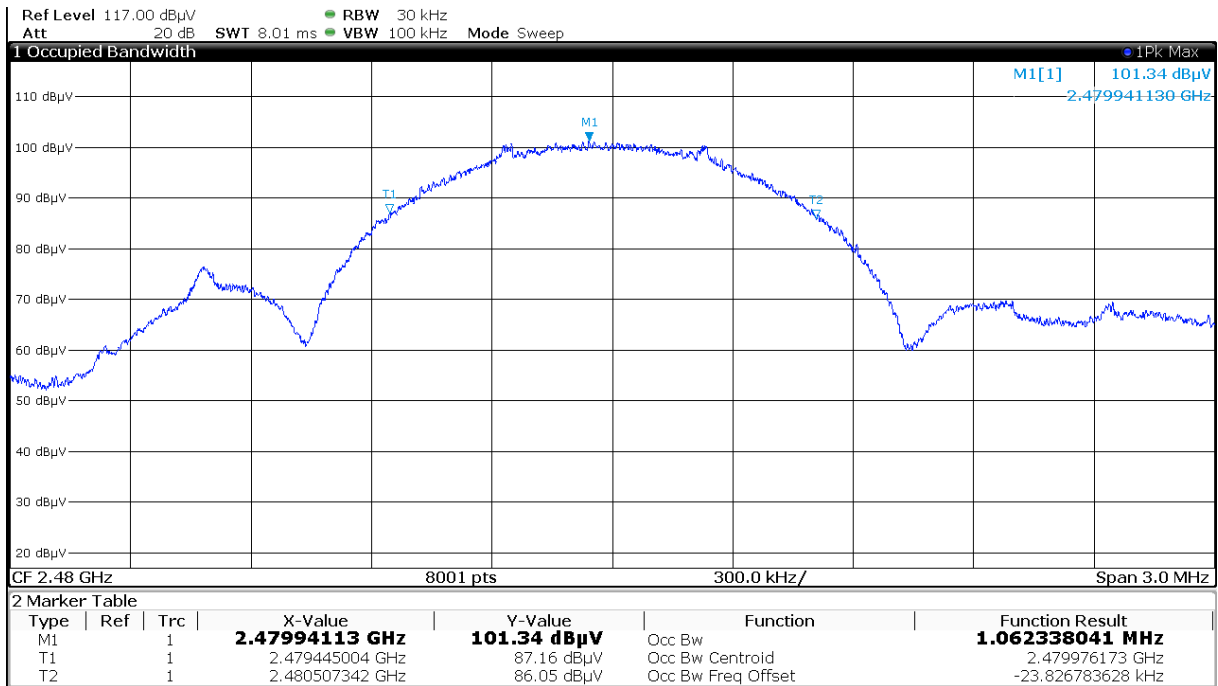

## 5.6 Antenna application

### 5.6.1 Applicable standard

According to FCC Part 15C, Section 15.203(a):

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section.

### 5.6.2 Result

The EUT use an integrated PCB antenna. No other antenna than that furnished by the responsible party or external power amplifier can be applied by a customer.

The antenna of the EUT meets the requirement of FCC Part 15C, Section 15.203 and 15.204.

The requirements are **FULFILLED**.

Remarks:

---

---

## **6 USED TEST EQUIPMENT AND ACCESSORIES**

All test instruments used are calibrated and verified regularly. The calibration history is available on request.

<b>Test ID</b>	<b>Model Type</b>	<b>Equipment No.</b>	<b>Next Calib.</b>	<b>Last Calib.</b>	<b>Next Verif.</b>	<b>Last Verif.</b>
CPR 3	FSW43	02-02/11-15-001	19/03/2019	19/03/2018		
	AMF-6D-01002000-22-10P	02-02/17-15-004				
	3117	02-02/24-05-009	08/05/2019	08/05/2018		
	18N-20	02-02/50-17-003				
	NMS111-GL200SC01-NMS11	02-02/50-17-012				
	BAM 4.5-P	02-02/50-17-024				
	NCD	02-02/50-17-025				
	KK-SF106-2X11N-6,5M	02-02/50-18-016				
DC	FSW43	02-02/11-15-001	19/03/2019	19/03/2018		
MB	FSW43	02-02/11-15-001	19/03/2019	19/03/2018		
	HM 8143	02-02/50-10-016				
	KK-SF104-11SMA-11N-2M	02-02/50-14-004				
SER 2	ESVS 30	02-02/03-05-006	06/06/2019	06/06/2018		
	VULB 9168	02-02/24-05-005	18/04/2019	18/04/2018	21/09/2018	21/03/2018
	NW-2000-NB	02-02/50-05-113				
	KK-EF393/U-16N-21N20 m	02-02/50-12-018				
	KK-SD_7/8-2X21N-33,0M	02-02/50-15-028				
SER 3	FSW43	02-02/11-15-001	19/03/2019	19/03/2018		
	JS4-18004000-30-5A	02-02/17-05-017				
	AMF-6D-01002000-22-10P	02-02/17-15-004				
	3117	02-02/24-05-009	08/05/2019	08/05/2018		
	BBHA 9170	02-02/24-05-014	12/06/2021	12/06/2018	12/06/2019	12/06/2018
	KMS102-1 m	02-02/50-11-014				
	KMS102-0.2 m	02-02/50-11-020				
	18N-20	02-02/50-17-003				
	NMS111-GL200SC01-NMS11	02-02/50-17-012				
	BAM 4.5-P	02-02/50-17-024				
	NCD	02-02/50-17-025				
	KK-SF106-2X11N-6,5M	02-02/50-18-016				