





Test Graphs channel power

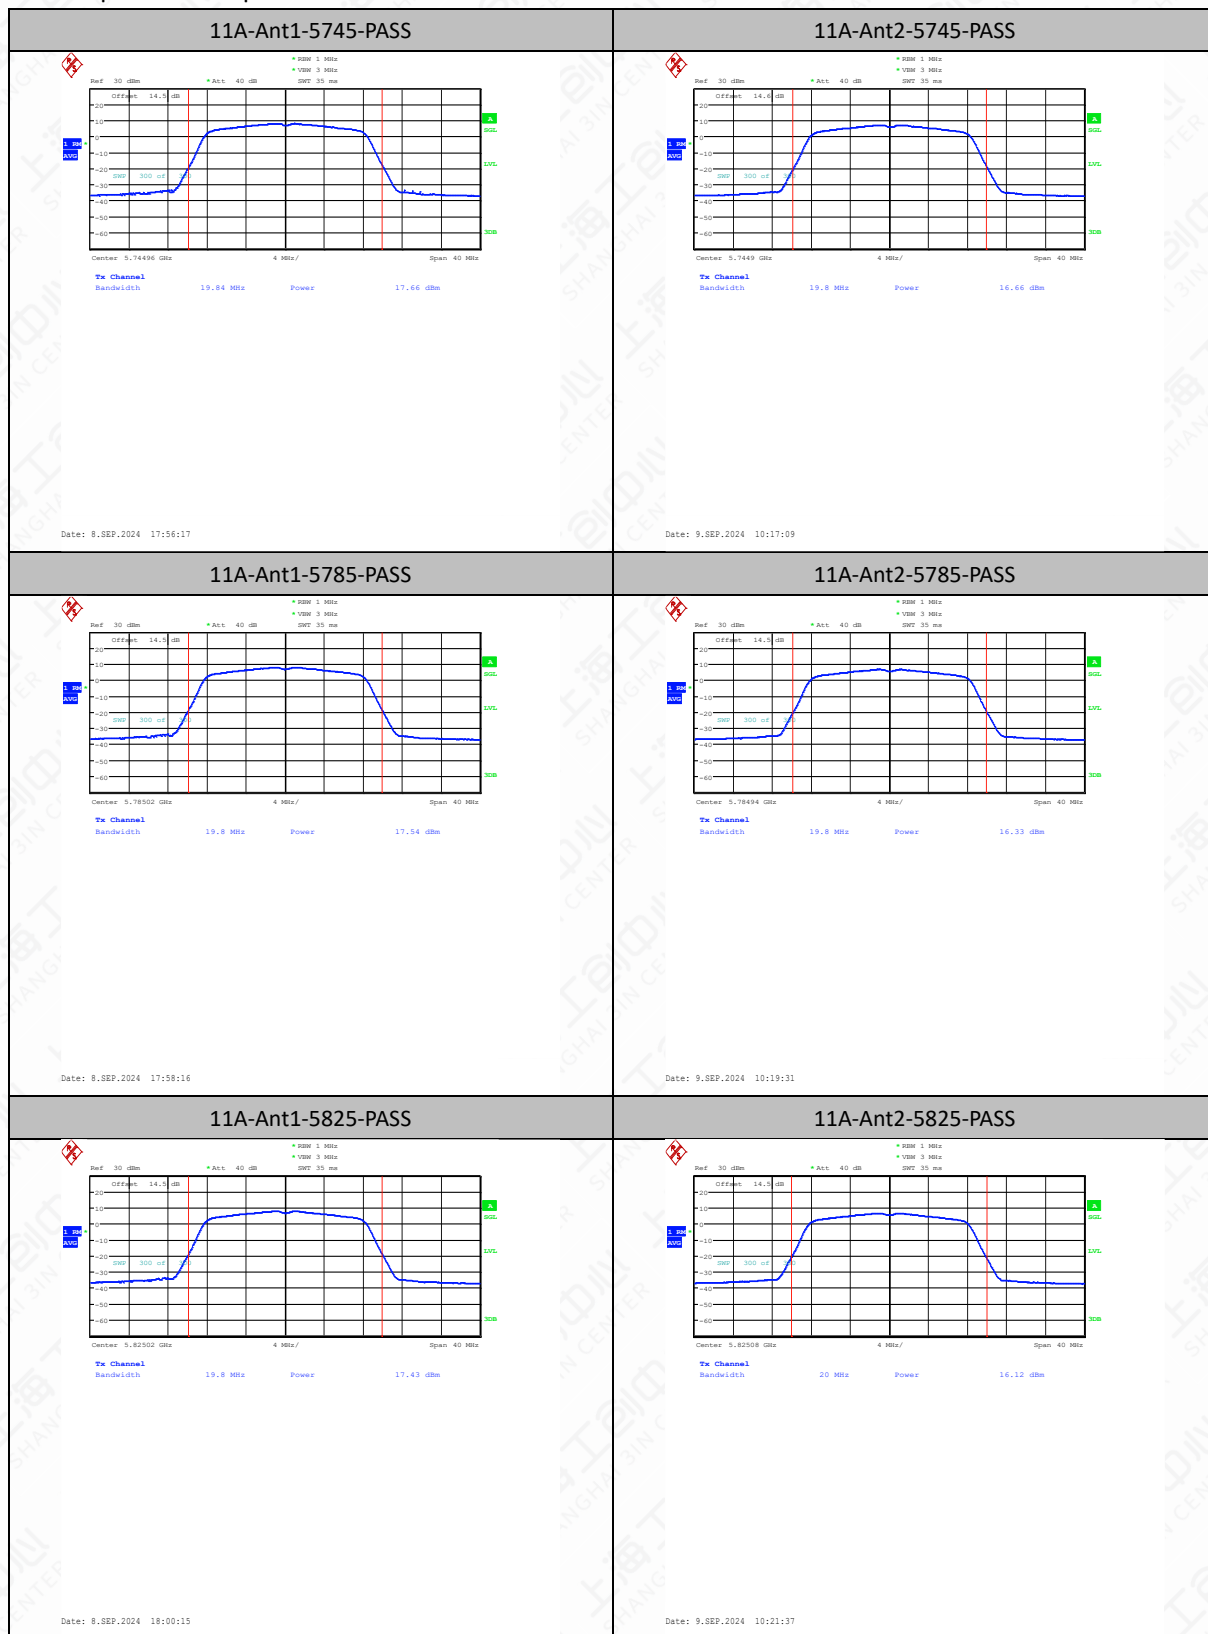

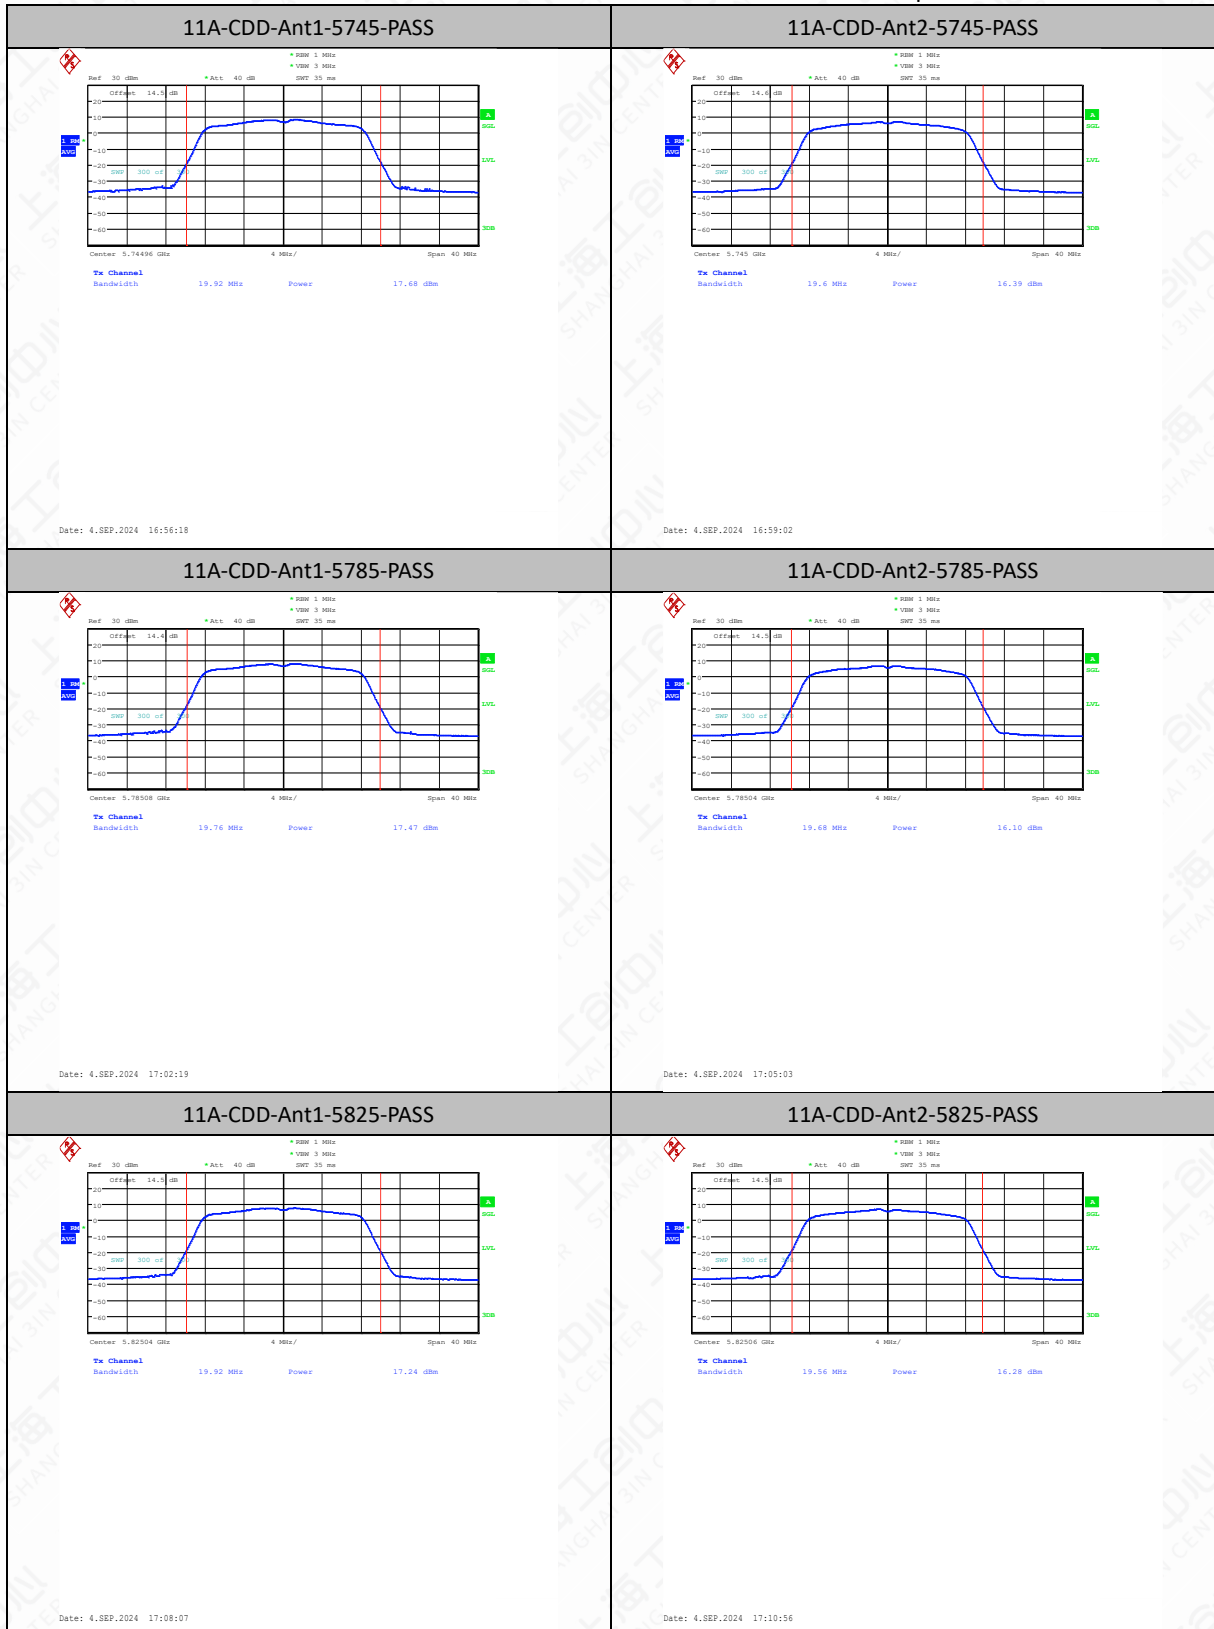

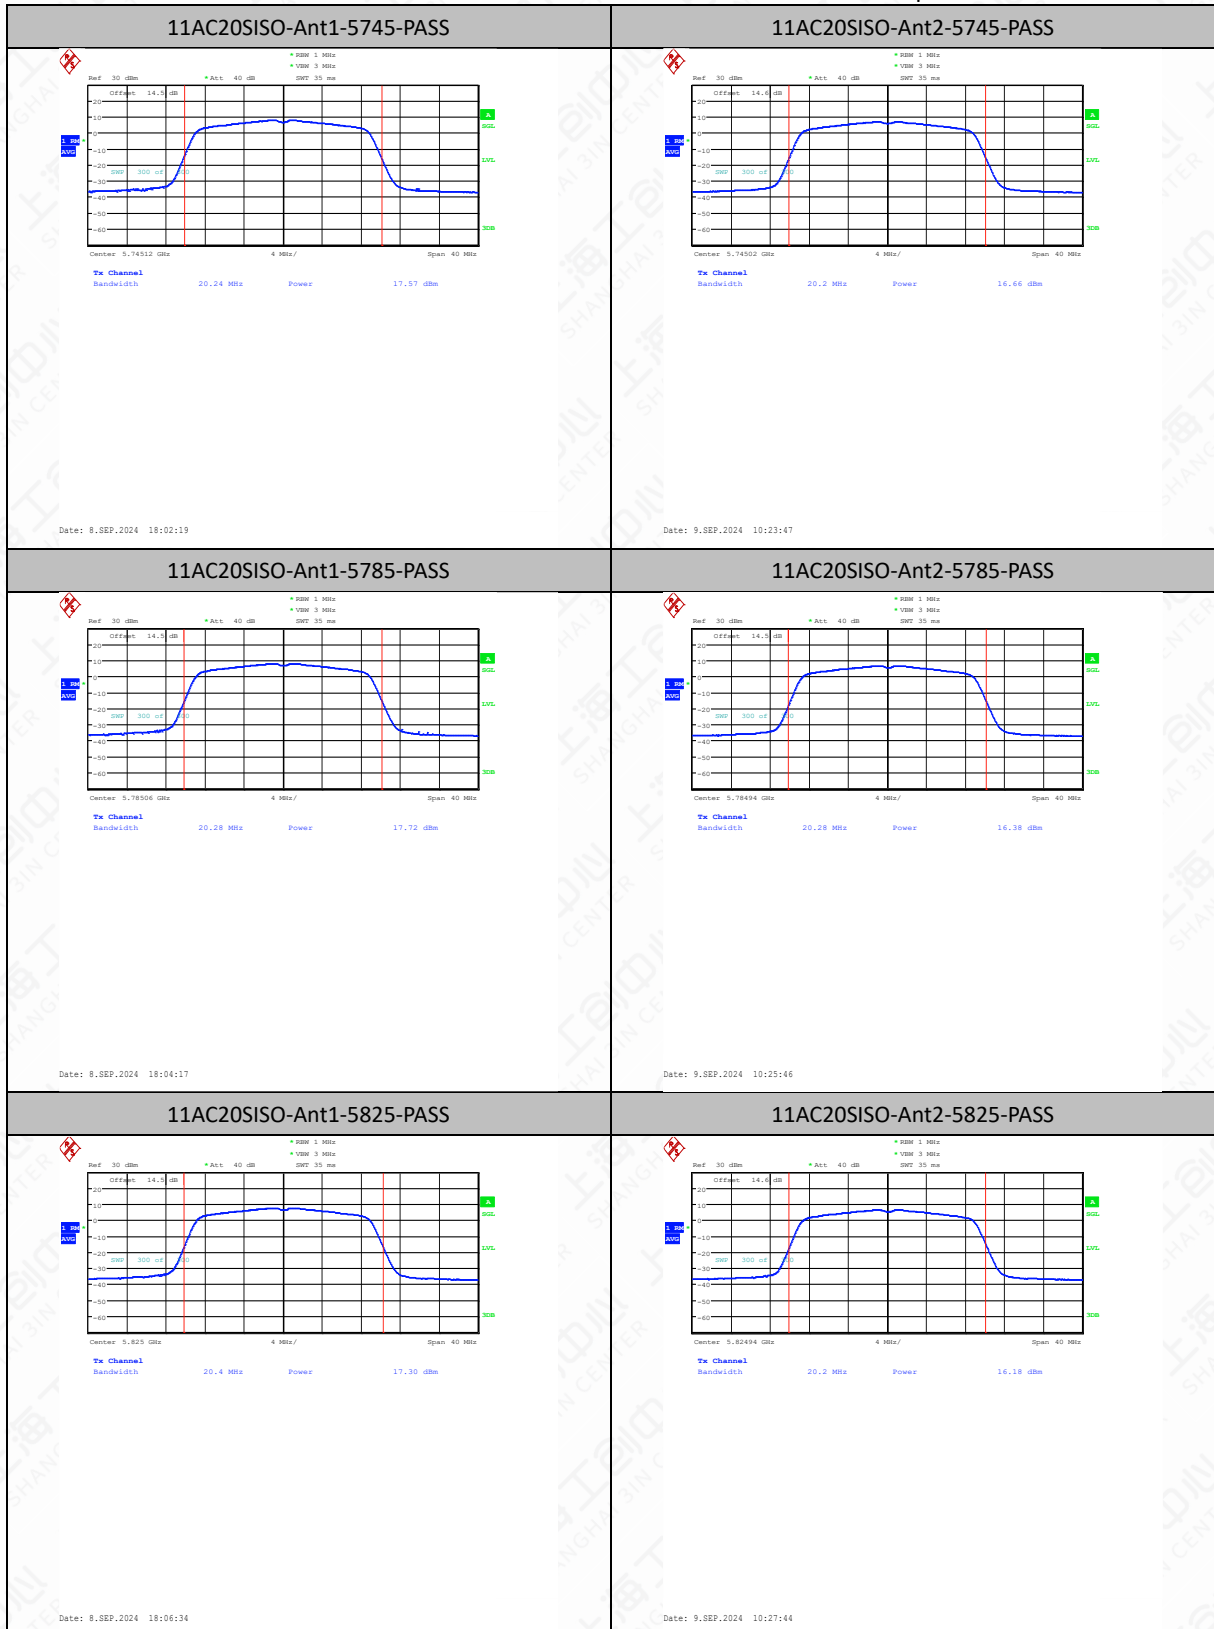


11AC20MIMO-Ant1-5745-PASS

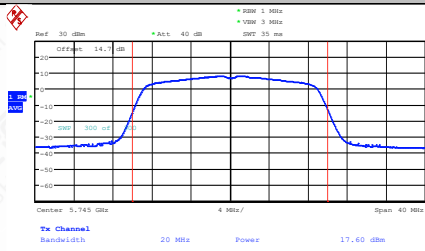


Date: 4.SEP.2024 17:14:59

11AC20MIMO-Ant2-5745-PASS

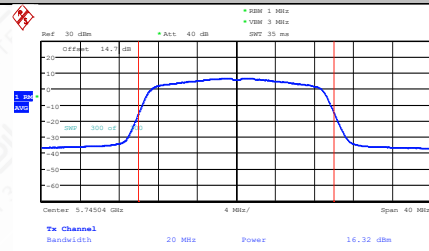


Date: 4.SEP.2024 17:17:43

11AC20MIMO-Ant1-5785-PASS

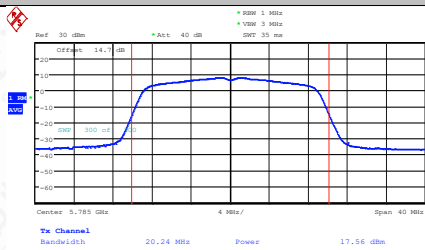


Date: 4.SEP.2024 17:20:45

11AC20MIMO-Ant2-5785-PASS

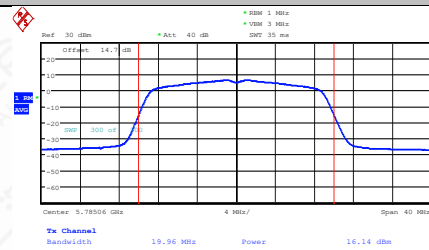


Date: 4.SEP.2024 17:23:30

11AC20MIMO-Ant1-5825-PASS

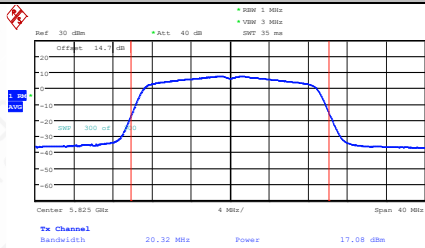



Date: 4.SEP.2024 17:31:49


11AC20MIMO-Ant2-5825-PASS

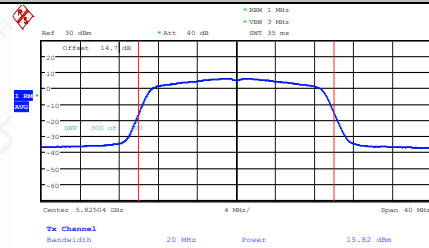



Date: 4.SEP.2024 17:34:38

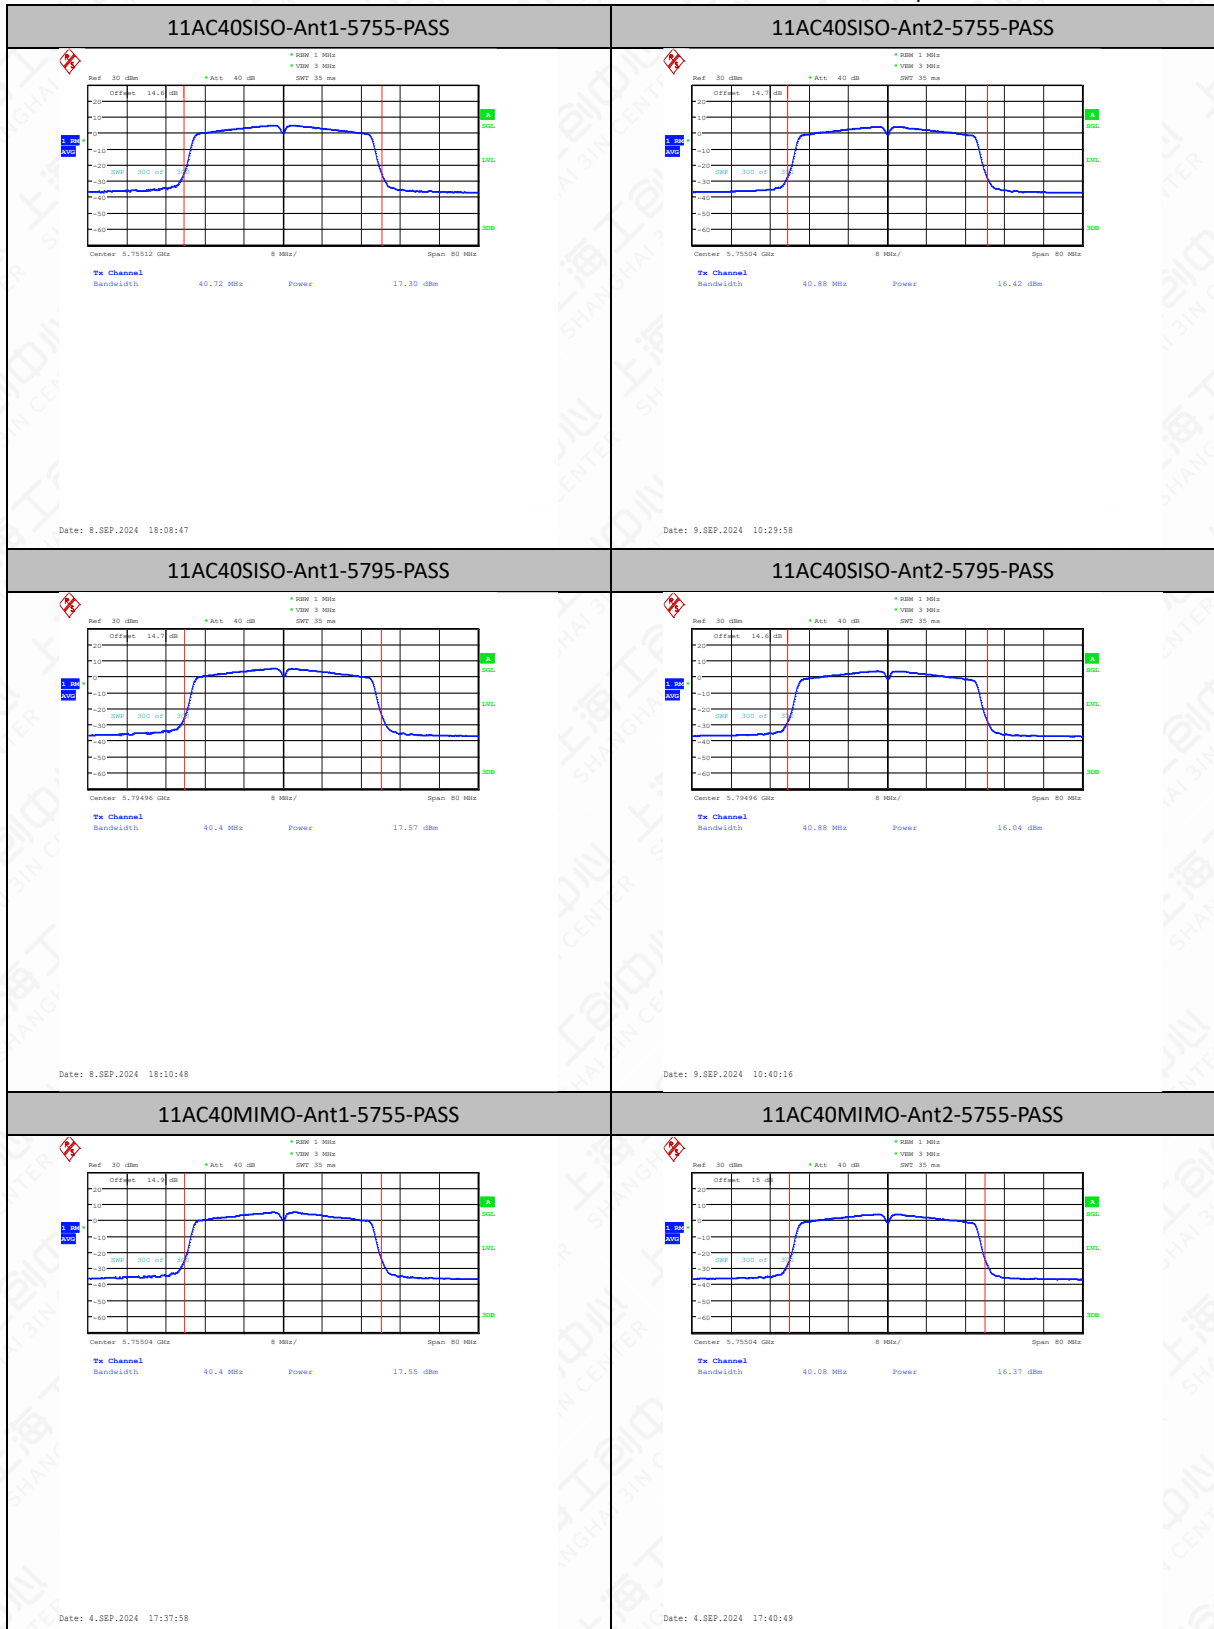


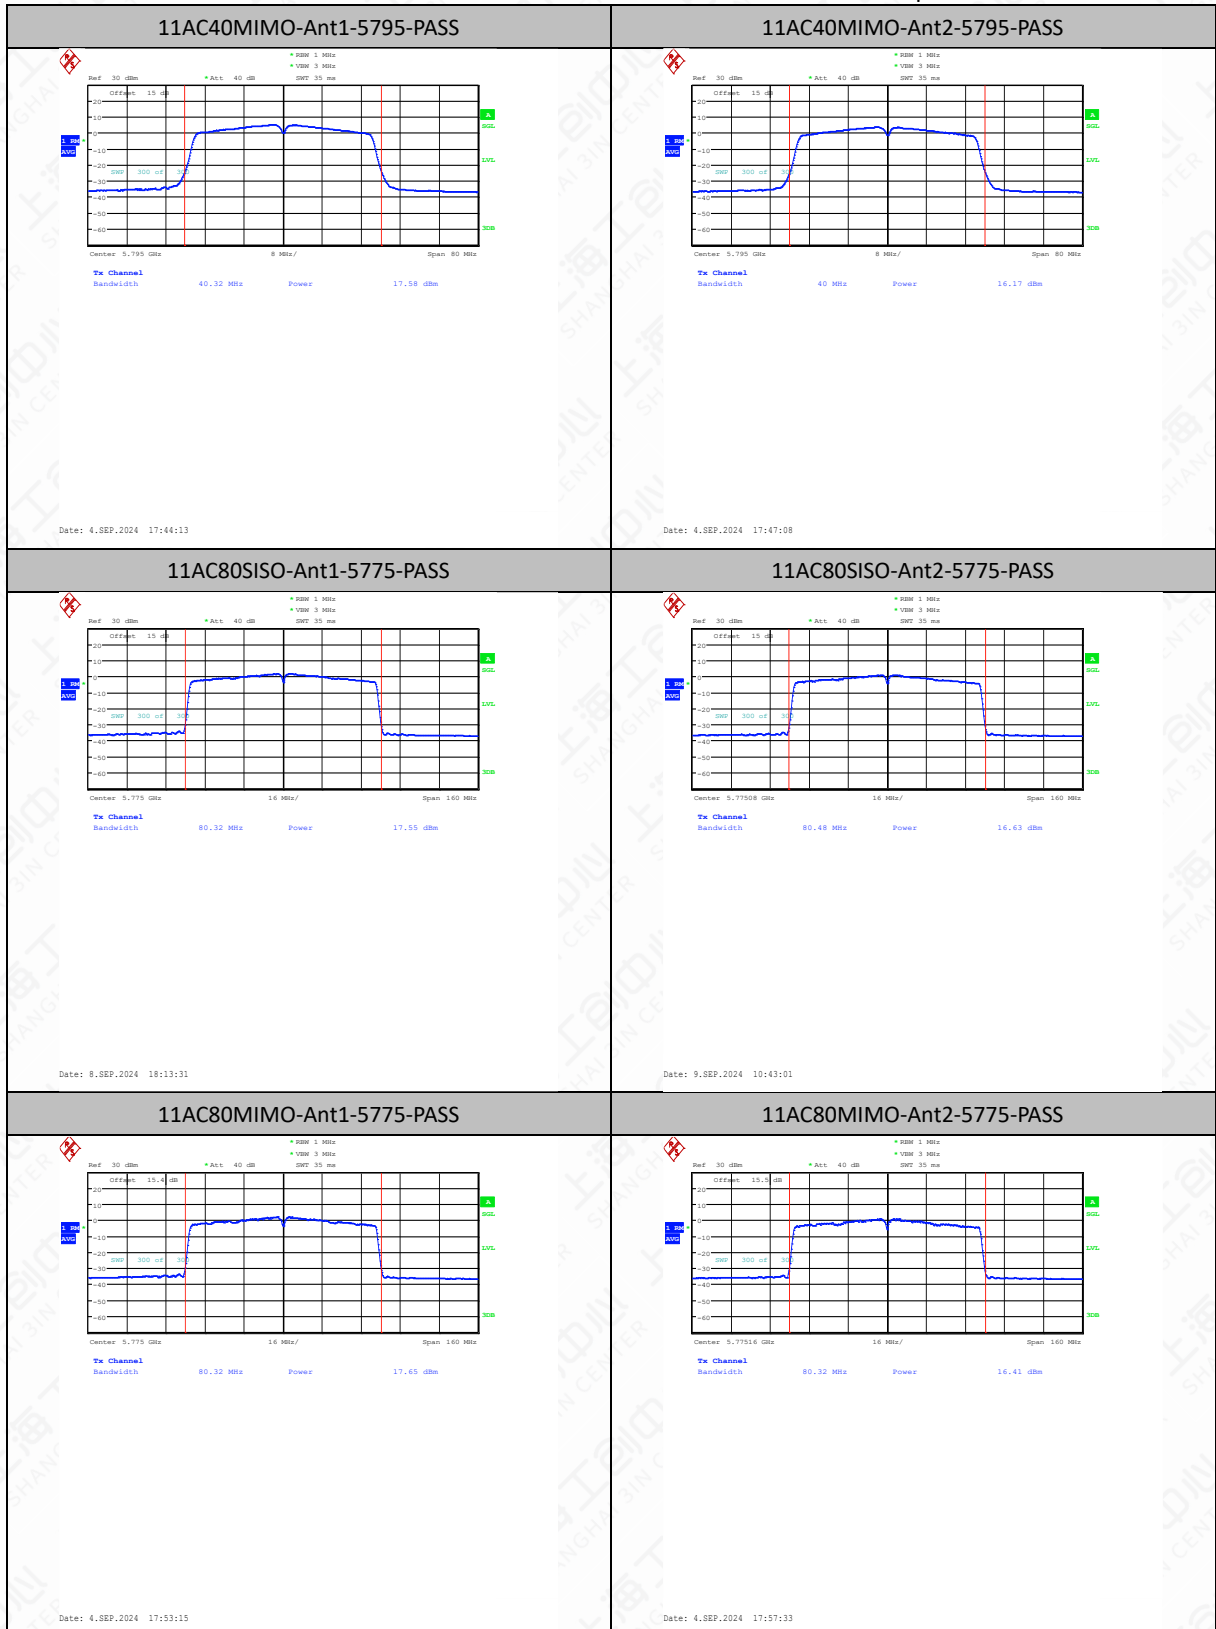


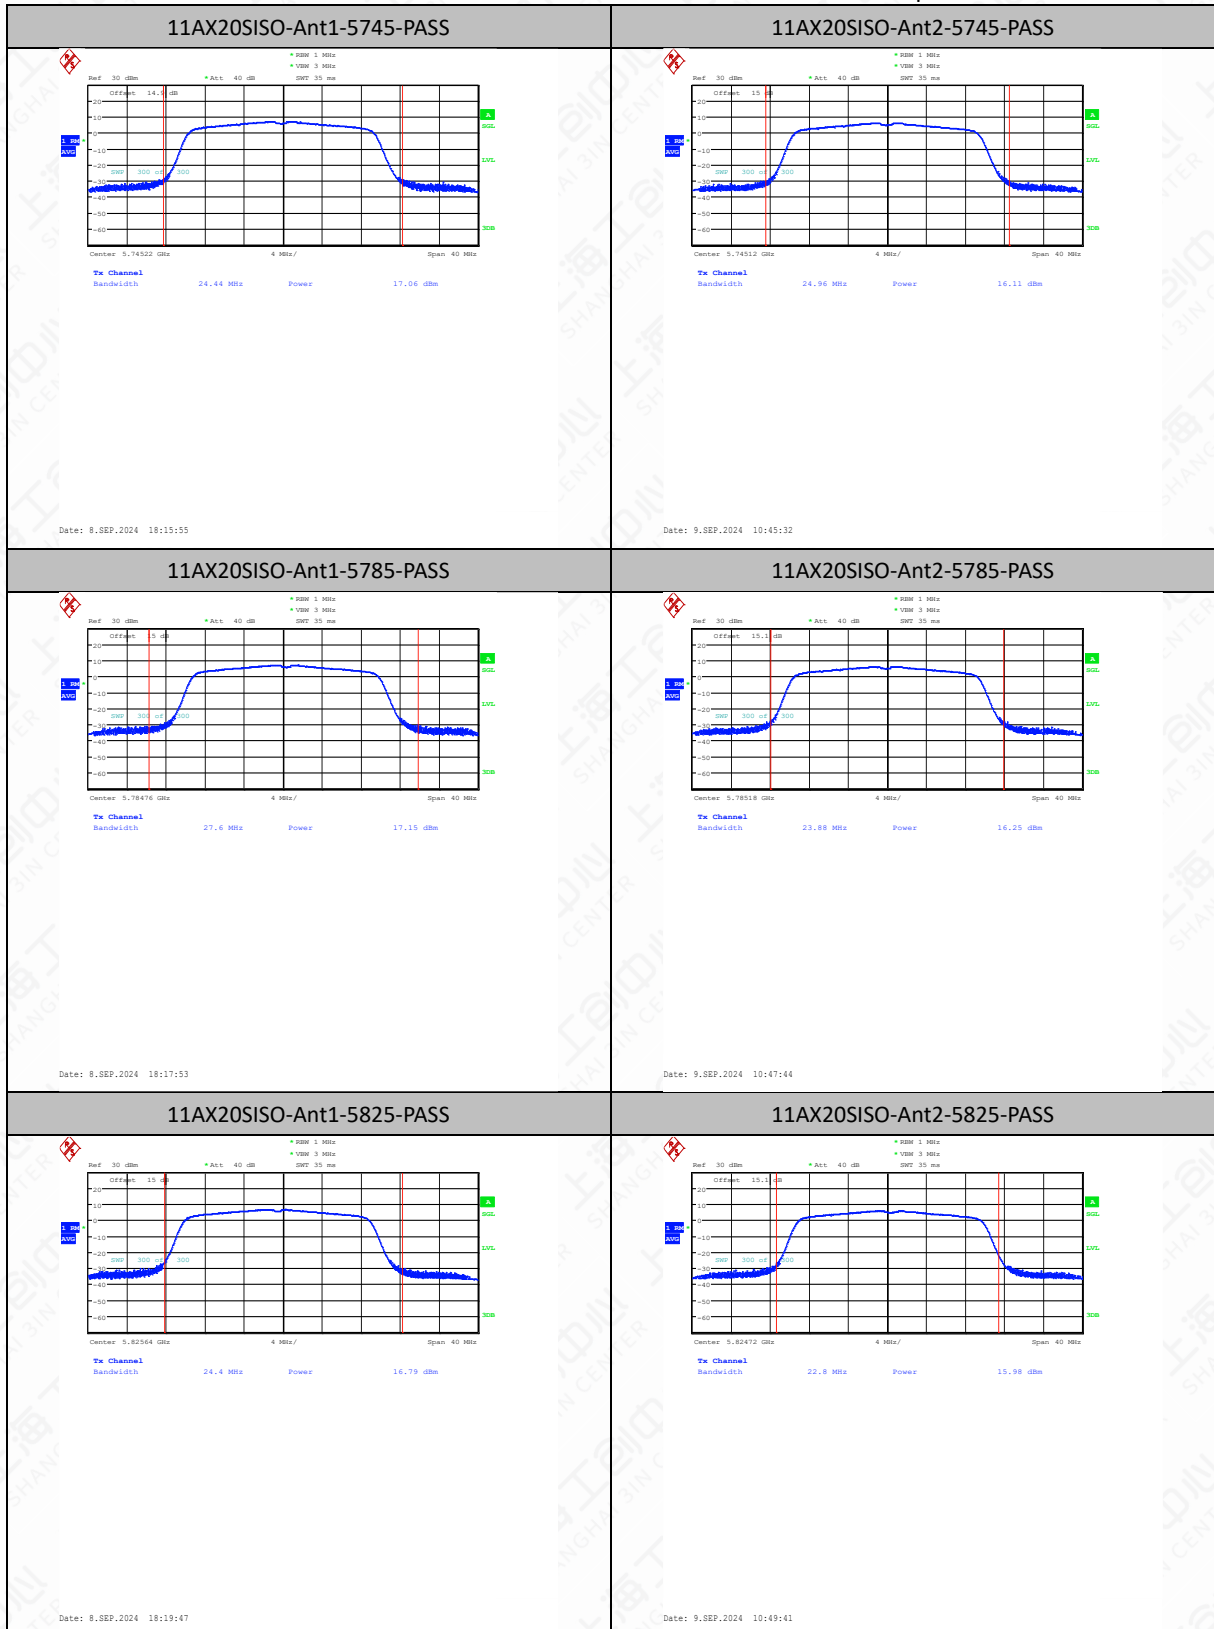


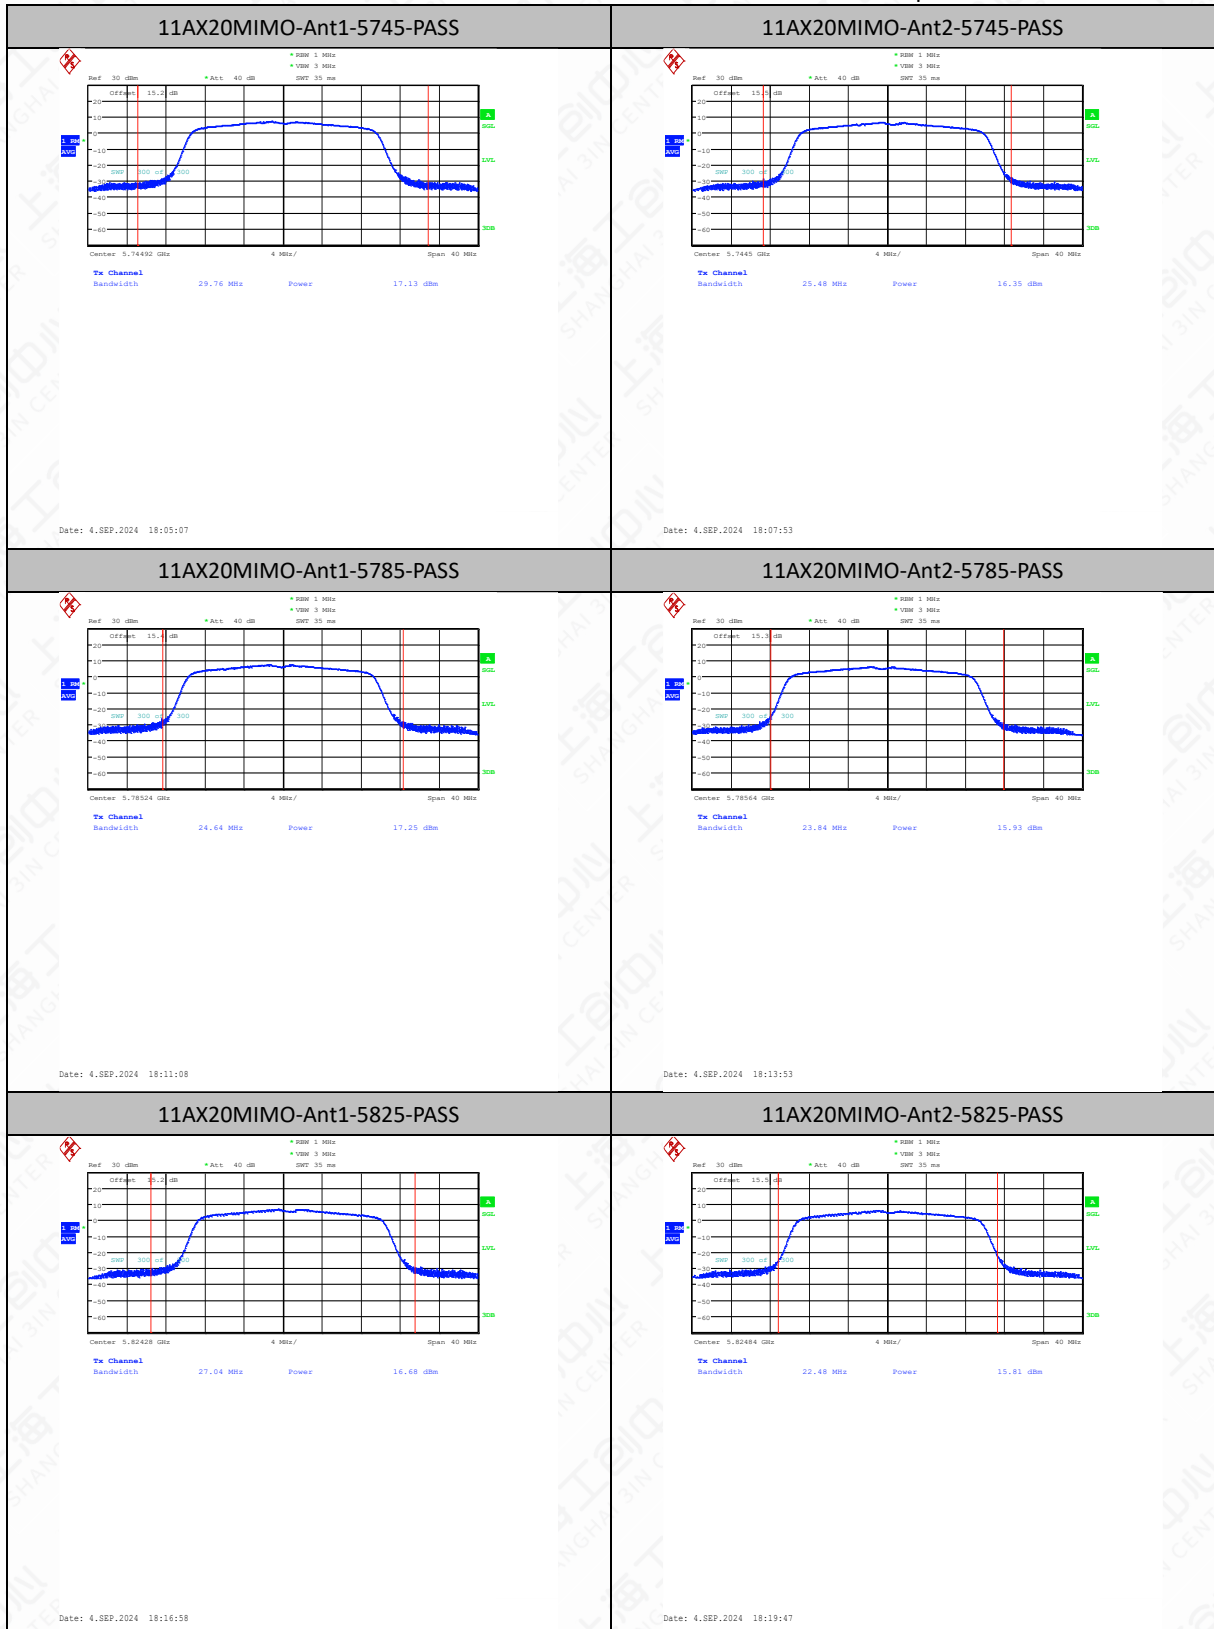


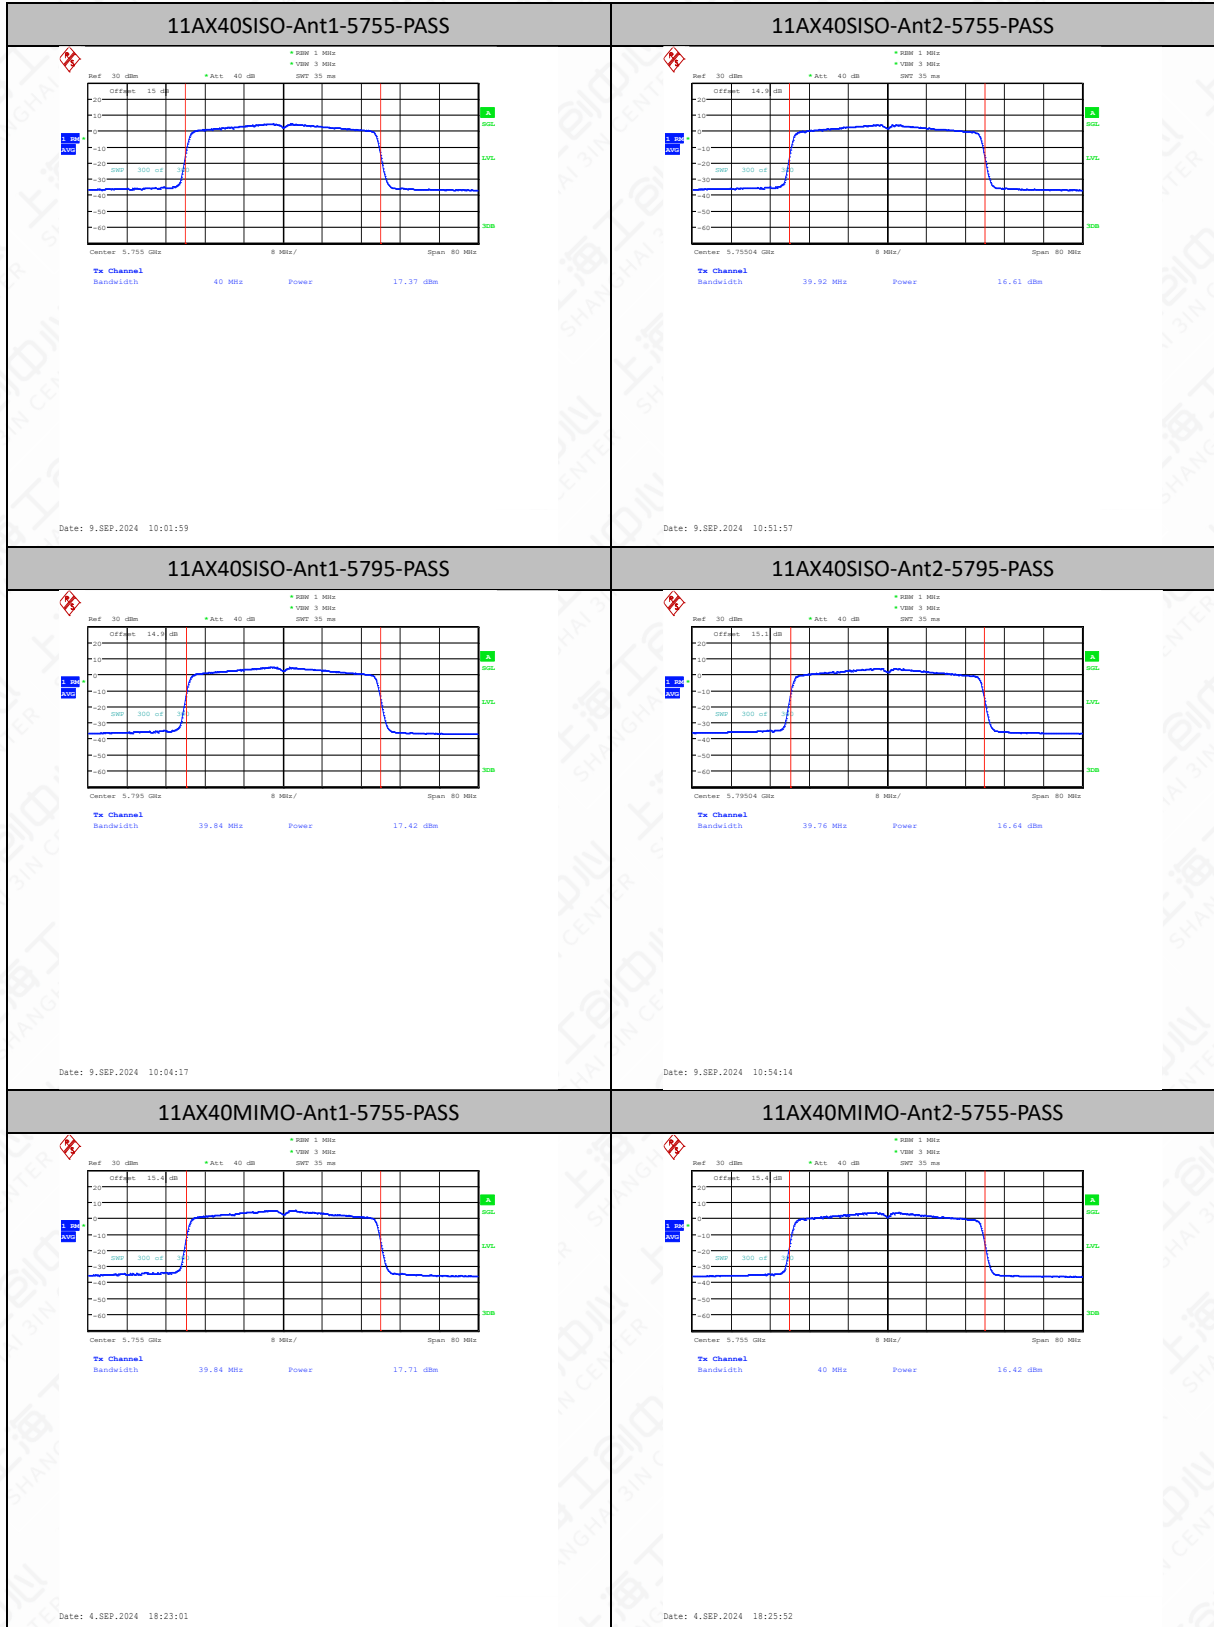


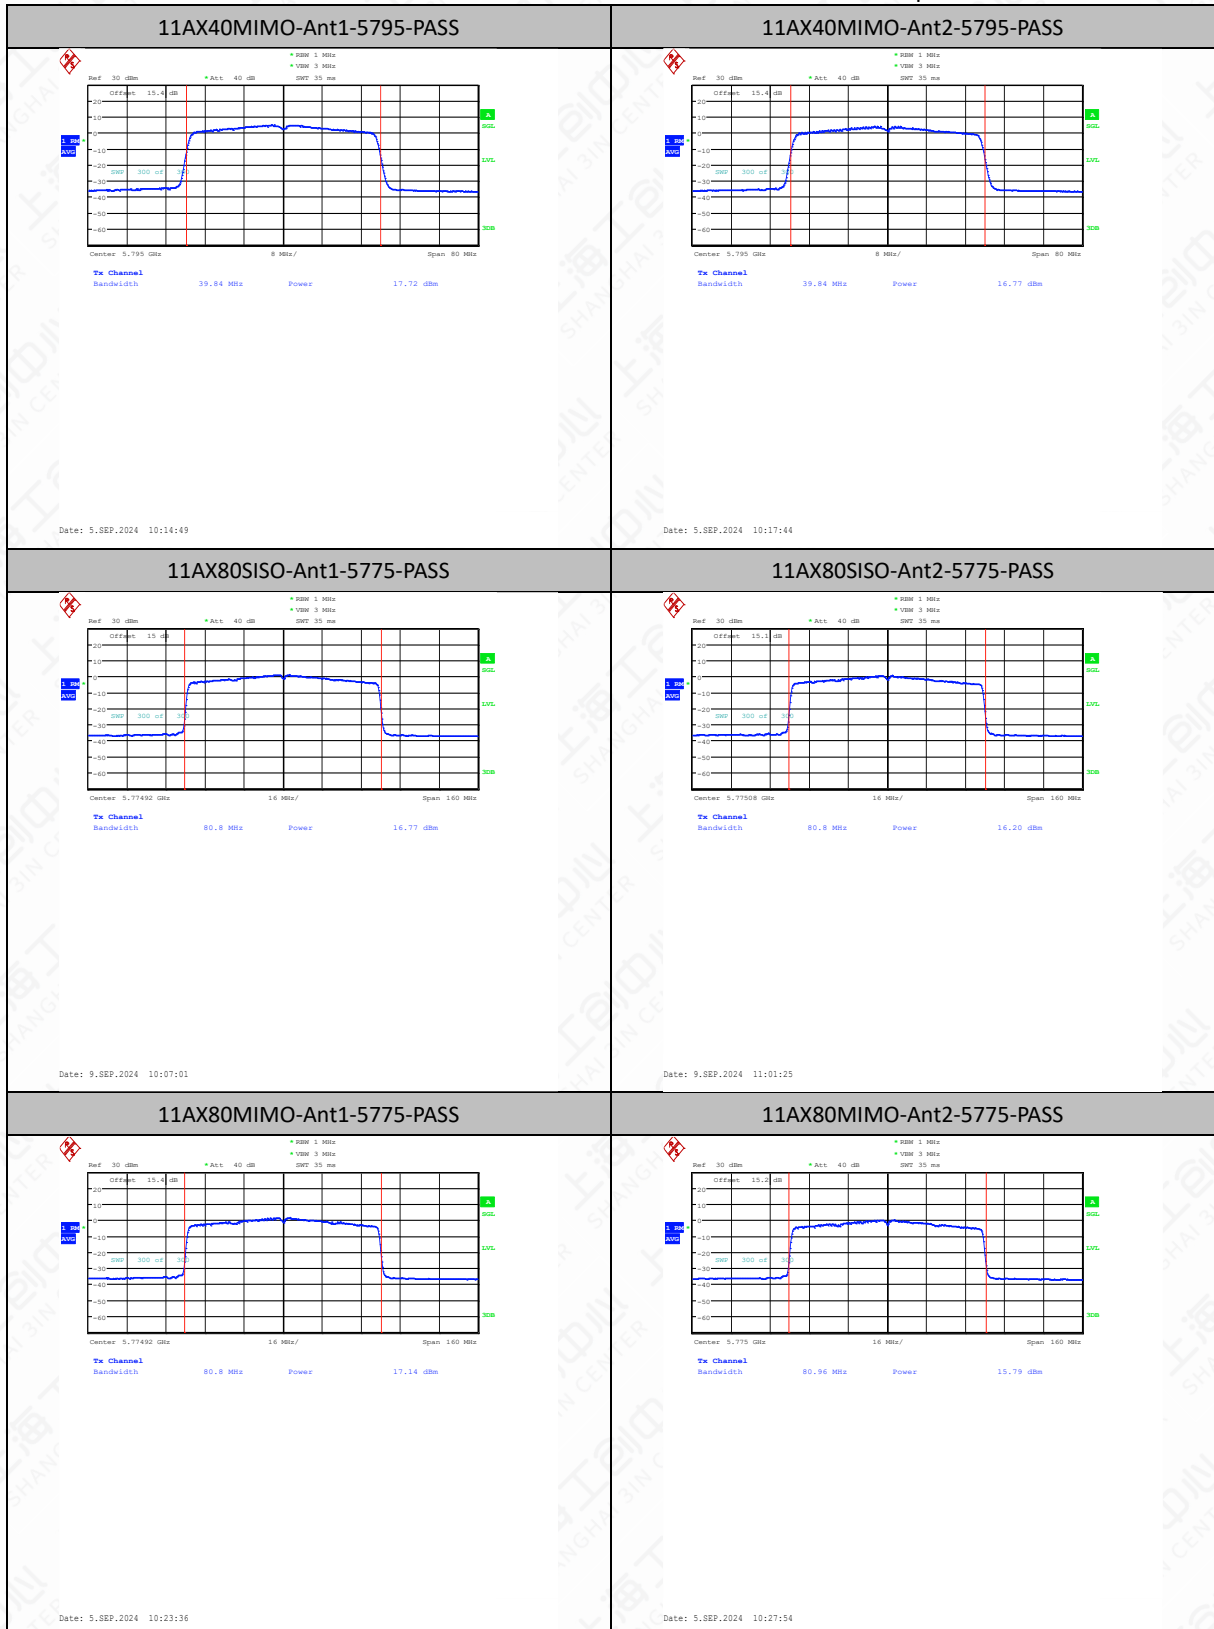


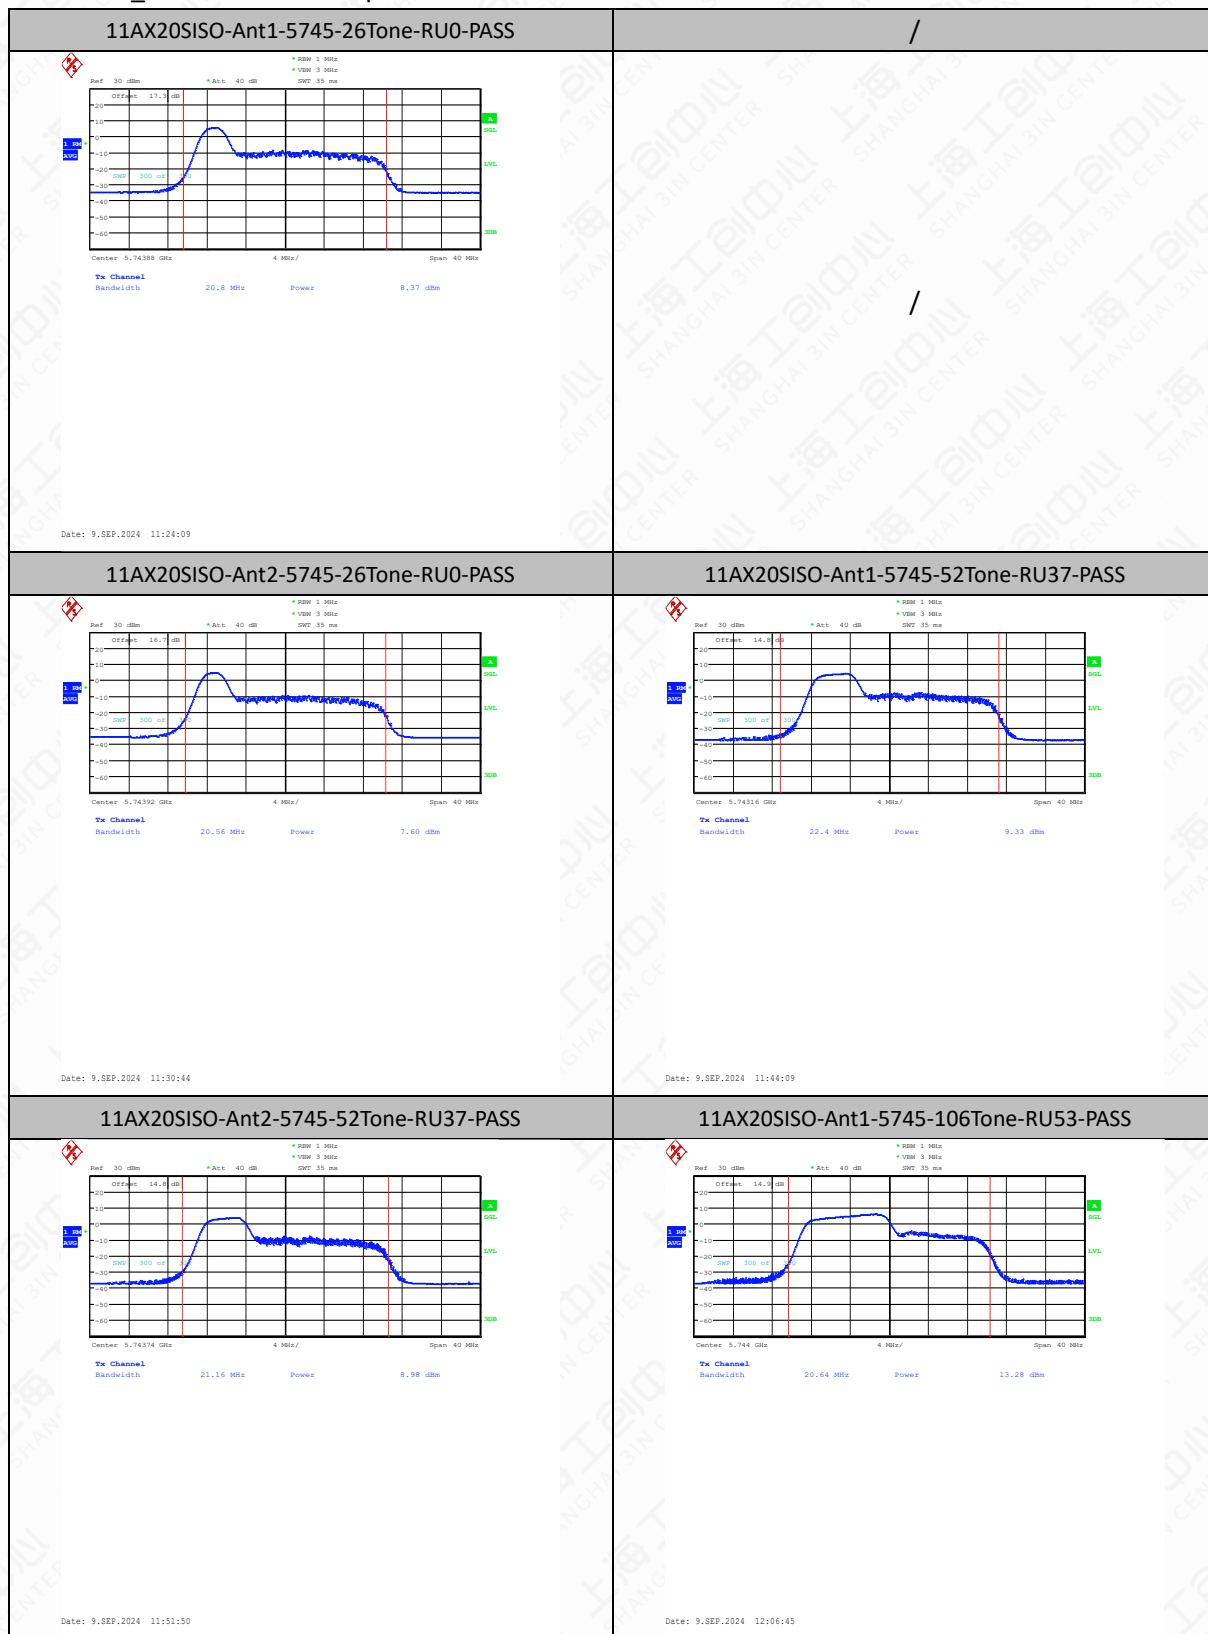AX Part RU_Multi-User Test Graph


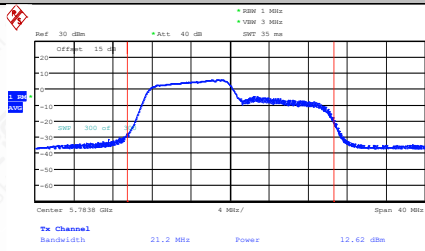




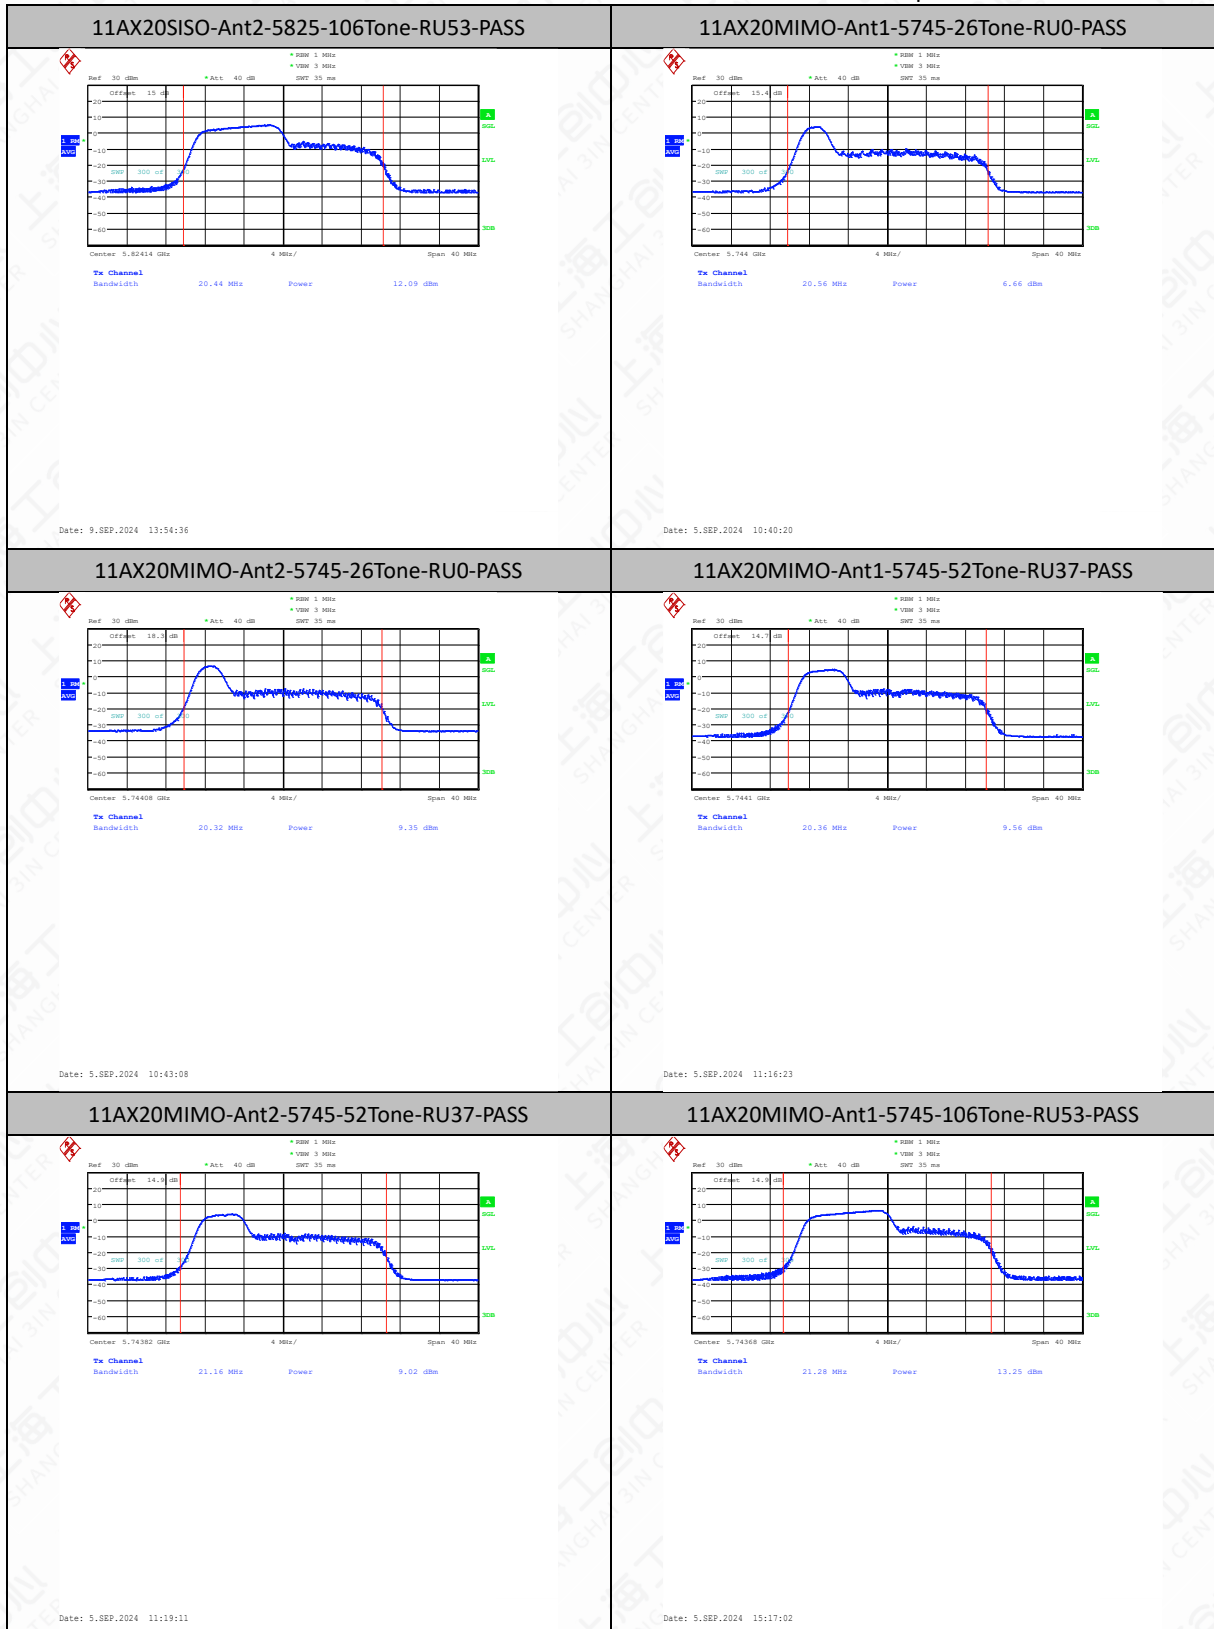

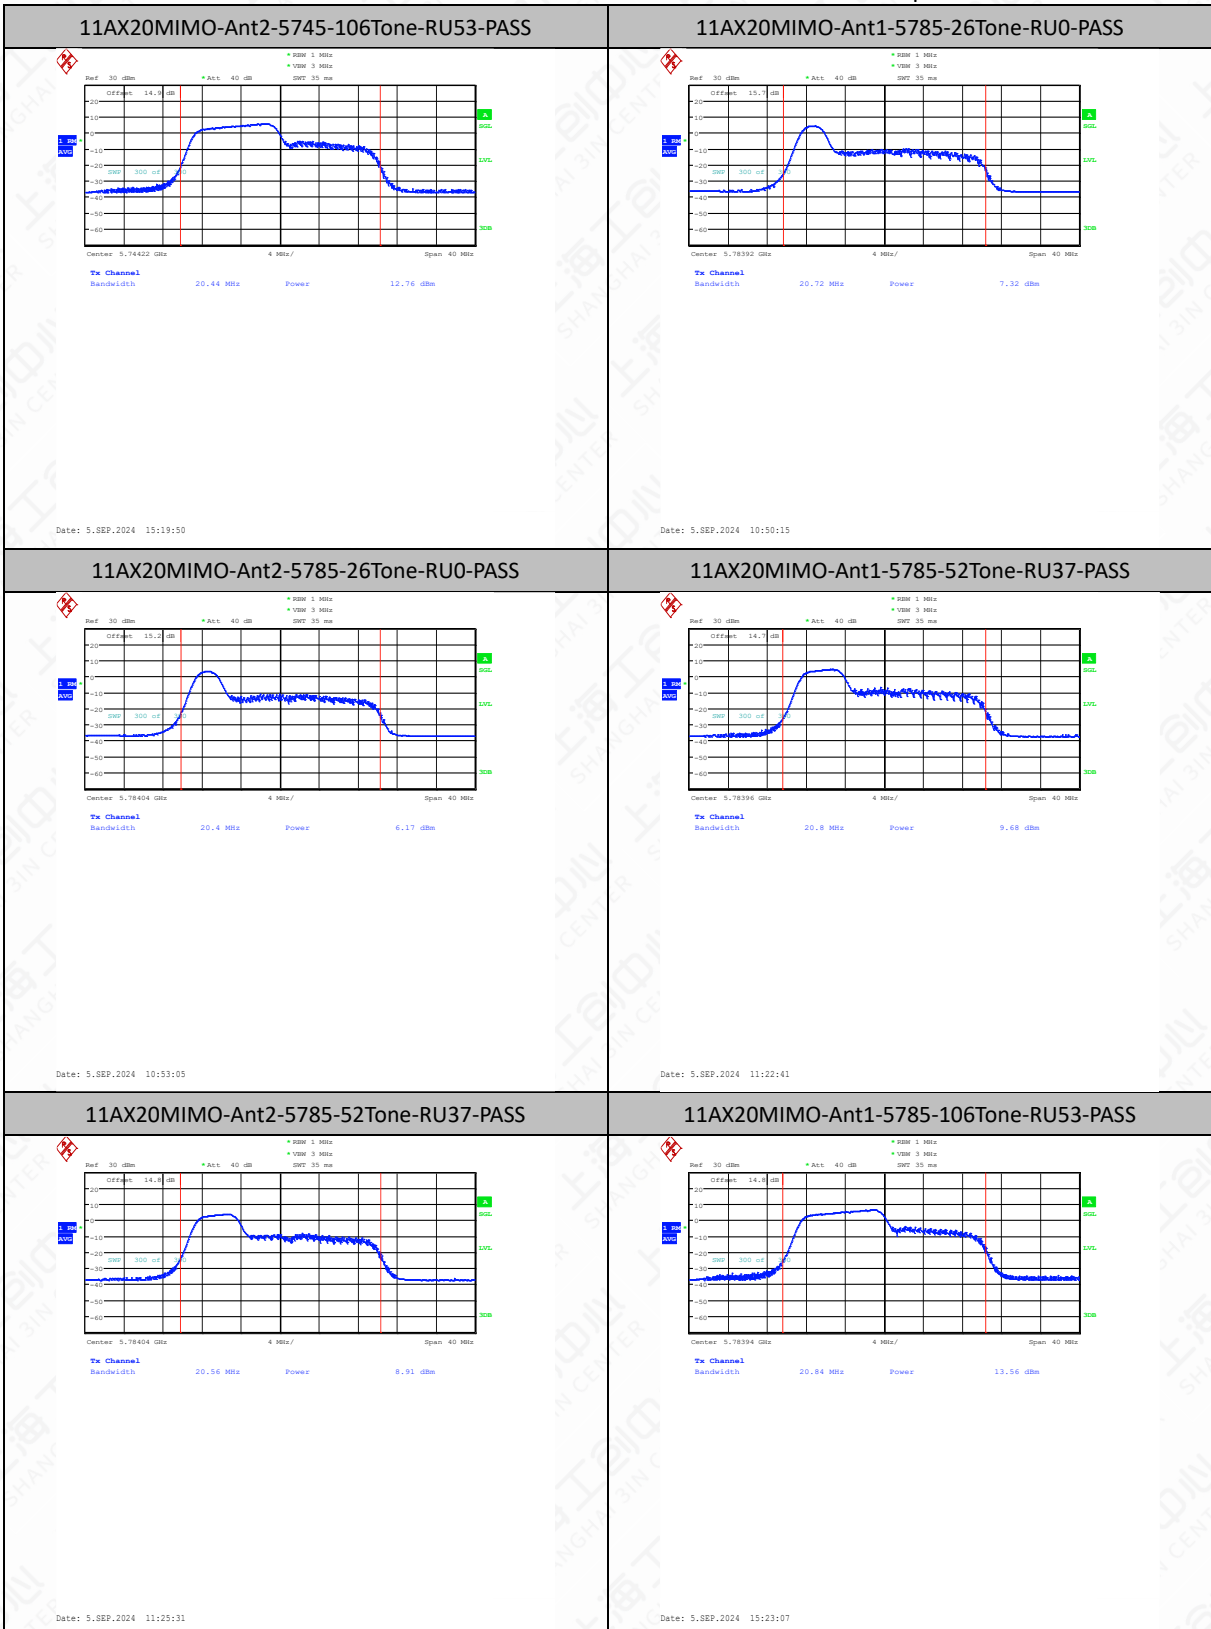


11AX20MIMO-Ant2-5785-106Tone-RU53-PASS




Date: 5.SEP.2024 15:25:56

11AX20MIMO-Ant1-5825-26Tone-RU0-PASS

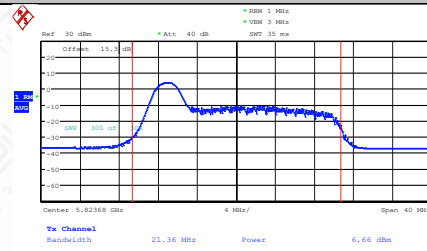


Date: 5.SEP.2024 10:56:27

11AX20MIMO-Ant2-5825-26Tone-RU0-PASS

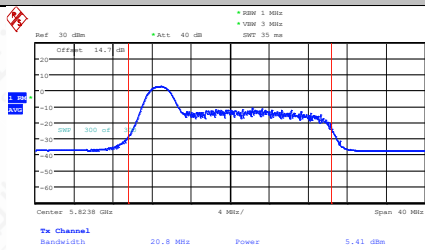


Date: 5.SEP.2024 10:59:21

11AX20MIMO-Ant1-5825-52Tone-RU37-PASS

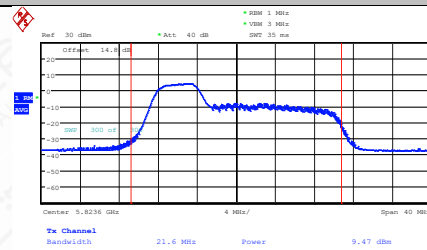


Date: 5.SEP.2024 12:16:17

11AX20MIMO-Ant2-5825-52Tone-RU37-PASS

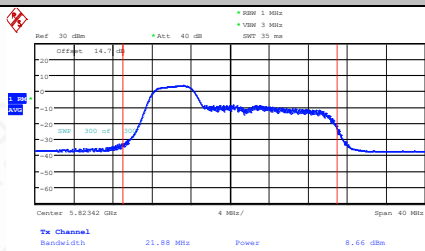



Date: 5.SEP.2024 12:19:11


11AX20MIMO-Ant1-5825-106Tone-RU53-PASS

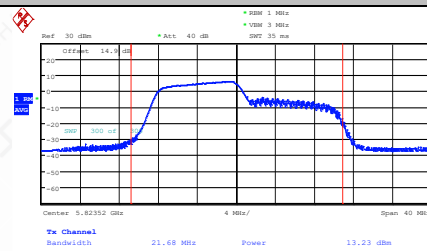

Date: 5.SEP.2024 15:29:04

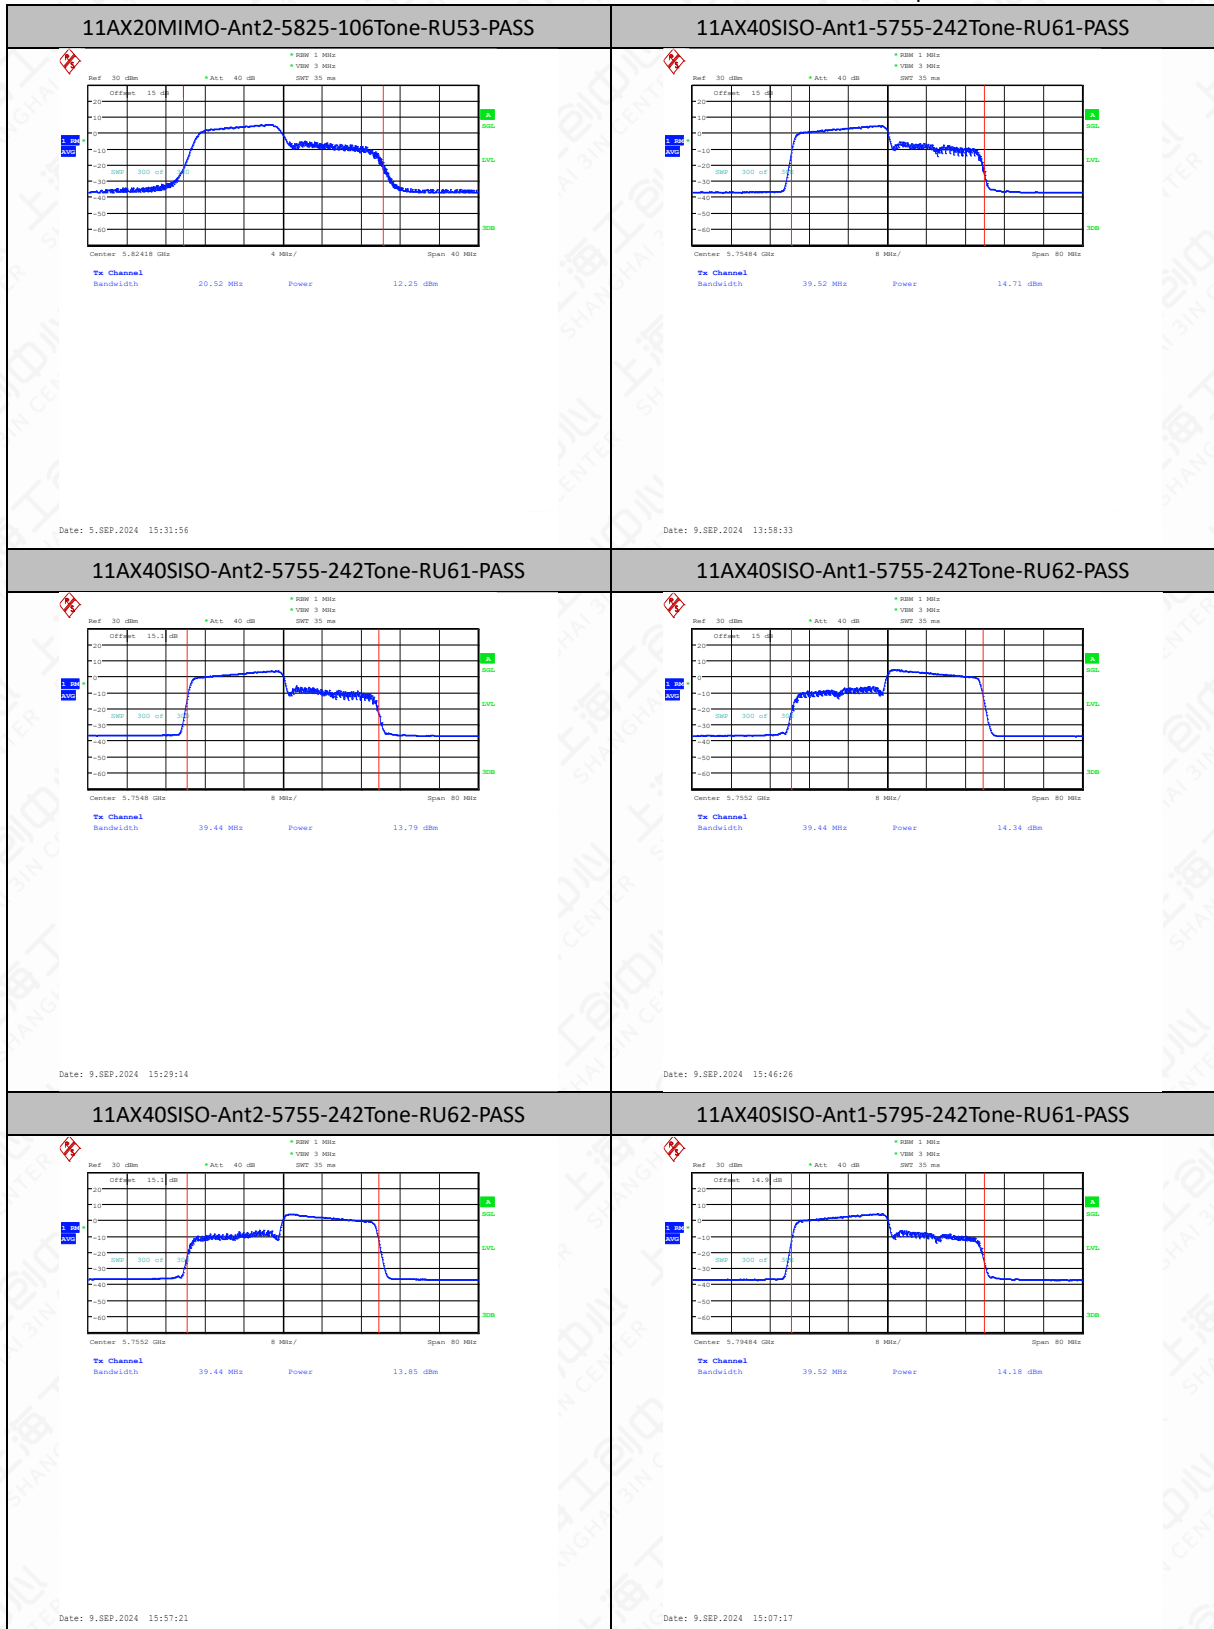

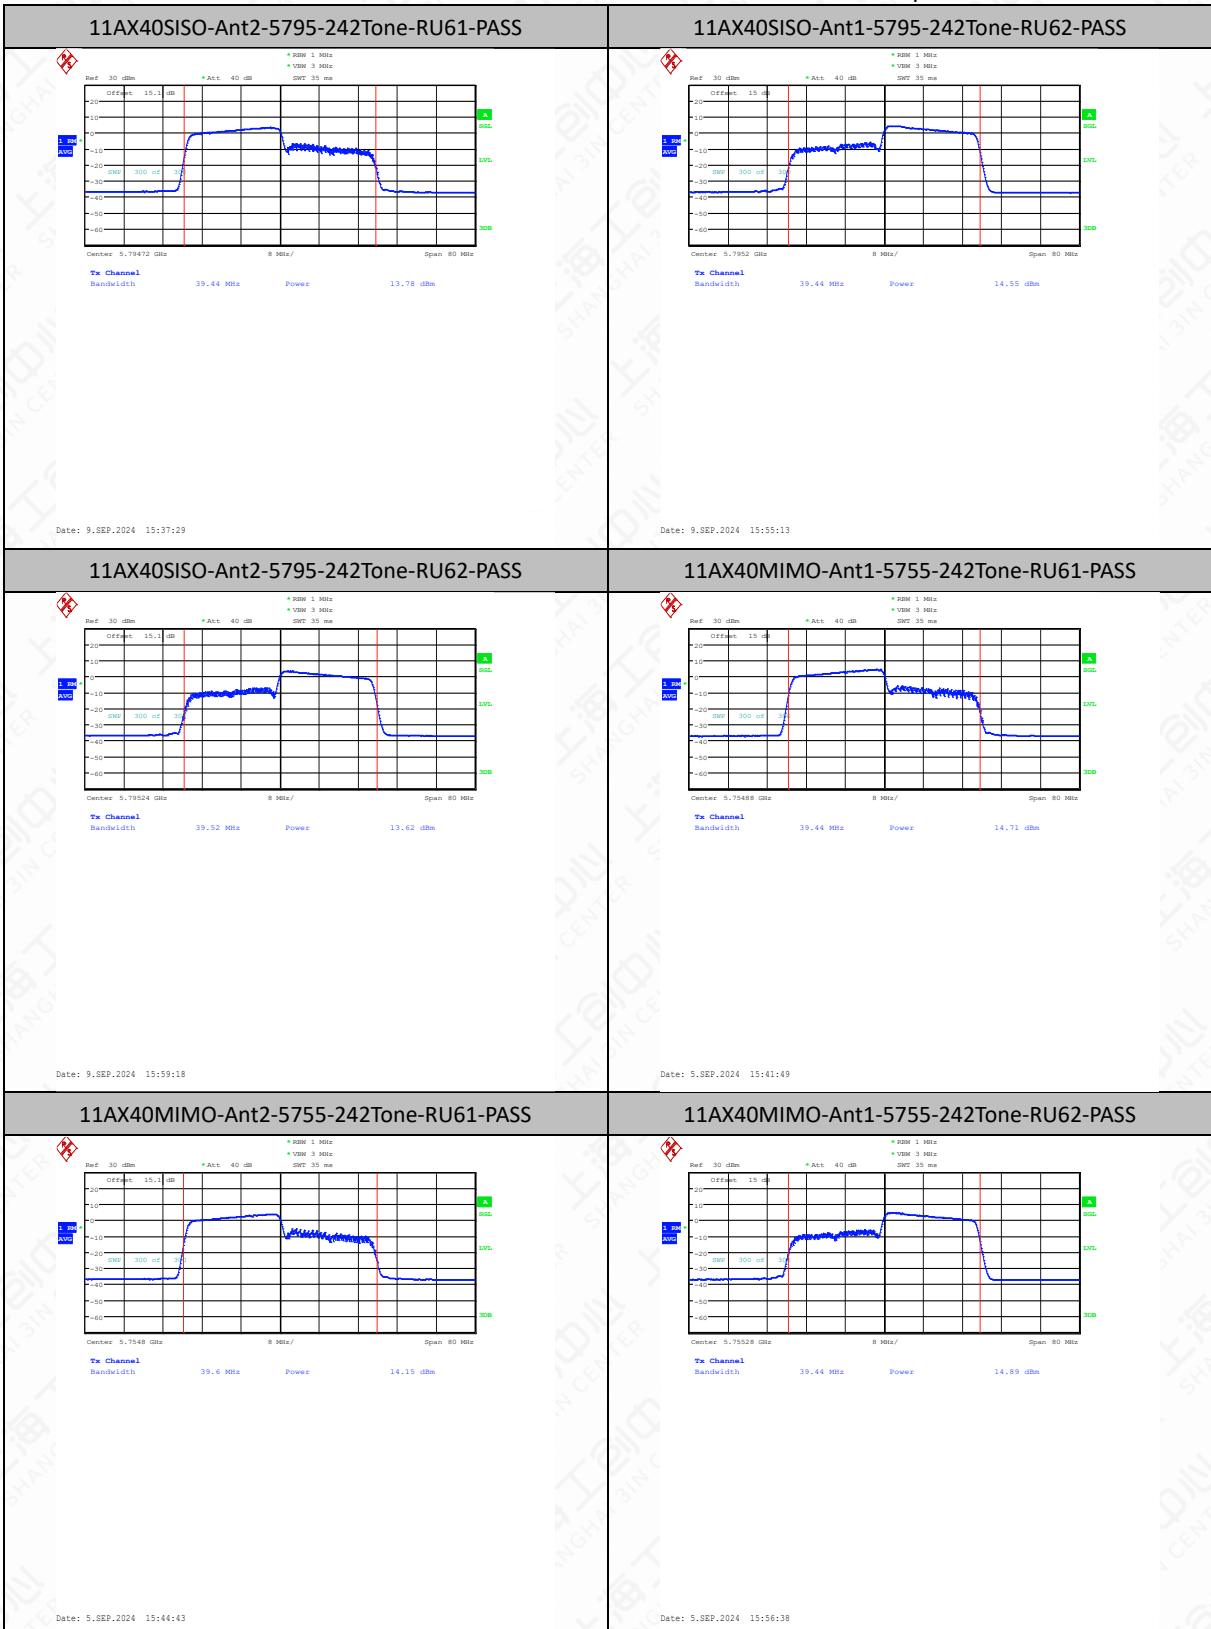

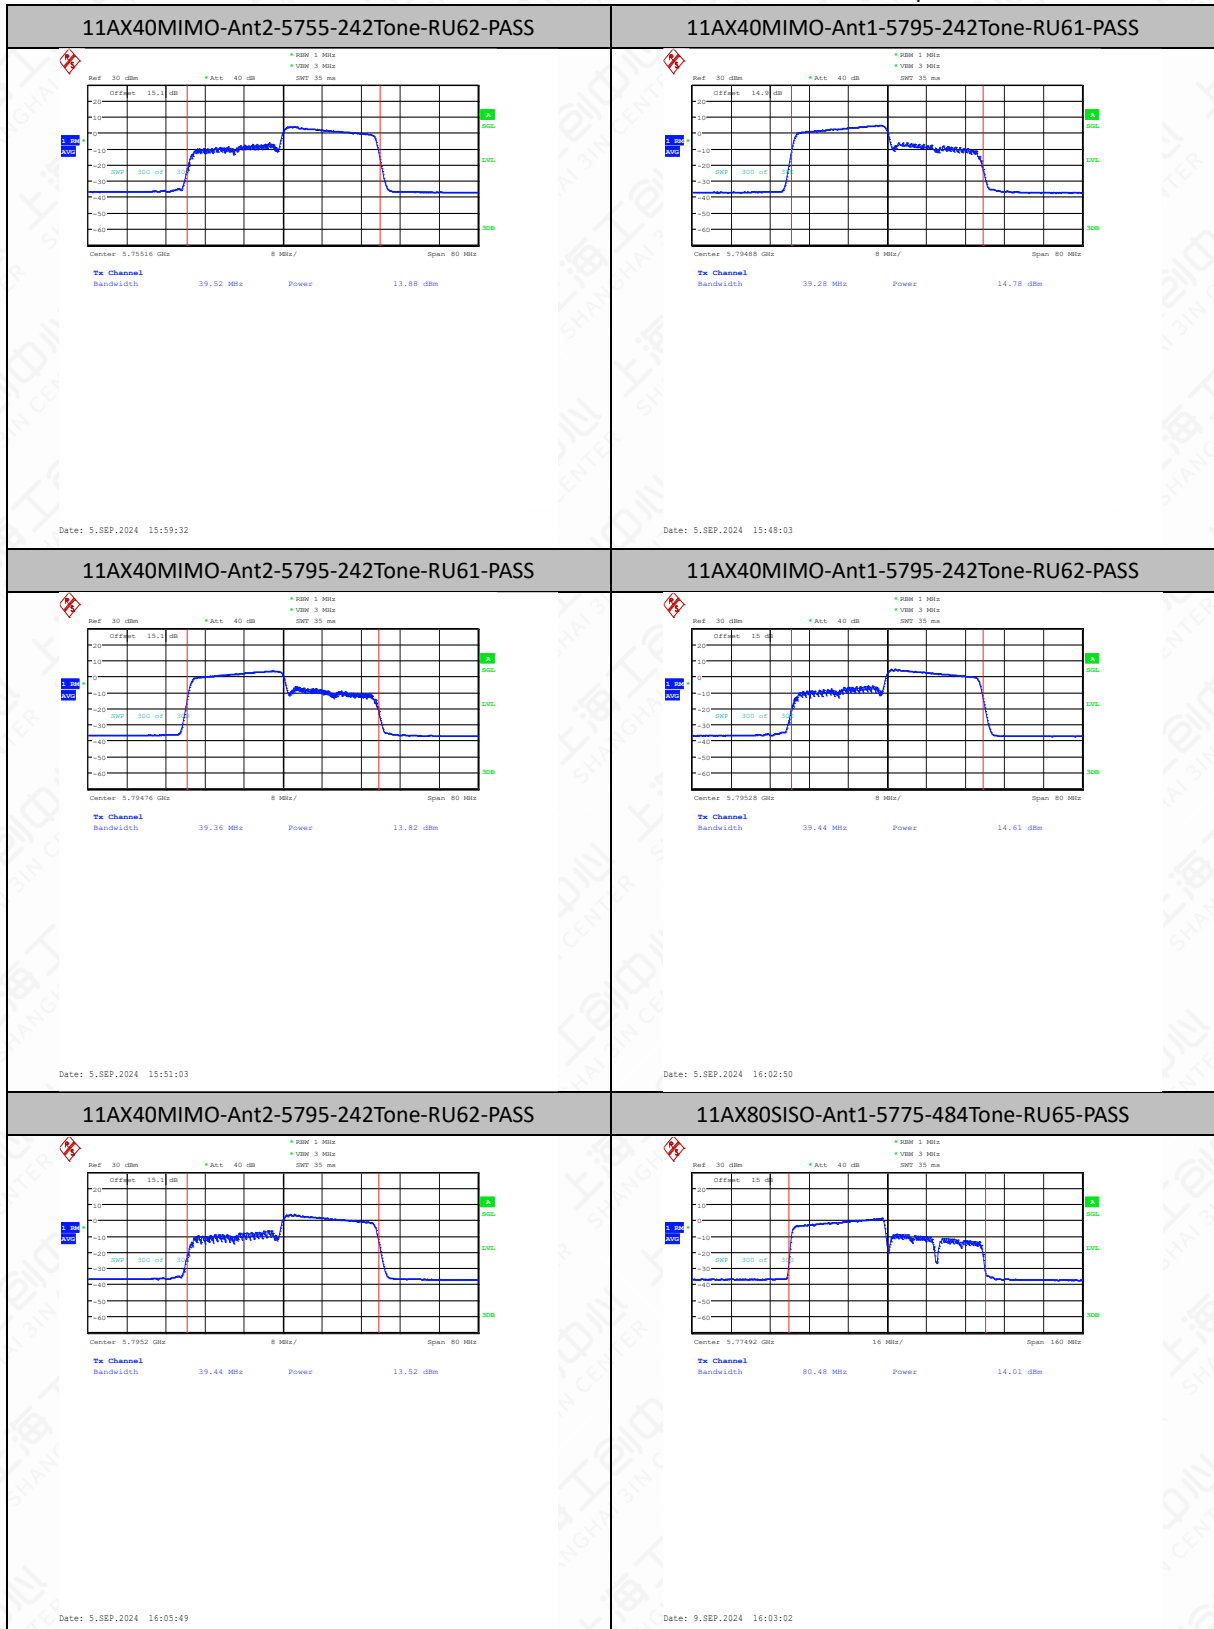



6.3 Peak Power Spectral Density

6.2.1 Measurement Limit

Standard	Limit
FCC 47 CFR Part 15.407(a)	< 30 dBm/500kHz


6.2.2 Test Procedure

The measurement method is made according to KDB 789033 F

1. Create an average power spectrum for the EUT operating mode being tested by following the instructions in II.E.2. for measuring maximum conducted output power using a spectrum analyzer or EMI receiver: select the appropriate test method (SA-1, SA-2, SA-3, or alternatives to each) and apply it up to, but not including, the step labeled, "Compute power...." (This procedure is required even if the maximum conducted output power measurement was performed using a power meter, method PM.)
2. Use the peak search function on the instrument to find the peak of the spectrum and record its value.
3. Make the following adjustments to the peak value of the spectrum, if applicable:
 - a) If Method SA-2 or SA-2 Alternative was used, add $10 \log (1/x)$, where x is the duty cycle, to the peak of the spectrum.
 - b) If Method SA-3 Alternative was used and the linear mode was used in step II.E.2.g)(viii), add 1 dB to the final result to compensate for the difference between linear averaging and power averaging.
4. The result is the Maximum PSD over 1 MHz reference bandwidth.
5. For devices operating in the bands 5.15-5.25 GHz, 5.25-5.35 GHz, and 5.47-5.725 GHz, the above procedures make use of 1 MHz RBW to satisfy directly the 1 MHz reference bandwidth specified in Section 15.407(a)(5). For devices operating in the band 5.725-5.85 GHz, the rules specify a measurement bandwidth of 500 kHz. Many spectrum analyzers do not have 500 kHz RBW, thus a narrower RBW may need to be used. The rules permit the use of a RBWs less than 1 MHz, or 500 kHz, "provided that the measured power is integrated over the full reference bandwidth" to show the total power over the specified measurement bandwidth (i.e., 1 MHz, or 500 kHz). If measurements are performed using a reduced resolution bandwidth (< 1 MHz, or < 500 kHz) and integrated over 1 MHz, or 500 kHz bandwidth, the following adjustments to the procedures apply:
 - a) Set $RBW \geq 1/T$, where T is defined in II.B.I.a).
 - b) Set $VBW \geq 3 \text{ RBW}$.
 - c) If measurement bandwidth of Maximum PSD is specified in 500 kHz, add $10 \log (500 \text{ kHz}/RBW)$ to the measured result, whereas RBW (<500 kHz) is the reduced resolution bandwidth of the spectrum analyzer set during measurement.
 - d) If measurement bandwidth of Maximum PSD is specified in 1 MHz, add $10 \log (1\text{MHz}/RBW)$ to the measured result, whereas RBW (< 1 MHz) is the reduced resolution bandwidth of spectrum analyzer set during measurement.
 - e) Care must be taken to ensure that the measurements are performed during a period of continuous transmission or are corrected upward for duty cycle.

Note: As a practical matter, it is recommended to use reduced RBW of 100 kHz for steps 5.c) and 5.d) above, since RBW=100 KHZ is available on nearly all spectrum analyzers.

6.2.3 Test setup

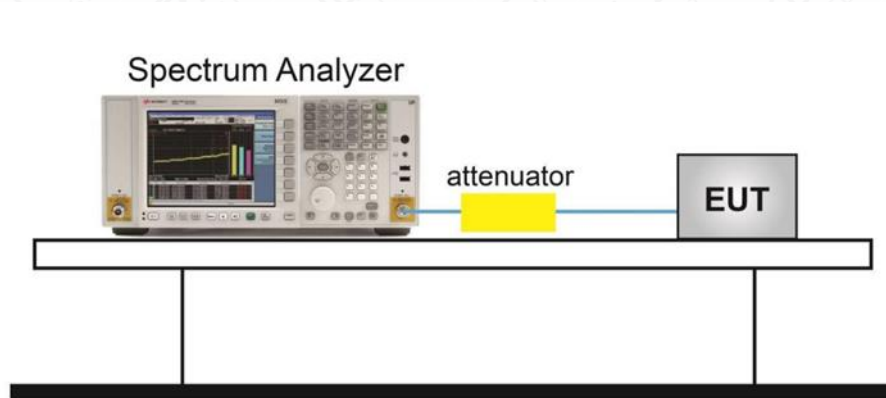

6.2.4 Measurement Results

TestMode	Antenna	Frequency[MHz]	Result [dBm/MHz]	Limit[dBm/MHz]	Verdict
11A	Ant1	5745	5.02	≤30.00	PASS
11A	Ant2	5745	4.35	≤30.00	PASS
11A	Ant1	5785	5.19	≤30.00	PASS
11A	Ant2	5785	3.70	≤30.00	PASS
11A	Ant1	5825	4.89	≤30.00	PASS
11A	Ant2	5825	3.75	≤30.00	PASS
11A-CDD	Ant1	5745	5.22	≤30.00	PASS
11A-CDD	Ant2	5745	4.09	≤30.00	PASS
11A-CDD	total	5745	7.70	≤28.79	PASS
11A-CDD	Ant1	5785	4.83	≤30.00	PASS
11A-CDD	Ant2	5785	3.72	≤30.00	PASS
11A-CDD	total	5785	7.32	≤28.79	PASS
11A-CDD	Ant1	5825	4.66	≤30.00	PASS
11A-CDD	Ant2	5825	3.72	≤30.00	PASS
11A-CDD	total	5825	7.23	≤28.79	PASS
11AC20SISO	Ant1	5745	5.16	≤30.00	PASS
11AC20SISO	Ant2	5745	4.03	≤30.00	PASS
11AC20SISO	Ant1	5785	5.03	≤30.00	PASS
11AC20SISO	Ant2	5785	3.61	≤30.00	PASS
11AC20SISO	Ant1	5825	4.40	≤30.00	PASS
11AC20SISO	Ant2	5825	3.35	≤30.00	PASS
11AC20MIMO	Ant1	5745	5.12	≤30.00	PASS
11AC20MIMO	Ant2	5745	3.78	≤30.00	PASS
11AC20MIMO	total	5745	7.51	≤28.79	PASS
11AC20MIMO	Ant1	5785	4.88	≤30.00	PASS
11AC20MIMO	Ant2	5785	3.37	≤30.00	PASS
11AC20MIMO	total	5785	7.20	≤28.79	PASS
11AC20MIMO	Ant1	5825	4.42	≤30.00	PASS
11AC20MIMO	Ant2	5825	3.05	≤30.00	PASS

11AC20MIMO	total	5825	6.80	≤28.79	PASS
11AC40SISO	Ant1	5755	1.83	≤30.00	PASS
11AC40SISO	Ant2	5755	0.68	≤30.00	PASS
11AC40SISO	Ant1	5795	1.95	≤30.00	PASS
11AC40SISO	Ant2	5795	0.46	≤30.00	PASS
11AC40MIMO	Ant1	5755	2.56	≤30.00	PASS
11AC40MIMO	Ant2	5755	1.18	≤30.00	PASS
11AC40MIMO	total	5755	4.93	≤28.79	PASS
11AC40MIMO	Ant1	5795	2.41	≤30.00	PASS
11AC40MIMO	Ant2	5795	0.76	≤30.00	PASS
11AC40MIMO	total	5795	4.67	≤28.79	PASS
11AC80SISO	Ant1	5775	-1.37	≤30.00	PASS
11AC80SISO	Ant2	5775	-2.30	≤30.00	PASS
11AC80MIMO	Ant1	5775	-0.88	≤30.00	PASS
11AC80MIMO	Ant2	5775	-2.23	≤30.00	PASS
11AC80MIMO	total	5775	1.51	≤28.79	PASS
11AX20SISO	Ant1	5745	4.05	≤30.00	PASS
11AX20SISO	Ant2	5745	3.40	≤30.00	PASS
11AX20SISO	Ant1	5785	4.05	≤30.00	PASS
11AX20SISO	Ant2	5785	3.11	≤30.00	PASS
11AX20SISO	Ant1	5825	3.71	≤30.00	PASS
11AX20SISO	Ant2	5825	2.93	≤30.00	PASS
11AX20MIMO	Ant1	5745	4.17	≤30.00	PASS
11AX20MIMO	Ant2	5745	3.52	≤30.00	PASS
11AX20MIMO	total	5745	6.87	≤28.79	PASS
11AX20MIMO	Ant1	5785	4.28	≤30.00	PASS
11AX20MIMO	Ant2	5785	3.11	≤30.00	PASS
11AX20MIMO	total	5785	6.74	≤28.79	PASS
11AX20MIMO	Ant1	5825	3.73	≤30.00	PASS
11AX20MIMO	Ant2	5825	2.94	≤30.00	PASS
11AX20MIMO	total	5825	6.36	≤28.79	PASS
11AX40SISO	Ant1	5755	1.38	≤30.00	PASS
11AX40SISO	Ant2	5755	0.61	≤30.00	PASS
11AX40SISO	Ant1	5795	1.22	≤30.00	PASS
11AX40SISO	Ant2	5795	0.52	≤30.00	PASS
11AX40MIMO	Ant1	5755	1.73	≤30.00	PASS
11AX40MIMO	Ant2	5755	0.43	≤30.00	PASS
11AX40MIMO	total	5755	4.14	≤28.79	PASS
11AX40MIMO	Ant1	5795	1.94	≤30.00	PASS
11AX40MIMO	Ant2	5795	1.02	≤30.00	PASS
11AX40MIMO	total	5795	4.51	≤28.79	PASS
11AX80SISO	Ant1	5775	-2.22	≤30.00	PASS
11AX80SISO	Ant2	5775	-2.77	≤30.00	PASS

11AX80MIMO	Ant1	5775	-1.73	≤30.00	PASS
11AX80MIMO	Ant2	5775	-2.92	≤30.00	PASS
11AX80MIMO	total	5775	0.73	≤28.79	PASS

AX Part RU_Multi-User


TestMode	Antenna	Frequency[MHz]	RuSize	RuIndex	Result [dBm/MHz]	Limit[dBm/MHz]	Verdict
11AX20SISO	Ant1	5745	26Tone	RU0	2.58	≤30.00	PASS
11AX20SISO	Ant2	5745	26Tone	RU0	1.84	≤30.00	PASS
11AX20SISO	Ant1	5745	52Tone	RU37	1.20	≤30.00	PASS
11AX20SISO	Ant2	5745	52Tone	RU37	0.98	≤30.00	PASS
11AX20SISO	Ant1	5745	106Tone	RU53	3.33	≤30.00	PASS
11AX20SISO	Ant2	5745	106Tone	RU53	2.43	≤30.00	PASS
11AX20SISO	Ant1	5785	26Tone	RU0	0.06	≤30.00	PASS
11AX20SISO	Ant2	5785	26Tone	RU0	0.14	≤30.00	PASS
11AX20SISO	Ant1	5785	52Tone	RU37	1.14	≤30.00	PASS
11AX20SISO	Ant2	5785	52Tone	RU37	0.60	≤30.00	PASS
11AX20SISO	Ant1	5785	106Tone	RU53	3.31	≤30.00	PASS
11AX20SISO	Ant2	5785	106Tone	RU53	2.21	≤30.00	PASS
11AX20SISO	Ant1	5825	26Tone	RU0	-0.32	≤30.00	PASS
11AX20SISO	Ant2	5825	26Tone	RU0	0.14	≤30.00	PASS
11AX20SISO	Ant1	5825	52Tone	RU37	0.78	≤30.00	PASS
11AX20SISO	Ant2	5825	52Tone	RU37	0.62	≤30.00	PASS
11AX20SISO	Ant1	5825	106Tone	RU53	2.85	≤30.00	PASS
11AX20SISO	Ant2	5825	106Tone	RU53	1.87	≤30.00	PASS
11AX20MIMO	Ant1	5745	26Tone	RU0	1.11	≤30.00	PASS
11AX20MIMO	Ant2	5745	26Tone	RU0	3.45	≤30.00	PASS
11AX20MIMO	total	5745	26Tone	RU0	5.45	≤28.79	PASS
11AX20MIMO	Ant1	5745	52Tone	RU37	1.45	≤30.00	PASS
11AX20MIMO	Ant2	5745	52Tone	RU37	0.82	≤30.00	PASS
11AX20MIMO	total	5745	52Tone	RU37	4.16	≤28.79	PASS
11AX20MIMO	Ant1	5745	106Tone	RU53	3.42	≤30.00	PASS
11AX20MIMO	Ant2	5745	106Tone	RU53	2.56	≤30.00	PASS
11AX20MIMO	total	5745	106Tone	RU53	6.02	≤28.79	PASS
11AX20MIMO	Ant1	5785	26Tone	RU0	1.51	≤30.00	PASS
11AX20MIMO	Ant2	5785	26Tone	RU0	0.13	≤30.00	PASS
11AX20MIMO	total	5785	26Tone	RU0	3.88	≤28.79	PASS
11AX20MIMO	Ant1	5785	52Tone	RU37	1.38	≤30.00	PASS
11AX20MIMO	Ant2	5785	52Tone	RU37	0.78	≤30.00	PASS
11AX20MIMO	total	5785	52Tone	RU37	4.10	≤28.79	PASS
11AX20MIMO	Ant1	5785	106Tone	RU53	3.38	≤30.00	PASS
11AX20MIMO	Ant2	5785	106Tone	RU53	2.41	≤30.00	PASS
11AX20MIMO	total	5785	106Tone	RU53	5.93	≤28.79	PASS
11AX20MIMO	Ant1	5825	26Tone	RU0	0.74	≤30.00	PASS


11AX20MIMO	Ant2	5825	26Tone	RU0	-0.53	≤30.00	PASS
11AX20MIMO	total	5825	26Tone	RU0	3.16	≤28.79	PASS
11AX20MIMO	Ant1	5825	52Tone	RU37	1.31	≤30.00	PASS
11AX20MIMO	Ant2	5825	52Tone	RU37	0.57	≤30.00	PASS
11AX20MIMO	total	5825	52Tone	RU37	3.97	≤28.79	PASS
11AX20MIMO	Ant1	5825	106Tone	RU53	2.96	≤30.00	PASS
11AX20MIMO	Ant2	5825	106Tone	RU53	1.97	≤30.00	PASS
11AX20MIMO	total	5825	106Tone	RU53	5.50	≤28.79	PASS
11AX40SISO	Ant1	5755	242Tone	RU61	1.48	≤30.00	PASS
11AX40SISO	Ant2	5755	242Tone	RU61	0.40	≤30.00	PASS
11AX40SISO	Ant1	5755	242Tone	RU62	1.40	≤30.00	PASS
11AX40SISO	Ant2	5755	242Tone	RU62	0.59	≤30.00	PASS
11AX40SISO	Ant1	5795	242Tone	RU61	0.99	≤30.00	PASS
11AX40SISO	Ant2	5795	242Tone	RU61	0.23	≤30.00	PASS
11AX40SISO	Ant1	5795	242Tone	RU62	1.17	≤30.00	PASS
11AX40SISO	Ant2	5795	242Tone	RU62	0.19	≤30.00	PASS
11AX40MIMO	Ant1	5755	242Tone	RU61	1.15	≤30.00	PASS
11AX40MIMO	Ant2	5755	242Tone	RU61	0.76	≤30.00	PASS
11AX40MIMO	total	5755	242Tone	RU61	3.97	≤28.79	PASS
11AX40MIMO	Ant1	5755	242Tone	RU62	1.57	≤30.00	PASS
11AX40MIMO	Ant2	5755	242Tone	RU62	0.87	≤30.00	PASS
11AX40MIMO	total	5755	242Tone	RU62	4.24	≤28.79	PASS
11AX40MIMO	Ant1	5795	242Tone	RU61	1.24	≤30.00	PASS
11AX40MIMO	Ant2	5795	242Tone	RU61	0.53	≤30.00	PASS
11AX40MIMO	total	5795	242Tone	RU61	3.91	≤28.79	PASS
11AX40MIMO	Ant1	5795	242Tone	RU62	1.18	≤30.00	PASS
11AX40MIMO	Ant2	5795	242Tone	RU62	0.17	≤30.00	PASS
11AX40MIMO	total	5795	242Tone	RU62	3.71	≤28.79	PASS
11AX80SISO	Ant1	5775	484Tone	RU65	-2.18	≤30.00	PASS
11AX80SISO	Ant2	5775	484Tone	RU65	-3.04	≤30.00	PASS
11AX80MIMO	Ant1	5775	484Tone	RU65	-2.12	≤30.00	PASS
11AX80MIMO	Ant2	5775	484Tone	RU65	-3.11	≤30.00	PASS
11AX80MIMO	total	5775	484Tone	RU65	0.42	≤28.79	PASS


Note: 1.The Result and Limit Unit is dBm/500 kHz in the band 5.725–5.85 GHz.


2.The Duty Cycle Factor is compensated in the graph.


Test graphs as below:

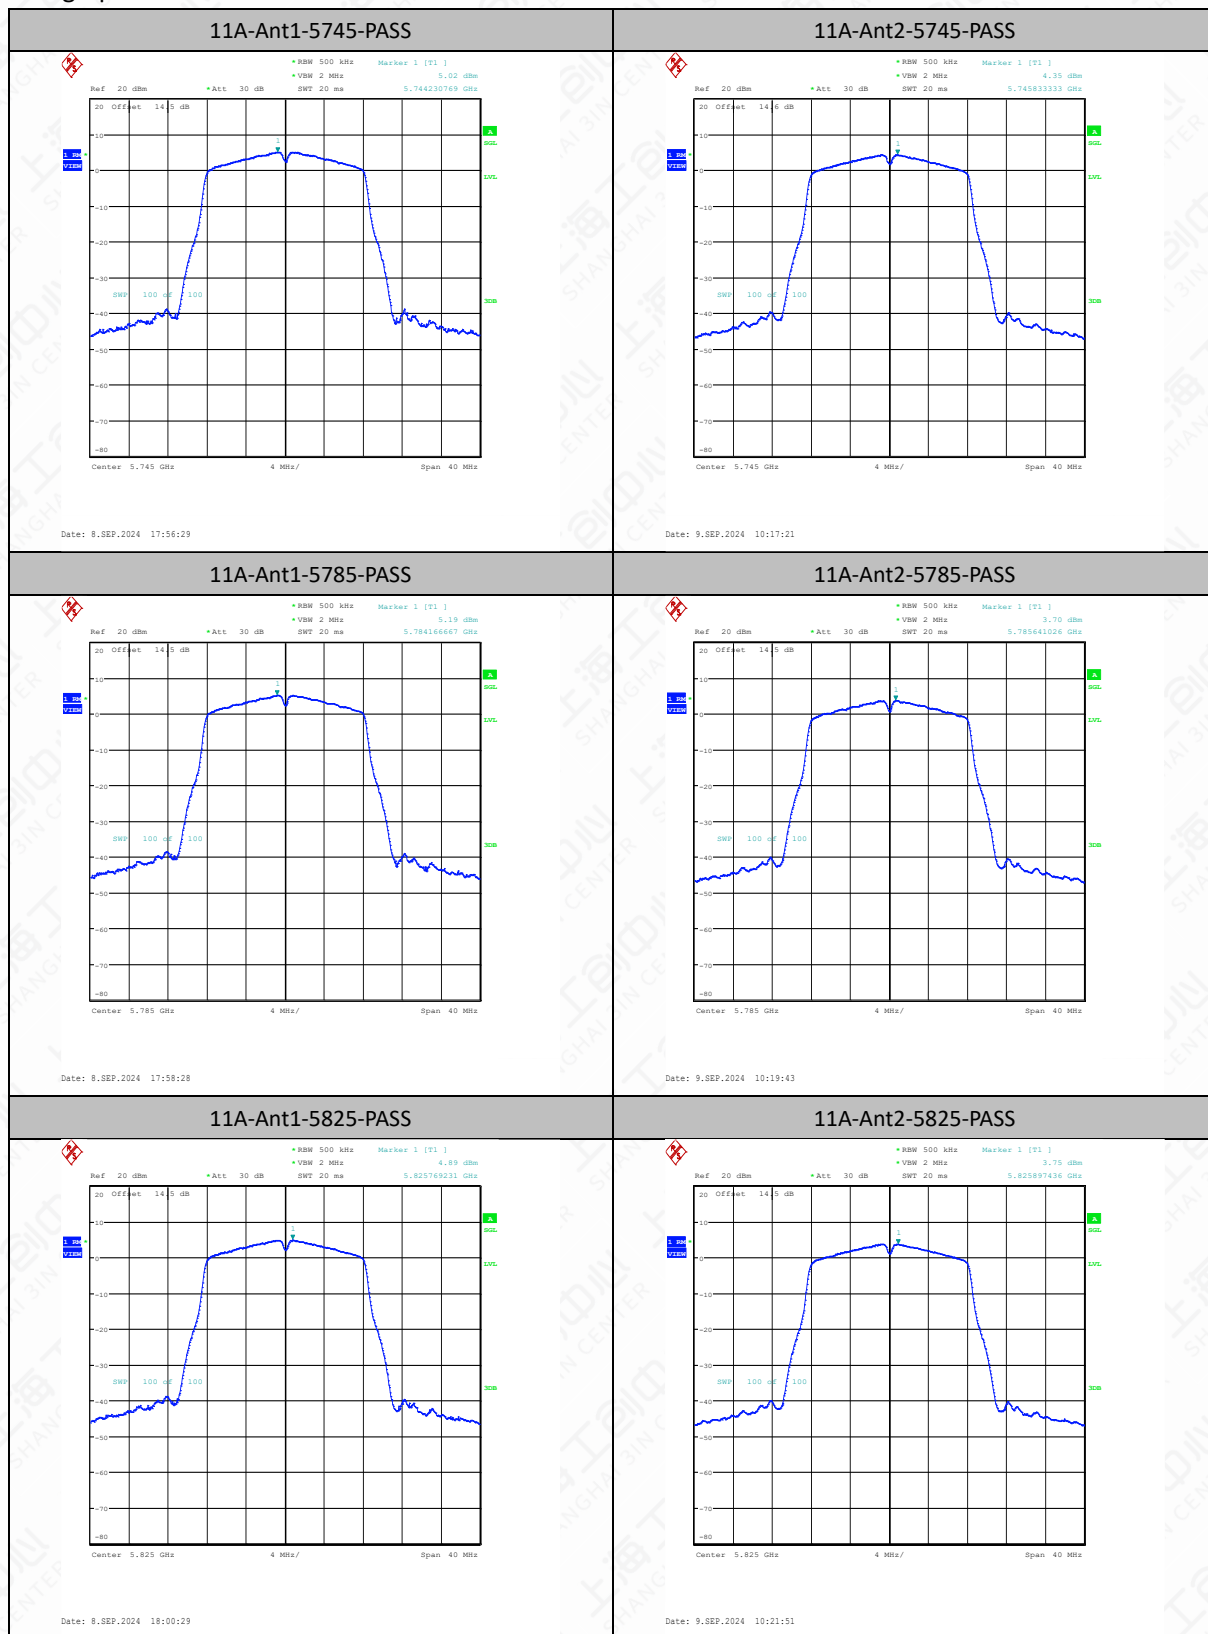


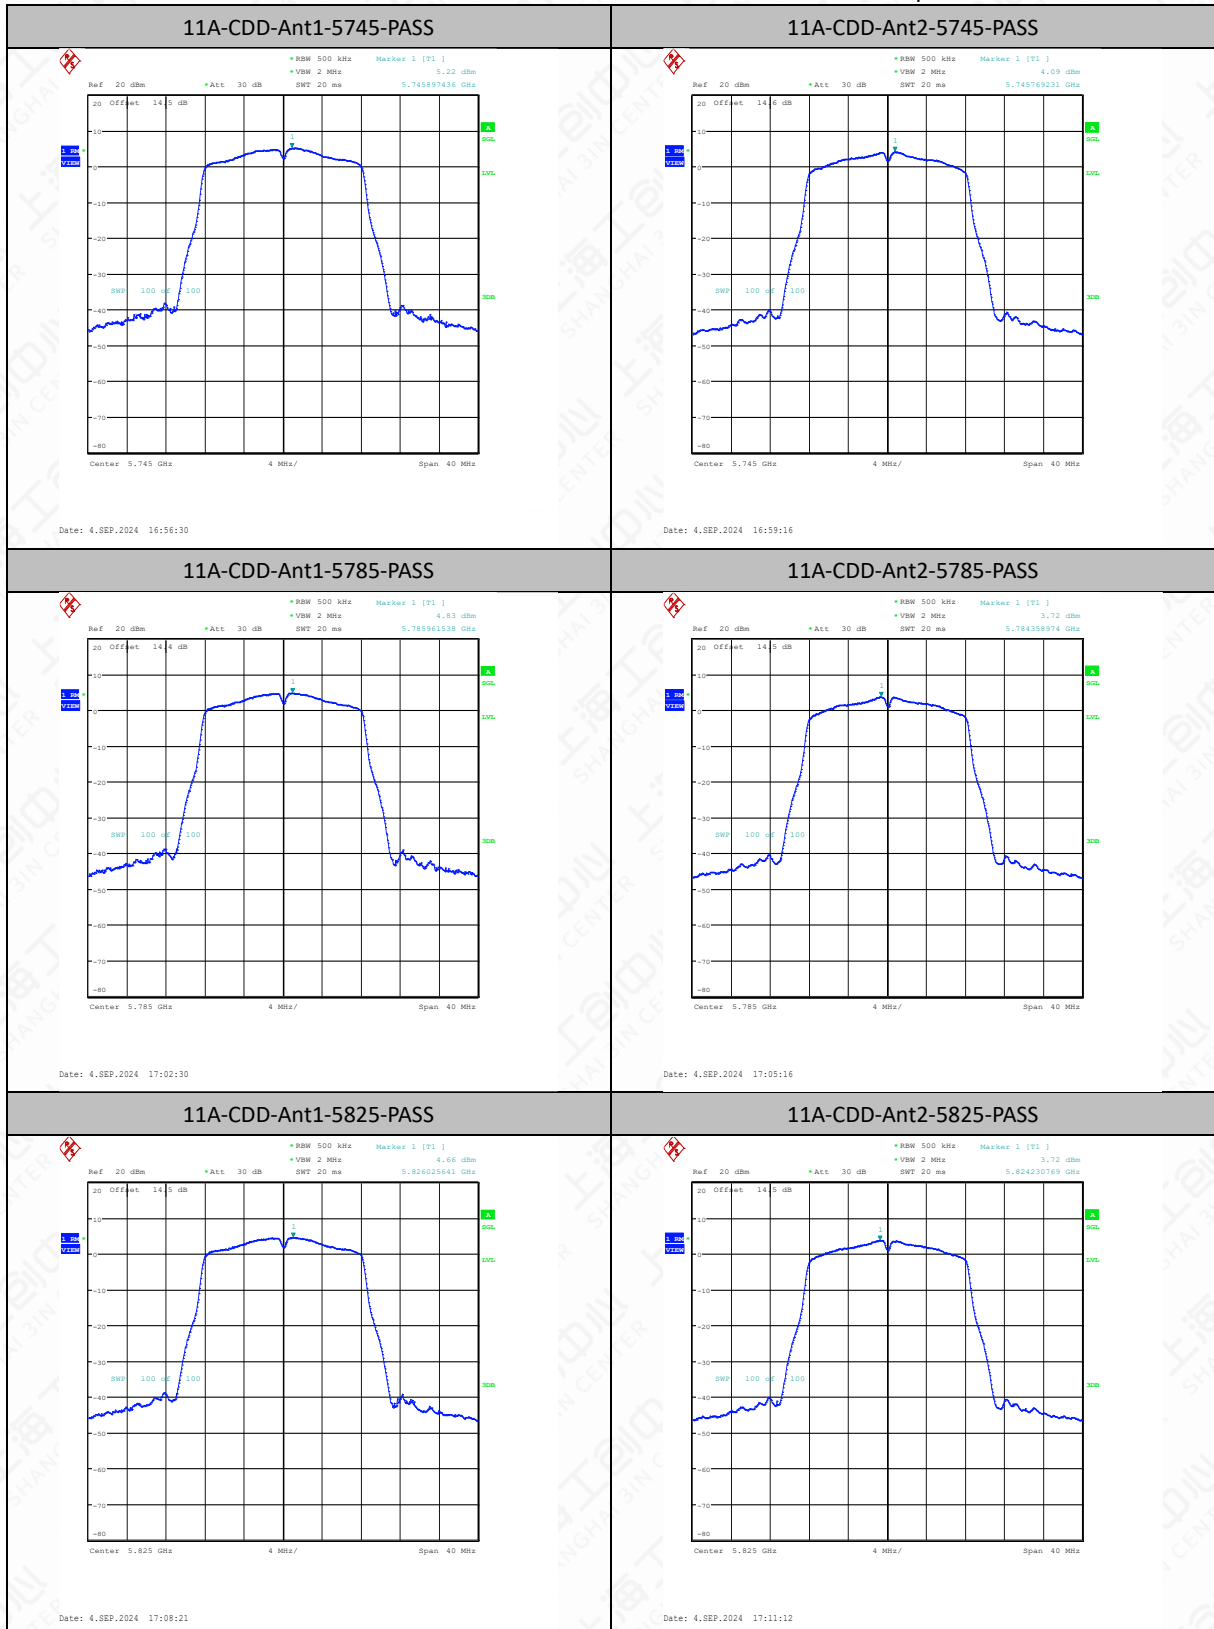

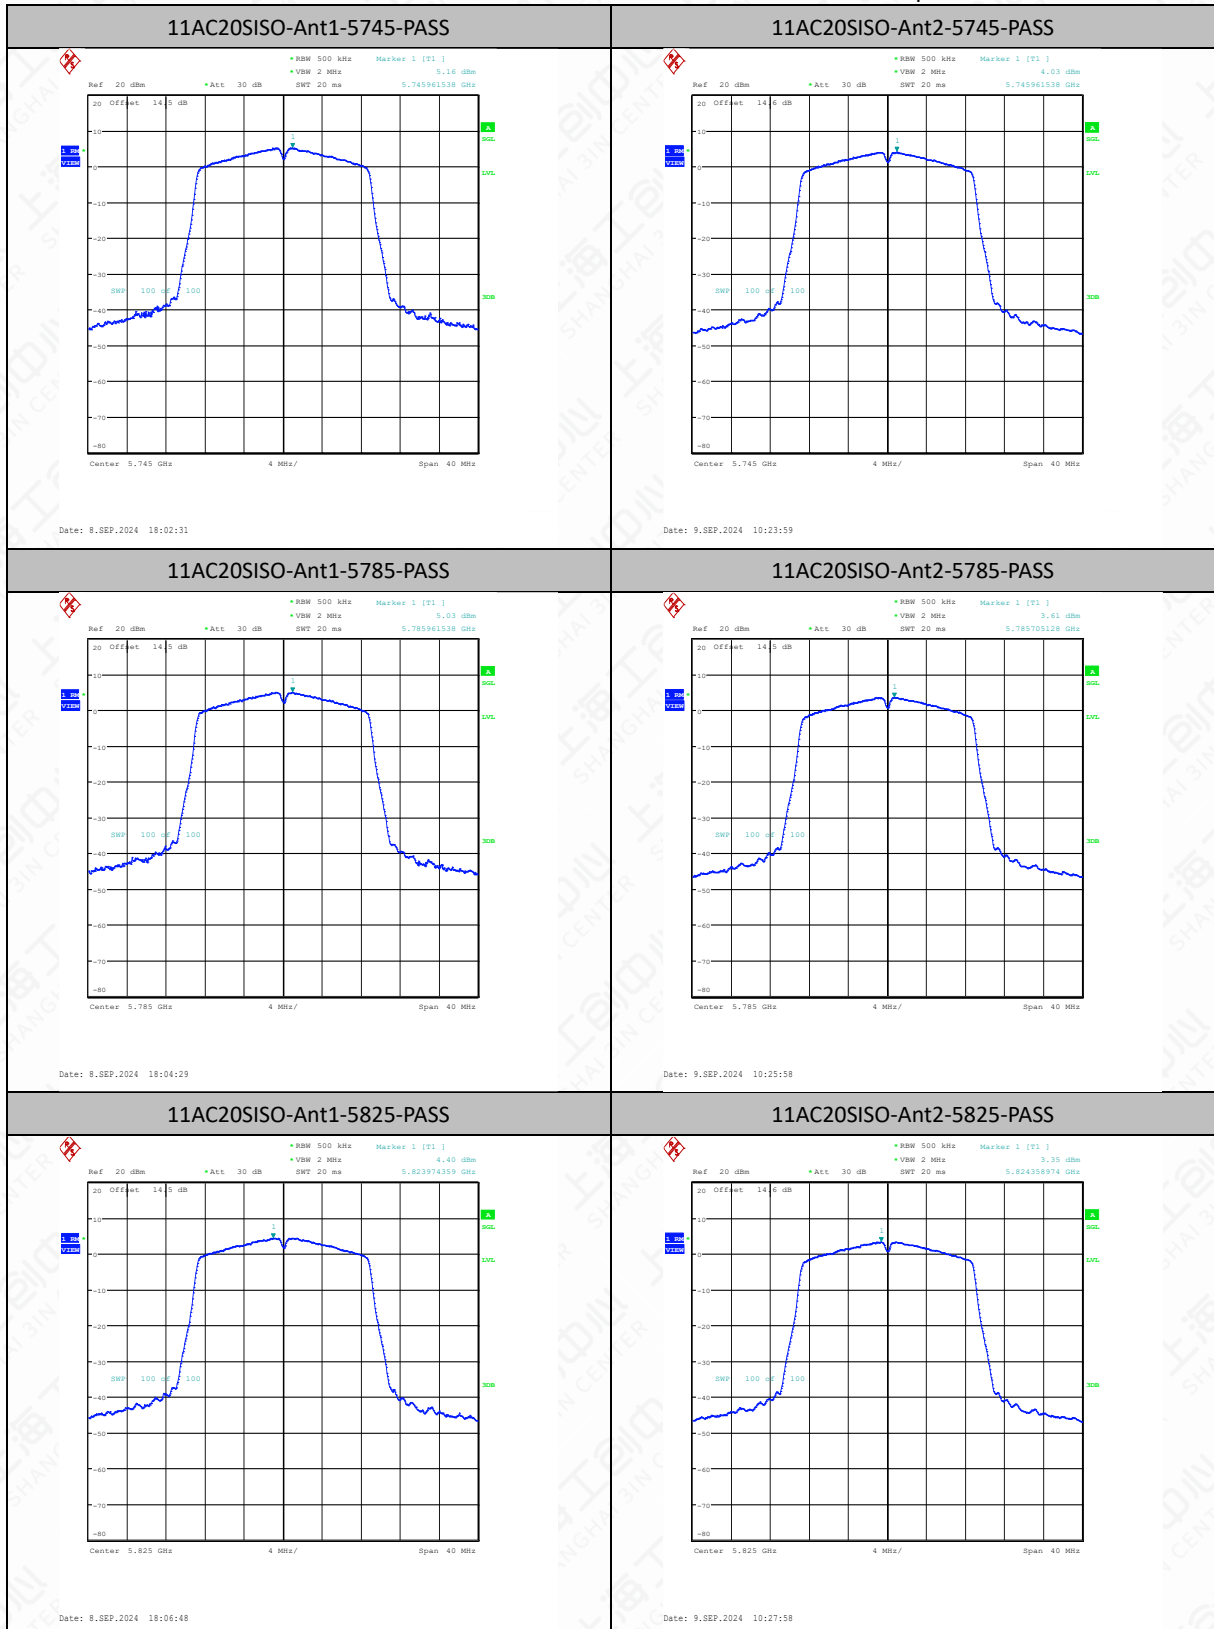


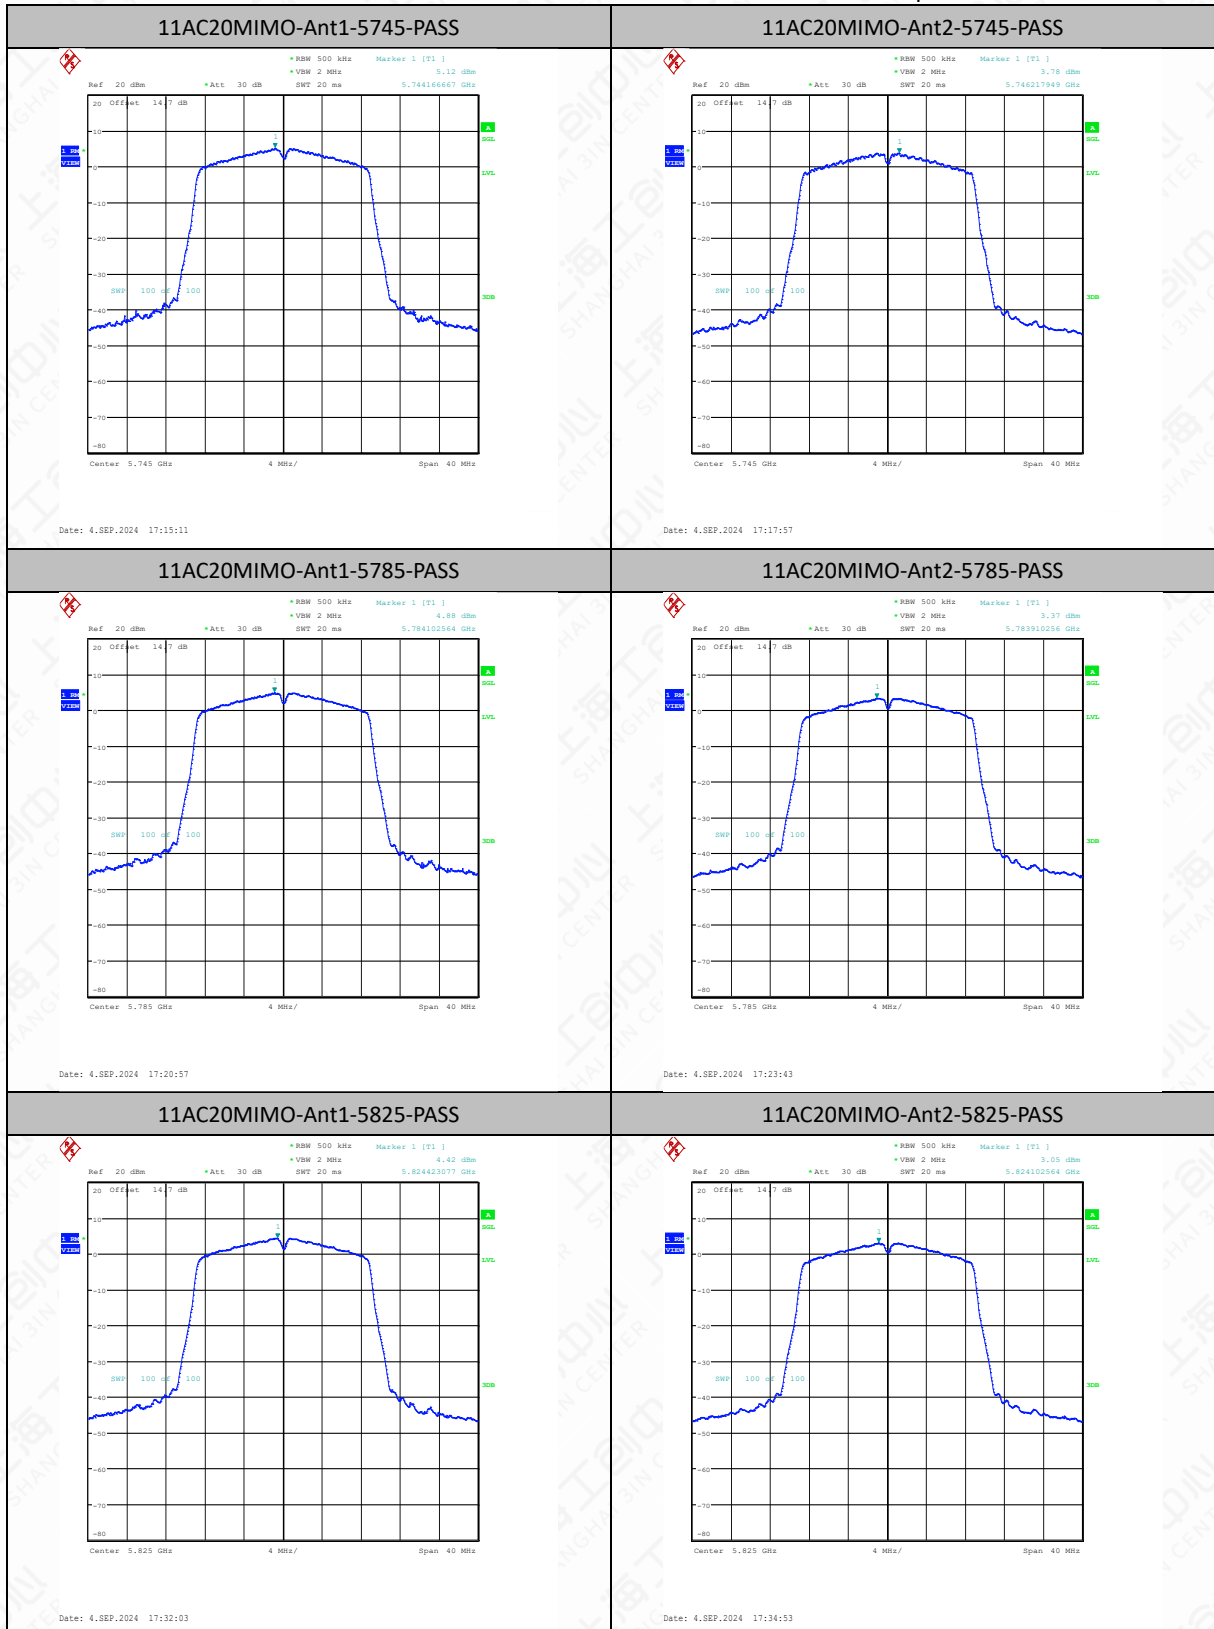

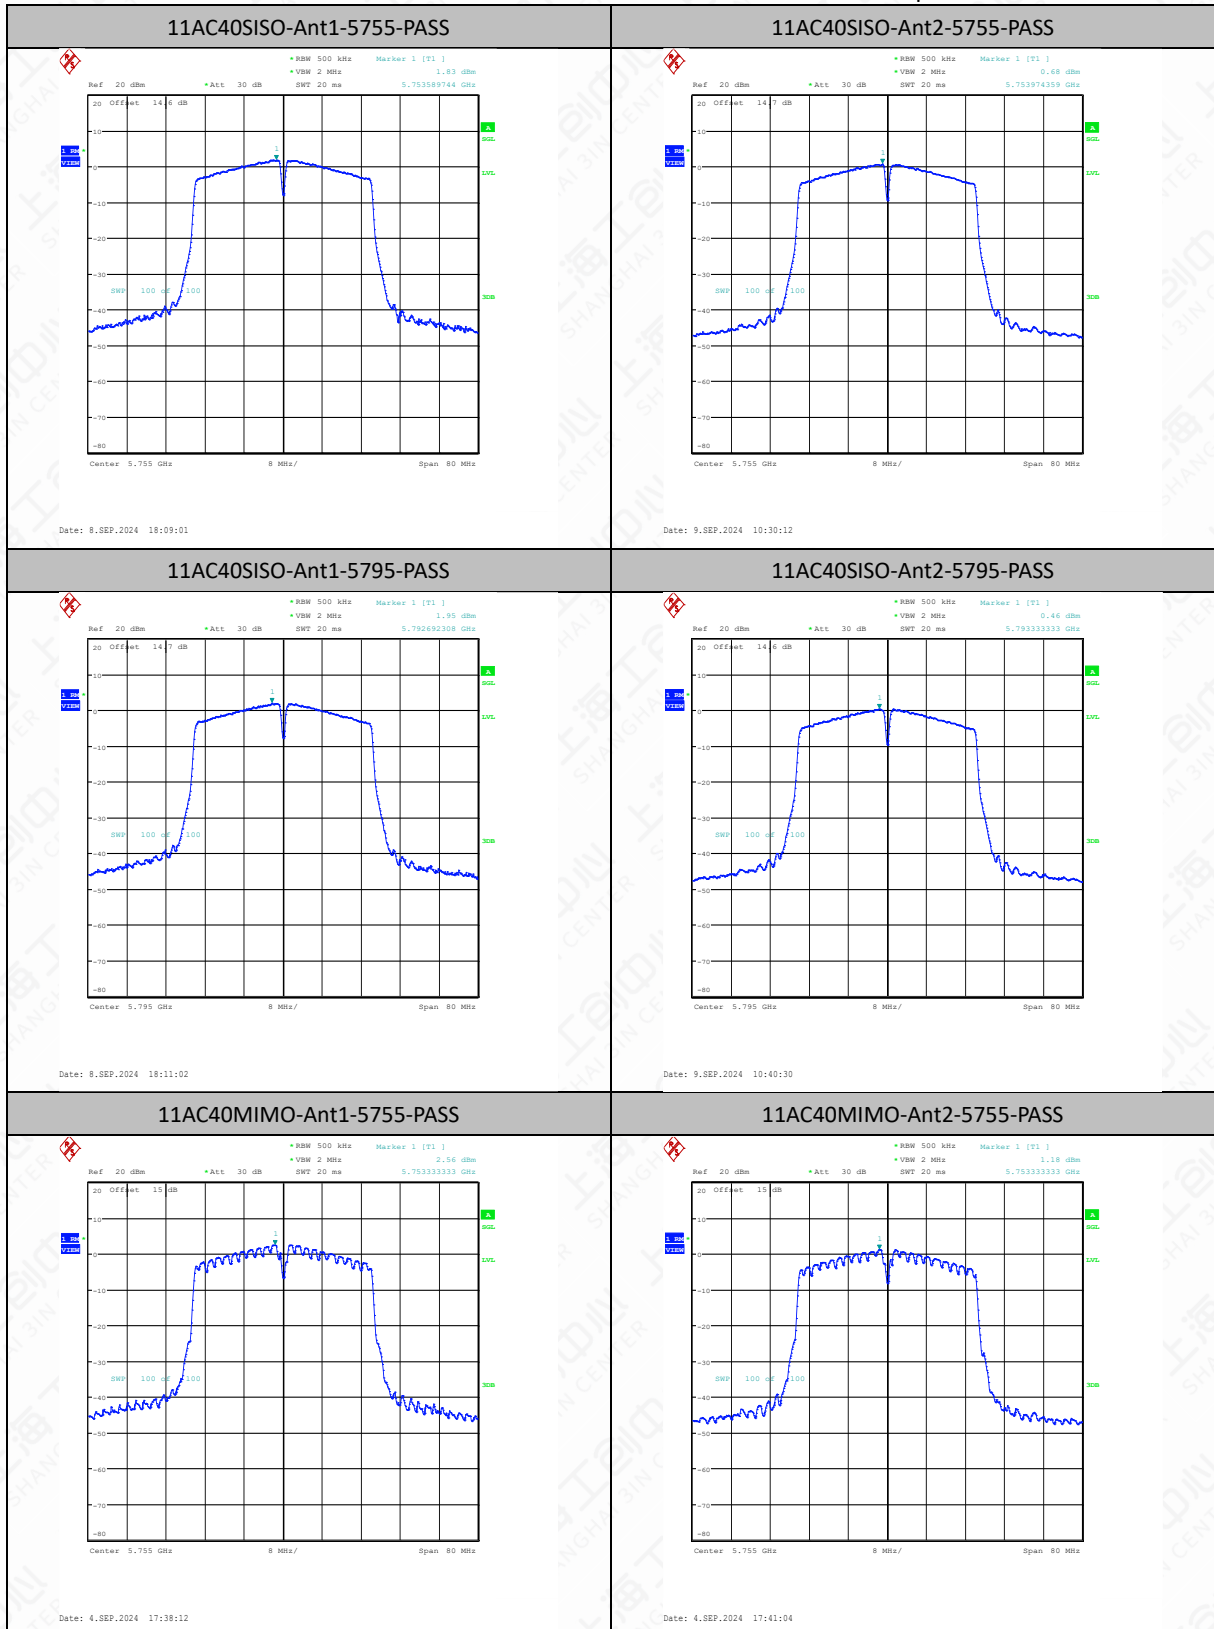


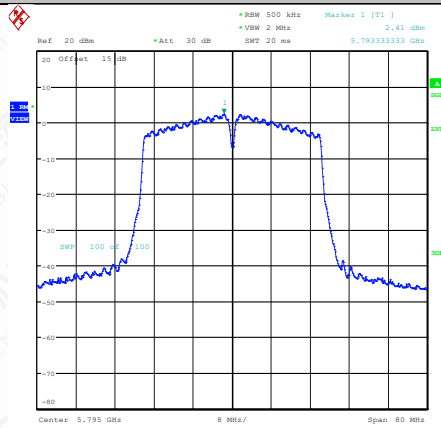11AC40MIMO-Ant1-5795-PASS


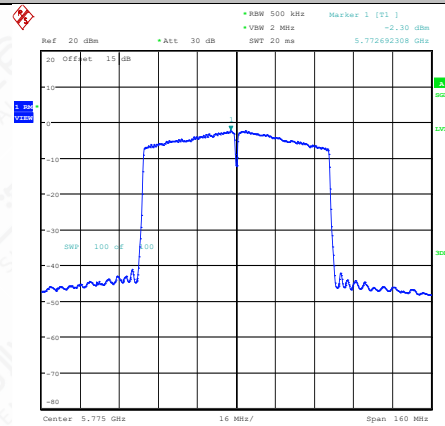
Date: 4.SEP.2024 17:44:27

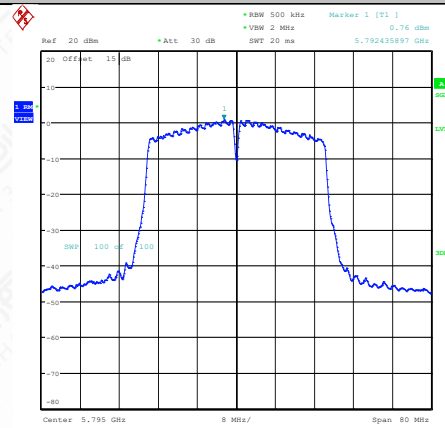11AC40MIMO-Ant2-5795-PASS


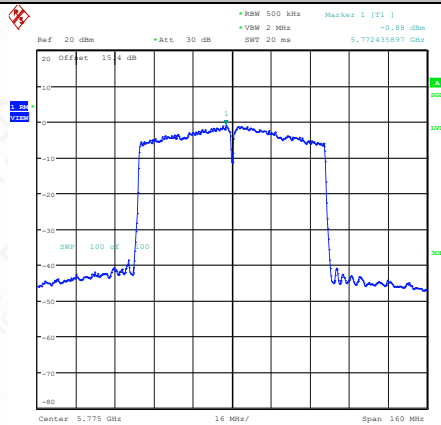
Date: 4.SEP.2024 17:47:24

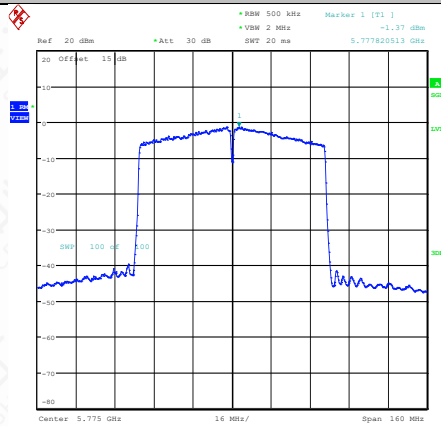11AC80SISO-Ant1-5775-PASS


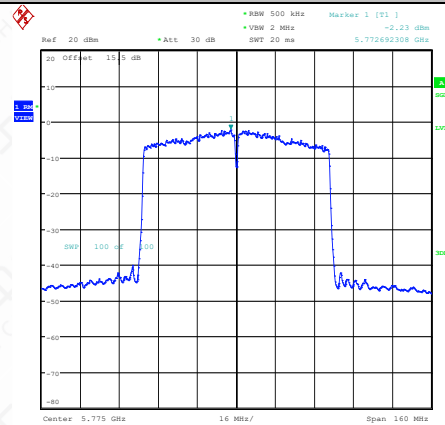
Date: 8.SEP.2024 18:13:52

11AC80SISO-Ant2-5775-PASS


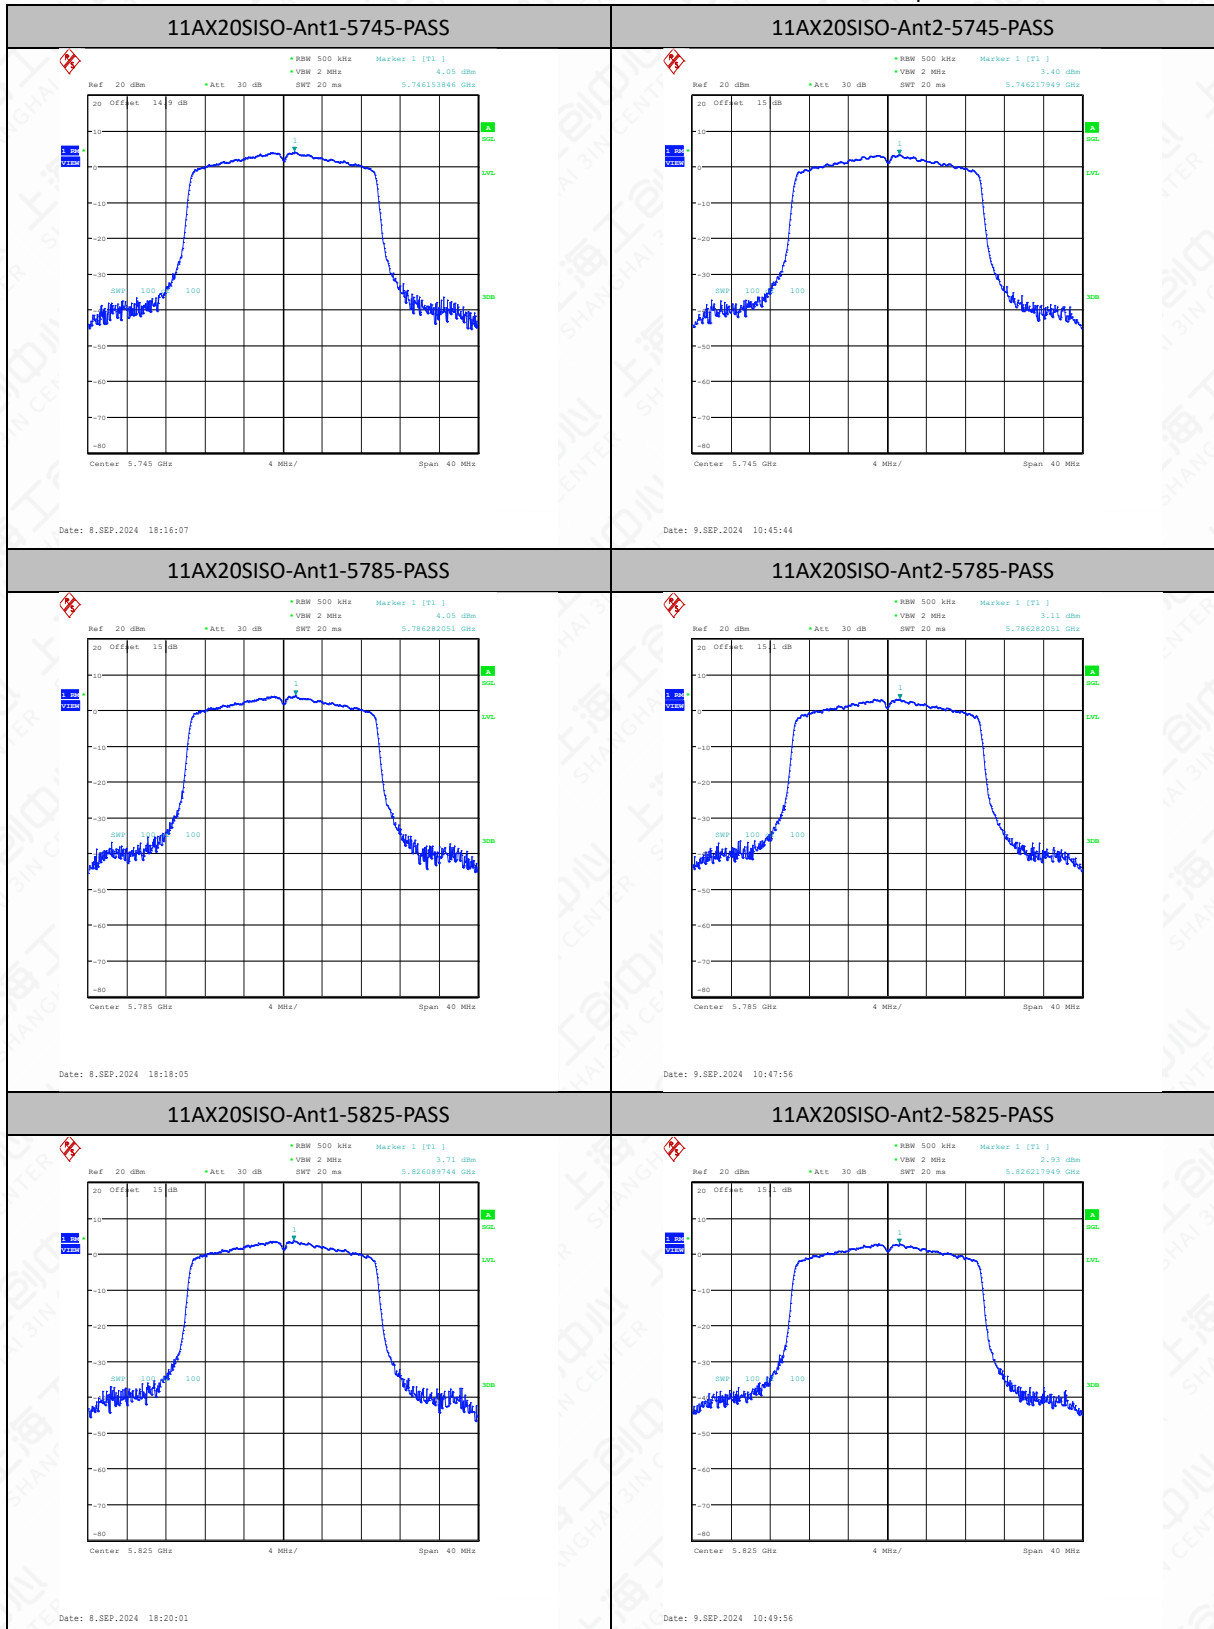
Date: 9.SEP.2024 10:43:22

11AC80MIMO-Ant1-5775-PASS


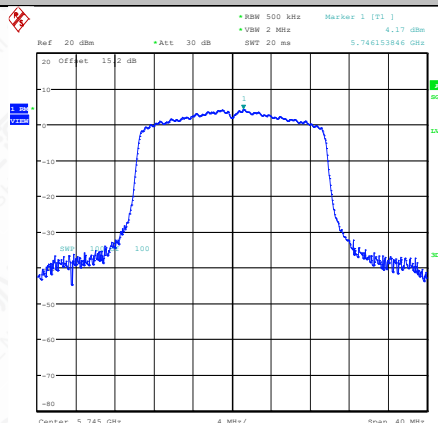
Date: 4.SEP.2024 17:53:36

11AC80MIMO-Ant2-5775-PASS


Date: 4.SEP.2024 17:57:55




11AX20MIMO-Ant1-5745-PASS




Date: 4.SEP.2024 18:05:20

11AX20MIMO-Ant2-5745-PASS

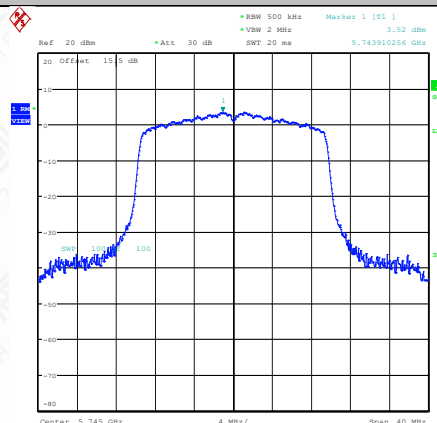


Date: 4.SEP.2024 18:08:06

11AX20MIMO-Ant1-5785-PASS

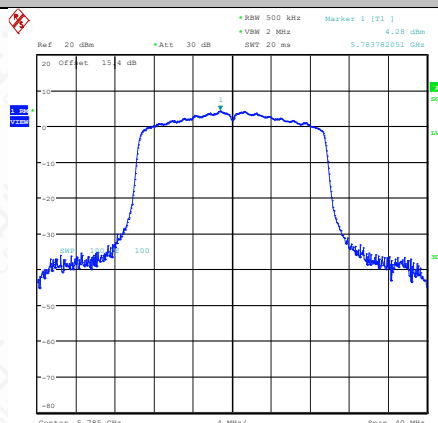


Date: 4.SEP.2024 18:11:20

11AX20MIMO-Ant2-5785-PASS

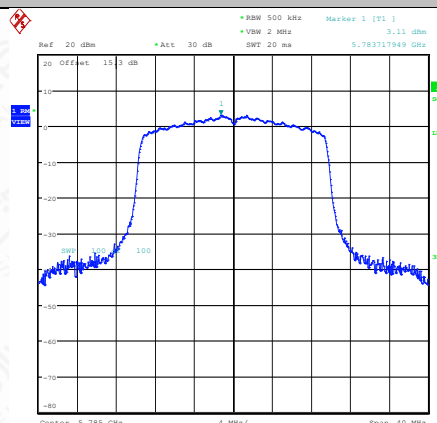


Date: 4.SEP.2024 18:14:07

11AX20MIMO-Ant1-5825-PASS

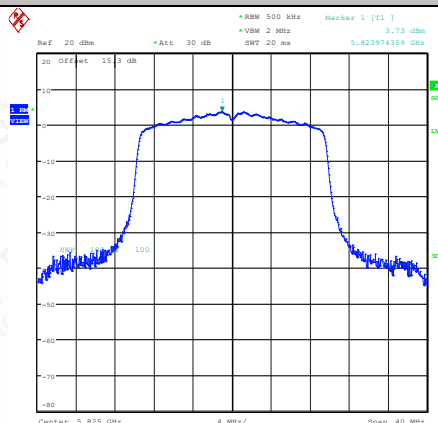



Date: 4.SEP.2024 18:17:12

11AX20MIMO-Ant2-5825-PASS

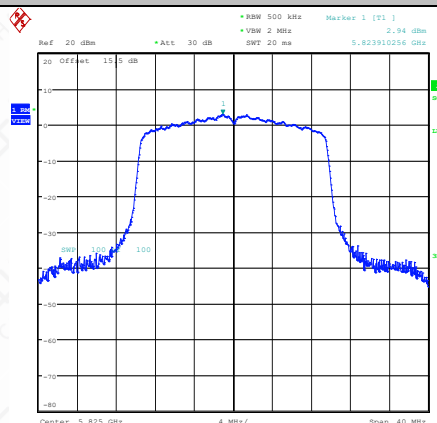

Date: 4.SEP.2024 18:20:02

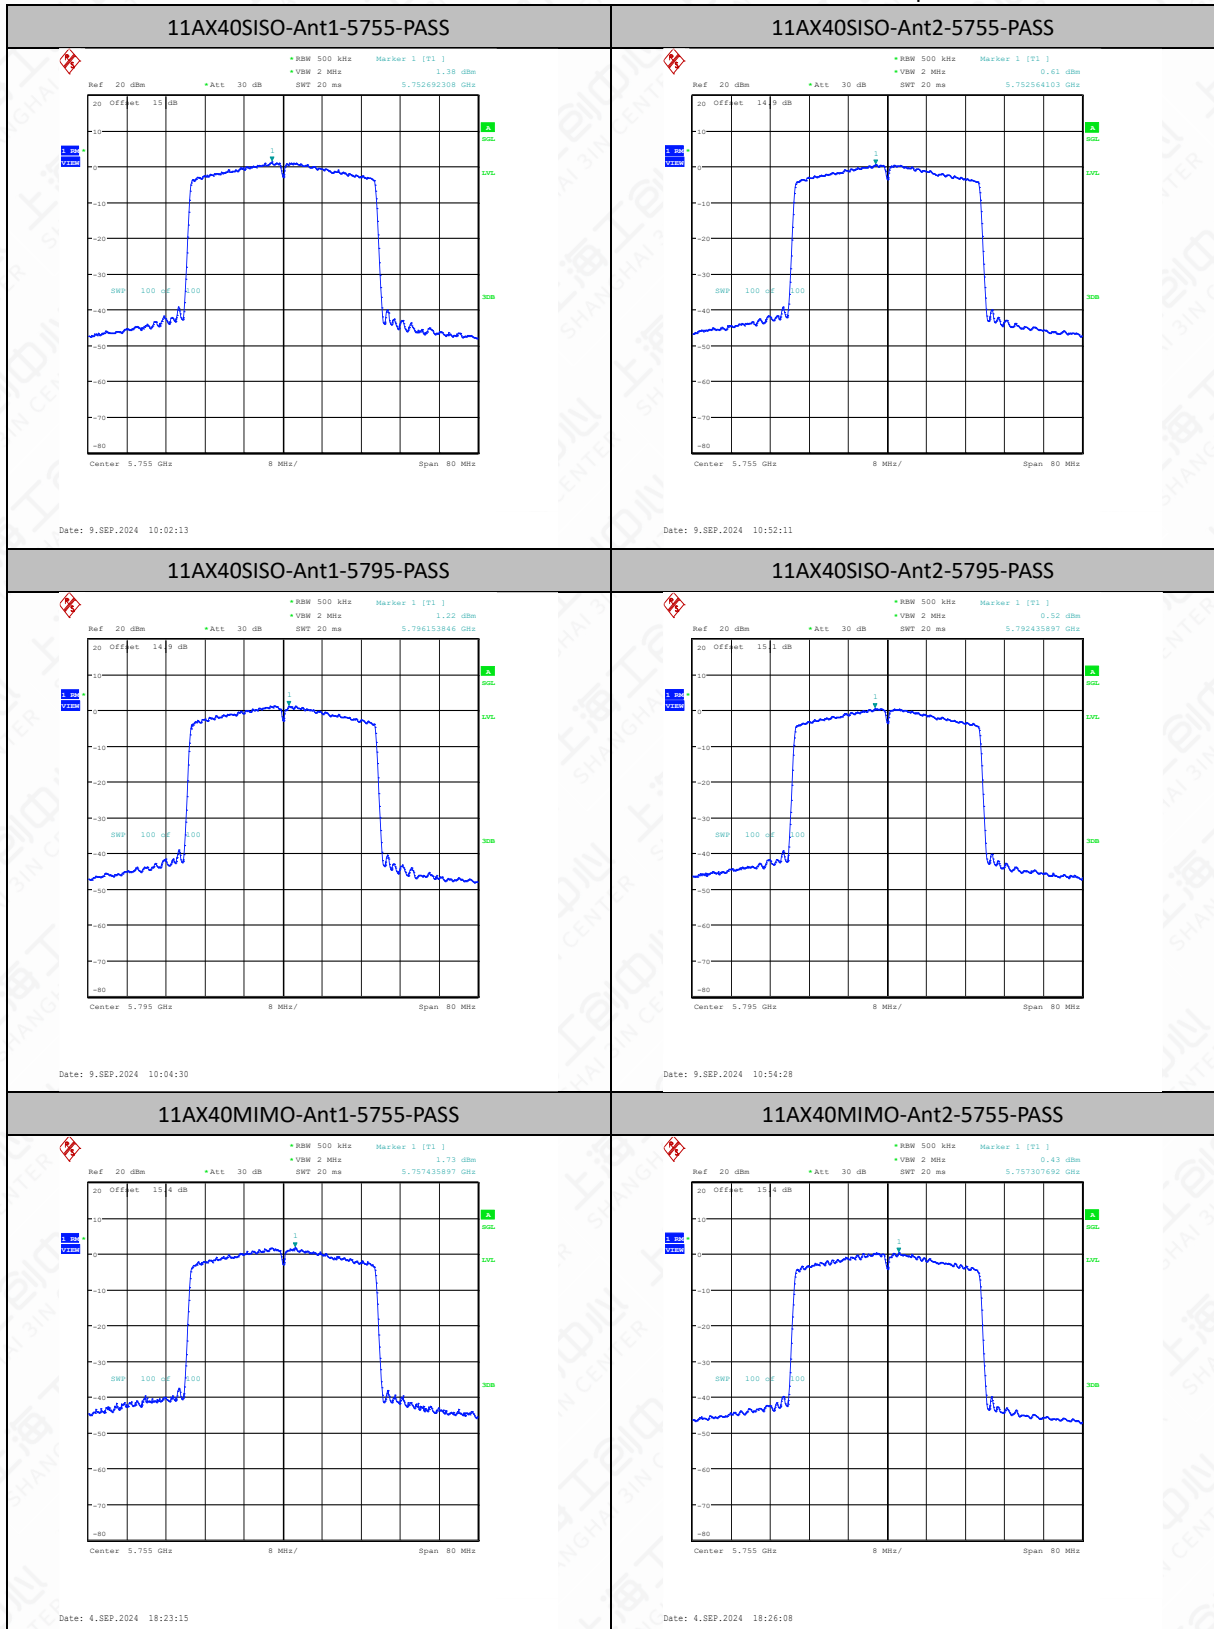

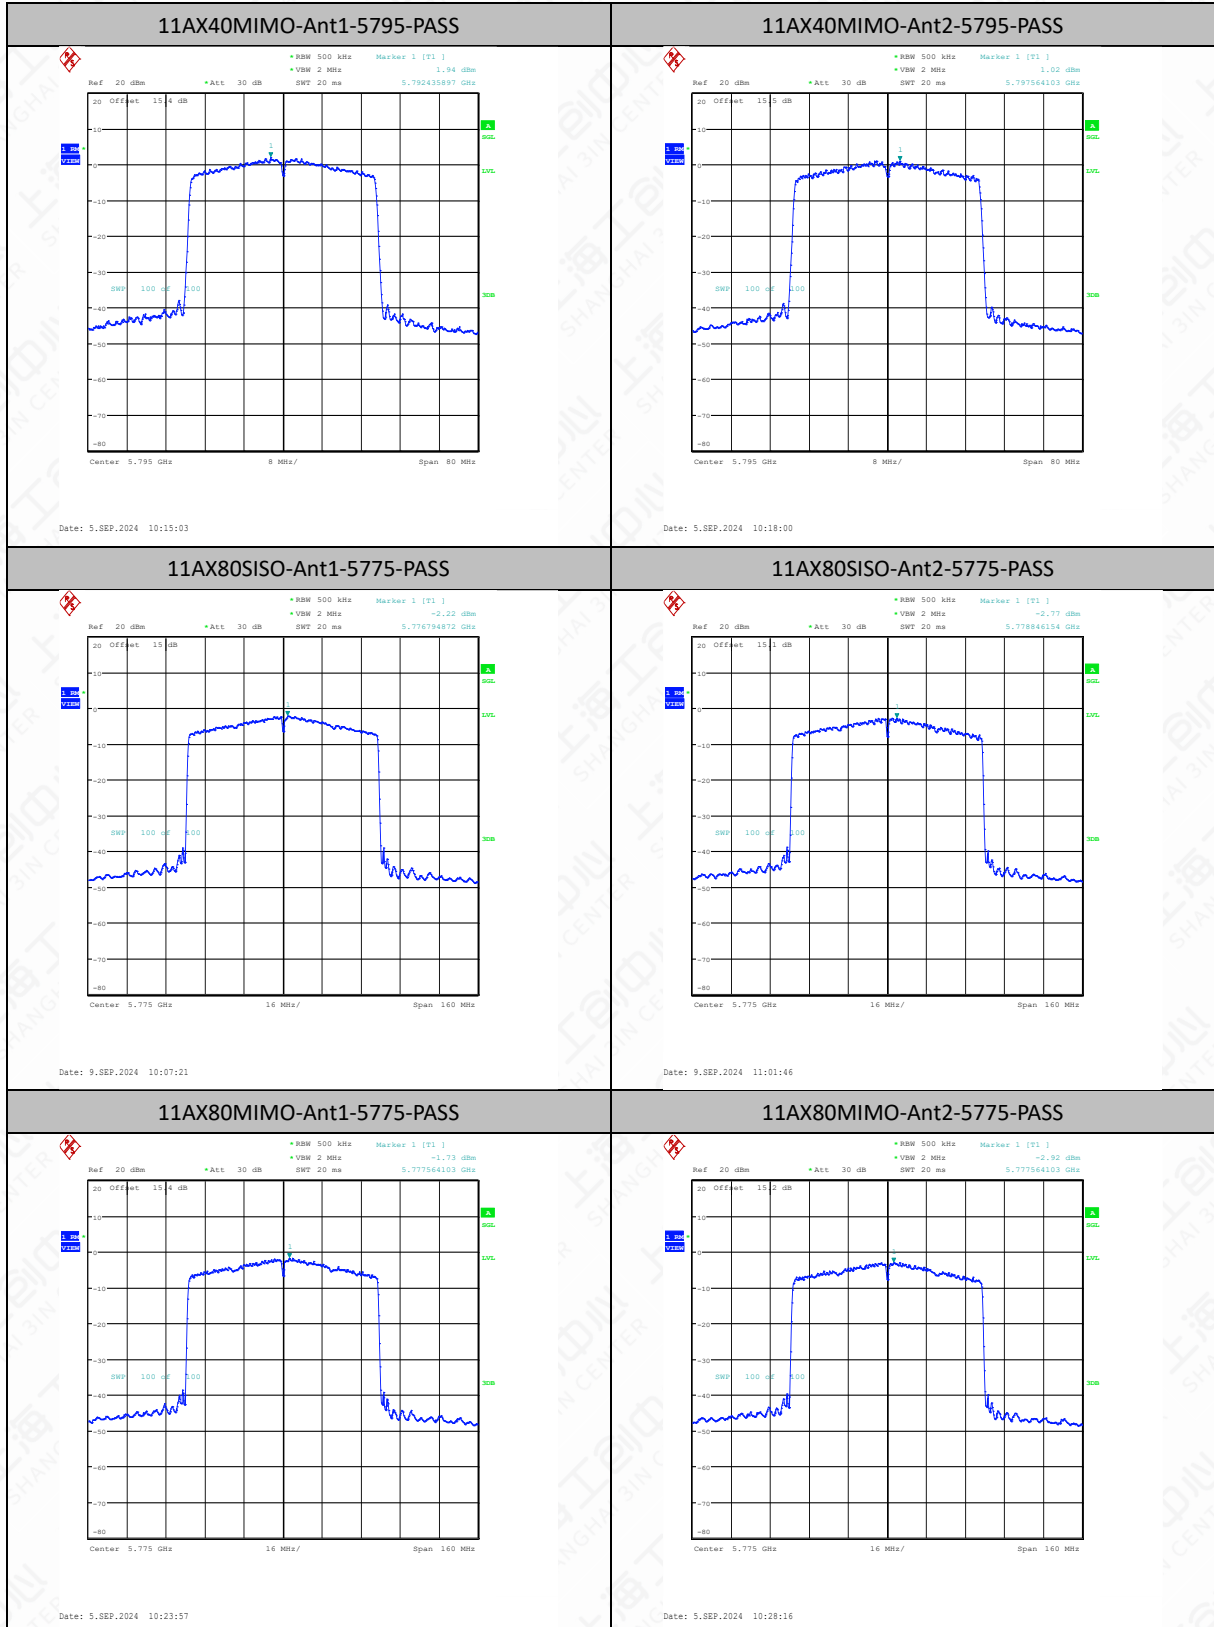

AX Part RU_Multi-User Test Graph

