

FRONT

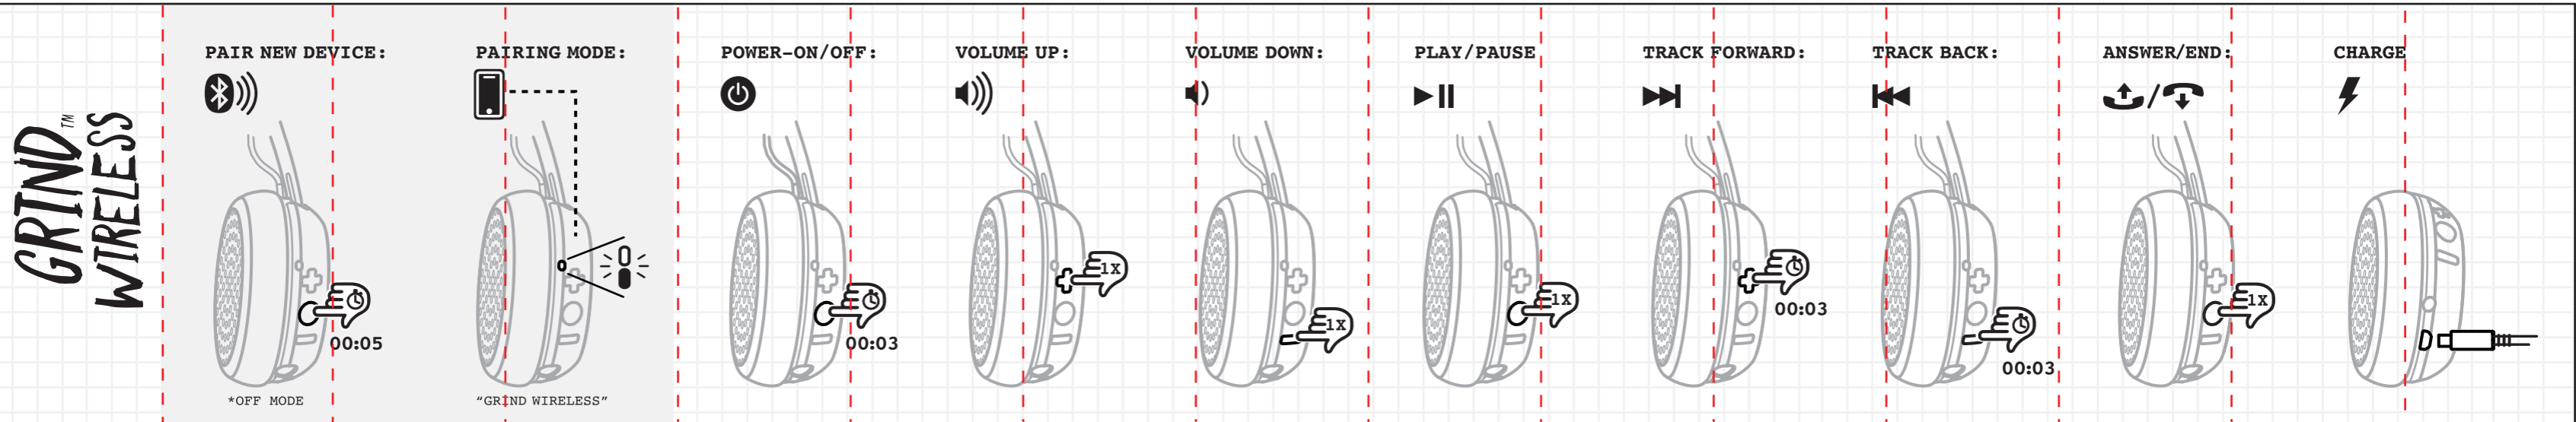


Table with 10 columns corresponding to the functions on the front view. Each column contains the function name in English and its translation in multiple languages (French, Spanish, Portuguese, German, Dutch, Swedish, Finnish, Danish, Norwegian, Polish, Czech, Russian, Chinese, Japanese, Korean, Arabic, Hebrew, Hindi, Vietnamese, Thai, Indonesian, Malay, Tagalog, Filipino, Vietnamese, Thai, Indonesian, Malay, Tagalog, Filipino).

BACK

Questions Visit: www.skullcandy.com
Si vous avez des questions, allez sur: www.skullcandy.com
Si tienes dudas, visita: www.skullcandy.com
Domande Visitare il sito: www.skullcandy.com
Fazer perguntas: www.skullcandy.com
Fragen Besuch: www.skullcandy.com
Voor vragen bezoek: www.skullcandy.com
For spørsmål se: www.skullcandy.com
Vastauksia löytyy: www.skullcandy.com
For spørsmål, besök: www.skullcandy.com
Если у вас возникнут вопросы, посетите: www.skullcandy.com
如有问题请访问: www.skullcandy.com
質問がある場合はこちらをご覧ください: www.skullcandy.com
질문 방문: www.skullcandy.com
www.skullcandy.com: إتصالات تفصل بزيارة

The FCC Compliance Statement
This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:
(1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.
This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:
- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

The IC Compliance Statement
This device complies with Industry Canada's licence-exempt RSSs. Operation is subject to the following two conditions:
(1) This device may not cause interference; and
(2) This device must accept any interference, including interference that may cause undesired operation of the device.

IC Statement
Le présent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux conditions suivantes : (1) l'appareil ne doit pas produire de brouillage, et (2) l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.
La operación de este equipo está sujeta a las siguientes dos condiciones: (1) es posible que este equipo o dispositivo no cause interferencia perjudicial y (2) este equipo o dispositivo debe aceptar cualquier interferencia, incluyendo la que pueda causar su operación no deseada.

(1) 이 기기는 가정용으로 전자파 적합등록을 한 기기로서 주거지역에서는 물론 모든 지역에서 사용할 수 있습니다.
(2) 당해 무선설비는 전파혼신 가능성이 있으므로 인명안전과 관련된 서비스는 할 수 없음.

根據NCC(低功率電波輻射性電機管理辦法)規定:
(1)第十二條經型式認證合格之低功率射頻電機,非經許可,公司、商號或使用者均不得擅自變更頻率、加大功率或變更原設計之特性及功能。
(2)第十四條
低功率射頻電機之使用不得影響飛航安全及干擾合法通信;經發現有干擾現象時,應立即停用,並改善至無干擾時方得繼續使用。
前項合法通信,指依電信法規定作業之無線電通信。
低功率射頻電機須忍受合法通信或工業、科學及醫療用電波

MODEL: S5GBW
EN Skullcandy, and other marks are registered trademarks of Skullcandy, Inc. All rights reserved. Speaker Driver: 40mm • Impedance: 33 Ohms • THD <0.1% (1mW/500Hz) • Voltage Regulation: 2.9v - 4.2v • Operation Temperature Range: 0 - 40 deg C • Bluetooth 4.0 • Weight: 183g. FR Skullcandy, Logos et dessins associés à Skullcandy sont les marques commerciales et/ou déposées de Skullcandy, Inc. Tous droits réservés. Commande de haut-parleur: 40mm • Impédance: 33 Ohms • THD <0.1% (1mW/500Hz) • Régulation de Tension: 2.9v - 4.2v • Température de fonctionnement: 0 - 40 deg C • Bluetooth 4.0 • Poids: 183g. ES Speaker Driver: 40mm • Impedance: 33 Ohms • THD <0.1% (1mW/500Hz) • Rango de temperatura de funcionamiento: 0 - 40 deg C • Bluetooth 4.0 • Weight: 183g. DE Lautsprecher-Treiber: 40mm • Impedanz: 33 Ohms • THD <0.1% (1mW/500Hz) • Regulación Voltage: 2.9v - 4.9v • Betriebstemperaturbereich: 0 - 40 deg C • Bluetooth 4.0 • Gewicht: 183g. ZH 扬声器驱动器: 40mm • 阻抗: 33 Ohms • THD <0.1% (1mW/500Hz) • 工作温度范围: 0 - 40 deg C • Bluetooth 4.0 • 重: 183g. JPスピーカーカードライバ: 40mm • インピーダンス: 33 Ohms • THD <0.1% (1mW/500Hz) • 動作温度範囲: 0 - 40 deg C • Bluetooth 4.0 • 重さ: 183g.z

EN CONTAINS LI-ION BATTERY. BATTERY MUST BE RECYCLED OR DISPOSED OF PROPERLY.
ES CONTIENE UNA BATERIA LI-ION. LA BATERIA DEBE SER RECICLADA O DESECHADA ADECUADAMENTE.
FR CONTIENT BATTERIE LI-ION. BATTERIE DOIT ÊTRE RECYCLÉE OU JETÉE CORRECTEMENT