

No. 1 Workshop, M-10, Middle section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057

Telephone:	+86 (0) 755 2601 2053
Fax:	+86 (0) 755 2671 0594
Email:	ee.shenzhen@sgs.com

Report No.: SZEM160600430101 Page: 1 of 87

FCC REPORT **Application No:** SZEM1606004300CR Applicant: SKULLCANDY, INC. Manufacturer: SKULLCANDY, INC. **Crusher VRA Product Name:** S6MBW Model No.(EUT): Trade Mark: Skullcandy FCC ID: Y22- S6MBW Standards: 47 CFR Part 15, Subpart C (2015) Date of Receipt: 2016-06-06 Date of Test: 2016-06-09 to 2016-06-13 Date of Issue: 2016-06-24 **Test Result:** PASS *

* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:



Jack Zhang EMC Laboratory Manager

The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS International Electrical Approvals or testing done by SGS International Electrical Approvals in connection with, distribution or use of the product described in this report must be approved by SGS International Electrical Approvals in writing.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. All test results in this report can be traceable to National or International Standards.



Report No.: SZEM160600430101 Page: 2 of 87

2 Version

Revision Record							
Version Chapter Date Modifier Remark							
00		2016-06-24		Original			

Authorized for issue by:		
Tested By	Benson Woma	2016-06-13
	(Benson Wang) /Project	
	Engineer	Date
Prepared By	Iris Zhou	2016-06-24
	(Iris Zhou) /Clerk	Date
Checked By	Eric Fu	2016-06-24
	(Eric Fu) /Reviewer	Date



Report No.: SZEM160600430101 Page: 3 of 87

3 Test Summary

Test Item	Test Requirement	Test method	Result
Antenna Requirement	47 CFR Part 15, Subpart C Section 15.203/15.247 (c)	ANSI C63.10 (2013)	PASS
AC Power Line Conducted Emission	47 CFR Part 15, Subpart C Section 15.207	ANSI C63.10 (2013)	PASS
Conducted Peak Output Power	47 CFR Part 15, Subpart C Section 15.247 (b)(1)	ANSI C63.10 (2013)	PASS
20dB Occupied Bandwidth	47 CFR Part 15, Subpart C Section 15.247 (a)(1)	ANSI C63.10 (2013)	PASS
Carrier Frequencies Separation	47 CFR Part 15, Subpart C Section 15.247 (a)(1)	ANSI C63.10 (2013)	PASS
Hopping Channel Number	47 CFR Part 15, Subpart C Section 15.247 (a)(1)	ANSI C63.10 (2013)	PASS
Dwell Time	47 CFR Part 15, Subpart C Section 15.247 (a)(1)	ANSI C63.10 (2013)	PASS
Pseudorandom Frequency Hopping Sequence	47 CFR Part 15, Subpart C Section 15.247(b)(4)&TCB Exclusion List (7 July 2002)	ANSI C63.10 (2013)	PASS
Band-edge for RF Conducted Emissions	47 CFR Part 15, Subpart C Section 15.247(d)	ANSI C63.10 (2013)	PASS
RF Conducted Spurious Emissions	47 CFR Part 15, Subpart C Section 15.247(d)	ANSI C63.10 (2013)	PASS
Radiated Spurious emissions	47 CFR Part 15, Subpart C Section 15.205/15.209	ANSI C63.10 (2013)	PASS
Restricted bands around fundamental frequency (Radiated Emission)	47 CFR Part 15, Subpart C Section 15.205/15.209	ANSI C63.10 (2013)	PASS

[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM160600430101 Page: 4 of 87

4 Contents

			-
1	CC	OVER PAGE	1
2	VE	RSION	2
3	TF	ST SUMMARY	3
4		ONTENTS	
5	GE	ENERAL INFORMATION	5
4	5.1	CLIENT INFORMATION	5
4	5.2	GENERAL DESCRIPTION OF EUT	
4	5.3	TEST ENVIRONMENT	
4	5.4	DESCRIPTION OF SUPPORT UNITS	7
4	5.5	TEST LOCATION	7
4	5.6	TEST FACILITY	
4	5.7	DEVIATION FROM STANDARDS	
	5.8	ABNORMALITIES FROM STANDARD CONDITIONS	
4	5.9	OTHER INFORMATION REQUESTED BY THE CUSTOMER	
-	5.10	EQUIPMENT LIST	9
6	TE	ST RESULTS AND MEASUREMENT DATA	
	5.1	ANTENNA REQUIREMENT	11
	5.1 5.2	AN TENNA REQUIREMENT	
	5.2 5.3	CONDUCTED EMISSIONS CONDUCTED PEAK OUTPUT POWER	
	5.5 5.4	20DB OCCUPY BANDWIDTH	
	5.5	CARRIER FREQUENCIES SEPARATION	
	5.6	HOPPING CHANNEL NUMBER	
	5.7	Dwell Time	
(5.8	BAND-EDGE FOR RF CONDUCTED EMISSIONS	
(5.9	Spurious RF Conducted Emissions	
(5.10	OTHER REQUIREMENTS FREQUENCY HOPPING SPREAD SPECTRUM SYSTEM	69
(5.11	RADIATED SPURIOUS EMISSION	71
		11.1 Radiated Emission below 1GHz	
	6.1	11.2 Transmitter Emission above 1GHz	
(5.12	RESTRICTED BANDS AROUND FUNDAMENTAL FREQUENCY	
7	PH	IOTOGRAPHS - EUT TEST SETUP	
-	7.1	CONDUCTED EMISSION	
Ţ.	7.2	RADIATED EMISSION	
ŕ	7.3	RADIATED SPURIOUS EMISSION	
8	PH	IOTOGRAPHS - EUT CONSTRUCTIONAL DETAILS	



Report No.: SZEM160600430101 Page: 5 of 87

5 General Information

5.1 Client Information

Applicant:	SKULLCANDY, INC.		
Address of Applicant: 1441 W. UTE BLVD. SUITE 250, PARK CITY, UT 84098, USA			
Manufacturer: SKULLCANDY, INC.			
Address of Manufacturer:	1441 W. UTE BLVD. SUITE 250, PARK CITY, UT 84098, USA		

5.2 General Description of EUT

Product Name:	Crusher VRA
Model No.:	S6MBW
Trade Mark:	Skullcandy
Operation Frequency:	2402MHz~2480MHz
Bluetooth Version:	V4.1 Single mode +EDR
Modulation Technique:	Frequency Hopping Spread Spectrum(FHSS)
Modulation Type:	GFSK, π/4DQPSK, 8DPSK
Number of Channel:	79
Hopping Channel Type:	Adaptive Frequency Hopping systems
EUT Function:	BT Headphone
Sample Type:	Portable production
Antenna Type:	Printed IFA
Antenna Gain:	4.88dBi
Power Supply:	Lithium Ion Battery: 3.7V 1050mAh(charged by USB)
Test Voltage:	120V/60Hz



Report No.: SZEM160600430101 Page: 6 of 87

Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
0	2402MHz	20	2422MHz	40	2442MHz	60	2462MHz
1	2403MHz	21	2423MHz	41	2443MHz	61	2463MHz
2	2404MHz	22	2424MHz	42	2444MHz	62	2464MHz
3	2405MHz	23	2425MHz	43	2445MHz	63	2465MHz
4	2406MHz	24	2426MHz	44	2446MHz	64	2466MHz
5	2407MHz	25	2427MHz	45	2447MHz	65	2467MHz
6	2408MHz	26	2428MHz	46	2448MHz	66	2468MHz
7	2409MHz	27	2429MHz	47	2449MHz	67	2469MHz
8	2410MHz	28	2430MHz	48	2450MHz	68	2470MHz
9	2411MHz	29	2431MHz	49	2451MHz	69	2471MHz
10	2412MHz	30	2432MHz	50	2452MHz	70	2472MHz
11	2413MHz	31	2433MHz	51	2453MHz	71	2473MHz
12	2414MHz	32	2434MHz	52	2454MHz	72	2474MHz
13	2415MHz	33	2435MHz	53	2455MHz	73	2475MHz
14	2416MHz	34	2436MHz	54	2456MHz	74	2476MHz
15	2417MHz	35	2437MHz	55	2457MHz	75	2477MHz
16	2418MHz	36	2438MHz	56	2458MHz	76	2478MHz
17	2419MHz	37	2439MHz	57	2459MHz	77	2479MHz
18	2420MHz	38	2440MHz	58	2460MHz	78	2480MHz
19	2421MHz	39	2441MHz	59	2461MHz		

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Channel	Frequency	
The Lowest channel	2402MHz	
The Middle channel	2441MHz	
The Highest channel	2480MHz	

[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM160600430101 Page: 7 of 87

5.3 Test Environment

Operating Environment:		
Temperature:	24.0 °C	
Humidity:	55 % RH	
Atmospheric Pressure:	1010 mbar	

5.4 Description of Support Units

The EUT has been tested with associated equipment below.

Description	Manufacturer	Model No.
Adapter	Apple	A1357 W010A051
Test software	CSR	Blue test 3

5.5 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen Branch E&E Lab,

No. 1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, Guangdong, China. 518057.

Tel: +86 755 2601 2053 Fax: +86 755 2671 0594 No tests were sub-contracted.



Report No.: SZEM160600430101 Page: 8 of 87

5.6 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

• CNAS (No. CNAS L2929)

CNAS has accredited SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch EMC Lab to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration Laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.

A2LA (Certificate No. 3816.01)

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 3816.01.

• VCCI

The 10m Semi-anechoic chamber and Shielded Room of SGS-CSTC Standards Technical Services Co., Ltd. have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: G-823, R-4188, T-1153 and C-2383 respectively.

FCC – Registration No.: 556682

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No.: 556682.

Industry Canada (IC)

Two 3m Semi-anechoic chambers and the 10m Semi-anechoic chamber of SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch EMC Lab have been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 4620C-1, 4620C-2, 4620C-3.

5.7 Deviation from Standards

None.

5.8 Abnormalities from Standard Conditions

None.

5.9 Other Information Requested by the Customer

None.



Report No.: SZEM160600430101 Page: 9 of 87

5.10 Equipment List

	Conducted Emission						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. date (yyyy-mm-dd)	Cal.Due date (yyyy-mm-dd)	
1	Shielding Room	ZhongYu Electron	GB-88	SEM001-06	2016-05-13	2017-05-13	
2	LISN	Rohde & Schwarz	ENV216	SEM007-01	2015-10-09	2016-10-09	
3	LISN	ETS-LINDGREN	3816/2	SEM007-02	2016-04-25	2017-04-25	
4	8 Line ISN	Fischer Custom Communications Inc.	FCC-TLISN- T8-02	EMC0120	2015-08-30	2016-08-30	
5	4 Line ISN	Fischer Custom Communications Inc.	FCC-TLISN- T4-02	EMC0121	2015-08-30	2016-08-30	
6	2 Line ISN	Fischer Custom Communications Inc.	FCC-TLISN- T2-02	EMC0122	2015-08-30	2016-08-30	
7	EMI Test Receiver	Rohde & Schwarz	ESCI	SEM004-02	2016-04-25	2017-04-25	
8	DC Power Supply	Zhao Xin	RXN-305D	SEM011-02	2015-10-09	2016-10-09	

	RE in Chamber					
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. date (yyyy-mm-dd)	Cal.Due date (yyyy-mm-dd)
1	3m Semi-Anechoic Chamber	ETS-LINDGREN	N/A	SEM001-01	2016-05-13	2017-05-13
2	EMI Test Receiver	Agilent Technologies	N9038A	SEM004-05	2015-09-16	2016-09-16
3	BiConiLog Antenna (26-3000MHz)	ETS-LINDGREN	3142C	SEM003-01	2014-11-01	2017-11-01
4	Double-ridged horn (1-18GHz)	ETS-LINDGREN	3117	SEM003-11	2015-10-17	2018-10-17
5	Horn Antenna (18-26GHz)	ETS-LINDGREN	3160	SEM003-12	2014-11-24	2017-11-24
6	Pre-amplifier (0.1-1300MHz)	Agilent Technologies	8447D	SEM005-01	2016-04-25	2017-04-25
7	Band filter	Amindeon	Asi 3314	SEM023-01	N/A	N/A
8	DC Power Supply	Zhao Xin	RXN-305D	SEM011-02	2015-10-09	2016-10-09
9	Loop Antenna	Beijing Daze	ZN30401	SEM003-09	2015-05-13	2018-05-13



Report No.: SZEM160600430101 Page: 10 of 87

	RE in Chamber					
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. date (yyyy-mm-dd)	Cal.Due date (yyyy-mm-dd)
1	3m Semi-Anechoic Chamber	AUDIX	N/A	SEM001-02	2016-05-13	2017-05-13
2	EMI Test Receiver	Rohde & Schwarz	ESIB26	SEM004-04	2016-04-25	2017-04-25
3	BiConiLog Antenna (26-3000MHz)	ETS-Lindgren	3142C	SEM003-02	2014-11-15	2017-11-15
4	Amplifier (0.1-1300MHz)	HP	8447D	SEM005-02	2015-10-09	2016-10-09
5	Horn Antenna (1-18GHz)	Rohde & Schwarz	HF907	SEM003-07	2015-06-14	2018-06-14
6	Low Noise Amplifier	Black Diamond Series	BDLNA- 0118- 352810	SEM005-05	2015-10-09	2016-10-09
7	Band filter	Amindeon	Asi 3314	SEM023-01	N/A	N/A

RF connected test						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. date (yyyy-mm-dd)	Cal.Due date (yyyy-mm-dd)
1	DC Power Supply	ZhaoXin	RXN-305D	SEM011-02	2015-10-09	2016-10-09
2	Spectrum Analyzer	Rohde & Schwarz	FSP	SEM004-06	2015-10-17	2016-10-17
3	Signal Generator	Rohde & Schwarz	SML03	SEM006-02	2016-04-25	2017-04-25
4	Power Meter	Rohde & Schwarz	NRVS	SEM014-02	2015-10-09	2016-10-09

[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM160600430101 Page: 11 of 87

6 Test results and Measurement Data

6.1 Antenna Requirement

Standard requirement: 47 CFR Part 15C Section 15.203 /247(c)


15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.



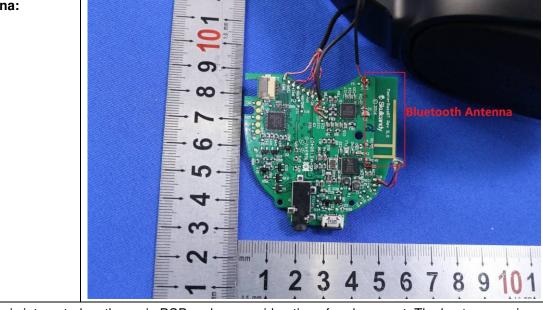

The antenna is integrated on the main PCB and no consideration of replacement. The best case gain of the antenna is 4.88dBi.



Report No.: SZEM160600430101 Page: 12 of 87

Test Require	ment:	47 CFR Part 15C Section 15.207			
Test Method:		ANSI C63.10: 2013 Section 6.2			
Test Frequen	icy Range:	150kHz to 30MHz			
Limit:			Limit (d	lBuV)	
		Frequency range (MHz)	Quasi-peak	Average	
		0.15-0.5	66 to 56*	56 to 46*	
		0.5-5	56	46	
		5-30	60	50	
		* Decreases with the logarithm	n of the frequency.		1
Test Procedu		 3-30 00 50 50 50 50 50 50 50 50 50 50 50 50			

6.2 Conducted Emissions



Report No.: SZEM160600430101 Page: 13 of 87

Test Setup:	Shielding Room Test Receiver Test			
Exploratory Test Mode:	 Non-hopping transmitting mode with all kind of modulation and all kind of data type at the lowest, middle, high channel. Charge + Transmitting mode. 			
Final Test Mode:	Through Pre-scan, find the DH1 of data type and GFSK modulation at the lowest channel is the worst case. Charge + Transmitting mode Only the worst case is recorded in the report.			
Instruments Used:	Refer to section 5.10 for details			
Test Results:	Pass			




Report No.: SZEM160600430101 Page: 14 of 87

Measurement Data

An initial pre-scan was performed on the live and neutral lines with peak detector.

Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission were detected.


Live line:

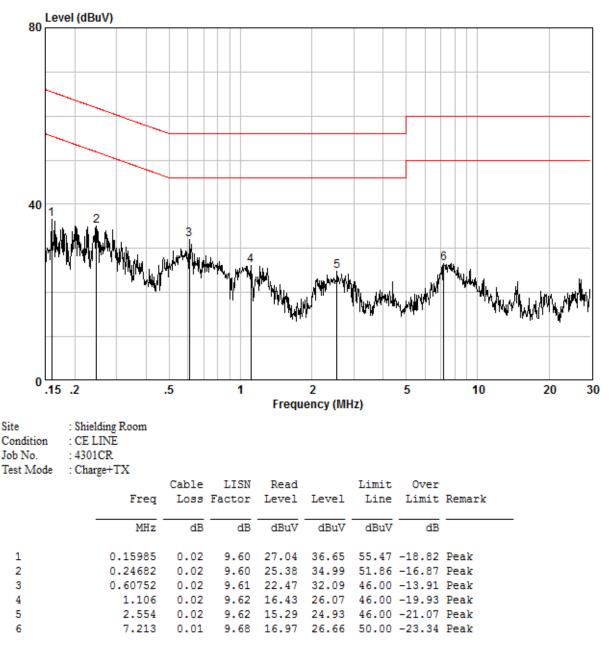



Report No.: SZEM160600430101 Page: 15 of 87

Neutral line:

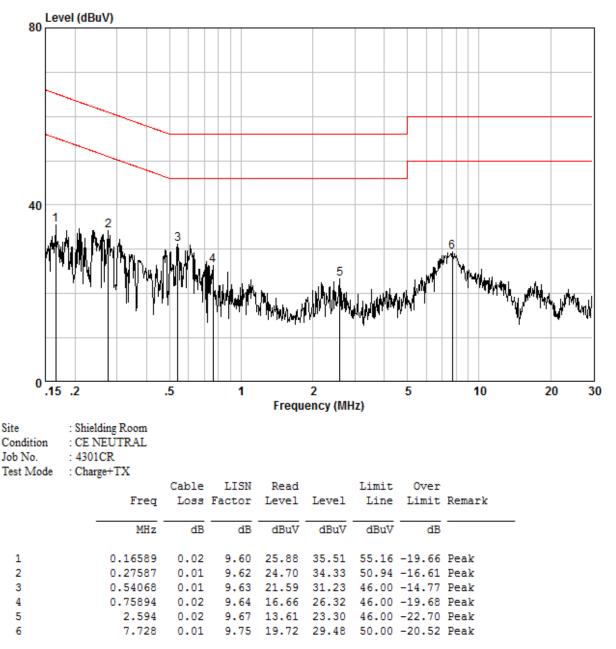

Notes:

1. The following Quasi-Peak and Average measurements were performed on the EUT:

2. Final Test Level =Receiver Reading + LISN Factor + Cable Loss.



Report No.: SZEM160600430101 Page: 16 of 87

6.3 Conducted Peak Output Power

Test Requirement:	47 CFR Part 15C Section 15.247 (b)(1)		
Test Method:	ANSI C63.10:2013 Section 7.8.5		
Test Setup:	Spectrum Analyzer E.U.T Non-Conducted Table Ground Reference Plane Remark: Offset the High-Frequency cable loss 1.5dB in the spectrum analyzer.		
Limit:	20.97dBm		
Exploratory Test Mode:	Non-hopping transmitting with all kind of modulation and all kind of data type		
Final Test Mode:	Through Pre-scan, find the DH1 of data type is the worst case of GFSK modulation type, 2-DH1 of data type is the worst case of $\pi/4DQPSK$ modulation type, 3-DH1 of data type is the worst case of 8DPSK modulation type.		
Instruments Used:	Refer to section 5.10 for details		
Test Results:	Pass		

[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."




Report No.: SZEM160600430101 Page: 17 of 87

Measurement Data

GFSK mode					
Test channel	Peak Output Power (dBm)	Limit (dBm)	Result		
Lowest	-2.81	20.97	Pass		
Middle	-1.32	20.97	Pass		
Highest	-1.24	20.97	Pass		
	π/4DQPSK m	ode			
Test channel	Peak Output Power (dBm)	Limit (dBm)	Result		
Lowest	-1.35	20.97	Pass		
Middle	-2.36	20.97	Pass		
Highest	-1.68	20.97	Pass		
	8DPSK mo	de			
Test channel	Peak Output Power (dBm)	Limit (dBm)	Result		
Lowest	-3.39	20.97	Pass		
Middle	-1.82	20.97	Pass		
Highest	-1.55	20.97	Pass		




Report No.: SZEM160600430101 Page: 18 of 87

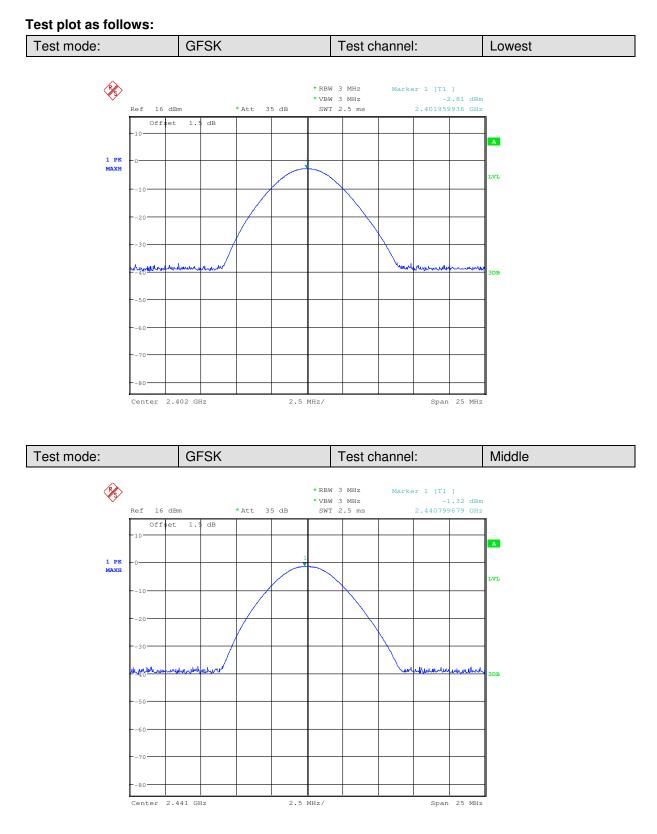




Report No.: SZEM160600430101 Page: 19 of 87

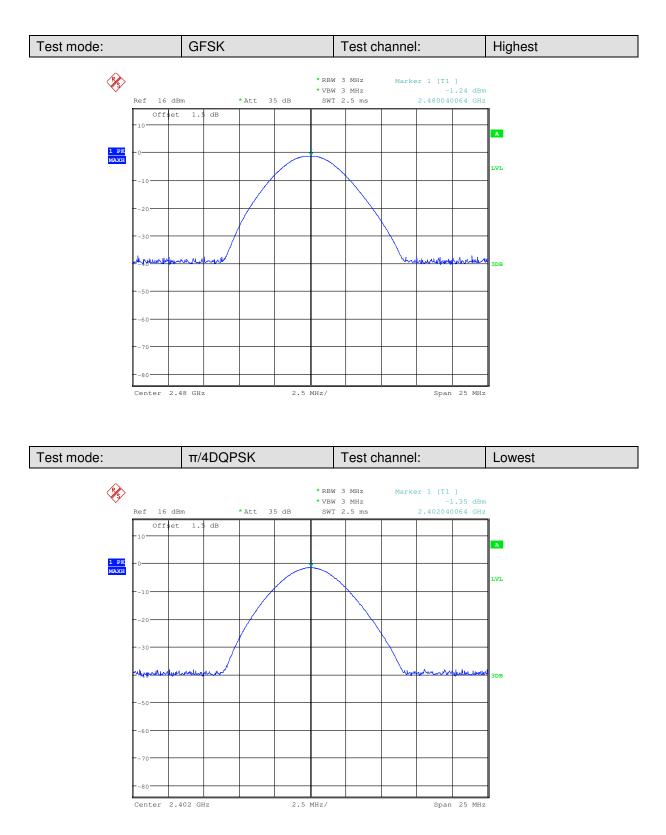




Report No.: SZEM160600430101 Page: 20 of 87

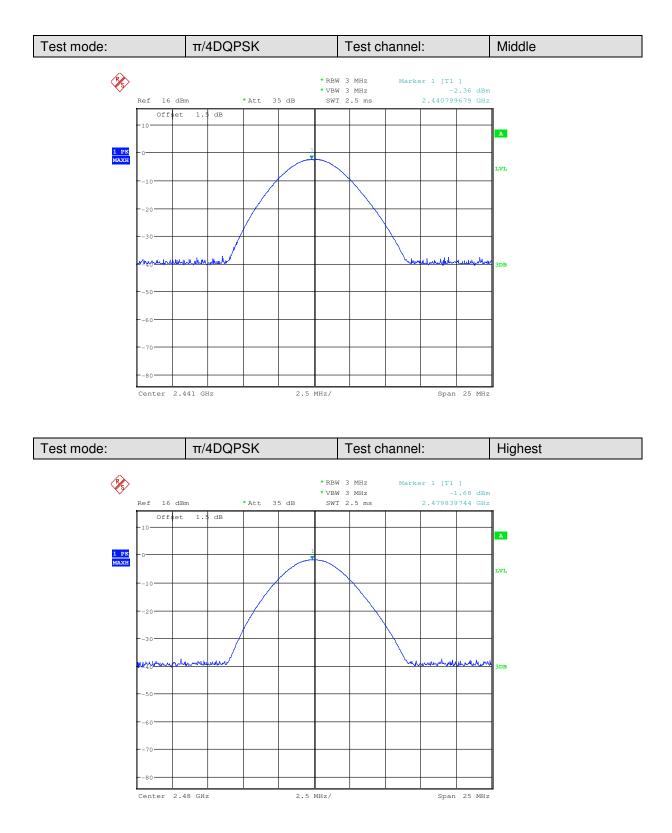




Report No.: SZEM160600430101 Page: 21 of 87

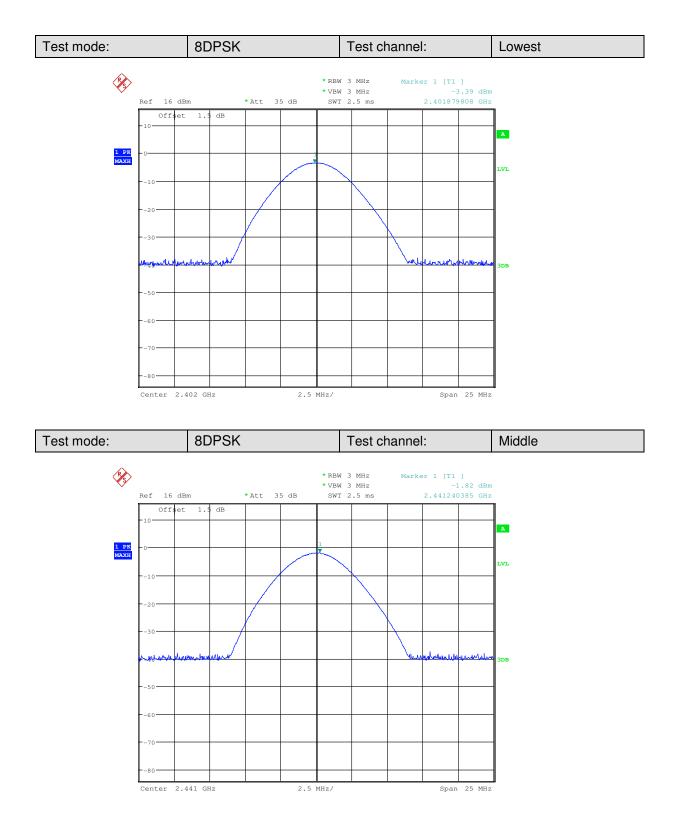



Report No.: SZEM160600430101 Page: 22 of 87

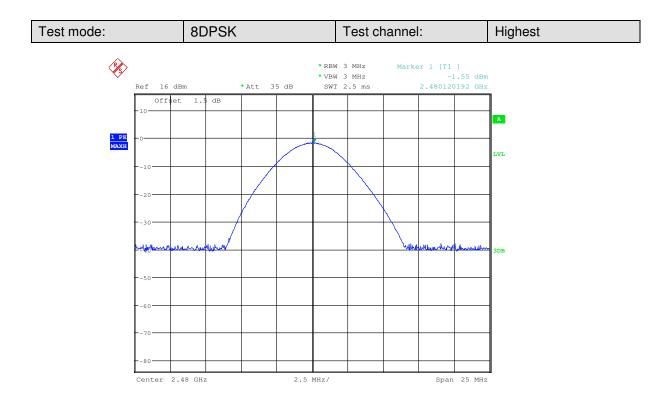



Report No.: SZEM160600430101 Page: 23 of 87

6.4 20dB Occupy Bandwidth


Test Requirement:	47 CFR Part 15C Section 15.247 (a)(1)		
Test Method:	ANSI C63.10:2013 Section 7.8.7		
Test Setup:	Spectrum Analyzer E.U.T Non-Conducted Table		
Limit:	NA		
Exploratory Test Mode:	Non-hopping transmitting with all kind of modulation and all kind of data type		
Final Test Mode:	Through Pre-scan, find the DH1 of data type is the worst case of GFSK modulation type, 2-DH1 of data type is the worst case of $\pi/4DQPSK$ modulation type, 3-DH1 of data type is the worst case of 8DPSK modulation type.		
Instruments Used:	Refer to section 5.10 for details		
Test Results:	Pass		

Measurement Data

Testshornel	20dB Occupy Bandwidth (kHz)			
Test channel	GFSK	π/4DQPSK	8DPSK	
Lowest	902.500	1215.346	1221.000	
Middle	898.885	1219.538	1224.385	
Highest	899.039	1221.000	1221.540	




Report No.: SZEM160600430101 Page: 24 of 87

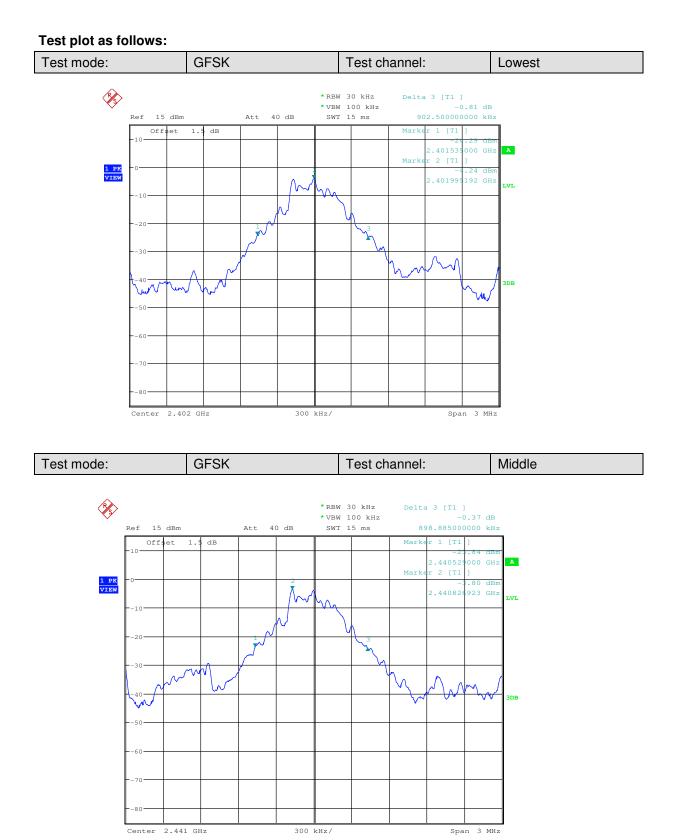




Report No.: SZEM160600430101 Page: 25 of 87

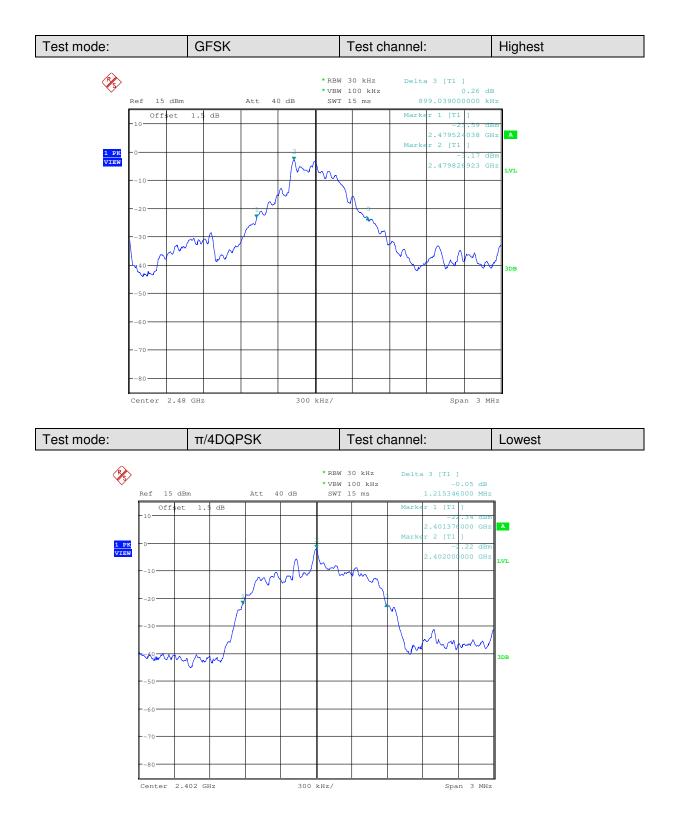




Report No.: SZEM160600430101 Page: 26 of 87

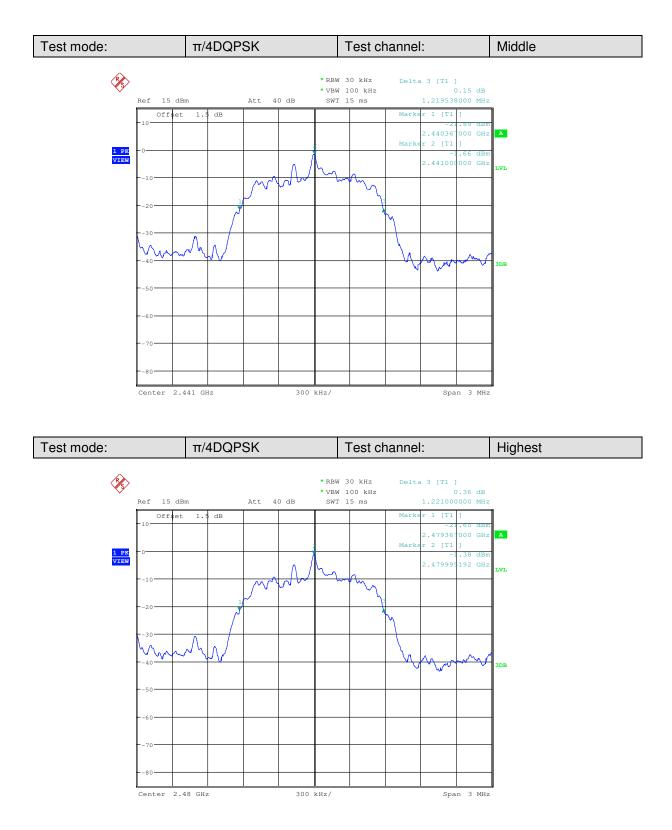




Report No.: SZEM160600430101 Page: 27 of 87

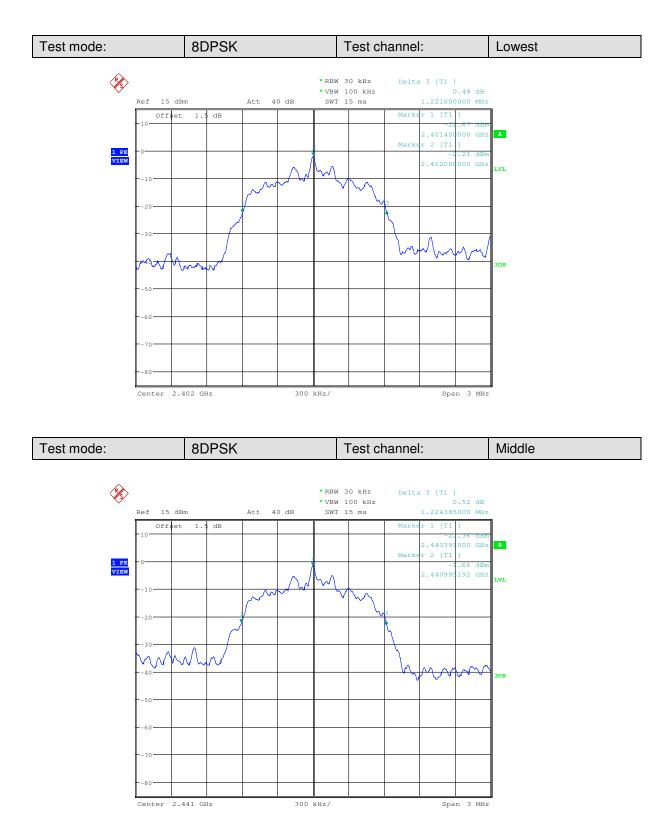



Report No.: SZEM160600430101 Page: 28 of 87

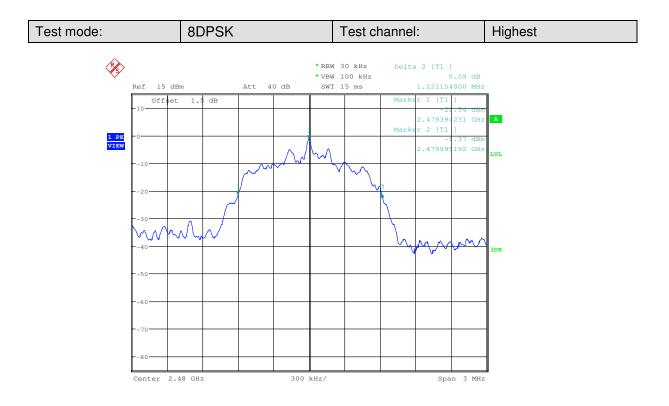



Report No.: SZEM160600430101 Page: 29 of 87

6.5 Carrier Frequencies Separation

Test Requirement:	47 CFR Part 15C Section 15.247 (a)(1)		
Test Method:	ANSI C63.10:2013 Section 7.8.2		
Test Setup:	Spectrum Analyzer E.U.T Non-Conducted Table Ground Reference Plane		
Limit:	2/3 of the 20dB bandwidth		
	Remark: the transmission power is less than 0.125W.		
Exploratory Test Mode:	Hopping transmitting with all kind of modulation and all kind of data type		
Final Test Mode:	Through Pre-scan, find the DH1 of data type is the worst case of GFSK modulation type, 2-DH1 of data type is the worst case of $\pi/4DQPSK$ modulation type, 3-DH1 of data type is the worst case of 8DPSK modulation type.		
Instruments Used:	Refer to section 5.10 for details		
Test Results:	Pass		

[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Measurement Data

SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZEM160600430101 Page: 30 of 87


GFSK mode						
Test channel	Carrier Frequencies Separation (kHz)	Limit (kHz)	Result			
Middle	981	≥601.7	Pass			
	π/4DQPSK mode					
Test channel	Carrier Frequencies Separation (kHz)	Limit (kHz)	Result			
Middle	1002	≥814.0	Pass			
8DPSK mode						
Test channel	Carrier Frequencies Separation (kHz)	Limit (kHz)	Result			
Middle	1002	≥816.3	Pass			

Note: According to section 6.4,

Mode	20dB bandwidth (kHz) (worse case)	Limit (kHz) (Carrier Frequencies Separation)
GFSK	902.500	601.7
π/4DQPSK	1221.000	814.0
8DPSK	1224.385	816.3




Report No.: SZEM160600430101 Page: 31 of 87

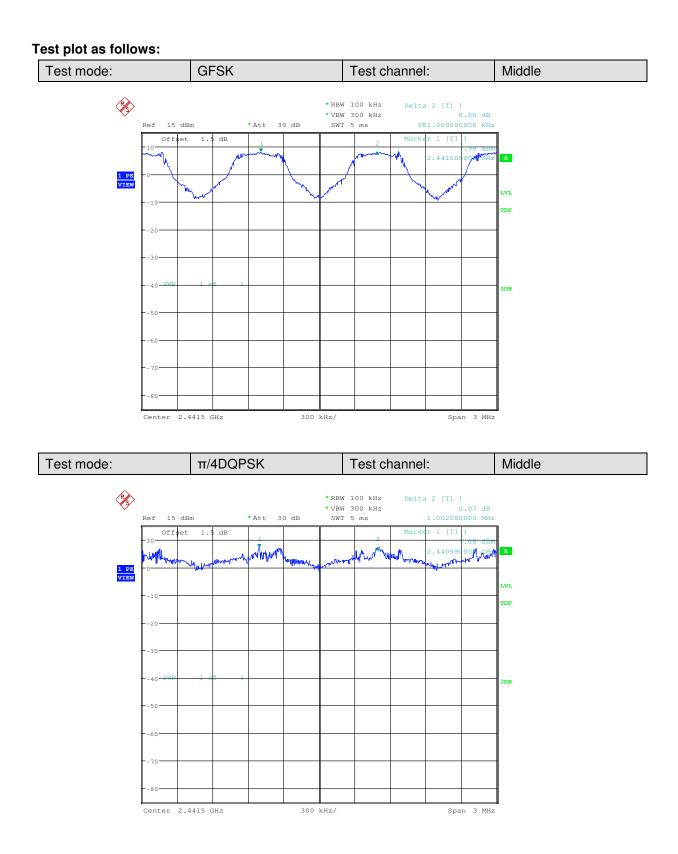



Report No.: SZEM160600430101 Page: 32 of 87

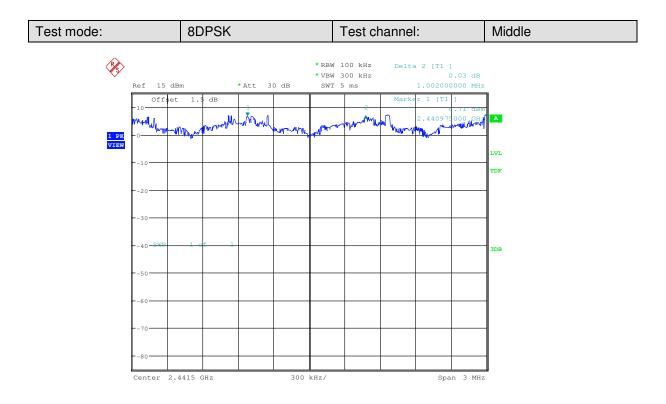



Report No.: SZEM160600430101 Page: 33 of 87

Test Requirement: 47 CFR Part 15C Section 15.247 (a)(1) Test Method: ANSI C63.10:2013 Section 7.8.3 Test Setup: Spectrum Analyzer E.U.T Non-Conducted Table **Ground Reference Plane** At least 15 channels Limit: Test Mode: Hopping transmitting with all kind of modulation Refer to section 5.10 for details Instruments Used: **Test Results:** Pass

6.6 Hopping Channel Number


Measurement Data

Mode	Hopping channel numbers	Limit
GFSK	79	≥15
π/4DQPSK	79	≥15
8DPSK	79	≥15

[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."




Report No.: SZEM160600430101 Page: 34 of 87

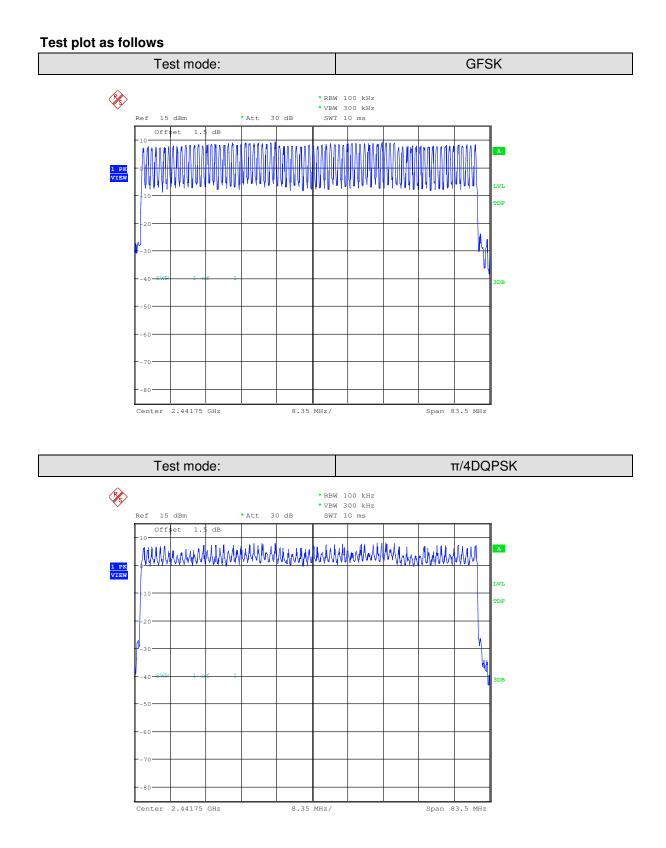



Report No.: SZEM160600430101 Page: 35 of 87

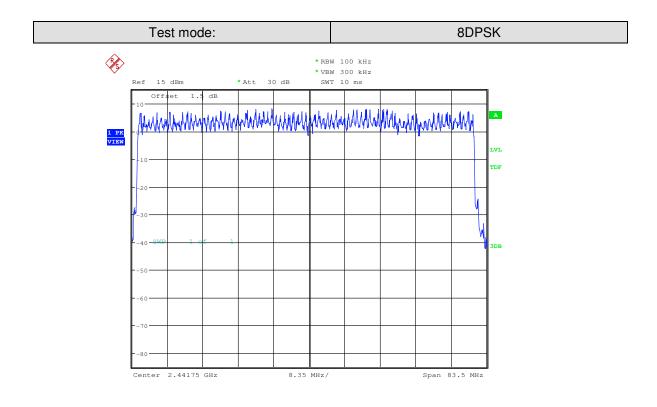



Report No.: SZEM160600430101 Page: 36 of 87

6.7 Dwell Time

Test Requirement:	47 CFR Part 15C Section 15.247 (a)(1)			
Test Method:	ANSI C63.10:2013 Section 7.8.4			
Test Setup:	Spectrum Analyzer E.U.T Non-Conducted Table Ground Reference Plane			
Instruments Used:	Refer to section 5.10 for details			
Test Mode:	Hopping transmitting with all kind of modulation and all kind of data type.			
Limit:	0.4 Second			
Test Results:	Pass			

Measurement Data

Mode	Packet	Dwell time (second)	Limit (second)
GFSK	DH1	0.13	0.4
	DH3	0.25	0.4
	DH5	0.29	0.4
π/4DQPSK	2-DH1	0.14	0.4
	2-DH3	0.25	0.4
	2-DH5	0.29	0.4
8DPSK	3-DH1	0.14	0.4
	3-DH3	0.25	0.4
	3-DH5	0.29	0.4



Report No.: SZEM160600430101 Page: 37 of 87

Remark:

The test period: T= 0.4 Second/Channel x 79 Channel /10= 3.16 s On (ms)*total number x10=dwell time (ms) The lowest channel (2441MHz), as below: DH1 time slot=0.413 (ms)*total number x10=132.16 ms) DH3 time slot=1.671 (ms)* total number x10=250.65 (ms) DH5 time slot=2.924 (ms)* total number x10=292.40 (ms) 2-DH1 time slot=0.424 (ms)*total number x10=135.68 (ms)

2-DH3 time slot=1.680 (ms)* total number x10=252.00 (ms)

2-DH5 time slot=2.932 (ms)* total number x10=293.20 (ms)


3-DH1 time slot=0.424 (ms)*total number x10=135.68 (ms)

3-DH3 time slot=1.677 (ms)* total number x10= 251.55 (ms)

3-DH5 time slot=2.936 (ms)* total number x10= 293.60 (ms)



Report No.: SZEM160600430101 Page: 38 of 87

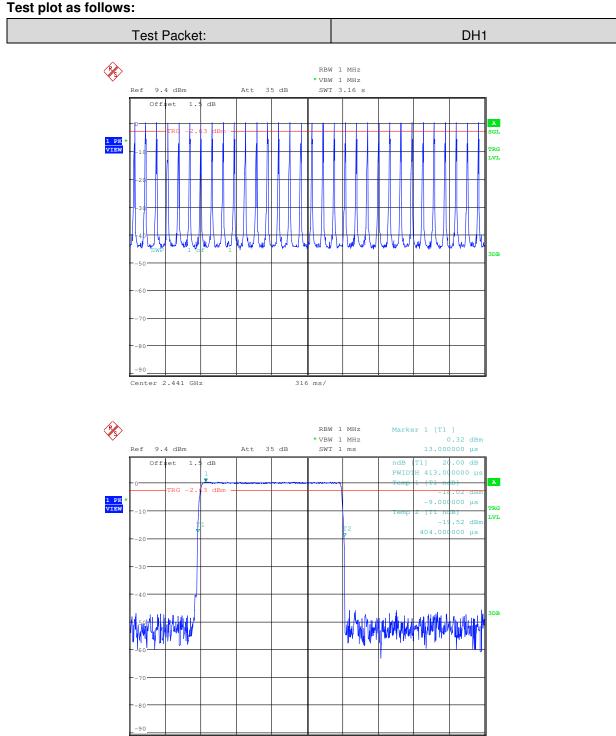


Center 2.441 GHz

"This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."

100 µs/




Report No.: SZEM160600430101 Page: 39 of 87

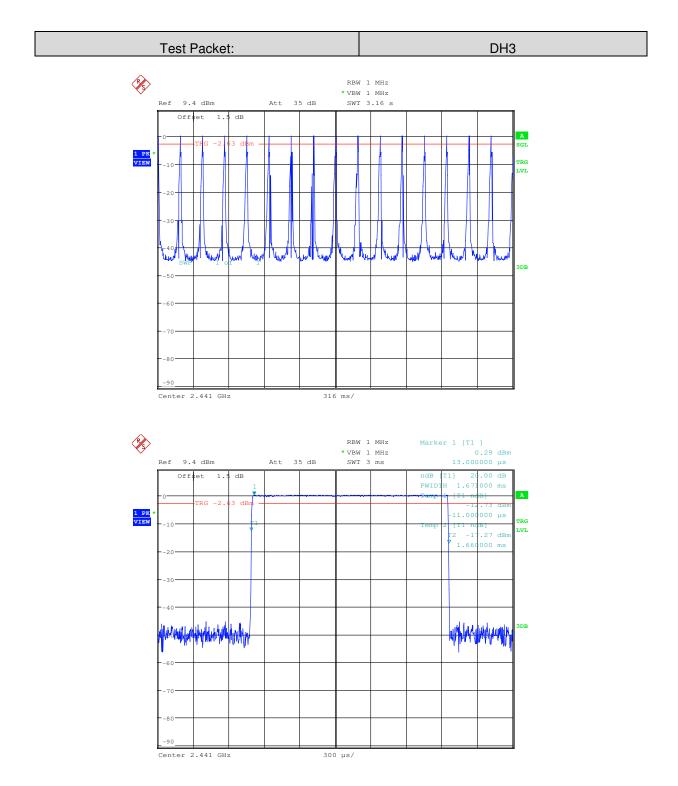




Report No.: SZEM160600430101 Page: 40 of 87

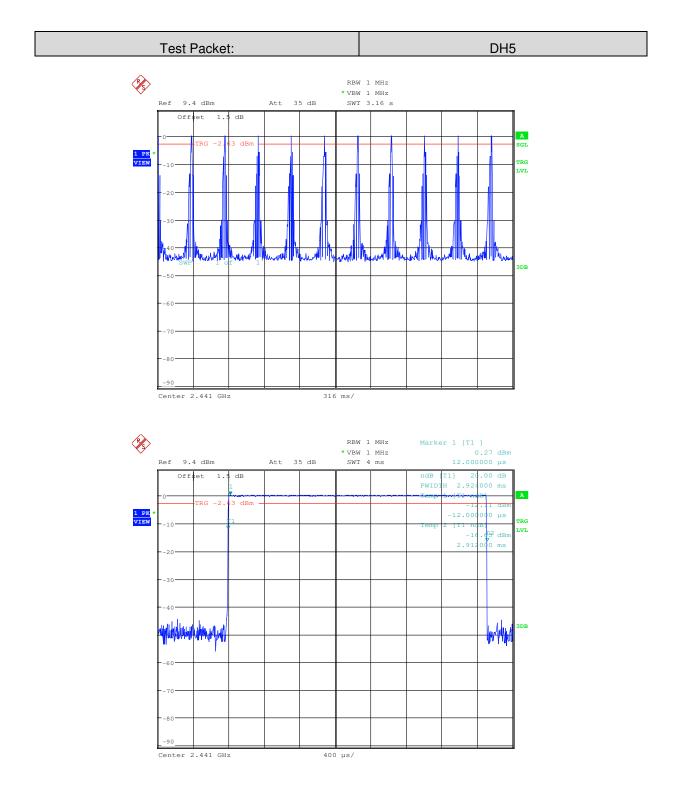




Report No.: SZEM160600430101 Page: 41 of 87

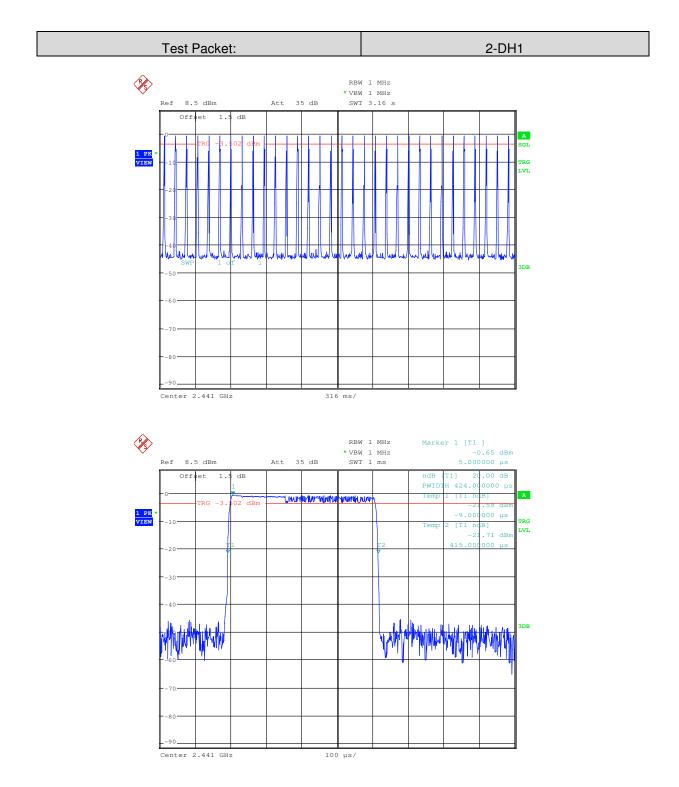




Report No.: SZEM160600430101 Page: 42 of 87

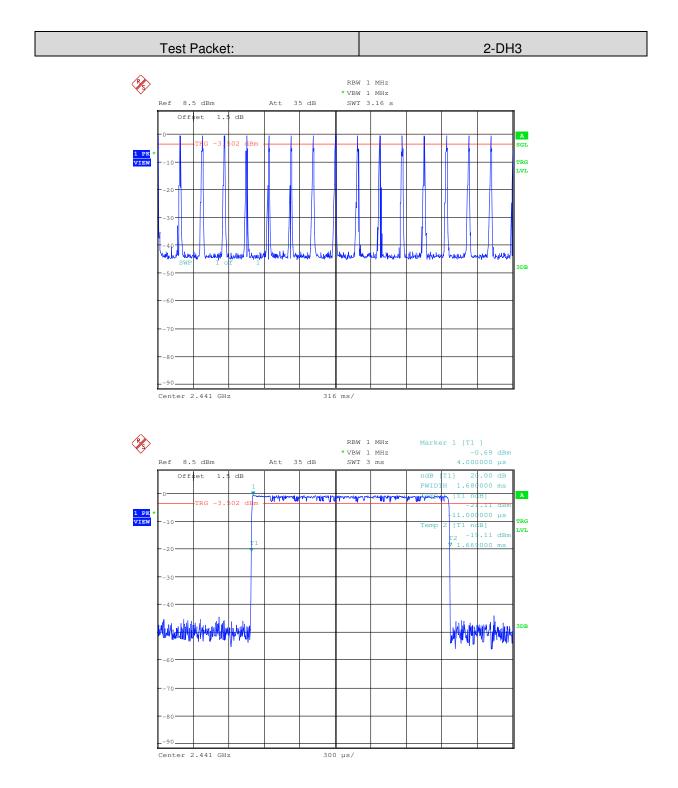




Report No.: SZEM160600430101 Page: 43 of 87

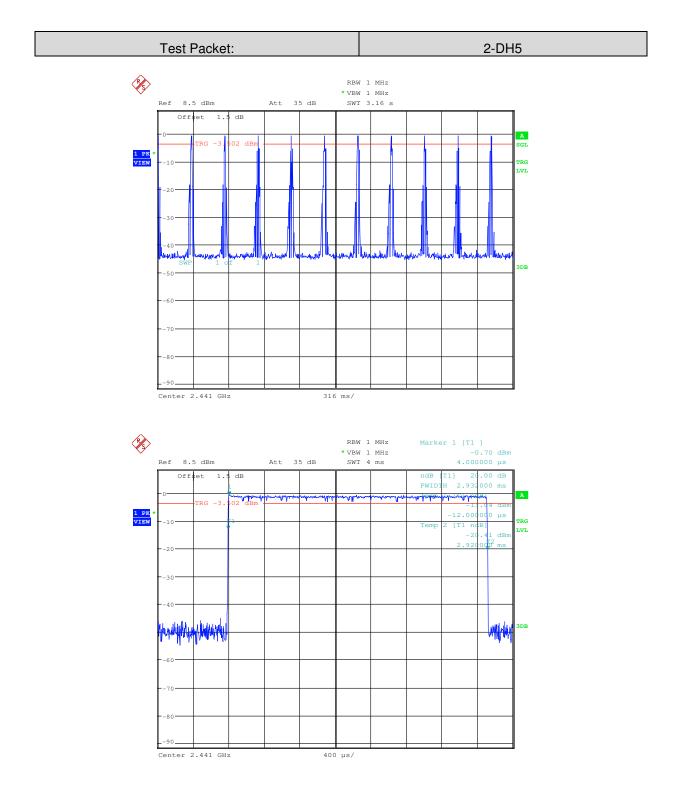




Report No.: SZEM160600430101 Page: 44 of 87

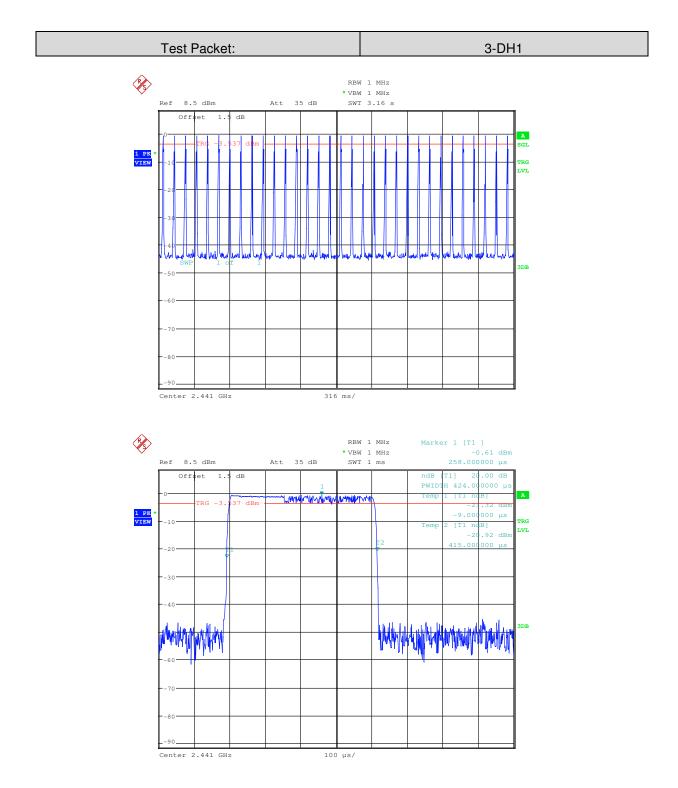




Report No.: SZEM160600430101 Page: 45 of 87

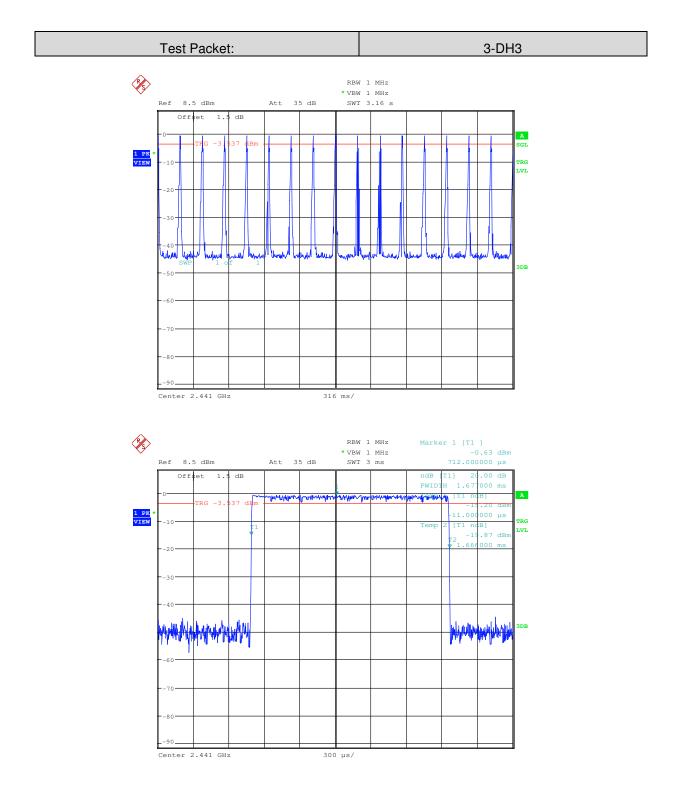



Report No.: SZEM160600430101 Page: 46 of 87

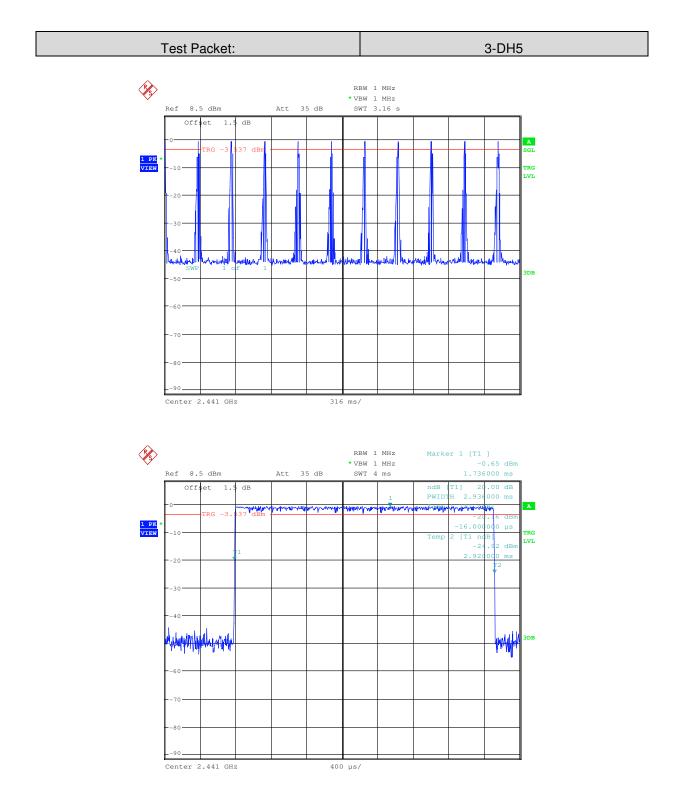

[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM160600430101 Page: 47 of 87


Test Requirement: 47 CFR Part 15C Section 15.247 (d) Test Method: ANSI C63.10:2013 Section 7.8.6 Test Setup: Spectrum Analyzer E.U.T 0 Non-Conducted Table **Ground Reference Plane** Remark: Offset the High-Frequency cable loss 1.5dB in the spectrum analyzer. In any 100 kHz bandwidth outside the frequency band in which the spread Limit: spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Exploratory Test Mode: Hopping and Non-hopping transmitting with all kind of modulation and all kind of data type Final Test Mode: Through Pre-scan, find the DH1 of data type is the worst case of GFSK modulation type, 2-DH1 of data type is the worst case of $\pi/4DQPSK$ modulation type, 3-DH1 of data type is the worst case of 8DPSK modulation type. Instruments Used: Refer to section 5.10 for details **Test Results:** Pass

6.8 Band-edge for RF Conducted Emissions

[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."




Report No.: SZEM160600430101 Page: 48 of 87

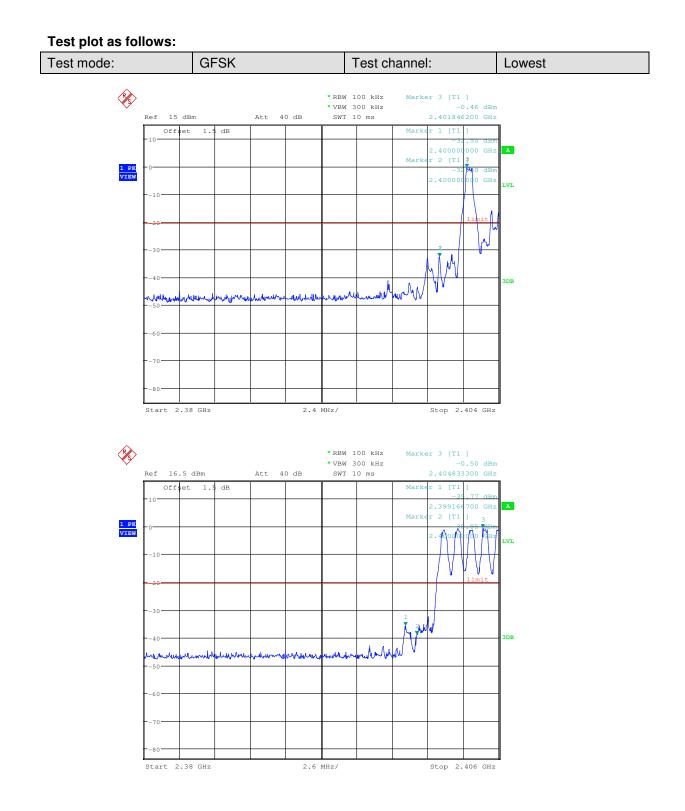




Report No.: SZEM160600430101 Page: 49 of 87

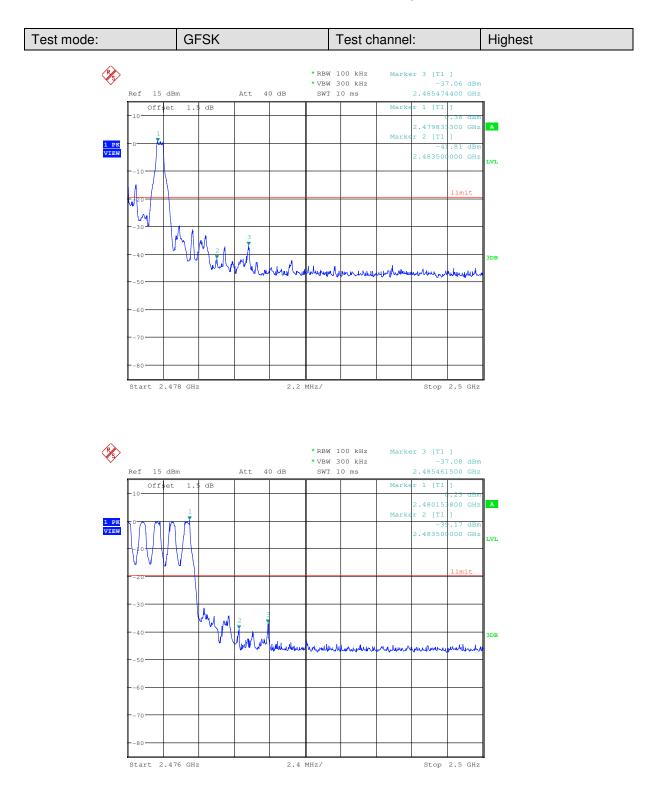

[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."




Report No.: SZEM160600430101 Page: 50 of 87

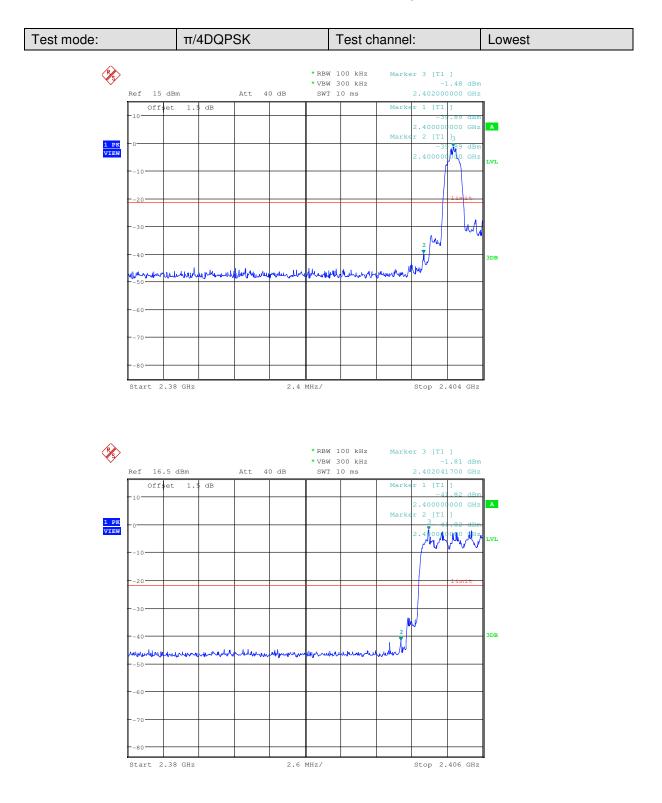




Report No.: SZEM160600430101 Page: 51 of 87

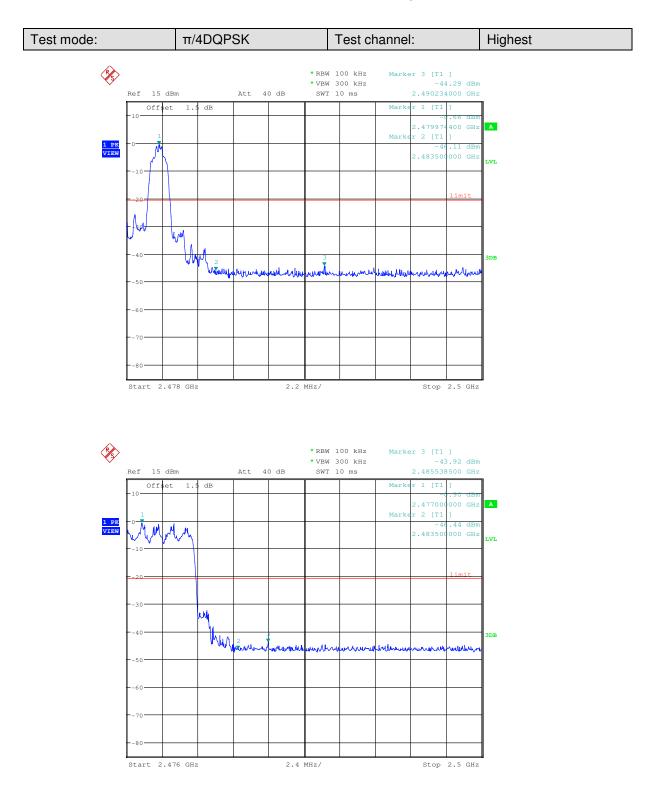




Report No.: SZEM160600430101 Page: 52 of 87

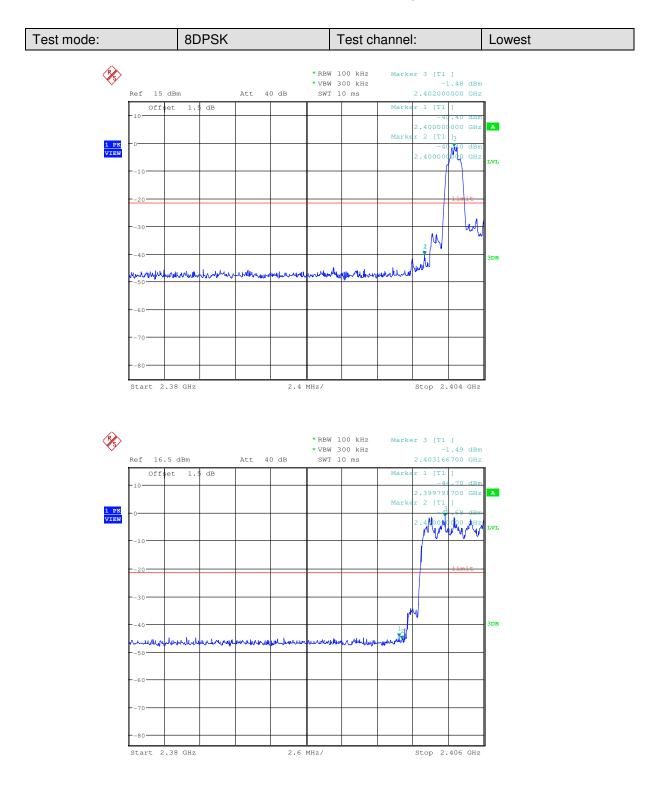



Report No.: SZEM160600430101 Page: 53 of 87

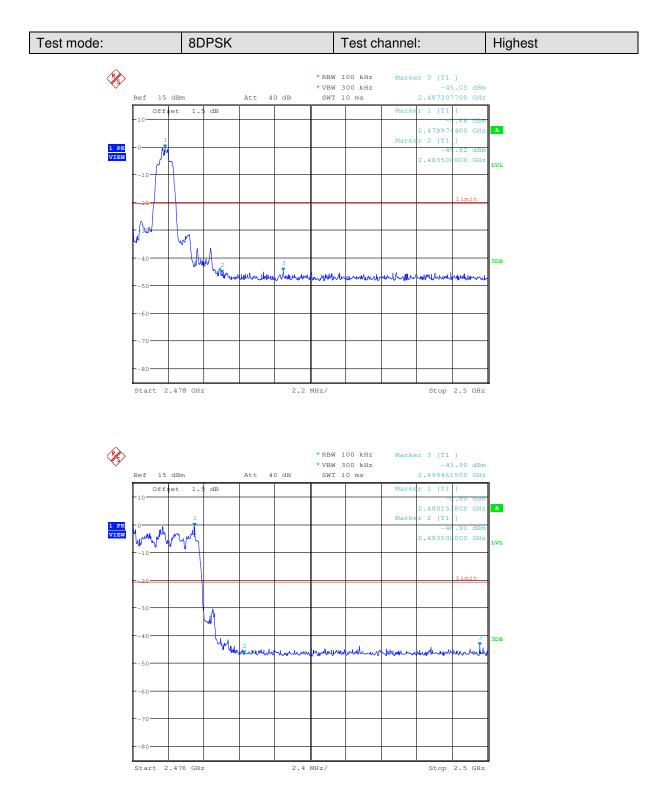



Report No.: SZEM160600430101 Page: 54 of 87


6.9 Spurious RF Conducted Emissions

Test Requirement:	47 CFR Part 15C Section 15.247 (d)						
Test Method:	ANSI C63.10:2013 Section 7.8.8						
Test Setup:	Spectrum Analyzer E.U.T Non-Conducted Table Ground Reference Plane						
	Remark: Offset the High-Frequency cable loss 1.5dB in the spectrum analyzer.						
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.						
Exploratory Test Mode:	Non-hopping transmitting with all kind of modulation and all kind of data type						
Final Test Mode:	Through Pre-scan, find the DH1 of data type is the worst case of GFSK modulation type, 2-DH1 of data type is the worst case of π /4DQPSK modulation type, 3-DH1 of data type is the worst case of 8DPSK modulation type.						
Instruments Used:	Refer to section 5.10 for details						
Test Results:	Pass						

[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."




Report No.: SZEM160600430101 Page: 55 of 87

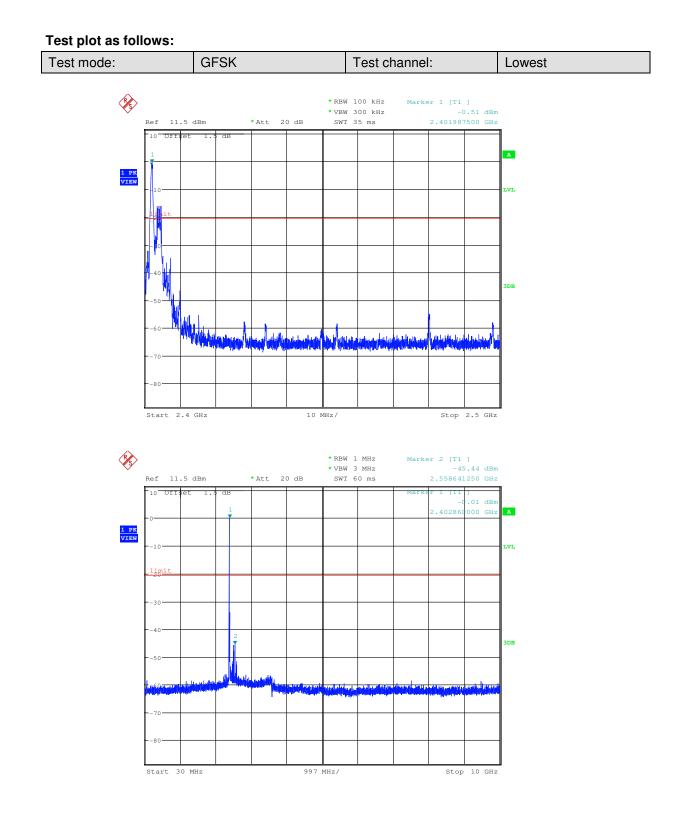




Report No.: SZEM160600430101 Page: 56 of 87

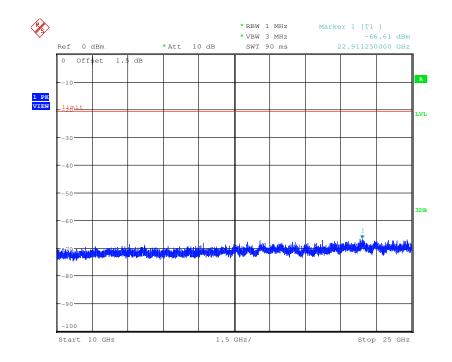




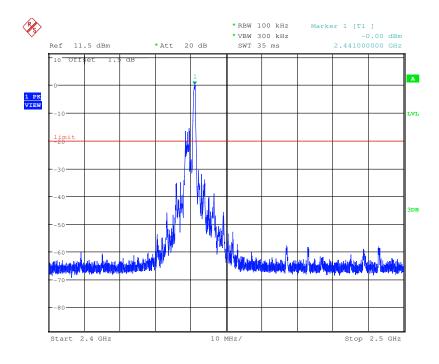




Report No.: SZEM160600430101 Page: 57 of 87

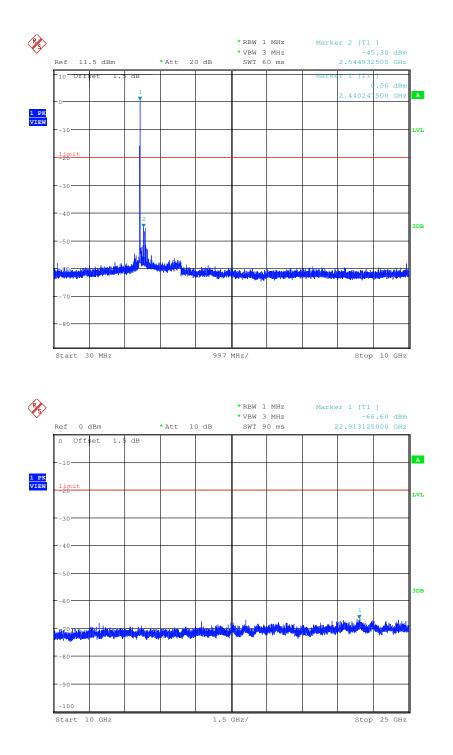




Report No.: SZEM160600430101 Page: 58 of 87

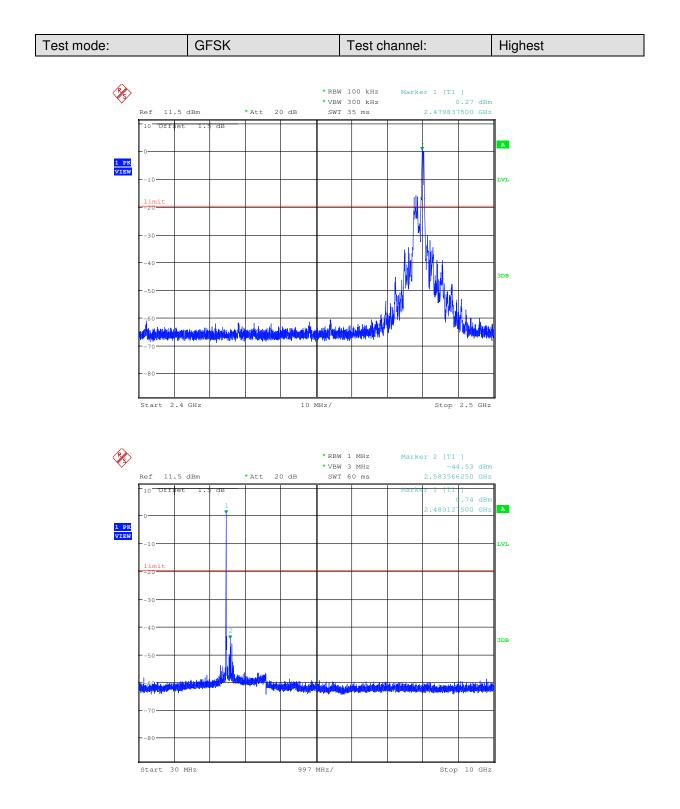


[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."




Report No.: SZEM160600430101 Page: 59 of 87

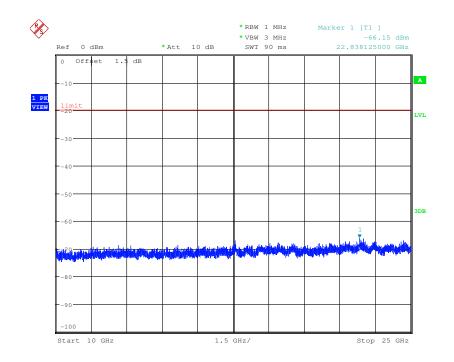

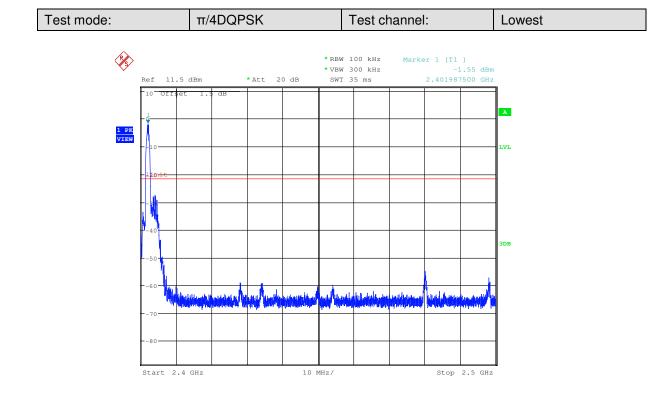




Report No.: SZEM160600430101 Page: 60 of 87

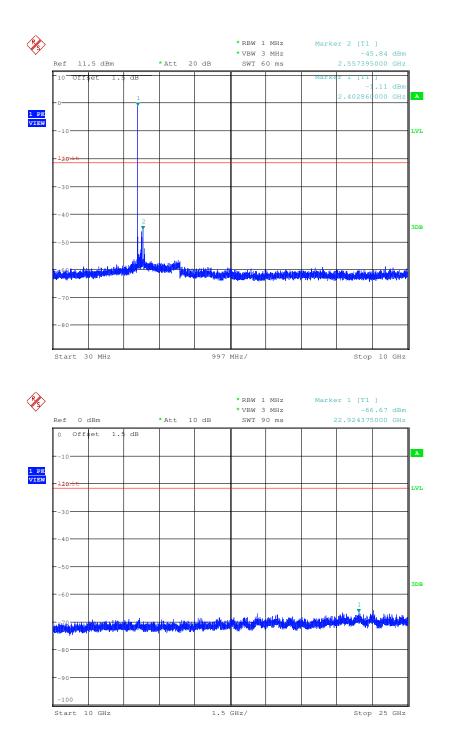

[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."





Report No.: SZEM160600430101 Page: 61 of 87

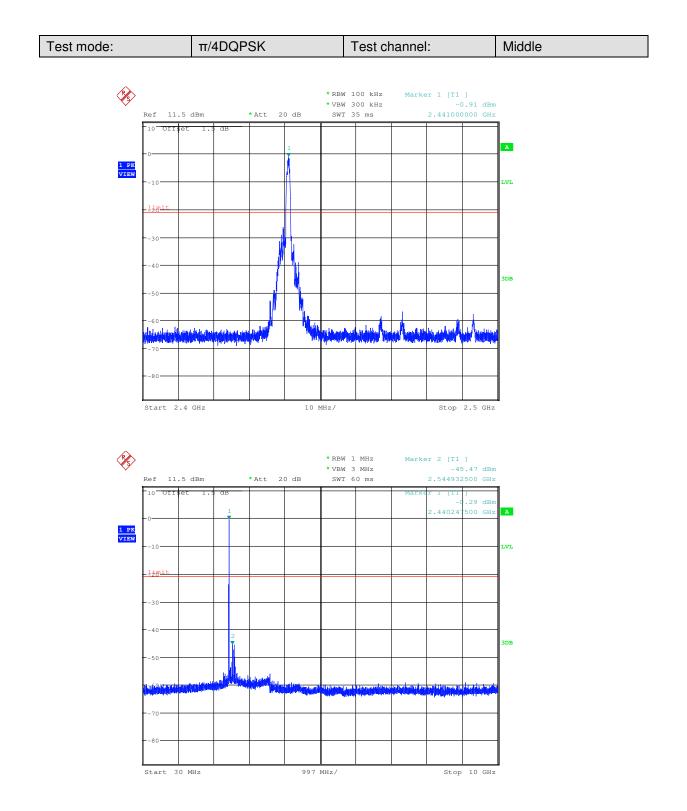




Report No.: SZEM160600430101 Page: 62 of 87

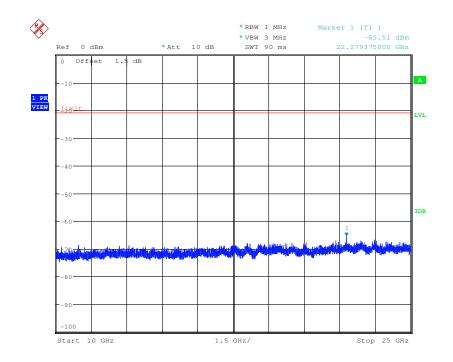

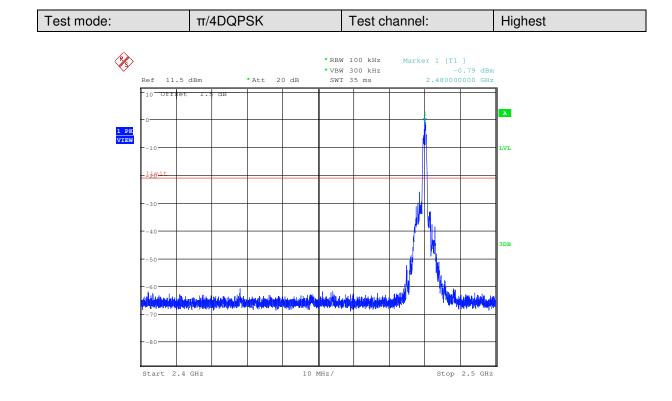




Report No.: SZEM160600430101 Page: 63 of 87

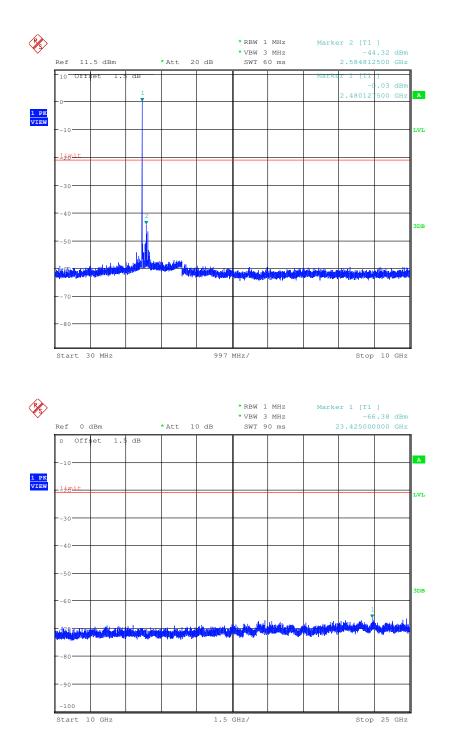





Report No.: SZEM160600430101 Page: 64 of 87

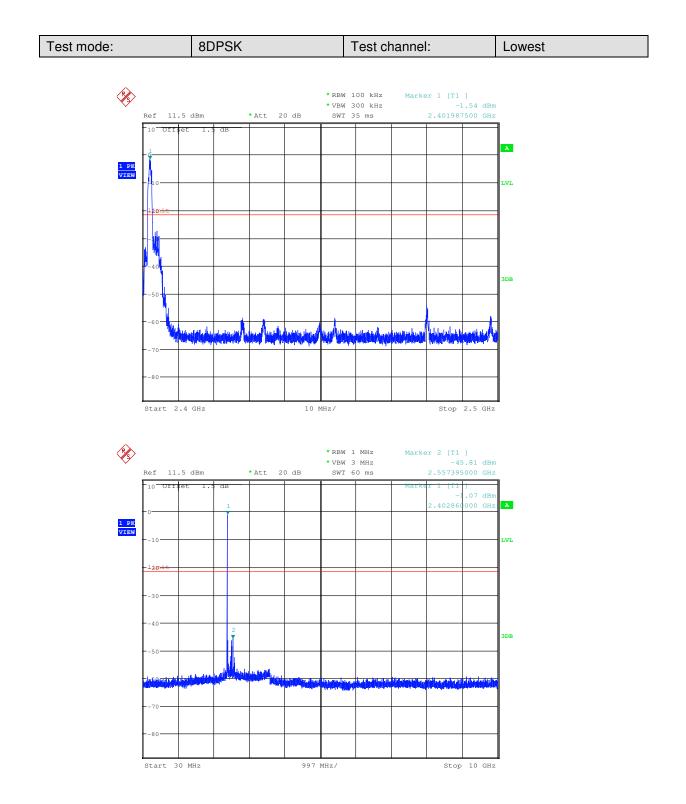




Report No.: SZEM160600430101 Page: 65 of 87

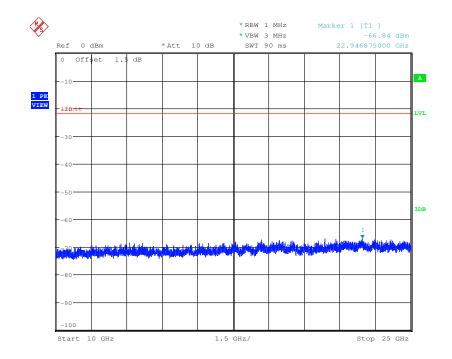

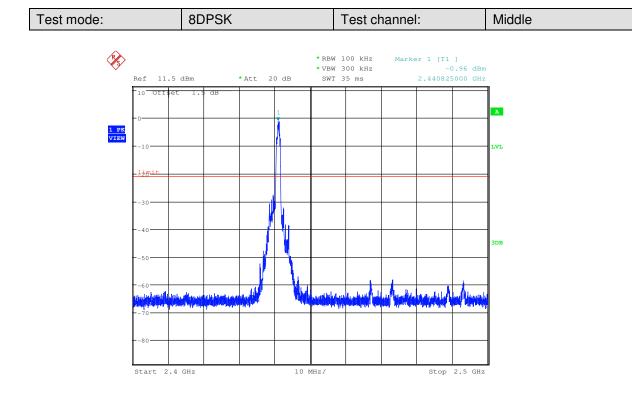




Report No.: SZEM160600430101 Page: 66 of 87

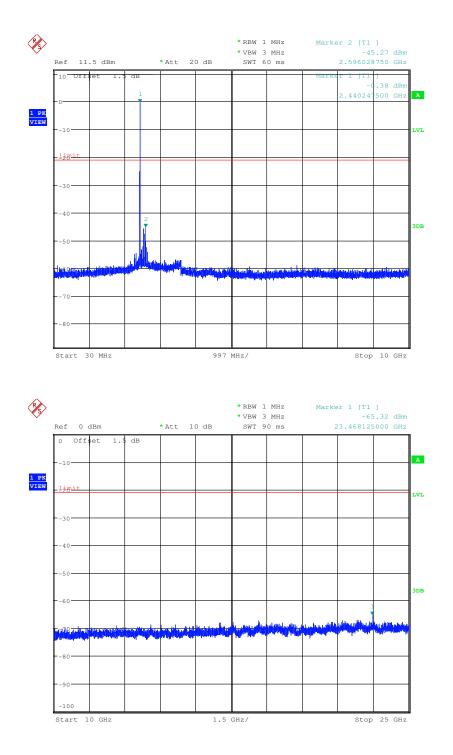




Report No.: SZEM160600430101 Page: 67 of 87

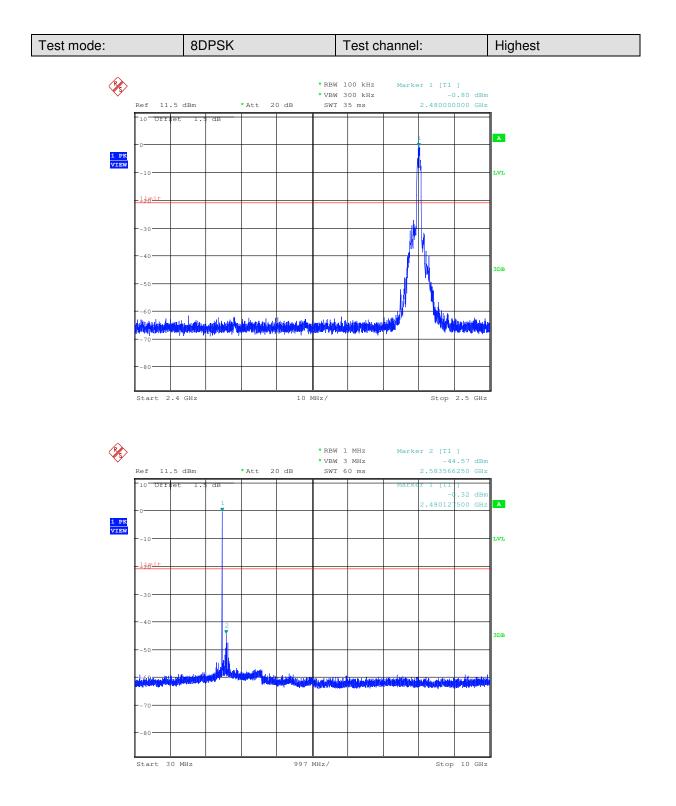

[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM160600430101 Page: 68 of 87

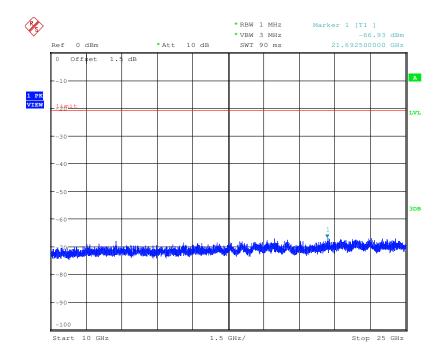

Remark:

Use 100kHz RBW to determine the relative limit in the band 2.4GHz to 2.5GHz, and Use 1MHz RBW to measure spurious emissions in the band 30MHz to 10GHz and 10GHz to 25GHz. The sweep points set to 30001.



Report No.: SZEM160600430101 Page: 69 of 87

6.10 Other requirements Frequency Hopping Spread Spectrum System

Test Requirement:	47 CFR Part 15C Section 15.247 (a)(1), (h) requirement:
	nnel frequencies that are selected at the system hopping
rate from a Pseudorandom of on the average by each trans	ordered list of hopping frequencies. Each frequency must be used equally smitter. The system receivers shall have input bandwidths that match the s of their corresponding transmitters and shall shift frequencies in
channels during each transn receiver, must be designed t transmitter be presented with employing short transmissio	spectrum systems are not required to employ all available hopping nission. However, the system, consisting of both the transmitter and the to comply with all of the regulations in this section should the h a continuous data (or information) stream. In addition, a system in bursts must comply with the definition of a frequency hopping system missions over the minimum number of hopping channels specified in
the system to recognize othe independently chooses and The coordination of frequence	ence within a frequency hopping spread spectrum system that permits er users within the spectrum band so that it individually and adapts its hopsets to avoid hopping on occupied channels is permitted. cy hopping systems in any other manner for the express purpose of occupancy of individual hopping frequencies by multiple transmitters is
Compliance for section 15	.247(a)(1)
•	ulo-two addition stage. And the result is fed back to the input of the first with the first ONE of 9 consecutive ONEs; i.e. the shift register is initialized ages: 9 sequence: $2^9 - 1 = 511$ bits
Linear Feedback S	hift Register for Generation of the PRBS sequence
	om Frequency Hopping Sequence as follow: 7 64 8 73 16 75 1
Each frequency used equally	y on the average by each transmitter.
bandwidths that match the	e Specification, Bluetooth receivers are designed to have input and IF hopping channel bandwidths of any Bluetooth transmitters and shift on with the transmitted signals.



Report No.: SZEM160600430101 Page: 70 of 87

Compliance for section 15.247(g)

According to Bluetooth Core Specification, the Bluetooth system transmits the packet with the pseudorandom hopping frequency with a continuous data and the short burst transmission from the Bluetooth system is also transmitted under the frequency hopping system with the pseudorandom hopping frequency system.

Compliance for section 15.247(h)

According to Bluetooth Core specification, the Bluetooth system incorporates with an adaptive system to detect other user within the spectrum band so that it individually and independently to avoid hopping on the occupied channels.

According to the Bluetooth Core specification, the Bluetooth system is designed not have the ability to coordinated with other FHSS System in an effort to avoid the simultaneous occupancy of individual hopping frequencies by multiple transmitter.



Report No.: SZEM160600430101 Page: 71 of 87


Test Requirement:	47 CFR Part 15C Section 15.209 and 15.205								
Test Method:	ANSI C63.10: 2013 Section 6.4,6.5,6.6								
Test Site:	Measurement Distance: 3m (Semi-Anechoic Chamber)								
Receiver Setup:	Frequency		Detector	RBW	V VBW	Remark			
	0.009MHz-0.090MHz		Peak	10kHz	z 30kHz	Peak	1		
	0.009MHz-0.090MHz		Average	10kHz	z 30kHz	Average			
	0.090MHz-0.110MHz		Quasi-peak	10kHz	z 30kHz	Quasi-peak			
	0.110MHz-0.490MHz		Peak	10kHz	z 30kHz	Peak			
	0.110MHz-0.490MHz		Average	10kHz	z 30kHz	Average			
	0.490MHz -30MHz		Quasi-peak	10kHz	z 30kHz	Quasi-peak			
	30MHz-1GHz Quasi-		Quasi-peak	100 kH	lz 300kHz	Quasi-peak			
	Above 1GHz		Peak	1MHz	z 3MHz	Peak			
			Peak	1MHz	z 10Hz	Average			
Limit:	Frequency		eld strength crovolt/meter)	Limit (dBuV/m)	Remark	Measureme distance (m			
	0.009MHz-0.490MHz	2400/F(kHz)		-	-	300			
	0.490MHz-1.705MHz	24	4000/F(kHz)	-	-	30			
	1.705MHz-30MHz	30		-	-	30			
	30MHz-88MHz	100		40.0	Quasi-peak	3			
	88MHz-216MHz	150		43.5	Quasi-peak	3			
	216MHz-960MHz	200		46.0	Quasi-peak	3			
	960MHz-1GHz	500		54.0	Quasi-peak	3			
	Above 1GHz		500	54.0	Average	3			
	emissions is 20dE applicable to the e	s otherwise specified, the limit on peak radio frequency dB above the maximum permitted average emission limit e equipment under test. This peak limit applies to the total evel radiated by the device.							

6.11 Radiated Spurious Emission

[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM160600430101 Page: 72 of 87

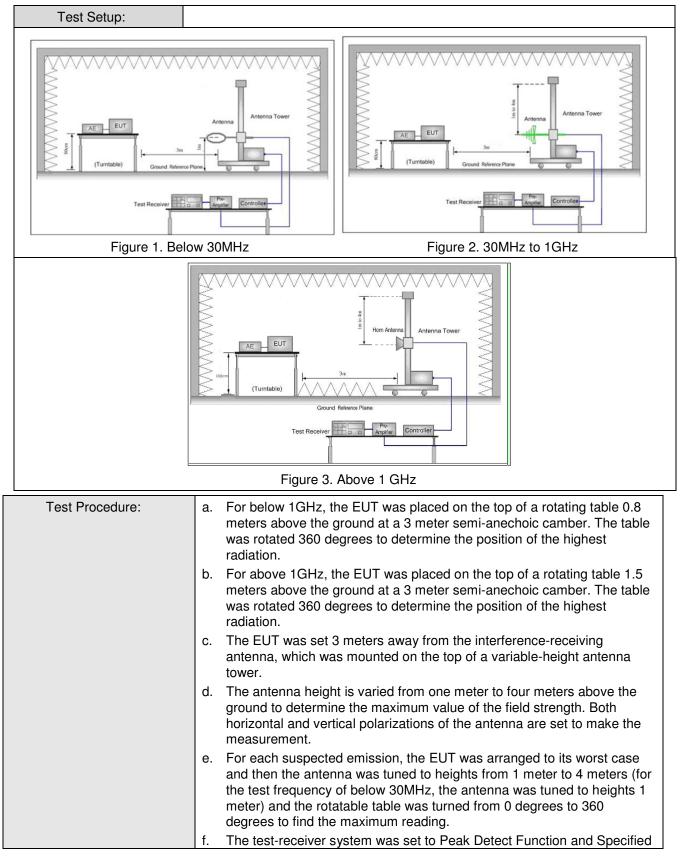

[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM160600430101 Page: 73 of 87

	Bandwidth with Maximum Hold Mode.
	 g. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet. h. Test the EUT in the lowest channel (2402MHz), the middle channel
	(2441MHz),the Highest channel (2480MHz)
	 The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
	j. Repeat above procedures until all frequencies measured was complete.
Exploratory Test Mode:	Non-hopping transmitting mode with all kind of modulation and all kind of data type Charge + Transmitting mode.
Final Test Mode:	Through Pre-scan, find the DH1 of data type and GFSK modulation is the worst case.
	Charge + Transmitting mode
	For below 1GHz part, through pre-scan, the worst case is the lowest channel.
	Only the worst case is recorded in the report.
Instruments Used:	Refer to section 5.10 for details
Test Results:	Pass


[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM160600430101 Page: 74 of 87

6.11.1 Radiated Emission below 1GHz

30MHz~1GHz (QP)		
Test mode:	Charge +Transmitting	Vertical

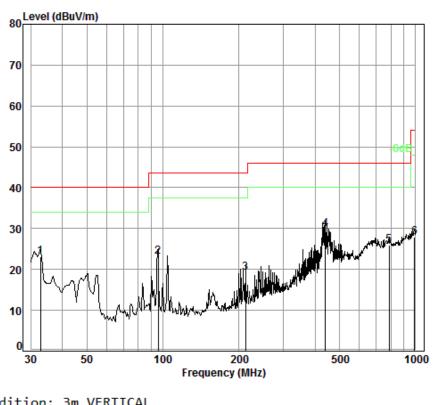


Condition: 3m VERTICAL Job No. : 4301CR Test mode: Charge + TX mode

		Cable	Ant	Preamp	Read		Limit	0ver
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	32.86	0.60	17.16	26.00	31.28	23.04	40.00	-16.96
2	96.10	1.16	8.99	25.90	38.92	23.17	43.50	-20.33
3	212.27	1.47	10.81	25.76	32.59	19.11	43.50	-24.39
4 pp	440.20	2.37	16.67	25.64	36.43	29.83	46.00	-16.17
5	785.09	3.16	21.94	25.79	26.59	25.90	46.00	-20.10
6	989.54	3.69	23.93	24.47	24.76	27.91	54.00	-26.09



Report No.: SZEM160600430101 Page: 75 of 87

Test mode: Charge +Transmitting Hor	orizontal
-------------------------------------	-----------

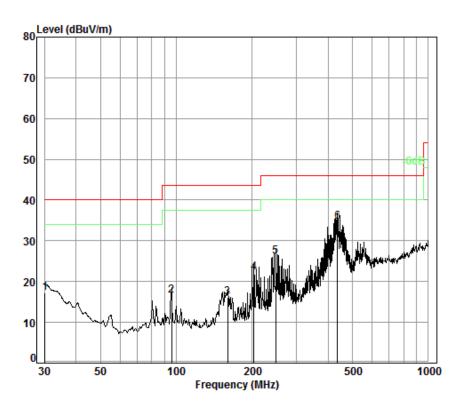

	tion: 3m o. : 430		NTAL					
Test	mode: Cha	rge +	TX mod	e				
		Cable	Ant	Preamp	Read		Limit	0ver
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	30.21	0.60	18.86	26.00	23.76	17.22	40.00	-22.78
2	96.10	1.16	8.99	25.90	32.27	16.52	43.50	-26.98
3	159.78	1.34	9.69	25.81	30.86	16.08	43.50	-27.42
4	203.52	1.42	10.38	25.77	36.29	22.32	43.50	-21.18
5	248.55	1.67	12.16	25.73	38.03	26.13	46.00	-19.87
6 pp	437.12	2.36	16.60	25.65	41.46	34.77	46.00	-11.23



Report No.: SZEM160600430101 Page: 76 of 87

Test mode:		GF	SK(DH1)		Test	channel:	Lowest		Rema	ark:	Peak
Frequency (MHz)	Anten facto (dB/n	rs	Cable Loss (dB)	Fa	eamp Ictor dB)	Read Level (dBuV)	Level (dBuV/m)		: Line IV/m)	Over Limit (dB)	Polarization
3770.567	32.7	8	7.73	38	3.47	44.83	46.87	7	'4	-27.13	Vertical
4804.000	34.1	0	8.87	38	3.75	45.06	49.28	7	'4	-24.72	Vertical
6016.949	34.7	1	10.54	38	3.94	46.26	52.57	7	'4	-21.43	Vertical
7206.000	35.6	0	10.68	37	7.64	39.41	48.05	7	'4	-25.95	Vertical
9608.000	37.1	0	12.50	36	6.35	34.92	48.17	7	'4	-25.83	Vertical
12566.850	37.8	7	14.34	37	7.72	37.20	51.69	7	'4	-22.31	Vertical
3716.403	32.5	7	7.71	38	3.45	44.83	46.66	7	'4	-27.34	Horizontal
4804.000	34.1	0	8.87	38	3.75	45.45	49.67	7	'4	-24.33	Horizontal
5982.226	34.6	6	10.51	38	3.96	46.88	53.09	7	'4	-20.91	Horizontal
7206.000	35.6	0	10.68	37	7.64	40.56	49.20	7	'4	-24.80	Horizontal
9608.000	37.1	0	12.50	36	6.35	35.49	48.74	7	'4	-25.26	Horizontal
12566.850	37.8	7	14.34	37	7.72	36.79	51.28	7	'4	-22.72	Horizontal

6.11.2 Transmitter Emission above 1GHz

Test mode:	G	FSK(DH1)	Te	est channel:	Middle	Rema	ırk:	Peak
Frequency (MHz)	Antenna factors (dB/m)	Cable Loss (dB)	Cable Loss (dB)	Reading Level (dBµV)	Emission Level (dBµV/m)	Limit (dBµV/m)	Over limit (dB)	Polarization
3770.567	32.78	7.73	38.47	44.74	46.78	74	-27.22	Vertical
4882.000	34.18	8.98	38.77	45.27	49.66	74	-24.34	Vertical
5999.562	34.70	10.56	38.96	45.99	52.29	74	-21.71	Vertical
7323.000	35.54	10.72	37.59	41.48	50.15	74	-23.85	Vertical
9764.000	37.10	12.58	36.14	37.63	51.17	74	-22.83	Vertical
12603.270	37.90	14.44	37.75	38.42	53.01	74	-20.99	Vertical
3759.672	32.74	7.73	38.47	44.83	46.83	74	-27.17	Horizontal
4882.000	34.18	8.98	38.77	46.65	51.04	74	-22.96	Horizontal
5982.226	34.66	10.51	38.96	45.41	51.62	74	-22.38	Horizontal
7323.000	35.54	10.72	37.59	41.20	49.87	74	-24.13	Horizontal
9764.000	37.10	12.58	36.14	37.25	50.79	74	-23.21	Horizontal
12603.270	37.90	14.44	37.75	38.17	52.76	74	-21.24	Horizontal



Report No.: SZEM160600430101 Page: 77 of 87

Test mode:	(GFSK(DH1)	Te	st channel:	Highest	Rema	ark:	Peak
Frequency (MHz)	Antenna factors (dB/m)	a Cable Loss (dB)	Pream factor (dB)	D Reading Level (dBµV)	Emission Level (dBµV/m)	Limit (dBµV/m)	Over limit (dB)	Polarization
3792.453	32.87	7.74	38.48	44.38	46.51	74	-27.49	Vertical
4960.000	34.26	9.09	38.78	45.72	50.29	74	-23.71	Vertical
5999.562	34.70	10.56	38.96	46.10	52.40	74	-21.60	Vertical
7440.000	35.60	10.77	37.54	39.44	48.27	74	-25.73	Vertical
9920.000	37.22	12.67	35.93	37.87	51.83	74	-22.17	Vertical
12639.790	37.92	14.55	37.79	36.14	50.82	74	-23.18	Vertical
3836.607	32.94	7.75	38.50	44.57	46.76	74	-27.24	Horizontal
4960.000	34.26	9.09	38.78	45.19	49.76	74	-24.24	Horizontal
6034.386	34.72	10.52	38.91	45.96	52.29	74	-21.71	Horizontal
7440.000	35.60	10.77	37.54	39.63	48.46	74	-25.54	Horizontal
9920.000	37.22	12.67	35.93	38.39	52.35	74	-21.65	Horizontal
12603.270	37.90	14.44	37.75	37.13	51.72	74	-22.28	Horizontal

Remark:

1) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading + Antenna Factor + Cable Factor - Preamplifier Factor

- 2) Scan from 9kHz to 25GHz, the disturbance above 13GHz and below 30MHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.
- 3) As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. So, only the peak measurements were shown in the report.

[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM160600430101 Page: 78 of 87

6.12 Restricted bands around fundamental frequency

Test Requirement:	7 CFR Part 15C Section 15.209 and 15.205							
Test Method:	ANSI C63.10: 2013 Section 6.10.5							
Test Site:	Measurement Distance: 3m (Semi-Anechoic Chamber)							
Limit:	Frequency	Limit (dBuV/m @3m)	Remark					
	30MHz-88MHz	40.0	Quasi-peak Value					
	88MHz-216MHz	43.5	Quasi-peak Value					
	216MHz-960MHz	46.0	Quasi-peak Value					
	960MHz-1GHz	54.0	Quasi-peak Value					
	Above 1GHz	54.0	Average Value					
		74.0	Peak Value					
Test Setup:								
Test Detup.								
Figure 1. 30	MHz to 1GHz	Figure 2. A	Figure 1. 30MHz to 1GHz Figure 2. Above 1 GHz					




Report No.: SZEM160600430101 Page: 79 of 87

Test Procedure:	 a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic camber. The table was rotated 360 degrees to determine the position of the highest radiation. b. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter semi-anechoic camber. The table was rotated 360 degrees to determine the position of the highest radiation. c. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. d. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. e. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. f. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. g. Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands. Save the spectrum analyzer plot. Repeat for each power and modulation for lowest and highest channel h. Test the EUT in the lowest channel , the Highest channel i. The radiation measurements are performed in X, Y, Z axis positioning which it is the worst case. j. Repeat above procedures until all frequencies measured was complete.
Exploratory Test Mode:	Non-hopping transmitting mode with all kind of modulation and all kind of data type Charge + Transmitting mode.
Final Test Mode:	Through Pre-scan, find the DH5 of data type and GFSK modulation is the worst case. Charge + Transmitting mode Only the worst case is recorded in the report.
Instruments Used:	Refer to section 5.10 for details
Test Results:	Pass



Report No.: SZEM160600430101 Page: 80 of 87

Test plot as follows:										
Worse case mode:	GFSK (DH5)	Test channel:	Lowest	Remark:	Peak	Vertical				

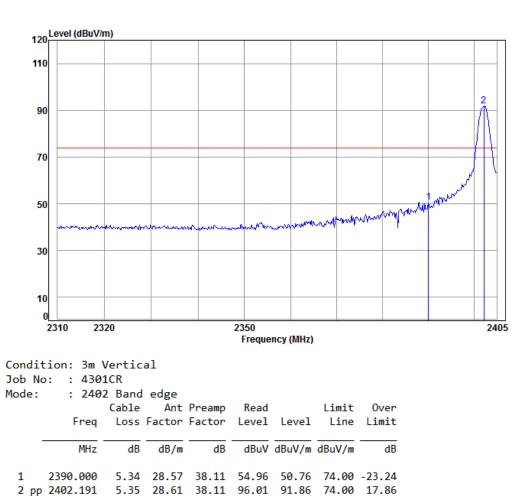


² pp 2402.131 5.55 20.01 50.11 50.01 51.00 74.00 17.00

[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM160600430101 Page: 81 of 87

Worse case mode: GFSK ((H5) Test channel:	Lowest Re	emark: Peak	Horizontal
-------------------------	--------------------	-----------	-------------	------------

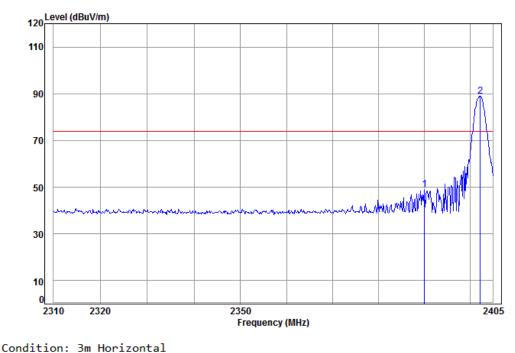


00110120	20111 200							
Job No	: : 430	1CR						
Mode:	: 240	2 Band	edge					
		Cable	Ant	Preamp	Read		Limit	0ver
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit
-								
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	2390.000	5.34	28.57	38.11	53.18	48.98	74.00	-25.02
2 pp	2402.288	5.35	28.61	38.11	93.21	89.06	74.00	15.06



Report No.: SZEM160600430101 Page: 82 of 87

Worse case mode:	GFSK (DH5)	Test channel:	Highest	Remark:	Peak	Vertical	
------------------	------------	---------------	---------	---------	------	----------	--

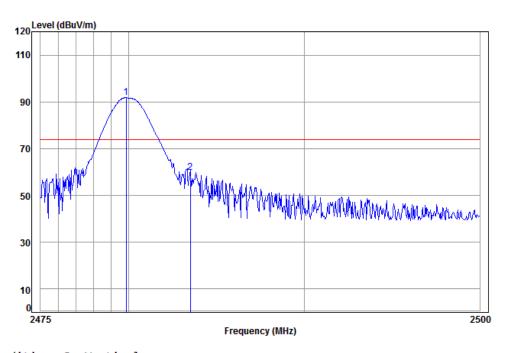


Conditio	n: 3m	Vertic	al					
Job No:	: 430	1CR						
Mode:	: 248	0 Band	edge					
		Cable	Ant	Preamp	Read		Limit	0ver
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 pp 24								
2 24	83.500	5.41	28.98	38.12	63.52	59.79	74.00	-14.21

[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM160600430101 Page: 83 of 87

Worse case mode:	GFSK(DH5)	Test channel:	Highest	Remark:	Peak	Horizontal	
------------------	-----------	---------------	---------	---------	------	------------	--

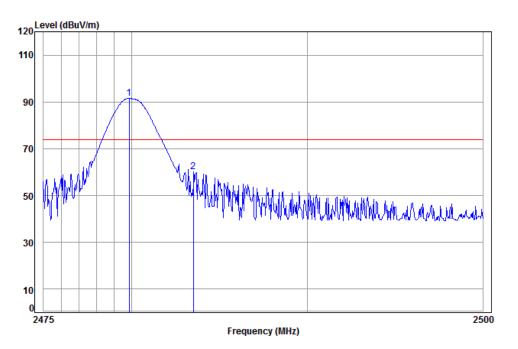


Condit	ion: 3m	Horizo	ntal						
Job No	: : 430	1CR							
Mode:	: 248	0 Band	edge						
		Cable	Ant	Preamp	Read		Limit	0ver	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	
_									
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
	2479.855								
2	2483.500	5.41	28.98	38.12	63.94	60.21	74.00	-13.79	



Report No.: SZEM160600430101 Page: 84 of 87

Worse case mode:	GFSK (DH5)	Test channel:	Highest	Remark:	Average	Vertical	
------------------	------------	---------------	---------	---------	---------	----------	--

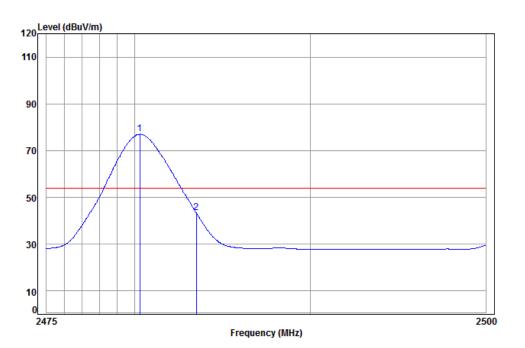


Condit	ion: 3m	Vertic	al					
Job No	: : 430	1CR						
Mode:	: 248	0 Band	edge					
		Cable	Ant	Preamp	Read		Limit	0ver
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit
_								
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
		_						
	2480.304			38.12				
2	2483.500	5.41	28.98	38.12	47.17	43.44	54.00	-10.56



Report No.: SZEM160600430101 Page: 85 of 87

Worse case mode: GFSK(DH5)	Test channel:	Highest	Remark:	Average	Horizontal	
----------------------------	---------------	---------	---------	---------	------------	--

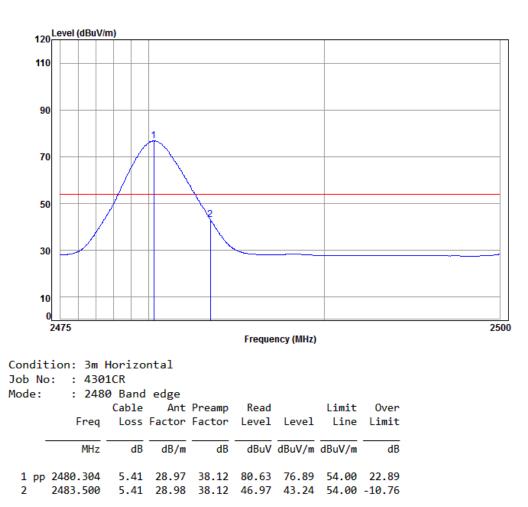

Note:

The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level =Receiver Reading + Antenna Factor + Cable Factor – Preamplifier Factor



Report No.: SZEM160600430101 Page: 86 of 87


7 Photographs - EUT Test Setup

Test model No.: S6MBW

7.1 Conducted Emission




7.2 Radiated Emission

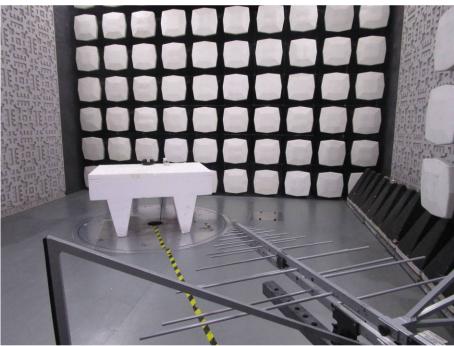



Report No.: SZEM160600430101 Page: 87 of 87

7.3 Radiated Spurious Emission

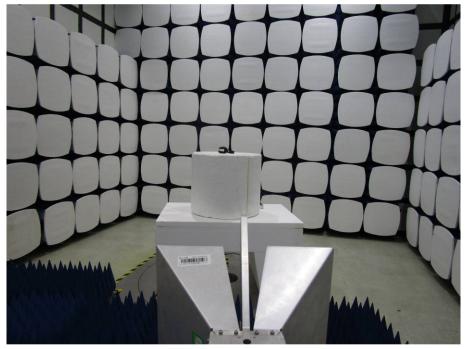

8 Photographs - EUT Constructional Details

Refer to Appendix A - Photographs of EUT Constructional Details for SZEM1606004301CR.