

TEST REPORT

Product : Portable Bluetooth Speaker
Trade mark : Skullcandy
Model/Type reference : Soundmine, Ringer
Serial number : N/A
Ratings : Charging input: 5V --- , 500mA
lithium Battery: 3,7V --- 500mAh, IPX0, Class III
FCC ID : Y22-SK20130016
Report number : EED32H000620
Date : May 20, 2015
Regulations : See below

Test Standards	Results
<input checked="" type="checkbox"/> 47 CFR FCC Part 15 Subpart C 15.247: 2014	PASS

Prepared for:
Skullcandy
1441 W. Ute Blvd Suite 250 Park City, UT 84098 United States

Prepared by:
Centre Testing International (Shenzhen) Corporation
Hongwei Industrial Zone, 70 Area, Bao'an District,
Shenzhen, Guangdong, China
TEL: +86-755-3368 3668
FAX: +86-755-3368 3385

Tested by: Christy Chen Reviewed by: Louisa Lu

Approved by: Jimmy Li Date: May 20, 2015

Jimmy Li
Lab manager

Check No.: 2135161736



TABLE OF CONTENTS

1. GENERAL INFORMATION	4
2. TEST SUMMARY	4
3. PRODUCT INFORMATION	5
4. MEASUREMENT UNCERTAINTY	5
5. TEST EQUIPMENT LIST	5
6. SUPPORT EQUIPMENT LIST	5
7. 20DB / 99% BANDWIDTH MEASUREMENT	5
7.1. LIMITS.....	6
7.2. BLOCK DIAGRAM OF TEST SETUP.....	6
7.3. TEST PROCEDURE.....	6
7.4. TEST RESULT.....	6
8. CARRIER FREQUENCY SEPARATION	16
8.1. LIMITS.....	16
8.2. BLOCK DIAGRAM OF TEST SETUP.....	16
8.3. TEST PROCEDURE.....	16
8.4. TEST RESULT.....	16
9. NUMBER OF HOPPING FREQUENCY	22
9.1. LIMITS.....	22
9.2. BLOCK DIAGRAM OF TEST SETUP.....	22
9.3. TEST PROCEDURE.....	22
9.4. TEST RESULT.....	22
10. TIME OF OCCUPANCY (DWELL TIME)	25
10.1. LIMITS.....	25
10.2. BLOCK DIAGRAM OF TEST SETUP.....	25
10.3. TEST PROCEDURE.....	25
10.4. TEST RESULT.....	25
11. MAXIMUM PEAK CONDUCTED OUTPUT POWER MEASUREMENT	31
11.1. LIMITS.....	31
11.2. BLOCK DIAGRAM OF TEST SETUP.....	31
11.3. TEST PROCEDURE.....	31
11.4. TEST RESULT.....	31

12. CONDUCTED BANDEDGE EMISSION MEASUREMENT	34
12.1. LIMITS.....	34
12.2. BLOCK DIAGRAM OF TEST SETUP.....	34
12.3. TEST PROCEDURE	34
12.4. TEST RESULT	34
$\Pi/4$ -DQPSK:	37
13. CONDUCTED SPURIOUS EMISSION MEASUREMENT	41
13.1. LIMITS.....	41
13.2. BLOCK DIAGRAM OF TEST SETUP.....	41
13.3. TEST PROCEDURE	41
13.4. TEST RESULT	41
14. RADIATED BANDEDGE EMISSION / RADIATED SPURIOUS EMISSION MEASUREMENT.....	44
14.1. LIMITS.....	44
14.2. BLOCK DIAGRAM OF TEST SETUP.....	44
14.3. TEST PROCEDURE	45
14.4. TEST RESULT	46
15. AC CONDUCTED EMISSION TEST	49
15.1. LIMITS.....	49
15.2. BLOCK DIAGRAM OF TEST SETUP.....	49
15.3. PROCEDURE OF CONDUCTED EMISSION TEST	49
15.4. GRAPHS AND DATA	50
APPENDIX 1 PHOTOGRAPHS OF TEST SETUP	52
APPENDIX 2 EXTERNAL PHOTOGRAPHS OF PRODUCT.....	54
APPENDIX 3 INTERNAL PHOTOGRAPHS OF PRODUCT.....	55

N/A means not applicable.

1. GENERAL INFORMATION

Applicant: Skullcandy
 1441 W. Ute Blvd Suite 250 Park City, UT 84098 United States

Manufacturer: Skullcandy
 1441 W. Ute Blvd Suite 250 Park City, UT 84098 United States

FCC ID: Y22-SK20130016

Product: Portable Bluetooth Speaker

Trade mark: Skullcandy

Model/Type reference: Soundmine, Ringer

Serial Number: N/A

Report Number: EED32H000620

Sample Received Date: Dec. 27, 2014

Sample tested Date: Dec. 27, 2014 to Jan. 15, 2015

The above equipment was tested by Centre Testing International (Shenzhen) Corporation for compliance with the requirements set forth in the FCC Rules and the measurement procedure according to ANSI C63.4:2009.

2. TEST SUMMARY

No.	Test Item	Rule	Test Result
1	20dB / 99% Bandwidth	FCC 15.247(a)(1) & RSS-Gen 4.6.1	PASS
2	Carrier Frequency Separation	FCC15.247(a)(1) & RSS-210 A8.1(b)	PASS
3	Number of Hopping Frequency	FCC 15.247(a)(iii) & RSS-210 A8.4(2)	PASS
4	Time of Occupancy (Dwell Time)	FCC 15.247(a)(iii) & RSS-210 A8.1(d)	PASS
5	Maximum Peak Conducted Output Power	FCC 15.247(b)(1) & RSS-210 A8.1(b)	PASS
6	Conducted Bandedge Emission / Conducted Spurious Emission	FCC PART15.247(d) & RSS-210 A8.5	PASS
7	Radiated Bandedge Emission / Radiated Spurious Emission	FCC PART15.247(d) & RSS-210 A8.5	PASS
8	AC Conducted Emission	FCC PART15.207 & RSS-Gen 7.2.4	PASS
9	Antenna Requirements *	FCC PART15.203 & RSS-Gen 7.1.2	PASS (See Notes)

*: According to Section 15.203 and RSS-Gen 7.1.2, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The EUT has a built in antenna which is a short wire solder on the PCB, this is permanently attached antenna and meets the requirements of this section.

3. PRODUCT INFORMATION

Items	Description
Rating	Charging input: 5V $\overline{=}$, 500mA lithium Battery: 3,7V $\overline{=}$ 500mAh, IPX0, Class III
Type of Modulation	GFSK (1Mbps) , $\pi/4$ -DQPSK (2Mbps), 8DPSK (3Mbps)
Antenna Type	Integral antenna
Frequency Range	2402 ~ 2480 MHz
Gain	0dBi

Remark: 1. Original FCC ID Y22-SK20130011, Original model number Soundmine and new FCC ID Y22-SK20130016, new model numbers Soundmine, Ringer are electrically identical, only model number and FCC ID are different, so data of report EED32H000620 for new FCC ID Y22-SK20130016 are from report EESZG12250005-1 for FCC ID Y22-SK20130011.

2. The models Soundmine and Ringer are identical except with different color. The test model is Soundmine, and test results are applicable to other.

4. MEASUREMENT UNCERTAINTY

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Measurement items	Uncertainty
Conducted Emission Test	3.2 dB
Radiated Emissions / Bandedge Emission	4.5 dB

5. TEST EQUIPMENT LIST

Equipment	Manufacturer	Model	Serial No.	Due Date
3M Chamber & Accessory Equipment	TDK	SAC-3	---	06/01/2016
Receiver	R&S	ESCI	100435	07/08/2015
TRILOG Broadband Antenna	schwarzbeck	VULB 9163	618	06/17/2015
Multi device Controller	matur	NCD/070/10711 112	---	N/A
Horn Antenna	ETS-LINGREN	3117	00057407	07/07/2015
Microwave Preamplifier	Agilent	8449B	3008A02425	03/19/2016
Spectrum Analyzer	R&S	FSP40	100416	07/06/2015
Receiver	R&S	ESCI	100009	07/19/2015
LISN	R&S	ENV216	100098	07/19/2015

6. SUPPORT EQUIPMENT LIST


Device Type	Brand	Model	Data Cable	Remark
Notebook	Lenovo	E42L	N/A	FCC DOC
Mouse	L.Selectron	M004	Un-shielded 1.2M	FCC DOC

7. 20dB / 99% Bandwidth Measurement

7.1. LIMITS

None

7.2. BLOCK DIAGRAM OF TEST SETUP

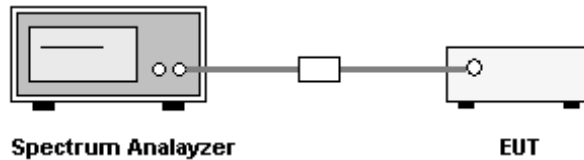

7.3. TEST PROCEDURE

1. The RF output of EUT was connected to the spectrum analyzer by RF cable. The path loss was compensated to the results for each measurement.
2. Set to the maximum power setting and enable the EUT transmit continuously.
3. Use the following spectrum analyzer settings for 20dB Bandwidth measurement. Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel; RBW \geq 1% of the 20 dB bandwidth; VBW \geq RBW; Sweep = auto; Detector function = peak; Trace = max hold.
4. Use the following spectrum analyzer settings for 99 % Bandwidth measurement. For 99% Bandwidth measurement, the RBW=30 kHz, and VBW = 100 kHz. Sweep = auto; Detector function = peak. Trace = max hold.
5. Measure and record the results in the test report.

7.4. TEST RESULT

The test data of worst case are below:

GFSK:

Frequency (MHz)	20dB BW (MHz)	99% BW (MHz)
2402	0.8370	0.8385
2441	0.8025	0.8355
2480	0.8475	0.8355

$\pi/4$ -DQPSK:


Frequency (MHz)	20dB BW (MHz)	99% BW (MHz)
2402	1.2060	1.1670
2441	1.2195	1.1790
2480	1.2225	1.1835

8DPSK:

Frequency (MHz)	20dB BW (MHz)	99% BW (MHz)
2402	1.2075	1.1535
2441	1.2120	1.1655
2480	1.2105	1.1670


Please see the following plots (worst case):

GFSK (20dB BW):

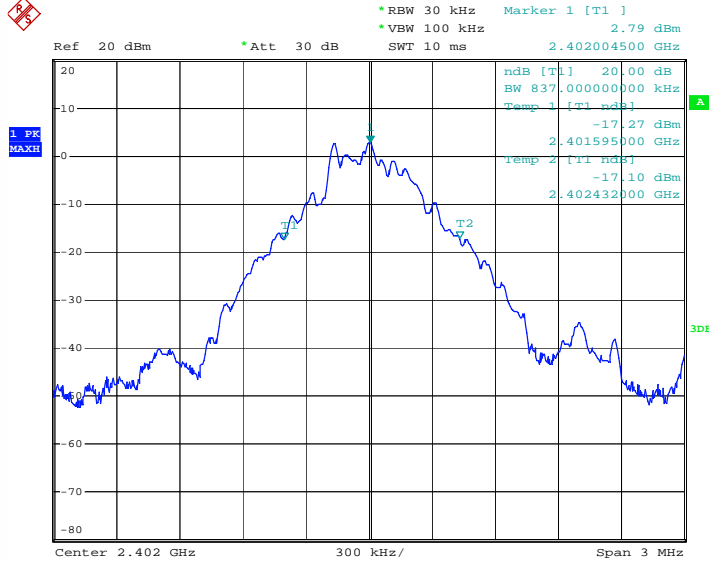


Date: 26.DEC.2014 10:16:44

2402 MHz

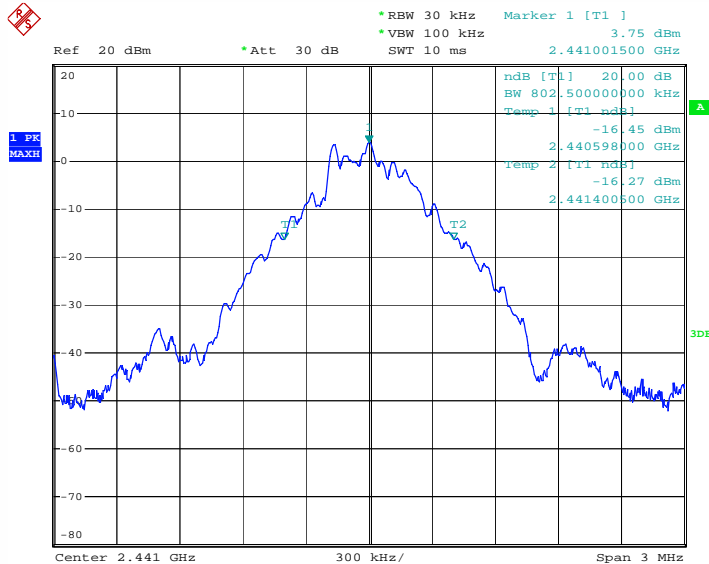

Date: 26.DEC.2014 10:18:03


2441 MHz

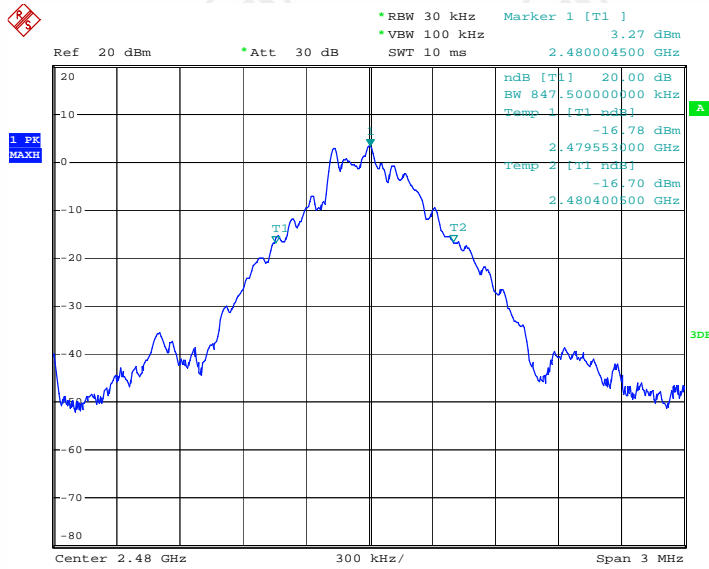

Date: 26.DEC.2014 10:19:15


2480 MHz

GFSK (99% BW):

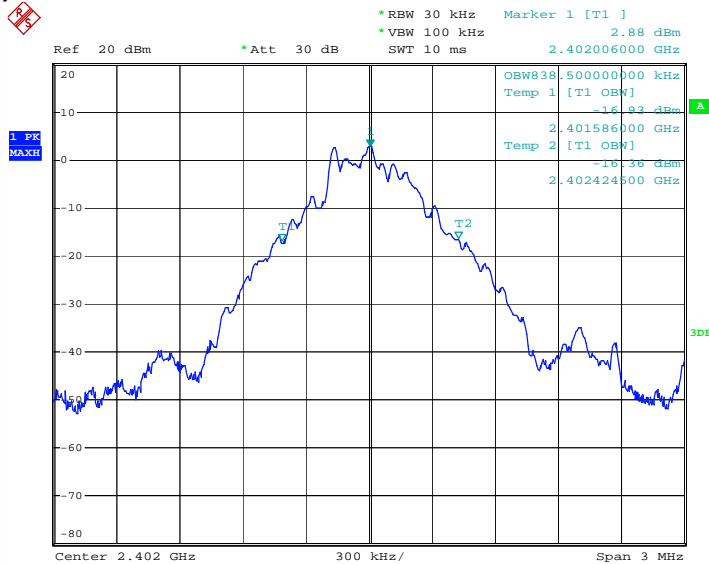


Date: 26.DEC.2014 11:13:29

2402 MHz

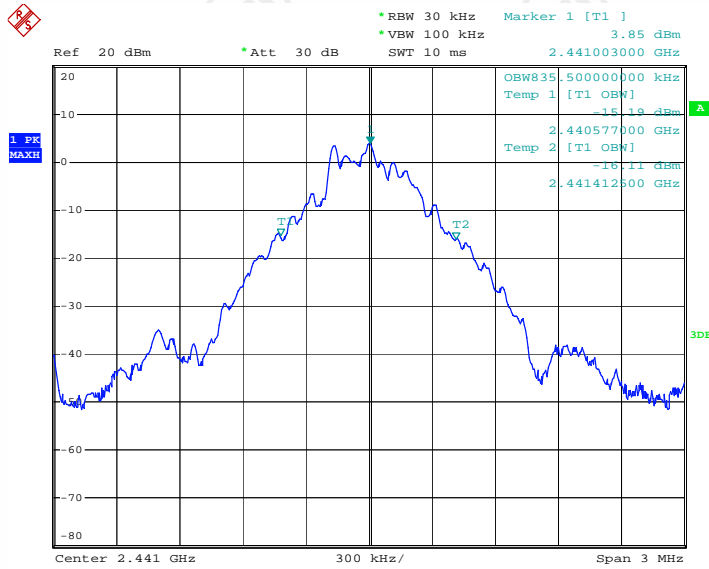

Date: 26.DEC.2014 11:14:43


2441 MHz

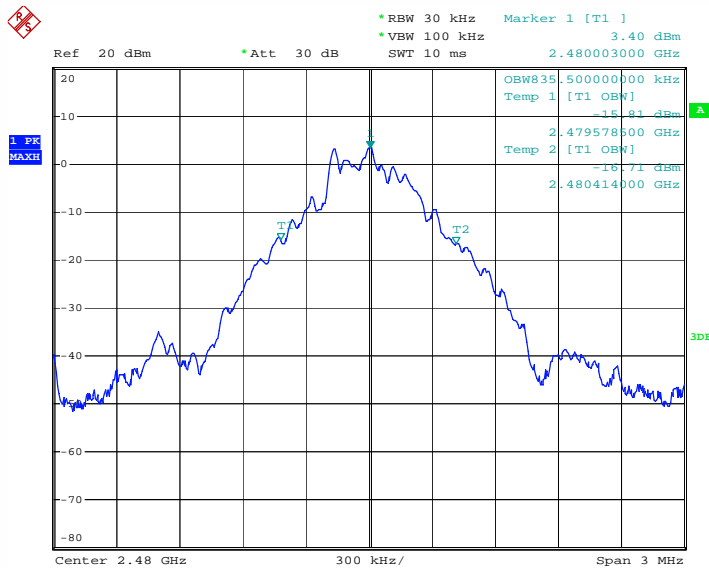

Date: 26.DEC.2014 11:16:08


2480 MHz

$\pi/4$ -DQPSK (20dB BW):

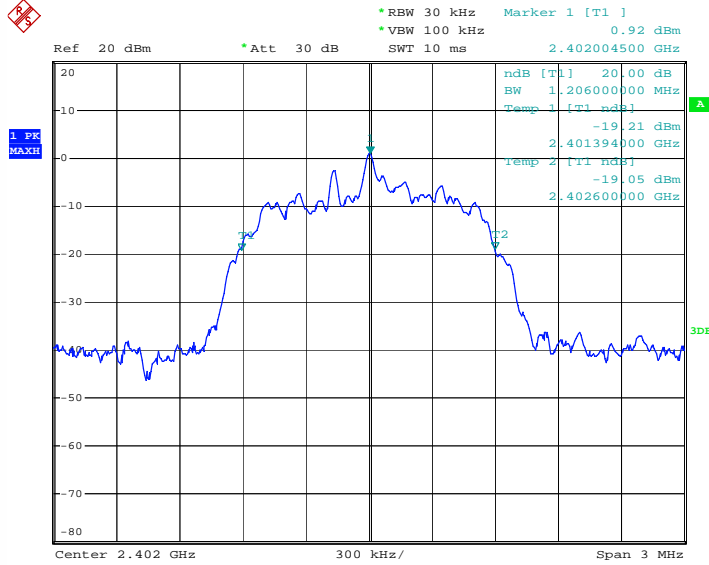


Date: 26.DEC.2014 10:20:41

2402 MHz

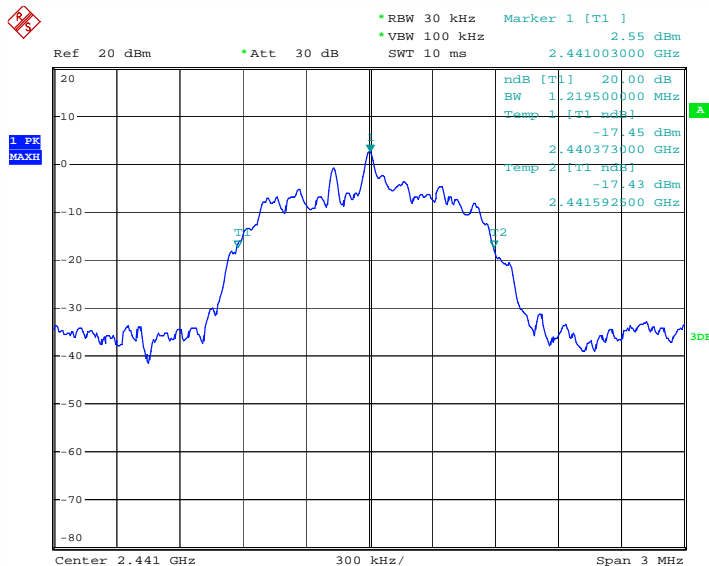

Date: 26.DEC.2014 10:22:31


2441 MHz

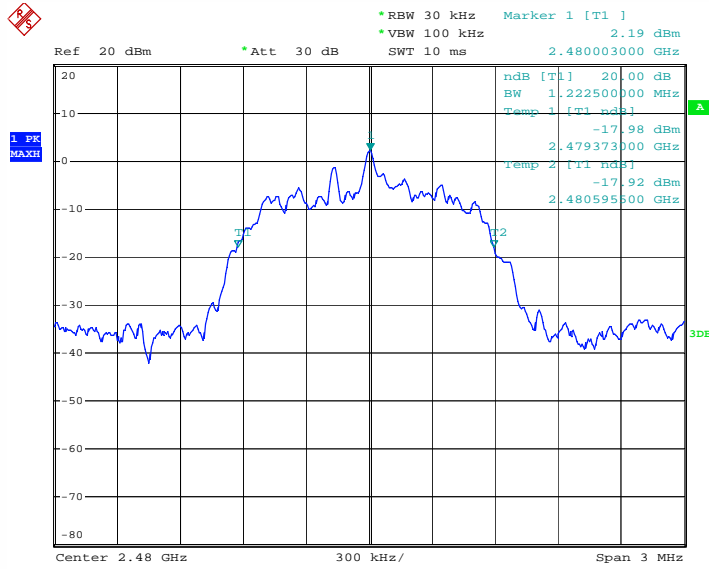

Date: 26.DEC.2014 10:23:28


2480 MHz

π/4-DQPSK (99% BW):

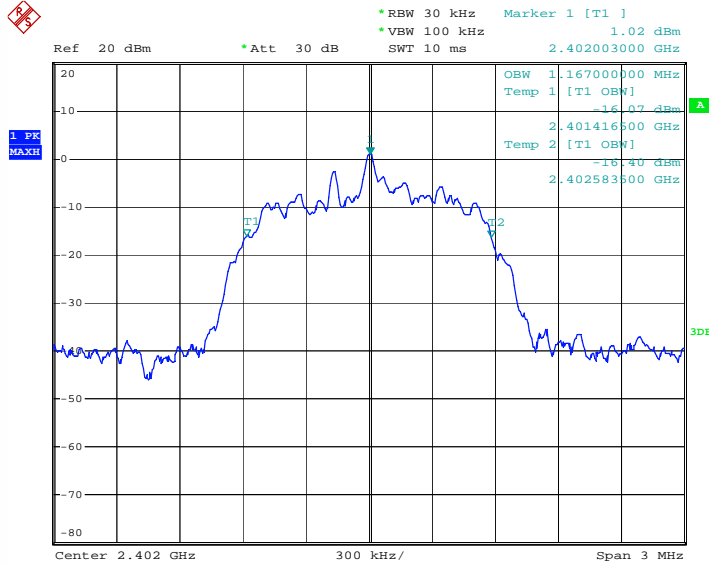


Date: 26.DEC.2014 11:19:53

2402 MHz

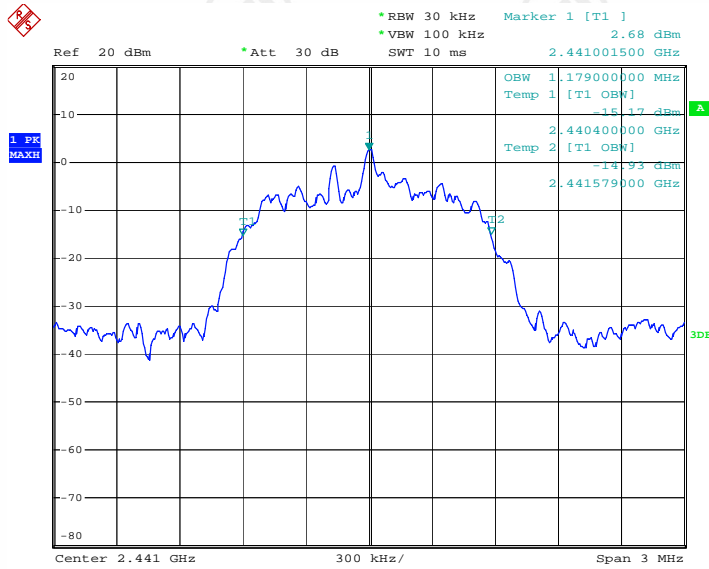

Date: 26.DEC.2014 11:18:49


2441 MHz

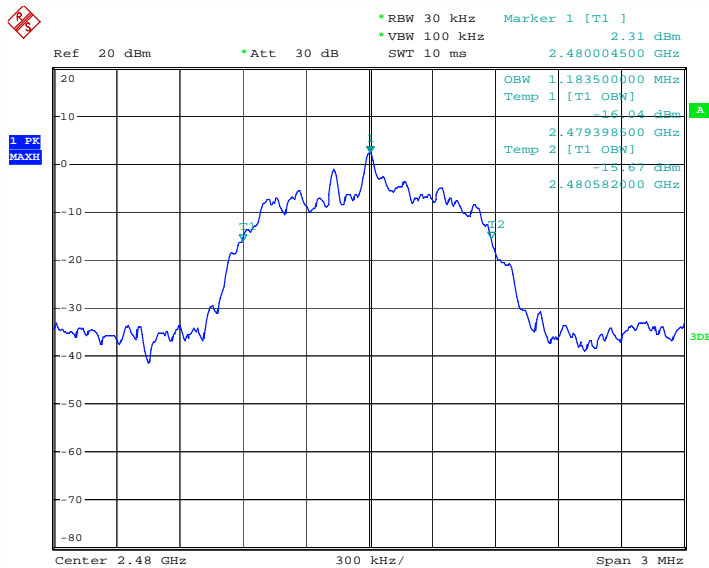

Date: 26.DEC.2014 11:17:49


2480 MHz

8DPSK (20dB BW):

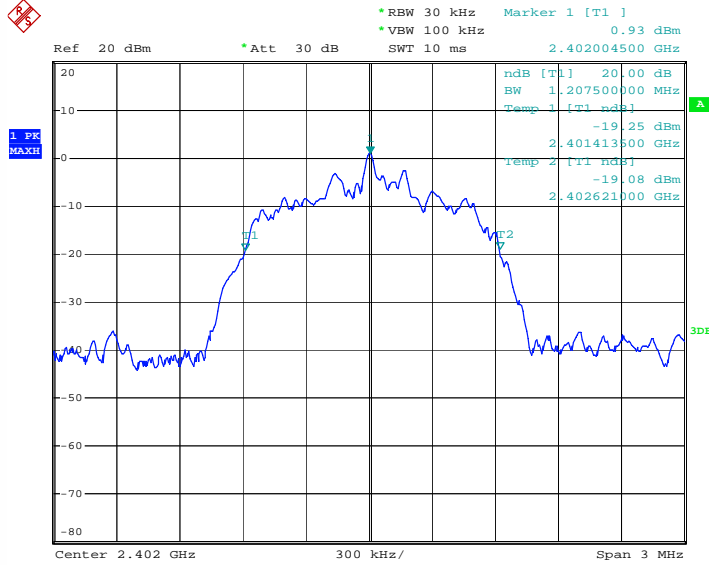


Date: 26.DEC.2014 10:24:51

2402 MHz

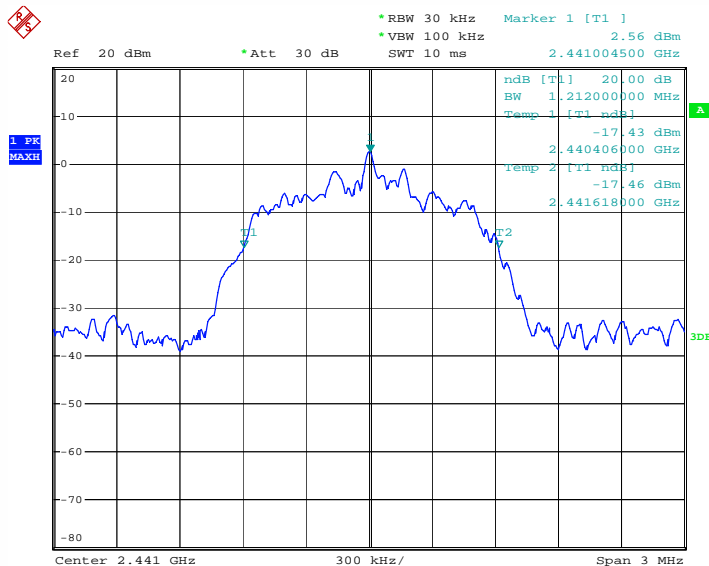

Date: 26.DEC.2014 10:25:56


2441 MHz

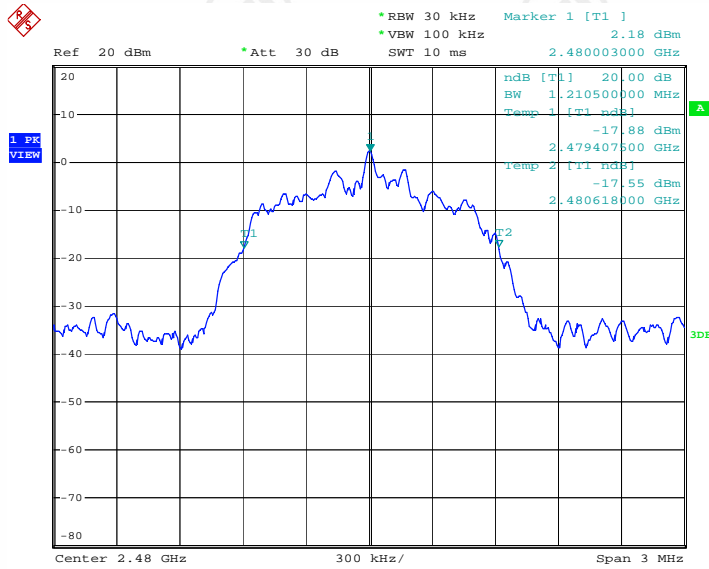

Date: 26.DEC.2014 11:11:25


2480 MHz

8DPSK (99% BW):

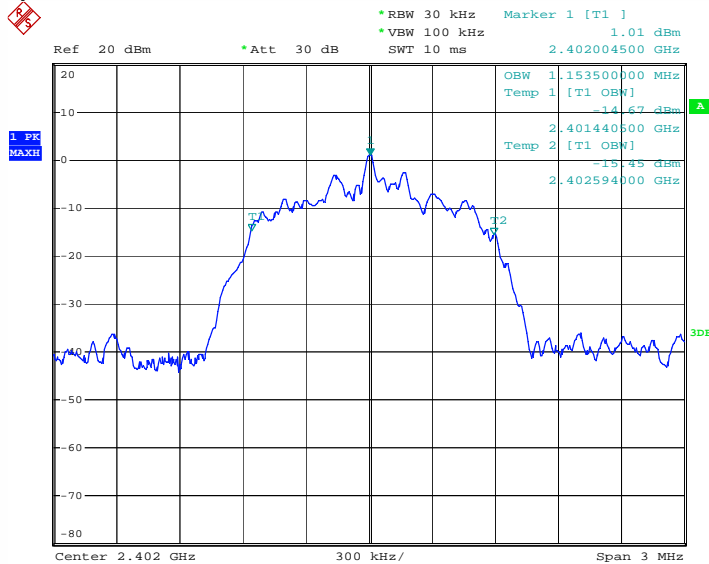


Date: 26.DEC.2014 11:21:01

2402 MHz

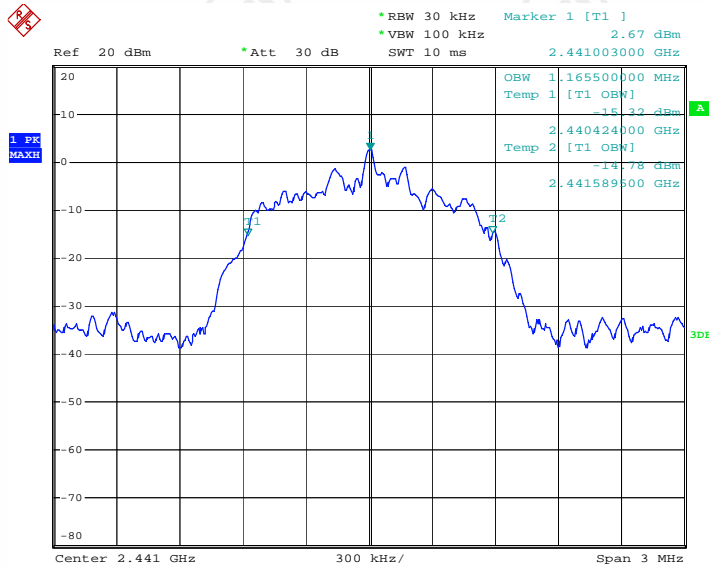

Date: 26.DEC.2014 11:21:54

2441 MHz

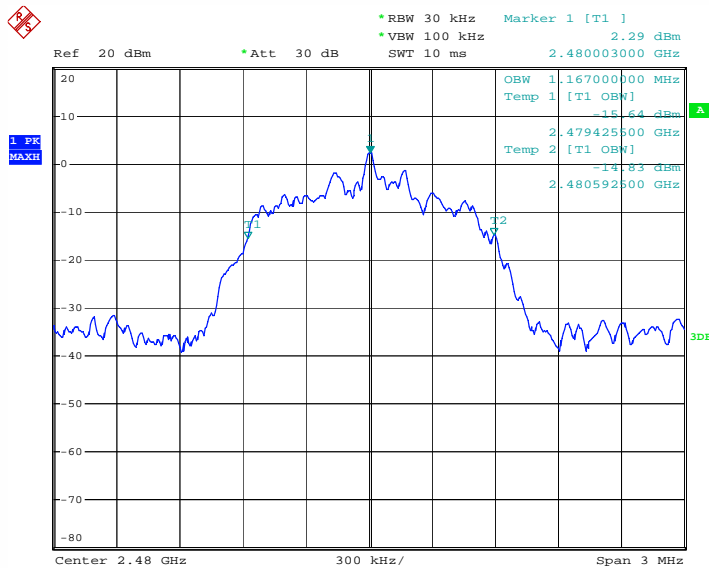

Date: 26.DEC.2014 11:22:47


2480 MHz

8. CARRIER FREQUENCY SEPARATION

8.1. LIMITS

Frequency hopping systems operating in the 2400-2483.5MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125mW.

8.2. BLOCK DIAGRAM OF TEST SETUP

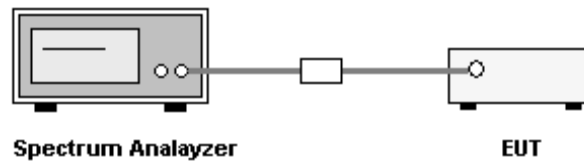

8.3. TEST PROCEDURE


1. The RF output of EUT was connected to the spectrum analyzer by RF cable. The path loss was compensated to the results for each measurement.
2. Set to the maximum power setting and enable the EUT transmit continuously.
3. Enable the EUT hopping function.
4. Use the following spectrum analyzer settings: Span = wide enough to capture the peaks of two adjacent channels; RBW \geq 1% of the span; VBW \geq RBW; Sweep = auto; Detector function = peak; Trace = max hold.
5. Measure and record the results in the test report.

8.4. TEST RESULT

Carrier Frequency Separation: 1 MHz


Please see the following plots (worst case):

GFSK:

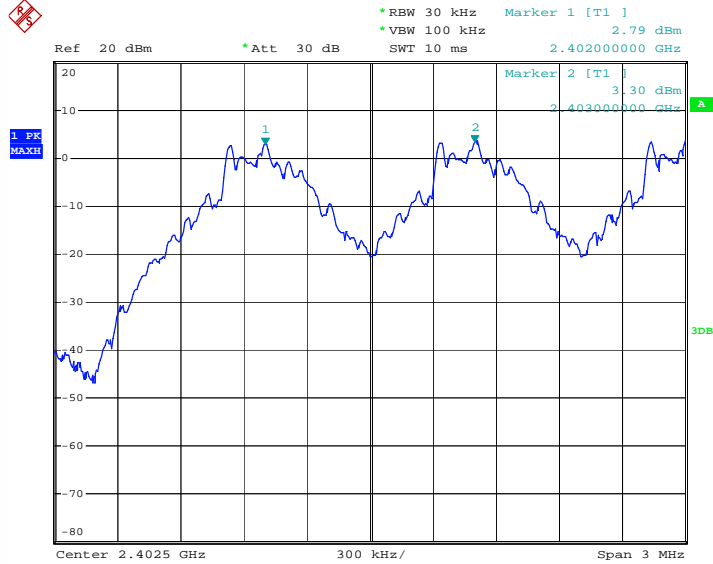


Date: 26.DEC.2014 11:35:33

Low channel

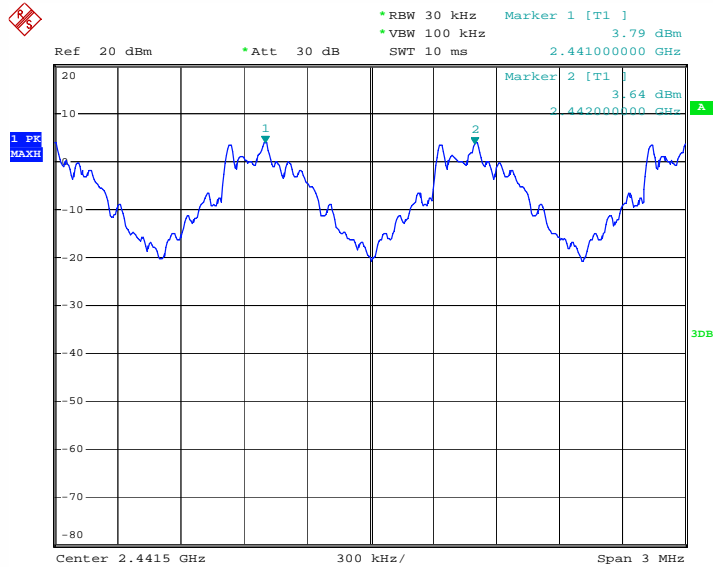

Date: 26.DEC.2014 11:37:20


Middle channel

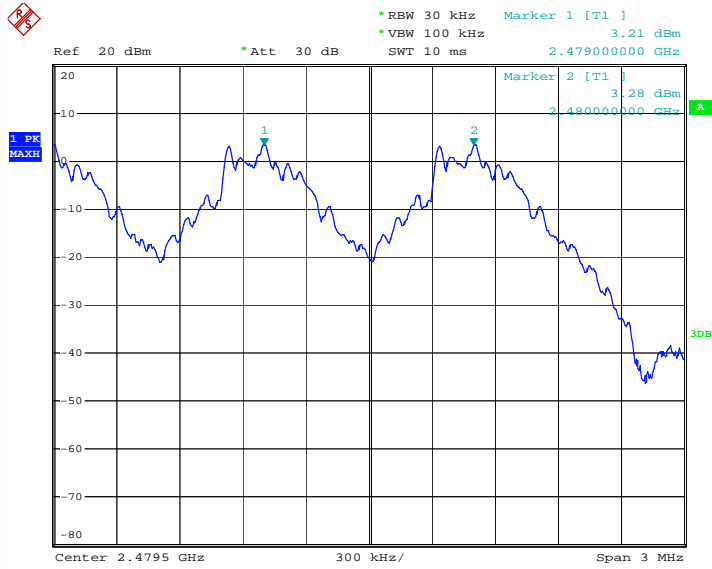

Date: 26.DEC.2014 11:39:04


High channel

Π/4-DQPSK:

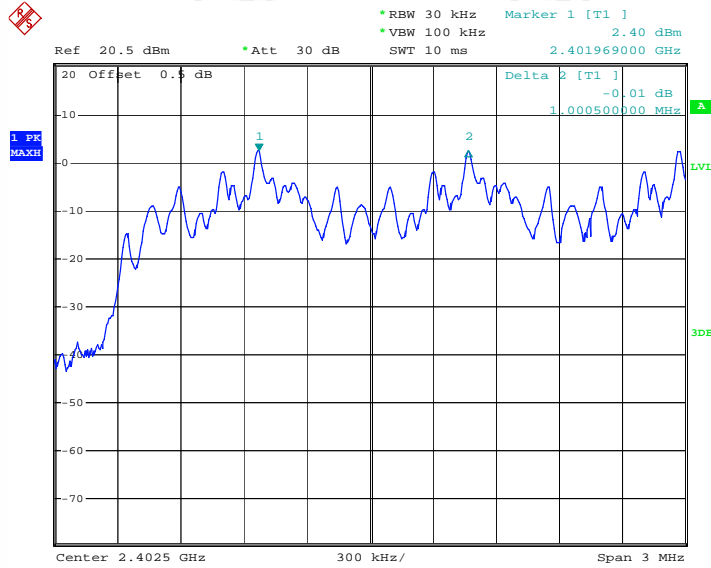


Date: 29.DEC.2014 18:05:33

Low channel

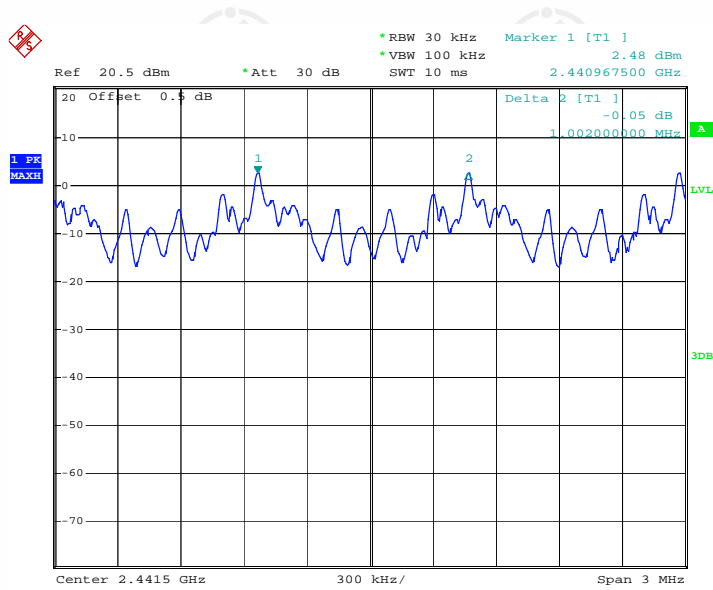

Date: 29.DEC.2014 18:07:49


Middle channel

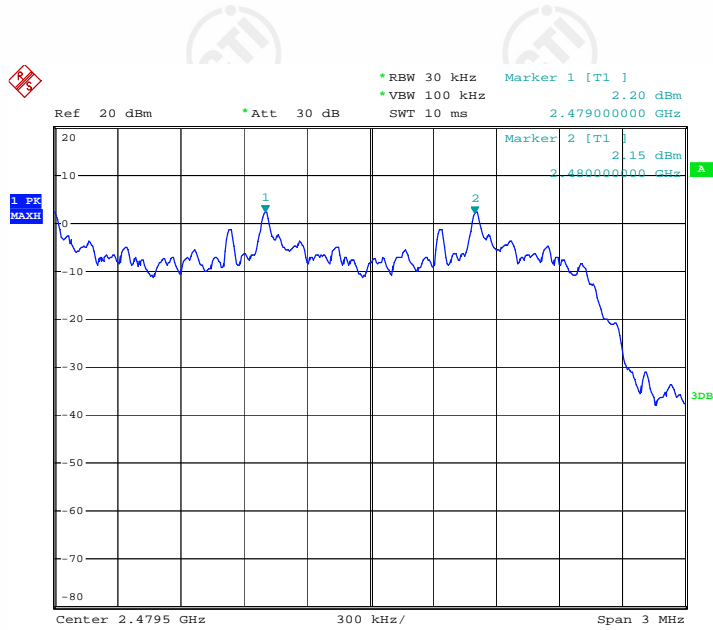

Date: 26.DEC.2014 11:40:50


High channel

8DPSK:

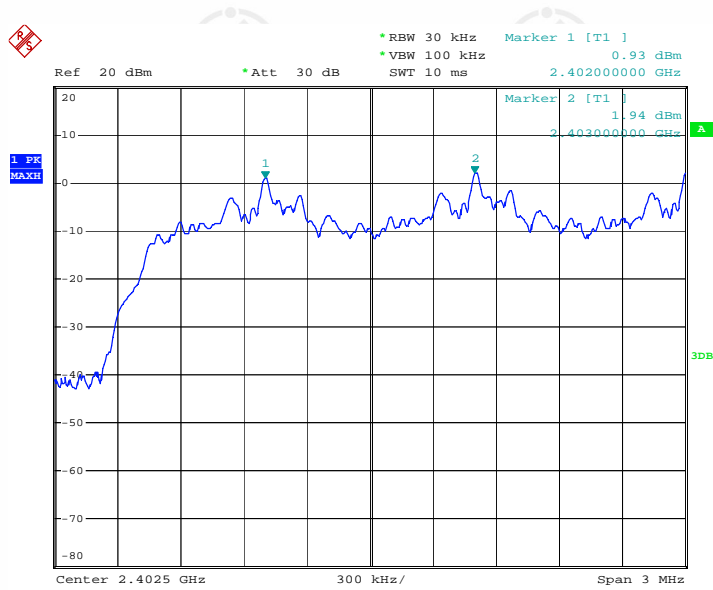


Date: 26.DEC.2014 11:47:52

Low channel

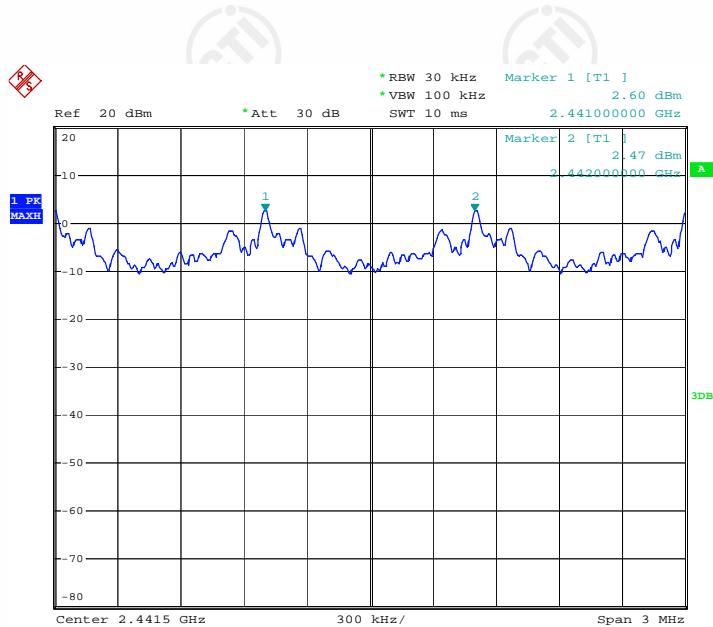

Date: 26.DEC.2014 11:49:55

Middle channel

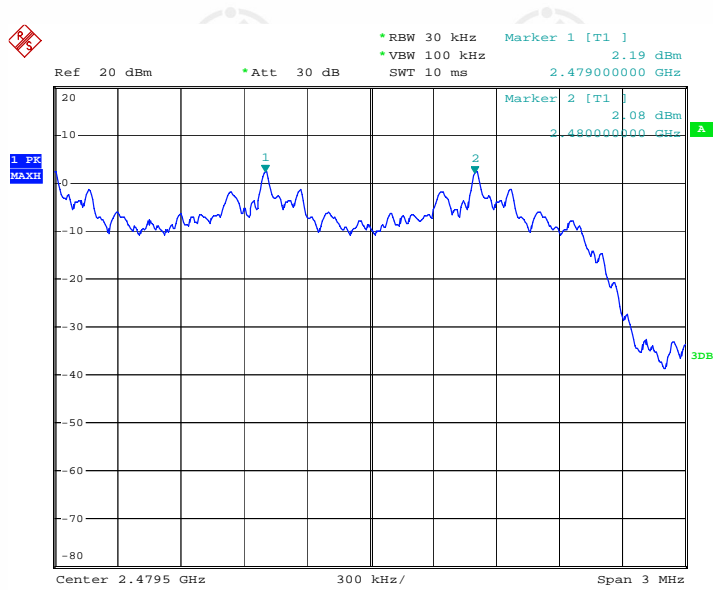

Date: 26.DEC.2014 11:51:42


High channel

9. NUMBER OF HOPPING FREQUENCY

9.1. LIMITS

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.

9.2. BLOCK DIAGRAM OF TEST SETUP

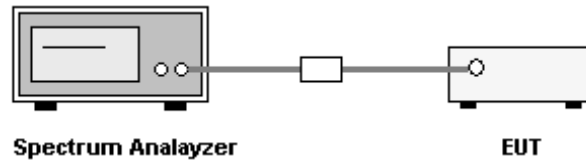

9.3. TEST PROCEDURE


1. The RF output of EUT was connected to the spectrum analyzer by RF cable. The path loss was compensated to the results for each measurement.
2. Set to the maximum power setting and enable the EUT transmit continuously.
3. Enable the EUT hopping function.
4. Use the following spectrum analyzer settings: Span = the frequency band of operation; RBW \geq 1% of the span; VBW \geq RBW; Sweep = auto; Detector function = peak; Trace = max hold.
5. The number of hopping frequency used is defined as the number of total channel.
6. Record the measurement data derived from spectrum analyzer.

9.4. TEST RESULT

Number of Hopping Frequency is 79, with frequency space = 1MHz.


Please see the following plots (worst case):

GFSK:

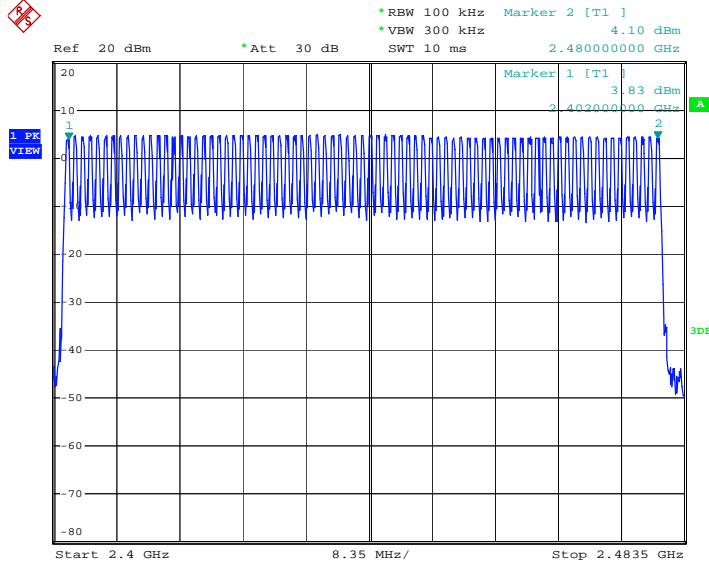


Date: 25.DEC.2014 16:13:40

$\pi/4$ -DQPSK:

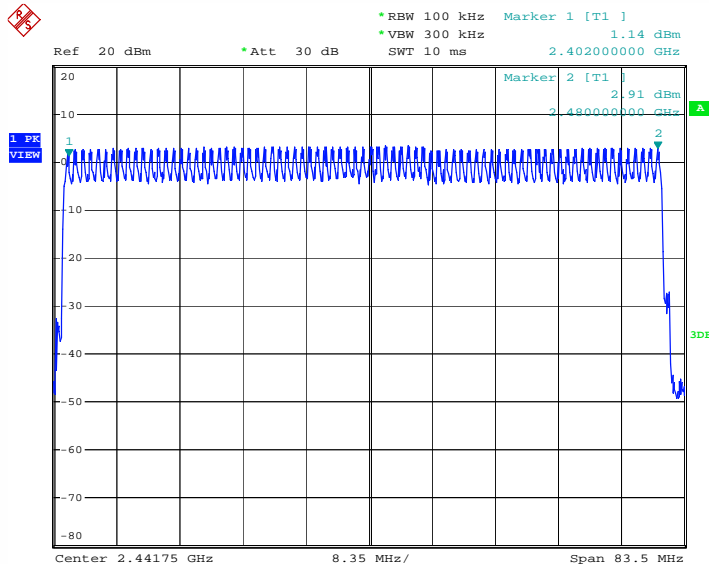

Date: 25.DEC.2014 15:44:40

8DPSK:

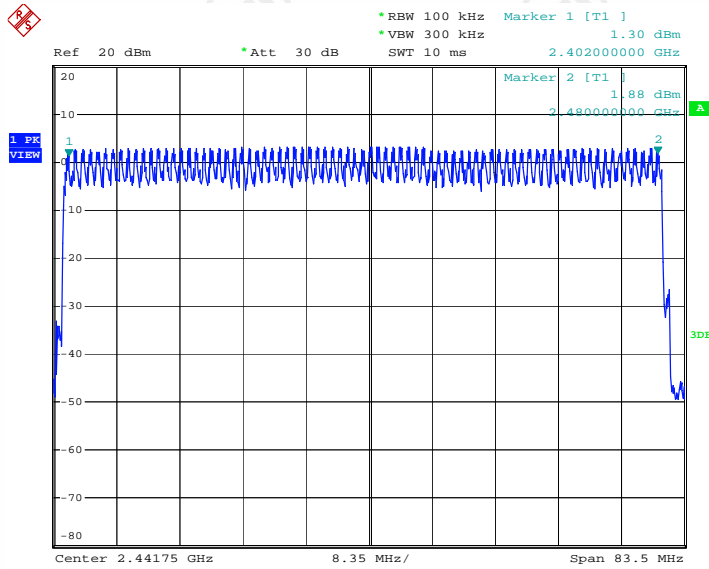


Date: 25.DEC.2014 15:22:39

10. TIME OF OCCUPANCY (DWELL TIME)

10.1. LIMITS

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

10.2. BLOCK DIAGRAM OF TEST SETUP

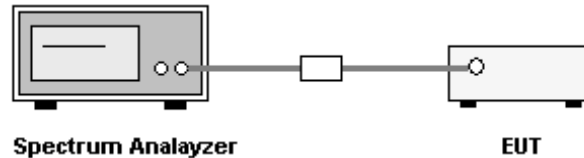

10.3. TEST PROCEDURE

1. The RF output of EUT was connected to the spectrum analyzer by RF cable. The path loss was compensated to the results for each measurement.
2. Set to the maximum power setting and enable the EUT transmit continuously.
3. Enable the EUT hopping function.
4. Use the following spectrum analyzer settings: Span = zero span, centered on a hopping channel; RBW = 1 MHz; VBW ≥ RBW; Sweep = as necessary to capture the entire dwell time per hopping channel; Detector function = peak; Trace = max hold.
5. Measure and record the results in the test report.

10.4. TEST RESULT

The test data of worst case are below:

Frequency (MHz)	Pulse Wide(ms)		Dwell Time (ms)	Limit (s)	Result (Pass / Fail)
2402	DH1	0.43	137.60	0.4	Pass
	DH3	0.88	140.80		
	DH5	2.92	311.48		
2441	DH1	0.43	137.60	0.4	Pass
	DH3	0.89	142.40		
	DH5	2.92	311.48		
2480	DH1	0.43	137.60	0.4	Pass
	DH3	0.89	142.40		
	DH5	2.95	314.68		


Remark:

DH1 Packet permit maximum $1600 / 79 / 2 = 10.12$ hops per second in each channel (1 time slot RX, 1 time slot TX). So, total hops is $10.12 \times 31.6 = 320$

DH3 Packet permit maximum $1600 / 79 / 4 = 5.06$ hops per second in each channel (3 time slots RX, 1 time slot TX). So, total hops is $5.06 \times 31.6 = 160$


DH5 Packet permit maximum $1600 / 79 / 6 = 3.37$ hops per second in each channel (5 time slots RX, 1 time slot TX). So, total hops is $3.37 \times 31.6 = 106.67$

Please see the following plots (worst case):

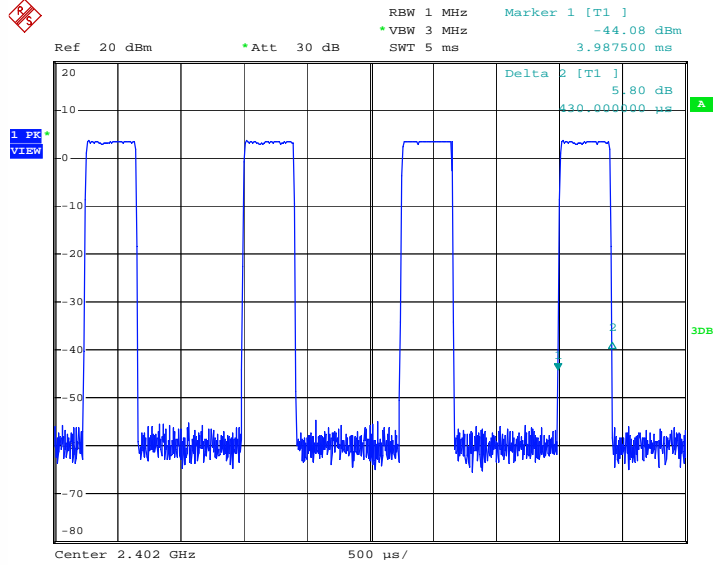


Date: 25.DEC.2014 17:32:25

2402 MHz_DH1

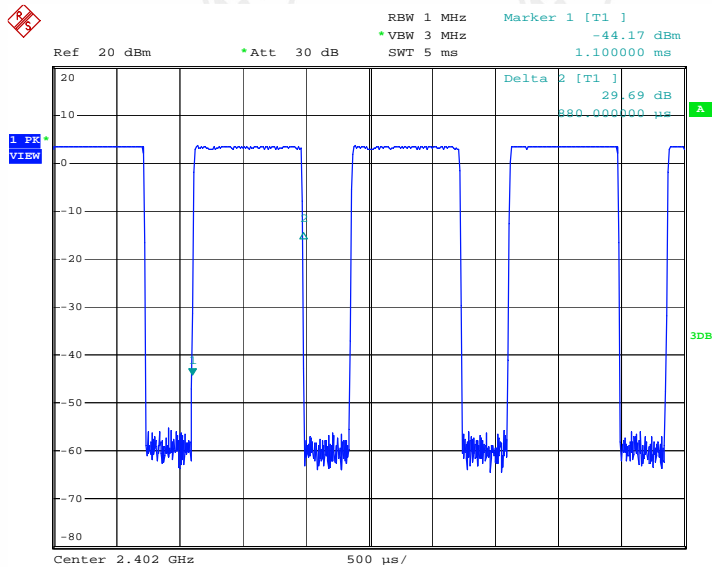


Date: 25.DEC.2014 17:31:31

2402 MHz_DH3

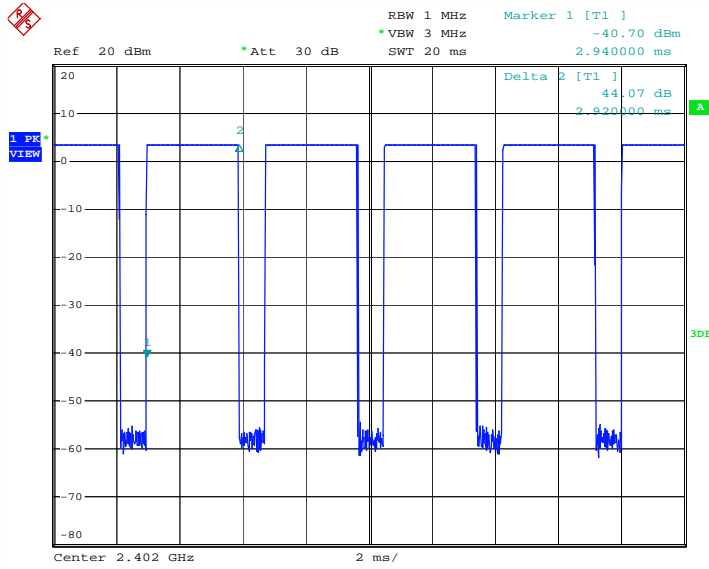


Date: 25.DEC.2014 17:27:40

2402 MHz_DH5

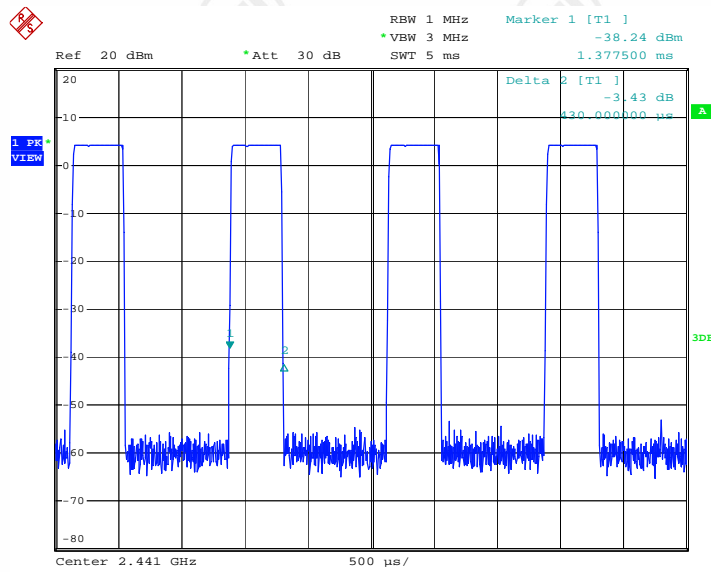


Date: 25.DEC.2014 17:34:27

2441 MHz_DH1

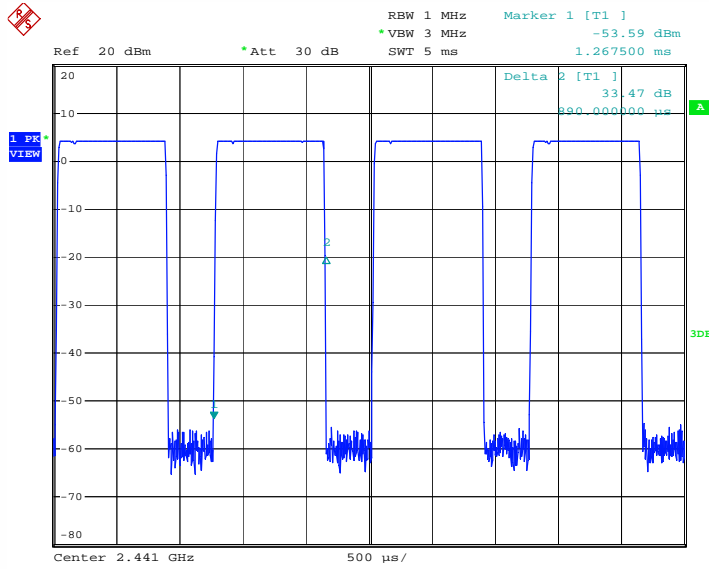


Date: 25.DEC.2014 17:30:49

2441 MHz_DH3

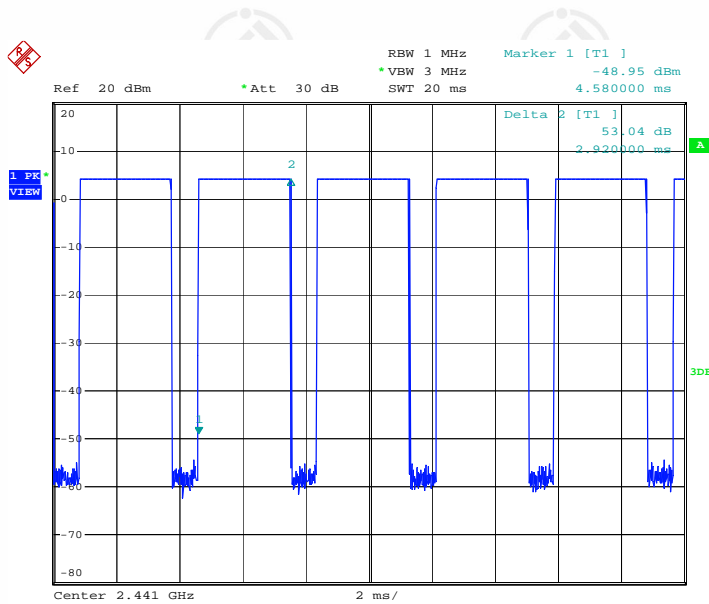


Date: 25.DEC.2014 17:28:44

2441 MHz_DH5

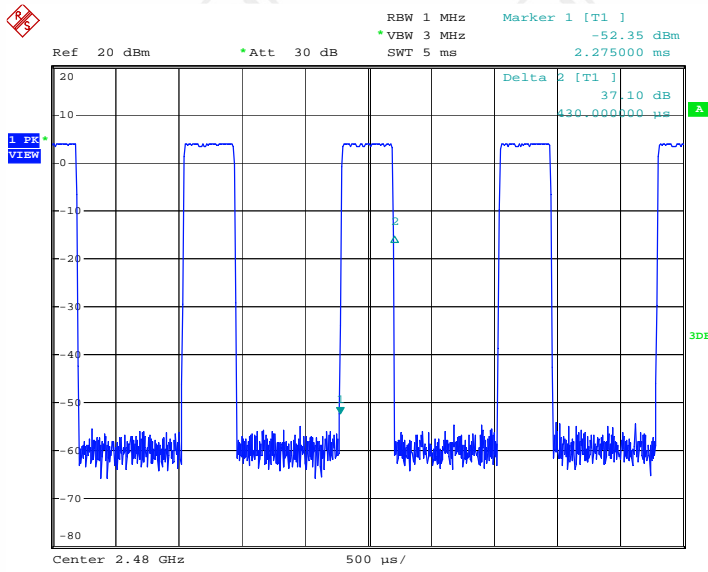


Date: 25.DEC.2014 17:35:03

2480 MHz_DH1

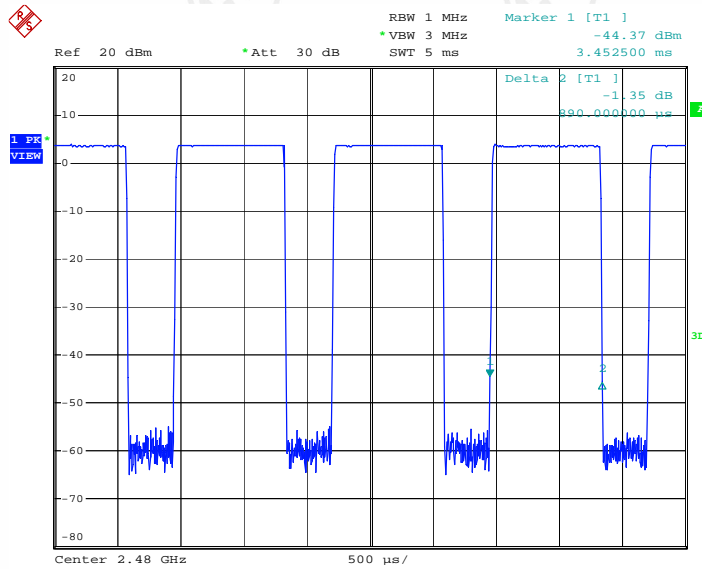

Date: 25.DEC.2014 17:30:05

2480 MHz_DH3

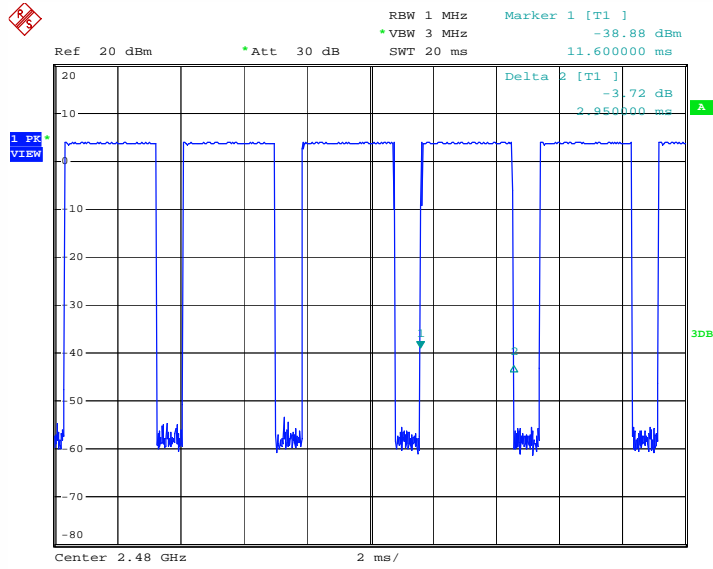

Date: 25.DEC.2014 17:29:19


2480 MHz_DH5

11. MAXIMUM PEAK CONDUCTED OUTPUT POWER MEASUREMENT

11.1. LIMITS

The limit for peak output power is 0.125Watt (21dBm).

11.2. BLOCK DIAGRAM OF TEST SETUP

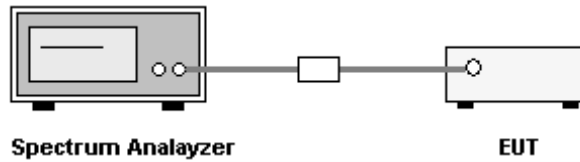

11.3. TEST PROCEDURE


1. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
2. Set to the maximum power setting and enable the EUT transmit continuously.
3. Measure the conducted output power with cable loss and record the results in the test report.
4. Measure and record the results in the test report.

11.4. TEST RESULT

All the modes of GFSK, $\pi/4$ -DQPSK and 8DPSK have been tested. The worst case is GFSK mode, and the worst data of GFSK mode are below:


Frequency (MHz)	Peak Power (dBm)	Limit (dBm)	Result (Pass / Fail)
2402	3.79	21	Pass
2441	4.47	21	Pass
2480	4.04	21	Pass

Please see the following plots (worst case):

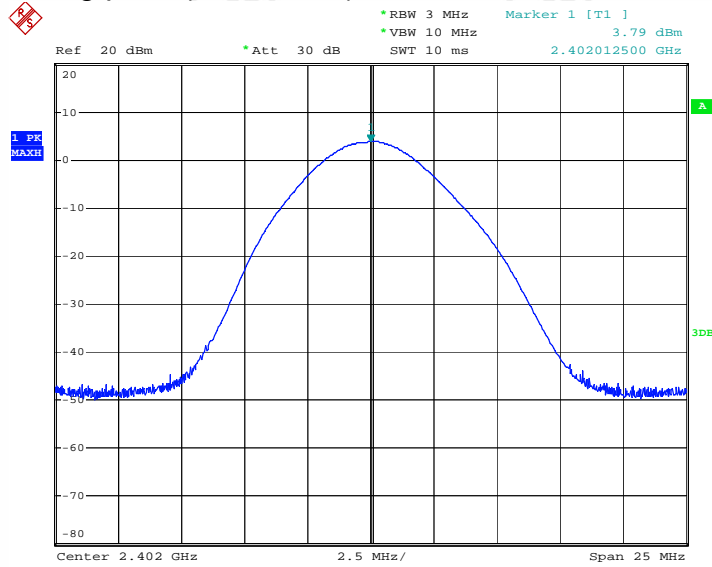


Date: 25.DEC.2014 16:16:20

2402MHz

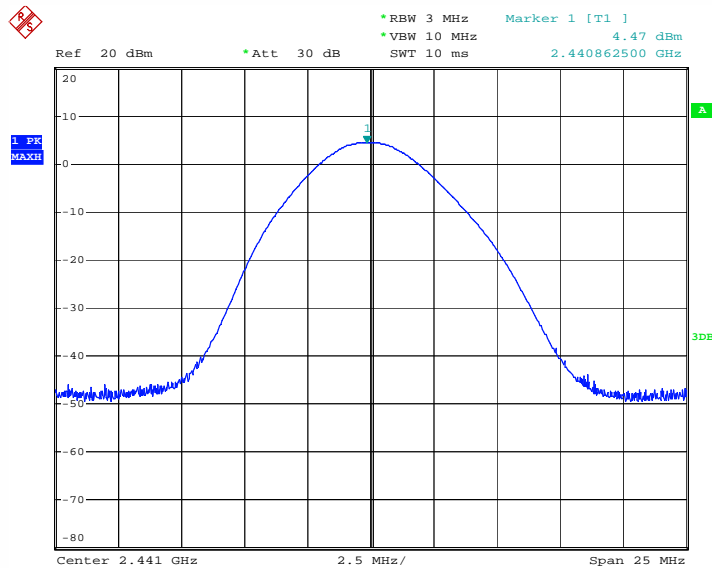

Date: 25.DEC.2014 16:17:40

2441MHz

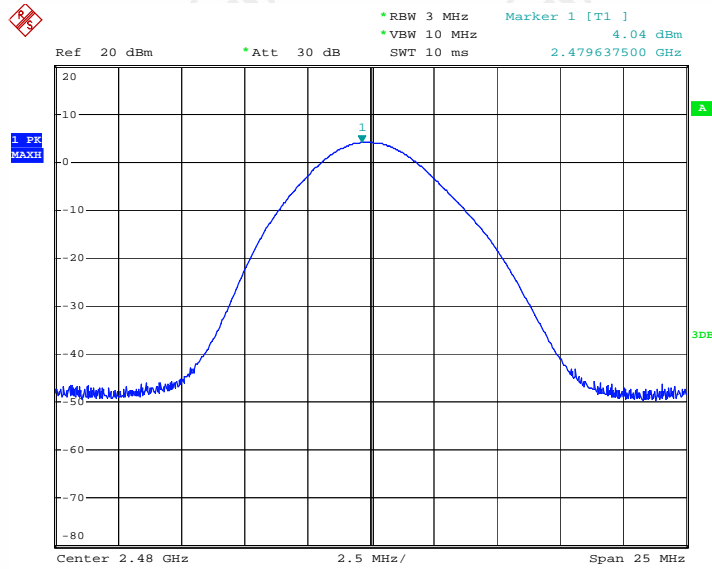

Date: 25.DEC.2014 16:19:02


2480MHz

12. CONDUCTED BANDEDGE EMISSION MEASUREMENT

12.1. LIMITS

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).

12.2. BLOCK DIAGRAM OF TEST SETUP

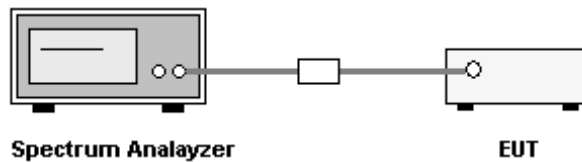

12.3. TEST PROCEDURE

1. Set to the maximum power setting and enable the EUT transmit continuously.
2. Set RBW = 100 kHz, VBW = 300 kHz (\geq RBW). Band edge emissions must be at least 20 dB down from the highest emission level within the authorized band as measured with a 100 kHz RBW.
3. Enable hopping function of the EUT and then repeat step 1 and 2.
4. Measure and record the results in the test report.


12.4. TEST RESULT

Pass.

The test data of worst case are below:


GFSK:

Hopping off mode:

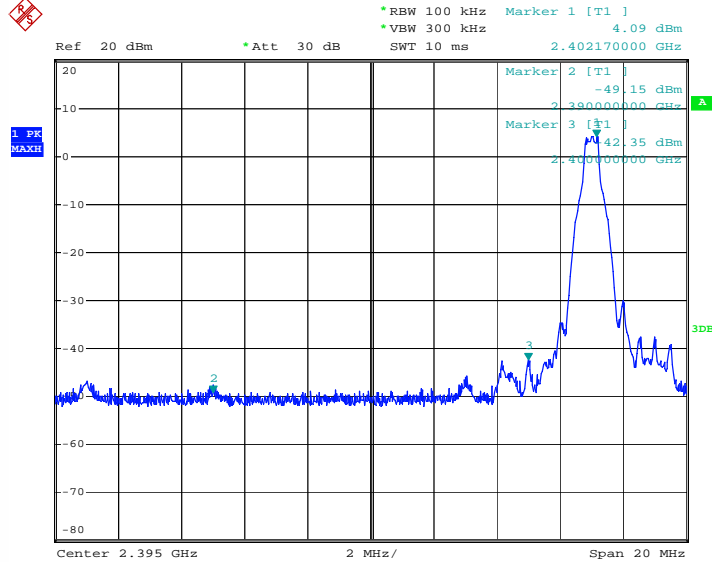

Date: 26.DEC.2014 13:47:06


Low channel

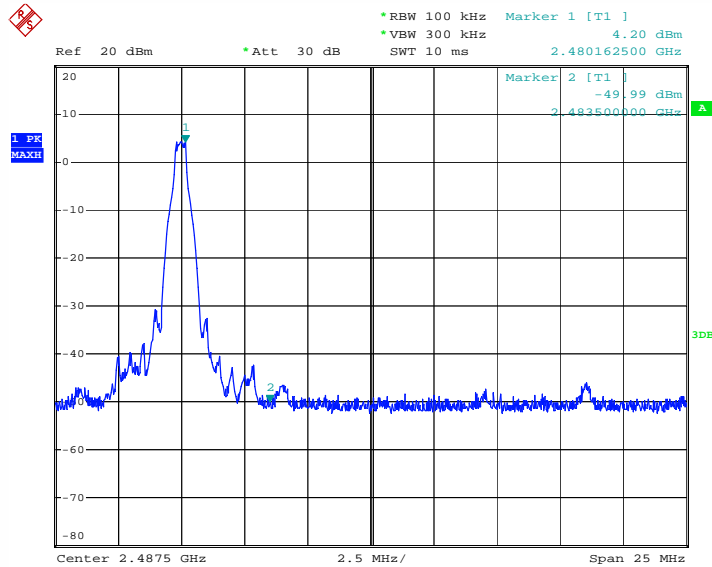

Date: 26.DEC.2014 13:52:59


High channel

Hopping mode:

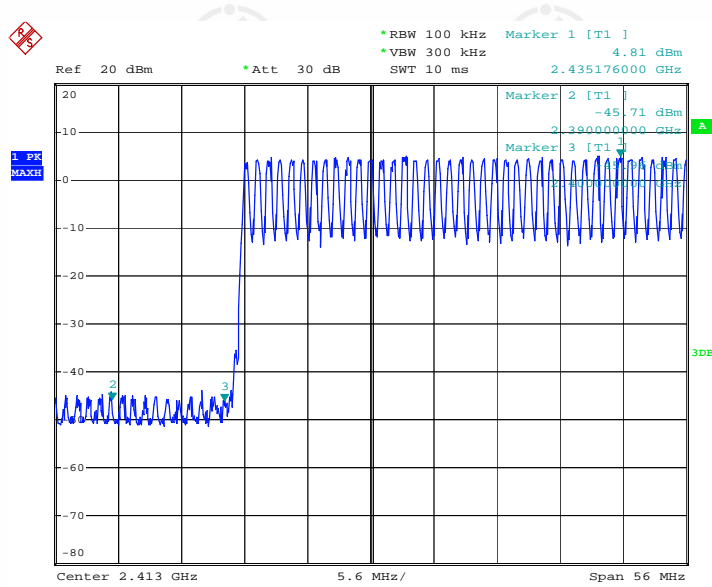

Date: 26.DEC.2014 13:06:45


Low channel

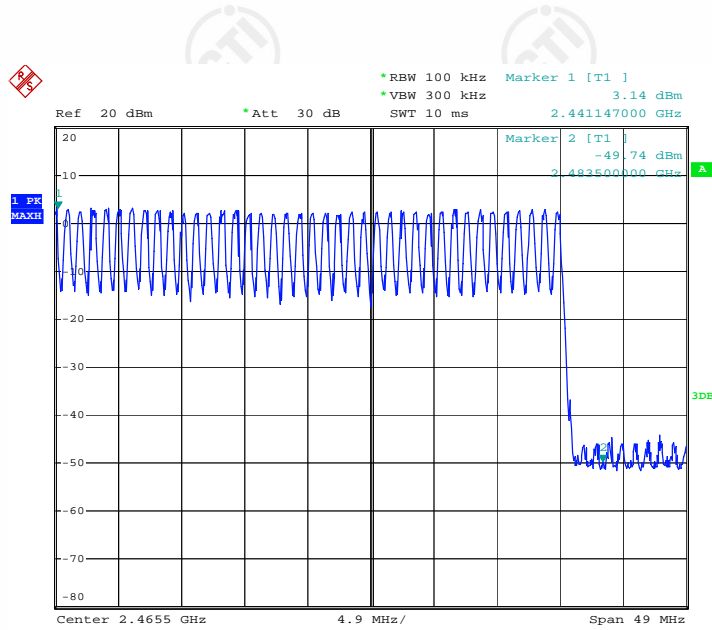

Date: 26.DEC.2014 13:44:41


High channel

$\pi/4$ -DQPSK:
Hopping off mode:

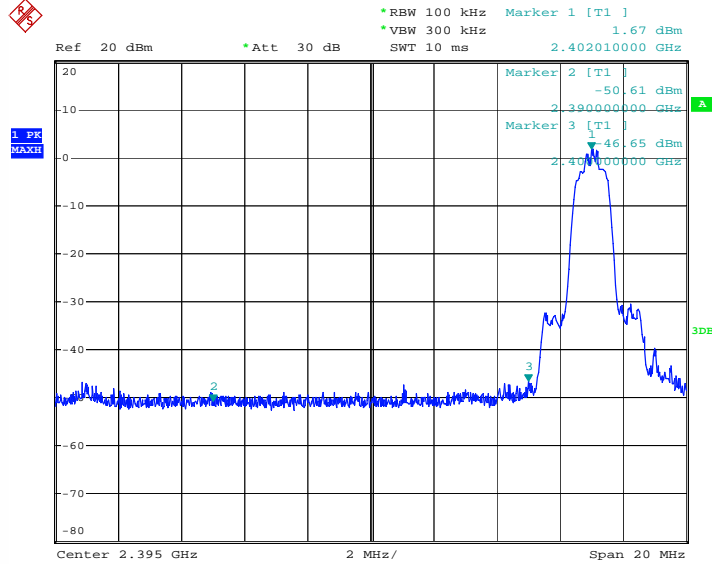

Date: 26.DEC.2014 13:48:14


Low channel

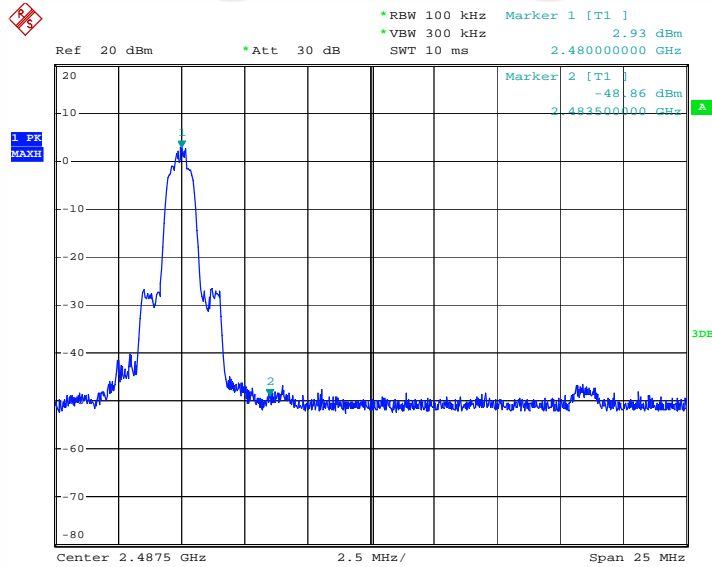

Date: 26.DEC.2014 13:51:51


High channel

Hopping mode:

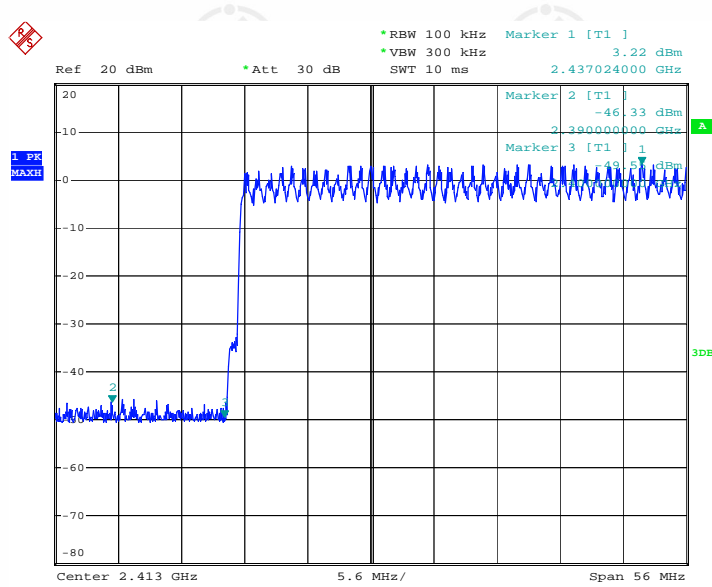

Date: 26.DEC.2014 13:12:40


Low channel

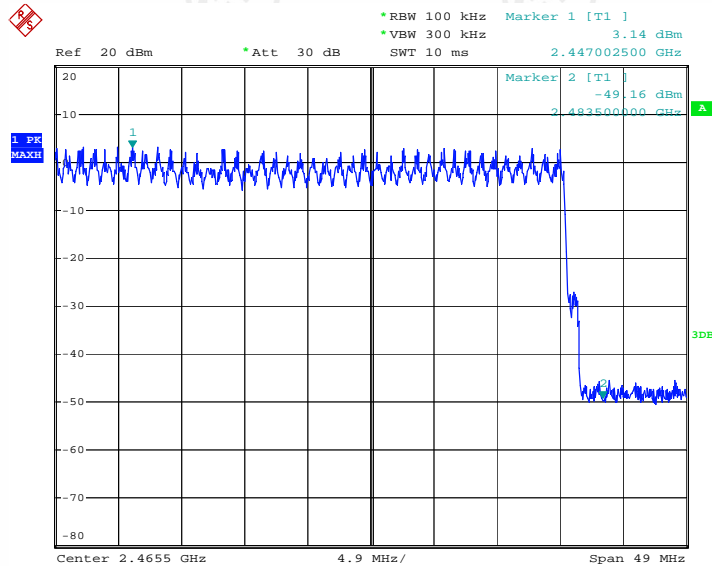

Date: 26.DEC.2014 13:42:17


High channel

8DPSK:
Hopping off mode:

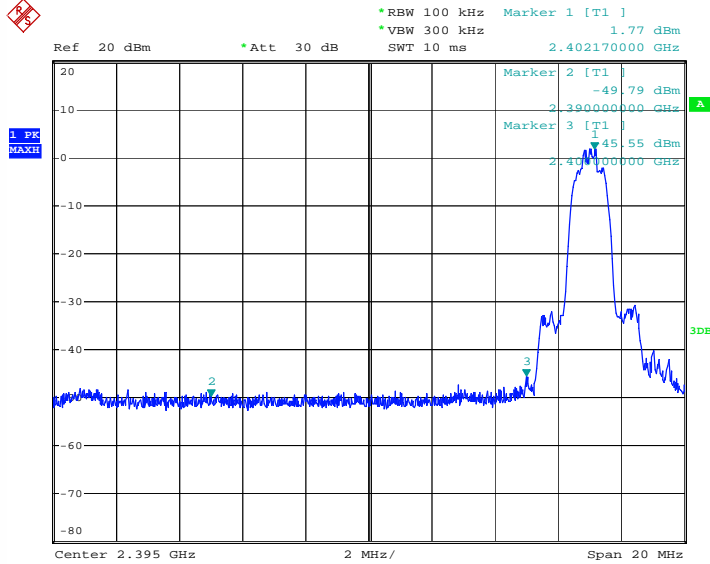

Date: 26.DEC.2014 13:49:13


Low channel

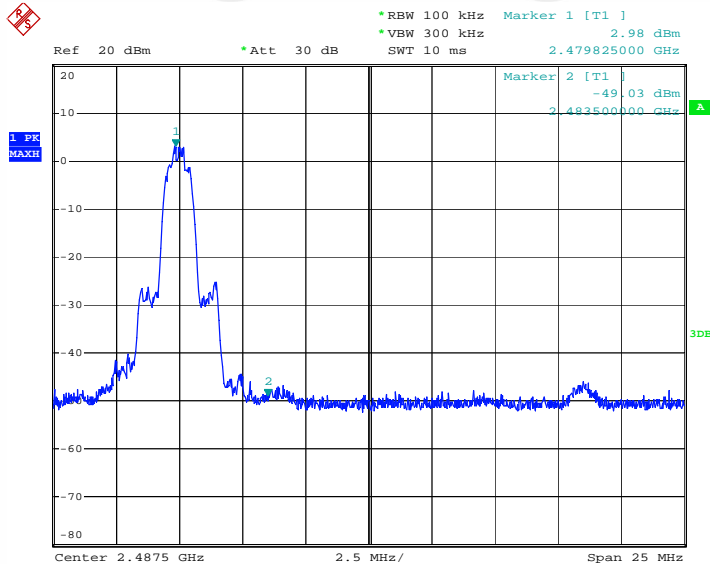

Date: 26.DEC.2014 13:50:48


High channel

Hopping mode:

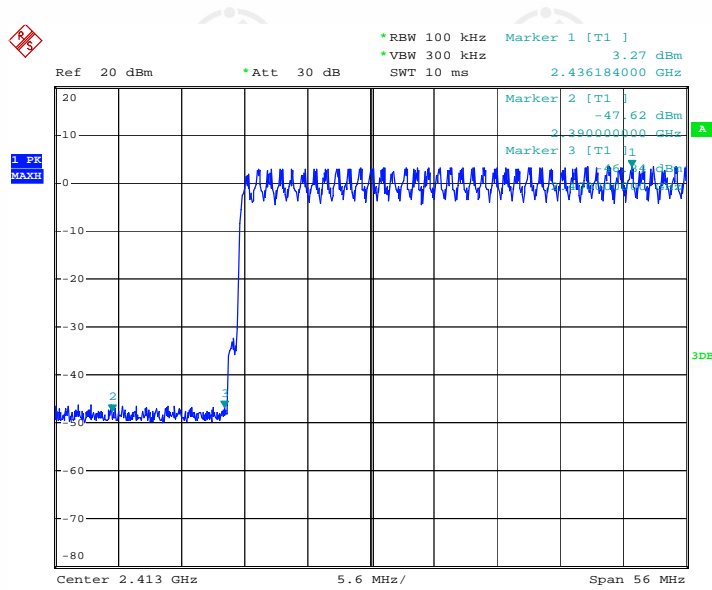

Date: 26.DEC.2014 13:32:12

Low channel

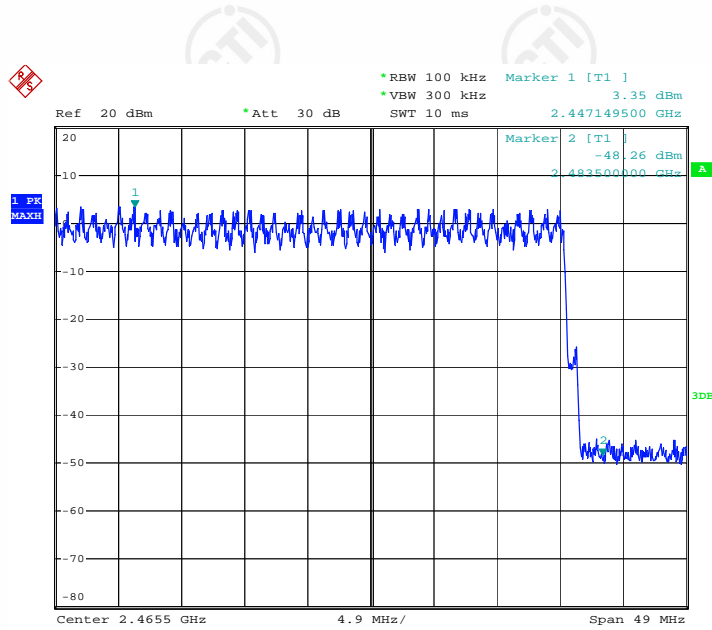

Date: 26.DEC.2014 13:38:06


High channel

13. CONDUCTED SPURIOUS EMISSION MEASUREMENT

13.1. LIMITS

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.

13.2. BLOCK DIAGRAM OF TEST SETUP

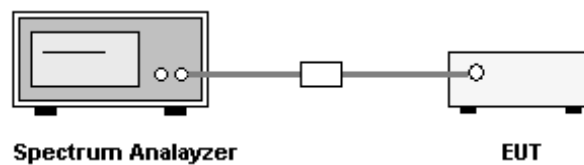


13.3. TEST PROCEDURE

1. The RF output of EUT was connected to the spectrum analyzer by RF cable. The path loss was compensated to the results for each measurement.
2. Set to the maximum power setting and enable the EUT transmit continuously.
3. Set RBW = 100 kHz, VBW = 300 kHz, scan up through 10th harmonic. All harmonics / spurs must be at least 20 dB down from the highest emission level within the authorized band as measured with a 100 kHz RBW.
4. Measure and record the results in the test report.
5. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

13.4. TEST RESULT


Pass.

Please see the following plots (worst case, GFSK mode):

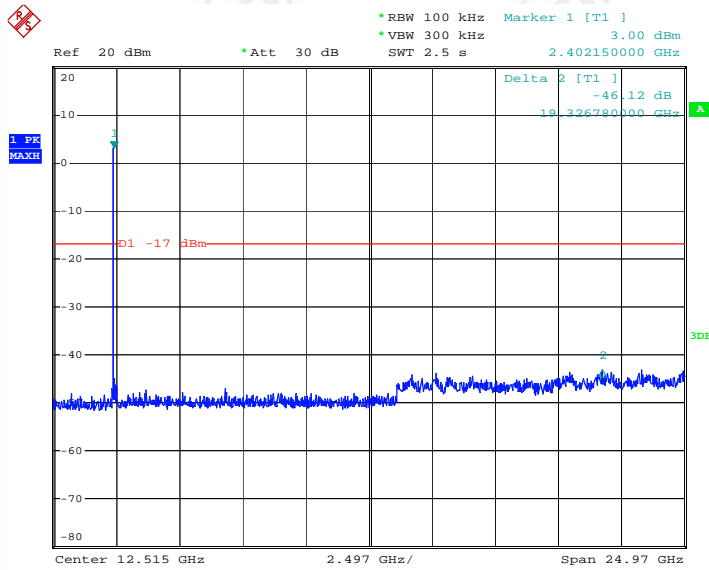


Date: 26.DEC.2014 11:26:24

2402MHz

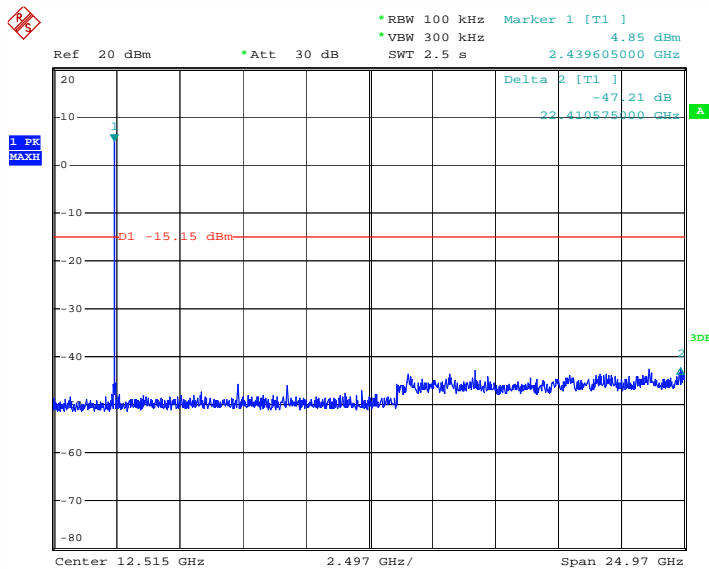

Date: 26.DEC.2014 11:28:20

2441MHz

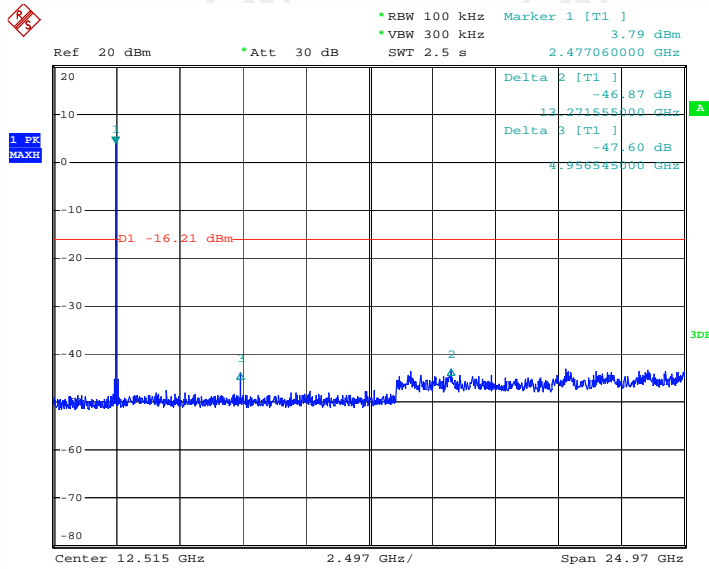

Date: 26.DEC.2014 11:29:51

2480MHz

14. RADIATED BANDEDGE EMISSION / RADIATED SPURIOUS EMISSION MEASUREMENT

14.1. LIMITS


The field strength of any emissions, which appear outside of operating frequency band and restricted band specified on FCC 15.205(a), shall not exceed the general radiated emission limits as below.

Frequency (MHz)	Field strength ($\mu\text{V}/\text{m}$)	Distance (m)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3


Note: the tighter limit applies at the band edges.

14.2. BLOCK DIAGRAM OF TEST SETUP


For radiated emissions from 9kHz to 30MHz

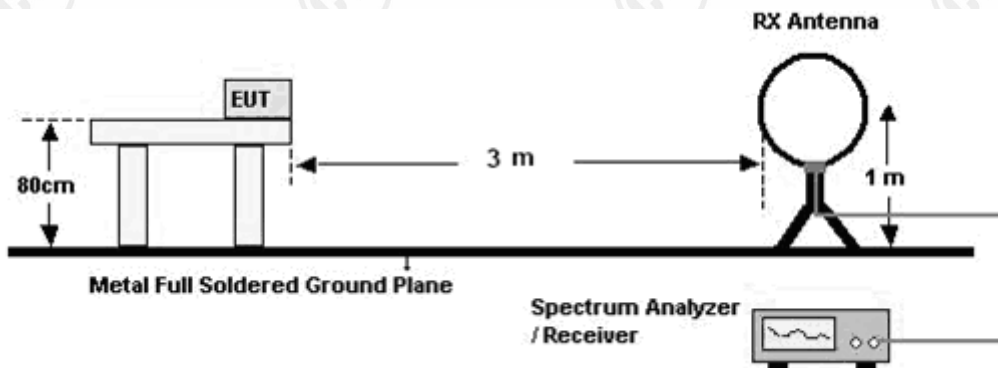

For radiated emissions from 30 - 1000MHz

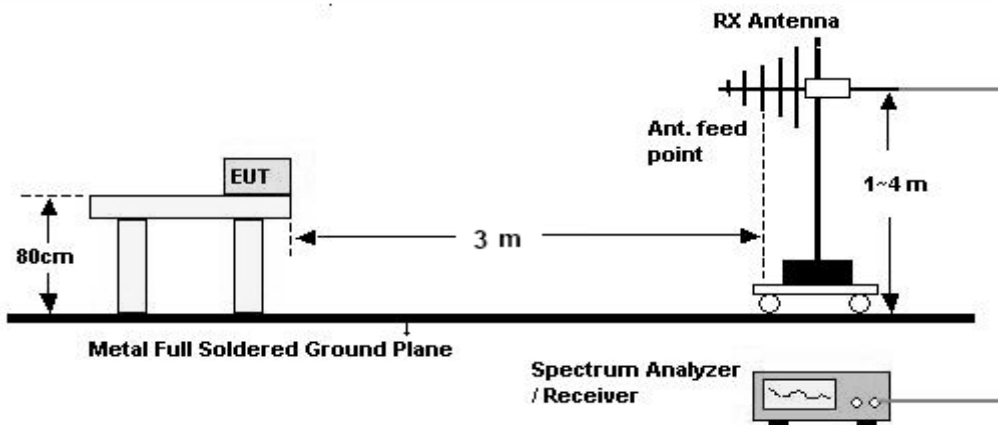

For radiated emissions from 1GHz to 25GHz

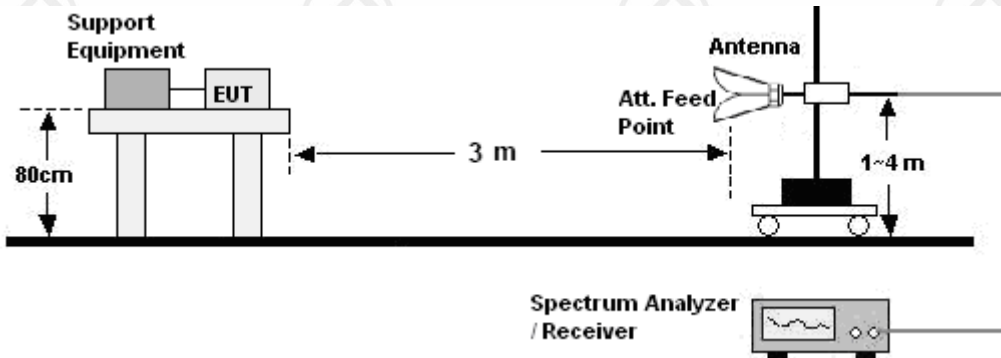

14.3. TEST PROCEDURE

Below 30MHz

- The Product is placed on a turntable 0.8 meters above the ground in the chamber, 3 meter away from the antenna (loop antenna). The maximum values of the field strength are recorded by adjusting the polarizations of the test antenna and rotating the turntable.
- For each suspected emission, the Product was arranged to its worst case and then turn table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test frequency analyzer system was set to Peak Detect (300Hz RBW in 9kHz to 150kHz and 10kHz RBW in 150kHz to 30MHz) Function and Specified Bandwidth with Maximum Hold Mode.

30MHz ~ 1GHz:

- The Product was placed on the non-conductive turntable 0.8m above the ground at a chamber.
- Set the spectrum analyzer/receiver in Peak detector, Max Hold mode, and 100 kHz RBW. Record the maximum field strength of all the pre-scan process in the full band when the antenna is varied between 1~4 m in both horizontal and vertical, and the turntable is rotated from 0 to 360 degrees.
- For each frequency whose maximum record was higher or close to limit, measure its QP value (120 kHz RBW): vary the antenna's height and rotate the turntable from 0 to 360 degrees to find the height and degree where Product radiated the maximum emission, then set the test frequency analyzer/receiver to QP Detector and specified bandwidth with Maximum Hold Mode, and record the maximum value.

Above 1GHz:

- The EUT was placed on the non-conductive turntable 0.8 m above the ground at a chamber.
- Set the spectrum analyzer/receiver in Peak detector, Max Hold mode, and 1MHz RBW. Record the maximum field strength of all the pre-scan process in the full band when the antenna is varied in both horizontal and vertical, and the turntable is rotated from 0 to 360 degrees.

14.4. TEST RESULT

All the modes of operation (X, Y, Z) were investigated and the worst-case emissions are reported.


A. Below 30MHz:

No emissions were found higher than the background below 30MHz and background is lower than the limit, so it deems to compliance with the limit without recorded.

B. 30MHz ~ 1GHz:

The test data of low channel, middle channel and high channel are almost same in frequency bands 30MHz to 1GHz, and the data of middle channel (GFSK mode) are chosen as representative in below:


H:

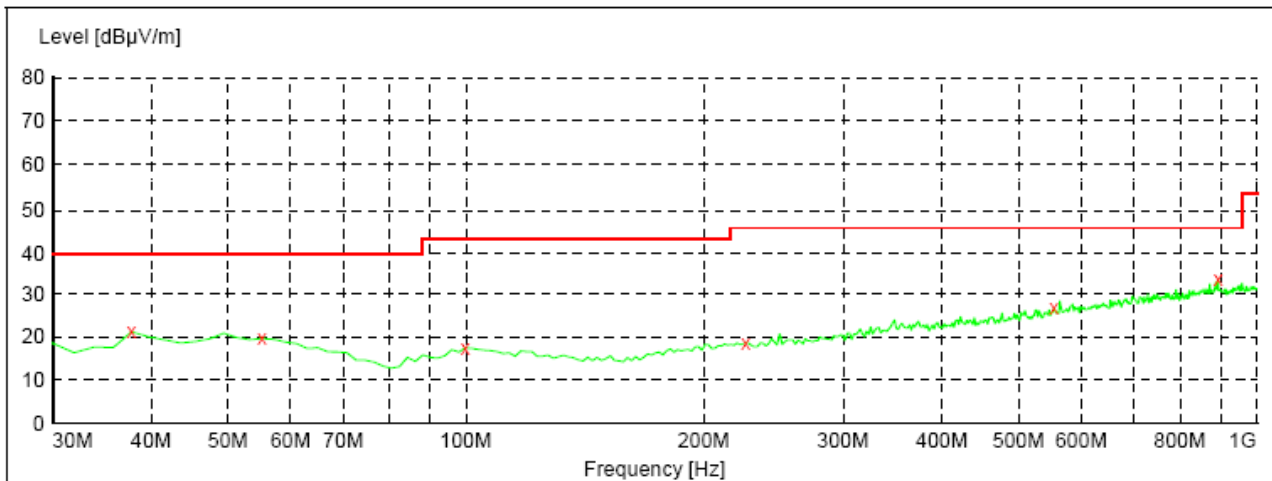

x x x MES WJ150113015_red

Frequency MHz	Level dBµV/m	Transd dB	Limit dBµV/m	Margin dB	Det.	Height cm	Azimuth deg	Polarization
37.760000	21.20	13.1	40.0	18.8	QP	200.0	207.00	HORIZONTAL
55.220000	19.60	14.4	40.0	20.4	QP	200.0	98.00	HORIZONTAL
99.840000	17.50	12.7	43.5	26.0	QP	200.0	78.00	HORIZONTAL
225.940000	18.60	13.9	46.0	27.4	QP	100.0	280.00	HORIZONTAL
553.800000	26.60	21.1	46.0	19.4	QP	200.0	294.00	HORIZONTAL
893.300000	33.40	26.2	46.0	12.6	QP	100.0	29.00	HORIZONTAL

V:

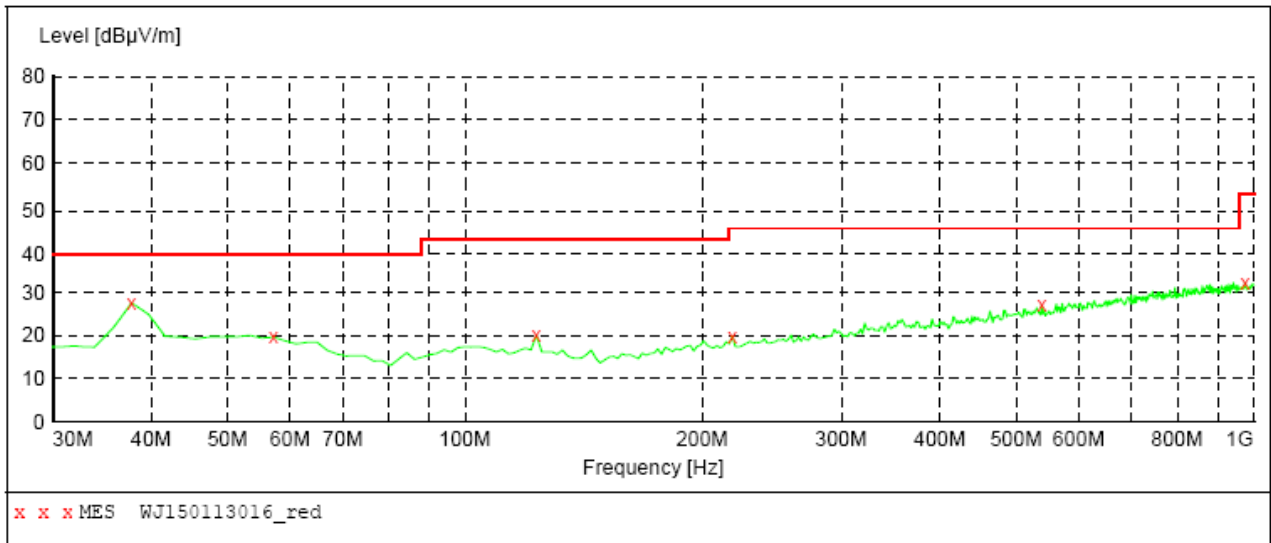

Frequency MHz	Level dBµV/m	Transd dB	Limit dBµV/m	Margin dB	Det.	Height cm	Azimuth deg	Polarization
37.760000	27.50	13.1	40.0	12.5	QP	100.0	10.00	VERTICAL
57.160000	19.60	14.1	40.0	20.4	QP	100.0	52.00	VERTICAL
123.120000	20.10	11.2	43.5	23.4	QP	100.0	336.00	VERTICAL
218.180000	19.90	13.8	46.0	26.1	QP	200.0	34.00	VERTICAL
538.280000	27.10	20.8	46.0	18.9	QP	200.0	164.00	VERTICAL
974.780000	32.30	26.7	54.0	21.7	QP	100.0	293.00	VERTICAL

C. Above 1GHz:
Test Results-(Measurement Distance: 3m)_Channel low_2402MHz_GFSK mode:

Frequency (MHz)	Measurement (dBuV/m)	Limit (dBuV/m)	Detector Type	Antenna (H/V)	Result (P/F)
2390.0	36.26	74	PK	H	P
2400.0	46.96	74	PK	H	P
2402.0*	86.96	---	PK	H	P
4804.0	45.12	74	PK	H	P
2390.0	35.26	74	PK	V	P
2400.0	45.26	74	PK	V	P
2402.0*	87.99	---	PK	V	P
4804.0	44.26	74	PK	V	P

*: fundamental frequency

Test Results-(Measurement Distance: 3m)_Channel middle_2441MHz_GFSK mode:

Frequency (MHz)	Measurement (dBuV/m)	Limit (dBuV/m)	Detector Type	Antenna (H/V)	Result (P/F)
2441.0*	87.36	---	PK	H	P
4882.0	46.96	74	PK	H	P
2441.0*	88.25	---	PK	V	P
4882.0	45.38	74	PK	V	P

*: fundamental frequency

Test Results-(Measurement Distance: 3m)_Channel high_2480MHz_GFSK mode:

Frequency (MHz)	Measurement (dBuV/m)	Limit (dBuV/m)	Detector Type	Antenna (H/V)	Result (P/F)
2480.0*	86.96	---	PK	H	P
2483.5	43.63	74	PK	H	P
4960.0	45.23	74	PK	H	P
2480.0*	87.99	---	PK	V	P
2483.5	42.69	74	PK	V	P
4960.0	46.21	74	PK	V	P

*: fundamental frequency

Remark:

1. The above tables show that the frequencies peak data are all below the average limit, so the average data of these frequencies are deemed to fulfill the average limits and not reported.
2. All the modes of GFSK, $\pi/4$ -DQPSK and 8DPSK have been tested. The worst case is GFSK mode, and the worst data of GFSK mode are chosen as above.
3. No emission found from 18GHz to 25GHz.
4. All outside of operating frequency band and restricted band specified are below 15.209.

15. AC CONDUCTED EMISSION TEST

15.1. LIMITS


Limits for Class B digital devices

Frequency range (MHz)	Limits dB(μV)	
	Quasi-peak	Average
0,15 to 0,50	66 to 56	56 to 46
0,50 to 5	56	46
5 to 30	60	50

NOTE: 1. The lower limit shall apply at the transition frequencies.

2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 to 0.50 MHz.

15.2. BLOCK DIAGRAM OF TEST SETUP

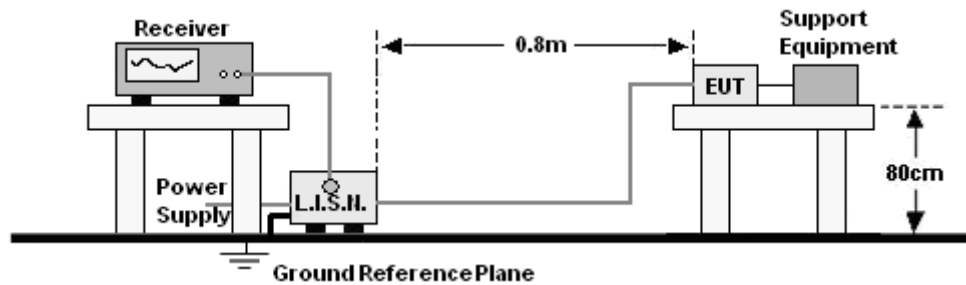

15.3. PROCEDURE OF CONDUCTED EMISSION TEST

- The Product was placed on a nonconductive table above the horizontal ground reference plane, and 0.4 m from the vertical ground reference plane, and connected to the main through Line Impedance Stability Network (L.I.S.N).
- The RBW of the receiver was set at 9 kHz in 150 kHz ~ 30MHz with Peak and AVG detector in Max Hold mode. Run the receiver's pre-scan to record the maximum disturbance generated from Product in all power lines in the full band.
- For each frequency whose maximum record was higher or close to limit, measure its QP and AVG values and record.

15.4. GRAPHS AND DATA

Product : Portable Bluetooth Speaker

Model/Type reference : Soundmine


Power : DC 5V

Temperature : 21°C

Mode : Keeping TX

Humidity : 52%


L:

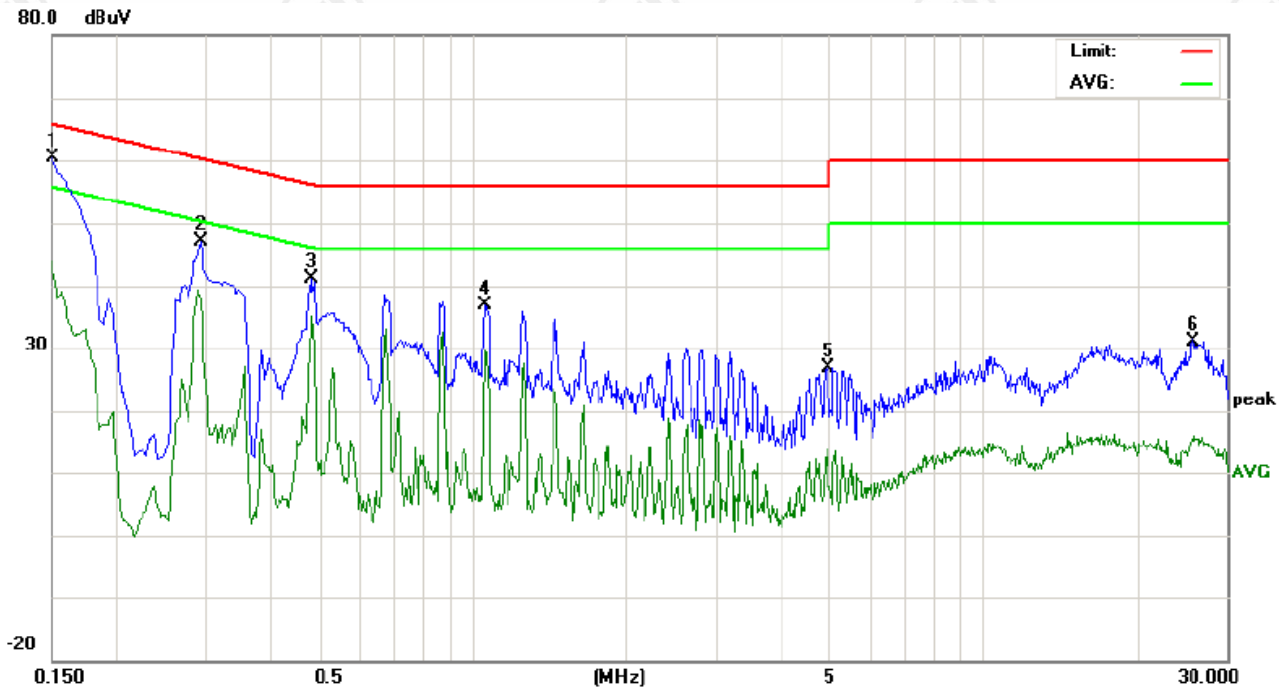

No.	Freq. MHz	Reading_Level (dBuV)			Correct Factor dB	Measurement (dBuV)			Limit (dBuV)		Margin (dB)		P/F	Comment
		Peak	QP	AVG		peak	QP	AVG	QP	AVG	QP	AVG		
1	0.1500	50.54	48.60	32.06	9.90	60.44	58.50	41.96	65.99	55.99	-7.49	-14.03	P	
2	0.2900	35.30		29.44	9.90	45.20		39.34	60.52	50.52	-15.32	-11.18	P	
3	0.4860	29.33		25.27	9.90	39.23		35.17	56.24	46.24	-17.01	-11.07	P	
4	1.0580	26.09		19.72	9.90	35.99		29.62	56.00	46.00	-20.01	-16.38	P	
5	4.9740	16.91		3.99	9.90	26.81		13.89	56.00	46.00	-29.19	-32.11	P	
6	25.8819	19.90		5.85	10.28	30.18		16.13	60.00	50.00	-29.82	-33.87	P	


N:

80.0 dBuV

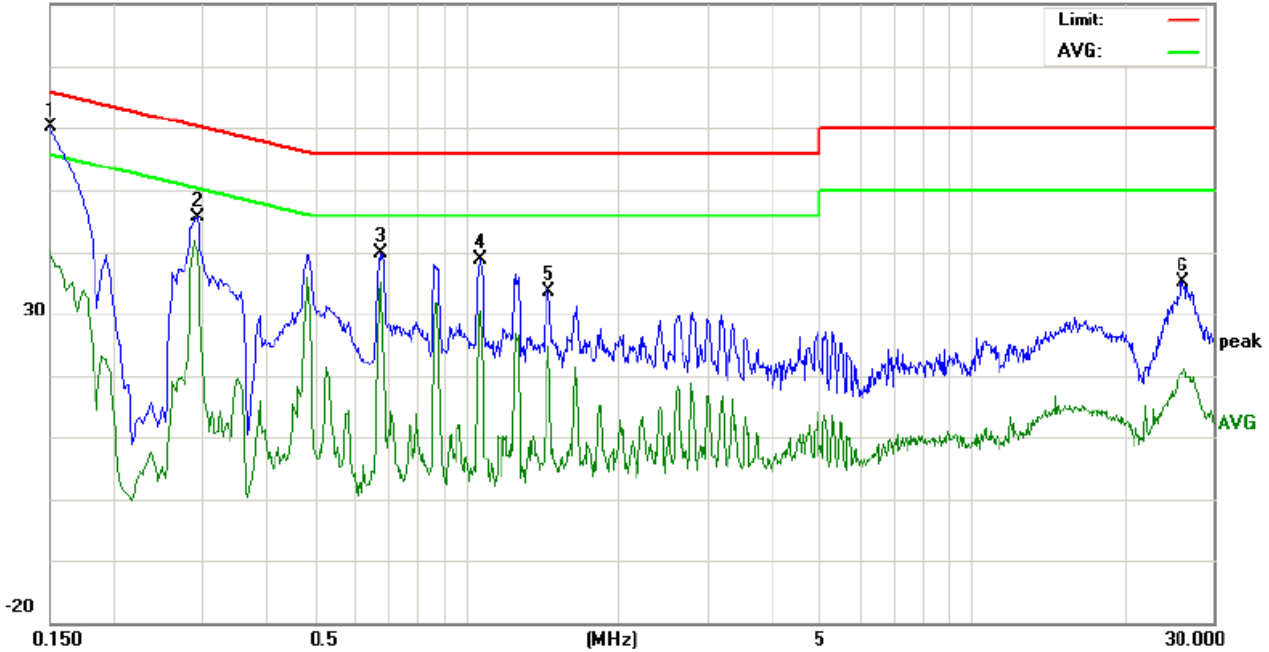


No.	Freq. MHz	Reading_Level (dBuV)			Correct Factor dB	Measurement (dBuV)			Limit (dBuV)		Margin (dB)		P/F	Comment
		Peak	QP	AVG		peak	QP	AVG	QP	AVG	QP	AVG		
1	0.1500	50.10		30.56	9.90	60.00		40.46	65.99	55.99	-5.99	-15.53	P	
2	0.2900	35.34		32.10	9.90	45.24		42.00	60.52	50.52	-15.28	-8.52	P	
3	0.6780	29.90		25.18	9.90	39.80		35.08	56.00	46.00	-16.20	-10.92	P	
4	1.0660	28.87		20.63	9.90	38.77		30.53	56.00	46.00	-17.23	-15.47	P	
5	1.4580	23.78		14.93	9.90	33.68		24.83	56.00	46.00	-22.32	-21.17	P	
6	26.2860	23.74		10.92	10.27	34.01		21.19	60.00	50.00	-25.99	-28.81	P	

APPENDIX 1 PHOTOGRAPHS OF TEST SETUP

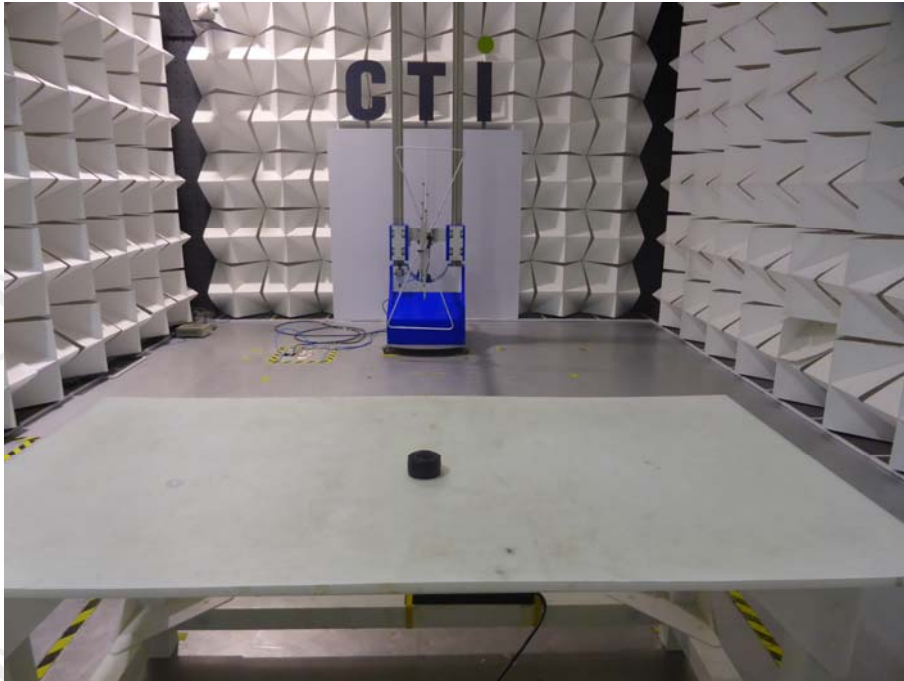

TEST SETUP OF RADIATED EMISSION (30MHz-1GHz)

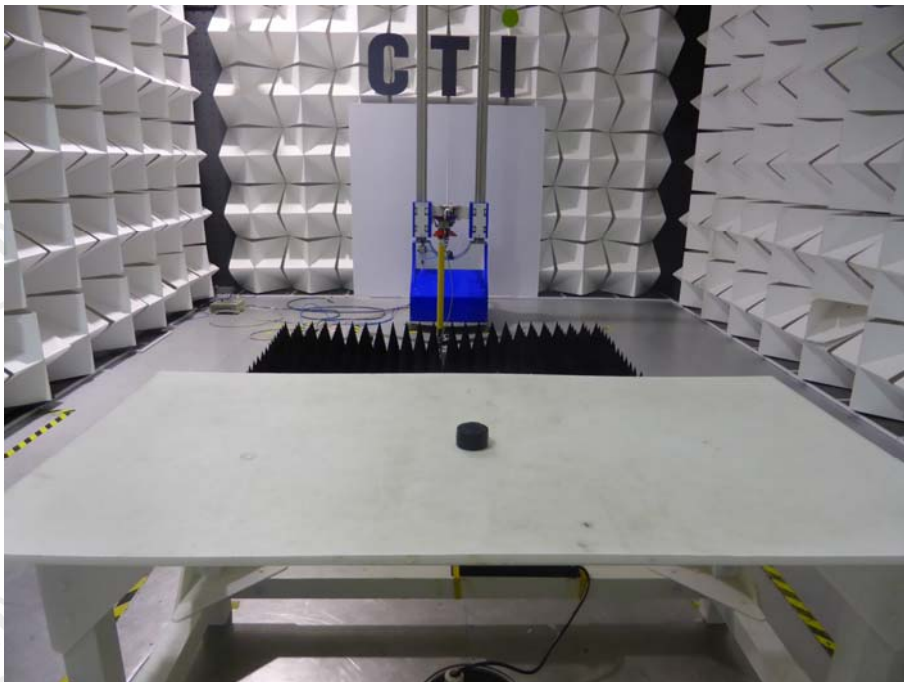

TEST SETUP OF RADIATED EMISSION (above 1GHz)



TEST SETUP OF CONDUCTED EMISSION

APPENDIX 2 EXTERNAL PHOTOGRAPHS OF PRODUCT



Fig.1- General View



Fig.2- General View

APPENDIX 3 INTERNAL PHOTOGRAPHS OF PRODUCT

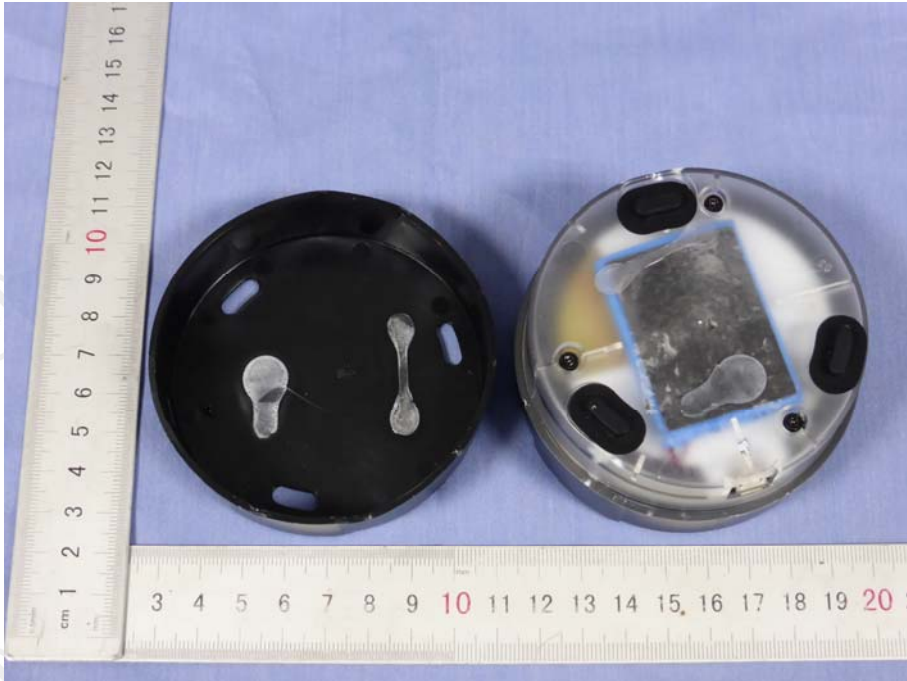


Fig.1- Inner View

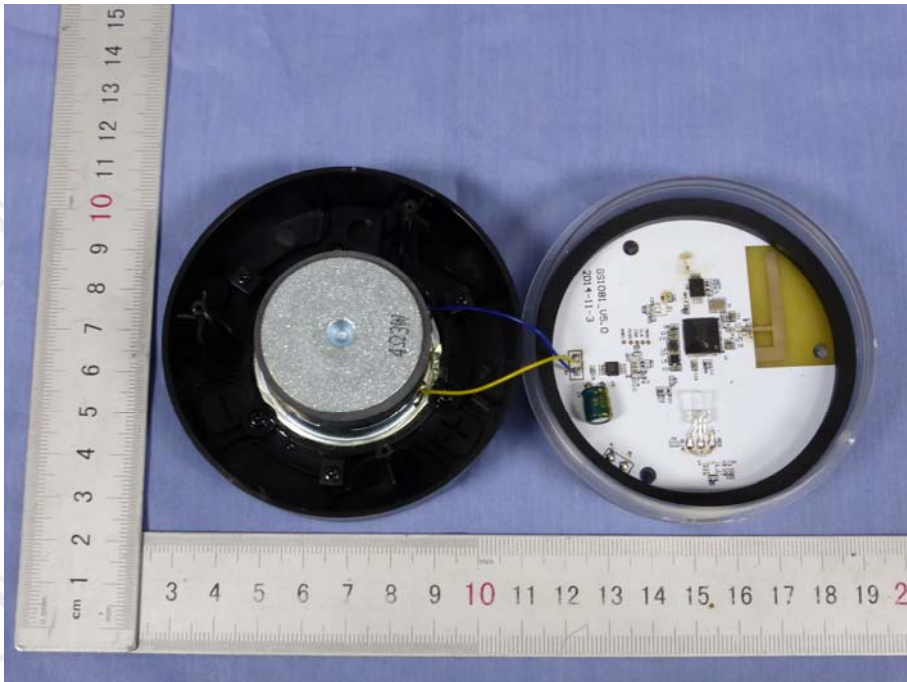


Fig.2- Inner View

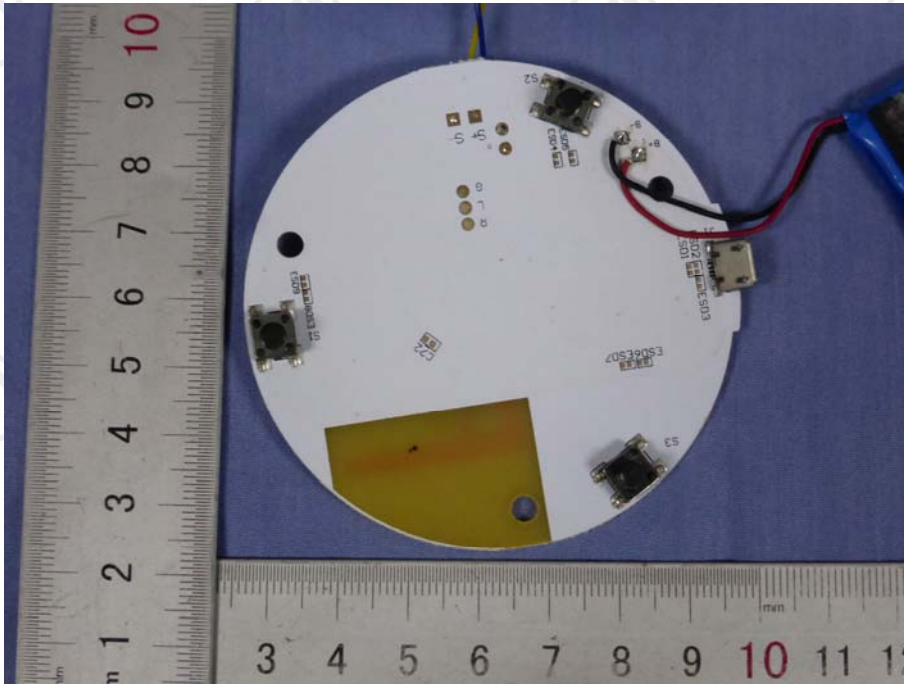


Fig.3- PCB View

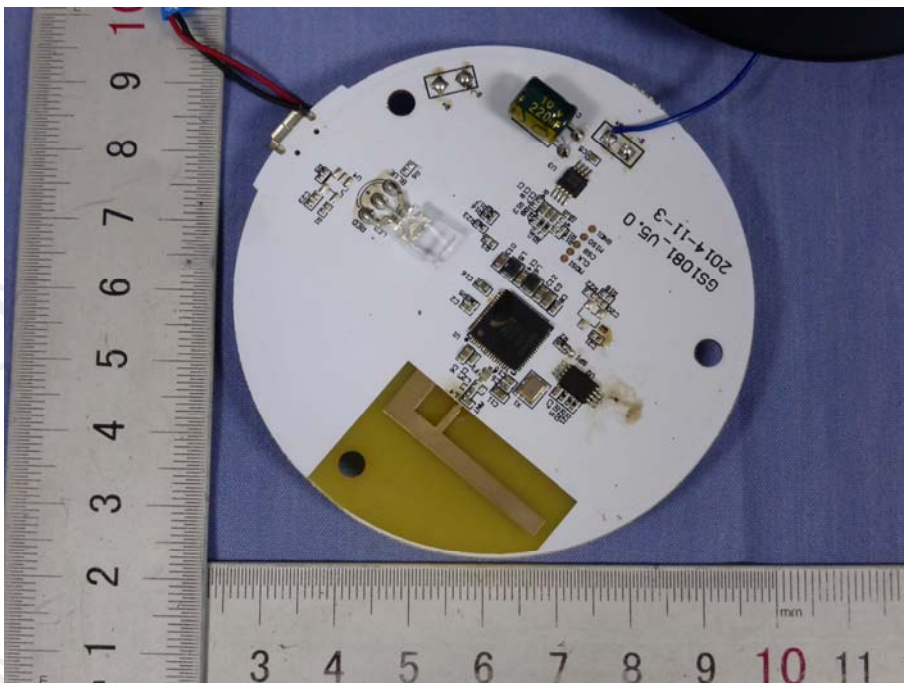


Fig.4- PCB View

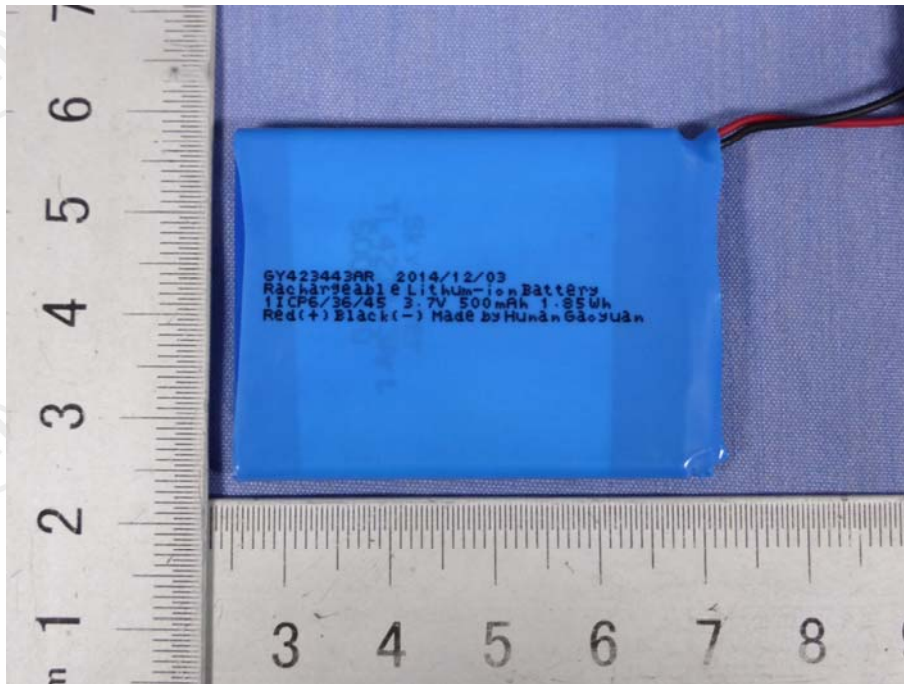


Fig.5- Battery View

*** End of Report ***

The test report is effective only with both signature and specialized stamp, The result(s) shown in this report refer only to the sample(s) tested. Without written approval of CTI, this report can't be reproduced except in full.