

2: Configure Wireless Settings


a. Network Name (SSID)

Your router has been configured at the factory with an SSID (wireless network name of "WRT300N-DX". To change the SSID, enter a new wireless network name in the 'Network Name (SSID)' field.

b. Security

Your router has been configured at the factory with "WPA-PSK/WPA2-PSK AES as the security mode and "abcxyz123" as your "Passphrase". You may enter a "Passphrase" of your choosing. Record it for future reference as you will need it to connect your wireless devices.

Click 'Apply' to complete set up of your router.

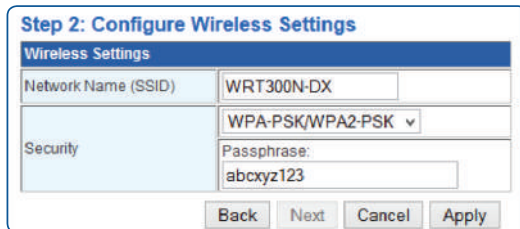

Step 2: Configure Wireless Settings

| Wireless Settings | |
|------------------------|--------------------------|
| Network Name (SSID) | WRT300N-DX |
| Security | WPA-PSK/WPA2-PSK ▾ |
| | Passphrase: abcxyz123 |
| Back Next Cancel Apply | |

Figure 4

D. Setting Up Your Wireless Devices

Your wireless devices (desktop, laptop, tablet, smart-phone, etc.) must be configured to work with your wireless router. Each of these devices must have an internal or external wireless adapter and applicable drivers. User guides for each of these devices should have instructions for wireless set up. You will need the SSID and Passphrase you assigned to this wireless router during Step 2.b of router set up. For each wireless device, access the setup menu, choose the appropriate SSID from the list of wireless networks, enter your Passphrase and connect.

ReadyNetTM
CONNECTIVITY SIMPLIFIED

300 Mbps

WRT300N-DX
Wireless Router




Website: www.readynetsolutions.com
Customer Service: 855.671.7932

QUICK INSTALLATION GUIDE

A. Connect the WRT300N-DX Router to Your Computer

1. To set up your router for the first time, please connect the router to your desktop or laptop computer as shown in the following diagram. Your broadband Internet access will generally be from a cable modem, ADSL modem, or similar device.

2. After the hardware connections have been completed, check the status of the LED Indicators using the following table:

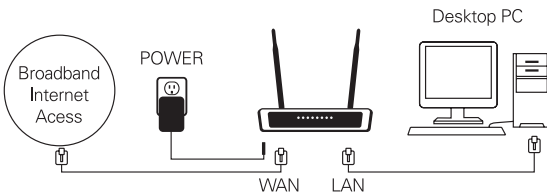

| LED Indicator | Description | Normal Status |
|---------------|---------------------------------|--------------------------------------|
| Power | Power on or off | Steady when power on |
| Wi-Fi | Wireless broadcast on or off | Steady or flashing when broadcasting |
| LAN1 - 4 | Local network connection status | Steady or flashing when connected |
| WAN | Internet connection status | Steady or flashing when connected |

Note: If the LED indicator is not displaying a “Normal Status” as described in the table above, please check the associated hardware and connections.

Safety Notice

- The device should be placed on a flat horizontal surface, or secured safely to a wall.
- Operate equipment away from heat sources.
- Provide good air ventilation.
- Keep away from water and damp areas.
- Disconnect power from the device during severe thunderstorms.
- Use only the included AC power adapter.
- Keep router at least 20 cm away from people to reduce exposure to radio frequency emissions.

B. Configure Your Computer to Operate with the WRT300N-DX Router

1. The network settings of your computer operating system must be set to automatically obtain an IP address and to automatically obtain a DNS Server Address.
2. Type “<http://192.168.11.1>” in the address field of your web browser and press the “Enter” key. A Username and Password dialog box will appear. The default Username is “admin” and the default Password is “pz938qdx”. Enter the username and password then click “Login”.

The screenshot shows a web browser's login dialog box. The 'Username:' field contains 'admin' and the 'Password:' field contains 'pz938qdx'. A 'Login' button is located to the right of the password field.

Figure 1

C. Configure Your WRT300N-DX Router

Upon successful login, click the “Setup Wizard” tab and follow the directions. Click “Next” to begin.

1. Configure Internet Connection

Choose the WAN connection type based on instructions from your ISP.

- DHCP is the most common method where the ISP automatically configures your Internet connection. DHCP is selected by default. Click ‘Next’ to move to step 2.
- Choose “Static IP” if you know the network connection settings of your ISP. Click ‘Next’, fill in the IP parameters provided by your ISP, then click ‘Next’ to move to step 2.
- If your ISP uses PPPoE and has given you a username and password, select PPPoE, fill in the User Name and Password provided by your ISP, click ‘Next’ to move to step 2.

The screenshot shows the 'Router Setup Wizard' interface. It includes a 'Welcome to the Router Setup Wizard.' message and a 'You can use this Setup Wizard to quickly configure your new WRT300N-DX Wi-Fi router.' instruction. Below this, there are two steps: 'Step 1: Configure Internet Connection' and 'Step 2: Configure Wireless Settings'. At the bottom, there are four buttons: 'Back', 'Next', 'Cancel', and 'Apply'.

Figure 2

The screenshot shows the 'Step 1: Configure Internet connection' screen. The 'DHCP' option is selected with a radio button. Below it, there is a description: 'This is the most common method where the ISP automatically configures the internet connection.' There are also two unselected options: 'Static Mode' and 'PPPOE'. At the bottom, there are four buttons: 'Back', 'Next', 'Cancel', and 'Apply'.

Figure 3

FCC STATEMENT



This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/ TV technician for help.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

- 1) This device may not cause harmful interference.
- 2) This device must accept any interference received, including interference that may cause undesired operation.

Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Note: The manufacturer is not responsible for any radio or TV interference caused by unauthorized modifications to this equipment. Such modifications could void the user's authority to operate the equipment.

FCC RF Radiation Exposure Statement

This equipment complies with FCC RF radiation exposure limits set forth for an uncontrolled environment. This device and its antenna must not be co-located or operating in conjunction with any other antenna or transmitter.

"To comply with FCC RF exposure compliance requirements, this grant is applicable to only Mobile Configurations. The antennas used for this transmitter must be installed to provide a separation distance of at least 20 cm from all persons and must not be co-located or operating in conjunction with any other antenna or transmitter."

Limited to local law of the United States, selecting country code and channel function was disabled.

成品尺寸：131*110mm，128克铜版纸，四色正反面印刷对折