



FCC TEST REPORT

FCC ID: Y3G-HOF-M1

On Behalf of

Galaxy Microsystems Ltd.

GAMING MOUSE

Model No.: HOF-M1, GALAX HOF-M1, KFA2 HOF-M1

Prepared for : Galaxy Microsystems Ltd.
Address : Room 1601, 16/F, Exchange Tower, 33 Wang Chiu Road, Kowloon
Bay, Kowloon, Hong Kong

Prepared By : Shenzhen Alpha Product Testing Co., Ltd.
Address : Building i, No.2, Lixin Road, Fuyong Street, Bao'an District, 518103,
Shenzhen, Guangdong, China

Report Number : A2204304-C01-R07
Date of Receipt : July 8, 2022
Date of Test : July 8, 2022- August 12, 2022
Date of Report : August 12, 2022
Version Number : V0

TABLE OF CONTENTS

Description	Page
1. Summary of Standards And Results	6
1.1. Description of Standards and Results	6
2. General Information.....	7
2.1. Description of Device (EUT)	7
2.2. Accessories of Device (EUT)	8
2.3. Tested Supporting System Details	8
2.4. Block Diagram of connection between EUT and simulators	8
2.5. Test Mode Description	9
2.6. Test Conditions	10
2.7. Test Facility.....	10
2.8. Measurement Uncertainty	10
2.9. Test Equipment List	11
3. Maximum Peak Output power	13
3.1. Limit.....	13
3.2. Test Procedure	13
3.3. Test Setup.....	13
3.4. Test Result.....	13
4. Bandwidth	14
4.1. Limit.....	14
4.2. Test Procedure	14
4.3. Test Result.....	14
5. Carrier Frequency Separation	18
5.1. Limit.....	18
5.2. Test Procedure	18
5.3. Test Result.....	18
6. Number Of Hopping Channel	19
6.1. Limit.....	19
6.2. Test Procedure	19
6.3. Test Result.....	19
7. Dwell Time	20
7.1. Test limit.....	20
7.2. Test Procedure	20
7.3. Test Result.....	20
8. Radiated emissions	21
8.1. Limit.....	22
8.2. Block Diagram of Test setup.....	23
8.3. Test Procedure	24
8.4. Test Result.....	24
9. Band Edge Compliance	30

9.1. Block Diagram of Test Setup	30
9.2. Limit	30
9.3. Test Procedure	30
9.4. Test Result	30
10. Power Line Conducted Emissions.....	35
10.1. Block Diagram of Test Setup	35
10.2. Limit	35
10.3. Test Procedure	35
10.4. Test Result	36
12. Antenna Requirements	39
12.1. Limit	39
12.2. Result	39
13. Test Setup Photo	40
13.1. Photos of Radiated emission.....	40
13.2. Photos of Conducted Emission test	41
14. EUT photo.....	42

TEST REPORT DECLARATION

Applicant : Galaxy Microsystems Ltd.

Address : Room 1601, 16/F, Exchange Tower, 33 Wang Chiu Road, Kowloon Bay, Kowloon, Hong Kong

Manufacturer : Aikun (China) Electronics Company Limited

Address : A2 building, Ditang Industrial Park, Ditang Road Agricultural Company, NO 72 Xi Sha Road, Shasan community, Shajing Street, Baoan District, Shenzhen

EUT Description : GAMING MOUSE

(A) Model No. : HOF-M1, GALAX HOF-M1, KFA2 HOF-M1



Measurement Standard Used:

**FCC Rules and Regulations Part 15 Subpart C Section 15.247,
ANSI C63.10-2013**

The device described above is tested by Shenzhen Alpha Product Testing Co., Ltd. to determine the maximum emission levels emanating from the device. The test results are contained in this test report and Shenzhen Alpha Product Testing Co., Ltd. is assumed of full responsibility for the accuracy and completeness of these tests.

After the test, our opinion is that EUT compliance with the requirement of the above standards.

This report applies to above tested sample only. This report shall not be reproduced in parts without written approval of Shenzhen Alpha Product Testing Co., Ltd.

Tested by (name + signature).....: Yanniss Wen
Project Engineer

Yanniss Wen

Approved by (name + signature).....: Jack Xu
Project Manager

Jack Xu

Date of issue.....: July 19, 2022

Revision History

Revision	Issue Date	Revisions	Revised By
V0	July 19, 2022	Initial released Issue	Yannis Wen

1. Summary Of Standards And Results

1.1. Description of Standards and Results

The EUT have been tested according to the applicable standards as referenced below:

Test Item	Standards Paragraph	Result
Maximum Peak Output Power	FCC Part 15: 15.247(b)(1)	P
Bandwidth	FCC Part 15: 15.215	P
Carrier Frequency Separation	FCC Part 15: 15.247(a)(1)	P
Number Of Hopping Channel	FCC Part 15: 15.247(a)(1)	P
Dwell Time	FCC Part 15: 15.247(a)(1)	P
Radiated Emission	FCC Part 15: 15.209 FCC Part 15: 15.247(d)	P
Band Edge Compliance	FCC Part 15: 15.247(d)	P
Power Line Conducted Emissions	FCC Part 15: 15.207	P
Antenna requirement	FCC Part 15: 15.203	P
Note:	1. P is an abbreviation for Pass. 2. F is an abbreviation for Fail. 3. N/A is an abbreviation for Not Applicable.	

2. General Information

2.1. Description of Device (EUT)

Description/PMN : GAMING MOUSE

Model : HOF-M1, GALAX HOF-M1, KFA2 HOF-M1
Number/HVIN(s)

Diff. : The only difference between the models is the Trademark and models name.
So all the test were performed on the model HOF-M1.



Test Voltage : DC 3.7V From Battery, DC 5V From Notebook

Radio Technology : 2.4g Technology

Operation frequency : 2405MHz-2475MHz

Modulation : GFSK

Channel No. : 16 Channels

Antenna Type : Internal Antenna, max gain -1dBi.
Antenna information is provided by applicant.

Software version : 6c8f9ee6

Hardware version : 202200531A


2.2. Accessories of Device (EUT)

Accessories : /
Manufacturer : /
Model : /
Input : /
Output : /

2.3. Tested Supporting System Details

No.	Description	Manufacturer	Model	Serial Number	Certification or SDOC
1.	Notebook PC	Lenovo	ThinkPad E14	N/A	SDOC
2	AC ADAPTER	Shenzhen HUONIU Technology Co., Ltd.	HNFCQC3024UU	N/A	N/A

2.4. Block Diagram of connection between EUT and simulators



2.5. Test Mode Description

The test software “RFTestTool.app” was used to control EUT work in Continuous TX mode, and select test channel, wireless mode

Tested mode, channel, and data rate information		
Mode	Channel	Frequency (MHz)
Carrier Tx Mode	CH1	2405
	CH9	2441
	CH16	2475
GFSK hopping on Tx Mode	CH1 to CH16	2405 to 2475
GFSK hopping off Tx Mode	CH1	2405
	CH9	2441
	CH16	2475

Channel list

CH1	CH2	CH3	CH4	CH5	CH6	CH7	CH8
2405MHz	2408MHz	2414MHz	2419MHz	2422MHz	2426MHz	2436MHz	2439MHz
CH9	CH10	CH11	CH12	CH13	CH14	CH15	CH16
2441MHz	2445MHz	2453MHz	2459MHz	2463MHz	2466MHz	2471MHz	2475MHz

2.6. Test Conditions

Items	Required	Actual
Temperature range:	15-35°C	25°C
Humidity range:	25-75%	56%
Pressure range:	86-106kPa	98kPa

2.7. Test Facility

Shenzhen Alpha Product Testing Co., Ltd

Building i, No.2, Lixin Road, Fuyong Street, Bao'an District, 518103,
Shenzhen, Guangdong, China

June 21, 2018 File on Federal Communication Commission

Registration Number: 293961

Designation Number: CN1236

July 15, 2019 Certificated by IC

Registration Number: CN0085

2.8. Measurement Uncertainty

(95% confidence levels, k=2)

Item	Uncertainty
Uncertainty for Power point Conducted Emissions Test	1.63dB
Uncertainty for Radiation Emission test in 3m chamber (below 30MHz)	3.5dB
Uncertainty for Radiation Emission test in 3m chamber (30MHz to 1GHz)	3.74dB(Polarize: V)
	3.76dB(Polarize: H)
Uncertainty for Radiation Emission test in 3m chamber (1GHz to 25GHz)	3.77dB(Polarize: V)
	3.80dB(Polarize: H)
Uncertainty for radio frequency	5.06×10^{-8} GHz
Uncertainty for conducted RF Power	0.40dB
Uncertainty for temperature	0.2°C
Uncertainty for humidity	1%
Uncertainty for DC and low frequency voltages	0.06%

2.9. Test Equipment List

Equipment	Manufacture	Model No.	Firmware version	Serial No.	Last cal.	Cal Interval
9*6*6 anechoic chamber	CHENYU	9*6*6	/	N/A	2020.09.02	3Year
Spectrum analyzer	ROHDE&SCHWARZ	FSV40-N	2.3	102137	2021.08.25	1Year
Spectrum analyzer	Agilent	N9020A	A.14.16	MY499100060	2021.08.25	1Year
Receiver	ROHDE&SCHWARZ	ESR	2.28 SP1	1316.3003K03-10 2082-Wa	2021.08.25	1Year
Receiver	R&S	ESCI	4.42 SP1	101165	2021.08.25	1Year
Bilog Antenna	Schwarzbeck	VULB 9168	/	VULB 9168#627	2021.08.30	2Year
Horn Antenna	SCHWARZBECK	BBHA 9120 D	/	2106	2021.08.30	2Year
Active Loop Antenna	SCHWARZBECK	FMZB 1519B	/	00059	2021.08.30	2Year
RF Cable	Resenberger	Cable 1	/	RE1	2021.08.25	1Year
RF Cable	Resenberger	Cable 2	/	RE2	2021.08.25	1Year
RF Cable	Resenberger	Cable 3	/	CE1	2021.08.25	1Year
Pre-amplifier	HP	HP8347A	/	2834A00455	2021.08.25	1Year
Pre-amplifier	Agilent	8449B	/	3008A02664	2021.08.25	1Year
L.I.S.N.#1	Schwarzbeck	NSLK8126	/	8126-466	2021.08.25	1Year
L.I.S.N.#2	ROHDE&SCHWARZ	ENV216	/	101043	2021.08.25	1 Year
Horn Antenna	SCHWARZBECK	BBHA9170	/	00946	2021.08.30	2 Year
Preamplifier	SKET	LNPA_1840 -50	/	SK2018101801	2021.08.25	1 Year
Power Meter	Agilent	E9300A	/	MY41496628	2021.08.25	1 Year
Power Sensor	DARE	RPR3006W	/	15100041SNO91	2021.08.25	1 Year
Temp. & Humid. Chamber	Wei Huang	WHTH-1000 -40-880	/	100631	2022.04.22	1 Year
Switching Mode Power Supply	JUNKE	JK12010S	/	20140927-6	2021.08.25	1 Year
Adjustable attenuator	MWRFtest	N/A	/	N/A	N/A	N/A
10dB Attenuator	Mini-Circuits	DC-6G	/	N/A	N/A	N/A

Software Information			
Test Item	Software Name	Manufacturer	Version
RE	EZ-EMC	farad	Alpha-3A1
CE	EZ-EMC	farad	Alpha-3A1
RF-CE	MTS 8310	MWRFtest	2.0.0.0

3. Maximum Peak Output Power

3.1. Limit


Please refer FCC part 15.247 & RSS-247..

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts, the e.i.r.p shall not exceed 4W

3.2. Test Procedure

The transmitter output is connected to the RF Power meter. The Power meter is set to the peak power detection.

3.3. Test Setup



3.4. Test Result

Mode	Freq (MHz)	PK Output Power (dBm)	Limit (dBm)	Result
GFSK	2405	-1.332	21	Pass
	2441	-0.661	21	Pass
	2475	-1.221	21	Pass
Conclusion: PASS				

4. Bandwidth

4.1. Limit

Intentional radiators operating under the alternative provisions to the general emission limits, as contained in RSS-GEN, FCC Section 15.247(a)(1), must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.


4.2. Test Procedure

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 30kHz RBW and 100kHz VBW. The 20dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 20dB.

4.3. Test Result


Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)	-20 dB Bandwidth (MHz)	Limit -20 dB Bandwidth (MHz)	Verdict
NVNT	user	2405	Ant 1	1.77	1.556	/	Pass
NVNT	user	2441	Ant 1	1.882	1.552	/	Pass
NVNT	user	2475	Ant 1	1.85	1.2	/	Pass

OBW NVNT user 2405MHz Ant1

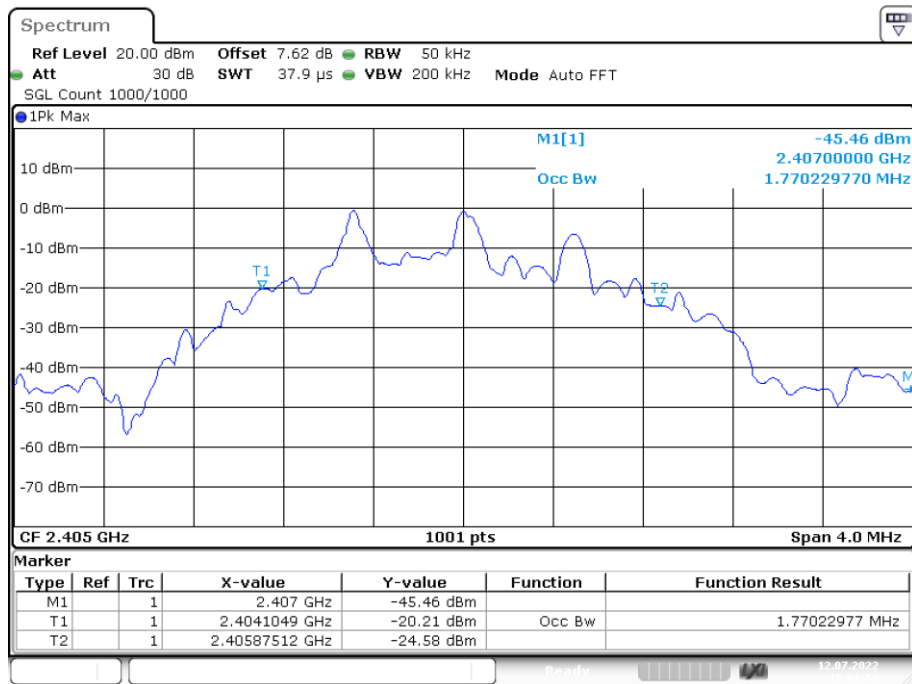


Date: 12.JUL.2022 15:08:51

-20dB Bandwidth NVNT user 2405MHz Ant1

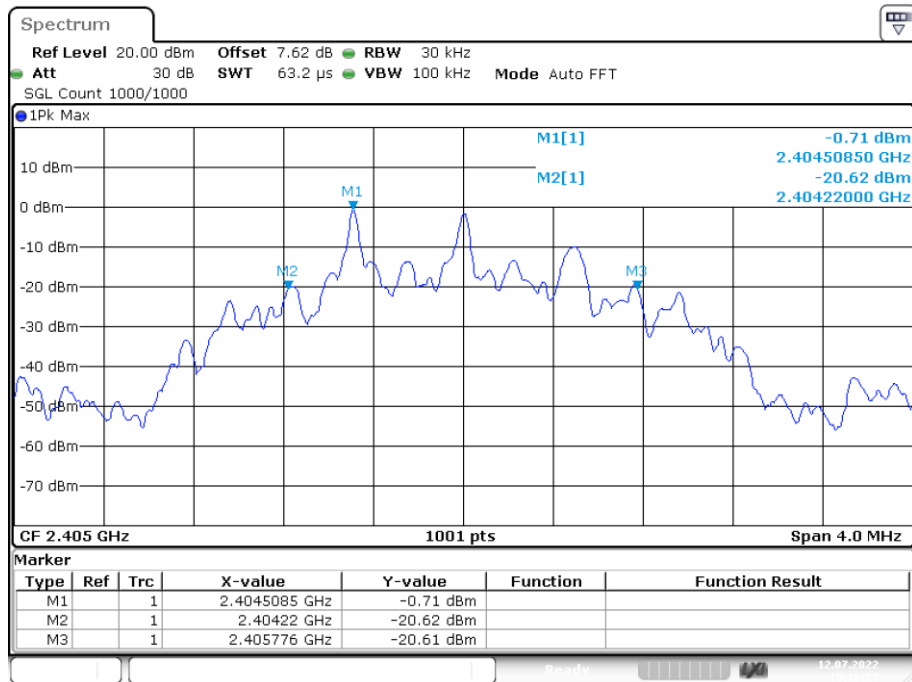


Date: 12.JUL.2022 15:12:31

OBW NVNT user 2441MHz Ant1

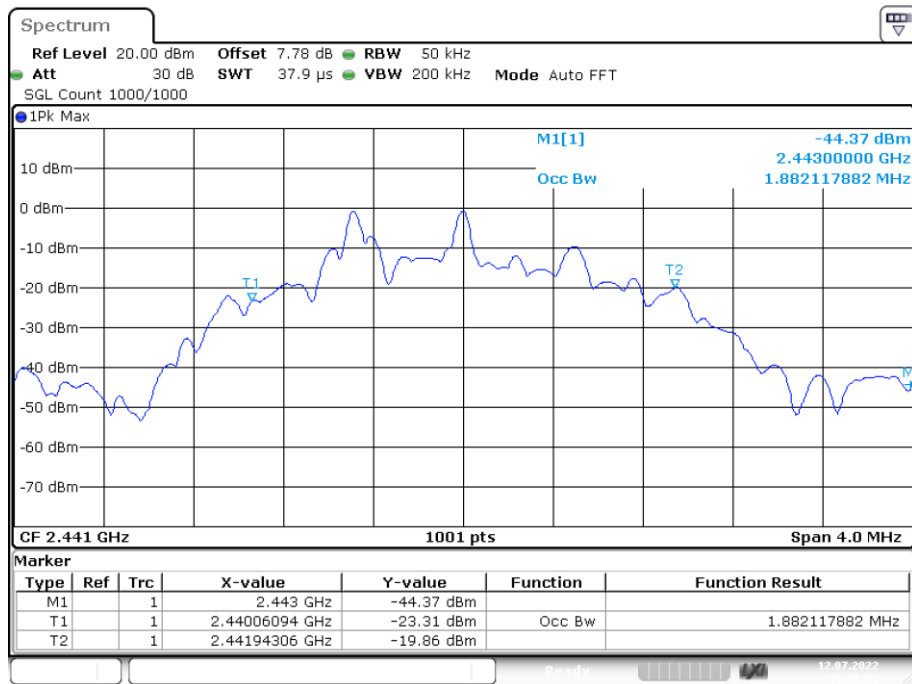


Date: 12.JUL.2022 15:36:02

-20dB Bandwidth NVNT user 2441MHz Ant1

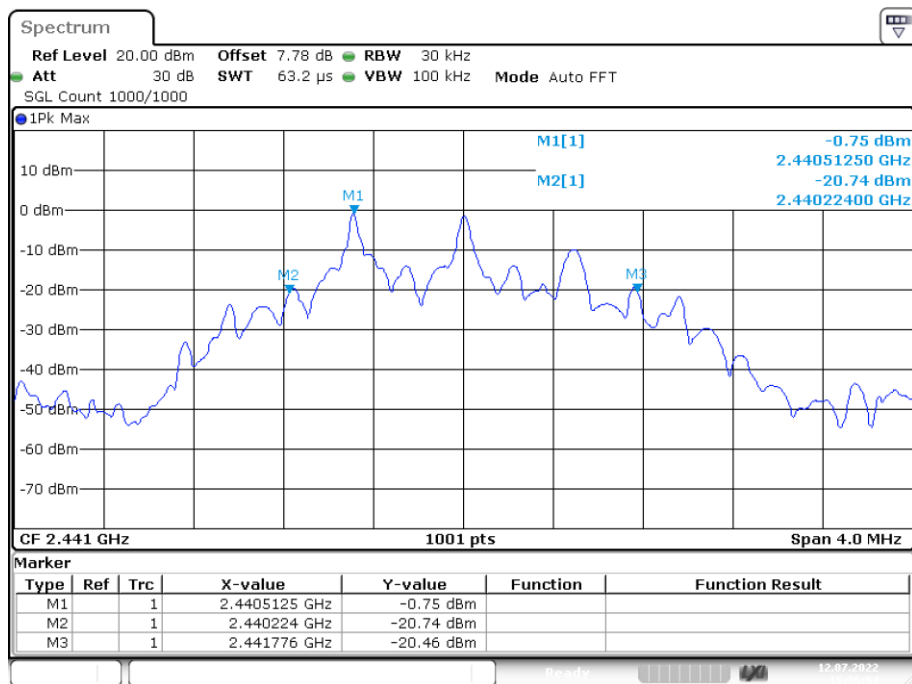


Date: 12.JUL.2022 15:36:55

OBW NVNT user 2475MHz Ant1

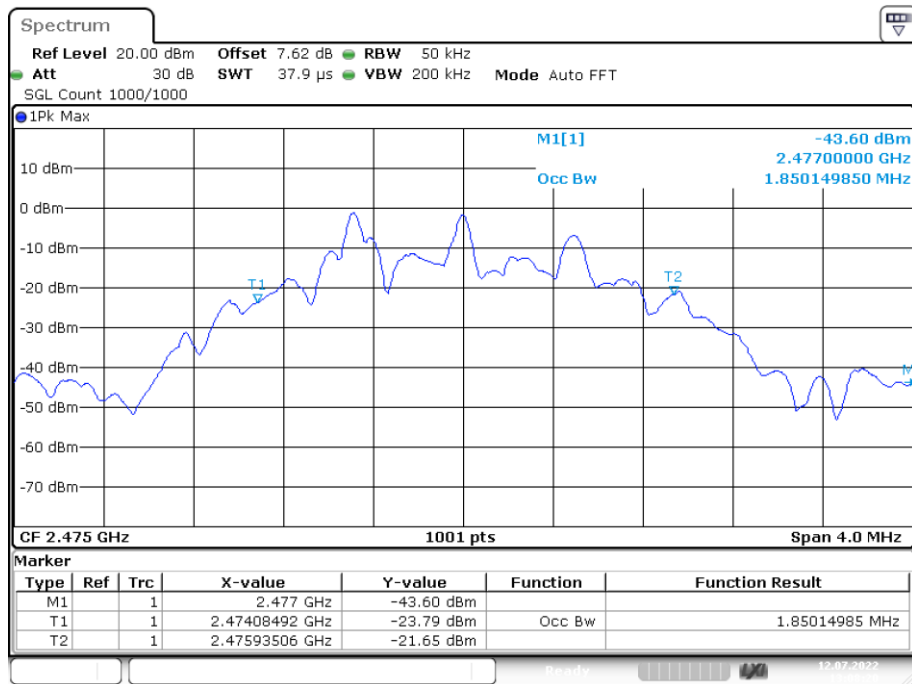

Date: 12.JUL.2022 13:08:19

-20dB Bandwidth NVNT user 2475MHz Ant1

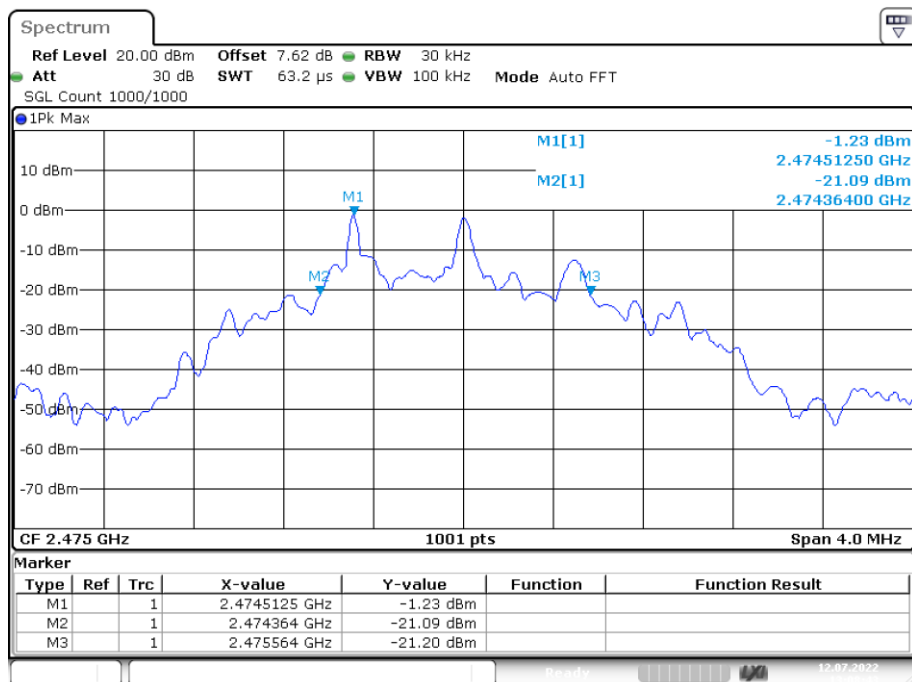

Date: 12.JUL.2022 13:08:43

5. Carrier Frequency Separation

5.1. Limit

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW


5.2. Test Procedure

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The carrier frequency was measured by spectrum analyzer with 30kHz RBW and 100kHz VBW.

5.3. Test Result

Condition	Mode	Antenna	Hopping Freq1 (MHz)	Hopping Freq2 (MHz)	HFS (MHz)	Limit (MHz)	Verdict
NVNT	user	Ant1	2438.51	2440.51	2	1.035	Pass

CFS NVNT user 2440MHz Ant1

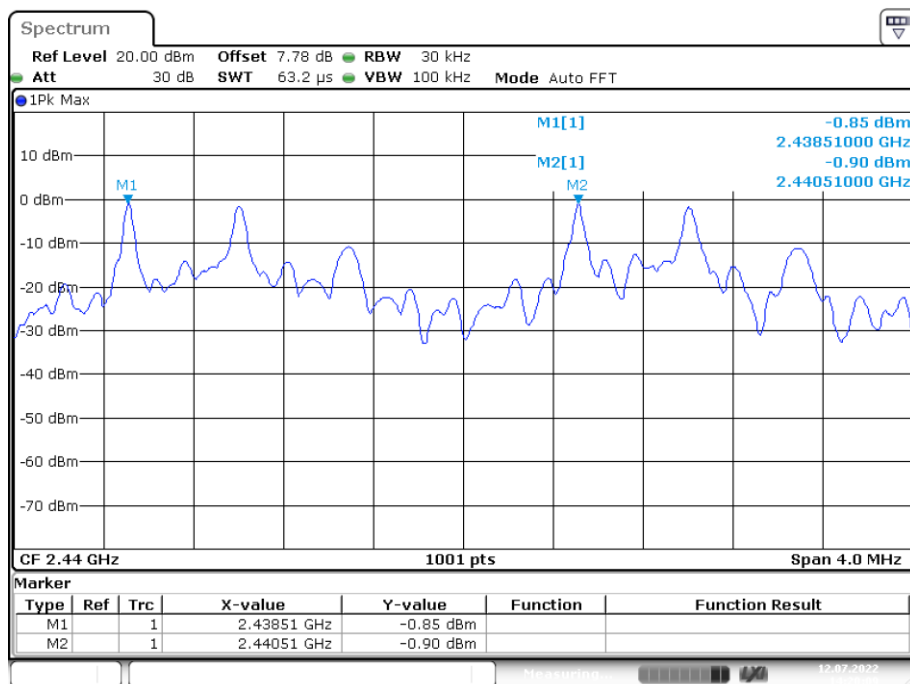

Date: 12.JUL.2022 14:20:08

6. Number Of Hopping Channel

6.1. Limit

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels


6.2. Test Procedure

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The number of hopping channel was measured by spectrum analyzer with 100kHz RBW and 300kHz VBW.

6.3. Test Result

Condition	Mode	Hopping Number	Limit	Verdict
NVNT	user	16	15	Pass

Hopping No. NVNT user 2441MHz Ant1

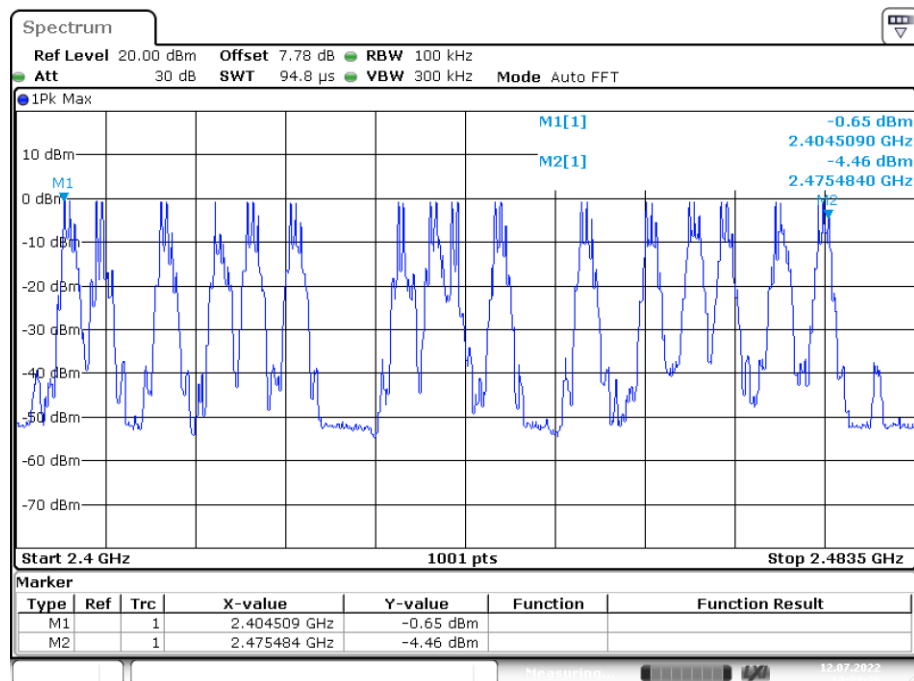

Date: 12.JUL.2022 14:23:36

7. Dwell Time

7.1. Test limit

Please refer FCC part 15.247 & RSS-247.

Frequency hopping systems operating in the 2400MHz-2483.5 MHz. The average time of occupancy on any frequency shall not greater than 0.4 s within period of 0.4 seconds multiplied by the number of hopping channel employed.

7.2. Test Procedure

7.2.1. Place the EUT on the table and set it in transmitting mode.

7.2.2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.

7.2.3. Set center frequency of spectrum analyzer = operating frequency.

7.2.4. Set the spectrum analyzer as RBW, VBW=1MHz, Span = 0Hz, Sweep = auto.

7.2.5. Repeat above procedures until all frequency measured were complete.


7.3. Test Result

PASS.

Detailed information please see the following page.


Condition	Mode	Frequency (MHz)	Antenna	Pulse Time (ms)	Dwell time(ms)	Burst Count	Period Time (ms)	Limit (ms)	Verdict
NVNT	user	2441	Ant1	0.142	7.242	51	6400	400	Pass

Dwell NVNT user 2441MHz Ant1

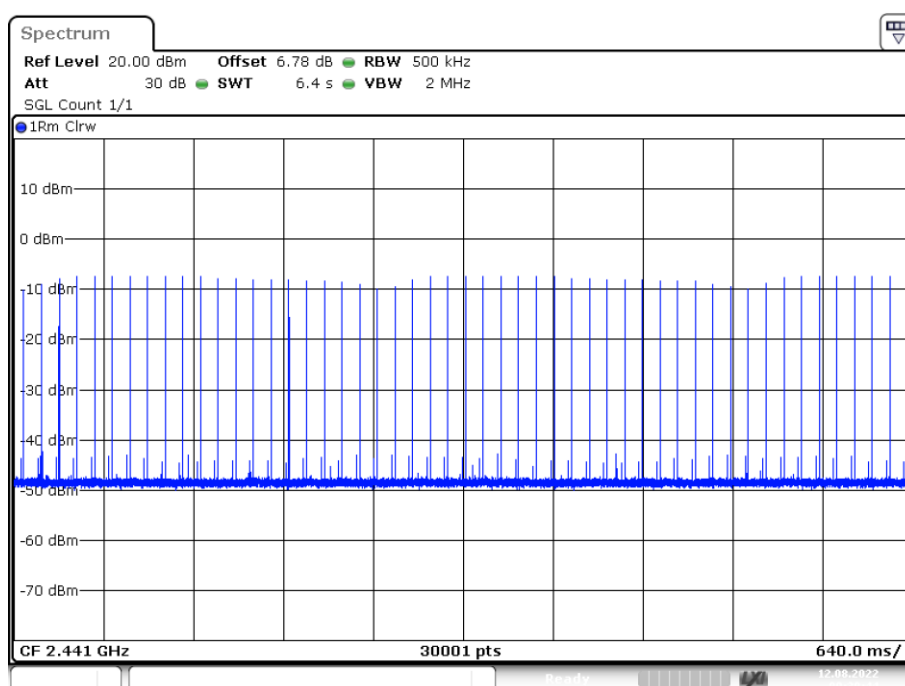

Date: 12.AUG.2022 09:30:44

One Burst NVNT user 2441MHz Ant1 One Burst

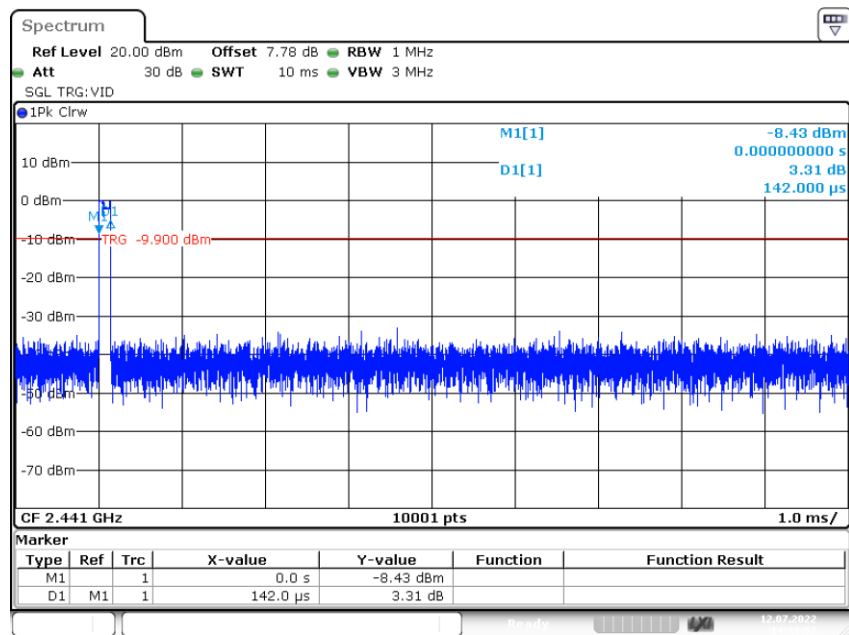

Required period time = 0.4 (s) * 16 = 6.4(s)

Pulse time=0.142(ms),

Burst number in analyzer sweep time=51

Dwell time = Burst Number in analyzer sweep time * Pulse time
 = 51 * 0.142 (ms)
 =7.242 (ms)

8. Radiated Emissions

8.1. Limit

All the emissions appearing within 15.205 restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions shall be at least 20dB below the fundamental emissions, or comply with 15.209 limits.

15.205 Restricted frequency band

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)


15.209 Limit

FREQUENCY MHz	DISTANCE Meters	FIELD STRENGTHS LIMIT	
		μV/m	dB(μV)/m
0.009-0.490	300	2400/F(KHz)	/
0.490-1.705	30	24000/F(KHz)	/
1.705-30	30	30	29.5
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
960 ~ 1000	3	500	54.0
Above 1000	3	74.0 dB(μV)/m (Peak) 54.0 dB(μV)/m (Average)	


Note: The peak limit is 20 dB higher than the average limit

8.2. Block Diagram of Test setup


8.2.1 In 3m Anechoic Chamber Test Setup Diagram for below 30MHz

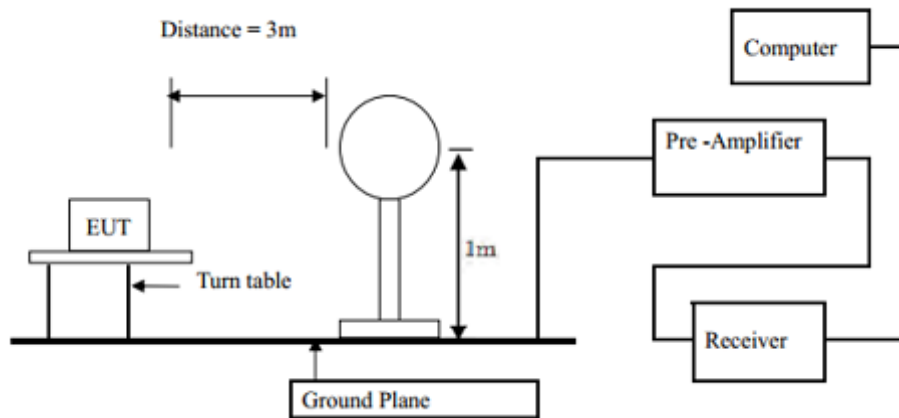

8.2.1 In 3m Anechoic Chamber Test Setup Diagram for below 1GHz

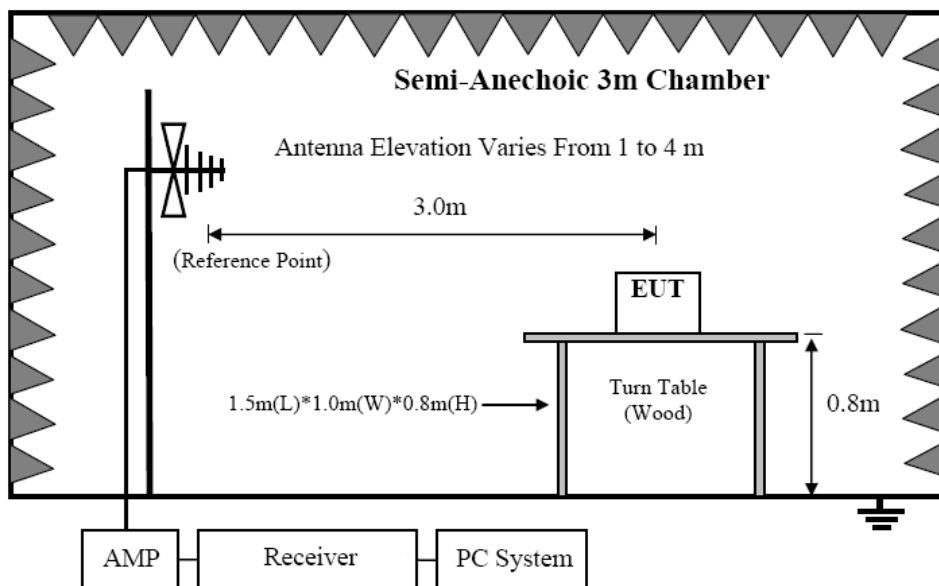

8.2.2 In 3m Anechoic Chamber Test Setup Diagram for frequency above 1GHz

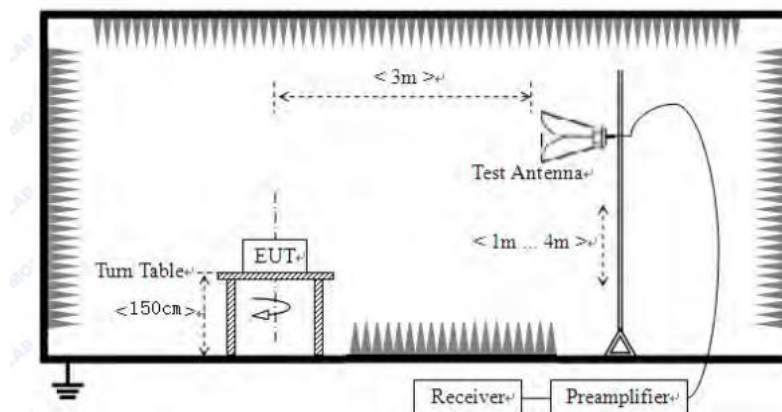

Note: For harmonic emissions test a appropriate high pass filter was inserted in the input port of AMP.

8.3. Test Procedure

- (1) EUT was placed on a non-metallic table, 80 cm above the ground plane inside a semi-anechoic chamber.
- (2) Setup EUT and simulator
- (3) Test antenna was located 3m from the EUT on an adjustable mast. Below pre-scan procedure was first performed in order to find prominent radiated emissions.
 - (a) Change work frequency or channel of device if practicable.
 - (b) Change modulation type of device if practicable.
 - (c) Rotated EUT though three orthogonal axes to determine the attitude of EUT arrangement produces highest emissions
- (4) Spectrum frequency from 9KHz to 25GHz (tenth harmonic of fundamental frequency) was investigated
- (5) For final emissions measurements at each frequency of interest, the EUT were rotated and the antenna height was varied between 1m and 4m in order to maximize the emission. Measurements in both horizontal and vertical polarities were made and the data was recorded. In order to find the maximum emission, the relative positions of equipments and all of the interface cables were changed according to ANSI C63.10 :2013on Radiated Emission test.
- (6) For emissions above 1GHz, both Peak and Average level were measured with Spectrum Analyzer, and the RBW is set at 1MHz, VBW is set at 3MHz for Peak measure; RBW is set at 1MHz, VBW is set at 10Hz for Average measure.

8.4. Test Result


We have scanned from 9kHz to the 10th harmonic of the EUT's highest frequency.
Detailed information please see the following page.

From 9KHz to 30MHz: Conclusion: PASS


Note: The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

From 30MHz to 1000MHz: Conclusion: PASS

Vertical:

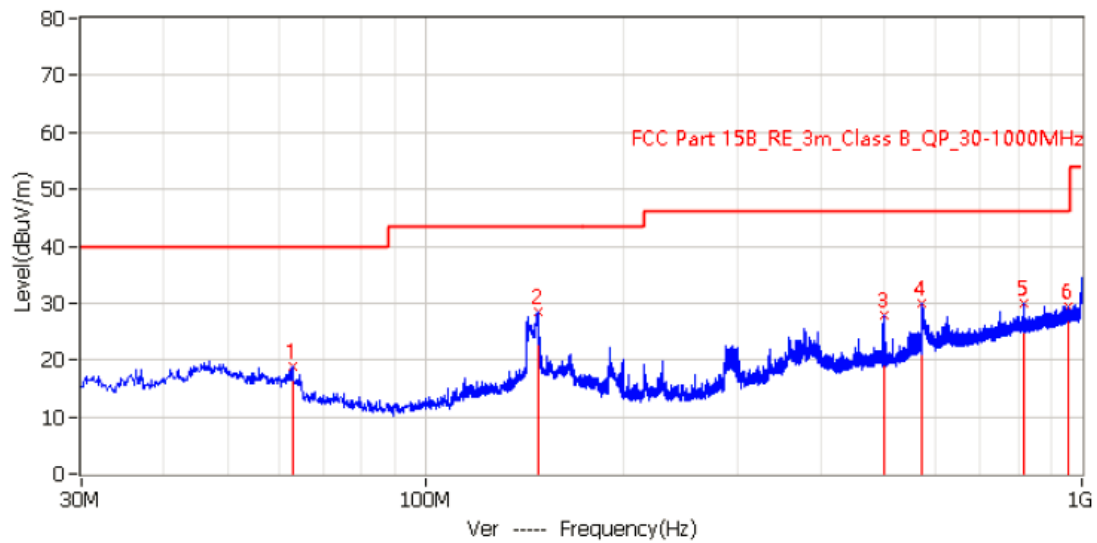

No.	Frequency	Level dBuV/m	Factor dB/m	Limit dBuV/m	Margin dB	Detector	Height cm	Height cm	Angle deg
1*	62.738MHz	18.8	17.1	40.0	-21.2	PK	Ver	100.0	56.0
2*	148.704MHz	28.4	15.9	43.5	-15.1	PK	Ver	100.0	139.0
3*	499.965MHz	27.8	19.9	46.0	-18.2	PK	Ver	100.0	76.0
4*	571.624MHz	29.9	21.8	46.0	-16.1	PK	Ver	100.0	139.0
5*	815.458MHz	30.0	25.7	46.0	-16.0	PK	Ver	100.0	220.0
6*	954.410MHz	29.4	27.3	46.0	-16.6	PK	Ver	100.0	151.0

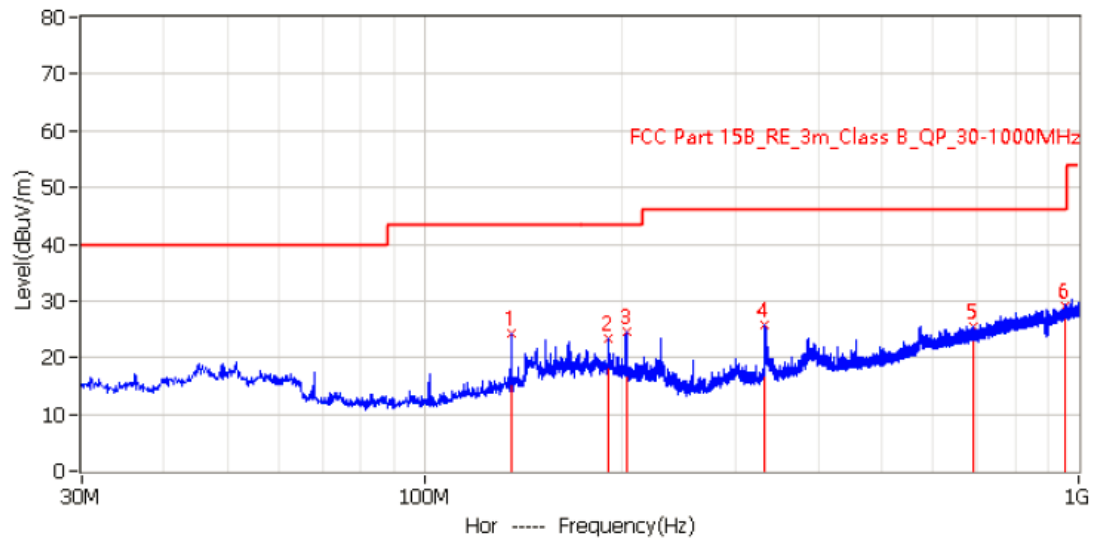Horizontal:

No.	Frequency	Level dBuV/m	Factor dB/m	Limit dBuV/m	Margin dB	Detector	Height cm	Height cm	Angle deg
1*	135.973MHz	24.2	15.1	43.5	-19.3	PK	Hor	200.0	228.0
2*	191.384MHz	23.4	12.9	43.5	-20.1	PK	Hor	200.0	255.0
3*	203.630MHz	24.7	12.4	43.5	-18.8	PK	Hor	200.0	275.0
4*	331.913MHz	25.8	16.5	46.0	-20.2	PK	Hor	200.0	234.0
5*	689.115MHz	25.5	23.6	46.0	-20.5	PK	Hor	119.0	3.0
6*	951.743MHz	29.2	27.3	46.0	-16.8	PK	Hor	200.0	41.0

Remark: All modes have been tested, and only worst data of GFSK mode, Channel 2441MHz (DC 3.7V From battery) was listed in this report.

Test Mode: GFSK TX Low									
Freq (MHz)	Read Level (dBuV/m)	Polar (H/V)	Antenna Factor (dB/m)	Cable loss(dB)	Amp Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4810	42.78	V	33.95	10.18	34.26	52.65	74	-21.35	PK
4810	38.03	V	33.95	10.18	34.26	47.90	54	-6.10	AV
7215	/	/	/	/	/	/	/	/	/
9620	/	/	/	/	/	/	/	/	/
4810	42.95	H	33.95	10.18	34.26	52.82	74	-21.18	PK
4810	34.32	H	33.95	10.18	34.26	44.19	54	-9.81	AV
7215	/	/	/	/	/	/	/	/	/
9620	/	/	/	/	/	/	/	/	/
Test Mode: GFSK TX Mid									
4882	42.17	V	33.93	10.2	34.29	52.01	74	-21.99	PK
4882	36.39	V	33.93	10.2	34.29	46.23	54	-7.77	AV
7323	/	/	/	/	/	/	/	/	/
9764	/	/	/	/	/	/	/	/	/
4882	44.19	H	33.93	10.2	34.29	54.03	74	-19.97	PK
4882	36.50	H	33.93	10.2	34.29	46.34	54	-7.66	AV
7323	/	/	/	/	/	/	/	/	/
9764	/	/	/	/	/	/	/	/	/
Test Mode: GFSK TX High									
4950	44.45	V	33.98	10.22	34.25	54.40	74	-19.60	PK
4950	34.09	V	33.98	10.22	34.25	44.04	54	-9.96	AV
7425	/	/	/	/	/	/	/	/	/
9900	/	/	/	/	/	/	/	/	/
4950	42.73	H	33.98	10.22	34.25	52.68	74	-21.32	PK
4950	32.44	H	33.98	10.22	34.25	42.39	54	-11.61	AV
7425	/	/	/	/	/	/	/	/	/
9900	/	/	/	/	/	/	/	/	/


Note:

1, Result = Read level + Antenna factor + cable loss-Amp factor

2, All the other emissions not reported were too low to read and deemed to comply with FCC limit.


Conducted RF Spurious Emission

Tx. Spurious NVNT user 2405MHz Ant1 Emission

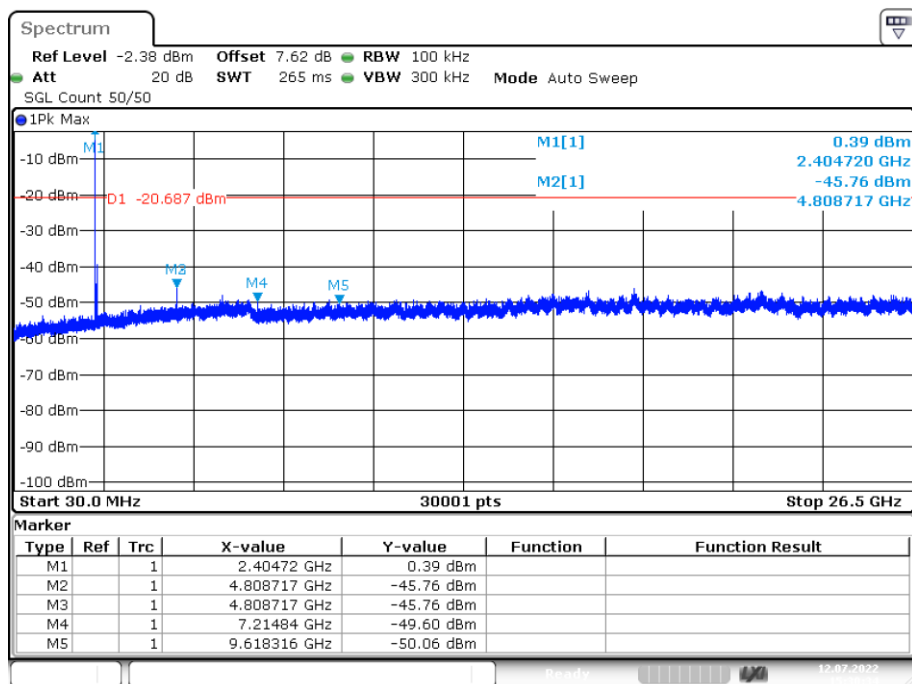


Date: 12.JUL.2022 15:30:34

Tx. Spurious NVNT user 2441MHz Ant1 Emission

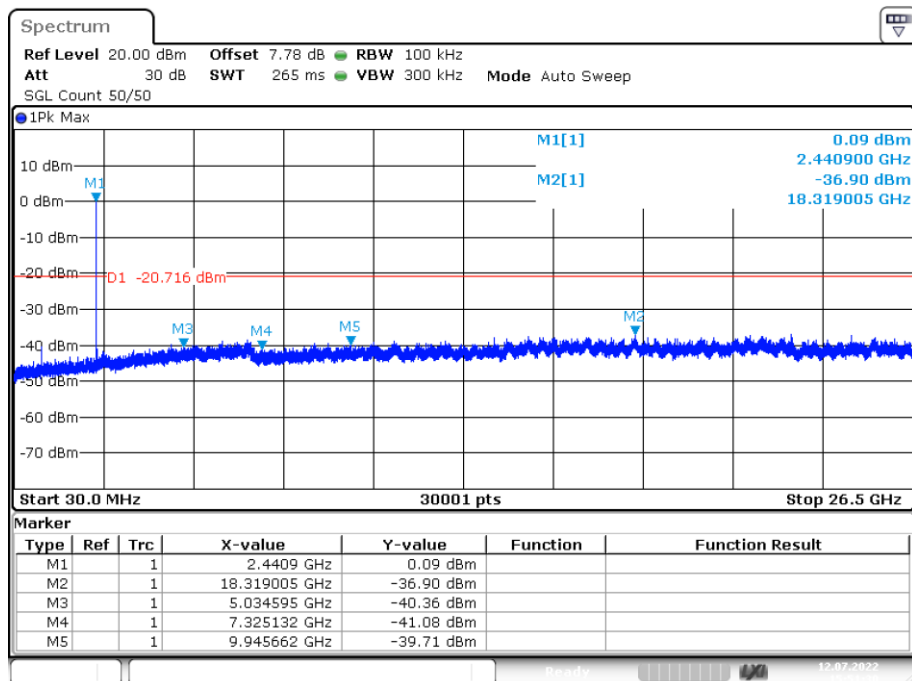

Date: 12.JUL.2022 15:51:29


Tx. Spurious NVNT user 2475MHz Ant1 Emission

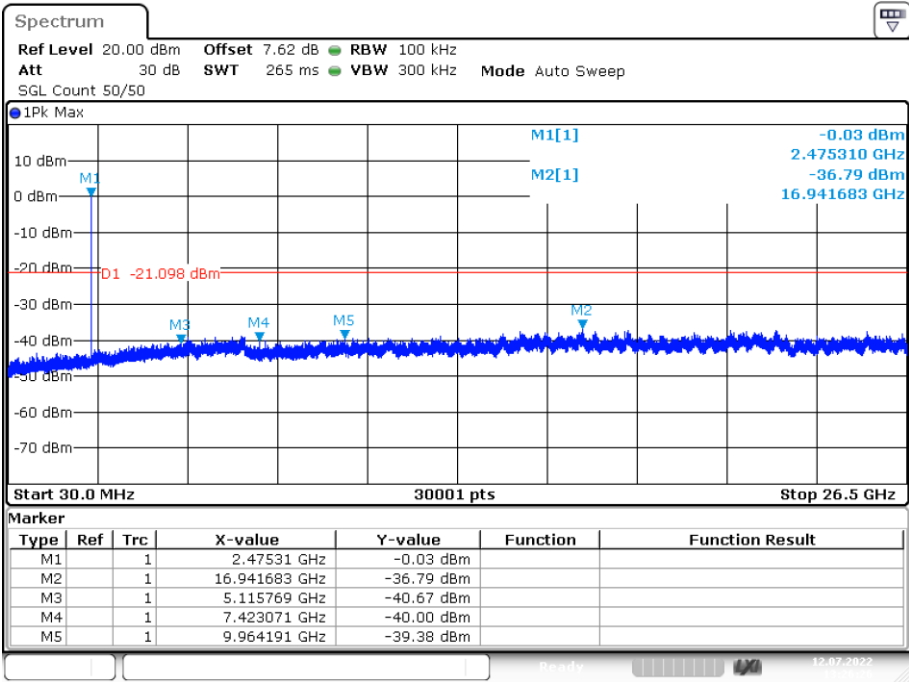

Date: 12.JUL.2022 13:26:27

9. Band Edge Compliance

9.1. Block Diagram of Test Setup

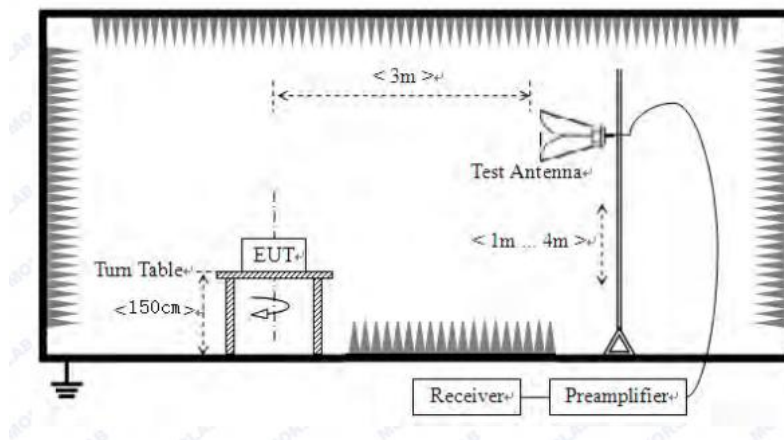

9.2. Limit

All the lower and upper band-edges emissions appearing within restricted frequency bands shall not exceed the limits shown in FCC part 15.209 and RSS-GEN, all the other emissions outside operation shall be at least 20dB below the fundamental emissions, or comply with FCC part 15.209 and RSS-GEN limits.

9.3. Test Procedure

Refer to ANSI C 63.10, Clause 6.10.


All restriction band and non- restriction band have been tested, only worse case is reported.

9.4. Test Result


PASS. (See below detailed test data)

Radiated Method:

Test Mode: GFSK-Low


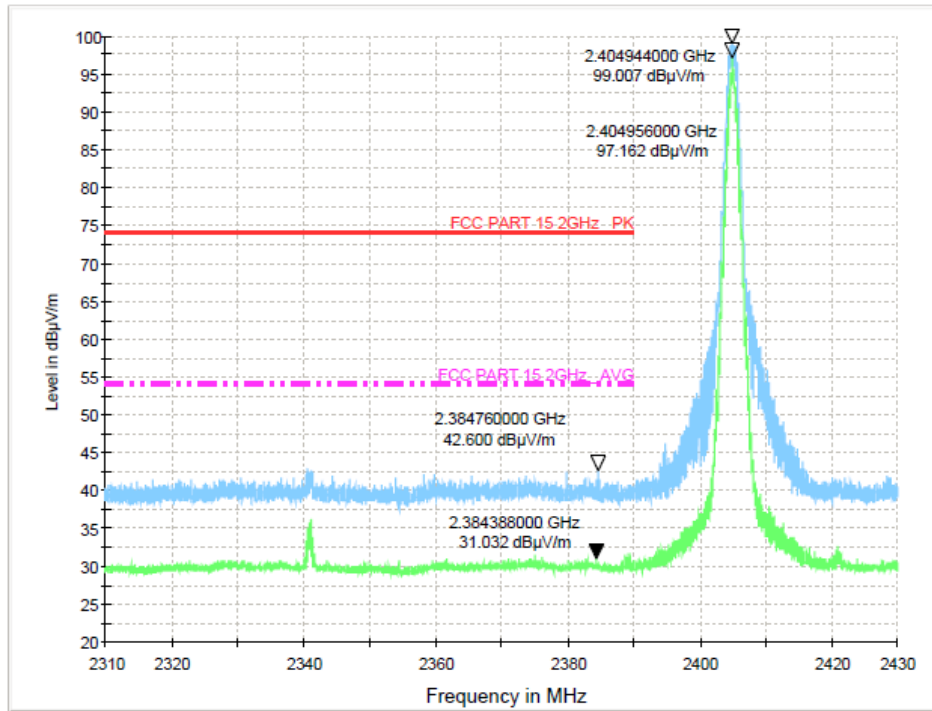


hopping-off

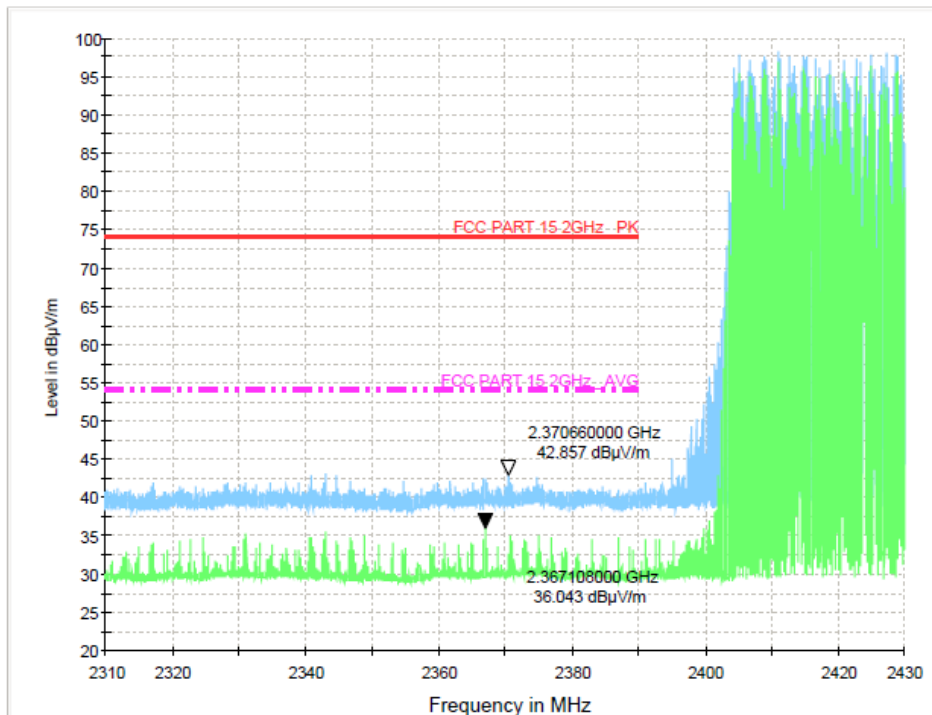

hopping-on

Test Mode: GFSK-High

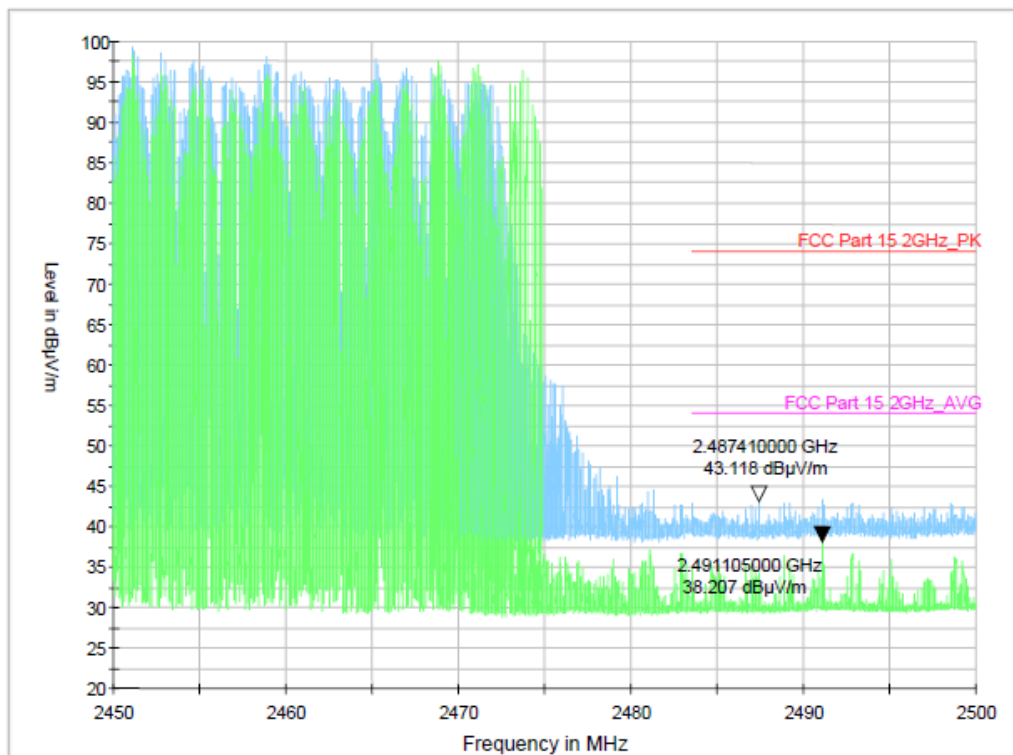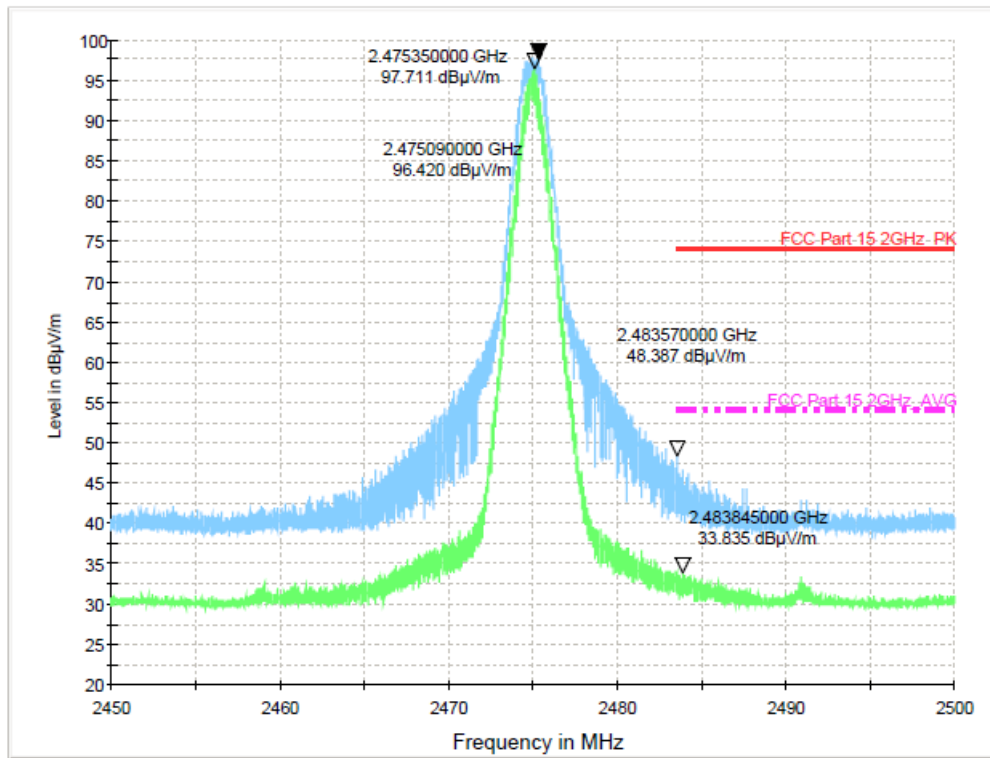


Note: 1. *:Maximum data; x:Over limit; !:over margin.

2.Measurement=Reading Level+Correct Factor; Correct Factor=Antenna Factor+Cable Loss.


Conducted Method:

Test Mode:

GFSK-Low

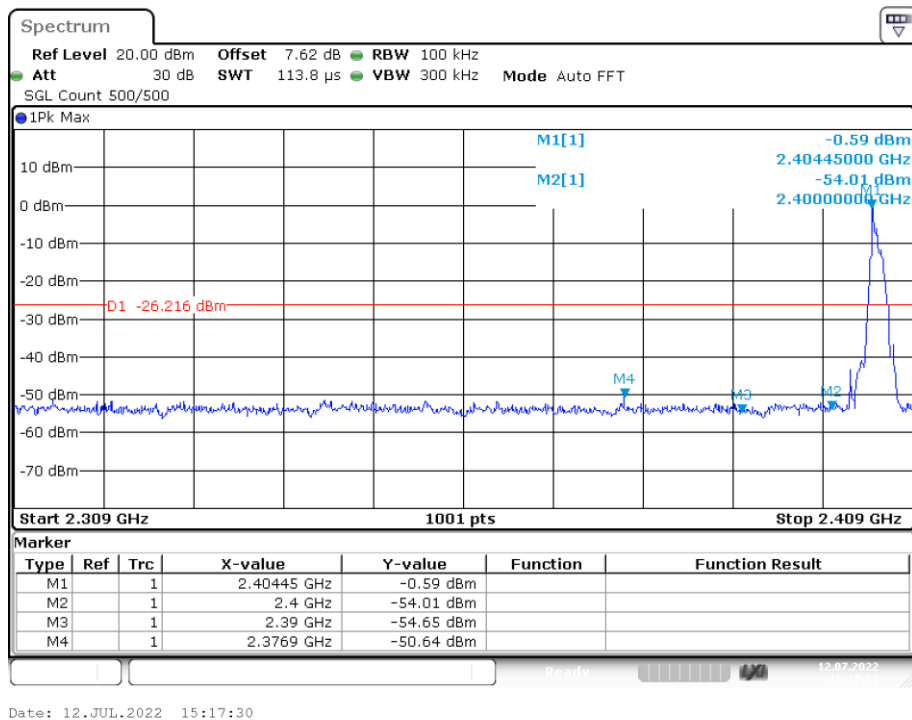


hopping-off

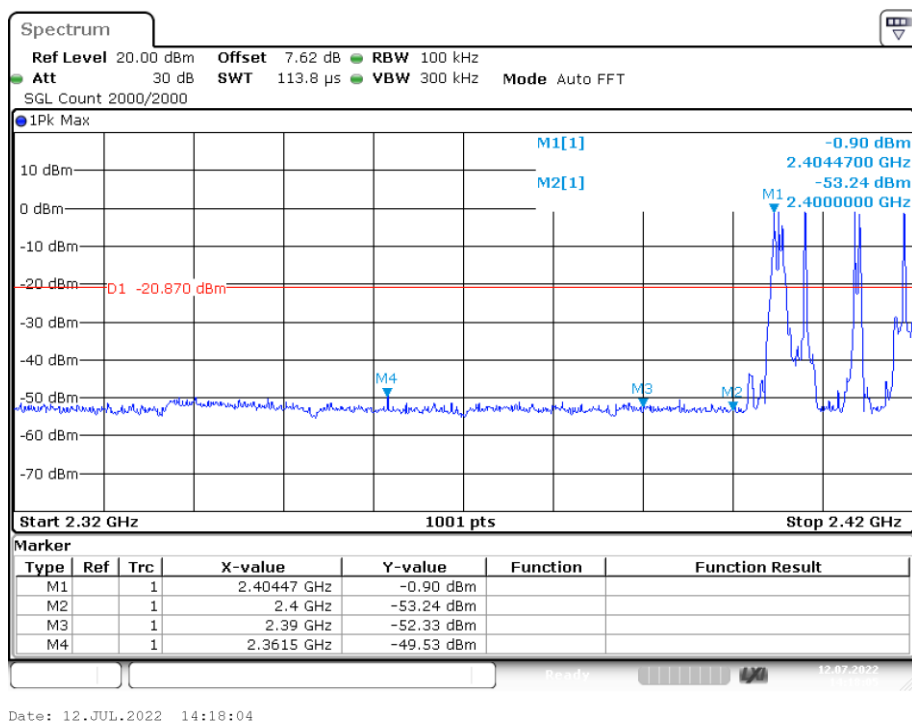


hopping-on

Test Mode: GFSK-High

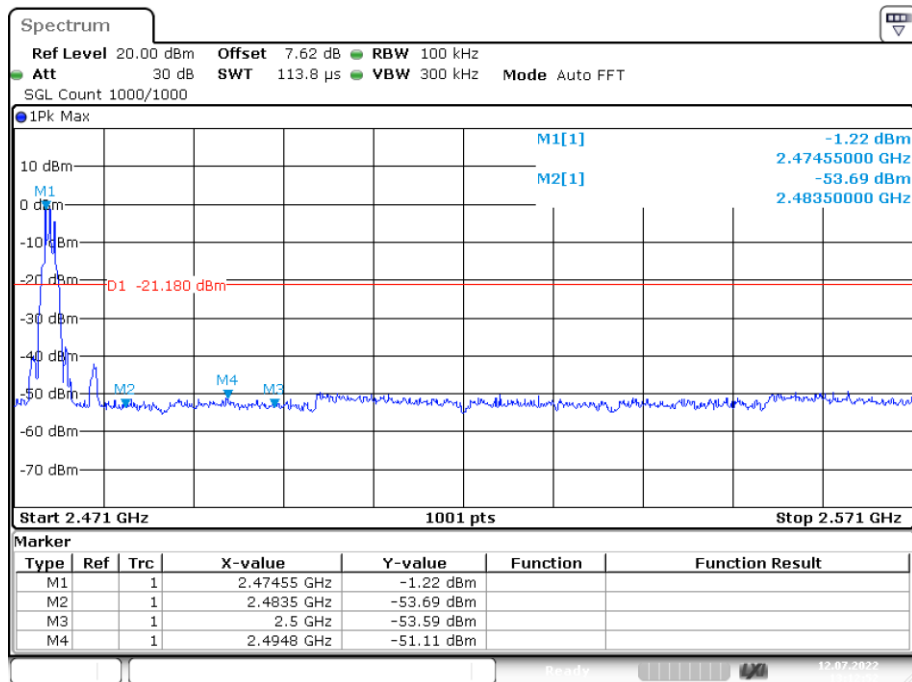

Date: 12.JUL.2022 13:12:51

hopping-off

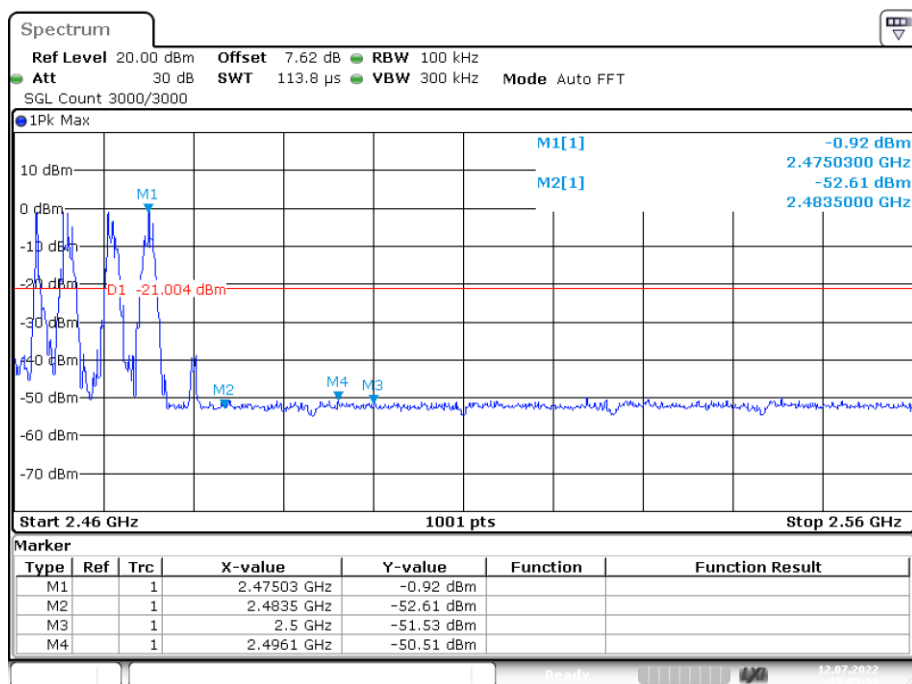


Date: 12.JUL.2022 15:03:37

hopping-on

10. Power Line Conducted Emissions

10.1. Block Diagram of Test Setup

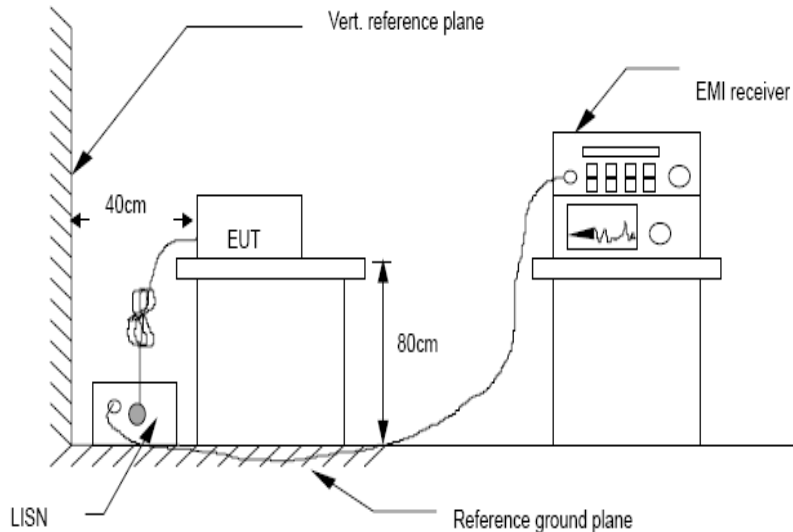

10.2. Limit

Frequency	Maximum RF Line Voltage	
	Quasi-Peak Level dB(μ V)	Average Level dB(μ V)
150kHz ~ 500kHz	66 ~ 56*	56 ~ 46*
500kHz ~ 5MHz	56	46
5MHz ~ 30MHz	60	50

Notes: 1. * Decreasing linearly with logarithm of frequency.

2. The lower limit shall apply at the transition frequencies.

10.3. Test Procedure

- (1) The EUT was placed on a non-metallic table, 80cm above the ground plane.
- (2) Setup the EUT and simulator as shown in 10.1
- (3) The EUT Power connected to the power mains through a power adapter and a line impedance stabilization network (L.I.S.N1). The other peripheral devices power cord connected to the power mains through a line impedance stabilization network (L.I.S.N2), this provided a 50-ohm coupling impedance for the EUT (Please refer to the block diagram of the test setup and photographs). Both sides of power line were checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipments and all of the interface cables were changed according to ANSI C63.10:2013on conducted Emission test.
- (4) The bandwidth of test receiver is set at 10KHz.


(5) The frequency range from 150 KHz to 30MHz is checked.

10.4.Test Result

PASS. (See below detailed test data)

Note: If peak Result comply with AV limit, QP and AV Result is deemed to comply with AV limit

Line:

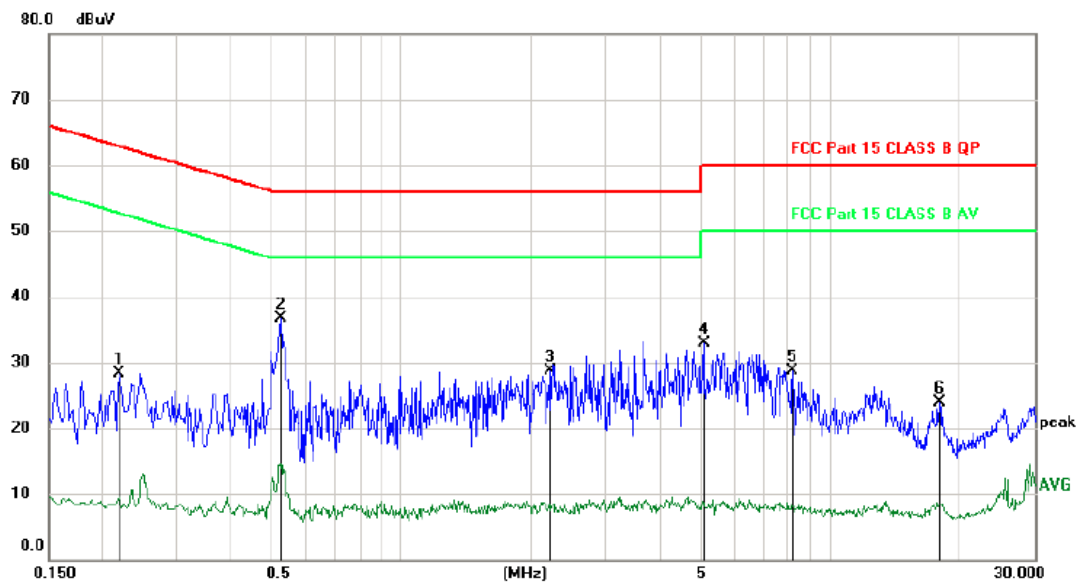


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.2190	18.41	9.94	28.35	62.86	-34.51	peak	
2	*	0.5220	26.68	9.95	36.63	56.00	-19.37	peak	
3		2.2200	18.81	9.89	28.70	56.00	-27.30	peak	
4		5.0670	22.90	10.04	32.94	60.00	-27.06	peak	
5		8.1720	18.50	10.16	28.66	60.00	-31.34	peak	
6		18.0270	13.48	10.41	23.89	60.00	-36.11	peak	

*:Maximum data x:Over limit !:over margin

(Reference Only)

Note: Measurement=Reading Level+Correc Factor. Factor=(LISN or ISN or PLC or Current Probe)Factor+Cable

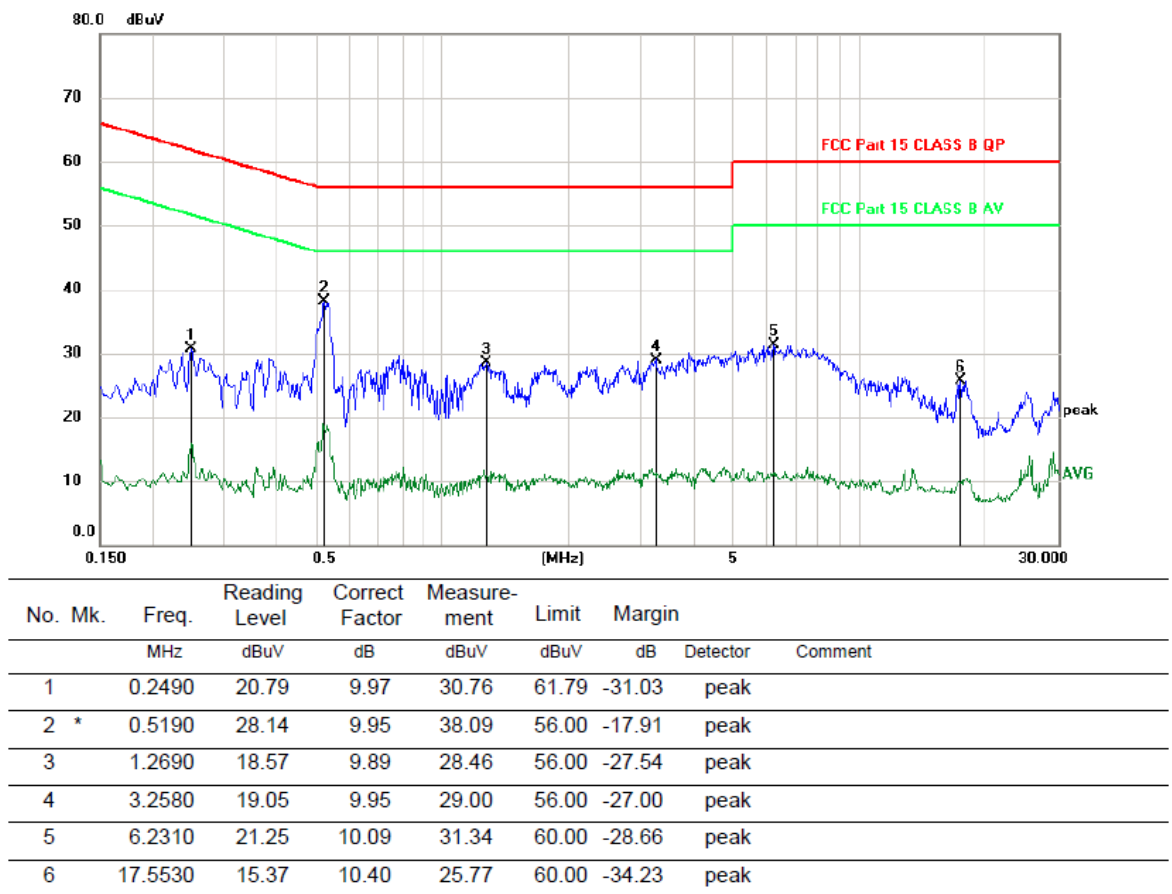Neutral:

*:Maximum data x:Over limit !:over margin

(Reference Only)

Note: Measurement=Reading Level+Correc Factor. Factor=(LISN or ISN or PLC or Current Probe)Factor+Cable

Remark: All modes have been tested, and only worst data of GFSK mode, Channel 2441MHz (DC 5V From Notebook) was listed in this report.

11. Antenna Requirements

11.1.Limit


For intentional device, according to FCC 47 CFR Section 15.203 and RSS-GEN, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

11.2.Result


The EUT antenna is internal antenna. It complies with the standard requirement.

12. Test Setup Photo


12.1. Photos of Radiated emission

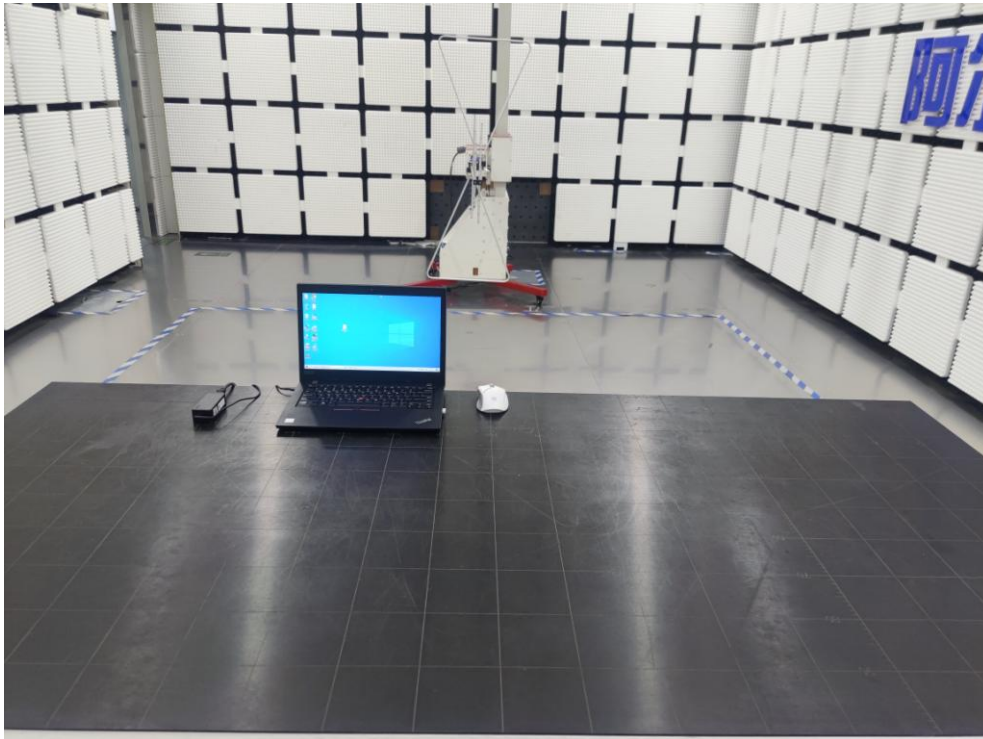


12.2.Photos of Conducted Emission test

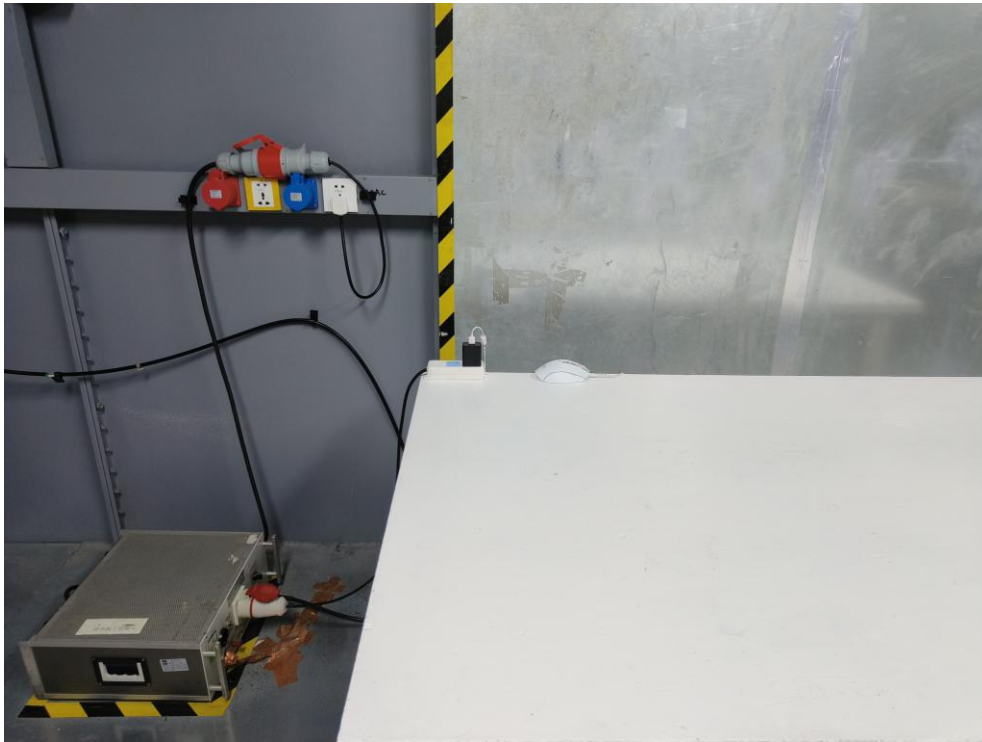



13. EUT Photo


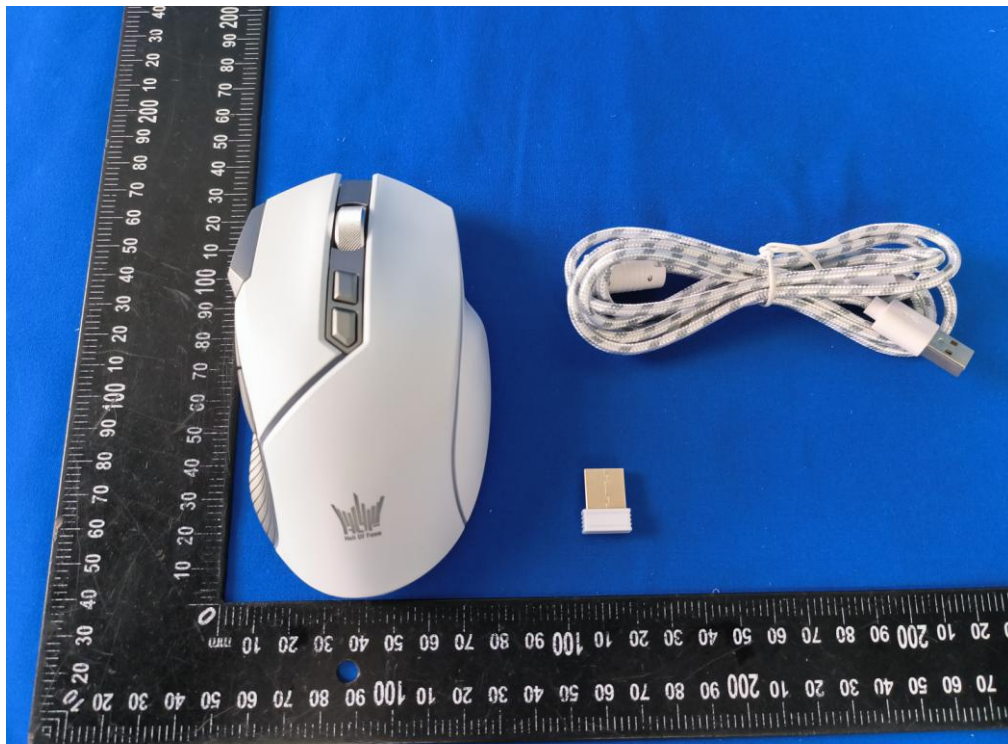



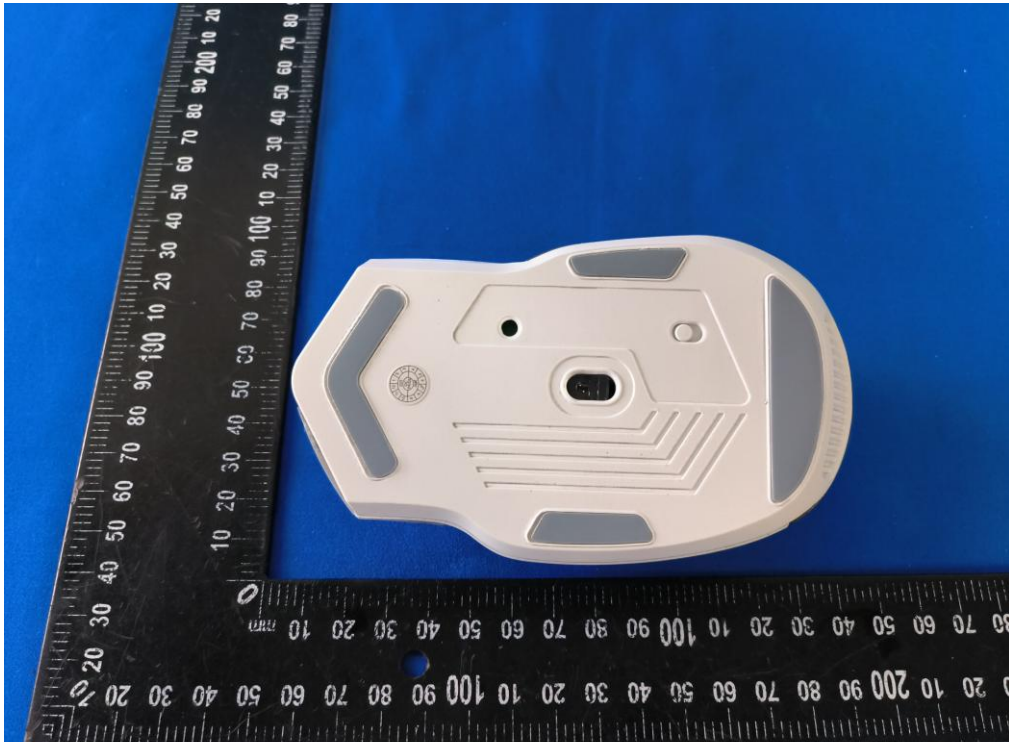




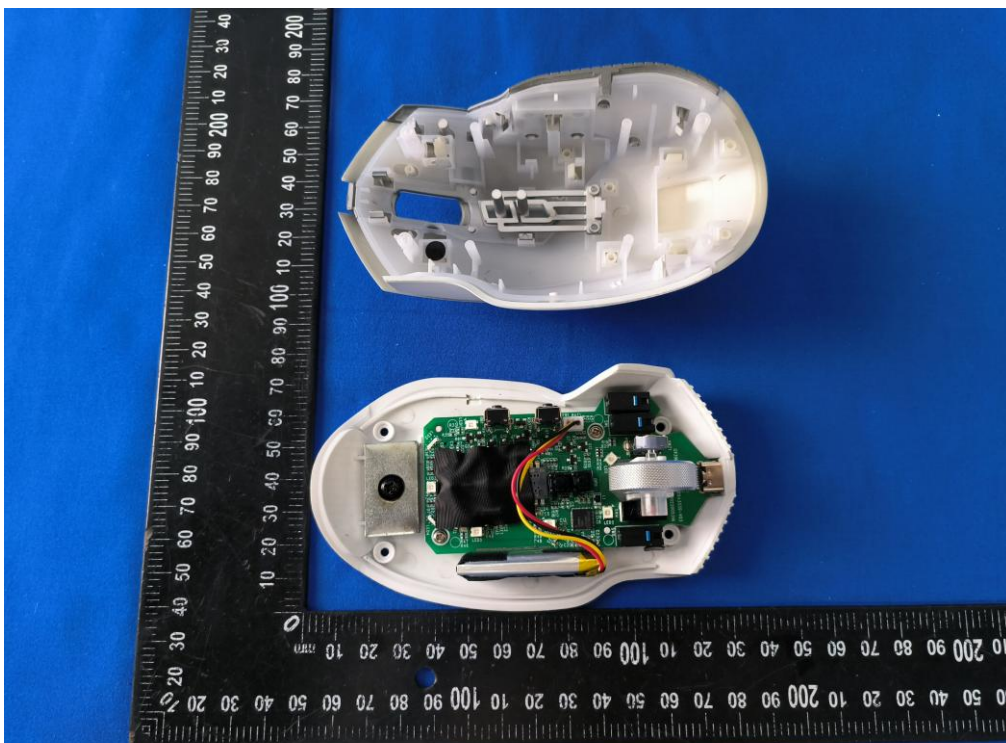

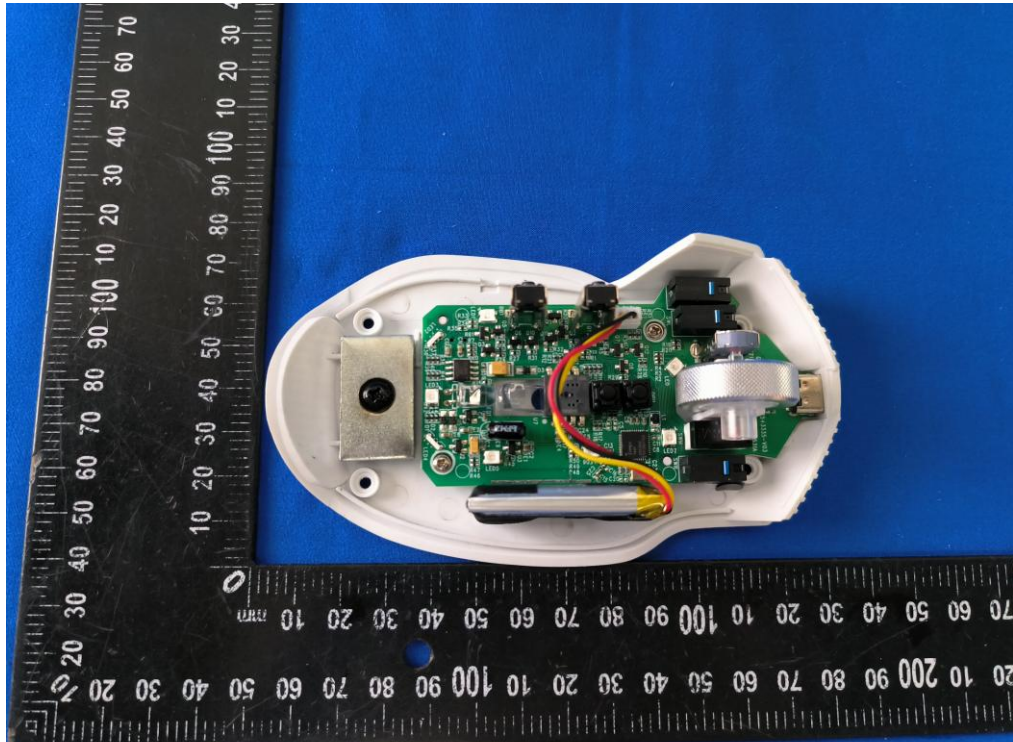

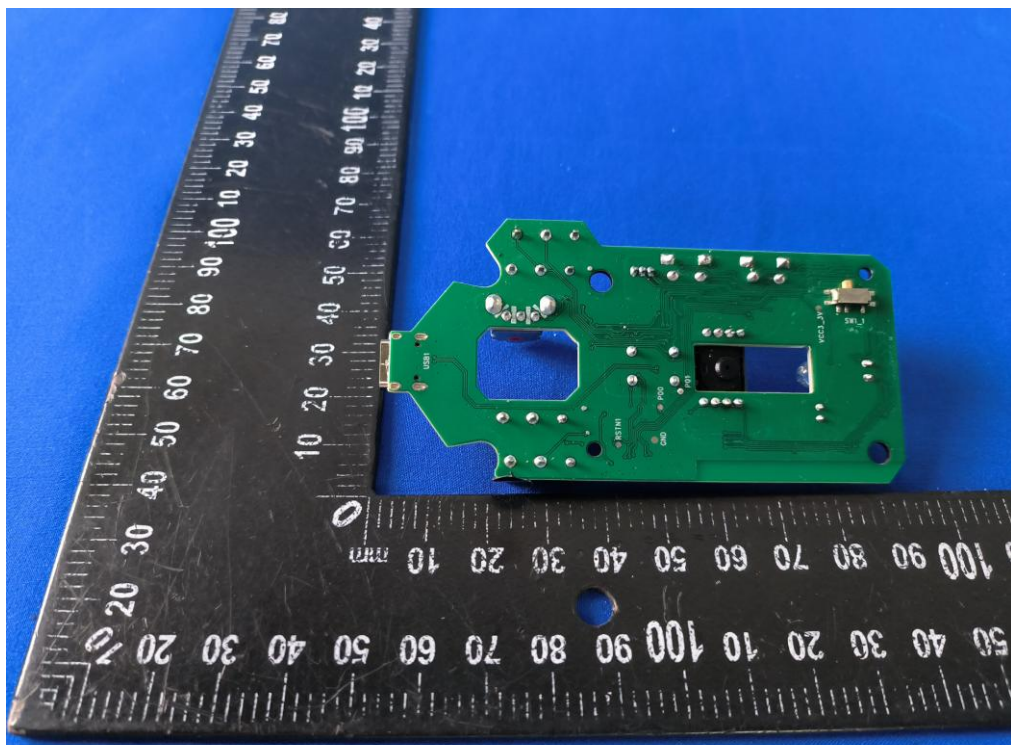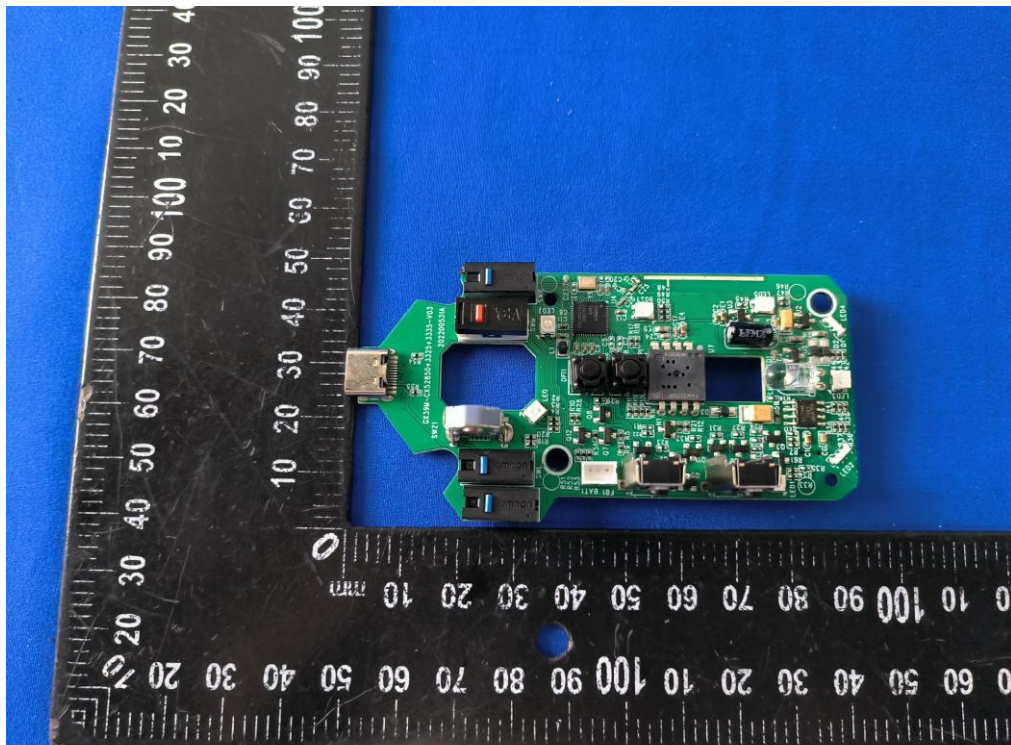

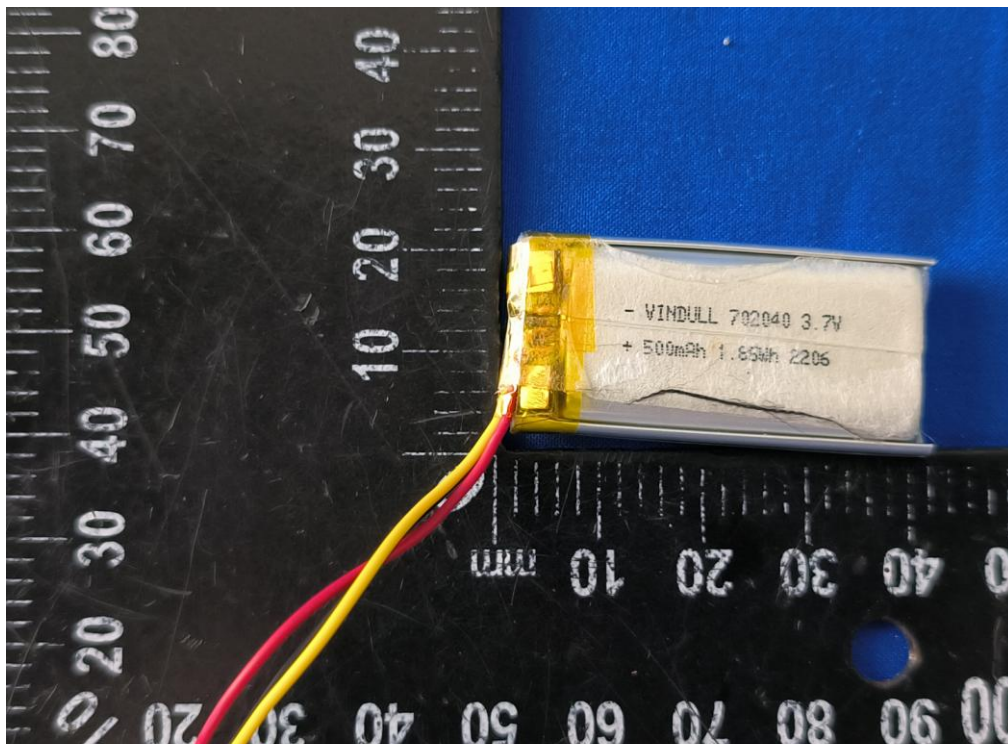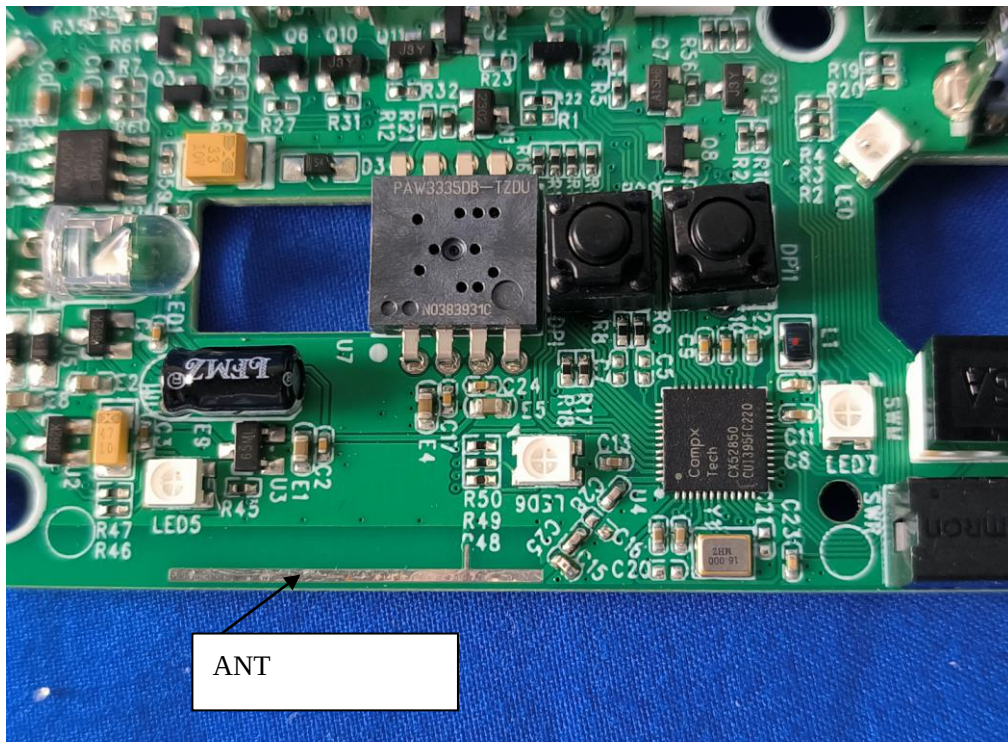

-----THE END OF REPORT-----