

Report No.: SZEM120900505101

No. 1 Workshop, M-10, Middle section, Science & Technology Park, Nanshan

District, Shenzhen, Guangdong, China 518057

Telephone: +86 (0) 755 2601 2053 Fax: +86 (0) 755 2671 0594

Email: ee.shenzhen@sgs.com Page: 1 of 22

# **FCC REPORT**

Application No.: SZEM1209005051RF

Applicant:Stonex Europe SrlManufacturer:Stonex Europe SrlFactory:Stonex Europe Srl

Host Product Name: GPS Receiver
Host Model No.: S8N GNSS
Limit Module FCC ID: Y44-B2029
Module Model No.: BlueMod+B20

Standards: 47 CFR Part 15, Subpart C (2011)

**Date of Receipt:** 2012-09-05

**Date of Test:** 2012-09-10 to 2012-09-25

**Date of Issue:** 2013-04-19

Test Result: PASS \*

#### Authorized Signature:



Jack Zhang EMC Laboratory Manager

The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS International Electrical Approvals or testing done by SGS International Electrical Approvals in connection with, distribution or use of the product described in this report must be approved by SGS International Electrical Approvals in writing.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. All test results in this report can be traceable to National or International Standards.

<sup>\*</sup> In the configuration tested, the EUT complied with the standards specified above.



Report No.: SZEM120900505101

Page: 2 of 22

# 2 Test Summary

Test Item	Test Requirement	Test method	Result
Conducted Peak Output Power	47 CFR Part 15, Subpart C Section 15.247 (b)(1)	ANSI C63.10 (2009)	PASS
Radiated Spurious emissions	47 CFR Part 15, Subpart C Section 15.205/15.209	ANSI C63.10 (2009)	PASS

Remark:

Limit Bluetooth module (FCC ID:Y44-B2029) be used into the new host (Host Product Name: GPS Receiver Model No.: S8N GNSS).

Conducted output power, Radiated Spurious emissions were fully retested on the host and shown the data in this report, other tests please refer to the original report FCC ID:Y44-B2029.



Report No.: SZEM120900505101

Page: 3 of 22

# 3 Contents

			Page
1	CC	OVER PAGE	1
2	TE	EST SUMMARY	2
3	CC	ONTENTS	3
4		ENERAL INFORMATION	
	4.1	CLIENT INFORMATION	4
	4.2	GENERAL DESCRIPTION OF EUT	
	4.3	TEST ENVIRONMENT	6
	4.4	DESCRIPTION OF SUPPORT UNITS	6
	4.5	TEST LOCATION	6
	4.6	TEST FACILITY	7
	4.7	DEVIATION FROM STANDARDS	7
	4.8	ABNORMALITIES FROM STANDARD CONDITIONS	
	4.9	OTHER INFORMATION REQUESTED BY THE CUSTOMER	
	4.10	EQUIPMENT LIST	8
5	TE	EST RESULTS AND MEASUREMENT DATA	10
	5.1	CONDUCTED PEAK OUTPUT POWER	
	5.2	RADIATED SPURIOUS EMISSION	
	5.2	2.1 Radiated Emission below 1GHz	
	5.2	2.2 Transmitter Emission above 1GHz	21-22



Report No.: SZEM120900505101

Page: 4 of 22

# 4 General Information

# 4.1 Client Information

Applicant:	Stonex Europe Srl	
Address of Applicant:	Via Zucchi 1, 20090 Monza (MB), Italy	
Manufacturer:	Stonex Europe Srl	
Address of Manufacturer:	Via Zucchi 1, 20090 Monza (MB), Italy	
Factory:	Stonex Europe Srl	
Address of Factory:	Via Zucchi 1, 20090 Monza (MB), Italy	

# 4.2 General Description of EUT

<del>-</del>						
Host Product Name:	GPS Receiver					
Host Model No.:	S8N GNSS					
Limit Module FCC ID:	Y44-B2029					
Module Model No.:	BlueMod+B20					
Trade Mark:	STONEX					
Operation Frequency:	2402MHz~2480MHz					
Bluetooth Version:	2.0 +EDR					
Modulation Technique:	Frequency Hopping Spread Spectrum(FHSS)					
Modulation Type:	GFSK, π/4DQPSK, 8DPSK					
Number of Channel:	79					
Hopping Channel Type:	Adaptive Frequency Hopping systems					
Sample Type:	Mobile production					
Test Power Grade:	50 (manufacturer decl	are)				
Test Software of EUT:	CSR BlueSuite (manu	facturer declare )				
Antenna Type:	Integral					
Antenna Gain:	0.9dBi					
Power Supply:	AC Adapter:	MODEL:PSA18R-120P INPUT: AC 100-240V 0.5A 50-60Hz 40-60VA OUTPUT: DC 12V 1.5A				
Battery Charger: Type: CH-S932X84 INPUT: 12V DC 1.5A max OUTPUT: 2*8.4V DC 400mA max						
EUT Power Supply:	Type: BT-S9374 DC 7.4V 2500mAh 18.5Wh Li-Ion Battery					
Test Voltage:	DC 7.4V	(C) 277 HI				
		100 777 111				



Report No.: SZEM120900505101

Page: 5 of 22

Operation I	Operation Frequency each of channel						
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2402MHz	21	2422MHz	41	2442MHz	61	2462MHz
2	2403MHz	22	2423MHz	42	2443MHz	62	2463MHz
3	2404MHz	23	2424MHz	43	2444MHz	63	2464MHz
4	2405MHz	24	2425MHz	44	2445MHz	64	2465MHz
5	2406MHz	25	2426MHz	45	2446MHz	65	2466MHz
6	2407MHz	26	2427MHz	46	2447MHz	66	2467MHz
7	2408MHz	27	2428MHz	47	2448MHz	67	2468MHz
8	2409MHz	28	2429MHz	48	2449MHz	68	2469MHz
9	2410MHz	29	2430MHz	49	2450MHz	69	2470MHz
10	2411MHz	30	2431MHz	50	2451MHz	70	2471MHz
11	2412MHz	31	2432MHz	51	2452MHz	71	2472MHz
12	2413MHz	32	2433MHz	52	2453MHz	72	2473MHz
13	2414MHz	33	2434MHz	53	2454MHz	73	2474MHz
14	2415MHz	34	2435MHz	54	2455MHz	74	2475MHz
15	2416MHz	35	2436MHz	55	2456MHz	75	2476MHz
16	2417MHz	36	2437MHz	56	2457MHz	76	2477MHz
17	2418MHz	37	2438MHz	57	2458MHz	77	2478MHz
18	2419MHz	38	2439MHz	58	2459MHz	78	2479MHz
19	2420MHz	39	2440MHz	59	2460MHz	79	2480MHz
20	2421MHz	40	2441MHz	60	2461MHz		

#### Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Channel	Frequency
The Lowest channel	2402MHz
The Middle channel	2441MHz
The Highest channel	2480MHz



Report No.: SZEM120900505101

Page: 6 of 22

#### 4.3 Test Environment

Operating Environment:		
Temperature:	26.0 °C	
Humidity:	53 % RH	
Atmospheric Pressure:	1003mbar	

# 4.4 Description of Support Units

The EUT has been tested independent unit.

#### 4.5 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen Branch E&E Lab,

No. 1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, Guangdong, China. 518057.

Tel: +86 755 2601 2053 Fax: +86 755 2671 0594

No tests were sub-contracted.



Report No.: SZEM120900505101

Page: 7 of 22

# 4.6 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

#### CNAS (No. CNAS L2929)

CNAS has accredited SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch EMC Lab to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration Laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.

#### VCCI

The 3m Semi-anechoic chamber, Full-anechoic Chamber and Shielded Room (7.5m x 4.0m x 3.0m) of SGS-CSTC Standards Technical Services Co., Ltd. have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: R-2197, G-416, T-1153 and C-2383 respectively.

#### • FCC – Registration No.: 556682

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No.: 556682.

#### Industry Canada (IC)

The 3m Semi-anechoic chamber of SGS-CSTC Standards Technical Services Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 4620C-1.

#### 4.7 Deviation from Standards

None.

#### 4.8 Abnormalities from Standard Conditions

None.

# 4.9 Other Information Requested by the Customer

None.



Report No.: SZEM120900505101

Page: 8 of 22

# 4.10 Equipment List

	RE in Chamber				
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Due date (yyyy-mm-dd)
1	3m Semi-Anechoic Chamber	ETS-LINDGREN	N/A	SEL0017	2013-06-10
2	EMI Test Receiver	Rohde & Schwarz	ESIB26	SEL0023	2013-05-17
3	EMI Test software	AUDIX	E3	SEL0050	N/A
4	BiConiLog Antenna (26-3000MHz)	ETS-LINDGREN	3142C	SEL0015	2013-10-24
5	Double-ridged horn (1-18GHz)	ETS-LINDGREN	3117	SEL0006	2013-10-24
6	Horn Antenna (18-26GHz)	ETS-LINDGREN	3160	SEL0076	2013-10-24
7	Pre-amplifier (0.1-1300MHz)	Agilent Technologies	8447D	SEL0053	2013-05-17
8	Pre-Amplifier (0.1-26.5GHz)	Compliance Directions Systems Inc.	PAP-0126	SEL0168	2013-10-24
9	Coaxial cable	SGS	N/A	SEL0027	2013-05-59
10	Coaxial cable	SGS	N/A	SEL0189	2013-05-29
11	Coaxial cable	SGS	N/A	SEL0121	2013-05-29
12	Coaxial cable	SGS	N/A	SEL0178	2013-05-29
13	Band filter	Amindeon	82346	SEL0094	2013-05-17
14	Barometer	Chang Chun	DYM3	SEL0088	2013-05-24
15	DC Power Supply	Zhao Xin	RXN-305D	SEL0117	2013-10-24
16	Humidity/ Temperature Indicator	Shanhai Qixiang	ZJ1-2B	SEL0103	2013-10-24
17	Signal Generator (10M-27GHz)	Rohde & Schwarz	SMR27	SEL0067	2013-05-17
18	Signal Generator	Rohde & Schwarz	SMY01	SEL0155	2013-10-24
19	Loop Antenna	Beijing Daze	ZN30401	SEL0203	2013-06-04



Report No.: SZEM120900505101

Page: 9 of 22

Item	Test Equipment Manufacturer		Model No.	Inventory No.	Cal.Due date (yyyy-mm-dd)
1	DC Power Supply	Zhao Xin	RXN-305D	SEL0117	2013-10-24
2	Humidity/ Temperature Indicator	Temperature HYGRO		SEL0033	2013-10-24
3	Spectrum Analyzer	Rohde & Schwarz	FSP	SEL0154	2013-10-24
4	Coaxial cable	SGS	N/A	SEL0178	2013-05-29
5	Coaxial cable	SGS	N/A	SEL0179	2013-05-29
6	Barometer	ChangChun	DYM3	SEL0088	2013-05-24
7	Signal Generator	Rohde & Schwarz	SML03	SEL0068	2013-05-17
8	Band filter	amideon	82346	SEL0094	2013-05-17
9	POWER METER	R&S	NRVS	SEL0144	2013-10-24
10	Attenuator	Beijin feihang taida	TST-2-6dB	SEL0205	2013-05-17
11	Power Divider(splitter)	Agilent Technologies	11636B	SEL0130	2013-10-24

Note: The calibration interval is one year, all the instruments are valid.




Report No.: SZEM120900505101

Page: 10 of 22

# 5 Test results and Measurement Data

# 5.1 Conducted Peak Output Power

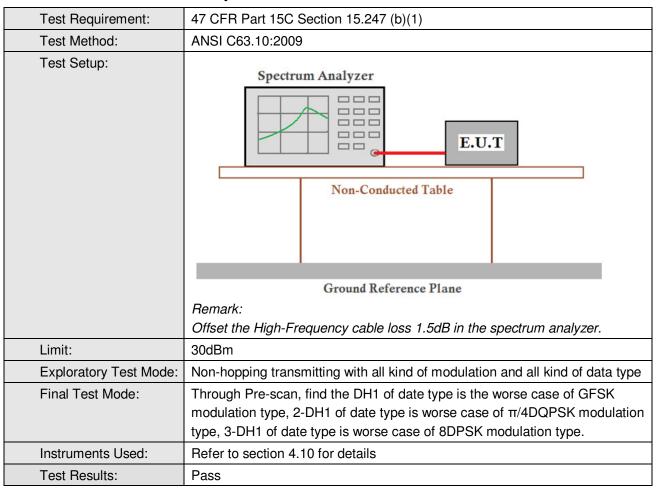

#### **Measurement Data**

	GFSK mode					
Test channel	Peak Output Power (dBm)	Limit (dBm)	Result			
Lowest	-0.10	30.00	Pass			
Middle	-0.10	30.00	Pass			
Highest	-1.45	30.00	Pass			
	π/4DQPSK m	node				
Test channel	Peak Output Power (dBm)	Limit (dBm)	Result			
Lowest	-0.66	30.00	Pass			
Middle	-1.59	30.00	Pass			
Highest	-1.58	30.00	Pass			
	8DPSK mo	de				
Test channel	Peak Output Power (dBm)	Limit (dBm)	Result			
Lowest	-0.66	30.00	Pass			
Middle	-0.59	30.00	Pass			
Highest	-0.91	30.00	Pass			




Report No.: SZEM120900505101


Page: 11 of 22

#### Test plot as follows:

Testinosia	OFOIC	Tarak alamana di	Laurant
l est mode:	GFSK	l est channel:	Lowest

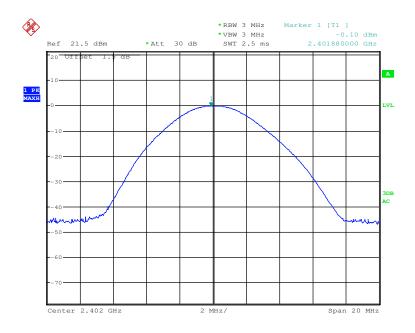

Test mode: GFSK Test channel: Middle

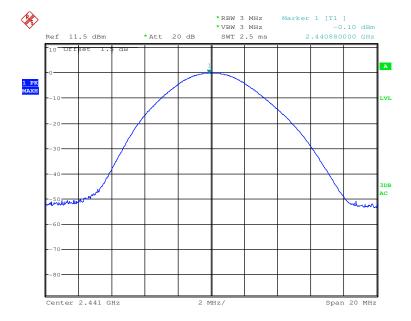


<sup>&</sup>quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> and conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."




Report No.: SZEM120900505101

Page: 12 of 22

Test mode: GFSK Test channel: Highest

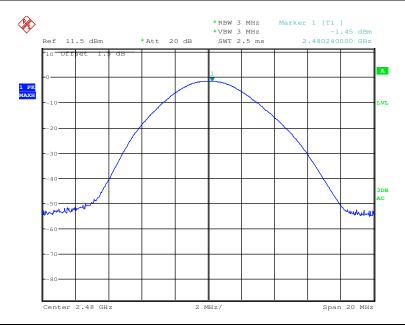

Test mode: π/4DQPSK Test channel: Lowest

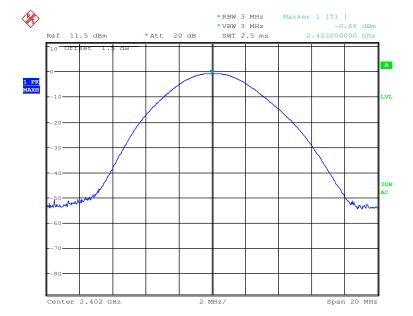


<sup>&</sup>quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> and conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."




Report No.: SZEM120900505101

Page: 13 of 22

Test mode: π/4DQPSK Test channel: Middle

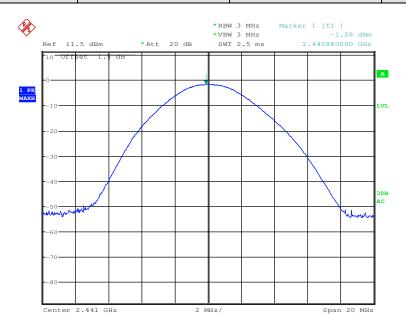



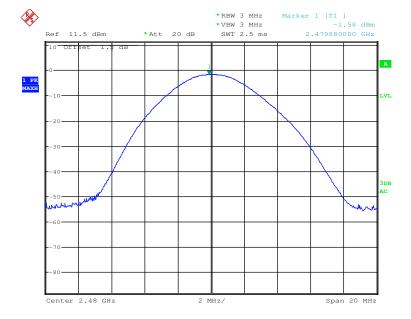


<sup>&</sup>quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> and conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."




Report No.: SZEM120900505101

Page: 14 of 22

Test mode: 8DPSK Test channel: Lowest

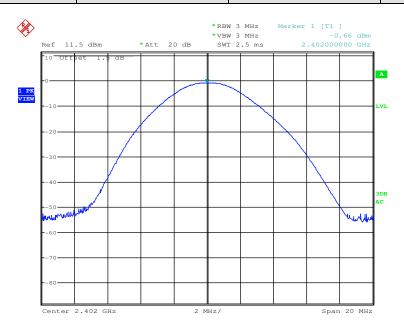

Test mode: 8DPSK Test channel: Middle

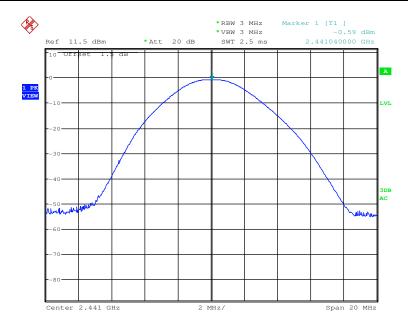






Report No.: SZEM120900505101

Page: 15 of 22

Test mode: 8DPSK Test channel: Highest

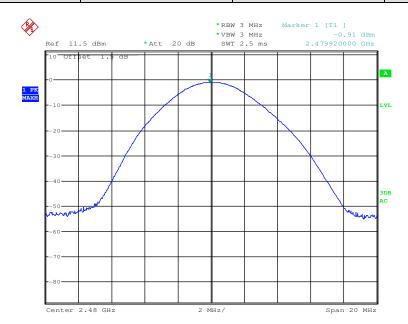



Report No.: SZEM120900505101

Page: 16 of 22

# 5.2 Radiated Spurious Emission


Test Requirement:	47 CFR Part 15C Section 15.209 and 15.205						
Test Method:	ANSI C63.10: 2009						
Test Site:	Measurement Distance: 3m (Semi-Anechoic Chamber)						
Receiver Setup:	Frequency	Frequency			VBW	Remark	
	0.009MHz-0.090MH	Z	Peak	10kHz	z 30kHz	Peak	
	0.009MHz-0.090MH	z	Average	10kHz	z 30kHz	Average	
	0.090MHz-0.110MH	z	Quasi-peak	10kHz	z 30kHz	Quasi-peak	
	0.110MHz-0.490MH	Z	Peak	10kHz	z 30kHz	Peak	
	0.110MHz-0.490MH	Z	Average	10kHz	z 30kHz	Average	
	0.490MHz -30MHz		Quasi-peak	10kHz	z 30kHz	Quasi-peak	
	30MHz-1GHz		Quasi-peak	100 kH	lz 300kHz	Quasi-peak	
	Above 1GHz		Peak	1MHz	z 3MHz	Peak	
	Above IGHZ		Peak	1MHz	10Hz	Average	
Limit:	Frequency	Frequency Fie		Limit (dBuV/m)	Remark	Measureme distance (m	
	0.009MHz-0.490MHz	2	400/F(kHz)	-	-	300	
	0.490MHz-1.705MHz	24	1000/F(kHz)	-	-	30	
	1.705MHz-30MHz		30	-	-	30	
	30MHz-88MHz		100	40.0	Quasi-peak	3	
	88MHz-216MHz		150	43.5	Quasi-peak	3	
	216MHz-960MHz		200	46.0	Quasi-peak	3	
	960MHz-1GHz Above 1GHz		500	54.0	Quasi-peak	3	
			500	54.0	Average	3	
	Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.						



Report No.: SZEM120900505101

Page: 17 of 22

#### Test Setup:






Figure 1. Below 30MHz

Figure 2. 30MHz to 1GHz




Figure 3. Above 1 GHz

#### Test Procedure:

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic camber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB



Report No.: SZEM120900505101

Page: 18 of 22

	margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.  g. Test the EUT in the lowest channel (2402MHz),the middle channel (2441MHz),the Highest channel (2480MHz)  h. The radiation measurements are performed in X, Y, Z axis positioning. And found the X axis positioning which it is worse case, only the test worst case mode is recorded in the report.  i. Repeat above procedures until all frequencies measured was complete.
Exploratory Test Mode:	Non-hopping transmitting mode with all kind of modulation and all kind of data type
Final Test Mode:	Through Pre-scan, find the DH1 of date type is the worse case of GFSK modulation type
Instruments Used:	Refer to section 4.10 for details
Test Results:	Pass




Report No.: SZEM120900505101

Page: 19 of 22

#### 5.2.1 Radiated Emission below 1GHz

30MHz~1GHz (QP)							
Test mode:	Transmitting	Vertical					

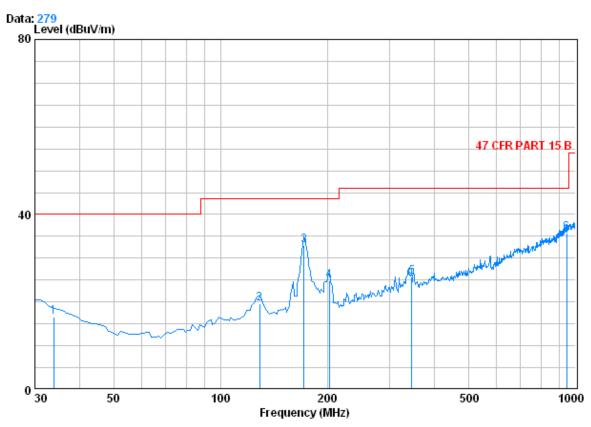

Condition : 47 CFR PART 15 B 3m 3142C VERTICAL

Job No. : 5051RF test mode : Transmitting


.sv mo ac	Freq			Preamp Factor	Read Level		Limit Line	Over Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	33.880	0.60	13.51	27.34	29.80	16.57	40.00	-23.43
2	128.940	1.27	7.72	27.02	37.65	19.62	43.50	-23.88
3 0	171.620	1.36	9.55	26.81	48.91	33.01	43.50	-10.49
4	202.660	1.42	10.32	26.69	39.75	24.80	43.50	-18.70
5	346.220	2.05	15.31	26.77	35.20	25.79	46.00	-20.21
6 @	943.740	3.64	23.30	26.58	35.41	35.78	46.00	-10.22



Report No.: SZEM120900505101

Page: 20 of 22

Test mode:	Transmitting	Horizontal

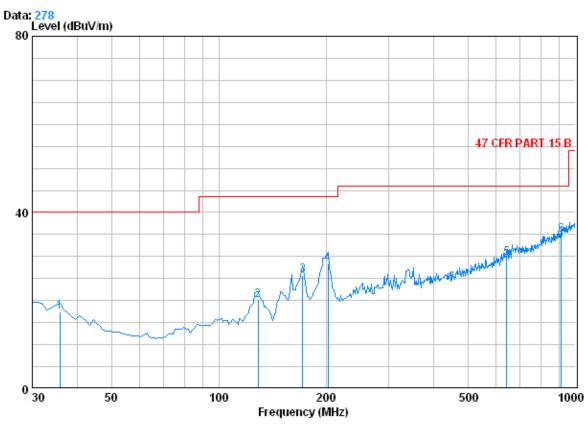

Condition : 47 CFR PART 15 B 3m 3142C HORIZONTAL

Job No. : 5051RF test mode : Transmitting

		CableA	ıntenna	Preamp	Read		Limit	Over
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	35.820	0.60	12.80	27.33	31.38	17.45	40.00	-22.55
2	128.940	1.27	7.72	27.02	38.01	19.99	43.50	-23.51
3	171.620	1.36	9.55	26.81	41.71	25.81	43.50	-17.69
4	202.660	1.42	10.32	26.69	43.33	28.38	43.50	-15.12
5	642.070	2.79	20.57	27.49	33.69	29.56	46.00	-16.44
6 0	912.700	3.61	23.25	26.71	34.67	34.82	46.00	-11.18



Report No.: SZEM120900505101

Page: 21 of 22

#### 5.2.2 Transmitter Emission above 1GHz

Test mode:		GFSK(DH1)	Test	channel:	Lowest	Remark:		Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
3588.939	3.81	33.3	40.73	46.12	42.50	74	-31.50	Vertical
4785.075	4.68	34.73	41.61	40.79	38.59	74	-35.41	Vertical
6764.538	5.33	36.04	40.27	39.44	40.54	74	-33.46	Vertical
7860.737	6.21	36.00	39.31	37.98	40.88	74	-33.12	Vertical
9370.083	6.05	37.03	37.99	36.37	41.46	74	-32.54	Vertical
11457.210	6.34	38.41	38.05	35.41	41.11	74	-32.89	Vertical
3026.195	3.33	33.39	40.33	42.66	39.05	74	-34.95	Horizontal
4785.075	4.68	34.73	41.61	44.95	42.75	74	-31.25	Horizontal
6094.137	5.15	35.82	40.84	39.76	39.89	74	-34.11	Horizontal
7547.013	6.17	36.00	39.57	39.12	41.72	74	-32.28	Horizontal
8462.975	6.18	36.19	38.78	36.73	40.32	74	-33.68	Horizontal
9393.966	6.04	37.08	37.98	36.73	41.87	74	-32.13	Horizontal

Test mode:	(	GFSK(DH1)	Test	channel:	Middle	Remark:		Peak
Frequency (MHz)	Cable loss (dB)	Antenna factors (dB/m)	Preamp factor (dB)	Reading Level (dBµV)	Emission Level (dBµV/m)	Limit (dBµV/m)	Over limit (dB)	Polarization
3525.555	3.76	33.24	40.69	43.86	40.17	74	-33.83	Vertical
4536.000	4.52	35.14	41.43	44.56	42.79	74	-31.21	Vertical
5462.297	4.94	34.85	41.38	42.31	40.72	74	-33.28	Vertical
7702.278	6.22	36.00	39.44	38.94	41.72	74	-32.28	Vertical
8208.370	6.2	36.08	39.01	38.51	41.78	74	-32.22	Vertical
9809.404	5.98	37.51	37.61	36.16	42.04	74	-31.96	Vertical
2905.419	3.26	33.26	40.23	44.01	40.30	74	-33.70	Horizontal
4065.707	4.21	33.99	41.08	45.54	42.66	74	-31.34	Horizontal
5850.919	5.07	35.45	41.06	41.93	41.39	74	-32.61	Horizontal
7702.278	6.22	36.00	39.44	38.06	40.84	74	-33.16	Horizontal
8462.975	6.18	36.19	38.78	37.52	41.11	74	-32.89	Horizontal
10011.210	5.97	37.72	37.45	35.42	41.66	74	-32.34	Horizontal



Report No.: SZEM120900505101

Page: 22 of 22

Test mode:	(	GFSK(DH1)	Test	channel:	Highest	Rema	rk:	Peak
Frequency (MHz)	Cable loss (dB)	Antenna factors (dB/m)	Preamp factor (dB)	Reading Level (dBµV)	Emission Level (dBµV/m)	Limit (dBμV/m)	Over limit (dB)	Polarization
3454.486	3.70	33.22	40.63	43.68	39.97	74	-34.03	Vertical
4536.000	4.52	35.14	41.43	43.87	42.10	74	-31.90	Vertical
5617.407	4.99	35.09	41.25	40.03	38.86	74	-35.14	Vertical
7624.250	6.23	36.00	39.51	38.38	41.10	74	-32.90	Vertical
8792.365	6.17	36.43	38.5	37.67	41.77	74	-32.23	Vertical
9636.161	5.99	37.34	37.76	36.39	41.96	74	-32.04	Vertical
3216.838	3.50	33.32	40.47	44.38	40.73	74	-33.27	Horizontal
4688.616	4.61	34.90	41.54	44.56	42.53	74	-31.47	Horizontal
6094.137	5.15	35.82	40.84	39.82	39.95	74	-34.05	Horizontal
7860.737	6.21	36.00	39.31	38.73	41.63	74	-32.37	Horizontal
8973.250	6.16	36.57	38.34	36.84	41.23	74	-32.77	Horizontal
9859.472	5.98	37.56	37.58	35.55	41.51	74	-32.49	Horizontal

#### Remark:

- 1) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:
  - Final Test Level = Receiver Reading + Antenna Factor + Cable Factor Preamplifier Factor
- 2) The disturbance above 13GHz and below 30MHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed.
- 3) As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. So, only the peak measurements were shown in the report.