


### PK-AV-Ratio-Band4-64QAM-5M BW-Low




### PK-AV-Ratio-Band4-64QAM-5M BW-Mid

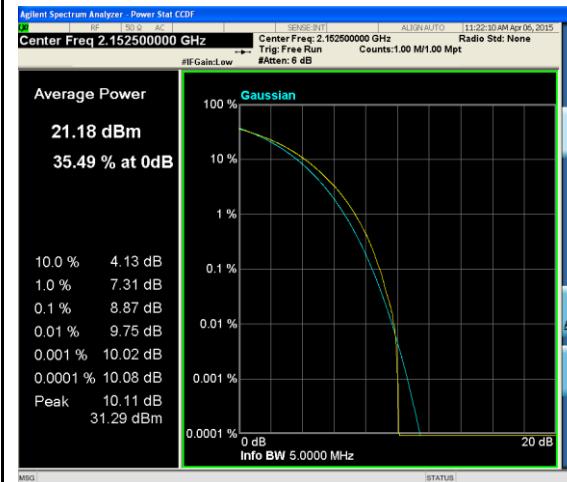


### PK-AV-Ratio-Band4-64QAM-5M BW-High

### PK-AV-Ratio-Band4-64QAM-15M BW-High

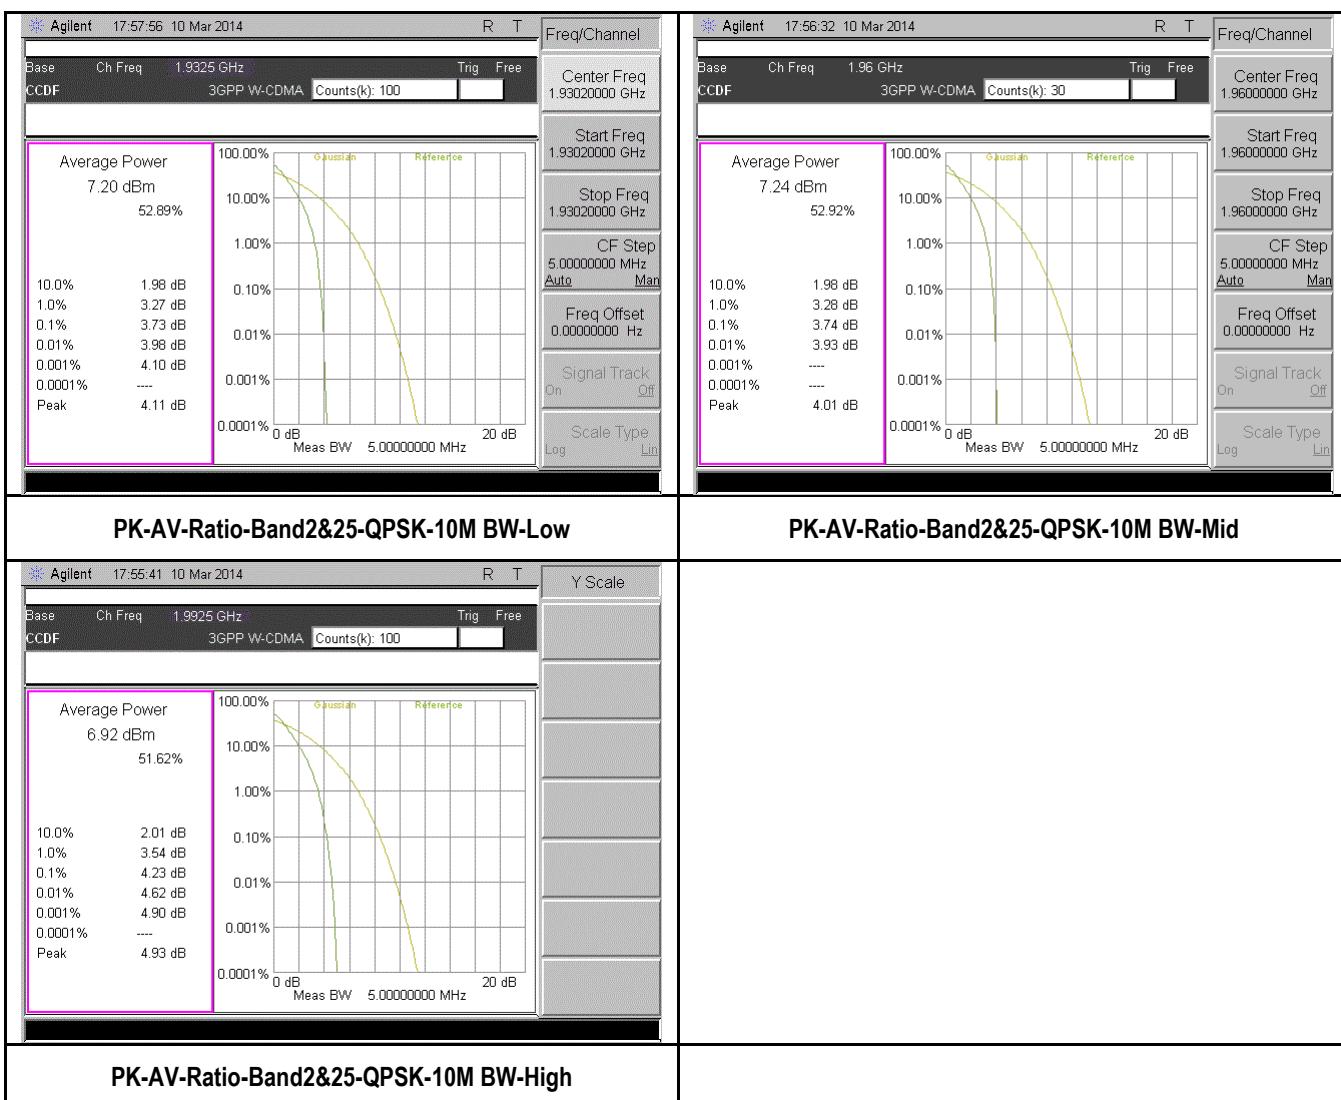

### 10.3 Occupied Bandwidth

Requirement(s):

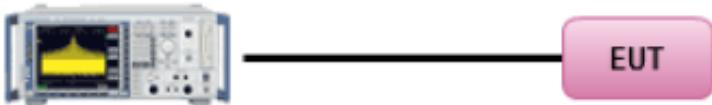Spec	Requirement	Applicable
47 CFR §2.1049	The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured under the following conditions of § 2.1049 (a) through (i)	<input checked="" type="checkbox"/>
Test Setup	 <p><b>Spectrum Analyzer</b></p>	
Procedure	<ol style="list-style-type: none"> <li>1. EUT was set for low, mid, high channel with modulated mode and highest RF output power.</li> <li>2. The spectrum analyzer was connected to the antenna terminal.</li> <li>3. The 99% bandwidths are measured using spectrum analyzer's internal meas function.</li> </ol>	
Test Date	02/27/2014 – 03/20/2014 03/03/2015 – 04/13/2015	Environmental condition Temperature 23°C Relative Humidity 48% Atmospheric Pressure 1008mbar
Remark	NONE	
Result	<input checked="" type="checkbox"/> Pass	<input type="checkbox"/> Fail

**Test Data**  Yes  N/A

**Test Plot**  Yes (See below)  N/A

## Test Data


99% Bandwidth measurement result for LTE band 4

Type	Channel	Channel Frequency (MHz)	99% Occupied Bandwidth (MHz)	26 dB Occupied Bandwidth (MHz)
5MHz BW, QPSK	Low	2112.5	4.48	5.06
	Mid	2132.5	4.48	5.10
	High	2152.5	4.48	5.07
5MHz BW, 64QAM	Low	2112.5	4.48	5.09
	Mid	2132.5	4.48	5.03
	High	2152.5	4.48	5.06
10MHz BW, QPSK	Low	2115	8.94	9.78
	Mid	2132	8.93	9.79
	High	2150	8.93	9.70
10MHz BW, 64QAM	Low	2115	8.96	9.29
	Mid	2132	8.94	9.25
	High	2150	8.93	9.90
15MHz BW, QPSK	Low	2117.5	13.36	14.21
	Mid	2132.5	13.35	14.06
	High	2147.5	13.38	14.25
15MHz BW, 64QAM	Low	2117.5	13.37	14.30
	Mid	2132.5	13.36	14.29
	High	2147.5	13.35	14.30
20MHz BW, QPSK	Low	2120	17.80	19.19
	Mid	2132	17.81	18.94
	High	2145	17.81	19.31
20MHz BW, 64QAM	Low	2120	17.82	18.66
	Mid	2132	17.79	18.61
	High	2145	17.81	18.83


99% Bandwidth measurement result for WCDMA

Type	Channel	Channel Frequency (MHz)	99% Occupied Bandwidth (MHz)	26 dB Occupied Bandwidth (MHz)
3.84MHz BW, QPSK	Low	1932.5	4.31	4.94
	Mid	1960.0	4.32	4.94
	High	1992.5	4.31	4.94


## Test Plots for LTE Band4 QPSK

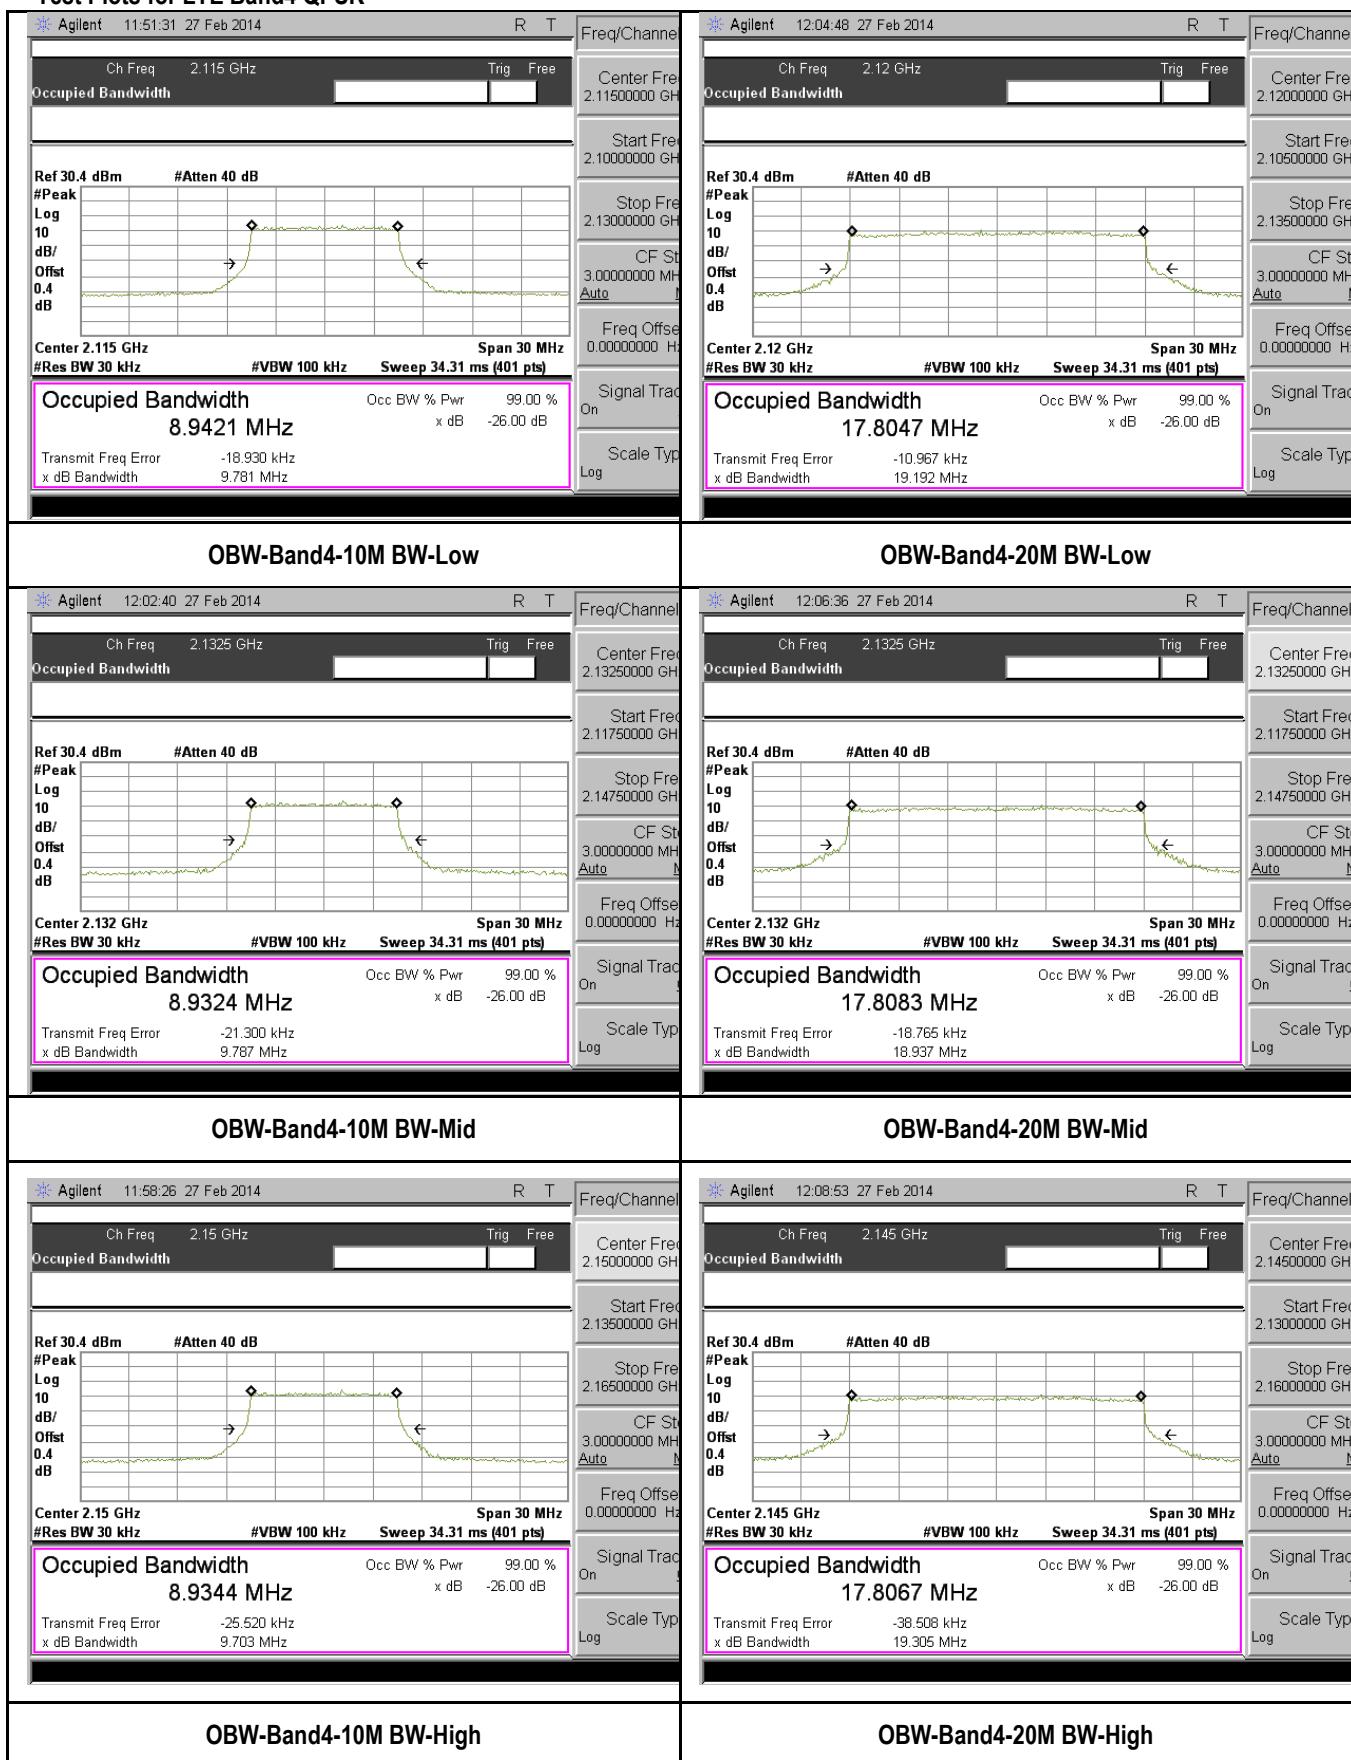


## Test Plots for LTE Band4 QPSK

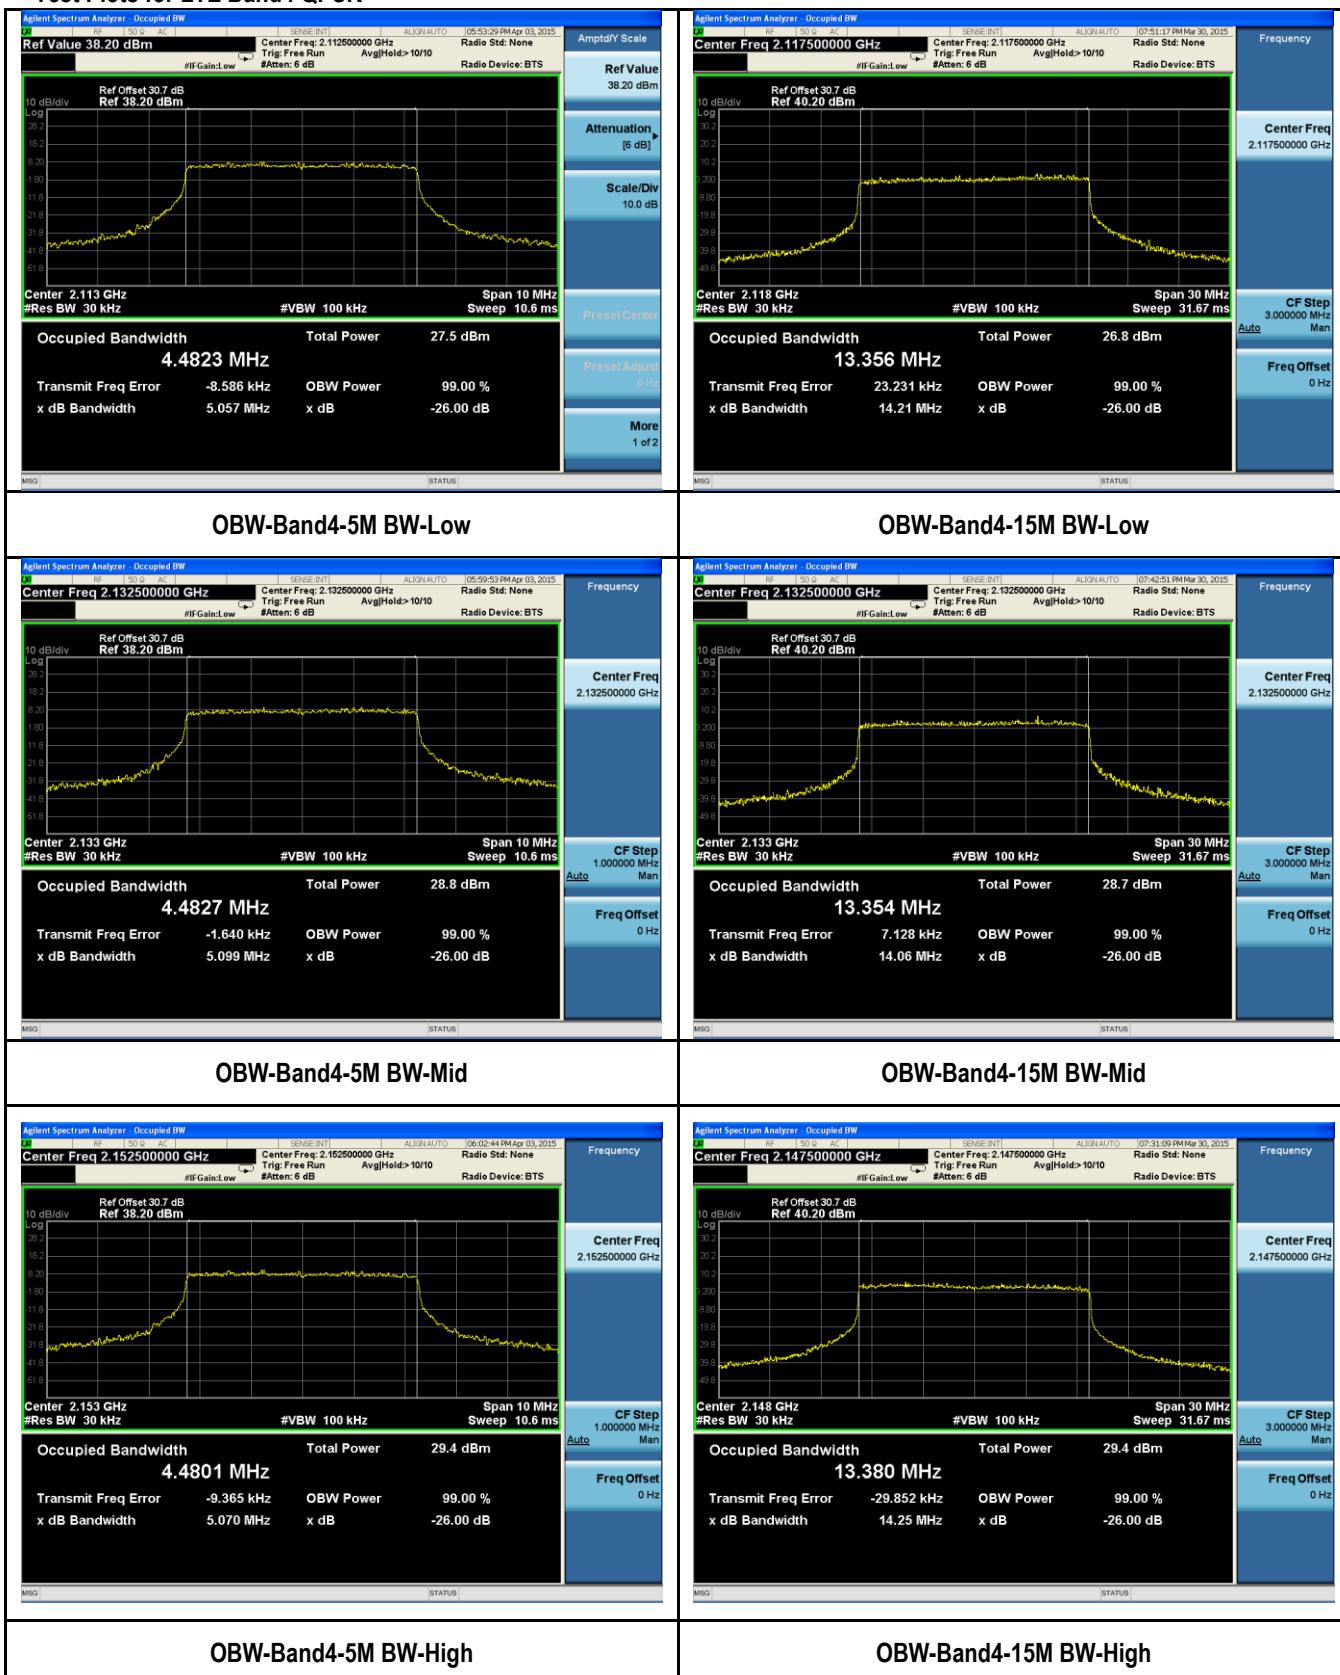


## Test Plots for LTE Band4 64QAM

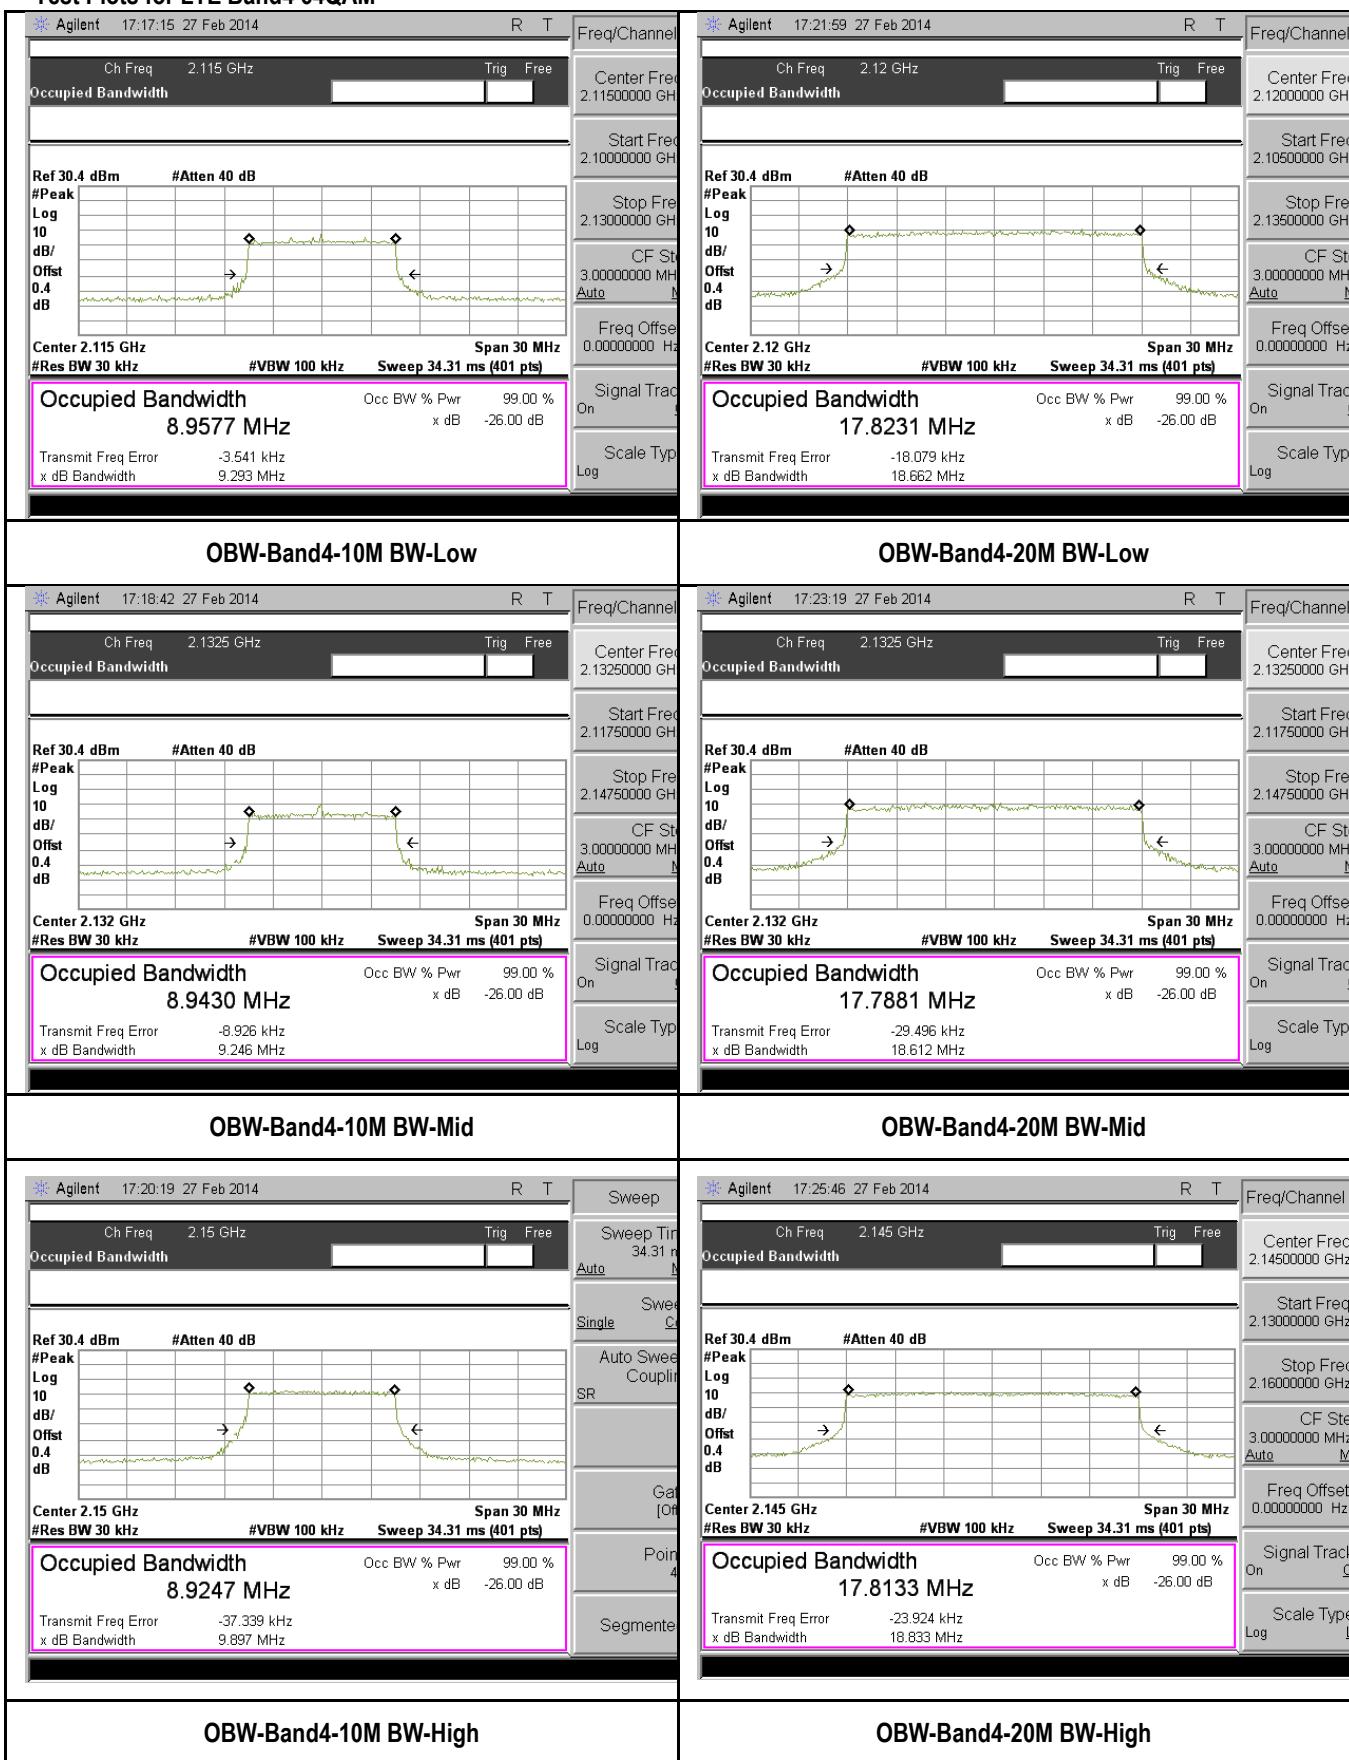

## Test Plots for LTE Band4 64QAM

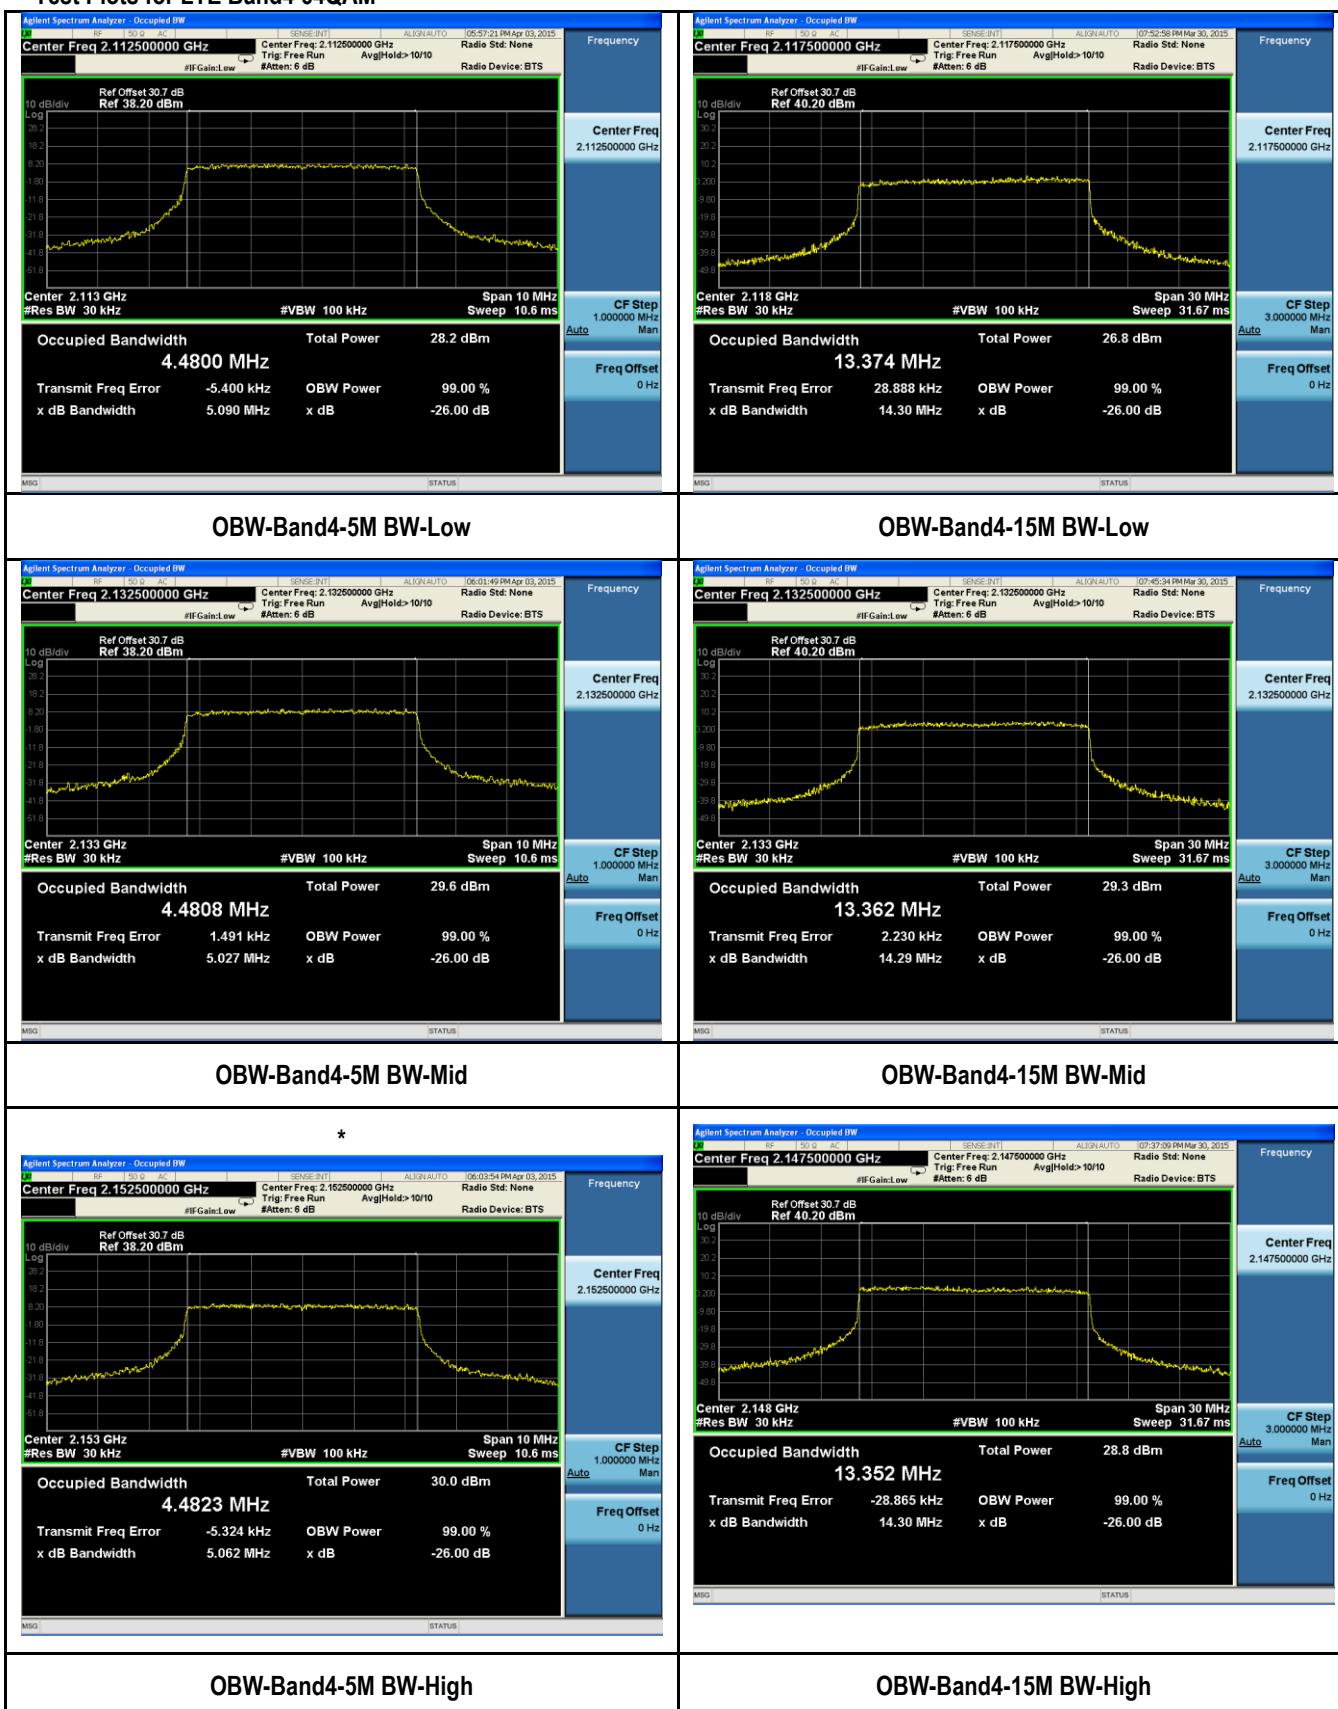


## Test Plots for WCDMA Band2

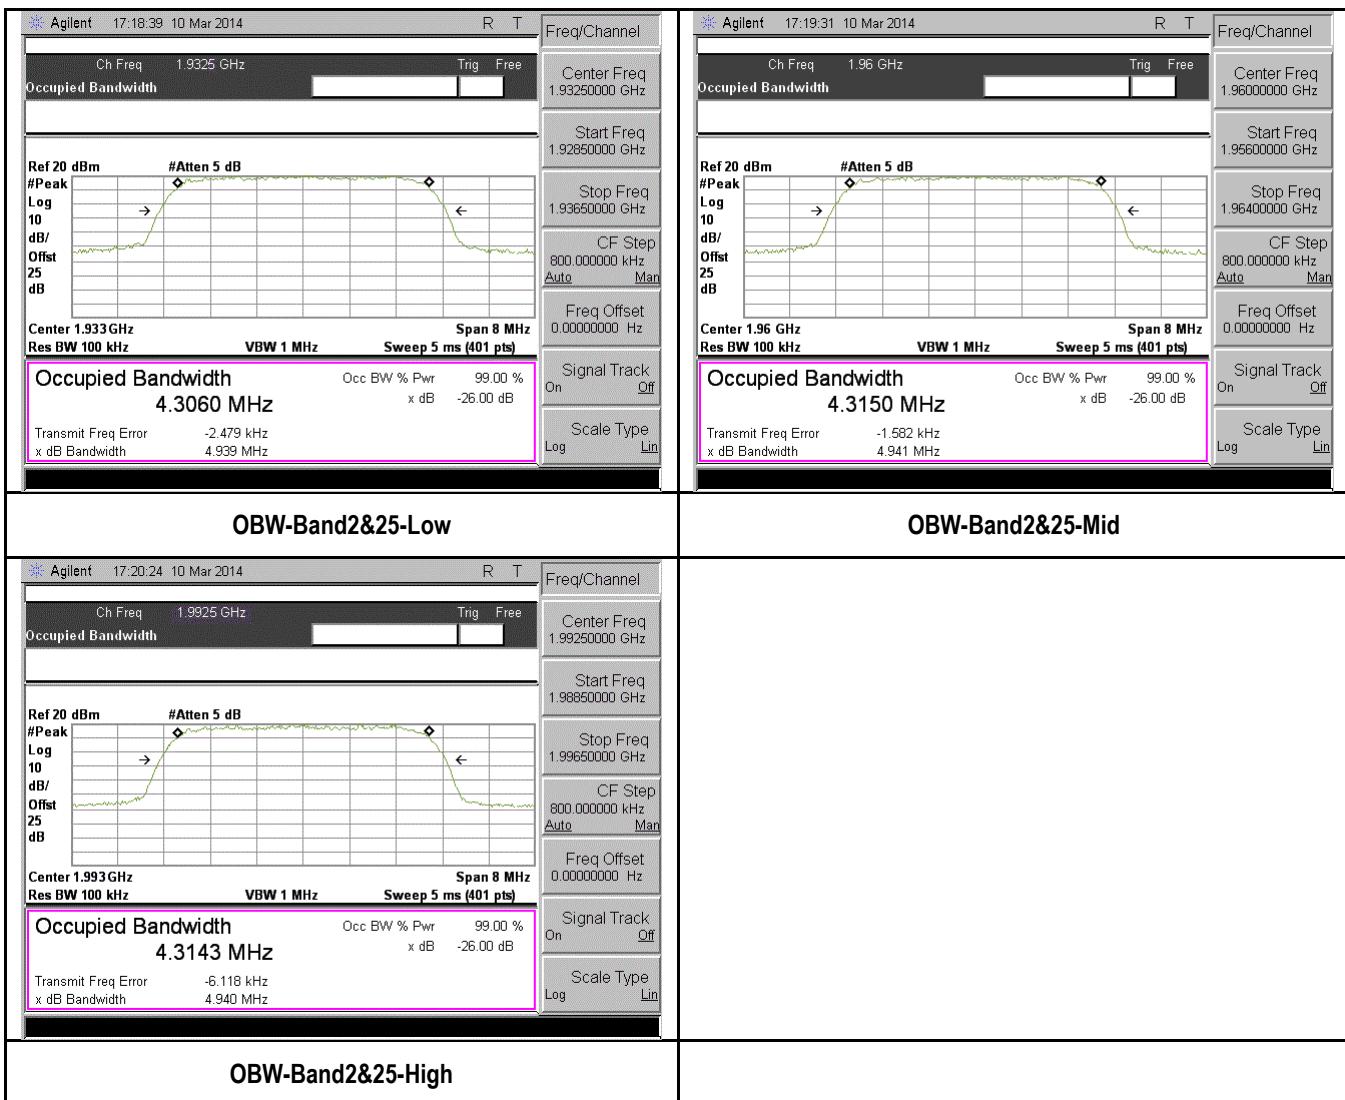

## 10.4 Band Edge

### Requirement(s):

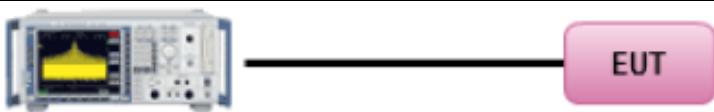Spec	Item	Requirement	Applicable
47CFR22.917	-	Out of band emissions. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.	<input type="checkbox"/>
47CFR24.238	-	Out of band emissions. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.	<input checked="" type="checkbox"/>
47CFR27.53	-	Out of band emissions. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.	<input checked="" type="checkbox"/>
Test Setup	 <p><b>Spectrum Analyzer</b></p>		
Test Procedure	<ol style="list-style-type: none"> <li>1. EUT was set for low, mid, high channel with modulated mode and highest RF output power.</li> <li>2. The spectrum analyzer was connected to the antenna terminal.</li> <li>3. A RBW of 1% greater than the 26 dB emission bandwidth should be used for band edge measurement or if narrower RBW is used, a correct factor calculated with formula <math>10 \log(\text{EBW}/\text{BW}_{\text{meas}})</math> will be added to the result.</li> </ol>		
Test Date	03/17/2014 03/03/2015 – 04/13/2015	Environmental condition	Temperature 22°C Relative Humidity 48% Atmospheric Pressure 1008mbar
Remark	‘		
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail		

**Test Data**  Yes  N/A


**Test Plot**  Yes (See below)  N/A


**Band Edge Measurement Data for LTE band 4**


Type	Channel	Channel Frequency (MHz)	Measurement Band Edge (dBm)	RBW Correction factor (dB)	Corrected Band Edge (dBm)	Limit (dBm)
5MHz BW, QPSK	Low	2112.5	-24.011	0	-24.011	-13
	High	2152.5	-25.676	0	-25.676	-13
5MHz BW, 64QAM	Low	2112.5	-22.79	0	-22.79	-13
	High	2152.5	-23.05	0	-23.05	-13
10MHz BW, QPSK	Low	2115	-16.585	0	-16.585	-13
	High	2150	-16.782	0	-16.782	-13
10MHz BW, 64QAM	Low	2115	-17.989	0	-17.989	-13
	High	2150	-18.330	0	-18.33	-13
15MHz BW, QPSK	Low	2117.5	-33.148	1.76	-31.388	-13
	High	2147.5	-35.78	1.76	-34.02	-13
15MHz BW, 64QAM	Low	2117.5	-33.83	1.76	-32.07	-13
	High	2147.5	-32.88	1.76	-31.12	-13
20MHz BW, QPSK	Low	2120	-23.696	3.01	-20.686	-13
	High	2145	-25.753	3.01	-22.743	-13
20MHz BW, 64QAM	Low	2120	-21.896	3.01	-18.886	-13
	High	2145	-20.486	3.01	-17.476	-13
Note:	Correction Factor (15MHz BW): 10 log (150/100)= 1.76 Correction Factor (20MHz BW): 10 log (200/100)= 3.01					


**Band Edge Measurement Data for WCDMA**


Type	Channel	Channel Frequency (MHz)	Measurement Band Edge (dBm)	RBW Correction factor (dB)	Corrected Band Edge (dBm)	Limit (dBm)
3.84MHz BW, QPSK	Low	1932.5	-17.809	0	-17.809	-13
	High	1992.5	-24.119	0	-24.119	-13

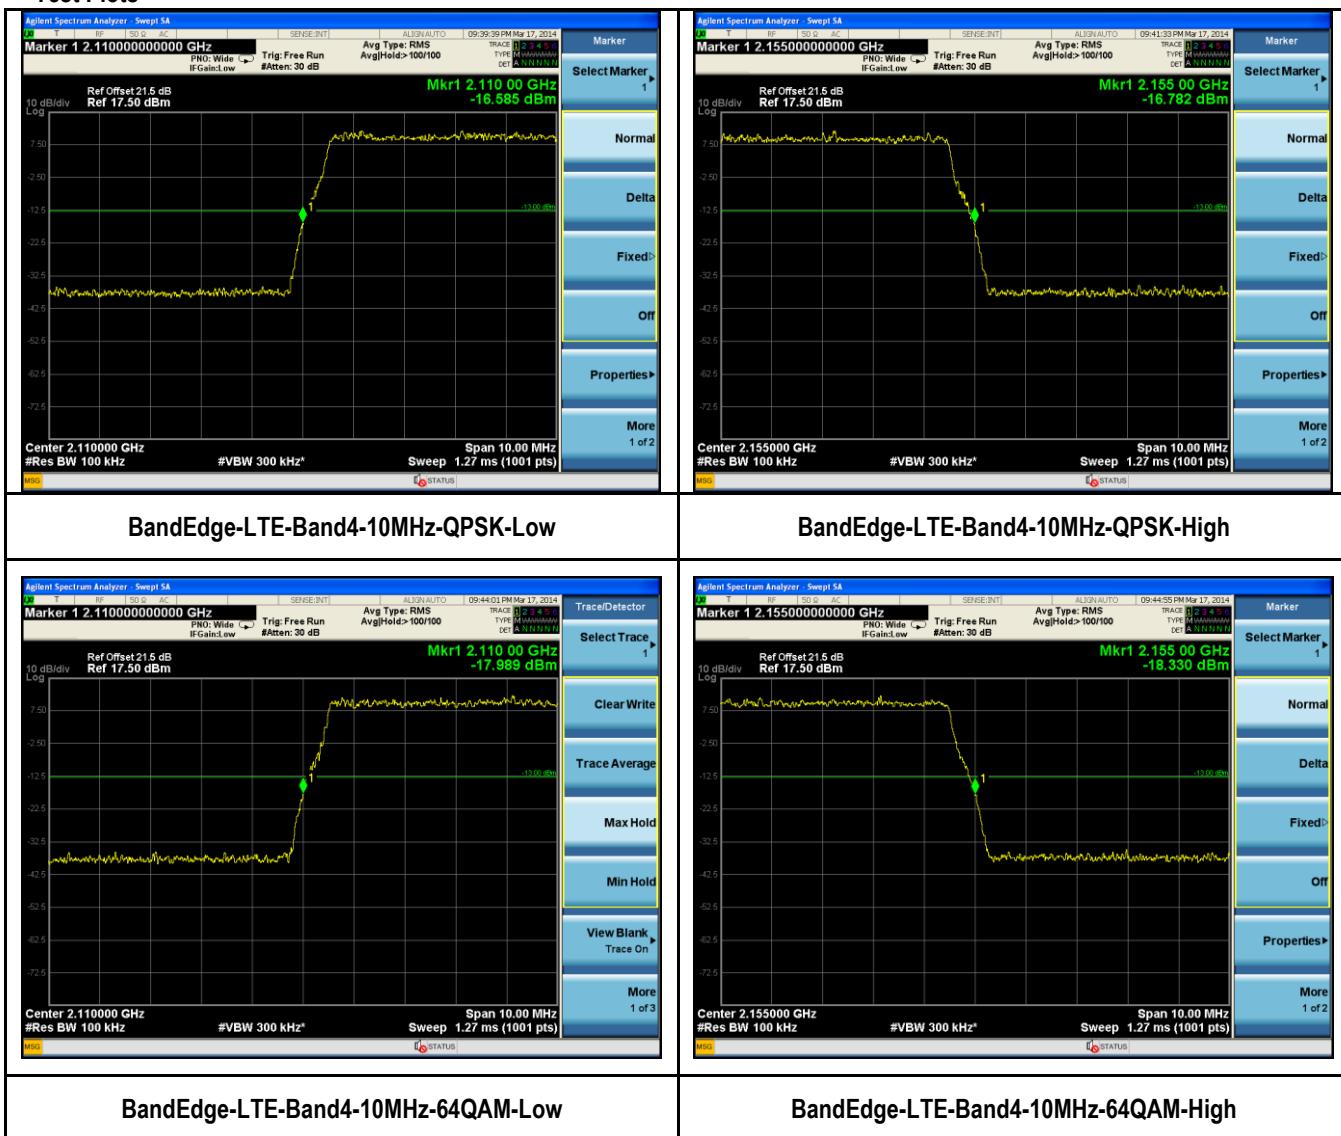**Test Plots**

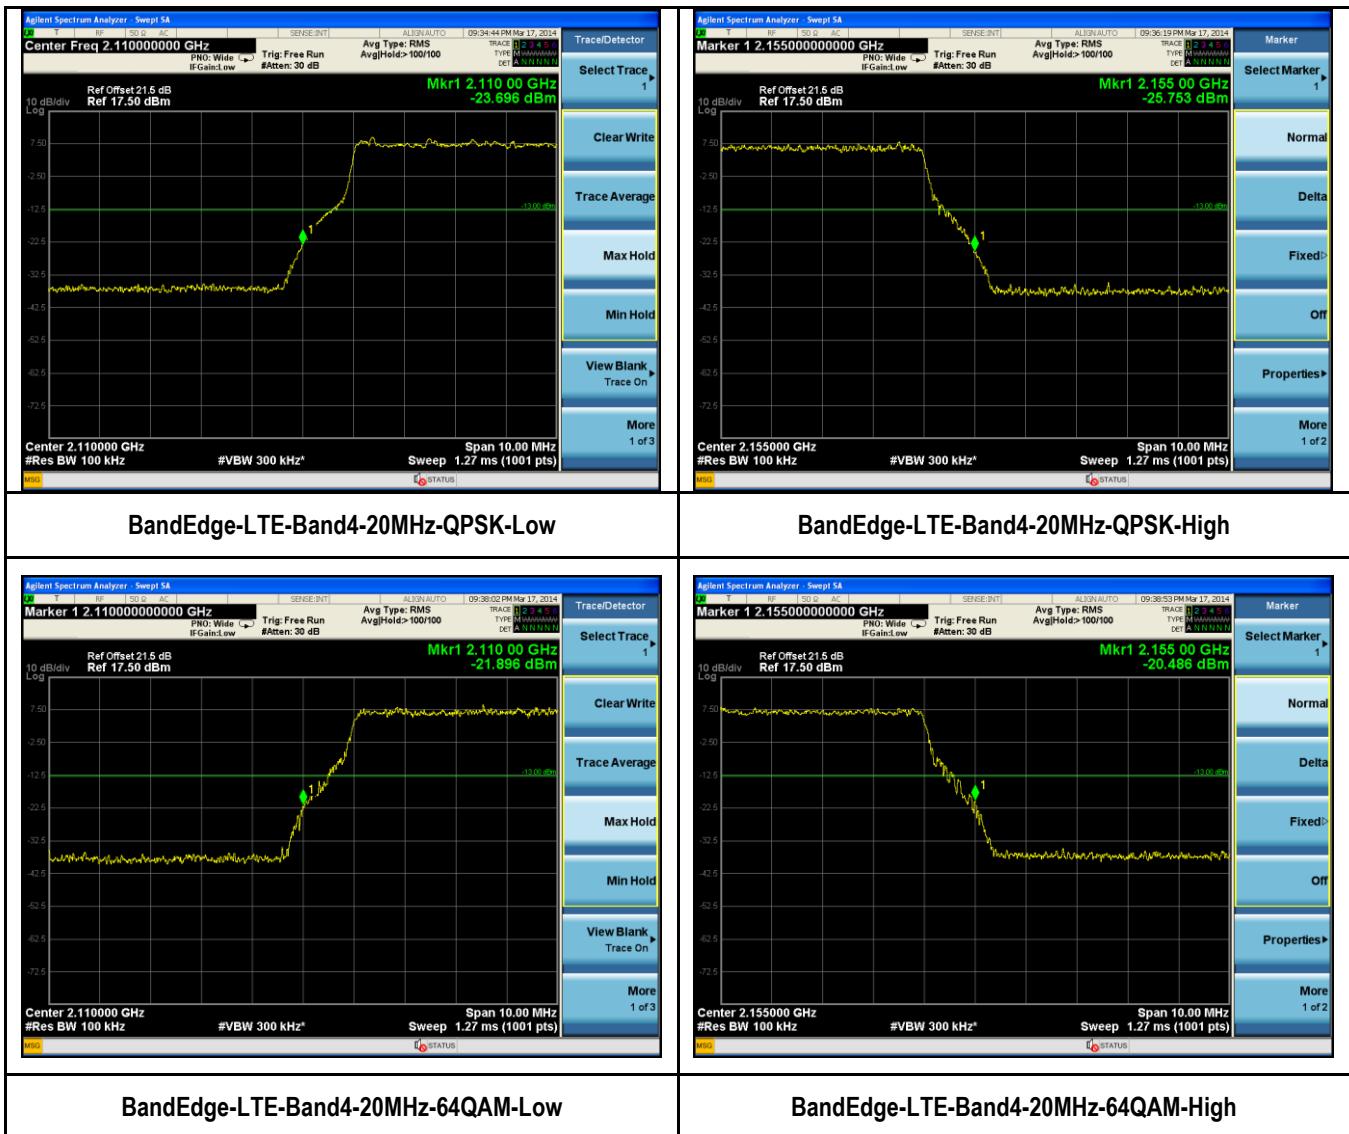

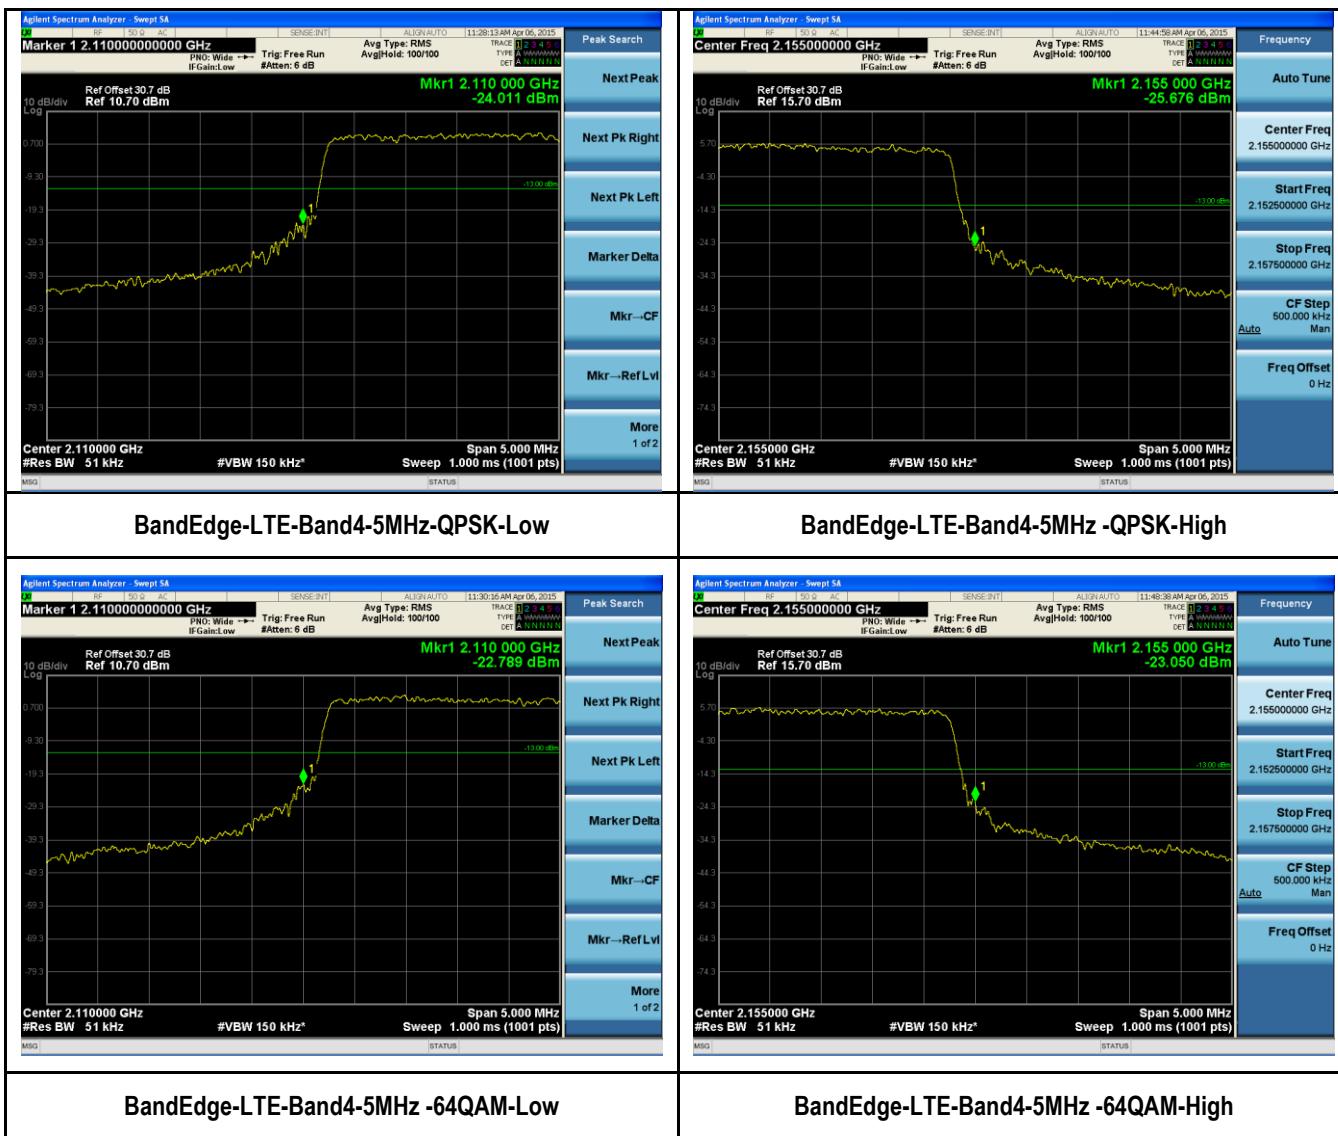
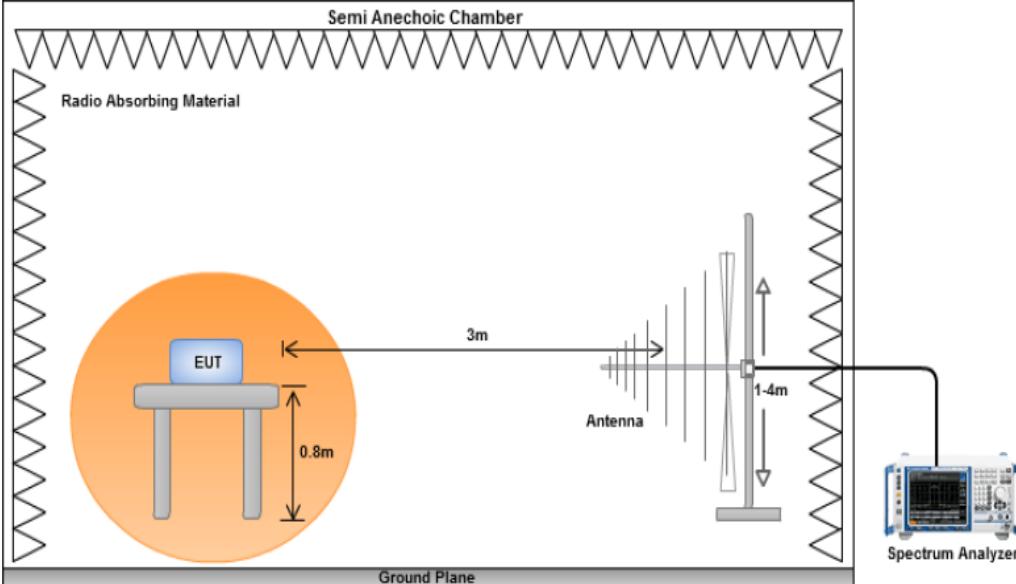


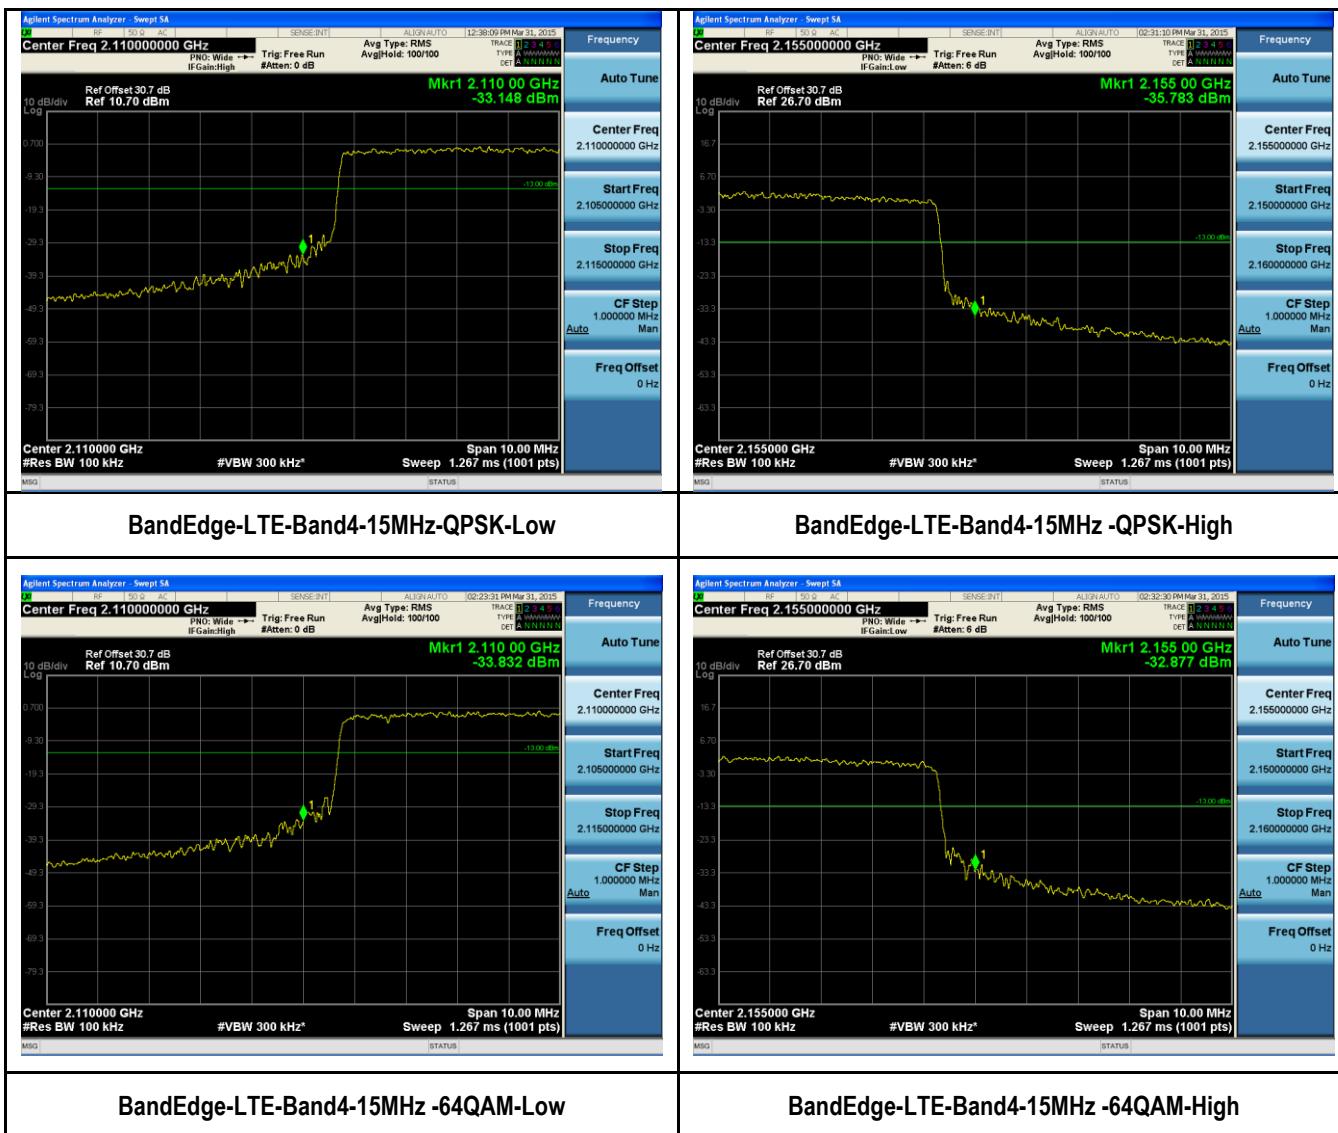

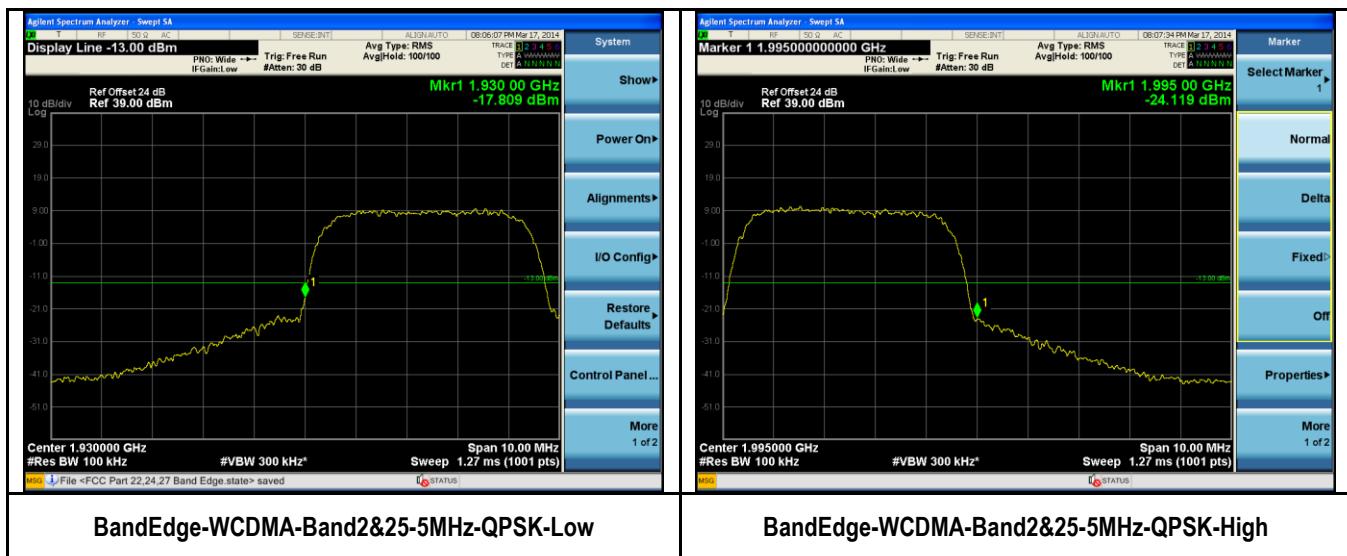

## 10.5 Radiated Spurious Emission below 1GHz

### Requirement(s):

Spec	Item	Requirement	Applicable
47CFR22.917	-	Out of band emissions. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.	<input type="checkbox"/>
47CFR24.238	-	Out of band emissions. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.	<input checked="" type="checkbox"/>
47CFR27.53	-	Out of band emissions. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.	<input checked="" type="checkbox"/>
Test Setup			
Procedure	<p><u>Substitution method:</u></p> <ol style="list-style-type: none"> <li>1. The EUT was switched on and allowed to warm up to its normal operating condition.</li> <li>2. The test was carried out at the selected frequency points obtained from the EUT characterisation. Maximization of the emissions, was carried out by rotating the EUT, changing the antenna polarization, and adjusting the antenna height in the following manner:           <ol style="list-style-type: none"> <li>a. Vertical or horizontal polarisation (whichever gave the higher emission level over a full rotation of the EUT) was chosen.</li> <li>b. The EUT was then rotated to the direction that gave the maximum emission.</li> <li>c. Finally, the antenna height was adjusted to the height that gave the maximum emission.</li> </ol> </li> <li>3. Remove the transmitter and replace it with a substitution antenna (the antenna should be half-wavelength for each frequency involved). The center of the substitution antenna should be approximately at the same location as the center of the transmitter.</li> <li>4. Feed the substitution antenna at the transmitter end with a signal generator connected to the antenna by means of a non-radiating cable. With the antennas at both ends horizontally polarized, and with the signal generator tuned to a particular spurious frequency, raise and lower the test antenna to obtain a maximum reading at the spectrum analyzer. Adjust the level of the signal generator output until the previously recorded maximum reading for this set of conditions is obtained.</li> <li>5. Steps 4 were repeated for the next frequency point, until all selected frequency points were measured.</li> </ol>		
Remark	All different modulation and bandwidth configuration has been verified and only the test data of worst case with QPSK modulation and greatest bandwidth (20MHz) was presented in this report. Power limit = $P_{dBm} - [43 + 10 \log(P_w)] \rightarrow 10\log(1000 \times P_w) - 43 - 10\log(P_w) \rightarrow 30 - 43 = -13 \text{ dBm}$		
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail		



GLOBAL TESTING & CERTIFICATIONS  
YOUR CHOICE FOR- TCB FCB CB NB CAB RCB

Test report No.	FCC_RF_SI15090201-SPC-041_0402
Page	47 of 57

**Test Data**  Yes (See below)  N/A

**Test Plot**  Yes (See below)  N/A

## Radiated Emission Test Results

Test specification		below 1GHz			Result	Pass		
Environmental Conditions:		Temp (°C):		22				
		Humidity (%)		45				
		Atmospheric (mbar):		1008				
Mains Power:		56VDC PoE						
Tested by:		David Zhang						
Test Date:		02/13/2014						
Remarks:		LTE band4-Mid CH-20MHz BW, QPSK						

Frequency MHz	SG Level dBm	Cable Loss dB	Antenna Gain dBd	Substituted Level dBm	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBm	Margin dB	Pass /Fail
996.89	-60.33	10.78	4.85	-44.70	RMS Max	H	359.00	357.00	-13.00	-31.70	Pass
186.40	-60.12	11.04	0.95	-48.13	RMS Max	V	100.00	356.00	-13.00	-35.13	Pass
242.88	-63.5	11.25	3.65	-48.60	RMS Max	V	100.00	9.00	-13.00	-35.60	Pass
58.24	-71.6	12.13	0.15	-59.32	RMS Max	V	100.00	291.00	-13.00	-46.32	Pass

Test specification		below 1GHz			Result	Pass		
Environmental Conditions:		Temp (°C):		22				
		Humidity (%)		45				
		Atmospheric (mbar):		1008				
Mains Power:		56VDC PoE						
Tested by:		David Zhang						
Test Date:		02/13/2014						
Remarks:		WCDMA band2, Mid CH						


Frequency MHz	SG Level dBm	Cable Loss dB	Antenna Gain dBd	Substituted Level dBm	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBm	Margin dB	Pass /Fail
181.32	-50.3	11.04	0.95	-38.31	RMS Max	V	140.00	356.00	-13.00	-25.31	Pass
249.71	-56.88	11.18	3.55	-42.15	RMS Max	V	100.00	341.00	-13.00	-29.15	Pass
208.00	-54.03	11.20	0.55	-42.28	RMS Max	V	100.00	100.00	-13.00	-29.28	Pass
995.64	-58.03	10.78	4.85	-42.40	RMS Max	H	161.00	23.00	-13.00	-29.40	Pass

Test specification		below 1GHz		Result	Pass		
Environmental Conditions:		Temp (°C): 22					
		Humidity (%) 45					
		Atmospheric (mbar): 1008					
Mains Power:		56VDC PoE					
Tested by:		David Zhang					
Test Date:		02/13/2014					
Remarks:		LTE band4 & WCDMA band 2 transmit simultaneously at Mid CH, QPSK					

Frequency MHz	SG Level dBm	Cable Loss dB	Antenna Gain dBd	Substituted Level dBm	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBm	Margin dB	Pass /Fail
185.69	-53.18	11.04	0.95	-41.19	RMS Max	V	102.00	203.00	-13.00	-28.19	Pass
995.64	-56.82	10.78	4.85	-41.19	RMS Max	H	112.00	301.00	-13.00	-28.19	Pass
35.81	-80.7	12.41	13.45	-54.84	RMS Max	V	201.00	102.00	-13.00	-41.84	Pass
246.38	-70.75	11.18	3.65	-55.92	RMS Max	V	221.00	87.00	-13.00	-42.92	Pass

## 10.6 Radiated Spurious Emissions above 1GHz

### Requirement(s):

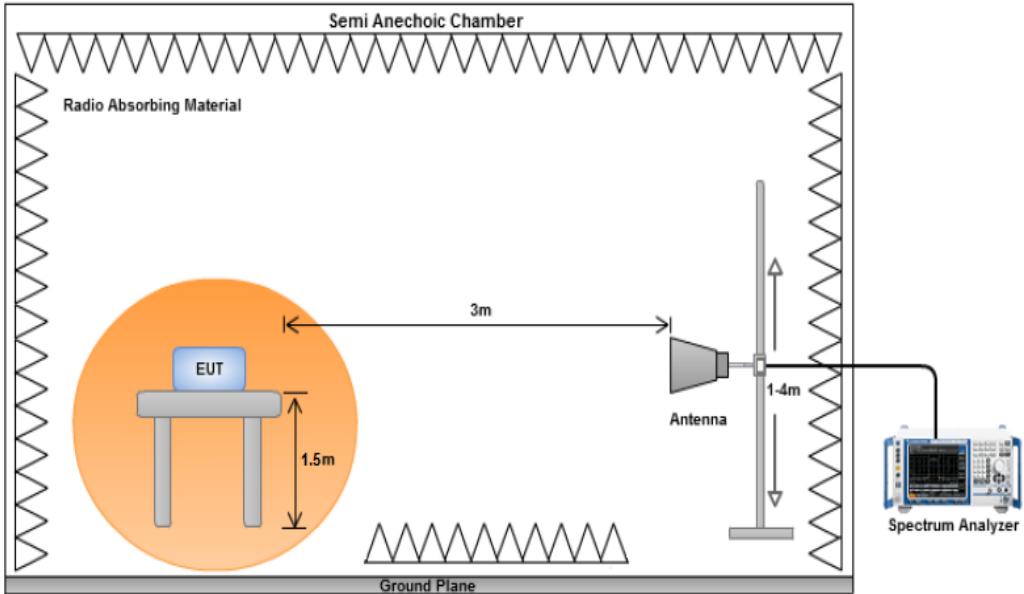Spec	Item	Requirement	Applicable	
47CFR22.917	-	Out of band emissions. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.	<input type="checkbox"/>	
47CFR24.238	-	Out of band emissions. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.	<input checked="" type="checkbox"/>	
47CFR27.53	-	Out of band emissions. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.	<input checked="" type="checkbox"/>	
Test Setup				
Procedure	<u>Substitution method:</u> <ol style="list-style-type: none"> <li>The EUT was switched on and allowed to warm up to its normal operating condition.</li> <li>The test was carried out at the selected frequency points obtained from the EUT characterisation. Maximization of the emissions, was carried out by rotating the EUT, changing the antenna polarization, and adjusting the antenna height in the following manner:           <ol style="list-style-type: none"> <li>Vertical or horizontal polarisation (whichever gave the higher emission level over a full rotation of the EUT) was chosen.</li> <li>The EUT was then rotated to the direction that gave the maximum emission.</li> <li>Finally, the antenna height was adjusted to the height that gave the maximum emission.</li> </ol> </li> <li>Remove the transmitter and replace it with a substitution antenna (the antenna should be half-wavelength for each frequency involved). The center of the substitution antenna should be approximately at the same location as the center of the transmitter.</li> <li>Feed the substitution antenna at the transmitter end with a signal generator connected to the antenna by means of a non-radiating cable. With the antennas at both ends horizontally polarized, and with the signal generator tuned to a particular spurious frequency, raise and lower the test antenna to obtain a maximum reading at the spectrum analyzer. Adjust the level of the signal generator output until the previously recorded maximum reading for this set of conditions is obtained.</li> <li>Steps 4 were repeated for the next frequency point, until all selected frequency points were measured.</li> </ol>			
	Test Date	02/13/2014 – 03/17/2014	Environmental condition	Temperature 23°C Relative Humidity 48% Atmospheric Pressure 1008mbar
	Remark	All different modulation and bandwidth configuration has been verified and only the test data of worst case with QPSK modulation and greatest bandwidth (20MHz) was presented in this report. Power limit = $P_{dBm} - [43 + 10 \log(P_w)] \rightarrow 10\log(1000 \times P_w) - 43 - 10\log(P_w) \rightarrow 30 - 43 = -13\text{dBm}$		

Result	<input checked="" type="checkbox"/> Pass	<input type="checkbox"/> Fail
--------	--	-------------------------------

**Test Data**  Yes (See below)  N/A

**Test Plot**  Yes (See below)  N/A

### Radiated Emission Test Results (Above 1GHz)

LTE band 4 Low Channel, 20MHz BW, QPSK

Frequency MHz	SG Level dBm	Cable Loss dB	Antenna Gain dBd	Substituted Level dBm	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBm	Margin dB	Pass /Fail
4218.353	-60.85	4.74	8.32	-47.79	RMS Max	H	125.00	350.00	-13.00	-34.79	Pass
6849.014	-71.95	6.23	9.74	-55.98	RMS Max	V	107.00	243.00	-13.00	-42.98	Pass
2110.337	-59.11	3.74	6.33	-49.04	RMS Max	H	100.00	29.00	-13.00	-36.04	Pass
8441.214	-71.43	5.81	9.37	-56.25	RMS Max	V	194.0	211.00	-13.00	-43.25	Pass
Remark	Emissions were scanned up to 40GHz; no emissions were detected above the noise floor which was at least 20dB below the specification limit. Both horizontal and vertical polarizations were verified.										

LTE band 4 Mid Channel, 20MHz BW, QPSK

Frequency MHz	SG Level dBm	Cable Loss dB	Antenna Gain dBd	Substituted Level dBm	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBm	Margin dB	Pass /Fail
4266.415	-61.99	4.76	8.32	-48.91	RMS Max	H	142.00	102.00	-13.00	-35.91	Pass
6935.074	-71.22	6.31	9.65	-55.26	RMS Max	V	145.00	175.00	-13.00	-42.26	Pass
8525.015	-70.74	5.82	9.12	-55.80	RMS Max	V	100.00	89.00	-13.00	-42.80	Pass
4266.415	-61.98	4.76	8.31	-48.91	RMS Max	H	142.00	102.00	-13.00	-35.91	Pass
Remark	Emissions were scanned up to 40GHz; no emissions were detected above the noise floor which was at least 20dB below the specification limit. Both horizontal and vertical polarizations were verified.										

LTE band 4 High Channel, 20MHz BW, QPSK

Frequency MHz	SG Level dBm	Cable Loss dB	Antenna Gain dBd	Substituted Level dBm	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBm	Margin dB	Pass /Fail
4310.894	-61.27	4.76	8.32	-48.19	RMS Max	H	153.00	102.00	-13.00	-35.19	Pass
6934.573	-71.22	6.31	9.65	-55.26	RMS Max	V	146.00	14.00	-13.00	-42.26	Pass
8525.925	-70.94	5.82	9.12	-56.00	RMS Max	V	170.00	174.00	-13.00	-43.00	Pass
Remark	Emissions were scanned up to 40GHz; no emissions were detected above the noise floor which was at least 20dB below the specification limit. Both horizontal and vertical polarizations were verified.										

## WCDMA Low Channel

Frequency MHz	SG Level dBm	Cable Loss dB	Antenna Gain dBd	Substituted Level dBm	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBm	Margin dB	Pass /Fail
5967.87	-59.89	5.36	9.79	-44.74	RMS Max	H	114.00	151.00	-13.00	-31.74	Pass
1492.00	-75.7	3.19	5.41	-67.10	RMS Max	V	123.00	202.00	-13.00	-54.10	Pass
1625.03	-59.19	3.33	6.45	-49.41	RMS Max	V	138.00	10.00	-13.00	-36.41	Pass
Remark	Emissions were scanned up to 40GHz; no emissions were detected above the noise floor which was at least 20dB below the specification limit. Both horizontal and vertical polarizations were verified.										

## WCDMA Mid Channel

Frequency MHz	SG Level dBm	Cable Loss dB	Antenna Gain dBd	Substituted Level dBm	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBm	Margin dB	Pass /Fail
8267.14	-71.5	5.79	9.52	-56.19	RMS Max	V	121.00	177.00	-13.00	-43.19	Pass
7015.03	-73.65	6.36	9.79	-57.50	RMS Max	H	130.00	127.00	-13.00	-44.50	Pass
5844.40	-74.91	5.32	9.65	-59.94	RMS Max	V	193.00	327.00	-13.00	-46.94	Pass
4129.15	-75.28	4.71	7.98	-62.59	RMS Max	V	128.00	13.00	-13.00	-49.59	Pass
Remark	Emissions were scanned up to 40GHz; no emissions were detected above the noise floor which was at least 20dB below the specification limit. Both horizontal and vertical polarizations were verified.										

## WCDMA High Channel

Frequency MHz	SG Level dBm	Cable Loss dB	Antenna Gain dBd	Substituted Level dBm	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBm	Margin dB	Pass /Fail
6054.95	-73.32	5.43	9.79	-58.10	RMS Max	H	105.00	84.00	-13.00	-45.10	Pass
3056.58	-76.12	4.06	7.00	-65.06	RMS Max	V	127.00	271.00	-13.00	-52.06	Pass
1607.75	-76.58	3.31	6.45	-66.82	RMS Max	V	108.00	265.00	-13.00	-53.82	Pass
Remark	Emissions were scanned up to 40GHz; no emissions were detected above the noise floor which was at least 20dB below the specification limit. Both horizontal and vertical polarizations were verified.										

## LTE Band 4 and WCDMA Mid Channel transmit simultaneously, QPSK

Frequency MHz	SG Level dBm	Cable Loss dB	Antenna Gain dBd	Substituted Level dBm	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBm	Margin dB	Pass /Fail
4189.62	-60.84	4.49	8.32	-48.03	RMS Max	H	139.00	100.00	-13.00	-35.03	Pass
6810.24	-70.03	6.02	9.74	-54.27	RMS Max	V	142.00	172.00	-13.00	-41.27	Pass
8371.56	-69.71	5.54	9.37	-54.80	RMS Max	V	100.00	189.00	-13.00	-41.80	Pass
Remark	Emissions were scanned up to 40GHz; no emissions were detected above the noise floor which was at least 20dB below the specification limit. Both horizontal and vertical polarizations were verified.										

## 10.7 Frequency Stability

### Requirement(s):

Spec	Item	Requirement	Applicable																																
47 CFR 2.1055, 47 CFR 22.355	-	<p>Except as otherwise provided in this part, the carrier frequency of each transmitter in the Public Mobile Services must be maintained within the tolerances given in Table at below,</p> <table border="1"> <thead> <tr> <th>Frequency range (MHz)</th><th>Base, fixed (ppm)</th><th>Mobile ≤3 watts (ppm)</th><th>Mobile ≤3 watts (ppm)</th></tr> </thead> <tbody> <tr> <td>25 to 50</td><td>20</td><td>20</td><td>50</td></tr> <tr> <td>50 to 450</td><td>5</td><td>5</td><td>50</td></tr> <tr> <td>450 to 512</td><td>2.5</td><td>5</td><td>5</td></tr> <tr> <td>821 to 896</td><td>1.5</td><td>2.5</td><td>2.5</td></tr> <tr> <td>928 to 929</td><td>5</td><td>n/a</td><td>n/a</td></tr> <tr> <td>929 to 960</td><td>1.5</td><td>n/a</td><td>n/a</td></tr> <tr> <td>2110 to 2220</td><td>10</td><td>n/a</td><td>n/a</td></tr> </tbody> </table>	Frequency range (MHz)	Base, fixed (ppm)	Mobile ≤3 watts (ppm)	Mobile ≤3 watts (ppm)	25 to 50	20	20	50	50 to 450	5	5	50	450 to 512	2.5	5	5	821 to 896	1.5	2.5	2.5	928 to 929	5	n/a	n/a	929 to 960	1.5	n/a	n/a	2110 to 2220	10	n/a	n/a	<input type="checkbox"/>
Frequency range (MHz)	Base, fixed (ppm)	Mobile ≤3 watts (ppm)	Mobile ≤3 watts (ppm)																																
25 to 50	20	20	50																																
50 to 450	5	5	50																																
450 to 512	2.5	5	5																																
821 to 896	1.5	2.5	2.5																																
928 to 929	5	n/a	n/a																																
929 to 960	1.5	n/a	n/a																																
2110 to 2220	10	n/a	n/a																																
47 CFR 2.1055, 47 CFR 24.135(a)	-	The frequency stability of the transmitter shall be maintained within ±0.0001 percent ( $\pm 1$ ppm) of the center frequency over a temperature variation of -30 °Celsius to +50 °Celsius at normal supply voltage, and over a variation in the primary supply voltage of 85 percent to 115 percent of the rated supply voltage at a temperature of 20 °Celsius.	<input checked="" type="checkbox"/>																																
47 CFR 2.1055, 47 CFR 27.54	-	The frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized bands of operation.	<input checked="" type="checkbox"/>																																
Test Setup		 <b>Spectrum Analyzer</b> → <b>EUT</b>																																	
Test Procedure		<p>The carrier frequency of the transmitter is measured at room temperature (20°C to provide a reference).</p> <ol style="list-style-type: none"> <li>1. The equipment is turned on in a "standby" condition for one minute before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.</li> <li>2. Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C. A period of at least one half hour is provided to allow stabilization of the equipment at each temperature level.</li> </ol>																																	
Test Date	03/10/2014	Environmental condition	Temperature 23°C Relative Humidity 48% Atmospheric Pressure 1008mbar																																
Remark	All different modulation and bandwidth configuration has been verified and only the test data of worst case with QPSK modulation and greatest bandwidth (20MHz) at mid channel was presented in this report.																																		
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail																																		

 Test Data  Yes

 N/A

Test Plot  Yes (See below)  N/A

**Test Data for LTE**

Voltage (%)	Power (VDC)	Temp. (°)	Frequency (KHz)	Frequency Error (Hz)	Deviation (ppm)
100%	56	20 (ref)	2132000.012	0	0.000
100%		-30	2132000.001	-11	-0.005
100%		-20	2132000.003	-9	-0.004
100%		-10	2132000.01	-2	-0.001
100%		0	2132000.01	-2	-0.001
100%		10	2132000.021	9	0.004
100%		30	2132000.019	7	0.003
100%		40	2132000.015	3	0.001
100%		50	2132000.026	14	0.007
115%		20	2132000.02	8	0.004
85%	47.6	20	2132000.019	7	0.003

**Test Data for WCDMA**

Voltage (%)	Power (VDC)	Temp. (°)	Frequency (KHz)	Frequency Error (Hz)	Deviation (ppm)
100%	56	20 (ref)	1960000.032	0	0.000
100%		-30	1960000.012	-20	-0.010
100%		-20	1960000.016	-16	-0.008
100%		-10	1960000.019	-13	-0.007
100%		0	1960000.021	-11	-0.006
100%		10	1960000.011	-21	-0.011
100%		30	1960000.022	-10	-0.005
100%		40	1960000.017	-15	-0.008
100%		50	1960000.019	-13	-0.007
115%		20	1960000.028	-4	-0.002
85%	47.6	20	1960000.028	-4	-0.002

## Annex A. TEST INSTRUMENT

Instrument	Model	Serial #	Cal Date	Cal Cycle	Cal Due	In use
<b>Conducted Emissions</b>						
EMI Test Receiver (9 kHz – 30 MHz)	ESHS10	830223/0009	04/08/2014	1 Year	04/08/2015	<input type="checkbox"/>
Spectrum Analyzer	FSIQ7	825555/013	05/31/2014	1 Year	05/31/2015	<input type="checkbox"/>
V-LISN (150 kHz – 30 MHz)	NNLK 8129	8129-190	08/11/2014	1 Year	08/11/2015	<input type="checkbox"/>
LISN (9 kHz – 30 MHz)	MN2050B	1018	07/31/2014	1 Year	07/31/2015	<input type="checkbox"/>
Hygro Hermograph	ST-50	HE01-000092	05/25/2014	1 Year	05/25/2015	<input type="checkbox"/>
<b>Radiated Emissions</b>						
EMI Test Receiver	ESIB 40	100179	05/24/2014	1 Year	05/24/2015	<input checked="" type="checkbox"/>
Bi-Log antenna (30MHz~2GHz)	JB1	A030702	08/12/2014	1 Year	08/12/2015	<input checked="" type="checkbox"/>
Horn Antenna (1-18GHz)	3115	10SL0059	08/11/2014	1 Year	08/11/2015	<input checked="" type="checkbox"/>
Horn Antenna (18-40 GHz)	AH-840	101013	08/11/2014	1 Year	08/11/2015	<input checked="" type="checkbox"/>
Pre-Amplifier	LPA-6-30	11140711	02/19/2015	1 Year	02/19/2016	<input checked="" type="checkbox"/>
Microwave Preamplifier (18-40 GHz)	PA-840	181251	02/19/2015	1 Year	02/19/2016	<input checked="" type="checkbox"/>
3 Meters SAC	3M	N/A	08/29/2014	1 Year	08/29/2015	<input checked="" type="checkbox"/>
10 Meters SAC	10M	N/A	09/05/2014	1 Year	09/05/2015	<input checked="" type="checkbox"/>
Hygro Hermograph	ST-50	HE01-000092	05/25/2014	1 Year	05/25/2015	<input checked="" type="checkbox"/>
<b>RF Conducted Measurement</b>						
Spectrum Analyzer	N9010A	MY50210206	08/13/2014	1 Year	08/13/2015	<input checked="" type="checkbox"/>
EMI Test Receiver	ESIB 40	100179	05/24/2014	1 Year	05/24/2015	<input checked="" type="checkbox"/>
Agilent Signal Generator	MXG N5182A	MY47071065	05/13/2014	1 Year	05/13/2015	<input checked="" type="checkbox"/>

## Annex B. SIEMIC Accreditation

Accreditations	Document	Scope / Remark
ISO 17025 (A2LA)		Please see the documents for the detailed scope
ISO Guide 65 (A2LA)		Please see the documents for the detailed scope
TCB Designation		<a href="#">A1</a> , <a href="#">A2</a> , <a href="#">A3</a> , <a href="#">A4</a> , <a href="#">B1</a> , <a href="#">B2</a> , <a href="#">B3</a> , <a href="#">B4</a> , C
FCC DoC Accreditation		FCC Declaration of Conformity Accreditation
FCC Site Registration		3 meter site
FCC Site Registration		10 meter site
IC Site Registration		3 meter site
IC Site Registration		10 meter site
EU NB		<b>Radio &amp; Telecommunications Terminal Equipment:</b> EN45001 – EN ISO/IEC 17025
		<b>Electromagnetic Compatibility:</b> EN45001 – EN ISO/IEC 17025
Singapore iDA CB(Certification Body)	 	<a href="#">Phase I</a> , <a href="#">Phase II</a>
Vietnam MIC CAB Accreditation		Please see the document for the detailed scope
Hong Kong OFCA		<b>(Phase II)</b> OFCA Foreign Certification Body for Radio and Telecom
		<b>(Phase I)</b> Conformity Assessment Body for Radio and Telecom
Industry Canada CAB		<b>Radio:</b> Scope A – All Radio Standard Specification in Category I
		<b>Telecom:</b> CS-03 Part I, II, V, VI, VII, VIII

Japan Recognized Certification Body Designation		<b>Radio:</b> A1. Terminal equipment for purpose of calling <b>Telecom:</b> B1. Specified radio equipment specified in Article 38-2, Paragraph 1, Item 1 of the Radio Law
		<b>EMI:</b> KCC Notice 2008-39, RRL Notice 2008-3: CA Procedures for EMI KN22: Test Method for EMI <b>EMS:</b> KCC Notice 2008-38, RRL Notice 2008-4: CA Procedures for EMS KN24, KN61000-4-2, -4-3, -4-4, -4-5, -4-6, -4-8, -4-11: Test Method for EMS
Korea CAB Accreditation		<b>Radio:</b> RRL Notice 2008-26, RRL Notice 2008-2, RRL Notice 2008-10, RRL Notice 2007-49, RRL Notice 2007-20, RRL Notice 2007-21, RRL Notice 2007-80, RRL Notice 2004-68 <b>Telecom:</b> President Notice 20664, RRL Notice 2007-30, RRL Notice 2008-7 with attachments 1, 3, 5, 6; President Notice 20664, RRL Notice 2008-7 with attachment 4
Taiwan NCC CAB Recognition		LP0002, PSTN01, ADSL01, ID0002, IS6100, CNS14336, PLMN07, PLMN01, PLMN08
Taiwan BSMI CAB Recognition		CNS 13438
Japan VCCI		R-3083: Radiation 3 meter site C-3421: Main Ports Conducted Interference Measurement T-1597: Telecommunication Ports Conducted Interference Measurement
Australia CAB Recognition		<b>EMC:</b> AS/NZS CISPR 11, AS/NZS CISPR 14.1, AS/NZS CISPR22, AS/NZS 61000.6.3, AS/NZS 61000.6.4 <b>Radio communications:</b> AS/NZS 4281, AS/NZS 4268, AS/NZS 4280.1, AS/NZS 4280.2, AS/NZS 4295, AS/NZS 4582, AS/NZS 4583, AS/NZS 4769.1, AS/NZS 4769.2, AS/NZS 4770, AS/NZS 4771 <b>Telecommunications:</b> AS/ACIF S002:05, AS/ACIF S003:06, AS/ACIF S004:06 AS/ACIF S006:01, AS/ACIF S016:01, AS/ACIF S031:01, AS/ACIF S038:01, AS/ACIF S040:01, AS/ACIF S041:05, AS/ACIF S043.2:06, AS/ACIF S60950.1
Australia NATA Recognition		AS/ACIF S002, AS/ACIF S003, AS/ACIF S004, AS/ACIF S006, AS/ACIF S016, AS/ACIF S031, AS/ACIF S038, AS/ACIF S040, AS/ACIF S041, AS/ACIF S043.2