



# RF TEST REPORT




Report No.: FCC-IC\_RF\_SL14091101-SPC-013  
Supersede Report No.: None

Applicant	SpiderCloud Wireless, Inc.		
Product Name	SpiderCloud Radio Node		
Model No.	SCRN-310-0702		
Test Standard	47CFR Part24: 2014 47CFR Part27: 2014 RSS-Gen, RSS-133, RSS-139		
Test Method	ANSI C63.10: 2009 TIA-603-D: 2009 RSS-Gen Issue3: 2010		
Date of test	03/03/2014 - 11/06/2014		
Issue Date	11/24/2014		
Test Result	<u>Pass</u>	Fail	
Equipment complied with the specification			[ x ]
Equipment did not comply with the specification			[ ]
			
			
Nima Molaei		David Zhang	
Test Engineer		Engineer Reviewer	
This test report may be reproduced in full only Test result presented in this test report is applicable to the tested sample only			

Issued By:  
SIEMIC Laboratories  
775 Montague Expressway, Milpitas, 95035 CA



775 Montague Expressway, Milpitas, CA 95035, USA • Phone: (+1) 408 526 1188 • Facsimile (+1) 408 526 1088

Visit us at: [www.siemic.com](http://www.siemic.com); Follow us at:    

## Laboratory Introduction

SIEMIC, headquartered in the heart of Silicon Valley, with superior facilities in US and Asia, is one of the leading independent testing and certification facilities providing customers with one-stop shop services for Compliance Testing and Global Certifications.



In addition to testing and certification, SIEMIC provides initial design reviews and compliance management throughout a project. Our extensive experience with China, Asia Pacific, North America, European, and International compliance requirements, assures the fastest, most cost effective way to attain regulatory compliance for the global markets.

### Accreditations for Conformity Assessment

Country/Region	Accreditation Body	Scope
USA	FCC, A2LA	EMC , RF/Wireless , Telecom
Canada	IC, A2LA, NIST	EMC, RF/Wireless , Telecom
Taiwan	BSMI , NCC , NIST	EMC, RF, Telecom , Safety
Hong Kong	OFTA , NIST	RF/Wireless ,Telecom
Australia	NATA, NIST	EMC, RF, Telecom , Safety
Korea	KCC/RRA, NIST	EMI, EMS, RF , Telecom, Safety
Japan	VCCI, JATE, TELEC, RFT	EMI, RF/Wireless, Telecom
Mexico	NOM, COFETEL, Caniety	Safety, EMC , RF/Wireless, Telecom
Europe	A2LA, NIST	EMC, RF, Telecom , Safety
Israel	MOC, NIST	EMC, RF, Telecom, Safety

### Accreditations for Product Certifications

Country	Accreditation Body	Scope
USA	FCC TCB, NIST	EMC , RF , Telecom
Canada	IC FCB , NIST	EMC , RF , Telecom
Singapore	iDA, NIST	EMC , RF , Telecom
EU	NB	EMC & R&TTE Directive
Japan	MIC (RCB 208)	RF , Telecom
HongKong	OFTA (US002)	RF , Telecom

**CONTENTS**

**1 REPORT REVISION HISTORY .....4**

**2 EXECUTIVE SUMMARY.....5**

**3 CUSTOMER INFORMATION .....5**

**4 TEST SITE INFORMATION .....5**

**5 MODIFICATION .....5**

**6 EUT INFORMATION .....6**

6.1 EUT Description ..... 6

6.2 Radio Description ..... 7

6.3 EUT test modes/configuration Description..... 7

6.4 EUT Photos - External ..... 8

6.5 EUT Photos - Internal ..... 9

6.6 EUT Test Setup Photos ..... 10

**7 SUPPORTING EQUIPMENT/SOFTWARE AND CABLING DESCRIPTION..... 11**

7.1 Supporting Equipment ..... 11

7.2 Test Software Description ..... 11

**8 TEST SUMMARY..... 12**

**9 MEASUREMENT UNCERTAINTY ..... 13**

**10 MEASUREMENTS, EXAMINATION AND DERIVED RESULTS ..... 14**

10.1 RF Output Power ..... 14

10.2 Peak-Average Ratio ..... 19

10.3 Occupied Bandwidth ..... 23

10.4 Antenna Port Spurious Emission ..... 27

10.5 Band Edge ..... 31

10.6 Radiated Spurious Emission below 1GHz..... 35

10.7 Radiated Spurious Emissions above 1GHz..... 39

10.8 Frequency Stability..... 42

10.9 Receiver Spurious Emissions ..... 44

**ANNEX A. TEST INSTRUMENT .....45**

**ANNEX B. SIEMIC ACCREDITATION .....46**

## 1 Report Revision History

Report No.	Report Version	Description	Issue Date
FCC-IC_RF_SL14091101-SPC-013	None	Original	11/24/2014

## 2 Executive Summary

The purpose of this test program was to demonstrate compliance of following product

Company: SpiderCloud Wireless, Inc.  
Product: SpiderCloud Radio Node  
Model: SCRN-310-0702

against the current Stipulated Standards. The specified model product stated above has demonstrated compliance with the Stipulated Standard listed on 1<sup>st</sup> page.

## 3 Customer information

Applicant Name	SpiderCloud Wireless, Inc.
Applicant Address	408 E. Plumeria Drive, San Jose, CA 95134
Manufacturer Name	SpiderCloud Wireless, Inc.
Manufacturer Address	408 E. Plumeria Drive, San Jose, CA 95134

## 4 Test site information

Lab performing tests	SIEMIC Laboratories
Lab Address	775 Montague Expressway, Milpitas, CA 95035
FCC Test Site No.	881796
IC Test Site No.	4842D-2
VCCI Test Site No.	A0133

## 5 Modification

Index	Item	Description	Note
-	-	-	-

## 6 EUT Information

### 6.1 EUT Description

Product Name	SpiderCloud Radio Node
Model No.	SCRN-310-0702
Trade Name	SpiderCloud
Serial No.	13338A10454
Input Power	56VDC (PoE)
Power Adapter Manu/Model	POE36U-1AT-R
Power Adapter SN	-
Hardware version	-
Software version	-
Date of EUT received	12/10/2014
Equipment Class/ Category	PCB, TNB
Operating Frequencies	UMTS: TX (1930 MHz to 1995 MHz), UMTS: RX (1850 MHz to 1915 MHz) LTE: TX (2620 MHz to 2690 MHz), LTE: RX (2500 MHz to 2570 MHz)
Port/Connectors	RJ45 (PoE)
Remark	NONE

## 6.2 Radio Description

Item	LTE	WCDMA
Operating Band /Radio Type	LTE Band 7	UMTS 1900 (Band 2)
Bandwidth	15 MHz	3.84 MHz
Modulation	QPSK/16QAM/64QAM	QPSK
Antenna Type	Internal Omni-directional antenna	Internal Omni-directional antenna
Antenna Gain	3 dBi	3 dBi
Frequency TX(MHz)	TX: 2620 MHz to 2690 MHz RX: 2500 MHz to 2570 MHz	TX: 1930 MHz to 1995 MHz RX: 1850 MHz to 1915 MHz

## 6.3 EUT test modes/configuration Description


### Test mode

Final Test Mode		Note
Final_test_mode_1	Continuous transmission, 15MHz, QPSK, Low CH	LTE
Final_test_mode_2	Continuous transmission, 15MHz, QPSK, Mid CH	LTE
Final_test_mode_3	Continuous transmission, 15MHz, QPSK, High CH	LTE
Final_test_mode_7	Continuous transmission, 15MHz, 16QAM, Low CH	LTE
Final_test_mode_8	Continuous transmission, 15MHz, 16QAM, Mid CH	LTE
Final_test_mode_9	Continuous transmission, 15MHz, 16QAM, High CH	LTE
Final_test_mode_13	Continuous transmission, 15MHz, 64QAM, Low CH	LTE
Final_test_mode_14	Continuous transmission, 15MHz, 64QAM, Mid CH	LTE
Final_test_mode_15	Continuous transmission, 15MHz, 64QAM, High CH	LTE
Final_test_mode_19	Continuous transmission, 3.84MHz, QPSK, Low CH	WCDMA
Final_test_mode_20	Continuous transmission, 3.84MHz, QPSK, Mid CH	WCDMA
Final_test_mode_21	Continuous transmission, 3.84MHz, QPSK, High CH	WCDMA
Remark: NONE		

**6.4 EUT Photos - External**



**Top View**

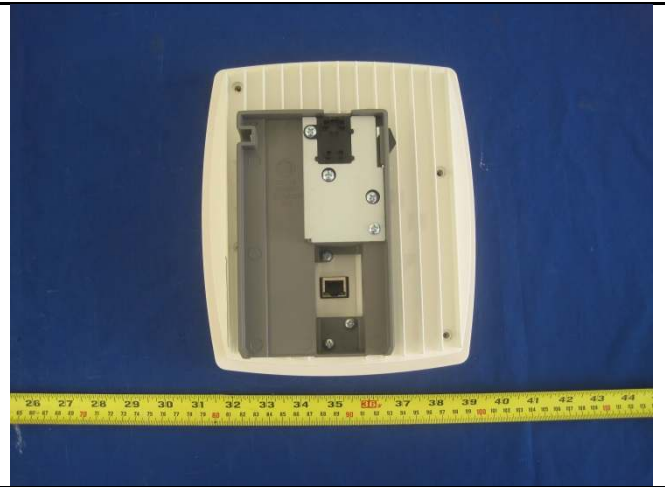

**Bottom View**



**Front View**



**Rear View**



**Left Side View**



**Right Side View**




**6.5 EUT Photos - Internal**




**Top View Top Cover Open**



**Rear View Top Cover Off**

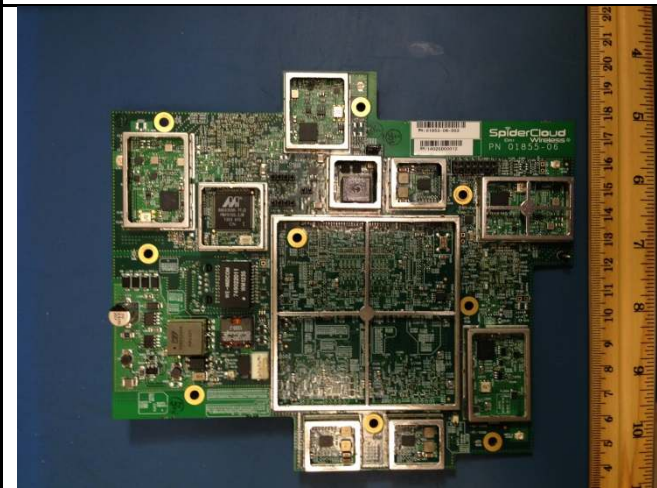


**Main PCB - Top View**

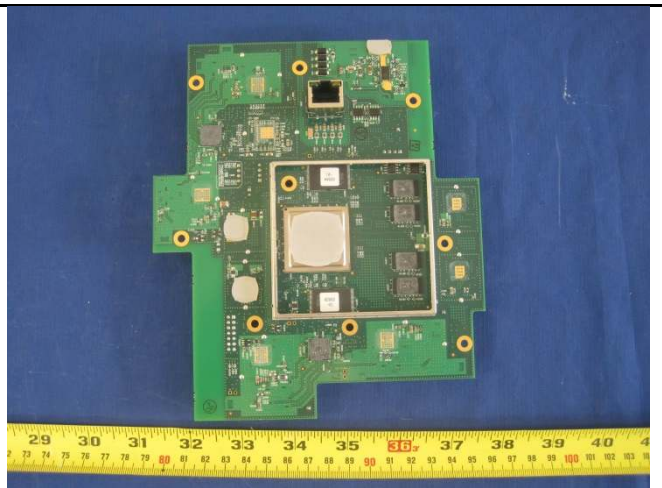

**Main PCB - Bottom View**

**6.6 EUT Test Setup Photos**

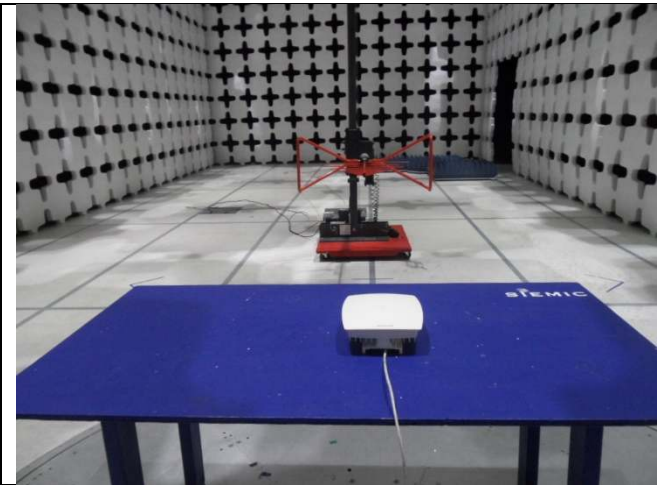

**Radiated Emissions (<1GHz) – Front View**



**Radiated Emissions (<1GHz) – Rear View**



**Radiated Emissions (>1GHz) – Front View**



**Radiated Emissions (>1GHz) – Rear View**

Note: The spurious emission in different EUT orientation was investigated, including the EUT standing up position and the laying down position. The EUT orientation shown in above setup photo is the worst case position.



## 8 Test Summary

Test Item	Test standard		Test Method/Procedure		Pass / Fail
E.R.P/ E.I.R.P	FCC	47CFR24.232, 47CFR27.50	FCC	ANSI C63.10:2009, TIA-603-D: 2009	<input checked="" type="checkbox"/> Pass
	IC	RSS-133(6.4), RSS-139(6.4)	IC	RSS-Gen Issue3: 2010	<input type="checkbox"/> N/A
Occupied Bandwidth	FCC	47CFR24.238(a), 47CFR27.53	FCC	ANSI C63.10:2009, TIA-603-D: 2009	<input checked="" type="checkbox"/> Pass
	IC	RSS-Gen(4.6)	IC	RSS-Gen Issue3: 2010	<input type="checkbox"/> N/A
Peak-Average Ratio	FCC	47CFR24.232, 47CFR27.50	FCC	ANSI C63.10:2009, TIA-603-D: 2009	<input checked="" type="checkbox"/> Pass
	IC	RSS-133(6.4), RSS-139(6.4)	IC	RSS-Gen Issue3: 2010	<input type="checkbox"/> N/A
Spurious and harmonic Emission at antenna port	FCC	47CFR2.1051,47CFR24.238, 47CFR27.53	FCC	ANSI C63.10:2009, TIA-603-D: 2009	<input checked="" type="checkbox"/> Pass
	IC	RSS-133 (6.5), RSS-139 (6.5)	IC	RSS-Gen Issue3: 2010	<input type="checkbox"/> N/A
Band Edge	FCC	47CFR2.1053,47CFR24.238, 47CFR27.53	FCC	ANSI C63.10:2009, TIA-603-D: 2009	<input checked="" type="checkbox"/> Pass
	IC	RSS-133 (6.5), RSS-139 (6.5)	IC	RSS-Gen Issue3: 2010	<input type="checkbox"/> N/A
Radiated spurious and harmonic emission	FCC	47CFR2.1053,47CFR24.238, 47CFR27.53	FCC	ANSI C63.10:2009, TIA-603-D: 2009	<input checked="" type="checkbox"/> Pass
	IC	RSS-133 (6.5), RSS-139 (6.5)	IC	RSS-Gen Issue3: 2010	<input type="checkbox"/> N/A
Frequency stability	FCC	47CFR2.1055, 47CFR24.135, 47CFR27.54	FCC	ANSI C63.10:2009, TIA-603-D: 2009	<input checked="" type="checkbox"/> Pass
	IC	RSS-133(6.3), RSS-139(6.3)	IC	RSS-Gen Issue3: 2010	<input type="checkbox"/> N/A
Receiver spurious emission	FCC	-	FCC	-	<input checked="" type="checkbox"/> Pass
	IC	RSS-Gen (6), RSS-133 (6.6), RSS-139 (6.6)	IC	RSS-Gen Issue3: 2010	<input type="checkbox"/> N/A
Remark	<ol style="list-style-type: none"> <li>All measurement uncertainties do not take into consideration for all presented test results.</li> <li>The applicant shall ensure frequency stability by showing that an emission is maintained within the band of operation under all normal operating conditions as specified in the user's manual.</li> </ol>				


## 9 Measurement Uncertainty

Test Item	Frequency Range	Description	Uncertainty
Band Edge and Radiated Spurious Emissions	30MHz – 1GHz	Confidence level of approximately 95% (in the case where distributions are normal), with a coverage factor of 2 (for EUTs < 0.5m X 0.5m X 0.5m)	+5.6dB/-4.5dB
Band Edge and Radiated Spurious Emissions	1GHz – 40GHz	Confidence level of approximately 95% (in the case where distributions are normal), with a coverage factor of 2 (for EUTs < 0.5m X 0.5m X 0.5m)	+4.3dB/-4.1dB

## 10 Measurements, Examination and Derived Results

### 10.1 RF Output Power

**Requirement(s):**

Spec	Item	Requirement	Applicable
47CFR 22.913(a) RSS-133(6.4), RSS-139(6.4)	-	The maximum effective radiated power (ERP) of base transmitters and cellular repeaters must not exceed 500 Watts.	<input type="checkbox"/>
47CFR24.232 RSS-133(6.4), RSS-139(6.4)	-	Mobile/portable stations are limited to 2 watts EIRP peak power and the equipment must employ means to limit the power to the minimum necessary for successful communications.	<input checked="" type="checkbox"/>
47CFR27.50 RSS-133(6.4), RSS-139(6.4)	-	The maximum effective radiated power (ERP) of fixed and base station must not exceed 1000 Watts.	<input checked="" type="checkbox"/>
Test Setup			
Test Procedure	<ul style="list-style-type: none"> <li>- EUT was set for low, mid, high channel with modulated mode and highest RF output power.</li> <li>- The spectrum analyzer was connected to the antenna terminal.</li> </ul>		
Test Date	03/03/2014 – 11/05/2014	Environmental condition	Temperature 22°C Relative Humidity 48% Atmospheric Pressure 1008mbar
Remark	NONE		
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail		

**Test Data**     Yes                       N/A

**Test Plot**     Yes (See below)             N/A


Test Data for LTE

Type	Channel	Frequency (MHz)	Measured PW -Port 1(dBm)	Measured PW -Port 2(dBm)	Combined Power (dBm)	Antenna Gain (dBi)	E.I.R.P (dBm)
15MHz BW, QPSK	Low	2627.5	16.79	18.49	20.73	3	23.73
	Mid	2655.0	19.81	19.91	22.87	3	25.87
	High	2682.5	19.37	17.73	21.64	3	24.64
15MHz BW, 64QAM	Low	2627.5	18.47	16.46	20.59	3	23.59
	Mid	2655.0	19.99	19.15	22.60	3	25.60
	High	2682.5	19.53	17.87	21.79	3	24.79

Test Data for WCDMA

Type	Channel	Frequency (MHz)	Measured PW -Port 1(dBm)	Measured PW -Port 2(dBm)	Max Power (dBm)	Antenna Gain (dBi)	E.I.R.P (dBm)
3.84MHz BW, QPSK	Low	1932.5	24.04	24.10	24.10	3	27.10
	Mid	1960.0	24.23	24.24	24.24	3	27.24
	High	1992.5	23.83	23.94	23.94	3	26.94


Test Plots for Band 7-QPSK-15MHz

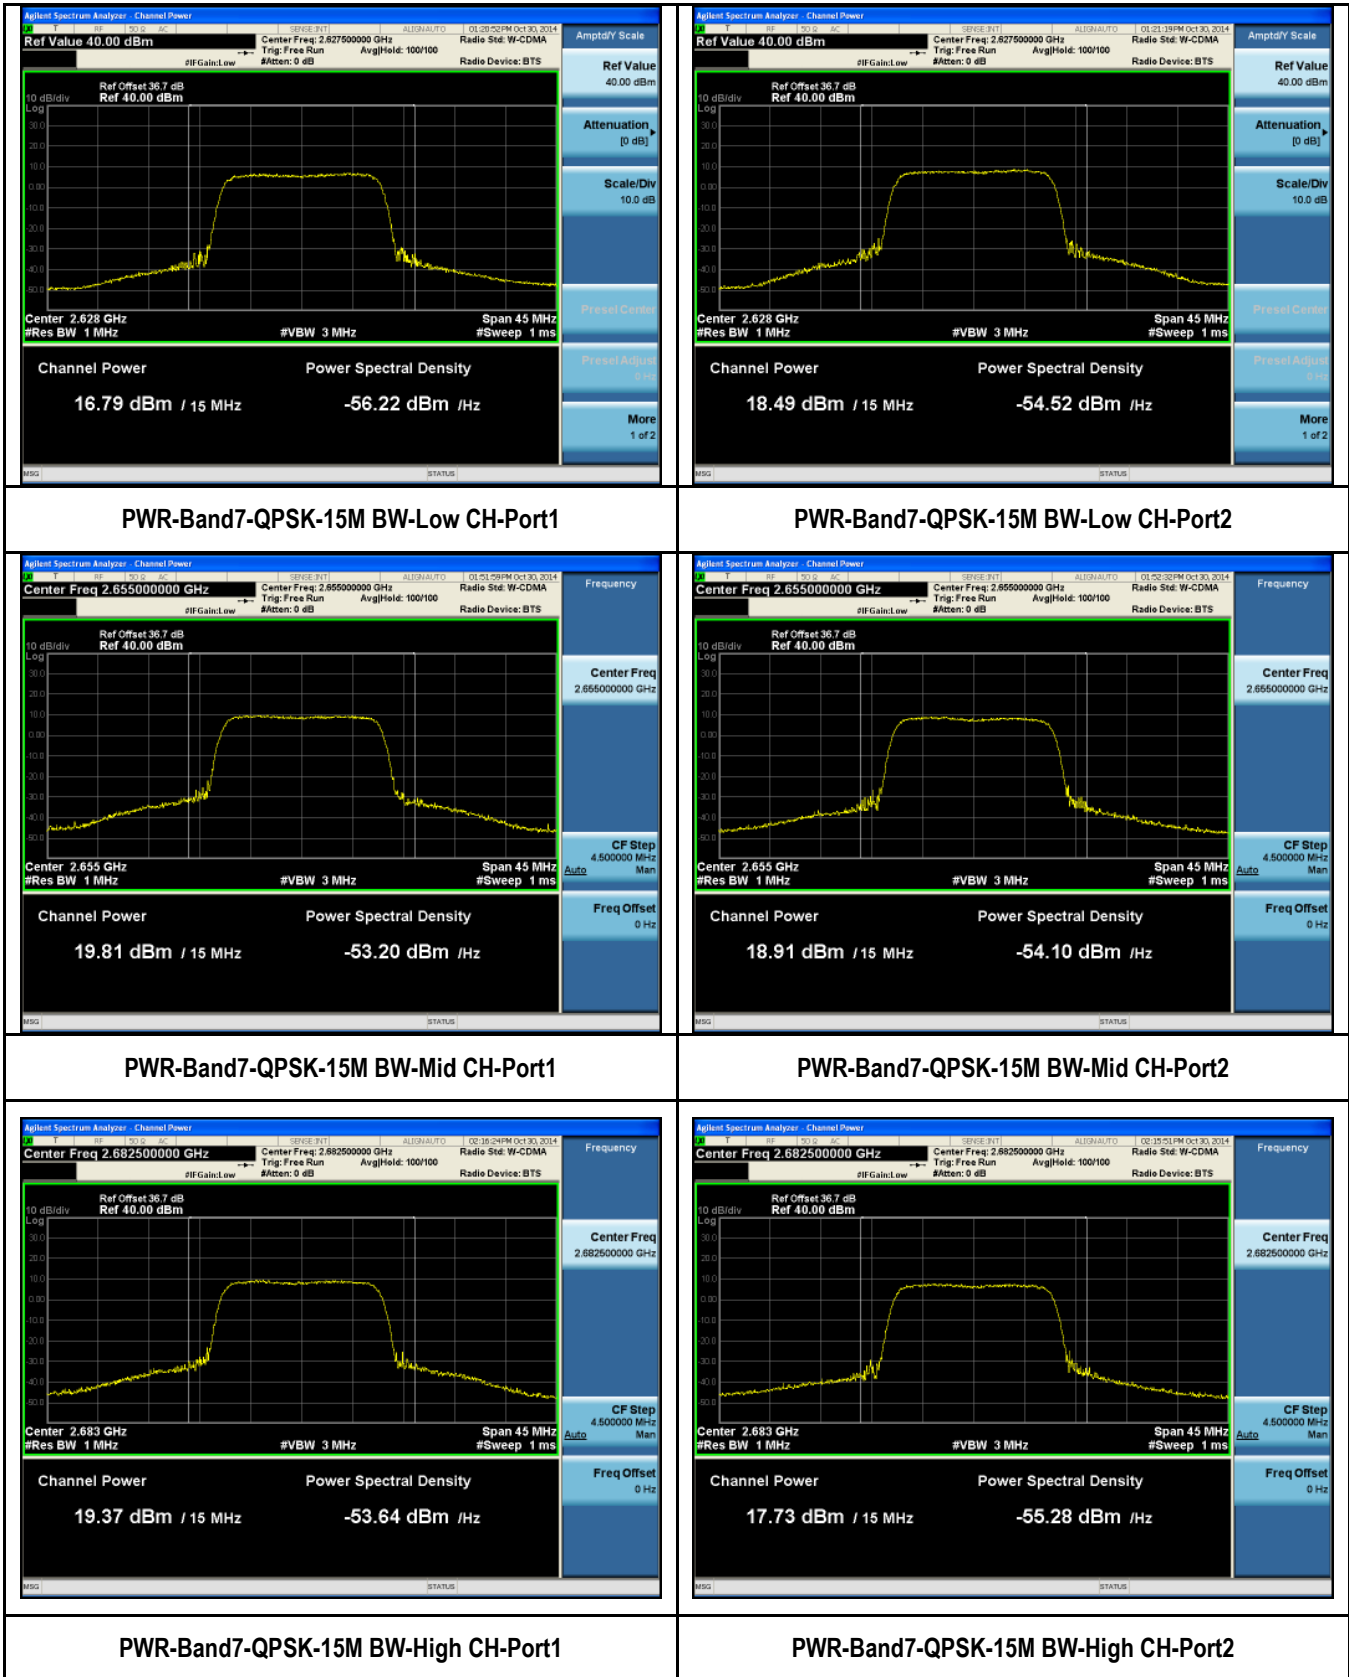


Test Plots for Band 4-16QAM-15MHz




Test Plots for Band 4-64QAM-15MHz

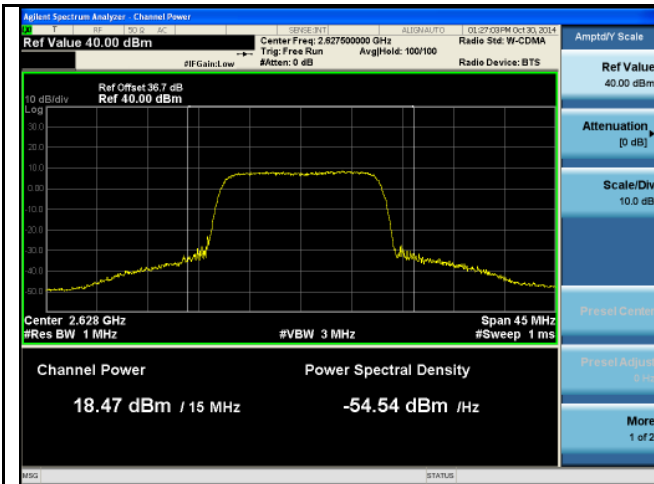


PWR-Band7-64QAM-15M BW-Low CH-Port1

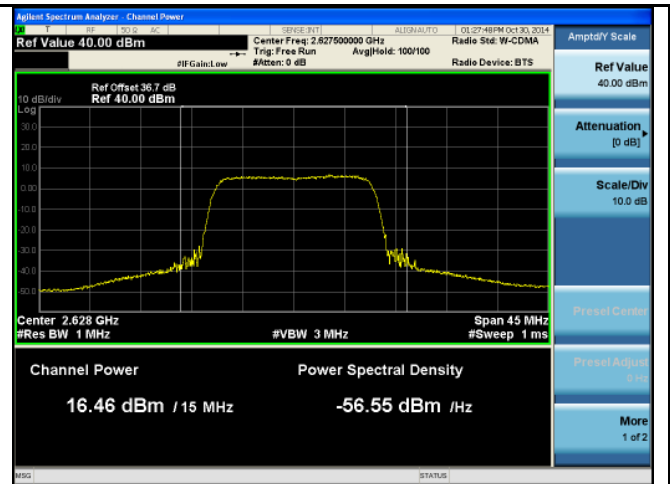


PWR-Band7-64QAM-15M BW-Low CH-Port2

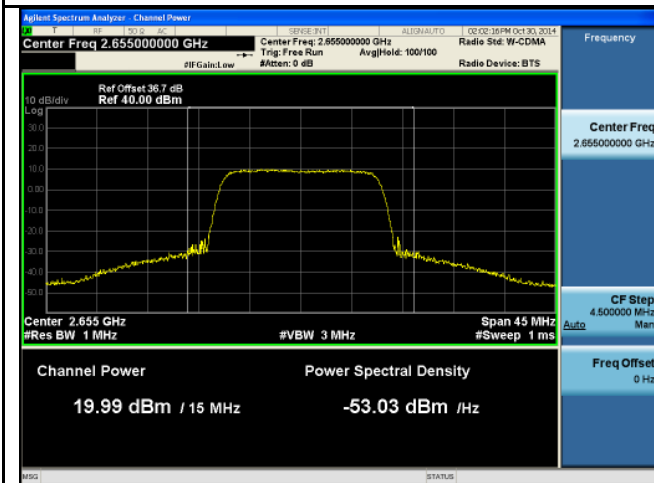


PWR-Band7-64QAM-15M BW-Mid CH-Port1

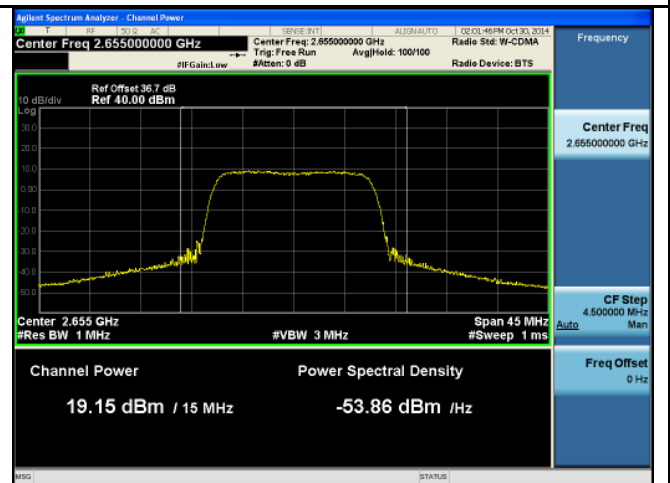

PWR-Band7-64QAM-15M BW-Mid CH-Port2

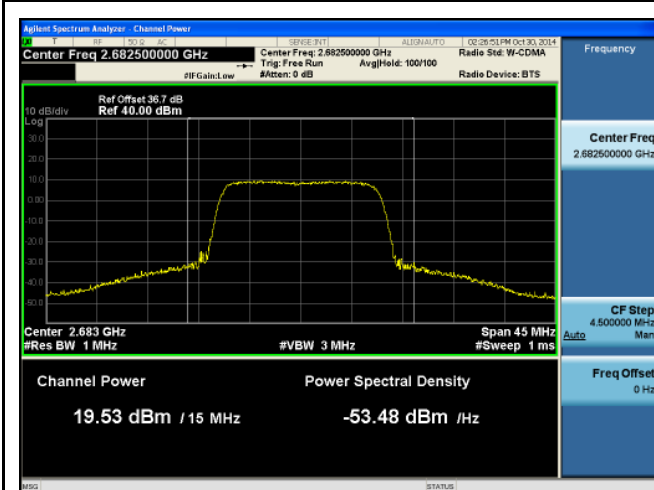


PWR-Band7-64QAM-15M BW-High CH-Port1

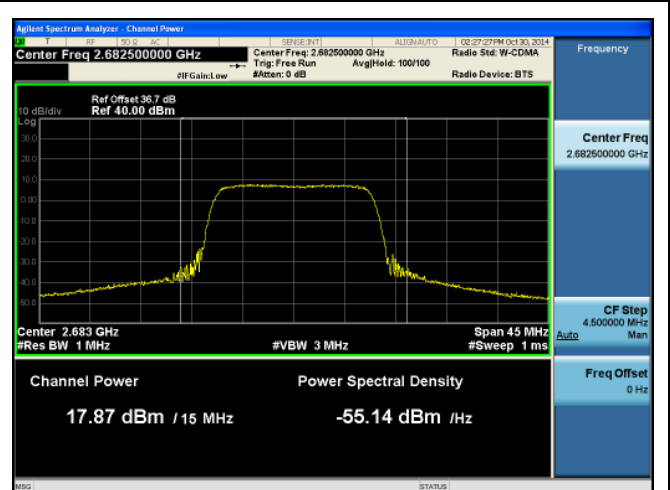


PWR-Band7-64QAM-15M BW-High CH-Port2


Test Plots for UMTS Band 2&25

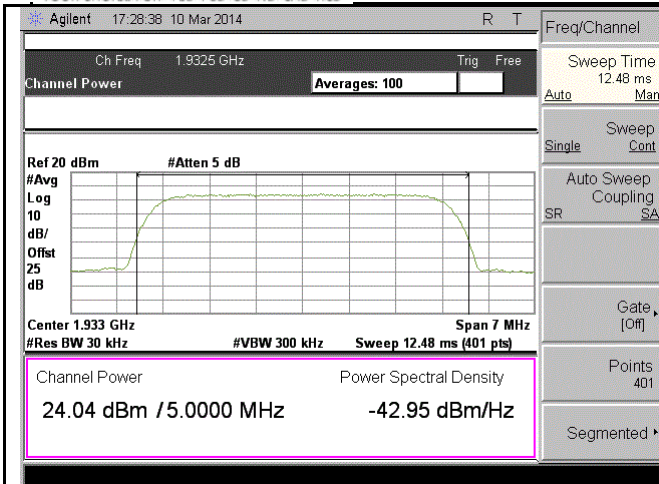


**PWR-Band2&25-QPSK-Low CH-Port1**

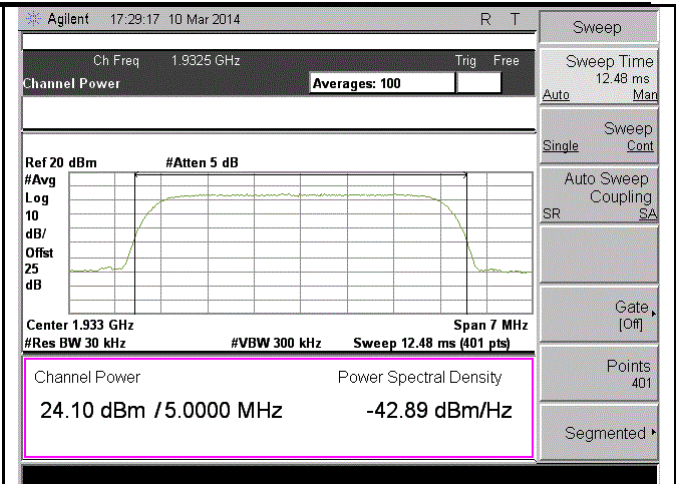


**PWR-Band2&25-QPSK-Low CH-Port2**

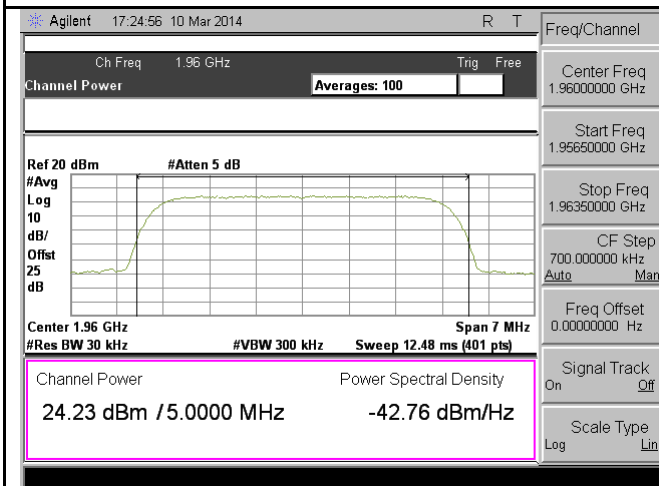


**PWR-Band2&25-QPSK-Mid CH-Port1**

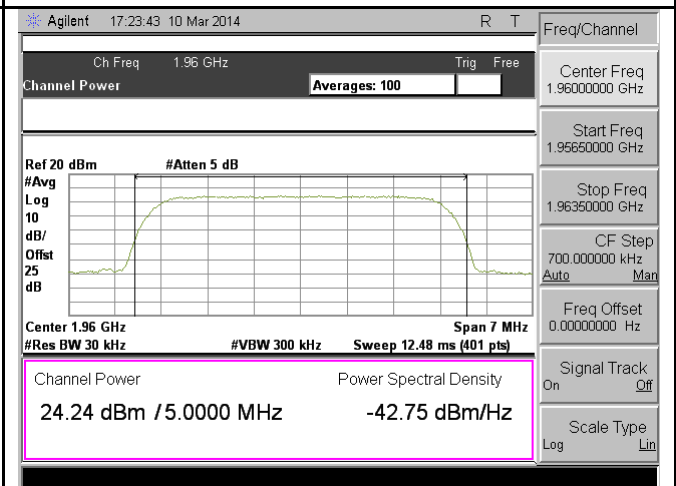

**PWR-Band2&25-QPSK-Mid CH-Port2**

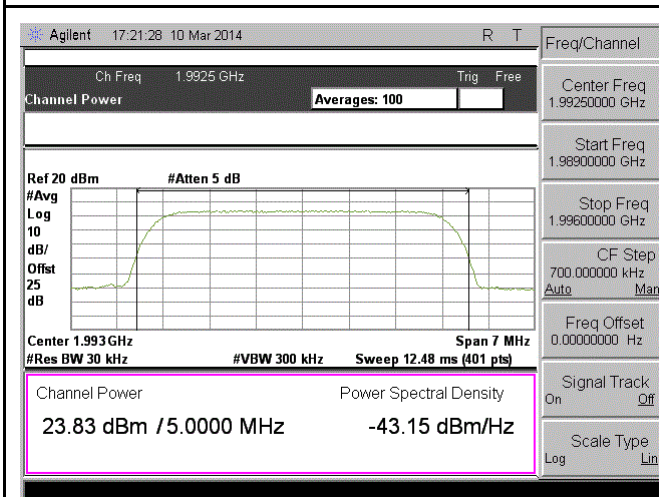


**PWR-Band2&25-QPSK--High CH-Port1**

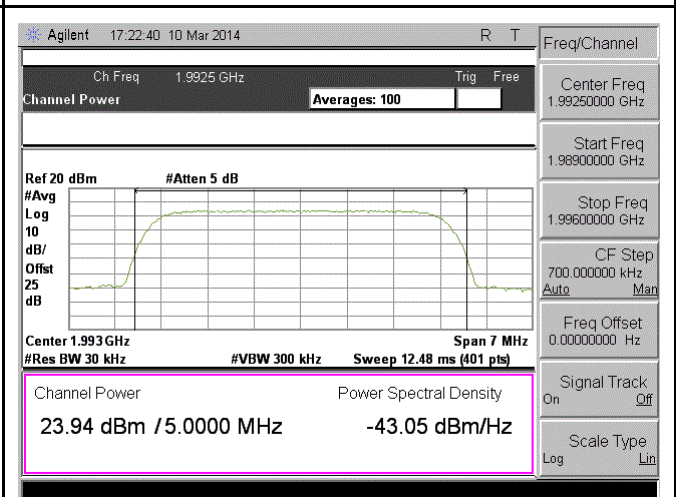

**PWR-Band2&25-QPSK-High CH-Port2**

## 10.2 Peak-Average Ratio

### Requirement(s):

Spec	Item	Requirement	Applicable
47CFR24.232 RSS-132(5.4)	(d)	Power measurements for transmissions by stations authorized under this section may be made either in accordance with a Commission-approved average power technique or in compliance with paragraph (e) of this section. In both instances, equipment employed must be authorized in accordance with the provisions of §24.51. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.	<input checked="" type="checkbox"/>
47CFR27.50 RSS-133(6.4)	(b)	The peak-to-average power ratio (PAPR) of the transmitter output power must not exceed 13 dB. The PAPR measurements should be made using either an instrument with complementary cumulative distribution function (CCDF) capabilities to determine that PAPR will not exceed 13 dB for more than 0.1 percent of the time or other Commission approved procedure. The measurement must be performed using a signal corresponding to the highest PAPR expected during periods of continuous transmission.	<input checked="" type="checkbox"/>
RSS-139(6.4)	-	The average equivalent isotropically radiated power (e.i.r.p.) for transmitters shall not exceed the limits given in SRSP-510. Moreover, base station transmitters operating in the band 1930-1995 MHz shall not have output power exceeding 100 watts.  In addition, when the transmitter power is measured in terms of average value, the peak-to-average ratio of the power shall not exceed 13 dB.	<input checked="" type="checkbox"/>
Test Setup			
Test Procedure	<ul style="list-style-type: none"> <li>- EUT was set for low, mid, high channel with modulated mode and highest RF output power.</li> <li>- The spectrum analyzer was connected to the antenna terminal.</li> </ul>		
Test Date	03/10/2014-11/05/2014	Environmental condition	Temperature 23°C Relative Humidity 48% Atmospheric Pressure 1008mbar
Remark	NONE		
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail		

Test Data     Yes                       N/A

Test Plot     Yes (See below)               N/A


Test Data for LTE

Type	Channel	Frequency (MHz)	Peak-Average Ratio (dB)	Peak-Average Ratio Limit (dB)
15MHz BW, QPSK	Low	2627.5	8.87	13
	Mid	2655.0	8.97	13
	High	2682.5	8.96	13
15MHz BW, 64QAM	Low	2627.5	8.84	13
	Mid	2655.0	8.82	13
	High	2682.5	8.77	13


Test Data for WCDMA

Type	Channel	Frequency (MHz)	Peak-Average Ratio (dB)	Peak-Average Ratio Limit (dB)
3.84MHz BW, 16QAM	Low	1932.5	3.73	13
	Mid	1960.0	3.74	13
	High	1992.5	4.23	13


Test Plots

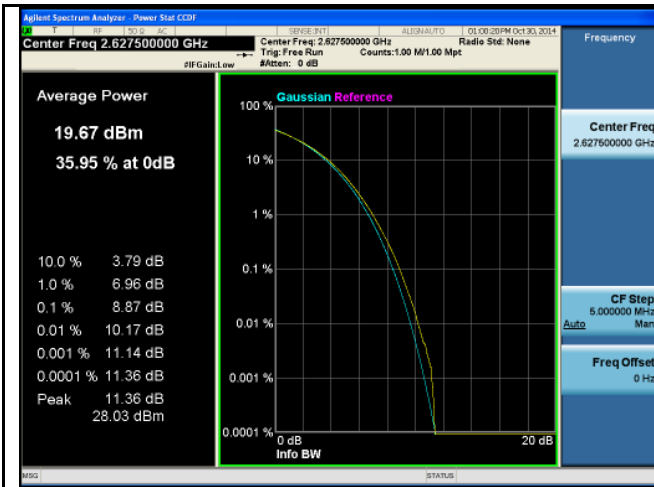


PK-AV-Ratio-Band7-QPSK-15M BW-Low

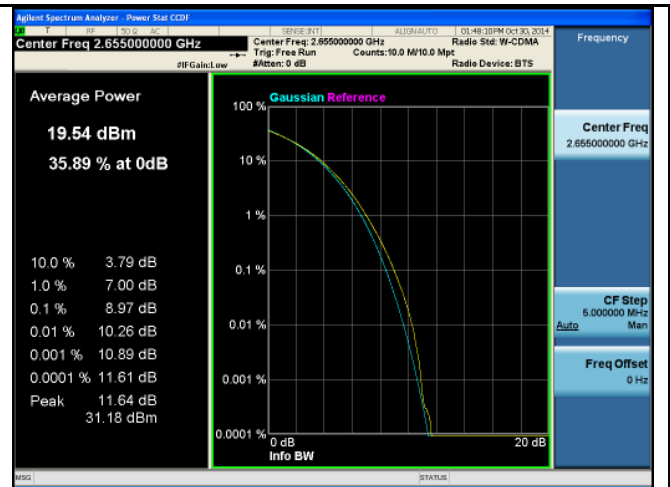

PK-AV-Ratio-Band7-QPSK-15M BW-Mid

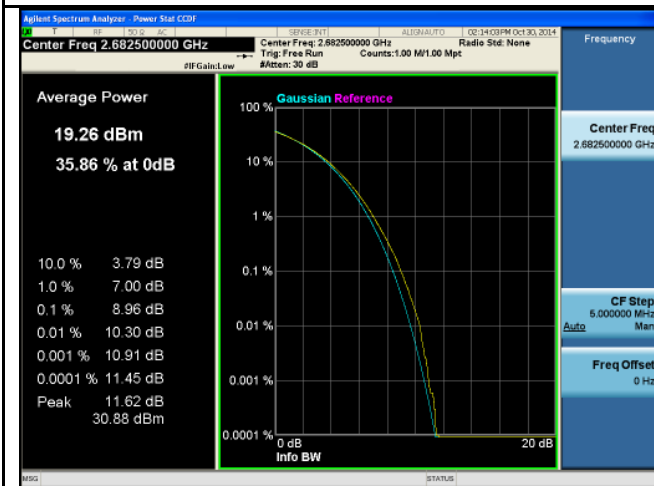


PK-AV-Ratio-Band7-QPSK-15M BW-High

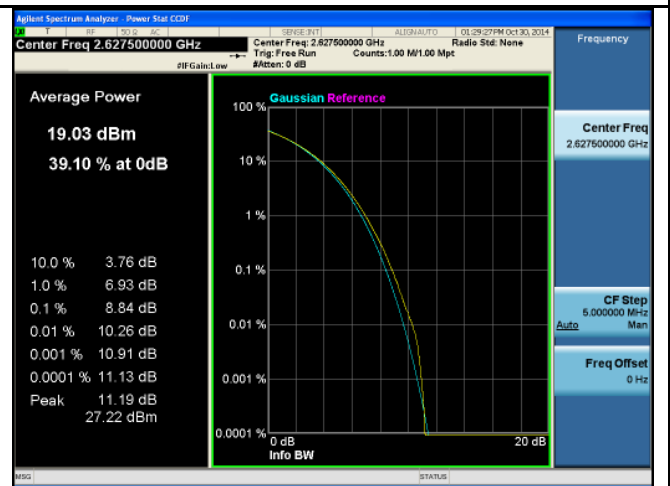


PK-AV-Ratio-Band7-64QAM-15M BW-Low




PK-AV-Ratio-Band7-64QAM-15M BW-Mid

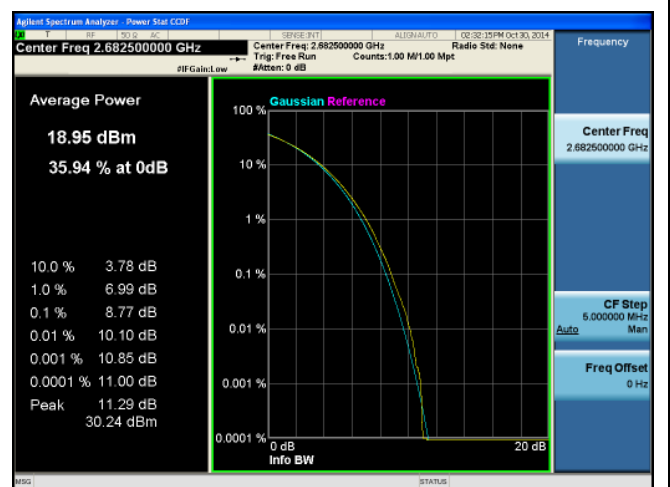


PK-AV-Ratio-Band7-64QAM-15M BW-High

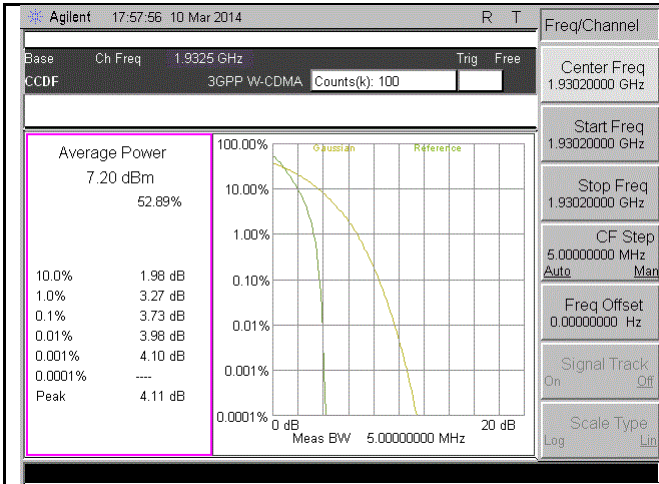

**PK-AV-Ratio-Band2&25-QPSK-10M BW-Low**

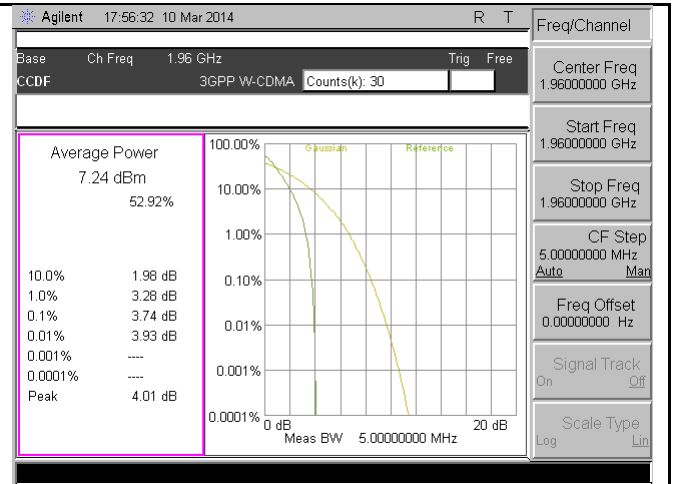


**PK-AV-Ratio-Band2&25-QPSK-10M BW-Mid**

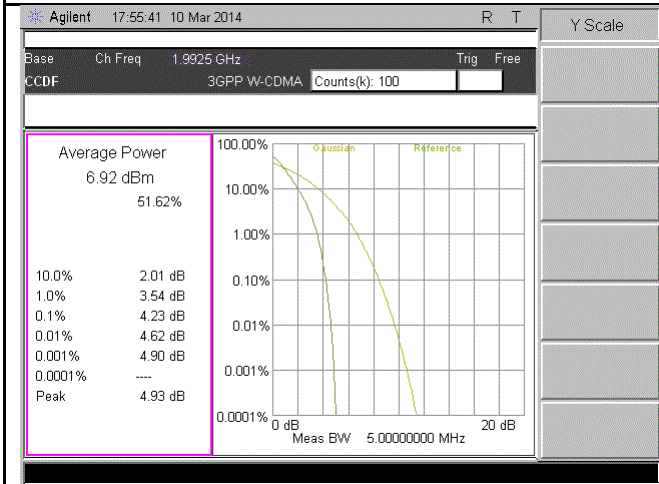

**PK-AV-Ratio-Band2&25-QPSK-10M BW-High**

### 10.3 Occupied Bandwidth

**Requirement(s):**

Spec	Requirement	Applicable
47 CFR §2.1049; RSS-GEN, 6.6	The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured under the following conditions of § 2.1049 (a) through (i)	<input checked="" type="checkbox"/>
Test Setup	 <pre> graph LR     SA[Spectrum Analyzer] --- EUT[EUT]             </pre>	
Procedure	<ol style="list-style-type: none"> <li>1. EUT was set for low, mid, high channel with modulated mode and highest RF output power.</li> <li>2. The spectrum analyzer was connected to the antenna terminal.</li> <li>3. The 99% bandwidths are measured using spectrum analyzer's internal meas function.</li> </ol>	
Test Date	02/27/2014 – 11/05/2014	Environmental condition
		Temperature 23°C Relative Humidity 48% Atmospheric Pressure 1008mbar
Remark	NONE	
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail	

**Test Data**     Yes                               N/A

**Test Plot**     Yes (See below)                       N/A

### Test Data


#### 99% Bandwidth measurement result for LTE

Type	Channel	Channel Frequency (MHz)	99% Occupied Bandwidth (MHz)	26 dB Occupied Bandwidth (MHz)
15MHz BW, QPSK	Low	2627.5	13.37	14.30
	Mid	2655.0	13.36	13.91
	High	2682.5	13.36	14.21
15MHz BW, 64QAM	Low	2627.5	13.39	14.20
	Mid	2655.0	13.36	14.33
	High	2682.5	13.37	14.21


#### 99% Bandwidth measurement result for WCDMA

Type	Channel	Channel Frequency (MHz)	99% Occupied Bandwidth (MHz)	26 dB Occupied Bandwidth (MHz)
3.84MHz BW, QPSK	Low	1932.5	4.31	4.94
	Mid	1960.0	4.32	4.94
	High	1992.5	4.31	4.94




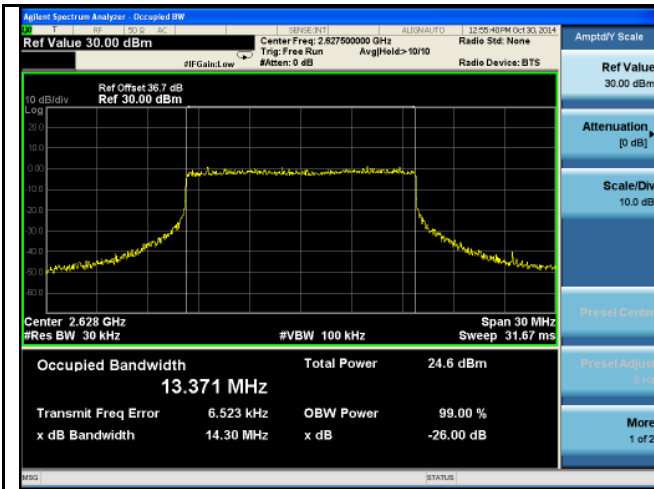


**OBW-Band7-15M BW-Low- QPSK**

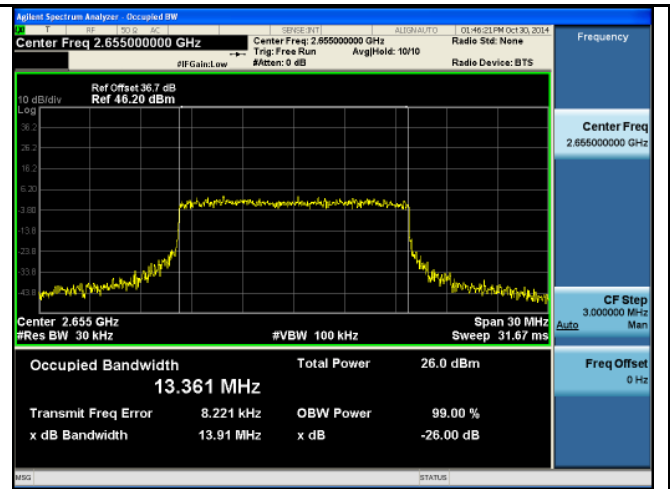


**OBW-Band7-15M BW-Mid- QPSK**

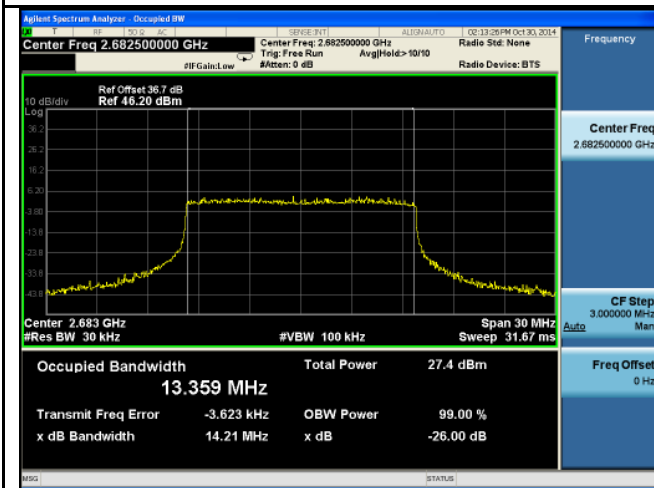


**OBW-Band7-15M BW-High- QPSK**

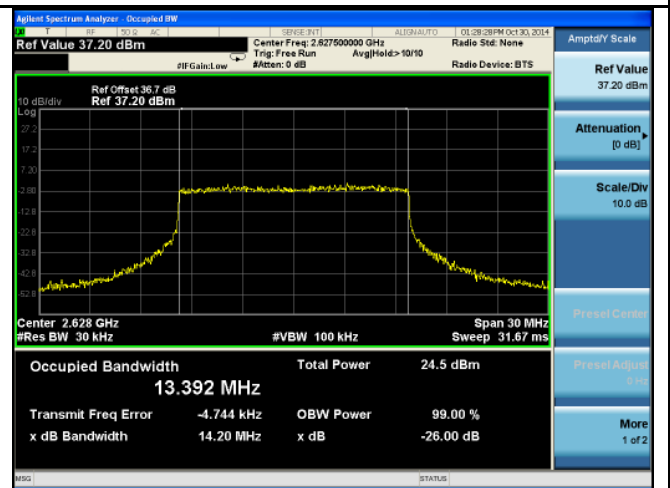

**OBW-Band7-15M BW-Low- 64QAM**

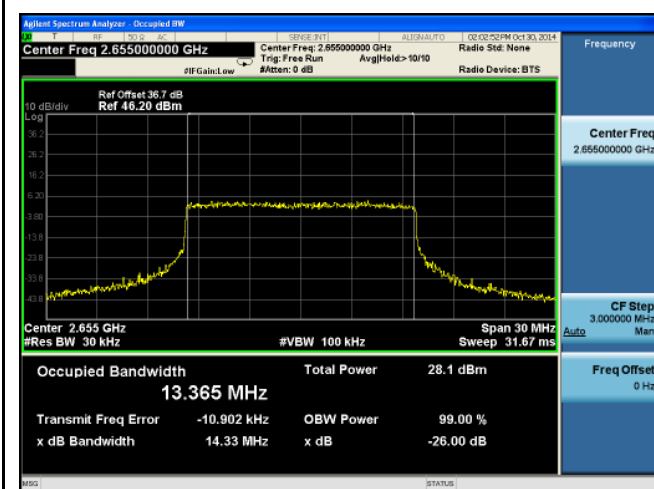


**OBW-Band7-15M BW-Mid- 64QAM**

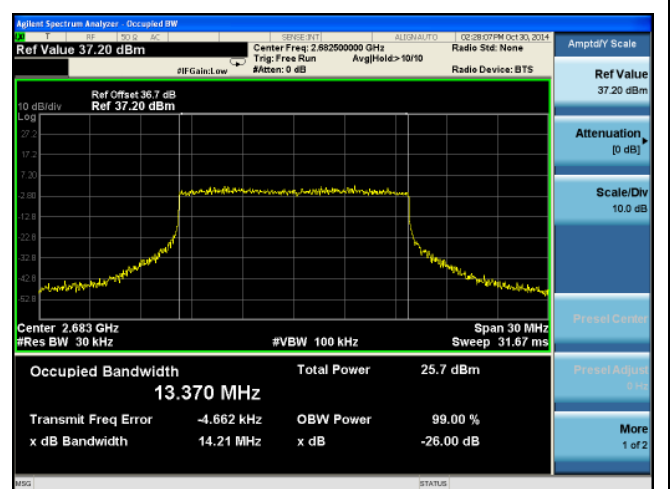


**OBW-Band7-15M BW-Mid- 64QAM**


Test Plots for WCDMA Band2

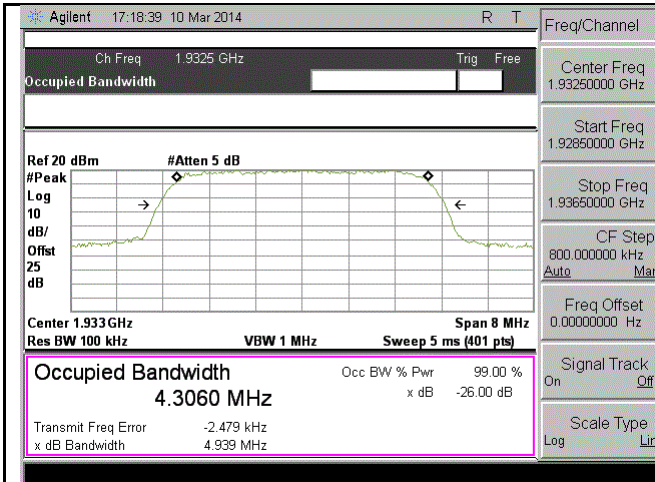

OBW-Band2&25-Low

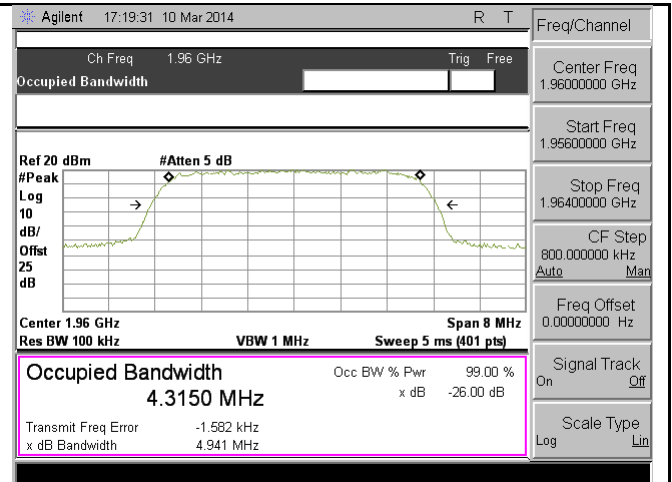


OBW-Band2&25-Mid

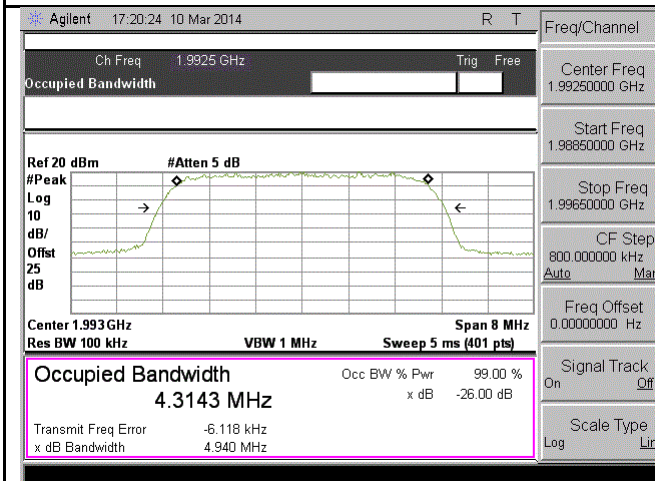

OBW-Band2&25-High

## 10.4 Antenna Port Spurious Emission


### Requirement(s):

Spec	Item	Requirement	Applicable
47CFR22.917 RSS-133 (6.5), RSS-139 (6.5)	-	Out of band emissions. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log (P)$ dB.	<input type="checkbox"/>
47CFR24.238 RSS-133 (6.5), RSS-139 (6.5)	-	Out of band emissions. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log (P)$ dB.	<input checked="" type="checkbox"/>
47CFR27.53 RSS-133 (6.5), RSS-139 (6.5)	-	Out of band emissions. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log (P)$ dB.	<input checked="" type="checkbox"/>
Test Setup			
Test Procedure	<ol style="list-style-type: none"> <li>EUT was set for low , mid, high channel with modulated mode and highest RF output power.</li> <li>The spectrum analyzer was connected to the antenna terminal.</li> </ol>		
Test Date	02/27/2014 – 11/05/2014	Environmental condition	Temperature 23°C Relative Humidity 48% Atmospheric Pressure 1008mbar
Remark	NONE		
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail		

Test Data     Yes                       N/A

Test Plot     Yes (See below)             N/A


Test Plots

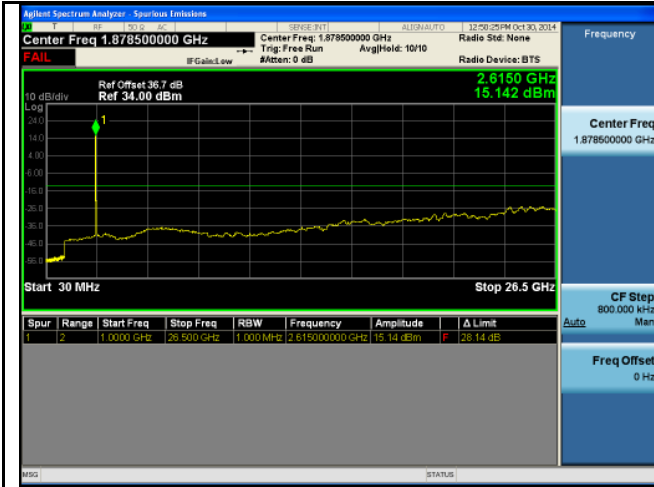


TX CSE-Band7-QPSK-15M BW-Low CH- Chain A




TX CSE-Band7-QPSK-15M BW-low CH- Chain B

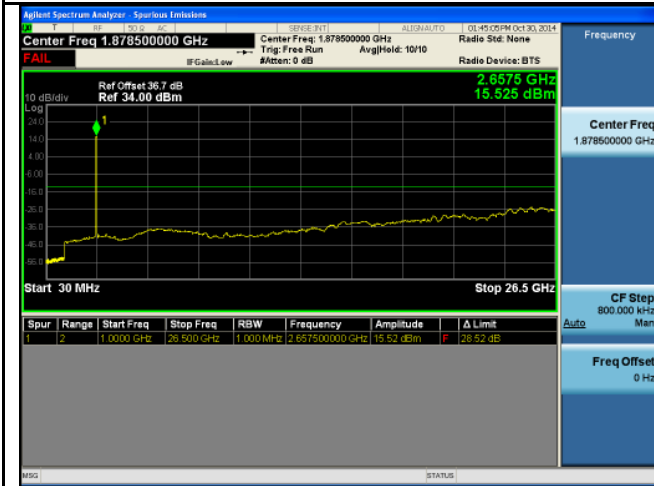

TX CSE-Band7-QPSK-15M BW-Mid CH- Chain A

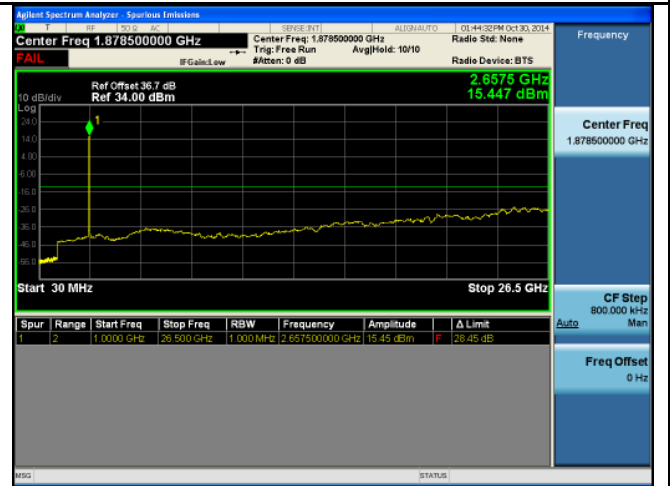


TX CSE-Band7-QPSK-15M BW-Mid CH- Chain B

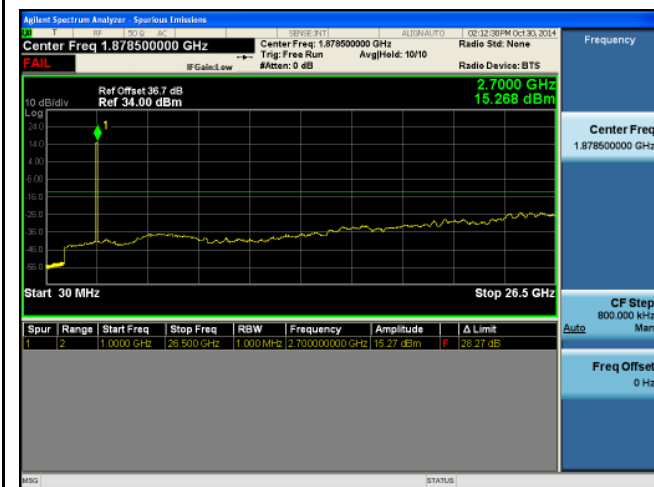

TX CSE-Band7-QPSK-15M BW-High CH- Chain A



TX CSE-Band7-QPSK-15M BW-High CH- Chain B

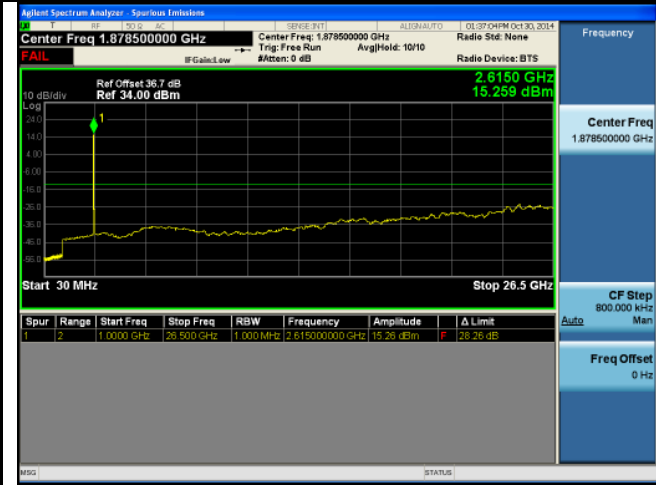


**TX CSE-Band7-64QAM-15M BW-Low CH- Chain A**




**TX CSE-Band7-64QAM-15M BW-low CH- Chain B**




**TX CSE-Band7-64QAM-15M BW-Mid CH- Chain A**

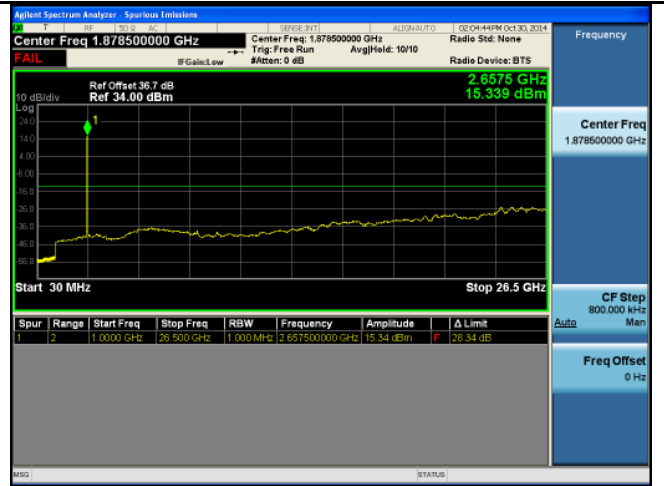


**TX CSE-Band7-64QAM-15M BW-Mid CH- Chain B**

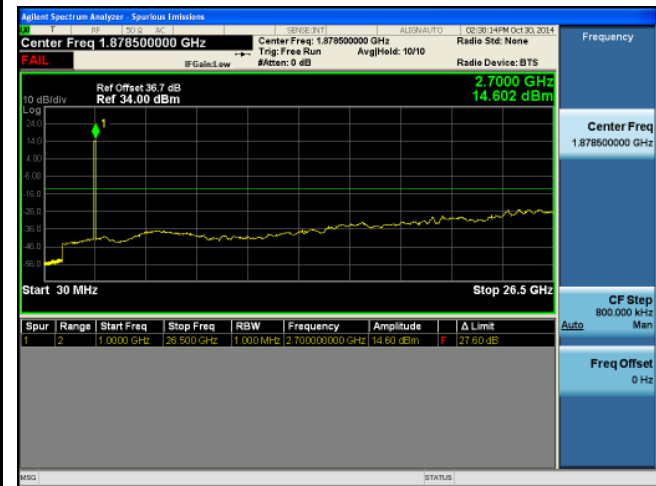


**TX CSE-Band7-64QAM-15M BW-High CH- Chain A**

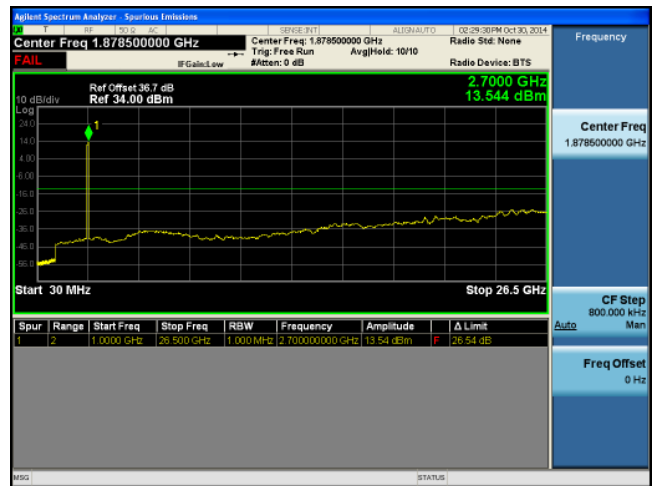


**TX CSE-Band7-64QAM-15M BW-High CH- Chain B**

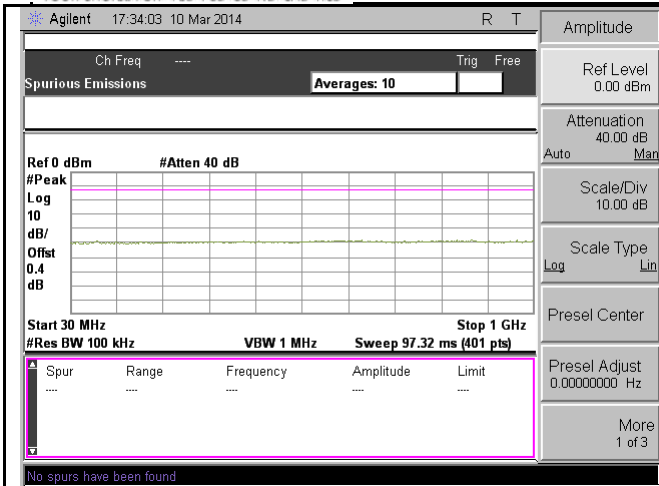


**TX CSE-Band2&25-QPSK-Low CH-below 1G**

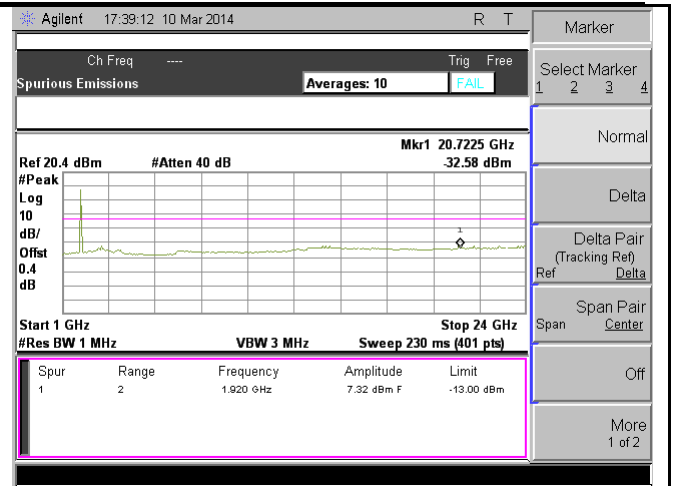


**TX CSE-Band2&25-QPSK-Low CH-above 1G**

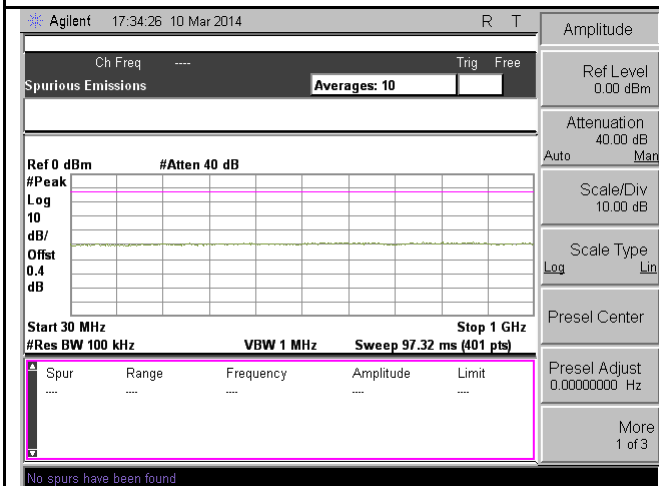


**TX CSE-Band2&25-QPSK-Mid CH-below 1G**

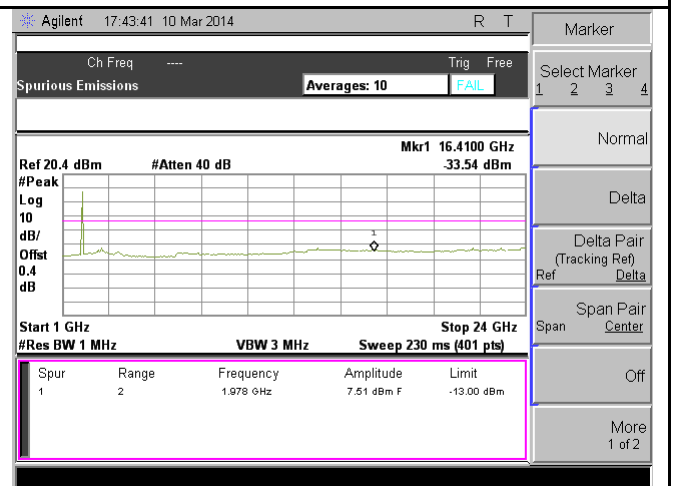

**TX CSE-Band2&25-QPSK-Mid CH-above 1G**

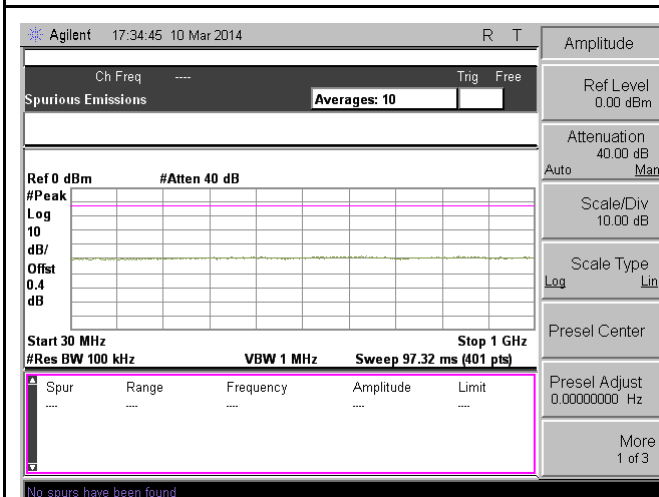


**TX CSE-Band2&25-QPSK-High CH-below 1G**

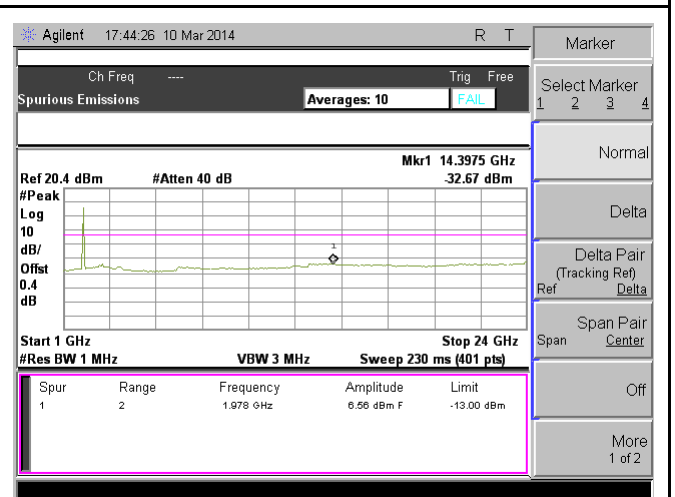

**TX CSE-Band2&25-QPSK-High CH-above 1G**

## 10.5 Band Edge

### Requirement(s):

Spec	Item	Requirement	Applicable
47CFR22.917 RSS-133 (6.5), RSS-139 (6.5)	-	Out of band emissions. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log (P)$ dB.	<input type="checkbox"/>
47CFR24.238 RSS-133 (6.5), RSS-139 (6.5)	-	Out of band emissions. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log (P)$ dB.	<input checked="" type="checkbox"/>
47CFR27.53 RSS-133 (6.5), RSS-139 (6.5)	-	Out of band emissions. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log (P)$ dB.	<input checked="" type="checkbox"/>
Test Setup			
Test Procedure	<ol style="list-style-type: none"> <li>EUT was set for low, mid, high channel with modulated mode and highest RF output power.</li> <li>The spectrum analyzer was connected to the antenna terminal.</li> <li>A RBW of 1% greater than the 26 dB emission bandwidth should be used for band edge measurement or if narrower RBW is used, a correct factor calculated with formula <math>10 \cdot \log (EBW/BW_{meas})</math> will be added to the result.</li> </ol>		
Test Date	03/17/2014 - 11/05/2014	Environmental condition	Temperature 22°C Relative Humidity 48% Atmospheric Pressure 1008mbar
Remark	100KHz RBW was used to make measurement for LTE Band 7 with 15MHz BW, so the correction factor will be added to correct the result to be using 200 KHz RBW.		
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail		

Test Data     Yes                       N/A

Test Plot     Yes (See below)               N/A

Band Edge Measurement Data for LTE


Type	Channel	Channel Frequency (MHz)	Measurement Band Edge (dBm)			RBW Correction factor (dB)	Corrected Band Edge (dBm)	Limit (dBm)
			Chain A	Chain B	Combined (dBm)			
15MHz BW, QPSK	Low	2627.5	-35.86	-33.87	-31.74	3.01	-28.73	-13
	High	2682.5	-34.44	-36.73	-32.43	3.01	-29.42	-13
15MHz BW, 64QAM	Low	2627.5	-35.90	-37.04	-33.42	3.01	-30.41	-13
	High	2682.5	-34.95	-37.10	-32.88	3.01	-29.87	-13

Band Edge Measurement Data for WCDMA


Type	Channel	Channel Frequency (MHz)	Measurement Band Edge (dBm)	RBW Correction factor (dB)	Corrected Band Edge (dBm)	Limit (dBm)
3.84MHz BW, QPSK	Low	1932.5	-17.809	0	-17.809	-13
	High	1992.5	-24.119	0	-24.119	-13




Test Plots

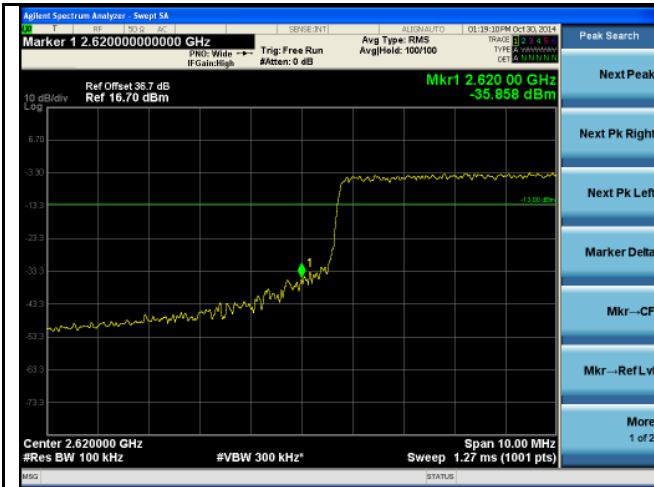

BandEdge-LTE-Band7-15MHz-QPSK-Low – Chain A

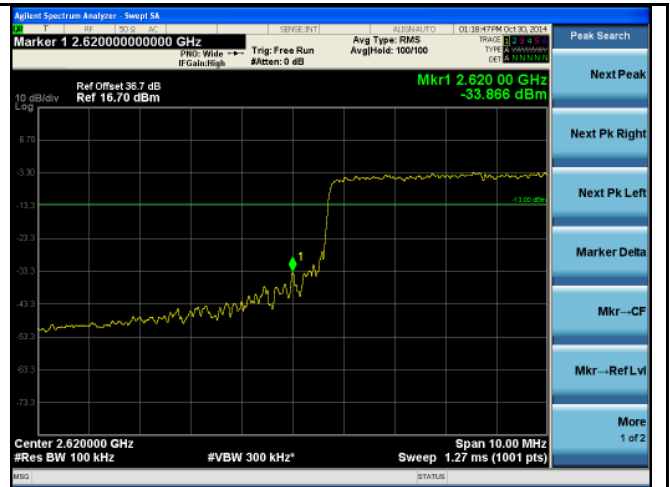


BandEdge-LTE-Band7-15MHz-QPSK-Low – Chain B

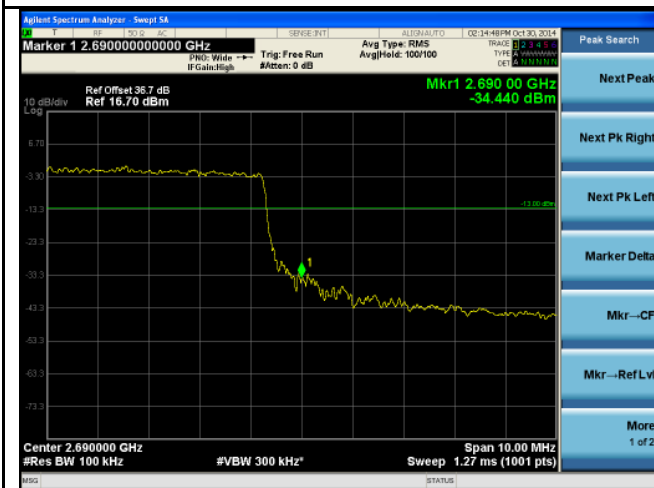


BandEdge-LTE-Band7-15MHz-QPSK-High – Chain A




BandEdge-LTE-Band7-15MHz-QPSK-High – Chain B

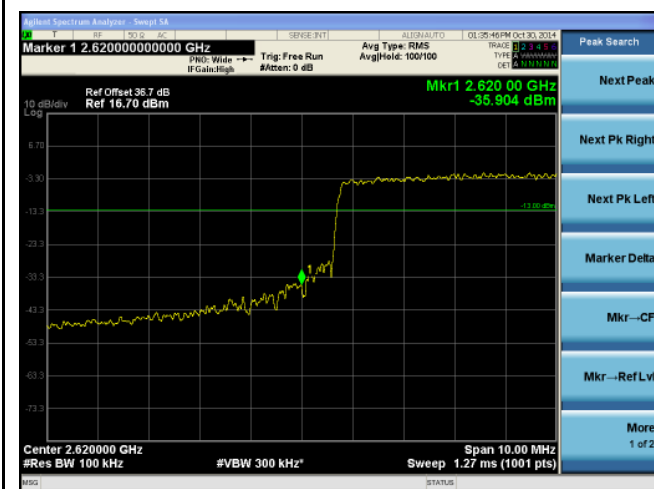

BandEdge-LTE-Band7-15MHz-64QAM-Low – Chain A

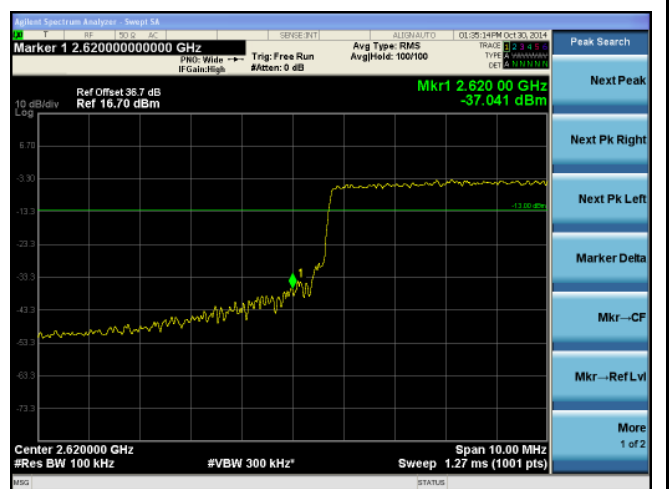

BandEdge-LTE-Band7-15MHz-64QAM-Low – Chain B

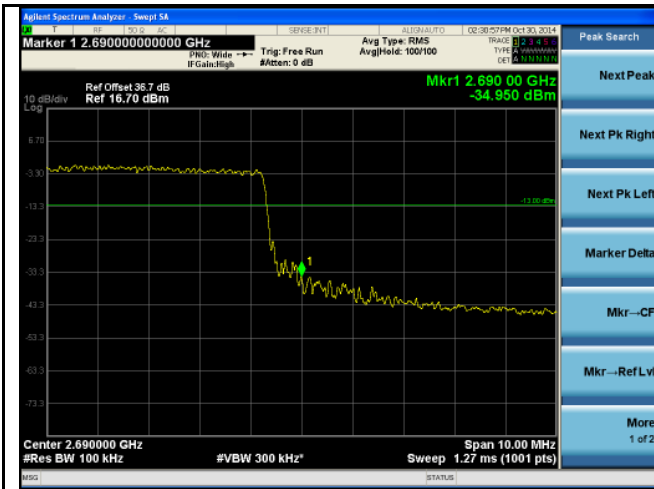

BandEdge-LTE-Band7-15MHz-64QAM-High – Chain A




BandEdge-LTE-Band7-15MHz-64QAM-High – Chain B

## 10.6 Radiated Spurious Emission below 1GHz

### Requirement(s):

Spec	Item	Requirement	Applicable
47CFR22.917 RSS-133 (6.5), RSS-139 (6.5)	-	Out of band emissions. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log (P)$ dB.	<input type="checkbox"/>
47CFR24.238 RSS-133 (6.5), RSS-139 (6.5)	-	Out of band emissions. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log (P)$ dB.	<input checked="" type="checkbox"/>
47CFR27.53 RSS-133 (6.5), RSS-139 (6.5)	-	Out of band emissions. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log (P)$ dB.	<input checked="" type="checkbox"/>

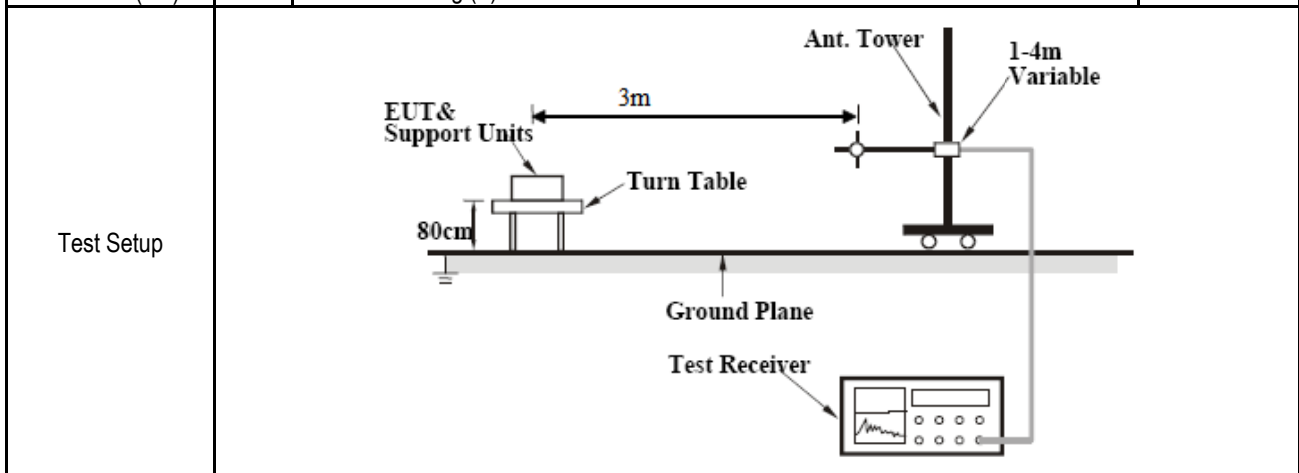

Procedure	<ol style="list-style-type: none"> <li>The EUT was switched on and allowed to warm up to its normal operating condition.</li> <li>The test was carried out at the selected frequency points obtained from the EUT characterisation. Maximization of the emissions, was carried out by rotating the EUT, changing the antenna polarization, and adjusting the antenna height in the following manner:           <ol style="list-style-type: none"> <li>Vertical or horizontal polarisation (whichever gave the higher emission level over a full rotation of the EUT) was chosen.</li> <li>The EUT was then rotated to the direction that gave the maximum emission.</li> <li>Finally, the antenna height was adjusted to the height that gave the maximum emission.</li> </ol> </li> <li>A peak measurement was then made for that frequency point.</li> <li>Steps 2 and 3 were repeated for the next frequency point, until all selected frequency points were measured.</li> </ol>
-----------	--

Remark	All different modulation and bandwidth configuration has been verified and only the test data of worst case with QPSK modulation and greatest bandwidth was presented in this report.
--------	---


Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail
--------	--

Test Data     Yes (See below)       N/A

Test Plot     Yes (See below)       N/A


### Radiated Emission Test Results

Test specification	Radiated Spurious Emissions (30MHz – 1000MHz)		
Environmental Conditions:	Temp (°C):	22	Result
	Humidity (%)	45	
	Atmospheric (mbar):	1008	
Mains Power:	56VDC PoE	Pass	
Tested by:	David Zhang		
Test Date:	02/13/2014		
Remarks:	WCDMA band2, Mid CH		

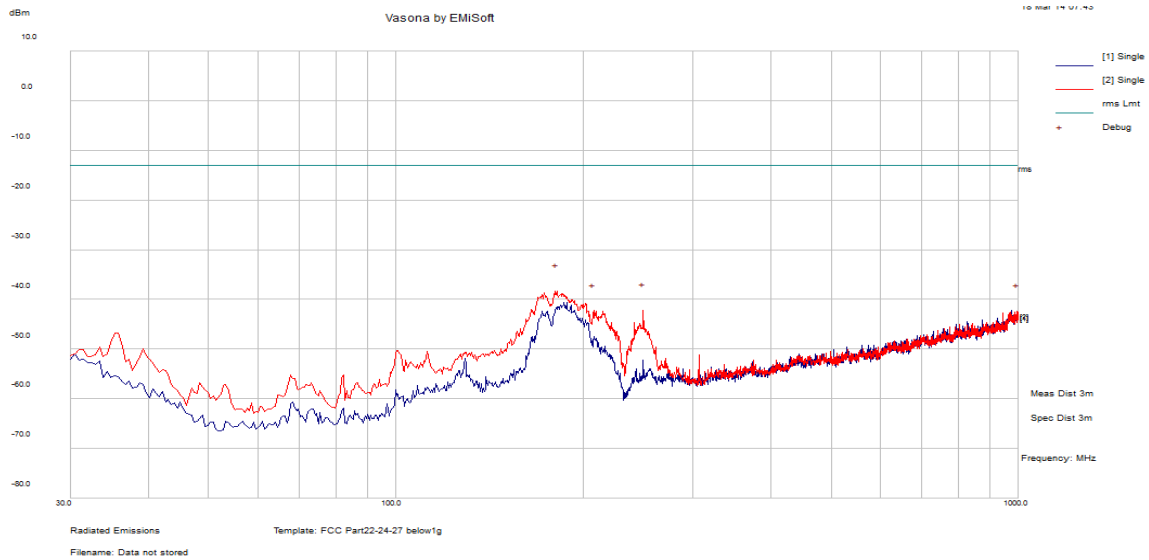

Frequency MHz	Raw dBm	Cable Loss	AF dB	Level dBm	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBm	Margin dB	Pass /Fail
181.32	-42.23	14.42	-10.50	-38.31	RMS Max	V	140.00	356.00	-13.00	-25.31	Pass
249.71	-46.94	14.79	-10.01	-42.15	RMS Max	V	100.00	341.00	-13.00	-29.15	Pass
208.00	-46.03	14.57	-10.82	-42.28	RMS Max	V	100.00	100.00	-13.00	-29.28	Pass
995.64	-62.78	18.34	2.04	-42.40	RMS Max	H	161.00	23.00	-13.00	-29.40	Pass


Test specification:	Radiated Spurious Emissions (30MHz – 1000MHz)		
Environmental Conditions:	Temp(°C):	20	Result:
	Humidity (%):	36	
	Atmospheric(mbar):	1021	
Mains Power:	56VDC PoE		<input checked="" type="checkbox"/> Pass
Tested by:	Teody Manansala		<input type="checkbox"/> Fail
Test Date:	6-Nov-2014		
Remarks:	LTE 15MHz 2.655 GHz		

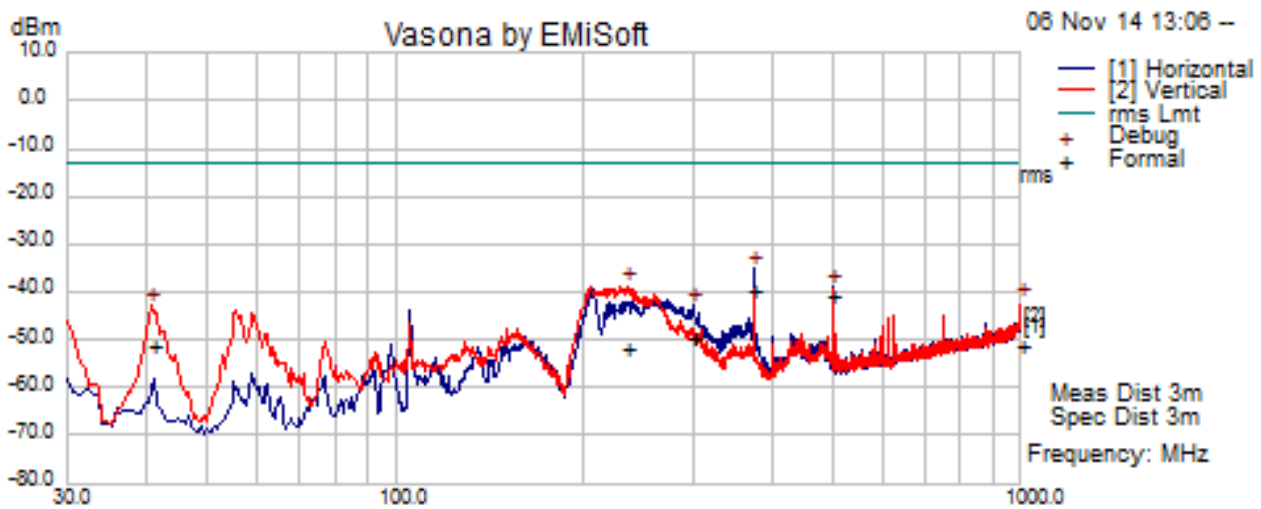

**Quasi Max Measurement**

Frequency (MHz)	Raw (dBuV)	Cable Loss (dB)	AF (dB)	Level (dBuV/m)	Measurement Type	Pol (V/H)	Hgt (cm)	Azt (Deg)	Limit (dBuV/m)	Margin (dB)	Pass /Fail
375.00	-49.52	15.49	-5.80	-39.84	RMS Max	H	100.00	229.00	-13.00	-26.84	Pass
235.29	-57.15	14.72	-9.49	-51.92	RMS Max	V	206.00	200.00	-13.00	-38.92	Pass
499.99	-53.08	16.26	-3.80	-40.62	RMS Max	H	171.00	235.00	-13.00	-27.62	Pass
998.30	-73.15	18.35	3.61	-51.19	RMS Max	V	391.00	75.00	-13.00	-38.19	Pass
41.13	-54.32	13.19	-10.11	-51.24	RMS Max	V	112.00	337.00	-13.00	-38.24	Pass
298.58	-57.17	15.01	-7.53	-49.68	RMS Max	H	103.00	107.00	-13.00	-36.68	Pass

Test specification:	Radiated Spurious Emissions (30MHz – 1000MHz)		
Environmental Conditions:	Temp(°C):	20	Result:
	Humidity (%):	36	
	Atmospheric(mbar):	1021	
Mains Power:	120VAC, 60Hz		<input checked="" type="checkbox"/> Pass
Tested by:	Teody Manansala		<input type="checkbox"/> Fail
Test Date:	6-Nov-14		
Remarks:	LTE (2.655 GHz) and WCDMA (2.1124 GHz) transmitting simultaneously		

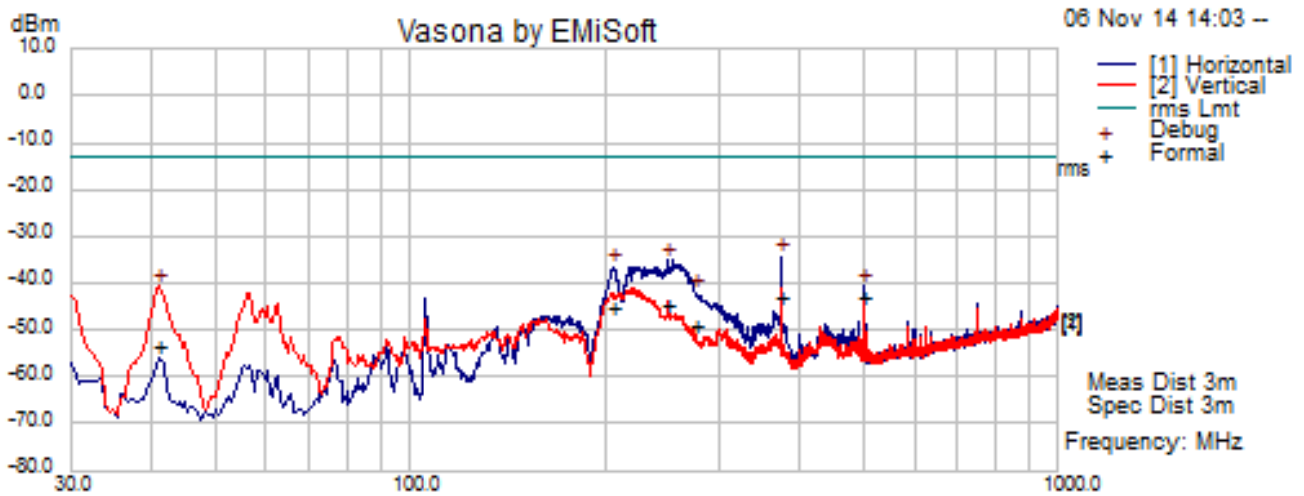


### Quasi Max Measurement

Frequency (MHz)	Raw (dBuV)	Cable Loss (dB)	AF (dB)	Level (dBuV/m)	Measurement Type	Pol (V/H)	Hgt (cm)	Azt (Deg)	Limit (dBuV/m)	Margin (dB)	Pass /Fail
374.99	-52.68	15.49	-5.80	-42.99	RMS Max	H	119.00	233.00	-13.00	-29.99	Pass
250.00	-50.16	14.80	-9.40	-44.77	RMS Max	H	147.00	84.00	-13.00	-31.77	Pass
205.76	-49.75	14.56	-9.89	-45.09	RMS Max	H	107.00	79.00	-13.00	-32.09	Pass
40.95	-56.70	13.19	-10.00	-53.51	RMS Max	V	132.00	318.00	-13.00	-40.51	Pass
500.01	-55.45	16.26	-3.80	-42.99	RMS Max	H	162.00	104.00	-13.00	-29.99	Pass
276.01	-56.24	14.92	-7.70	-49.02	RMS Max	H	104.00	250.00	-13.00	-36.02	Pass

## 10.7 Radiated Spurious Emissions above 1GHz

### Requirement(s):

Spec	Item	Requirement	Applicable
47CFR22.917 RSS-133 (6.5), RSS-139 (6.5)	-	Out of band emissions. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.	<input type="checkbox"/>
47CFR24.238 RSS-133 (6.5), RSS-139 (6.5)	-	Out of band emissions. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.	<input checked="" type="checkbox"/>
47CFR27.53 RSS-133 (6.5), RSS-139 (6.5)	-	Out of band emissions. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.	<input checked="" type="checkbox"/>

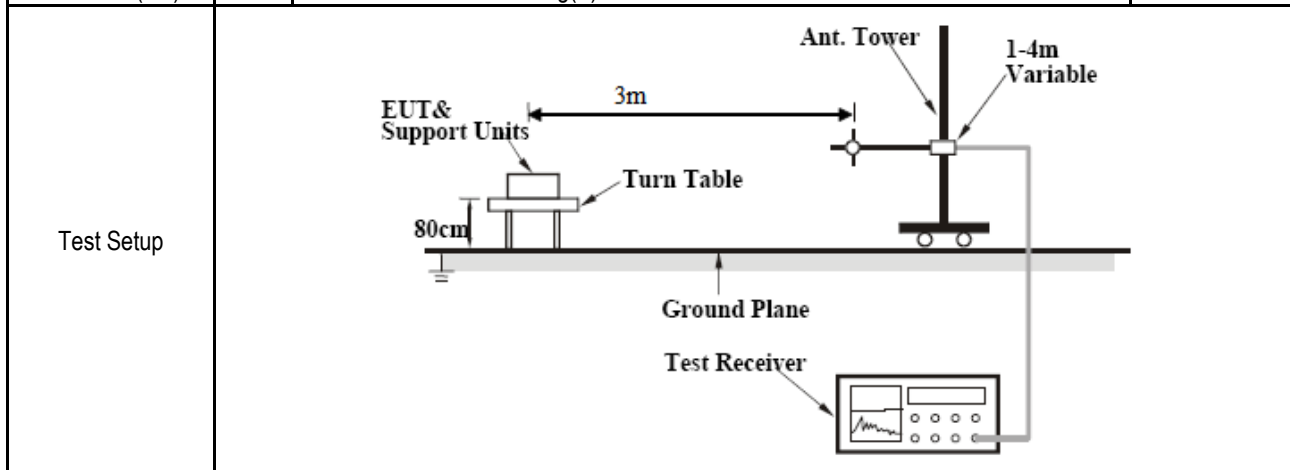

Procedure	<ol style="list-style-type: none"> <li>The EUT was switched on and allowed to warm up to its normal operating condition.</li> <li>The test was carried out at the selected frequency points obtained from the EUT characterisation. Maximization of the emissions, was carried out by rotating the EUT, changing the antenna polarization, and adjusting the antenna height in the following manner: <ol style="list-style-type: none"> <li>Vertical or horizontal polarisation (whichever gave the higher emission level over a full rotation of the EUT) was chosen.</li> <li>The EUT was then rotated to the direction that gave the maximum emission.</li> <li>Finally, the antenna height was adjusted to the height that gave the maximum emission.</li> </ol> </li> <li>A peak measurement was then made for that frequency point.</li> <li>Steps 2 and 3 were repeated for the next frequency point, until all selected frequency points were measured.</li> </ol>
-----------	--

Test Date	02/13/2014 – 11/05/2014	Environmental condition	Temperature 23°C Relative Humidity 48% Atmospheric Pressure 1008mbar
-----------	-------------------------	-------------------------	--

Remark	All different modulation and bandwidth configuration has been verified and only the test data of worst case with QPSK modulation and greatest bandwidth was presented in this report.
--------	---

Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail
--------	--

Test Data     Yes (See below)       N/A

Test Plot     Yes (See below)       N/A

## Radiated Emission Test Results (Above 1GHz)

LTE band 7 Low Channel, 15MHz BW, QPSK

Frequency (MHz)	Raw (dBuV)	Cable Loss (dB)	AF (dB)	Level (dBuV/m)	Measurement Type	Pol (V/H)	Hgt (cm)	Azt (Deg)	Limit (dBuV/m)	Margin (dB)	Pass /Fail
8778.89	-77.47	15.84	5.56	-56.07	RMS Max	H	187.00	212.00	-13.00	-43.07	Pass
4154.43	-77.22	14.72	-0.22	-62.72	RMS Max	H	110.00	284.00	-13.00	-49.72	Pass
6596.83	-75.50	15.99	2.28	-57.23	RMS Max	V	177.00	103.00	-13.00	-44.23	Pass

LTE band 7 Mid Channel, 15MHz BW, QPSK

Frequency (MHz)	Raw (dBuV)	Cable Loss (dB)	AF (dB)	Level (dBuV/m)	Measurement Type	Pol (V/H)	Hgt (cm)	Azt (Deg)	Limit (dBuV/m)	Margin (dB)	Pass /Fail
8029.73	-76.87	15.77	4.50	-56.60	RMS Max	H	125.00	170.00	-13.00	-43.60	Pass
4066.23	-76.85	14.68	-0.20	-62.36	RMS Max	H	137.00	278.00	-13.00	-49.36	Pass
6270.39	-74.23	15.66	1.89	-56.69	RMS Max	V	101.00	41.00	-13.00	-43.69	Pass

LTE band 7 High Channel, 15MHz BW, QPSK

Frequency (MHz)	Raw (dBuV)	Cable Loss (dB)	AF (dB)	Level (dBuV/m)	Measurement Type	Pol (V/H)	Hgt (cm)	Azt (Deg)	Limit (dBuV/m)	Margin (dB)	Pass /Fail
8782.66	-77.51	15.84	5.56	-56.10	RMS Max	H	133.00	302.00	-13.00	-43.10	Pass
6808.31	-74.45	16.19	2.51	-55.75	RMS Max	V	186.00	350.00	-13.00	-42.75	Pass
4316.98	-77.31	14.78	-0.25	-62.78	RMS Max	V	132.00	323.00	-13.00	-49.78	Pass



WCDMA Low Channel

Frequency MHz	Raw dBm	Cable Loss	AF dB	Level dBm	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBm	Margin dB	Pass /Fail
5967.87	-61.60	15.36	1.50	-44.74	RMS Max	H	114.00	151.00	-13.00	-31.74	Pass
1492.00	-73.99	13.19	-6.29	-67.10	RMS Max	V	123.00	202.00	-13.00	-54.10	Pass
1625.03	-56.94	13.33	-5.80	-49.41	RMS Max	V	138.00	10.00	-13.00	-36.41	Pass

WCDMA Mid Channel

Frequency MHz	Raw dBm	Cable Loss	AF dB	Level dBm	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBm	Margin dB	Pass /Fail
8267.14	-76.95	15.79	4.97	-56.19	RMS Max	V	121.00	177.00	-13.00	-43.19	Pass
7015.03	-76.60	16.36	2.74	-57.50	RMS Max	H	130.00	127.00	-13.00	-44.50	Pass
5844.40	-76.62	15.32	1.35	-59.94	RMS Max	V	193.00	327.00	-13.00	-46.94	Pass
4129.15	-77.09	14.71	-0.21	-62.59	RMS Max	V	128.00	13.00	-13.00	-49.59	Pass

WCDMA High Channel


Frequency MHz	Raw dBm	Cable Loss	AF dB	Level dBm	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBm	Margin dB	Pass /Fail
6054.95	-75.14	15.43	1.61	-58.10	RMS Max	H	105.00	84.00	-13.00	-45.10	Pass
3056.58	-77.19	14.06	-1.93	-65.06	RMS Max	V	127.00	271.00	-13.00	-52.06	Pass
1607.75	-74.27	13.31	-5.86	-66.82	RMS Max	V	108.00	265.00	-13.00	-53.82	Pass

LTE Band 7 and WCDMA Mid Channel transmit simultaneously, QPSK

Frequency (MHz)	Raw (dBuV)	Cable Loss (dB)	AF (dB)	Level (dBuV/m)	Measurement Type	Pol (V/H)	Hgt (cm)	Azt (Deg)	Limit (dBuV/m)	Margin (dB)	Pass /Fail
8160.32	-77.36	15.78	4.76	-56.82	RMS Max	V	169.00	42.00	-13.00	-43.82	Pass
6670.50	-74.18	16.06	2.36	-55.77	RMS Max	H	122.00	214.00	-13.00	-42.77	Pass
4135.41	-76.81	14.71	-0.21	-62.31	RMS Max	V	127.00	162.00	-13.00	-49.31	Pass

## 10.8 Frequency Stability

### Requirement(s):

Spec	Item	Requirement	Applicable																																
47 CFR 2.1055, 47 CFR 22.355, RSS-133(6.3), RSS-139(6.3)	-	<p>Except as otherwise provided in this part, the carrier frequency of each transmitter in the Public Mobile Services must be maintained within the tolerances given in Table at below,</p> <table border="1"> <thead> <tr> <th>Frequency range (MHz)</th> <th>Base, fixed (ppm)</th> <th>Mobile ≤3 watts (ppm)</th> <th>Mobile ≤3 watts (ppm)</th> </tr> </thead> <tbody> <tr> <td>25 to 50</td> <td>20</td> <td>20</td> <td>50</td> </tr> <tr> <td>50 to 450</td> <td>5</td> <td>5</td> <td>50</td> </tr> <tr> <td>450 to 512</td> <td>2.5</td> <td>5</td> <td>5</td> </tr> <tr> <td>821 to 896</td> <td>1.5</td> <td>2.5</td> <td>2.5</td> </tr> <tr> <td>928 to 929</td> <td>5</td> <td>n/a</td> <td>n/a</td> </tr> <tr> <td>929 to 960</td> <td>1.5</td> <td>n/a</td> <td>n/a</td> </tr> <tr> <td>2110 to 2220</td> <td>10</td> <td>n/a</td> <td>n/a</td> </tr> </tbody> </table>	Frequency range (MHz)	Base, fixed (ppm)	Mobile ≤3 watts (ppm)	Mobile ≤3 watts (ppm)	25 to 50	20	20	50	50 to 450	5	5	50	450 to 512	2.5	5	5	821 to 896	1.5	2.5	2.5	928 to 929	5	n/a	n/a	929 to 960	1.5	n/a	n/a	2110 to 2220	10	n/a	n/a	<input type="checkbox"/>
Frequency range (MHz)	Base, fixed (ppm)	Mobile ≤3 watts (ppm)	Mobile ≤3 watts (ppm)																																
25 to 50	20	20	50																																
50 to 450	5	5	50																																
450 to 512	2.5	5	5																																
821 to 896	1.5	2.5	2.5																																
928 to 929	5	n/a	n/a																																
929 to 960	1.5	n/a	n/a																																
2110 to 2220	10	n/a	n/a																																
47 CFR 2.1055, 47 CFR 24.135(a), RSS-133(6.3), RSS-139(6.3)	-	The frequency stability of the transmitter shall be maintained within ±0.0001 percent (±1 ppm) of the center frequency over a temperature variation of -30 °Celsius to +50 °Celsius at normal supply voltage, and over a variation in the primary supply voltage of 85 percent to 115 percent of the rated supply voltage at a temperature of 20 °Celsius.	<input checked="" type="checkbox"/>																																
47 CFR 2.1055, 47 CFR 27.54 RSS-133(6.3), RSS-139(6.3)	-	The frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized bands of operation.	<input checked="" type="checkbox"/>																																
Test Setup																																			
Test Procedure	<p>The carrier frequency of the transmitter is measured at room temperature (20°C to provide a reference).</p> <ol style="list-style-type: none"> <li>The equipment is turned on in a "standby" condition for one minute before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.</li> <li>Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C. A period of at least one half hour is provided to allow stabilization of the equipment at each temperature level.</li> </ol>																																		
Test Date	03/10/2014 - 11/05/2014	Environmental condition	Temperature 23°C Relative Humidity 48% Atmospheric Pressure 1008mbar																																
Remark	NONE																																		
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail																																		

Test Data     Yes                       N/A

Test Plot     Yes (See below)             N/A

Test Data for LTE

Voltage (%)	Power (VDC)	Temp. (°)	Frequency (KHz)	Frequency Error (Hz)	Deviation (ppm)
100%	56	20 (ref)	2655000.008	0	0.000
100%		-30	2655000.002	-6	-0.002
100%		-20	2655000.006	-2	-0.001
100%		-10	2655000.005	-3	-0.001
100%		0	2655000.009	1	-0.001
100%		10	2655000.013	5	0.002
100%		30	2655000.01	2	0.001
100%		40	2655000.015	7	0.003
100%		50	2655000.022	14	0.005
115%		64.4	20	2655000.024	16
85%	47.6	20	2655000.026	18	0.007

Test Data for WCDMA

Voltage (%)	Power (VDC)	Temp. (°)	Frequency (KHz)	Frequency Error (Hz)	Deviation (ppm)
100%	56	20 (ref)	1960000.032	0	0.000
100%		-30	1960000.012	-20	-0.010
100%		-20	1960000.016	-16	-0.008
100%		-10	1960000.019	-13	-0.007
100%		0	1960000.021	-11	-0.006
100%		10	1960000.011	-21	-0.011
100%		30	1960000.022	-10	-0.005
100%		40	1960000.017	-15	-0.008
100%		50	1960000.019	-13	-0.007
115%		64.4	20	1960000.028	-4
85%	47.6	20	1960000.028	-4	-0.002

### 10.9 Receiver Spurious Emissions

**Requirement(s):**

Spec	Item	Requirement	Applicable
RSS-Gen 7.1	-	Receivers shall comply with the limits of spurious emissions set out in this section, measured over the frequency range determined in accordance with Section 4.10.	<input checked="" type="checkbox"/>
Test Setup			
Procedure	<ol style="list-style-type: none"> <li>1.</li> <li>2.</li> <li>3.</li> <li>4.</li> </ol>	<p>The EUT was switched on and allowed to warm up to its normal operating condition.</p> <p>The test was carried out at the selected frequency points obtained from the EUT characterisation. Maximization of the emissions, was carried out by rotating the EUT, changing the antenna polarization, and adjusting the antenna height in the following manner:</p> <ol style="list-style-type: none"> <li>a. Vertical or horizontal polarisation (whichever gave the higher emission level over a full rotation of the EUT) was chosen.</li> <li>b. The EUT was then rotated to the direction that gave the maximum emission.</li> <li>c. Finally, the antenna height was adjusted to the height that gave the maximum emission.</li> </ol> <p>A peak measurement was then made for that frequency point.</p> <p>Steps 2 and 3 were repeated for the next frequency point, until all selected frequency points were measured.</p>	
Remark	No outstanding emission except the noise floor was found.		
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail		

















**Test Data**     Yes (See below)       N/A




**Test Plot**     Yes (See below)       N/A

## Annex A. TEST INSTRUMENT

Instrument	Model	Serial #	Cal Date	Cal Cycle	Cal Due	In use
<b>Conducted Emissions</b>						
R & S Receiver	ESIB 40	100179	04/20/2014	1 Year	04/20/2015	<input type="checkbox"/>
R&S LISN	ESH2-Z5	861741/013	05/18/2014	1 Year	05/18/2015	<input type="checkbox"/>
CHASE LISN	MN2050B	1018	07/24/2014	1 Year	07/24/2015	<input type="checkbox"/>
Sekonic Hygro Hermograph	ST-50	HE01-000092	05/25/2014	1 Year	05/25/2015	<input type="checkbox"/>
<b>Radiated Emissions</b>						
R & S Receiver	ESL6	100178	03/01/2014	1 Year	03/01/2015	<input checked="" type="checkbox"/>
R & S Receiver	ESIB 40	100179	04/20/2014	1 Year	04/20/2015	<input checked="" type="checkbox"/>
ETS-Lingren Loop Antenna	6512	00049120	05/13/2014	1 Year	05/13/2015	<input type="checkbox"/>
Bi-Log antenna (30MHz~2GHz)	JB1	A030702	07/03/2014	1 Year	07/03/2015	<input checked="" type="checkbox"/>
Horn Antenna (1-26.5GHz)	3115	10SL0059	04/26/2014	1 Year	04/26/2015	<input checked="" type="checkbox"/>
Horn Antenna (18-40 GHz)	AH-840	101013	04/23/2014	1 Year	04/23/2015	<input type="checkbox"/>
Pre-Amplifier (1-26.5GHz)	8449B	3008A00715	05/30/2014	1 Year	05/30/2015	<input checked="" type="checkbox"/>
Microwave Preamplifier (18-40 GHz)	PA-840	181251	05/30/2014	1 Year	05/30/2015	<input type="checkbox"/>
3 Meters SAC	3M	N/A	10/13/2014	1 Year	10/13/2015	<input checked="" type="checkbox"/>
10 Meters SAC	10M	N/A	06/05/2014	1 Year	06/05/2015	<input checked="" type="checkbox"/>
Sekonic Hygro Hermograph	ST-50	HE01-000092	05/25/2014	1 Year	05/25/2015	<input checked="" type="checkbox"/>
<b>RF Conducted Measurement</b>						
Spectrum Analyzer	N9010A	MY50210206	05/30/2014	1 Year	05/30/2015	<input checked="" type="checkbox"/>
Spectrum Analyzer	E4407B	US88441016	05/31/2014	1 Year	05/31/2015	<input checked="" type="checkbox"/>
R & S Receiver	ESIB 40	100179	04/20/2014	1 Year	04/20/2015	<input checked="" type="checkbox"/>

## Annex B. SIEMIC Accreditation

Accreditations	Document	Scope / Remark
ISO 17025 (A2LA)		Please see the documents for the detailed scope
ISO Guide 65 (A2LA)		Please see the documents for the detailed scope
TCB Designation		A1, A2, A3, A4, B1, B2, B3, B4, C
FCC DoC Accreditation		FCC Declaration of Conformity Accreditation
FCC Site Registration		3 meter site
FCC Site Registration		10 meter site
IC Site Registration		3 meter site
IC Site Registration		10 meter site
EU NB		<b>Radio &amp; Telecommunications Terminal Equipment:</b> EN45001 – EN ISO/IEC 17025
		<b>Electromagnetic Compatibility:</b> EN45001 – EN ISO/IEC 17025
Singapore iDA CB(Certification Body)	 	Phase I, Phase II
Vietnam MIC CAB Accreditation		Please see the document for the detailed scope
HongKong OFCA		<b>(Phase II)</b> OFCA Foreign Certification Body for Radio and Telecom
		<b>(Phase I)</b> Conformity Assessment Body for Radio and Telecom
Industry Canada CAB		<b>Radio:</b> Scope A – All Radio Standard Specification in Category I
		<b>Telecom:</b> CS-03 Part I, II, V, VI, VII, VIII

Japan Recognized Certification Body Designation		<p><b>Radio</b> : A1. Terminal equipment for purpose of calling</p> <p><b>Telecom</b> : B1. Specified radio equipment specified in Article 38-2, Paragraph 1, Item 1 of the Radio Law</p>
Korea CAB Accreditation		<p><b>EMI</b>: KCC Notice 2008-39, RRL Notice 2008-3: CA Procedures for EMI          KN22: Test Method for EMI  <b>EMS</b>: KCC Notice 2008-38, RRL Notice 2008-4: CA Procedures for EMS          KN24, KN61000-4-2, -4-3, -4-4, -4-5, -4-6, -4-8, -4-11: Test Method for EMS</p>
		<p><b>Radio</b>: RRL Notice 2008-26, RRL Notice 2008-2, RRL Notice 2008-10, RRL Notice 2007-49, RRL Notice 2007-20, RRL Notice 2007-21, RRL Notice 2007-80, RRL Notice 2004-68</p>
		<p><b>Telecom</b>: President Notice 20664, RRL Notice 2007-30, RRL Notice 2008-7 with attachments 1, 3, 5, 6; President Notice 20664, RRL Notice 2008-7 with attachment 4</p>
Taiwan NCC CAB Recognition		LP0002, PSTN01, ADSL01, ID0002, IS6100, CNS14336, PLMN07, PLMN01, PLMN08
Taiwan BSMI CAB Recognition		CNS 13438
Japan VCCI		R-3083: Radiation 3 meter site
		C-3421: Main Ports Conducted Interference Measurement
		T-1597: Telecommunication Ports Conducted Interference Measurement
Australia CAB Recognition		<p><b>EMC</b>: AS/NZS CISPR 11, AS/NZS CISPR 14.1, AS/NZS CISPR22, AS/NZS 61000.6.3, AS/NZS 61000.6.4</p>
		<p><b>Radiocommunications</b>: AS/NZS 4281, AS/NZS 4268, AS/NZS 4280.1, AS/NZS 4280.2, AS/NZS 4295, AS/NZS 4582, AS/NZS 4583, AS/NZS 4769.1, AS/NZS 4769.2, AS/NZS 4770, AS/NZS 4771</p>
		<p><b>Telecommunications</b>: AS/ACIF S002:05, AS/ACIF S003:06, AS/ACIF S004:06 AS/ACIF S006:01, AS/ACIF S016:01, AS/ACIF S031:01, AS/ACIF S038:01, AS/ACIF S040:01, AS/ACIF S041:05, AS/ACIF S043.2:06, AS/ACIF S60950.1</p>
Australia NATA Recognition		AS/ACIF S002, AS/ACIF S003, AS/ACIF S004, AS/ACIF S006, AS/ACIF S016, AS/ACIF S031, AS/ACIF S038, AS/ACIF S040, AS/ACIF S041, AS/ACIF S043.2