




BW 5M 64QAM Low

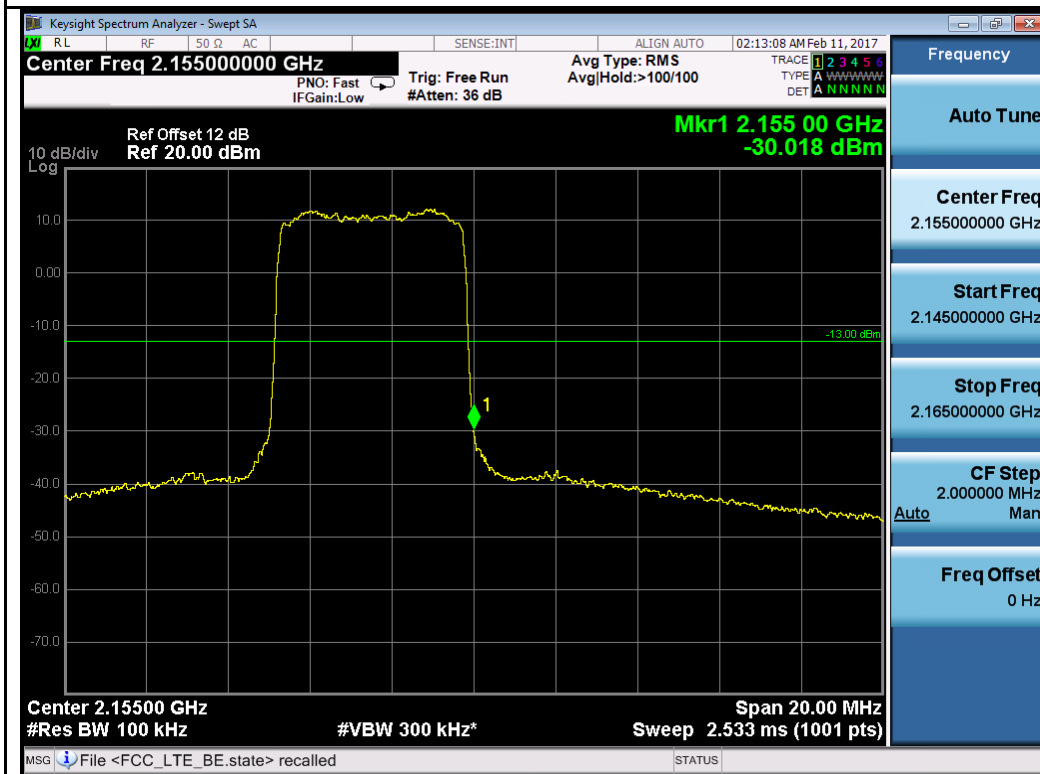


BW 5M 64QAM High

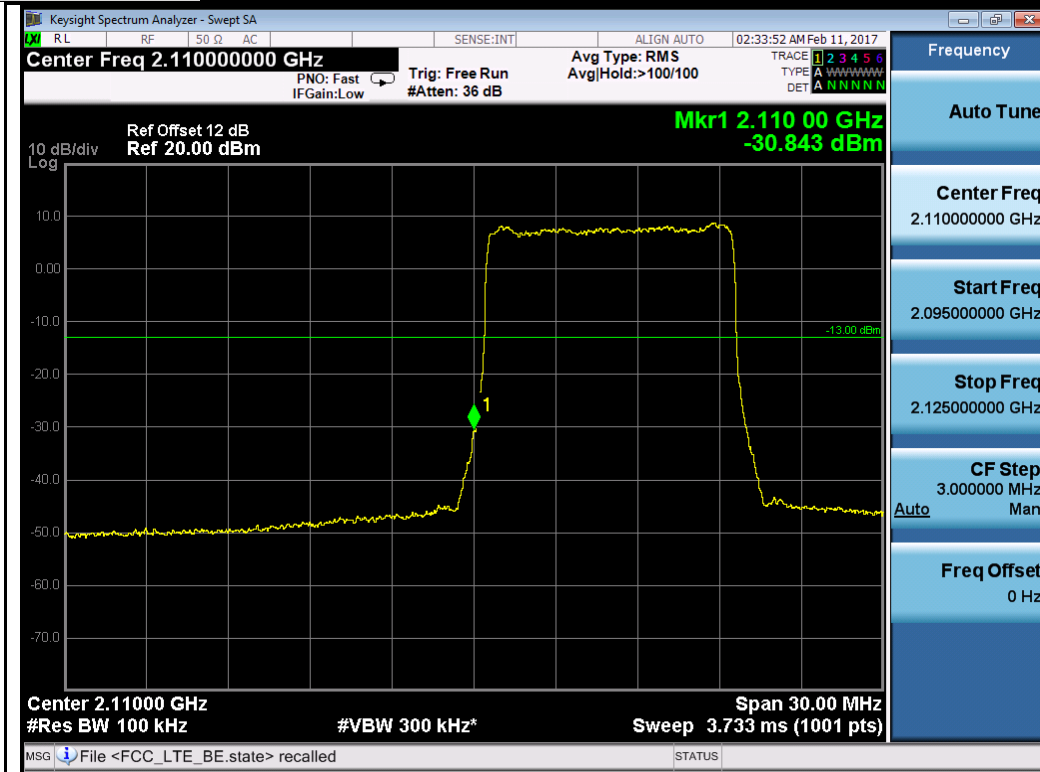


BW 10M 64QAM Low

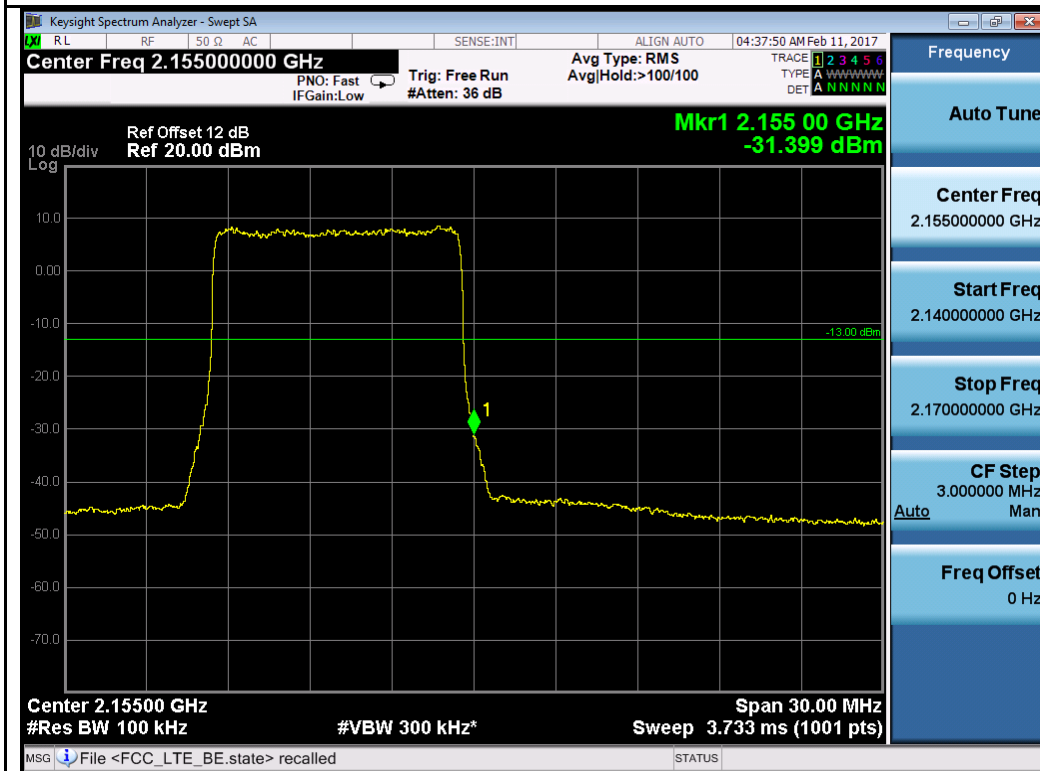


BW 10M 64QAM High

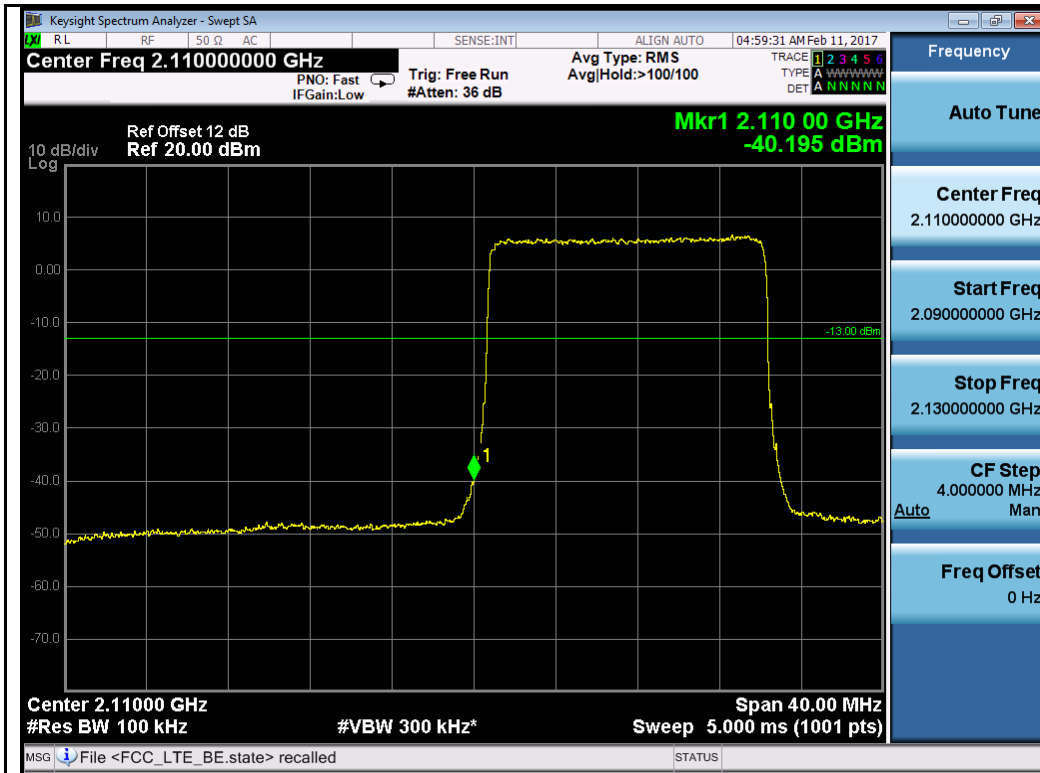


**BW 15M 64QAM Low**

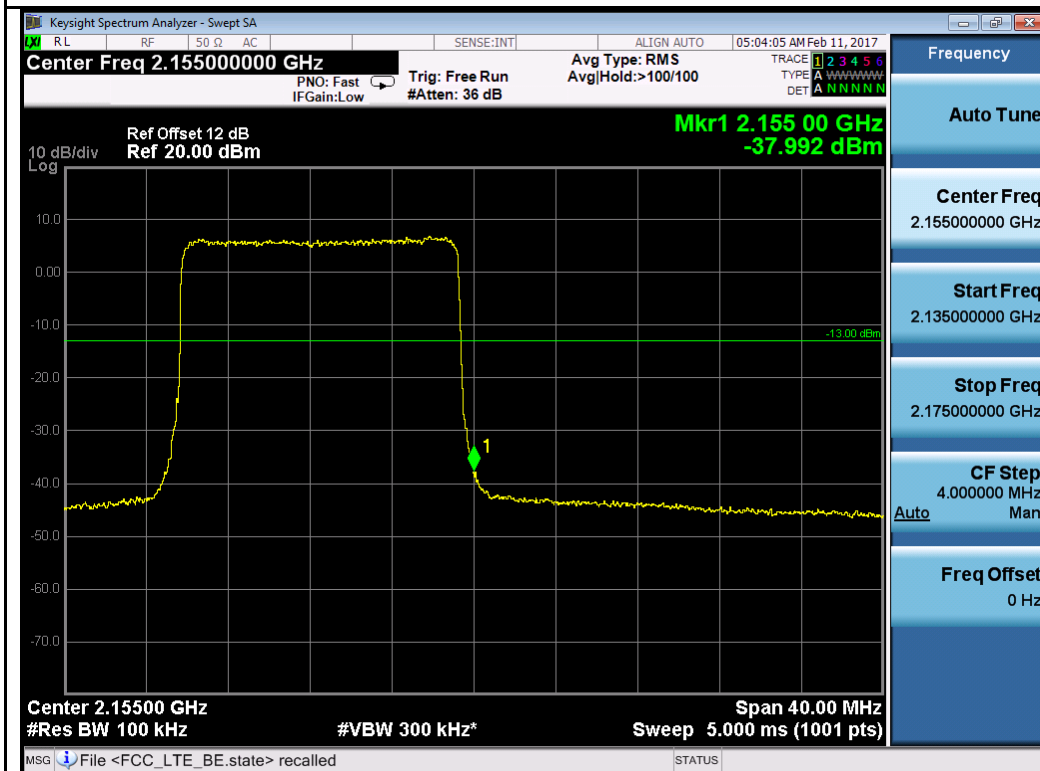

**BW 15M 64QAM High**

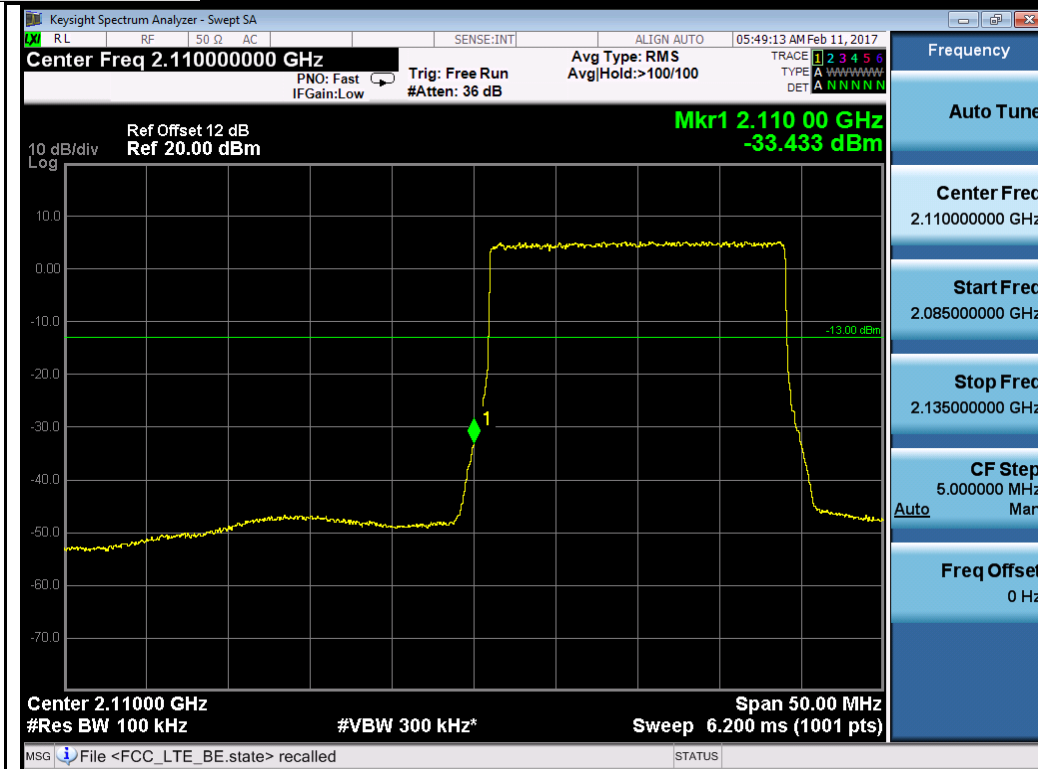


BW 20M 64QAM Low

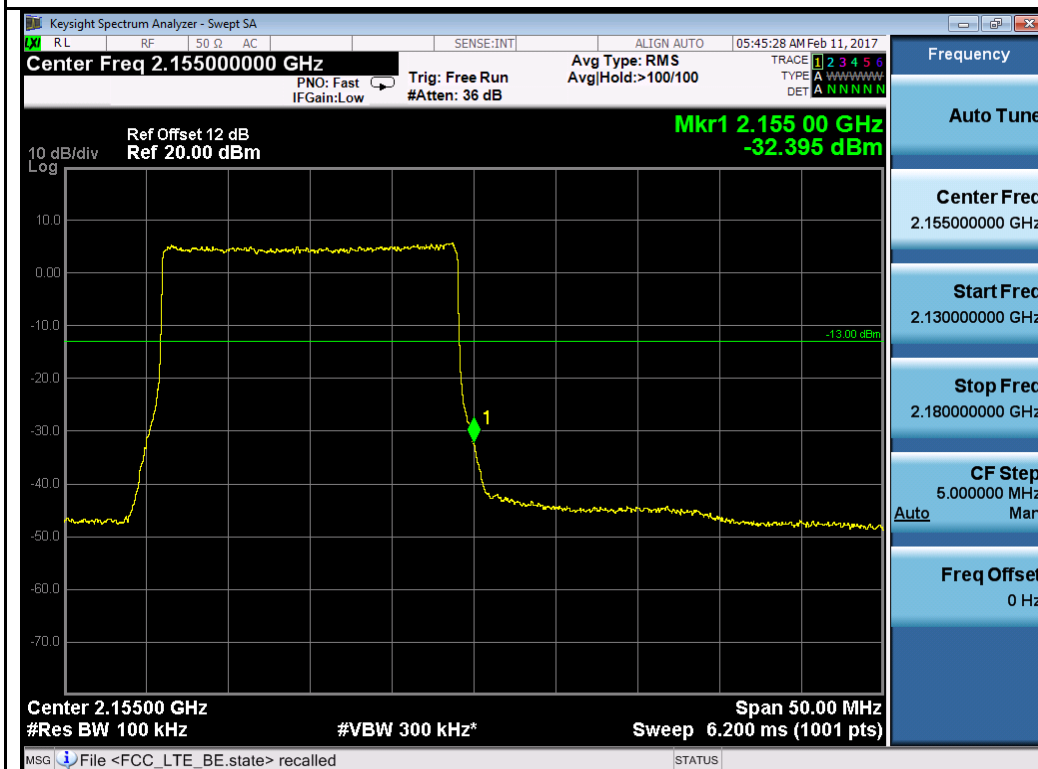


BW 20M 64QAM High


**Chain 2:**

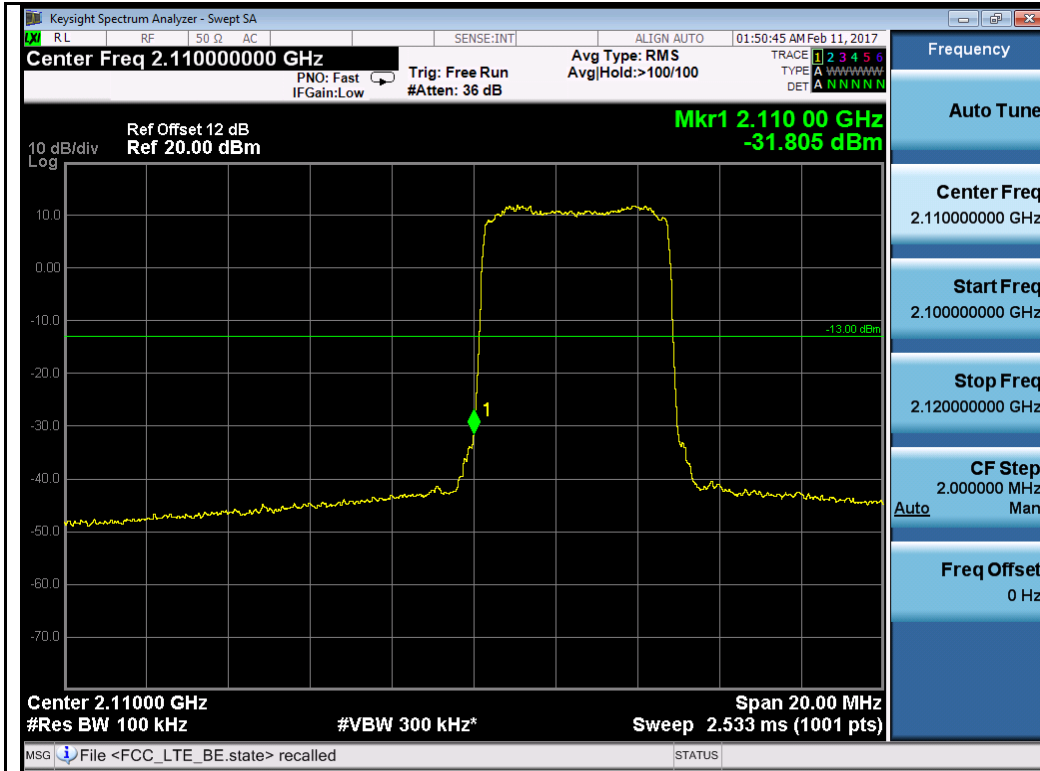


**BW 5M QPSK Low**

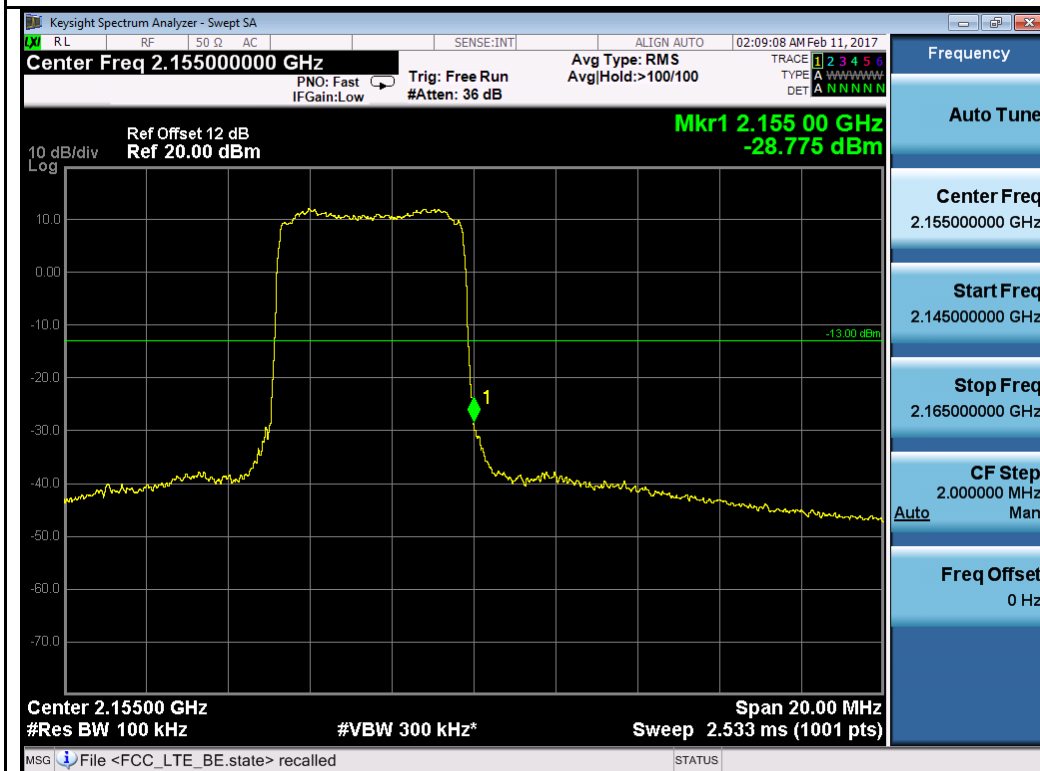


**BW 5M QPSK High**

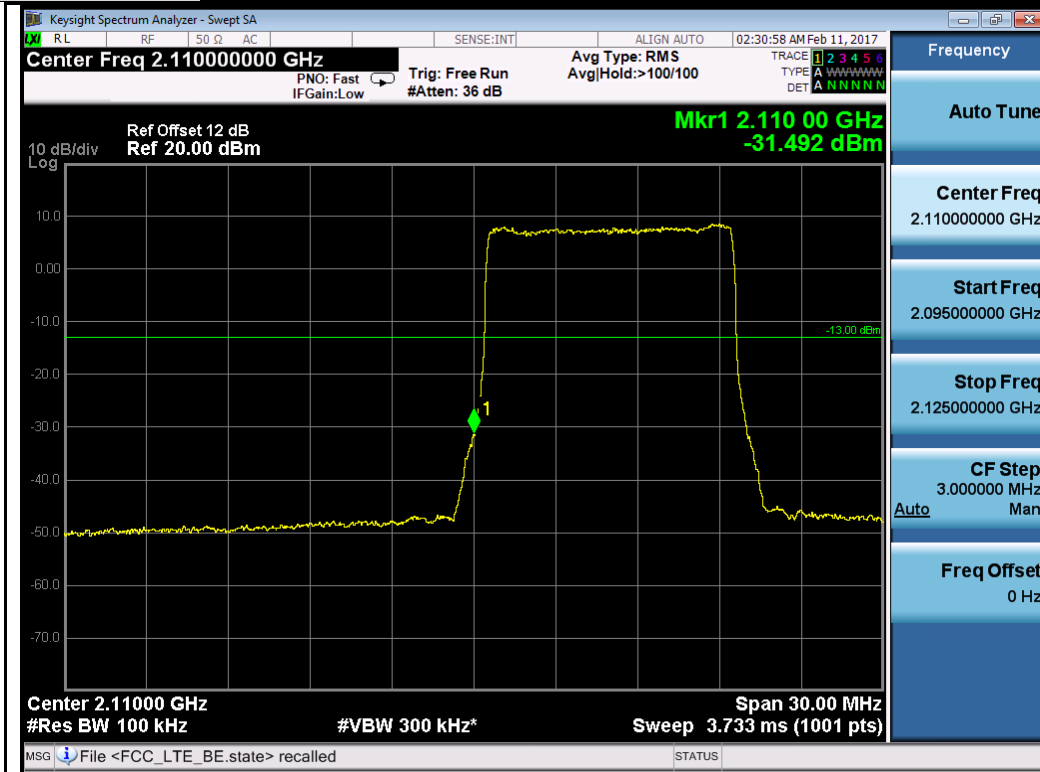


BW 10M QPSK Low

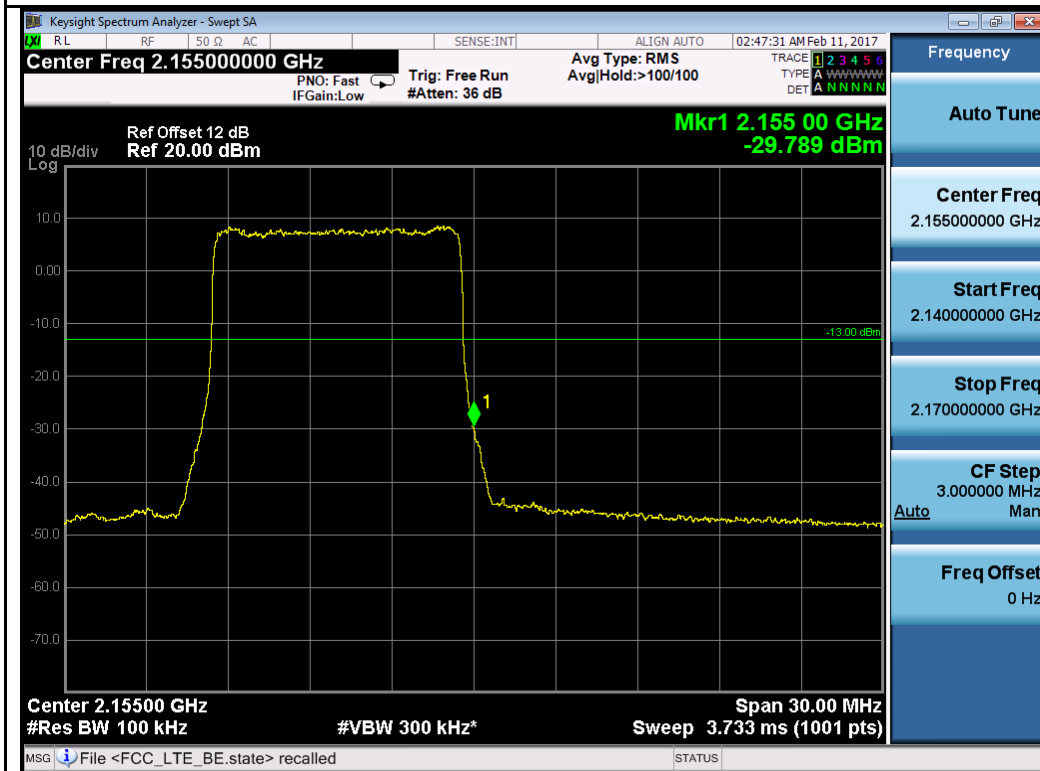


BW 10M QPSK High

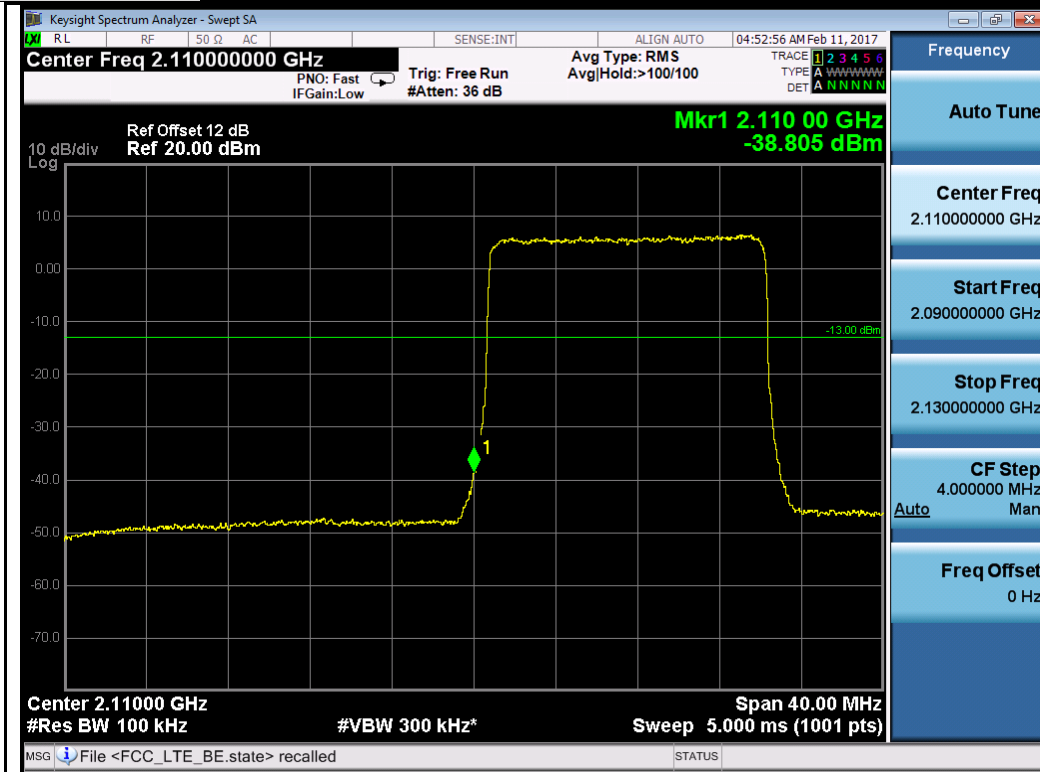


BW 15M QPSK Low

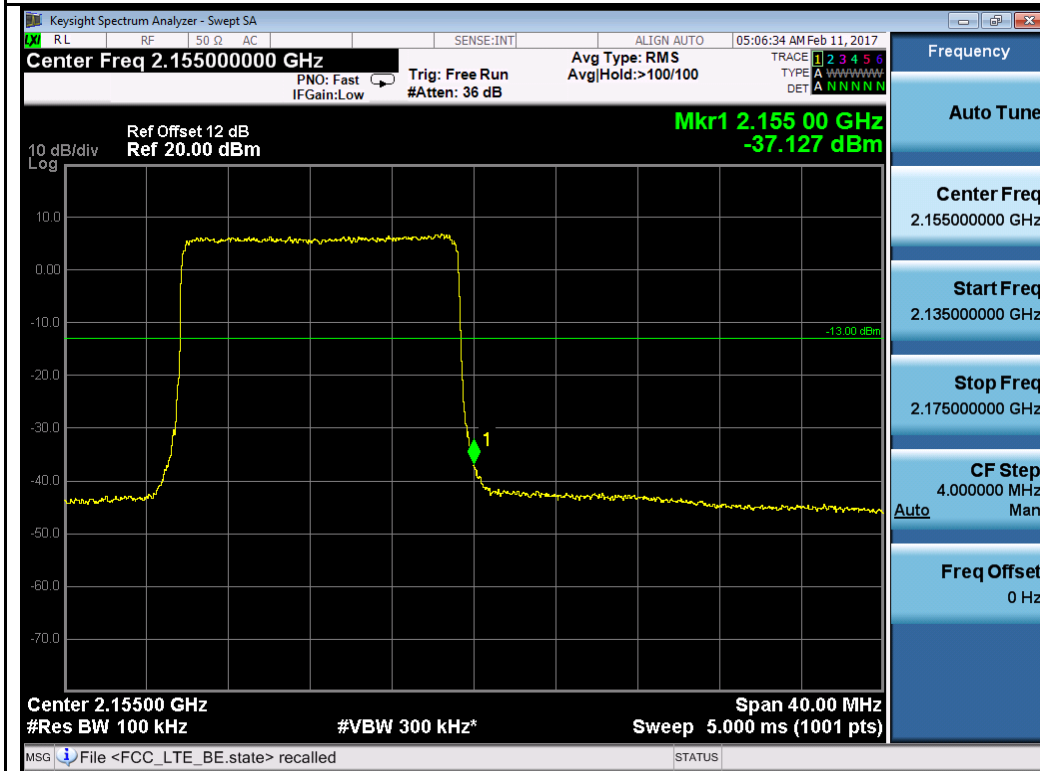

BW 15M QPSK High

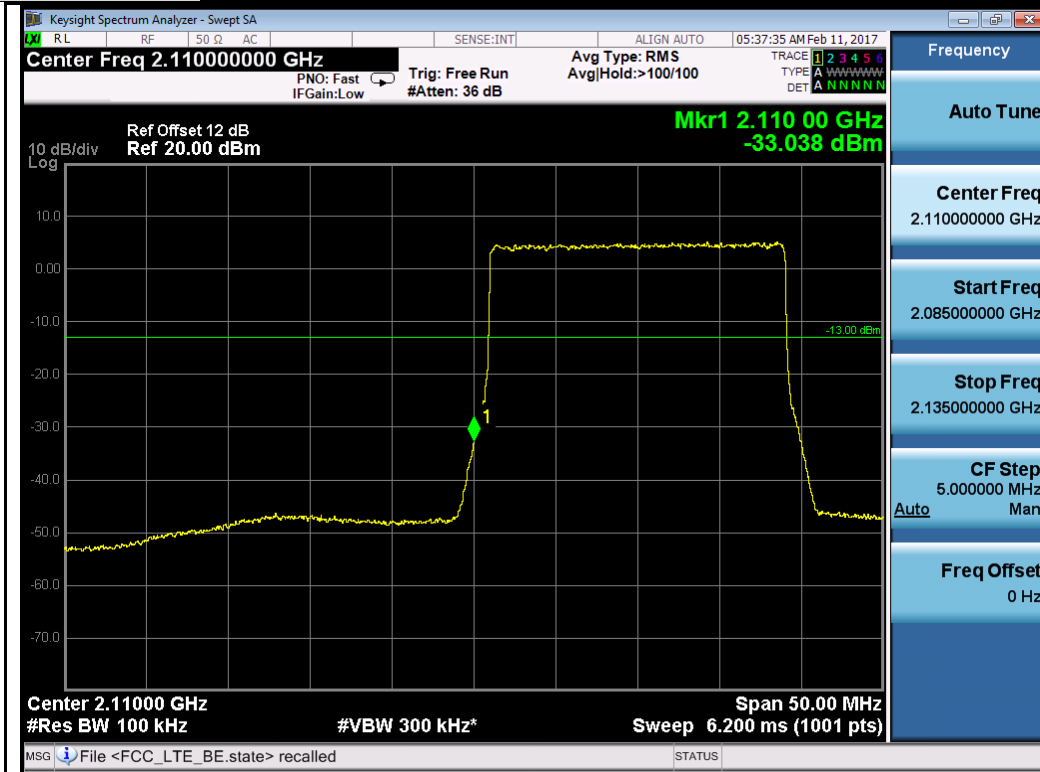


BW 20M QPSK Low

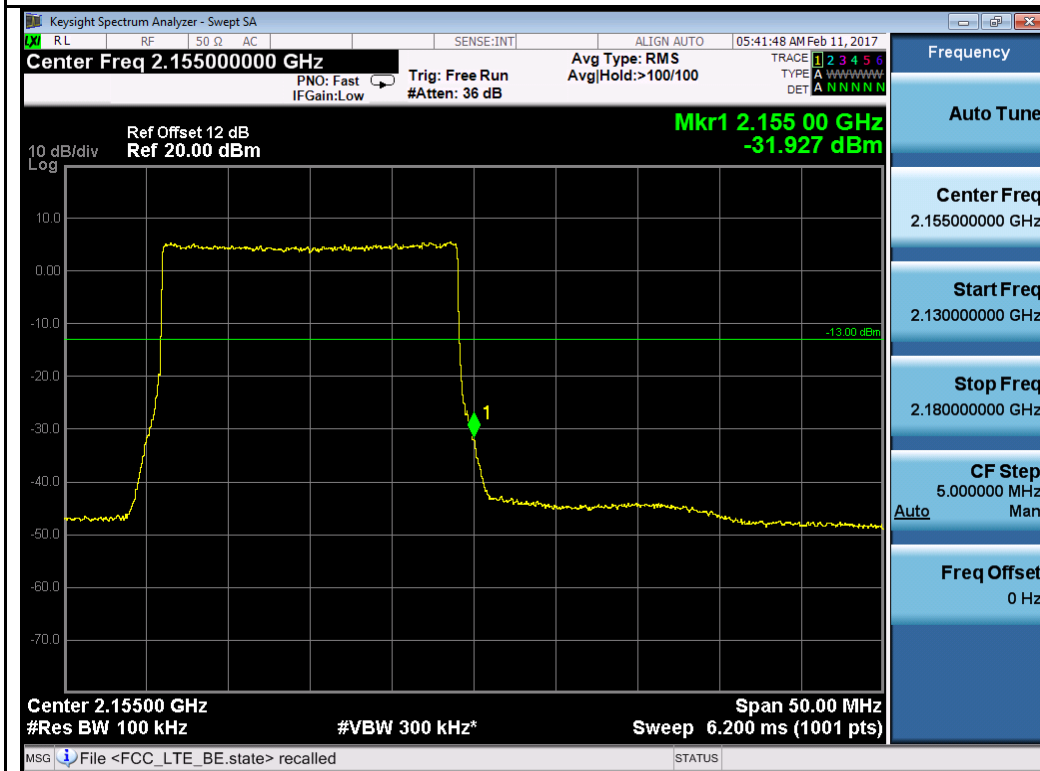


BW 20M QPSK High




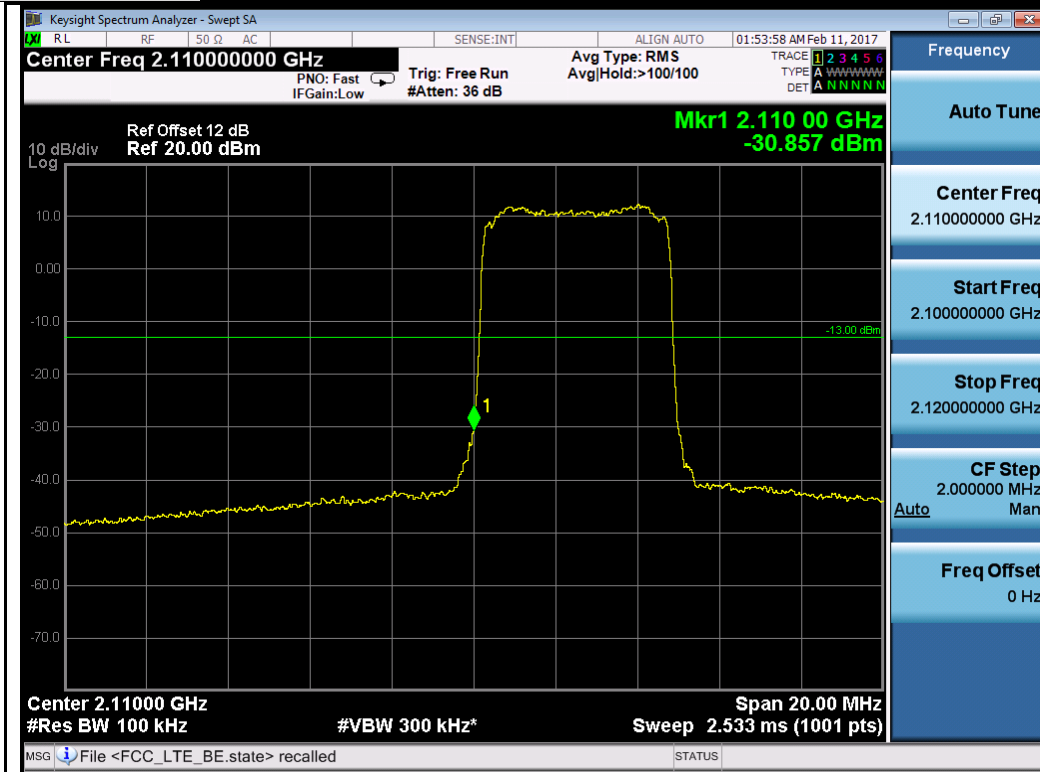


BW 5M 64QAM Low

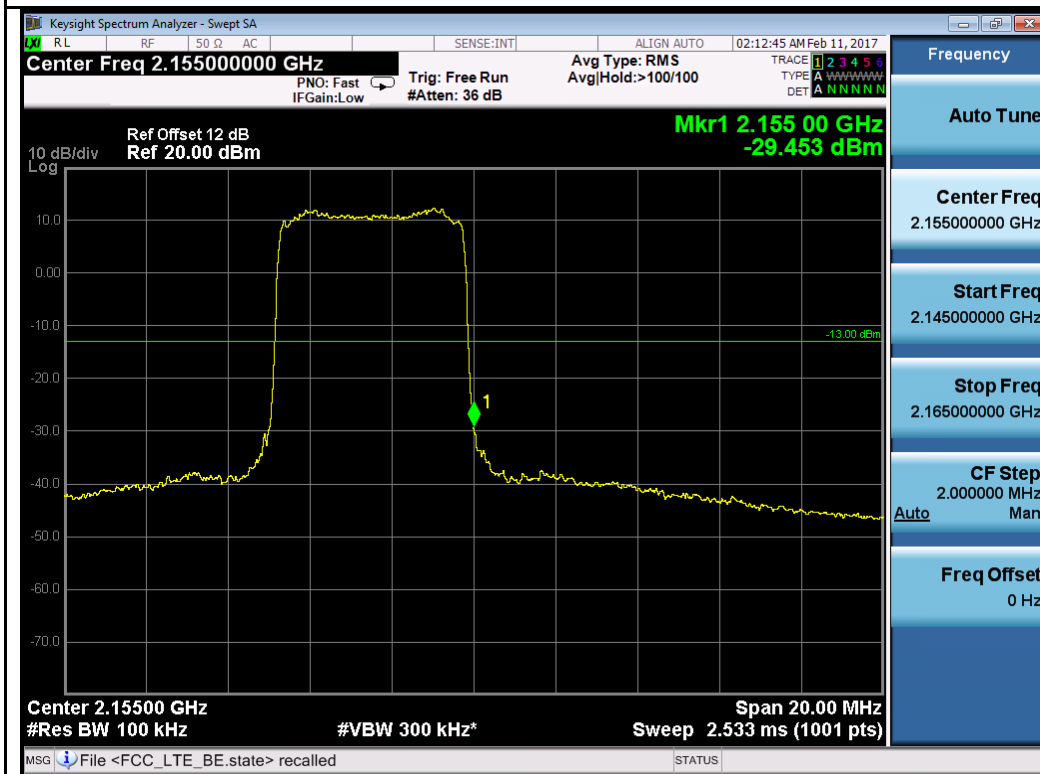


BW 5M 64QAM High

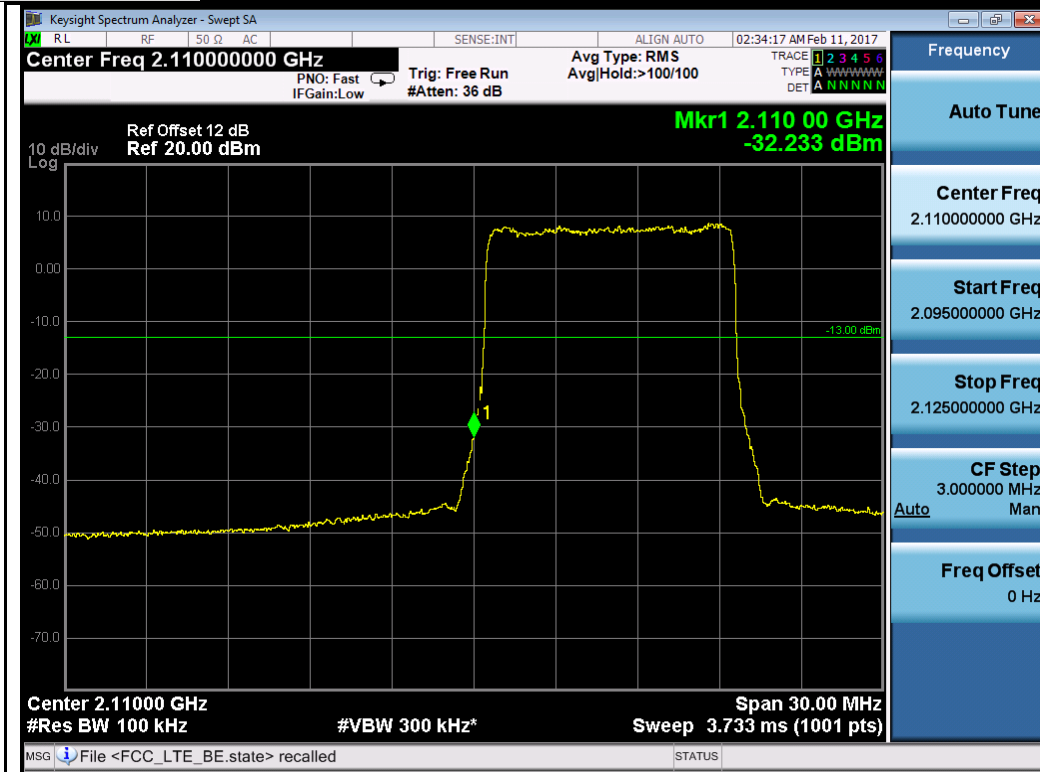


BW 10M 64QAM Low

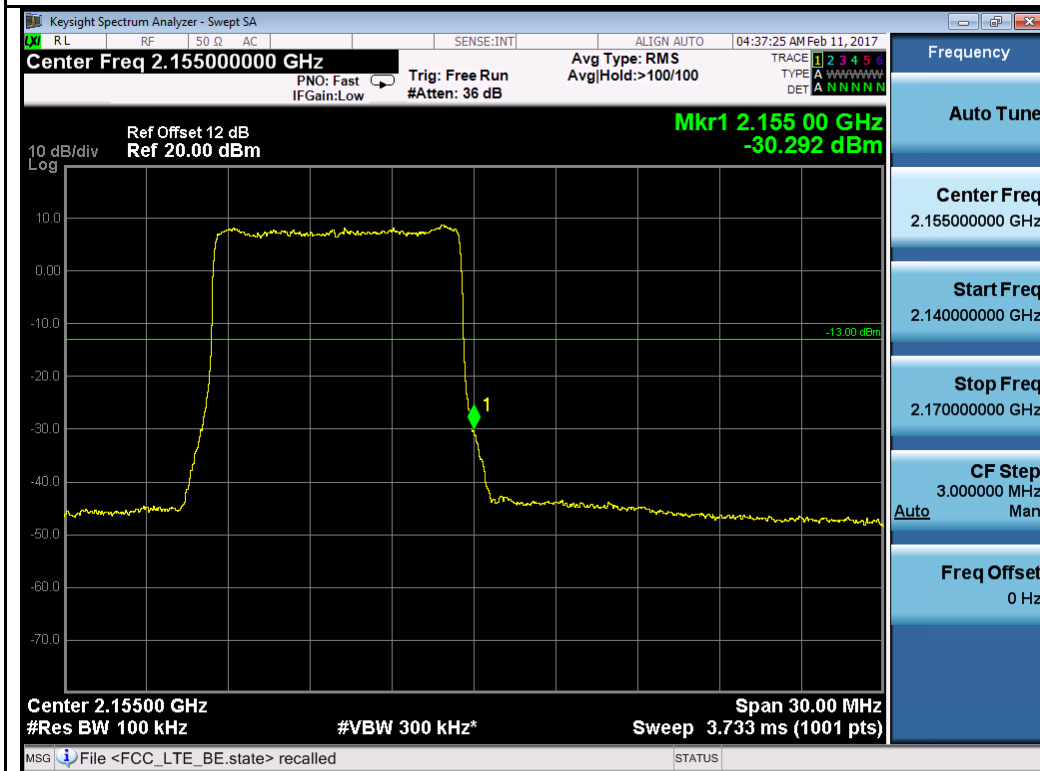


BW 10M 64QAM High

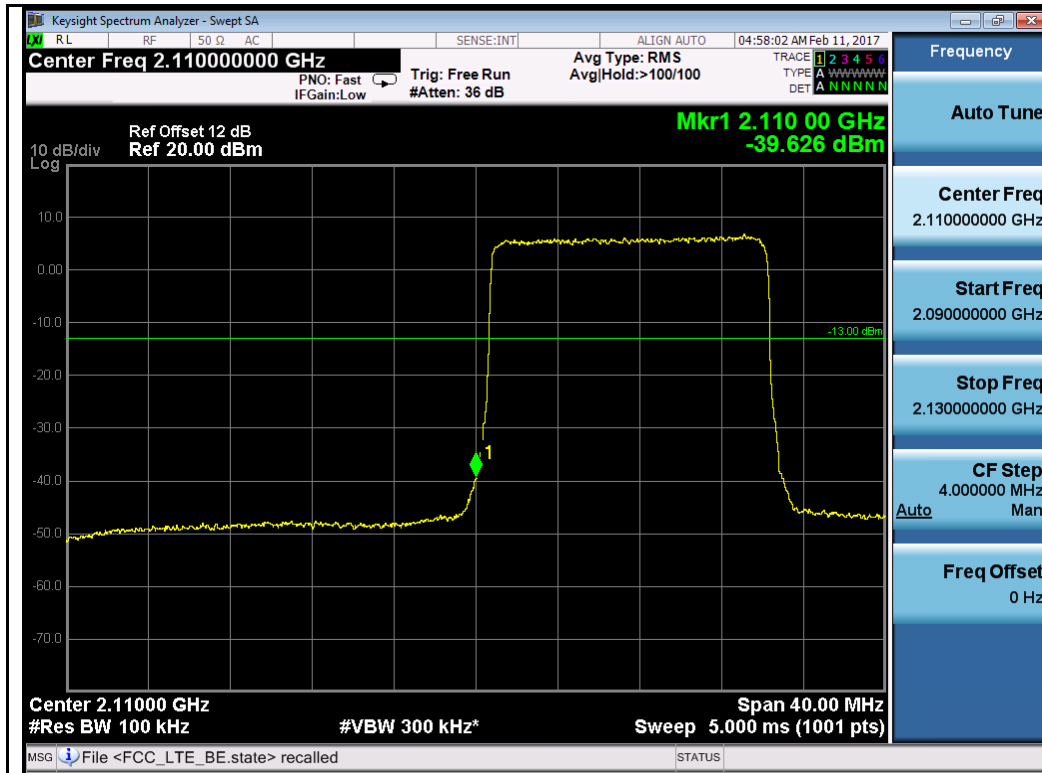


**BW 15M 64QAM Low**

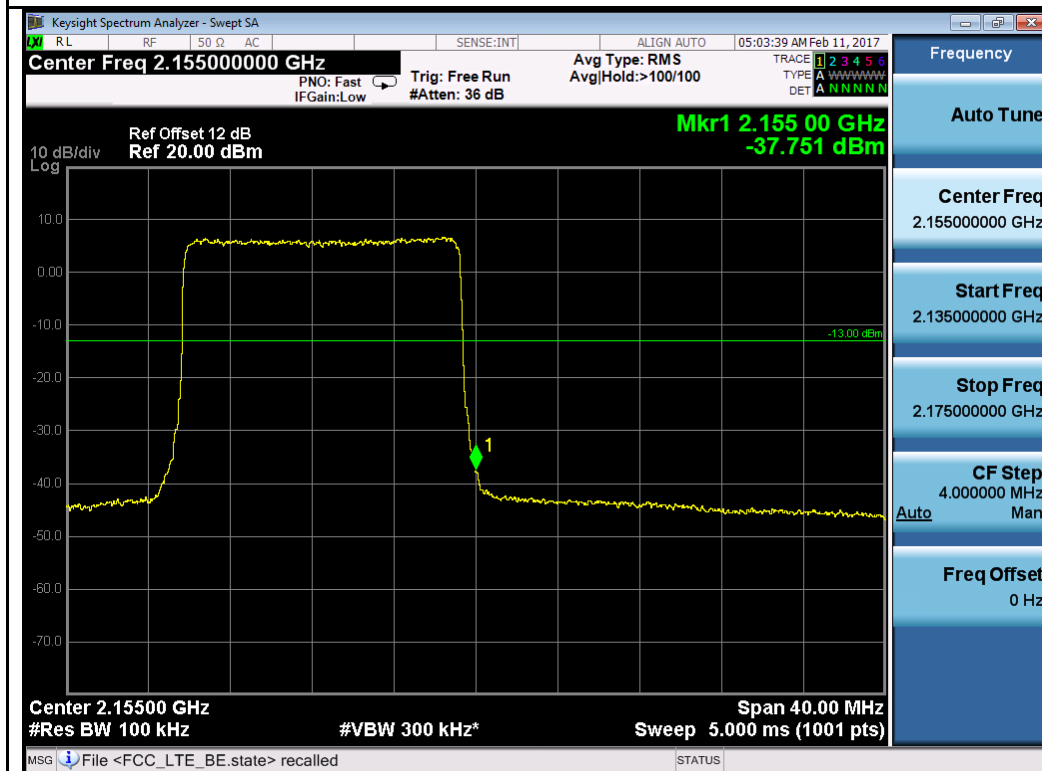

**BW 15M 64QAM High**

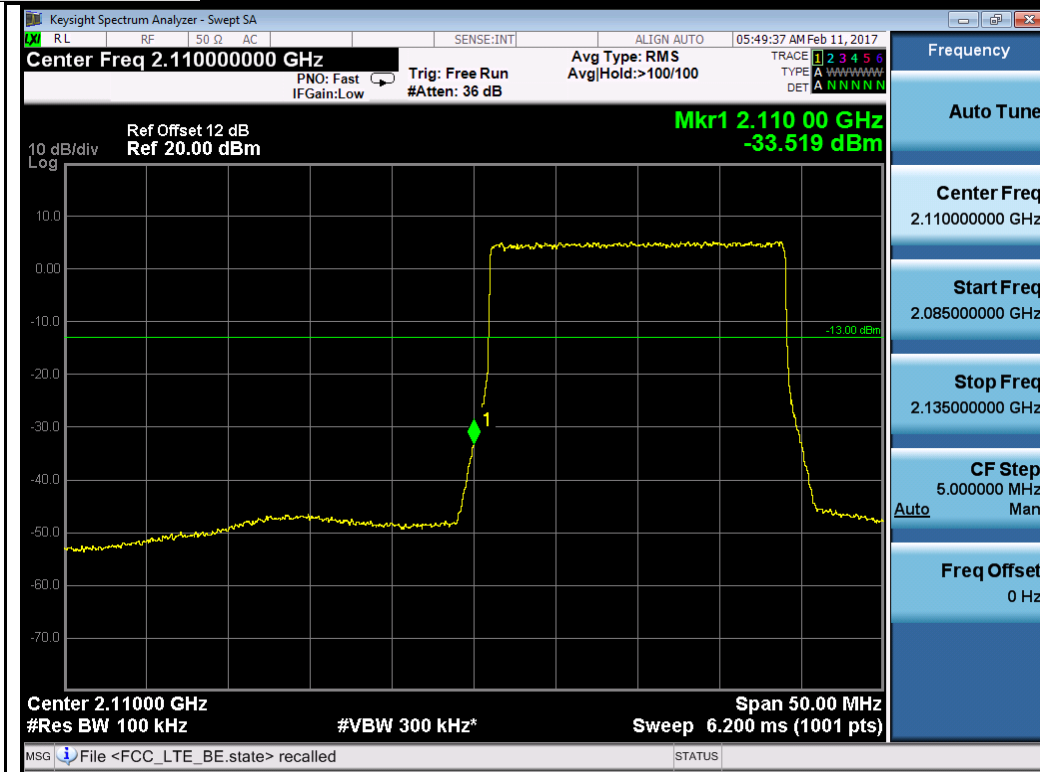

BW 20M 64QAM Low

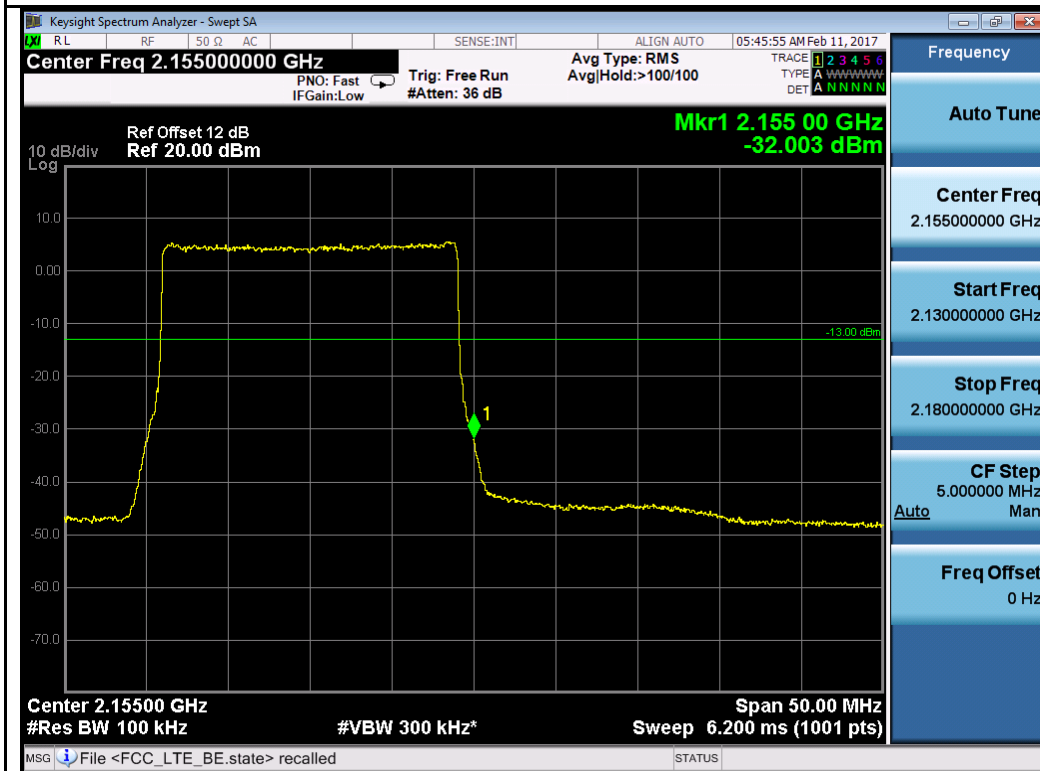

BW 20M 64QAM High

### 10.5 Radiated Spurious Emission below 1GHz

**Requirement(s):**

Spec	Item	Requirement	Applicable
47CFR27.53	-	Out of band emissions. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.	<input checked="" type="checkbox"/>
Test Setup	<p>The diagram shows a semi-anechoic chamber with radio absorbing material on the walls and a ground plane at the bottom. Inside, an EUT (Equipment Under Test) is placed on a table that is 0.8m high. To the right of the EUT, an antenna is positioned 3m away from the EUT and 1.4m high. The antenna is connected to a spectrum analyzer. The chamber is labeled 'Semi Anechoic Chamber' and 'Radio Absorbing Material'.</p>		
Test Procedure	<p><u>Substitution method:</u></p> <ol style="list-style-type: none"> <li>The EUT was switched on and allowed to warm up to its normal operating condition.</li> <li>The test was carried out at the selected frequency points obtained from the EUT characterisation. Maximization of the emissions, was carried out by rotating the EUT, changing the antenna polarization, and adjusting the antenna height in the following manner:             <ol style="list-style-type: none"> <li>Vertical or horizontal polarisation (whichever gave the higher emission level over a full rotation of the EUT) was chosen.</li> <li>The EUT was then rotated to the direction that gave the maximum emission.</li> <li>Finally, the antenna height was adjusted to the height that gave the maximum emission.</li> </ol> </li> <li>Remove the transmitter and replace it with a substitution antenna (the antenna should be half-wavelength for each frequency involved). The center of the substitution antenna should be approximately at the same location as the center of the transmitter.</li> <li>Feed the substitution antenna at the transmitter end with a signal generator connected to the antenna by means of a nonradiating cable. With the antennas at both ends horizontally polarized, and with the signal generator tuned to a particular spurious frequency, raise and lower the test antenna to obtain a maximum reading at the spectrum analyzer. Adjust the level of the signal generator output until the previously recorded maximum reading for this set of conditions is obtained.</li> <li>Steps 4 were repeated for the next frequency point, until all selected frequency points were measured.</li> </ol>		
Test Date	01/13/2017 – 02/02/2017	Environmental condition	Temperature 23°C Relative Humidity 48% Atmospheric Pressure 1008mbar
Remark	<p>The EUT was scanned up to 25GHz. Both horizontal and vertical polarities were investigated. The results show only the worst case.</p> <p>Limit calculation:  <math>Emission\ limit = PdBm - [43 + 10 \log(PW)] = 10\log(1000 \times PW) - 43 - 10\log(PW) = 30\ dBm - 43 = -13\ dBm</math>            All different modulation and bandwidth configuration has been verified and only the test data of worst case with QPSK modulation and greatest bandwidth was presented in this report.</p>		
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail		

**Test Data**    Yes (See below)       N/A

Test Plot  Yes (See below)  N/A

Test was done by Gary Chou at 10m chamber.

### Radiated Emission Test Results for LTE band 4

Test specification	below 1GHz		Result	Pass
Environmental Conditions:	Temp (°C):	21		
	Humidity (%)	43		
	Atmospheric (mbar):	1019		
Mains Power:	56VDC			
Tested by:	Gary Chou			
Test Date:	02/02/2017			
Remarks:	LTE band4-Mid CH-20MHz BW, QPSK			

#### Internal Antenna:

Frequency (MHz)	Degree	Height	Polarity	Frequency (MHz)	Level (dBm)	Ant Gain (dBi)	Cable Loss (dB)	Absolute Level (dBm)	Limit (dBm)	Margin (dB)
125.89	236	165	V	125.89	-60.14	0	0.29	-60.43	-13	-47.43
125.89	167	176	H	125.89	-61.07	0	0.29	-61.36	-13	-48.36
150.12	264	168	V	150.12	-57.94	0	0.31	-58.25	-13	-45.25
150.12	153	156	H	150.12	-59.96	0	0.31	-60.27	-13	-47.27
404.25	269	169	V	404.25	-59.86	0	0.33	-60.19	-13	-47.19
404.25	147	161	H	404.25	-62.92	0	0.33	-63.25	-13	-50.25

#### External Antenna:

Frequency (MHz)	Degree	Height	Polarity	Frequency (MHz)	Level (dBm)	Ant Gain (dBi)	Cable Loss (dB)	Absolute Level (dBm)	Limit (dBm)	Margin (dB)
125.89	212	155	V	125.89	-59.58	0	0.29	-59.87	-13	-46.87
125.89	125	157	H	125.89	-59.27	0	0.29	-59.56	-13	-46.56
150.12	265	152	V	150.12	-57.69	0	0.31	-58.00	-13	-45.00
150.12	115	156	H	150.12	-58.47	0	0.31	-58.78	-13	-45.78
404.25	257	160	V	404.25	-57.95	0	0.33	-58.28	-13	-45.28
404.25	69	155	H	404.25	-61.54	0	0.33	-61.87	-13	-48.87

Note: Dipole antenna was used for substitution method.

## 10.6 Radiated Spurious Emissions above 1GHz

### Requirement(s):

Spec	Item	Requirement	Applicable
47CFR27.53	-	Out of band emissions. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.	<input checked="" type="checkbox"/>
Test Setup			
Test Procedure	<p><u>Substitution method:</u></p> <ol style="list-style-type: none"> <li>The EUT was switched on and allowed to warm up to its normal operating condition.</li> <li>The test was carried out at the selected frequency points obtained from the EUT characterisation. Maximization of the emissions, was carried out by rotating the EUT, changing the antenna polarization, and adjusting the antenna height in the following manner:             <ol style="list-style-type: none"> <li>Vertical or horizontal polarisation (whichever gave the higher emission level over a full rotation of the EUT) was chosen.</li> <li>The EUT was then rotated to the direction that gave the maximum emission.</li> <li>Finally, the antenna height was adjusted to the height that gave the maximum emission.</li> </ol> </li> <li>Remove the transmitter and replace it with a substitution antenna (the antenna should be half-wavelength for each frequency involved). The center of the substitution antenna should be approximately at the same location as the center of the transmitter.</li> <li>Feed the substitution antenna at the transmitter end with a signal generator connected to the antenna by means of a nonradiating cable. With the antennas at both ends horizontally polarized, and with the signal generator tuned to a particular spurious frequency, raise and lower the test antenna to obtain a maximum reading at the spectrum analyzer. Adjust the level of the signal generator output until the previously recorded maximum reading for this set of conditions is obtained.</li> <li>Steps 4 were repeated for the next frequency point, until all selected frequency points were measured.</li> </ol>		
Test Date	01/13/2017 – 02/02/2017	Environmental condition	Temperature 23°C Relative Humidity 48% Atmospheric Pressure 1008mbar
Remark	<p>The EUT was scanned up to 25GHz. Both horizontal and vertical polarities were investigated. The results show only the worst case.            Limit calculation:  <math>\text{Emission limit} = \text{PdBm} - [43 + 10 \log(PW)] = 10 \log(1000 \times PW) - 43 - 10 \log(PW) = 30 \text{ dBm} - 43 = -13 \text{ dBm}</math></p> <p>All different modulation and bandwidth configuration has been verified and only the test data of worst case with QPSK modulation and greatest bandwidth was presented in this report.</p>		
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail		

Test Data  Yes (See below)       N/A

Test Plot  Yes (See below)       N/A

Test was done by Gary Chou at 10m chamber.

## Radiated Emission Test Results (Above 1GHz)

### Internal Antenna:

LTE band 4 Low Channel, 20MHz BW, QPSK

Frequency (MHz)	Degree	Height	Polarity	Frequency (MHz)	Level (dBm)	Ant Gain (dBi)	Cable Loss (dB)	Absolute Level (dBm)	Limit (dBm)	Margin (dB)
4240.68	120	150	V	4240.68	-40.86	9.82	0.31	-31.35	-13	-18.35
4240.68	156	153	H	4240.68	-42.95	9.82	0.31	-33.44	-13	-20.44
6360.46	243	150	V	6360.46	-36.59	11.71	0.78	-25.66	-13	-12.66
6360.46	189	149	H	6360.46	-40.96	11.71	0.78	-30.03	-13	-17.03

LTE band 4 Mid Channel, 20MHz BW, QPSK

Frequency (MHz)	Degree	Height	Polarity	Frequency (MHz)	Level (dBm)	Ant Gain (dBi)	Cable Loss (dB)	Absolute Level (dBm)	Limit (dBm)	Margin (dB)
4265.60	120	150	V	4265.60	-39.82	9.82	0.31	-30.31	-13	-17.31
4265.60	156	153	H	4265.60	-41.73	9.82	0.31	-32.22	-13	-19.22
6397.59	243	150	V	6397.59	-39.71	11.71	0.78	-28.78	-13	-15.78
6397.59	189	149	H	6397.59	-41.46	11.71	0.78	-30.53	-13	-17.53

LTE band 4 High Channel, 20MHz BW, QPSK

Frequency (MHz)	Degree	Height	Polarity	Frequency (MHz)	Level (dBm)	Ant Gain (dBi)	Cable Loss (dB)	Absolute Level (dBm)	Limit (dBm)	Margin (dB)
4290.48	49	154	V	4290.48	-39.94	9.82	0.31	-30.43	-13	-17.43
4290.48	64	161	H	4290.48	-43.01	9.82	0.31	-33.50	-13	-20.50
6435.98	67	138	V	6435.98	-40.76	11.71	0.78	-29.83	-13	-16.83
6435.98	28	149	H	6435.98	-43.53	11.71	0.78	-32.60	-13	-19.60



**External Antenna:**

LTE band 4 Low Channel, 20MHz BW, QPSK

Frequency (MHz)	Degree	Height	Polarity	Frequency (MHz)	Level (dBm)	Ant Gain (dBi)	Cable Loss (dB)	Absolute Level (dBm)	Limit (dBm)	Margin (dB)
4240.68	120	150	V	4240.68	-41.48	9.82	0.31	-31.97	-13	-18.97
4240.68	156	153	H	4240.68	-40.24	9.82	0.31	-30.73	-13	-17.73
6360.46	243	150	V	6360.46	-35.91	11.71	0.78	-24.98	-13	-11.98
6360.46	189	149	H	6360.46	-40.19	11.71	0.78	-29.26	-13	-16.26

LTE band 4 Mid Channel, 20MHz BW, QPSK


Frequency (MHz)	Degree	Height	Polarity	Frequency (MHz)	Level (dBm)	Ant Gain (dBi)	Cable Loss (dB)	Absolute Level (dBm)	Limit (dBm)	Margin (dB)
4265.60	120	150	V	4265.60	-38.49	9.82	0.31	-28.98	-13	-15.98
4265.60	156	153	H	4265.60	-40.52	9.82	0.31	-31.01	-13	-18.01
6397.59	243	150	V	6397.59	-40.52	11.71	0.78	-29.59	-13	-16.59
6397.59	189	149	H	6397.59	-40.69	11.71	0.78	-29.76	-13	-16.76

LTE band 4 High Channel, 20MHz BW, QPSK

Frequency (MHz)	Degree	Height	Polarity	Frequency (MHz)	Level (dBm)	Ant Gain (dBi)	Cable Loss (dB)	Absolute Level (dBm)	Limit (dBm)	Margin (dB)
4290.48	49	154	V	4290.48	-40.24	9.82	0.31	-30.73	-13	-17.73
4290.48	64	161	H	4290.48	-42.36	9.82	0.31	-32.85	-13	-19.85
6435.98	67	138	V	6435.98	-41.58	11.71	0.78	-30.65	-13	-17.65
6435.98	28	149	H	6435.98	-42.63	11.71	0.78	-31.70	-13	-18.70

## 10.7 Frequency Stability

### Requirement(s):

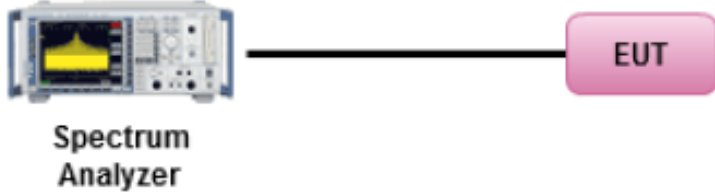Spec	Item	Requirement	Applicable
47 CFR 2.1055, 47 CFR	-	The frequency stability of the transmitter shall be maintained within $\pm 0.0001$ percent ( $\pm 1$ ppm) of the center frequency over a temperature variation of $-30$ °Celsius to $+50$ °Celsius at normal supply voltage, and over a variation in the primary supply voltage of 85 percent to 115 percent of the rated supply voltage at a temperature of $20$ °Celsius.	<input checked="" type="checkbox"/>
47 CFR 2.1055, 47 CFR 27.54	-	The frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized bands of operation.	<input checked="" type="checkbox"/>
Test Setup	 <p style="text-align: center;"><b>Spectrum Analyzer</b>      <b>EUT</b></p>		
Test Procedure	<p>The carrier frequency of the transmitter is measured at room temperature (<math>20^{\circ}\text{C}</math> to provide a reference).</p> <ol style="list-style-type: none"> <li>The equipment is turned on in a "standby" condition for one minute before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.</li> <li>Frequency measurements are made at <math>10^{\circ}\text{C}</math> intervals ranging from <math>-30^{\circ}\text{C}</math> to <math>+50^{\circ}\text{C}</math>. A period of at least one half hour is provided to allow stabilization of the equipment at each temperature level.</li> </ol>		
Test Date	01/13/2017 – 02/02/2017	Environmental condition	Temperature $23^{\circ}\text{C}$ Relative Humidity      48% Atmospheric Pressure      1008mbar
Remark	NONE		
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail		

Test Data     Yes       N/A

Test Plot     Yes (See below)       N/A

Test was done by **Chen Ge** at RF Test Site.

















Test Data for LTE Band 4:

Voltage (%)	Power (VDC)	Temp. (°)	Frequency (KHz)	Frequency Error (Hz)	Deviation (ppm)
100%	56	20	2132500.380	380	0.18
100%		0	2132500.400	400	0.19
100%		10	2132500.400	400	0.19
100%		30	2132500.420	420	0.20
100%		40	2132500.440	440	0.21
115%	64.4	20	2132500.400	400	0.19
85%	47.6	20	2132500.400	400	0.19

### Annex A. TEST INSTRUMENT

Instrument	Model	Serial #	Cal Date	Cal Cycle	Cal Due	In use
<b>Radiated Emissions</b>						
EMI Test Receiver	ESIB 40	100179	06/03/2016	1 Year	06/03/2017	<input checked="" type="checkbox"/>
Bi-Log antenna (30MHz~2GHz)	JB1	A030702	08/15/2016	1 Year	08/15/2017	<input checked="" type="checkbox"/>
Horn Antenna (1-18GHz)	3115	10SL0059	08/25/2016	1 Year	08/25/2017	<input checked="" type="checkbox"/>
Horn Antenna (18-40 GHz)	AH-840	101013	08/28/2016	1 Year	08/28/2017	<input checked="" type="checkbox"/>
Pre-Amplifier	LPA-6-30	11140711	02/19/2016	1 Year	02/19/2017	<input checked="" type="checkbox"/>
Microwave Preamplifier (18-40 GHz)	PA-840	181251	03/10/2016	1 Year	03/10/2017	<input checked="" type="checkbox"/>
10 Meters SAC	10M	N/A	09/05/2016	1 Year	09/05/2017	<input checked="" type="checkbox"/>
<b>RF Conducted Measurement</b>						
Spectrum Analyzer	N9010A	MY51440112	08/20/2016	1 Year	08/20/2017	<input checked="" type="checkbox"/>
EMI Test Receiver	ESIB 40	100179	06/03/2016	1 Year	06/03/2017	<input checked="" type="checkbox"/>
Agilent Signal Generator	MXG N5182A	MY47071065	04/06/2016	1 Year	04/06/2017	<input checked="" type="checkbox"/>

## Annex B. SIEMIC Accreditation

Accreditations	Document	Scope / Remark
ISO 17025 (A2LA)		Please see the documents for the detailed scope
ISO Guide 65 (A2LA)		Please see the documents for the detailed scope
TCB Designation		A1, A2, A3, A4, B1, B2, B3, B4, C
FCC DoC Accreditation		FCC Declaration of Conformity Accreditation
FCC Site Registration		3 meter site
FCC Site Registration		10 meter site
IC Site Registration		3 meter site
IC Site Registration		10 meter site
EU NB		<b>Radio &amp; Telecommunications Terminal Equipment:</b> EN45001 – EN ISO/IEC 17025
		<b>Electromagnetic Compatibility:</b> EN45001 – EN ISO/IEC 17025
Singapore iDA CB(Certification Body)	 	Phase I, Phase II
Vietnam MIC CAB Accreditation		Please see the document for the detailed scope
HongKong OFCA		<b>(Phase II)</b> OFCA Foreign Certification Body for Radio and Telecom
		<b>(Phase I)</b> Conformity Assessment Body for Radio and Telecom
Industry Canada CAB		<b>Radio:</b> Scope A – All Radio Standard Specification in Category I
		<b>Telecom:</b> CS-03 Part I, II, V, VI, VII, VIII

Japan Recognized Certification Body Designation		<p><b>Radio</b> : A1. Terminal equipment for purpose of calling</p> <p><b>Telecom</b> : B1. Specified radio equipment specified in Article 38-2, Paragraph 1, Item 1 of the Radio Law</p>
Korea CAB Accreditation		<p><b>EMI</b>: KCC Notice 2008-39, RRL Notice 2008-3: CA Procedures for EMI          KN22: Test Method for EMI  <b>EMS</b>: KCC Notice 2008-38, RRL Notice 2008-4: CA Procedures for EMS          KN24, KN61000-4-2, -4-3, -4-4, -4-5, -4-6, -4-8, -4-11: Test Method for EMS</p>
		<p><b>Radio</b>: RRL Notice 2008-26, RRL Notice 2008-2, RRL Notice 2008-10, RRL Notice 2007-49, RRL Notice 2007-20, RRL Notice 2007-21, RRL Notice 2007-80, RRL Notice 2004-68</p>
		<p><b>Telecom</b>: President Notice 20664, RRL Notice 2007-30, RRL Notice 2008-7 with attachments 1, 3, 5, 6; President Notice 20664, RRL Notice 2008-7 with attachment 4</p>
Taiwan NCC CAB Recognition		LP0002, PSTN01, ADSL01, ID0002, IS6100, CNS14336, PLMN07, PLMN01, PLMN08
Taiwan BSMI CAB Recognition		CNS 13438
Japan VCCI		<p>R-3083: Radiation 3 meter site</p> <p>C-3421: Main Ports Conducted Interference Measurement</p> <p>T-1597: Telecommunication Ports Conducted Interference Measurement</p>
Australia CAB Recognition		<p><b>EMC</b>: AS/NZS CISPR 11, AS/NZS CISPR 14.1, AS/NZS CISPR22, AS/NZS 61000.6.3, AS/NZS 61000.6.4</p>
		<p><b>Radiocommunications</b>: AS/NZS 4281, AS/NZS 4268, AS/NZS 4280.1, AS/NZS 4280.2, AS/NZS 4295, AS/NZS 4582, AS/NZS 4583, AS/NZS 4769.1, AS/NZS 4769.2, AS/NZS 4770, AS/NZS 4771</p>
		<p><b>Telecommunications</b>: AS/ACIF S002:05, AS/ACIF S003:06, AS/ACIF S004:06 AS/ACIF S006:01, AS/ACIF S016:01, AS/ACIF S031:01, AS/ACIF S038:01, AS/ACIF S040:01, AS/ACIF S041:05, AS/ACIF S043.2:06, AS/ACIF S60950.1</p>
Australia NATA Recognition		AS/ACIF S002, AS/ACIF S003, AS/ACIF S004, AS/ACIF S006, AS/ACIF S016, AS/ACIF S031, AS/ACIF S038, AS/ACIF S040, AS/ACIF S041, AS/ACIF S043.2