





Chain 1:



5M QPSK High

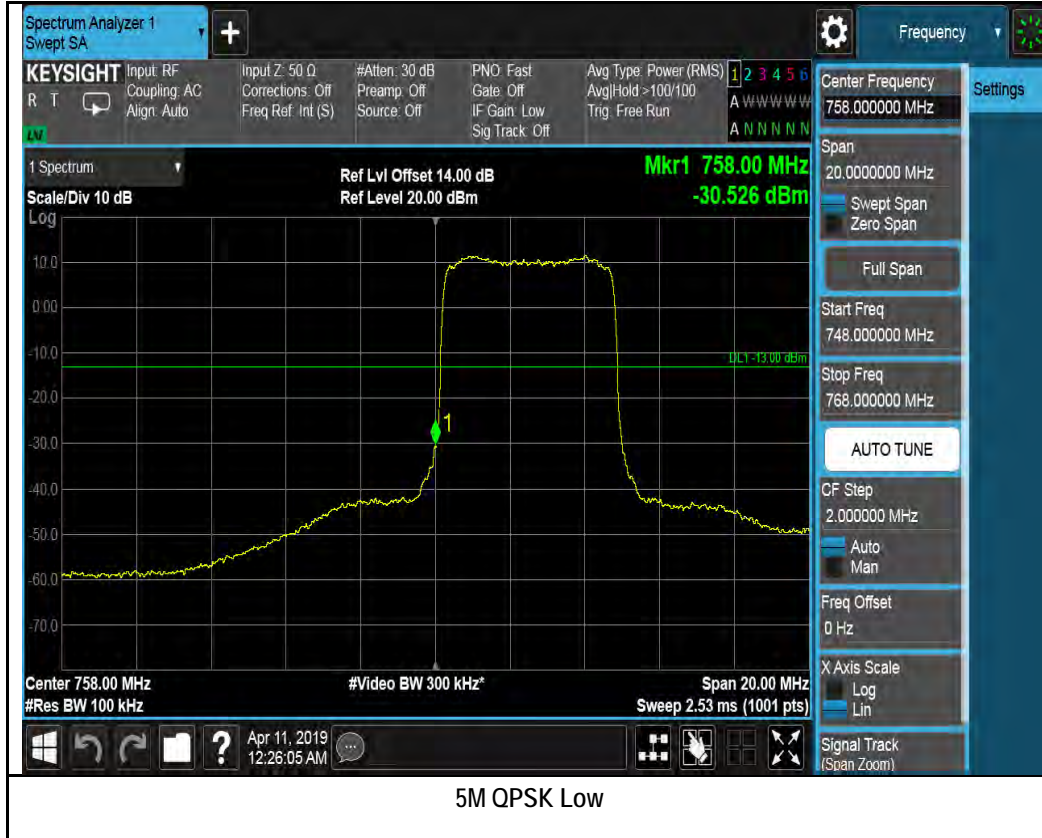

10M QPSK Mid

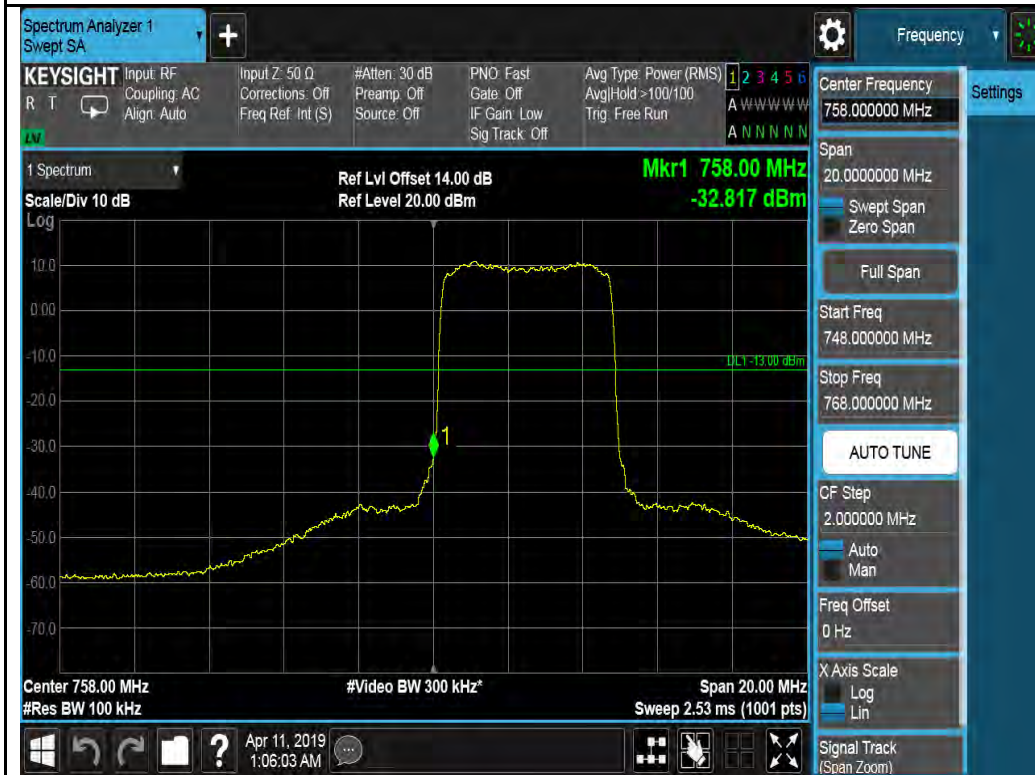

5M 64QAM Low



5M 64QAM High




10M 64QAM Mid

10.5 Radiated Spurious Emission below 1GHz

Requirement(s):

Spec	Item	Requirement	Applicable
47CFR24.238	-	Out of band emissions. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.	<input checked="" type="checkbox"/>
47CFR27.53	-	Out of band emissions. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.	<input checked="" type="checkbox"/>
47CFR90.543	-	Out-of-band emission limit. On any frequency outside of the frequency ranges covered by the ACP tables in this section, the power of any emission must be reduced below the mean output power (P) by at least $43 + 10 \log(P)$ dB measured in a 100 kHz bandwidth for frequencies less than 1 GHz, and in a 1 MHz bandwidth for frequencies greater than 1 GHz.	<input checked="" type="checkbox"/>

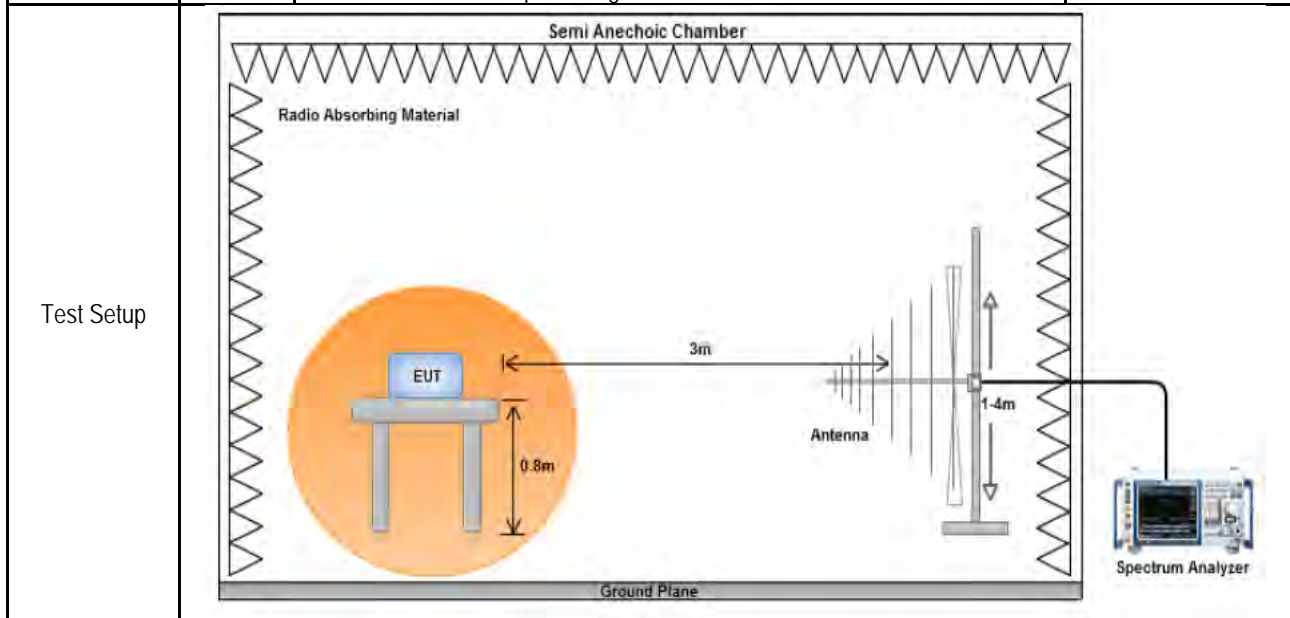

Test Procedure	<p><u>Substitution method:</u></p> <ol style="list-style-type: none"> The EUT was switched on and allowed to warm up to its normal operating condition. The test was carried out at the selected frequency points obtained from the EUT characterisation. Maximization of the emissions, was carried out by rotating the EUT, changing the antenna polarization, and adjusting the antenna height in the following manner: <ol style="list-style-type: none"> Vertical or horizontal polarisation (whichever gave the higher emission level over a full rotation of the EUT) was chosen. The EUT was then rotated to the direction that gave the maximum emission. Finally, the antenna height was adjusted to the height that gave the maximum emission. Remove the transmitter and replace it with a substitution antenna (the antenna should be half-wavelength for each frequency involved). The center of the substitution antenna should be approximately at the same location as the center of the transmitter. Feed the substitution antenna at the transmitter end with a signal generator connected to the antenna by means of a nonradiating cable. With the antennas at both ends horizontally polarized, and with the signal generator tuned to a particular spurious frequency, raise and lower the test antenna to obtain a maximum reading at the spectrum analyzer. Adjust the level of the signal generator output until the previously recorded maximum reading for this set of conditions is obtained. Steps 4 were repeated for the next frequency point, until all selected frequency points were measured. 		
----------------	--	--	--

Test Date	04/01/2019 – 04/16/2019	Environmental condition	Temperature 23°C Relative Humidity 48% Atmospheric Pressure 1008mbar
-----------	-------------------------	-------------------------	--

Remark	<p>The EUT was scanned up to 25GHz. Both horizontal and vertical polarities were investigated. The results show only the worst case.</p> <p>Limit calculation:</p>		
--------	--	--	--

	Emission limit = PdBm - [43+ 10 log (PW)] = 10log(1000 x PW) - 43 - 10log(PW) = 30 dBm - 43 = -13 dBm All different modulation and bandwidth configuration has been verified and only the test data of worst case with QPSK modulation and greatest bandwidth was presented in this report.
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail

Test Data Yes (See below) N/A

Test Plot Yes (See below) N/A

Test was done by Gary Chou at 10m chamber.

Internal Antenna:

Radiated Emission Test Results for LTE band 25

Frequency MHz	SG Level dBm	Cable Loss dB	Antenna Gain dBd	Substituted Level dBm	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBm	Margin dB	Pass /Fail
70.01	-59.21	0.47	0	-58.74	RMS Max	V	186.00	315.00	-13.00	-45.74	Pass
70.01	-61.7	0.47	0	-61.23	RMS Max	H	133.00	293.00	-13.00	-48.23	Pass
165.19	-58.15	1.24	0	-56.91	RMS Max	V	159.00	224.00	-13.00	-43.91	Pass
165.19	-59.6	1.24	0	-58.36	RMS Max	H	284.00	344.00	-13.00	-45.36	Pass
240.06	-59.39	1.45	0	-57.94	RMS Max	V	359.00	305.00	-13.00	-44.94	Pass
240.06	-61.08	1.45	0	-59.63	RMS Max	H	332.00	356.00	-13.00	-46.63	Pass

Radiated Emission Test Results for LTE band 66

Frequency MHz	SG Level dBm	Cable Loss dB	Antenna Gain dBd	Substituted Level dBm	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBm	Margin dB	Pass /Fail
70.01	-58.82	0.47	0	-58.35	RMS Max	V	186.00	315.00	-13.00	-45.35	Pass
70.01	-61.9	0.47	0	-61.43	RMS Max	H	133.00	293.00	-13.00	-48.43	Pass
165.19	-57.5	1.24	0	-56.26	RMS Max	V	159.00	224.00	-13.00	-43.26	Pass
165.19	-59.63	1.24	0	-58.39	RMS Max	H	284.00	344.00	-13.00	-45.39	Pass
240.06	-58.87	1.45	0	-57.42	RMS Max	V	359.00	305.00	-13.00	-44.42	Pass
240.06	-60.99	1.45	0	-59.54	RMS Max	H	332.00	356.00	-13.00	-46.54	Pass

Radiated Emission Test Results for LTE band 13

Frequency MHz	SG Level dBm	Cable Loss dB	Antenna Gain dBd	Substituted Level dBm	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBm	Margin dB	Pass /Fail
70.01	-59.06	0.47	0	-58.59	RMS Max	V	186.00	315.00	-13.00	-45.59	Pass
70.01	-61.7	0.47	0	-61.23	RMS Max	H	133.00	293.00	-13.00	-48.23	Pass
165.19	-57.7	1.24	0	-56.46	RMS Max	V	159.00	224.00	-13.00	-43.46	Pass
165.19	-60.08	1.24	0	-58.84	RMS Max	H	284.00	344.00	-13.00	-45.84	Pass
240.06	-58.74	1.45	0	-57.29	RMS Max	V	359.00	305.00	-13.00	-44.29	Pass
240.06	-60.81	1.45	0	-59.36	RMS Max	H	332.00	356.00	-13.00	-46.36	Pass

Radiated Emission Test Results for LTE band 14

Frequency MHz	SG Level dBm	Cable Loss dB	Antenna Gain dBd	Substituted Level dBm	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBm	Margin dB	Pass /Fail
70.01	-59.92	0.47	0	-59.45	RMS Max	V	186.00	315.00	-13.00	-46.45	Pass
70.01	-62.74	0.47	0	-62.27	RMS Max	H	133.00	293.00	-13.00	-49.27	Pass
165.19	-58.93	1.24	0	-57.69	RMS Max	V	159.00	224.00	-13.00	-44.69	Pass
165.19	-60.77	1.24	0	-59.53	RMS Max	H	284.00	344.00	-13.00	-46.53	Pass
240.06	-59.72	1.45	0	-58.27	RMS Max	V	359.00	305.00	-13.00	-45.27	Pass
240.06	-62.3	1.45	0	-60.85	RMS Max	H	332.00	356.00	-13.00	-47.85	Pass

External Antenna:

Radiated Emission Test Results for LTE band 25

Frequency MHz	SG Level dBm	Cable Loss dB	Antenna Gain dBd	Substituted Level dBm	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBm	Margin dB	Pass /Fail
70.01	-58.74	0.47	0	-58.27	RMS Max	V	186.00	315.00	-13.00	-45.27	Pass
70.01	-61.85	0.47	0	-61.38	RMS Max	H	133.00	293.00	-13.00	-48.38	Pass
165.19	-57.69	1.24	0	-56.45	RMS Max	V	159.00	224.00	-13.00	-43.45	Pass
165.19	-59.88	1.24	0	-58.64	RMS Max	H	284.00	344.00	-13.00	-45.64	Pass
240.06	-58.98	1.45	0	-57.53	RMS Max	V	359.00	305.00	-13.00	-44.53	Pass
240.06	-60.63	1.45	0	-59.18	RMS Max	H	332.00	356.00	-13.00	-46.18	Pass

Radiated Emission Test Results for LTE band 66

Frequency MHz	SG Level dBm	Cable Loss dB	Antenna Gain dBd	Substituted Level dBm	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBm	Margin dB	Pass /Fail
70.01	-58.93	0.47	0	-58.46	RMS Max	V	186.00	315.00	-13.00	-45.46	Pass
70.01	-61.75	0.47	0	-61.28	RMS Max	H	133.00	293.00	-13.00	-48.28	Pass
165.19	-57.61	1.24	0	-56.37	RMS Max	V	159.00	224.00	-13.00	-43.37	Pass
165.19	-59.66	1.24	0	-58.42	RMS Max	H	284.00	344.00	-13.00	-45.42	Pass
240.06	-58.98	1.45	0	-57.53	RMS Max	V	359.00	305.00	-13.00	-44.53	Pass
240.06	-60.93	1.45	0	-59.48	RMS Max	H	332.00	356.00	-13.00	-46.48	Pass

Radiated Emission Test Results for LTE band 13

Frequency MHz	SG Level dBm	Cable Loss dB	Antenna Gain dBd	Substituted Level dBm	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBm	Margin dB	Pass /Fail
70.01	-58.76	0.47	0	-58.29	RMS Max	V	186.00	315.00	-13.00	-45.29	Pass
70.01	-61.84	0.47	0	-61.37	RMS Max	H	133.00	293.00	-13.00	-48.37	Pass
165.19	-57.87	1.24	0	-56.63	RMS Max	V	159.00	224.00	-13.00	-43.63	Pass
165.19	-59.82	1.24	0	-58.58	RMS Max	H	284.00	344.00	-13.00	-45.58	Pass
240.06	-58.92	1.45	0	-57.47	RMS Max	V	359.00	305.00	-13.00	-44.47	Pass
240.06	-60.74	1.45	0	-59.29	RMS Max	H	332.00	356.00	-13.00	-46.29	Pass


Radiated Emission Test Results for LTE band 14

Frequency MHz	SG Level dBm	Cable Loss dB	Antenna Gain dBd	Substituted Level dBm	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBm	Margin dB	Pass /Fail
70.01	-59.74	0.47	0	-59.27	RMS Max	V	186.00	315.00	-13	-46.27	Pass
70.01	-62.98	0.47	0	-62.51	RMS Max	H	133.00	293.00	-13	-49.51	Pass
165.19	-59.07	1.24	0	-57.83	RMS Max	V	159.00	224.00	-13	-44.83	Pass
165.19	-60.69	1.24	0	-59.45	RMS Max	H	284.00	344.00	-13	-46.45	Pass
240.06	-59.63	1.45	0	-58.18	RMS Max	V	359.00	305.00	-13	-45.18	Pass
240.06	-62.14	1.45	0	-60.69	RMS Max	H	332.00	356.00	-13	-47.69	Pass

10.6 Radiated Spurious Emissions above 1GHz

Requirement(s):

Spec	Item	Requirement	Applicable
47CFR24.238	-	Out of band emissions. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.	<input checked="" type="checkbox"/>
47CFR27.53	-	Out of band emissions. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.	<input checked="" type="checkbox"/>
47CFR90.543	-	Out-of-band emission limit. On any frequency outside of the frequency ranges covered by the ACP tables in this section, the power of any emission must be reduced below the mean output power (P) by at least $43 + 10 \log(P)$ dB measured in a 100 kHz bandwidth for frequencies less than 1 GHz, and in a 1 MHz bandwidth for frequencies greater than 1 GHz.	<input checked="" type="checkbox"/>

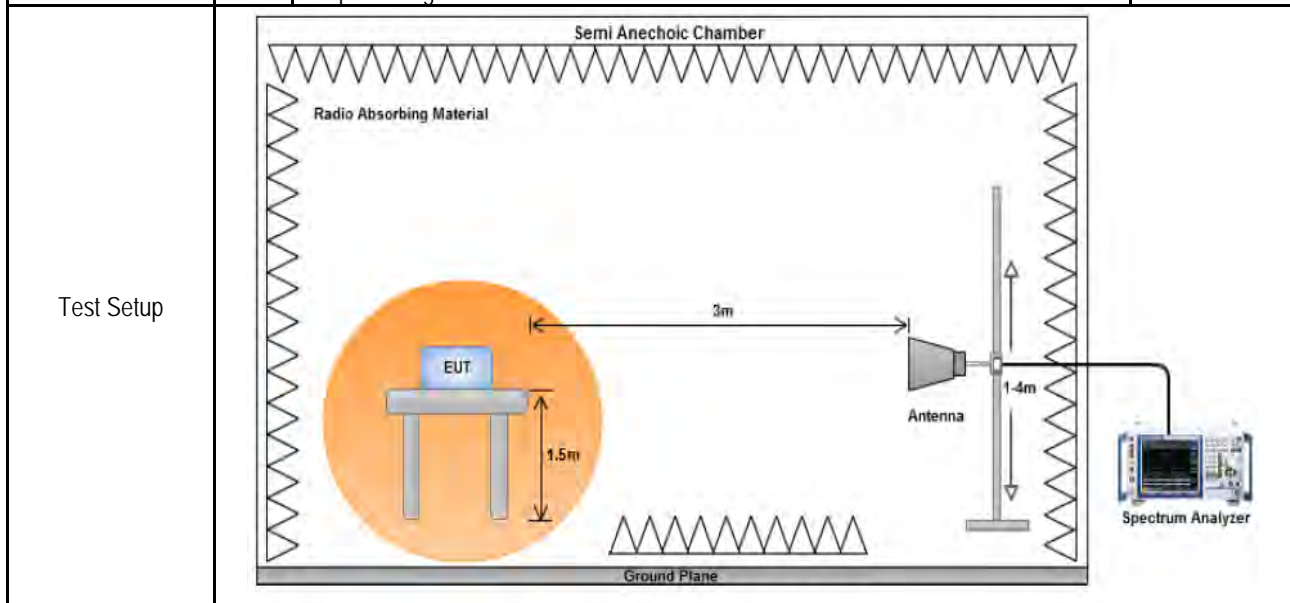

Test Procedure

Substitution method:

- The EUT was switched on and allowed to warm up to its normal operating condition.
- The test was carried out at the selected frequency points obtained from the EUT characterisation. Maximization of the emissions, was carried out by rotating the EUT, changing the antenna polarization, and adjusting the antenna height in the following manner:
 - Vertical or horizontal polarisation (whichever gave the higher emission level over a full rotation of the EUT) was chosen.
 - The EUT was then rotated to the direction that gave the maximum emission.
 - Finally, the antenna height was adjusted to the height that gave the maximum emission.
- Remove the transmitter and replace it with a substitution antenna (the antenna should be half-wavelength for each frequency involved). The center of the substitution antenna should be approximately at the same location as the center of the transmitter.
- Feed the substitution antenna at the transmitter end with a signal generator connected to the antenna by means of a nonradiating cable. With the antennas at both ends horizontally polarized, and with the signal generator tuned to a particular spurious frequency, raise and lower the test antenna to obtain a maximum reading at the spectrum analyzer. Adjust the level of the signal generator output until the previously recorded maximum reading for this set of conditions is obtained.
- Steps 4 were repeated for the next frequency point, until all selected frequency points were measured.

Test Date	04/01/2019 – 04/16/2019	Environmental condition	Temperature	23°C
			Relative Humidity	48%
			Atmospheric Pressure	1008mbar

Remark	The EUT was scanned up to 25GHz. Both horizontal and vertical polarities were investigated. The results show only the worst case. Limit calculation:
--------	---

	Emission limit = PdBm - [43+ 10 log (PW)] = 10log(1000 x PW) - 43 - 10log(PW) = 30 dBm - 43 = -13 dBm
	All different modulation and bandwidth configuration has been verified and only the test data of worst case with QPSK modulation and greatest bandwidth was presented in this report.
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail

Test Data Yes (See below) N/A

Test Plot Yes (See below) N/A

Test was done by Gary Chou at 10m chamber.

Radiated Emission Test Results (Above 1GHz)

Internal Antenna:

LTE band 25 Low Channel, 20MHz BW, QPSK

Frequency MHz	Raw dBm	Degree	Height	Pol	Frequency MHz	Level dBm	Antenna Gain dBi	Cable Loss dB	Absolute Level dBm	Limit	Margin
3880	-55.09	319	159	V	3880	-49.76	9.54	1.94	-42.16	-13	-29.16
3880	-52.53	94	199	H	3880	-47.2	9.54	1.94	-39.6	-13	-26.6
7976	-61.68	202	220	V	7976	-55.95	10.74	2.55	-47.76	-13	-34.76
7976	-57.85	27	206	H	7976	-52.12	10.74	2.55	-43.93	-13	-30.93

LTE band 25 Mid Channel, 20MHz BW, QPSK

Frequency MHz	Raw dBm	Degree	Height	Pol	Frequency MHz	Level dBm	Antenna Gain dBi	Cable Loss dB	Absolute Level dBm	Limit	Margin
3925	-57.68	201	168	V	3925	-51.88	9.55	1.95	-44.28	-13	-31.28
3925	-56.55	93	211	H	3925	-50.75	9.55	1.95	-43.15	-13	-30.15
7915	-60.93	137	214	V	7915	-55.19	10.85	2.54	-46.88	-13	-33.88
7915	-63.49	234	219	H	7915	-57.75	10.85	2.54	-49.44	-13	-36.44

LTE band 25 High Channel, 20MHz BW, QPSK

Frequency MHz	Raw dBm	Degree	Height	Pol	Frequency MHz	Level dBm	Antenna Gain dBi	Cable Loss dB	Absolute Level dBm	Limit	Margin
3970	-54.84	162	215	V	3970	-49.11	9.67	1.97	-41.41	-13	-28.41
3970	-58.1	3	209	H	3970	-52.37	9.67	1.97	-44.67	-13	-31.67
7647	-64.74	330	214	V	7647	-58.92	11.04	2.47	-50.35	-13	-37.35
7647	-61.23	215	197	H	7647	-55.41	11.04	2.47	-46.84	-13	-33.84

LTE band 66 Low Channel, 20MHz BW, QPSK

Frequency MHz	Raw dBm	Degree	Height	Pol	Frequency MHz	Level dBm	Antenna Gain dBi	Cable Loss dB	Absolute Level dBm	Limit	Margin
4240	-58.79	116	205	V	4240	-53.48	10.59	2.07	-44.96	-13	-31.96
4240	-60.52	337	165	H	4240	-55.21	10.59	2.07	-46.69	-13	-33.69
7592	-66.17	208	206	V	7592	-60.34	11	2.45	-51.79	-13	-38.79
7592	-62.33	296	182	H	7592	-56.5	11	2.45	-47.95	-13	-34.95

LTE band 66 Mid Channel, 20MHz BW, QPSK

Frequency MHz	Raw dBm	Degree	Height	Pol	Frequency MHz	Level dBm	Antenna Gain dBi	Cable Loss dB	Absolute Level dBm	Limit	Margin
4290	-57.73	303	154	V	4290	-52.49	10.59	2.09	-43.99	-13	-30.99
4290	-63.76	334	180	H	4290	-58.52	10.59	2.09	-50.02	-13	-37.02
7598	-59.83	226	192	V	7598	-54	11.02	2.45	-45.43	-13	-32.43
7598	-58.99	138	161	H	7598	-53.16	11.02	2.45	-44.59	-13	-31.59

LTE band 66 High Channel, 20MHz BW, QPSK

Frequency MHz	Raw dBm	Degree	Height	Pol	Frequency MHz	Level dBm	Antenna Gain dBi	Cable Loss dB	Absolute Level dBm	Limit	Margin
4340	-59.78	41	192	V	4340	-54.62	10.54	2.11	-46.19	-13	-33.19
4340	-54.59	260	190	H	4340	-49.43	10.54	2.11	-41	-13	-28
7034	-63.31	216	196	V	7034	-57.46	10.42	2.87	-49.91	-13	-36.91
7034	-61.44	70	172	H	7034	-55.59	10.42	2.87	-48.04	-13	-35.04

LTE band 13 Middle Channel, 10MHz BW, QPSK


Frequency MHz	Raw dBm	Degree	Height	Pol	Frequency MHz	Level dBm	Antenna Gain dBi	Cable Loss dB	Absolute Level dBm	Limit	Margin
2253	-59.75	133	151	V	2253	-55.18	9.36	1.44	-47.26	-13	-34.26
2253	-65.83	275	159	H	2253	-61.26	9.36	1.44	-53.34	-13	-40.34
7215	-57.14	26	210	V	7215	-51.09	10.33	2.93	-43.69	-13	-30.69
7215	-62.4	29	214	H	7215	-56.35	10.33	2.93	-48.95	-13	-35.95

LTE band 14 Middle Channel, 10MHz BW, QPSK

Frequency MHz	Raw dBm	Degree	Height	Pol	Frequency MHz	Level dBm	Antenna Gain dBi	Cable Loss dB	Absolute Level dBm	Limit	Margin
2289	-65.63	85	182	V	2289	-61.02	9.29	1.45	-53.18	-13	-40.18
2289	-59.78	156	165	H	2289	-55.17	9.29	1.45	-47.33	-13	-34.33
7368	-59.2	165	164	V	7368	-53.18	10.51	2.71	-45.38	-13	-32.38
7368	-65.82	360	212	H	7368	-59.8	10.51	2.71	-52	-13	-39

10.7 Frequency Stability

Requirement(s):

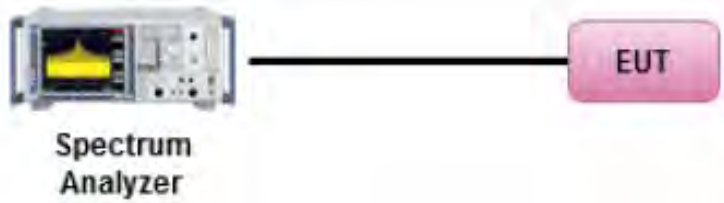Spec	Item	Requirement	Applicable
47 CFR 2.1055	-	The frequency stability of the transmitter shall be maintained within ± 0.0001 percent (± 1 ppm) of the center frequency over a temperature variation of -30 °Celsius to $+50$ °Celsius at normal supply voltage, and over a variation in the primary supply voltage of 85 percent to 115 percent of the rated supply voltage at a temperature of 20 °Celsius.	<input checked="" type="checkbox"/>
47 CFR 2.1055, 47 CFR 24.135(a),	-	The frequency stability of the transmitter shall be maintained within ± 0.0001 percent (± 1 ppm) of the center frequency over a temperature variation of -30 °Celsius to $+50$ °Celsius at normal supply voltage, and over a variation in the primary supply voltage of 85 percent to 115 percent of the rated supply voltage at a temperature of 20 °Celsius.	<input checked="" type="checkbox"/>
47 CFR 2.1055, 47 CFR 27.54	-	The frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized bands of operation.	<input checked="" type="checkbox"/>
47 CFR 90.539(d)	-	The frequency stability of base transmitters operating in the wideband segment must be 1 part per million or better.	<input checked="" type="checkbox"/>
Test Setup			
Test Procedure	<p>The carrier frequency of the transmitter is measured at room temperature (20°C to provide a reference).</p> <ol style="list-style-type: none"> The equipment is turned on in a "standby" condition for one minute before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter. Frequency measurements are made at 10°C intervals ranging from -30°C to $+50^{\circ}\text{C}$. A period of at least one half hour is provided to allow stabilization of the equipment at each temperature level. 		
Test Date	04/01/2019 – 04/16/2019	Environmental condition	Temperature 23°C Relative Humidity 48% Atmospheric Pressure 1008mbar
Remark	NONE		
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail		

Test Data Yes N/A

Test Plot Yes (See below) N/A

Test was done by Gary Chou at RF test site.

Test Data for Band 25:

Reference Frequency: 1960MHz

Voltage (%)	Power (VDC)	Temp. (°)	Frequency (kHz)	Frequency Error (Hz)	Deviation (ppm)
100%	56	20	1960000.018	18	0.009
100%		0	1960000.024	24	0.012
100%		10	1960000.020	20	0.010
100%		30	1960000.018	18	0.009
100%		40	1960000.034	34	0.017
115%	64.4	20	1960000.018	18	0.009
85%	47.6	20	1960000.018	18	0.009

Test Data for Band 66:

Reference Frequency: 2145MHz

Voltage (%)	Power (VDC)	Temp. (°)	Frequency (KHz)	Frequency Error (Hz)	Deviation (ppm)
100%	56	20	2145000.016	16	0.008
100%		0	2145000.028	28	0.013
100%		10	2145000.020	20	0.009
100%		30	2145000.024	24	0.011
100%		40	2145000.020	20	0.009
115%	64.4	20	2145000.016	16	0.008
85%	47.6	20	2145000.016	16	0.008

Test Data for LTE Band 13:

Reference Frequency: 751MHz

Voltage (%)	Power (VDC)	Temp. (°)	Frequency (KHz)	Frequency Error (Hz)	Deviation (ppm)
100%	56	20	751000.020	20	0.027
100%		0	751000.028	28	0.037
100%		10	751000.020	20	0.027
100%		30	751000.028	28	0.037
100%		40	751000.028	28	0.037
115%	64.4	20	751000.016	16	0.021
85%	47.6	20	751000.016	16	0.021

Test Data for LTE Band 14:

















Reference Frequency: 763MHz






Voltage (%)	Power (VDC)	Temp. (°)	Frequency (KHz)	Frequency Error (Hz)	Deviation (ppm)
100%	56	20	763000.020	20	0.027
100%		0	763000.028	28	0.037
100%		10	763000.020	20	0.027
100%		30	763000.028	28	0.037
100%		40	763000.028	28	0.037
115%	64.4	20	763000.016	16	0.021
85%	47.6	20	763000.016	16	0.021

Annex A. TEST INSTRUMENT

Instrument	Model	Serial #	Cal Date	Cal Cycle	Cal Due	In use
Radiated Emissions						
EMI Test Receiver	ESIB 40	100179	05/13/2018	1 Year	05/13/2019	<input checked="" type="checkbox"/>
Bi-Log antenna (30MHz~2GHz)	JB1	A030702	08/15/2018	1 Year	08/15/2019	<input checked="" type="checkbox"/>
Horn Antenna (1-18GHz)	3115	10SL0059	08/25/2018	1 Year	08/25/2019	<input checked="" type="checkbox"/>
Horn Antenna (18-40 GHz)	AH-840	101013	08/28/2018	1 Year	08/28/2019	<input checked="" type="checkbox"/>
RF Conducted Measurement						
Spectrum Analyzer	N9010A	MY51440112	08/20/2018	1 Year	08/20/2019	<input checked="" type="checkbox"/>

Annex B. SIEMIC Accreditation

Accreditations	Document	Scope / Remark
ISO 17025 (A2LA)		Please see the documents for the detailed scope
ISO Guide 65 (A2LA)		Please see the documents for the detailed scope
TCB Designation		A1, A2, A3, A4, B1, B2, B3, B4, C
FCC DoC Accreditation		FCC Declaration of Conformity Accreditation
FCC Site Registration		3 meter site
FCC Site Registration		10 meter site
IC Site Registration		3 meter site
IC Site Registration		10 meter site
EU NB		Radio & Telecommunications Terminal Equipment: EN45001 – EN ISO/IEC 17025
		Electromagnetic Compatibility: EN45001 – EN ISO/IEC 17025
Singapore iDA CB(Certification Body)	 	Phase I, Phase II
Vietnam MIC CAB Accreditation		Please see the document for the detailed scope
HongKong OFCA		(Phase II) OFCA Foreign Certification Body for Radio and Telecom
		(Phase I) Conformity Assessment Body for Radio and Telecom
Industry Canada CAB		Radio: Scope A – All Radio Standard Specification in Category I
		Telecom: CS-03 Part I, II, V, VI, VII, VIII

Japan Recognized Certification Body Designation		<p>Radio : A1. Terminal equipment for purpose of calling</p> <p>Telecom : B1. Specified radio equipment specified in Article 38-2, Paragraph 1, Item 1 of the Radio Law</p>
Korea CAB Accreditation		<p>EMI: KCC Notice 2008-39, RRL Notice 2008-3: CA Procedures for EMI KN22: Test Method for EMI EMIS: KCC Notice 2008-38, RRL Notice 2008-4: CA Procedures for EMS KN24, KN61000-4-2, -4-3, -4-4, -4-5, -4-6, -4-8, -4-11: Test Method for EMS</p>
		<p>Radio: RRL Notice 2008-26, RRL Notice 2008-2, RRL Notice 2008-10, RRL Notice 2007-49, RRL Notice 2007-20, RRL Notice 2007-21, RRL Notice 2007-80, RRL Notice 2004-68</p> <p>Telecom: President Notice 20664, RRL Notice 2007-30, RRL Notice 2008-7 with attachments 1, 3, 5, 6; President Notice 20664, RRL Notice 2008-7 with attachment 4</p>
Taiwan NCC CAB Recognition		LP0002, PSTN01, ADSL01, ID0002, IS6100, CNS14336, PLMN07, PLMN01, PLMN08
Taiwan BSMI CAB Recognition		CNS 13438
Japan VCCI		<p>R-3083: Radiation 3 meter site</p> <p>C-3421: Main Ports Conducted Interference Measurement</p> <p>T-1597: Telecommunication Ports Conducted Interference Measuremet</p>
Australia CAB Regocnition		<p>EMC: AS/NZS CISPR 11, AS/NZS CISPR 14.1, AS/NZS CISPR22, AS/NZS 61000.6.3, AS/NZS 61000.6.4</p>
		<p>Radiocommunications: AS/NZS 4281, AS/NZS 4268, AS/NZS 4280.1, AS/NZS 4280.2, AS/NZS 4295, AS/NZS 4582, AS/NZS 4583, AS/NZS 4769.1, AS/NZS 4769.2, AS/NZS 4770, AS/NZS 4771</p>
		<p>Telecommunications: AS/ACIF S002:05, AS/ACIF S003:06, AS/ACIF S004:06 AS/ACIF S006:01, AS/ACIF S016:01, AS/ACIF S031:01, AS/ACIF S038:01, AS/ACIF S040:01, AS/ACIF S041:05, AS/ACIF S043.2:06, AS/ACIF S60950.1</p>
Australia NATA Recognition		AS/ACIF S002, AS/ACIF S003, AS/ACIF S004, AS/ACIF S006, AS/ACIF S016, AS/ACIF S031, AS/ACIF S038, AS/ACIF S040, AS/ACIF S041, AS/ACIF S043.2