



中认信通

CHINA CERTIFICATION ICT CO., LTD (DONGGUAN)



TEST REPORT

Applicant: SHENZHEN COVALUE COMMUNICATIONS
CO.,LTD.

Address: No.616,Block A,Building 7,No. 1008 Songbai Road,Xili
street,Nanshan District, Shenzhen,Guangdong,China

FCC ID: Y4GDR7810S-2

Product Name: Two Way Radio

Model Number: DR7810S-2, DR7610S-2, DR7510S-2, DR7800S-2,
DR7600S-2, DR7500S-2

Standard(s): 47 CFR Part 2
47 CFR Part 22
47 CFR Part 90
ANSI C63.26-2015
ANSI/TIA 603-E-2016

The above equipment has been tested and found compliant with the requirement of the relative standards by China Certification ICT Co., Ltd (Dongguan)

Report Number: CR22050007-00D

Date Of Issue: 2022-08-13

Reviewed By: Sun Zhong

Sun Zhong

Title: Manager

Test Laboratory: China Certification ICT Co., Ltd (Dongguan)

No. 113, Pingkang Road, Dalang Town, Dongguan,
Guangdong, China
Tel: +86-769-82016888

Test Facility

The Test site used by China Certification ICT Co., Ltd (Dongguan) to collect test data is located on the No. 113, Pingkang Road, Dalang Town, Dongguan, Guangdong, China.

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 442868, the FCC Designation No. : CN1314.

The lab has been recognized by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements, the CAB identifier: CN0123.

Declarations

China Certification ICT Co., Ltd (Dongguan) is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with a triangle symbol “▲”. Customer model name, addresses, names, trademarks etc. are not considered data.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested.

This report cannot be reproduced except in full, without prior written approval of the Company.

This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

This report may contain data that are not covered by the accreditation scope and shall be marked with an asterisk “★”.

CONTENTS

TEST FACILITY	2
DECLARATIONS.....	2
1. GENERAL INFORMATION	5
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	5
1.2 DESCRIPTION OF TEST CONFIGURATION.....	7
1.2.2 Support Equipment List and Details	7
1.2.3 Support Cable List and Details	7
1.2.4 Block Diagram of Test Setup.....	7
1.3 MEASUREMENT UNCERTAINTY	8
2. SUMMARY OF TEST RESULTS	9
3. REQUIREMENTS AND TEST PROCEDURES	10
3.1 TRANSMITTER FREQUENCY STABILITY	10
3.1.1 Applicable Standard.....	10
3.1.2 Test Procedure	10
3.1.3 EUT Setup Block Diagram	11
3.2 TRANSMITTER OUTPUT POWER	12
3.2.1 Applicable Standard.....	12
3.2.2 Test Procedure	13
3.2.3 EUT Setup Block Diagram	13
3.3 OCCUPIED BANDWIDTH & EMISSION MASK.....	14
3.3.1 Applicable Standard.....	14
3.3.2 Test Procedure	15
3.3.3 EUT Setup Block Diagram	16
3.4 TRANSMITTER UNWANTED EMISSIONS(CONDUCTED).....	17
3.4.1 Applicable Standard.....	17
3.4.2 Test Procedure	18
3.4.3 EUT Setup Block Diagram	19
3.5 TRANSMITTER UNWANTED EMISSIONS(RADIATED)	20
3.5.1 Applicable Standard.....	20
3.5.2 Test Procedure	21
3.6 TRANSIENT FREQUENCY BEHAVIOR	22
3.6.1 Applicable Standard.....	22
3.6.2 Test Procedure	22
3.7 MODULATION CHARACTERISTICS.	24
3.7.1 Applicable Standard.....	24
3.7.2 Test Procedure	24
3.7.3 EUT Setup Block Diagram	25
4. Test DATA AND RESULTS	26
4.1 TRANSMITTER FREQUENCY STABILITY	26
4.2 TRANSMITTER OUTPUT POWER	29

4.3 OCCUPIED BANDWIDTH & EMISSION MASK.....	33
4.4 TRANSMITTER UNWANTED EMISSIONS (CONDUCTED).....	41
4.5 TRANSIENT FREQUENCY BEHAVIOR	45
4.6 MODULATION CHARACTERISTIC.....	47
4.7 TRANSMITTER UNWANTED EMISSIONS (RADIATED)	52

1. GENERAL INFORMATION

1.1 Product Description for Equipment under Test (EUT)

EUT Name:	Two Way Radio
EUT Model:	DR7810S-2
Multiple Model:	DR7610S-2, DR7510S-2, DR7800S-2, DR7600S-2, DR7500S-2
Operation Frequency:	400-512MHz
Modulation Type:	FM, 4FSK
Channel Spacing:	12.5/25 kHz
Rated Output Power: (Conducted)	High Power Level: 4W Low Power Level: 1W
Rated Input Voltage:	DC 7.4V from battery or DC 12V from Charger
Serial Number:	CR22050007-RF-S1(Model:DR7810S-2) CR22050007-RF-S2(Model:DR7610S-2) CR22050007-RF-S3(Model:DR7510S-2)
EUT Received Date:	2022.05.10
EUT Received Status:	Good
Note: The Multiple Model(s) are electrically identical with test model, please refer to the Declaration of Similar Letter for more detail, which was provided by manufacturer. Test was performed with Model: DR7810S-2 except radiation emission test with Model: DR7510S-2, DR7610S-2, DR7810S-2.	

Antenna Information Detail ▲ :

Antenna Manufacturer	Antenna Type	input impedance (Ohm)	Antenna Gain /Frequency Range
Beijing JianJi Electronics Ltd.	Whip	50	0 dBi/400-512MHz

Accessory Information:

Accessory Description	Manufacturer	Model	Parameters
Adapter	YOU PIN POWEER	YP02S-1200100US	Input: 100-240V~50/60Hz 0.35A Output: 12V 1.0A 12.0W
Charger	SHENZHEN COVALUE COMMUNICATIONS CO.,LTD.	CP-03	Input: DC 12V 1A Output: DC 12V 0.8A
Belt Clip		Not Applicable	Not Applicable

Test Frequency Detail:

Per C63.26-2015, section 5.1, the frequencies below was performed for test:

Modulation/ Channel Bandwidth	Test Channel	Frequency (MHz)	Rule Part
FM 12.5kHz	Lowest	400.0125	For Federal
	Middle	480.0125	For Part 90
	Additional	454.0125	For Part 22
	Highest	511.9875	For Federal
4FSK 12.5kHz	Lowest	400.0125	For Federal
	Middle	480.0125	For Part 90
	Additional	454.0125	For Part 22
	Highest	511.9875	For Federal
FM 25kHz	Additional	454.0125	For Part 22

1.2 Description of Test Configuration

1.2.1 EUT Operation Condition:

EUT Operation Mode:	The system was configured for testing in Engineering Mode, which was provided by the manufacturer.
Equipment Modifications:	No
EUT Exercise Software:	No


1.2.2 Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
api	Load	50oml	50oml Load

1.2.3 Support Cable List and Details

Cable Description	Shielding Type	Ferrite Core	Length (m)	From Port	To
\	\	\	\	\	\

1.2.4 Block Diagram of Test Setup

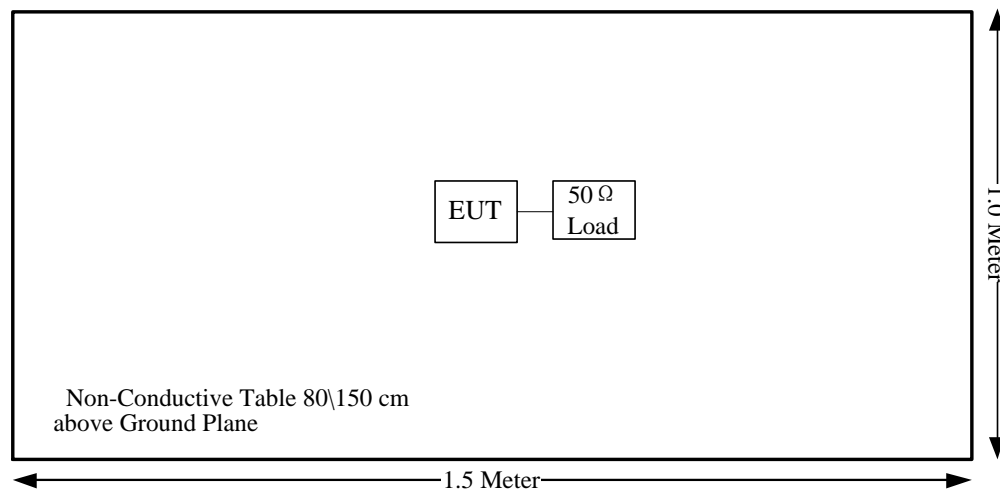

1.3 Measurement Uncertainty

Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty. The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval.

Parameter	Measurement Uncertainty
Occupied Channel Bandwidth	±5 %
RF output power, conducted	±0.61dB
Power Spectral Density, conducted	±0.61 dB
Unwanted Emissions, radiated	30M~200MHz: 4.15 dB,200M~1GHz: 5.61 dB,1G~6GHz: 5.14 dB, 6G~18GHz: 5.93 dB,18G~26.5G:5.47 dB,26.5G~40G:5.63 dB
Unwanted Emissions, conducted	±1.26 dB
Temperature	±1 °C
Humidity	±5%
DC and low frequency voltages	±0.4%
Duty Cycle	1%
RF Frequency	±0.082×10 ⁻⁶
Audio Frequency/Low Pass Filter Response	4.02%
Modulation Limiting	1.19%

2. SUMMARY OF TEST RESULTS

Standard/Rule(s)	Description of Test	Results
§2.1055; § 22.355; §90.213	Frequency Stability	Compliant
§2.1046; § 22.727; §90.205	RF Output Power	Compliant
§2.1049; §22.359; §90.209; §90.210	Occupied Bandwidth & Emission Mask	Compliant
§2.1051; §22.359; §90.210	Spurious Emission at Antenna Terminal	Compliant
§2.1053; §22.359; §90.210	Spurious Radiated Emissions	Compliant
§90.214	Transient Frequency Behavior	Compliant
§2.1047	Modulation Characteristic	Compliant

3. REQUIREMENTS AND TEST PROCEDURES

3.1 Transmitter Frequency Stability

3.1.1 Applicable Standard

FCC §90.213

In the 421-512 MHz band, mobile stations designed to operate with a 12.5 kHz channel bandwidth must have a frequency stability of 2.5 ppm. Mobile stations designed to operate with a 6.25 kHz channel bandwidth must have a frequency stability of 1.0 ppm.

FCC §22.355

Except as otherwise provided in this part, the carrier frequency of each transmitter in the Public Mobile Services must be maintained within the tolerances given in Table C-1 of this section.

Table C-1 - Frequency Tolerance for Transmitters in the Public Mobile Services


Frequency range (MHz)	Base, fixed (ppm)	Mobile >3 watts (ppm)	Mobile ≤3 watts (ppm)
25 to 50	20.0	20.0	50.0
50 to 450	5.0	5.0	50.0
450 to 512	2.5	5.0	5.0
821 to 896	1.5	2.5	2.5
928 to 929	5.0	n/a	n/a
929 to 960	1.5	n/a	n/a
2110 to 2220	10.0	n/a	n/a

3.1.2 Test Procedure

Frequency Stability vs. Temperature: The equipment under test was connected to an external power supply and the RF output was connected to a frequency counter via feed-through attenuators. The EUT was placed inside the temperature chamber. The DC or AC leads and RF output cable exited the chamber through an opening made for the purpose.

After the temperature stabilized for approximately 20 minutes, the frequency output was recorded from the counter.

3.1.3 EUT Setup Block Diagram

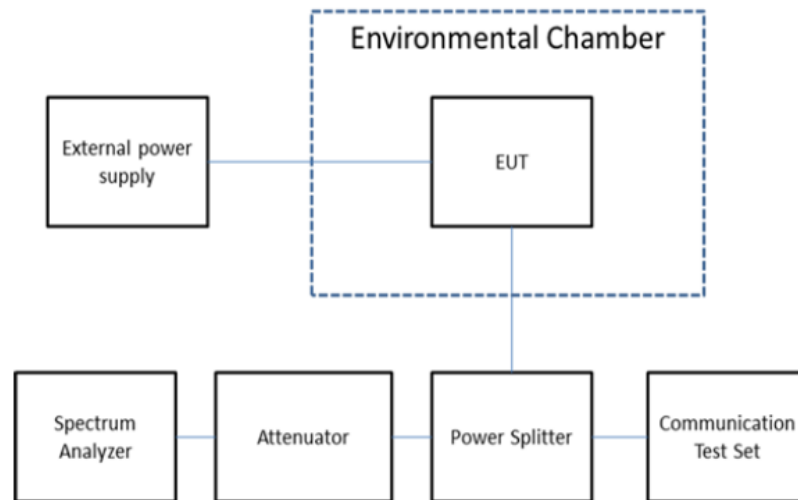

3.2 Transmitter Output Power

3.2.1 Applicable Standard

FCC §90.205

(h) 450-470 MHz.

(1) The maximum allowable station effective radiated power (ERP) is dependent upon the station's antenna HAAT and required service area and will be authorized in accordance with table 2.

Applicants requesting an ERP in excess of that listed in table 2 must submit an engineering analysis based upon generally accepted engineering practices and standards that includes coverage contours to demonstrate that the requested station parameters will not produce coverage in excess of that which the applicant requires.

(2) Applications for stations where special circumstances exist that make it necessary to deviate from the ERP and antenna heights in Table 2 will be submitted to the frequency coordinator accompanied by a technical analysis, based upon generally accepted engineering practices and standards, that demonstrates that the requested station parameters will not produce a signal strength in excess of 39 dBu at any point along the edge of the requested service area. The coordinator may then recommend any ERP appropriate to meet this condition.

(3) An applicant for a station with a service area radius greater than 32 km (20 mi) must justify the requested service area radius, which may be authorized only in accordance with table 2, note 4. For base stations with service areas greater than 80 km, all operations 80 km or less from the base station will be on a primary basis and all operations outside of 80 km from the base station will be on a secondary basis and will be entitled to no protection from primary operations.

FCC §22.727

(a) *Maximum ERP.* The effective radiated power (ERP) of central office and rural subscriber station transmitters must not exceed the applicable limits in this paragraph under any circumstances.

Frequency range (MHz)	Maximum ERP (watts)
152-153	1400
157-159	150
454-455	3500
459-460	150


3.2.2 Test Procedure

Before performing this measurement, the power of the EUT shall be set or controlled to the maximum rating of the range for which equipment certification or verification is sought.

Except where otherwise specified, tests shall be performed at the ambient temperature, at the manufacturer's rated supply voltage, and with the transmitter modulating signal representative (i.e. typical) of those encountered in a real system operation.

The spectrum analyzer shall be configured with a resolution bandwidth that encompasses the entire occupied bandwidth (see section 6.7) of the EUT. If the spectrum analyzer's largest available resolution bandwidth is smaller than the occupied bandwidth of the EUT, it is permitted to use a narrower resolution bandwidth plus numerical integration, in linear power terms, over the occupied bandwidth of the transmitter in order to measure its output power, except when the emission is a wideband noise-like signal and being measured for peak power. For transmitters with constant envelope modulation, RF output power and field strength measurements performed on the fundamental frequency can be carried out with an unmodulated carrier. The method used shall be described in the test report.

3.2.3 EUT Setup Block Diagram

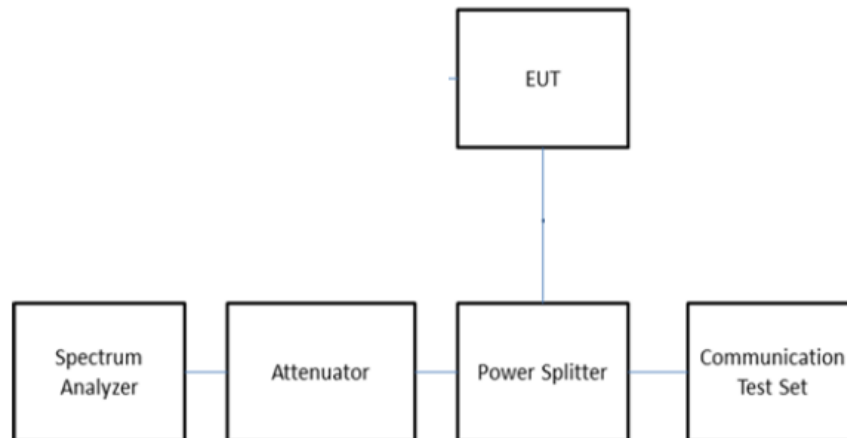

3.3 Occupied Bandwidth & Emission Mask

3.3.1 Applicable Standard

FCC §90.209

(a) Each authorization issued to a station licensed under this part will show an emission designator representing the class of emission authorized. The designator will be prefixed by a specified necessary bandwidth. This number does not necessarily indicate the bandwidth occupied by the emission at any instant. In those cases where §2.202 of this chapter does not provide a formula for the computation of necessary bandwidth, the occupied bandwidth, as defined in part 2 of this chapter, may be used in lieu of the necessary bandwidth.

(b) (5) Unless specified elsewhere, channel spacings and bandwidths that will be authorized in the following frequency bands are given in the following table: STANDARD CHANNEL SPACING/BANDWIDTH

FCC §90.210

Emission Mask D—12.5 kHz channel bandwidth equipment. For transmitters designed to operate with a 12.5 kHz channel bandwidth, any emission must be attenuated below the power (P) of the highest emission contained within the authorized bandwidth as follows:

- (1) On any frequency from the center of the authorized bandwidth f_0 to 5.625 kHz removed from f_0 : Zero dB.
- (2) On any frequency removed from the center of the authorized bandwidth by a displacement frequency (f_d in kHz) of more than 5.625 kHz but no more than 12.5 kHz: At least $7.27(f_d - 2.88 \text{ kHz})$ dB.
- (3) On any frequency removed from the center of the authorized bandwidth by a displacement frequency (f_d in kHz) of more than 12.5 kHz: At least $50 + 10 \log(P)$ dB or 70 dB, whichever is the lesser attenuation.
- (4) The reference level for showing compliance with the emission mask shall be established using a resolution bandwidth sufficiently wide (usually two or three times the channel bandwidth) to capture the true peak emission of the equipment under test. In order to show compliance with the emission mask up to and including 50 kHz removed from the edge of the authorized bandwidth, adjust the resolution bandwidth to 100 Hz with the measuring instrument in a peak hold mode. A sufficient number of sweeps must be measured to insure that the emission profile is developed. If video filtering is used, its bandwidth must not be less than the instrument resolution bandwidth. For emissions beyond 50 kHz from the edge of the authorized bandwidth, see paragraph (o) of this section. If it can be shown that use of the above instrumentation settings do not accurately represent the true interference potential of the equipment under test, an alternate procedure may be used provided prior Commission approval is obtained.

FCC §22.359

(a) *Out of band emissions.* The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log (P)$ dB.

(b) *Measurement procedure.* Compliance with these rules is based on the use of measurement instrumentation employing a resolution bandwidth of 30 kHz or more. In the 60 kHz bands immediately outside and adjacent to the authorized frequency range or channel, a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (i.e., 30 kHz or 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

3.3.2 Test Procedure

The occupied bandwidth or the “99% emission bandwidth” is defined as the frequency range between two points, one above and the other below the carrier frequency, within which 99% of the total transmitted power of the fundamental transmitted emission is contained. The occupied bandwidth shall be reported for all equipment in addition to the specified bandwidth required in the applicable RSSs.

In some cases, the “x dB bandwidth” is required, which is defined as the frequency range between two points, one at the lowest frequency below and one at the highest frequency above the carrier frequency, at which the maximum power level of the transmitted emission is attenuated x dB below the maximum in-band power level of the modulated signal, where the two points are on the outskirts of the in-band emission.

The following conditions shall be observed for measuring the occupied bandwidth and x dB bandwidth:

- The transmitter shall be operated at its maximum carrier power measured under normal test conditions.
- The span of the spectrum analyzer shall be set large enough to capture all products of the modulation process, including the emission skirts, around the carrier frequency, but small enough to avoid having other emissions (e.g. on adjacent channels) within the span.
- The detector of the spectrum analyzer shall be set to “Sample”. However, a peak, or peak hold, may be used in place of the sampling detector since this usually produces a wider bandwidth than the actual bandwidth (worst-case measurement). Use of a peak hold (or “Max Hold”) may be necessary to determine the occupied / x dB bandwidth if the device is not transmitting continuously.
- The resolution bandwidth (RBW) shall be in the range of 1% to 5% of the actual occupied / x dB bandwidth and the video bandwidth (VBW) shall not be smaller than three times the RBW value. Video averaging is not permitted.

Note: It may be necessary to repeat the measurement a few times until the RBW and VBW are in compliance with the above requirement.

For the 99% emission bandwidth, the trace data points are recovered and directly summed in linear power level terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached, and that frequency recorded. The process is repeated for the highest frequency data points (starting at the highest frequency, at the right side of the span, and going down in frequency). This frequency is then recorded. The difference between the two recorded frequencies is the occupied bandwidth (or the 99% emission bandwidth).


Emission Mask D for Transmitters Equipped With or Without an Audio Low-Pass Filter

The power of any emission shall be attenuated below the transmitter output power P (dBW) as specified in Table.

Displacement Frequency, f_d (kHz)	Minimum Attenuation (dB)	Resolution Bandwidth (Hz)
$5.625 < f_d \leq 12.5$	$7.27(f_d - 2.88)$	Specified in Section 4.2.2
$f_d > 12.5$	Whichever is the lesser: 70 or $50 + 10 \log_{10}(p)$	Specified in Section 4.2.2

In order to show compliance with the emission mask up to and including 50 kHz removed from the edge of the authorized bandwidth, adjust the resolution bandwidth to 100 Hz with the measuring instrument in a peak mode. For emissions beyond 50 kHz from the edge of the authorized bandwidth, the resolution bandwidth shall be 100 kHz for frequencies at or below 1 GHz, and 1 MHz for frequencies above 1 GHz. However, for emission mask F, at a displacement frequency of less than 3.75 kHz, the resolution bandwidth shall be 30 Hz.

3.3.3 EUT Setup Block Diagram

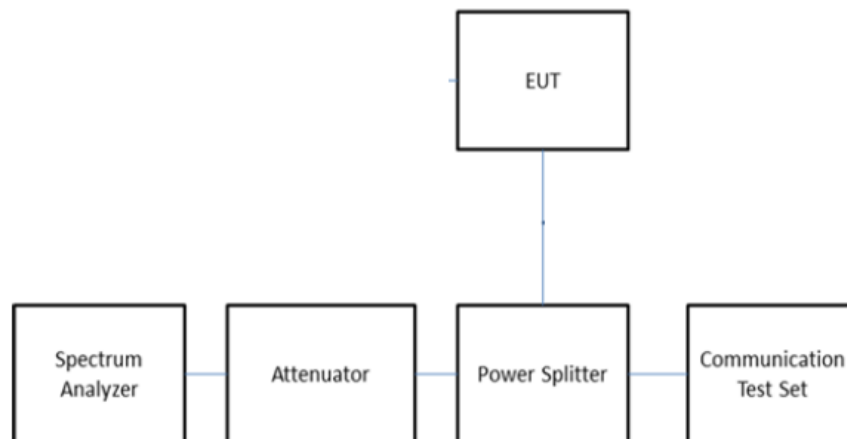

3.4 Transmitter Unwanted Emissions(Conducted)

3.4.1 Applicable Standard

FCC §90.210

Emission Mask D—12.5 kHz channel bandwidth equipment. For transmitters designed to operate with a 12.5 kHz channel bandwidth, any emission must be attenuated below the power (P) of the highest emission contained within the authorized bandwidth as follows:

- (5) On any frequency from the center of the authorized bandwidth f_0 to 5.625 kHz removed from f_0 : Zero dB.
- (6) On any frequency removed from the center of the authorized bandwidth by a displacement frequency (f_d in kHz) of more than 5.625 kHz but no more than 12.5 kHz: At least $7.27(f_d - 2.88 \text{ kHz})$ dB.
- (7) On any frequency removed from the center of the authorized bandwidth by a displacement frequency (f_d in kHz) of more than 12.5 kHz: At least $50 + 10 \log(P)$ dB or 70 dB, whichever is the lesser attenuation.
- (8) The reference level for showing compliance with the emission mask shall be established using a resolution bandwidth sufficiently wide (usually two or three times the channel bandwidth) to capture the true peak emission of the equipment under test. In order to show compliance with the emission mask up to and including 50 kHz removed from the edge of the authorized bandwidth, adjust the resolution bandwidth to 100 Hz with the measuring instrument in a peak hold mode. A sufficient number of sweeps must be measured to insure that the emission profile is developed. If video filtering is used, its bandwidth must not be less than the instrument resolution bandwidth. For emissions beyond 50 kHz from the edge of the authorized bandwidth, see paragraph (o) of this section. If it can be shown that use of the above instrumentation settings do not accurately represent the true interference potential of the equipment under test, an alternate procedure may be used provided prior Commission approval is obtained.

FCC §22.359

- (a) *Out of band emissions.* The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.
- (b) *Measurement procedure.* Compliance with these rules is based on the use of measurement instrumentation employing a resolution bandwidth of 30 kHz or more. In the 60 kHz bands immediately outside and adjacent to the authorized frequency range or channel, a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (i.e., 30 kHz or 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

3.4.2 Test Procedure

In order to show compliance with the emission mask up to and including 50 kHz removed from the edge of the authorized bandwidth, adjust the resolution bandwidth to 100 Hz with the measuring instrument in a peak mode. For emissions beyond 50 kHz from the edge of the authorized bandwidth, the resolution bandwidth shall be 100 kHz for frequencies at or below 1 GHz, and 1 MHz for frequencies above 1 GHz. However, for emission mask F, at a displacement frequency of less than 3.75 kHz, the resolution bandwidth shall be 30 Hz.

In measuring unwanted emissions, the spectrum shall be investigated from 30 MHz or the lowest radio frequency signal generated or used in the equipment, whichever is lower, without going below 9 kHz, up to at least the applicable frequency given below:


- (a) If the equipment operates below 10 GHz: to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.
- (b) If the equipment operates at or above 10 GHz and below 30 GHz: to the fifth harmonic of the highest fundamental frequency or to 100 GHz, whichever is lower.
- (c) If the equipment operates at or above 30 GHz: to the fifth harmonic of the highest fundamental frequency or to 200 GHz, whichever is lower, unless specified otherwise in the applicable RSS.
- (d) If the equipment contains a digital device that is exclusively used for enabling the operation of the radio apparatus: the spectrum shall be investigated according to the conditions specified in paragraphs (a) through (c) of this section or the range applicable to the digital device, as shown in table 2, whichever is the higher frequency range of investigation.

Table 2 – Frequency range for radiated measurement for equipment with a digital device

Highest frequency generated, operated or used in the equipment (MHz)	Upper frequency limit of measurement range (MHz)
< 1.705	30
1.705-108	1000
108-500	2000
500-1000	5000
> 1000	5 th harmonic of the highest frequency or 40 GHz, whichever is lower

It is not necessary to report the amplitude of spurious emissions attenuated more than 20 dB below the permissible value

3.4.3 EUT Setup Block Diagram

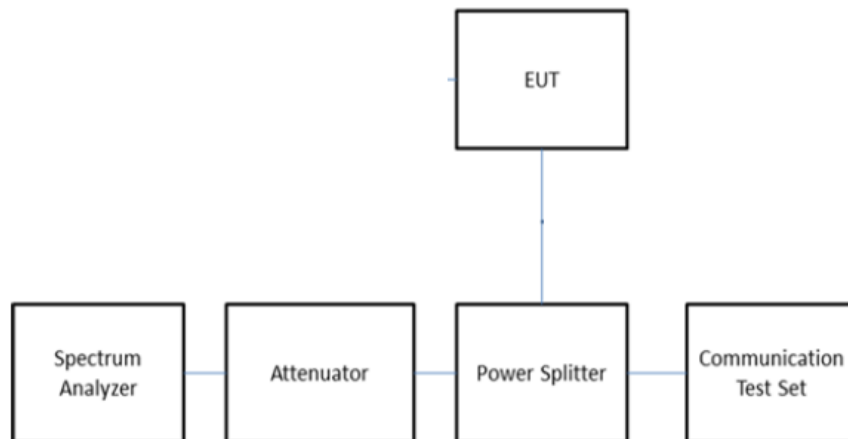

3.5 Transmitter Unwanted Emissions(Radiated)

3.5.1 Applicable Standard

FCC §90.210

Emission Mask D—12.5 kHz channel bandwidth equipment. For transmitters designed to operate with a 12.5 kHz channel bandwidth, any emission must be attenuated below the power (P) of the highest emission contained within the authorized bandwidth as follows:

- (9) On any frequency from the center of the authorized bandwidth f_0 to 5.625 kHz removed from f_0 : Zero dB.
- (10) On any frequency removed from the center of the authorized bandwidth by a displacement frequency (f_d in kHz) of more than 5.625 kHz but no more than 12.5 kHz: At least $7.27(f_d - 2.88 \text{ kHz})$ dB.
- (11) On any frequency removed from the center of the authorized bandwidth by a displacement frequency (f_d in kHz) of more than 12.5 kHz: At least $50 + 10 \log (P)$ dB or 70 dB, whichever is the lesser attenuation.
- (12) The reference level for showing compliance with the emission mask shall be established using a resolution bandwidth sufficiently wide (usually two or three times the channel bandwidth) to capture the true peak emission of the equipment under test. In order to show compliance with the emission mask up to and including 50 kHz removed from the edge of the authorized bandwidth, adjust the resolution bandwidth to 100 Hz with the measuring instrument in a peak hold mode. A sufficient number of sweeps must be measured to insure that the emission profile is developed. If video filtering is used, its bandwidth must not be less than the instrument resolution bandwidth. For emissions beyond 50 kHz from the edge of the authorized bandwidth, see paragraph (o) of this section. If it can be shown that use of the above instrumentation settings do not accurately represent the true interference potential of the equipment under test, an alternate procedure may be used provided prior Commission approval is obtained.

FCC §22.359

- (a) *Out of band emissions.* The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log (P)$ dB.
- (b) *Measurement procedure.* Compliance with these rules is based on the use of measurement instrumentation employing a resolution bandwidth of 30 kHz or more. In the 60 kHz bands immediately outside and adjacent to the authorized frequency range or channel, a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (i.e., 30 kHz or 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

3.5.2 Test Procedure

In measuring unwanted emissions, the spectrum shall be investigated from 30 MHz or the lowest radio frequency signal generated or used in the equipment, whichever is lower, without going below 9 kHz, up to at least the applicable frequency given below:

- (a) If the equipment operates below 10 GHz: to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.
- (b) If the equipment operates at or above 10 GHz and below 30 GHz: to the fifth harmonic of the highest fundamental frequency or to 100 GHz, whichever is lower.
- (c) If the equipment operates at or above 30 GHz: to the fifth harmonic of the highest fundamental frequency or to 200 GHz, whichever is lower, unless specified otherwise in the applicable RSS.
- (d) If the equipment contains a digital device that is exclusively used for enabling the operation of the radio apparatus: the spectrum shall be investigated according to the conditions specified in paragraphs (a) through (c) of this section or the range applicable to the digital device, as shown in table 2, whichever is the higher frequency range of investigation.

Table 2 – Frequency range for radiated measurement for equipment with a digital device

Highest frequency generated, operated or used in the equipment (MHz)	Upper frequency limit of measurement range (MHz)
< 1.705	30
1.705-108	1000
108-500	2000
500-1000	5000
> 1000	5 th harmonic of the highest frequency or 40 GHz, whichever is lower

It is not necessary to report the amplitude of spurious emissions attenuated more than 20 dB below the permissible value

3.6 Transient Frequency Behavior

3.6.1 Applicable Standard


FCC §90.214

Transmitters designed to operate in the 150-174 MHz and 421-512 MHz frequency bands must maintain transient frequencies within the maximum frequency difference limits during the time intervals indicated:

Time intervals ^{1 2}	Maximum frequency difference ³	All equipment	
		150 to 174 MHz	421 to 512 MHz
Transient Frequency Behavior for Equipment Designed to Operate on 12.5 kHz Channels			
t_1 ⁴	± 12.5 kHz	5.0 ms	10.0 ms
t_2	± 6.25 kHz	20.0 ms	25.0 ms
t_3 ⁴	± 12.5 kHz	5.0 ms	10.0 ms

3.6.2 Test Procedure

TIA-603-E Clause 2.2.19

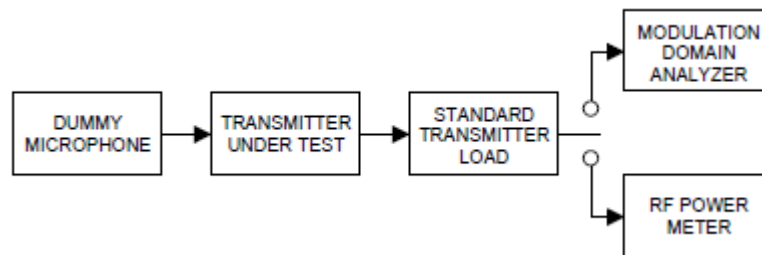

- a) Connect the equipment as illustrated.
- b) Connect the output of the standard transmitter load to the RF power meter. Supply sufficient attenuation via the RF attenuator to provide a level that is approximately 40 dB below the maximum allowable input to the modulation domain analyzer.
- c) Unkey the transmitter.
- d) Disconnect the RF power meter and connect the modulation domain analyzer in its place. Set the envelope trigger of the modulation domain analyzer to the minimum level that will trigger when the transmitter is keyed.
- e) Reduce the attenuation of the RF attenuator so that the input to the modulation domain analyzer is increased by 30 dB when the transmitter is keyed.
- f) Set the modulation domain analyzer to trigger on the rising edge of the waveform in order to capture a single-shot turn-on of the transmitter signal.
- g) Adjust the display of the modulation domain analyzer for proper viewing of the transmitter transient behavior. Set the timebase reference to the left for observing the transmitter turn-on transient.
- h) Key the transmitter.
- i) Observe the stored display of the modulation domain analyzer. The signal trace shall be maintained within the allowable limits during the periods t_1 and t_2 , and shall also remain within limits following t_2 .
- j) Adjust the modulation domain analyzer to trigger on the falling edge of the transmitter waveform in order to capture a single-shot turn-off transient of the transmitter signal.
- k) Adjust the display of the modulation domain analyzer for proper viewing of the transmitter

transient behavior. Set the timebase reference to the right for observing the transmitter turn-off transient.

l) Unkey the transmitter.

m) Observe the stored display of the modulation domain analyzer. The signal trace shall be maintained within the allowable limits during the period t_3 .

3.7 Modulation characteristics.

3.7.1 Applicable Standard

FCC §2.1047

- (a) Voice modulated communication equipment. A curve or equivalent data showing the frequency response of the audio modulating circuit over a range of 100 to 5000 Hz shall be submitted. For equipment required to have an audio low-pass filter, a curve showing the frequency response of the filter, or of all circuitry installed between the modulation limiter and the modulated stage shall be submitted.
- (b) Equipment which employs modulation limiting. A curve or family of curves showing the percentage of modulation versus the modulation input voltage shall be supplied. The information submitted shall be sufficient to show modulation limiting capability throughout the range of modulating frequencies and input modulating signal levels employed.
- (c) Single sideband and independent sideband radiotelephone transmitters which employ a device or circuit to limit peak envelope power. A curve showing the peak envelope power output versus the modulation input voltage shall be supplied. The modulating signals shall be the same in frequency as specified in paragraph (c) of §2.1049 for the occupied bandwidth tests.
- (d) Other types of equipment. A curve or equivalent data which shows that the equipment will meet the modulation requirements of the rules under which the equipment is to be licensed.

3.7.2 Test Procedure

C63.26-2015, Clause 5.3.2 Modulation limiting test methodology


Modulation limiting is the ability of a transmitter circuit to limit the transmitter from producing deviations in excess of a rated system deviation.

- a) Connect the equipment as illustrated in Figure 1.
- b) Adjust the transmitter per the manufacturer's procedure for full rated system deviation.
- c) Set the test receiver to measure peak positive deviation. Set the audio bandwidth for ≤ 0.25 Hz to ≥ 15000 Hz. Turn the de-emphasis function off.
- d) Apply a 1000 Hz modulating signal to the transmitter from the audio frequency generator, and adjust the level to obtain 60% of full rated system deviation. This is the 0 dB reference level.
- e) Increase the level from the audio generator by 20 dB in 5 dB increments recording the deviation as measured from the test receiver in each step. Verify that the audio level used to make the OBW measurement is included in the sweep.
- f) Repeat for step e) at 300 Hz, 2500 Hz and 3000 Hz at a minimum using the 0 dB reference level obtained in step d).
- g) Set the test receiver to measure peak negative deviation and repeat step d) through step f).
- h) The values recorded in step f) and step g) are the modulation limiting.
- i) Plot the data set as a percentage of deviation relative to the 0 dB reference point versus input voltage.

C63.26-2015, Clause 5.3.3.2 Audio frequency response test methodology—Constant Input

- a) Connect the equipment as illustrated in Figure 3.
- b) Set the test receiver to measure peak positive deviation. Set the audio bandwidth for ≤ 50 Hz to ≥ 15000 Hz. Turn the de-emphasis function off.
- c) Adjust the transmitter per the manufacturer's procedure for full rated system deviation.
- d) Apply a 1000 Hz tone and adjust the audio frequency generator to produce 20% of the rated system deviation.
- e) Set the test receiver to measure rms deviation and record the deviation reading as DEVREF.
- f) Set the audio frequency generator to the desired test frequency between 300 Hz and 3000 Hz.

3.7.3 EUT Setup Block Diagram

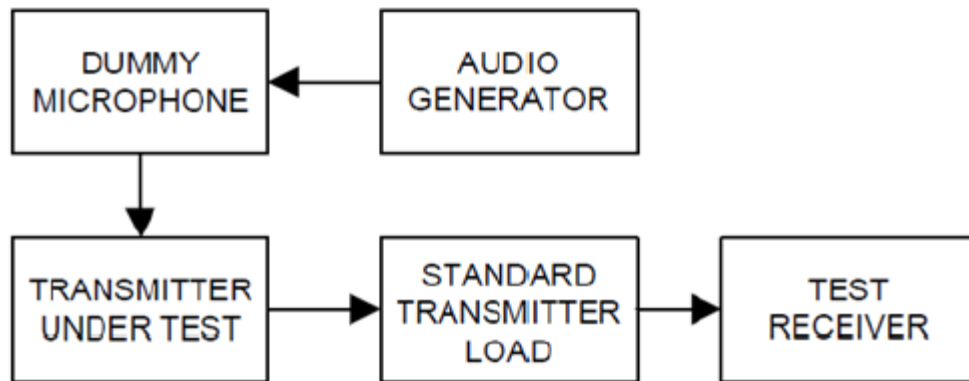

4. Test DATA AND RESULTS

4.1 Transmitter Frequency Stability

Serial Number:	CR22050007-RF-S1	Test Date:	2022/7/09-2022/07/11
Test Site:	RF	Test Mode:	Transmitting
Tester:	Morpheus Shi	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	27.1-27.8	Relative Humidity: (%)	66-72	ATM Pressure: (kPa)	100.0-100.2
----------------------	-----------	------------------------------	-------	------------------------	-------------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Signal Analyzer	FSIQ26	831929/006	2021-07-22	2022-07-21
zhuoxiang	Coaxial Cable	SMA-178	211002	Each time	N/A
Mini-Circuits	DC Block	BLK-18-S+	1554404	Each time	N/A
Weinschel	Coaxial Attenuators	53-20-34	LN751	Each time	N/A
BACL	TEMP&HUMI Test Chamber	BTH-150	30026	2021-07-22	2022-07-21
UNI-T	Multimeter	UT39A+	C210582554	2021-09-30	2022-09-29
HP	RF Communications Test Set	8920A	3438A05209	2021-07-22	2022-07-21
ZHAOXIN	DC Power Supply	RXN-6010D	21R6010D0912386	N/A	N/A
Weinschel	Power splitter	1515	RA915	Each time	N/A

* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data:

Part 90:

FM, 12.5kHz, $f_c = 480.0125$ MHz,				
Temperature	Voltage	Measured	Frequency Error	Limit
°C	V _{DC}	MHz	ppm	ppm
-30	7.4	480.0124012	-0.21	2.5
-20		480.0124245	-0.16	
-10		480.0124331	-0.14	
0		480.0125124	0.03	
10		480.0125358	0.07	
20		480.0124799	-0.04	
30		480.0124587	-0.09	
40		480.0125252	0.05	
50		480.0125657	0.14	
20		6.3	480.0124472	
20	8.9	480.0125299	0.06	

4FSK, $f_c = 480.0125$ MHz,				
Temperature	Voltage	Measured	Frequency Error	Limit
°C	V _{DC}	MHz	ppm	ppm
-30	7.4	480.0124385	-0.13	2.5
-20		480.0124896	-0.02	
-10		480.0125524	0.11	
0		480.0125842	0.18	
10		480.0126201	0.25	
20		480.0126503	0.31	
30		480.0126725	0.36	
40		480.0126854	0.39	
50		480.0126963	0.41	
20		6.3	480.0125471	
20	8.9	480.0126854	0.39	

Part 22:

FM,12.5kHz, $f_c = 454.0125$ MHz				
Temperature	Voltage	Measured	Frequency Error	Limit
°C	V _{DC}	MHz	ppm	ppm
-30	7.4	454.0124015	-0.22	5
-20		454.0124286	-0.16	
-10		454.0124371	-0.14	
0		454.0125244	0.05	
10		454.0125547	0.12	
20		454.0124799	-0.04	
30		454.0124953	-0.01	
40		454.0125424	0.09	
50		454.0125687	0.15	
20		6.3	454.0124964	
20	8.9	454.0125782	0.17	

4FSK, 12.5kHz, $f_c = 454.0125$ MHz				
Temperature	Voltage	Measured	Frequency Error	Limit
°C	V _{DC}	MHz	ppm	ppm
-30	7.4	454.0125274	0.06	5
-20		454.0124571	-0.09	
-10		454.0124863	-0.03	
0		454.0125784	0.17	
10		454.0125653	0.14	
20		454.0124799	-0.04	
30		454.0125247	0.05	
40		454.0125571	0.13	
50		454.0126342	0.30	
20		6.3	454.0125101	
20	8.9	454.0125847	0.19	

FM,25kHz, $f_c = 454.0125$ MHz				
Temperature	Voltage	Measured	Frequency Error	Limit
°C	V _{DC}	MHz	ppm	ppm
-30	7.4	454.0125025	0.01	5
-20		454.0124154	-0.19	
-10		454.0124577	-0.09	
0		454.0124684	-0.07	
10		454.0128653	0.80	
20		454.0124499	-0.11	
30		454.0125024	0.01	
40		454.0125247	0.05	
50		454.0125678	0.15	
20		6.3	454.0124382	
20	8.9	454.0124538	-0.10	

4.2 Transmitter Output Power

Serial Number:	CR22050007-RF-S1	Test Date:	2022/7/09-2022/07/11
Test Site:	RF	Test Mode:	Transmitting
Tester:	Morpheus Shi	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	27.1-27.8	Relative Humidity: (%)	66-72	ATM Pressure: (kPa)	100.0-100.2
----------------------	-----------	------------------------------	-------	------------------------	-------------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Signal Analyzer	FSIQ26	831929/006	2021-07-22	2022-07-21
zhuoxiang	Coaxial Cable	SMA-178	211002	Each time	N/A
Mini-Circuits	DC Block	BLK-18-S+	1554404	Each time	N/A
Weinschel	Coaxial Attenuators	53-20-34	LN751	Each time	N/A
Weinschel	Power splitter	1515	RA915	Each time	N/A
HP	RF Communications Test Set	8920A	3438A05209	2021-07-22	2022-07-21

* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data:


Channel Separation	Test Modulation	Test Channel	Test Frequency (MHz)	Conducted Output Power (dBm)		Limit (dBm)	
				High Power Level	Low Power Level	High Power Level	Low Power Level
12.5kHz	FM	Low	400.0125	35.71	30.22	36.81	30.79
		Middle	480.0125	35.61	30.24	36.81	30.79
		High	511.9875	35.16	29.13	36.81	30.79
	4FSK	Low	400.0125	35.77	30.47	36.81	30.79
		Middle	480.0125	35.71	30.29	36.81	30.79
		High	511.9875	35.37	29.23	36.81	30.79
12.5kHz	FM	Additional	454.0125	35.57	29.89	36.81	30.79
25kHz	FM		454.0125	35.53	29.89	36.81	30.79
12.5kHz	4FSK		454.0125	35.64	30.02	36.81	30.79

Note: The high rated power level is 4W(36dBm), and low rated power level is 1W(30dBm).


The output power shall not exceed by more than 20 percent the manufacturer's rated output power for the particular transmitter specifically listed on the authorization.

FM, 12.5kHz:


Low Channel, 400.0125 MHz High Power

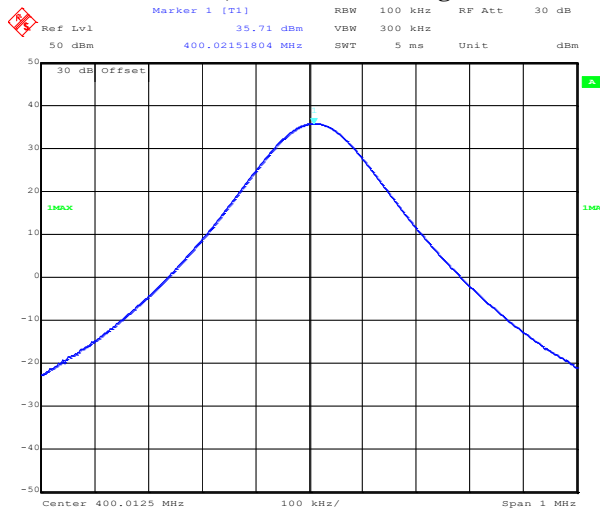


Low Channel, 400.0125 MHz Low Power

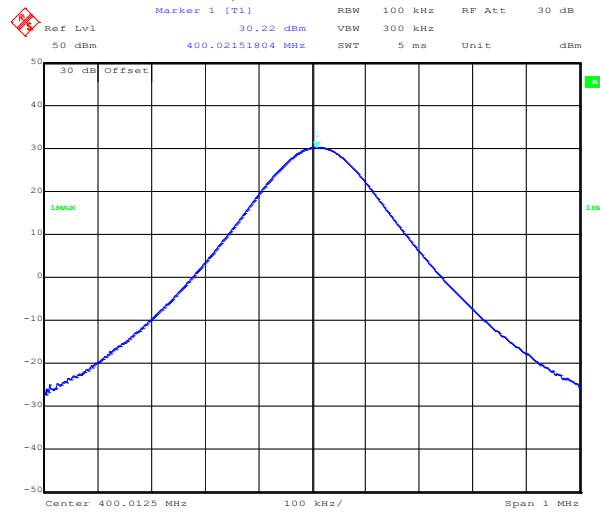


Middle Channel, 480.0125 MHz High Power

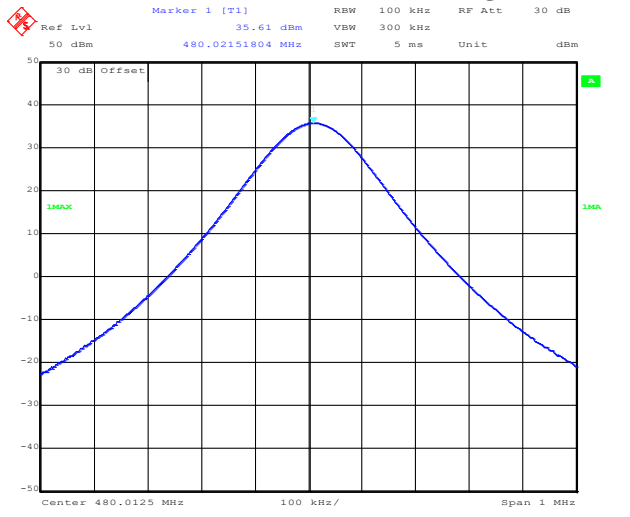


Middle Channel, 480.0125 MHz Low Power

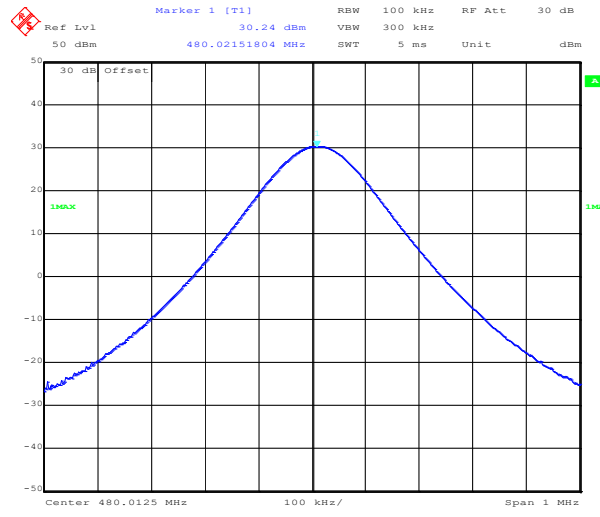

High Channel, 511.9875 MHz High Power

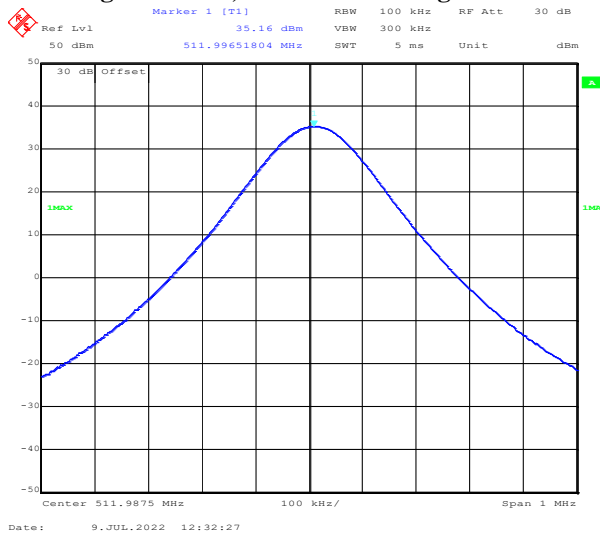


High Channel, 511.9875 MHz Low Power

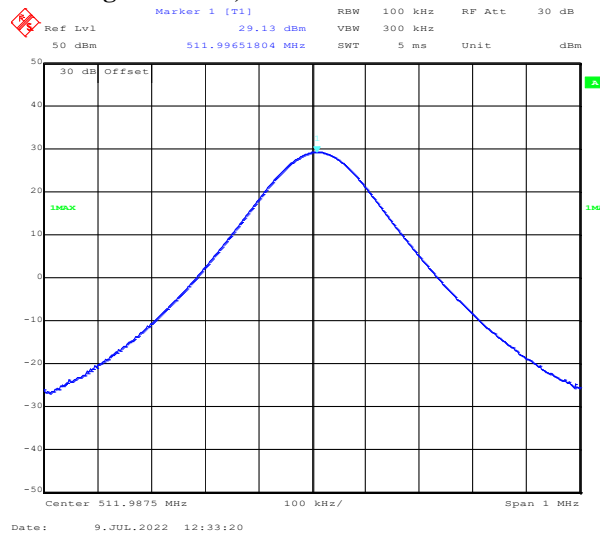


4FSK, 12.5kHz:


Low Channel, 400.0125 MHz High Power

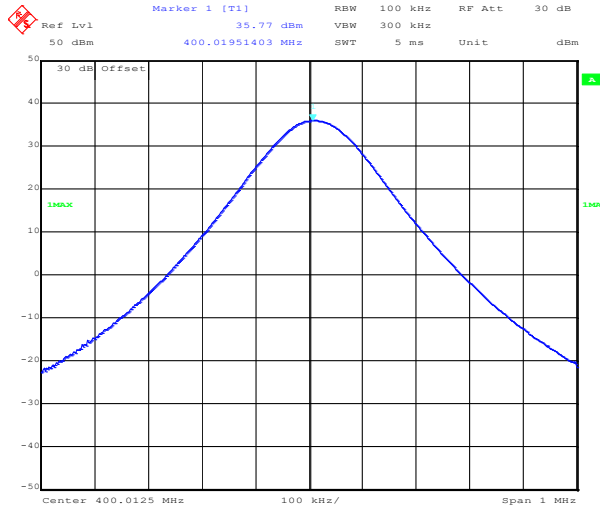


Low Channel, 400.0125 MHz Low Power

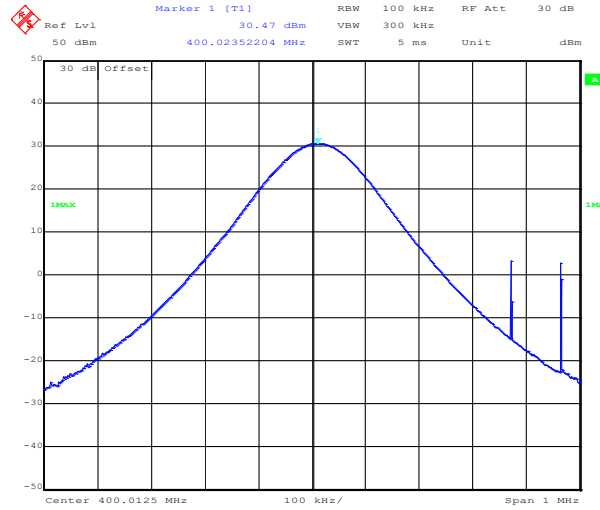


Middle Channel, 480.0125 MHz High Power

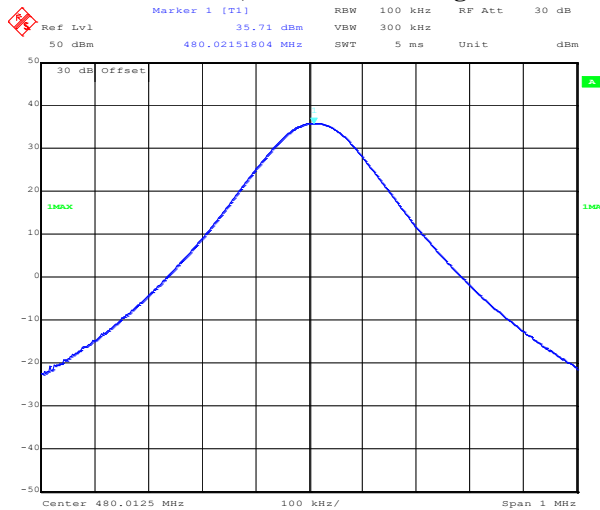


Middle Channel, 480.0125 MHz Low Power

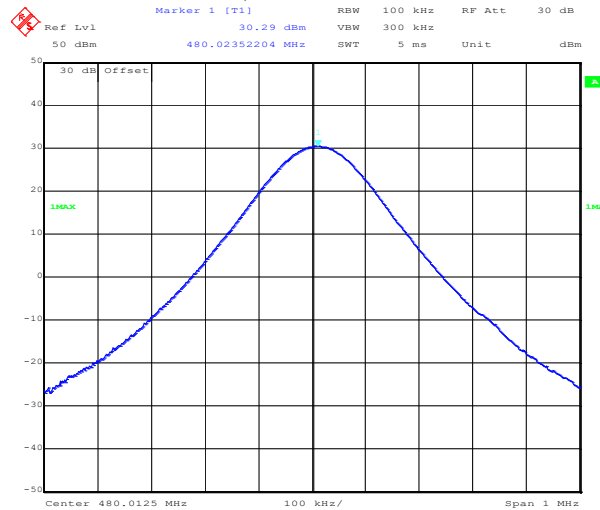

High Channel, 511.9875MHz High Power

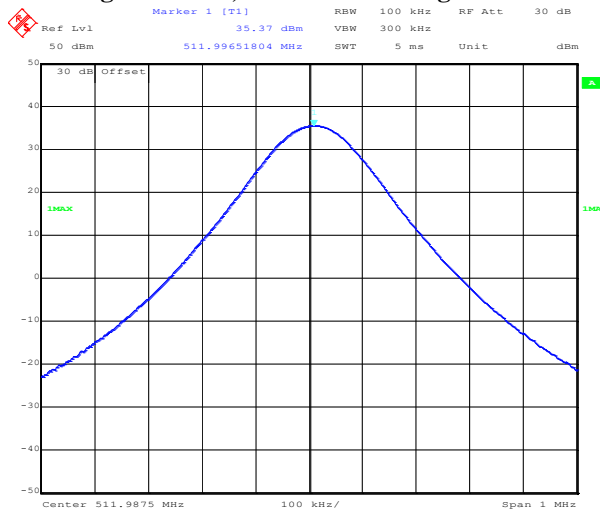


High Channel, 511.9875 MHz Low Power

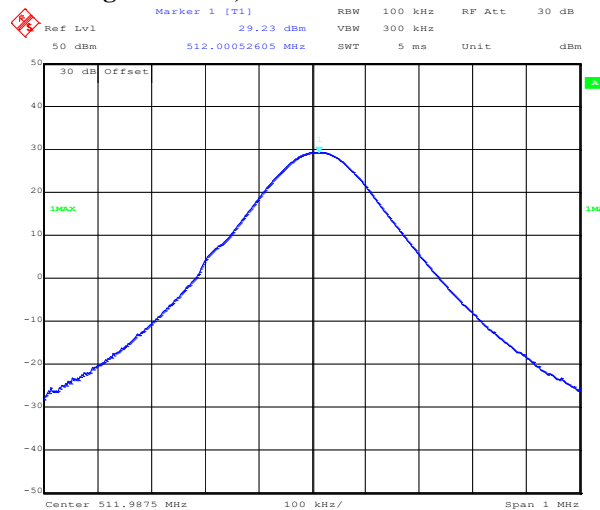


Additional Channel:


FM, 12.5kHz, 454.0125 MHz High Power

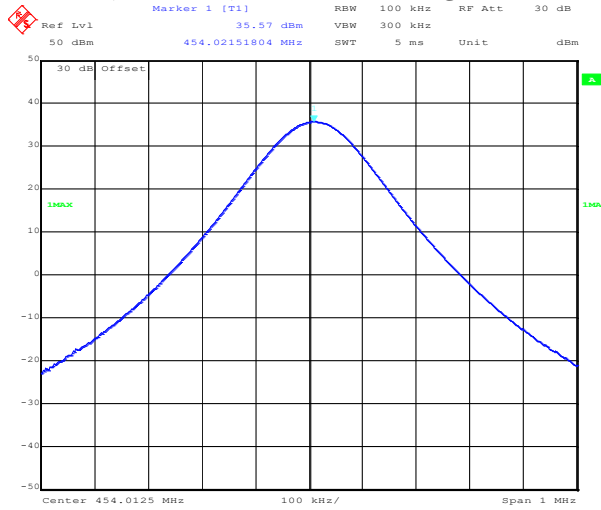


FM, 12.5kHz, 454.0125 MHz Low Power

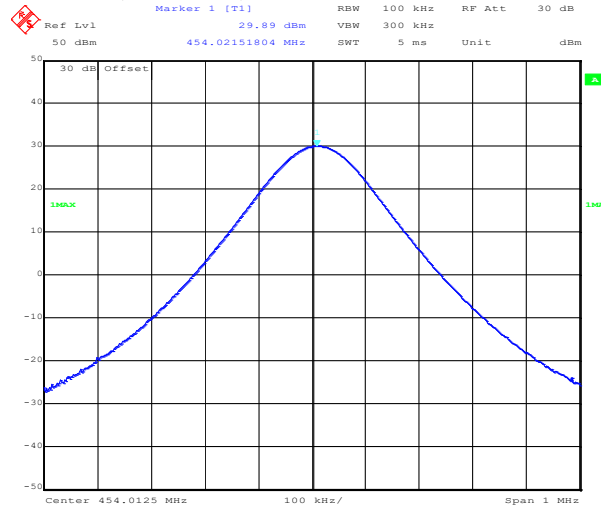


FM, 25kHz, 454.0125 MHz High Power

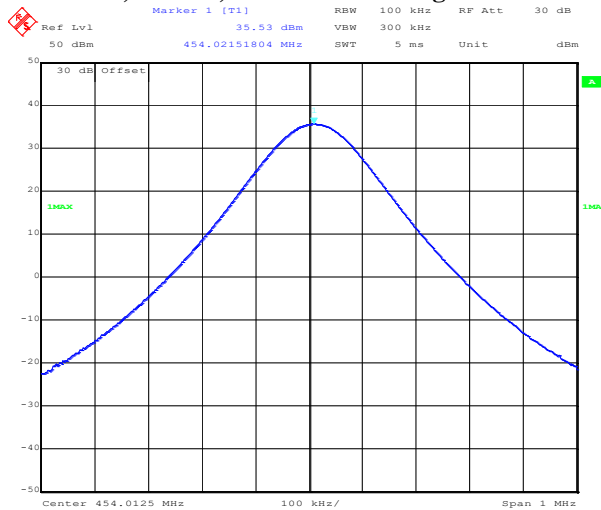


FM, 25kHz, 454.0125 MHz Low Power

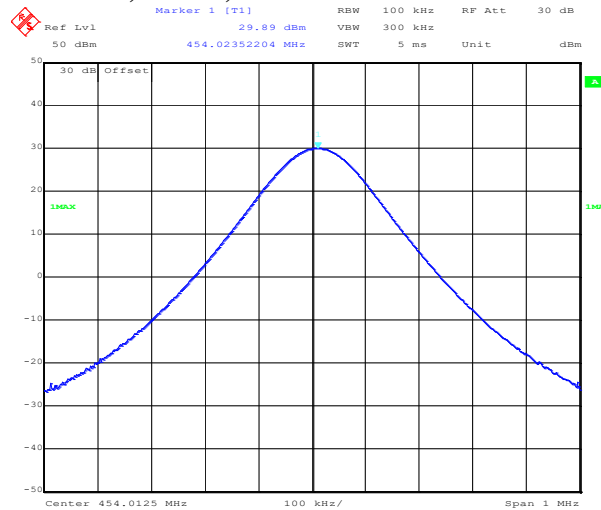

4FSK, 12.5kHz, 454.0125 MHz High Power

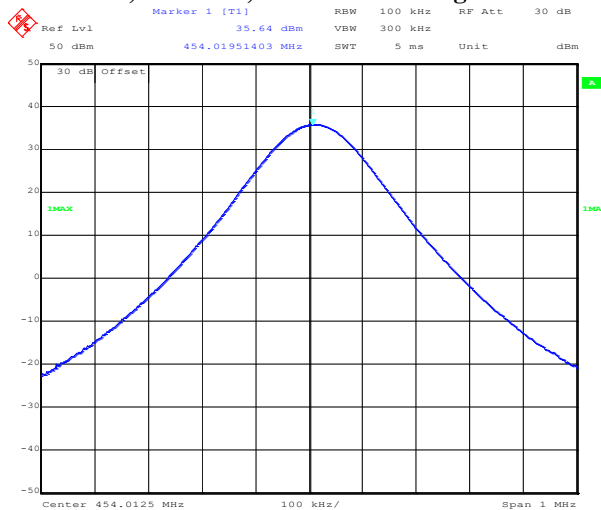

4FSK, 12.5kHz, 454.0125 MHz Low Power

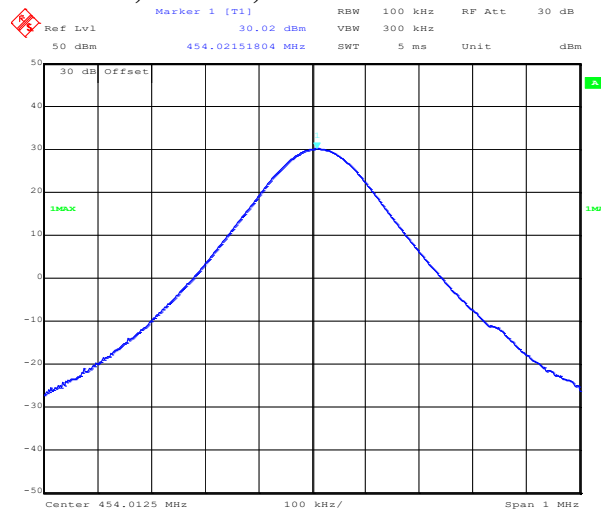

4.3 Occupied Bandwidth & Emission Mask

Serial Number:	CR22050007-RF-S1	Test Date:	2022/7/09-2022/07/11
Test Site:	RF	Test Mode:	Transmitting
Tester:	Morpheus Shi	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	27.1-27.8	Relative Humidity: (%)	66-72	ATM Pressure: (kPa)	100.0-100.2
----------------------	-----------	------------------------------	-------	------------------------	-------------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Signal Analyzer	FSIQ26	831929/006	2021-07-22	2022-07-21
zhuoxiang	Coaxial Cable	SMA-178	211002	Each time	N/A
Mini-Circuits	DC Block	BLK-18-S+	1554404	Each time	N/A
Weinschel	Coaxial Attenuators	53-20-34	LN751	Each time	N/A
Weinschel	Power splitter	1515	RA915	Each time	N/A
HP	RF Communications Test Set	8920A	3438A05209	2021-07-22	2022-07-21

* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data:

Test Mode	Test Channel	Test Frequency (MHz)	High Power Level		Low Power Level	
			99% Occupied Bandwidth (kHz)	26dB Emission Bandwidth (kHz)	99% Occupied Bandwidth (kHz)	26dB Emission Bandwidth (kHz)
FM 12.5kHz	Low	400.0125	5.611	10.321	5.912	10.321
	Middle	480.0125	6.012	10.321	6.112	10.321
	High	511.9875	9.920	10.321	9.920	10.321
4FSK 12.5kHz	Low	400.0125	6.112	8.918	6.212	9.218
	Middle	480.0125	6.012	9.118	6.112	8.918
	High	511.9875	6.313	8.918	6.313	9.118
FM 12.5kHz	Additional	454.0125	9.820	10.321	9.820	10.321
4FSK 12.5kHz		454.0125	6.413	8.818	6.413	8.717
FM 25kHz		454.0125	10.621	15.832	10.621	15.832

Note: Emission bandwidth was based on calculation method instead of measurement.
Emission Designator: Per CFR 47 §2.201& §2.202, $BW = 2M + 2D$

For FM Mode (Channel Spacing: 12.5 kHz)

Emission Designator: 11K0F3E

In this case, the maximum modulating frequency is 3.0 kHz with a 2.5 kHz deviation.

$$BW = 2(M+D) = 2*(3.0 \text{ kHz} + 2.5 \text{ kHz}) = 11 \text{ kHz} = 11K0$$

F3E portion of the designator represents an FM voice transmission

Therefore, the entire designator for 12.5 kHz channel spacing FM mode is 11K0F3E.

For FM Mode (Channel Spacing: 25 kHz)

Emission Designator: 16K0F3E

In this case, the maximum modulating frequency is 3.0 kHz with a 5.0 kHz deviation.

$$BW = 2(M+D) = 2*(3.0 \text{ kHz} + 5.0 \text{ kHz}) = 16 \text{ kHz} = 16K0$$

F3E portion of the designator represents an FM voice transmission

Therefore, the entire designator for 25 kHz channel spacing FM mode is 16K0F3E.

For Digital Mode (Channel Spacing: 12.5 kHz)

Emission Designator: 7K60F1D and 7K60F1E



The 99% energy rule (title 47CFR 2.1049) was used for digital mode. It basically states that 99% of the modulation energy falls within X kHz, in this case, 7.60 kHz. The emission mask was obtained from 47CFR 90.210(d).

F1D and F1E portion of the designator indicates digital information.



Therefore, the entire designator for 12.5 kHz channel spacing digital mode is 7K60F1D and 7K60F1E.

FM, 12.5kHz, High Power:



Low Channel

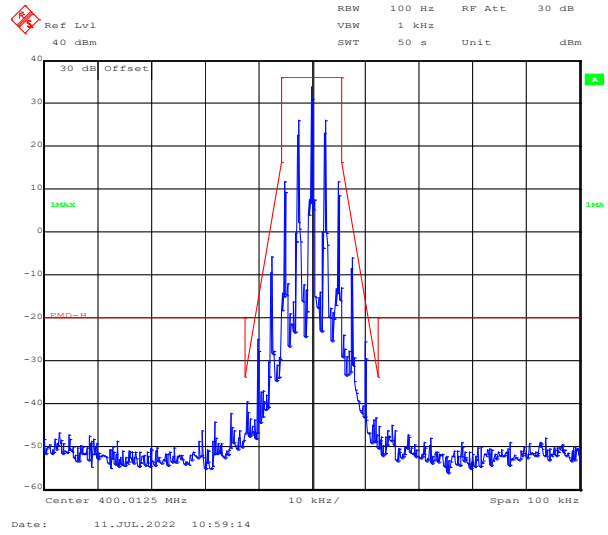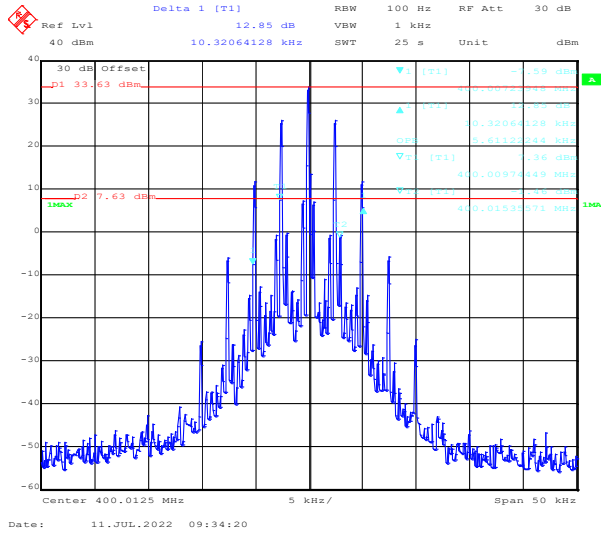

Middle Channel

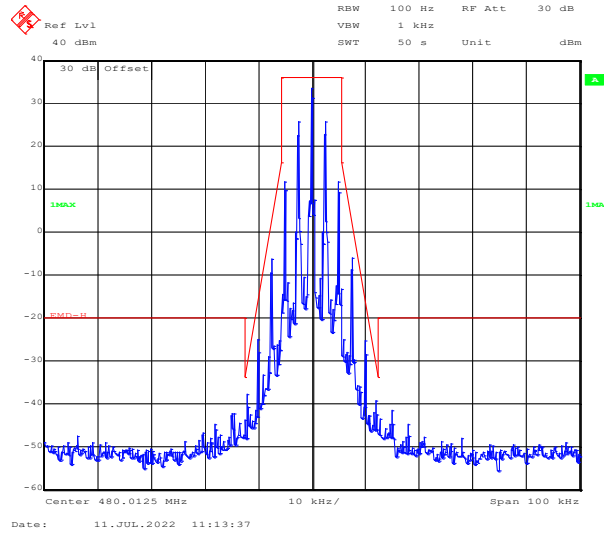
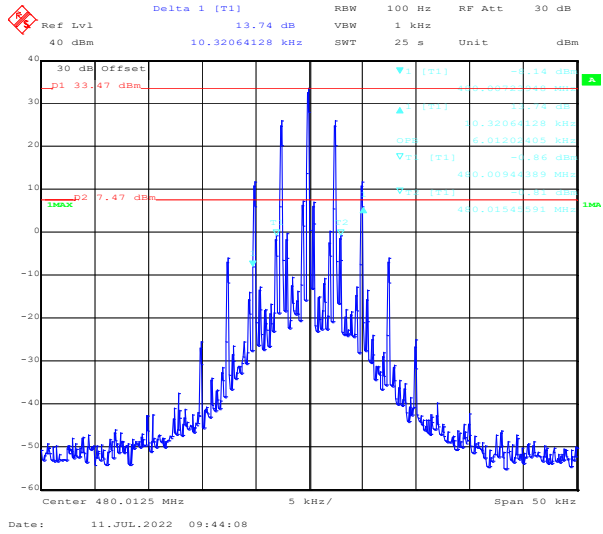


High Channel

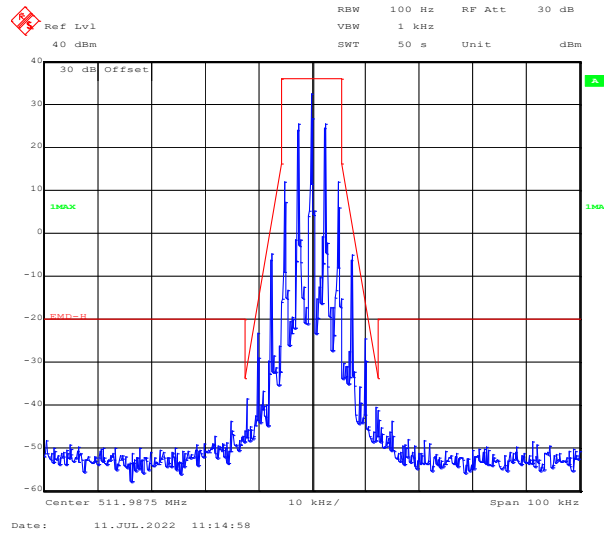
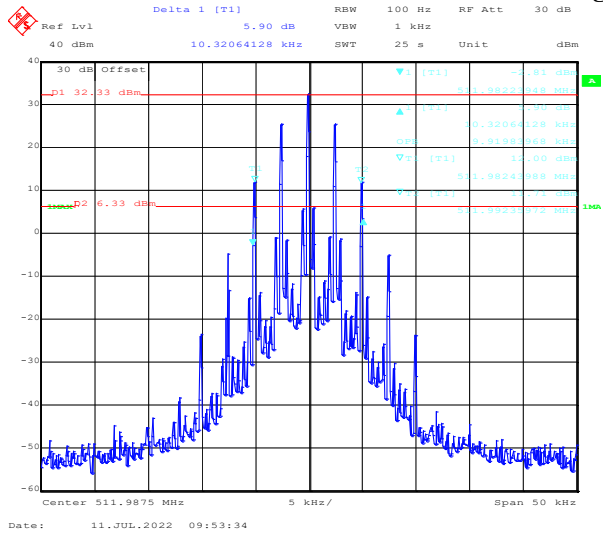


FM, 12.5kHz, Low Power:



Low Channel

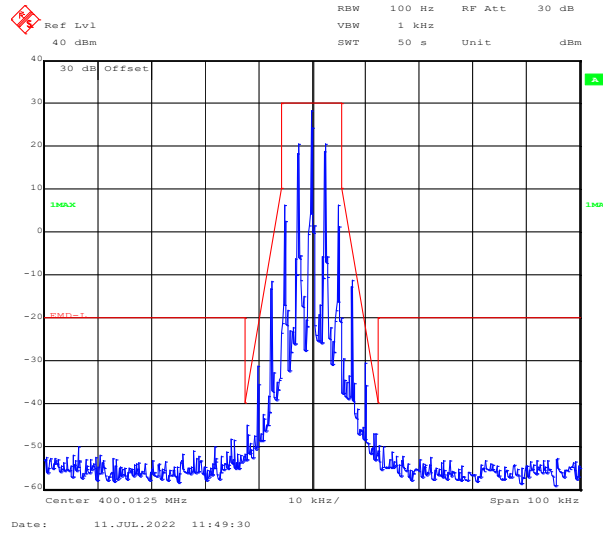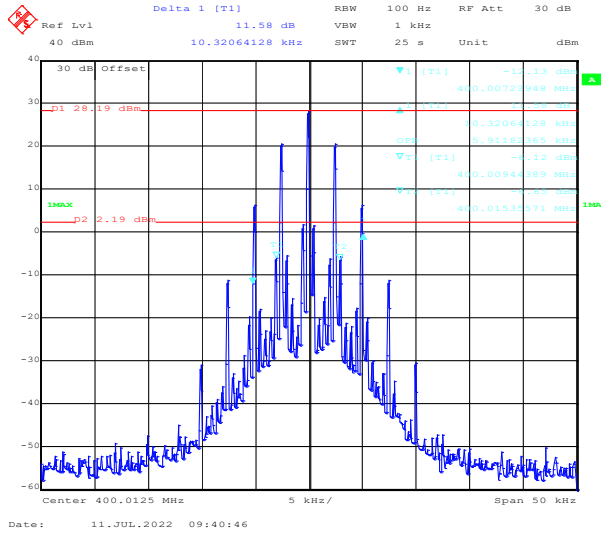

Middle Channel

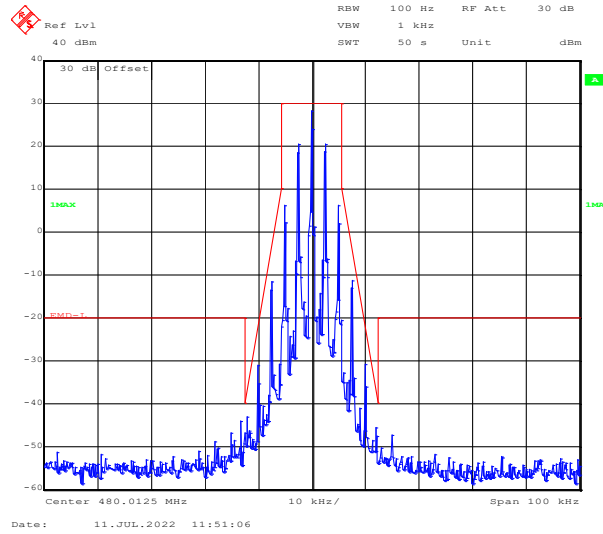
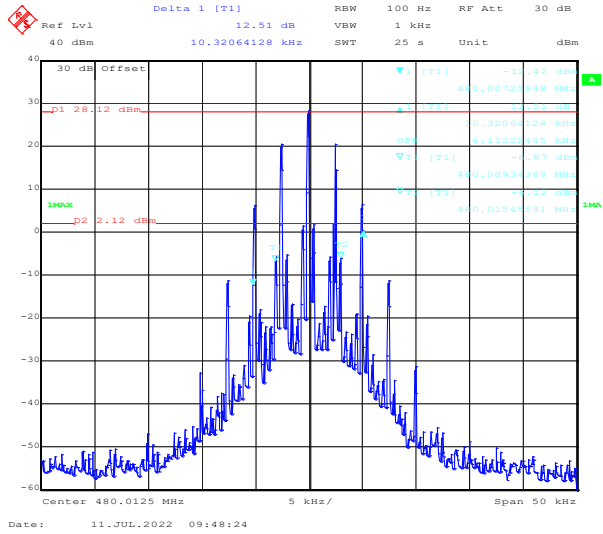


High Channel

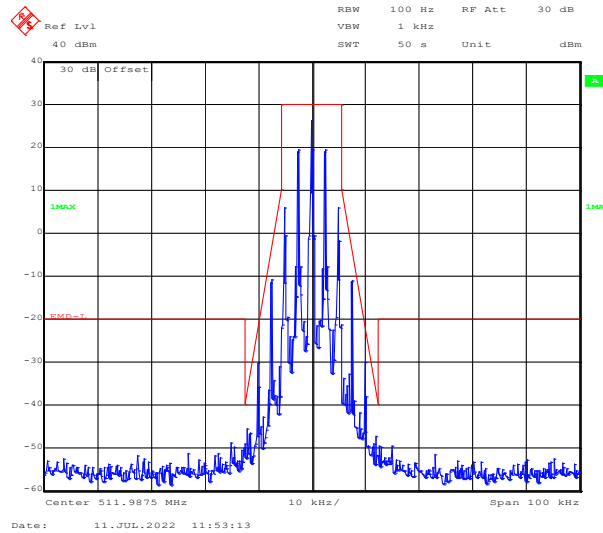
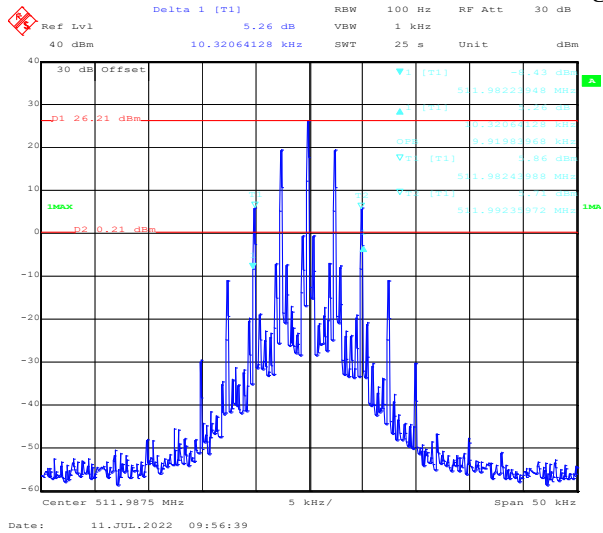


4FSK, 12.5kHz, High Power:



Low Channel

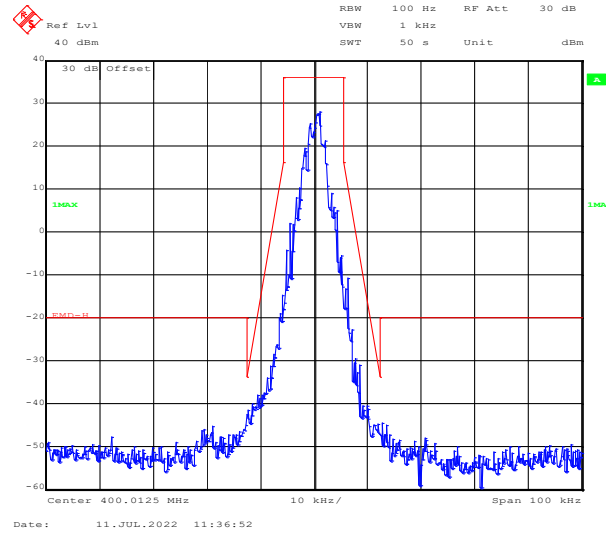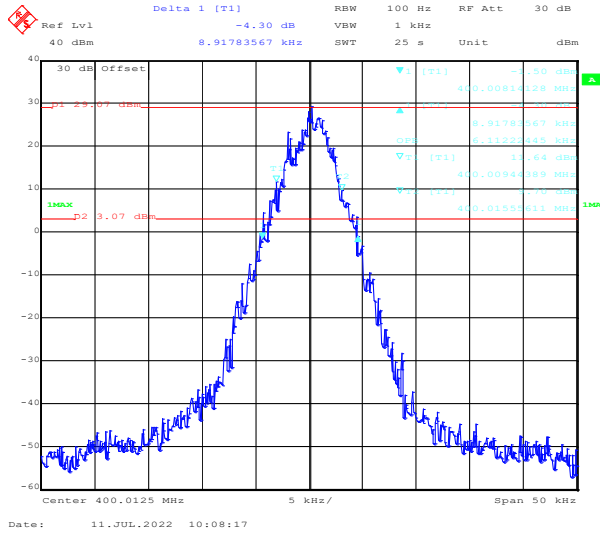

Middle Channel

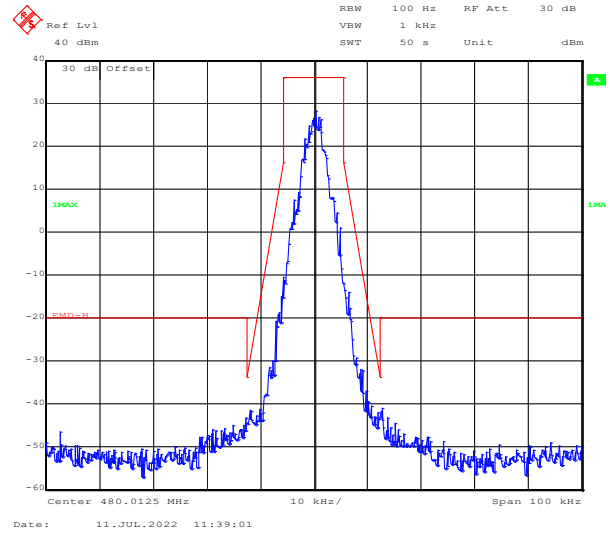
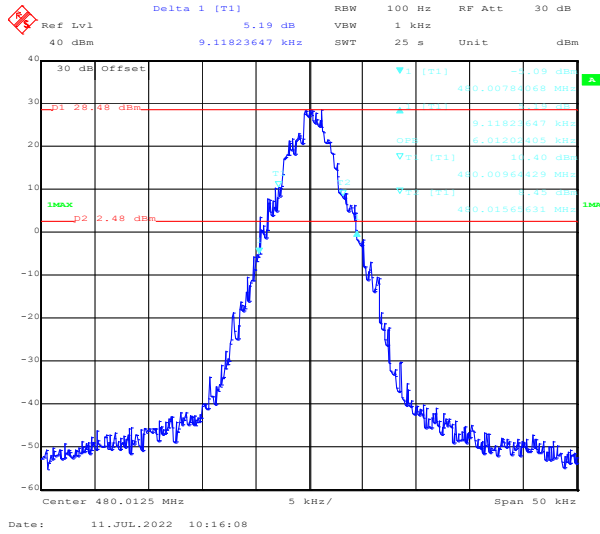


High Channel

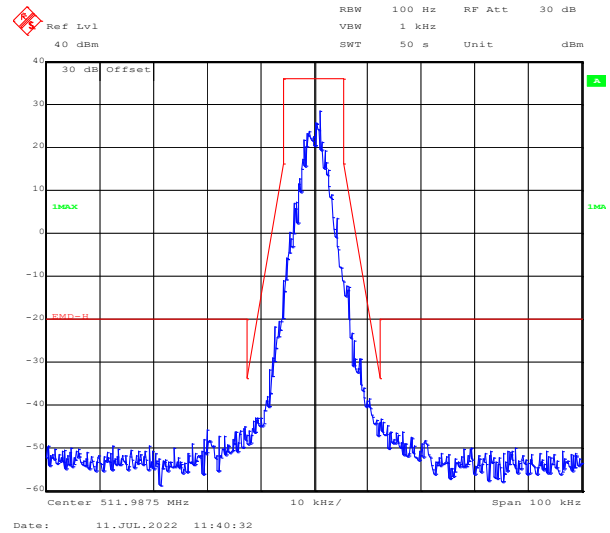
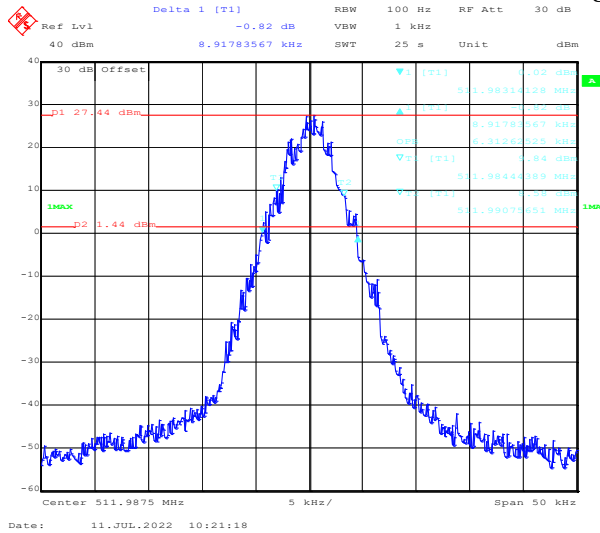


4FSK, 12.5kHz, Low Power:



Low Channel

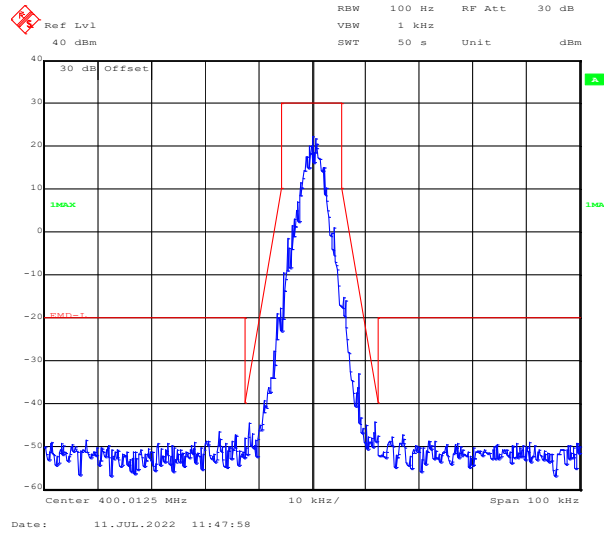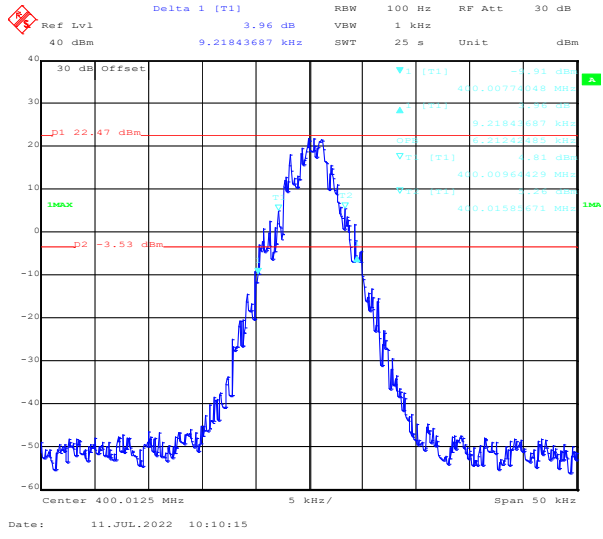

Middle Channel

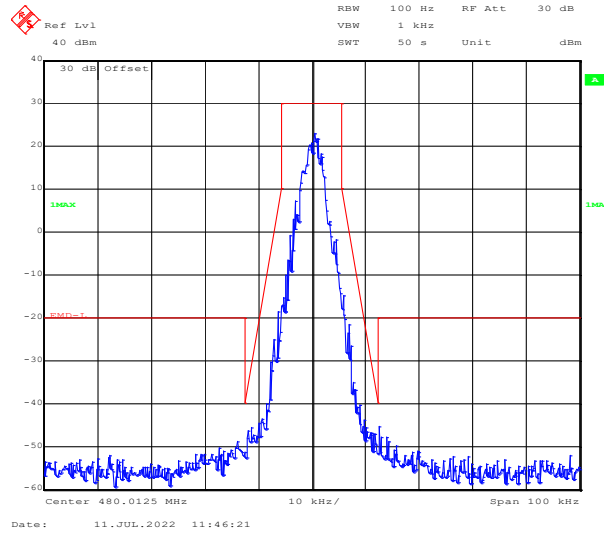
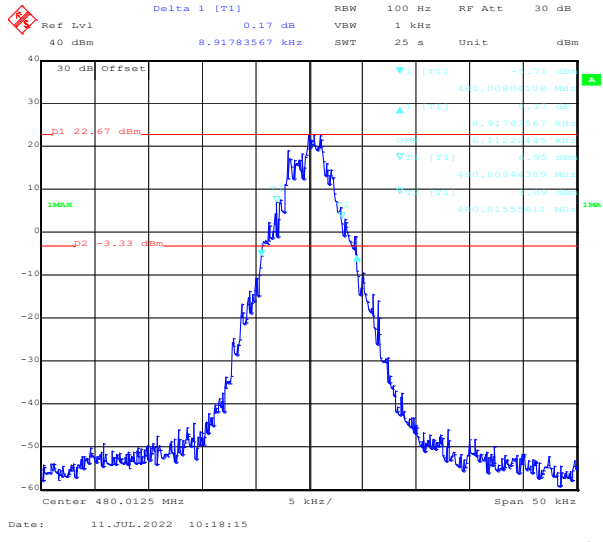


High Channel

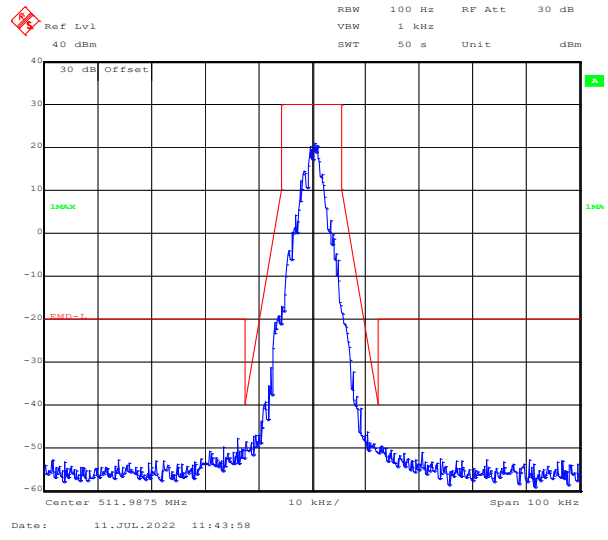
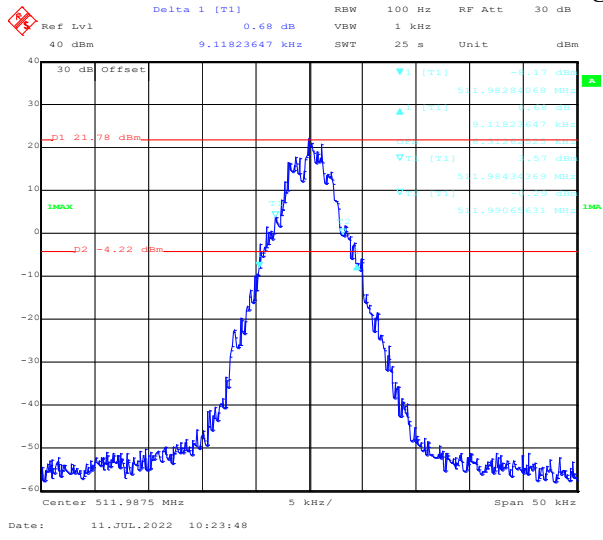


Additional Channel, High Power:



FM, 12.5kHz

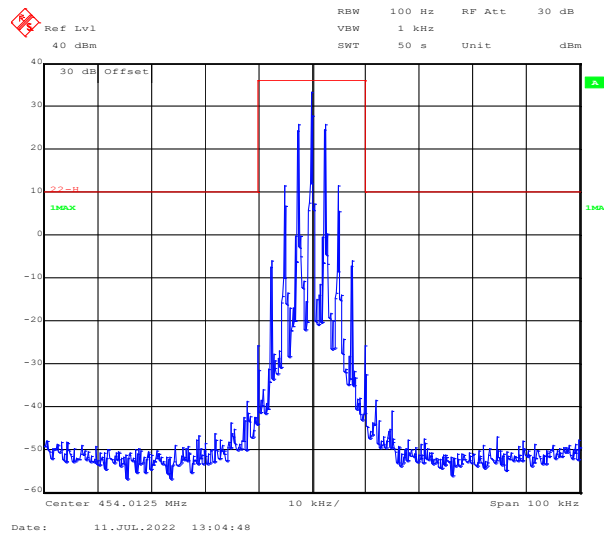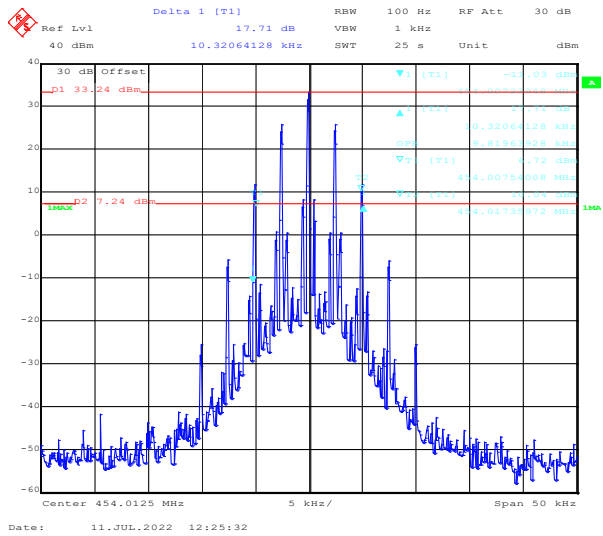

4FSK, 12.5kHz

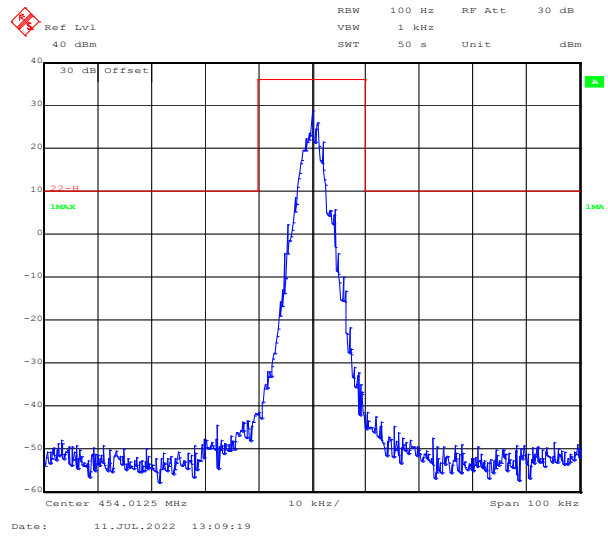
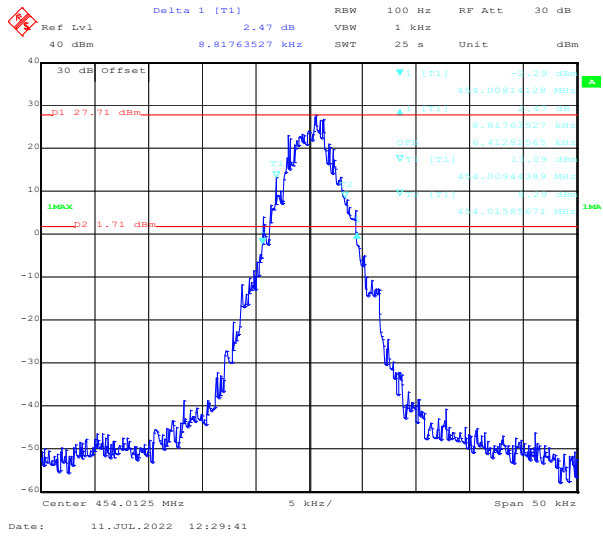


FM, 25kHz

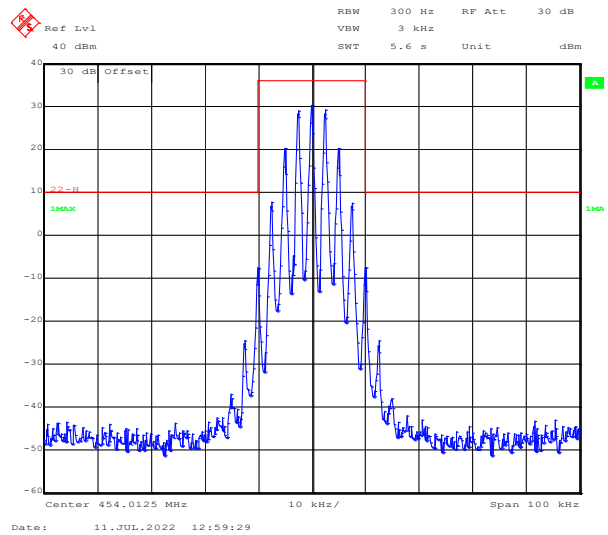
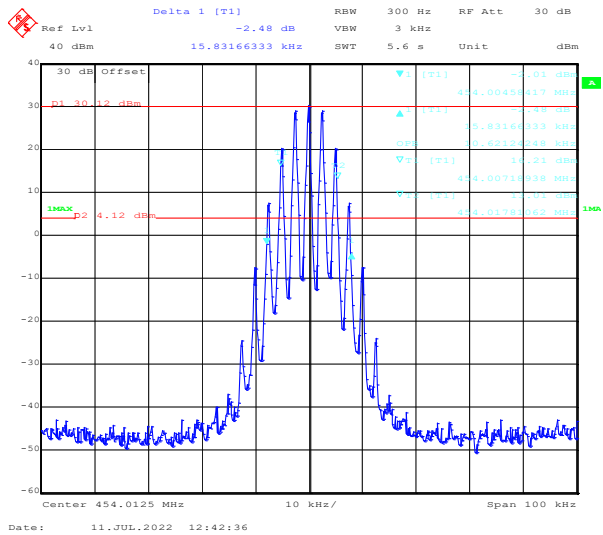


Additional Channel, Low Power:



FM, 12.5kHz

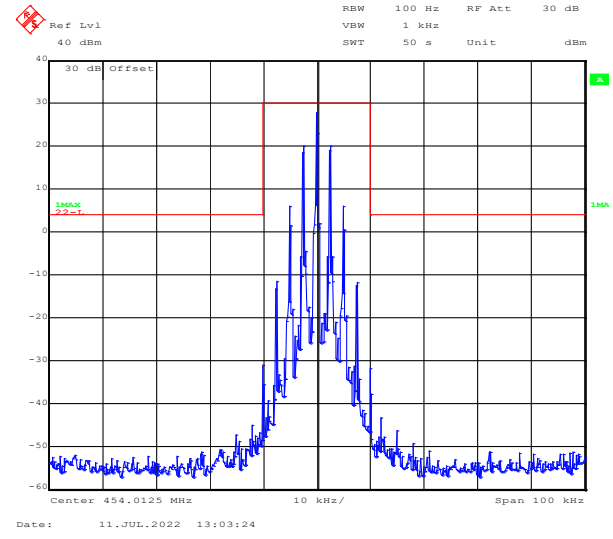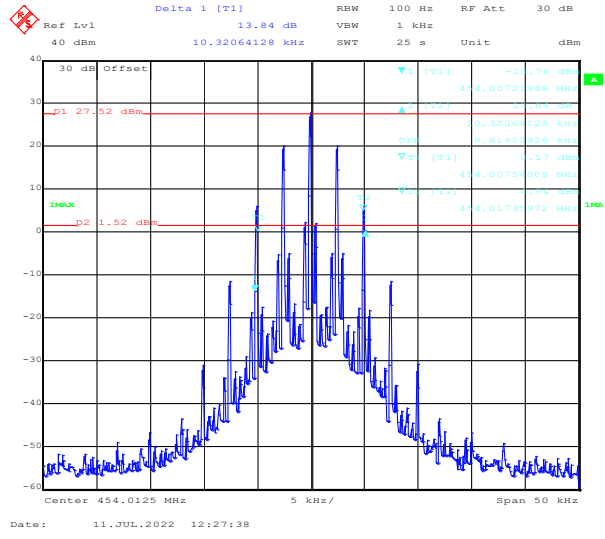

4FSK, 12.5kHz

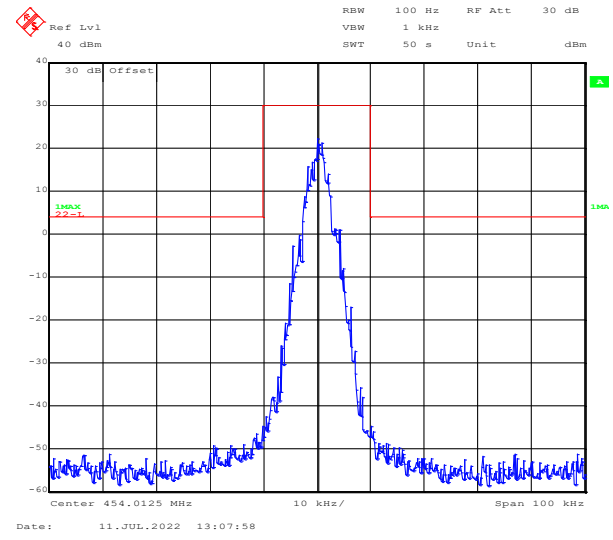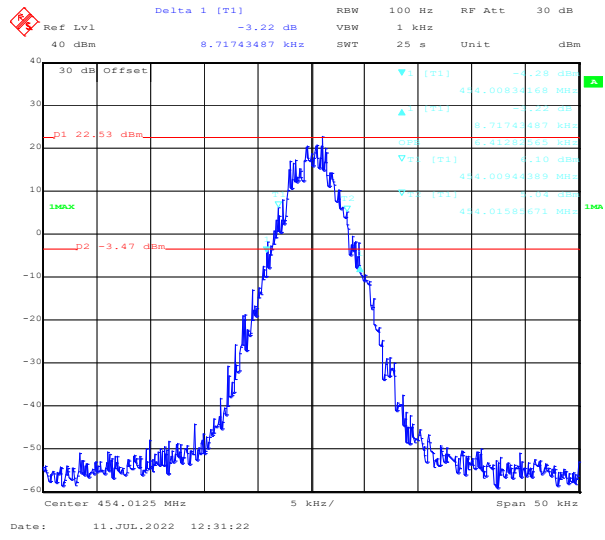

FM, 25kHz

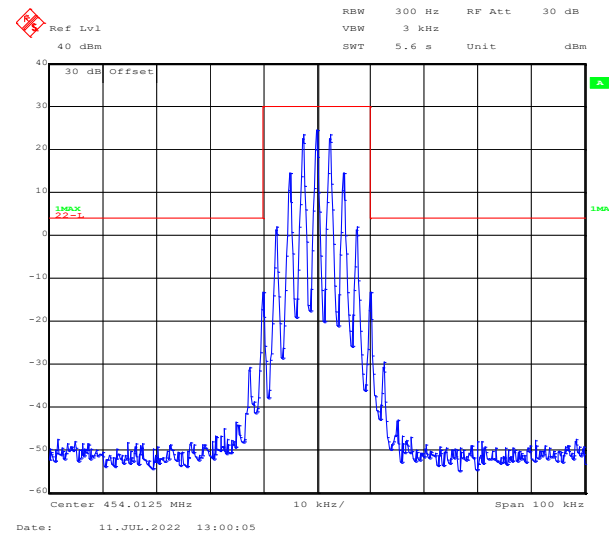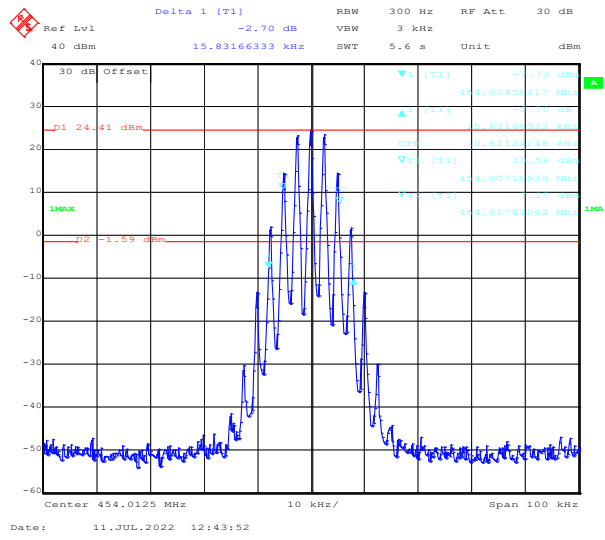

4.4 Transmitter Unwanted Emissions (Conducted)

Serial Number:	CR22050007-RF-S1	Test Date:	2022/7/09-2022/08/11
Test Site:	RF	Test Mode:	Transmitting
Tester:	Morpheus Shi	Test Result:	Pass

Environmental Conditions:					
Temperature: (°C)	27.1-27.8	Relative Humidity: (%)	66-72	ATM Pressure: (kPa)	100.0-100.2

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Signal Analyzer	FSIQ26	831929/006	2021-07-22	2022-07-21
zhuoxiang	Coaxial Cable	SMA-178	211002	Each time	N/A
Mini-Circuits	DC Block	BLK-18-S+	1554404	Each time	N/A
Weinschel	Coaxial Attenuators	53-20-34	LN751	Each time	N/A
Weinschel	Power splitter	1515	RA915	Each time	N/A
HP	RF Communications Test Set	8920A	3438A05209	2021-07-22	2022-07-21



* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data:



Note: Test only was performed at high power level.

FM, 12.5kHz:



Low Channel

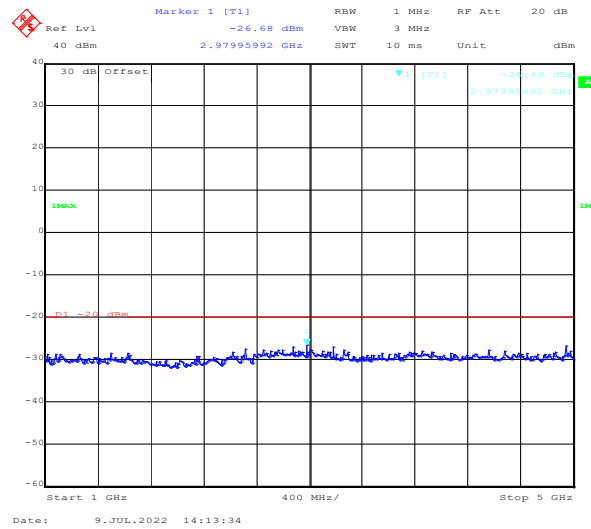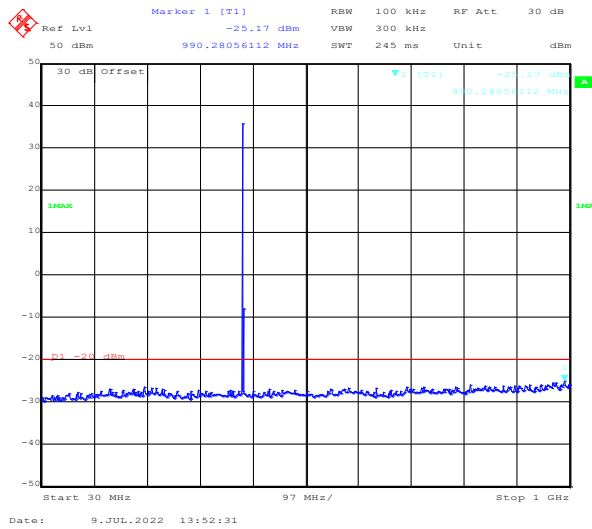

Middle Channel

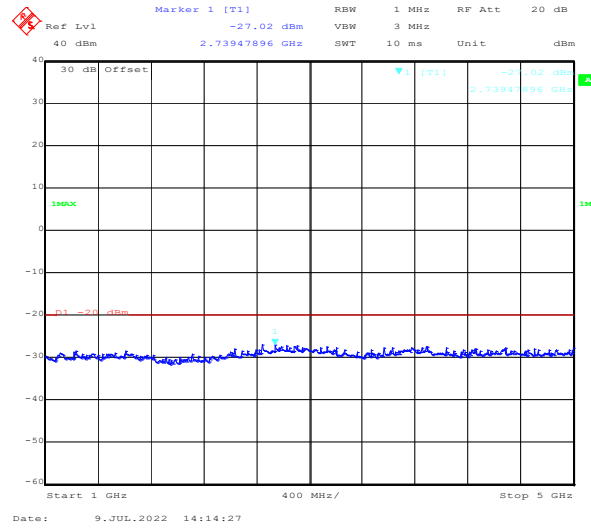
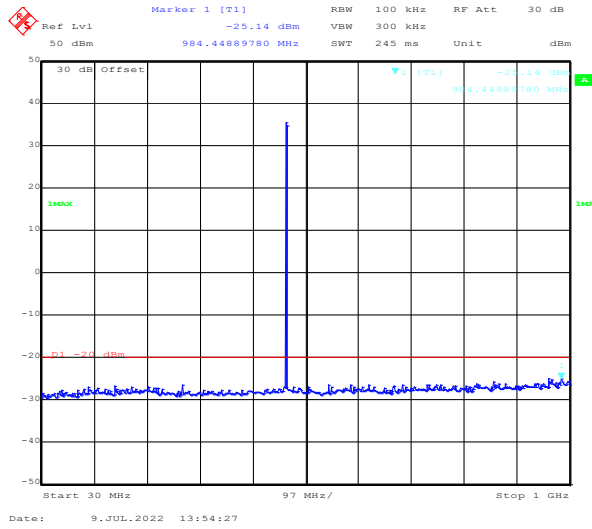


High Channel

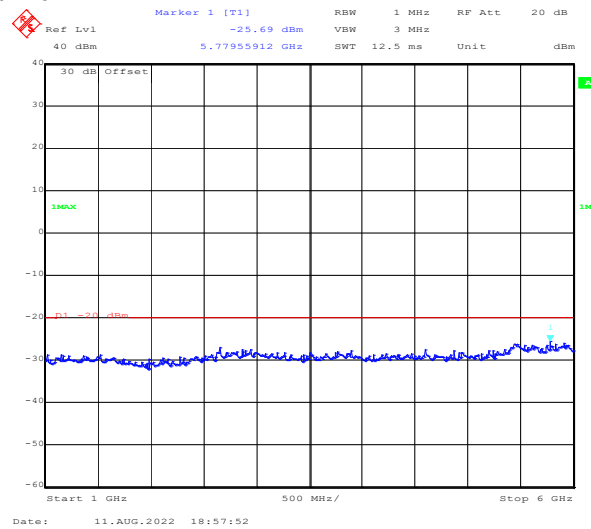
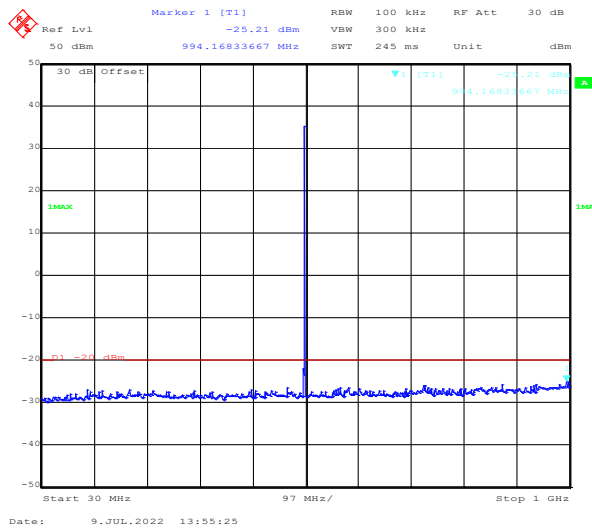


4FSK, 12.5kHz:



Low Channel

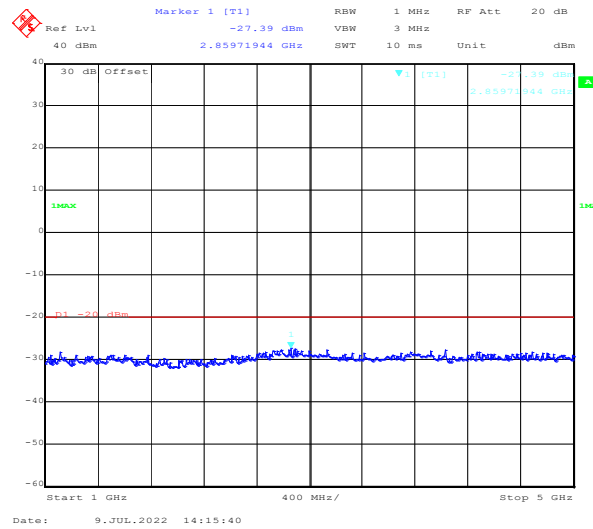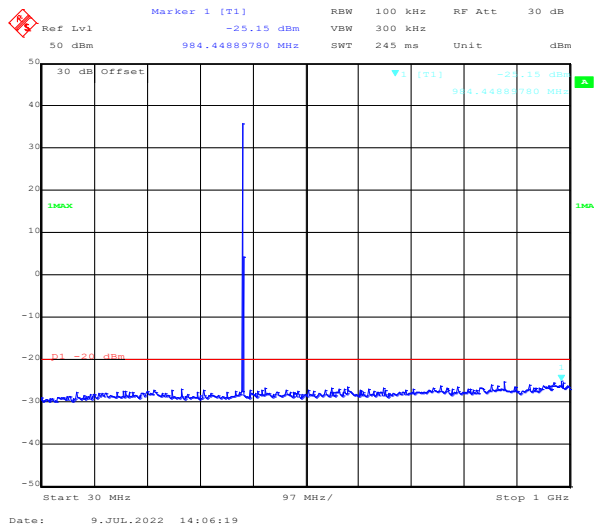

Middle Channel

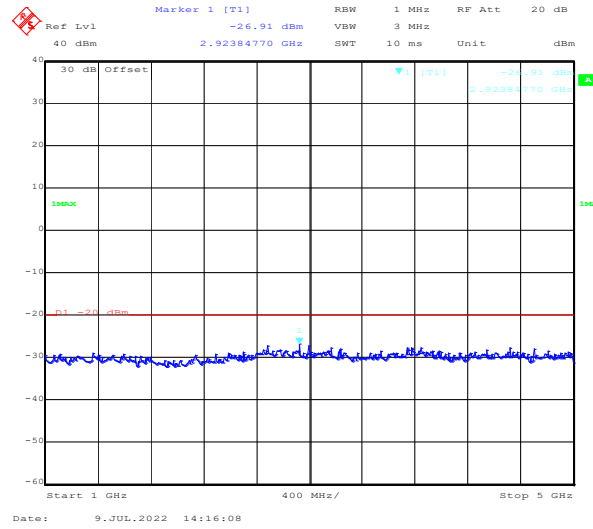
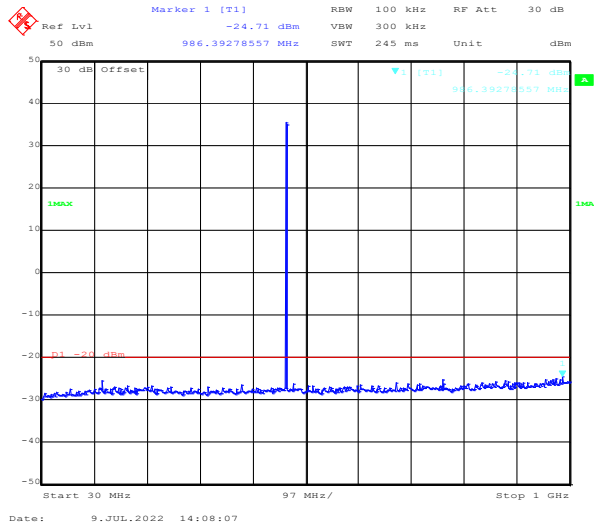


High Channel

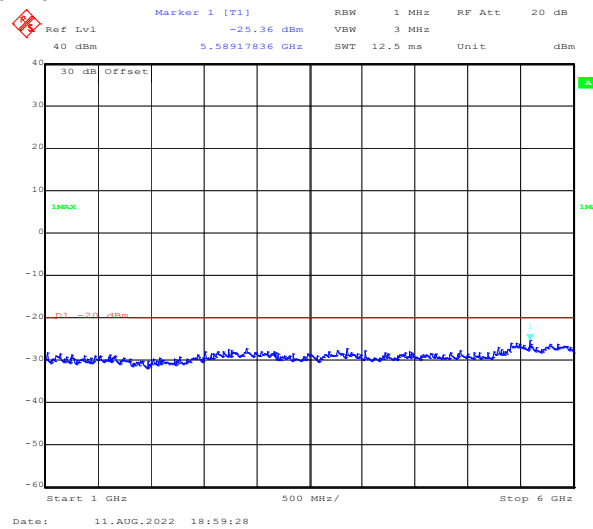
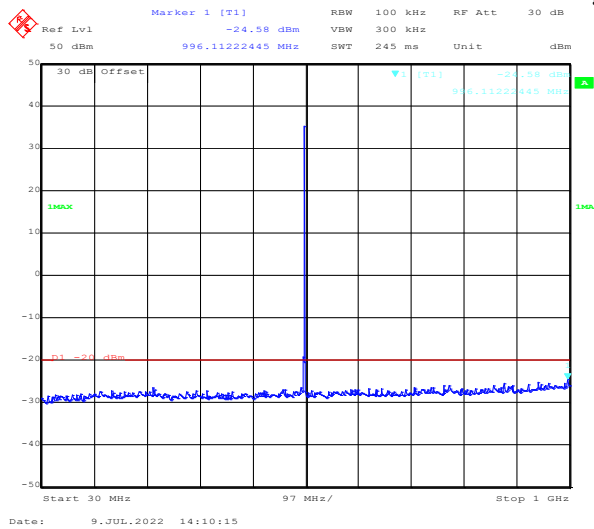


Additional Channel:



FM, 12.5kHz

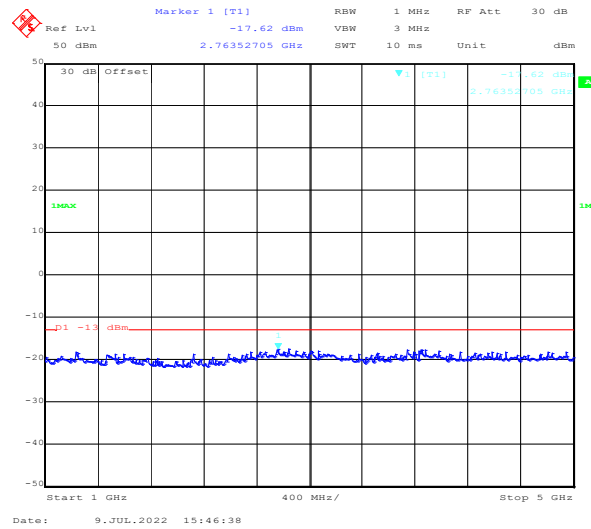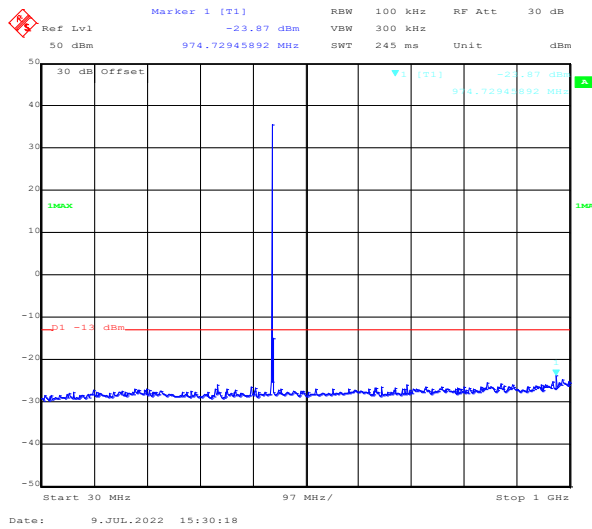

4FSK, 12.5kHz

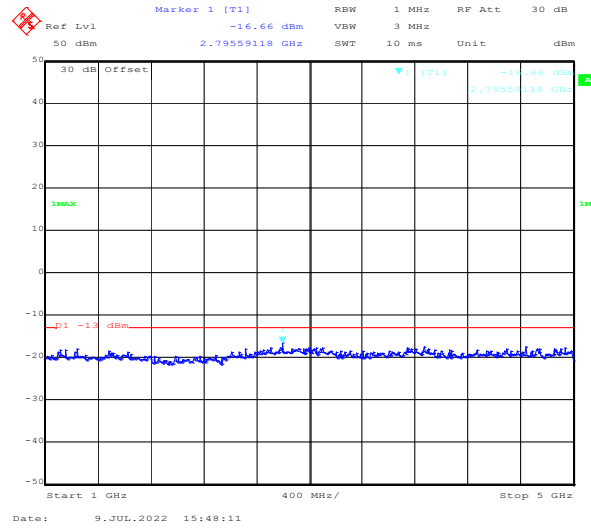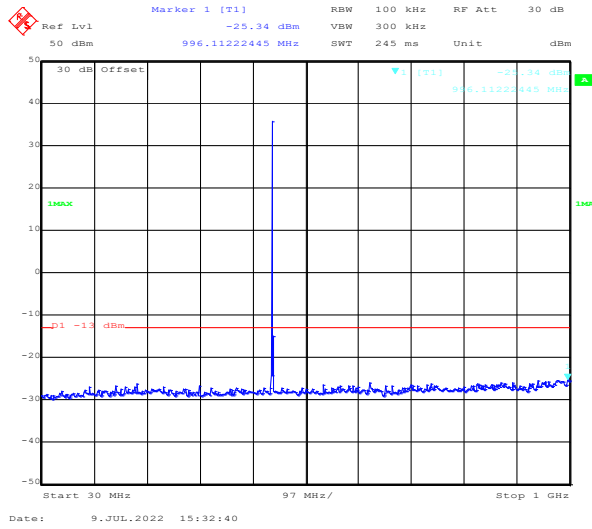

FM, 25kHz

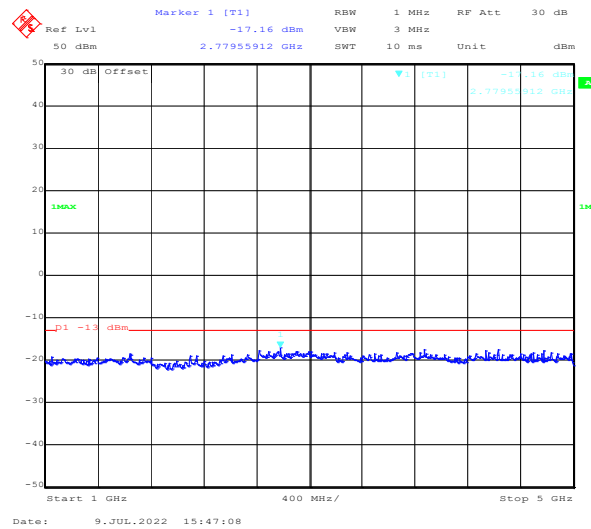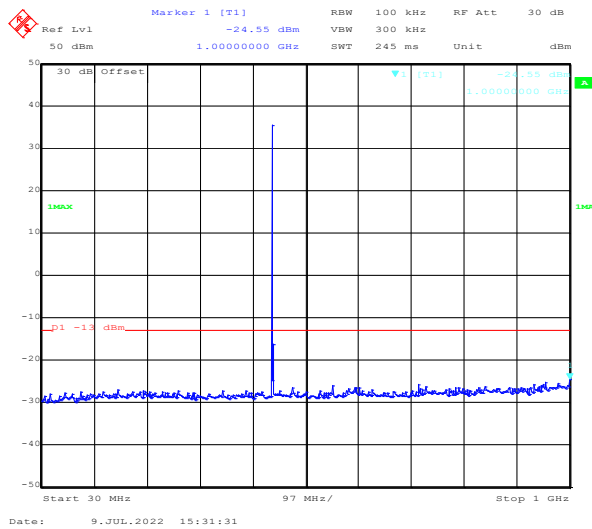

4.5 Transient Frequency Behavior

Serial Number:	CR22050007-RF-S1	Test Date:	2022/7/09-2022/07/11
Test Site:	RF	Test Mode:	Transmitting
Tester:	Morpheus Shi	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	27.1-27.8	Relative Humidity: (%)	66-72	ATM Pressure: (kPa)	100.0-100.2
----------------------	-----------	------------------------------	-------	------------------------	-------------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Signal Analyzer	FSIQ26	831929/006	2021-07-22	2022-07-21
zhuoxiang	Coaxial Cable	SMA-178	211002	Each time	N/A
Mini-Circuits	DC Block	BLK-18-S+	1554404	Each time	N/A
Weinschel	Coaxial Attenuators	53-20-34	LN751	Each time	N/A
Weinschel	Power splitter	1515	RA915	Each time	N/A
HP	RF Communications Test Set	8920A	3438A05209	2021-07-22	2022-07-21

* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data:


Note: Test only was performed at high power level.

Channel Spacing (kHz)	Transient Period (ms)	Transient Frequency	Result
12.5	10(t ₁)	±12.5 kHz	Pass
	25(t ₂)	±6.25 kHz	
	10(t ₃)	±12.5 kHz	


Note: During the time from the end of t₂ to the beginning of t₃, the frequency difference must not exceed the limits specified in §90.213:

For 480.0125 MHz 12.5kHz mode, limit is: 480.0125 MHz* 2.5ppm = 1.20kHz

Tune ON

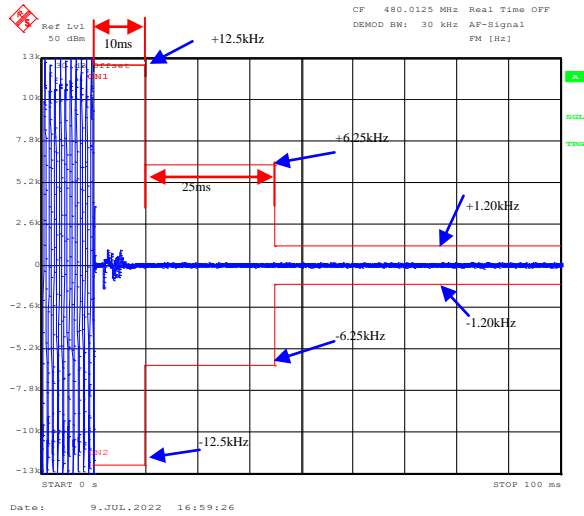

Tune OFF

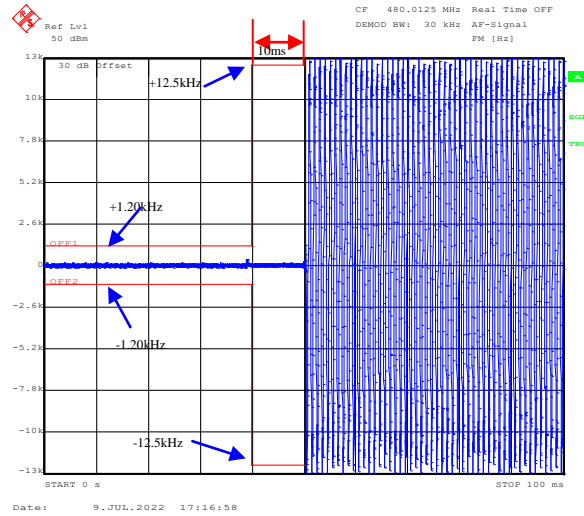

4.6 Modulation Characteristic

Serial Number:	CR22050007-RF-S1	Test Date:	2022/7/09-2022/07/11
Test Site:	RF	Test Mode:	Transmitting
Tester:	Morpheus Shi	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	27.1-27.8	Relative Humidity: (%)	66-72	ATM Pressure: (kPa)	100.0-100.2
----------------------	-----------	------------------------------	-------	------------------------	-------------



Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Signal Analyzer	FSIQ26	831929/006	2021-07-22	2022-07-21
zhuoxiang	Coaxial Cable	SMA-178	211002	Each time	N/A
Mini-Circuits	DC Block	BLK-18-S+	1554404	Each time	N/A
Weinschel	Coaxial Attenuators	53-20-34	LN751	Each time	N/A
Weinschel	Power splitter	1515	RA915	Each time	N/A
HP	RF Communications Test Set	8920A	3438A05209	2021-07-22	2022-07-21



* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data:

Audio Frequency Response – High Power

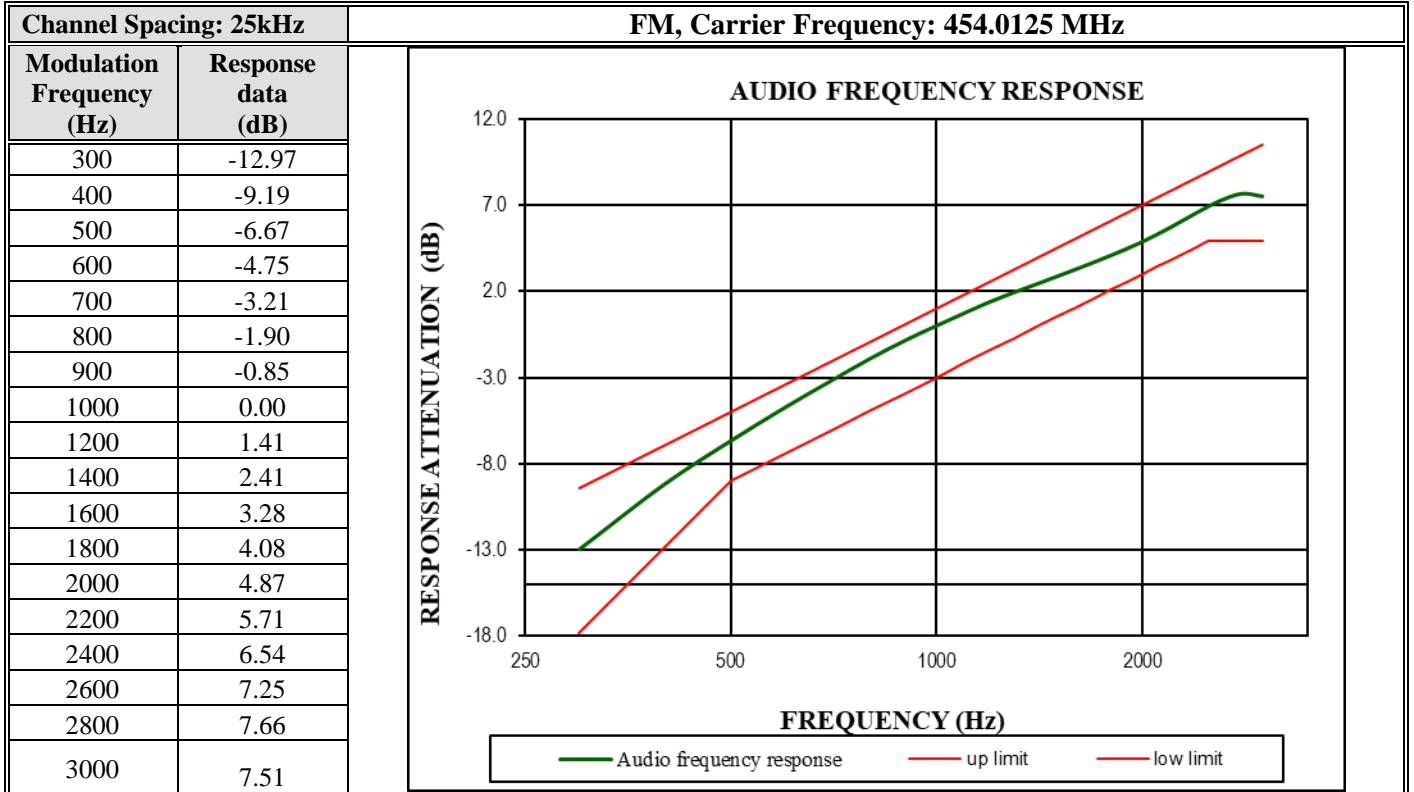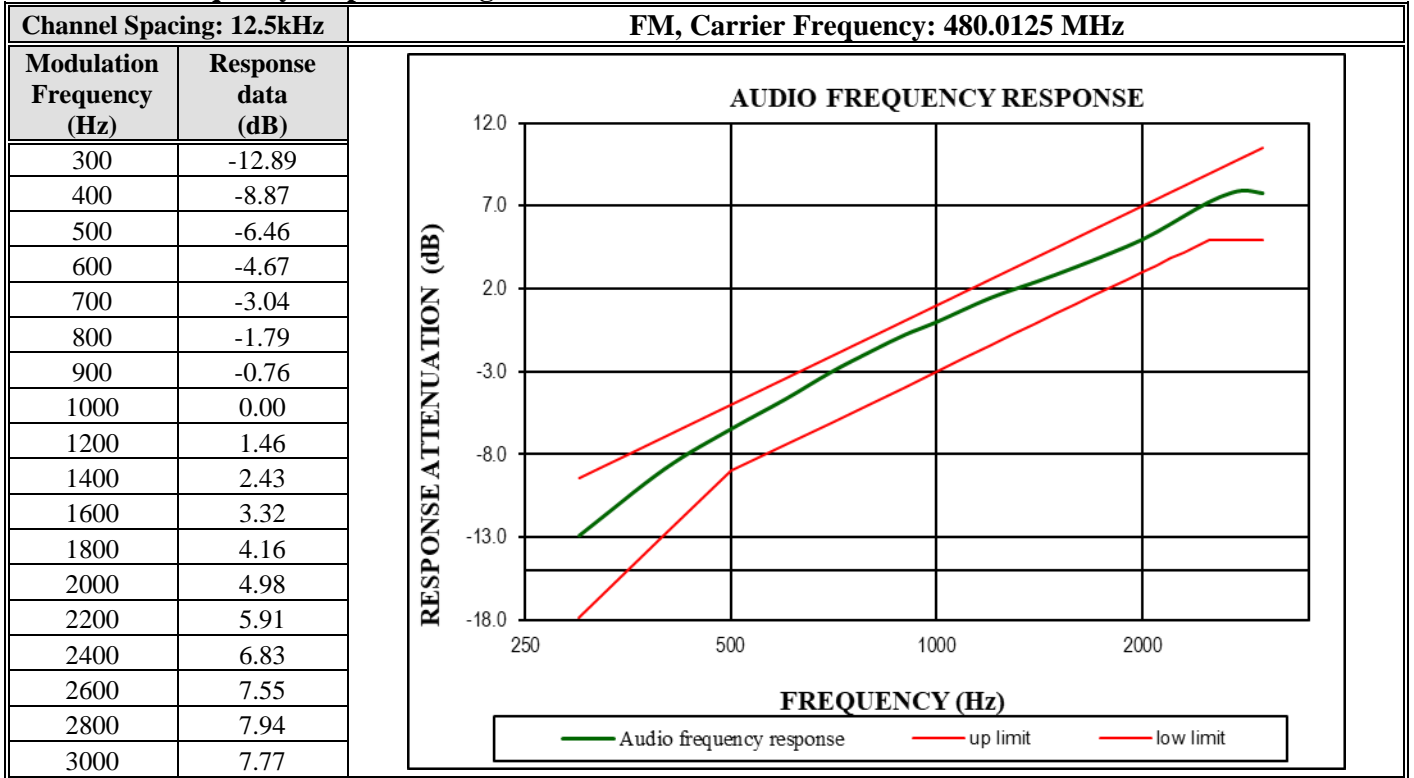


Audio Frequency Low Pass Filter Response – High Power

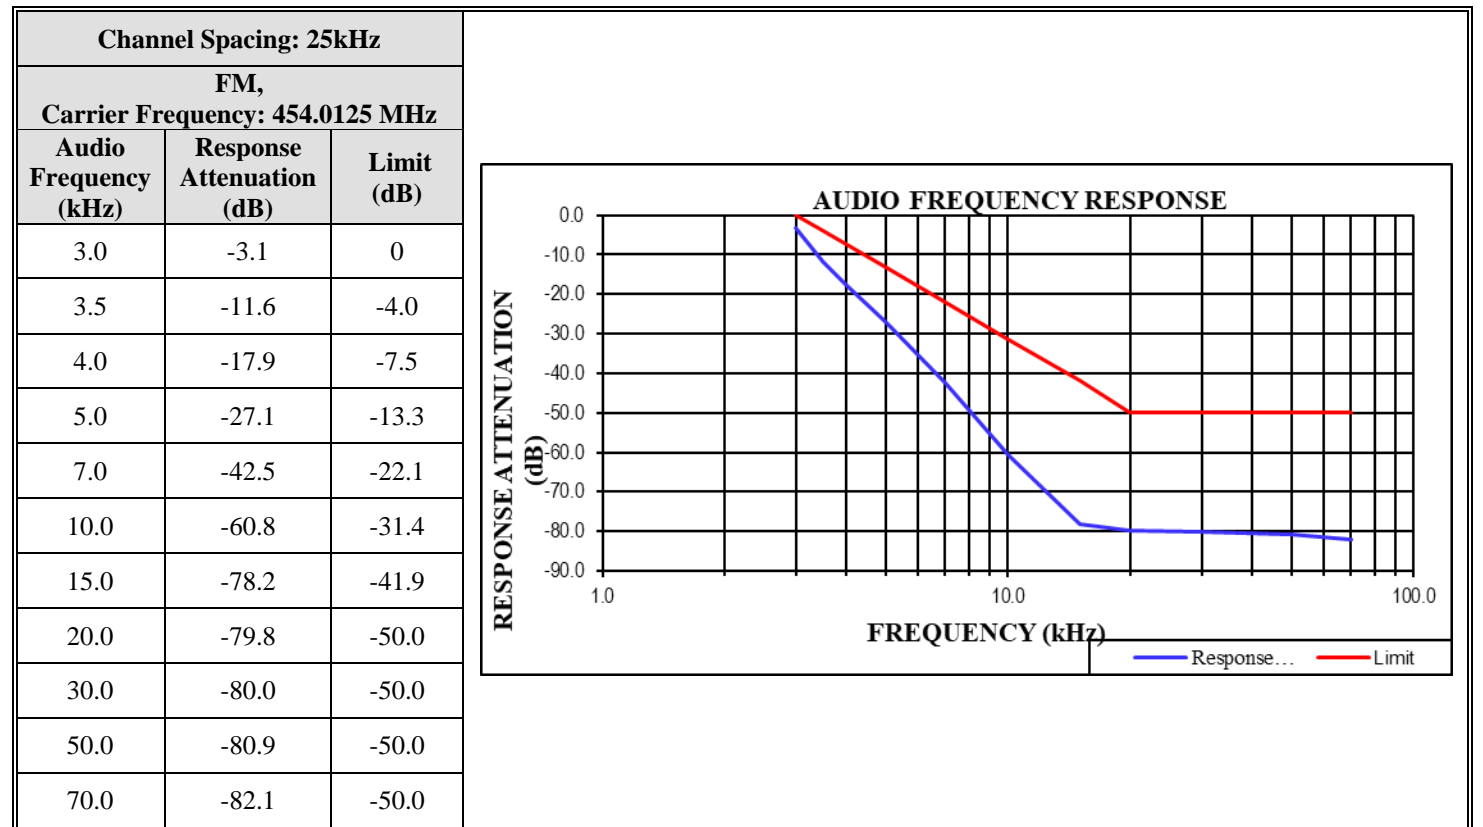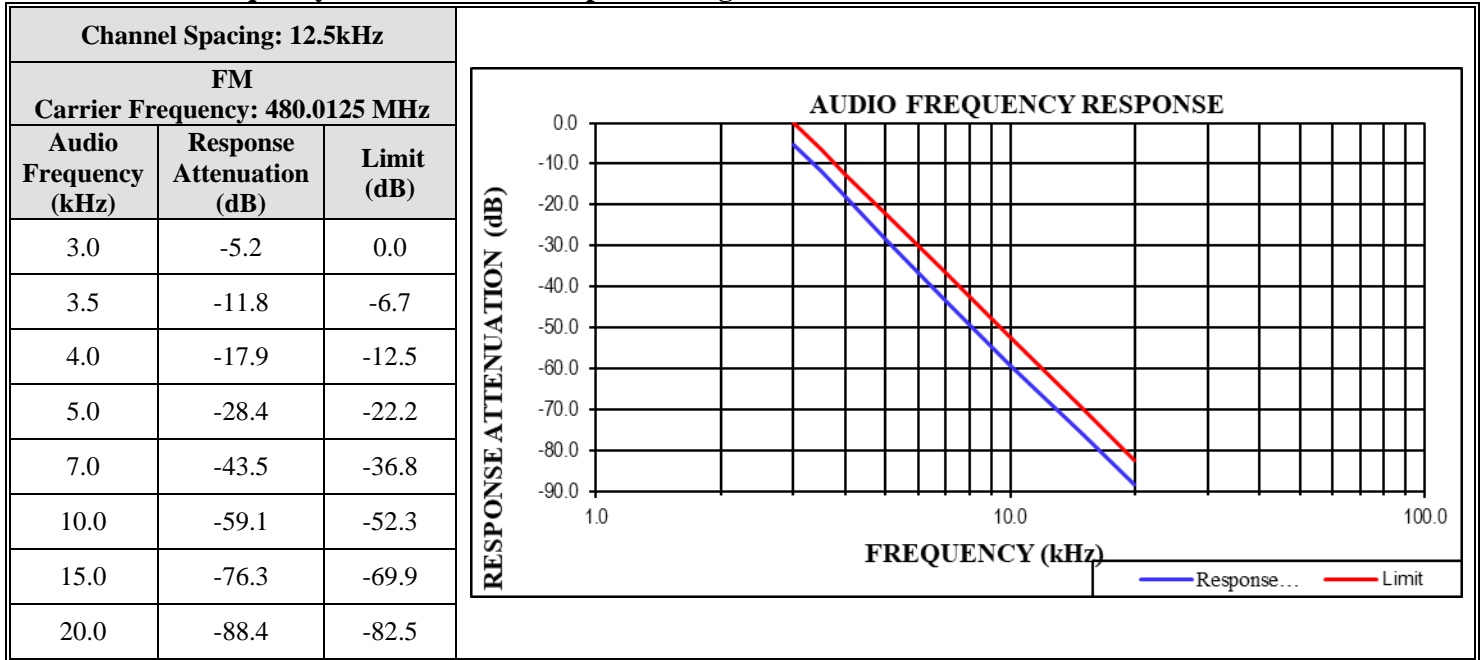


Modulation Limiting – High Power

Channel Spacing: 12.5kHz		FM, Carrier Frequency: 480.0125 MHz			
Audio Frequency (Hz)	Instantaneous		Steady-state		Limit [kHz]
	Deviation (@+20dB) [kHz]	Deviation (@-20dB) [kHz]	Deviation (@+20dB) [kHz]	Deviation (@-20dB) [kHz]	
300	1.625	0.085	1.591	0.053	2.5
400	1.806	0.122	1.775	0.086	2.5
500	1.863	0.137	1.834	0.101	2.5
600	1.859	0.166	1.827	0.133	2.5
700	1.846	0.174	1.816	0.142	2.5
800	1.832	0.207	1.805	0.165	2.5
900	1.825	0.214	1.789	0.176	2.5
1000	1.775	0.216	1.732	0.179	2.5
1200	1.705	0.245	1.671	0.206	2.5
1400	1.853	0.254	1.822	0.214	2.5
1600	1.873	0.293	1.854	0.247	2.5
1800	1.719	0.318	1.683	0.269	2.5
2000	1.754	0.341	1.732	0.312	2.5
2200	1.801	0.377	1.767	0.338	2.5
2400	1.929	0.401	1.894	0.375	2.5
2600	1.952	0.434	1.914	0.401	2.5
2800	2.036	0.455	2.011	0.424	2.5
3000	2.028	0.434	2.003	0.401	2.5

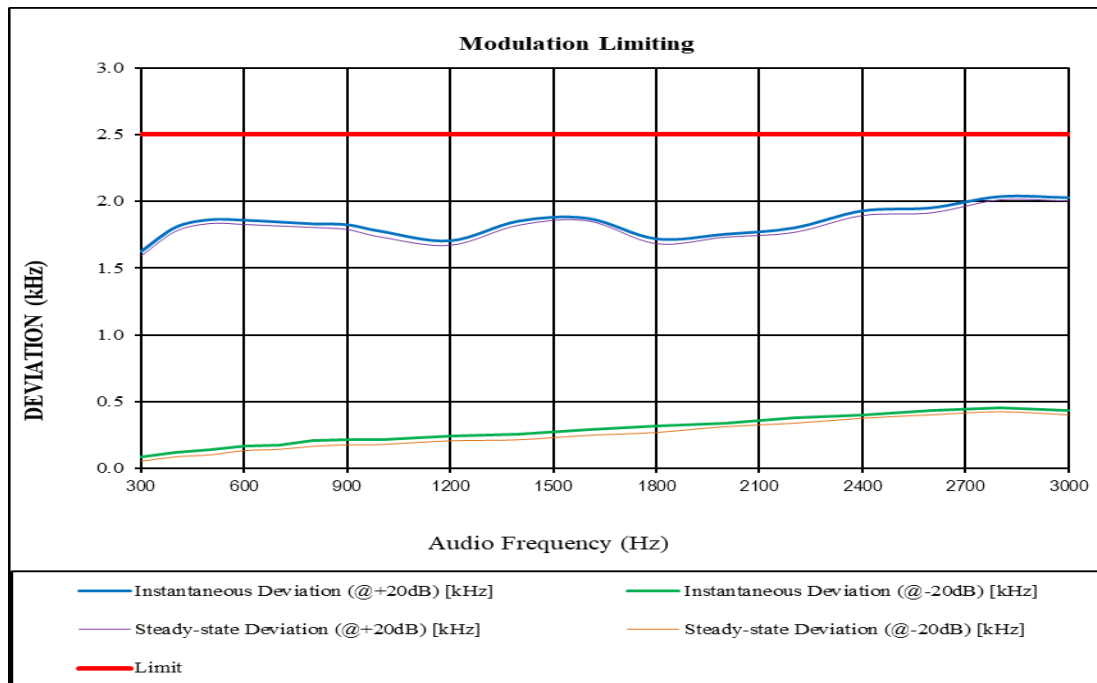

Modulation Limiting – High Power

Audio Frequency (Hz)	FM,Carrier Frequency: 454.0125 MHz				Limit [kHz]
	Instantaneous		Steady-state		
	Deviation (@+20dB) [kHz]	Deviation (@-20dB) [kHz]	Deviation (@+20dB) [kHz]	Deviation (@-20dB) [kHz]	
300	3.671	0.478	3.602	0.411	5
400	3.252	0.715	3.201	0.627	5
500	3.435	0.956	3.386	0.893	5
600	3.219	1.174	3.157	1.104	5
700	3.433	1.384	3.375	1.327	5
800	3.381	1.603	3.327	1.543	5
900	3.213	1.796	3.145	1.727	5
1000	3.025	1.982	2.968	1.926	5
1200	2.981	2.311	2.927	2.237	5
1400	3.185	2.521	3.121	2.446	5
1600	3.183	2.601	3.108	2.527	5
1800	2.956	2.649	2.887	2.586	5
2000	2.935	2.723	2.878	2.673	5
2200	3.072	2.845	3.004	2.766	5
2400	3.232	2.977	3.158	2.925	5
2600	3.339	3.106	3.287	3.047	5
2800	3.519	3.187	3.446	3.129	5
3000	3.581	3.132	3.525	3.075	5

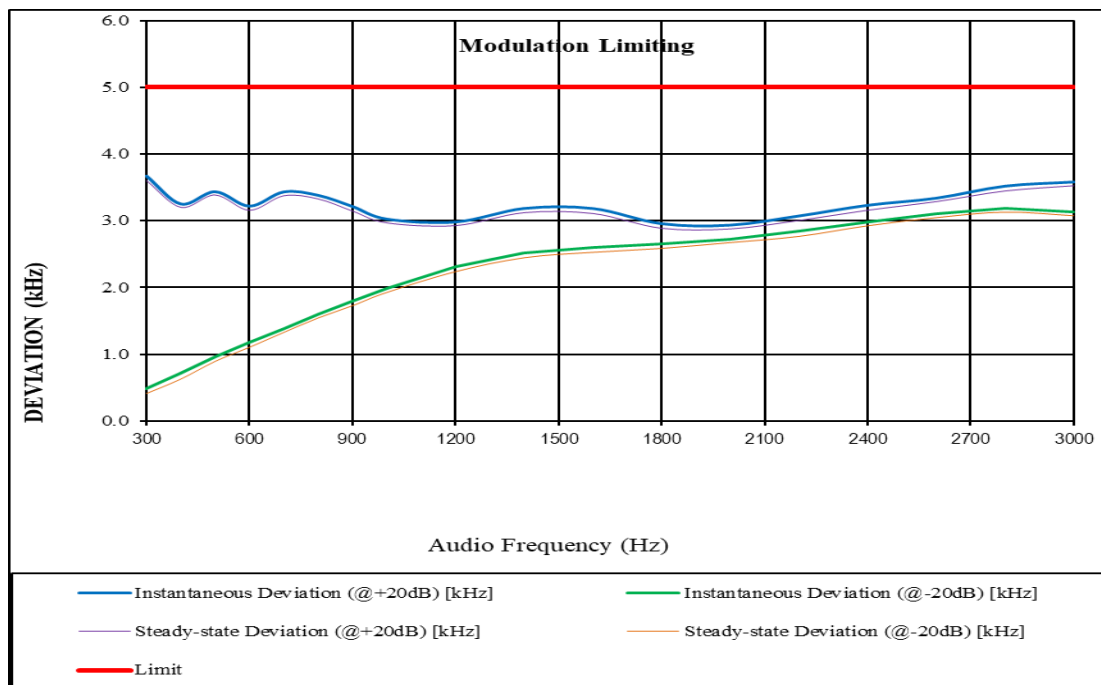

4.7 Transmitter Unwanted Emissions (Radiated)

Serial Number:	CR22050007-RF-S1 CR22050007-RF-S2 CR22050007-RF-S3	Test Date:	2022-05-26~2022-07-15
Test Site:	966-1,966-2	Test Mode:	Transmit
Tester:	Gary Ling, Nick Tang	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	24.5~24.9	Relative Humidity: (%)	51~62	ATM Pressure: (kPa)	100.1
----------------------	-----------	---------------------------	-------	---------------------------	-------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Sunol Sciences	Antenna	JB6	A082520-5	2020-10-19	2023-10-18
R&S	EMI Test Receiver	ESR3	102724	2021-07-22	2022-07-21
TIMES MICROWAVE	Coaxial Cable	LMR-600-UltraFlex	C-0470-02	2021-07-18	2022-07-17
TIMES MICROWAVE	Coaxial Cable	LMR-600-UltraFlex	C-0780-01	2021-07-18	2022-07-17
Sonoma	Amplifier	310N	186165	2021-07-18	2022-07-17
EMCO	Adjustable Dipole Antenna	3121C	9109-756	N/A	N/A
MICRO-COAX	Coaxial Cable	UFA210B-0-0720- 300300	99G1448	2021-07-25	2022-07-24
Agilent	Signal Generator	E8247C	MY43321352	2022-04-01	2023-03-31
ETS-Lindgren	Horn Antenna	3115	9912-5985	2020-10-13	2023-10-12
R&S	Spectrum Analyzer	FSV40	101591	2021-07-22	2022-07-21
MICRO-COAX	Coaxial Cable	UFA210A-1-1200- 70U300	217423-008	2021-08-08	2022-08-07
MICRO-COAX	Coaxial Cable	UFA210A-1-2362- 300300	235780-001	2021-08-08	2022-08-07
Mini	Pre-amplifier	ZVA-183-S+	5969001149	2021-11-10	2022-11-09
AH	Double Ridge Guide Horn Antenna	SAS-571	1396	2021-10-18	2024-10-17
MICRO-COAX	Coaxial Cable	UFA210B-0-0720- 300300	99G1448	2021-07-25	2022-07-24

* **Statement of Traceability:** China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data:

Note:

Test only performed with High power level. The device can be mounted in multiple orientations, test was performed with X, Y, Z Axis according to C63.26 Figure 5, the worst orientation was photographed and its data was recorded.

30MHz - 6GHz:**Model: DR7510S-2, Part 90:**

Frequency (MHz)	Polar (H/V)	Receiver Reading (dB μ V)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
FM, Frequency: 400.0125MHz-12.5 kHz								
800.03	H	69.01	-33.32	0.00	0.58	-33.90	-20.00	13.90
800.03	V	55.54	-43.20	0.00	0.58	-43.78	-20.00	23.78
1200.04	H	38.58	-64.28	7.66	0.69	-57.31	-20.00	37.31
1200.04	V	40.19	-63.41	7.66	0.69	-56.44	-20.00	36.44
1600.05	H	38.72	-65.65	8.62	0.83	-57.86	-20.00	37.86
1600.05	V	41.28	-63.12	8.62	0.83	-55.33	-20.00	35.33
2000.06	H	39.30	-62.83	9.10	0.89	-54.62	-20.00	34.62
2000.06	V	39.67	-61.83	9.10	0.89	-53.62	-20.00	33.62
2400.08	H	42.04	-59.01	9.34	0.98	-50.65	-20.00	30.65
2400.08	V	45.17	-55.62	9.34	0.98	-47.26	-20.00	27.26
2800.09	H	49.69	-50.24	9.88	1.04	-41.40	-20.00	21.40
2800.09	V	52.33	-47.47	9.88	1.04	-38.63	-20.00	18.63
3200.10	H	51.86	-45.26	10.28	1.11	-36.09	-20.00	16.09
3200.10	V	54.90	-41.97	10.28	1.11	-32.80	-20.00	12.80
3600.11	H	37.05	-60.50	10.50	1.24	-51.24	-20.00	31.24
3600.11	V	42.36	-55.05	10.50	1.24	-45.79	-20.00	25.79
4000.13	H	37.22	-58.54	10.90	1.29	-48.93	-20.00	28.93
4000.13	V	37.07	-58.49	10.90	1.29	-48.88	-20.00	28.88
4FSK, Frequency: 400.0125MHz-12.5 kHz								
800.03	H	68.34	-33.99	0.00	0.58	-34.57	-20.00	14.57
800.03	V	54.26	-44.48	0.00	0.58	-45.06	-20.00	25.06
1200.04	H	38.51	-64.35	7.66	0.69	-57.38	-20.00	37.38
1200.04	V	40.46	-63.14	7.66	0.69	-56.17	-20.00	36.17
1600.05	H	38.64	-65.73	8.62	0.83	-57.94	-20.00	37.94
1600.05	V	41.23	-63.17	8.62	0.83	-55.38	-20.00	35.38
2000.06	H	39.03	-63.10	9.10	0.89	-54.89	-20.00	34.89
2000.06	V	39.50	-62.00	9.10	0.89	-53.79	-20.00	33.79
2400.08	H	41.67	-59.38	9.34	0.98	-51.02	-20.00	31.02
2400.08	V	45.13	-55.66	9.34	0.98	-47.30	-20.00	27.30
2800.09	H	49.84	-50.09	9.88	1.04	-41.25	-20.00	21.25
2800.09	V	51.97	-47.83	9.88	1.04	-38.99	-20.00	18.99
3200.10	H	51.61	-45.51	10.28	1.11	-36.34	-20.00	16.34
3200.10	V	55.28	-41.59	10.28	1.11	-32.42	-20.00	12.42
3600.11	H	37.33	-60.22	10.50	1.24	-50.96	-20.00	30.96
3600.11	V	42.50	-54.91	10.50	1.24	-45.65	-20.00	25.65
4000.13	H	38.70	-57.06	10.90	1.29	-47.45	-20.00	27.45
4000.13	V	37.21	-58.35	10.90	1.29	-48.74	-20.00	28.74

Frequency (MHz)	Polar (H/V)	Receiver Reading (dB μ V)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
FM, Frequency: 480.0125MHz-12.5 kHz								
960.03	H	45.66	-51.83	0.00	0.62	-52.45	-20.00	32.45
960.03	V	52.51	-42.61	0.00	0.62	-43.23	-20.00	23.23
1440.04	H	39.57	-64.03	8.33	0.74	-56.44	-20.00	36.44
1440.04	V	43.31	-60.36	8.33	0.74	-52.77	-20.00	32.77
1920.05	H	37.47	-65.33	9.00	0.86	-57.19	-20.00	37.19
1920.05	V	41.57	-60.83	9.00	0.86	-52.69	-20.00	32.69
2400.06	H	40.71	-60.34	9.34	0.98	-51.98	-20.00	31.98
2400.06	V	44.46	-56.33	9.34	0.98	-47.97	-20.00	27.97
2880.08	H	52.36	-47.21	10.01	1.07	-38.27	-20.00	18.27
2880.08	V	64.78	-34.84	10.01	1.07	-25.90	-20.00	5.90
3360.09	H	53.68	-43.63	10.34	1.17	-34.46	-20.00	14.46
3360.09	V	63.61	-33.60	10.34	1.17	-24.43	-20.00	4.43
3840.10	H	39.04	-56.90	10.74	1.28	-47.44	-20.00	27.44
3840.10	V	43.99	-51.84	10.74	1.28	-42.38	-20.00	22.38
4320.11	H	48.52	-47.63	10.71	1.35	-38.27	-20.00	18.27
4320.11	V	49.13	-46.92	10.71	1.35	-37.56	-20.00	17.56
4800.13	H	55.74	-38.37	10.96	1.44	-28.85	-20.00	8.85
4800.13	V	50.56	-43.35	10.96	1.44	-33.83	-20.00	13.83
4FSK, Frequency:480.0125MHz-12.5 kHz								
960.03	H	45.44	-52.05	0.00	0.62	-52.67	-20.00	32.67
960.03	V	53.68	-41.44	0.00	0.62	-42.06	-20.00	22.06
1440.04	H	40.17	-63.43	8.33	0.74	-55.84	-20.00	35.84
1440.04	V	43.70	-59.97	8.33	0.74	-52.38	-20.00	32.38
1920.05	H	38.05	-64.75	9.00	0.86	-56.61	-20.00	36.61
1920.05	V	40.94	-61.46	9.00	0.86	-53.32	-20.00	33.32
2400.06	H	40.46	-60.59	9.34	0.98	-52.23	-20.00	32.23
2400.06	V	45.45	-55.34	9.34	0.98	-46.98	-20.00	26.98
2880.08	H	58.09	-41.48	10.01	1.07	-32.54	-20.00	12.54
2880.08	V	66.30	-33.32	10.01	1.07	-24.38	-20.00	4.38
3360.09	H	58.11	-39.20	10.34	1.17	-30.03	-20.00	10.03
3360.09	V	63.79	-33.42	10.34	1.17	-24.25	-20.00	4.25
3840.10	H	38.78	-57.16	10.74	1.28	-47.70	-20.00	27.70
3840.10	V	43.16	-52.67	10.74	1.28	-43.21	-20.00	23.21
4320.11	H	48.45	-47.70	10.71	1.35	-38.34	-20.00	18.34
4320.11	V	49.71	-46.34	10.71	1.35	-36.98	-20.00	16.98
4800.13	H	56.39	-37.72	10.96	1.44	-28.20	-20.00	8.20
4800.13	V	52.17	-41.74	10.96	1.44	-32.22	-20.00	12.22

Frequency (MHz)	Polar (H/V)	Receiver Reading (dB μ V)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
FM, Frequency: 511.9875MHz-12.5 kHz								
926.84	H	28.21	-70.28	0.00	0.62	-70.90	-20.00	50.90
926.84	V	26.69	-69.15	0.00	0.62	-69.77	-20.00	49.77
1535.96	H	40.88	-62.89	8.54	0.78	-55.13	-20.00	35.13
1535.96	V	45.55	-58.30	8.54	0.78	-50.54	-20.00	30.54
2047.95	H	44.05	-57.96	9.13	0.92	-49.75	-20.00	29.75
2047.95	V	46.31	-55.35	9.13	0.92	-47.14	-20.00	27.14
2559.94	H	40.25	-59.98	9.50	1.01	-51.49	-20.00	31.49
2559.94	V	43.80	-56.36	9.50	1.01	-47.87	-20.00	27.87
3071.93	H	65.21	-32.67	10.23	1.13	-23.57	-20.00	3.57
3071.93	V	66.49	-31.34	10.23	1.13	-22.24	-20.00	2.24
3583.91	H	46.58	-51.02	10.48	1.23	-41.77	-20.00	21.77
3583.91	V	51.98	-45.49	10.48	1.23	-36.24	-20.00	16.24
4095.90	H	54.85	-41.15	10.84	1.27	-31.58	-20.00	11.58
4095.90	V	59.60	-36.36	10.84	1.27	-26.79	-20.00	6.79
4607.89	H	55.90	-39.50	10.73	1.40	-30.17	-20.00	10.17
4607.89	V	50.77	-44.48	10.73	1.40	-35.15	-20.00	15.15
5119.88	H	44.49	-48.98	11.27	1.50	-39.21	-20.00	19.21
5119.88	V	42.33	-51.04	11.27	1.50	-41.27	-20.00	21.27
4FSK, Frequency:511.9875MHz-12.5 kHz								
926.84	H	28.21	-70.28	0.00	0.62	-70.90	-20.00	50.90
926.84	V	26.69	-69.15	0.00	0.62	-69.77	-20.00	49.77
1535.96	H	40.13	-63.64	8.54	0.78	-55.88	-20.00	35.88
1535.96	V	45.92	-57.93	8.54	0.78	-50.17	-20.00	30.17
2047.95	H	44.68	-57.33	9.13	0.92	-49.12	-20.00	29.12
2047.95	V	45.94	-55.72	9.13	0.92	-47.51	-20.00	27.51
2559.94	H	39.96	-60.27	9.50	1.01	-51.78	-20.00	31.78
2559.94	V	44.40	-55.76	9.50	1.01	-47.27	-20.00	27.27
3071.93	H	59.65	-38.23	10.23	1.13	-29.13	-20.00	9.13
3071.93	V	61.10	-36.73	10.23	1.13	-27.63	-20.00	7.63
3583.91	H	46.84	-50.76	10.48	1.23	-41.51	-20.00	21.51
3583.91	V	51.23	-46.24	10.48	1.23	-36.99	-20.00	16.99
4095.90	H	41.80	-54.20	10.84	1.27	-44.63	-20.00	24.63
4095.90	V	54.49	-41.47	10.84	1.27	-31.90	-20.00	11.90
4607.89	H	56.49	-38.91	10.73	1.40	-29.58	-20.00	9.58
4607.89	V	52.12	-43.13	10.73	1.40	-33.80	-20.00	13.80
5119.88	H	45.41	-48.06	11.27	1.50	-38.29	-20.00	18.29
5119.88	V	44.27	-49.10	11.27	1.50	-39.33	-20.00	19.33

PART 22:

Frequency (MHz)	Polar (H/V)	Receiver Reading (dB μ V)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
FM, Frequency: 454.0125MHz-12.5 kHz								
908.03	H	58.78	-40.28	0.00	0.54	-40.82	-13.00	27.82
908.03	V	55.43	-40.83	0.00	0.54	-41.37	-13.00	28.37
1362.04	H	40.60	-62.74	8.11	0.77	-55.40	-13.00	42.40
1362.04	V	41.87	-61.67	8.11	0.77	-54.33	-13.00	41.33
1816.05	H	36.76	-66.65	8.88	0.90	-58.67	-13.00	45.67
1816.05	V	40.26	-63.26	8.88	0.90	-55.28	-13.00	42.28
2270.06	H	41.21	-60.84	9.26	0.95	-52.53	-13.00	39.53
2270.06	V	46.40	-55.53	9.26	0.95	-47.22	-13.00	34.22
2724.08	H	51.52	-48.45	9.76	1.05	-39.74	-13.00	26.74
2724.08	V	53.36	-46.55	9.76	1.05	-37.84	-13.00	24.84
3178.09	H	56.42	-40.80	10.27	1.12	-31.65	-13.00	18.65
3178.09	V	60.57	-36.43	10.27	1.12	-27.28	-13.00	14.28
3632.10	H	42.33	-55.15	10.53	1.22	-45.84	-13.00	32.84
3632.10	V	45.98	-51.40	10.53	1.22	-42.09	-13.00	29.09
4086.11	H	42.99	-52.99	10.85	1.28	-43.42	-13.00	30.42
4086.11	V	44.38	-51.54	10.85	1.28	-41.97	-13.00	28.97
4540.13	H	49.13	-46.52	10.65	1.36	-37.23	-13.00	24.23
4540.13	V	46.94	-48.48	10.65	1.36	-39.19	-13.00	26.19
FM, Frequency: 454.0125MHz-25 kHz								
908.03	H	59.01	-40.05	0.00	0.54	-40.59	-13.00	27.59
908.03	V	56.67	-39.59	0.00	0.54	-40.13	-13.00	27.13
1362.04	H	40.25	-63.09	8.11	0.77	-55.75	-13.00	42.75
1362.04	V	41.53	-62.01	8.11	0.77	-54.67	-13.00	41.67
1816.05	H	37.20	-66.21	8.88	0.90	-58.23	-13.00	45.23
1816.05	V	40.47	-63.05	8.88	0.90	-55.07	-13.00	42.07
2270.06	H	42.10	-59.95	9.26	0.95	-51.64	-13.00	38.64
2270.06	V	45.83	-56.10	9.26	0.95	-47.79	-13.00	34.79
2724.08	H	51.53	-48.44	9.76	1.05	-39.73	-13.00	26.73
2724.08	V	52.61	-47.30	9.76	1.05	-38.59	-13.00	25.59
3178.09	H	55.98	-41.24	10.27	1.12	-32.09	-13.00	19.09
3178.09	V	60.07	-36.93	10.27	1.12	-27.78	-13.00	14.78
3632.10	H	41.30	-56.18	10.53	1.22	-46.87	-13.00	33.87
3632.10	V	46.94	-50.44	10.53	1.22	-41.13	-13.00	28.13
4086.11	H	43.47	-52.51	10.85	1.28	-42.94	-13.00	29.94
4086.11	V	44.87	-51.05	10.85	1.28	-41.48	-13.00	28.48
4540.13	H	49.11	-46.54	10.65	1.36	-37.25	-13.00	24.25
4540.13	V	46.51	-48.91	10.65	1.36	-39.62	-13.00	26.62

Frequency (MHz)	Polar (H/V)	Receiver Reading (dB μ V)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
4FSK, Frequency: 454.0125MHz-12.5 kHz								
908.03	H	58.12	-40.94	0.00	0.54	-41.48	-13.00	28.48
908.03	V	56.60	-39.66	0.00	0.54	-40.20	-13.00	27.20
1362.04	H	39.90	-63.44	8.11	0.77	-56.10	-13.00	43.10
1362.04	V	41.63	-61.91	8.11	0.77	-54.57	-13.00	41.57
1816.05	H	38.79	-64.62	8.88	0.90	-56.64	-13.00	43.64
1816.05	V	40.40	-63.12	8.88	0.90	-55.14	-13.00	42.14
2270.06	H	42.55	-59.50	9.26	0.95	-51.19	-13.00	38.19
2270.06	V	48.85	-53.08	9.26	0.95	-44.77	-13.00	31.77
2724.08	H	51.94	-48.03	9.76	1.05	-39.32	-13.00	26.32
2724.08	V	54.09	-45.82	9.76	1.05	-37.11	-13.00	24.11
3178.09	H	55.36	-41.86	10.27	1.12	-32.71	-13.00	19.71
3178.09	V	60.34	-36.66	10.27	1.12	-27.51	-13.00	14.51
3632.10	H	42.01	-55.47	10.53	1.22	-46.16	-13.00	33.16
3632.10	V	46.92	-50.46	10.53	1.22	-41.15	-13.00	28.15
4086.11	H	43.86	-52.12	10.85	1.28	-42.55	-13.00	29.55
4086.11	V	45.99	-49.93	10.85	1.28	-40.36	-13.00	27.36
4540.13	H	49.43	-46.22	10.65	1.36	-36.93	-13.00	23.93
4540.13	V	46.51	-48.91	10.65	1.36	-39.62	-13.00	26.62

Model: DR7610S-2
PART 90:

Frequency (MHz)	Polar (H/V)	Receiver Reading (dB μ V)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
FM, Frequency: 400.0125MHz-12.5 kHz								
800.03	H	69.58	-32.75	0.00	0.58	-33.33	-20.00	13.33
800.03	V	55.14	-43.60	0.00	0.58	-44.18	-20.00	24.18
1200.04	H	38.64	-64.22	7.66	0.69	-57.25	-20.00	37.25
1200.04	V	40.05	-63.55	7.66	0.69	-56.58	-20.00	36.58
1600.05	H	38.86	-65.51	8.62	0.83	-57.72	-20.00	37.72
1600.05	V	41.04	-63.36	8.62	0.83	-55.57	-20.00	35.57
2000.06	H	39.17	-62.96	9.10	0.89	-54.75	-20.00	34.75
2000.06	V	39.41	-62.09	9.10	0.89	-53.88	-20.00	33.88
2400.08	H	41.69	-59.36	9.34	0.98	-51.00	-20.00	31.00
2400.08	V	44.77	-56.02	9.34	0.98	-47.66	-20.00	27.66
2800.09	H	49.26	-50.67	9.88	1.04	-41.83	-20.00	21.83
2800.09	V	52.09	-47.71	9.88	1.04	-38.87	-20.00	18.87
3200.10	H	51.52	-45.60	10.28	1.11	-36.43	-20.00	16.43
3200.10	V	54.65	-42.22	10.28	1.11	-33.05	-20.00	13.05
3600.11	H	37.29	-60.26	10.50	1.24	-51.00	-20.00	31.00
3600.11	V	42.41	-55.00	10.50	1.24	-45.74	-20.00	25.74
4000.13	H	37.35	-58.41	10.90	1.29	-48.80	-20.00	28.80
4000.13	V	36.83	-58.73	10.90	1.29	-49.12	-20.00	29.12
4FSK, Frequency: 400.0125MHz-12.5 kHz								
800.03	H	68.31	-34.02	0.00	0.58	-34.60	-20.00	14.60
800.03	V	56.18	-42.56	0.00	0.58	-43.14	-20.00	23.14
1200.04	H	38.62	-64.24	7.66	0.69	-57.27	-20.00	37.27
1200.04	V	40.40	-63.20	7.66	0.69	-56.23	-20.00	36.23
1600.05	H	38.52	-65.85	8.62	0.83	-58.06	-20.00	38.06
1600.05	V	40.84	-63.56	8.62	0.83	-55.77	-20.00	35.77
2000.06	H	39.20	-62.93	9.10	0.89	-54.72	-20.00	34.72
2000.06	V	39.64	-61.86	9.10	0.89	-53.65	-20.00	33.65
2400.08	H	41.87	-59.18	9.34	0.98	-50.82	-20.00	30.82
2400.08	V	44.77	-56.02	9.34	0.98	-47.66	-20.00	27.66
2800.09	H	50.25	-49.68	9.88	1.04	-40.84	-20.00	20.84
2800.09	V	52.07	-47.73	9.88	1.04	-38.89	-20.00	18.89
3200.10	H	51.57	-45.55	10.28	1.11	-36.38	-20.00	16.38
3200.10	V	54.98	-41.89	10.28	1.11	-32.72	-20.00	12.72
3600.11	H	36.96	-60.59	10.50	1.24	-51.33	-20.00	31.33
3600.11	V	42.01	-55.40	10.50	1.24	-46.14	-20.00	26.14
4000.13	H	38.58	-57.18	10.90	1.29	-47.57	-20.00	27.57
4000.13	V	36.84	-58.72	10.90	1.29	-49.11	-20.00	29.11

Frequency (MHz)	Polar (H/V)	Receiver Reading (dB μ V)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
FM, Frequency: 480.0125MHz-12.5 kHz								
960.03	H	46.40	-51.09	0.00	0.62	-51.71	-20.00	31.71
960.03	V	52.79	-42.33	0.00	0.62	-42.95	-20.00	22.95
1440.04	H	39.34	-64.26	8.33	0.74	-56.67	-20.00	36.67
1440.04	V	42.99	-60.68	8.33	0.74	-53.09	-20.00	33.09
1920.05	H	37.76	-65.04	9.00	0.86	-56.90	-20.00	36.90
1920.05	V	41.55	-60.85	9.00	0.86	-52.71	-20.00	32.71
2400.06	H	40.41	-60.64	9.34	0.98	-52.28	-20.00	32.28
2400.06	V	44.50	-56.29	9.34	0.98	-47.93	-20.00	27.93
2880.08	H	60.93	-38.64	10.01	1.07	-29.70	-20.00	9.70
2880.08	V	60.19	-39.43	10.01	1.07	-30.49	-20.00	10.49
3360.09	H	56.99	-40.32	10.34	1.17	-31.15	-20.00	11.15
3360.09	V	62.06	-35.15	10.34	1.17	-25.98	-20.00	5.98
3840.10	H	38.55	-57.39	10.74	1.28	-47.93	-20.00	27.93
3840.10	V	43.76	-52.07	10.74	1.28	-42.61	-20.00	22.61
4320.11	H	47.92	-48.23	10.71	1.35	-38.87	-20.00	18.87
4320.11	V	49.05	-47.00	10.71	1.35	-37.64	-20.00	17.64
4800.13	H	55.18	-38.93	10.96	1.44	-29.41	-20.00	9.41
4800.13	V	50.70	-43.21	10.96	1.44	-33.69	-20.00	13.69
4FSK, Frequency:480.0125MHz-12.5 kHz								
960.03	H	46.19	-51.30	0.00	0.62	-51.92	-20.00	31.92
960.03	V	53.16	-41.96	0.00	0.62	-42.58	-20.00	22.58
1440.04	H	39.63	-63.97	8.33	0.74	-56.38	-20.00	36.38
1440.04	V	43.66	-60.01	8.33	0.74	-52.42	-20.00	32.42
1920.05	H	38.36	-64.44	9.00	0.86	-56.30	-20.00	36.30
1920.05	V	40.76	-61.64	9.00	0.86	-53.50	-20.00	33.50
2400.06	H	40.28	-60.77	9.34	0.98	-52.41	-20.00	32.41
2400.06	V	45.38	-55.41	9.34	0.98	-47.05	-20.00	27.05
2880.08	H	61.14	-38.43	10.01	1.07	-29.49	-20.00	9.49
2880.08	V	62.31	-37.31	10.01	1.07	-28.37	-20.00	8.37
3360.09	H	58.50	-38.81	10.34	1.17	-29.64	-20.00	9.64
3360.09	V	63.92	-33.29	10.34	1.17	-24.12	-20.00	4.12
3840.10	H	38.34	-57.60	10.74	1.28	-48.14	-20.00	28.14
3840.10	V	43.17	-52.66	10.74	1.28	-43.20	-20.00	23.20
4320.11	H	48.24	-47.91	10.71	1.35	-38.55	-20.00	18.55
4320.11	V	49.50	-46.55	10.71	1.35	-37.19	-20.00	17.19
4800.13	H	56.41	-37.70	10.96	1.44	-28.18	-20.00	8.18
4800.13	V	51.97	-41.94	10.96	1.44	-32.42	-20.00	12.42

Frequency (MHz)	Polar (H/V)	Receiver Reading (dB μ V)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
FM, Frequency: 511.9875MHz-12.5 kHz								
926.84	H	29.15	-69.34	0.00	0.62	-69.96	-20.00	49.96
926.84	V	25.92	-69.92	0.00	0.62	-70.54	-20.00	50.54
1535.96	H	40.58	-63.19	8.54	0.78	-55.43	-20.00	35.43
1535.96	V	45.30	-58.55	8.54	0.78	-50.79	-20.00	30.79
2047.95	H	43.75	-58.26	9.13	0.92	-50.05	-20.00	30.05
2047.95	V	46.02	-55.64	9.13	0.92	-47.43	-20.00	27.43
2559.94	H	40.24	-59.99	9.50	1.01	-51.50	-20.00	31.50
2559.94	V	43.53	-56.63	9.50	1.01	-48.14	-20.00	28.14
3071.93	H	60.28	-37.60	10.23	1.13	-28.50	-20.00	8.50
3071.93	V	64.25	-33.58	10.23	1.13	-24.48	-20.00	4.48
3583.91	H	46.45	-51.15	10.48	1.23	-41.90	-20.00	21.90
3583.91	V	51.63	-45.84	10.48	1.23	-36.59	-20.00	16.59
4095.90	H	42.66	-53.34	10.84	1.27	-43.77	-20.00	23.77
4095.90	V	47.55	-48.41	10.84	1.27	-38.84	-20.00	18.84
4607.89	H	55.32	-40.08	10.73	1.40	-30.75	-20.00	10.75
4607.89	V	50.53	-44.72	10.73	1.40	-35.39	-20.00	15.39
5119.88	H	44.53	-48.94	11.27	1.50	-39.17	-20.00	19.17
5119.88	V	42.56	-50.81	11.27	1.50	-41.04	-20.00	21.04
4FSK, Frequency:511.9875MHz-12.5 kHz								
926.84	H	28.23	-70.26	0.00	0.62	-70.88	-20.00	50.88
926.84	V	27.52	-68.32	0.00	0.62	-68.94	-20.00	48.94
1535.96	H	39.84	-63.93	8.54	0.78	-56.17	-20.00	36.17
1535.96	V	45.88	-57.97	8.54	0.78	-50.21	-20.00	30.21
2047.95	H	44.37	-57.64	9.13	0.92	-49.43	-20.00	29.43
2047.95	V	45.73	-55.93	9.13	0.92	-47.72	-20.00	27.72
2559.94	H	39.85	-60.38	9.50	1.01	-51.89	-20.00	31.89
2559.94	V	44.59	-55.57	9.50	1.01	-47.08	-20.00	27.08
3071.93	H	59.63	-38.25	10.23	1.13	-29.15	-20.00	9.15
3071.93	V	60.78	-37.05	10.23	1.13	-27.95	-20.00	7.95
3583.91	H	46.99	-50.61	10.48	1.23	-41.36	-20.00	21.36
3583.91	V	51.30	-46.17	10.48	1.23	-36.92	-20.00	16.92
4095.90	H	41.87	-54.13	10.84	1.27	-44.56	-20.00	24.56
4095.90	V	48.46	-47.50	10.84	1.27	-37.93	-20.00	17.93
4607.89	H	56.49	-38.91	10.73	1.40	-29.58	-20.00	9.58
4607.89	V	51.85	-43.40	10.73	1.40	-34.07	-20.00	14.07
5119.88	H	45.29	-48.18	11.27	1.50	-38.41	-20.00	18.41
5119.88	V	44.11	-49.26	11.27	1.50	-39.49	-20.00	19.49

PART 22:

Frequency (MHz)	Polar (H/V)	Receiver Reading (dB μ V)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
FM, Frequency: 454.0125MHz-12.5 kHz								
908.03	H	58.15	-40.91	0.00	0.54	-41.45	-13.00	28.45
908.03	V	55.24	-41.02	0.00	0.54	-41.56	-13.00	28.56
1362.04	H	40.99	-62.35	8.11	0.77	-55.01	-13.00	42.01
1362.04	V	41.69	-61.85	8.11	0.77	-54.51	-13.00	41.51
1816.05	H	36.78	-66.63	8.88	0.90	-58.65	-13.00	45.65
1816.05	V	39.82	-63.70	8.88	0.90	-55.72	-13.00	42.72
2270.06	H	41.56	-60.49	9.26	0.95	-52.18	-13.00	39.18
2270.06	V	46.33	-55.60	9.26	0.95	-47.29	-13.00	34.29
2724.08	H	51.10	-48.87	9.76	1.05	-40.16	-13.00	27.16
2724.08	V	53.26	-46.65	9.76	1.05	-37.94	-13.00	24.94
3178.09	H	55.93	-41.29	10.27	1.12	-32.14	-13.00	19.14
3178.09	V	60.01	-36.99	10.27	1.12	-27.84	-13.00	14.84
3632.10	H	42.14	-55.34	10.53	1.22	-46.03	-13.00	33.03
3632.10	V	45.98	-51.40	10.53	1.22	-42.09	-13.00	29.09
4086.11	H	42.98	-53.00	10.85	1.28	-43.43	-13.00	30.43
4086.11	V	44.71	-51.21	10.85	1.28	-41.64	-13.00	28.64
4540.13	H	49.29	-46.36	10.65	1.36	-37.07	-13.00	24.07
4540.13	V	46.40	-49.02	10.65	1.36	-39.73	-13.00	26.73
FM, Frequency: 454.0125MHz-25 kHz								
908.03	H	59.07	-39.99	0.00	0.54	-40.53	-13.00	27.53
908.03	V	56.55	-39.71	0.00	0.54	-40.25	-13.00	27.25
1362.04	H	40.06	-63.28	8.11	0.77	-55.94	-13.00	42.94
1362.04	V	41.82	-61.72	8.11	0.77	-54.38	-13.00	41.38
1816.05	H	37.40	-66.01	8.88	0.90	-58.03	-13.00	45.03
1816.05	V	39.83	-63.69	8.88	0.90	-55.71	-13.00	42.71
2270.06	H	41.82	-60.23	9.26	0.95	-51.92	-13.00	38.92
2270.06	V	45.48	-56.45	9.26	0.95	-48.14	-13.00	35.14
2724.08	H	51.49	-48.48	9.76	1.05	-39.77	-13.00	26.77
2724.08	V	52.74	-47.17	9.76	1.05	-38.46	-13.00	25.46
3178.09	H	55.94	-41.28	10.27	1.12	-32.13	-13.00	19.13
3178.09	V	59.70	-37.30	10.27	1.12	-28.15	-13.00	15.15
3632.10	H	41.35	-56.13	10.53	1.22	-46.82	-13.00	33.82
3632.10	V	46.80	-50.58	10.53	1.22	-41.27	-13.00	28.27
4086.11	H	43.14	-52.84	10.85	1.28	-43.27	-13.00	30.27
4086.11	V	44.70	-51.22	10.85	1.28	-41.65	-13.00	28.65
4540.13	H	49.25	-46.40	10.65	1.36	-37.11	-13.00	24.11
4540.13	V	46.59	-48.83	10.65	1.36	-39.54	-13.00	26.54

Frequency (MHz)	Polar (H/V)	Receiver Reading (dB μ V)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
4FSK, Frequency: 454.0125MHz-12.5 kHz								
908.03	H	58.95	-40.11	0.00	0.54	-40.65	-13.00	27.65
908.03	V	55.60	-40.66	0.00	0.54	-41.20	-13.00	28.20
1362.04	H	40.00	-63.34	8.11	0.77	-56.00	-13.00	43.00
1362.04	V	41.23	-62.31	8.11	0.77	-54.97	-13.00	41.97
1816.05	H	38.64	-64.77	8.88	0.90	-56.79	-13.00	43.79
1816.05	V	40.26	-63.26	8.88	0.90	-55.28	-13.00	42.28
2270.06	H	42.40	-59.65	9.26	0.95	-51.34	-13.00	38.34
2270.06	V	48.62	-53.31	9.26	0.95	-45.00	-13.00	32.00
2724.08	H	51.73	-48.24	9.76	1.05	-39.53	-13.00	26.53
2724.08	V	54.02	-45.89	9.76	1.05	-37.18	-13.00	24.18
3178.09	H	55.67	-41.55	10.27	1.12	-32.40	-13.00	19.40
3178.09	V	60.82	-36.18	10.27	1.12	-27.03	-13.00	14.03
3632.10	H	42.10	-55.38	10.53	1.22	-46.07	-13.00	33.07
3632.10	V	46.89	-50.49	10.53	1.22	-41.18	-13.00	28.18
4086.11	H	43.63	-52.35	10.85	1.28	-42.78	-13.00	29.78
4086.11	V	46.09	-49.83	10.85	1.28	-40.26	-13.00	27.26
4540.13	H	49.40	-46.25	10.65	1.36	-36.96	-13.00	23.96
4540.13	V	45.84	-49.58	10.65	1.36	-40.29	-13.00	27.29

MODEL DR7810S-2
PART 90:

Frequency (MHz)	Polar (H/V)	Receiver Reading (dB μ V)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
FM, Frequency: 400.0125MHz-12.5 kHz								
800.03	H	70.24	-32.09	0.00	0.58	-32.67	-20.00	12.67
800.03	V	56.84	-41.90	0.00	0.58	-42.48	-20.00	22.48
1200.04	H	38.68	-64.18	7.66	0.69	-57.21	-20.00	37.21
1200.04	V	39.98	-63.62	7.66	0.69	-56.65	-20.00	36.65
1600.05	H	38.59	-65.78	8.62	0.83	-57.99	-20.00	37.99
1600.05	V	41.23	-63.17	8.62	0.83	-55.38	-20.00	35.38
2000.06	H	39.08	-63.05	9.10	0.89	-54.84	-20.00	34.84
2000.06	V	39.54	-61.96	9.10	0.89	-53.75	-20.00	33.75
2400.08	H	41.84	-59.21	9.34	0.98	-50.85	-20.00	30.85
2400.08	V	44.83	-55.96	9.34	0.98	-47.60	-20.00	27.60
2800.09	H	49.41	-50.52	9.88	1.04	-41.68	-20.00	21.68
2800.09	V	52.01	-47.79	9.88	1.04	-38.95	-20.00	18.95
3200.10	H	51.63	-45.49	10.28	1.11	-36.32	-20.00	16.32
3200.10	V	54.69	-42.18	10.28	1.11	-33.01	-20.00	13.01
3600.11	H	37.00	-60.55	10.50	1.24	-51.29	-20.00	31.29
3600.11	V	42.26	-55.15	10.50	1.24	-45.89	-20.00	25.89
4000.13	H	37.20	-58.56	10.90	1.29	-48.95	-20.00	28.95
4000.13	V	36.67	-58.89	10.90	1.29	-49.28	-20.00	29.28
4FSK, Frequency: 400.0125MHz-12.5 kHz								
800.03	H	69.78	-32.55	0.00	0.58	-33.13	-20.00	13.13
800.03	V	56.66	-42.08	0.00	0.58	-42.66	-20.00	22.66
1200.04	H	38.66	-64.20	7.66	0.69	-57.23	-20.00	37.23
1200.04	V	40.19	-63.41	7.66	0.69	-56.44	-20.00	36.44
1600.05	H	38.70	-65.67	8.62	0.83	-57.88	-20.00	37.88
1600.05	V	41.03	-63.37	8.62	0.83	-55.58	-20.00	35.58
2000.06	H	39.00	-63.13	9.10	0.89	-54.92	-20.00	34.92
2000.06	V	39.36	-62.14	9.10	0.89	-53.93	-20.00	33.93
2400.08	H	41.74	-59.31	9.34	0.98	-50.95	-20.00	30.95
2400.08	V	44.84	-55.95	9.34	0.98	-47.59	-20.00	27.59
2800.09	H	50.01	-49.92	9.88	1.04	-41.08	-20.00	21.08
2800.09	V	52.04	-47.76	9.88	1.04	-38.92	-20.00	18.92
3200.10	H	51.75	-45.37	10.28	1.11	-36.20	-20.00	16.20
3200.10	V	54.82	-42.05	10.28	1.11	-32.88	-20.00	12.88
3600.11	H	36.90	-60.65	10.50	1.24	-51.39	-20.00	31.39
3600.11	V	42.20	-55.21	10.50	1.24	-45.95	-20.00	25.95
4000.13	H	38.31	-57.45	10.90	1.29	-47.84	-20.00	27.84
4000.13	V	36.97	-58.59	10.90	1.29	-48.98	-20.00	28.98

Frequency (MHz)	Polar (H/V)	Receiver Reading (dB μ V)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
FM, Frequency: 480.0125MHz-12.5 kHz								
960.03	H	46.30	-51.19	0.00	0.62	-51.81	-20.00	31.81
960.03	V	52.63	-42.49	0.00	0.62	-43.11	-20.00	23.11
1440.04	H	39.29	-64.31	8.33	0.74	-56.72	-20.00	36.72
1440.04	V	42.98	-60.69	8.33	0.74	-53.10	-20.00	33.10
1920.05	H	37.54	-65.26	9.00	0.86	-57.12	-20.00	37.12
1920.05	V	41.47	-60.93	9.00	0.86	-52.79	-20.00	32.79
2400.06	H	40.46	-60.59	9.34	0.98	-52.23	-20.00	32.23
2400.06	V	44.22	-56.57	9.34	0.98	-48.21	-20.00	28.21
2880.08	H	56.47	-43.10	10.01	1.07	-34.16	-20.00	14.16
2880.08	V	58.35	-41.27	10.01	1.07	-32.33	-20.00	12.33
3360.09	H	56.72	-40.59	10.34	1.17	-31.42	-20.00	11.42
3360.09	V	61.81	-35.40	10.34	1.17	-26.23	-20.00	6.23
3840.10	H	38.56	-57.38	10.74	1.28	-47.92	-20.00	27.92
3840.10	V	43.64	-52.19	10.74	1.28	-42.73	-20.00	22.73
4320.11	H	48.08	-48.07	10.71	1.35	-38.71	-20.00	18.71
4320.11	V	48.84	-47.21	10.71	1.35	-37.85	-20.00	17.85
4800.13	H	55.28	-38.83	10.96	1.44	-29.31	-20.00	9.31
4800.13	V	50.46	-43.45	10.96	1.44	-33.93	-20.00	13.93
4FSK, Frequency:480.0125MHz-12.5 kHz								
960.03	H	46.67	-50.82	0.00	0.62	-51.44	-20.00	31.44
960.03	V	53.09	-42.03	0.00	0.62	-42.65	-20.00	22.65
1440.04	H	39.72	-63.88	8.33	0.74	-56.29	-20.00	36.29
1440.04	V	43.79	-59.88	8.33	0.74	-52.29	-20.00	32.29
1920.05	H	38.22	-64.58	9.00	0.86	-56.44	-20.00	36.44
1920.05	V	40.55	-61.85	9.00	0.86	-53.71	-20.00	33.71
2400.06	H	40.06	-60.99	9.34	0.98	-52.63	-20.00	32.63
2400.06	V	45.23	-55.56	9.34	0.98	-47.20	-20.00	27.20
2880.08	H	57.03	-42.54	10.01	1.07	-33.60	-20.00	13.60
2880.08	V	59.02	-40.60	10.01	1.07	-31.66	-20.00	11.66
3360.09	H	58.21	-39.10	10.34	1.17	-29.93	-20.00	9.93
3360.09	V	63.62	-33.59	10.34	1.17	-24.42	-20.00	4.42
3840.10	H	38.40	-57.54	10.74	1.28	-48.08	-20.00	28.08
3840.10	V	43.14	-52.69	10.74	1.28	-43.23	-20.00	23.23
4320.11	H	47.98	-48.17	10.71	1.35	-38.81	-20.00	18.81
4320.11	V	49.36	-46.69	10.71	1.35	-37.33	-20.00	17.33
4800.13	H	56.20	-37.91	10.96	1.44	-28.39	-20.00	8.39
4800.13	V	51.68	-42.23	10.96	1.44	-32.71	-20.00	12.71

Frequency (MHz)	Polar (H/V)	Receiver Reading (dB μ V)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
FM, Frequency: 511.9875MHz-12.5 kHz								
926.84	H	29.42	-69.07	0.00	0.62	-69.69	-20.00	49.69
926.84	V	26.34	-69.50	0.00	0.62	-70.12	-20.00	50.12
1535.96	H	40.48	-63.29	8.54	0.78	-55.53	-20.00	35.53
1535.96	V	45.45	-58.40	8.54	0.78	-50.64	-20.00	30.64
2047.95	H	43.92	-58.09	9.13	0.92	-49.88	-20.00	29.88
2047.95	V	45.86	-55.80	9.13	0.92	-47.59	-20.00	27.59
2559.94	H	40.34	-59.89	9.50	1.01	-51.40	-20.00	31.40
2559.94	V	43.48	-56.68	9.50	1.01	-48.19	-20.00	28.19
3071.93	H	59.78	-38.10	10.23	1.13	-29.00	-20.00	9.00
3071.93	V	60.99	-36.84	10.23	1.13	-27.74	-20.00	7.74
3583.91	H	46.23	-51.37	10.48	1.23	-42.12	-20.00	22.12
3583.91	V	51.50	-45.97	10.48	1.23	-36.72	-20.00	16.72
4095.90	H	42.79	-53.21	10.84	1.27	-43.64	-20.00	23.64
4095.90	V	47.69	-48.27	10.84	1.27	-38.70	-20.00	18.70
4607.89	H	55.40	-40.00	10.73	1.40	-30.67	-20.00	10.67
4607.89	V	50.67	-44.58	10.73	1.40	-35.25	-20.00	15.25
5119.88	H	44.62	-48.85	11.27	1.50	-39.08	-20.00	19.08
5119.88	V	42.47	-50.90	11.27	1.50	-41.13	-20.00	21.13
4FSK, Frequency:511.9875MHz-12.5 kHz								
926.84	H	28.07	-70.42	0.00	0.62	-71.04	-20.00	51.04
926.84	V	27.75	-68.09	0.00	0.62	-68.71	-20.00	48.71
1535.96	H	39.90	-63.87	8.54	0.78	-56.11	-20.00	36.11
1535.96	V	45.60	-58.25	8.54	0.78	-50.49	-20.00	30.49
2047.95	H	44.43	-57.58	9.13	0.92	-49.37	-20.00	29.37
2047.95	V	45.71	-55.95	9.13	0.92	-47.74	-20.00	27.74
2559.94	H	39.80	-60.43	9.50	1.01	-51.94	-20.00	31.94
2559.94	V	44.54	-55.62	9.50	1.01	-47.13	-20.00	27.13
3071.93	H	59.78	-38.10	10.23	1.13	-29.00	-20.00	9.00
3071.93	V	60.82	-37.01	10.23	1.13	-27.91	-20.00	7.91
3583.91	H	46.70	-50.90	10.48	1.23	-41.65	-20.00	21.65
3583.91	V	51.23	-46.24	10.48	1.23	-36.99	-20.00	16.99
4095.90	H	41.76	-54.24	10.84	1.27	-44.67	-20.00	24.67
4095.90	V	48.54	-47.42	10.84	1.27	-37.85	-20.00	17.85
4607.89	H	56.22	-39.18	10.73	1.40	-29.85	-20.00	9.85
4607.89	V	51.76	-43.49	10.73	1.40	-34.16	-20.00	14.16
5119.88	H	45.45	-48.02	11.27	1.50	-38.25	-20.00	18.25
5119.88	V	44.16	-49.21	11.27	1.50	-39.44	-20.00	19.44

PART 22:

Frequency (MHz)	Polar (H/V)	Receiver Reading (dB μ V)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
FM, Frequency: 454.0125MHz-12.5 kHz								
908.03	H	58.63	-40.43	0.00	0.54	-40.97	-13.00	27.97
908.03	V	55.62	-40.64	0.00	0.54	-41.18	-13.00	28.18
1362.04	H	40.79	-62.55	8.11	0.77	-55.21	-13.00	42.21
1362.04	V	41.40	-62.14	8.11	0.77	-54.80	-13.00	41.80
1816.05	H	36.87	-66.54	8.88	0.90	-58.56	-13.00	45.56
1816.05	V	39.86	-63.66	8.88	0.90	-55.68	-13.00	42.68
2270.06	H	41.39	-60.66	9.26	0.95	-52.35	-13.00	39.35
2270.06	V	46.41	-55.52	9.26	0.95	-47.21	-13.00	34.21
2724.08	H	51.16	-48.81	9.76	1.05	-40.10	-13.00	27.10
2724.08	V	53.04	-46.87	9.76	1.05	-38.16	-13.00	25.16
3178.09	H	56.03	-41.19	10.27	1.12	-32.04	-13.00	19.04
3178.09	V	60.12	-36.88	10.27	1.12	-27.73	-13.00	14.73
3632.10	H	41.86	-55.62	10.53	1.22	-46.31	-13.00	33.31
3632.10	V	45.99	-51.39	10.53	1.22	-42.08	-13.00	29.08
4086.11	H	42.92	-53.06	10.85	1.28	-43.49	-13.00	30.49
4086.11	V	44.49	-51.43	10.85	1.28	-41.86	-13.00	28.86
4540.13	H	48.99	-46.66	10.65	1.36	-37.37	-13.00	24.37
4540.13	V	46.59	-48.83	10.65	1.36	-39.54	-13.00	26.54
FM, Frequency: 454.0125MHz-25 kHz								
908.03	H	59.19	-39.87	0.00	0.54	-40.41	-13.00	27.41
908.03	V	56.70	-39.56	0.00	0.54	-40.10	-13.00	27.10
1362.04	H	39.98	-63.36	8.11	0.77	-56.02	-13.00	43.02
1362.04	V	41.69	-61.85	8.11	0.77	-54.51	-13.00	41.51
1816.05	H	37.36	-66.05	8.88	0.90	-58.07	-13.00	45.07
1816.05	V	39.98	-63.54	8.88	0.90	-55.56	-13.00	42.56
2270.06	H	42.01	-60.04	9.26	0.95	-51.73	-13.00	38.73
2270.06	V	45.67	-56.26	9.26	0.95	-47.95	-13.00	34.95
2724.08	H	51.51	-48.46	9.76	1.05	-39.75	-13.00	26.75
2724.08	V	52.77	-47.14	9.76	1.05	-38.43	-13.00	25.43
3178.09	H	55.98	-41.24	10.27	1.12	-32.09	-13.00	19.09
3178.09	V	59.63	-37.37	10.27	1.12	-28.22	-13.00	15.22
3632.10	H	41.21	-56.27	10.53	1.22	-46.96	-13.00	33.96
3632.10	V	46.82	-50.56	10.53	1.22	-41.25	-13.00	28.25
4086.11	H	42.98	-53.00	10.85	1.28	-43.43	-13.00	30.43
4086.11	V	44.66	-51.26	10.85	1.28	-41.69	-13.00	28.69
4540.13	H	49.14	-46.51	10.65	1.36	-37.22	-13.00	24.22
4540.13	V	46.60	-48.82	10.65	1.36	-39.53	-13.00	26.53

Frequency (MHz)	Polar (H/V)	Receiver Reading (dB μ V)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
4FSK, Frequency: 454.0125MHz-12.5 kHz								
908.03	H	58.48	-40.58	0.00	0.54	-41.12	-13.00	28.12
908.03	V	55.70	-40.56	0.00	0.54	-41.10	-13.00	28.10
1362.04	H	40.02	-63.32	8.11	0.77	-55.98	-13.00	42.98
1362.04	V	41.13	-62.41	8.11	0.77	-55.07	-13.00	42.07
1816.05	H	38.68	-64.73	8.88	0.90	-56.75	-13.00	43.75
1816.05	V	40.08	-63.44	8.88	0.90	-55.46	-13.00	42.46
2270.06	H	42.33	-59.72	9.26	0.95	-51.41	-13.00	38.41
2270.06	V	48.74	-53.19	9.26	0.95	-44.88	-13.00	31.88
2724.08	H	51.88	-48.09	9.76	1.05	-39.38	-13.00	26.38
2724.08	V	53.91	-46.00	9.76	1.05	-37.29	-13.00	24.29
3178.09	H	55.43	-41.79	10.27	1.12	-32.64	-13.00	19.64
3178.09	V	60.54	-36.46	10.27	1.12	-27.31	-13.00	14.31
3632.10	H	41.98	-55.50	10.53	1.22	-46.19	-13.00	33.19
3632.10	V	46.99	-50.39	10.53	1.22	-41.08	-13.00	28.08
4086.11	H	43.77	-52.21	10.85	1.28	-42.64	-13.00	29.64
4086.11	V	46.05	-49.87	10.85	1.28	-40.30	-13.00	27.30
4540.13	H	49.10	-46.55	10.65	1.36	-37.26	-13.00	24.26
4540.13	V	46.01	-49.41	10.65	1.36	-40.12	-13.00	27.12

Note 1: The unit of antenna gain is dBd for frequency below 1GHz and is dBi for frequency above 1GHz.

Note 2:

Absolute Level = Substituted Level - Cable loss + Antenna Gain

Margin = Limit - Absolute Level

===== END OF REPORT =====