

# ***FCC TEST REPORT***

**FCC ID** : Y4NDW700TX

**Applicant** : Mobi Technologies, Inc.

**Address of Applicant** : 5913 Blackwelder Street, Culver City, CA 90232, United States

**Equipment Under Test (EUT) :**


Product description : MOBICAM DXR

Model No. : 70204

Frequency Range : 2402MHz to 2480MHz

**Standards** : FCC 15 Paragraph 15.247

**Date of Test** : Dec.16,2010

**Test Engineer** : (Olic huang)/Engineer 

**Reviewed By** : (Philo zhong)/Manager 

PREPARED BY:

**Waltek Services (Shenzhen) Co., Ltd.**

1/F, Fukangtai Building, West Baima Rd., Songgang Street, Baoan District, Shenzhen  
518105, China

Tel :+86-755-27553488

Fax:+86-755-27553868

## 2 Contents

	Page
<b>1 COVER PAGE.....</b>	<b>1</b>
<b>2 CONTENTS.....</b>	<b>2</b>
<b>3 TEST SUMMARY.....</b>	<b>4</b>
<b>4 GENERAL INFORMATION.....</b>	<b>5</b>
4.1 CLIENT INFORMATION .....	5
4.2 GENERAL DESCRIPTION OF E.U.T.....	5
4.3 DETAILS OF E.U.T. ....	5
4.4 DESCRIPTION OF SUPPORT UNITS .....	5
4.5 STANDARDS APPLICABLE FOR TESTING.....	5
4.6 TEST FACILITY.....	6
4.7 TEST LOCATION.....	6
4.8 EQUIPMENT USED DURING TEST .....	7
<b>5 CONDUCTED EMISSION TEST .....</b>	<b>10</b>
5.1 TEST EQUIPMENT.....	10
5.2 TEST PROCEDURE .....	10
5.3 CONDUCTED TEST SETUP .....	11
5.4 EUT OPERATING CONDITION .....	11
5.5 CONDUCTED EMISSION LIMITS .....	12
5.6 CONDUCTED EMISSION TEST DATA.....	12
5.7 CONDUCTED EMISSION TEST SETUP VIEW.....	16
<b>6 RADIATION EMISSION TEST.....</b>	<b>17</b>
6.1 TEST EQUIPMENT.....	17
6.2 MEASUREMENT UNCERTAINTY.....	17
6.3 TEST PROCEDURE .....	17
6.4 RADIATED TEST SETUP.....	18
6.5 SPECTRUM ANALYZER SETUP.....	18
6.6 CORRECTED AMPLITUDE & MARGIN CALCULATION .....	19
6.7 SUMMARY OF TEST RESULTS.....	19
6.8 EUT OPERATING CONDITION .....	20
6.9 RADIATED EMISSIONS LIMIT ON PARAGRAPH 15.209.....	20
6.10 RADIATED EMISSIONS TEST RESULT.....	21
6.11 RADIATED EMISSION DATA .....	21
6.11.1 Test mode: standby mode.....	22
6.11.2 Test mode: continuously transmit mode.....	28
<b>7 ANTENNA REQUIREMENT.....</b>	<b>32</b>
<b>8 MAXIMUM PEAK OUTPUT POWER.....</b>	<b>32</b>
<b>9 HOPPING CHANNEL NUMBER.....</b>	<b>33</b>
<b>10 FREQUENCY SEPARATED.....</b>	<b>34</b>
<b>11 DWELL TIME.....</b>	<b>37</b>

**12 20-DB BANDWIDTH.....41**

**13 RADIATED SPURIOUS EMISSIONS INTO ADJACENT RESTRICTED BAND .....43**

**14 RF EXPOSURE TEST.....46**

**15 PHOTOGRAPHS OF TEST SETUP FOR TX AND STANDBY .....48**

**16 PHOTOGRAPHS - CONSTRUCTIONAL DETAILS .....49**

16.1 EUT – APPEARANCE VIEW .....49

16.2 EUT - FRONT VIEW .....49

16.3 EUT - BACK VIEW .....50

16.4 ADAPTER - APPEARANCE VIEW .....50

16.5 EUT - OPEN VIEW .....51

16.6 PCB1 - FRONT VIEW .....51

16.7 PCB1 - BACK VIEW .....52

16.8 PCB2 - FRONT VIEW .....52

16.9 PCB2 - BACK VIEW .....53

**17 FCC ID LABEL.....54**

### 3 Test Summary

Test Items	Test Requirement	Test Method	Limit / Severity	Result
Maximum peak output power	FCC Part 15:2008	ANSI C63.4: 2003	20dBm	PASS
Restricted Band	FCC Part 15:2008	ANSI C63.4: 2003	Note	PASS
Dwell time	FCC Part 15:2008	ANSI C63.4: 2003	Maximum:0.4 s	PASS
Channel separation	FCC Part 15:2008	ANSI C63.4: 2003	Channel separation at least 1MHz	PASS
Hopping channel No.	FCC Part 15:2008	ANSI C63.4: 2003	As the test data	PASS
20-dB Bandwidth	FCC Part 15:2008	ANSI C63.4: 2003	Note	PASS
RF Exposure Test	FCC Part 15:2008	ANSI C63.4: 2003	Note	PASS
Mains Terminal Disturbance Voltage, 150kHz to 30MHz	FCC Part 15:2008	ANSI C63.4: 2003	N/A	PASS
Radiation Emission, 30MHz to 25GHz	FCC Part 15:2008	ANSI C63.4: 2003	N/A	PASS

**Note :** denote that for more details of the EUT , please refer to the relating test items as below .

**Remark :** the methods of measurement in all the test items were according to the FCC Public Notice DA 00-705 .

## 4 General Information

### 4.1 Client Information

Applicant: Mobi Technologies, Inc.  
Address of Applicant: 5913 Blackwelder Street, Culver City, CA 90232, United States

Manufacturer: Sky Advance Electronics(Dong Guan)Co.,Ltd.  
Address of Manufacturer: No 138.SanJiang Industry District,HengliTown,DongguanCity,  
GuangdongProvince,China

### 4.2 General Description of E.U.T.

Product description: MOBICAM DXR  
Model No.: 70204

### 4.3 Details of E.U.T.

Power Supply: Adapter Input: AC 100-240V, 50/60Hz, 0.18A  
Output: DC 5V, 1.0A

Battery :3.7V/1300mAh

### 4.4 Description of Support Units

The EUT has been tested as an independent unit.

### 4.5 Standards Applicable for Testing

The customer requested FCC tests for a MOBICAM DXR. The standards used were FCC 15 Paragraph 15.247, Paragraph 15.205, Paragraph 15.207, Paragraph 15.209, Paragraph 15.31, Paragraph 15.33, Paragraph 15.35.

#### 4.6 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **FCC – Registration No.: 880581**

Waltek Services(Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 880581, June 24, 2008.

- **IC – Registration No.: IC 7760A**

Waltek Services(Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the Industry Canada. The acceptance letter from the Industry Canada is maintained in our files. Registration IC7760A, Aug.03, 2010

#### 4.7 Test Location

All Emissions tests were performed at:-

1/F, Fukangtai Building, West Baima Rd., Songgang Street, Baoan District, Shenzhen 518105, Guangdong, China.

**Remark :** All the test results of the peripherals were conformed to the Fcc Verification requirements.

**4.8 Equipment Used during Test**

Equipment Name	Manufacturer Model	Equipment No	Internal No	Specification	Cal. Date	Due Date	Cert. No	Uncertainty
EMC Analyzer	Agilent/ E7405A	MY451149 43	W2008001	9k-26.5GHz	Aug- 03-10	Aug- 02-11	Wws200 81596	±1dB
Trilog Broadband Antenne 30-3000 MHz	SCHWARZB ECK MESS- ELEKTROM / VULB9163	336	W2008002	30-3000 MHz	Aug- 03-10	Aug- 02-11		±1dB
Broad-band Horn Antenna	SCHWARZB ECK MESS- ELEKTROM / BBHA 9120D(1201)	667	W2008003	1-18GHz	Aug- 03-10	Aug- 02-11		f<10 GHz: ±1dB 10GHz<f< 18 GHz: ±1.5dB
Broadband Preamplifier	SCHWARZB ECK MESS- ELEKTROM / BBV 9718	9718-148	W2008004	0.5-18GHz	Aug- 03-10	Aug- 02-11		±1.2dB
10m Coaxial Cable with N-male Connectors usable up to 25GHz,	SCHWARZB ECK MESS- ELEKTROM / AK 9515 H	-	-	-	Aug- 03-10	Aug- 02-11		-
10m 50 Ohm Coaxial Cable with N-plug, individual length, usable up to 3(5)GHz, Connector	SCHWARZB ECK MESS- ELEKTROM / AK 9513				Aug- 03-10	Aug- 02-11		
Positioning Controller	C&C LAB/ CC-C-IF				N/A	N/A		
Color Monitor	SUNSP0/ SP-14C				N/A	N/A		
Test Receiver	ROHDE&SC HWARZ/ ESPI	101155	W2005001	9k-3GHz	Aug- 03-10	Aug- 02-11	Wws200 80942	±1dB
EMI Receiver	Beijingkehua n	KH3931		9k-1GHz	Aug- 03-10	Aug- 02-11		
Two-Line V-Network	ROHDE&SC HWARZ/ ENV216	100115	W2005002	50Ω/50μH	Aug- 03-10	Aug- 02-11	Wws200 80941	±10%

Equipment Name	Manufacturer Model	Equipment No	Internal No	Specification	Cal. Date	Due Date	Cert. No	Uncertainty
Absorbing Clamp	ROHDE&SC HWAARZ/ MDS-21	100205	W2005003	impedance 50 $\Omega$ loss : 17 dB	Aug- 03-10	Aug- 02-11	Wws200 80943	$\pm 1$ dB
10m 50 Ohm Coaxial Cable with N-plug, individual length, usable up to 3(5)GHz, Connectors	SCHWARZB ECK MESS- ELEKTROM / AK 9514				Aug- 03-10	Aug- 02-11		
Digital Power Analyzer	Em Test AG/Switzerland/ DPA 500	V07451 03095	W2008012	Power: 2000VA Vol-range: 0- 300V Freq_range: 10-80Hz	Aug- 03-10	Aug- 02-11	Wwd200 81185	Voltage distinguish:0 .025% Power_freq distinguish:0 .02Hz
Power Source	Em Test AG/Switzerland/ ACS 500	V07451 03096	W2008013	Vol-range: 0- 300V Power_freq: 10-80Hz				
Electrostatic Discharge Simulator	Em Test AG/Switzerland/DITO	V07451 03094	W2008005	Contact discharge: 500V-10KV Air discharge: 500V-16.5KV	Aug- 03-10	Aug- 02-11	Wwc200 82400	7.5A current will be changed in $V_m=1.5V$
RF Generator	TESEQ GmbH/ NSG4070	25781	W2008008	Freq-range: 9K-1GHz RF voltage: - 60 dBm- +10dBm	Aug- 03-10	Aug- 02-11	Wws200 81890	Power_freq distinguish0. 1Hz RFelectricity distinguish 0.1 B
CDN M-Type	TESEQ GmbH/ CDN M016	25112	W2008009	Voltage correct factor 9.5 dB	Aug- 03-10	Aug- 02-11	Wwc200 82396	150K- 80MHz: $\pm 1$ dB 80- 230MHz:-2- +3dB
EM-Clamp	TESEQ GmbH/ KEMZ 801	25453	W2008010	Freq_range: 0.15-1000 MHz	Aug- 03-10	Aug- 02-11	Wwc200 82397	0.3-400 MHz: $\pm 4$ dB Other freq: $\pm 5$ dB
Attenuator 6dB	TESEQ GmbH/ ATN6050	25365			Aug- 03-10	Aug- 02-11	Wws200 81597	



Equipment Name	Manufacturer Model	Equipment No	Internal No	Specification	Cal. Date	Due Date	Cert. No	Uncertainty
All Modules Generator	SCHAFFNER/6150	34579	W2008006	voltage:200V-4.4KV Pulse current: 100A-2.2KA	Aug-03-10	Aug-02-11	Wwc20082401	voltage: ±10% Pulse current: ±10%
Capacitive Coupling Clamp	SCHAFFNER/CDN 8014	25311			Aug-03-10	Aug-02-11	Wwc20082398	-
Signal and Data Line Coupling Network	SCHAFFNER/CDN 117	25627	W2008011	1.2/50µS	Aug-03-10	Aug-02-11	Wwc20082399	-
AC Power Supply	TONGYUN/DTDGC-4				Aug-03-10	Aug-02-11	Wws20080944	-
Exposure Level Tester ELT-400	Narda Safety TEST Solutions/2304/03	M-0155	w2008022	Test freq range: 1—400kHz	Aug-03-10	Aug-02-11	Wwd20081191	Test uncertainty : 1—120kHz:±1.83%, 120 kHz-400 kHz: ±4.06%
Magnetic Field Probe 100cm <sup>2</sup>	Narda Safety TEST Solutions/2300/90.10	M-1070	w2008021	Test freq range: 1—400kHz				Test uncertainty : 1Hz-10Hz: ±16.2%, 10Hz - 120kHz:±2.2%, 120 kHz-400 kHz: ±4.7%
Active Loop Antenna Charger 10kHz-30MHz	Beijing Dazhi / ZN30900A	-	-	10kHz-30MHz	Aug-03-10	Aug-02-11		±1dB

## 5 Conducted Emission Test

Test Requirement:	FCC Part15 Paragraph 15.207
Test Method:	Based on FCC Part15 Paragraph 15.207
Test Date:	Dec.16,2010
Frequency Range:	150kHz to 30MHz
Class:	Class B
Detector:	Peak for pre-scan (9kHz Resolution Bandwidth) Quasi-Peak & Average if maximised peak within 6dB of Average Limit

### 5.1 Test Equipment


Please refer to Section 5 this report.

### 5.2 Test Procedure

1. The EUT was connected to LISN and placed on a table.
2. The EUT was tested according to ANSI C63.4:2003. The frequency spectrum from 150kHz to 30MHz was investigated.
3. The maximised peak emissions from the EUT was scanned and measured for both the Live and Neutral Lines. Quasi-peak & average measurements were performed if peak emissions were within 6dB of the average limit line.

**5.3 Conducted Test Setup**


The conducted emission tests were performed using the setup accordance with the ANSI C63.4:2003, The specification used in this report was the FCC Part15 Paragraph 15.207 limits.

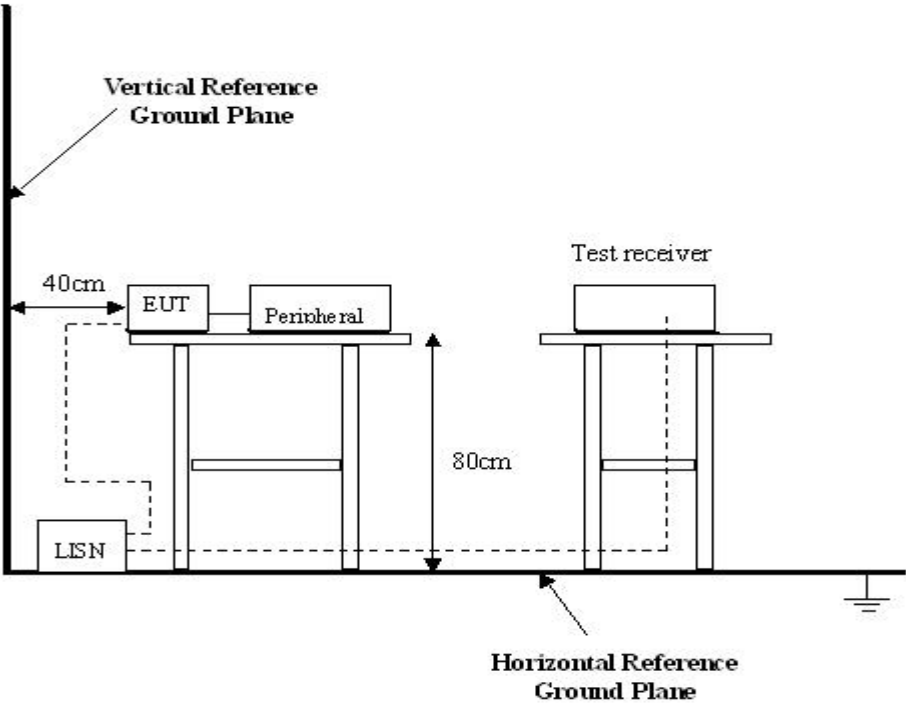

**5.4 EUT Operating Condition**

Operating condition is according to ANSI C63.4:2003.

- A. Setup the EUT and simulators as shown on follow.
- B. Enable RF signal and confirm EUT active.
- C. Modulate output capacity of EUT up to specification.

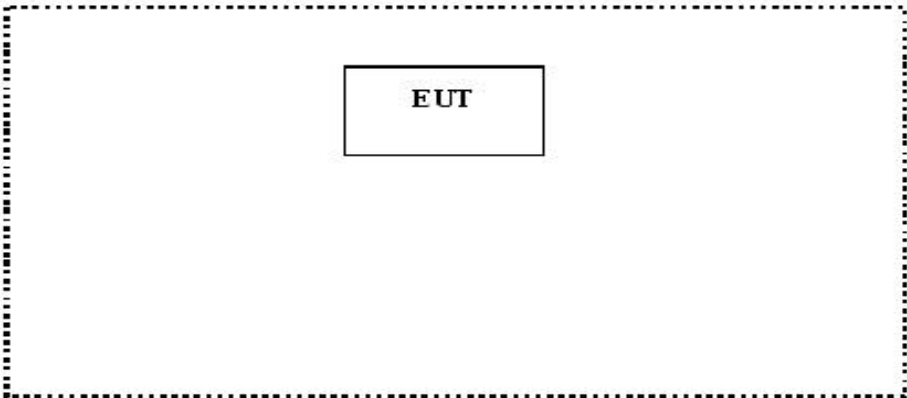

**5.5 Conducted Emission Limits**

66-56 dB $\mu$ V between 0.15MHz & 0.5MHz

56 dB $\mu$ V between 0.5MHz & 5MHz

60 dB $\mu$ V between 5MHz & 30MHz


**Note:** In the above limits, the tighter limit applies at the band edges.

**5.6 Conducted Emission Test Data**

Remark: the EUT was used two adapter, and the model number is KSAB0500100W1US and KSAS50060500100VUD, and all the test passed. For more details, please refer to the test results and the EUT photos.


Model Number: KSAB0500100W1US

Live Line

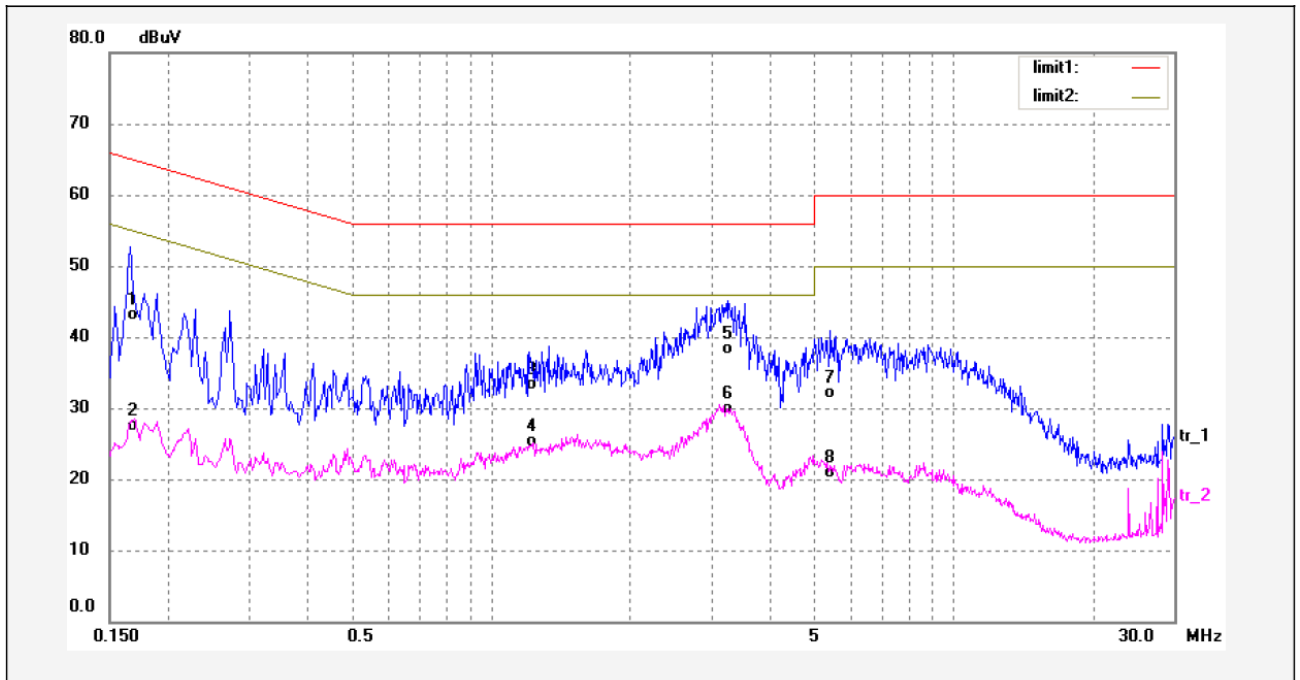

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Margin (dB)	Detector	Remark
1	0.1660	31.70	10.65	42.35	65.15	-22.80	QP	
2	0.1660	16.04	10.65	26.69	55.15	-28.46	AVG	
3	1.2140	20.36	12.19	32.55	56.00	-23.45	QP	
4	1.2140	12.33	12.19	24.52	46.00	-21.48	AVG	
5	3.2700	24.98	12.51	37.49	56.00	-18.51	QP	
6	3.2700	16.60	12.51	29.11	46.00	-16.89	AVG	
7	5.4420	19.72	11.64	31.36	60.00	-28.64	QP	
8	5.4420	8.50	11.64	20.14	50.00	-29.86	AVG	


Neutral Line

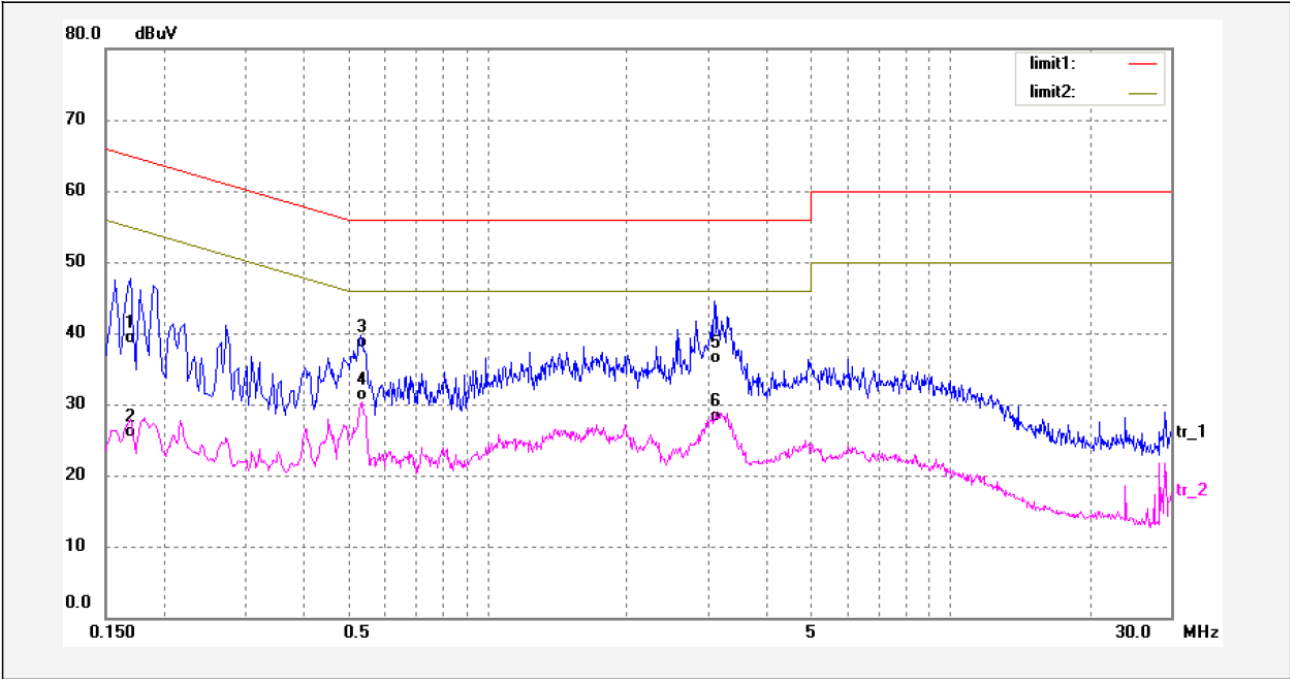

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Margin (dB)	Detector	Remark
1	0.1700	27.87	10.68	38.55	64.96	-26.41	QP	
2	0.1700	14.69	10.68	25.37	54.96	-29.59	AVG	
3	0.5340	26.24	11.61	37.85	56.00	-18.15	QP	
4	0.5340	18.91	11.61	30.52	46.00	-15.48	AVG	
5	3.0940	23.19	12.48	35.67	56.00	-20.33	QP	
6	3.0940	14.93	12.48	27.41	46.00	-18.59	AVG	


Model Number: KSAS50060500100VUD

Live Line

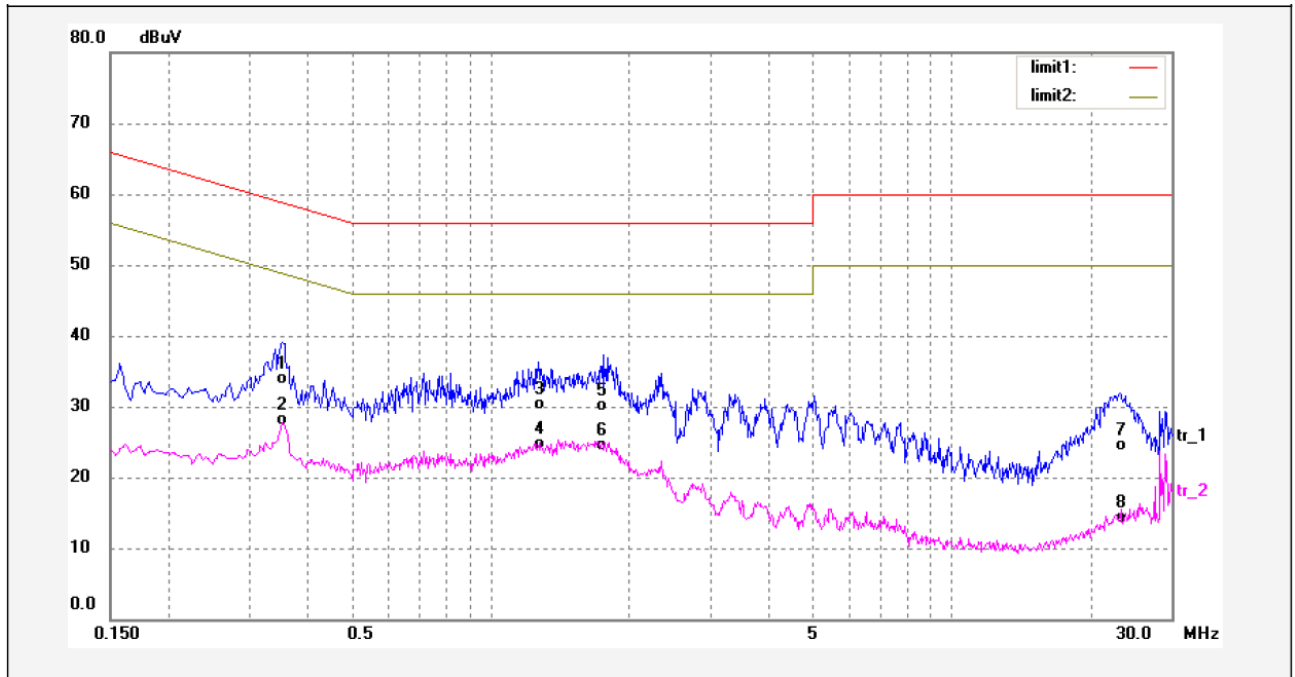

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Margin (dB)	Detector	Remark
1	0.3540	22.42	10.74	33.16	58.87	-25.71	QP	
2	0.3540	16.58	10.74	27.32	48.87	-21.55	AVG	
3	1.2700	17.36	12.19	29.55	56.00	-26.45	QP	
4	1.2700	11.74	12.19	23.93	46.00	-22.07	AVG	
5	1.7620	17.05	12.22	29.27	56.00	-26.73	QP	
6	1.7620	11.54	12.22	23.76	46.00	-22.24	AVG	
7	23.2500	11.00	12.62	23.62	60.00	-36.38	QP	
8	23.2500	0.90	12.62	13.52	50.00	-36.48	AVG	

Neutral Line

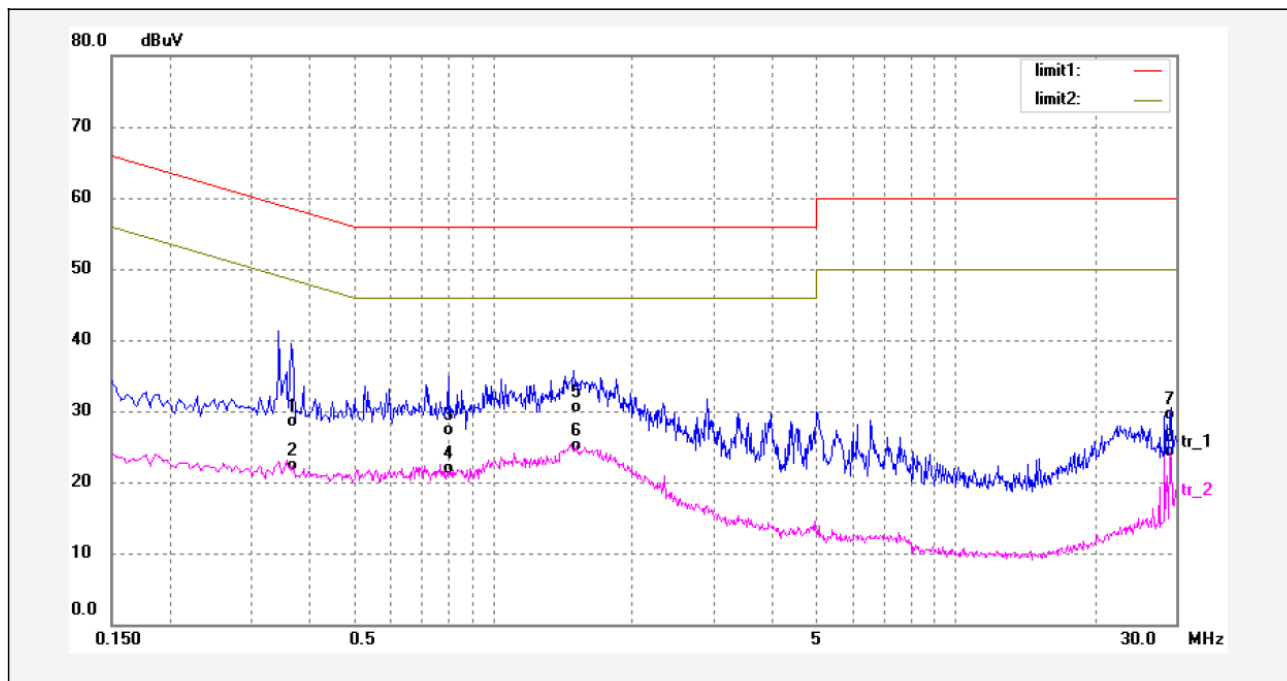

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Margin (dB)	Detector	Remark
1	0.3660	17.02	10.73	27.75	58.59	-30.84	QP	
2	0.3660	10.70	10.73	21.43	48.59	-27.16	AVG	
3	0.8020	14.29	12.15	26.44	56.00	-29.56	QP	
4	0.8020	8.90	12.15	21.05	46.00	-24.95	AVG	
5	1.4980	17.61	12.19	29.80	56.00	-26.20	QP	
6	1.4980	12.17	12.19	24.36	46.00	-21.64	AVG	
7	29.2380	15.96	12.82	28.78	60.00	-31.22	QP	
8	29.2380	10.72	12.82	23.54	50.00	-26.46	AVG	

### 5.7 Conducted Emission Test Setup View





## 6 Radiation Emission Test

Test Requirement:	FCC Part15 Paragraph 15.247
Test Method:	Based on ANSI 63.4:2003
Test Date:	Dec.16,2010
Frequency Range:	30MHz to 25GHz
Measurement Distance:	3m
Detector:	Peak for pre-scan (120kHz resolution bandwidth) Quasi-Peak if maximised peak within 6dB of limit

### 6.1 Test Equipment

Please refer to Section 5 this report.

### 6.2 Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in the field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.


Based on ANSI C63.4:2003, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of a radiation emissions measurement at WALTEK SERVICES EMC Lab is +/-5.03 dB.

### 6.3 Test Procedure

1. The adapter was used in the equipment under test for radiated emissions test.
2. The radiation emission should be tested under the X ,Y,Z position. And the worse case was the X position. So the data shown was the X position only.
3. Maximizing procedure was performed on the six (6) highest emissions to ensure EUT is compliant with all installation combinations.
4. All data was recorded in the peak and average detection mode.
5. The EUT was under working mode during the final qualification test and the configuration was used to represent the worst case results.

### 6.4 Radiated Test Setup

The radiated emission tests were performed in the 3m Semi- Anechoic Chamber test site, using the setup accordance with the ANSI C63.4:2003, The specification used in this report was the FCC Part15 Paragraph 15.209 limits and Paragraph 15.247 limits.

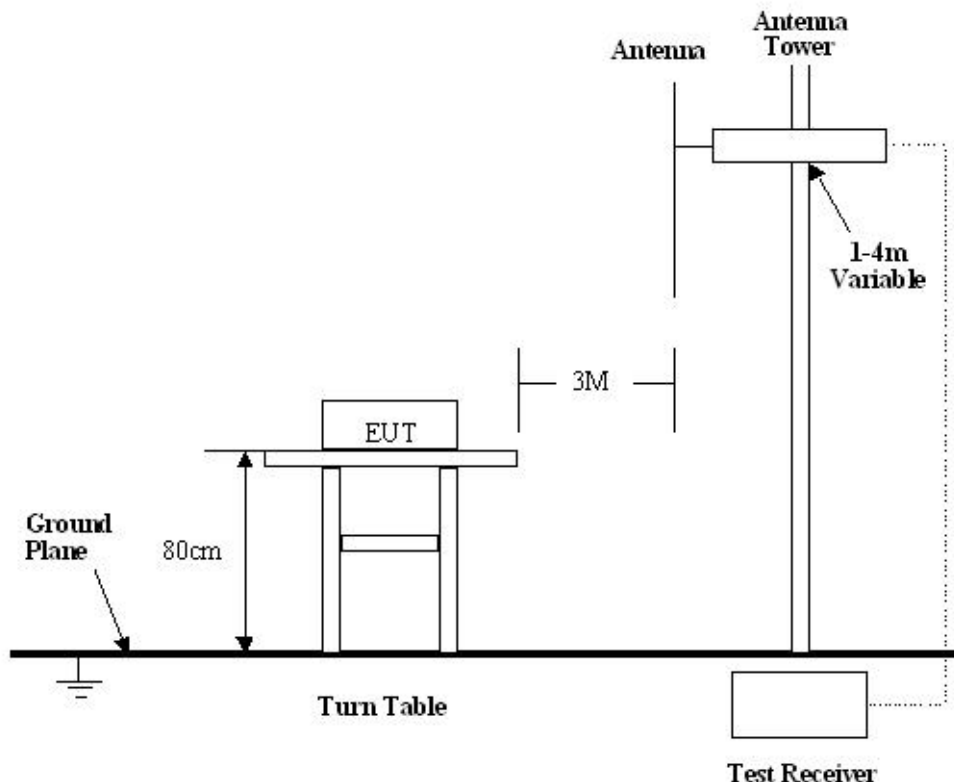

### 6.5 Spectrum Analyzer Setup

According to FCC Part15 Paragraph 15.247 Rules, the system was tested to 25000 MHz. Below 1GHz

- Start Frequency .....30 MHz
- Stop Frequency .....1000 MHz
- Sweep Speed Auto
- IF Bandwidth.....120 kHz
- Video Bandwidth .....100KHz
- Quasi-Peak Adapter Bandwidth .....120 kHz
- Quasi-Peak Adapter Mode.....Normal
- Resolution Bandwidth .....100KHz

Above 1GHz

Start Frequency .....	1000 MHz
Stop Frequency .....	25000MHz
Sweep Speed	Auto
IF Bandwidth.....	120 kHz
Video Bandwidth .....	1MHz
Quasi-Peak Adapter Bandwidth .....	120 kHz
Quasi-Peak Adapter Mode.....	Normal
Resolution Bandwidth .....	1MHz

**6.6 Corrected Amplitude & Margin Calculation**

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Antenna Factor} + \text{Cable Factor} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -7dBμV means the emission is 7dBμV below the maximum limit for Class B. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{Class B Limit}$$

**6.7 Summary of Test Results**

According to the data in section 7.11, the EUT complied with the FCC Part15 Paragraph 15.247 standards.

### 6.8 EUT Operating Condition

The same as section 6.4 of this report.

Let the EUT work in test mode and test it.

### 6.9 Radiated Emissions Limit on Paragraph 15.209

Frequency(MHZ)	Distance(m)	Field strength(dBuV/m)
30-88	3	40.0
88-216	3	43.5
216-960	3	46.0
Above 960	3	54.0

- Note:**
- (1) RF Voltage(dBuV)=20 log RF Voltage(uV)
  - (2) In the Above Table,the tighter limit applies at the band edges.
  - (3) Distance refers to the distance in meters between the measuring instrument antenna.
  - (4)The emission limit in this paragraph is based on measurement instrumentaion employing an average detector.Measurement using instrumentation with a peak detector function,corresponding to 20dB above the maximum permitted average limit.
  - (5)Above 1GHz, mark a Peak and average measurements for all emissions,Limit for peak is 74dBuV/m,According to Part15.35(b) and average is 54BuV/m.

### 6.10 Radiated Emissions Test Result

Formula of conversion factors:the field strength at 3m was established by adding  
 The meter reading of the spectrum analyzer (which is set to read in units of dBuV/m)  
 To the antenna correction factor supplied by the antenna manufacturer. The antenna  
 Correction factors are stated in terms of dB.The gain of the pressletor was accounted  
 For in the spectrum analyser meter reading.

Example:

Freq(MHz) Meter Reading +ACF=FS

33            20dBuV+10.36dB=30.36dBuV/m @3m

### 6.11 Radiated Emission Data

A. Test Item:	Radiated Emission Data
Test Voltage:	AC 120V
Test Mode:	CRX and CTX On
Temperature:	25.5 °C
Humidity:	51%RH
Test Result:	PASS


**6.11.1 Test mode: standby mode.**

Remark: Remark: the EUT was used two adapter,and the model number is KSAB0500100W1US and KSAS50060500100VUD,and all the test passed .For more details , please refer to the test results and the EUT photos.

Test frequency : 30-1000MHz radiation test data:


Model Number: KSAB0500100W1US

Vertical

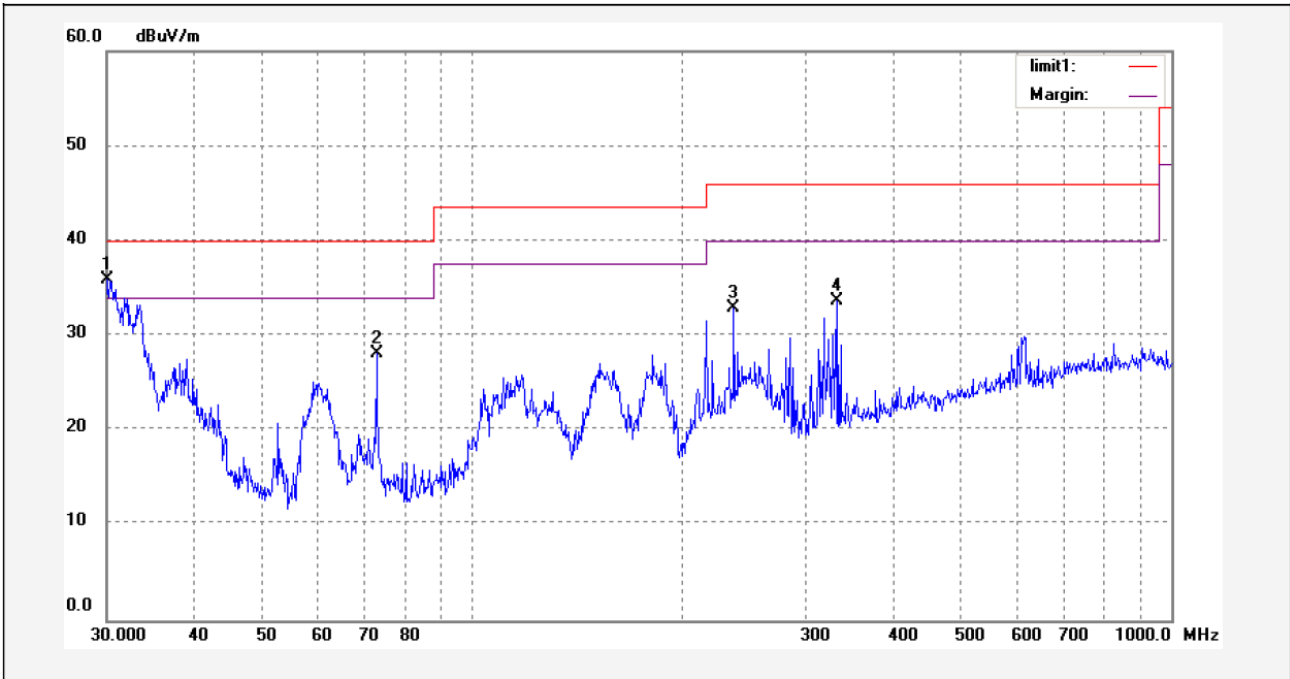

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	30.0000	18.58	17.40	35.98	40.00	-4.02	peak	
2	72.9763	18.27	9.82	28.09	40.00	-11.91	peak	
3	236.7928	15.76	17.17	32.93	46.00	-13.07	peak	
4	332.9536	14.25	19.44	33.69	46.00	-12.31	peak	


Horizontal

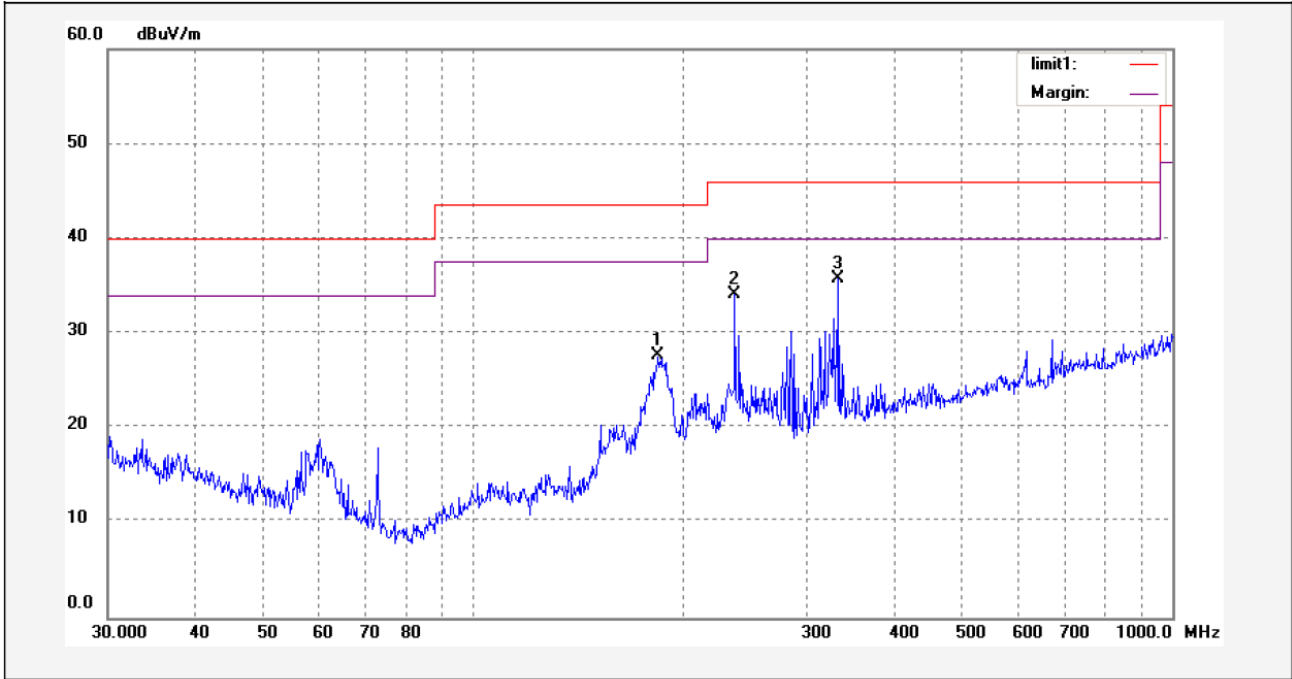

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	183.8660	15.45	12.15	27.60	43.50	-15.90	peak	
2	236.7928	17.25	16.84	34.09	46.00	-11.91	peak	
3	332.9536	16.36	19.40	35.76	46.00	-10.24	peak	

Model Number: KSAS50060500100VUD


Vertical

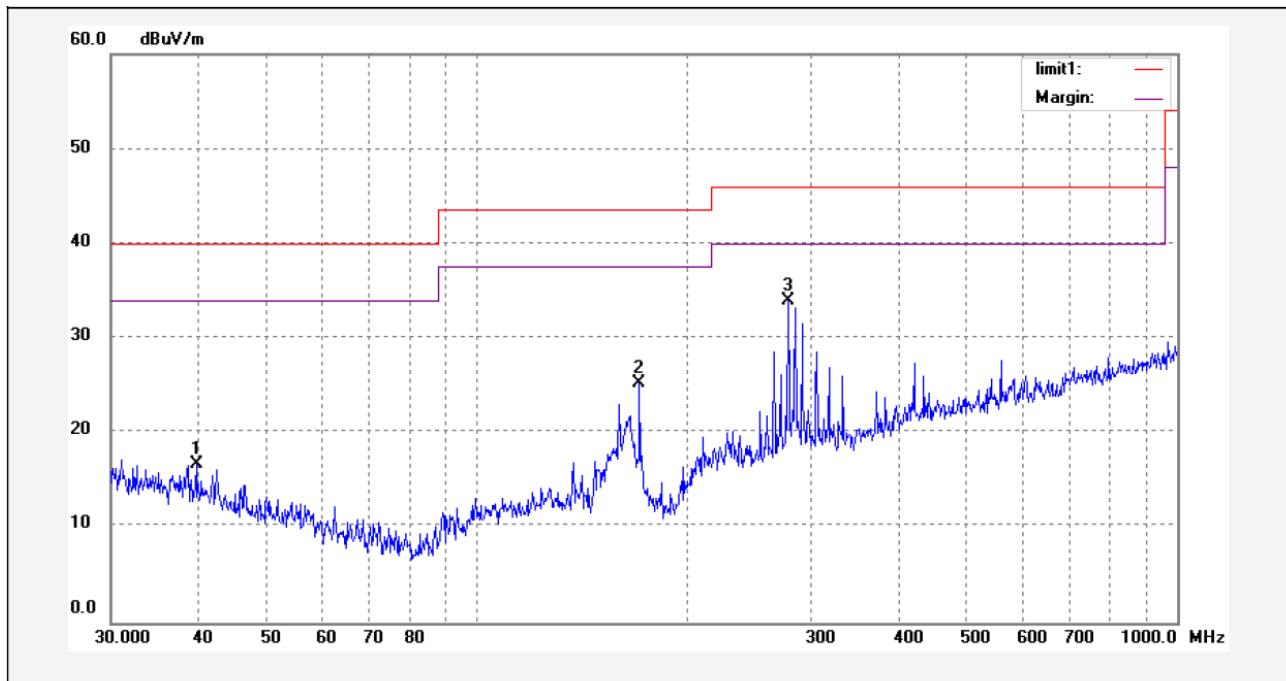

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	39.7371	0.61	16.12	16.73	40.00	-23.27	peak	
2	170.7878	13.16	12.11	25.27	43.50	-18.23	peak	
3	278.3308	16.50	17.44	33.94	46.00	-12.06	peak	



Horizontal

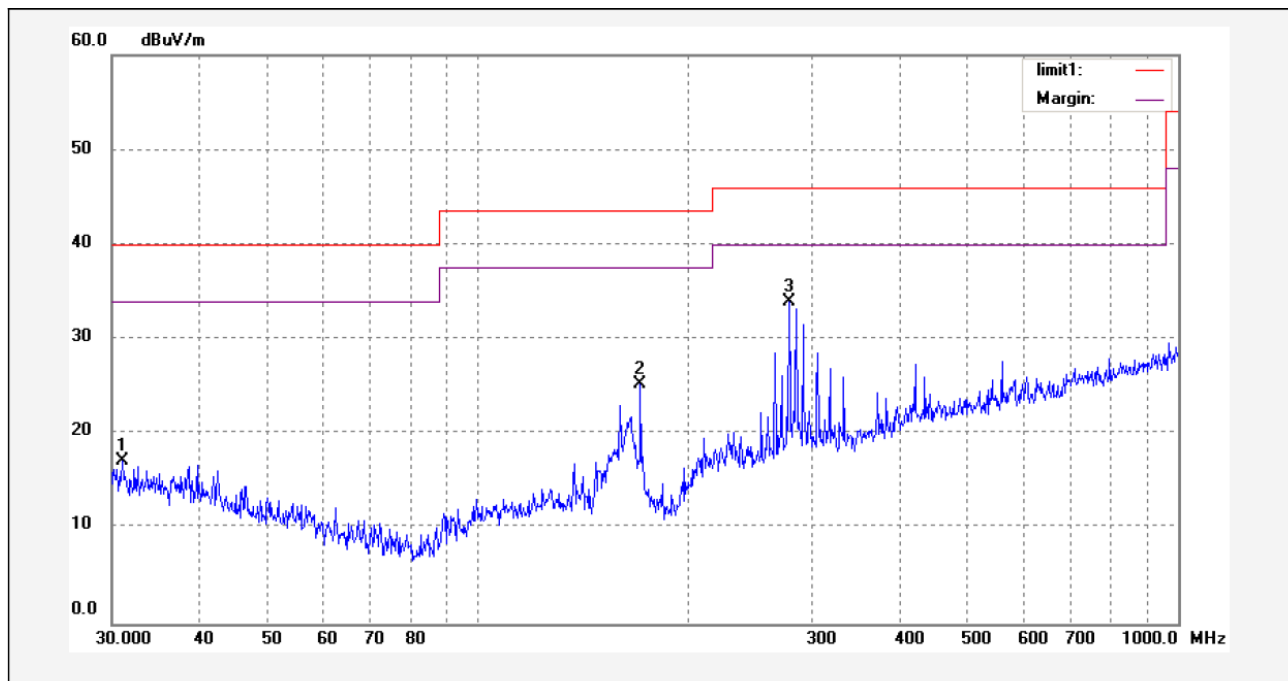


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	31.0728	-0.04	17.21	17.17	40.00	-22.83	peak	
2	170.7878	13.16	12.11	25.27	43.50	-18.23	peak	
3	278.3308	16.50	17.44	33.94	46.00	-12.06	peak	

Test frequency: Above 1GHz radiation test data:


Remark: above 18GHz, the test signal below the noise level, so the data was not performed.

Vertical

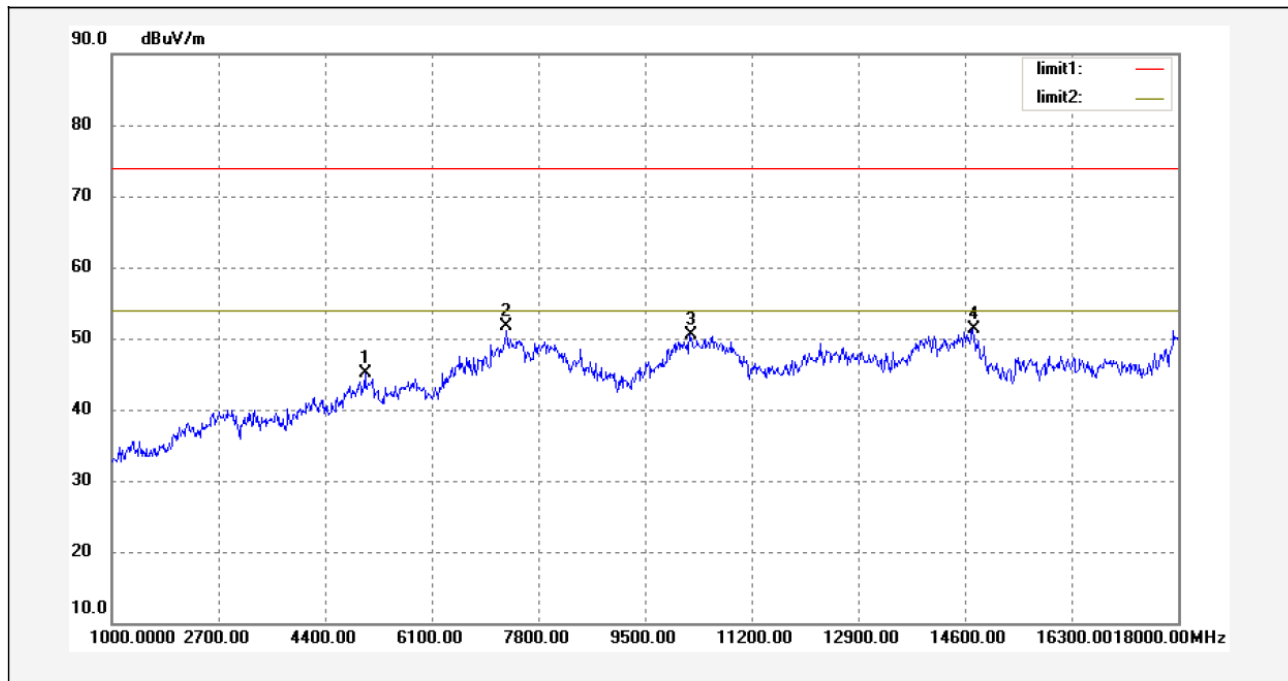

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	5037.074	39.84	5.32	45.16	74.00	-28.84	peak	
2	7285.571	39.14	12.50	51.64	74.00	-22.36	peak	
3	10215.431	32.84	17.75	50.59	74.00	-23.41	peak	
4	14729.459	28.12	23.26	51.38	74.00	-22.62	peak	

Horizontal

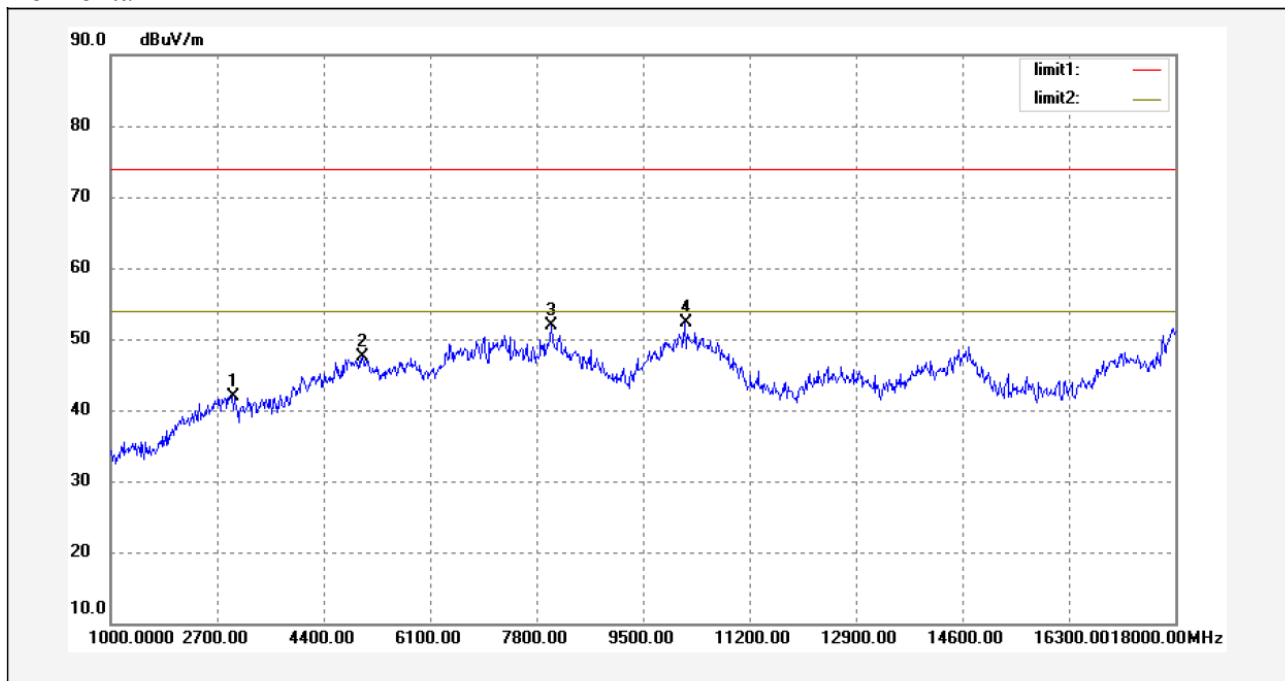

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	2941.884	40.26	1.71	41.97	74.00	-32.03	peak	
2	5020.040	38.56	8.86	47.42	74.00	-26.58	peak	
3	8035.070	33.59	18.27	51.86	74.00	-22.14	peak	
4	10164.329	31.63	20.63	52.26	74.00	-21.74	peak	

**6.11.2 Test mode: continuously transmit mode.**

Remarks: 30-1000MHz radiation test no significant emissions above the equipment noise floor were detected.

And the below is the Fundamental and Harmonic .

Frequency (MHz)	Detect or	Antenna Polarization	Emission Level (dBuV/m)	FCC Part15 Subpart C Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Turntable Angle (°)
Low frequency							
2402	AV	Vertical	98.54		(Fund.)	1.0	100
4804	AV	Vertical	49.68	54.00	4.32	1.2	60
7206	AV	Vertical	41.47	54.00	12.53	1.1	120
9608	AV	Vertical	40.04	54.00	13.96	1.1	120
12010	AV	Vertical	39.75	54.00	14.25	1.1	10
14412	AV	Vertical	38.74	54.00	15.26	1.0	135
16814	AV	Vertical	38.68	54.00	15.32	1.0	120
19216	AV	Vertical	36.42	54.00	17.58	1.0	110
21618	AV	Vertical	37.44	54.00	16.55	1.0	60
24020	AV	Vertical	37.37	54.00	16.63	1.2	100
2402	AV	Horizontal	92.36		(Fund.)	1.0	60
4804	AV	Horizontal	48.69	54.00	5.31	1.0	110
7206	AV	Horizontal	42.36	54.00	11.64	1.1	30
9608	AV	Horizontal	38.58	54.00	15.42	1.2	110
12010	AV	Horizontal	33.42	54.00	20.58	1.0	100
14412	AV	Horizontal	32.42	54.00	21.58	1.2	90
16814	AV	Horizontal	36.99	54.00	17.01	1.0	60
19216	AV	Horizontal	32.09	54.00	21.91	1.1	90
21618	AV	Horizontal	31.27	54.00	22.73	1.2	20
24020	AV	Horizontal	32.58	54.00	21.42	1.0	100
2402	PK	Vertical	109.01		(Fund.)	1.0	110
4804	PK	Vertical	62.35	74.00	11.65	1.0	30
7206	PK	Vertical	50.35	74.00	23.65	1.1	110
9608	PK	Vertical	48.98	74.00	25.02	1.0	100
12010	PK	Vertical	48.69	74.00	25.31	1.2	90
14412	PK	Vertical	47.68	74.00	26.32	1.2	60

16814	PK	Vertical	47.62	74.00	26.38	1.1	90
19216	PK	Vertical	45.36	74.00	28.64	1.2	120
21618	PK	Vertical	46.34	74.00	27.66	1.1	0
24020	PK	Vertical	40.35	74.00	33.65	1.0	45
2402	PK	Horizontal	105.24		(Fund.)	1.0	100
4804	PK	Horizontal	60.24	74.00	13.76	1.0	60
7206	PK	Horizontal	52.30	74.00	21.70	1.0	110
9608	PK	Horizontal	46.00	74.00	28.00	1.2	110
12010	PK	Horizontal	42.36	74.00	31.64	1.2	10
14412	PK	Horizontal	41.36	74.00	32.64	1.0	90
16814	PK	Horizontal	42.32	74.00	31.68	1.0	120
19216	PK	Horizontal	41.03	74.00	32.97	1.0	110
21618	PK	Horizontal	41.00	74.00	34.00	1.2	250
24020	PK	Horizontal	35.85	74.00	38.15	1.0	230
Middle frequency							
2440	AV	Vertical	97.24		(Fund.)	1.1	10
4880	AV	Vertical	49.25	54.00	4.75	1.2	10
7320	AV	Vertical	45.00	54.00	9.00	1.0	50
9760	AV	Vertical	42.36	54.00	11.64	1.0	20
12200	AV	Vertical	39.42	54.00	14.58	1.2	20
14640	AV	Vertical	40.00	54.00	14.00	1.2	110
17080	AV	Vertical	39.40	54.00	14.60	1.0	30
19520	AV	Vertical	37.44	54.00	16.56	1.0	100
21960	AV	Vertical	38.04	54.00	15.96	1.0	60
24400	AV	Vertical	35.66	54.00	18.34	1.2	120
2440	AV	Horizontal	92.85		(Fund.)	1.0	120
4880	AV	Horizontal	47.31	54.00	6.69	1.0	10
7320	AV	Horizontal	42.00	54.00	12.00	1.5	45
9760	AV	Horizontal	38.69	54.00	15.31	1.2	10
12200	AV	Horizontal	36.00	54.00	18.00	1.2	150
14640	AV	Horizontal	34.75	54.00	19.25	1.1	100
17080	AV	Horizontal	35.75	54.00	18.25	1.1	60
19520	AV	Horizontal	35.32	54.00	18.68	1.1	120
21960	AV	Horizontal	33.43	54.00	20.57	1.2	120
24400	AV	Horizontal	31.88	54.00	22.12	1.1	10

2440	PK	Vertical	105.36		(Fund.)	1.0	45
4880	PK	Vertical	63.33	74.00	10.67	1.1	90
7320	PK	Vertical	51.00	74.00	23.00	1.0	60
9760	PK	Vertical	49.12	74.00	24.88	1.1	10
12200	PK	Vertical	48.36	74.00	25.64	1.0	100
14640	PK	Vertical	47.69	74.00	26.31	1.2	0
17080	PK	Vertical	48.34	74.00	25.66	1.1	0
19520	PK	Vertical	46.38	74.00	27.62	1.1	120
21960	PK	Vertical	46.98	74.00	27.02	1.1	124
24400	PK	Vertical	47.26	74.00	26.74	1.2	120
2440	PK	Horizontal	102.63		(Fund.)	1.0	10
4880	PK	Horizontal	63.14	74.00	11.86	1.1	45
7320	PK	Horizontal	48.00	74.00	26.00	1.1	90
9760	PK	Horizontal	45.64	74.00	28.36	1.1	60
12200	PK	Horizontal	44.84	74.00	29.16	1.1	10
14640	PK	Horizontal	43.69	74.00	30.31	1.2	150
17080	PK	Horizontal	44.69	74.00	29.31	1.1	10
19520	PK	Horizontal	44.26	74.00	29.74	1.1	260
21960	PK	Horizontal	42.37	74.00	31.63	1.1	00
24400	PK	Horizontal	39.56	74.00	34.44	1.1	45
High frequency							
2480	AV	Vertical	97.56		(Fund.)	1.0	100
4960	AV	Vertical	48.96	54.00	5.04	1.0	60
7440	AV	Vertical	42.52	54.00	11.48	1.2	120
9920	AV	Vertical	42.00	54.00	12.00	1.0	120
1240	AV	Vertical	40.95	54.00	13.05	1.1	10
14880	AV	Vertical	40.69	54.00	13.31	1.1	45
17360	AV	Vertical	40.74	54.00	13.26	1.1	90
19840	AV	Vertical	39.04	54.00	14.96	1.1	60
22320	AV	Vertical	39.65	54.00	14.35	1.4	10
24800	AV	Vertical	35.63	54.00	18.37	1.1	120
2480	AV	Horizontal	93.69		(Fund.)	1.0	10
4960	AV	Horizontal	47.56	54.00	6.44	1.2	120
7440	AV	Horizontal	42.36	54.00	11.64	1.2	60
9920	AV	Horizontal	40.33	54.00	13.67	1.0	100

1240	AV	Horizontal	40.00	54.00	14.00	1.2	60
14880	AV	Horizontal	38.91	54.00	15.09	1.2	120
17360	AV	Horizontal	36.71	54.00	17.29	1.0	120
19840	AV	Horizontal	34.75	54.00	19.25	1.0	10
22320	AV	Horizontal	34.32	54.00	19.68	1.1	45
24800	AV	Horizontal	33.33	54.00	20.67	1.0	90
2480	PK	Vertical	107.36		(Fund.)	1.0	60
4960	PK	Vertical	62.33	74.00	11.67	1.2	10
7440	PK	Vertical	50.14	74.00	23.86	1.0	120
9920	PK	Vertical	50.34	74.00	23.66	1.0	10
1240	PK	Vertical	49.89	74.00	24.11	1.4	100
14880	PK	Vertical	49.63	74.00	24.37	1.2	60
17360	PK	Vertical	49.68	74.00	24.32	1.2	120
19840	PK	Vertical	47.98	74.00	26.02	1.2	120
22320	PK	Vertical	48.59	74.00	25.41	1.1	10
24800	PK	Vertical	47.36	74.00	26.64	1.4	45
2480	PK	Horizontal	103.14		(Fund.)	1.1	90
4960	PK	Horizontal	63.14	74.00	10.86	1.0	60
7440	PK	Horizontal	47.56	74.00	26.44	1.0	10
9920	PK	Horizontal	46.36	74.00	27.64	1.3	120
1240	PK	Horizontal	46.85	74.00	27.15	1.2	10
14880	PK	Horizontal	47.85	74.00	26.15	1.0	45
17360	PK	Horizontal	45.65	74.00	28.35	1.1	90
19840	PK	Horizontal	43.69	74.00	30.31	1.0	100
22320	PK	Horizontal	43.00	74.00	31.00	1.1	60
24800	PK	Horizontal	41.22	74.00	32.78	1.0	120

## 7 Antenna Requirement

According to the FCC Part 15 Paragraph 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna to the intentional radiator shall be considered sufficient to comply with the provisions of this section. This product has a permanent antenna, fulfill the requirement of this section.

## 8 Maximum Peak Output Power

Test Requirement: FCC Part15 Paragraph 15.247  
 Test Method: Based on ANSI 63.4:2003  
 Test Date: Dec.16,2010  
 Test mode: Compliance test in the worse case: Tx Lower/Tx Middle/Tx Upper  
 Requirements: Regulation 15.247(b) The limit of Maximum Peak Output Power Measurement is 0.125W

### Test procedure:

The following test procedure as below:

The transmitter output (antenna port) was connected to the spectrum analyzer.EUT and its simulators are placed on a table, let EUT working in test mode,then test it.

The bandwidth of the fundamental frequency was measured with the spectrum analyser using 100kHz RBW and 100kHz VBW.

**Test Result:** The unit does meet the FCC requirements.

Test Channel	Fundamental Frequency(MHz)	Output Power (mW)	Limit (W)	Power output level
Lower	2402	33.96	0.125	conducted
Middle	2440	28.65	0.125	conducted
Upper	2480	33.96	0.125	conducted


**Note:** The EUT uses 39 channels ,and according to 47 CFR Part 15 Subpart C Section 15.247 (b),the the maximum allowable power for this device is 0.125W.



### 9 Hopping Channel Number

Test Requirement: FCC Part15 C  
 Test Method: Based on FCC Part15 Paragraph 15.247  
 Test Date: Dec.16,2010  
 Test mode: The EUT work in test mode(Tx) and test it  
 Requirements: Regulation 15.247(b) For frequency hopping systems operating  
 In the 2400-2483.5MHz band employing at least 15 hopping  
 channels.  
 Test result: The total number of channels would be 40 channels.  
 The unit does meet the FCC requirements.

Please refer the graph as below:

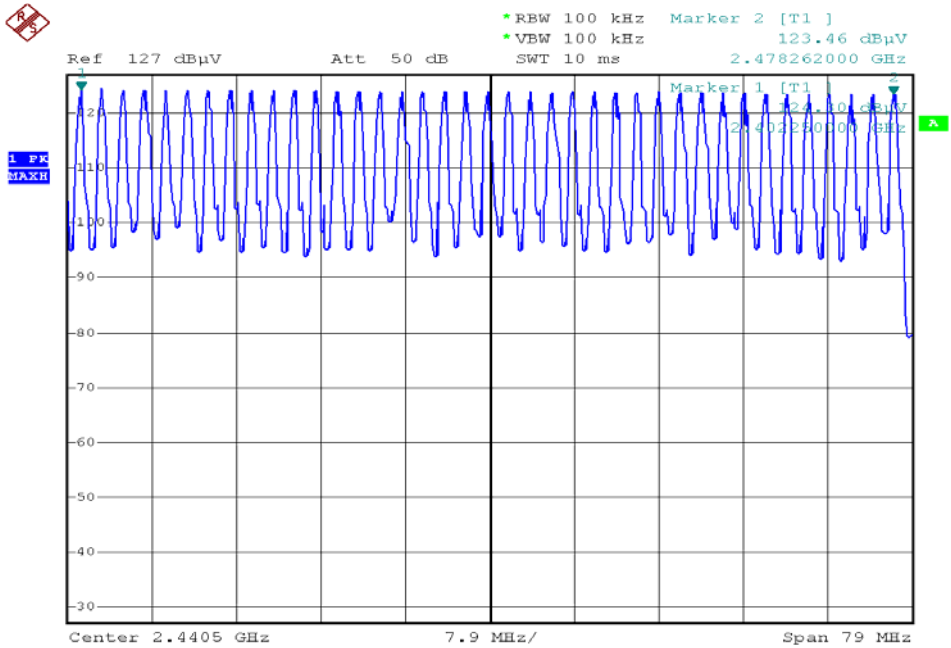

### 10 Frequency Separated

The requirements in this clause are only applicable to equipment using frequency hopping spread spectrum (FHSS) modulation.

#### Channel Separated

Definition: A hopping channel is any of the centre frequencies defined within the hopping sequence of a FHSS system.

Limit: Non-adaptive frequency hopping system shall make use of non-overlapping channels separated by the channel bandwidth as measured at 20dB below peak power.

The hopping channels defined within a hopping sequence shall be at least 1MHz apart(channel separation)

Operating Environment:

- Temperature: 25.50 °C
- Humidity: 51 % RH
- Barometric Pressure: 1012 mbar

EUT Operation Condition:


The EUT was programmed to be in continuously transmitting mode.

Test Result: PASS


Test Channel	Channel Separation	PASS/FAIL
Lower Channels	2MHz	Pass
Middle Channels	2MHz	Pass
Upper Channels	2MHz	Pass

Please refer to the below photos for more details


Lower Channel

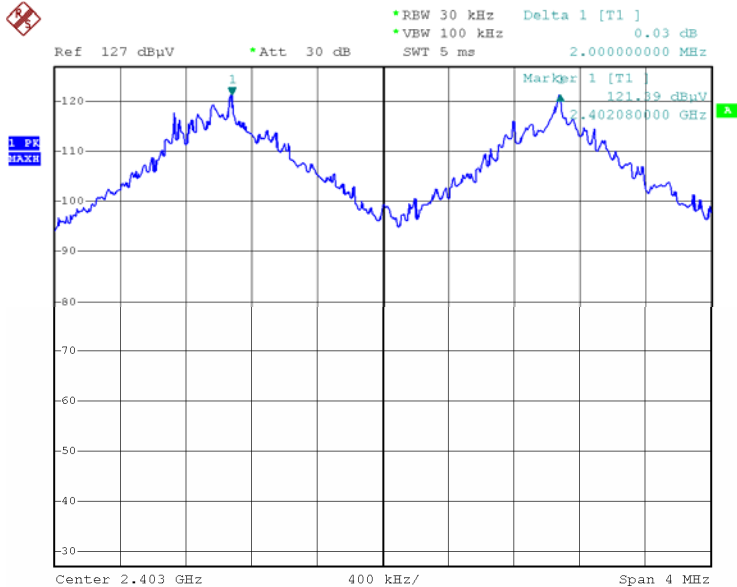

Middle Channel

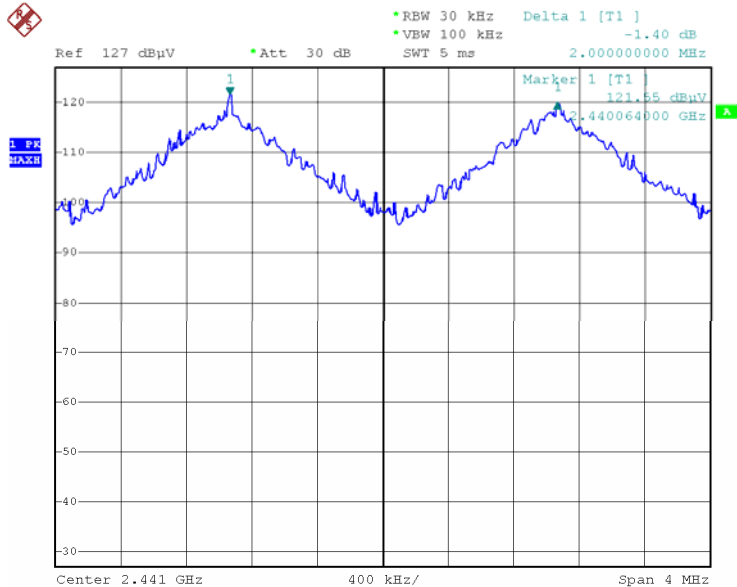

### Upper Channel

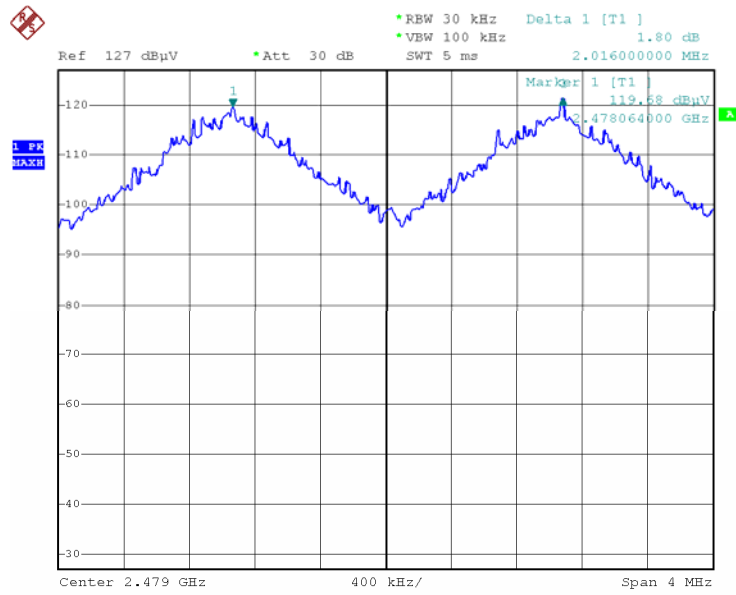

## 11 Dwell time

The dwell time is the time spent at a particular frequency during any single hop.

Limit: the maximum dwell time shall be less than 0.4s.

Operating Environment:

Temperature: 25.5 °C

Humidity: 51 % RH

Barometric Pressure: 1012 mbar

EUT Operation Condition:

The EUT was programmed to be in continuously transmitting mode.

### 11.2 Test Procedure

The EUT output antenna port was connected to the spectrum analyzer. Set RBW of spectrum analyzer to 1MHz and VBW to 1MHz, and the frequency span to zero span, measure the maximum time duration of one single pulse. So, the Dwell Time can be calculated as follows:

$$T = T_{\text{on-time}} * N_{\text{times}} / 1S * 0.4 * 40 \leq 0.4S.$$

### 11.3 Test Result: PASS


Please refer to the below photos for more details.

**Channel Low channel**

Dwell time of each occupation in this channel as follows:  
 $0.0053 * 3 / 1S * 0.4 * 40 = 0.2544 < 0.4S$

**Test Result: PASS**

The Results are not be greater than 0.4 seconds.

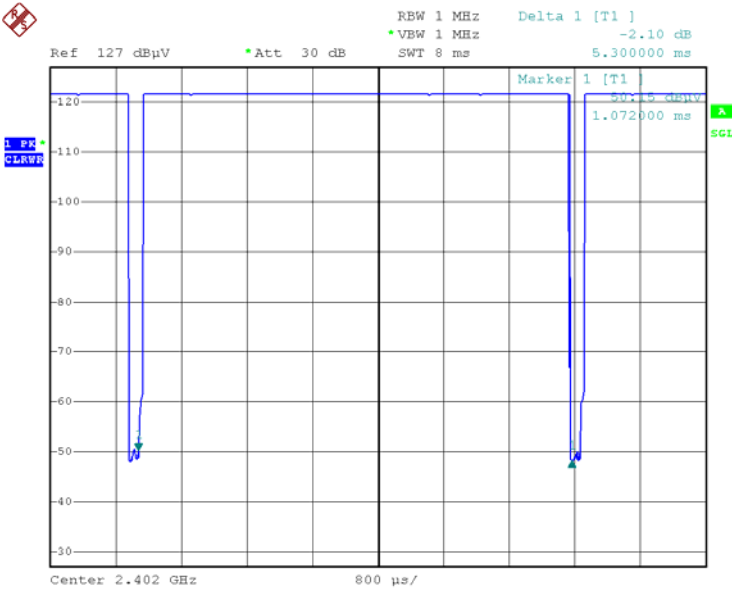


**Channel Mid channel**

Dwell time of each occupation in this channel as follows:

$$0.005292 \times 3 / 1S \times 0.4 \times 40 = 0.254 < 0.4S$$

**Test Result: PASS**

The Results are not be greater than 0.4 seconds.

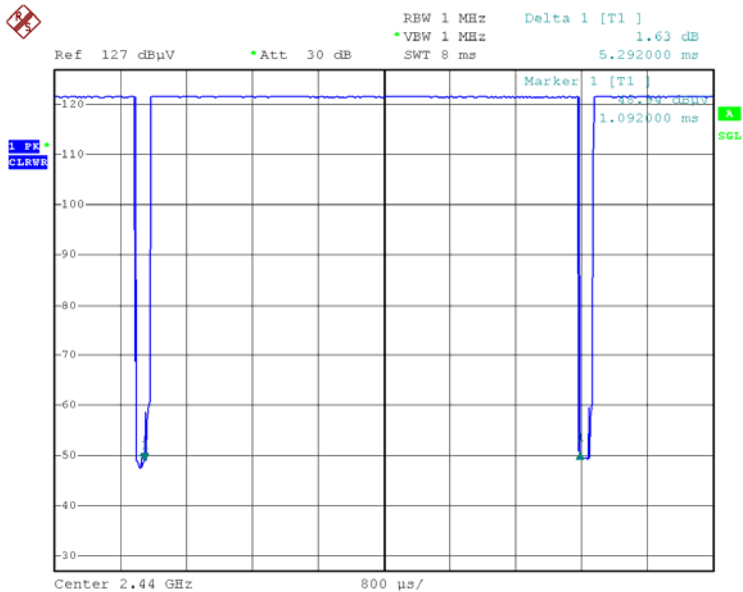


**Channel High channel**

Dwell time of each occupation in this channel as follows:  
 $0.00528 \times 3 / 1S \times 0.4 \times 40 = 0.2534 < 0.4S$

**Test Result: PASS**

The Results are not be greater than 0.4 seconds.

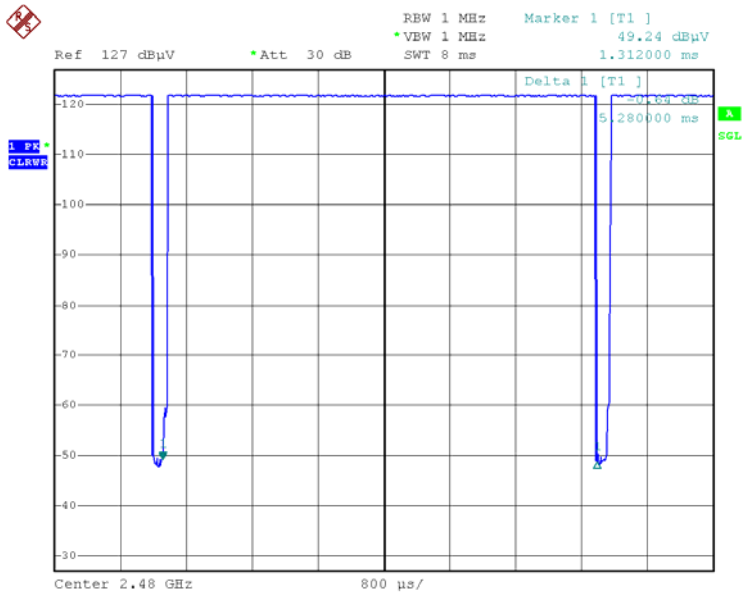



## 12 20-dB Bandwidth

Test Requirement: FCC Part15 C  
 Test Method: Based on FCC Part15 Paragraph 15.247  
 Test Date: Dec.16,2010  
 Test mode: The EUT work in test mode(Tx) and test it


### Test Procedure

1. The transmitter output (antenna port) was connected to the spectrum analyzer.
2. The bandwidth of the fundamental frequency was measure by spectrum analyser with 100KHz RBW and 100KHz VBW.The 20dB bandwidth is defined as the total spectrum the power of which is higher than peak power 20dB.


### Test Result

Please refer the graph as below:


#### Lower Channel 2402MHz

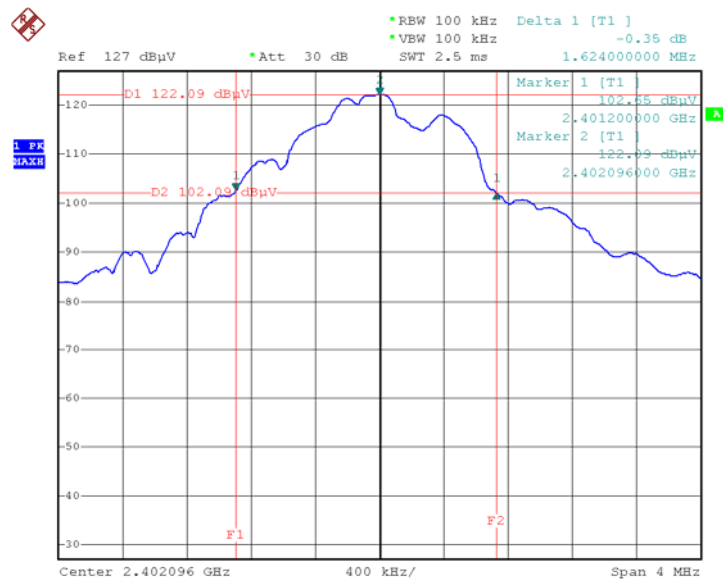

Middle Channel 2440MHz

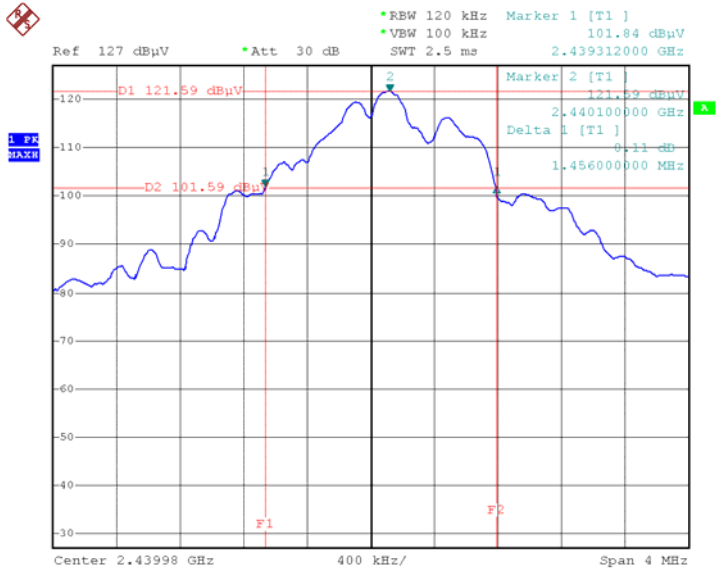

Upper Channel 2480MHz

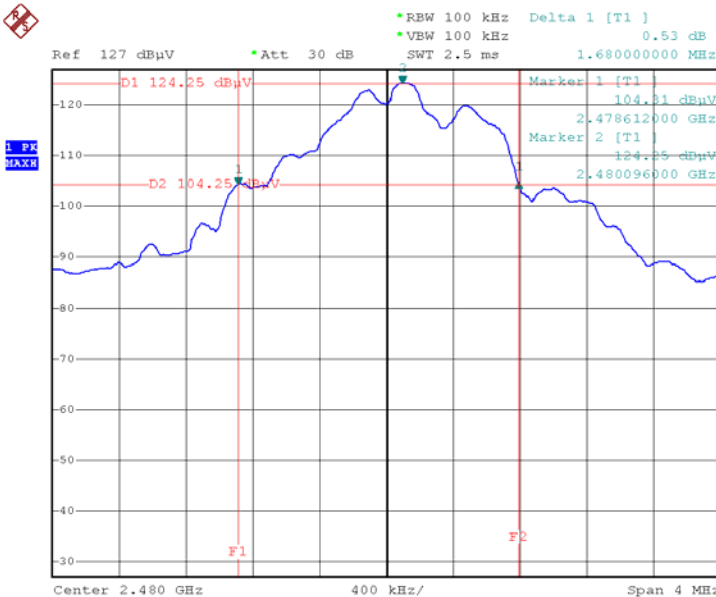

### **13 Radiated spurious emissions into adjacent restricted band**

Test Requirement: FCC Part15 Paragraph 15.205  
Test Method: Based on FCC Part 15 Paragraph 15.247  
Test Date: Dec.16,2010  
Requirements: The EUT work in test mode(Tx) and test it


#### **Requiments:**

emissions that fall in the restricted bands(15.205).Above 1000MHz, compliance with the emissions limits in section 15.209 shall be demonstrated based on the average value of the measured emissions,The provisions in section 15.35 apply to these measurements.

#### **Test procedure:**

An in band field strength measurement of the fundamental emission using the RBW and detector function required by C63.4-2003 and FCC Rules.The procedure was repeated with an average detector and a plot made.The calculated field strength in the adjacent restricted band is presented below.


**Lower bandedge/ restricted band**

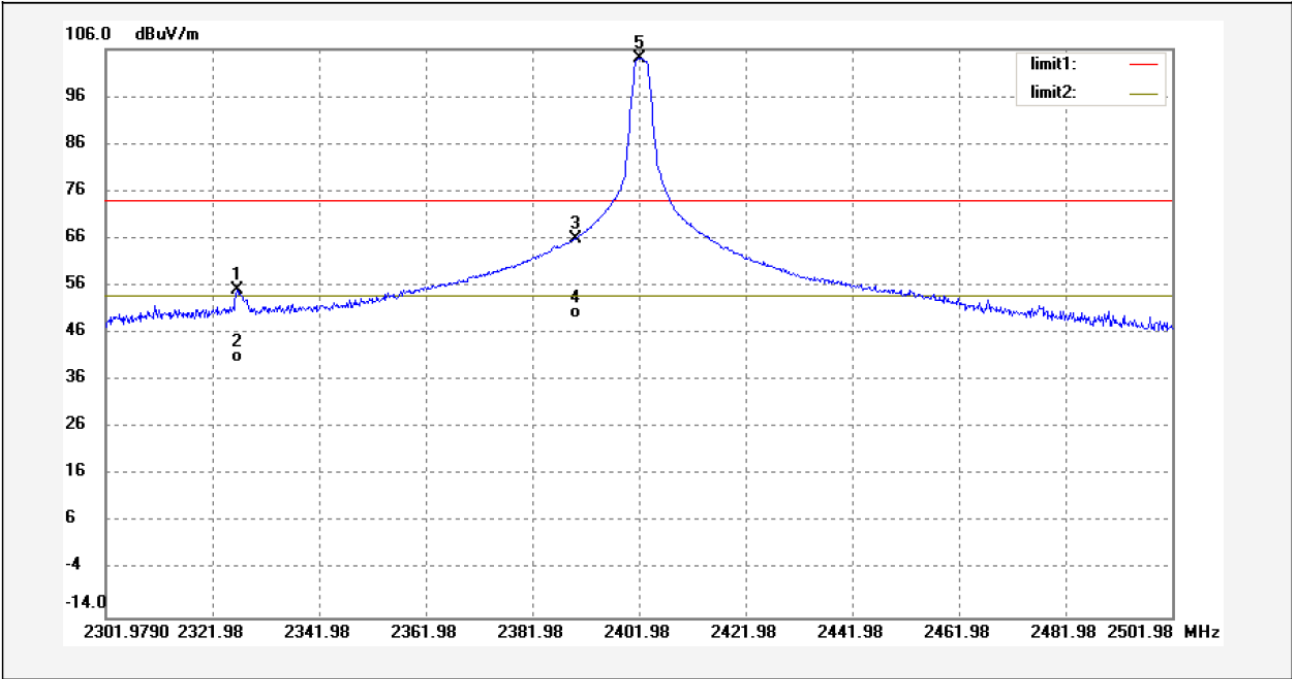

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	2326.628	55.43	-0.14	55.29	74.00	-18.71	peak	
2	2326.628	40.14	-0.14	40.00	54.00	-14.00	AVG	
3	2390.000	66.31	-0.23	66.08	74.00	-7.92	peak	
4	2390.000	49.27	-0.23	49.04	54.00	-4.96	AVG	
5	2401.979	104.27	-0.24	104.03	74.00	30.03	peak	

Remark: the radation test data,please refer to the section 6.11 .

### Upper Bandedge/ Restricted Band

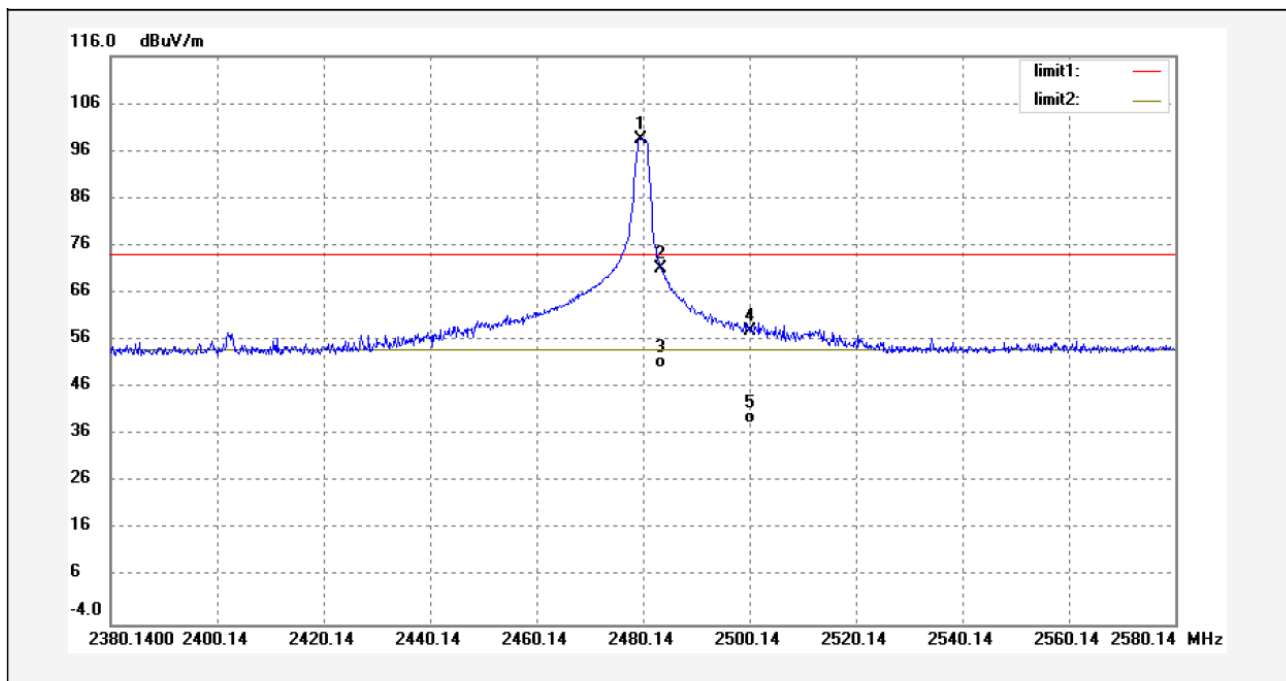

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	2479.539	100.57	-1.97	98.60	74.00	24.60	peak	
2	2483.500	73.03	-1.95	71.08	74.00	-2.92	peak	
3	2483.500	52.01	-1.95	50.06	54.00	-3.94	AVG	
4	2500.000	59.75	-1.89	57.86	74.00	-16.14	peak	
5	2500.000	40.23	-1.89	38.34	54.00	-15.66	AVG	

Remark: the radation test data,please refer to the section 6.11

### 14 RF Exposure Test

Test Requirement: FCC Part 2 Subpart J  
 Test Method: Based on FCC Part 15 Paragraph 15.247  
 Test Date: Dec.16,2010  
 Requirements: The EUT work in test mode(Tx) and test it

#### Requiments:

Systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy levels in excess limit for maximum permissible exposure. In accordance with 47 CFR FCC Part 2 Subpart J, section 2.1091 this device has been defined as a mobile device whereby a distance of 0.2 m normally can be maintained between the user and the device.

#### The procedures / limit

##### (A) Limits for Occupational / Controlled Exposure

Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/ cm <sup>2</sup> )	Averaging Time  E  <sup>2</sup> , H  <sup>2</sup> or S (minutes)
0.3-3.0	614	1.63	(100)*	6
3.0-30	1842 / f	4.89 / f	(900 / f)*	6
30-300	61.4	0.163	1.0	6
300-1500			F/300	6
1500-100,000			5	6

##### (B) Limits for General Population / Uncontrolled Exposure

Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/ cm <sup>2</sup> )	Averaging Time  E  <sup>2</sup> , H  <sup>2</sup> or S (minutes)
0.3-1.34	614	1.63	(100)*	30
1.34-30	824/f	2.19/f	(180/f)*	30
30-300	27.5	0.073	0.2	30
300-1500			F/1500	30
1500-100,000			1.0	30

Note: f = frequency in MHz ; \*Plane-wave equivalent power density

**MPE Calculation Method**

$$E \text{ (V/m)} = \frac{\sqrt{30 \times P \times G}}{d} \qquad \text{Power Density: } Pd \text{ (W/m}^2\text{)} = \frac{E^2}{377}$$

**E** = Electric field (V/m)

**P** = Peak RF output power (W)

**G** = EUT Antenna numeric gain (numeric)

**d** = Separation distance between radiator and human body (m)


The formula can be changed to

$$Pd = \frac{30 \times P \times G}{377 \times d^2}$$


From the peak EUT RF output power, the minimum mobile separation distance, d=0.2m, as well as the gain of the used antenna, the RF power density can be obtained

Antenna Gain (dBi)	Antenna Gain (numeric)	Peak Output Power (dBm)	Peak Output Power (mW)	Power Density (S) (mW/cm2)	Limit of Power Density (S) (mW/cm2)	Test Result
-2.39	0.577	15.31	33.96	0.003898	1	Complies
-2.39	0.577	14.57	28.65	0.003289	1	Complies
-2.39	0.577	15.31	33.96	0.003898	1	Complies

**15 Photographs of Test Setup for TX and Standby  
Radiation Emission Test View For 30MHz-1000MHz**

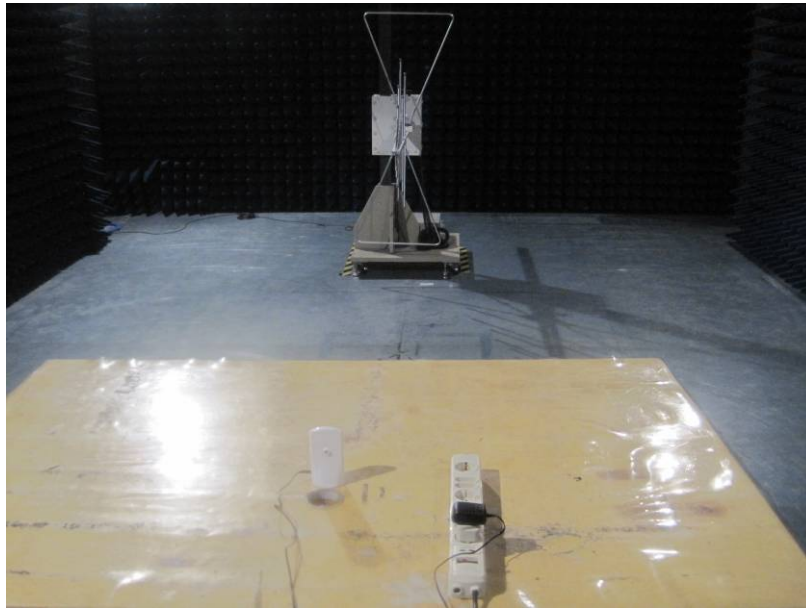

**Radiation Emission Test View For 1GHz-25GHz**

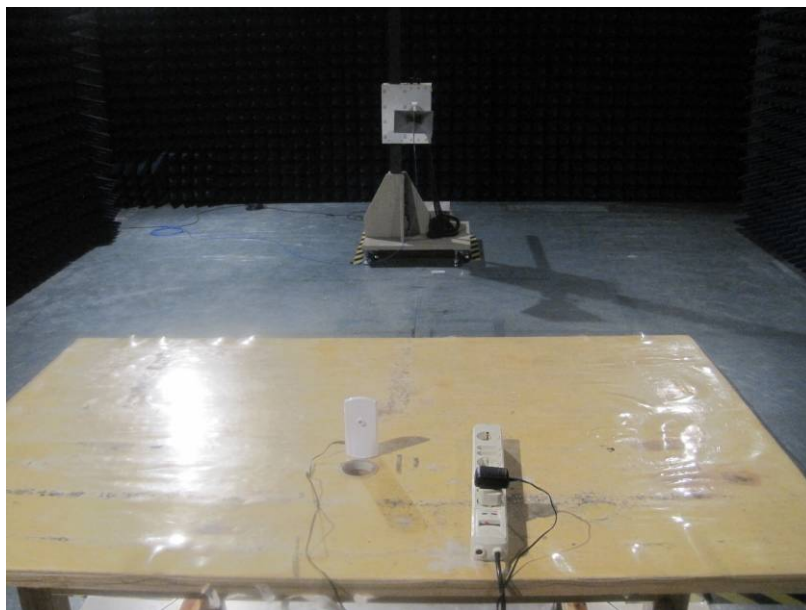




## 16 Photographs - Constructional Details

### 16.1 EUT – Appearance View



### 16.2 EUT - Front View

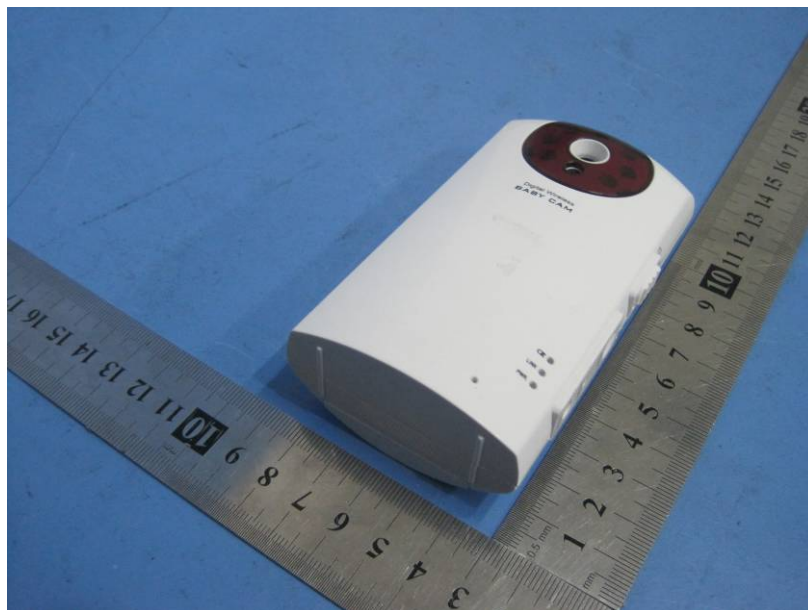


**16.3 EUT - Back View**




**16.4 Adapter - Appearance View**



### 16.5 EUT - Open View

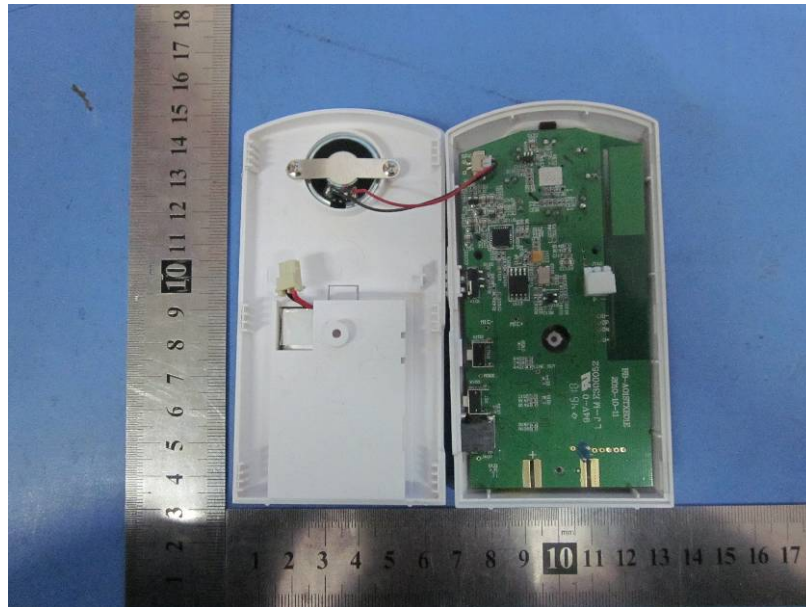

### 16.6 PCB1 - Front View

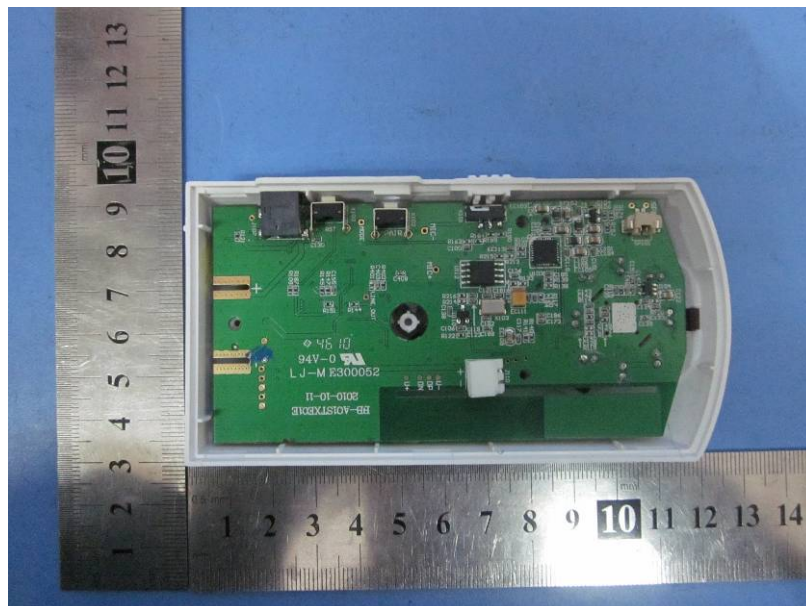





**16.7 PCB1 - Back View**



**16.8 PCB2 - Front View**

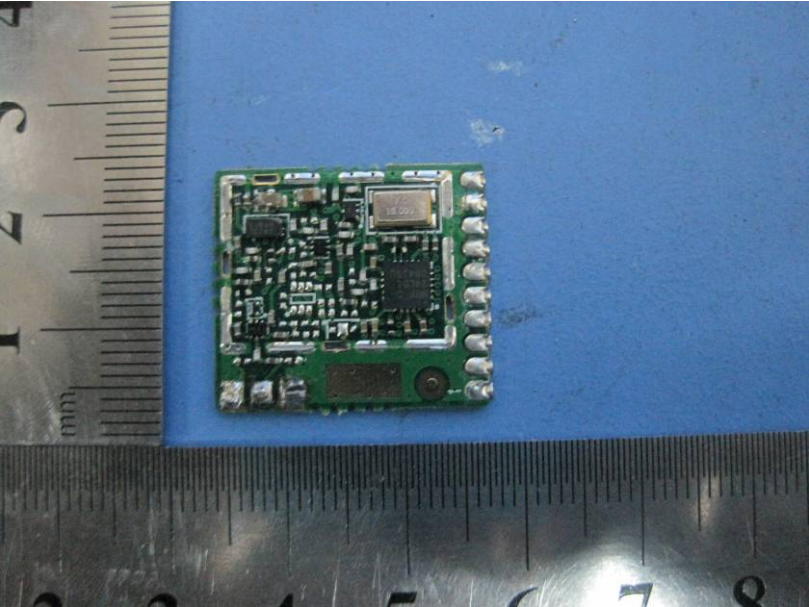

**16.9 PCB2 - Back View**

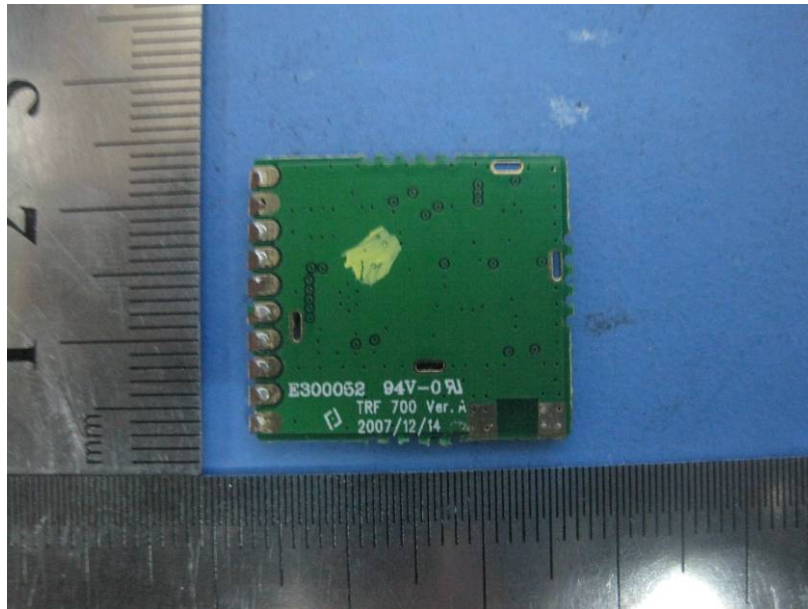

### 17 FCC ID Label

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:(1)this device may not cause harmful interference,and (2) this device must accept any interference received, including interference that may cause undesired operation.

The Label must not be a stick-on paper. The Label on these products must be permanently affixed to the product and readily visible at the time of purchase and must last the expected lifetime of the equipment not be readily detachable.

Proposed Label Location on EUT  
EUT Bottom View/proposed FCC Mark Location

