

---

Project 19469-15

**Alert Technologies  
EA201**

**Paging Transmitter  
150.800 to 173.400 MHz**

**Wireless Certification Report**

**FCC Part 90 and IC RSS-119**

Prepared for:

Alert Technologies  
16875 Diana Lane  
Houston, Texas 77058  
USA

By

Professional Testing (EMI), Inc.  
1601 North A.W. Grimes Blvd., Suite B  
Round Rock, Texas 78665

16 Oct 2017

---

Reviewed by



Larry Finn  
Chief Technical Officer

Written by



Eric Lifsey  
EMC Engineer

## Revision History

Revision Number	Description	Date
02 DRAFT	Draft for review.	17 Oct 2017
01 Final		25 Oct 2017
02 Final	Correct model references to remove dash character.	2 Nov 2017

### Errata:

None.

## Table of Contents

Revision History.....	2
Certificate of Compliance .....	5
1.0 Introduction.....	6
1.1 Scope.....	6
1.2 EUT Description .....	6
1.3 EUT Operation.....	6
1.4 Modifications to Equipment.....	6
1.5 Test Site .....	7
1.6 Applicable Documents.....	7
2.0 Conducted Output Power.....	8
2.1 Procedure .....	8
2.2 Criteria .....	8
2.3 Results.....	8
2.4 Masks Applied and Emission Limits .....	8
2.4.1 Mask C .....	8
2.4.2 Mask D .....	8
3.0 Emission Mask.....	9
3.1 Procedure .....	9
3.2 Criteria .....	9
3.3 Results.....	9
3.3.1 Mask C .....	10
3.3.2 Mask D .....	11
4.0 Spurious Emissions at Antenna Terminals .....	12
4.1 Procedure .....	12
4.2 Criteria .....	12
4.3 Results.....	12
4.3.1 Transmit Mode, Bottom Channel .....	13
4.3.2 Transmit Mode, Middle Channel.....	13
4.3.3 Transmit Mode, Top Channel.....	13
4.3.4 Receive/Idle Mode, Middle Channel.....	14
5.0 Field Strength of Radiated Spurious Emissions.....	15
5.1 Procedure .....	15
5.2 Criteria .....	15
5.3 Results.....	15
5.3.1 Transmit Mode, Below 1 GHz, Bottom Channel .....	16
5.3.2 Transmit Mode, Above 1 GHz, Bottom Channel .....	18
5.3.3 Transmit Mode, Below 1 GHz, Middle Channel.....	20
5.3.4 Transmit Mode, Above 1 GHz, Middle Channel .....	22
5.3.5 Transmit Mode, Below 1 GHz, Top Channel.....	24
5.3.6 Transmit Mode, Above 1 GHz, Top Channel .....	26
6.0 Frequency Stability .....	28
6.1 Procedure .....	28
6.2 Criteria .....	28
6.3 Results.....	28
6.3.1 Bottom Channel, Temperature .....	29
6.3.2 Bottom Channel, Operating Voltage .....	29
6.3.3 Middle Channel, Temperature.....	30
6.3.4 Middle Channel, Operating Voltage.....	30
6.3.5 Top Channel, Temperature.....	31
6.3.6 Top Channel, Operating Voltage.....	31
7.0 Transient Frequency Behavior.....	32
7.1 Criteria .....	32
7.2 Results.....	33
7.2.1 Bottom Channel.....	34
7.2.2 Middle Channel .....	35
7.2.3 Top Channel .....	36
8.0 Emission Bandwidth .....	37
8.1 Procedure .....	37

---

8.2	Criteria .....	37
8.3	Results.....	37
8.3.1	25 kHz Channel Spacing .....	38
8.3.2	12.5 kHz Channel Spacing .....	39
9.0	Equipment Lists .....	40
9.1	Conducted Power, Conducted Spurious, Mask, and Bandwidth .....	40
9.2	Frequency Stability .....	40
9.3	Frequency Behavior .....	40
9.4	Radiated Spurious Transmit Mode and Receive Mode.....	41
Appendix: Policy, Rationale, and Evaluation of EMC Measurement Uncertainty .....		42
End of Report .....		43

**NOTICE:**

(1) This Report must not be used to claim product endorsement, by NVLAP, NIST, the FCC or any other Agency. This report also does not warrant certification by NVLAP or NIST.

(2) This report shall not be reproduced except in full, without the written approval of Professional Testing (EMI), Inc.

(3) The significance of this report is dependent on the representative character of the test sample submitted for evaluation and the results apply only in reference to the sample tested. The manufacturer must continuously implement the changes shown herein to attain and maintain the required degree of compliance.



# Certificate of Compliance

Applicant	Device & Test Identification	
Alert Technologies	FCC ID:	Y5J-EA20117
16875 Diana Lane	IC ID:	N/A
Houston, Texas 77058	Model(s):	EA201
Certificate Date: 16 Oct 2017	Laboratory Project ID:	19469-15

The device model(s) listed above were tested utilizing the following documents and found to be in compliance with the required criteria.

47 CFR (USA) FCC, RSS IC(Industry Canada)		
Parameter	FCC	IC
Conducted Output Power	90.210, 2.1046	RSS-119 Issue 12, 5.4
Emission Masks (C, D)	90.210, 2.1047	RSS-119 Issue 12, 5.8
Conducted Spurious/Harmonic Emissions at Antenna Terminals	90.210, 2.1051	RSS-119 Issue 12, 5.8; RSS-Gen Issue 4
Field Strength of Radiated Spurious/Harmonic Emissions Fundamental to 5 GHz	90.210, 15.209, 2.1053	RSS-119 Issue 12, 5.8
Transient Frequency Behavior	90.214, TIA/EIA-603-E	RSS-119 Issue 12, 5.9
Frequency Stability	90.213, 2.1055	RSS-119 Issue 12, 5.3
Occupied Bandwidth, 20 dB, < 11.5 kHz	90.209, 2.1049	RSS-119 Issue 12, 5.5
Radiated Emissions 30 MHz – 5 GHz	15.109	RSS-Gen Issue 4, ICES-003

I, Eric Lifsey, for Professional Testing (EMI), Inc., being familiar with the above rules and test procedures have reviewed the test setup, measured data, and this report. I believe them to be true and accurate.

Eric Lifsey  
EMC Engineer

This report has been reviewed and accepted by the Applicant. The undersigned is responsible for ensuring that this device will continue to comply with the requirements listed above.

\_\_\_\_\_  
Representative of Applicant

## 1.0 Introduction

### 1.1 Scope

This report describes the extent to which the equipment under test (EUT) conformed to the intentional radiator requirements of North America.

Professional Testing (EMI), Inc., (PTI) follows the guidelines of National Institute of Standards and Technology (NIST) for all uncertainty calculations, estimates, and expressions thereof for electromagnetic compatibility testing. The methods of TIA/EIA-603 were applied unless specified otherwise in the associated agency rules and procedures.

### 1.2 EUT Description

**Table 1.2.1 Equipment Under Test**

Manufacturer & Description	Basic Properties	Photo
Alert Technologies Paging transmitter with user interface. Model EA201 Serial Number: none	Dimensions ~19 x 11 x 3 cm. Typically wall mounted. Powered internally by six AA batteries in series/parallel to provide 4.5 VDC maximum; nominally 4.0 VDC in operation. Photo at right shown with cosmetic cover in place and battery holder partially removed at bottom end.	

**Table 1.2.2 Antenna Description**

Antenna Description	Photo
Shortened/helical quarter-wave monopole soldered to circuit board. It is positioned near the bottom edge of circuit board and becomes oriented vertically when EUT is wall mounted. Antenna is fully contained in the enclosure and cannot be touched or modified by the user.  Length ~7.7 cm. Gain 0 dBi.	

### 1.3 EUT Operation

The EUT was exercised in a manner consistent with normal operations.

**Table 1.3.1 Operating Frequency/Range (On licensed frequencies per localized regulations.)**

Lowest Frequency	Center Frequency	Highest Frequency	Total Frequency Range
150.800 MHz	161.700 MHz	173.400 MHz	22.6 MHz
The three channels were tested per customary practice for a frequency range exceeding 10 MHz.			

### 1.4 Modifications to Equipment

No modifications were made to the EUT during the performance of the test program.

## 1.5 Test Site

Measurements were made at the PTI semi-anechoic facility designated Site 45 (FCC 459644, IC 3036B-1) in Austin, Texas. The site is registered with the FCC under Section 2.948 and Industry Canada per RSS-Gen, and is subsequently confirmed by laboratory accreditation (NVLAP). The test site is located at 11400 Burnet Road, Austin, Texas 78758, while the main office is located at 1601 North A.W. Grimes Boulevard, Suite B, Round Rock, Texas, 78665.

## 1.6 Applicable Documents

**Table 1.6.1: Applicable Documents**

Document #	Title/Description	Date
47 CFR	FCC Part 90	
IC RSS-119 Issue 12	Land Mobile and Fixed Equipment Operating in the Frequency Range 27.41-960 MHz	2015
IC RSS-Gen Issue 4	General Requirements for Compliance of Radio Apparatus	2014
TIA/EIA-603-E	Land Mobile FM or PM – Communications Equipment – Measurement and Performance Standards	2016
ANSI C63.26	American National Standard for Compliance Testing of Transmitters Used in Licensed Radio Services;	2015

## 2.0 Conducted Output Power

### 2.1 Procedure

The EUT is placed into continuous transmit mode without modulation for peak power measurement.

### 2.2 Criteria

Parameter	Section Reference	Date
Conducted Output Power	90.210, 2.1046   RSS-119 Issue 12, 5.4	21 Sep 2017

### 2.3 Results

EUT antenna port was directly coupled to the spectrum analyzer without a cable so power was read directly with no factors required.

The EUT satisfied the requirement. Tabular results are presented below.

Table 2.3.1 Power, Peak, Conducted		
Frequency (MHz)	Power (dBm)	Power (mW)
150.800	25.46	352
161.700	25.14	327
173.400	23.86	243

### 2.4 Masks Applied and Emission Limits

#### 2.4.1 Mask C

- (1) On any frequency removed from the center of the authorized bandwidth by a displacement frequency ( $f_d$  in kHz) of more than 5 kHz, but not more than 10 kHz: At least  $83 \log(f_d/5)$  dB;
- (2) On any frequency removed from the center of the authorized bandwidth by a displacement frequency ( $f_d$  in kHz) of more than 10 kHz, but not more than 250 percent of the authorized bandwidth: At least  $29 \log(f_d^2/11)$  dB or 50 dB, whichever is the lesser attenuation;
- (3) On any frequency removed from the center of the authorized bandwidth by more than 250 percent of the authorized bandwidth: At least  $43 + 10 \log(P)$  dB.

Spurious: Per 90.210(c)  $\text{Attenuation}_{(\text{dB})} = 43 + 10 \log_{10}(0.352 \text{ W}) = 38.5 \text{ dB}$  (Is lower than 70 dB.)

$$\text{Limit}_{(\text{dBm})} = \text{Fundamental\_Power}_{(\text{dBm})} - \text{Attenuation}_{(\text{dB})} = 25.46 \text{ dBm} - 45.5 \text{ dB} = -13.04 \text{ dBm}$$

#### 2.4.2 Mask D

- (1) On any frequency from the center of the authorized bandwidth  $f_0$  to 5.625 kHz removed from  $f_0$ : Zero dB.
- (2) On any frequency removed from the center of the authorized bandwidth by a displacement frequency ( $f_d$  in kHz) of more than 5.625 kHz but no more than 12.5 kHz: At least  $7.27(f_d - 2.88 \text{ kHz})$  dB.
- (3) On any frequency removed from the center of the authorized bandwidth by a displacement frequency ( $f_d$  in kHz) of more than 12.5 kHz: At least  $50 + 10 \log(P)$  dB or 70 dB, whichever is the lesser attenuation.

Spurious: Per 90.210(d)  $\text{Attenuation}_{(\text{dB})} = 50 + 10 \log_{10}(0.352 \text{ W}) = 45.5 \text{ dB}$  (Is lower than 70 dB.)

$$\text{Limit}_{(\text{dBm})} = \text{Fundamental\_Power}_{(\text{dBm})} - \text{Attenuation}_{(\text{dB})} = 25.46 \text{ dBm} - 45.5 \text{ dB} = -20.04 \text{ dBm}$$

## 3.0 Emission Mask

### 3.1 Procedure

Emissions are measured with peak detector with the mask superimposed on the graph.

### 3.2 Criteria

Parameter	Section Number	Date
Emissions at Antenna Terminals	90.210(c), 90.217(b), 2.1047   RSS-119 Issue 12, 5.8.3	11 Oct 2017


### 3.3 Results

The emission was measured coupled directly to the analyzer without cabling.


The EUT satisfied the requirement. Measurements appear below.

The EUT supports two channel widths represented by Mask C and Mask D.

### 3.3.1 Mask C

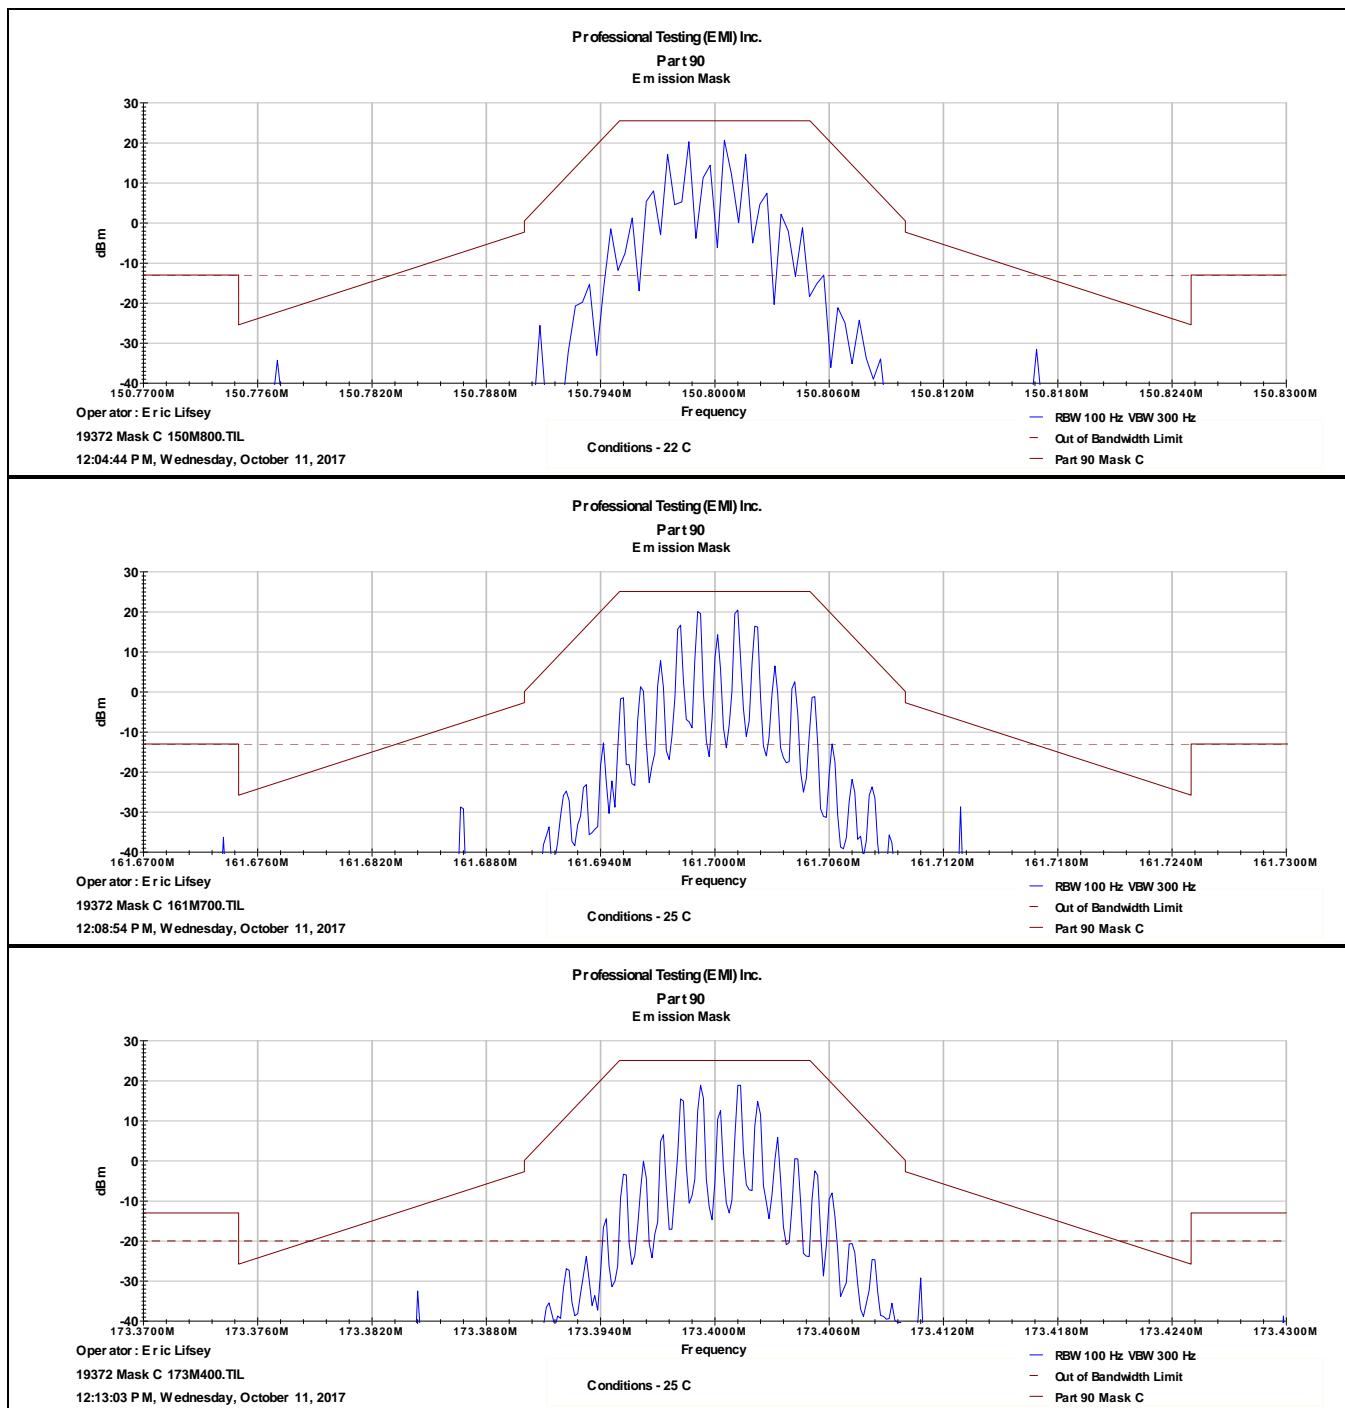

### 3.3.2 Mask D

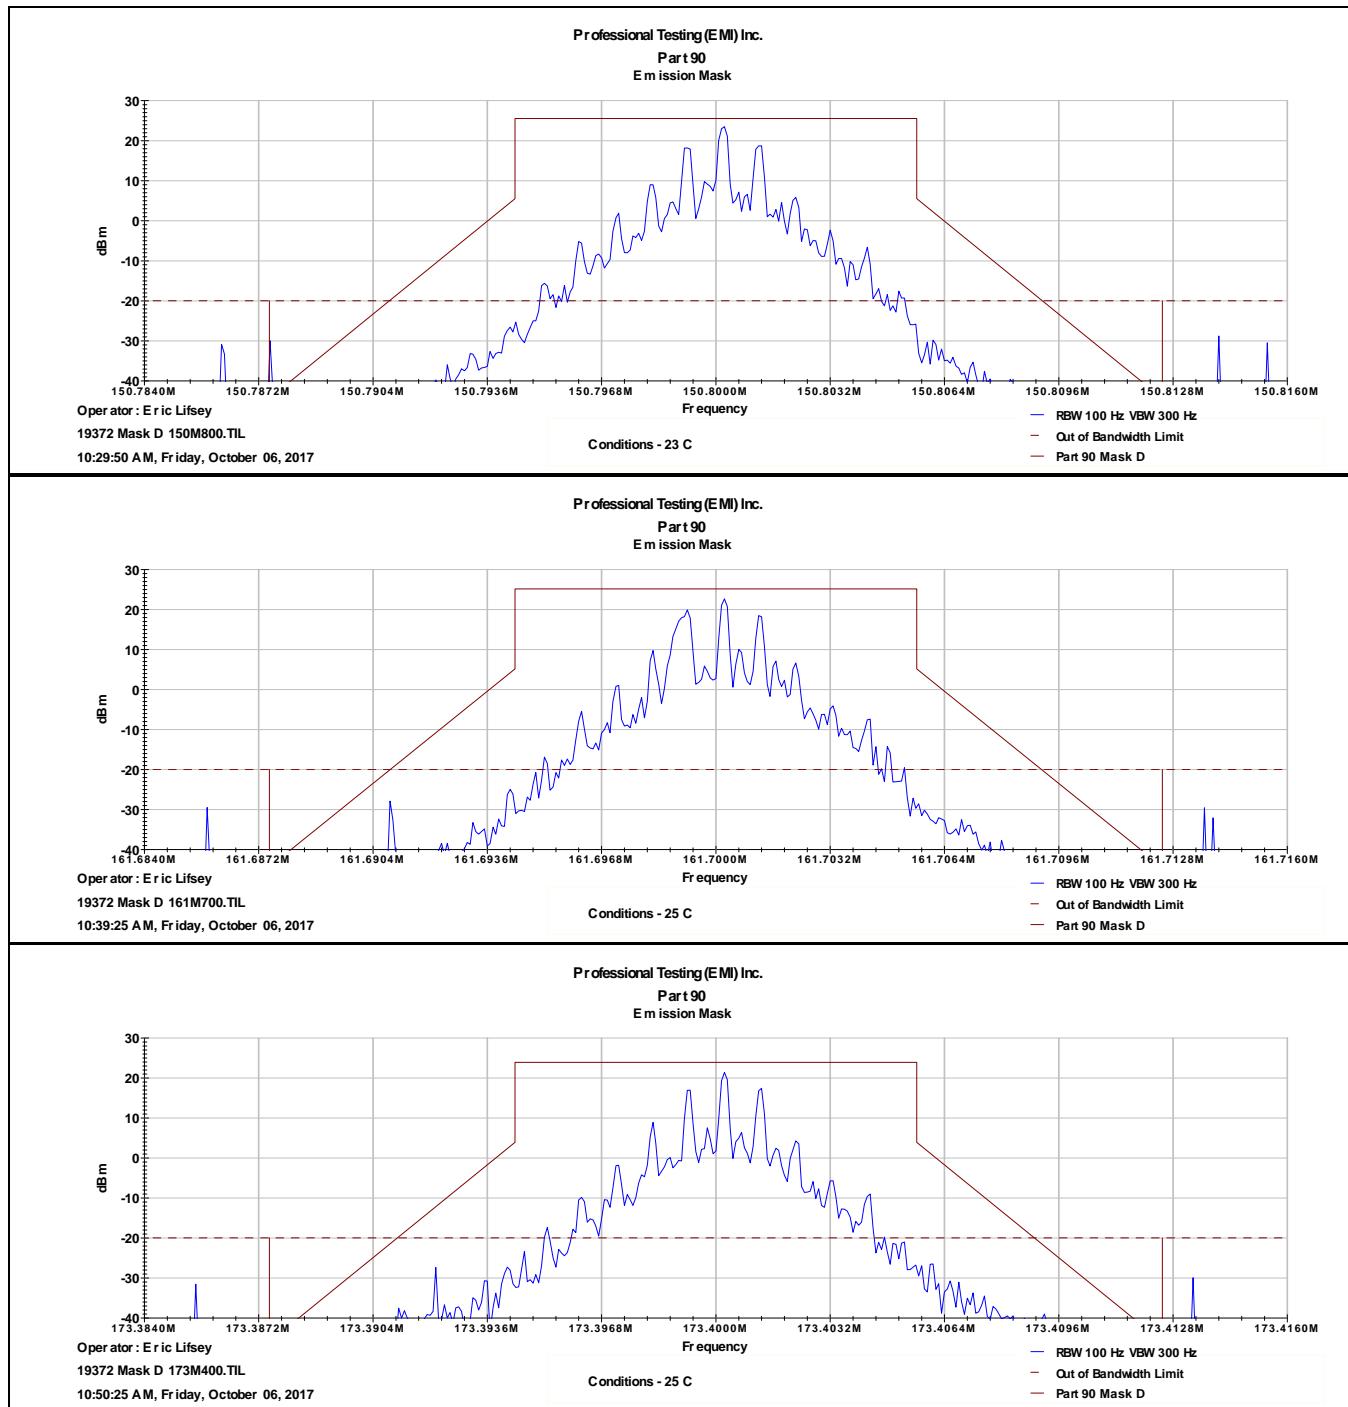

## 4.0 Spurious Emissions at Antenna Terminals

### 4.1 Procedure

The EUT antenna port is coupled through a power attenuator to a spectrum analyzer and then is placed into continuous transmit mode without modulation. The connection is direct and no cables are used. Spurious signals are then measured directly with no additional calculation required. Emissions are measured with a peak detector function from 9 kHz to 5 GHz to include the tenth harmonic 4.75 GHz.

### 4.2 Criteria

Parameter	Section Number	Date
Emissions at Antenna Terminals	90.210(e), 2.1047   RSS-119 Issue 12, 5.8	22 Sep 2017

Limit is determined from for emissions beyond the authorized bandwidth.

### 4.3 Results

Measurements were performed with a direct connection to the spectrum analyzer such that no external losses or gains would apply. Measurement bandwidth is detailed in the graphs provided.


Emission limit for spurious is -20 dBm per Mask D as worse-case.

Emission limit per 15.111 applies to the receive mode.


Highest spurious emission recorded: -22.7 dBm at 114.18 MHz.

The EUT satisfied the requirement. Measurements appear below.


### 4.3.1 Transmit Mode, Bottom Channel

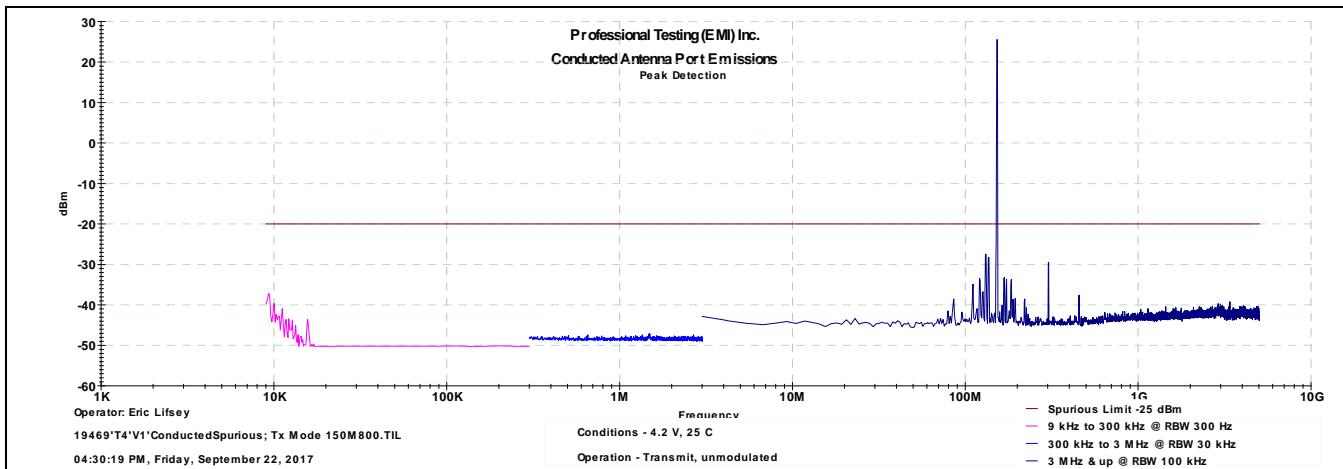


### 4.3.2 Transmit Mode, Middle Channel

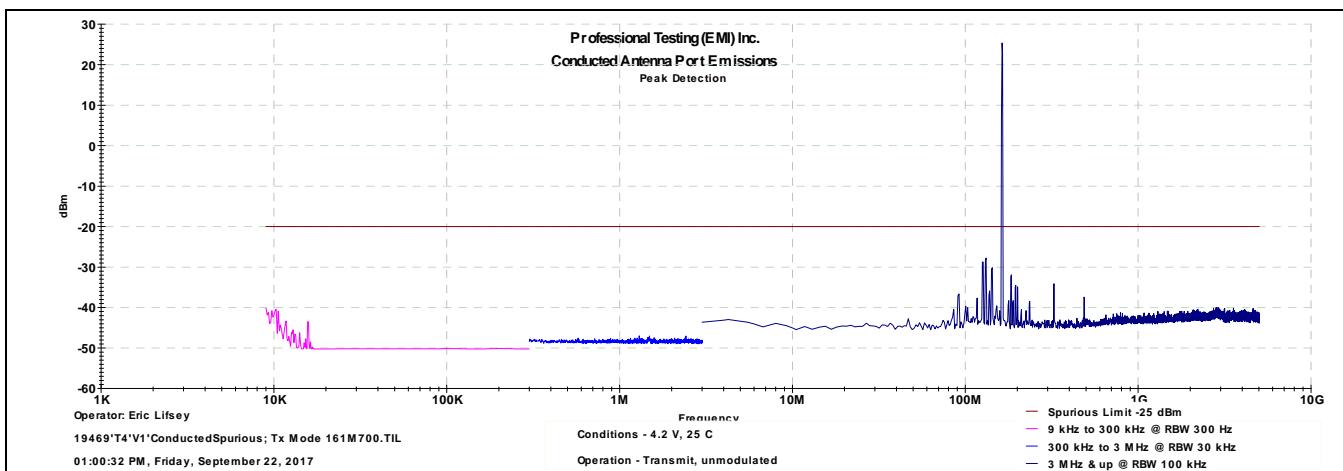

### 4.3.3 Transmit Mode, Top Channel

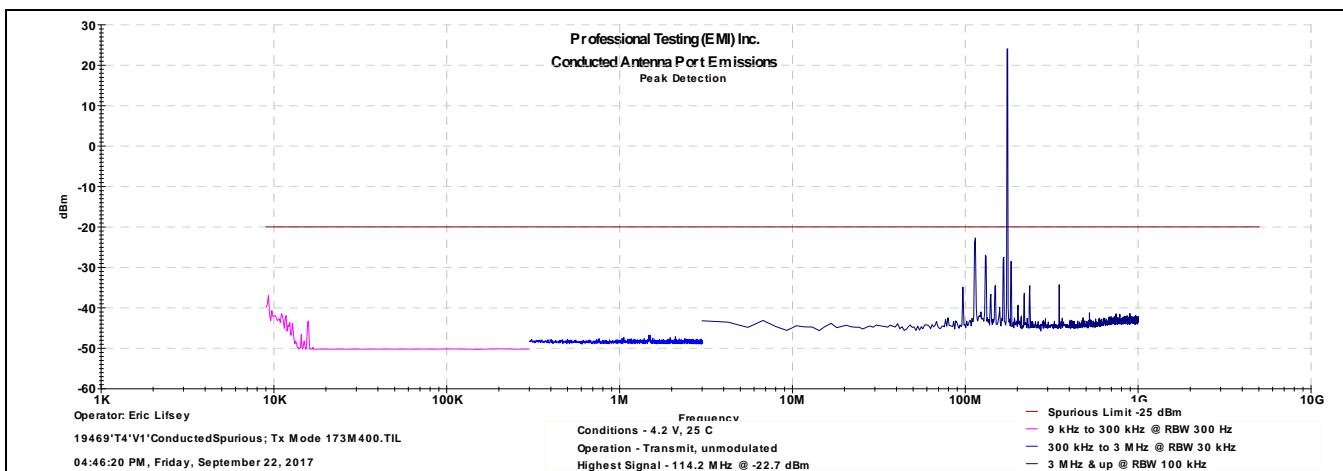


#### 4.3.4 Receive/Idle Mode, Middle Channel

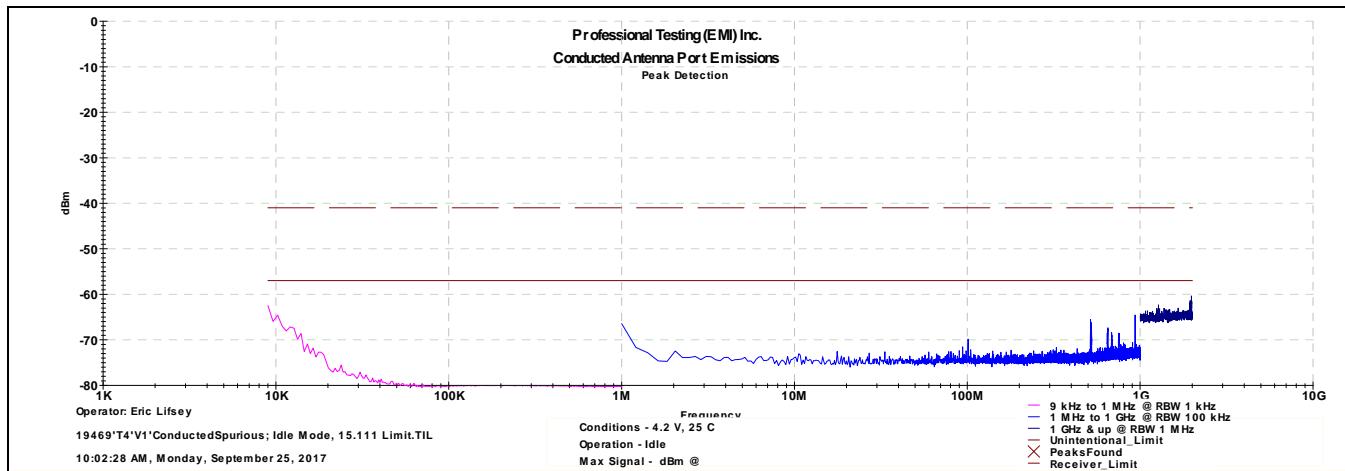

## 5.0 Field Strength of Radiated Spurious Emissions

### 5.1 Procedure

The EUT was placed on a non-conductive table 0.8 meters above the ground plane. The table was centered on a rotating turntable at a distance of 10 meters from the measurement antenna. The EUT was placed into transmit mode with the antenna removed and a resistive terminator substituted.

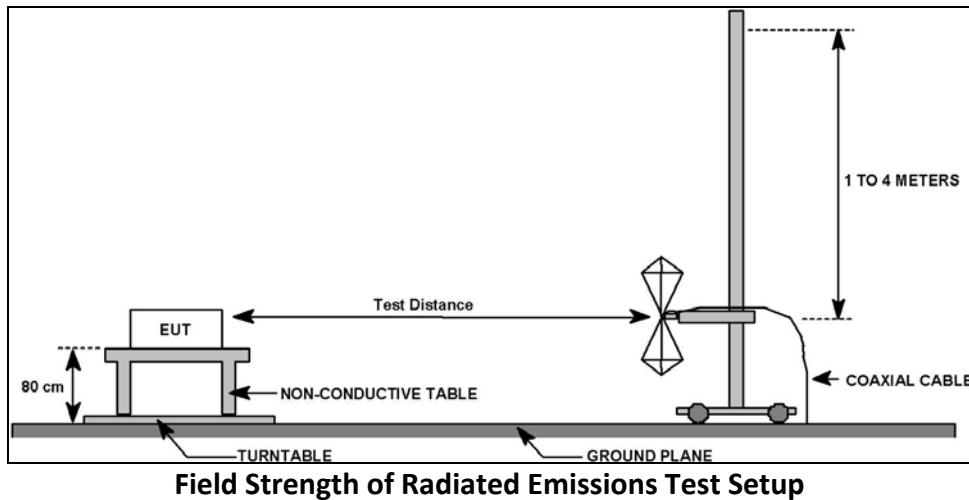

### 5.2 Criteria

Parameter	Section Number	Date
Field Strength of Radiated Emissions 30 MHz to 5 GHz	90.210, 15.209, 2.1053   RSS-119 Issue 12, 5.8; RSS-Gen Issue 4	20 Sep 2017

### 5.3 Results

Conducted limit is -25 dBm.

Highest recorded spurious emission: 37 dB $\mu$ V/m @ 10 m on 452 MHz.

The EUT satisfied the requirement. Measurements appear below.

### 5.3.1 Transmit Mode, Below 1 GHz, Bottom Channel

<b>Professional Testing, EMI, Inc.</b>			
<b>Test Method:</b> Part 90			
<b>In accordance with:</b> Part 90			
<b>Section:</b> Spurious cabinet radiated emissions			
<b>Test Date(s):</b>	9/20/2017	<b>EUT Serial #:</b>	None
<b>Customer:</b>	Alert Technologies	<b>EUT Part #:</b>	None
<b>Project Number:</b>	19372-15	<b>Test Technician:</b>	Eric Lifsey
<b>Purchase Order #:</b>	N/A	<b>Supervisor:</b>	Lisa Arndt
<b>Equip. Under Test:</b>	EA201	<b>Witness' Name:</b>	None
<b>Radiated Emissions Test Results Data Sheet</b>			Page: 1 of 1
<b>EUT Line Voltage:</b>	4.2 VDC	<b>EUT Power Frequency:</b>	- N/A
<b>Antenna Orientation:</b>	Vertical	<b>Frequency Range:</b>	30MHz to 1GHz
<b>EUT Mode of Operation:</b>		Transmit, Bot Chan	
<p><b>Professional Testing, EMI, Inc</b>  <b>Radiated Emissions, 10m Distance</b>  30MHz - 1GHz Vertical Polarity Measured Emissions</p> <p>Field Strength (dB<sub>u</sub>V/m)</p> <p>Frequency</p> <p>30M 100M 1G</p> <p>Operator: Eric Lifsey 19469\092017\Run02\TxMode\150M8.til 11:45:15 AM, Wednesday, September 20, 2017</p> <p>Mode: Tx 150M0 Power: 4.2 VDC</p> <p>EUT: EA201A Project Number: 19469 Client: Alert Technologies</p>			
<b>≤ 1GHz Vertical Antenna Polarity Measured Emissions</b>			

# Professional Testing, EMI, Inc.

**Test Method:** Part 90

**In accordance with:** Part 90

**Section:** Spurious cabinet radiated emissions

<b>Test Date(s):</b>	9/20/2017	<b>EUT Serial #:</b>	None
<b>Customer:</b>	Alert Technologies	<b>EUT Part #:</b>	None
<b>Project Number:</b>	19372-15	<b>Test Technician:</b>	Eric Lifsey
<b>Purchase Order #:</b>	N/A	<b>Supervisor:</b>	Lisa Arndt
<b>Equip. Under Test:</b>	EA201	<b>Witness' Name:</b>	None

## Radiated Emissions Test Results Data Sheet

Page: 1 of 1

<b>EUT Line Voltage:</b>	4.2 VDC	<b>EUT Power Frequency:</b>	-	N/A
--------------------------	---------	-----------------------------	---	-----


<b>Antenna Orientation:</b>	Horizontal	<b>Frequency Range:</b>	30MHz to 1GHz
-----------------------------	------------	-------------------------	---------------

<b>EUT Mode of Operation:</b>	Transmit, Bot Chan
-------------------------------	--------------------

### Professional Testing, EMI, Inc

Radiated Emissions, 10m Distance

30MHz - 1GHz Horizontal Polarity Measured Emissions

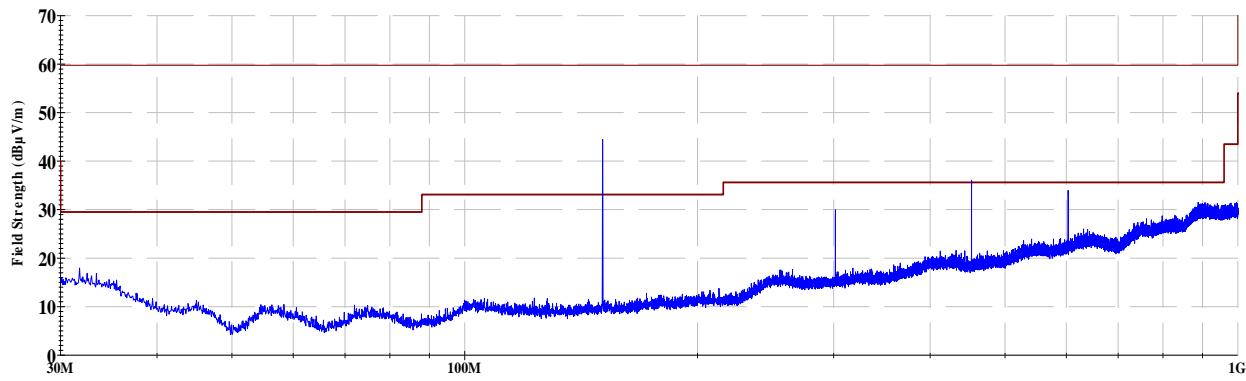

Operator: Eric Lifsey

19469\092017\Run02\TxMode\150M8.til

11:45:14 AM, Wednesday, September 20, 2017

Mode: Tx 150M0

Power: 4.2 VDC

EUT: EA201A

Project Number: 19469

Client: Alert Technologies

## ≤ 1GHz Horizontal Antenna Polarity Measured Emissions

### 5.3.2 Transmit Mode, Above 1 GHz, Bottom Channel

#### Professional Testing, EMI, Inc.

Test Method: Part 90

In accordance with: Part 90

Section: Spurious cabinet radiated emissions

Test Date(s):	9/20/2017	EUT Serial #:	None
Customer:	Alert Technologies	EUT Part #:	None
Project Number:	19372-15	Test Technician:	Eric Lifsey
Purchase Order #:	N/A	Supervisor:	Lisa Arndt
Equip. Under Test:	EA201	Witness' Name:	None

#### Radiated Emissions Test Results Data Sheet

Page: 1 of 1


EUT Line Voltage: 4.2 VDC EUT Power Frequency: - N/A

Antenna Orientation: Vertical Frequency Range: Above 1GHz

EUT Mode of Operation: Transmit, Bot Chan

#### Professional Testing, EMI, Inc

Radiated Emissions, 3m Distance  
1-3GHz Vertical Polarity Measured Emissions

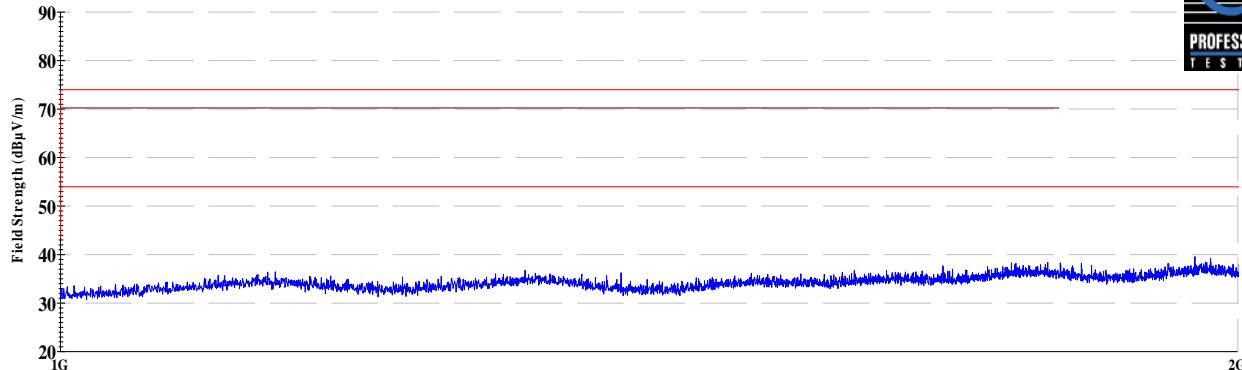

Operator: Eric Lifsey

19469\092017\Run02\TxMode\150M8.til

11:53:38 AM, Wednesday, September 20, 2017

Frequency

Mode: Tx 150M0

Power: 4.2 VDC

EUT: EA201A

Project Number: 19469

Client: Alert Technologies

> 1GHz Vertical Antenna Polarity Measured Emissions

# Professional Testing, EMI, Inc.

**Test Method:** Part 90

**In accordance with:** Part 90

**Section:** Spurious cabinet radiated emissions

<b>Test Date(s):</b>	9/20/2017	<b>EUT Serial #:</b>	None
<b>Customer:</b>	Alert Technologies	<b>EUT Part #:</b>	None
<b>Project Number:</b>	19372-15	<b>Test Technician:</b>	Eric Lifsey
<b>Purchase Order #:</b>	N/A	<b>Supervisor:</b>	Lisa Arndt
<b>Equip. Under Test:</b>	EA201	<b>Witness' Name:</b>	None

## Radiated Emissions Test Results Data Sheet

Page: 1 of 1

EUT Line Voltage:	4.2 VDC	EUT Power Frequency:	- N/A
-------------------	---------	----------------------	-------


Antenna Orientation:	Horizontal	Frequency Range:	Above 1GHz
----------------------	------------	------------------	------------

EUT Mode of Operation:	Transmit, Bot Chan
------------------------	--------------------

Professional Testing, EMI, Inc

Radiated Emissions, 3m Distance

1-3GHz Horizontal Polarity Measured Emissions

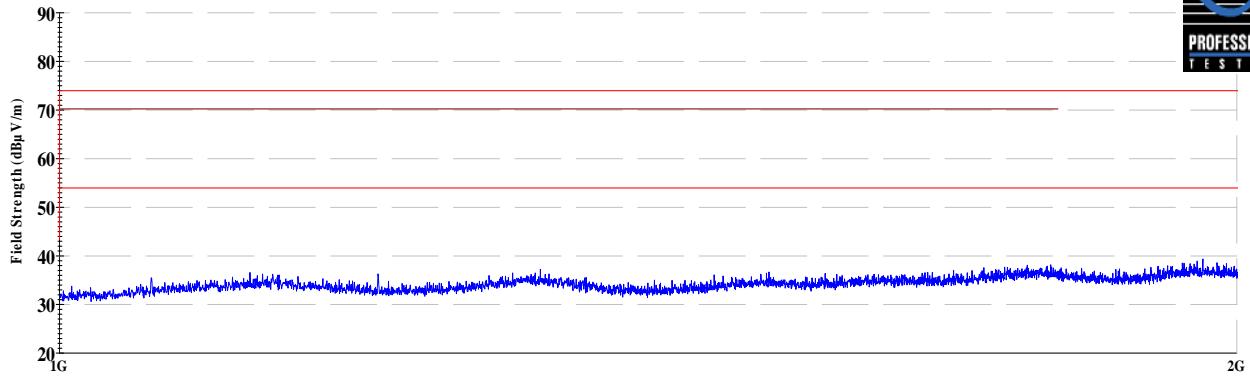

Operator: Eric Lifsey

19469'092017'Run02'TxMode'150M8.til

11:53:37 AM, Wednesday, September 20, 2017

Mode: Tx 150M0

Power: 4.2 VDC

EUT: EA201A

Project Number: 19469

Client: Alert Technologies

**> 1GHz Horizontal Antenna Polarity Measured Emissions**

### 5.3.3 Transmit Mode, Below 1 GHz, Middle Channel

#### Professional Testing, EMI, Inc.

**Test Method:** Part 90

**In accordance with:** Part 90

**Section:** Spurious cabinet radiated emissions

<b>Test Date(s):</b>	9/20/2017	<b>EUT Serial #:</b>	None
<b>Customer:</b>	Alert Technologies	<b>EUT Part #:</b>	None
<b>Project Number:</b>	19372-15	<b>Test Technician:</b>	Eric Lifsey
<b>Purchase Order #:</b>	N/A	<b>Supervisor:</b>	Lisa Arndt
<b>Equip. Under Test:</b>	EA201	<b>Witness' Name:</b>	None

#### Radiated Emissions Test Results Data Sheet

Page: 1 of 1

**EUT Line Voltage:** 4.2 VDC **EUT Power Frequency:** - N/A

**Antenna Orientation:** Vertical **Frequency Range:** 30MHz to 1GHz

#### EUT Mode of Operation:


Transmit, Mid Chan

Frequency Measured (MHz)	Test Distance (Meters)	EUT Direction (Degrees)	Antenna Height (Meters)	Detector Function	Recorded Amplitude (dB $\mu$ V)	Corrected Level (dB $\mu$ V/m)	Limit Level (dB $\mu$ V/m)	Margin (dB)	Test Results
132.49	10	227	1.25	Quasi-peak	34.1	16.739	33.0	-16.3	Pass
209.445	10	70	1.37	Quasi-peak	30.6	16.207	33.0	-16.8	Pass
311.27	10	133	1.62	Quasi-peak	28.5	18.386	35.6	-17.2	Pass
393.987	10	5	1.42	Quasi-peak	23.6	16.114	35.6	-19.5	Pass
872.526	10	138	4.07	Quasi-peak	21.3	24.805	35.6	-10.8	Pass
903.27	10	12	3.82	Quasi-peak	21.1	25.976	35.6	-9.6	Pass

#### Professional Testing, EMI, Inc

Radiated Emissions, 10m Distance

30MHz - 1GHz Vertical Polarity Measured Emissions

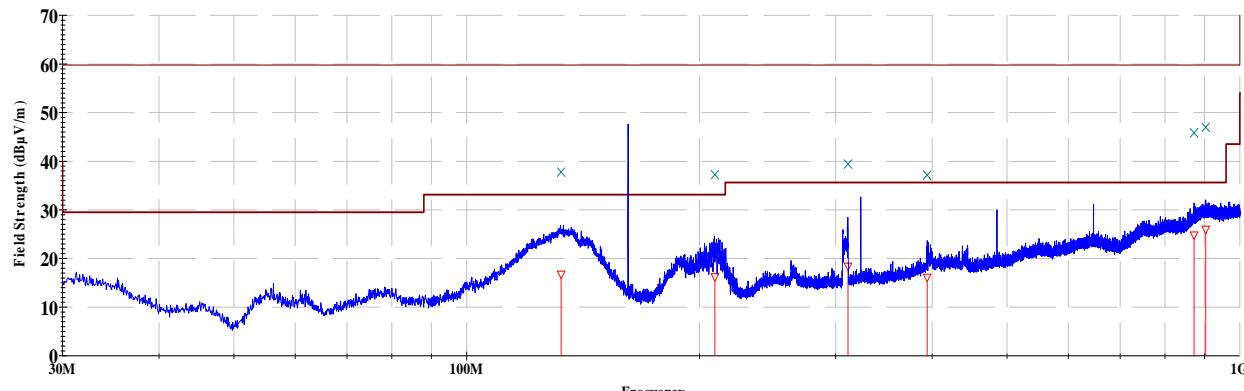

≤ 1GHz Vertical Antenna Polarity Measured Emissions

# Professional Testing, EMI, Inc.

**Test Method:** Part 90

**In accordance with:** Part 90

**Section:** Spurious cabinet radiated emissions

<b>Test Date(s):</b>	9/20/2017	<b>EUT Serial #:</b>	None
<b>Customer:</b>	Alert Technologies	<b>EUT Part #:</b>	None
<b>Project Number:</b>	19372-15	<b>Test Technician:</b>	Eric Lifsey
<b>Purchase Order #:</b>	N/A	<b>Supervisor:</b>	Lisa Arndt
<b>Equip. Under Test:</b>	EA201	<b>Witness' Name:</b>	None

## Radiated Emissions Test Results Data Sheet

Page: 1 of 1


EUT Line Voltage:	4.2 VDC	EUT Power Frequency:	-	N/A
-------------------	---------	----------------------	---	-----

Antenna Orientation:	Horizontal	Frequency Range:	30MHz to 1GHz	
----------------------	------------	------------------	---------------	--

EUT Mode of Operation:	Transmit, Mid Chan
------------------------	--------------------

Frequency Measured (MHz)	Test Distance (Meters)	EUT Direction (Degrees)	Antenna Height (Meters)	Detector Function	Recorded Amplitude (dB $\mu$ V)	Corrected Level (dB $\mu$ V/m)	Limit Level (dB $\mu$ V/m)	Margin (dB)	Test Results
31.2278	10	155	2.93	Quasi-peak	24.1	12.139	29.0	-16.9	Pass
134.528	10	347	1.39	Quasi-peak	23.2	5.966	33.0	-27.0	Pass
202.69	10	354	1.13	Quasi-peak	22.4	8.069	33.0	-24.9	Pass
542.504	10	131	1.11	Quasi-peak	22.1	18.033	35.6	-17.6	Pass
895.438	10	43	1.14	Quasi-peak	21.3	26.008	35.6	-9.6	Pass
905.719	10	28	3.08	Quasi-peak	21.2	26.033	35.6	-9.6	Pass

**Professional Testing, EMI, Inc**  
**Radiated Emissions, 10m Distance**  
**30MHz - 1GHz Horizontal Polarity Measured Emissions**

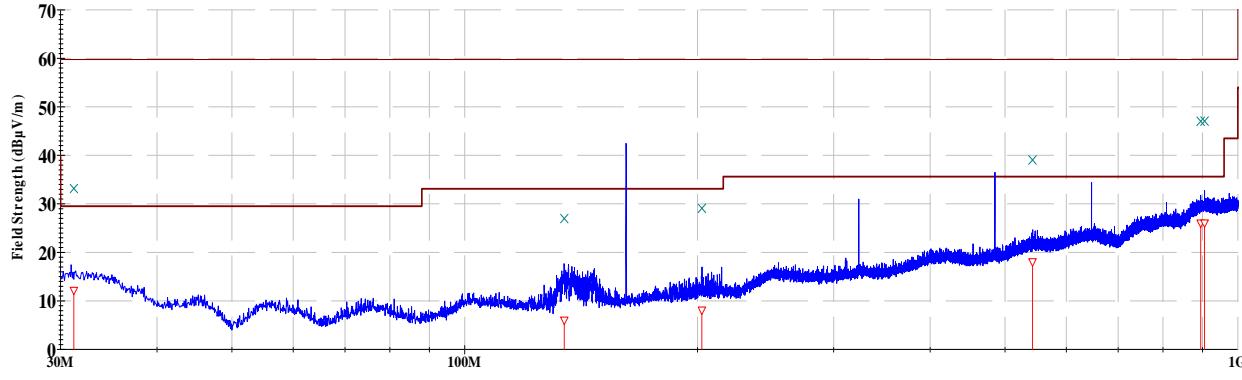

**≤ 1GHz Horizontal Antenna Polarity Measured Emissions**

### 5.3.4 Transmit Mode, Above 1 GHz, Middle Channel

#### Professional Testing, EMI, Inc.

**Test Method:** Part 90

**In accordance with:** Part 90

**Section:** Spurious cabinet radiated emissions

<b>Test Date(s):</b>	9/20/2017	<b>EUT Serial #:</b>	None
<b>Customer:</b>	Alert Technologies	<b>EUT Part #:</b>	None
<b>Project Number:</b>	19372-15	<b>Test Technician:</b>	Eric Lifsey
<b>Purchase Order #:</b>	N/A	<b>Supervisor:</b>	Lisa Arndt
<b>Equip. Under Test:</b>	EA201	<b>Witness' Name:</b>	None

#### Radiated Emissions Test Results Data Sheet

Page: 1 of 1

**EUT Line Voltage:** 4.2 VDC **EUT Power Frequency:** - N/A

**Antenna Orientation:** Vertical **Frequency Range:** Above 1GHz


#### EUT Mode of Operation:

Transmit, Mid Chan

Frequency Measured (MHz)	Test Distance (Meters)	EUT Direction (Degrees)	Antenna Height (Meters)	Detector Function	Recorded Amplitude (dB $\mu$ V)	Corrected Level (dB $\mu$ V/m)	Limit Level (dB $\mu$ V/m)	Margin (dB)	Test Results
1151.96	3	218	2.69	Average	36.3	23.772	54.0	-30.2	Pass
1336.42	3	338	2.27	Average	36.1	24.092	54.0	-29.9	Pass
1528.73	3	12	3.83	Average	38.3	26.435	54.0	-27.6	Pass
1741.59	3	63	2.39	Average	35.5	25.513	54.0	-28.5	Pass

#### Professional Testing, EMI, Inc

Radiated Emissions, 3m Distance  
1-3GHz Vertical Polarity Measured Emissions

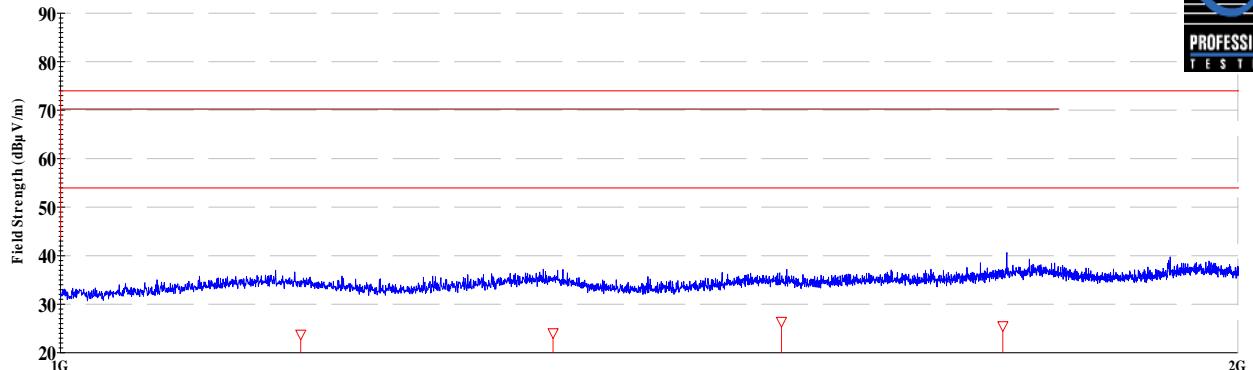

Operator: Eric Lifsey

19469'092017'Run01'TxMode'161M7.til

11:16:48 AM, Wednesday, September 20, 2017

Mode: Tx 161M7  
Power: 4.2 VDC

EUT: EA201A

Project Number: 19469

Client: Alert Technologies

> 1GHz Vertical Antenna Polarity Measured Emissions

# Professional Testing, EMI, Inc.

**Test Method:** Part 90

**In accordance with:** Part 90

**Section:** Spurious cabinet radiated emissions

<b>Test Date(s):</b>	9/20/2017	<b>EUT Serial #:</b>	None
<b>Customer:</b>	Alert Technologies	<b>EUT Part #:</b>	None
<b>Project Number:</b>	19372-15	<b>Test Technician:</b>	Eric Lifsey
<b>Purchase Order #:</b>	N/A	<b>Supervisor:</b>	Lisa Arndt
<b>Equip. Under Test:</b>	EA201	<b>Witness' Name:</b>	None

## Radiated Emissions Test Results Data Sheet

Page: 1 of 1

EUT Line Voltage:	4.2 VDC	EUT Power Frequency:	- N/A
-------------------	---------	----------------------	-------

Antenna Orientation:	Horizontal	Frequency Range:	Above 1GHz
----------------------	------------	------------------	------------


**EUT Mode of Operation:** Transmit, Mid Chan

Frequency Measured (MHz)	Test Distance (Meters)	EUT Direction (Degrees)	Antenna Height (Meters)	Detector Function	Recorded Amplitude (dB $\mu$ V)	Corrected Level (dB $\mu$ V/m)	Limit Level (dB $\mu$ V/m)	Margin (dB)	Test Results
1128.86	3	101	1.44	Average	36.6	23.926	54.0	-30.1	Pass
1336.7	3	119	1.14	Average	36.1	24.169	54.0	-29.8	Pass
1526.44	3	14	2.61	Average	35.8	23.906	54.0	-30.1	Pass
1606.93	3	344	3.77	Average	35.4	24.259	54.0	-29.7	Pass

### Professional Testing, EMI, Inc


Radiated Emissions, 3m Distance

1-3GHz Horizontal Polarity Measured Emissions

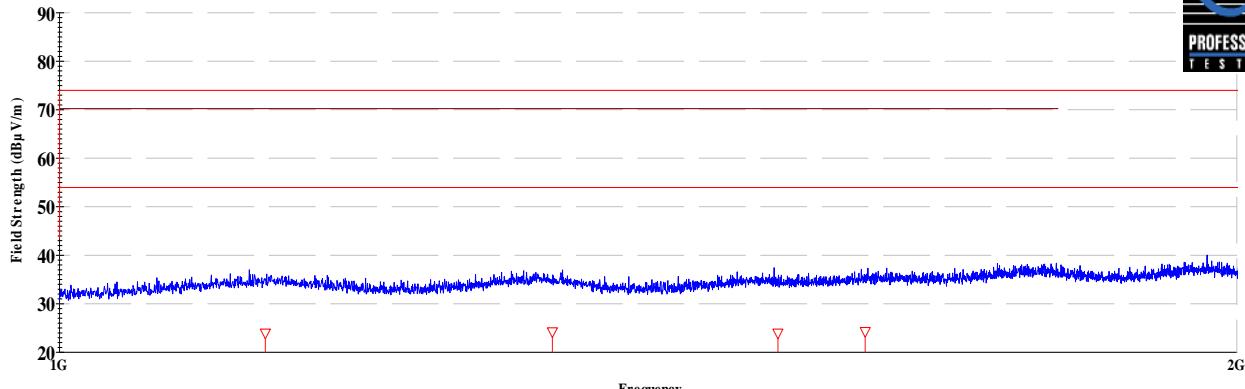

**> 1GHz Horizontal Antenna Polarity Measured Emissions**

### 5.3.5 Transmit Mode, Below 1 GHz, Top Channel

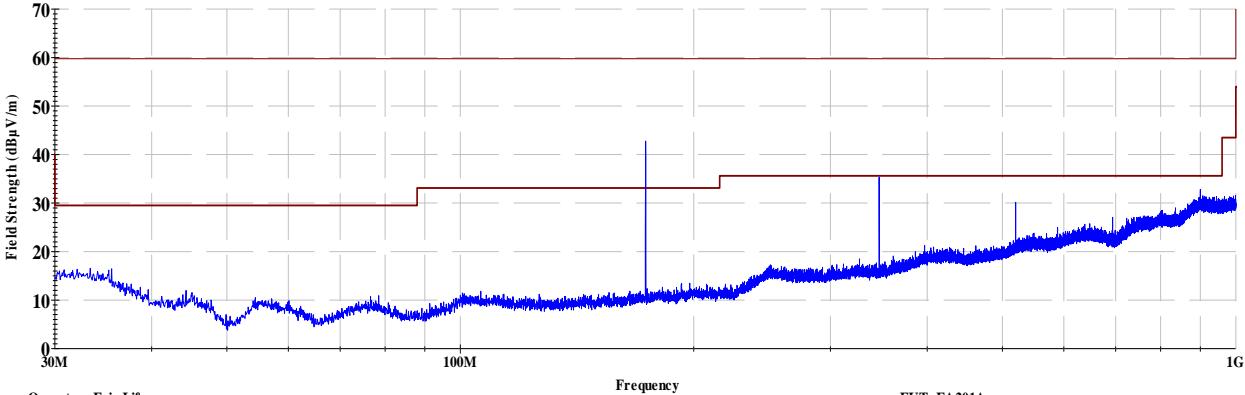Professional Testing, EMI, Inc.					
Test Method: Part 90					
In accordance with: Part 90					
Section: Spurious cabinet radiated emissions					
Test Date(s):	9/20/2017	EUT Serial #:	None		
Customer:	Alert Technologies	EUT Part #:	None		
Project Number:	19372-15	Test Technician:	Eric Lifsey		
Purchase Order #:	N/A	Supervisor:	Lisa Arndt		
Equip. Under Test:	EA201	Witness' Name:	None		
Radiated Emissions Test Results Data Sheet				Page:	1 of 1
EUT Line Voltage:	4.2 VDC	EUT Power Frequency:	-	N/A	
Antenna Orientation:	Vertical	Frequency Range:	30MHz to 1GHz		
EUT Mode of Operation:		Transmit, Top Chan			
<p>Professional Testing, EMI, Inc            Radiated Emissions, 10m Distance            30MHz - 1GHz Vertical Polarity Measured Emissions</p>  <p>Field Strength (dB<math>\mu</math>V/m)</p> <p>Frequency</p> <p>30M 100M 1G</p> <p>Operator: Eric Lifsey            19469092017'Run03'TxMode'173M4.til            12:19:35 PM, Wednesday, September 20, 2017</p> <p>Mode: Tx 173M4            Power: 4.2 VDC</p> <p>EUT: EA201A            Project Number: 19469            Client: Alert Technologies</p>					
<b>≤ 1GHz Vertical Antenna Polarity Measured Emissions</b>					

# Professional Testing, EMI, Inc.

**Test Method:** Part 90

**In accordance with:** Part 90

**Section:** Spurious cabinet radiated emissions

<b>Test Date(s):</b>	9/20/2017	<b>EUT Serial #:</b>	None
<b>Customer:</b>	Alert Technologies	<b>EUT Part #:</b>	None
<b>Project Number:</b>	19372-15	<b>Test Technician:</b>	Eric Lifsey
<b>Purchase Order #:</b>	N/A	<b>Supervisor:</b>	Lisa Arndt
<b>Equip. Under Test:</b>	EA201	<b>Witness' Name:</b>	None

## Radiated Emissions Test Results Data Sheet

Page: 1 of 1

<b>EUT Line Voltage:</b>	4.2 VDC	<b>EUT Power Frequency:</b>	-	N/A
--------------------------	---------	-----------------------------	---	-----


<b>Antenna Orientation:</b>	Horizontal	<b>Frequency Range:</b>	30MHz to 1GHz
-----------------------------	------------	-------------------------	---------------

<b>EUT Mode of Operation:</b>	Transmit, Top Chan
-------------------------------	--------------------

### Professional Testing, EMI, Inc

Radiated Emissions, 10m Distance

30MHz - 1GHz Horizontal Polarity Measured Emissions

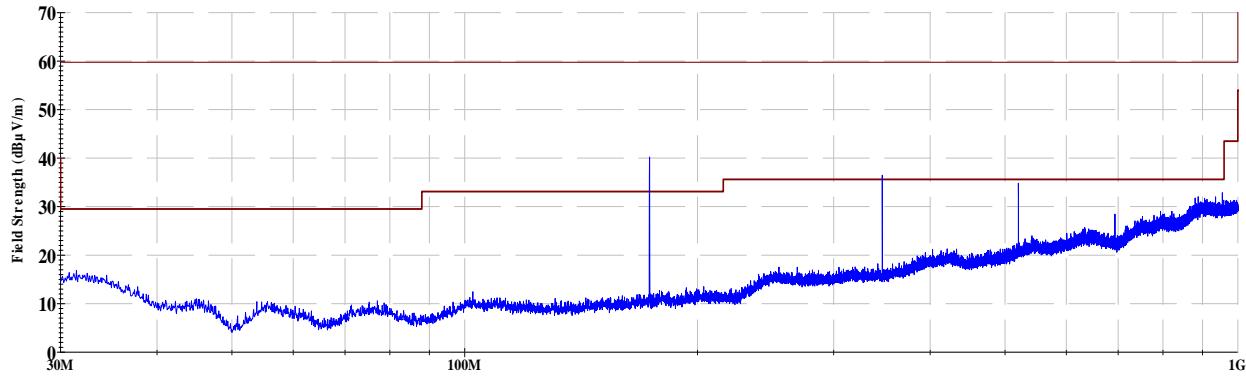

## ≤ 1GHz Horizontal Antenna Polarity Measured Emissions

### 5.3.6 Transmit Mode, Above 1 GHz, Top Channel

#### Professional Testing, EMI, Inc.

**Test Method:** Part 90

**In accordance with:** Part 90

**Section:** Spurious cabinet radiated emissions

<b>Test Date(s):</b>	9/20/2017	<b>EUT Serial #:</b>	None
<b>Customer:</b>	Alert Technologies	<b>EUT Part #:</b>	None
<b>Project Number:</b>	19372-15	<b>Test Technician:</b>	Eric Lifsey
<b>Purchase Order #:</b>	N/A	<b>Supervisor:</b>	Lisa Arndt
<b>Equip. Under Test:</b>	EA201	<b>Witness' Name:</b>	None

#### Radiated Emissions Test Results Data Sheet

Page: 1 of 1


**EUT Line Voltage:** 4.2 VDC **EUT Power Frequency:** - N/A

**Antenna Orientation:** Vertical **Frequency Range:** Above 1GHz

**EUT Mode of Operation:** Transmit, Top Chan

Professional Testing, EMI, Inc

Radiated Emissions, 3m Distance  
1-3GHz Vertical Polarity Measured Emissions

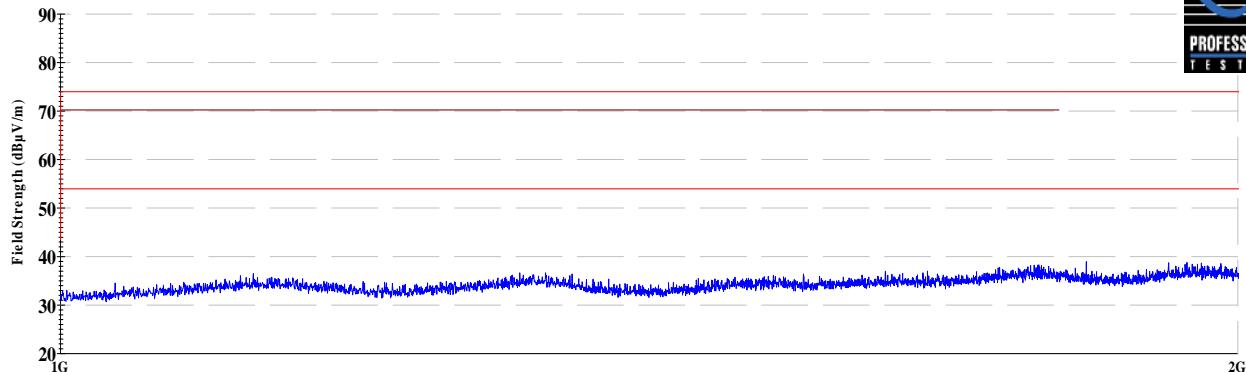

Operator: Eric Lifsey

19469\092017\Run03\TxMode\173M4.til

12:26:01 PM, Wednesday, September 20, 2017

Frequency

Mode: Tx 173M4

Power: 4.2 VDC

EUT: EA201A

Project Number: 19469

Client: Alert Technologies

> 1GHz Vertical Antenna Polarity Measured Emissions

# Professional Testing, EMI, Inc.

**Test Method:** Part 90

**In accordance with:** Part 90

**Section:** Spurious cabinet radiated emissions

<b>Test Date(s):</b>	9/20/2017	<b>EUT Serial #:</b>	None
<b>Customer:</b>	Alert Technologies	<b>EUT Part #:</b>	None
<b>Project Number:</b>	19372-15	<b>Test Technician:</b>	Eric Lifsey
<b>Purchase Order #:</b>	N/A	<b>Supervisor:</b>	Lisa Arndt
<b>Equip. Under Test:</b>	EA201	<b>Witness' Name:</b>	None

## Radiated Emissions Test Results Data Sheet

Page: 1 of 1

EUT Line Voltage:	4.2 VDC	EUT Power Frequency:	-	N/A
-------------------	---------	----------------------	---	-----


Antenna Orientation:	Horizontal	Frequency Range:	Above 1GHz	
----------------------	------------	------------------	------------	--

EUT Mode of Operation:	Transmit, Top Chan		
------------------------	--------------------	--	--

Professional Testing, EMI, Inc

Radiated Emissions, 3m Distance

1-3GHz Horizontal Polarity Measured Emissions

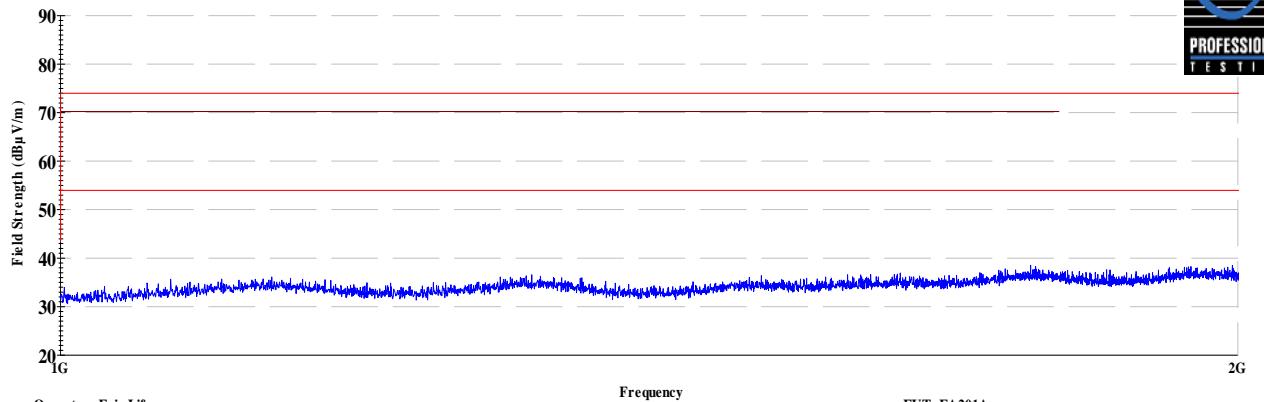

**> 1GHz Horizontal Antenna Polarity Measured Emissions**

## 6.0 Frequency Stability

### 6.1 Procedure

The EUT is placed into a temperature chamber with a cable coupling the transmitted signal to a spectrum analyzer. On reaching each set point temperature, the EUT is allowed to soak at least 10 minutes without power applied. After soak time was satisfied, the EUT is powered on in transmit mode and the frequency is observed until it becomes stable; then the measurement of frequency is taken.

### 6.2 Criteria

Parameter	Section Number	Date
Frequency Stability	90.213   RSS-119 Issue 12, 5.3	21 Sep 2017

**Table 6.2.1 Frequency Tolerance**

$\pm 5$  ppm or restated as  $\pm 2050$  Hz

**Table 6.2.2 Operating Voltages**

Low	Nominal	High
3.3	4.2	4.7

The operating frequency shall remain within the required tolerance.

### 6.3 Results

The highest deviation from frequency observed was 200 Hz. The EUT satisfied the requirement. Measurements appear below.

### 6.3.1 Bottom Channel, Temperature

Condition	Frequency		Deviation
Temperature (C)	Reference Center Frequency (MHz)	Measured Frequency (MHz)	Calculated Deviation (Hz)
-30	150.800000	150.800157	157
-20	150.800000	150.800105	105
-10	150.800000	150.800082	82
0	150.800000	150.800065	65
10	150.800000	150.800067	67
20	150.800000	150.800087	87
30	150.800000	150.800014	14
40	150.800000	150.800140	140
50	150.800000	150.800147	147
Max Deviation (Hz)			157
Min Deviation (Hz)			14

### 6.3.2 Bottom Channel, Operating Voltage

Condition	Voltage	Frequency		
		Reference Frequency (MHz)	Measured Frequency (MHz)	Calculated Deviation (Hz)
Voltage Extreme	Voltage (V DC)			
Low	3.30	150.800000	150.800087	87
Nominal	4.20	150.800000	150.800097	97
High	4.70	150.800000	150.800105	105

### 6.3.3 Middle Channel, Temperature

Condition	Frequency		Deviation
Temperature (C)	Reference Center Frequency (MHz)	Measured Frequency (MHz)	Calculated Deviation (Hz)
-30	161.700000	161.700185	185
-20	161.700000	161.700120	120
-10	161.700000	161.700110	110
0	161.700000	161.700087	87
10	161.700000	161.700095	95
20	161.700000	161.700125	125
30	161.700000	161.700172	172
40	161.700000	161.700180	180
50	161.700000	161.700157	157
Max Deviation (Hz)			185
Min Deviation (Hz)			87

### 6.3.4 Middle Channel, Operating Voltage

Condition	Voltage	Frequency		
		Reference Frequency (MHz)	Measured Frequency (MHz)	Calculated Deviation (Hz)
Voltage Extreme	Voltage (V DC)			
Low	3.30	161.700000	161.700142	142
Nominal	4.20	161.700000	161.700140	140
High	4.70	161.700000	161.700135	135

### 6.3.5 Top Channel, Temperature

Condition	Frequency		Deviation
Temperature (C)	Reference Center Frequency (MHz)	Measured Frequency (MHz)	Calculated Deviation (Hz)
-30	173.400000	173.400177	177
-20	173.400000	173.400155	155
-10	173.400000	173.400117	117
0	173.400000	173.400097	97
10	173.400000	173.400105	105
20	173.400000	173.400135	135
30	173.400000	173.400200	200
40	173.400000	173.400185	185
50	173.400000	173.400165	165
Max Deviation (Hz)			200
Min Deviation (Hz)			97

### 6.3.6 Top Channel, Operating Voltage

Condition	Voltage	Frequency		
		Reference Frequency (MHz)	Measured Frequency (MHz)	Calculated Deviation (Hz)
Voltage Extreme	Voltage (V DC)			
Low	3.30	173.400000	173.400162	162
Nominal	4.20	173.400000	173.400165	165
High	4.70	173.400000	173.400165	165

## 7.0 Transient Frequency Behavior

The EUT was tested for transient frequency behavior using the test method outlined in TIA/EIA-603-E paragraph 2.2.19.3 Alternate Method of Measurement (Using a Test Receiver).

The EUT is terminated with a suitable resistive attenuator with the output connected to a forward power coupler. The coupler forward output (-10 dB) is run through a detector diode then to the trigger input port of a digital oscilloscope. The RF pass-through output of the coupler is then run to a 3 port resistive power combining network; the #2 port of the combiner is connected to the output of a RF signal generator, the #3 port is used as output and connected to a test receiver (modulation analyzer). The detected output of the modulation analyzer is connected to the vertical input of the digital oscilloscope.

The RF generator is set to the fundamental operating frequency, set to modulate with a 1 kHz tone at +/- 25 kHz FM deviation, and at a relatively low but usable level where the modulation analyzer is able to demodulate the signal. The modulation analyzer is configured to use the high and low pass filter settings as called out in the TIA-603-C procedure. The modulation analyzer is then dialed via front panel keypad to the fundamental operating frequency for best sensitivity.

The transmitter is keyed as needed and adjustments are made to the instruments to trigger appropriately and render the measurement as required by the TIA-603-C standard. The essential technique is the signal generator provides a reference frequency captured by the modulation analyzer. When the EUT is keyed, at many dB above the signal generator level, the modulation analyzer locks to the EUT signal and deviation from center frequency can be observed and recorded on the digital oscilloscope.

## 7.1 Criteria

Parameter	Section Reference	Date
Transient Frequency Behavior	90.214   RSS-119 Issue 12, 5.9 Procedure: TIA-603-E	11 Oct 2017

**Table 7.1.1 Transient Frequency Limits**

Time intervals <sup>1,2</sup>	Maximum frequency difference <sup>3</sup>	Frequency Range	
		150 to 174 MHz	421 to 512 MHz
Transient Frequency Behavior for Equipment Designed to Operate on 25 kHz Channels			
$t_1^4$	±25.0 kHz	5.0 ms	10.0 ms
$t_2$	±12.5 kHz	20.0 ms	25.0 ms
$t_3^4$	±25.0 kHz	5.0 ms	10.0 ms
Transient Frequency Behavior for Equipment Designed to Operate on 12.5 kHz Channels			
$t_1^4$	±12.5 kHz	5.0 ms	10.0 ms
$t_2$	±6.25 kHz	20.0 ms	25.0 ms
$t_3^4$	±12.5 kHz	5.0 ms	10.0 ms
Transient Frequency Behavior for Equipment Designed to Operate on 6.25 kHz Channels			
$t_1^4$	±6.25 kHz	5.0 ms	10.0 ms
$t_2$	±3.125 kHz	20.0 ms	25.0 ms
$t_3^4$	±6.25 kHz	5.0 ms	10.0 ms

<sup>1</sup> is the instant when a 1 kHz test signal is completely suppressed, including any capture time due to phasing.

$t_1$  is the time period immediately following  $t_{on}$ .

$t_2$  is the time period immediately following  $t_1$ .

$t_3$  is the time period from the instant when the transmitter is turned off until  $t_{off}$ .

$t_{off}$  is the instant when the 1 kHz test signal starts to rise.

<sup>2</sup>During the time from the end of  $t_2$  to the beginning of  $t_3$ , the frequency difference must not exceed the limits specified in §90.213.

<sup>3</sup>Difference between the actual transmitter frequency and the assigned transmitter frequency.

<sup>4</sup>If the transmitter carrier output power rating is 6 watts or less, the frequency difference during this time period may exceed the maximum frequency difference for this time period.


The measurement is performed for the lowest, middle, and highest operating frequency.

## 7.2 Results


Plotted measurements appear on the following pages. The limits were not superimposed on the plots as the transmitter performance was clearly in compliance for any allowed channel scheme and for either 25 kHz or 12.5 kHz channel spacing. The EUT was operated in the wide channel spacing mode as worse-case.

The EUT satisfied the requirement. Measurements appear below.

### 7.2.1 Bottom Channel

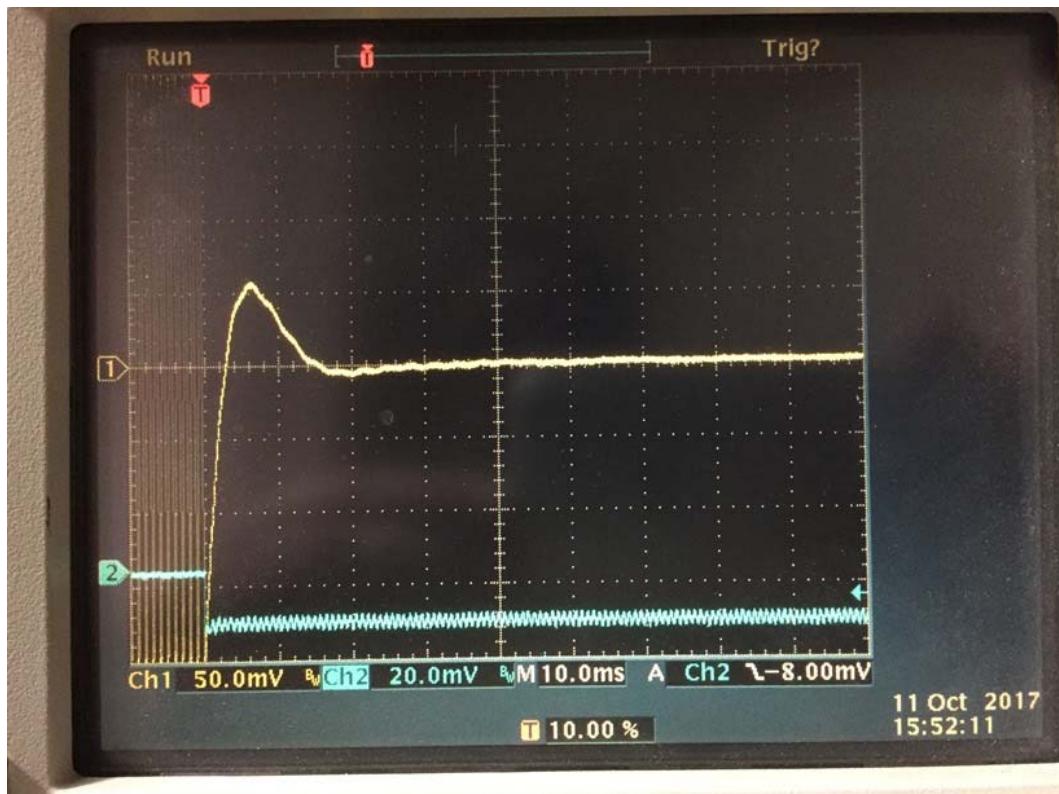


Attack

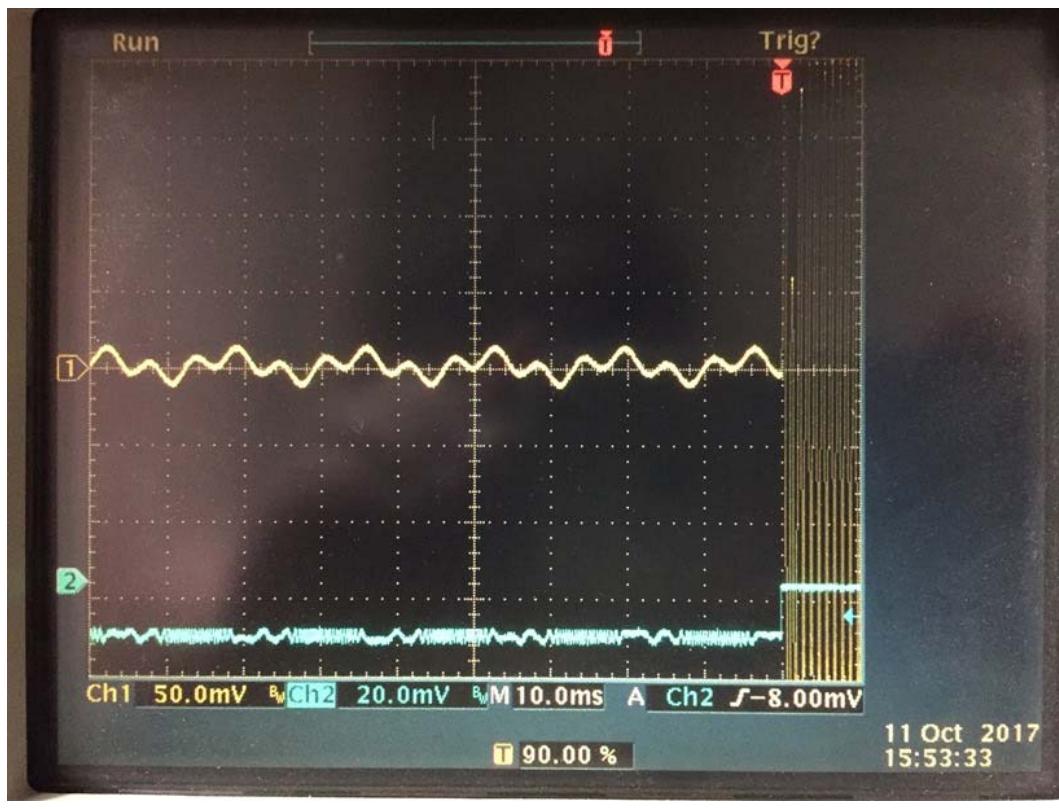


Release

### 7.2.2 Middle Channel

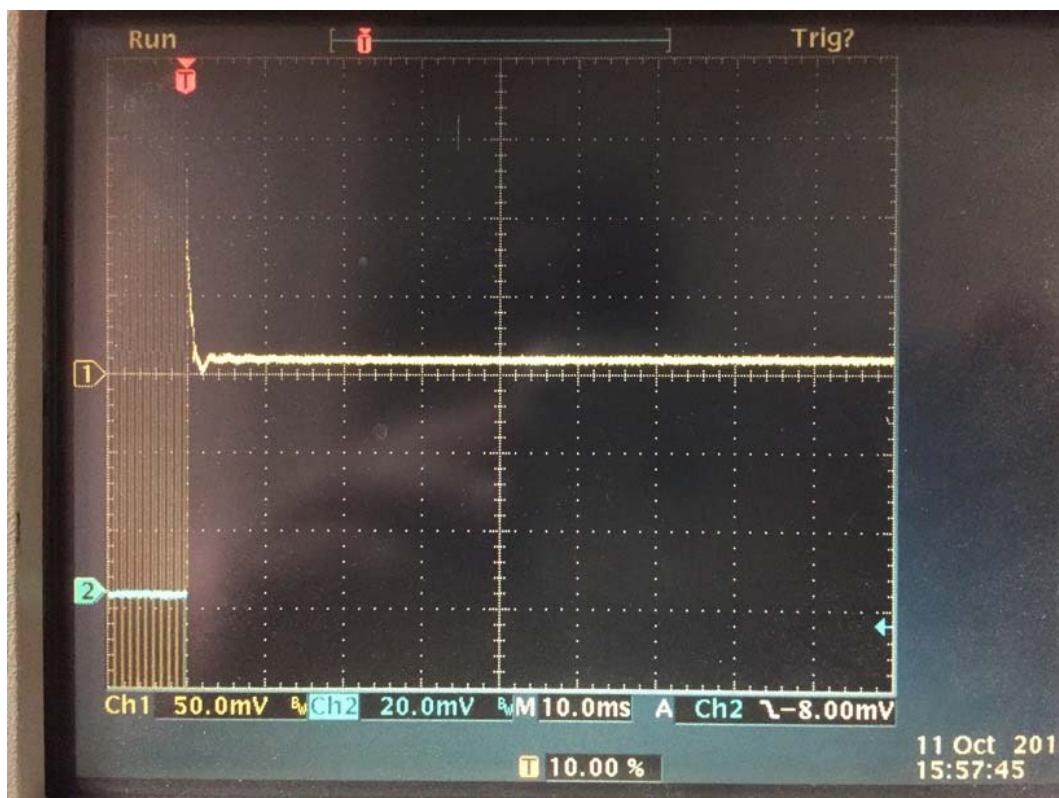


Attack

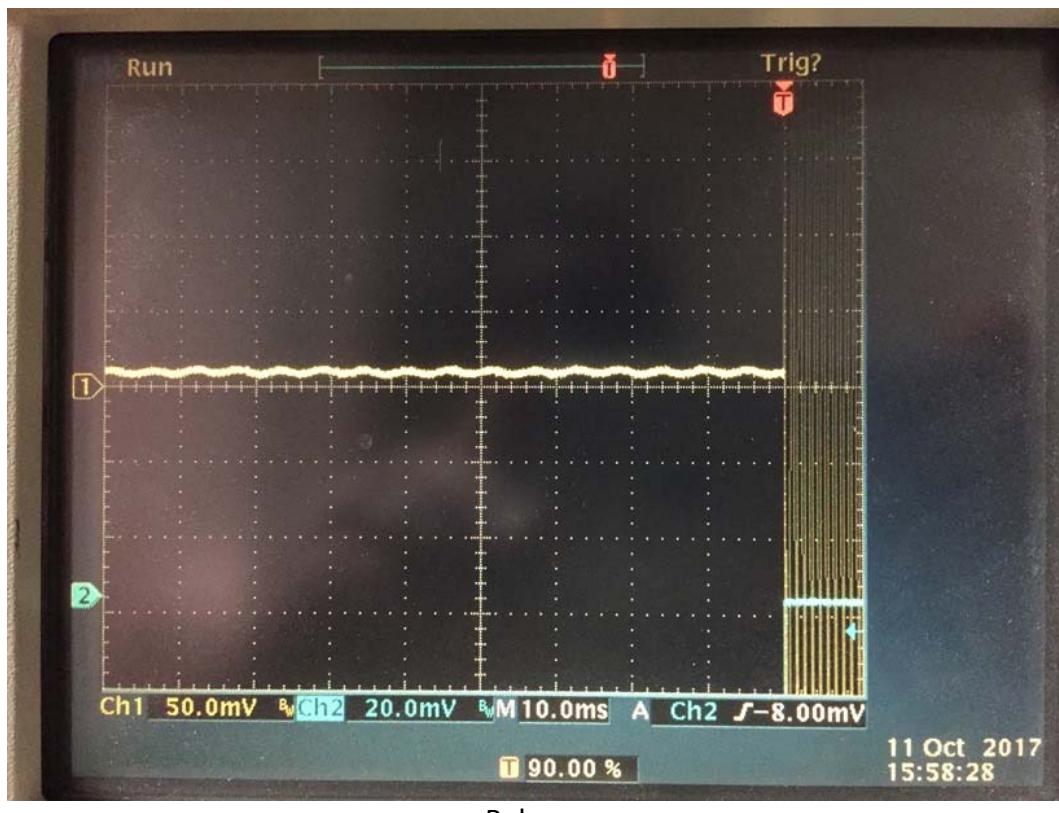


Release

### 7.2.3 Top Channel

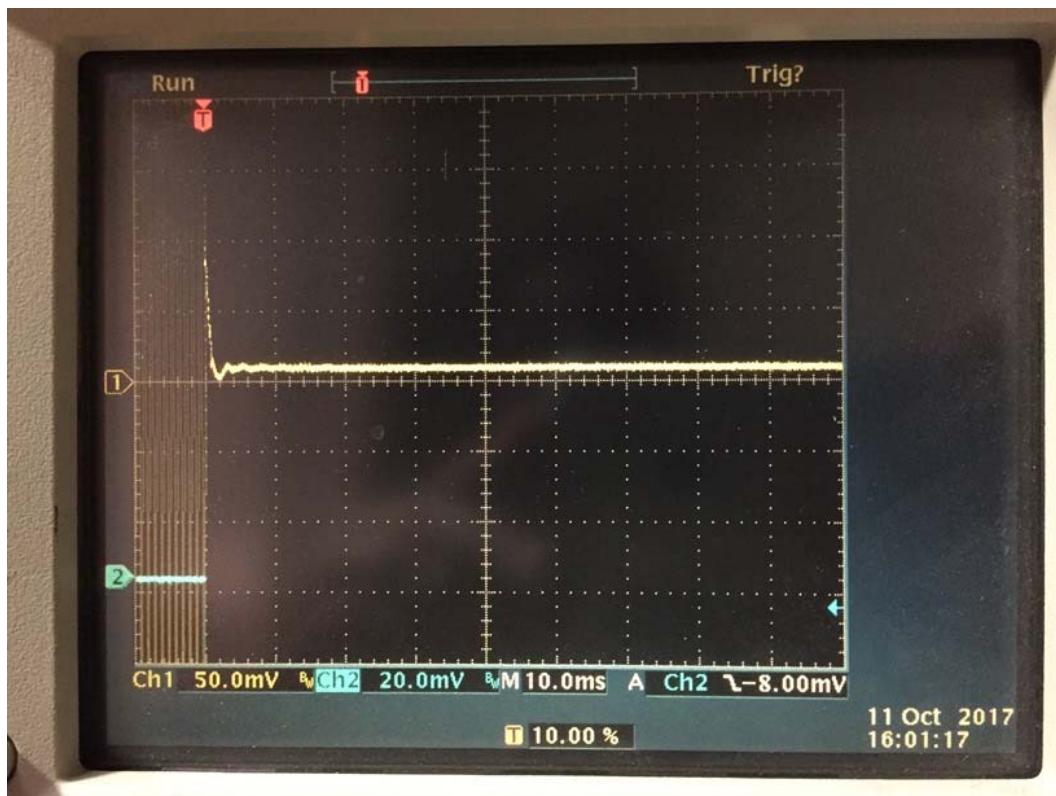

Attack

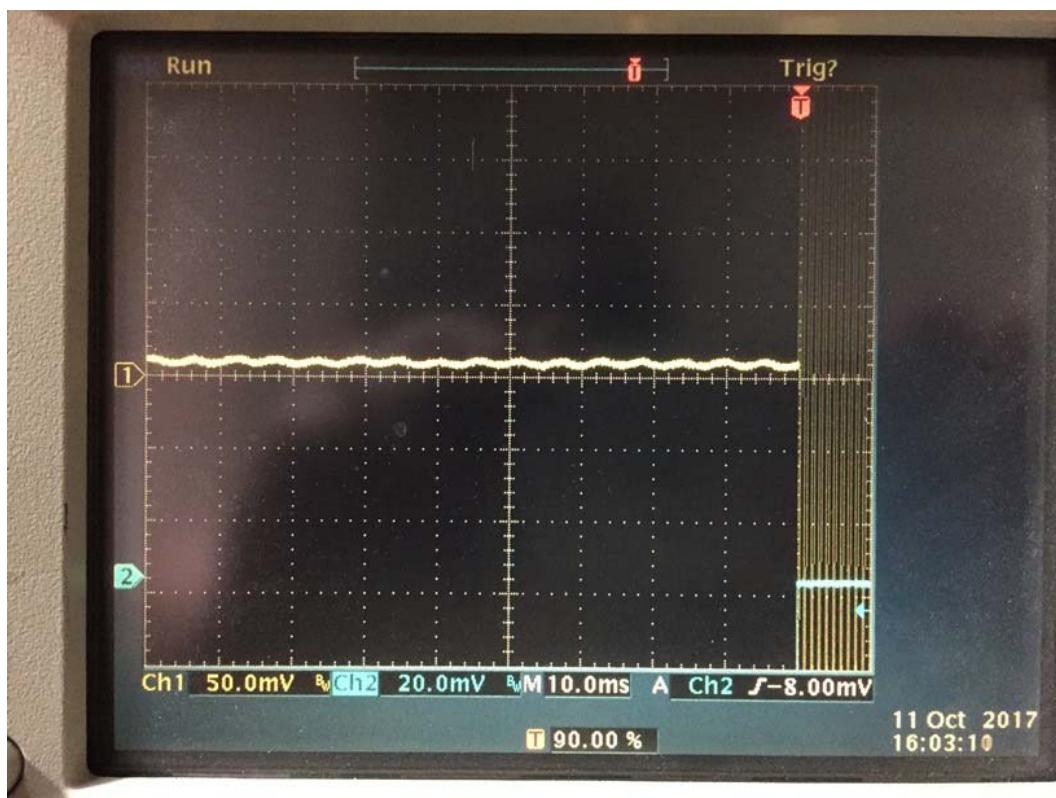

Release

## 8.0 Emission Bandwidth

### 8.1 Procedure

The EUT antenna port is coupled direct to the spectrum analyzer for measurement.

### 8.2 Criteria

Parameter	Section Number	Date
20 dB Bandwidth for Reporting	90.210(c), 90.203(j)(3), 2.1049   RSS-119 Issue 12, 5.5	11 Oct 2017

### 8.3 Results


<b>Table 8.3.1 Bandwidth 20 dB (kHz) 25 kHz Channel Spacing</b>	
Frequency	Measured Bandwidth
150.80 MHz	6.15 kHz
161.70 MHz	6.15 kHz
173.40 MHz	6.15 kHz

<b>Table 8.3.2 Bandwidth 20 dB (kHz) 12.5 kHz Channel Spacing</b>	
Frequency	Measured Bandwidth
150.80 MHz	4.15 kHz
161.70 MHz	4.15 kHz
173.40 MHz	4.15 kHz


The EUT satisfied the channel usage requirement.

Measurements appear below.

### 8.3.1 25 kHz Channel Spacing

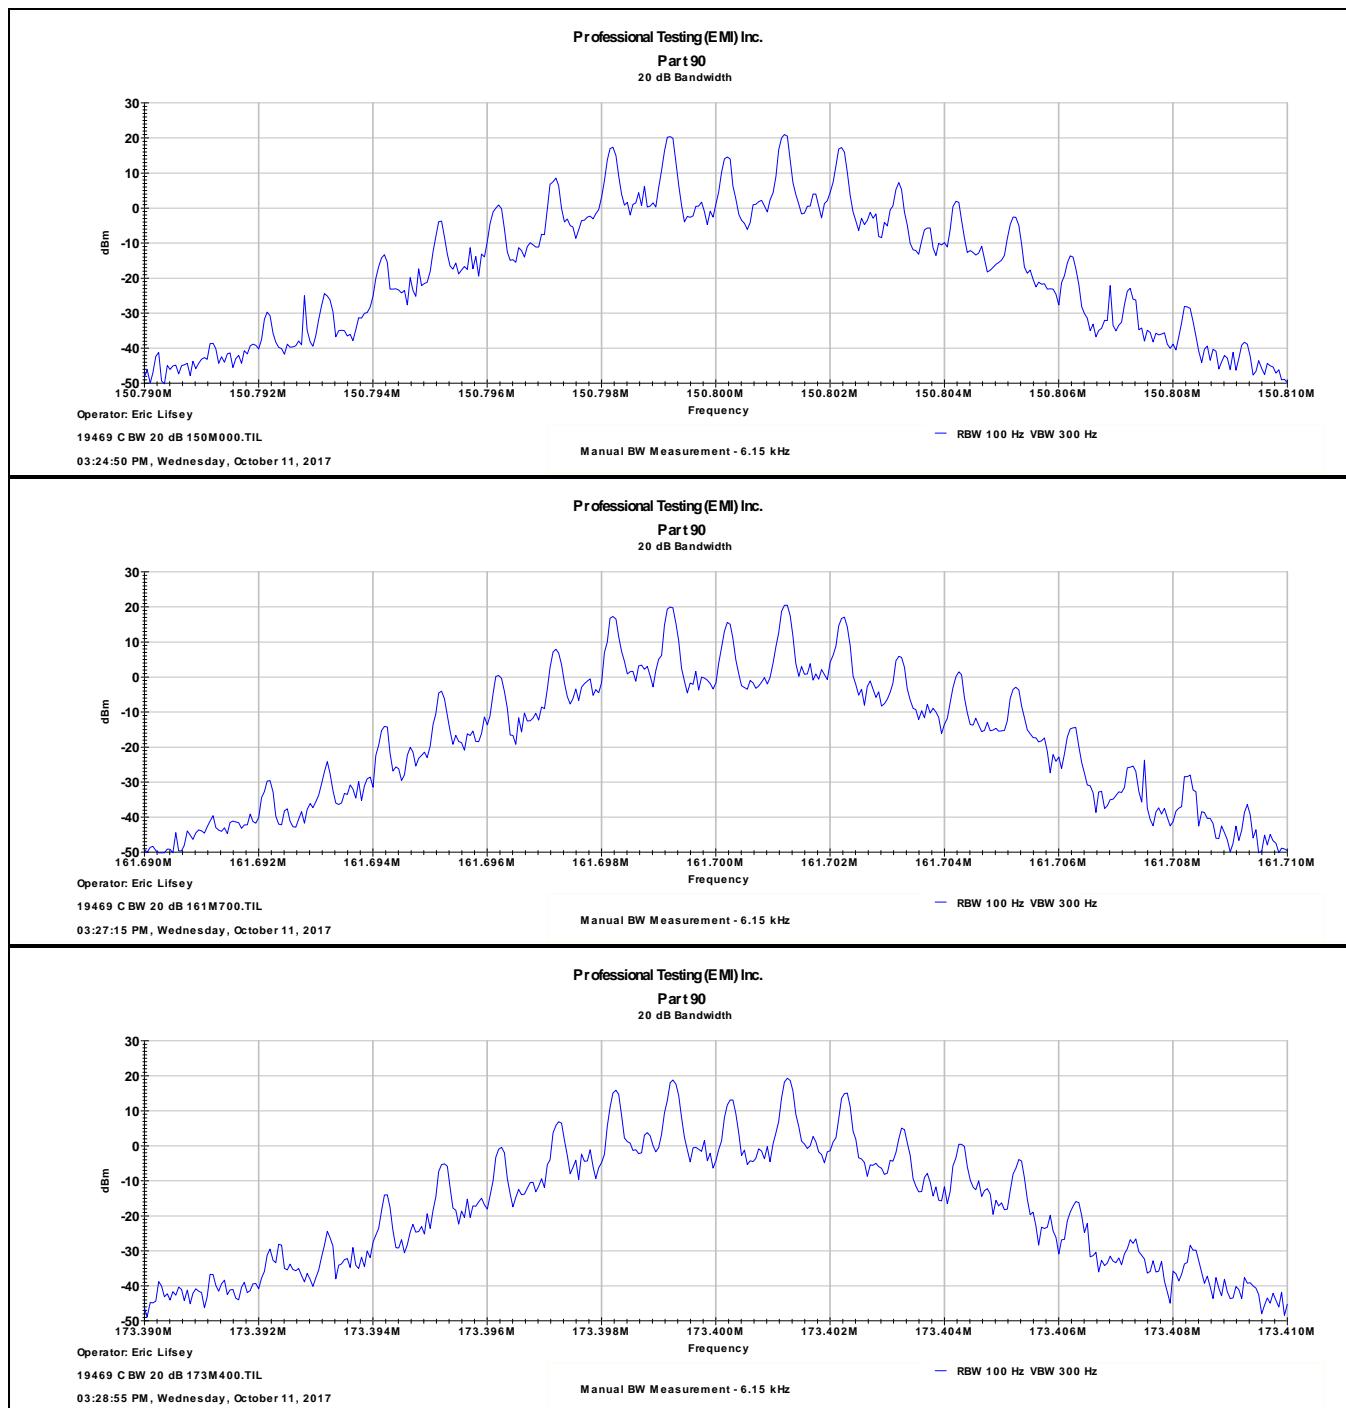

### 8.3.2 12.5 kHz Channel Spacing

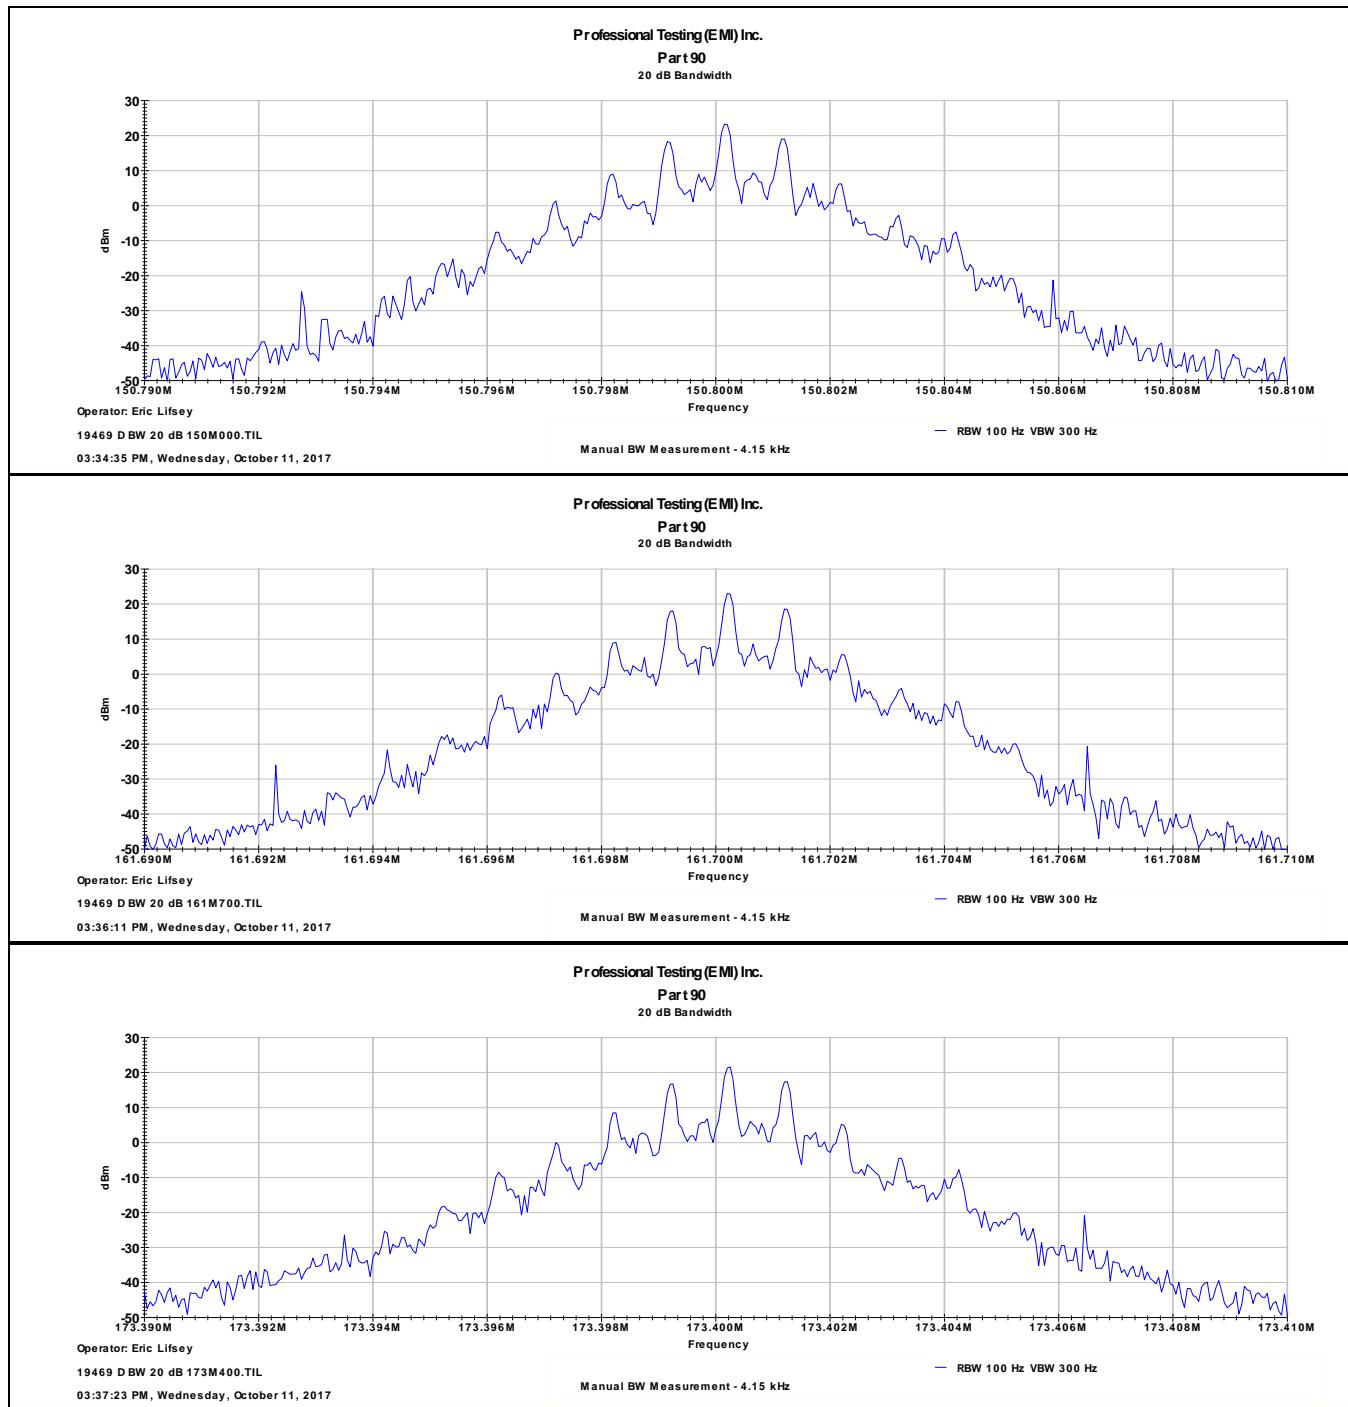

## 9.0 Equipment Lists

### 9.1 Conducted Power, Conducted Spurious, Mask, and Bandwidth

Asset #	Manufacturer	Model #	Description	Calibration Due
2216	HP	8593E	Spectrum Analyzer	18 Jan 2019
2134	Tenny	TPS T2C	Temperature Chamber	12 Oct 2017
C241	Pasternack	RG type	Coaxial Cable, Low Loss, ~5m	21 Jan 2018
0472	Tektronix	THS730A	Scope/DMM	15 Nov 2017
1831	HP	6622A	DC Power Supply	CIU

### 9.2 Frequency Stability

Asset #	Manufacturer	Model #	Description	Calibration Due
2216	HP	8593E	Spectrum Analyzer	18 Jan 2019
2134	Tenny	TPS	Temperature Chamber	12 Oct 2017
C247	Pasternack	RG type	Coaxial Cable, double shielded	CNR
0472	Tektronix	THS730A	Scope/DMM	15 Nov 2017
1831	HP	6622A	Adjustable DC Power Supply	CIU

### 9.3 Frequency Behavior

Asset #	Manufacturer	Model #	Description	Calibration Due
0836	Narda	3293-1	Broadband Directional Coupler	CNR
2228	Tektronix	TDS3034	Oscilloscope, Digital	19 Jul 2018
1816	Agilent	N5181A	Signal Generator	CIU
0742	HP	355C	Step Attenuator	CNR
0637	HP	8901A	Modulation Analyzer	CNR
None	Mini-Circuits	ZFRSC-43	3 Port Resistive Divider/Combiner SMA	CNR
0835	Narda	3293-1	Forward Power Coupler	CNR
0856	Narda	702-60	70 dB Step Attenuator	CNR
A100	Narda	94455-1	Diode Detector	CNR
1831	HP	6622A	Adjustable DC Power Supply	CIU
None	Various	None	RG Type coaxial cables	CNR

## 9.4 Radiated Spurious Transmit Mode and Receive Mode

Radiated Emissions Test Equipment List					
Tile! Software Version:		4.2.A, May 23, 2010, 08:38:52 AM			
Test Profile:		2016 RE_ClassA - Boresite+Mast_LowPRF_030617.til or 2016 RE_ClassB - Boresite+Mast_LowPRF_030617.til			
Asset #	Manufacturer	Model	Equipment Nomenclature	Serial Number	Calibration Due Date
1509A	Braden	TDK 10M	TDK 10M Chamber, NSA < 1 GHz	DAC-012915-005	7/10/2019
1890	HP	8447F	Preamp/Amp, 9kHz-1300MHz, 28/25dB	3313A05298	2/1/2018
1937	Agilent	E4440A	Spectrum Analyzer, 3 Hz - 26.5 GHz, Opt. AYZ	MY44808298	11/15/2017
1926	ETS-Lindgren	3142D	Antenna, Biconilog, 26 MHz - 6 GHz	135454	3/7/2019
C027D	PTI	None	Relay	none	N/A
1327	EMCO	1050	Controller, Antenna Mast	none	N/A
0942	EMCO	11968D	Turntable, 4ft.	9510-1835	N/A
1969	HP	11713A	Attenuator/Switch Driver	3748A04113	N/A
1509B	Braden	TDK 10M	TDK 10M Chamber, VSWR > 1 GHz	DAC-012915-005	6/23/2019
2004	Miteq	AFS44-00101800- 2S-10P-44	Amplifier, 40dB, .1-18GHz	0	1/11/2018
C030	none	none	Cable Coax, N-N, 30m, 30 MHz - 18GHz	none	9/28/2018
1325	EMCO	1050	Controller, Antenna Mast	9003-1461	N/A
1780	ETS-Lindgren	3117	Antenna, Double Ridged Guide Horn, 1 - 18 GHz	110313	3/15/2019

## Appendix: Policy, Rationale, and Evaluation of EMC Measurement Uncertainty

All uncertainty calculations, estimates and expressions thereof shall be in accordance with NIST policy. Since PTI operates in accordance with NIST (NVLAP) Handbook 150-11: 2007, all instrumentation having an effect on the accuracy or validity of tests shall be periodically calibrated or verified traceable to national standards by a competent calibration laboratory. The certificates of calibration or verification on this instrumentation shall include estimates of uncertainty as required by NIST Handbook 150-11.

### 1. Rationale and Summary of Expanded Uncertainty.

Each piece of instrumentation at PTI that is used in making measurements for determining conformance to a standard (or limit), shall be assessed to evaluate its contribution to the overall uncertainty of the measurement in which it is used. The assessment of each item will be based on either a type A evaluation or a type B evaluation. Most of the evaluations will be type B, since they will be based on the manufacturer's statements or specifications of the calibration tolerances, or uncertainty will be stated along with a brief rationale for the type of evaluation and the resulting stated uncertainties.

The individual uncertainties included in the combined standard uncertainty for a specific test result will depend on the configuration in which the item of instrumentation is used. The combination will always be based on the law of propagation of uncertainty. Any systematic effects will be accommodated by including their uncertainties, in the calculation of the combined standard uncertainty; except that if the direction and amount of the systematic effect cannot be determined and separated from its uncertainty, the whole effect will be treated as uncertainty and combined along with the other elements of the test setup.

Type A evaluations of standard uncertainty will usually be based on calculating the standard deviation of the mean of a series of independent observations, but may be based on a least-squares curve fit or the analysis of variance for unusual situations. Type B evaluations of standard uncertainty will usually be based on manufacturer's specifications, data provided in calibration reports, and experience. The type of probability distribution used (normal, rectangular, a priori, or u-shaped) will be stated for each Type B evaluation.

In the evaluation of the uncertainty of each type of measurement, the uncertainty caused by the operator will be estimated. One notable operator contribution to measurement uncertainty is the manipulation of cables to maximize the measured values of radiated emissions. The operator contribution to measurement uncertainty is evaluated by having several operators independently repeat the same test. This results in a Type A evaluation of operator-contributed measurement uncertainty.

A summary of the expanded uncertainties of PTI measurements is shown as Table 1. These are the worst-case uncertainties considering all operative influence factors.

**Table 1: Summary of Measurement Uncertainties for Site 45**

Type of Measurement	Frequency Range	Meas. Dist.	Expanded Uncertainty U, dB (k=2)
Mains Conducted Emissions	150 kHz to 30 MHz	N/A	2.9
Telecom Conducted Emissions	150 kHz to 30 MHz	N/A	2.8
Radiated Emissions	30 to 1,000 MHz	10 m	4.8
	1 to 18 GHz	3 m	5.7

## **End of Report**

(This page intentionally left blank.)