



Dates of Tests: Feb 10~18, 2011
Test Report S/N: LR500111102E
Test Site : LTA Co., Ltd.

CERTIFICATION OF COMPLIANCE

FCC ID.

Y6V-RCV01B

APPLICANT

LAONEX CO., LTD.

Equipment Class	:	Digital Transmission System (DTS)
Manufacturing Description	:	AirKIT USB Dongle
Manufacturer	:	LAONEX CO., LTD.
Model name	:	Y6V-RCV01B
Test Device Serial No.:	:	Identical prototype
Rule Part(s)	:	FCC Part 15.247 Subpart C ; ANSI C-63.4-2003
Frequency Range	:	2418MHz ~ 2478MHz
Max. Output Power	:	Max 2.56dBm – Conducted
Data of issue	:	February 21, 2011

This test report is issued under the authority of:

The test was supervised by:




Hyun-Chae You, Manager

Il-Shin kim, Test Engineer

This test result only responds to the tested sample. It is not allowed to copy this report even partly without the allowance of the test laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.



NVLAP LAB Code.: 200723-0

TABLE OF CONTENTS

1. GENERAL INFORMATION'S	3
2. INFORMATION'S ABOUT TEST ITEM	4
3. TEST REPORT	5
3.1 SUMMARY OF TESTS	5
3.2 TECHNICAL CHARACTERISTICS TEST	6
3.2.1 6dB BANDWIDTH	6
3.2.2 PEAK OUTPUT POWER	9
3.2.3 POWER SPECTRAL DENSITY	12
3.2.4 BAND – EDGE & SPURIOUS	15
3.2.5 FIELD STRENGTH OF HARMONICS	21
3.2.6 AC CONDUCTED EMISSIONS	24
 APPENDIX	
APPENDIX TEST EQUIPMENT USED FOR TESTS	27

1. General information's

1-1 Test Performed

Company name : LTA Co., Ltd.
Address : 243, Jubug-ri, Yangji-Myeon, Youngin-Si, Kyunggi-Do, Korea. 449-822
Web site : <http://www.ltalab.com>
E-mail : chahn@ltalab.com
Telephone : +82-31-323-6008
Facsimile : +82-31-323-6010

Quality control in the testing laboratory is implemented as per ISO/IEC 17025 which is the “General requirements for the competents of calibration and testing laboratory”.

1-2 Accredited agencies

LTA Co., Ltd. is approved to perform EMC testing by the following agencies:

Agency	Country	Accreditation No.	Validity	Reference
NVLAP	U.S.A	200723-0	2011-09-30	ECT accredited Lab.
RRL	KOREA	KR0049	2011-09-01	EMC accredited Lab.
FCC	U.S.A	610755	2011-04-22	FCC filing
VCCI	JAPAN	R2133, C2307	2011-06-21	VCCI registration
IC	CANADA	IC5799	2012-05-14	IC filing

2. Information's about test item

2-1 Applicant & Manufacturer

Company name : LAONEX CO., LTD.
 Address : Digital Empire Bldg., C-206, 980-3, Yeongtong-Dong,
 Yeongtong-Gu, Suwon-Si, Gyeonggi-Do, Korea
 Tel / Fax : TEL No : +82-70-7759-5164 FAX No : +82-505-953-5164

2-2 Equipment Under Test (EUT)

Trade name : AirKIT USB Dongle
 FCC ID : Y6V-RCV01B
 Model name : RCV01B
 Serial number : Identical prototype
 Date of receipt : February 10, 2011
 EUT condition : Pre-production, not damaged
 Antenna type : PCB antenna with Max. -5.384dBi gain
 Frequency Range : 2418MHz ~ 2478MHz
 RF output power : Max 2.56dBm - Conducted
 Number of channels : 5
 Type of Modulation : GFSK
 Channel spacing : 15MHz
 Power Source : 5.0Vdc by USB Power
 Firmware version : -

2-3 Tested frequency

	LOW	MID	HIGH
Frequency (MHz)	2418	2448	2478

2-4 Ancillary Equipment

Equipment	Model No.	Serial No.	Manufacturer
NOTEBOOK	VOSTRO 1015	G4YRDN1	DELL
PRINTER	STYLUS C59	JF5Y020825	EPSON

3. Test Report

3.1 Summary of tests

FCC Part Section(s)	Parameter	Limit	Test Condition	Status (note 1)
15.247(a)	6 dB Bandwidth	> 500kHz	Conducted	C
15.247(b)	Transmitter Peak Output Power	< 1Watt		C
15.247(d)	Transmitter Power Spectral Density	< 8dBm @ 3kHz		C
15.247(d)	Band Edge & Spurious	> 20 dBc		C
15.209	Field Strength of Harmonics	Emission	Radiated	C
15.207	AC Conducted Emissions	Emissions	Conducted	C
15.203	Antenna requirement	-	-	C

Note 1: C=Complies NC=Not Complies NT=Not Tested NA=Not Applicable

Note 2: The data in this test report are traceable to the national or international standards.

→ Antenna Requirement

This unit complies with the requirement of §15.203.

The antenna is connected to inside of EUT. And type is PCB antenna.

The sample was tested according to the following specification:

FCC Parts 15.247; ANSI C-63.4-2003

3.2 Technical Characteristics Test

3.2.1 6 dB Bandwidth

Procedure:

The bandwidth at 6dB below the highest in-band spectral density was measured with a spectrum analyzer connected to the antenna terminal, while EUT is operating in transmission mode at the appropriate frequencies.

After the trace being stable, Use the marker-to-peak function to set the marker to the peak of the emission. Use the marker-delta function to measure 6dB down one side of the emission. Reset the marker-delta function, and move the marker to the other side of the emission, until it is (as close as possible to) even with the reference marker level. The marker-delta reading at this point is the 6 dB bandwidth of the emission.

The spectrum analyzer is set to:

Center frequency = the highest, middle and the lowest channels

RBW = 100 kHz

Span = 5 MHz

VBW = 100 kHz (VBW $\geq$ RBW)

Sweep = auto

Trace = max hold

Detector function = peak

Measurement Data:

Frequency (MHz)	Test Results	
	Measured Bandwidth (MHz)	Result
2418	0.622	Complies
2448	0.666	Complies
2478	0.521	Complies

- See next pages for actual measured spectrum plots.


Minimum Standard:

6 dB Bandwidth > 500kHz


Measurement Setup

Same as the Chapter 3.2.1 (Figure 1)


Low Channel

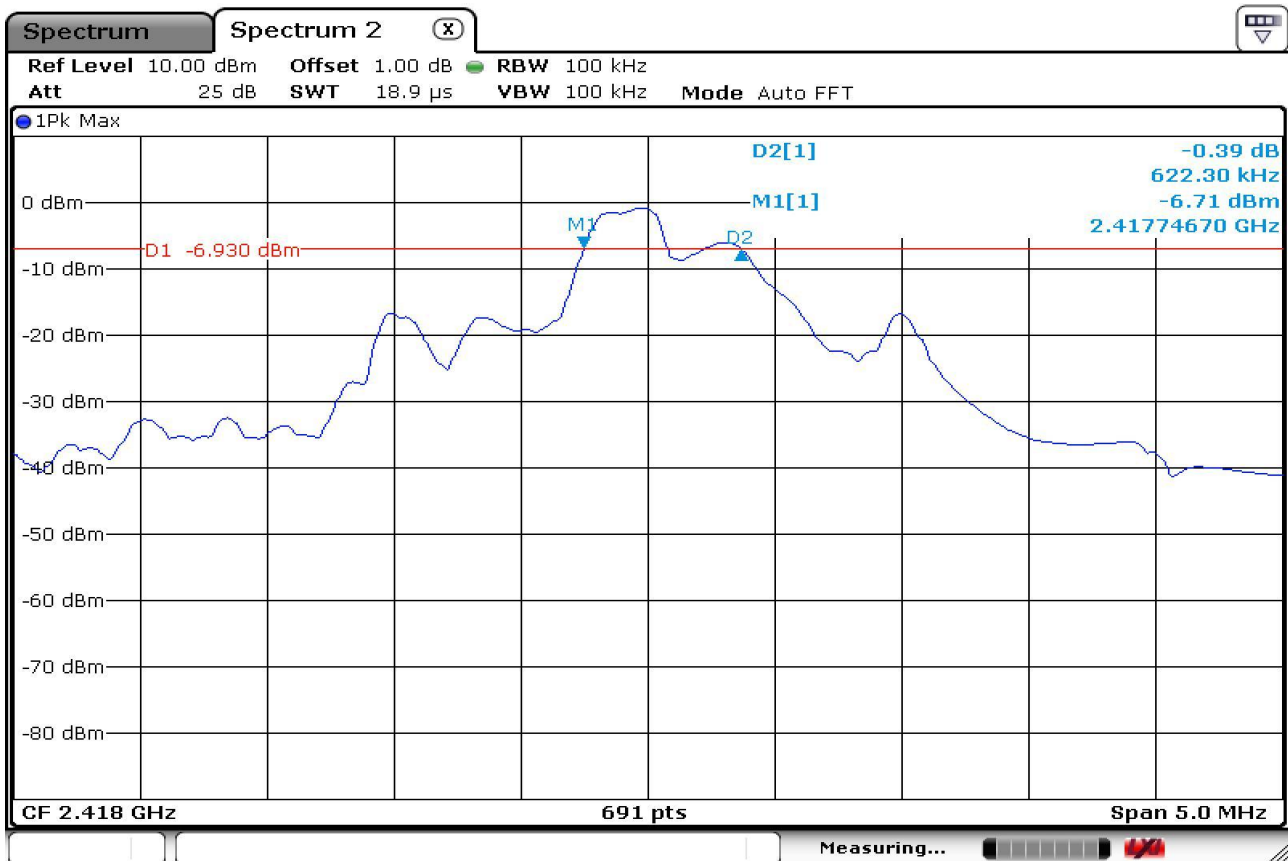

Mid Channel

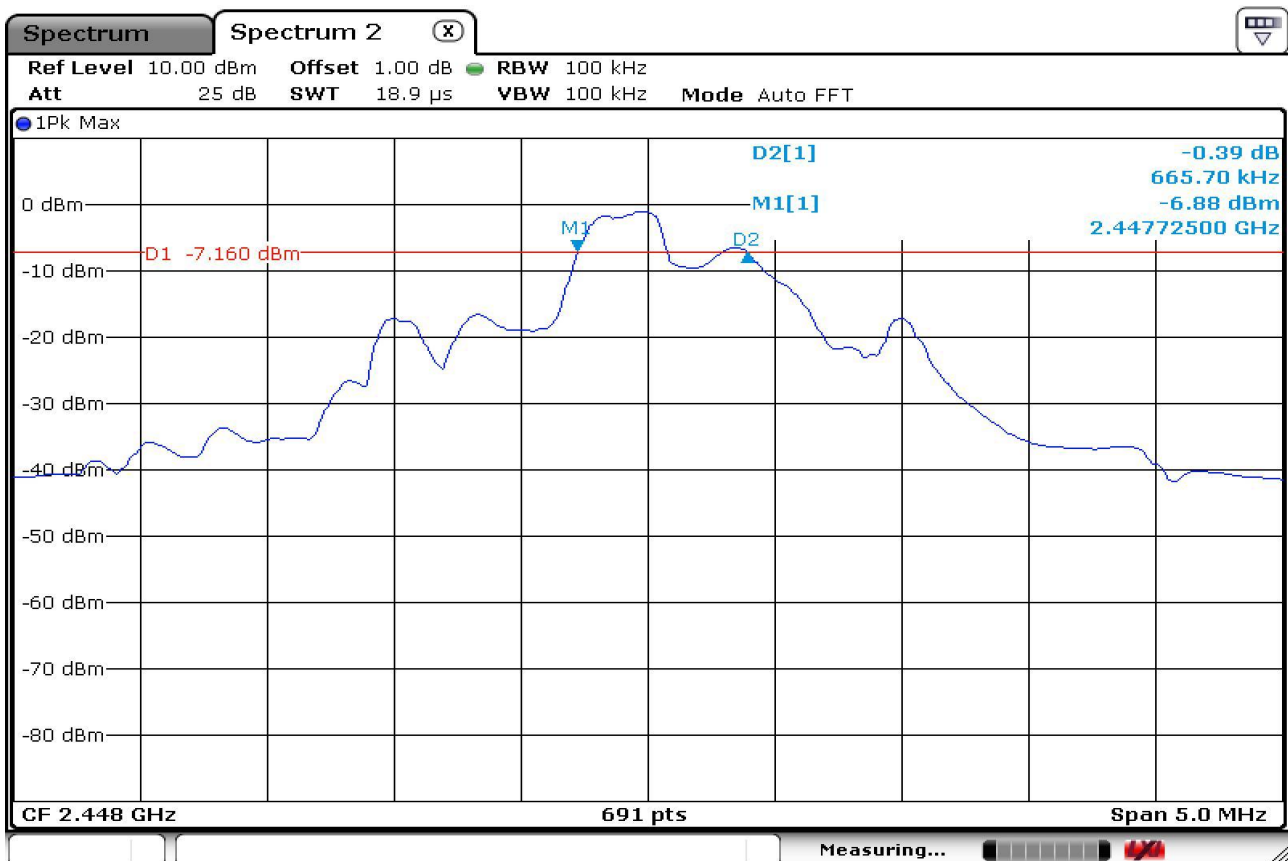

High Channel

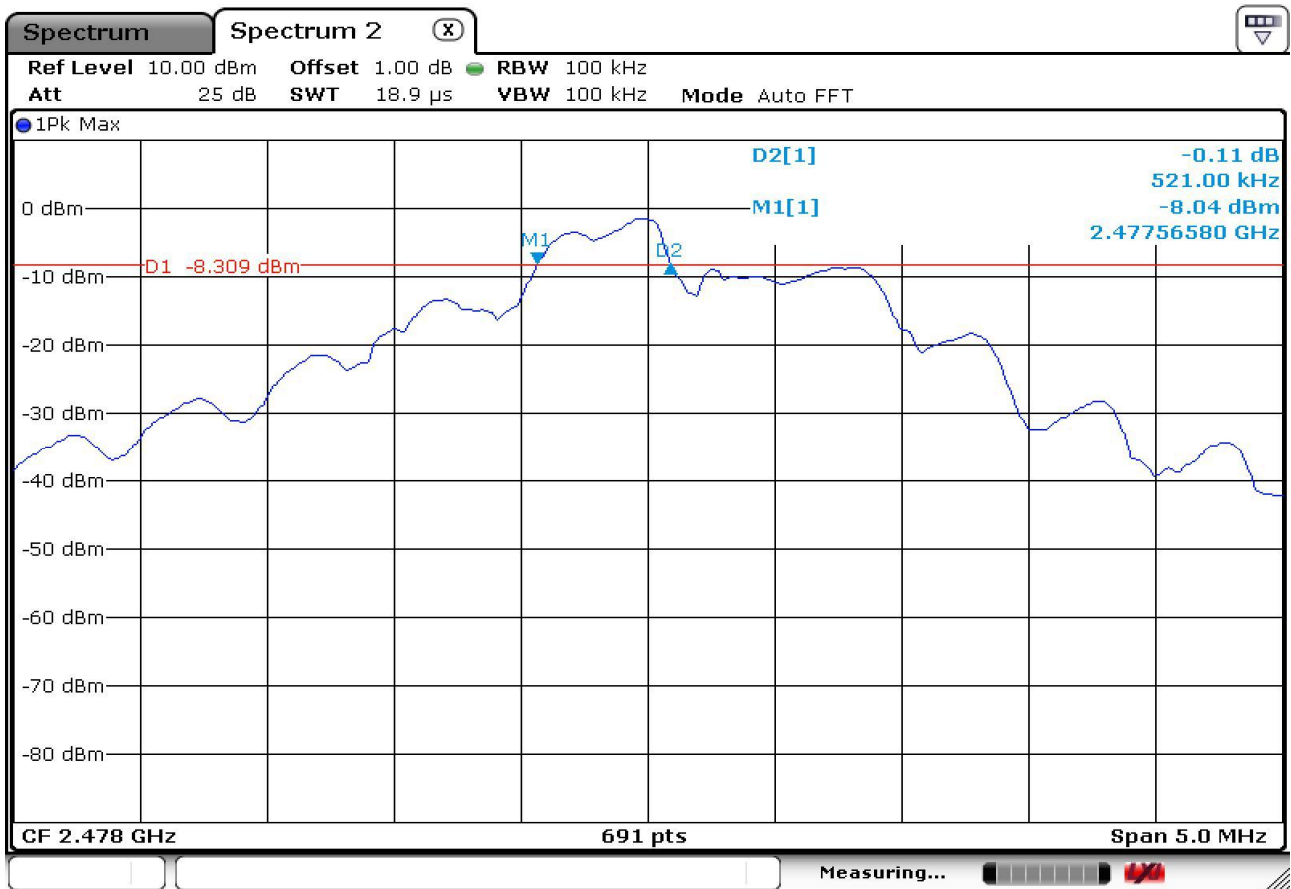

3.2.2 Peak Output Power Measurement

Procedure:

The maximum peak output power was measured with the spectrum analyzer connected to the antenna output of the EUT. The spectrum analyzer's internal channel power integration function is used to integrate the power over a bandwidth greater than or equal to the 99% bandwidth. The EUT was operating in transmit mode at the appropriate center frequency.

The spectrum analyzer is set to:

Center frequency = the highest, middle and the lowest channels

RBW = 1MHz

Span = auto

VBW = 1MHz (VBW $\geq$ RBW)

Sweep = auto

Detector function = peak

Measurement Data:


Frequency (MHz)	Test Results		
	dBm	mW	Result
2418	1.49	1.409	Complies
2448	1.87	1.538	Complies
2478	2.56	1.803	Complies

- See next pages for actual measured spectrum plots.


Minimum Standard:

Peak output power	< 1W
-------------------	------

Low Channel

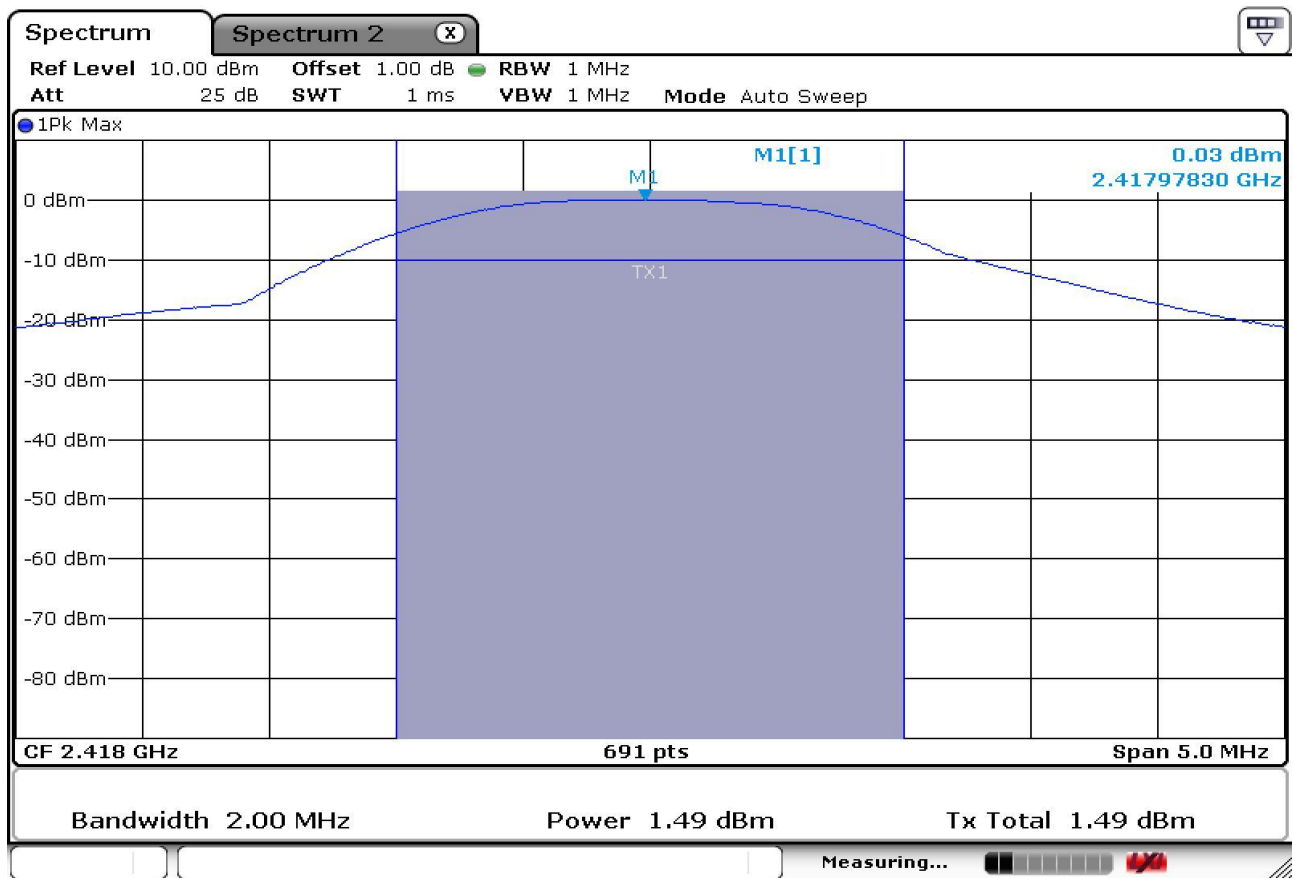

Mid Channel

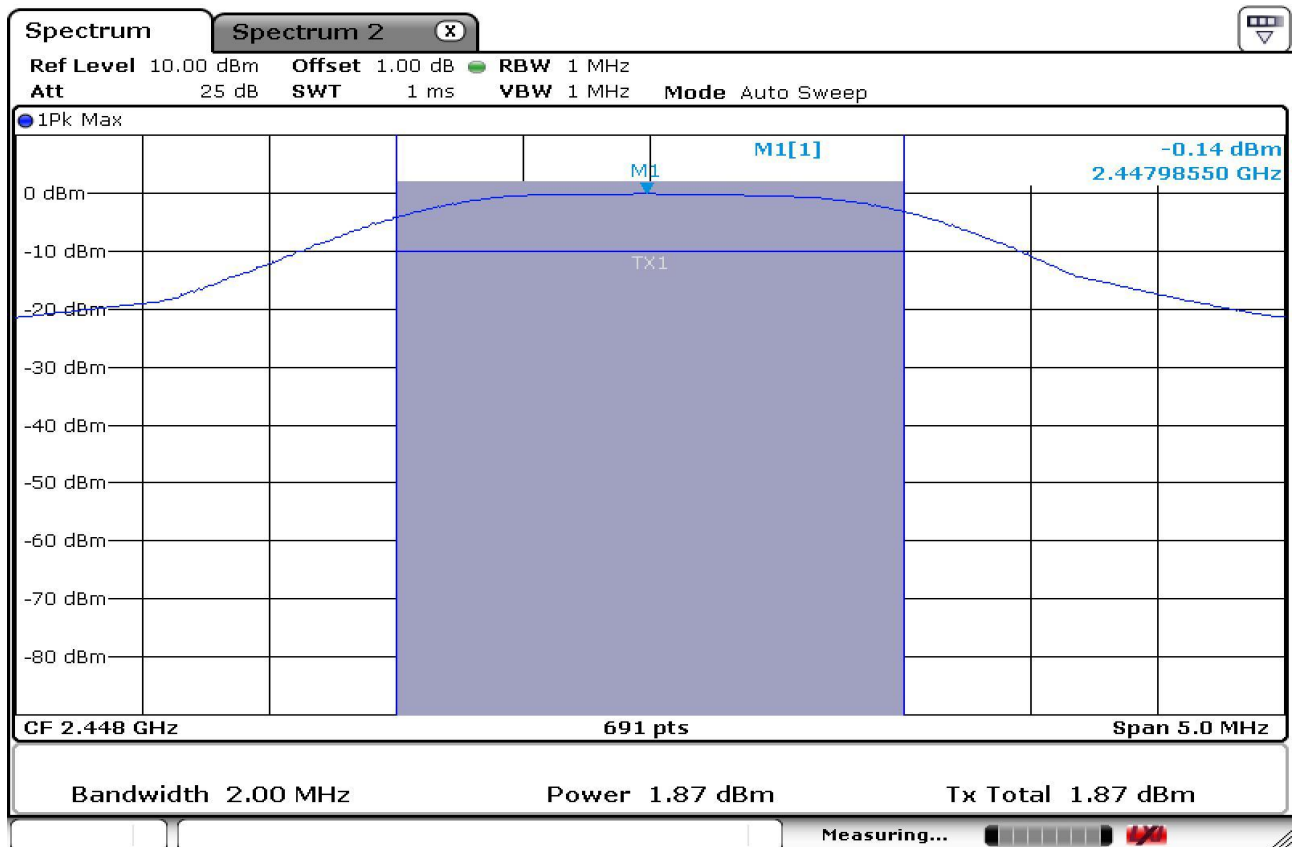

Spectrum Spectrum 2

3.2.3 Power Spectral Density

Procedure:

The peak power density is measured with a spectrum analyzer connected to the antenna terminal while the EUT is operating in transmission mode at the appropriate frequencies.

The spectrum analyzer is set to:

RBW = 3 kHz

Span = 300 kHz

VBW = 10 kHz

Sweep = 100 sec

Detector function = peak

Trace = max hold

Measurement Data:

Frequency (MHz)	Test Results	
	dBm	Result
2418	-7.66	Complies
2448	-8.05	Complies
2478	-9.43	Complies

- See next pages for actual measured spectrum plots.

Minimum Standard:


Power Spectral Density	< 8dBm @ 3kHz BW
------------------------	------------------

Measurement Setup


Same as the Chapter 3.2.1 (Figure 1)

Power Density Measurement


Low Channel

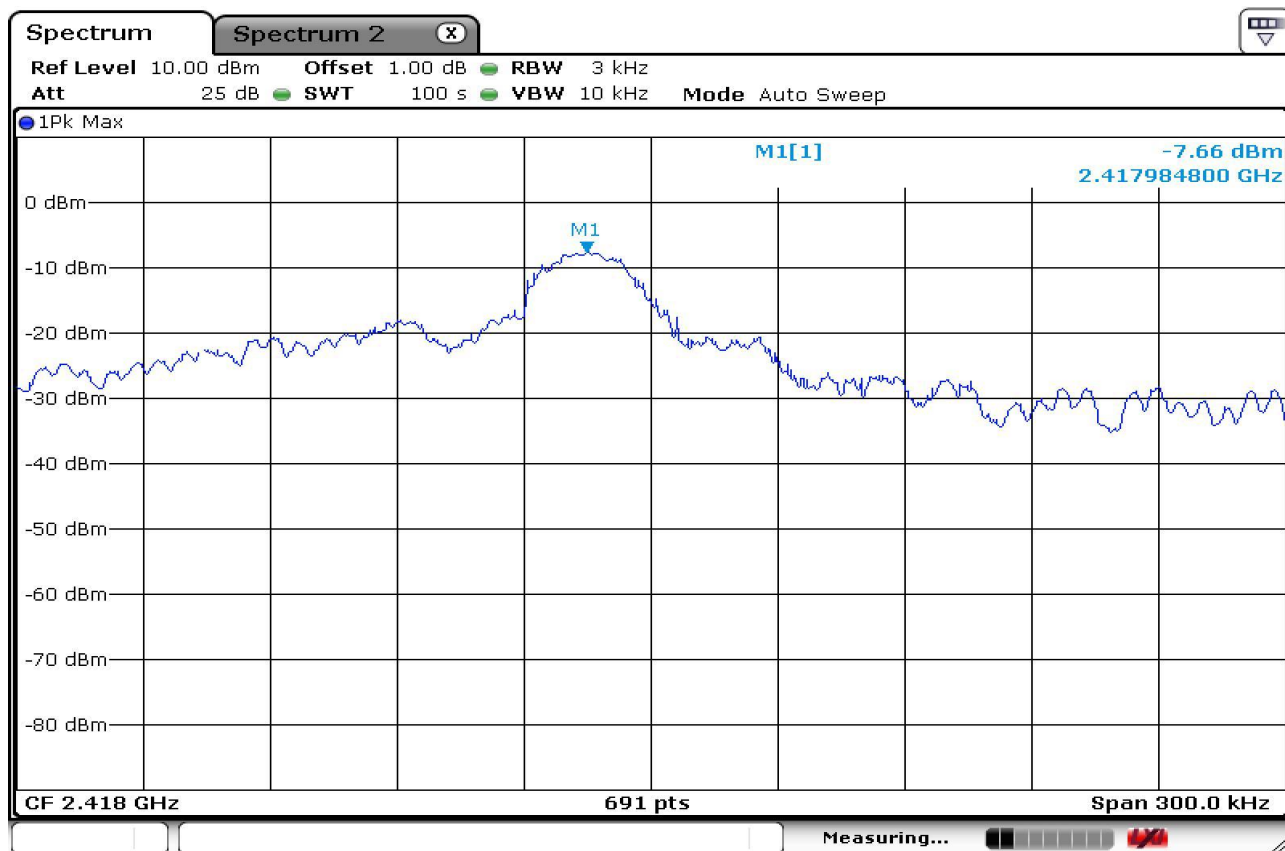

Mid Channel

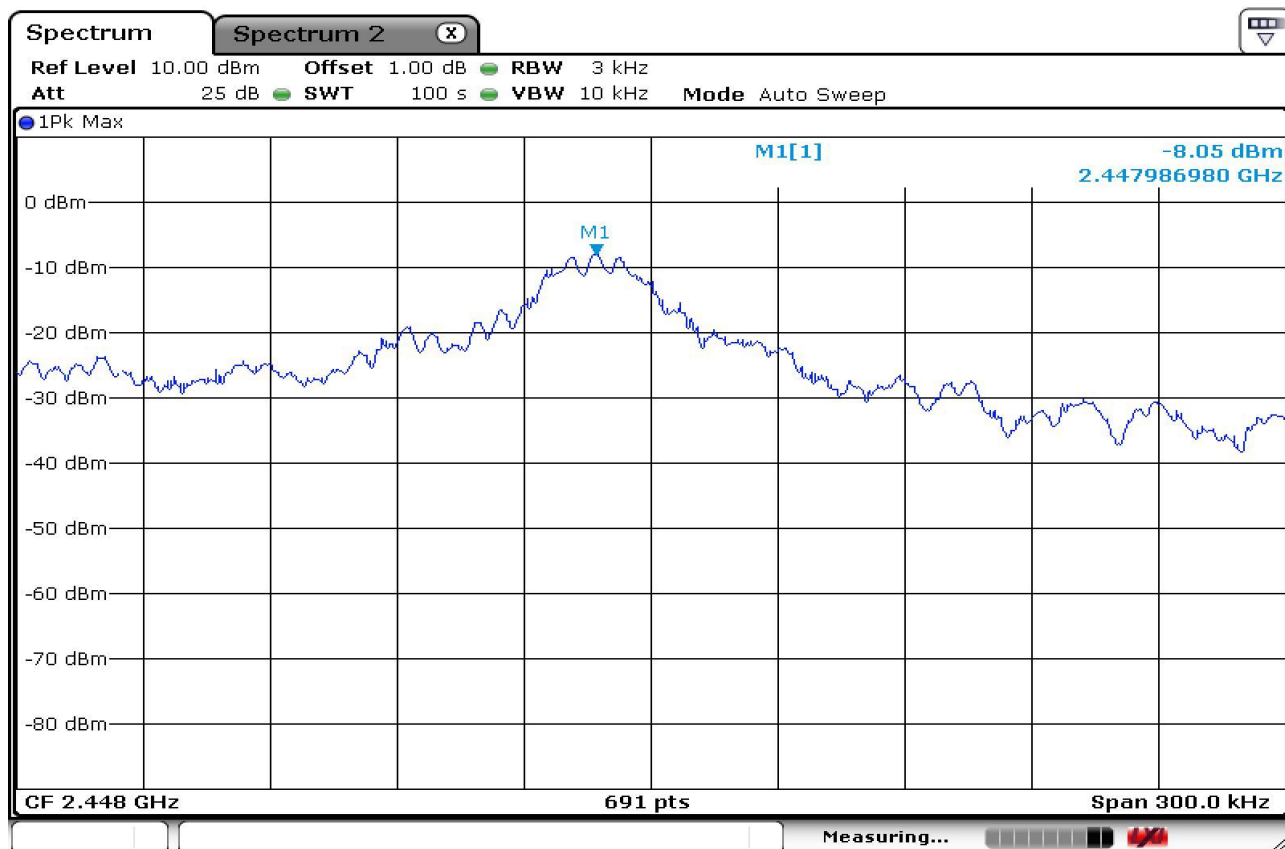

High Channel

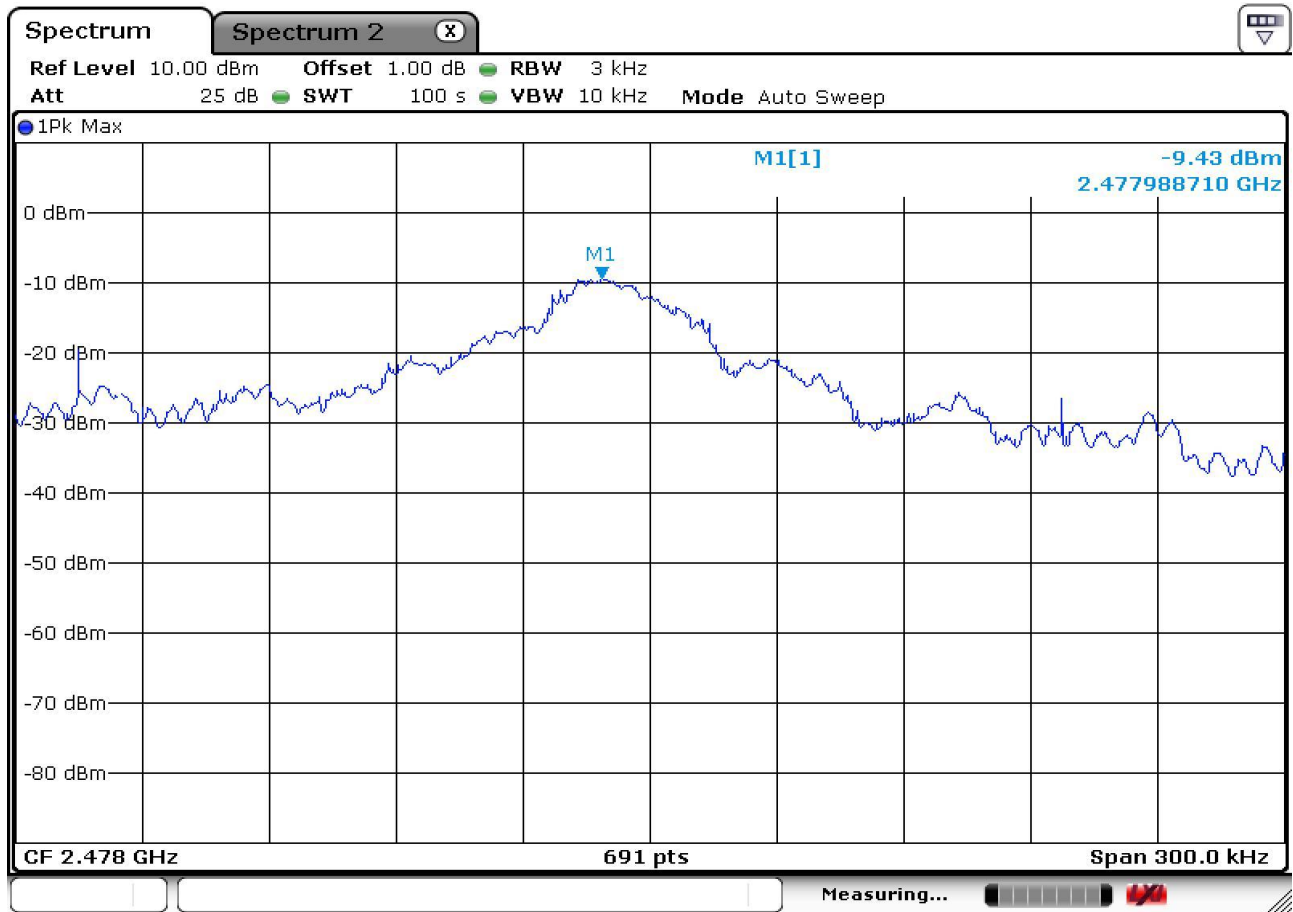

3.2.4 Band - edge & Spurious

Procedure:

The bandwidth at 20dB down from the highest inband spectral density is measured with a spectrum analyzer connected to the antenna terminal, while EUT is operating in transmission mode at the appropriate frequencies.

After the trace being stable, Use the marker-to-peak function to measure 20 dB down both sides of the intentional emission.

The spectrum analyzer is set to:

Center frequency = the highest, middle and the lowest channels

RBW = 100 kHz

VBW = 100 kHz

Span = 50 MHz

Detector function = peak

Trace = max hold

Sweep = auto

Radiated emissions which fall in the restricted bands, as defined in 15.205(a), must also comply with the radiated emission limits specified in 15.209(a)

The spectrum analyzer is set to:

Center frequency = the highest, the lowest channels

PEAK:

RBW = VBW = 1MHz, Sweep=Auto

Average:

RBW = 1MHz, VBW=10Hz, Sweep=Auto

Measurement Distance:

3m

Polarization:



Horizontal / Vertical

Measurement Data: Complies

- All conducted emission in any 100kHz bandwidth outside of the spread spectrum band was at least 20dB lower than the highest inband spectral density. Therefore the applying equipment meets the requirement.
- See next pages for actual measured spectrum plots.

Minimum Standard:	> 20 dBc
--------------------------	----------

Band-edge

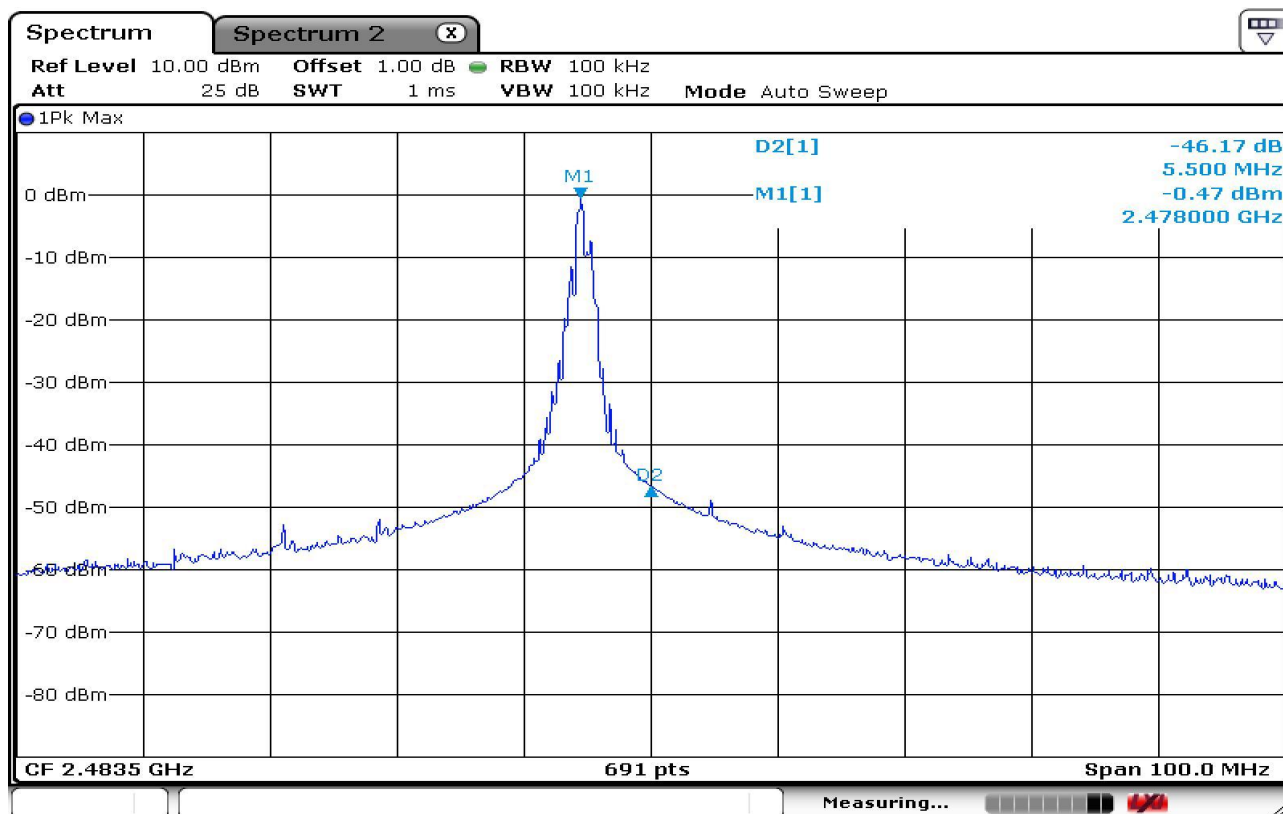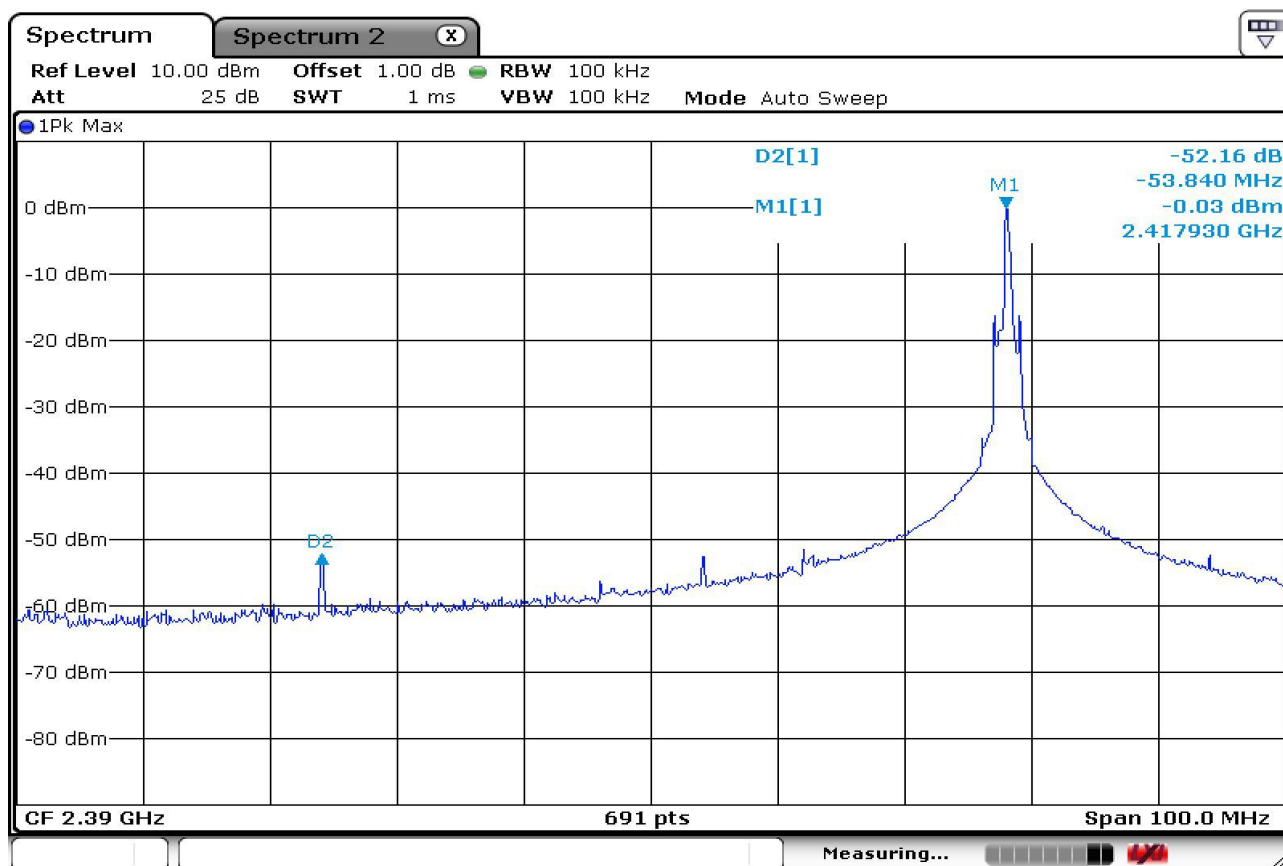

Band-edges in the restricted band 2310-2390 MHz measurement


Frequency	Reading		Pol.	Correction			Limits		Result		Margin	
	[dBuV/m]			Factor			[dBuV/m]		[dBuV/m]		[dB]	
[MHz]	AV / Peak			Antenna	Amp. Gain	Cable	AV / Peak		AV / Peak		AV / Peak	
2390	33.4	48.5	H	25.4	37.1	4.0	54.0	74.0	25.7	40.8	28.4	33.3

Band-edges in the restricted band 2483.5-2500 MHz measurement


Frequency	Reading [dBuV/m]		Pol.	Correction			Limits		Result		Margin	
				Factor			[dBuV/m]		[dBuV/m]		[dB]	
[MHz]	AV / Peak			Antenna	Amp. Gain	Cable	AV / Peak		AV / Peak		AV / Peak	
2483.5	32.4	52.4	H	25.4	37.1	4.0	54.0	74.0	24.7	44.7	29.4	29.4

Note : This EUT was tested in 3 orthogonal positions and the worst-case data was presented.


Low channel
Frequency Range = 30 MHz ~ 10th harmonic.

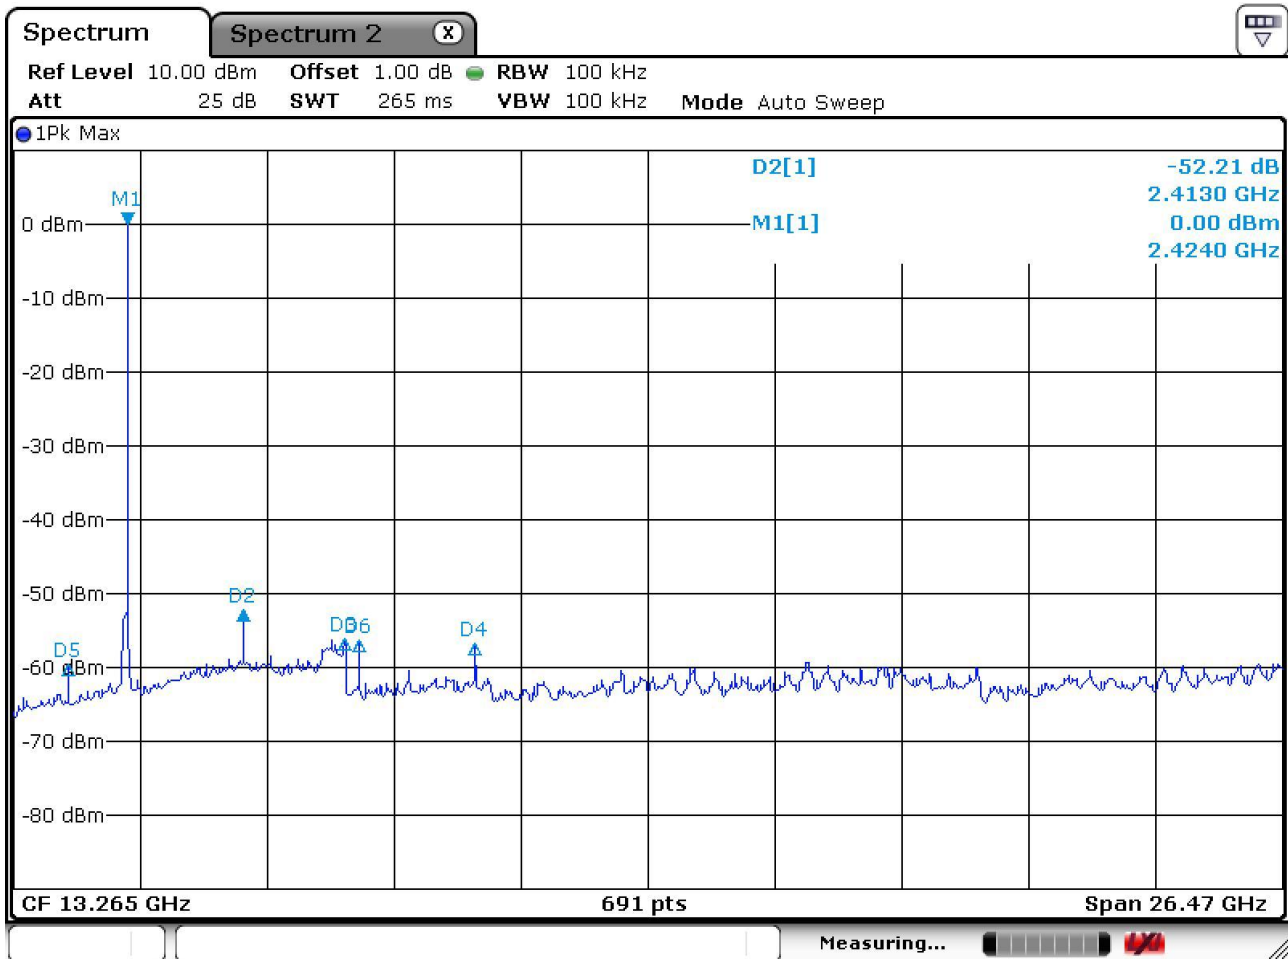

Mid channel
Frequency Range = 30 MHz ~ 10th harmonic.

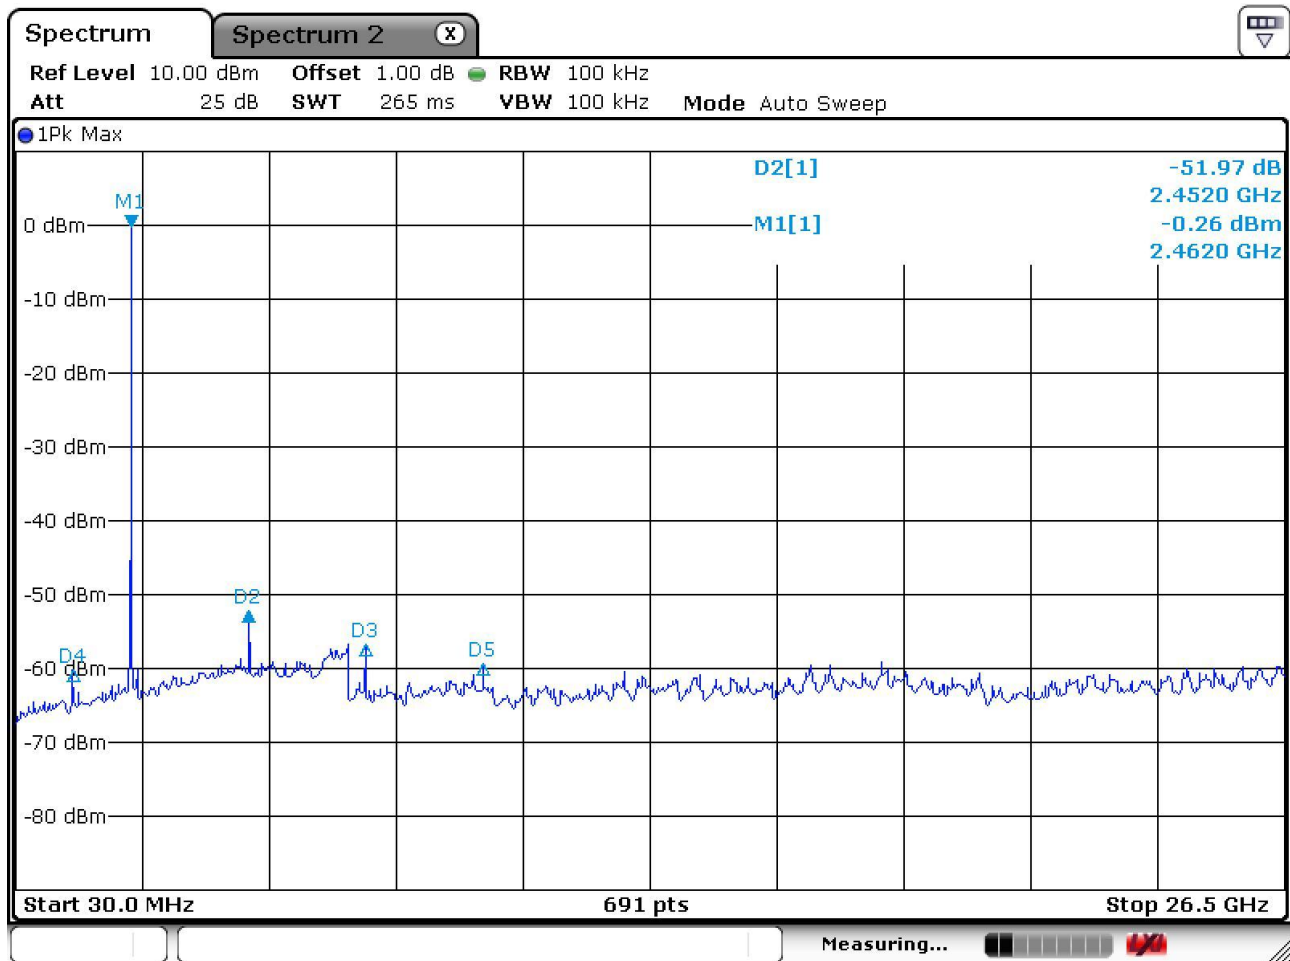

High channel
Frequency Range = 30 MHz ~ 10th harmonic.

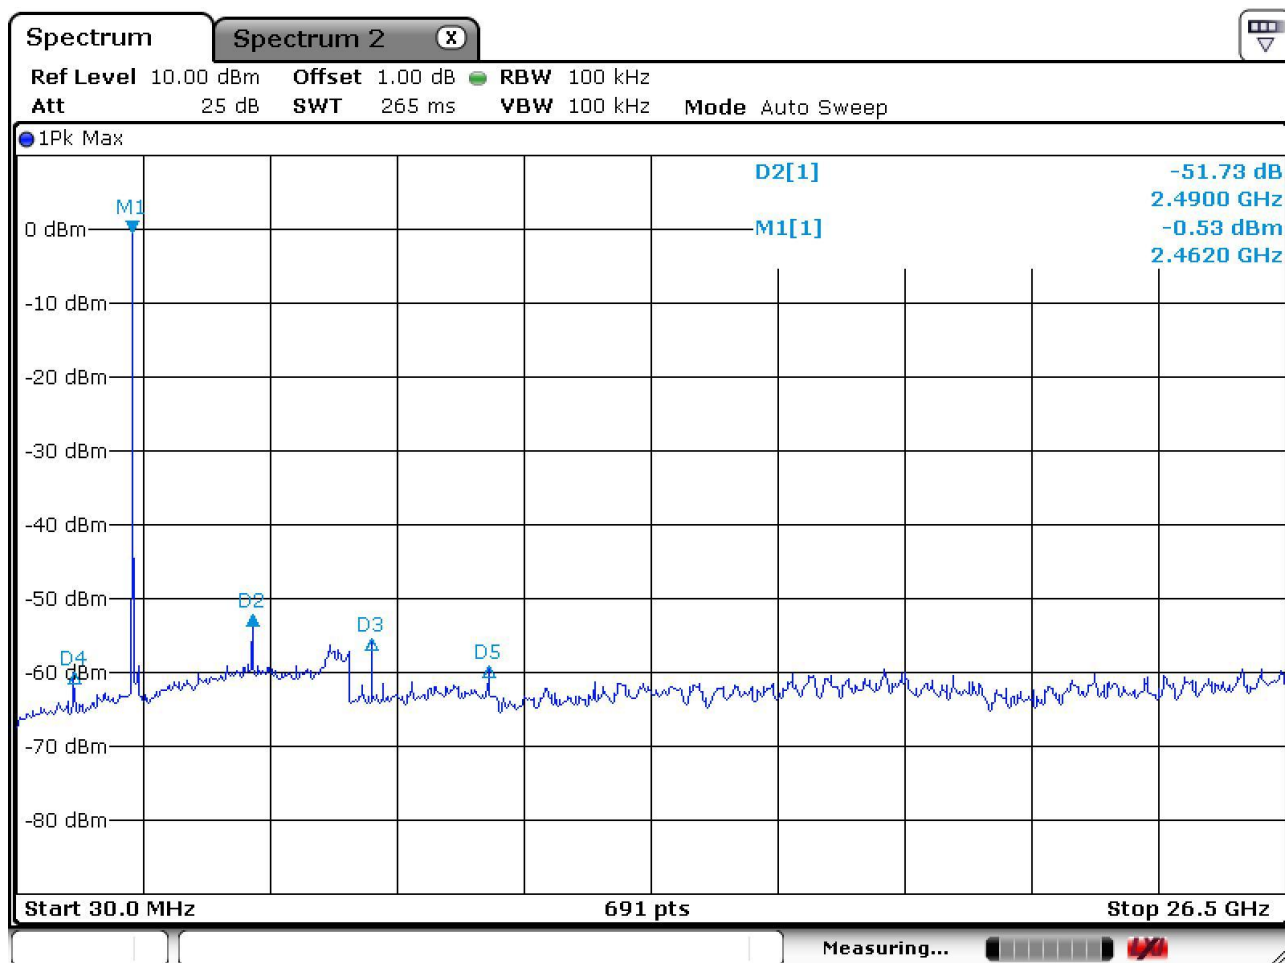

3.2.5 Field Strength of Harmonics

Procedure:

The EUT was placed on a 0.8m high wooden table inside a shielded enclosure. An antenna was placed near the EUT and measurements of frequencies and amplitudes of field strengths were recorded for reference during final measurements. For final radiated testing, measurements were performed in OATS. Measurements were performed with the EUT oriented in 3 orthogonal axis and rotated 360 degrees to determine worst-case orientation for maximum emissions. In case of the air temperature of the test site is out of the range is 10 to 40°C before the testing proceeds the warm-up time of EUT maintain adequately

The spectrum analyzer is set to:

Center frequency = the worst channel

Frequency Range = 30 MHz ~ 10th harmonic.

RBW = 100 kHz (30MHz ~ 1 GHz)

VBW ≥ RBW

= 1 MHz (1 GHz ~ 10th harmonic)

Span = 100 MHz

Detector function = peak

Trace = max hold

Sweep = auto

Measurement Data: Complies

- See next pages for actual measured data.
- The warm-up time of the EUT is 20min.

Minimum Standard: FCC Part 15.209(a)

Frequency (MHz)	Limit (uV/m) @ 3m
30 ~ 88	100 **
88 ~ 216	150 **
216 ~ 960	200 **
Above 960	500

** Except as provided in 15.209(g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88MHz, 174-216MHz or 470-806MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g. 15.231 and 15.241.

Measurement Data:

Frequency	Reading		Pol.	Correction			Limits		Result		Margin	
	[dBuV/m]			Factor			[dBuV/m]		[dBuV/m]		[dB]	
[MHz]	AV / Peak			Antenna	Amp. Gain	Cable	AV / Peak		AV / Peak		AV / Peak	
-	-	-	-	-	-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-	-	-	-	-	-
Frequency	Reading		Pol.	Correction			Limits		Result		Margin	
	[dBuV/m]			Factor			[dBuV/m]		[dBuV/m]		[dB]	
[MHz]	AV / Peak			Antenna	Amp. Gain	Cable	AV / Peak		AV / Peak		AV / Peak	
-	-	-	-	-	-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-	-	-	-	-	-
Frequency	Reading		Pol.	Correction			Limits		Result		Margin	
	[dBuV/m]			Factor			[dBuV/m]		[dBuV/m]		[dB]	
[MHz]	AV / Peak			Antenna	Amp. Gain	Cable	AV / Peak		AV / Peak		AV / Peak	
4956.00	29.5	44.5	H	31.4	36.5	5.7	54.0	74.0	30.2	45.2	23.8	28.8
-	-	-	-	-	-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-	-	-	-	-	-

No other emissions were detected at a level greater than 20dB below limit.

Radiated Emissions – Wireless+Charging mode

243 Jubug-ni, yangji-Myeon, Youngin-si,
Gyeonggi-do 449-822 Korea
Tel :+82-31-3236008,9
Fax:+82-31-3236010

EUT/Model No.: RCV01B

TEST MODE: Wireless mode


Temp Humi : 2 / 33

Tested by: PARK.H.W

Data: 83

Level (dBuV/m)

Date: 2011-02-11

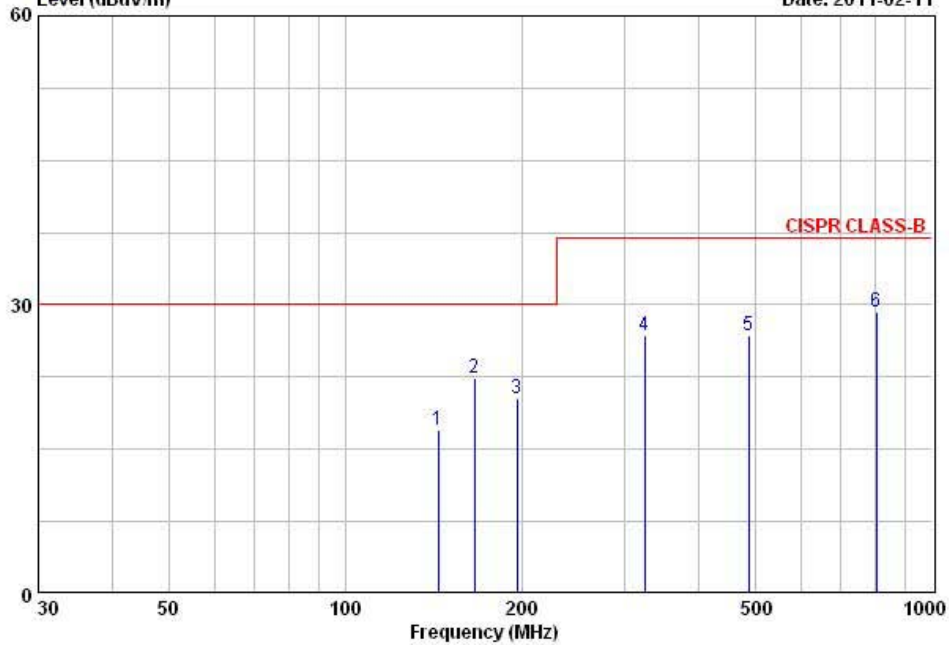

Freq	Reading	C.F	Result	Limit	Margin	Height	Angle	Polarity
MHz	dBuV/m	dB/m	dBuV/m	dBuV/m	dB	cm	deg	
1 144.25	26.10	-9.06	17.04	30.00	12.96	116	288	VERTICAL
2 166.37	31.50	-9.13	22.37	30.00	7.63	400	270	HORIZONTAL
3 196.02	31.60	-11.29	20.31	30.00	9.69	159	309	VERTICAL
4 324.02	33.50	-6.65	26.85	37.00	10.15	171	341	HORIZONTAL
5 488.02	30.20	-3.45	26.75	37.00	10.25	262	117	HORIZONTAL
6 804.01	25.90	3.29	29.19	37.00	7.81	216	134	VERTICAL

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain

3.2.6 AC Conducted Emissions

Procedure:

The conducted emissions are measured in the shielded room with a spectrum analyzer in peak hold. While the measurement, EUT had its hopping function disabled at the middle channels in line with Section 15.31(m). Emissions closest to the limit are measured in the quasi-peak mode (QP) with the tuned receiver using a bandwidth of 9 kHz. The emissions are maximized further by cable manipulation and Exerciser operation. The highest emissions relative to the limit are listed.

Measurement Data: Complies

- See next pages for actual measured spectrum plots.
- No emissions were detected at a level greater than 20dB below limit.

Minimum Standard: FCC Part 15.207(a)/EN 55022

Frequency Range (MHz)	Conducted Limit (dBuV)	
	Quasi-Peak	Average
0.15 ~ 0.5	66 to 56 *	56 to 46 *
0.5 ~ 5	56	46
5 ~ 30	60	50


* Decreases with the logarithm of the frequency

AC Conducted Emissions – Wireless mode – Line

243 Jibug-ni, yangji-Myeon, Youngin-si,
Gyeonggi-do 449-822 Korea
Tel :+82-31-3236008,9
Fax :+82-31-3236010

EUT / Model No. : RCV01B	Phase : LINE
Test Mode : Wireless mode	Test Power : 120 / 60
Temp./Humi. : 12 / 32	Test Engineer : PARK.H.W

Data: 54 File: C:\Conducted Data\2011\LTA_Conduction_1101-2.EMI (338) Date: 02-12-2011

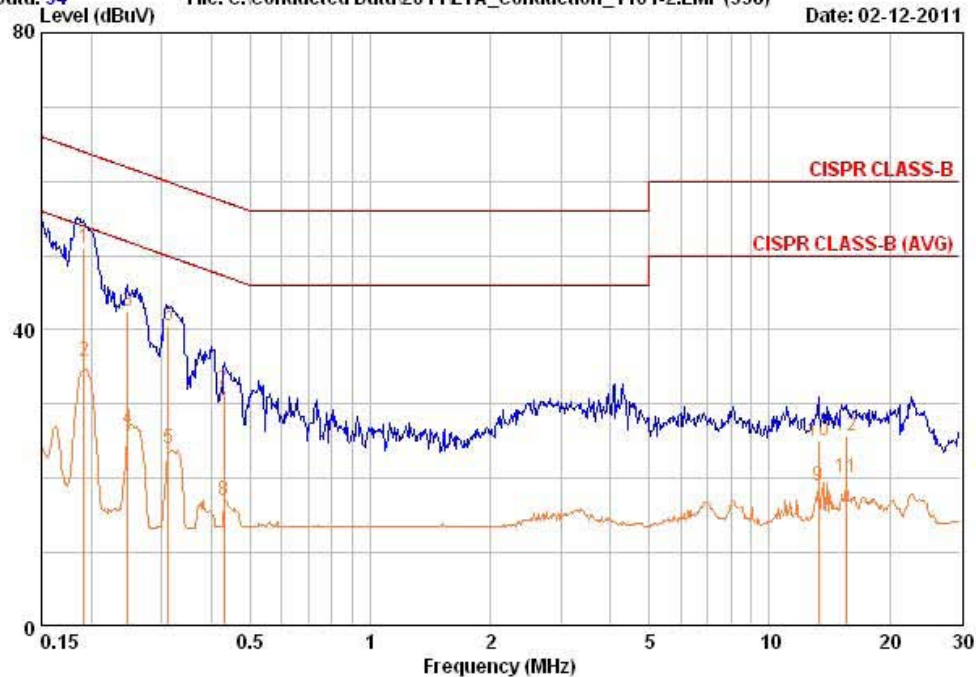

Freq	RD	RD	C.F	Result	Result	Limit	Limit	Margin	Margin
MHz	QP	AV	dB	QP	AV	QP	AV	QP	AV
	dBuV	dBuV		dBuV	dBuV	dBuV	dBuV	dB	dB
0.192	41.46	26.06	9.64	51.10	35.70	63.95	53.95	12.85	18.25
0.247	32.95	16.95	9.64	42.59	26.59	61.86	51.86	19.27	25.27
0.311	30.86	14.26	9.65	40.51	23.91	59.94	49.94	19.43	26.03
0.430	22.15	7.35	9.67	31.82	17.02	57.25	47.25	25.43	30.23
13.281	15.10	9.00	9.89	25.00	18.90	60.00	50.00	35.00	31.10
15.553	15.71	10.21	9.94	25.65	20.15	60.00	50.00	34.35	29.85


Remarks: C.F (Correction Factor) = Insertion loss + Cable loss

AC Conducted Emissions – Wireless mode – Neutral

243 Jubug-ri, yangji-Myeon, Youngin-si,
Gyeonggi-do 449-822 Korea
Tel +82-31-3236008,9
Fax: +82-31-3236010

EUT / Model No. : RCV01B	Phase : NEUTRAL
Test Mode : Wireless mode	Test Power : 120 / 60
Temp./Humi. : 12 / 32	Test Engineer : PARK.H.W

Data: 56 File: C:\Conducted Data\2011\LTA_Conduction_1101-2.EMI (338) Date: 02-12-2011

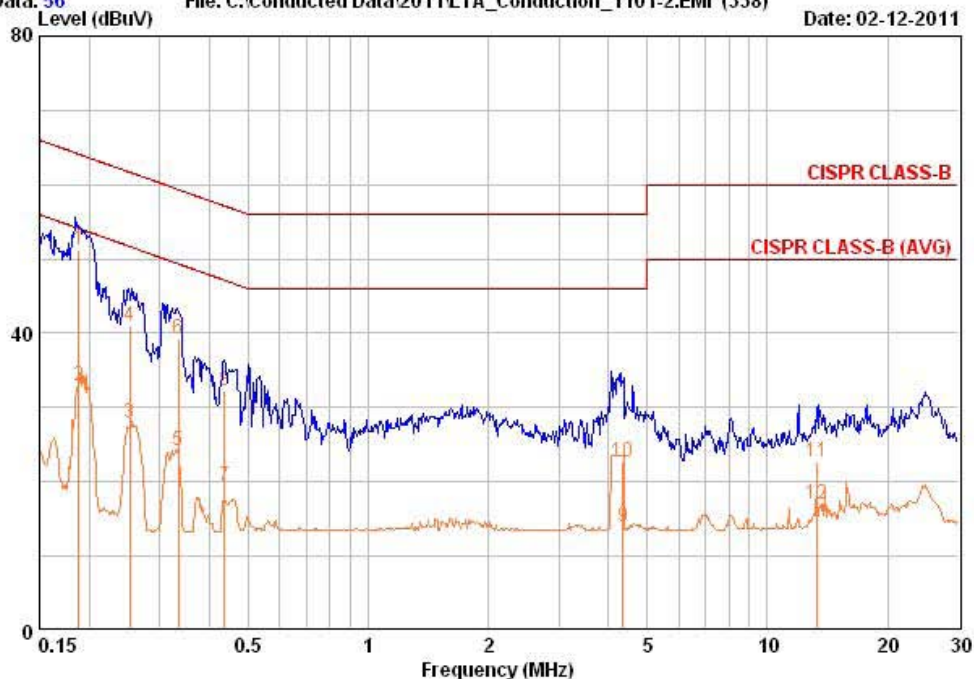

Freq	RD	RD	C.F	Result	Result	Limit	Limit	Margin	Margin
MHz	QP	AV	dB	QP	AV	QP	AV	QP	AV
	dBuV	dBuV		dBuV	dBuV	dBuV	dBuV	dB	dB
0.188	41.56	23.36	9.65	51.20	33.00	64.12	54.12	12.92	21.12
0.252	31.35	18.35	9.65	41.00	28.00	61.69	51.69	20.69	23.69
0.335	29.66	14.46	9.65	39.31	24.11	59.33	49.33	20.02	25.22
0.437	22.65	9.65	9.66	32.31	19.31	57.12	47.12	24.81	27.81
4.343	12.94	4.14	9.73	22.67	13.87	56.00	46.00	33.33	32.13
13.265	12.70	7.10	9.91	22.61	17.01	60.00	50.00	37.39	32.99

Remarks: C.F (Correction Factor) = Insertion loss + Cable loss

APPENDIX
TEST EQUIPMENT USED FOR TESTS

	Description	Model No.	Serial No.	Manufacturer	Interval	Last Cal. Date
1	Spectrum Analyzer	FSV-30	100757	R&S	1 year	2011-01-24
2	Spectrum Analyzer	8563E	3425A02505	HP	1 year	2010-03-29
3	Spectrum Analyzer	8594E	3710A04074	HP	2 year	2009-10-12
4	Signal Generator	8648C	3623A02597	HP	1 year	2010-03-30
5	Signal Generator	83711B	US34490456	HP	1 year	2010-03-30
6	Attenuator (3dB)	8491A	37822	HP	1 year	2010-10-08
7	Attenuator (10dB)	8491A	63196	HP	1 year	2010-10-08
8	EMI Test Receiver	ESC17	100722	R&S	1 year	2010-10-08
9	Horn Antenna(18 ~ 40GHz)	SAS-574	154	Schwarzbeck	2 year	2010-11-25
10	Horn Antenna(18 ~ 40GHz)	SAS-574	155	Schwarzbeck	2 year	2010-11-25
11	RF Amplifier	8447D	2949A02670	HP	2 year	2009-10-12
12	RF Amplifier	8449B	3008A02126	HP	1 year	2010-03-29
13	Test Receiver	ESHS10	828404/009	R&S	1 year	2010-03-29
14	TRILOG Antenna	VULB 9160	9160-3212	SCHWARZBECK	2 year	2009-04-02
15	Log Periodic Antenna	VULP 9118	9118 A 401	SCHWARZBECK	2 year	2009-04-13
16	Biconical Antenna	BBA 9106	VHA 9103-2315	SCHWARZBECK	2 year	2009-04-13
17	Horn Antenna	3115	00055005	ETS LINDGREN	2 year	2009-03-16
18	Horn Antenna	BBHA 9120D	9120D122	SCHWARZBECK	2 year	2010-12-24
19	Dipole Antenna	VHA9103	2116	SCHWARZBECK	2 year	2010-11-25
20	Dipole Antenna	VHA9103	2117	SCHWARZBECK	2 year	2010-11-25
21	Dipole Antenna	VHA9105	2261	SCHWARZBECK	2 year	2010-11-25
22	Dipole Antenna	VHA9105	2262	SCHWARZBECK	2 year	2010-11-25
23	Hygro-Thermograph	THB-36	0041557-01	ISUZU	1 year	2010-04-12
24	Splitter (SMA)	ZFSC-2-2500	SF617800326	Mini-Circuits	-	-
25	Power Divider	11636A	6243	HP	1 year	2010-10-08
26	DC Power Supply	6622A	3448A03079	HP	1 year	2010-10-08
27	Frequency Counter	5342A	2826A12411	HP	1 year	2010-03-30
28	Power Meter	EPM-441A	GB32481702	HP	1 year	2010-03-29
29	Power Sensor	8481A	US41030291	HP	1 year	2010-10-08
30	Audio Analyzer	8903B	3729A18901	HP	1 year	2010-10-08
31	Modulation Analyzer	8901B	3749A05878	HP	1 year	2010-10-08
32	TEMP & HUMIDITY Chamber	YJ-500	LTAS06041	JinYoung Tech	1 year	2010-10-08
33	LOOP-ANTENNA	FMZB 1516	151602/94	SCHWARZBECK	2 year	2009-03-02
34	Stop Watch	HS-3	601Q09R	CASIO	2 year	2010-03-31
35	LISN	ENV216	100408	R&S	1 year	2010-10-08
36	UNIVERSAL RADIO COMMUNICATION TESTER	CMU200	106243	R&S	2 year	2010-05-13
37	Attenuator (30dB)	8498A	3318A10929	HP	1 year	2011-01-05