

WiFi Antenna

SKYLINK[®]

BASE STATION

INSTRUCTIONS

To Link CRMX Receivers:

Briefly press "Link" button once to link all unlinked, powered receivers in range.

To Unlink all CRMX Receivers:

Press and hold "Link" button to unlink all linked and powered receivers in range.

For WiFi Use:

Use your wireless device to connect to SkyLink WiFi Network.

For Ethernet Use:

Connect an Ethernet-enabled device to Ethernet Port.

For XLR Use:

Connect a DMX source to XLR port. Device must be configured via web portal for XLR input functionality.

To Configure:

After connecting via WiFi or Ethernet, use a browser to visit the Web Portal at 192.168.0.100 or current IP address.

To Restore Factory Defaults:

Locate Reset hole next to POWER switch. Press with pen for 10s while powering on. Cycle power to complete process.

INPUT 12 VDC 3A



USE ONLY INCLUDED POWER SUPPLY

Default SSID: ARRI SkyLink Base

Default Password: ArriSkyLink

Default IP Address: 192.168.0.100

Default Art-Net: Net=0, Sub=0, Uni=0

Serial Number: L2.0016358-000100

IP20 - Indoor Use Only

t_g = 40°C / 104°F

WEIGHT: 0.4kg / 0.9lbs



FCC ID: Y7NARRISKYLINK
Contains FCC ID: XRSCRMXNOVA101
IC: 8879A-CRIMXN101

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Arnold & Richter Cine Technik
Pulvermühle
D-83071 Stephanskirchen
Germany



Designed and Manufactured by Innovative Dimmers
7508 Tyrone Ave, Van Nuys, CA 91405

CRMX Antenna

ARNOLD AND RICHTER CINE TECHNIK




SERIAL NUMBER - L2.0016357-000001

Contains FCC ID: XRSCRMXTIMO101
IC: 8879A-CRMXT101

DESIGNED AND MANUFACTURED BY
INNOVATIVE DIMMERS IN VAN NUYS, CA



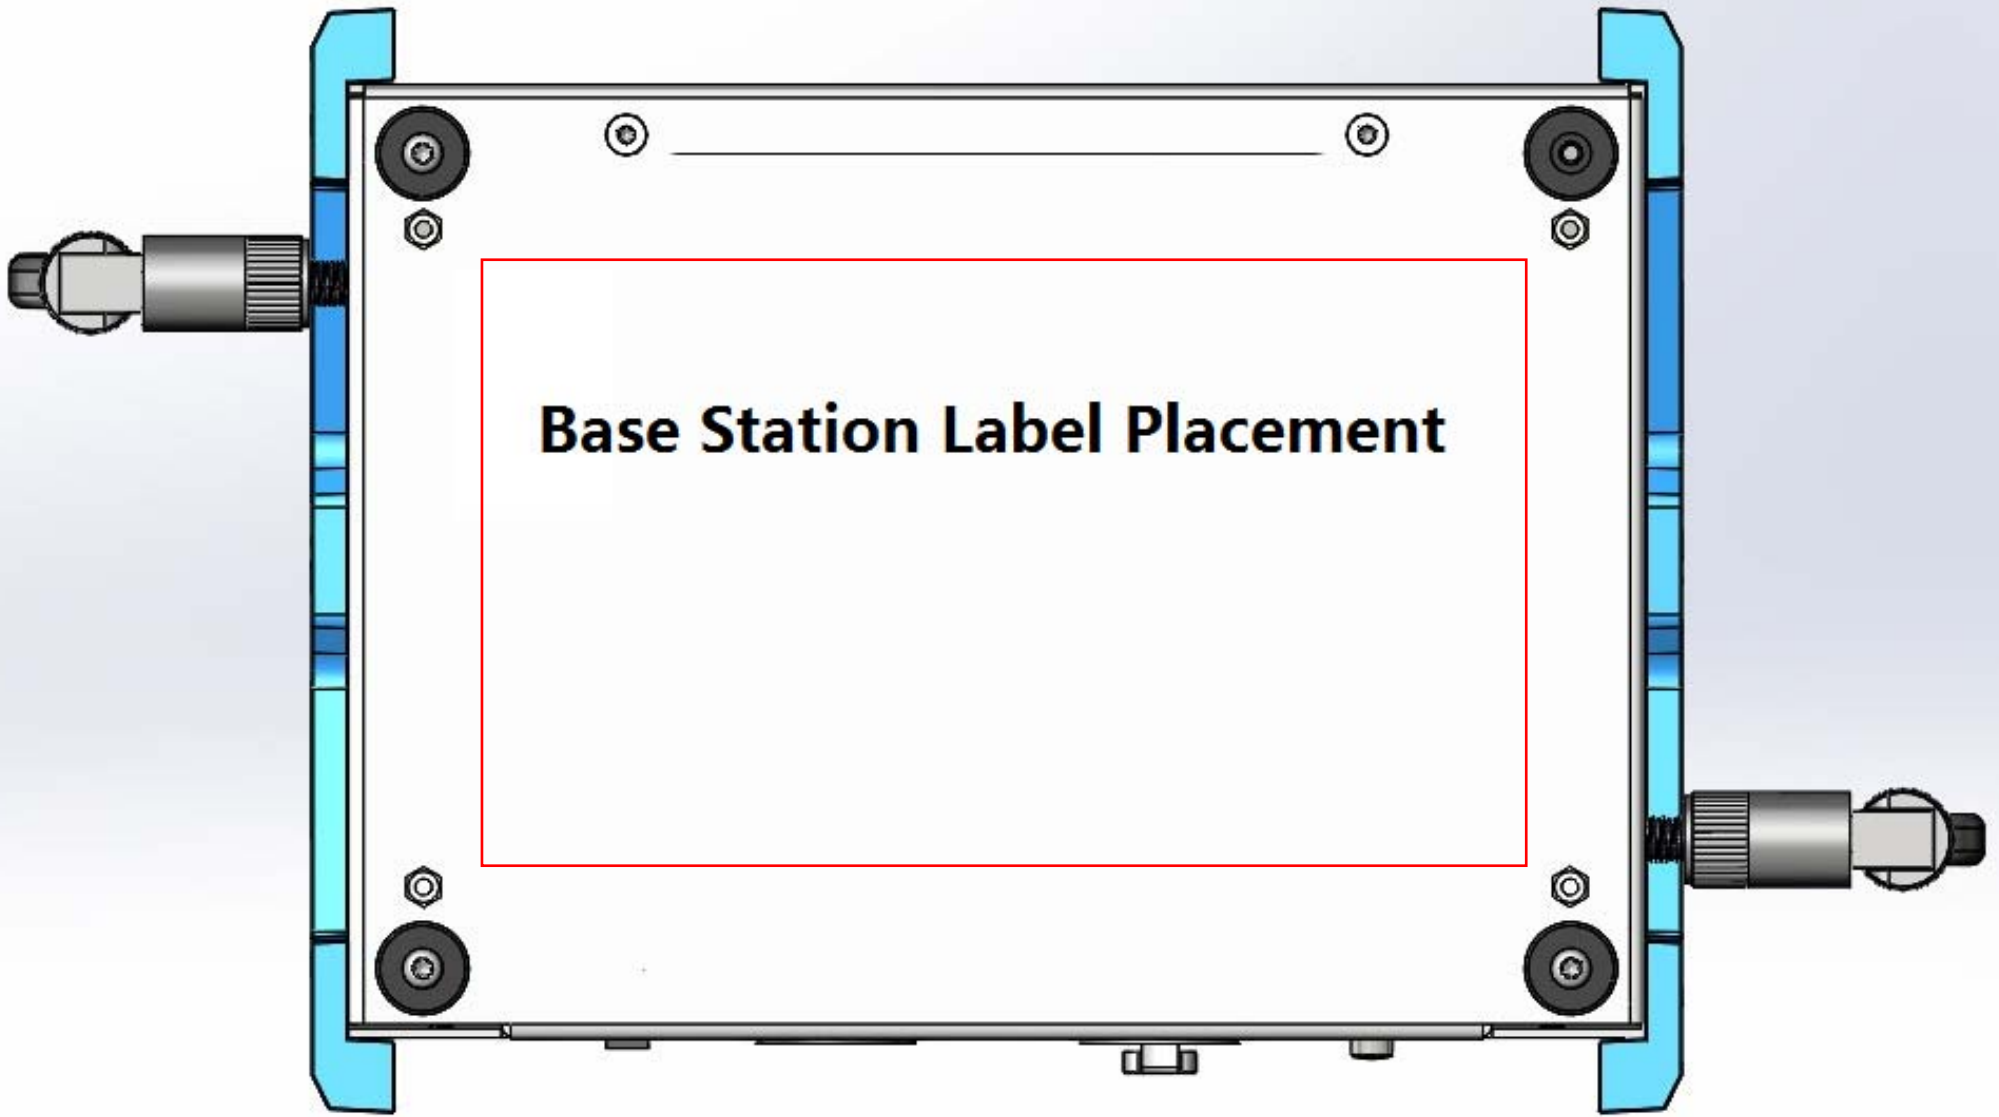

Base Station Label Placement

Receiver Label Placement

