



Choose Scandinavian trust

Wireless test report – 372813-6TRFWL

Applicant:

ASSA ABLOY Global Solutions AS

Product name:

Assa Abloy locks with BLE Reader and RFID Reader

Model:

LCU5352SC1

FCC ID:

V7V-LCU5352SC1

IC Registration number:

9514A-LCU5352SC1

Specifications:

FCC 47 CFR Part 15.225

Operation within the band 13.110–14.010 MHz

RSS-210 Issue 9, August 2016, Annex B.6

Devices operating in 13.110–14.010 MHz frequency band for any application

Date of issue: August 23, 2019

Andrey Adelberg, Senior Wireless/EMC Specialist

Test engineer(s)

Signature

Kevin Rose, Wireless/EMC Specialist

Reviewed by

Signature

Test location

Company name	Nemko Canada Inc.
Address	303 River Road
City	Ottawa
Province	Ontario
Postal code	K1V 1H2
Country	Canada
Telephone	+1 613 737 9680
Facsimile	+1 613 737 9691
Toll free	+1 800 563 6336
Website	www.nemko.com
Site number	FCC test site registration number: CA2040, IC: 2040A-4 (3 m semi anechoic chamber)

Limits of responsibility

Note that the results contained in this report relate only to the items tested and were obtained in the period between the date of initial receipt of samples and the date of issue of the report.

This test report has been completed in accordance with the requirements of ISO/IEC 17025. All results contained in this report are within Nemko Canada's ISO/IEC 17025 accreditation.

Copyright notification

Nemko Canada Inc. authorizes the applicant to reproduce this report provided it is reproduced in its entirety and for use by the company's employees only. Any use which a third party makes of this report, or any reliance on or decisions to be made based on it, are the responsibility of such third parties.

Nemko Canada Inc. accepts no responsibility for damages, if any, suffered by any third party as a result of decisions made or actions based on this report.

© Nemko Canada Inc.

Table of contents

Table of contents	3
Section 1. Report summary	4
1.1 Applicant and manufacturer	4
1.2 Test specifications	4
1.3 Statement of compliance	4
1.4 Exclusions	4
1.5 Test report revision history	4
Section 2. Summary of test results.....	5
2.1 FCC Part 15 Subpart C, general requirements test results.....	5
2.2 FCC Part 15 Subpart C, intentional radiators test results.....	5
2.3 IC RSS-GEN, Issue 5, test results	5
2.4 IC RSS-210, Issue 9, test results	5
Section 3. Equipment under test (EUT) details	6
3.1 Sample information.....	6
3.2 EUT information	6
3.3 Technical information	6
3.4 Product description and theory of operation	6
3.5 EUT exercise details.....	6
3.6 EUT setup diagram	6
3.7 EUT sub assemblies	6
Section 4. Engineering considerations.....	7
4.1 Modifications incorporated in the EUT.....	7
4.2 Technical judgment	7
4.3 Deviations from laboratory tests procedures	7
Section 5. Test conditions.....	8
5.1 Atmospheric conditions	8
5.2 Power supply range	8
Section 6. Measurement uncertainty.....	9
6.1 Uncertainty of measurement	9
Section 7. Test equipment	10
7.1 Test equipment list.....	10
Section 8. Testing data	11
8.1 FCC 15.215(c) and RSS-Gen 6.7 Occupied bandwidth (or 99% emission bandwidth) and x dB bandwidth	11
8.2 FCC 15.225(a-c) and RSS-210 B.6 (a-c) Field strength within the 13.110–14.010 MHz band	13
8.3 FCC 15.225(d) and RSS-210 B.6(d) Field strength of emissions outside 13.110–14.010 MHz band	15
8.4 FCC 15.225(e) and RSS-210 B.6 Frequency tolerance of the carrier signal	19
Section 9. Block diagrams of test set-ups	20
9.1 Radiated emissions set-up.....	20
9.2 Conducted emissions set-up	20

Section 1. Report summary

1.1 Applicant and manufacturer

Company name	ASSA ABLOY Global Solutions AS
Address	Anolitveien 1-3 P.O. Box 340, 1402 Ski Norway

1.2 Test specifications

FCC 47 CFR Part 15, Subpart C, Clause 15.225	Operation in the 13.110–14.010 MHz
RSS-210 Issue 9, August 2016, Annex B.6	Devices operating in 13.110–14.010 MHz frequency band for any application
ANSI C63.10 v2013	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices

1.3 Statement of compliance

In the configuration tested, the EUT was found compliant.

Testing was completed against all relevant requirements of the test standard. Results obtained indicate that the product under test complies in full with the requirements tested. The test results relate only to the items tested.

See "Summary of test results" for full details.

1.4 Exclusions

None

1.5 Test report revision history

Revision #	Details of changes made to test report
TRF	Original report issued

Section 2. Summary of test results

2.1 FCC Part 15 Subpart C, general requirements test results

Part	Test description	Verdict
§15.207(a)	Conducted limits	Not applicable
§15.31(e)	Variation of power source	Pass ¹
§15.203	Antenna requirement	Pass ²
§15.215(c)	20 dB bandwidth	Pass

Notes: ¹ Measurements of the variation of the input power or the radiated signal level of the fundamental frequency component of the emission, as appropriate, was performed with the supply voltage varied between 85 % and 115 % of the nominal rated supply voltage. No noticeable output power variation was observed

² The Antennas are located within the enclosure of EUT and not user accessible.

2.2 FCC Part 15 Subpart C, intentional radiators test results

Part	Test description	Verdict
§15.225(a)	Field strength within 13.553–13.567 MHz band	Pass
§15.225(b)	Field strength within 13.410–13.553 MHz and 13.567–13.710 MHz bands	Pass
§15.225(c)	Field strength within 13.110–13.410 MHz and 13.710–14.010 MHz bands	Pass
§15.225(d)	Field strength outside 13.110–14.010 MHz band	Pass
§15.225(e)	Frequency tolerance of carrier signal	Pass

Notes: None

2.3 IC RSS-GEN, Issue 5, test results

Part	Test description	Verdict
7.3	Receiver radiated emission limits	Not applicable
7.4	Receiver conducted emission limits	Not applicable
6.9	Operating bands and selection of test frequencies	Pass
8.8	AC power-line conducted emissions limits	Pass

Notes: ¹ According to sections 5.2 and 5.3 of RSS-Gen, Issue 5 the EUT does not have a stand-alone receiver neither scanner receiver, therefore exempt from receiver requirements.

EUT is an AC powered device.

2.4 IC RSS-210, Issue 9, test results

Annex	Test description	Verdict
B.6 (a)	The field strength within the band 13.553–13.567 MHz	Pass
B.6 (b)	The field strength within the bands 13.410–13.553 MHz and 13.567–13.710 MHz	Pass
B.6 (c)	The field strength within the bands 13.110–13.410 MHz and 13.710–14.010 MHz	Pass
B.6 (d)	The field strength outside the band 13.110–14.010 MHz	Pass
B.6	Carrier frequency stability	Pass

Notes: None

Section 3. Equipment under test (EUT) details

3.1 Sample information

Receipt date	June 27, 2019
Nemko sample ID number	1

3.2 EUT information

Product type	Assa Abloy locks with BLE Reader and RFID Reader
Model	Error! Reference source not found.C1
Part number	P001016399-001-001

3.3 Technical information

Operating band	13.553–13.567 MHz
Operating frequency	13.56 MHz
Modulation type	CW
Occupied bandwidth (99 %)	4.81 kHz
Power requirements	4.5 V _{DC} from 3 × 4.5 V batteries
Emission designator	NON
Antenna information	Loop printed antenna (The EUT uses a unique antenna coupling/ non-detachable antenna to the intentional radiator.)

3.4 Product description and theory of operation

It is a Lock Controller Unit (LCU), with integrated RFID reader and BLE communication ability. If the MCU, by using the detection circuit, detects that a RFID keycard or Mobile phone is held in front of the lock, it will start up the RFID transceiver to try to read a RFID card. If the MCU (Main Microcontroller), by using the detection circuit, detects that a RFID keycard or Mobile phone is held in front of the lock, it will start up the BLE module. If no RFID card is found, it will turn off the BLE module, and instead start up the BLE module.

3.5 EUT exercise details

EUT was energized and transmission on 13.56 MHz commenced.

Section 4. Engineering considerations

4.1 Modifications incorporated in the EUT

There were no modifications performed to the EUT during this assessment.

4.2 Technical judgment


None

4.3 Deviations from laboratory tests procedures

No deviations were made from laboratory procedures.

Section 5. Test conditions

5.1 Atmospheric conditions

Temperature	 15 °C 30 °C	15–30 °C
Relative humidity	 20 % 75 %	20–75 %
Air pressure	 860 mbar 1060 mbar	860–1060 mbar

When it is impracticable to carry out tests under these conditions, a note to this effect stating the ambient temperature and relative humidity during the tests shall be recorded and stated.

5.2 Power supply range

The normal test voltage for equipment to be connected to the mains shall be the nominal mains voltage. For the purpose of the present document, the nominal voltage shall be the declared voltage, or any of the declared voltages $\pm 5\%$, for which the equipment was designed.

Section 6. Measurement uncertainty

6.1 Uncertainty of measurement

Measurement uncertainty budgets for the tests are detailed below. Measurement uncertainty calculations assume a coverage factor of $K = 2$ with 95% certainty.

Test name	Measurement uncertainty, dB
All antenna port measurements	0.55
Conducted spurious emissions	1.13
Radiated spurious emissions	3.78
AC power line conducted emissions	3.55

Section 7. Test equipment

7.1 Test equipment list

Table 7.1-1: Equipment list

Equipment	Manufacturer	Model no.	Asset no.	Cal cycle	Next cal.
3 m EMI test chamber	TDK	SAC-3	FA002047	1 year	January 24, 2020
Flush mount turntable	Sunol	FM2022	FA002082	—	NCR
Controller	Sunol	SC104V	FA002060	—	NCR
Antenna mast	Sunol	TLT2	FA002061	—	NCR
Receiver/spectrum analyzer	Rohde & Schwarz	ESU 26	FA002043	1 year	May 8, 2020
Active loop antenna (0.01–30 MHz)	Com-Power	AL-130	FA002674	1 year	September 12, 2019
Spectrum analyzer	Rohde & Schwarz	FSU	FA001877	1 year	October 26, 2019
Bilog antenna (20–3000 MHz)	Sunol	JB3	FA002108	1 year	January 3, 2020

Note: NCR - no calibration required

Section 8. Testing data

8.1 FCC 15.215(c) and RSS-Gen 6.7 Occupied bandwidth (or 99% emission bandwidth) and x dB bandwidth

8.1.1 Definitions and limits

FCC

Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated. The requirement to contain the designated bandwidth of the emission within the specified frequency band includes the effects from frequency sweeping, frequency hopping and other modulation techniques that may be employed as well as the frequency stability of the transmitter over expected variations in temperature and supply voltage. If a frequency stability is not specified in the regulations, it is recommended that the fundamental emission be kept within at least the central 80 % of the permitted band in order to minimize the possibility of out-of-band operation.

IC

When the occupied bandwidth limit is not stated in the applicable RSS or reference measurement method, the transmitted signal bandwidth shall be reported as the 99% emission bandwidth, as calculated or measured.

8.1.2 Test summary

Test date August 8, 2019

8.1.3 Observations, settings and special notes

Spectrum analyzer settings:

Detector mode	Peak
Resolution bandwidth	≥1 % of span
Video bandwidth	RBW × 3
Trace mode	Max Hold


8.1.4 Test data

Table 8.1-1: Lower 20 dBc frequency cross result

Fundamental frequency, MHz	Lower 20 dBc frequency cross, MHz	Limit, MHz	Margin, MHz
13.560	13.557	13.553	0.04


Table 8.1-2: Upper 20 dBc frequency cross result

Fundamental frequency, MHz	Upper 20 dBc frequency cross, MHz	Limit, MHz	Margin, MHz
13.560	13.562	13.567	0.05

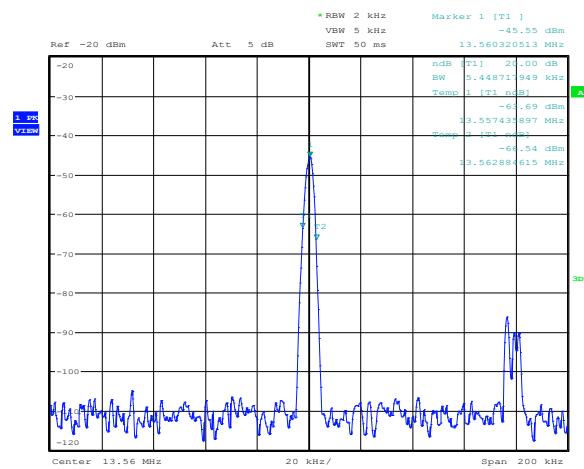

Date: 8.AUG.2019 11:22:56

Figure 8.1-1: 20 dB bandwidth

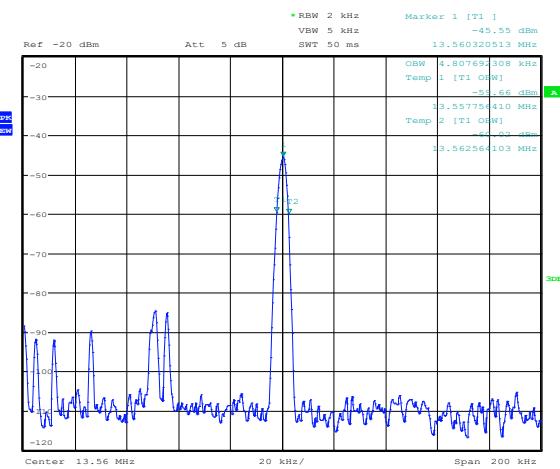

Date: 8.AUG.2019 11:22:14

Figure 8.1-2: 99% dB bandwidth

8.2 FCC 15.225(a–c) and RSS-210 B.6 (a–c) Field strength within the 13.110–14.010 MHz band

8.2.1 Definitions and limits

- a) The field strength of any emissions within the band 13.553–13.567 MHz shall not exceed 15848 μ V/m (84 dB μ V/m) at 30 m.
- b) Within the bands 13.410–13.553 MHz and 13.567–13.710 MHz, the field strength of any emissions shall not exceed 334 μ V/m (50.5 dB μ V/m) at 30 m.
- c) Within the bands 13.110–13.410 MHz and 13.710–14.010 MHz the field strength of any emissions shall not exceed 106 μ V/m (40.5 dB μ V/m) at 30 m.

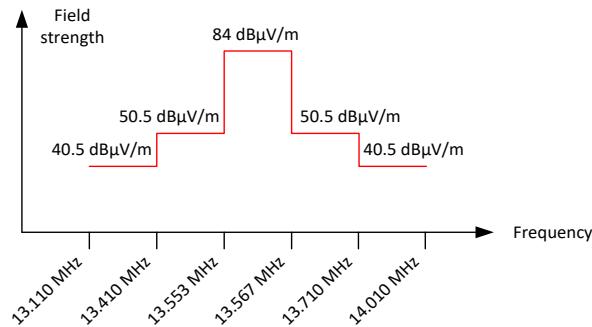


Figure 8.2-1: In-band spurious emissions limit

8.2.2 Test summary

Test date July 9, 2019

8.2.3 Observations/special notes

The measurements were performed at the distance of 3 m. 40 dB distance correction factor* was applied to the measurement result in order to comply with 30 m limits.

* 30 m to 3 m distance correction factor calculation (for 13 MHz band):

$$40 \times \log_{10} (3 \text{ m}/30 \text{ m}) = 40 \times \log_{10} (0.1) = -40 \text{ dB}$$

Spectrum analyzer settings:

Detector mode	Peak
Resolution bandwidth	10 kHz
Video bandwidth	30 kHz
Trace mode	Max Hold

8.2.4 Test data

Table 8.2-1: Field strength measurements results

Frequency range, MHz	Frequency, MHz	Field strength at 3 m, dB μ V/m	Calculated field strength at 30 m, dB μ V/m	Limit, dB μ V/m	Margin, dB
13.553–13.567	13.56	41.16	1.16	84.00	82.84
13.410–13.553	13.410–13.553	22.00	-18.00	50.50	68.50
13.567–13.710	13.567–13.710	22.00	-18.00	50.50	68.50
13.110–13.410	13.110–13.410	22.00	-18.00	40.50	58.50
13.710–14.010	13.710–14.010	22.00	-18.00	40.50	58.50

Note: Calculated field strength at 30 m = Measured field strength at 3 m – 40 dB

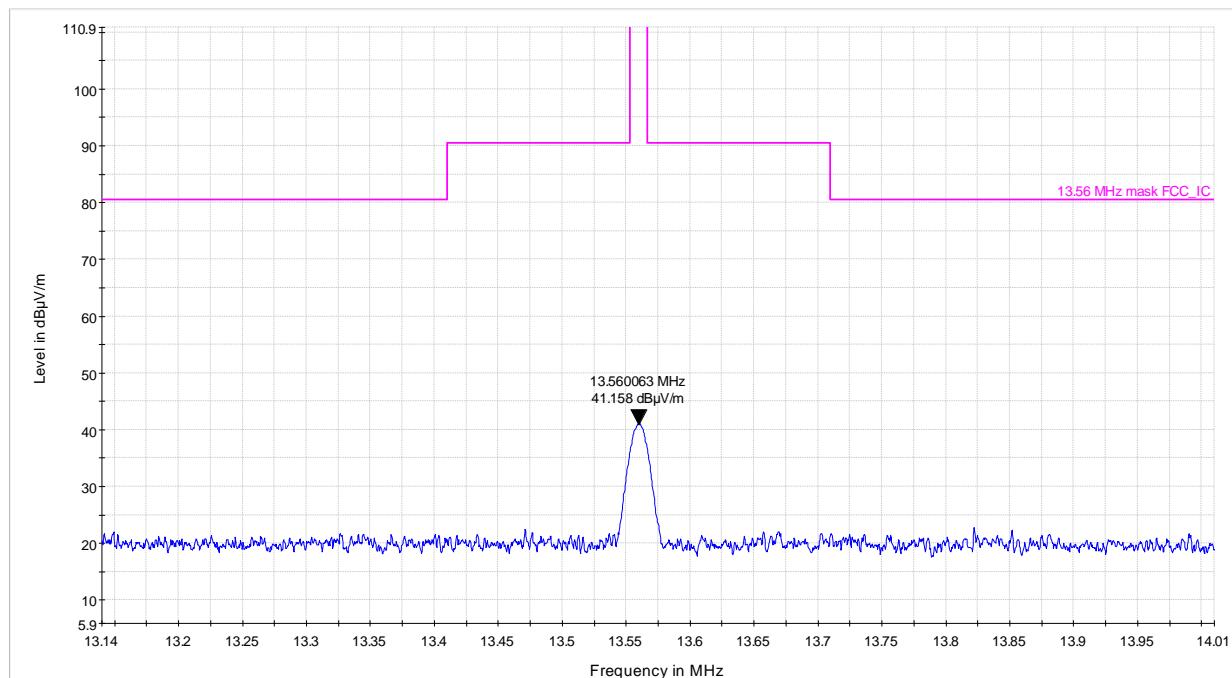


Figure 8.2-2: Field strength within 13.14–14.01 MHz band

8.3 FCC 15.225(d) and RSS-210 B.6(d) Field strength of emissions outside 13.110–14.010 MHz band

8.3.1 Definitions and limits

FCC:

The field strength of any emissions appearing outside of the 13.110–14.010 MHz band shall not exceed the general radiated emission limits in §15.209. The field strength of emissions appearing within restricted bands (as specified in §15.205) shall not exceed the limits from §15.209.

ISED:

RSS-Gen general field strength limits for frequencies outside the band 13.110–14.010 MHz.

Table 8.3-1: FCC §15.209 and RSS-Gen – Radiated emission limits

Frequency, MHz	Field strength of emissions		Measurement distance, m
	µV/m	dB μ V/m	
0.009–0.490	2400/F	67.6 – $20 \times \log_{10}(F)$	300
0.490–1.705	24000/F	87.6 – $20 \times \log_{10}(F)$	30
1.705–30.0	30	29.5	30
30–88	100	40.0	3
88–216	150	43.5	3
216–960	200	46.0	3
above 960	500	54.0	3

Notes: In the emission table above, the tighter limit applies at the band edges. For frequencies above 1 GHz the limit on peak RF emissions is 20 dB above the maximum permitted average emission limit applicable to the equipment under test

Table 8.3-2: ISED restricted frequency bands

MHz	MHz	MHz	GHz
0.090–0.110	12.57675–12.57725	399.9–410	7.25–7.75
0.495–0.505	13.36–13.41	608–614	8.025–8.5
2.1735–2.1905	16.42–16.423	960–1427	9.0–9.2
3.020–3.026	16.69475–16.69525	1435–1626.5	9.3–9.5
4.125–4.128	16.80425–16.80475	1645.5–1646.5	10.6–12.7
4.17725–4.17775	25.5–25.67	1660–1710	13.25–13.4
4.20725–4.20775	37.5–38.25	1718.8–1722.2	14.47–14.5
5.677–5.683	73–74.6	2200–2300	15.35–16.2
6.215–6.218	74.8–75.2	2310–2390	17.7–21.4
6.26775–6.26825	108–138	2483.5–2500	22.01–23.12
6.31175–6.31225	149.9–150.05	2655–2900	23.6–24.0
8.291–8.294	156.52475–156.52525	3260–3267	31.2–31.8
8.362–8.366	156.7–156.9	3332–3339	36.43–36.5
8.37625–8.38675	162.0125–167.17	3345.8–3358	
8.41425–8.41475	167.72–173.2	3500–4400	
12.29–12.293	240–285	4500–5150	Above 38.6
12.51975–12.52025	322–335.4	5350–5460	

Note: Certain frequency bands listed in the **Error! Reference source not found.**table and above 38.6 GHz are designated for licence-exempt applications. These frequency bands and the requirements that apply to related devices are set out in the 200 and 300 series of RSSs.

Table 8.3-3: FCC restricted frequency bands

MHz	MHz	MHz	GHz
0.090–0.110	16.42–16.423	399.9–410	4.5–5.15
0.495–0.505	16.69475–16.69525	608–614	5.35–5.46
2.1735–2.1905	16.80425–16.80475	960–1240	7.25–7.75
4.125–4.128	25.5–25.67	1300–1427	8.025–8.5
4.17725–4.17775	37.5–38.25	1435–1626.5	9.0–9.2
4.20725–4.20775	73–74.6	1645.5–1646.5	9.3–9.5
6.215–6.218	74.8–75.2	1660–1710	10.6–12.7
6.26775–6.26825	108–121.94	1718.8–1722.2	13.25–13.4
6.31175–6.31225	123–138	2200–2300	14.47–14.5
8.291–8.294	149.9–150.05	2310–2390	15.35–16.2
8.362–8.366	156.52475–156.52525	2483.5–2500	17.7–21.4
8.37625–8.38675	156.7–156.9	2690–2900	22.01–23.12
8.41425–8.41475	162.0125–167.17	3260–3267	23.6–24.0
12.29–12.293	167.72–173.2	3332–3339	31.2–31.8
12.51975–12.52025	240–285	3345.8–3358	36.43–36.5
12.57675–12.57725	322–335.4	3600–4400	Above 38.6
13.36–13.41			

8.3.2 Test summary

Test date July 9, 2019

8.3.3 Observations, settings and special notes

The spectrum was searched from 9 kHz to 1 GHz.

Radiated measurements were performed at a distance of 3 m.

Spectrum analyzer settings for frequencies below 150 kHz:

Detector mode	Quasi-Peak
Resolution bandwidth	300 Hz
Video bandwidth	9 kHz
Trace mode	Max Hold
Measurement time	100 ms

Detector mode	Quasi-Peak
Resolution bandwidth	9 kHz
Video bandwidth	30 kHz
Trace mode	Max Hold
Measurement time	100 ms

Spectrum analyzer settings for frequencies above 30 MHz:

Detector mode	Peak
Resolution bandwidth	100 kHz
Video bandwidth	300 kHz
Trace mode	Max Hold
Measurement time	100 ms

8.3.4 Test data

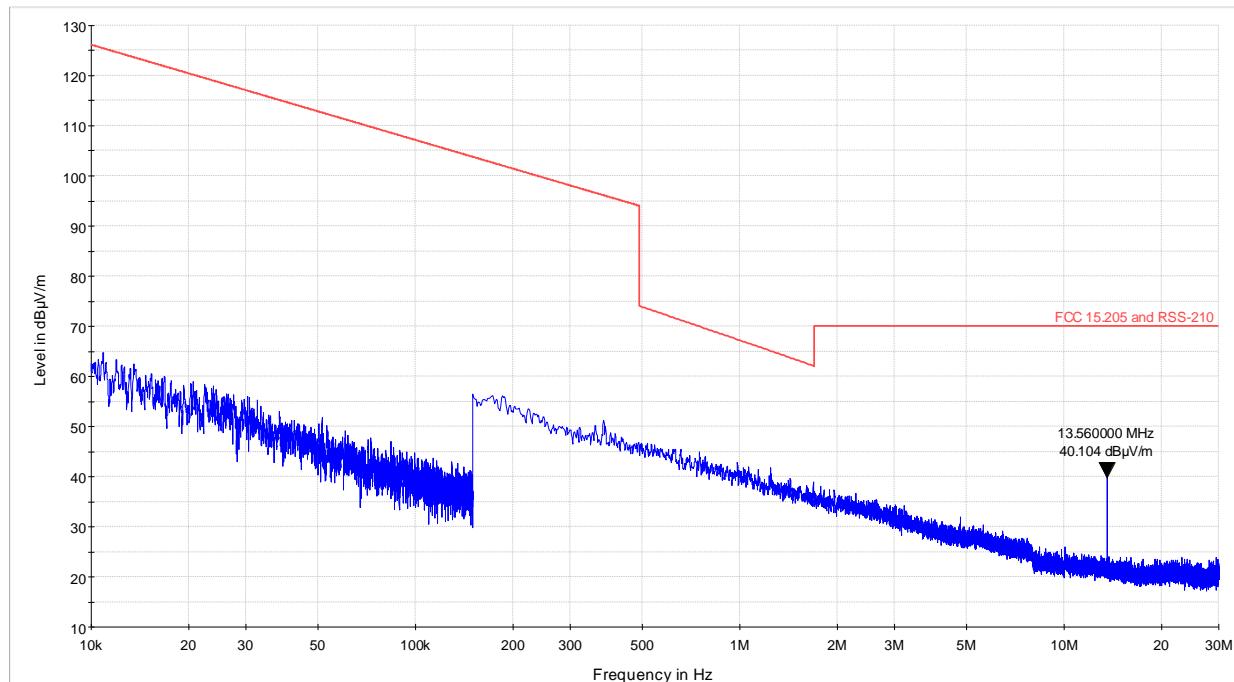


Figure 8.3-1: Field strength of spurious emissions below 30 MHz

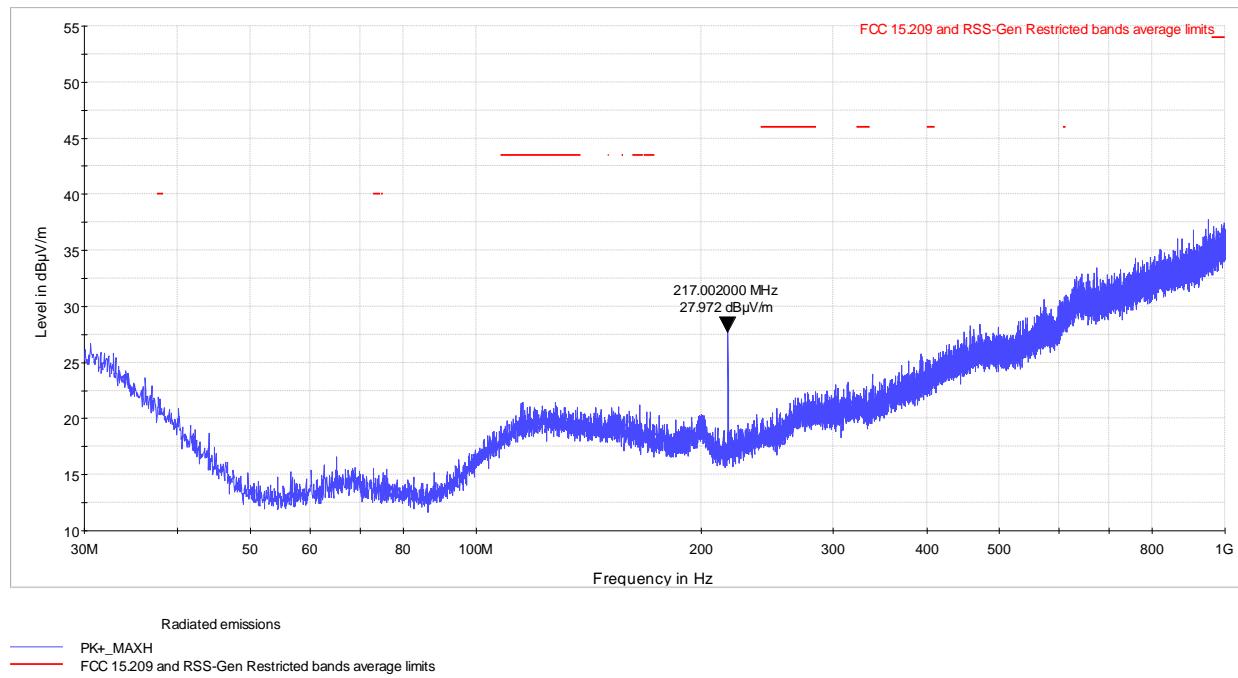


Figure 8.3-2: Field strength of spurious emissions above 30 MHz

Note: all measurement results indicated in the plot were taken with a peak detector, which is more stringent measurement, and still comply with quasi-peak limit.

8.4 FCC 15.225(e) and RSS-210 B.6 Frequency tolerance of the carrier signal

8.4.1 Definitions and limits

The frequency tolerance of the carrier signal shall be maintained within $\pm 0.01\%$ (± 100 ppm) of the operating frequency over a temperature variation of $-20\text{ }^{\circ}\text{C}$ to $+50\text{ }^{\circ}\text{C}$ at normal supply voltage, and for a variation in the primary supply voltage from 85 % to 115 % of the rated supply voltage at a temperature of $20\text{ }^{\circ}\text{C}$. For battery operated equipment, the equipment tests shall be performed using a new battery.

8.4.2 Test summary

Test date August 7, 2019

8.4.3 Observations, settings and special notes

Spectrum analyzer settings:

Detector mode	Peak
Resolution bandwidth	$\geq 1\%$ of emission bandwidth
Video bandwidth	RBW $\times 3$
Trace mode	Max Hold

8.4.4 Test data

Table 8.4-1: Frequency drift measurements results


Test conditions	Frequency, MHz	Frequency drift, \pm ppm	Limit, \pm ppm	Margin, ppm
+50 °C, Nominal	13560.206	0	100	0
+20 °C, +15 %	13560.206	0	100	0
+20 °C, Nominal	13560.206	Reference	Reference	Reference
+20 °C, -15 %	13560.206	0	100	0
-20 °C, Nominal	13560.206	0	100	0

Note: frequency drift was calculated as follows:

$$\text{Frequency drift (ppm)} = ((F_{\text{measured}} - F_{\text{reference}}) \div F_{\text{reference}}) \times 1 \times 10^6$$

Section 9. Block diagrams of test set-ups

9.1 Radiated emissions set-up

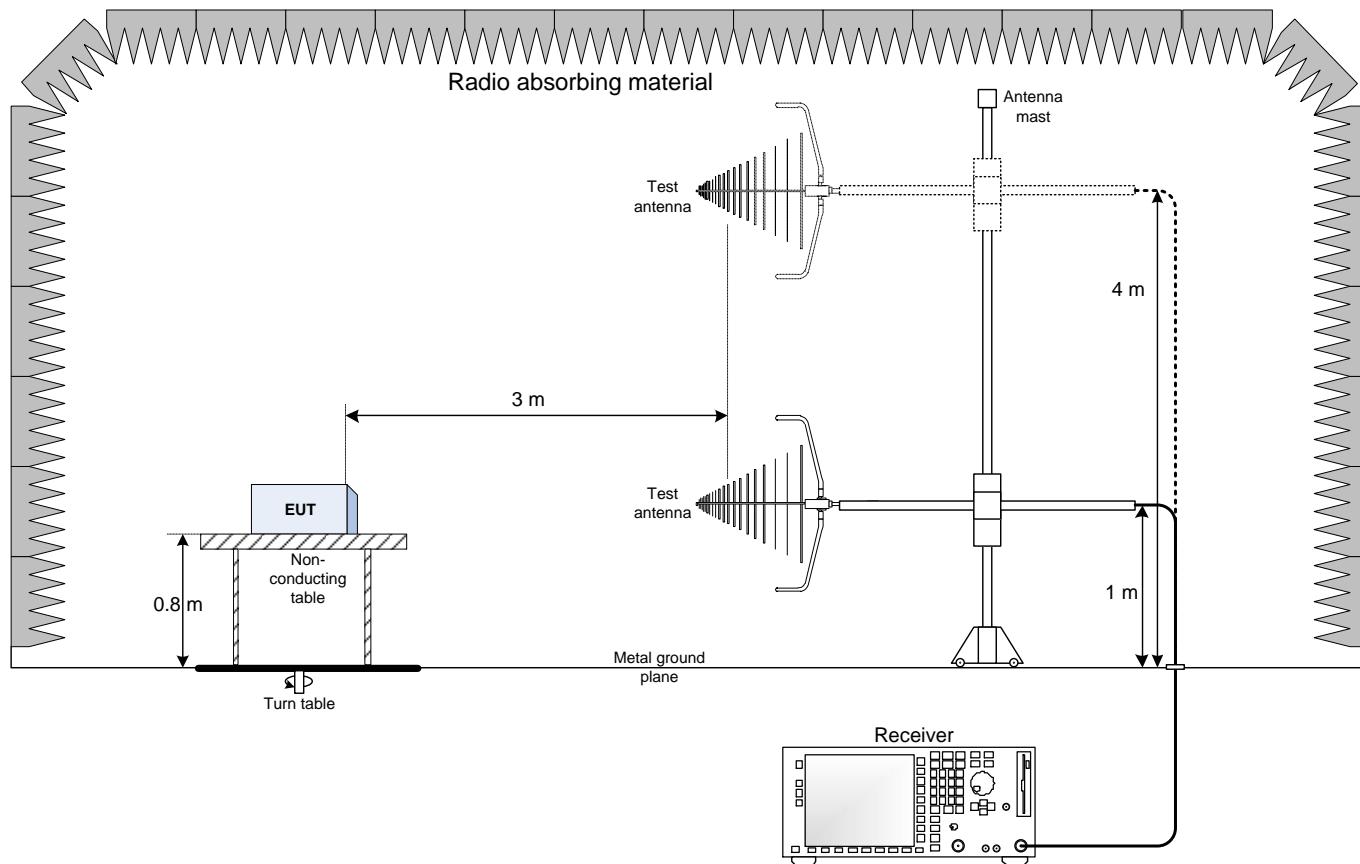

9.2 Conducted emissions set-up

