



Report No. 357459-03

Test Report

Product	Door Lock with radio Module
Name and address of the applicant	ASSA ABLOY Hospitality AS Anolitveien 1-3, 1400 Ski, Norway
Name and address of the manufacturer	ASSA ABLOY Hospitality AS Anolitveien 1-3, 1400 Ski, Norway
Model	LCX7301
Rating	3.2Vdc
Trademark	ASSA ABLOY
Serial number	/
Additional information	Door lock with 906MHz Radio Module
Tested according to	FCC Part 15.249 Low Power Transmitter. 902 – 928MHz Industry Canada RSS-210, Issue 9 Licence-Exempt Radio Apparatus, Category I Equipment
Order number	357459
Tested in period	2018.10.04 - 2019-01-04
Issue date	2019.05.31
Name and address of the testing laboratory	 Instituttveien 6 Kjeller, Norway
 CAB Number: FCC: NO0001 ISED: NO0470	
  An accredited technical test executed under the Norwegian accreditation scheme	
 	
Prepared by [G.Suhanthakumar] Approved by [Frode Sveinsen]	
<p>This report shall not be reproduced except in full without the written approval of Nemko. Opinions and interpretations expressed within this report are not part of the current accreditation. This report was originally distributed electronically with digital signatures. For more information contact Nemko.</p>	

Template version: C

Nemko Norway

Nemko AS, Instituttveien 6, P.O. Box 96 Kjeller, 2027 Kjeller, Norway
TEL +47 22 96 03 30 FAX +47 22 96 05 50 EMAIL info@nemko.com
ENTERPRISE NUMBER NO974404532

nemko.com/no

CONTENTS

1	INFORMATION	3
1.1	Test Item.....	3
1.2	Normal test condition.....	4
1.3	Test Engineer(s)	4
1.4	Description of modification for Modification Filing	4
1.5	Family List Rational	4
1.6	Antenna Requirement.....	4
1.7	Worst-Case Configuration and Mode.....	4
1.8	Comments	4
2	TEST REPORT SUMMARY	5
2.1	General.....	5
2.2	Test Summary	6
3	TEST RESULTS.....	7
3.1	99% Occupied Bandwidth.....	7
3.2	Peak Power Output.....	9
3.3	Restricted Bands of operation.....	14
3.4	Spurious Emissions (Radiated).....	15
4	Measurement Uncertainty	25
5	LIST OF TEST EQUIPMENT.....	26
6	BLOCK DIAGRAM	27
6.1	Power Line Conducted Emission.....	27
6.2	Test Site Radiated Emission.....	27

1 INFORMATION

1.1 Test Item

Name :	ASSA ABLOY
FCC ID :	Y7V-LCX7301C1
Industry Canada ID :	9514A-LCX7301C1
Model/version :	LCX7301
Serial number :	/
Hardware identity and/or version :	C1
Software identity and/or version :	V1.00
Frequency Range :	906 MHz
Tunable Bands :	None
Number of Channels :	1
Operating Modes :	Transceiver
Type of Modulation :	GFSK
User Frequency Adjustment :	None
Rated Output Power :	0.01 mW
Type of Power Supply :	3.2Vdc, Li-Ion Battery
Antenna Connector :	None, PCB antenna
Antenna Diversity Supported :	No
Desktop Charger :	No

Description of Test Item

LCX or LCU (Lock Case Unit) (door lock – LCX7301) and proximity:

- I. LCX/LCU sends data over RF (906MHz) only in case when a person who has access to the cabin is in proximity of it (probably around 1.5m).
- II. Proximity function works all the time and it turns on GREEN LED if a person has access to the cabin and touched a door handle or RED if a person doesn't have access to the cabin and touch a door handle.
- III. It is important to know that LCX must receive 'permission' to active RF and this permission comes from Master. In our system Master is a Panel which hangs on the wall. The distance between Panel and door is approximately 1 meter.

Theory of Operation

When a person comes into the proximity of the Master/Panel then it sends command to the LCX to be ready to open a door. When that person touches the door handle then LCX opens the door and then sends preamble which is 10ms long plus some data (data contains information about lock case status, dead bolt, door switch etc.).

If a person comes out from the 'proximity' of the Master/ Panel then the LCX does not send any data and goes into sleep mode. It is just listening for 'permission' signal from the Master/Panel.

1.2 Normal test condition

Temperature: 20 - 24 °C
Relative humidity: 20 - 50 %
Normal test voltage: 3.2 V DC

The values are the limit registered during the test period.

1.3 Test Engineer(s)

G.Suhanthakumar

1.4 Description of modification for Modification Filing

Not applicable.

1.5 Family List Rational

Not Applicable.

1.6 Antenna Requirement

Is the antenna detachable?

Yes No

If detachable, is the antenna connector non-standard?

Yes No

Type of antenna connector: N/A

Ref. FCC §15.203

1.7 Worst-Case Configuration and Mode

Radiated Emissions was performed with the EUT set to transmit at the channel with the highest output power as worst-case scenario.

1.8 Comments

All measurements were done with the EUT powered by a fully charged battery.

All ports were populated during spurious emission measurements, i.e. with host device.

2 TEST REPORT SUMMARY

2.1 General

All measurements are traceable to national standards.

The tests were conducted for demonstrating compliance with FCC CFR 47 Part 15, paragraph 15.249 and Industry Canada RSS-210 Issue 9.

Tests were performed in accordance with ANSI C63.4-2014 and ANSI C63.10-2013.

Radiated tests were made in a semi-anechoic chamber at measuring distances of 1m, 3m and 10m.

A description of the test facility is on file with the FCC and Industry Canada.

New Submission

Production Unit

Class II Permissive Change

Pre-production Unit

DXT Equipment Code

Family Listing



THIS TEST REPORT APPLIES ONLY TO THE ITEM(S) AND CONFIGURATIONS TESTED.

Deviations from, additions to, or exclusions from the test specifications are described in "Summary of Test Data".

Nemko Group authorizes the above named company to reproduce this report provided it is reproduced in its entirety and for use by the company's employees only. Any reproduction of parts of this report requires approval in writing from Nemko Group.

Any use that a third party makes of this report, or any reliance on or decisions to be made based on it, are the responsibility of such third parties. Nemko Group accepts no responsibility for damages suffered by any third party because of decisions made or actions based on this report.

2.2 Test Summary

Name of test	FCC Part 15 reference	RSS-210 Issue 9, RSS-GEN Issue 5 reference	Result
Supply Voltage Variations	15.31(e)	F.2.2 (RSS-210) 6.11, 8.11 (RSS-Gen)	N/A ¹
Antenna Requirement	15.203	6.8 (RSS-GEN)	Complies ²
Power Line Conducted Emission	15.107(a) 15.207(a)	8.8 (RSS-GEN)	N/A ¹
99% Occupied Bandwidth	N/A	6.7 (RSS-GEN)	-
Peak Power Output	15.249(a),(c),(e)	B.10 (RSS-210)	Complies
Band edge emissions	15.249(d)	B.10 (RSS-210)	Complies
Spurious Emissions (Radiated)	15.249(d), 15.209 15.35 (b)	5.5 (RSS-247) 6.13 (RSS-GEN) 8.9 (RSS-GEN)	Complies

¹ EUT is battery powered

² The EUT has only integrated antenna.

RSS-Gen Issue 5 covers section 6 & 8

RSS-210 issue 9 covers Annex B

3 TEST RESULTS

3.1 99% Occupied Bandwidth

Para. No.: 6.6 RSS_Gen

Test Results: -


Measurement Data:

Measured 99% Bandwidth (kHz)		
-	906 MHz	-
-	91.3	-

See attached plots.

Requirements:

No requirement for 99% BW, reported for information only.

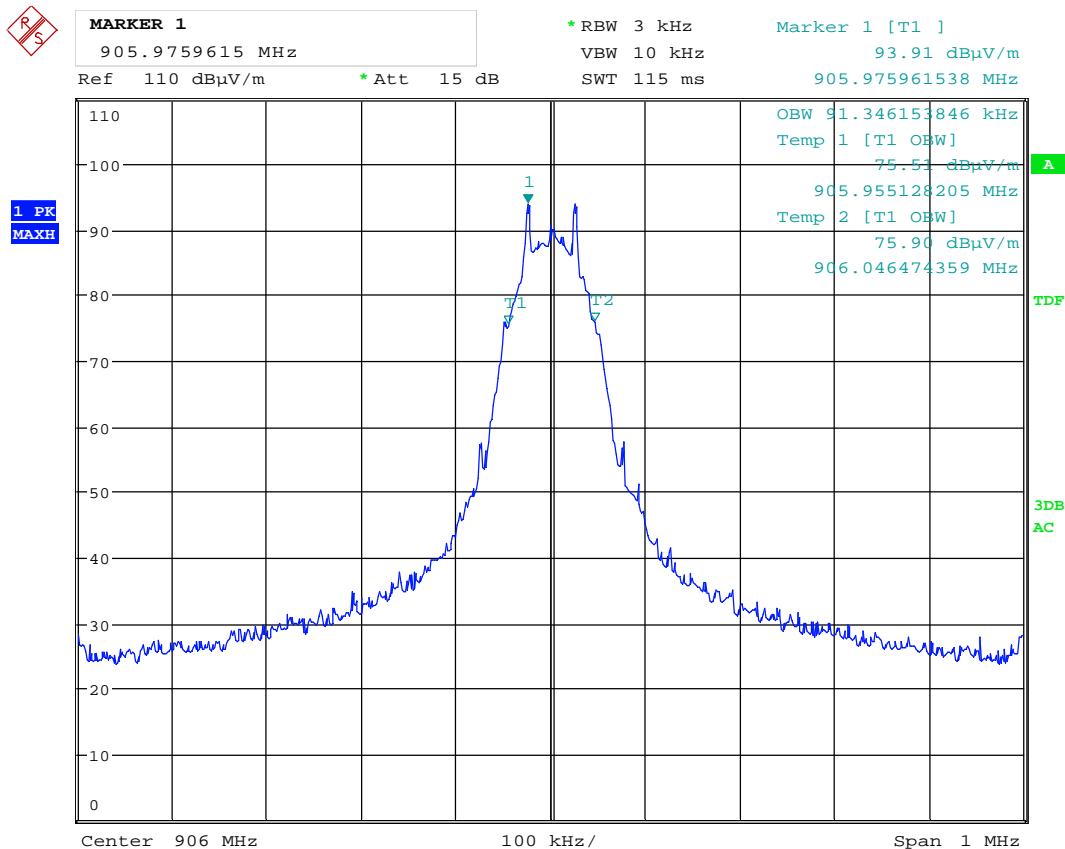

Date: 27.SEP.2018 09:50:03

99% Bandwidth

3.2 Peak Power Output

FCC part 15.249 (a),(c),(e)

Test Results: Complies

Measurement Data:

PK detector

	906 MHz
Conducted Power (dBm)	-0.21
Conducted Power (mWatts)	0.95
Field Strength (dBμV/m)	95.84
ERP, Calculated (mWatts)	0.70
Antenna gain (dBd)	-1.3

Average field strength calculated with duty cycle correction:

	906 MHz
Duty cycle correction (dB)	20.18
AV Field Strength (dBμV/m)	75.66
ERP, Calculated (mWatts)	0.01

Duty Cycle Correction Factor Calculation:

Duty Cycle = ON time / ON + OFF time = (9.8 ms / 100 ms) * 100 = 9.8%

Duty Cycle Correction factor = -20 x log (0.098) = -20.18 dB

Maximum Duty Cycle Correction Factor according to Para 15.35 (b): 20 dB

Measured with 100%.

Antenna gain = 10 * log(ERP/Conducted power) dBi

EIRP is calculated from measured field strength by the formulas in KDB 412172 D01 Determining ERP and EIRP v01r01.


See attached plots.

Requirements:


(e) As shown in §15.35(b), for frequencies above 1000 MHz, the field strength limits in paragraphs (a)

The maximum average output power shall be \leq 94 dB μ V/m


and (b) of this section are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

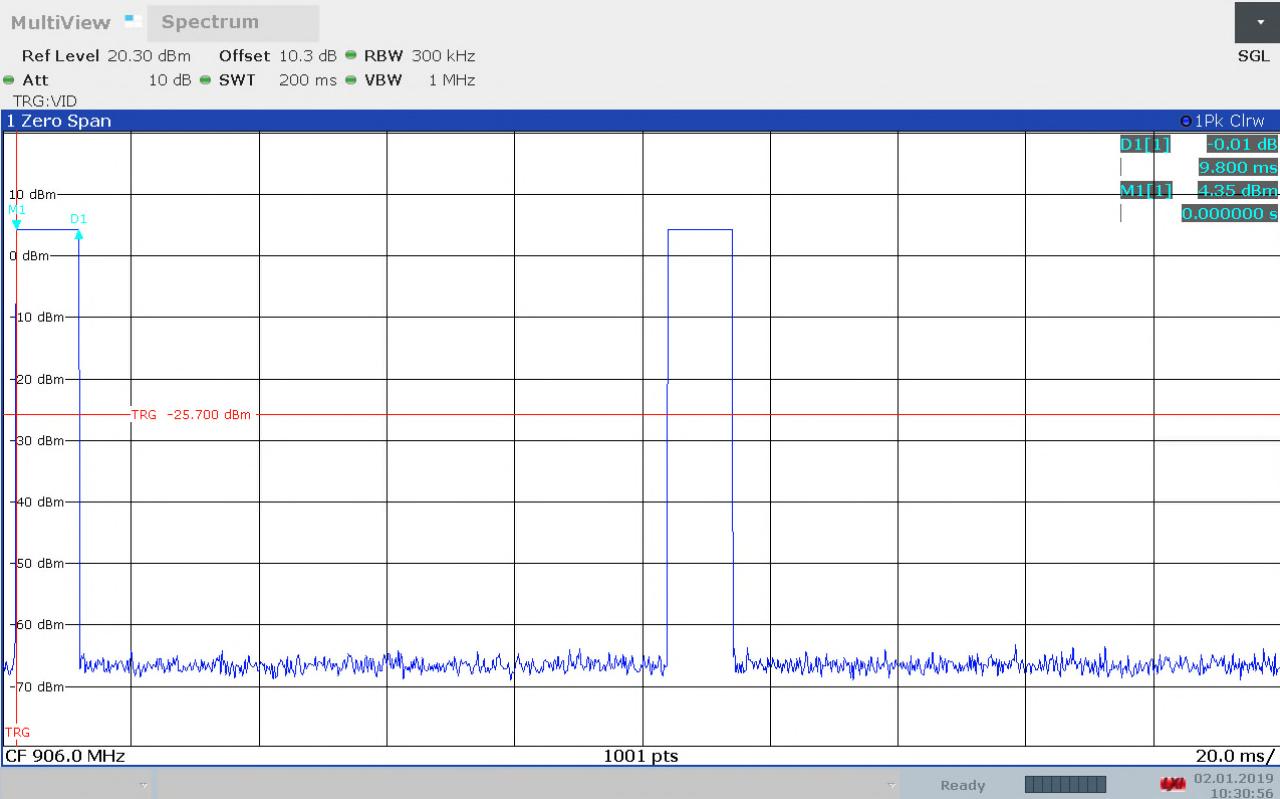


ON time

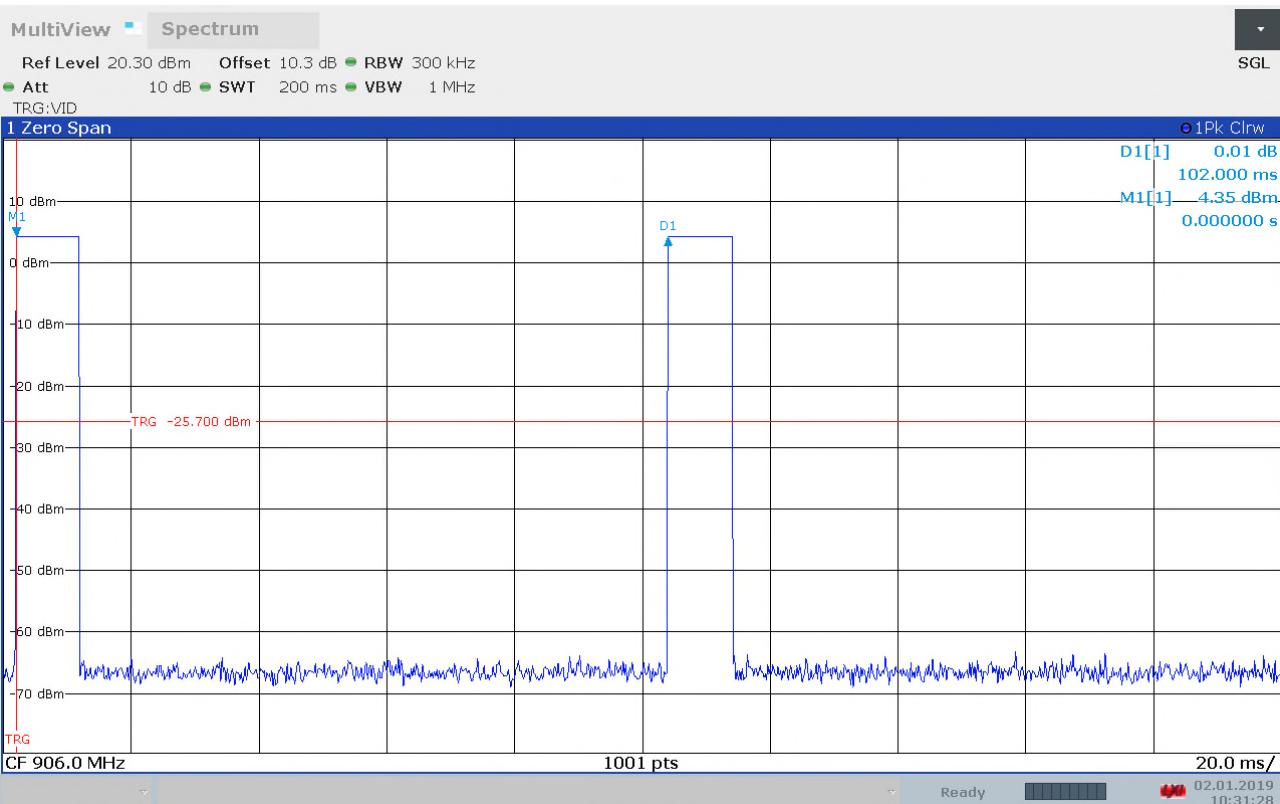

ON+OFF time

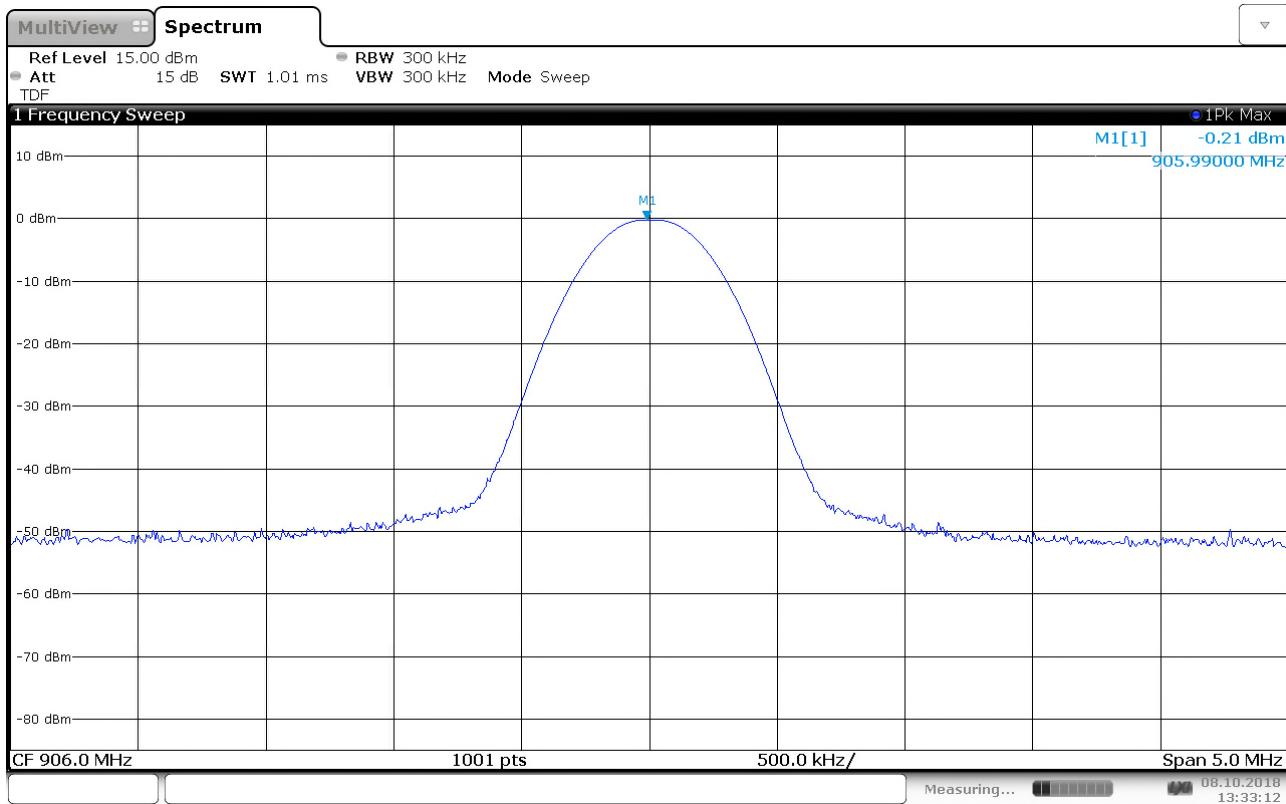


Conducted power, 906MHz

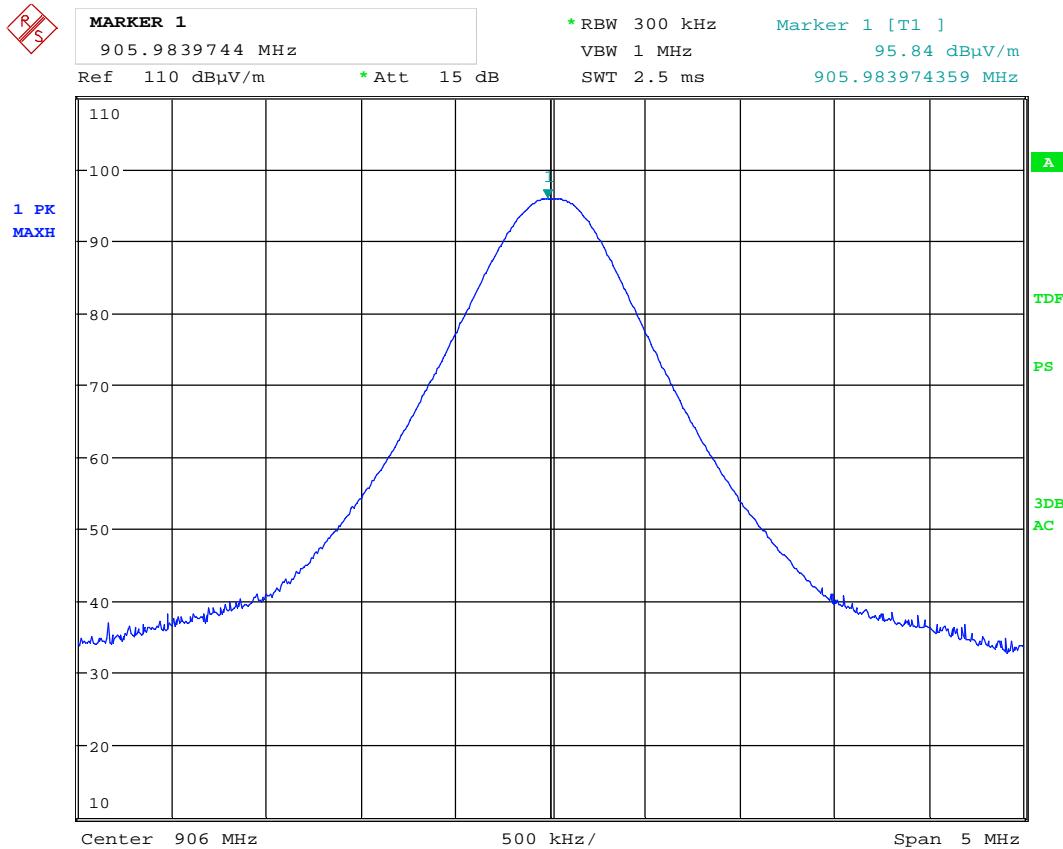

Date: 27.SEP.2018 09:11:36

Field strength @ Horizontal Polarization-906MHz

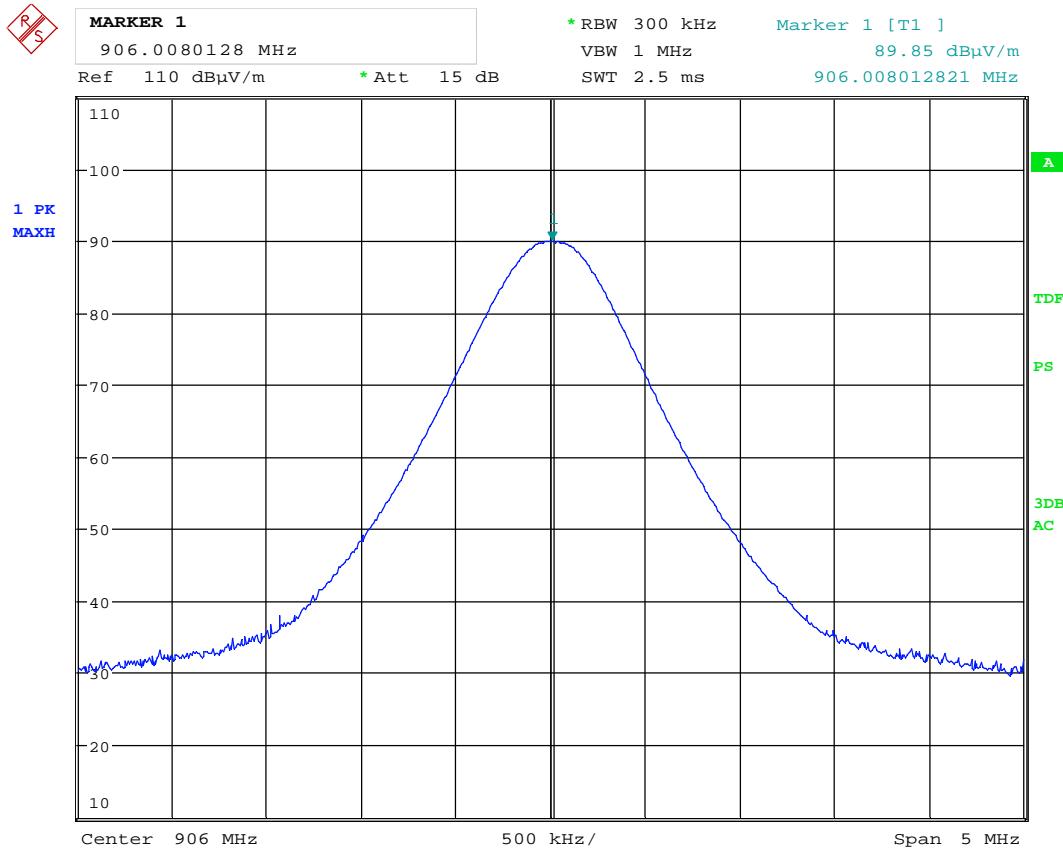

Date: 27.SEP.2018 09:01:28

Field strength @ Vertical Polarization-906MHz

3.3 Restricted Bands of operation

Restricted Bands of operation for FCC and ISED are defined in FCC Part 15.205 and ISED RSS-GEN, Issue 4 clause 8.10.

Generally, no fundamentals are allowed in the restricted bands and all emissions must comply with the limits in FCC 15.209 or RSS-GEN, Issue 4, clause 8.9.

FCC (MHz)	ISED (MHz)	FCC (GHz)	ISED (GHz)
0.090-0.110		0.96-1.24 1.3-1.427	0.96-1.427
0.495-0.505		1.435-1.6265	
2.1735-2.1905		1.6455-1.6465	
	3.020-3.026	1.660-1.710	
4.125-4.128		1.7188-1.7222	
4.17725-4.17775		2.2-2.3	
4.20725-4.20775		2.31-2.39	
	5.677-5.683	2.4835-2.5	
6.215-6.218		2.69-2.9	2.655-2.9
6.26775-6.26825		3.26-3.267	
6.31175-6.31225		3.332-3.339	
8.291-8.294		3.3458-3.358	
8.362-8.366		3.6-4.4	3.5-4.4
8.37625-8.38675		4.5-5.15	
8.41425-8.41475		5.35-5.46	
12.29-12.293		7.25-7.75	
12.51975-12.52025		8.025-8.5	
12.57675-12.57725		9.0-9.2	
13.36-13.41		9.3-9.5	
16.42-16.423		10.6-12.7	
16.69475-16.69525		13.25-13.4	
16.80425-16.80475		14.47-14.5	
25.5-25.67		15.35-16.2	
37.5-38.25		17.7-21.4	
73-74.6		22.01-23.12	
74.8-75.2		23.6-24.0	
108-121.94 123-138	108-138	31.2-31.8	
149.9-150.05		36.43-36.5	
156.52475-156.52525		Above 38.6	
156.7-156.9			
162.0125-167.17			
167.72-173.2			
240-285			
322-335.4			
399.9-410			
608-614			

Frequencies in **Bold** text are specific for FCC or ISED, all other frequencies are common.

3.4 Spurious Emissions (Radiated)

FCC Part 15.209, 249 (d)

Test Results: Complies

See attached plots.

Duty Cycle Correction Factor Calculation:

Duty Cycle = ON time / ON +OFF time= (9.8 ms/ 100 ms)*100= 9.8%

Duty Cycle Correction factor = $-20 \times \log(0.098)$ = -20.18dB

Maximum Duty Cycle Correction Factor according to Para 15.35 (b): 20 dB

Radiated emission 30 – 1000 MHz.

Measuring distance 3 m.

Tested in speech mode with active connection.


Frequency	Operational condition	Field strength	Measuring distance	Limit	Margin
MHz		dB μ V/m	metres	dB μ V/m	dB
34.6	TX on	17.29	3	40	22.7
902	TX on	36.4	3	46	9.6

See attached graphs.

Requirements/Limit


FCC	Part 15.209 @ frequencies defined in §15.205	
ISED	RSS-GEN Issue 4, Clause 8.9 @ frequencies defined in clause 8.10	
Radiated emission limit @3 meters		
Frequency (MHz)	Quasi Peak (μV/m)	Quasi Peak (dBμV/m)
30 – 88	100	40.0
88 – 216	150	43.5
216 – 960	200	46.0
Above 960	500	54.0

(d) Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in §15.209, whichever is the lesser attenuation.

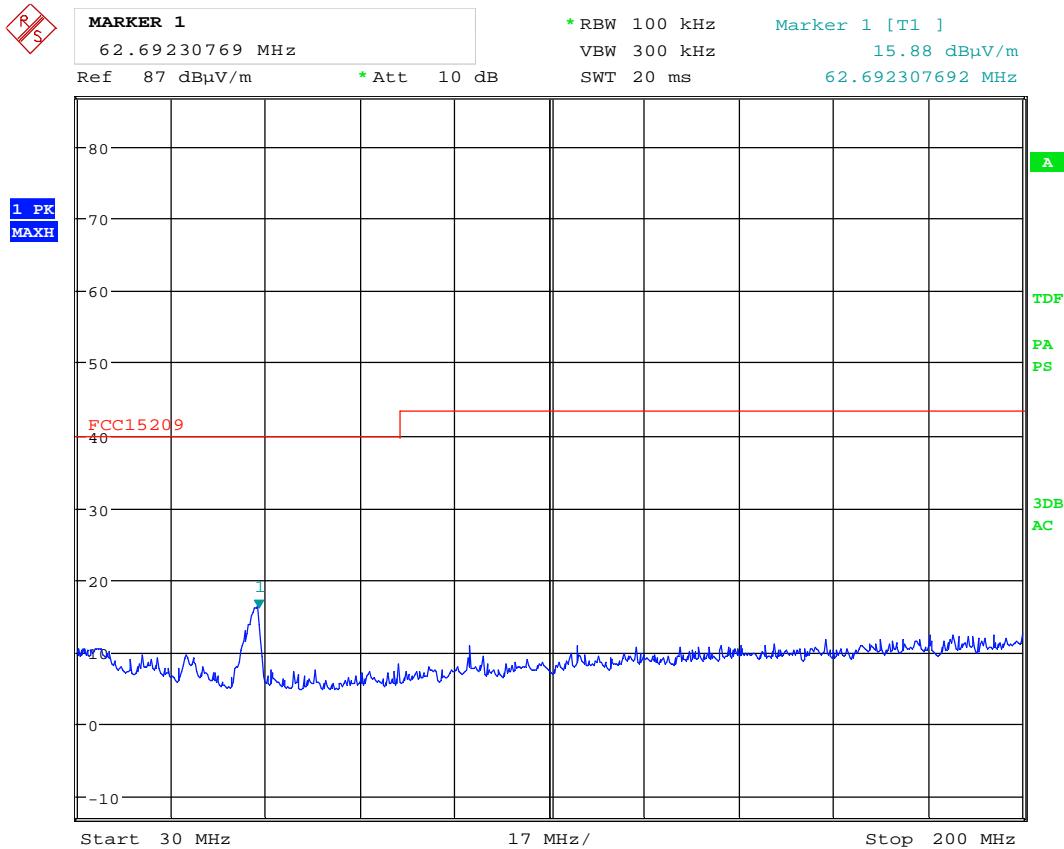


Date: 27.SEP.2018 08:50:15

VP: 30 - 200MHz, PKscan

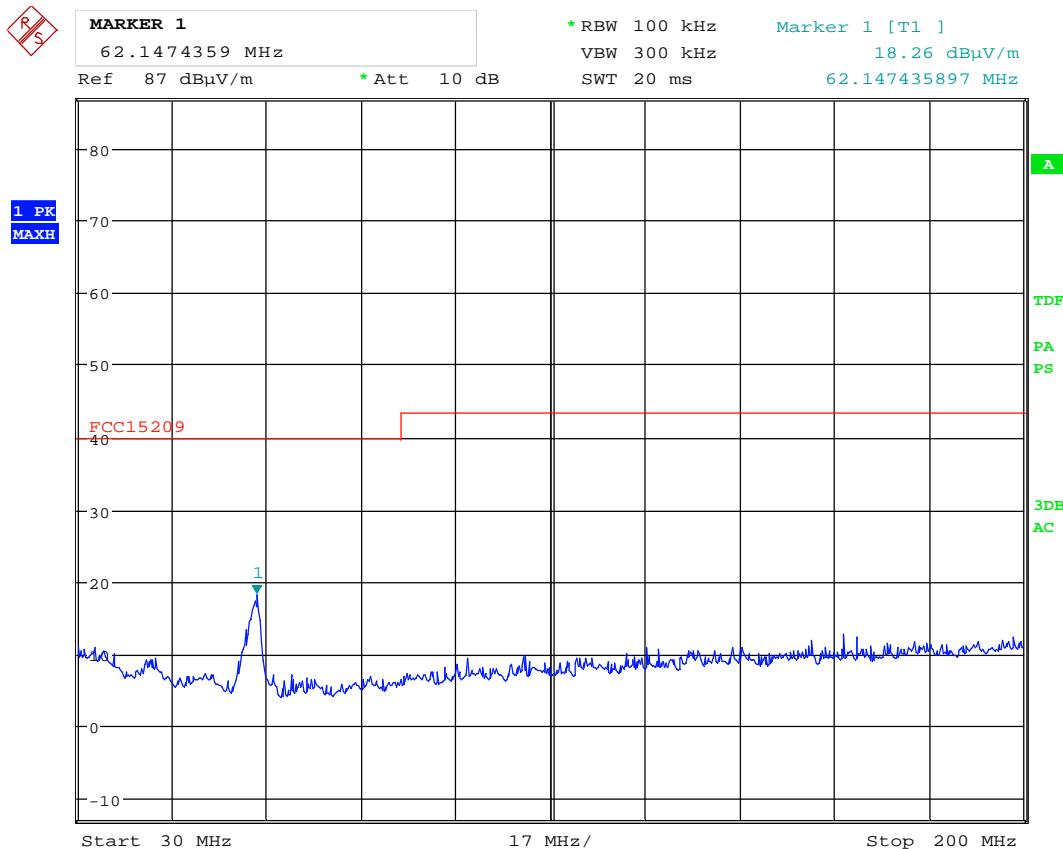


Date: 27.SEP.2018 08:51:58

HP: 30 - 200MHz, PKscan

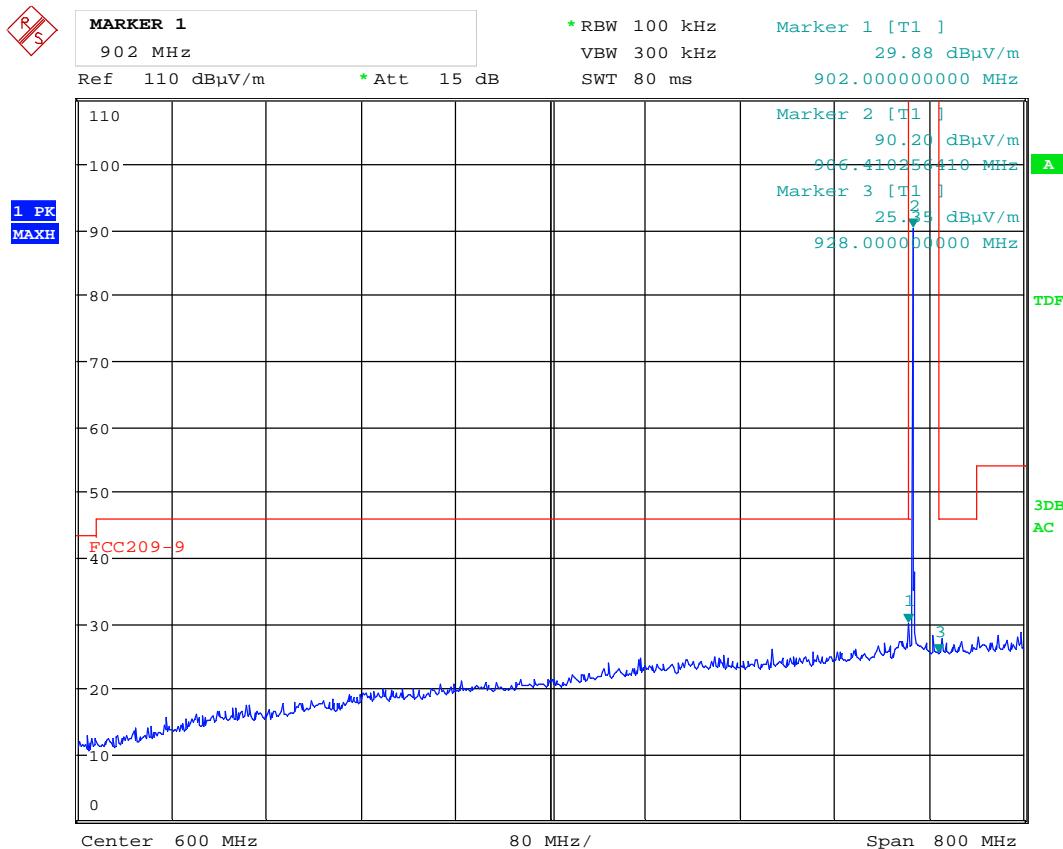

Date: 27.SEP.2018 09:28:33

VP: 200- 1000MHz, PKscan

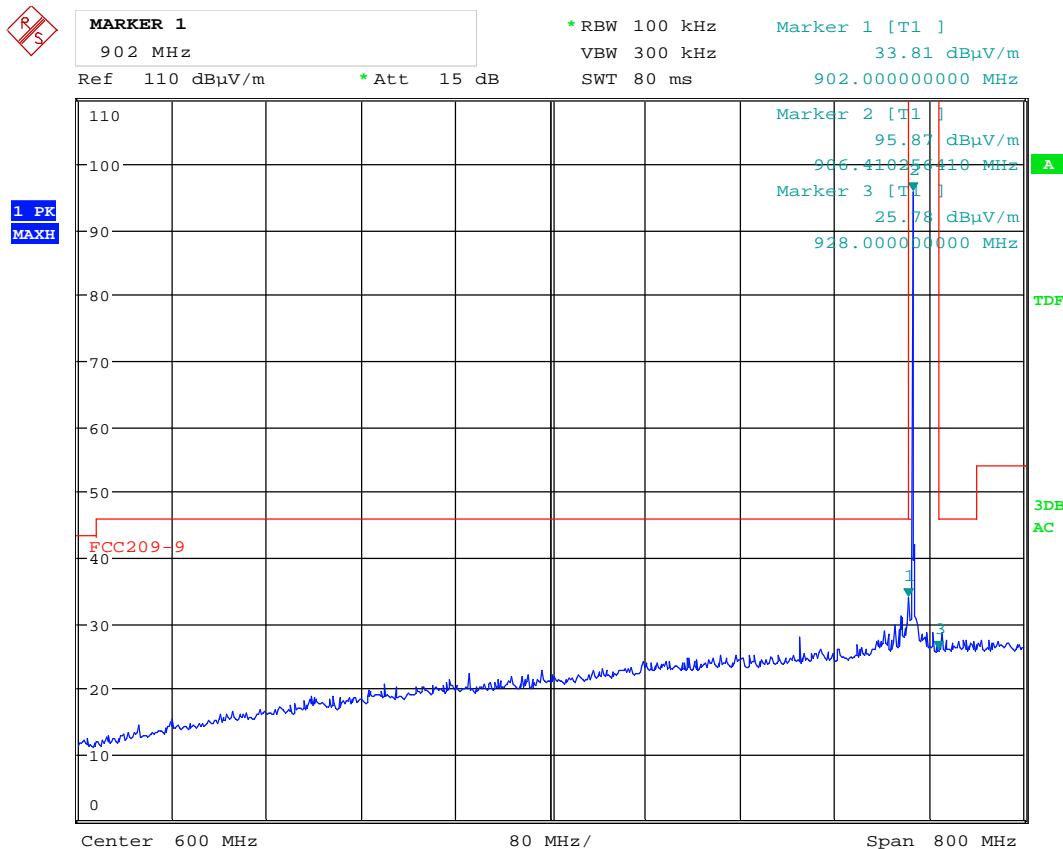

Date: 27.SEP.2018 09:27:02

HP: 200 - 1000MHz, PKscan

Radiated Emissions, 1-10 GHz

Measuring distance: 3m (1 – 10 GHz)

Peak Detector:

Frequency	RF channel	Dist. corr. factor	Field strength, Peak Detector, 3m	Duty cycle corr. factor	Limit	Margin
MHz	L,M,H	dB	dB μ V/m	dB	dB μ V/m	dB
1807.69	906MHz	0	50.54	/	74	23.46
2718.0	906MHz	0	56.96	/	74	17.12
3625.0	906MHz	0	45.86	/	74	28.14
4533.65	906MHz	0	47.38	/	74	26.62
Other freqs	906MHz	0	None detected	/	74	-

Average Detector:

Frequency	RF channel	Dist. corr. factor	Field strength, Peak Detector, 3m	Duty cycle corr. factor	Limit	Margin
GHz	L,M,H	dB	dB μ V/m	dB	dB μ V/m	dB
1807.69	906MHz	0	/	20	54	-
2718.0	906MHz	0	36.96	20	54	17.12
3625.0	906MHz	0	/	20	54	-
4533.65	906MHz	0	/	20	54	-
Other freqs	L,M,H	/	None detected	20	54	-

Average Detector values are calculated from Peak values by Duty Cycle Correction Factor.


Antenna factor, amplifier gain and cable loss are included in spectrum analyzer "Transducer factor".

See plots.

Requirements/Limit

FCC	Part 15.209 @ frequencies defined in §15.205	
ISED	RSS-GEN Issue 4, Clause 8.9 @ frequencies defined in clause 8.10	
Radiated emission limit @3 meters		
Frequency (MHz)	AV (dB μ V/m)	Peak (dB μ V/m)
Above 1 GHz	54.0	74.0


(d) Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in §15.209, whichever is the lesser attenuation.

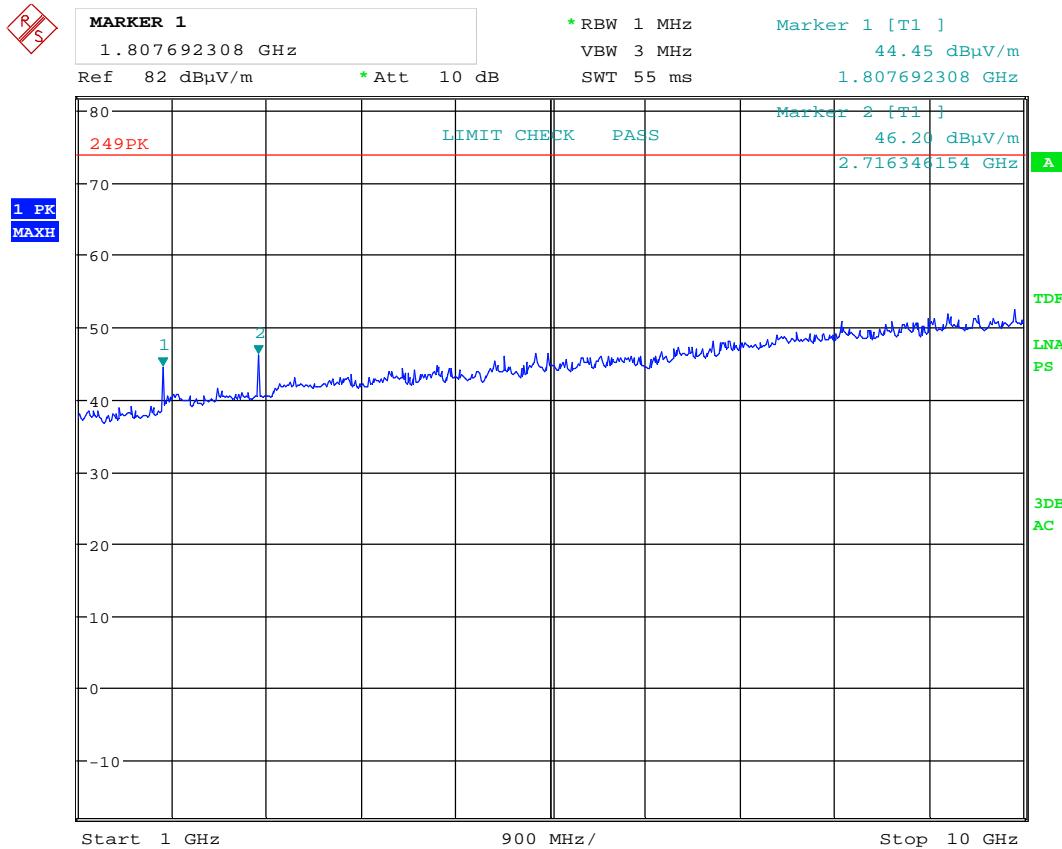

Date: 27.SEP.2018 11:03:09


VP: 1 – 10 GHz, PK scan

RS

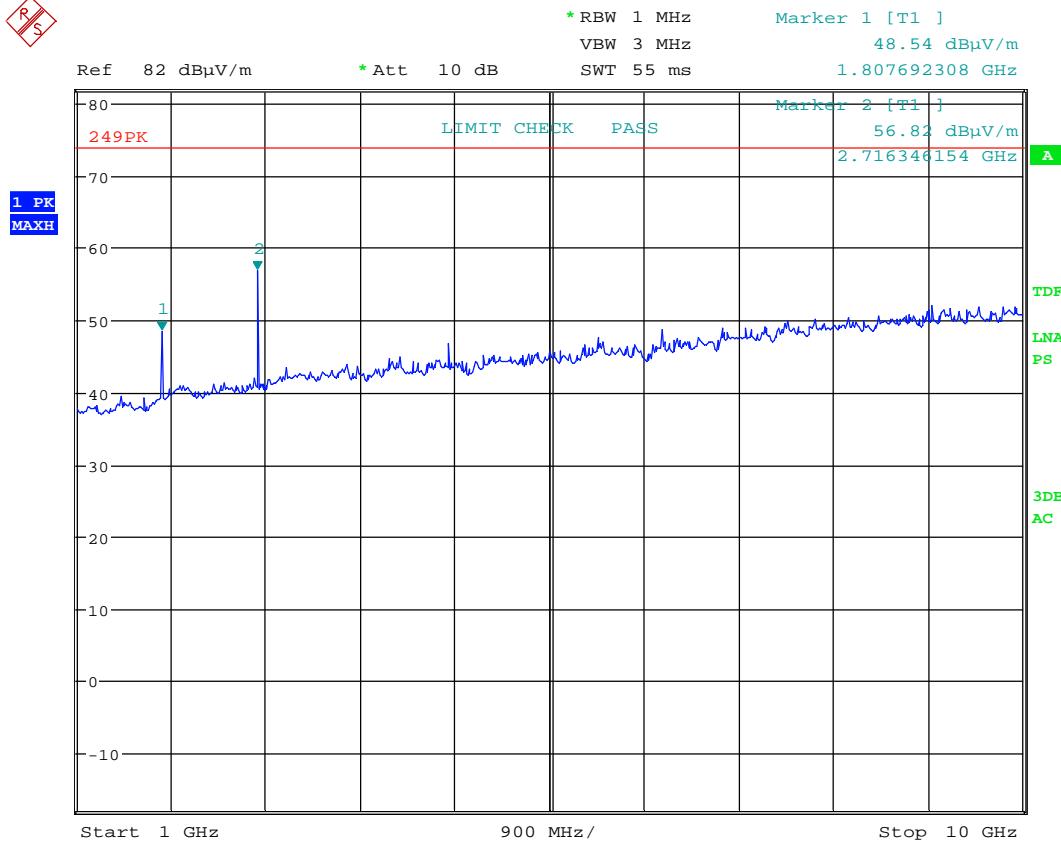

Date: 27.SEP.2018 11:06:54

HP: 1 – 10 GHz, PK scan

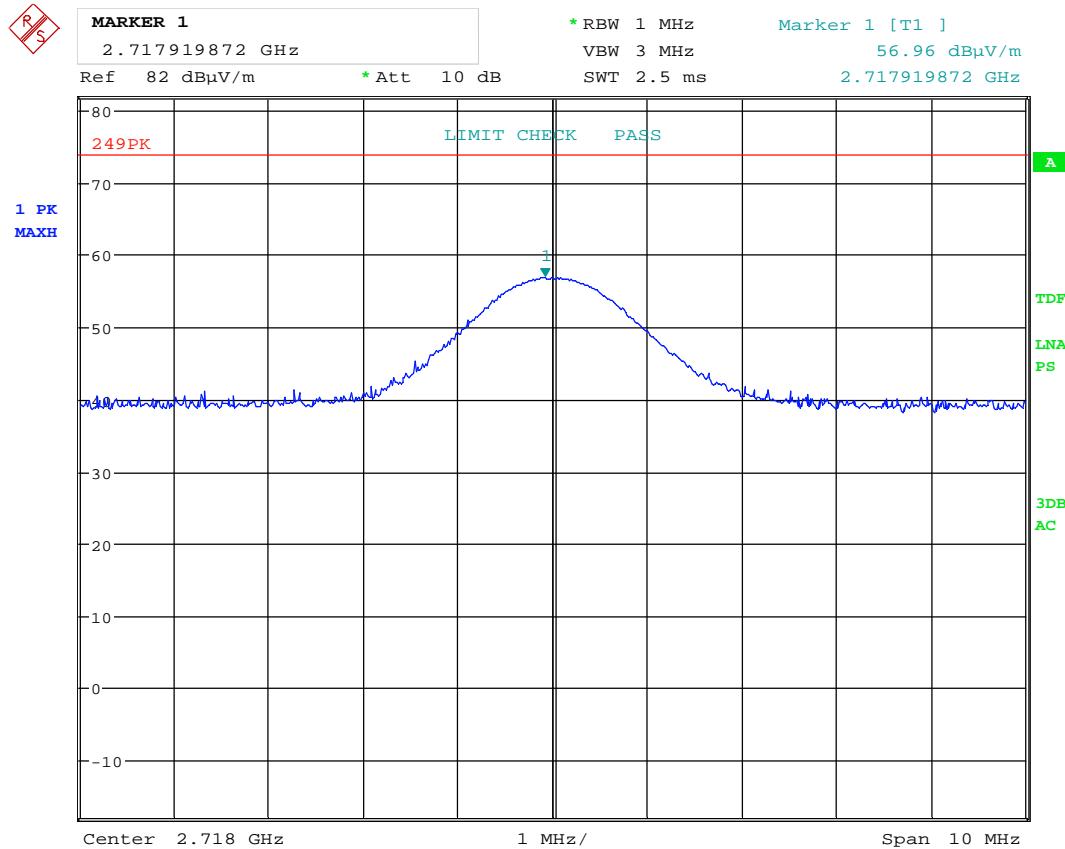

Date: 27.SEP.2018 11:09:41

HP: 2nd Harmonic, PK

4 Measurement Uncertainty

Measurement Uncertainty Values		
Test Item		Uncertainty
Output Power		±0.5 dB
Power Spectral Density		±0.5 dB
Out of Band Emissions, Conducted	< 3.6 GHz	±0.6 dB
	> 3.6 GHz	±0.9 dB
Spurious Emissions, Radiated	< 1 GHz	±2.5 dB
	> 1 GHz	±2.2 dB
Emission Bandwidth		±4 %
Power Line Conducted Emissions		+2.9 / -4.1 dB
Spectrum Mask Measurements	Frequency	±5 %
	Amplitude	±1.0 dB
Frequency Error		±0.6 ppm
Temperature Uncertainty		±1 °C

All uncertainty values are expanded standard uncertainty to give a confidence level of 95%, based on coverage factor k=2


5 LIST OF TEST EQUIPMENT

To facilitate inclusion on each page of the test equipment used for related tests, each item of test equipment and ancillaries are identified (numbered) by the Test Laboratory.


No.	Model number	Description	Manufacturer	Ref. no.	Cal. date	Cal. Due
1	ESU40	Measuring Receiver	Rohde & Schwarz	LR 1639	2019.01	2020.01
2	317	Preamplifier	Sonoma	LR 1687	2018.07	2019.07
3	HK116	Biconical Antenna	Rohde & Schwarz	LR 1260	2013.12	2019.12
4	HL223	Log Periodic Dipole	Rohde & Schwarz	LR 1261	2013.12	2019.12
5	3115	Horn Antenna	EMCO	LR 1330	2016.10	2020.10
6	8449A	Pre-amplifier	Hewlett Packard	LR 1322	2018.07	2019.07
7	6HC1500/10000	Highpass Filter	Trilithic	LR 1612	Cal b4 use	
8	Model 87V	Multimeter	Fluke	LR 1599	2018.10	2020.10
9	FSW43	Spectrum analyser	Rohde & Schwarz	LR 1690	2019.01	2020.01

6 BLOCK DIAGRAM

6.1 Power Line Conducted Emission

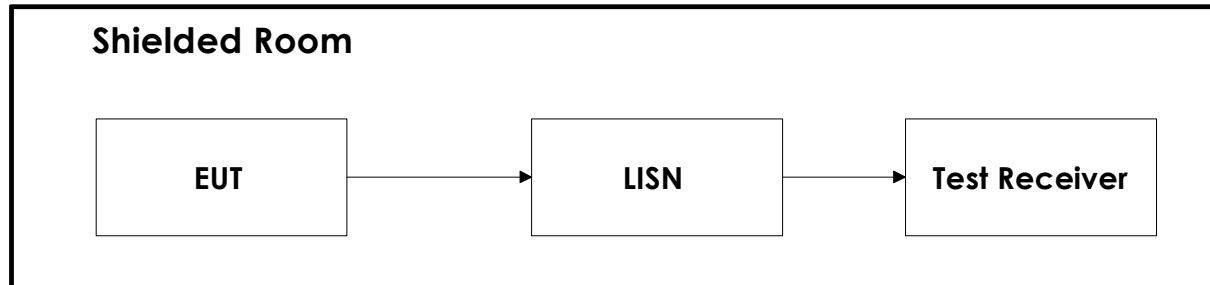

6.2 Test Site Radiated Emission

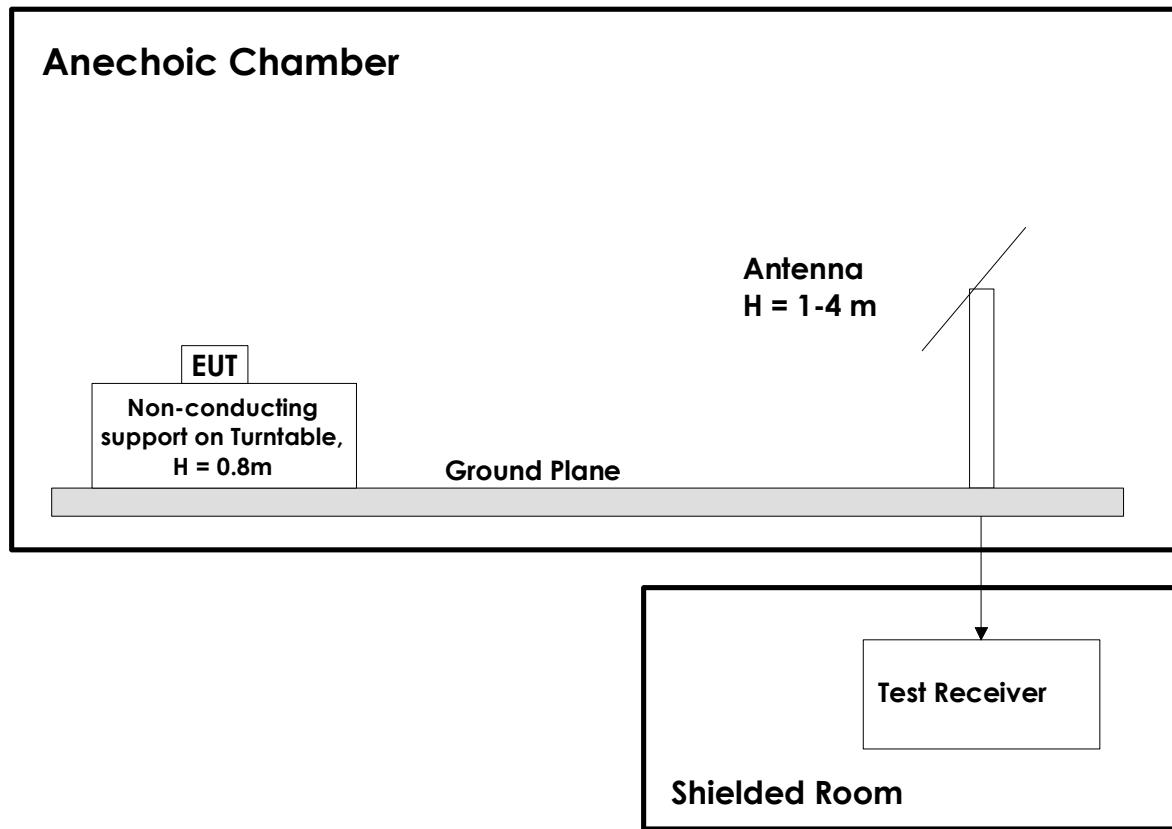

Measurements at 1GHz and above were performed with turntable height 1.5m and with the ground plane covered by absorbers.

Revision history

Version	Date	Comment	Sign
00	2019-02-28	First Version	gns
01	2019-05-31	Editorial corrections in page 3	gns