



GSM 850-Right Head Cheek Low CH128	2
GSM 850-Right Head Cheek Middle CH190	3
GSM 850-Right Head Cheek High CH251	4
GSM 850-Right Head Tilted High CH251	5
GSM 850-Left Head Cheek High CH251	6
GSM 850-Left Head Tilted High CH251	7
PCS-1900-Right Head Cheek Low CH512	8
PCS-1900-Right Head Cheek Middle CH661	9
PCS-1900-Right Head Cheek High CH810	10
PCS-1900-Right Head Tilted High CH810	11
PCS 1900-Left Head Cheek High CH810	12
PCS 1900-Left Head Tilted High CH810	13
GSM 850-Body Up High CH251	14
GSM 850-Body Down Low CH128	15
GSM 850-Body Down Middle CH190	16
GSM 850-Body Down High CH251	17
GPRS 850-Body Up Low CH128	18
EGPRS 850-Body Up Low CH128	19
GPRS 850-Body Down Low CH128	20
EGPRS 850-Body Down Low CH128	21
PCS1900-Body Up High CH810	22
PCS1900-Body Down High CH810	23
GPRS1900-Body Up High CH810	24
EGPRS1900-Body Up High CH810	25
GPRS1900-Body Down High CH810	26
EGPRS1900-Body Down High CH810	27
WCDMA Band V-Right Head Cheek Low CH4132	28
WCDMA Band V-Right Head Tilted Low CH4132	29
WCDMA Band V-Left Head Cheek Low CH4132	30
WCDMA Band V-Left Head Tilted Low CH4132	31
WCDMA Band V-Body Up Low CH4132	32
WCDMA Band V-Body Down Low CH4132	33
WCDMA HSDPA Band V-Body Up Low CH4132	34
WCDMA HSDPA Band V-Body Down Low CH4132	35
WCDMA Band II-Right Head Cheek Middle CH9400	36
WCDMA Band II-Right Head Tilted Middle CH9400	37
WCDMA Band II-Left Head Cheek Middle CH9400	38
WCDMA Band II-Left Head Tilted Middle CH9400	39
WCDMA Band II-Body Up Middle CH9400	40
WCDMA Band II- Body Down Middle CH9400	41



Test Laboratory: Compliance Certification Services Inc.

July 22, 2012

GSM 850-Right Head Cheek Low CH128

DUT: Mobile Phone; Type: Caliber; Serial: 358392040361395

Communication System: Generic GSM; Communication System Band: GSM 850 (824.2 - 848.8 MHz);

Frequency: 824.2 MHz; Communication System PAR: 9.03 dB

Medium parameters used (interpolated): $f = 824.2$ MHz; $\sigma = 0.88$ mho/m; $\epsilon_r = 41.628$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3755; ConvF(8.99, 8.99, 8.99); Calibrated: 1/20/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 1/11/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASYS 52.8.0(692); SEMCAD X 14.6.4(4989)

GSM850/Right Head Cheek Low CH128/Area Scan (6x10x1): Measurement grid: dx=15mm,

dy=15mm

Maximum value of SAR (measured) = 0.513 mW/g

GSM850/Right Head Cheek Low CH128/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm,


dy=5mm, dz=5mm

Reference Value = 10.404 V/m; Power Drift = 0.042 dB

Peak SAR (extrapolated) = 0.7100

SAR(1 g) = 0.443 mW/g; SAR(10 g) = 0.295 mW/g

Maximum value of SAR (measured) = 0.480 mW/g

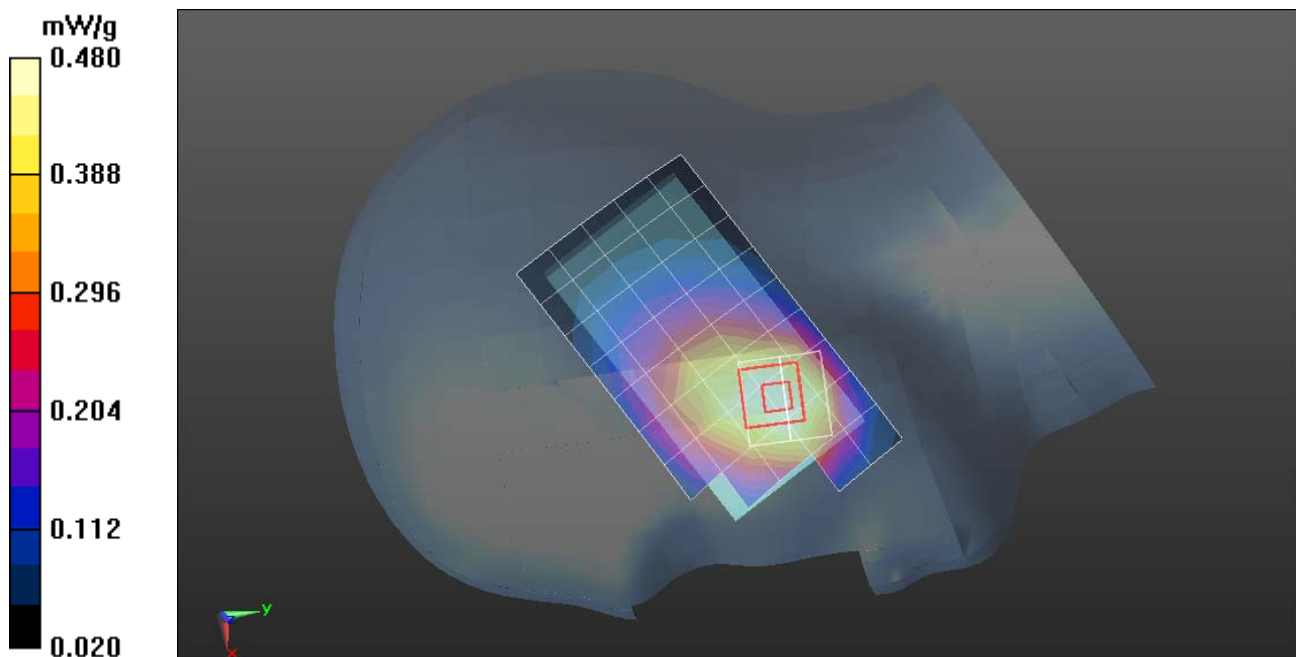



Test Laboratory: Compliance Certification Services Inc.

July 22, 2012

GSM 850-Right Head Cheek Middle CH190

DUT: Mobile Phone; Type: Caliber; Serial: 358392040361395

Communication System: Generic GSM; Communication System Band: GSM 850 (824.2 - 848.8 MHz);

Frequency: 836.6 MHz; Communication System PAR: 9.191 dB

Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.89$ mho/m; $\epsilon_r = 41.478$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3755; ConvF(8.99, 8.99, 8.99); Calibrated: 1/20/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 1/11/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASYS 52.8.0(692); SEMCAD X 14.6.4(4989)

GSM850/Right Head Cheek Middle CH190/Area Scan (6x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.585 mW/g


GSM850/Right Head Cheek Middle CH190/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.332 V/m; Power Drift = 0.005dB

Peak SAR (extrapolated) = 0.8370

SAR(1 g) = 0.512 mW/g; SAR(10 g) = 0.333 mW/g

Maximum value of SAR (measured) = 0.561 mW/g

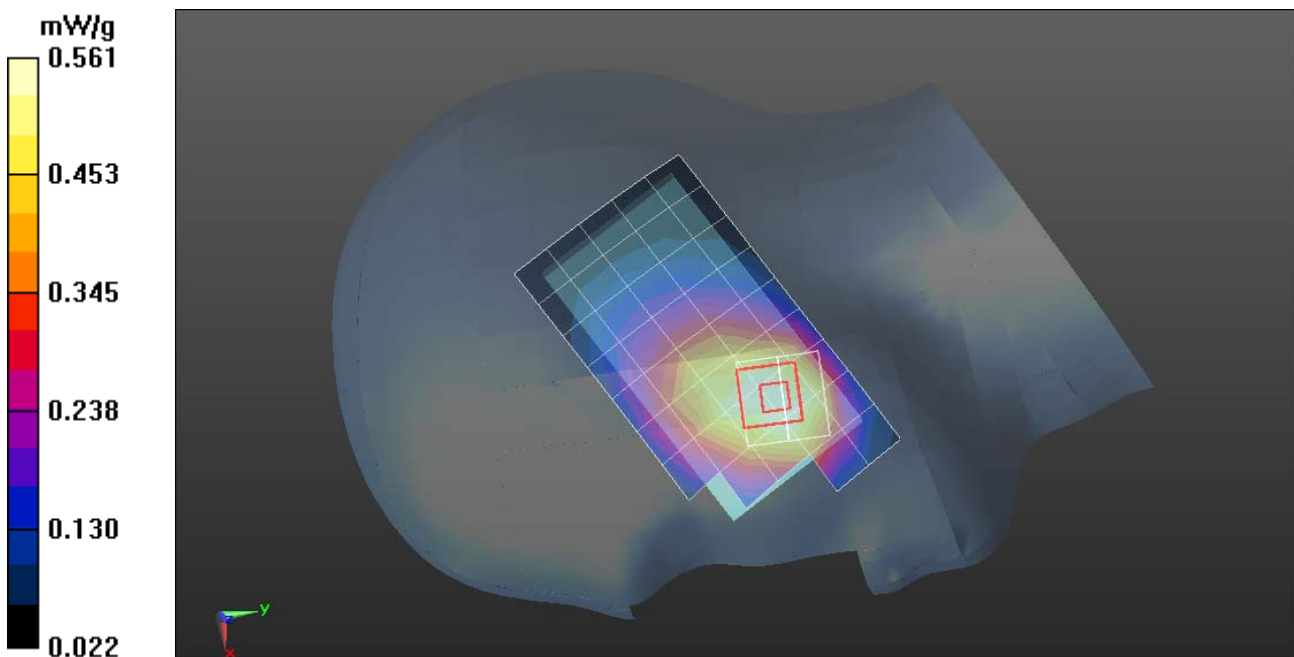



Test Laboratory: Compliance Certification Services Inc.

July 22, 2012

GSM 850-Right Head Cheek High CH251

DUT: Mobile Phone; Type: Caliber; Serial: 358392040361395

Communication System: Generic GSM; Communication System Band: GSM 850 (824.2 - 848.8 MHz);

Frequency: 848.8 MHz; Communication System PAR: 9.03 dB

Medium parameters used (interpolated): $f = 848.8$ MHz; $\sigma = 0.899$ mho/m; $\epsilon_r = 41.327$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3755; ConvF(8.99, 8.99, 8.99); Calibrated: 1/20/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 1/11/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASYS 52.8.0(692); SEMCAD X 14.6.4(4989)

GSM850/Right Head Cheek High CH251/Area Scan (6x10x1): Measurement grid: dx=15mm,

dy=15mm

Maximum value of SAR (measured) = 0.670 mW/g

GSM850/Right Head Cheek High CH251/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm,


dy=5mm, dz=5mm

Reference Value = 12.060 V/m; Power Drift = -0.038 dB

Peak SAR (extrapolated) = 0.9430

SAR(1 g) = 0.578 mW/g; SAR(10 g) = 0.383 mW/g

Maximum value of SAR (measured) = 0.632 mW/g

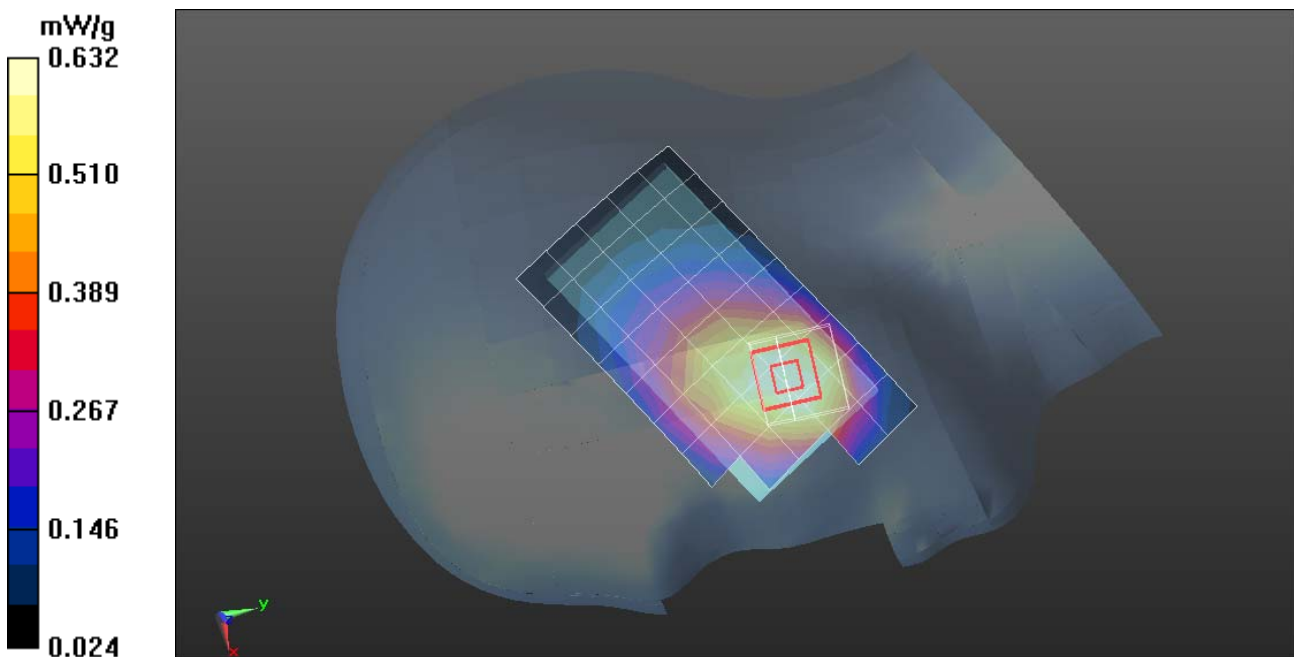



Test Laboratory: Compliance Certification Services Inc.

July 22, 2012

GSM 850-Right Head Tilted High CH251

DUT: Mobile Phone; Type: Caliber; Serial: 358392040361395

Communication System: Generic GSM; Communication System Band: GSM 850 (824.2 - 848.8 MHz);

Frequency: 848.8 MHz; Communication System PAR: 9.03 dB

Medium parameters used (interpolated): $f = 848.8$ MHz; $\sigma = 0.899$ mho/m; $\epsilon_r = 41.327$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3755; ConvF(8.99, 8.99, 8.99); Calibrated: 1/20/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 1/11/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASYS 52.8.0(692); SEMCAD X 14.6.4(4989)

GSM850/Right Head Tilted High CH251/Area Scan (6x10x1): Measurement grid: dx=15mm,

dy=15mm

Maximum value of SAR (measured) = 0.454 mW/g

GSM850/Right Head Tilted High CH251/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=5mm,


dy=5mm, dz=3mm

Reference Value = 17.678 V/m; Power Drift = 0.046 dB

Peak SAR (extrapolated) = 0.5280

SAR(1 g) = 0.389 mW/g; SAR(10 g) = 0.295 mW/g

Maximum value of SAR (measured) = 0.455 mW/g

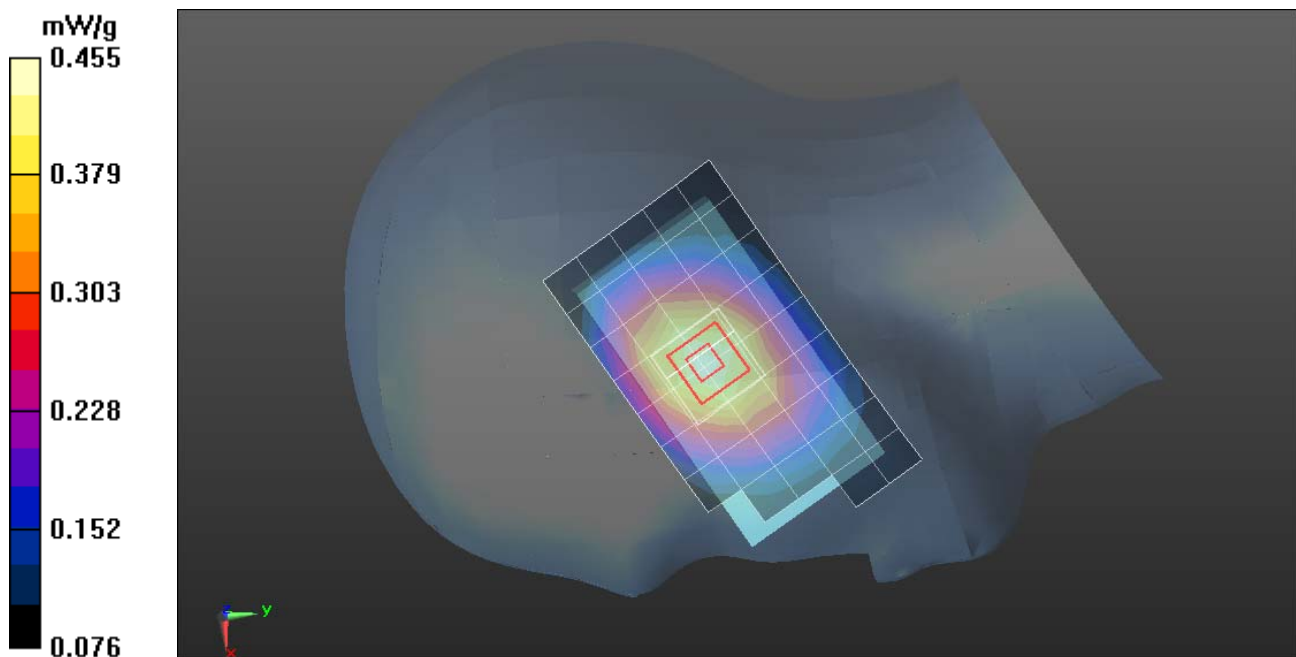



Test Laboratory: Compliance Certification Services Inc.

July 22, 2012

GSM 850-Left Head Cheek High CH251

DUT: Mobile Phone; Type: Caliber; Serial: 358392040361395

Communication System: Generic GSM; Communication System Band: GSM 850 (824.2 - 848.8 MHz);

Frequency: 848.8 MHz; Communication System PAR: 9.03 dB

Medium parameters used (interpolated): $f = 848.8$ MHz; $\sigma = 0.899$ mho/m; $\epsilon_r = 41.327$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3755; ConvF(8.99, 8.99, 8.99); Calibrated: 1/20/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 1/11/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASYS 52.8.0(692); SEMCAD X 14.6.4(4989)

GSM850/Left Head Cheek High CH251/Area Scan (6x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.670 mW/g

GSM850/Left Head Cheek High CH251/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=5mm,


dy=5mm, dz=3mm

Reference Value = 12.826 V/m; Power Drift = 0.035 dB

Peak SAR (extrapolated) = 1.2260

SAR(1 g) = 0.536 mW/g; SAR(10 g) = 0.398 mW/g

Maximum value of SAR (measured) = 0.699 mW/g

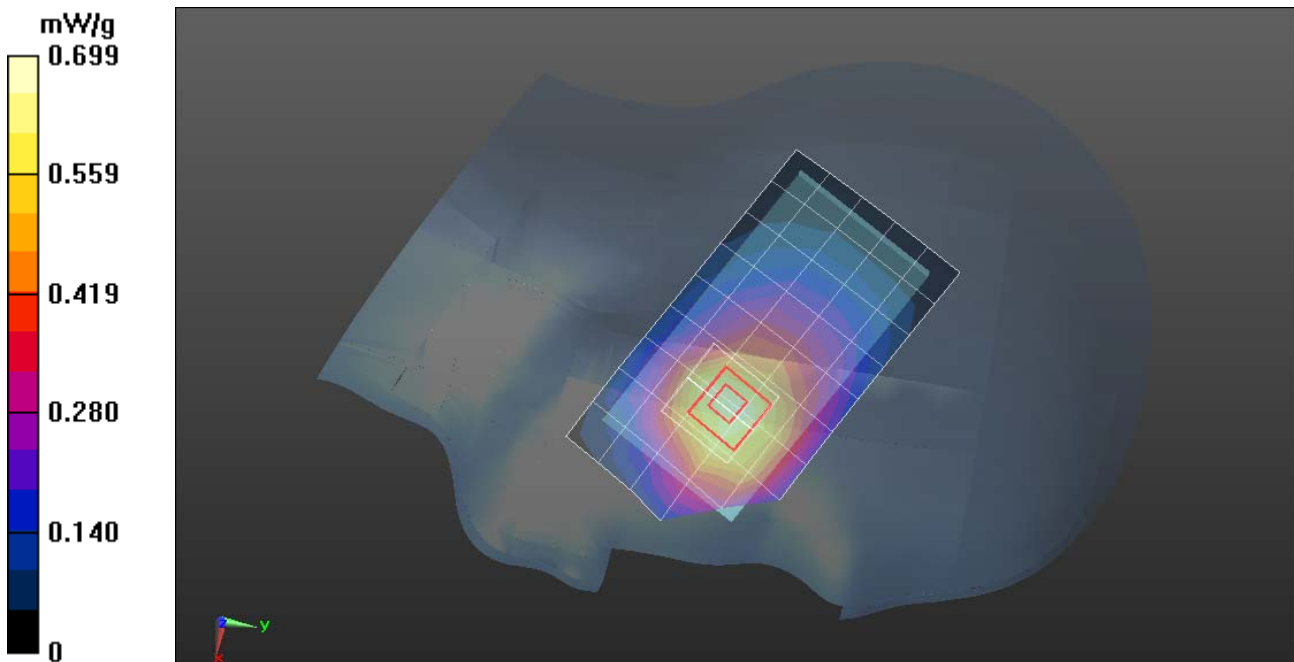



Test Laboratory: Compliance Certification Services Inc.

July 22, 2012

GSM 850-Left Head Tilted High CH251

DUT: Mobile Phone; Type: Caliber; Serial: 358392040361395

Communication System: Generic GSM; Communication System Band: GSM 850 (824.2 - 848.8 MHz);

Frequency: 848.8 MHz; Communication System PAR: 9.03 dB

Medium parameters used (interpolated): $f = 848.8$ MHz; $\sigma = 0.899$ mho/m; $\epsilon_r = 41.327$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3755; ConvF(8.99, 8.99, 8.99); Calibrated: 1/20/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection), $z = 1.0, 25.0$
- Electronics: DAE4 Sn1245; Calibrated: 1/11/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASYS 52.8.0(692); SEMCAD X 14.6.4(4989)

GSM850/Left Head Tilted High CH251/Area Scan (6x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.428 mW/g

GSM850/Left Head Tilted High CH251/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=5mm,


dy=5mm, dz=3mm

Reference Value = 16.763 V/m; Power Drift = -0.090 dB

Peak SAR (extrapolated) = 0.5010

SAR(1 g) = 0.412 mW/g; SAR(10 g) = 0.396 mW/g

Maximum value of SAR (measured) = 0.430 mW/g

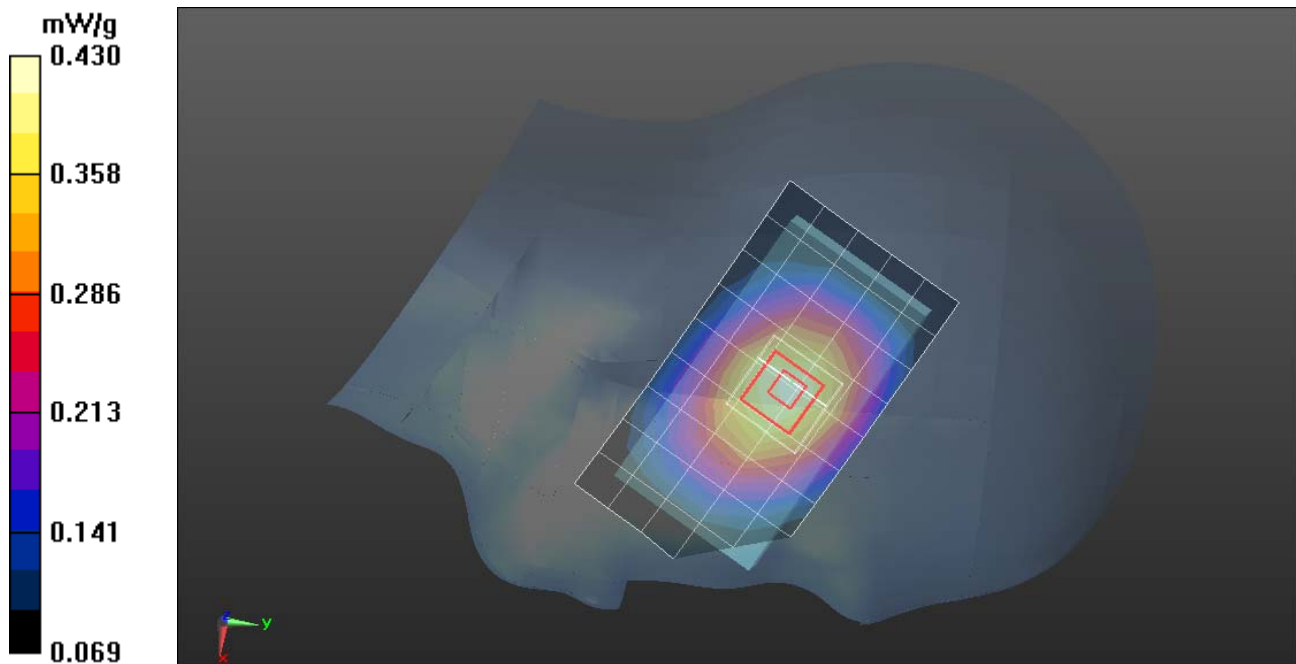



Test Laboratory: Compliance Certification Services Inc.

July 22, 2012

PCS-1900-Right Head Cheek Low CH512

DUT: Mobile Phone; Type: Caliber; Serial: 358392040361395

Communication System: Generic GSM; Communication System Band: PCS 1900 (1850.2 - 1909.8.0 MHz); Frequency: 1850.2 MHz; Communication System PAR: 9.03 dB

Medium parameters used: $f = 1850.2$ MHz; $\sigma = 1.42$ mho/m; $\epsilon_r = 39.87$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3755; ConvF(7.84, 7.84, 7.84); Calibrated: 1/20/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 1/11/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- Measurement SW: DASYS2, Version 52.6 (1); SEMCAD X Version 14.4.2 (2595)

PCS1900/Right Head Cheek Low CH512/Area Scan (6x9x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.723 mW/g

PCS1900/Right Head Cheek Low CH512/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=5mm,


dy=5mm, dz=5mm

Reference Value = 18.833 V/m; Power Drift = 0.017 dB

Peak SAR (extrapolated) = 1.285 W/kg

SAR(1 g) = 0.512 mW/g; SAR(10 g) = 0.398 mW/g

Maximum value of SAR (measured) = 0.935 mW/g

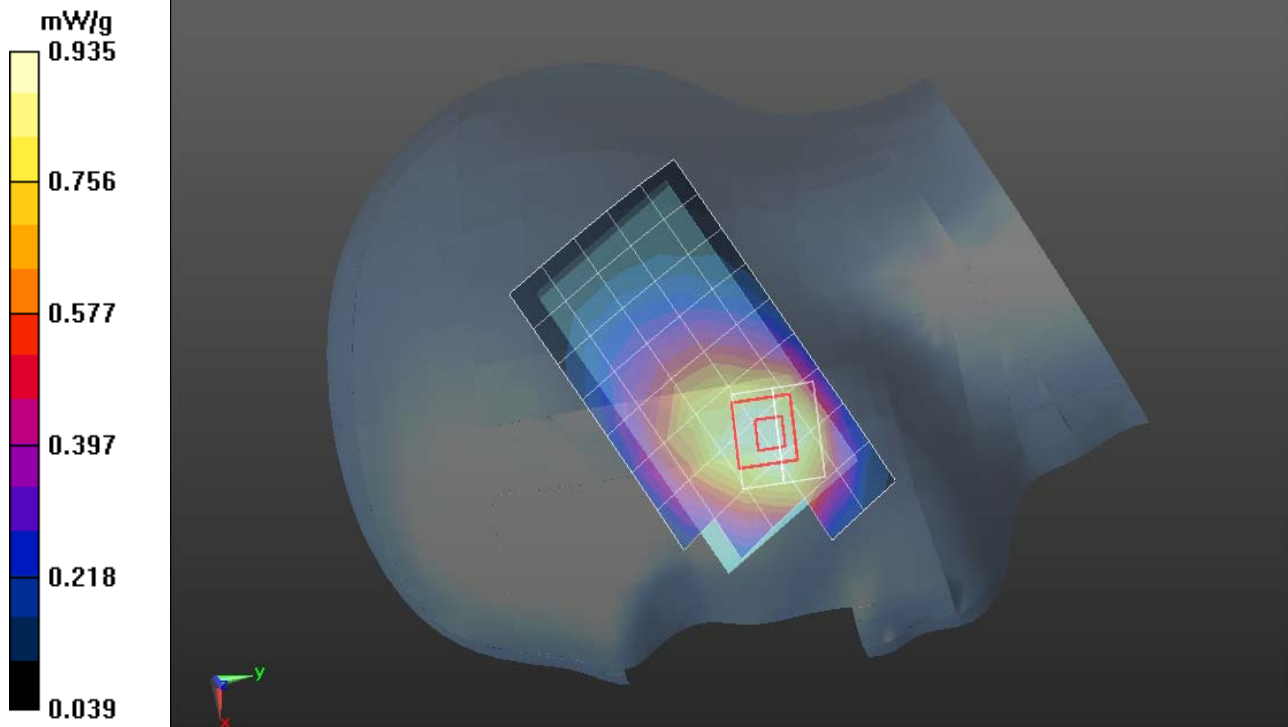



Test Laboratory: Compliance Certification Services Inc.

July 22, 2012

PCS-1900-Right Head Cheek Middle CH661

DUT: Mobile Phone; Type: Caliber; Serial: 358392040361395

Communication System: Generic GSM; Communication System Band: PCS 1900 (1850.2 - 1909.8.0 MHz); Frequency: 1880 MHz; Communication System PAR: 9.03 dB

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.45$ mho/m; $\epsilon_r = 39.74$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3755; ConvF(7.84, 7.84, 7.84); Calibrated: 1/20/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 1/11/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- Measurement SW: DASY52, Version 52.6 (1); SEMCAD X Version 14.4.2 (2595)

PCS1900/Right Head Cheek Middle CH661/Area Scan (6x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.727 mW/g


PCS1900/Right Head Cheek Middle CH661/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 16.306 V/m; Power Drift = 0.097 dB

Peak SAR (extrapolated) = 1.085 W/kg

SAR(1 g) = 0.423 mW/g; SAR(10 g) = 0.210 mW/g

Maximum value of SAR (measured) = 0.813 mW/g

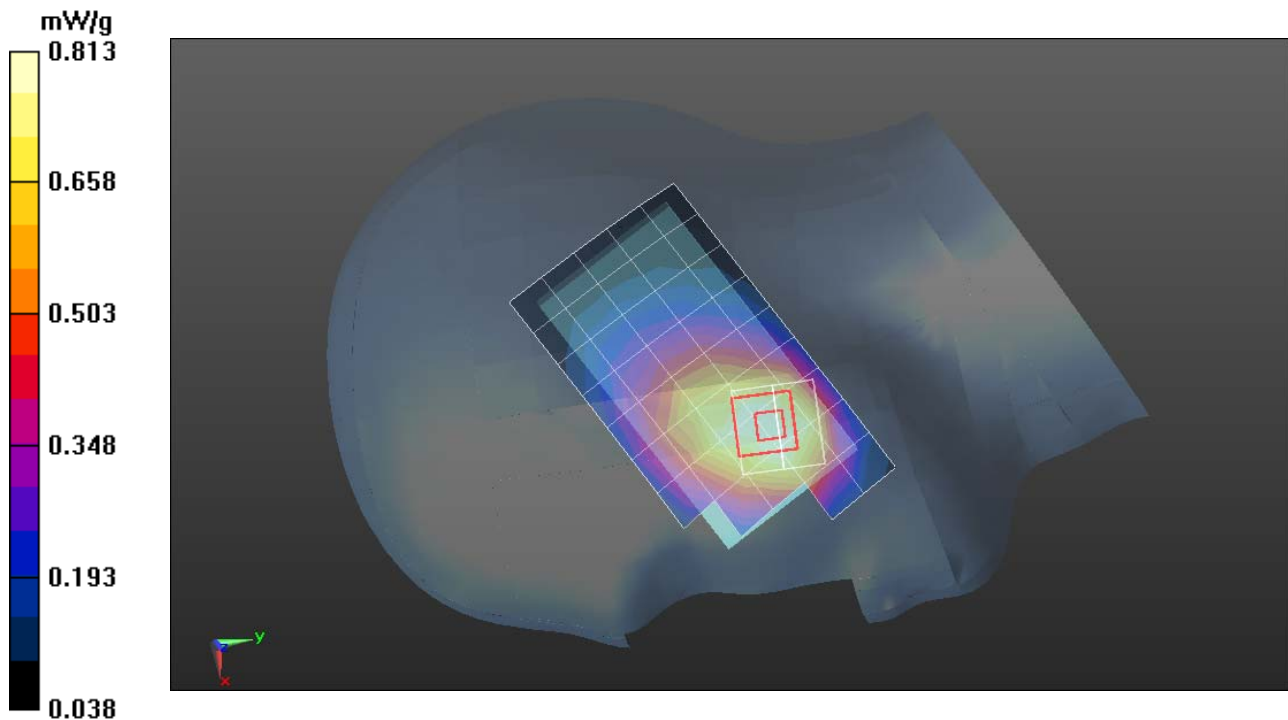



Test Laboratory: Compliance Certification Services Inc.

July 22, 2012

PCS-1900-Right Head Cheek High CH810

DUT: Mobile Phone; Type: Caliber; Serial: 358392040361395

Communication System: Generic GSM; Communication System Band: PCS 1900 (1850.2 - 1909.8.0 MHz); Frequency: 1909.80MHz; Communication System PAR: 9.03 dB

Medium parameters used: $f = 1909.80\text{MHz}$; $\sigma = 1.47 \text{ mho/m}$; $\epsilon_r = 39.6$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3755; ConvF(7.84, 7.84, 7.84); Calibrated: 1/20/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 1/11/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- Measurement SW: DASY52, Version 52.6 (1); SEMCAD X Version 14.4.2 (2595)

PCS1900/Right Head Cheek High CH810/Area Scan (6x9x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.769 mW/g


PCS1900/Right Head Cheek High CH810/Zoom Scan (7x7x9)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 16.426 V/m; Power Drift = 0.056 dB

Peak SAR (extrapolated) = 1.154 W/kg

SAR(1 g) = 0.542 mW/g; SAR(10 g) = 0.200 mW/g

Maximum value of SAR (measured) = 0.857 mW/g

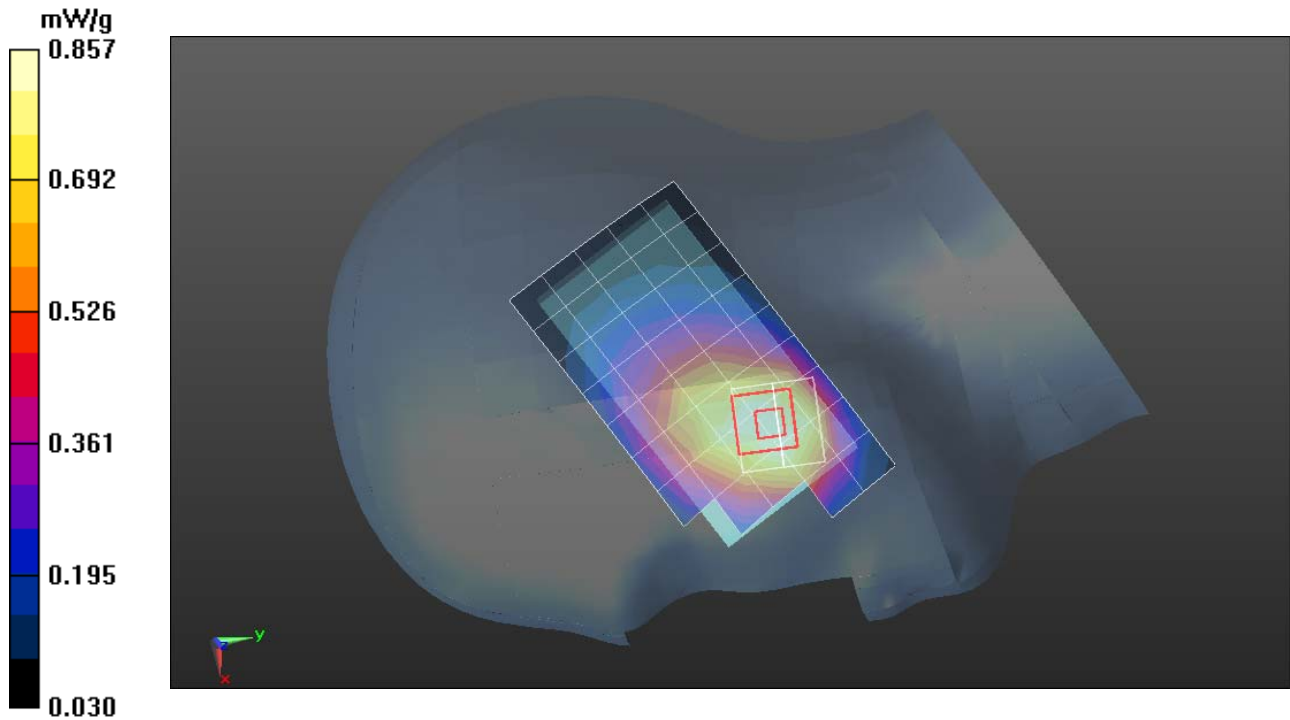



Test Laboratory: Compliance Certification Services Inc.

July 22, 2012

PCS-1900-Right Head Tilted High CH810

DUT: Mobile Phone; Type: Caliber; Serial: 358392040361395

Communication System: Generic GSM; Communication System Band: PCS 1900 (1850.2 - 1909.8MHz);

Frequency: 1909.80MHz; Communication System PAR: 9.03 dB

Medium parameters used: $f = 1909.80\text{MHz}$; $\sigma = 1.47 \text{ mho/m}$; $\epsilon_r = 39.6$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3755; ConvF(7.84, 7.84, 7.84); Calibrated: 1/20/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 1/11/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- Measurement SW: DASY52, Version 52.6 (1); SEMCAD X Version 14.4.2 (2595)

PCS1900/Right Head Tilted High CH810/Area Scan (6x9x1):

Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.703 mW/g

PCS1900/Right Head Tilted High CH810/Zoom Scan (7x7x9)/Cube 0: Measurement grid: $dx=5\text{mm}$,


$dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 18.947 V/m; Power Drift = 0.083 dB

Peak SAR (extrapolated) = 1.126 W/kg

SAR(1 g) = 0.446 mW/g; SAR(10 g) = 0.231 mW/g

Maximum value of SAR (measured) = 0.633 mW/g

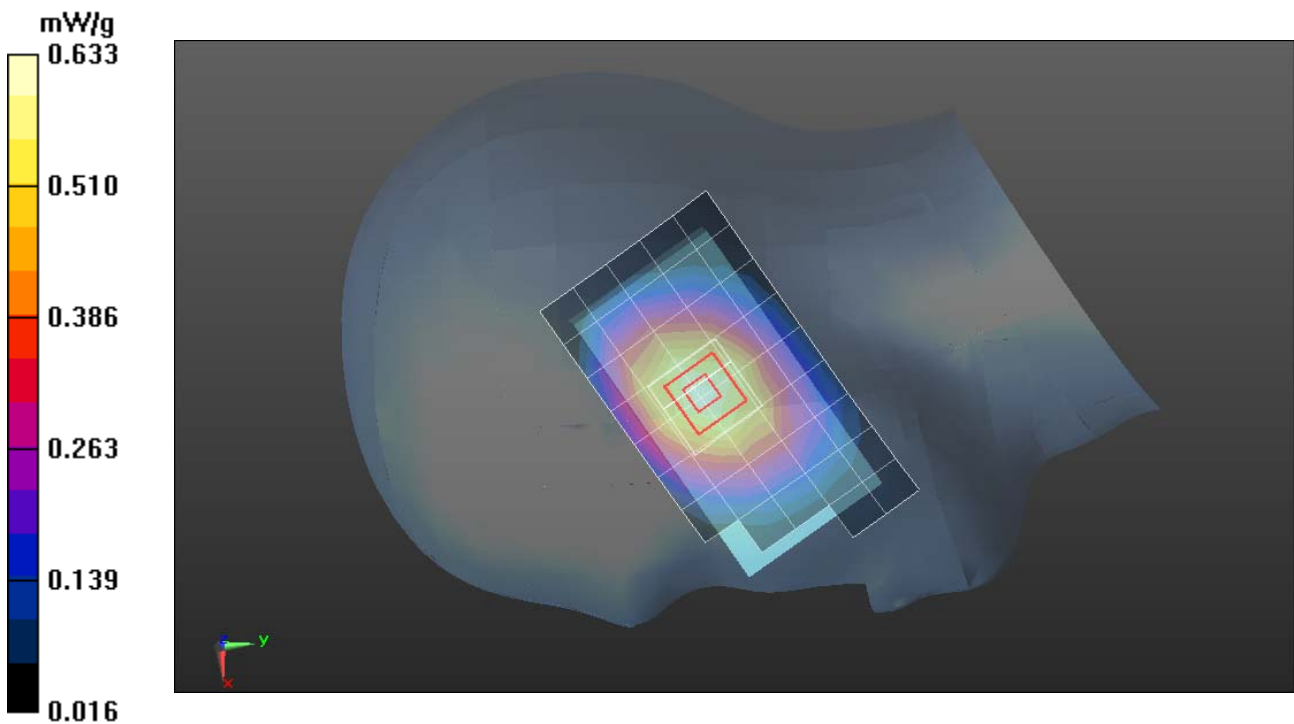



Test Laboratory: Compliance Certification Services Inc.

July 22, 2012

PCS 1900-Left Head Cheek High CH810

DUT: Mobile Phone; Type: Caliber; Serial: 358392040361395

Communication System: Generic GSM; Communication System Band: PCS 1900 (1850.2 - 1909.8.0 MHz); Frequency: 1909.80MHz; Communication System PAR: 9.03 dB

Medium parameters used: $f = 1909.80\text{MHz}$; $\sigma = 1.47 \text{ mho/m}$; $\epsilon_r = 39.6$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3755; ConvF(7.84, 7.84, 7.84); Calibrated: 1/20/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 1/11/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- Measurement SW: DASY52, Version 52.6 (1); SEMCAD X Version 14.4.2 (2595)

PCS1900/Left Head Cheek High CH810/Area Scan (6x9x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.533 mW/g

PCS1900/Left Head Cheek High CH810/Zoom Scan (7x7x9)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$


Reference Value = 16.367 V/m; Power Drift = 0.001 dB

Peak SAR (extrapolated) = 0.796 W/kg

Peak SAR (extrapolated) = 0.796 W/kg

SAR(1 g) = 0.523 mW/g; SAR(10 g) = 0.265mW/g

Maximum value of SAR (measured) = 0.628 mW/g

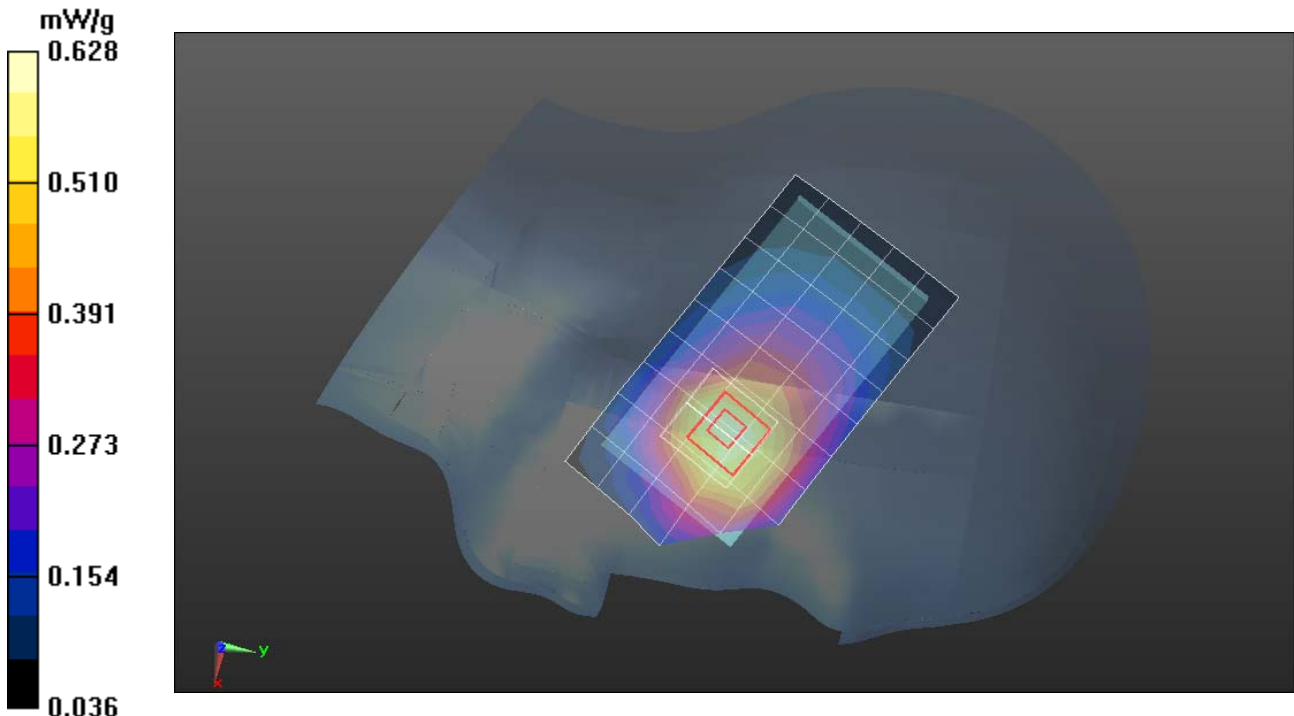



Test Laboratory: Compliance Certification Services Inc.

July 22, 2012

PCS 1900-Left Head Tilted High CH810

DUT: Mobile Phone; Type: Caliber; Serial: 358392040361395

Communication System: Generic GSM; Communication System Band: PCS 1900 (1850.2 - 1909.8.0 MHz); Frequency: 1909.80MHz; Communication System PAR: 9.03 dB

Medium parameters used: $f = 1909.80\text{MHz}$; $\sigma = 1.47\text{ mho/m}$; $\epsilon_r = 39.6$; $\rho = 1000\text{ kg/m}^3$

Phantom section: Left Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3755; ConvF(7.84, 7.84, 7.84); Calibrated: 1/20/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 1/11/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- Measurement SW: DASYS2, Version 52.6 (1); SEMCAD X Version 14.4.2 (2595)

PCS1900/Left Head Tilted High CH810/Area Scan (6x9x1):

Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.454 mW/g

PCS1900/Left Head Tilted High CH810/Zoom Scan (7x7x9)/Cube 0: Measurement grid: $dx=5\text{mm}$,


$dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 12.272 V/m; Power Drift = 0.079dB

Peak SAR (extrapolated) = 0.615 W/kg

SAR(1 g) = 0.365 mW/g; SAR(10 g) = 0.268 mW/g

Maximum value of SAR (measured) = 0.468 mW/g

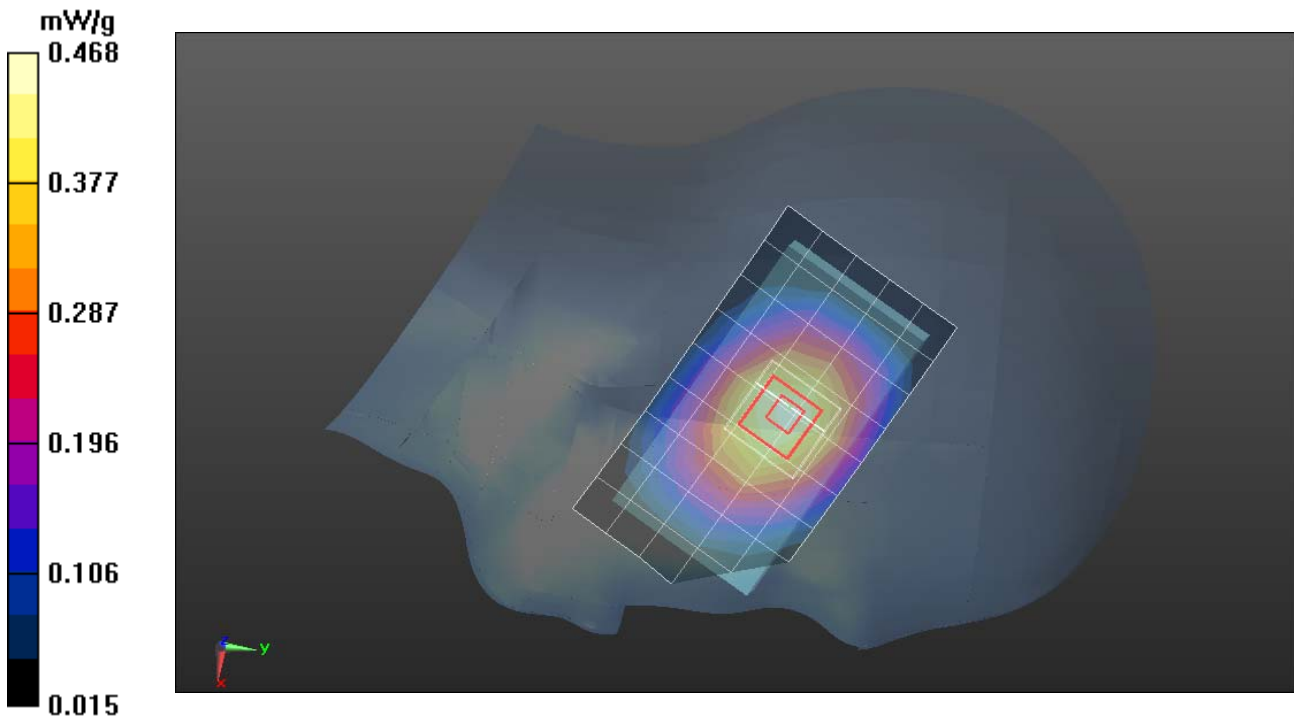



Test Laboratory: Compliance Certification Services Inc.

July 22, 2012

GSM 850-Body Up High CH251

DUT: Mobile Phone; Type: Caliber; Serial: 358392040361395

Communication System: Generic GSM; Communication System Band: GSM 850 (824.2 - 848.8 MHz);

Frequency: 848.8 MHz; Communication System PAR: 9.03 dB

Medium parameters used (interpolated): $f = 848.8$ MHz; $\sigma = 0.969$ mho/m; $\epsilon_r = 55.752$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3755; ConvF(9.07, 9.07, 9.07); Calibrated: 1/20/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 1/11/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASYS 52.8.0(692); SEMCAD X 14.6.4(4989)

GSM 850/GSM850 Body Up High CH251/Area Scan (6x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.746 mW/g


GSM 850/GSM850 Body Up High CH251/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 23.215 V/m; Power Drift = 0.021 dB

Peak SAR (extrapolated) = 0.8660

SAR(1 g) = 0.531mW/g; SAR(10 g) = 0.301 mW/g

Maximum value of SAR (measured) = 0.678 mW/g

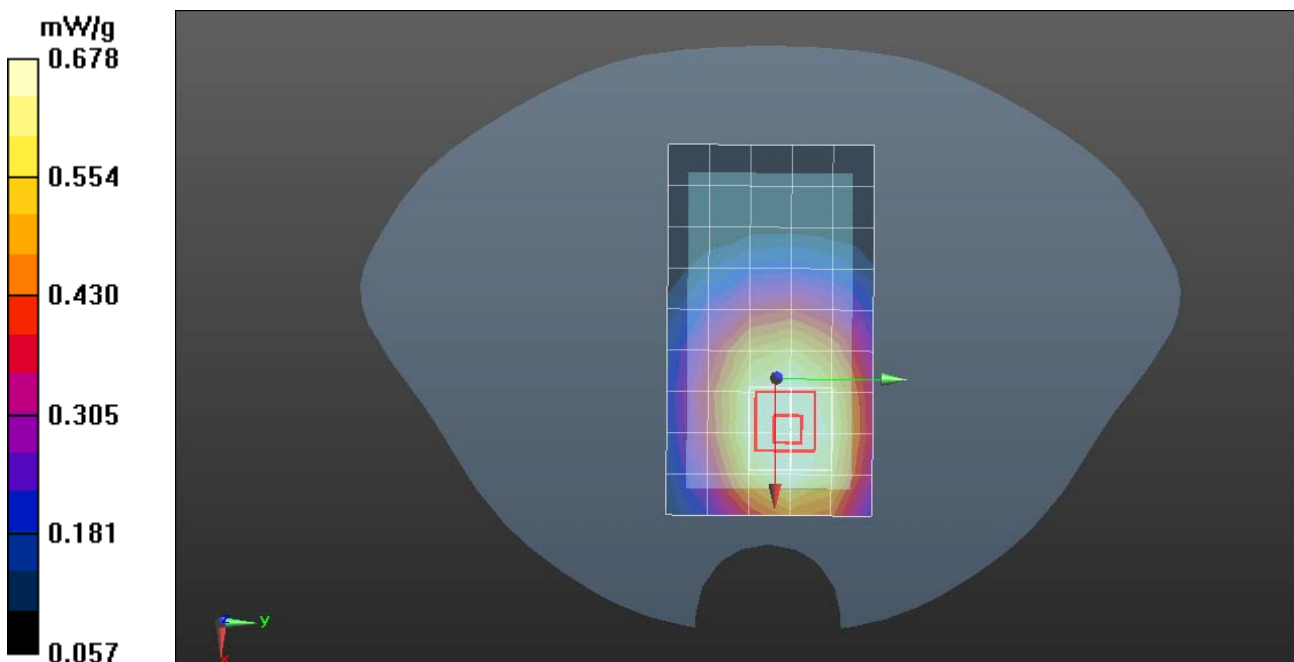



Test Laboratory: Compliance Certification Services Inc.

July 22, 2012

GSM 850-Body Down Low CH128

DUT: Mobile Phone; Type: Caliber; Serial: 358392040361395

Communication System: Generic GSM; Communication System Band: GSM 850 (824.2 - 848.8 MHz);

Frequency: 824.2 MHz; Communication System PAR: 9.03 dB

Medium parameters used (interpolated): $f = 824.2$ MHz; $\sigma = 0.95$ mho/m; $\epsilon_r = 55.959$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3755; ConvF(9.07, 9.07, 9.07); Calibrated: 1/20/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 1/11/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASYS 52.8.0(692); SEMCAD X 14.6.4(4989)

GSM 850/GSM850 Body Down Low CH128/Area Scan (6x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.693 mW/g


GSM 850/GSM850 Body Down Low CH128/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 25.748 V/m; Power Drift = 0.024 dB

Peak SAR (extrapolated) = 0.8140

SAR(1 g) = 0.502 mW/g; SAR(10 g) = 0.353 mW/g

Maximum value of SAR (measured) = 0.647 mW/g

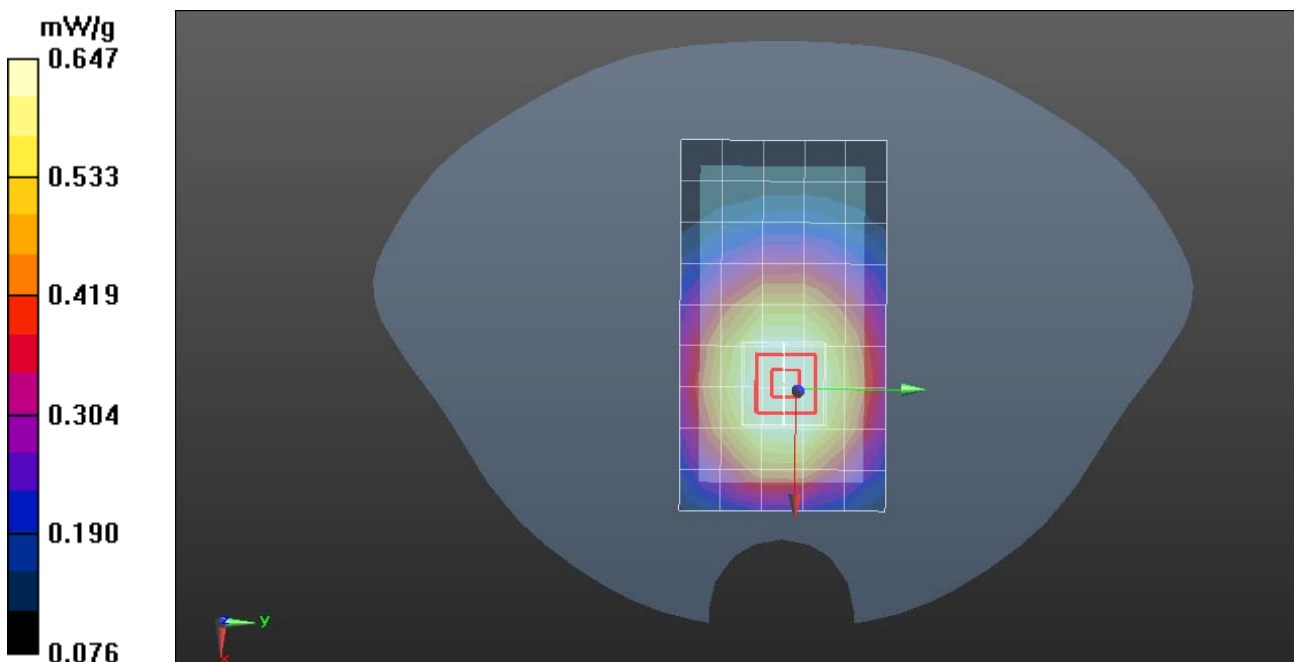



Test Laboratory: Compliance Certification Services Inc.

July 22, 2012

GSM 850-Body Down Middle CH190

DUT: Mobile Phone; Type: Caliber; Serial: 358392040361395

Communication System: Generic GSM; Communication System Band: GSM 850 (824.2 - 848.8 MHz);

Frequency: 836.6 MHz; Communication System PAR: 9.03 dB

Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.96$ mho/m; $\epsilon_r = 55.858$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3755; ConvF(9.07, 9.07, 9.07); Calibrated: 1/20/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 1/11/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASYS 52.8.0(692); SEMCAD X 14.6.4(4989)

GSM 850/GSM850 Body Down Middle CH190/Area Scan (6x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.703 mW/g

GSM 850/GSM850 Body Down Middle CH190/Zoom Scan (7x7x7)/Cube 0: Measurement grid:


dx=5mm, dy=5mm, dz=5mm

Reference Value = 26.131 V/m; Power Drift = 0.033 dB

Peak SAR (extrapolated) = 0.8390

SAR(1 g) = 0.533 mW/g; SAR(10 g) = 0.312 mW/g

Maximum value of SAR (measured) = 0.660 mW/g

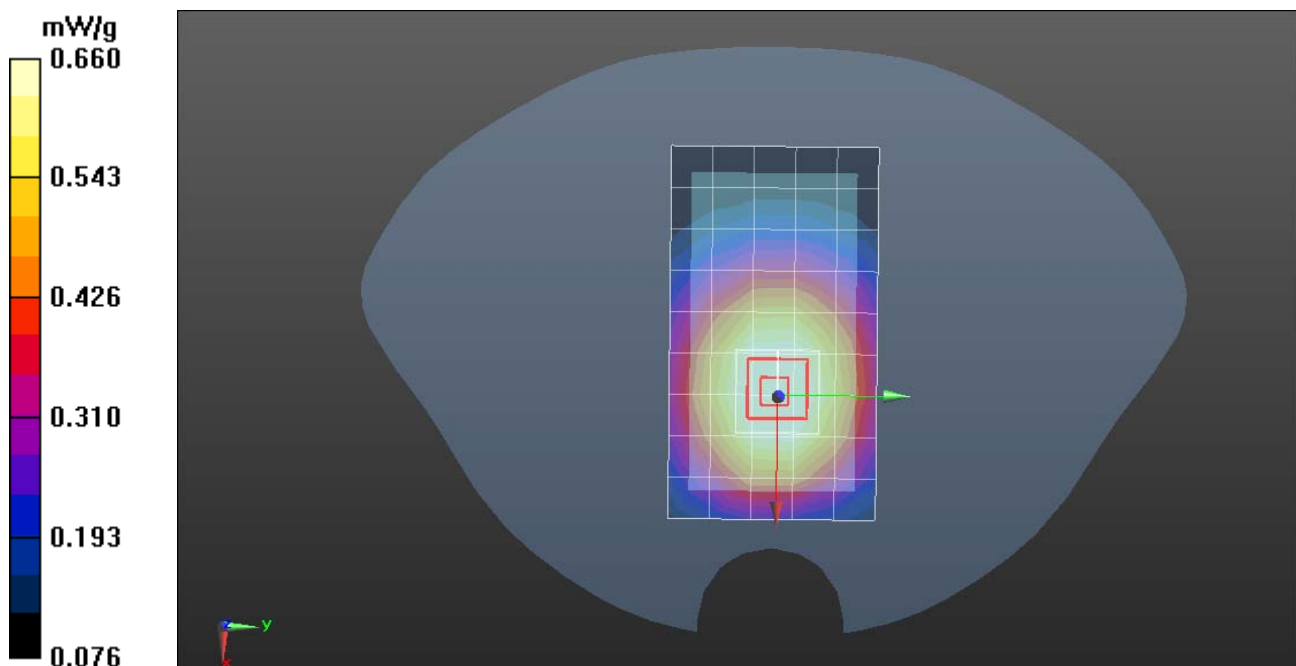



Test Laboratory: Compliance Certification Services Inc.

July 22, 2012

GSM 850-Body Down High CH251

DUT: Mobile Phone; Type: Caliber; Serial: 358392040361395

Communication System: Generic GSM; Communication System Band: GSM 850 (824.2 - 848.8 MHz);

Frequency: 848.8 MHz; Communication System PAR: 9.03 dB

Medium parameters used (interpolated): $f = 848.8$ MHz; $\sigma = 0.969$ mho/m; $\epsilon_r = 55.752$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3755; ConvF(9.07, 9.07, 9.07); Calibrated: 1/20/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 1/11/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASYS 52.8.0(692); SEMCAD X 14.6.4(4989)

GSM 850/GSM850 Body Down High CH251/Area Scan (6x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.707 mW/g


GSM 850/GSM850 Body Down High CH251/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 26.161 V/m; Power Drift = -0.023dB

Peak SAR (extrapolated) = 0.8330

SAR(1 g) = 0.563 mW/g; SAR(10 g) = 0.332 mW/g

Maximum value of SAR (measured) = 0.655 mW/g

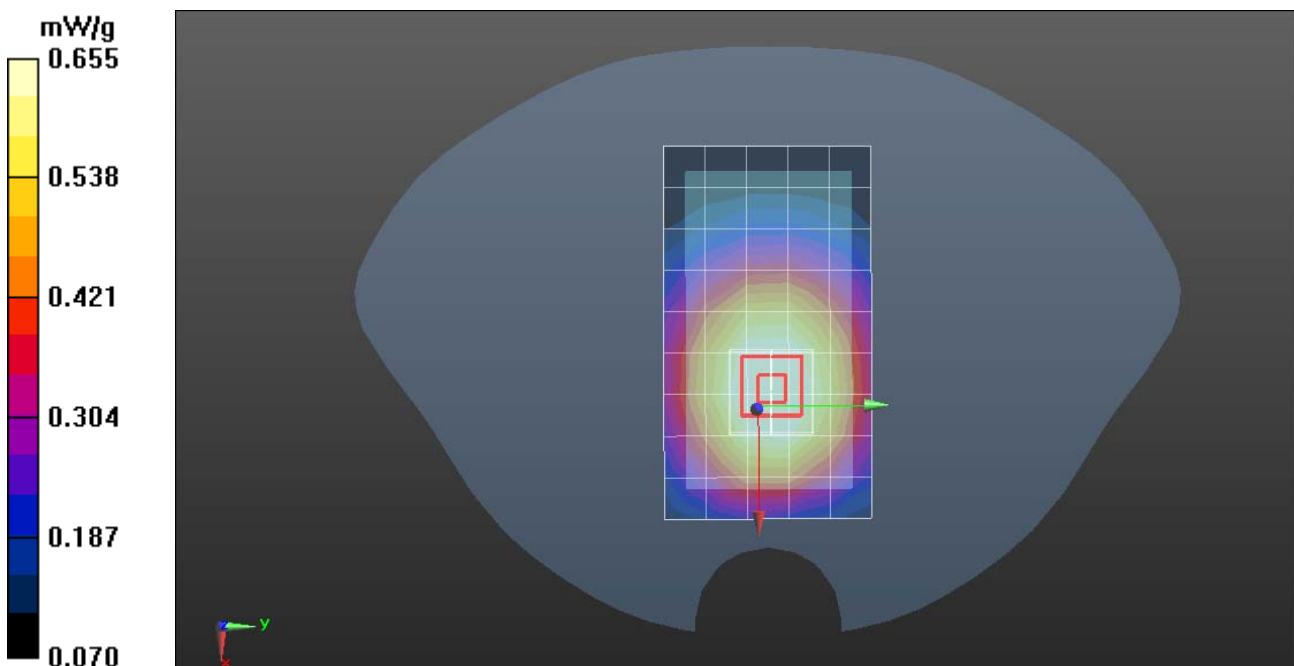



Test Laboratory: Compliance Certification Services Inc.

July 22, 2012

GPRS 850-Body Up Low CH128

DUT: Mobile Phone; Type: Caliber; Serial: 358392040361395

Communication System: Generic GPRS; Communication System Band: GPRS 850 (824.2 - 848.8 MHz);

Frequency: 824.2 MHz; Communication System PAR: 3.01 dB

Medium parameters used (interpolated): $f = 824.2$ MHz; $\sigma = 0.95$ mho/m; $\epsilon_r = 55.628$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3755; ConvF(9.07, 9.07, 9.07); Calibrated: 1/20/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 1/11/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- Measurement SW: DASYS2, Version 52.6 (1); SEMCAD X Version 14.4.2 (2595)

GPRS 850/GPRS850 Body Up Low CH128/Area Scan (6x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.327 mW/g


GPRS 850/GPRS850 Body Up Low CH128/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 18.903 V/m; Power Drift = 0.021 dB

Peak SAR (extrapolated) = 0.384 W/kg

SAR(1 g) = 0.235 mW/g; SAR(10 g) = 0.201 mW/g

Maximum value of SAR (measured) = 0.317 mW/g

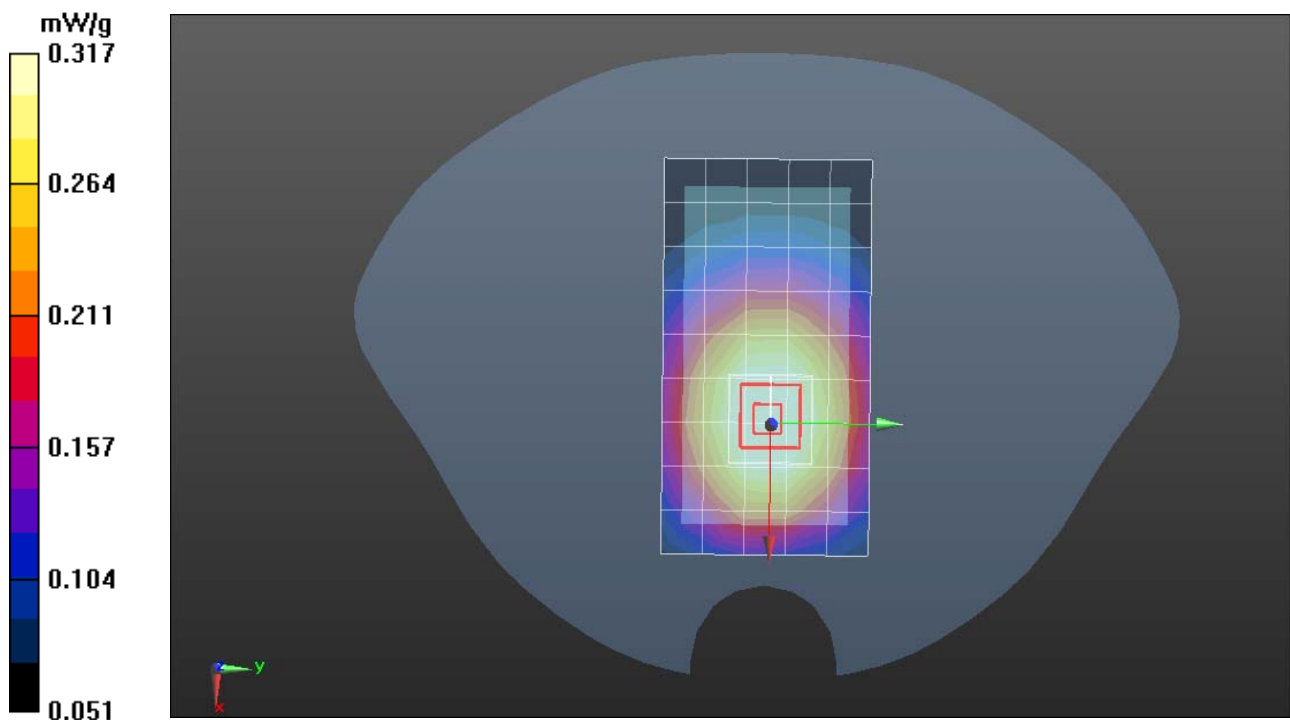



Test Laboratory: Compliance Certification Services Inc.

July 22, 2012

EGPRS 850-Body Up Low CH128

DUT: Mobile Phone; Type: Caliber; Serial: 358392040361395

Communication System: Generic EGPRS; Communication System Band: EGPRS 850 (824.2 - 848.8 MHz); Frequency: 824.2 MHz; Communication System PAR: 3.01 dB

Medium parameters used (interpolated): $f = 824.2$ MHz; $\sigma = 0.95$ mho/m; $\epsilon_r = 55.628$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3755; ConvF(9.07, 9.07, 9.07); Calibrated: 1/20/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 1/11/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- Measurement SW: DASYS2, Version 52.6 (1); SEMCAD X Version 14.4.2 (2595)

EGPRS 850/EGPRS850 Body Up Low CH128/Area Scan (6x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.327 mW/g

EGPRS 850/EGPRS850 Body Up Low CH128/Zoom Scan (7x7x9)/Cube 0: Measurement grid:


dx=5mm, dy=5mm, dz=5mm

Reference Value = 18.903 V/m; Power Drift = 0.003 dB

Peak SAR (extrapolated) = 0.386 W/kg

SAR(1 g) = 0.312 mW/g; SAR(10 g) = 0.197 mW/g

Maximum value of SAR (measured) = 0.317 mW/g

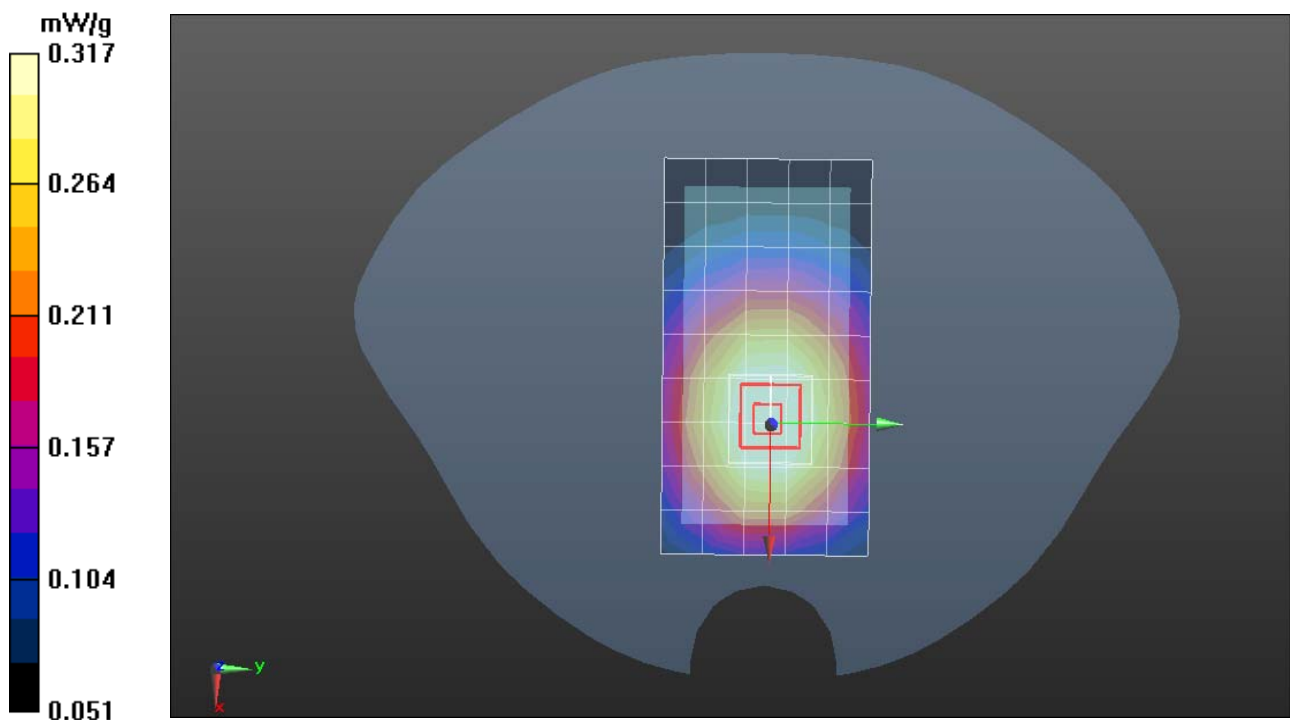



Test Laboratory: Compliance Certification Services Inc.

July 22, 2012

GPRS 850-Body Down Low CH128

DUT: Mobile Phone; Type: Caliber; Serial: 358392040361395

Communication System: Generic GPRS; Communication System Band: GPRS 850 (824.2 - 848.8 MHz);

Frequency: 824.2 MHz; Communication System PAR: 3.01 dB

Medium parameters used (interpolated): $f = 824.2$ MHz; $\sigma = 0.95$ mho/m; $\epsilon_r = 55.628$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3755; ConvF(9.07, 9.07, 9.07); Calibrated: 1/20/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 1/11/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- Measurement SW: DASYS2, Version 52.6 (1); SEMCAD X Version 14.4.2 (2595)

GPRS 850/GPRS850 Body Down Low CH128/Area Scan (6x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.808 mW/g

GPRS 850/GPRS850 Body Down Low CH128/Zoom Scan (7x7x9)/Cube 0: Measurement grid:


dx=5mm, dy=5mm, dz=5mm

Reference Value = 28.993 V/m; Power Drift = -0.032 dB

Peak SAR (extrapolated) = 1.084 W/kg

SAR(1 g) = 0.436 mW/g; SAR(10 g) = 0.235 mW/g

Maximum value of SAR (measured) = 0.812 mW/g

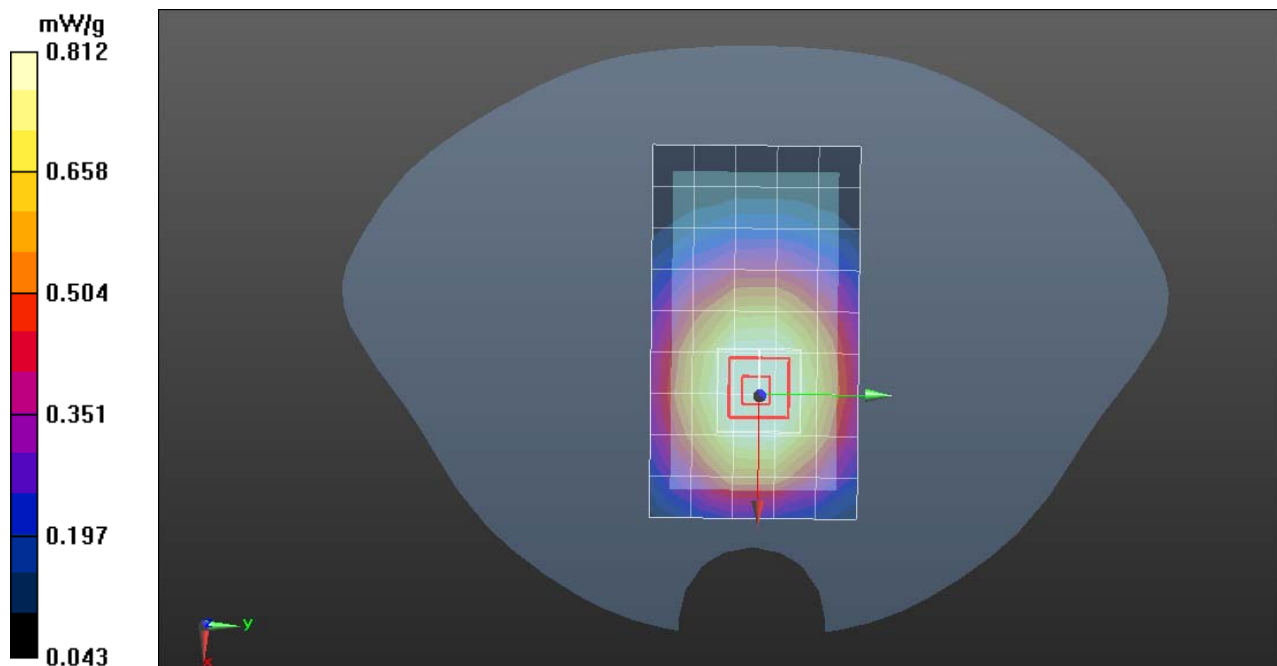



Test Laboratory: Compliance Certification Services Inc.

July 22, 2012

EGPRS 850-Body Down Low CH128

DUT: Mobile Phone; Type: Caliber; Serial: 358392040361395

Communication System: Generic EGPRS; Communication System Band: EGPRS 850 (824.2 - 848.8 MHz); Frequency: 824.2 MHz; Communication System PAR: 3.01 dB

Medium parameters used (interpolated): $f = 824.2$ MHz; $\sigma = 0.95$ mho/m; $\epsilon_r = 55.628$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3755; ConvF(9.07, 9.07, 9.07); Calibrated: 1/20/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 1/11/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- Measurement SW: DASYS2, Version 52.6 (1); SEMCAD X Version 14.4.2 (2595)

EGPRS 850/EGPRS850 Body Down Low CH128/Area Scan (6x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.808 mW/g


EGPRS 850/EGPRS850 Body Down Low CH128/Zoom Scan (7x7x9)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 28.993 V/m; Power Drift = 0.012 dB

Peak SAR (extrapolated) = 1.085 W/kg

SAR(1 g) = 0.424 mW/g; SAR(10 g) = 0.252 mW/g

Maximum value of SAR (measured) = 0.812 mW/g

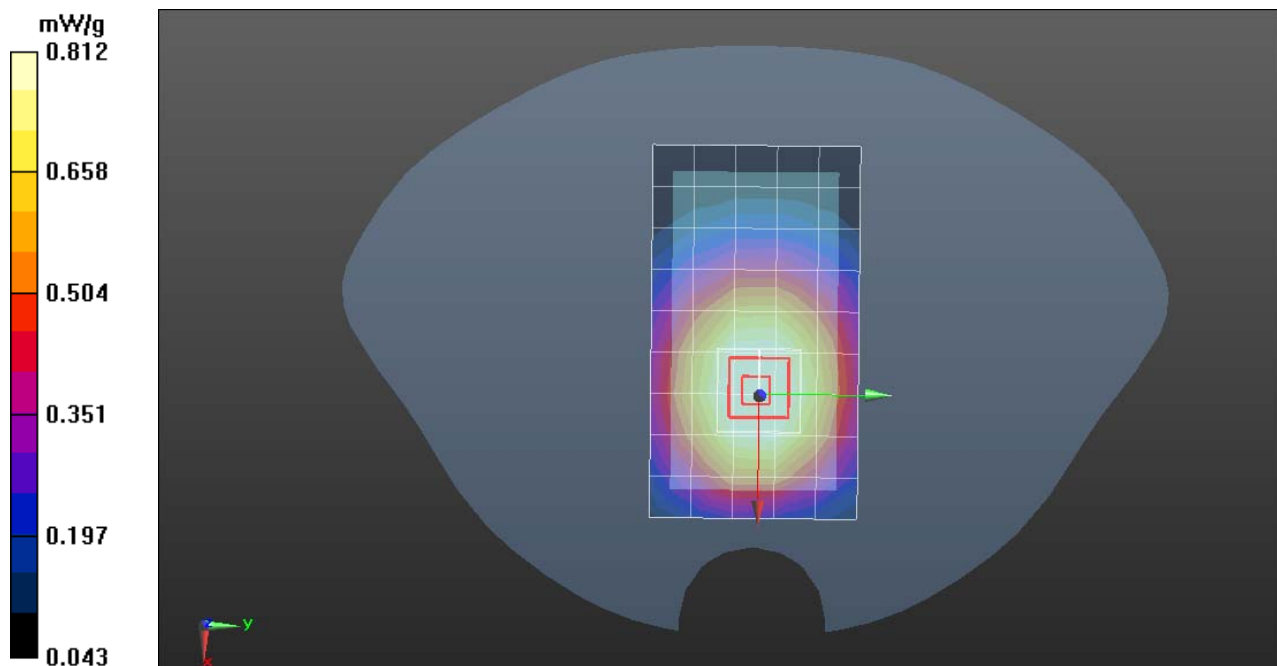



Test Laboratory: Compliance Certification Services Inc.

July 22, 2012

PCS1900-Body Up High CH810

DUT: Mobile Phone; Type: Caliber; Serial: 358392040361395

Communication System: Generic GSM; Communication System Band: PCS 1900 (1850.2 - 1909.8.0 MHz); Frequency: 1909.80MHz; Communication System PAR: 9.03 dB

Medium parameters used: $f = 1909.80\text{MHz}$; $\sigma = 1.47 \text{ mho/m}$; $\epsilon_r = 39.6$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3755; ConvF(7.23, 7.23, 7.23); Calibrated: 1/20/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 1/11/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- Measurement SW: DASY52, Version 52.6 (1); SEMCAD X Version 14.4.2 (2595)

PCS1900/ PCS1900 Body Up High CH810/Area Scan (6x9x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.380 mW/g


PCS1900/ PCS1900 Body Up High CH810/Zoom Scan (7x7x9)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 14.177 V/m; Power Drift = -0.125 dB

Peak SAR (extrapolated) = 0.496 W/kg

SAR(1 g) = 0.308 mW/g; SAR(10 g) = 0.215 mW/g

Maximum value of SAR (measured) = 0.381 mW/g

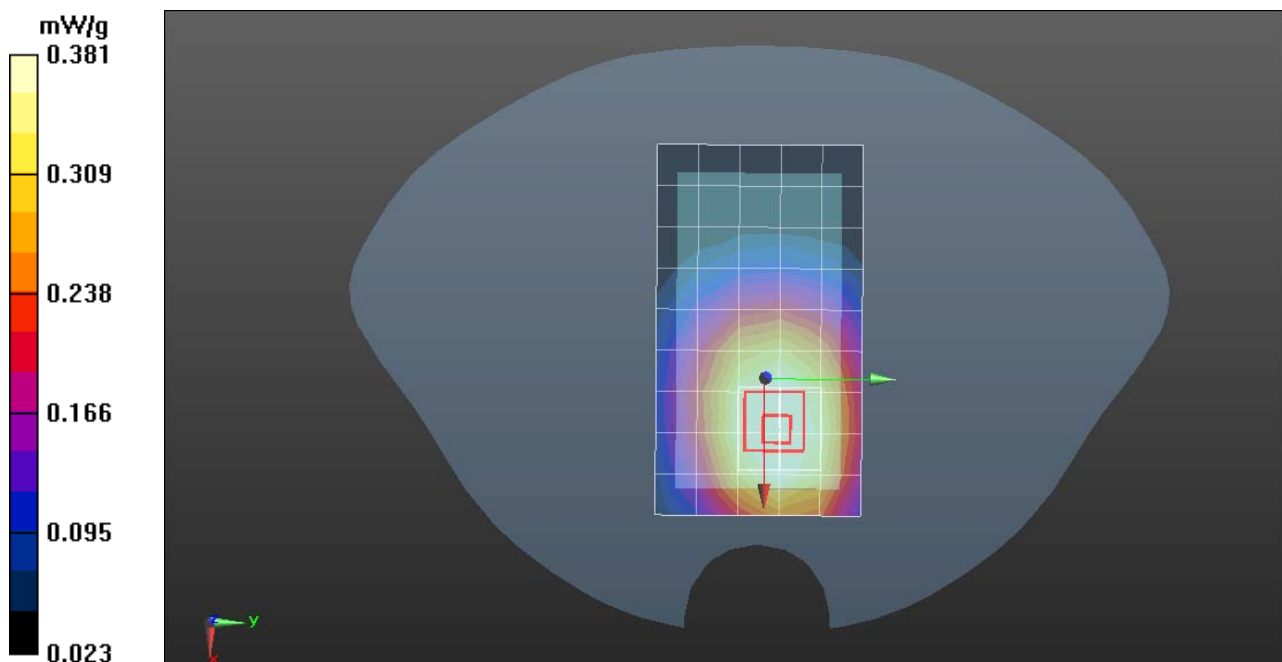



Test Laboratory: Compliance Certification Services Inc.

July 22, 2012

PCS1900-Body Down High CH810

DUT: Mobile Phone; Type: Caliber; Serial: 358392040361395

Communication System: Generic GSM; Communication System Band: PCS 1900 (1850.2 - 1909.8.0 MHz); Frequency: 1909.80MHz; Communication System PAR: 9.03 dB

Medium parameters used: $f = 1909.80\text{MHz}$; $\sigma = 1.47 \text{ mho/m}$; $\epsilon_r = 39.6$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3755; ConvF(7.23, 7.23, 7.23); Calibrated: 1/20/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 1/11/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- Measurement SW: DASY52, Version 52.6 (1); SEMCAD X Version 14.4.2 (2595)

PCS1900/ PCS1900 Body Down High CH810/Area Scan (6x9x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.753 mW/g


PCS1900/ PCS1900 Body Down High CH810/Zoom Scan (7x7x9)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 21.972 V/m; Power Drift = 0.022dB

Peak SAR (extrapolated) = 1.127 W/kg

SAR(1 g) = 0.515 mW/g; SAR(10 g) = 0.361 mW/g

Maximum value of SAR (measured) = 0.847 mW/g

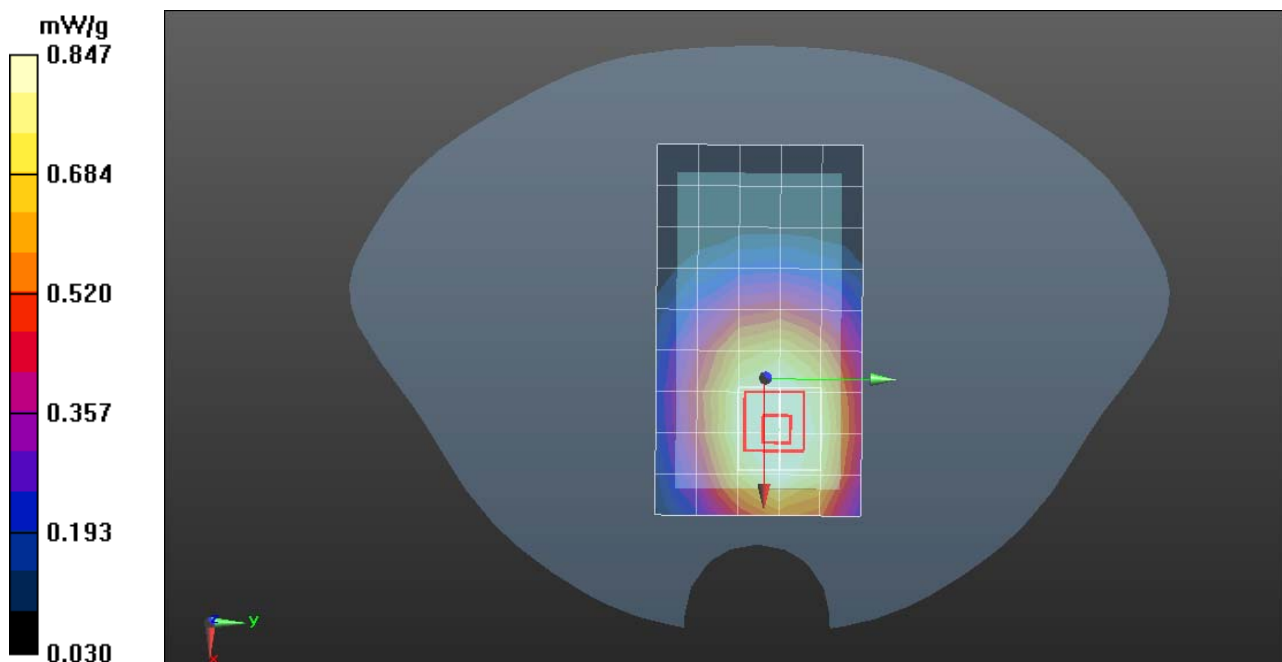



Test Laboratory: Compliance Certification Services Inc.

July 22, 2012

GPRS1900-Body Up High CH810

DUT: Mobile Phone; Type: Caliber; Serial: 358392040361395

Communication System: Generic GSM; Communication System Band: GPRS 1900 (1850.2 - 1909.8 MHz); Frequency: 1909.80MHz; Communication System PAR: 9.03 dB

Medium parameters used: $f = 1909.80\text{MHz}$; $\sigma = 1.47\text{ mho/m}$; $\epsilon_r = 39.6$; $\rho = 1000\text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3755; ConvF(7.23, 7.23, 7.23); Calibrated: 1/20/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 1/11/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- Measurement SW: DASY52, Version 52.6 (1); SEMCAD X Version 14.4.2 (2595)

GPRS1900/GPRS1900 Body Up High CH810/Area Scan (6x9x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.290 mW/g

GPRS1900/GPRS1900 Body Up High CH810/Zoom Scan (7x7x9)/Cube 0: Measurement grid:


$dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 10.728 V/m; Power Drift = 0.024 dB

Peak SAR (extrapolated) = 0.423 W/kg

SAR(1 g) = 0.352 mW/g; SAR(10 g) = 0.212 mW/g

Maximum value of SAR (measured) = 0.322 mW/g

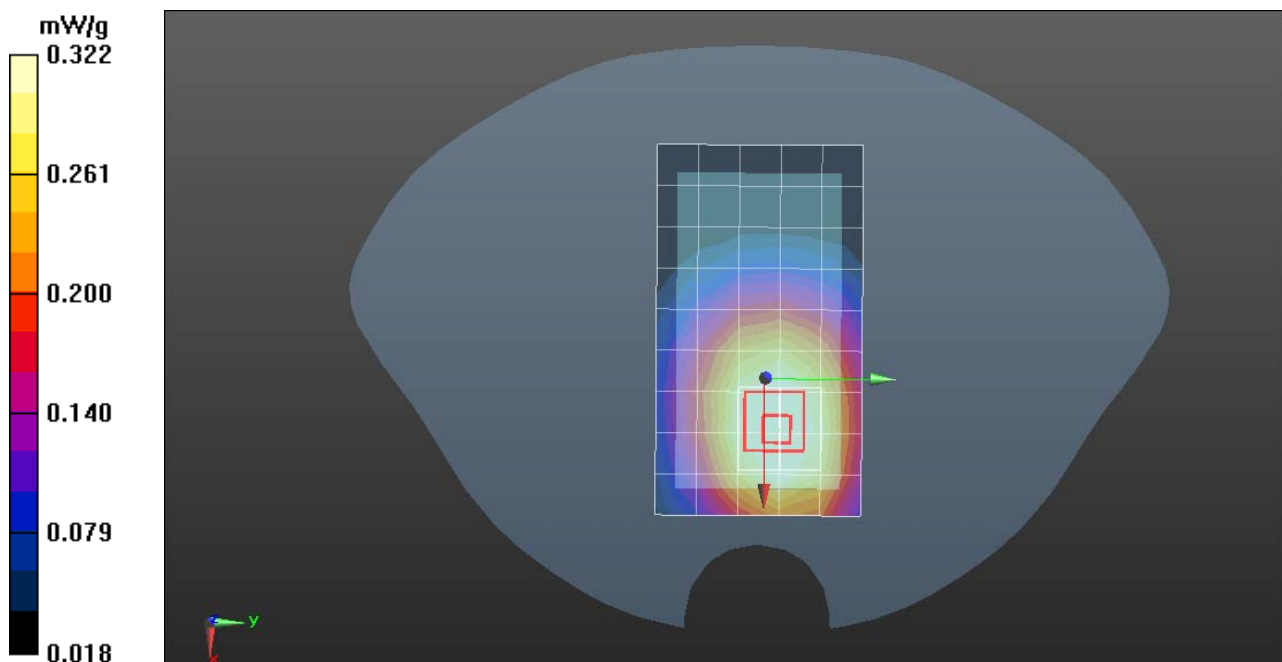



Test Laboratory: Compliance Certification Services Inc.

July 22, 2012

EGPRS1900-Body Up High CH810

DUT: Mobile Phone; Type: Caliber; Serial: 358392040361395

Communication System: Generic EGPRS; Communication System Band: EGPRS 1900 (1850.2 - 1909.8 MHz); Frequency: 1909.80MHz; Communication System PAR: 9.03 dB

Medium parameters used: $f = 1909.80\text{MHz}$; $\sigma = 1.47 \text{ mho/m}$; $\epsilon_r = 39.6$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3755; ConvF(7.23, 7.23, 7.23); Calibrated: 1/20/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 1/11/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- Measurement SW: DASYS2, Version 52.6 (1); SEMCAD X Version 14.4.2 (2595)

EGPRS1900/EGPRS1900 Body Up High CH810/Area Scan (6x9x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.290 mW/g

EGPRS1900/EGPRS1900 Body Up High CH810/Zoom Scan (7x7x9)/Cube 0: Measurement grid:


$dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 10.728 V/m; Power Drift = 0.014 dB

Peak SAR (extrapolated) = 0.423 W/kg

SAR(1 g) = 0.322 mW/g; SAR(10 g) = 0.201 mW/g

Maximum value of SAR (measured) = 0.322 mW/g

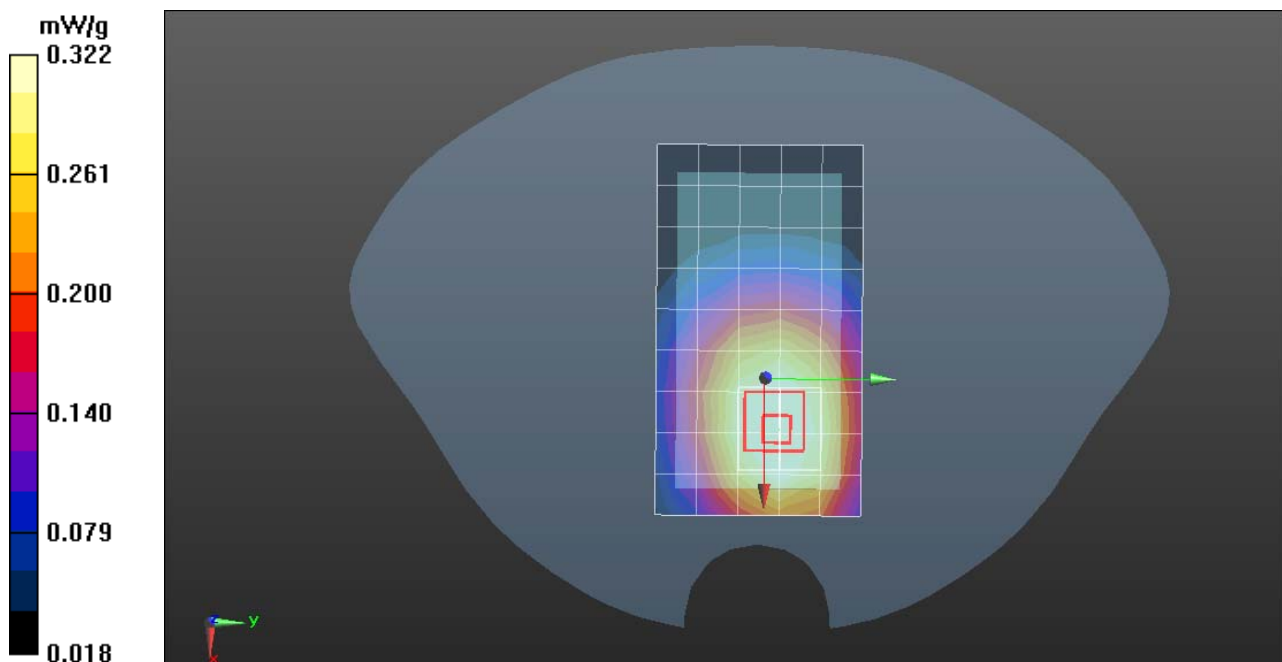



Test Laboratory: Compliance Certification Services Inc.

July 22, 2012

GPRS1900-Body Down High CH810

DUT: Mobile Phone; Type: Caliber; Serial: 358392040361395

Communication System: Generic GSM; Communication System Band: GPRS 1900 (1850.2 - 1909.8MHz); Frequency: 1909.80MHz; Communication System PAR: 9.03 dB

Medium parameters used: $f = 1909.80\text{MHz}$; $\sigma = 1.47 \text{ mho/m}$; $\epsilon_r = 39.6$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3755; ConvF(7.23, 7.23, 7.23); Calibrated: 1/20/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 1/11/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- Measurement SW: DASYS2, Version 52.6 (1); SEMCAD X Version 14.4.2 (2595)

GPRS1900/GPRS1900 Body Down High CH810/Area Scan (6x9x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.701 mW/g

GPRS1900/GPRS1900 Body Down High CH810/Zoom Scan (7x7x9)/Cube 0: Measurement grid:


$dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 20.020 V/m; Power Drift = -0.021 dB

Peak SAR (extrapolated) = 1.138 W/kg

SAR(1 g) = 0.501 mW/g; SAR(10 g) = 0.332 mW/g

Maximum value of SAR (measured) = 0.835 mW/g

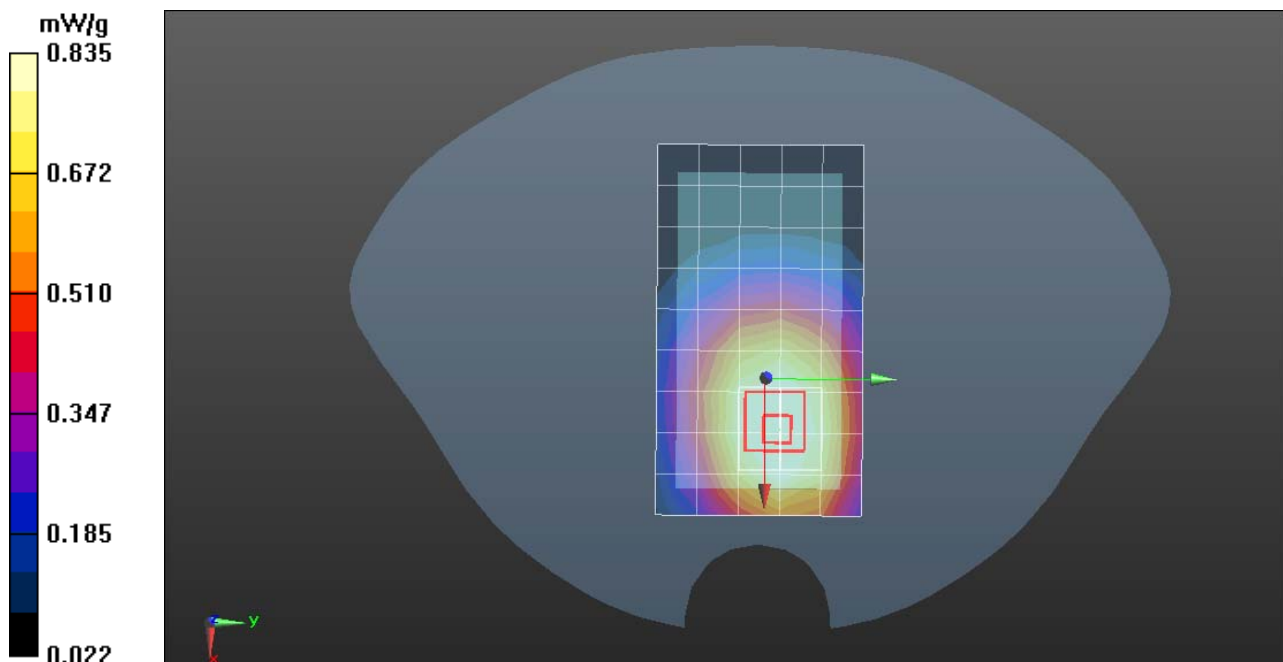



Test Laboratory: Compliance Certification Services Inc.

July 22, 2012

EGPRS1900-Body Down High CH810

DUT: Mobile Phone; Type: Caliber; Serial: 358392040361395

Communication System: Generic EGPRS; Communication System Band: EGPRS 1900 (1850.2 - 1909.8 MHz); Frequency: 1909.80MHz; Communication System PAR: 9.03 dB

Medium parameters used: $f = 1909.80\text{MHz}$; $\sigma = 1.47 \text{ mho/m}$; $\epsilon_r = 39.6$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3755; ConvF(7.23, 7.23, 7.23); Calibrated: 1/20/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 1/11/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- Measurement SW: DASYS2, Version 52.6 (1); SEMCAD X Version 14.4.2 (2595)

EGPRS1900/EGPRS1900 Body Down High CH810/Area Scan (6x9x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.701 mW/g


EGPRS1900/EGPRS1900 Body Down High CH810/Zoom Scan (7x7x9)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 20.020 V/m; Power Drift = 0.001 dB

Peak SAR (extrapolated) = 1.138 W/kg

SAR(1 g) = 0.491 mW/g; SAR(10 g) = 0.301 mW/g

Maximum value of SAR (measured) = 0.835 mW/g

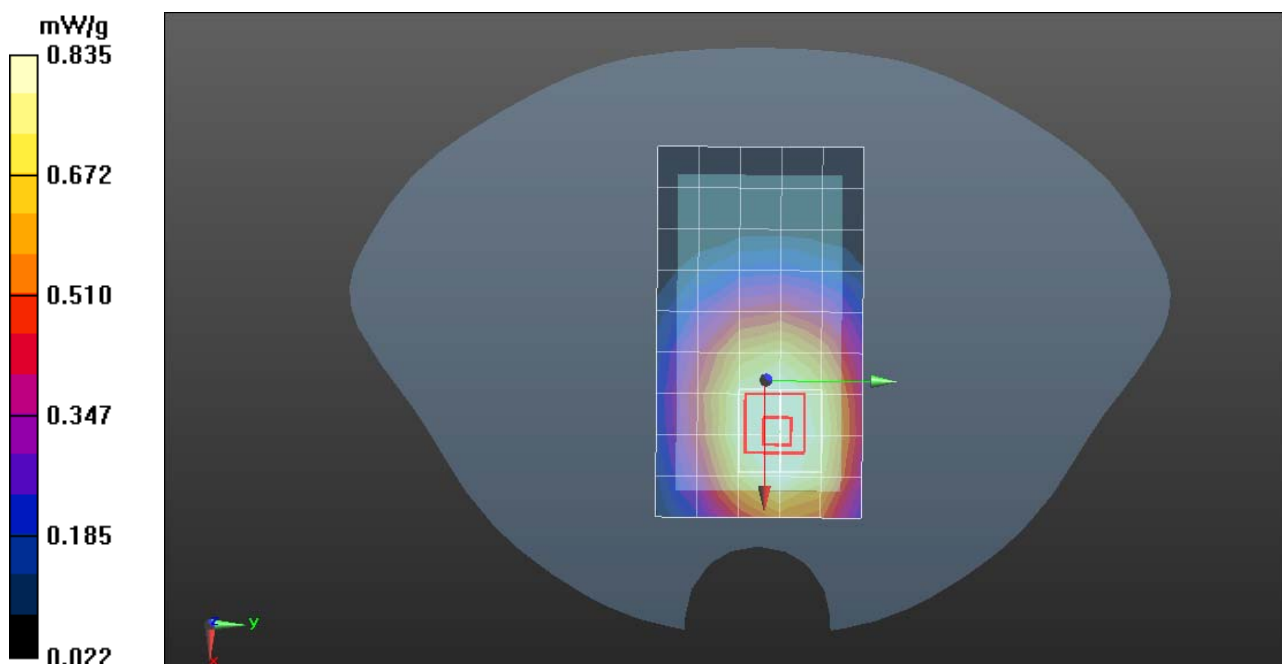



Test Laboratory: Compliance Certification Services Inc.

July 22, 2012

WCDMA Band V-Right Head Cheek Low CH4132

DUT: Mobile Phone; Type: Caliber; Serial: 358392040361395

Communication System: FDD WCDMA; Communication System Band: Band V; Frequency: 826.4 MHz; Communication System PAR: 0 dB;

Medium parameters used: $f = 826.4$ MHz; $\sigma = 0.897$ mho/m; $\epsilon_r = 41.78$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3755; ConvF(8.99, 8.99, 8.99); Calibrated: 1/20/2012 :
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 1/11/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Band V/Right Cheek Low CH4132/Area Scan (6x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.051 mW/g


Band V/Right Cheek Low CH4132/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 3.955 V/m; Power Drift = 0.012 dB

Peak SAR (extrapolated) = 1.560 mW/g

SAR(1 g) = 0.621 mW/g; SAR(10 g) = 0.432 mW/g

Maximum value of SAR (measured) = 1.056 mW/g

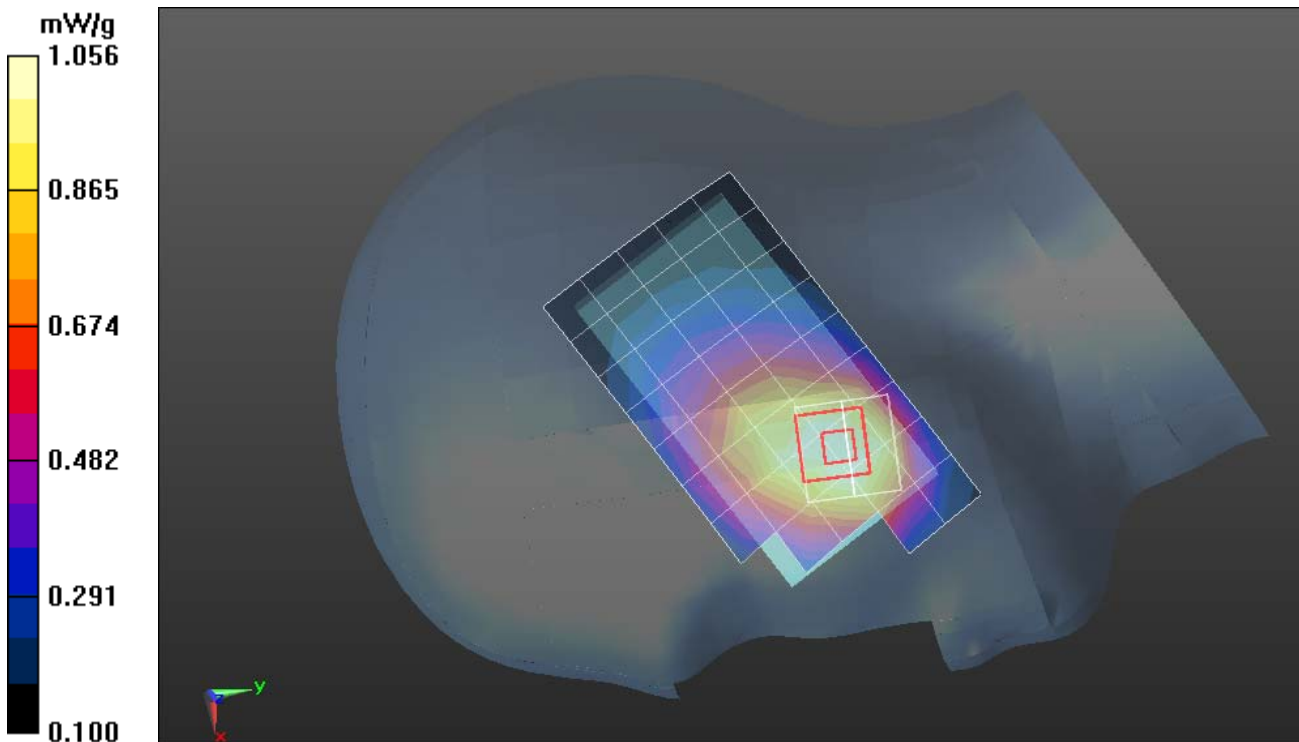



Test Laboratory: Compliance Certification Services Inc.

July 22, 2012

WCDMA Band V-Right Head Tilted Low CH4132

DUT: Mobile Phone; Type: Caliber; Serial: 358392040361395

Communication System: FDD WCDMA; Communication System Band: Band V; Frequency: 826.4 MHz; Communication System PAR: 0 dB

Medium parameters used: $f = 826.4$ MHz; $\sigma = 0.897$ mho/m; $\epsilon_r = 41.78$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3755; ConvF(8.99, 8.99, 8.99); Calibrated: 1/20/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 1/11/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASYS 52.8.0(692); SEMCAD X 14.6.4(4989)

Band V/Right Tilted Low CH4132/Area Scan (6x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.242 mW/g

Band V/Right Tilted Low CH4132/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm


Reference Value = 5.571 V/m; Power Drift = 0.014 dB

Peak SAR (extrapolated) = 0.610 mW/g

Peak SAR (extrapolated) = 0.610 mW/g

SAR(1 g) = 0.283 mW/g; SAR(10 g) = 0.136 mW/g

Maximum value of SAR (measured) = 0.484 mW/g

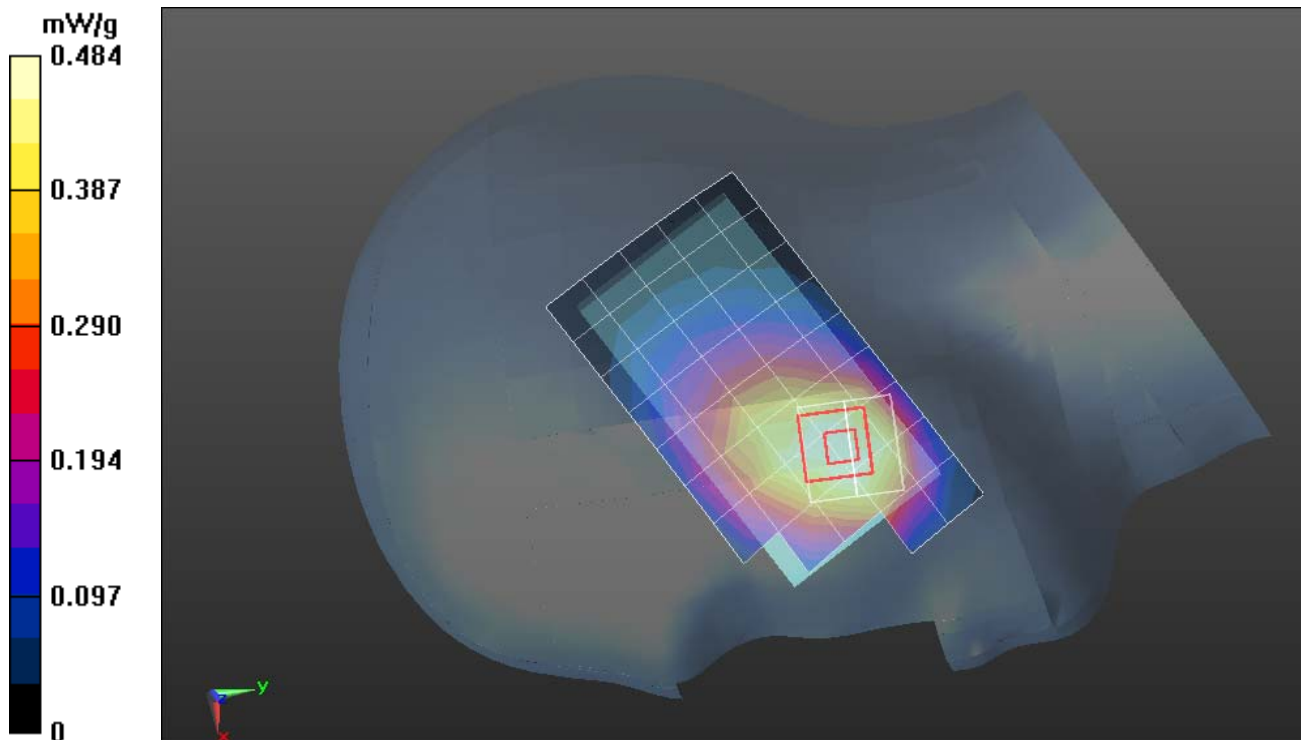



Test Laboratory: Compliance Certification Services Inc.

July 22, 2012

WCDMA Band V-Left Head Cheek Low CH4132

DUT: Mobile Phone; Type: Caliber; Serial: 358392040361395

Communication System: FDD WCDMA; Communication System Band: Band V; Frequency: 826.4 MHz; Communication System PAR: 0 dB;

Medium parameters used: $f = 826.4$ MHz; $\sigma = 0.897$ mho/m; $\epsilon_r = 41.78$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3755; ConvF(8.99, 8.99, 8.99); Calibrated: 1/20/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 1/11/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASYS 52.8.0(692); SEMCAD X 14.6.4(4989)

Band V/Left Cheek Low CH4132/Area Scan (6x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.854 mW/g

Band V/Left Cheek Low CH4132/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm,


dy=7.5mm, dz=5mm

Reference Value = 4.336 V/m; Power Drift = 0.023dB

Peak SAR (extrapolated) = 1.537 mW/g

SAR(1 g) = 0.652 mW/g; SAR(10 g) = 0.213 mW/g

Maximum value of SAR (measured) = 0.859 mW/g

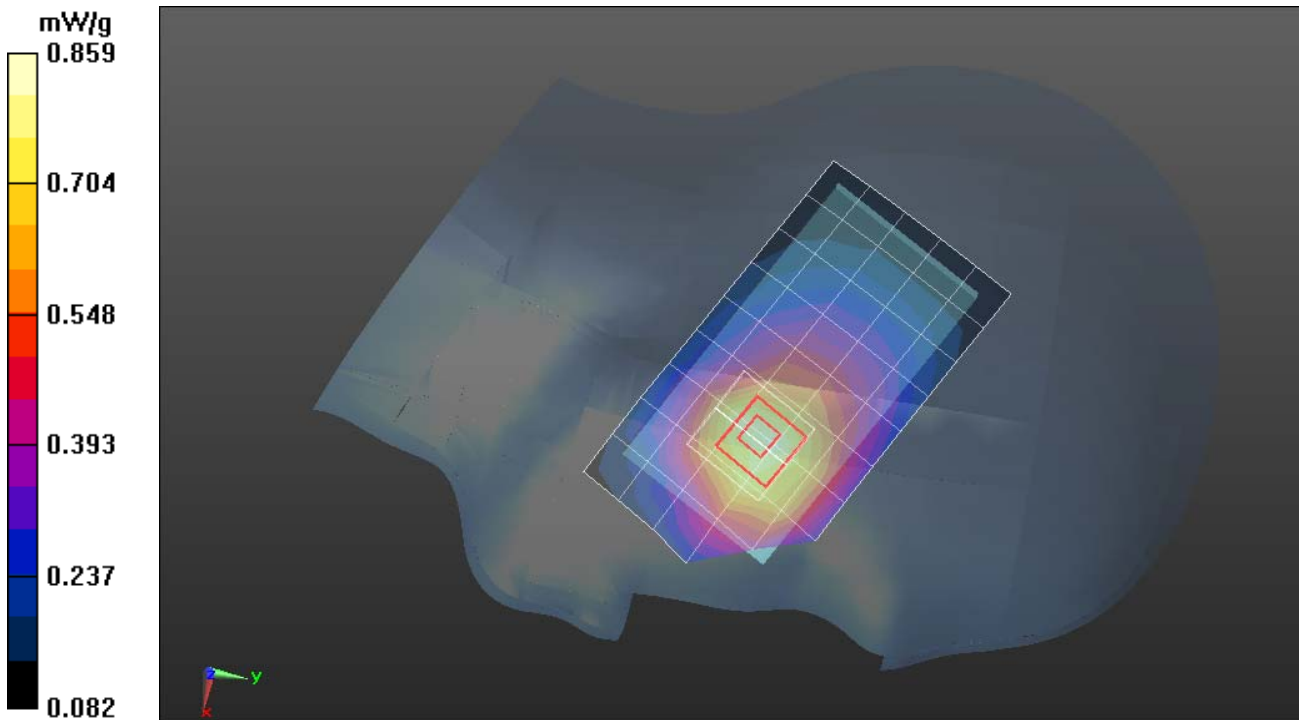



Test Laboratory: Compliance Certification Services Inc.

July 22, 2012

WCDMA Band V-Left Head Tilted Low CH4132

DUT: Mobile Phone; Type: Caliber; Serial: 358392040361395

Communication System: FDD WCDMA; Communication System Band: Band V; Frequency: 826.4 MHz; Communication System PAR: 0 dB;

Medium parameters used: $f = 826.4$ MHz; $\sigma = 0.897$ mho/m; $\epsilon_r = 41.78$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3755; ConvF(8.99, 8.99, 8.99); Calibrated: 1/20/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 1/11/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

Band V/Left Tilted Low CH4132/Area Scan (6x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.251 mW/g


Band V/Left Tilted Low CH4132/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 4.458 V/m; Power Drift = 0.015 dB

Peak SAR (extrapolated) = 0.452 mW/g

SAR(1 g) = 0.259 mW/g; SAR(10 g) = 0.201 mW/g

Maximum value of SAR (measured) = 0.349 mW/g

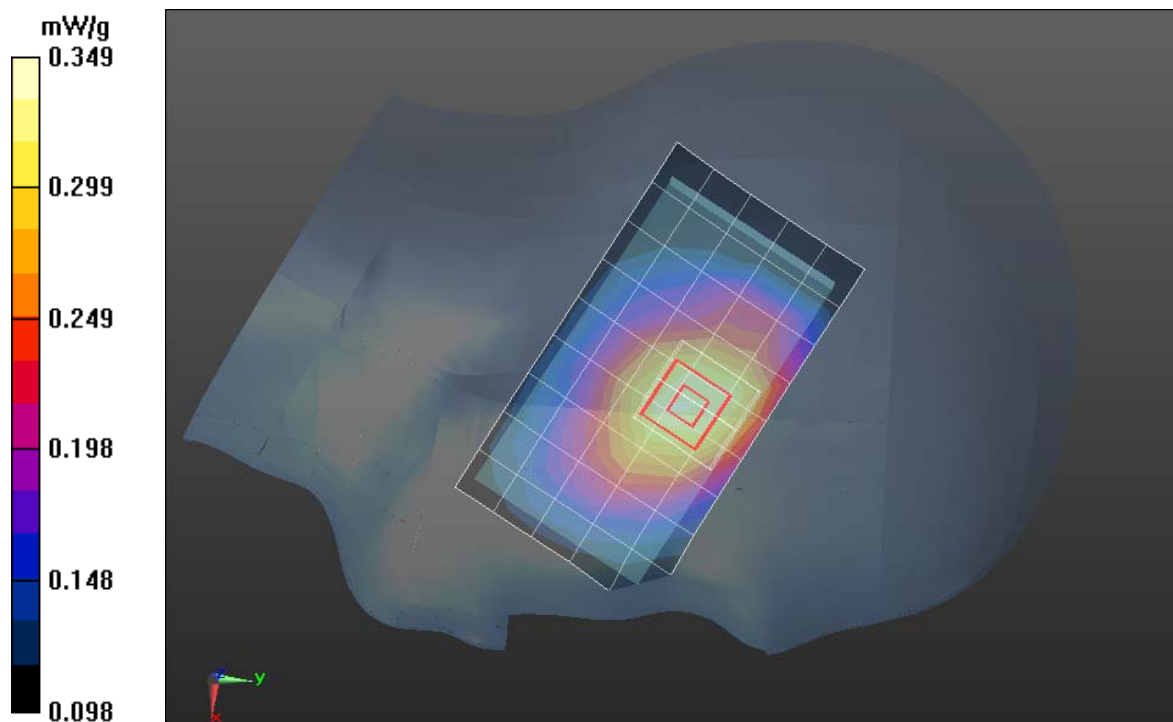



Test Laboratory: Compliance Certification Services Inc.

July 22, 2012

WCDMA Band V-Body Up Low CH4132

DUT: Mobile Phone; Type: Caliber; Serial: 358392040361395

Communication System: FDD WCDMA; Communication System Band: Band V; Frequency: 826.4 MHz; Communication System PAR: 0 dB;

Medium parameters used: $f = 826.4$ MHz; $\sigma = 0.897$ mho/m; $\epsilon_r = 41.78$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3755; ConvF(8.99, 8.99, 8.99); Calibrated: 1/20/2012
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 1/11/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASYS 52.8.0(692); SEMCAD X 14.6.4(4989)

Band V/Body Up Low CH4132/Area Scan (6x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.378 mW/g


Band V/Body Up Low CH4132/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 7.621 V/m; Power Drift = -0.040 dB

Peak SAR (extrapolated) = 0.415 mW/g

SAR(1 g) = 0.260 mW/g; SAR(10 g) = 0.133 mW/g

Maximum value of SAR (measured) = 0.389 mW/g

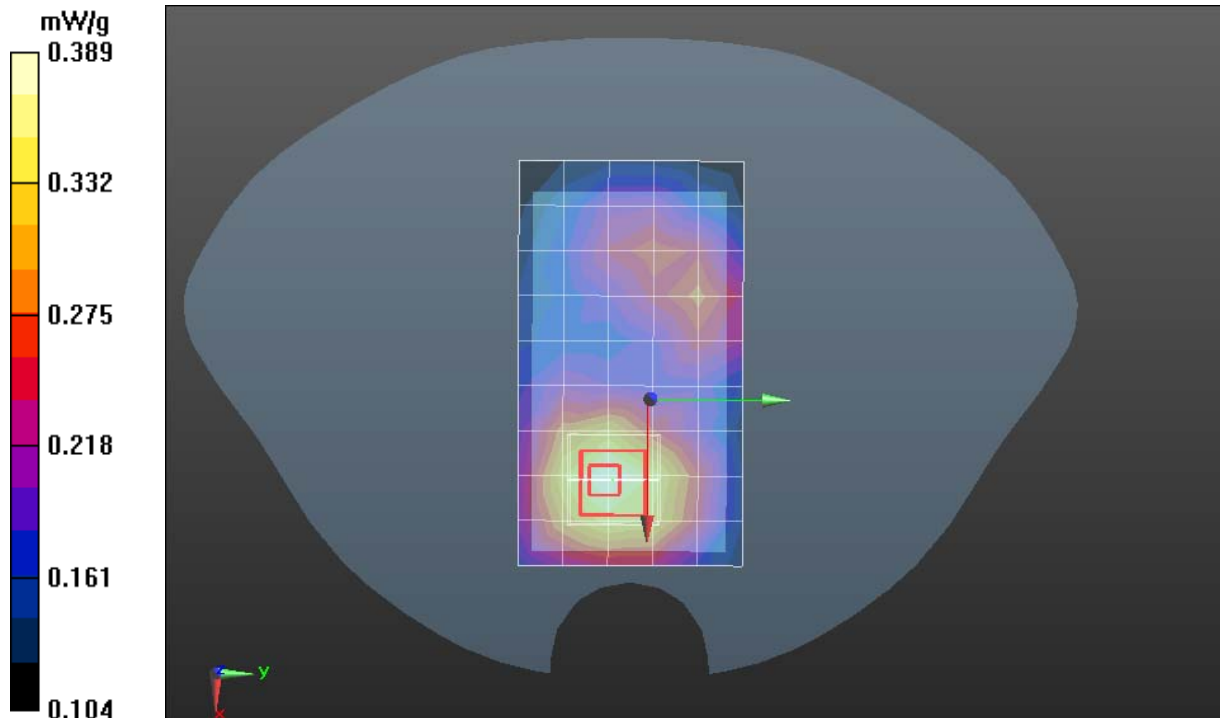



Test Laboratory: Compliance Certification Services Inc.

July 22, 2012

WCDMA Band V-Body Down Low CH4132

DUT: Mobile Phone; Type: Caliber; Serial: 358392040361395

Communication System: FDD WCDMA; Communication System Band: Band V; Frequency: 826.4 MHz; Communication System PAR: 0 dB

Medium parameters used: $f = 826.4$ MHz; $\sigma = 0.897$ mho/m; $\epsilon_r = 41.78$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3755; ConvF(8.99, 8.99, 8.99); Calibrated: 1/20/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 1/11/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASYS 52.8.0(692); SEMCAD X 14.6.4(4989)

Band V/Body Down Low CH4132/Area Scan (6x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.309 mW/g


Band V/Body Down Low CH4132/Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 7.524 V/m; Power Drift = 0.032 dB

Peak SAR (extrapolated) = 0.389 mW/g

SAR(1 g) = 0.263 mW/g; SAR(10 g) = 0.132 mW/g

Maximum value of SAR (measured) = 0.319 mW/g

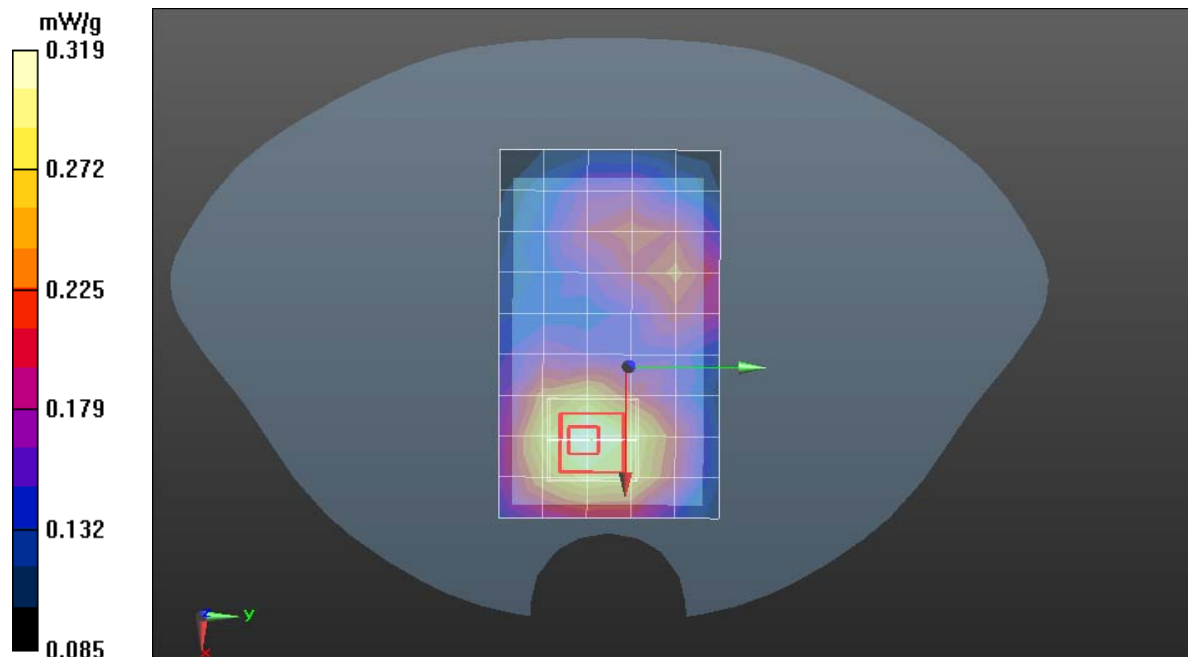



Test Laboratory: Compliance Certification Services Inc.

July 22, 2012

WCDMA HSDPA Band V-Body Up Low CH4132

DUT: Mobile Phone; Type: Caliber; Serial: 358392040361395

Communication System: FDD WCDMA; Communication System Band: Band V; Frequency: 826.4 MHz; Communication System PAR: 0 dB;

Medium parameters used: $f = 826.4$ MHz; $\sigma = 0.897$ mho/m; $\epsilon_r = 41.78$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3755; ConvF(8.99, 8.99, 8.99); Calibrated: 1/20/2012
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 1/11/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASYS 52.8.0(692); SEMCAD X 14.6.4(4989)

Band V/Body Up Low CH4132/Area Scan (6x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.378 mW/g


Band V/Body Up Low CH4132/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 7.621 V/m; Power Drift = 0.032 dB

Peak SAR (extrapolated) = 0.415 mW/g

SAR(1 g) = 0.254 mW/g; SAR(10 g) = 0.136 mW/g

Maximum value of SAR (measured) = 0.389 mW/g

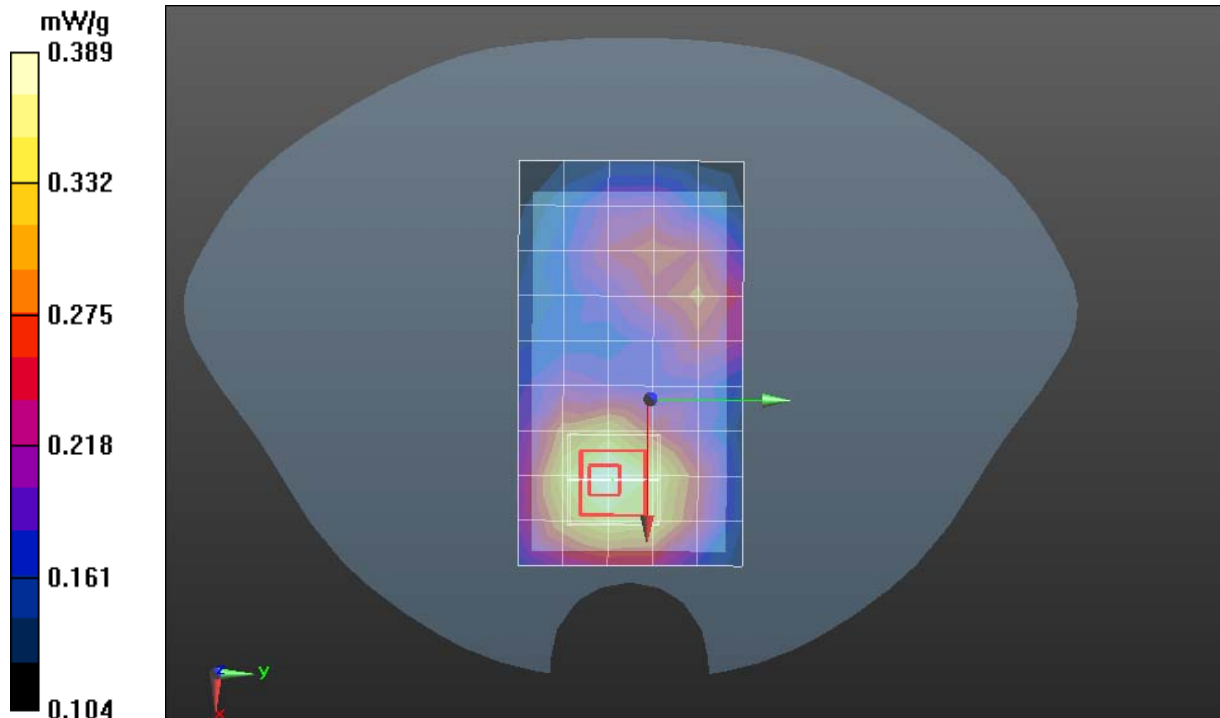



Test Laboratory: Compliance Certification Services Inc.

July 22, 2012

WCDMA HSDPA Band V-Body Down Low CH4132

DUT: Mobile Phone; Type: Caliber; Serial: 358392040361395

Communication System: FDD WCDMA; Communication System Band: Band V; Frequency: 826.4 MHz; Communication System PAR: 0 dB

Medium parameters used: $f = 826.4$ MHz; $\sigma = 0.897$ mho/m; $\epsilon_r = 41.78$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3755; ConvF(8.99, 8.99, 8.99); Calibrated: 1/20/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 1/11/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASYS 52.8.0(692); SEMCAD X 14.6.4(4989)

Band V/Body Down Low CH4132/Area Scan (6x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.309 mW/g


Band V/Body Down Low CH4132/Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 7.524 V/m; Power Drift = 0.022 dB

Peak SAR (extrapolated) = 0.389 mW/g

SAR(1 g) = 0.260 mW/g; SAR(10 g) = 0.114 mW/g

Maximum value of SAR (measured) = 0.319 mW/g

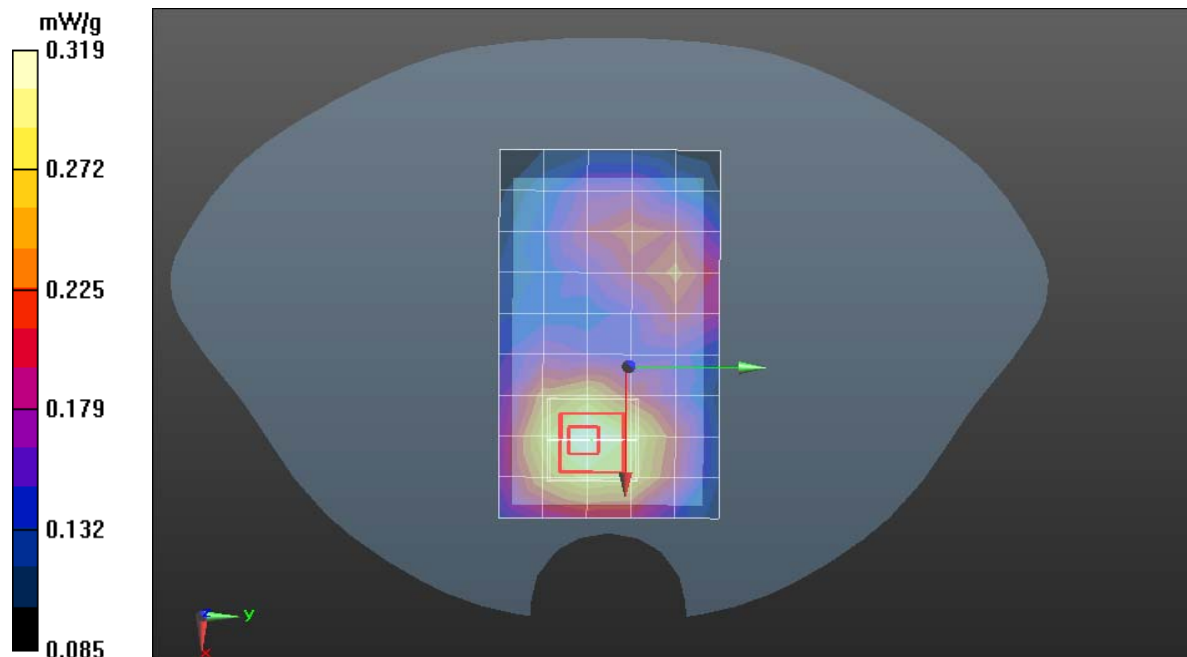



Test Laboratory: Compliance Certification Services Inc.

July 22, 2012

WCDMA Band II-Right Head Cheek Middle CH9400

DUT: Mobile Phone; Type: CALIBER; Serial: 358392040361395

Communication System: FDD WCDMA; Communication System Band: Band II; Frequency: 1880 MHz; Communication System PAR: 0 dB

Ambient: Temperature: 21 °C Relative humidity: 58% Liquid : Temperature: 20 °C

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.403$ mho/m; $\epsilon_r = 40$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3755; ConvF(7.84, 7.84, 7.84); Calibrated: 1/20/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 1/11/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASYS 52.8.0(692); SEMCAD X 14.6.4(4989)

WCDMA/Right Head Cheek Middle CH9400/Area Scan (51x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.779 mW/g


WCDMA/Right Head Cheek Middle CH9400/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.864 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 1.140 mW/g

SAR(1 g) = 0.671 mW/g; SAR(10 g) = 0.485 mW/g

Maximum value of SAR (measured) = 0.783 mW/g

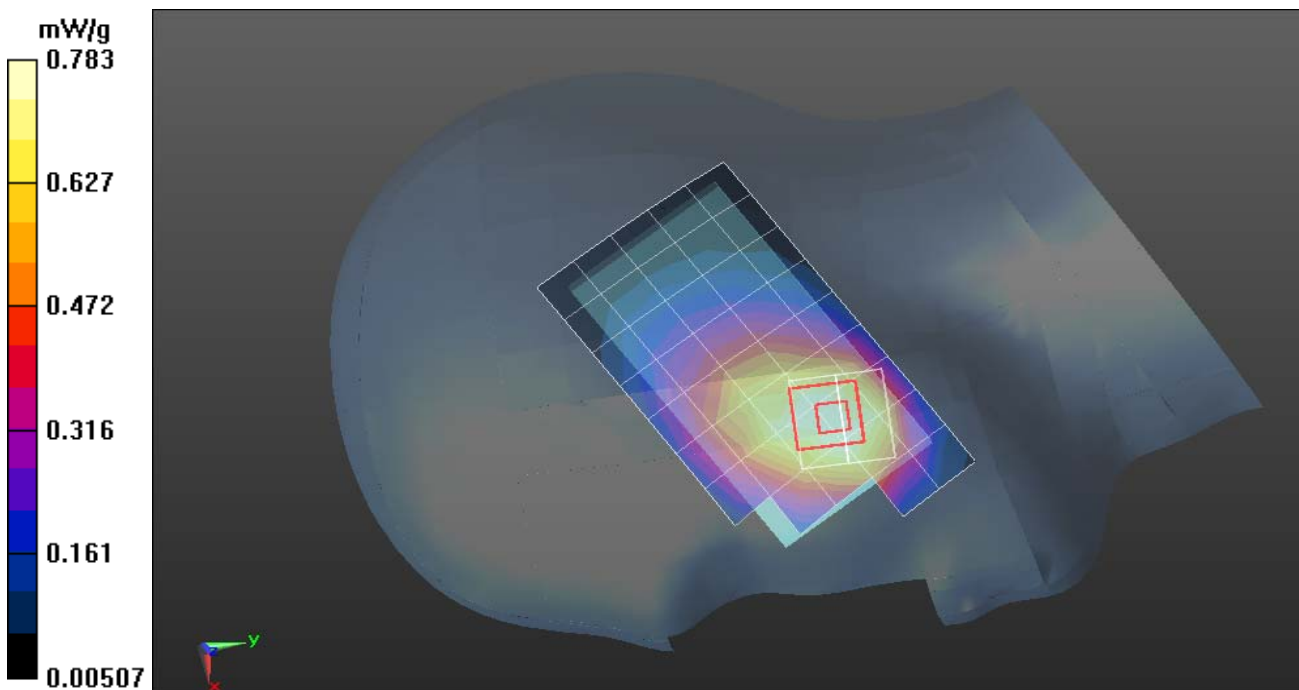



Test Laboratory: Compliance Certification Services Inc.

July 22, 2012

WCDMA Band II-Right Head Tilted Middle CH9400

DUT: Mobile Phone; Type: CALIBER; Serial: 358392040361395

Communication System: FDD WCDMA; Communication System Band: Band II; Frequency: 1880 MHz; Communication System PAR: 0 dB

Ambient: Temperature: 21 °C Relative humidity: 58% Liquid : Temperature: 20 °C

Medium parameters used (interpolated): $f = 1880$ MHz; $\sigma = 1.403$ mho/m; $\epsilon_r = 38.955$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3755; ConvF(7.84, 7.84, 7.84); Calibrated: 1/20/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 1/11/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASYS 52.8.0(692); SEMCAD X 14.6.4(4989)

WCDMA/Right Head Tilted Middle CH9400/Area Scan (51x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.562 mW/g


WCDMA/Right Head Tilted Middle CH9400/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 14.332 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 0.887 mW/g

SAR(1 g) = 0.422 mW/g; SAR(10 g) = 0.101 mW/g

Maximum value of SAR (measured) = 0.2586 mW/g

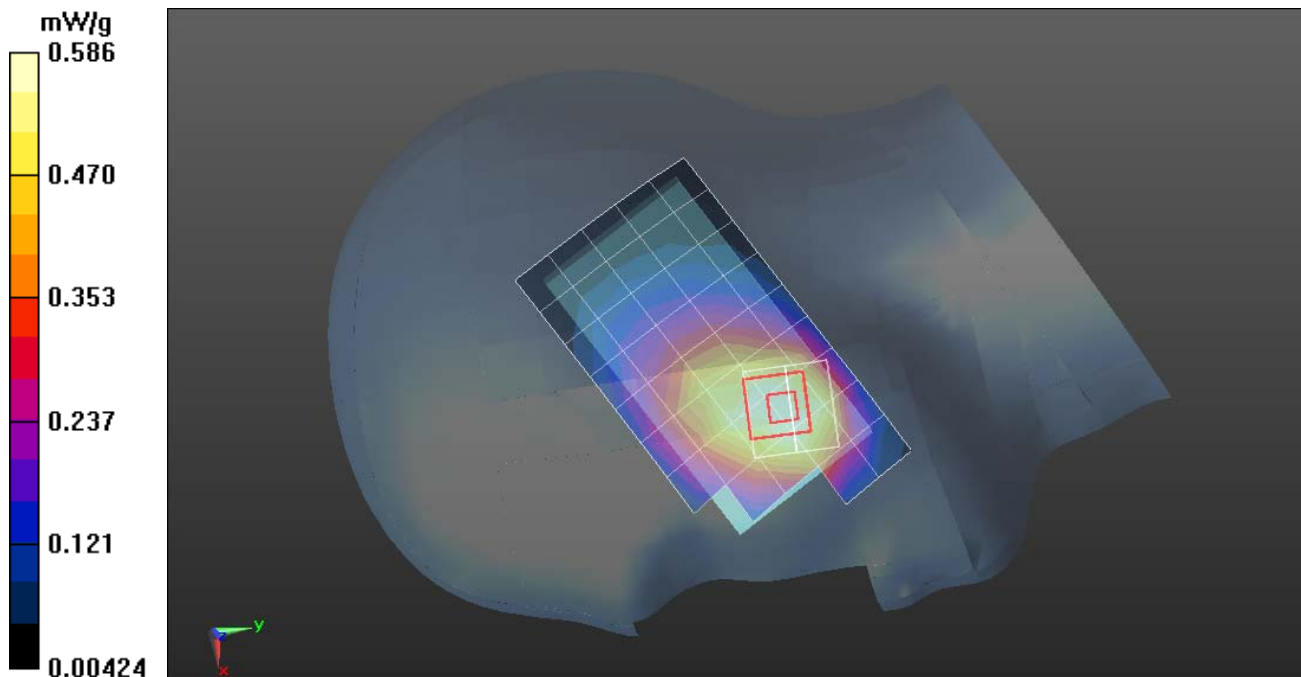



Test Laboratory: Compliance Certification Services Inc.

July 22, 2012

WCDMA Band II-Left Head Cheek Middle CH9400

DUT: Mobile Phone; Type: CALIBER; Serial: 358392040361395

Communication System: FDD WCDMA; Communication System Band: Band II; Frequency: 1880 MHz; Communication System PAR: 0 dB

Ambient: Temperature: 21 °C Relative humidity: 58% Liquid : Temperature: 20 °C

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.403$ mho/m; $\epsilon_r = 40$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Measurement Standard: DAS5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3755; ConvF(7.84, 7.84, 7.84); Calibrated: 1/20/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 1/11/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DAS52 52.8.0(692); SEMCAD X 14.6.4(4989)

WCDMA/Left Head Cheek Middle CH9400/Area Scan (51x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.840 mW/g


WCDMA/Left Head Cheek Middle CH9400/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.051 V/m; Power Drift = -0.18 dB

Peak SAR (extrapolated) = 1.366mW/g

SAR(1 g) = 0.463 mW/g; SAR(10 g) = 0.431 mW/g

Maximum value of SAR (measured) = 0.847 mW/g

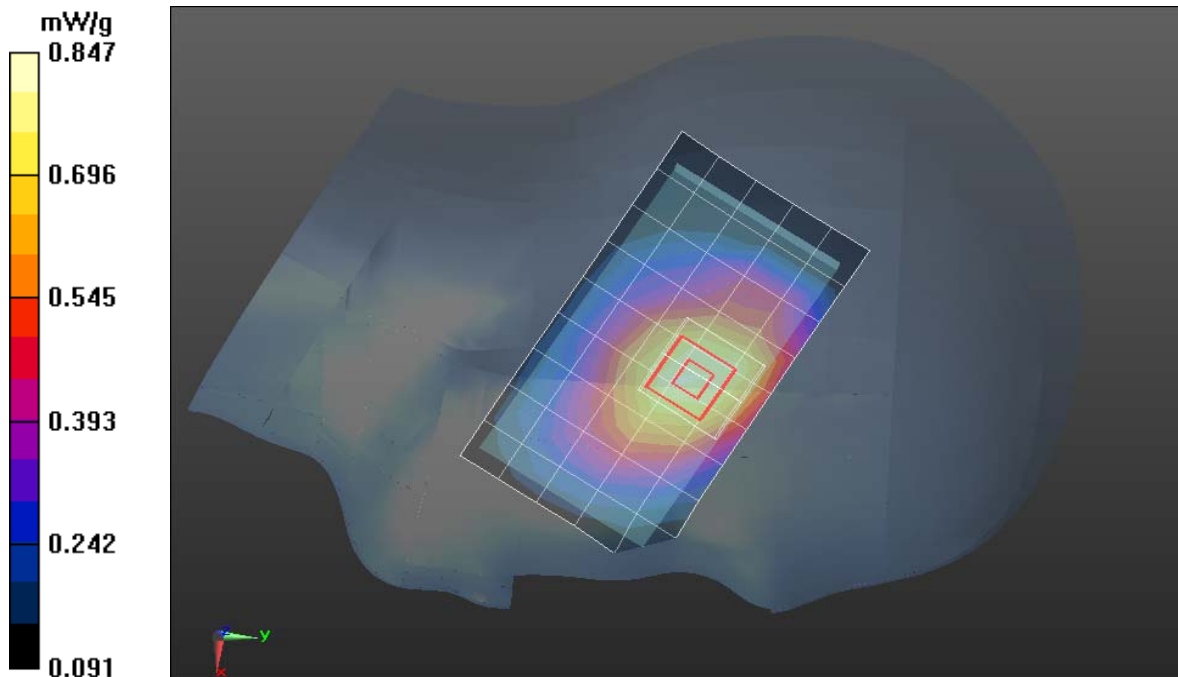



Test Laboratory: Compliance Certification Services Inc.

July 22, 2012

WCDMA Band II-Left Head Tilted Middle CH9400

DUT: Mobile Phone; Type: CALIBER; Serial: 358392040361395

Communication System: FDD WCDMA; Communication System Band: Band II; Frequency: 1880 MHz; Communication System PAR: 0 dB

Ambient: Temperature: 21 °C Relative humidity: 58% Liquid : Temperature: 20 °C

Medium parameters used (interpolated): $f = 1880$ MHz; 1.403 mho/m; $\epsilon_r = 40$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Measurement Standard: DAS5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3755; ConvF(7.84, 7.84, 7.84); Calibrated: 1/20/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 1/11/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DAS52 52.8.0(692); SEMCAD X 14.6.4(4989)

WCDMA/Left Head Tilted Middle CH9400/Area Scan (51x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.429 mW/g


WCDMA/Left Head Tilted Middle CH9400/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 13.580 V/m; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 0.402 mW/g

SAR(1 g) = 0.453 mW/g; SAR(10 g) = 0.183 mW/g

Maximum value of SAR (measured) = 0.436 mW/g

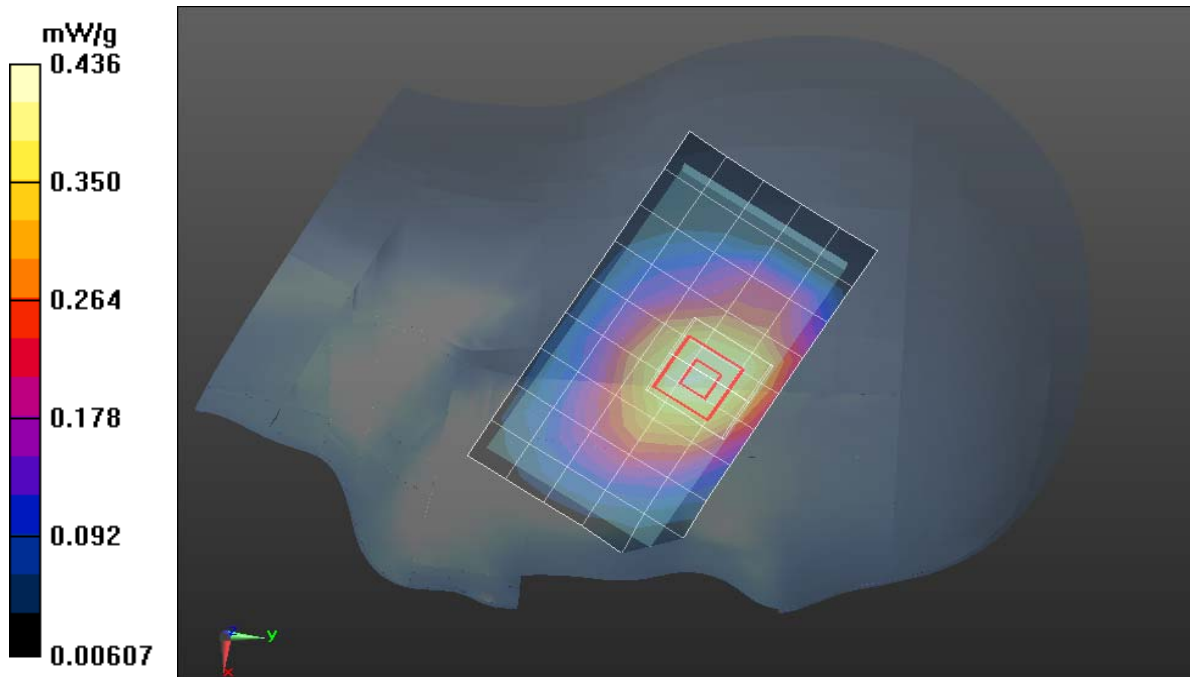



Test Laboratory: Compliance Certification Services Inc.

July 22, 2012

WCDMA Band II-Body Up Middle CH9400

DUT: Mobile Phone; Type: CALIBER; Serial: 358392040361395

Communication System: FDD WCDMA; Communication System Band: Band II; Frequency: 1880 MHz; Communication System PAR: 0 dB

Ambient: Temperature: 21 °C Relative humidity: 58% Liquid : Temperature: 20 °C

Medium parameters used (interpolated): $f = 1880$ MHz; $\sigma = 1.527$ mho/m; $\epsilon_r = 52.807$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3755; ConvF(7.23, 7.23, 7.23); Calibrated: 1/20/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 1/11/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASYS 52.8.0(692); SEMCAD X 14.6.4(4989)

WCDMA/Body Up Middle CH9400/Area Scan (51x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.723 mW/g


WCDMA/Body Up Middle CH9400/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 21.767 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 1.086 mW/g

SAR(1 g) = 0.551 mW/g; SAR(10 g) = 0.496 mW/g

Maximum value of SAR (measured) = 0.729 mW/g

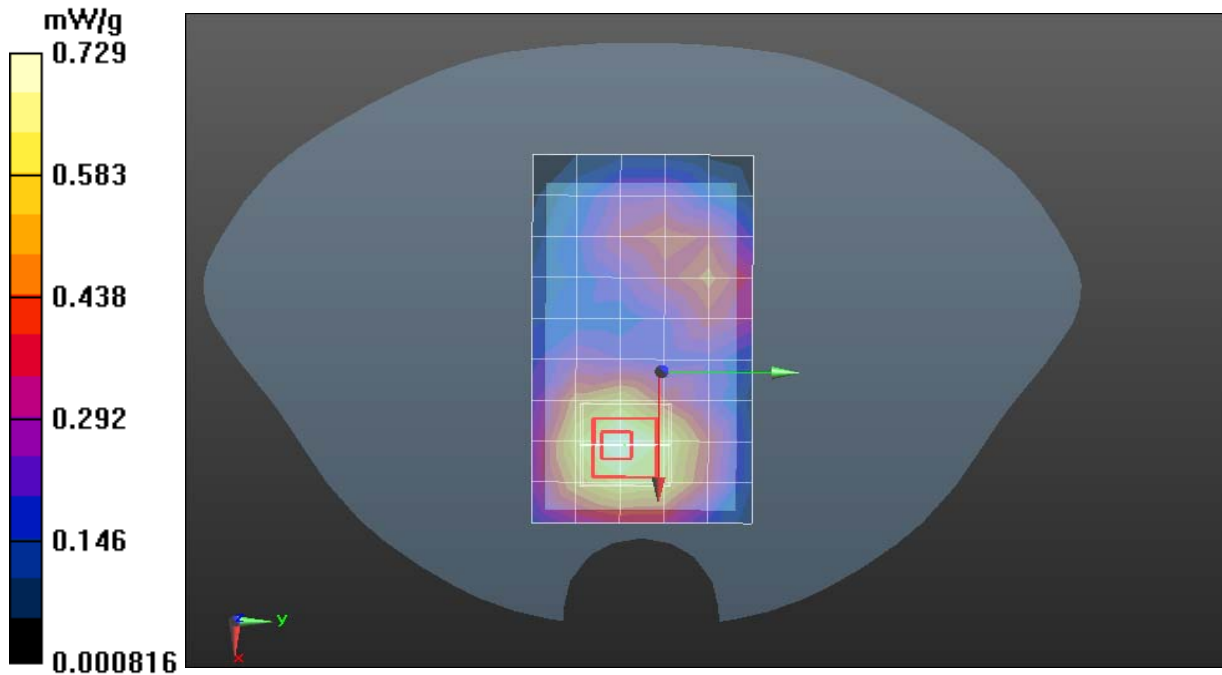



Test Laboratory: Compliance Certification Services Inc.

July 22, 2012

WCDMA Band II- Body Down Middle CH9400

DUT: Mobile Phone; Type: CALIBER; Serial: 358392040361395

Communication System: FDD WCDMA; Communication System Band: Band II; Frequency: 1880 MHz; Communication System PAR: 0 dB

Ambient: Temperature: 21 °C Relative humidity: 58% Liquid : Temperature: 20 °C

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.522$ mho/m; $\epsilon_r = 53.3$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3755; ConvF(7.23, 7.23, 7.23); Calibrated: 1/20/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 1/11/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASYS 52.8.0(692); SEMCAD X 14.6.4(4989)

WCDMA/Body Down Middle CH9400/Area Scan (51x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.880 mW/g

WCDMA/Body Down Middle CH9400/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 24.489 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 1.152 mW/g

SAR(1 g) = 0.621 mW/g; SAR(10 g) = 0.469 mW/g

Maximum value of SAR (measured) = 0.884 mW/g

