

**FCC PART 15C TEST REPORT FOR CERTIFICATION**

On Behalf of

IAdea Corporation

Room Booking Panel

Model No.: IAD-18010H

FCC ID: Y9E-IAD-18010H

Prepared for : IAdea Corporation  
3F, No.21, Lane 168, Xingshan Road, Neihu Dist. Taipei, 114  
Taiwan

Prepared By : Audix Technology (Shenzhen) Co., Ltd.  
No. 6, Kefeng Road, Science & Technology Park,  
Nanshan District , Shenzhen, Guangdong, China

Tel: (0755) 26639496

Report Number : ACS-F23023-1  
Date of Test : Jan.11~12, 2023 & Sep.19~Oct.07, 2023  
Date of Report : Oct.25, 2023

## TABLE OF CONTENTS

Description	Page
<b>1. SUMMARY OF STANDARDS AND RESULTS</b> .....	<b>6</b>
1.1. Description of Standards and Results .....	6
<b>2. GENERAL INFORMATION</b> .....	<b>7</b>
2.1. Description of Equipment Under Test .....	7
2.2. Feature of Equipment Under Test .....	8
2.3. Tested Supporting System Details .....	9
2.4. Block diagram of connection between the EUT and simulators .....	9
2.5. Test Information.....	9
2.6. Test Facility.....	10
2.7. Measurement Uncertainty (95% confidence levels, k=2) .....	10
<b>3. POWER LINE CONDUCTED EMISSION TEST</b> .....	<b>11</b>
3.1. Test Equipments.....	11
3.2. Block Diagram of Test Setup .....	11
3.3. Power Line Conducted Emission Test Limits .....	11
3.4. Configuration of EUT on Test .....	11
3.5. Operating Condition of EUT .....	12
3.6. Test Procedure.....	12
3.7. Power Line Conducted Emission Test Results .....	12
<b>4. RADIATED EMISSION TEST</b> .....	<b>15</b>
4.1. Test Equipments.....	15
4.2. Block Diagram of Test Setup .....	16
4.3. Radiated Emission Limits .....	17
4.4. EUT Configuration on Test.....	17
4.5. Operating Condition of EUT .....	18
4.6. Test Procedure.....	18
4.7. Radiated Emission Test Results .....	18
<b>5. CONDUCTED SPURIOUS EMISSIONS</b> .....	<b>76</b>
5.1. Test Equipments.....	76
5.2. Limit.....	76
5.3. Test Procedure.....	76
5.4. Test result .....	76
<b>6. BAND EDGE COMPLIANCE TEST</b> .....	<b>86</b>
6.1. Test Equipments.....	86
6.2. Limit .....	86
6.3. Test Procedure .....	86
6.4. Test Results .....	86
<b>7. 6dB &amp; 99% Bandwidth Test</b> .....	<b>111</b>
7.1. Test Equipments.....	111
7.2. Limit .....	111
7.3. Test Procedure.....	111
7.4. Test Results .....	112
<b>8. OUTPUT POWER TEST</b> .....	<b>116</b>
8.1. Test Equipments.....	116
8.2. Limit (FCC Part 15C 15.247 b(3)).....	116
8.3. Test Procedure.....	116
8.4. Test Results .....	117

<b>9.</b>	<b>POWER SPECTRAL DENSITY TEST .....</b>	<b>119</b>
9.1.	Test Equipments.....	119
9.2.	Limit .....	119
9.3.	Test Procedure.....	119
9.4.	Test Results .....	120
<b>10.</b>	<b>ANTENNA REQUIREMENT .....</b>	<b>122</b>
10.1.	Standard Applicable .....	122
10.2.	Antenna Connected Construction .....	122
<b>11.</b>	<b>DEVIATION TO TEST SPECIFICATIONS .....</b>	<b>123</b>

Appendix A. Photograph of Test

Appendix B. Photo of the EUT

### TEST REPORT

Applicant : IAdea Corporation  
 Manufacturer : IAdea Corporation  
 Product : Room Booking Panel  
 FCC ID : Y9E-IAD-18010H  
 (A) Model No. : IAD-18010H  
 (B) Test Voltage : AC 120V/60Hz

Tested for comply with:  
FCC CFR 47 Part 15 Subpart C

Test procedure used:  
ANSI C63.10: 2020  
KDB 558074 D01v05

The device described above is tested by Audix Technology (Shenzhen) Co., Ltd. to confirm comply with all the FCC Part 15 Subpart C requirements. The test results are contained in this test report and Audix Technology (Shenzhen) Co., Ltd. is assumed full responsibility for the accuracy and completeness of these tests. Also, this report shows that the Equipment Under Test (EUT) is to be technically compliant with the FCC and IC requirements. This report contains data that are not covered by the NVLAP accreditation.

This Report is made under FCC Part 2.1075. No modifications were required during testing to bring this product into compliance.

This report applies to single evaluation of one sample of above mentioned product and shall not be reproduced in part without written approval of Audix Technology (Shenzhen) Co., Ltd.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S. Government.

Date of Test : Jan.11~12, 2023 & Sep.19~Oct.07, 2023      Report of date: Oct.25, 2023

Prepared by : Mia Zhao      Reviewed by : Thomas Chen  
 Mia Zhao / Assistant      Thomas Chen / Assistant Manager

Audix Technology (Shenzhen) Co., Ltd.  
 EMC 部門報告專用章  
 Stamp only for EMC Dept. Report  
 Signature: Sunny Lu  
 Sunny Lu / Manager

Approved & Authorized Signer :

## Modified History

Edition No.	Revision	Issue Date	Report No.
Original	Initial issue of report	Mar.16, 2023	ACS-F23023
Rev.01	Add Panel	Oct.25, 2023	ACS-F23023-1

- Note: 1. This report is based on report of ACS-F23023.  
2. This report is an additional version with original report number ACS-F23023. The differences with original report please see the above table of Rev.01.  
3. Through the evaluation of the above differences, some test items need to be re-conducted.

## 1. SUMMARY OF STANDARDS AND RESULTS

### 1.1. Description of Standards and Results

The EUT has been tested according to the applicable standards as referenced below.

EMISSION		
Description of Test Item	Standard	Results
Power Line Conducted Emission	FCC Part 15: 15.207	PASS
Radiated Emission	FCC Part 15: 15.209 FCC Part 15: 15.205	PASS
Band Edge Compliance	FCC Part 15: 15.247(d)	PASS
Conducted spurious emissions	FCC Part 15: 15.247(d)	PASS
6dB Bandwidth	FCC Part 15: 15.247(a)(2)	PASS
Peak Output Power	FCC Part 15: 15.247(b)(3)	PASS
Power Spectral Density	FCC Part 15: 15.247(e)	PASS
Antenna requirement	FCC Part 15: 15.203	PASS

Note: Measurement uncertainty affection to the result is considered, the EUT is technically compliant with standard requirements.

## 2. GENERAL INFORMATION

### 2.1. Description of Equipment Under Test

Applicant	IAdea Corporation
Applicant Address	3F, No.21, Lane 168, Xingshan Road, Neihu Dist. Taipei, 114 Taiwan
Manufacturer	IAdea Corporation
Manufacturer Address	3F, No.21, Lane 168, Xingshan Road, Neihu Dist. Taipei, 114 Taiwan
Product	Room Booking Panel
Model No.	IAD-18010H
FCC ID	Y9E-IAD-18010H
AC Adapter	Manufacturer: Asian Power Devices Inc. Model No.: WB-24J12R Input: 100-240V~50-60Hz, 0.7A Max Output: DC 12V, 2.0A, 24W DC Cable: Unshielded, Undetachable, 1.8m ( with one core)
Sample Type	Prototype production
Date of Receipt	Jan.05,2023 & Sep.12, 2023
Date of Test	Jan.11~12, 2023 & Sep.19~Oct.07, 2023
Remark: This report only for WIFI 2.4GHz.	

2.2.Feature of Equipment Under Test

Product Feature & Specification		
Product	Room Booking Panel	
Model No.	IAD-18010H	
Radio	IEEE802.11 a/b/g/n/ac	
Power Source	<input checked="" type="checkbox"/> Commercial Power	AC 100 ~ 240V, 50-60Hz, 0.7A
	<input checked="" type="checkbox"/> External Power Source	DC 12V, 2.0A, 24W
	<input type="checkbox"/> Lithium battery	DC V, mAh
	<input type="checkbox"/> UM battery	DC V
2.4GHz Wi-Fi		
Support Modes	802.11b/g/n20	
Frequency Range	2412-2462MHz	
Type of Modulation	802.11b(DSSS): CCK, QPSK, BPSK; 802.11g/n(OFDM): 64QAM,16QAM, QPSK, BPSK	
Data Rate	802.11b: 1/2/5.5/11 Mbps; 802.11g: 6/9/12/18/24/36/48/54 Mbps; 802.11n: up to 300Mbps	
Channel Separation	5MHz	
5GHz Wi-Fi		
Support Modes	802.11a/n20/n40/ac20/ac40/ac80	
Frequency Range	5180-5240MHz, 5745-5825MHz	
Type of Modulation	802.11a/n (OFDM): QPSK, BPSK, 16QAM, 64QAM 802.11ac (OFDM): QPSK, BPSK, 16QAM, 64QAM,256QAM	
Data Rate	802.11a: 6/9/12/18/24/36/48/54 Mbps; 802.11n: up to 300Mbps; 802.11ac: up to 433Mbps	
Channel Separation	5MHz	


Antenna System	
Type of Antenna	FPC Antenna
Antenna Peak Gain	DTS Band (2400-2483.5MHz) Peak Gain: 2.3dBi. U-NII-1 Band (5150-5250MHz) Peak Gain: 3.5dBi. U-NII-3 Band (5725-5850MHz) Peak Gain: 5.1dBi.



### 2.3. Tested Supporting System Details

No.	Description	ACS No.	Manufacturer	Model	Serial Number
1.	Notebook	N/A	ACER	ZOW	N/A
		Power Cord(3C): Unshielded, Detachable, 1.8m Power Adapter: Manufacturer: Lite-On, M/N: PA-1900-32 Data Cable: Shielded, Undetectable, 4.0m(Bond one ferrite core)			

### 2.4. Block diagram of connection between the EUT and simulators



**(EUT: Room Booking Panel)**

### 2.5. Test Information

A special test software (Ampak RFTesttool V7.0) was used to control EUT work in Continuous TX mode(The duty cycle of the test signal is 100%), and select test channel, wireless mode and data rate.

Tested mode, channel, and data rate information			
Mode	data rate (Mbps)(see Note)	Channel	Frequency (MHz)
IEEE 802.11b	1	Low :CH1	2412
	1	Middle: CH6	2437
	1	High: CH11	2462
IEEE 802.11g	6	Low :CH1	2412
	6	Middle: CH6	2437
	6	High: CH11	2462
IEEE 802.11n HT20	MCS0	Low :CH1	2412
	MCS0	Middle: CH6	2437
	MCS0	High: CH11	2462

Note: According exploratory test, EUT will have maximum output power in those data rate, so those data rate were used for all test.

**2.6. Test Facility**

Site Description  
Name of Firm

: Audix Technology (Shenzhen) Co., Ltd.  
No. 6, Kefeng Road, Science & Technology Park,  
Nanshan District , Shenzhen, Guangdong, China

EMC Lab.

: Certificated by ISED, Canada  
Company Number: 5183A  
CAB identifier: CN0034  
Valid Date: Mar.31, 2024

Certificated by FCC, USA  
Designation No.: CN5022  
Valid Date: Mar.31, 2024

Accredited by NVLAP, USA  
NVLAP Code: 200372-0  
Valid Date: Mar.31, 2024

**2.7.Measurement Uncertainty (95% confidence levels, k=2)**

Test Item	Uncertainty
Uncertainty for Conduction emission test in No. 1 Conduction	$\pm 2.6\text{dB}(150\text{kHz to } 30\text{MHz})$
Uncertainty for Radiation Emission test in 3m chamber	$\pm 3.8\text{dB}(30\sim 200\text{MHz, Polarization: H})$
	$\pm 3.8\text{dB}(30\sim 200\text{MHz, Polarization: V})$
	$\pm 4.0\text{dB}(200\text{M}\sim 1\text{GHz, Polarization: H})$
	$\pm 4.0\text{dB}(200\text{M}\sim 1\text{GHz, Polarization: V})$
Uncertainty for Radiation Emission test in 3m chamber(1GHz-25GHz)	$\pm 4.0\text{dB}(1\sim 6\text{GHz, Distance: } 3\text{m})$
	$\pm 4.0\text{dB}(6\sim 25\text{GHz, Distance: } 3\text{m})$
Uncertainty for Radiated Spurious Emission test in RF chamber	$\pm 3.7\text{dB}(30\text{MHz}\sim 1000\text{MHz})$
	$\pm 3.3\text{dB}(1\sim 26.5\text{GHz})$
Uncertainty for Power density test	$\pm 2.0\text{dB}$
Uncertainty for Output power test	$\pm 0.8\text{dB}$
Uncertainty for Bandwidth test	$\pm 4.6\%$
Uncertainty for DC power test	$\pm 0.1\%$
Uncertainty for test site temperature and humidity	$\pm 0.6^\circ\text{C}$
	$\pm 3\%$


### 3. POWER LINE CONDUCTED EMISSION TEST

#### 3.1. Test Equipments

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	1# Shielding Room	AUDIX	N/A	N/A	Nov.09,22	3 Year
2.	EMI Test Receiver	Rohde & Schwarz	ESCI	100842	Apr.01,23	1 Year
3.	L.I.S.N.#1	Rohde & Schwarz	ENV216	102160	Jun.25,23	1 Year
4.	L.I.S.N.#2	Kyoritsu	KNW-407	8-1628-5	Apr.01,23	1 Year
5.	RF Cable	Eastsheep	RG223	190424	Sep.15,23	1Year
6.	Terminator	Hubersuhner	50Ω	No.1	Apr.02,23	1 Year
7.	Test Software	AUDIX	e3	6.100913a	N/A	N/A

Note: N/A means Not applicable.

#### 3.2. Block Diagram of Test Setup

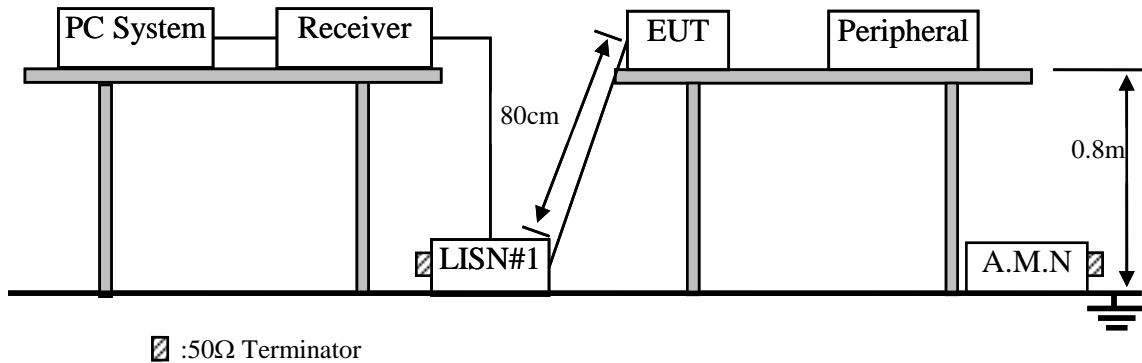

#### 3.3. Power Line Conducted Emission Test Limits

Frequency	Maximum RF Line Voltage	
	Quasi-Peak Level dB(μV)	Average Level dB(μV)
150kHz ~ 500kHz	66 ~ 56*	56 ~ 46*
500kHz ~ 5MHz	56	46
5MHz ~ 30MHz	60	50

- Notes: 1. \* Decreasing linearly with logarithm of frequency.  
 2. The lower limits shall apply at the transition frequencies.  
 3. Emission Level (dBμV) = Factor (L.I.S.N.) (dB) + Cable Loss (dB)+Reading (Receiver) (dBμV)

#### 3.4. Configuration of EUT on Test

The following equipment are installed on Power Line Conducted Emission Test to meet the commission requirement and operating regulations in a manner which tends to maximize its emission characteristics in a normal application.

##### 3.4.1. Room Booking Panel (EUT)

Model No. : IAD-18010H  
 Serial No. : N/A

##### 3.4.2. Support Equipment: As Tested Supporting System Details, in Section 2.2.

### 3.5. Operating Condition of EUT

- 3.5.1. Setup the EUT as shown as Section 3.2.
- 3.5.2. Turn on the power of EUT.
- 3.5.3. PC run test software to control EUT work in Tx mode.

### 3.6. Test Procedure


The EUT was placed on a non-metallic table, 80cm above the ground plane. The EUT Power Via AC unit connected to the power mains through a line impedance stabilization network (L.I.S.N. #1). This provides a 50 ohm coupling impedance for the EUT (Please refer the block diagram of the test setup and photographs). The AC line are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to ANSI C63.10 on Conducted Emission Test.

The bandwidth of test receiver (R & S ESCI) is set at 9kHz.

The frequency range from 150kHz to 30MHz is checked.

### 3.7. Power Line Conducted Emission Test Results


**PASS.** (All emissions not reported below are too low against the prescribed limits.)

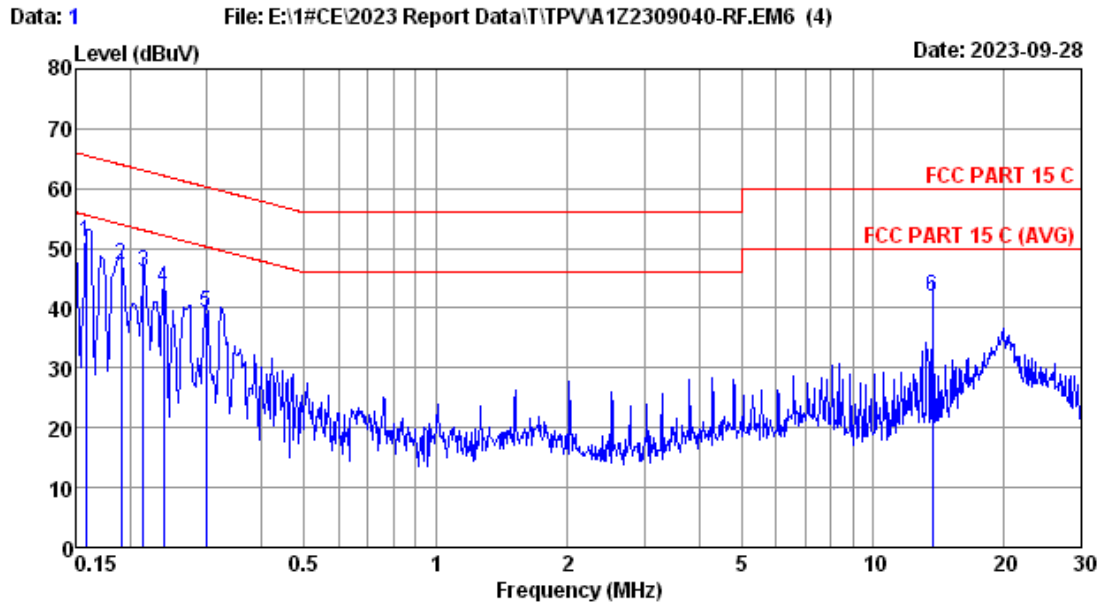

Site no :1# CE Data No :1  
 Dis./Lisn :2023 ENV216-L  
 Limit :FCC PART 15 C  
 Env./Ins. :24.3\*C/52% Engineer :Sucy  
 EUT :  
 Power Rating :AC 120V/60Hz  
 Test Mode :WIFI 2.4G TX

No	Freq (MHz)	LISN Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.158	9.62	0.01	41.50	51.13	65.56	14.43	QP
2	0.190	9.62	0.01	37.62	47.25	64.02	16.77	QP
3	0.214	9.62	0.01	36.46	46.09	63.05	16.96	QP
4	0.238	9.61	0.01	33.66	43.28	62.17	18.89	QP
5	0.299	9.61	0.01	29.68	39.30	60.28	20.98	QP
6	13.695	9.92	0.08	31.90	41.90	60.00	18.10	QP

Remarks: 1.Emission Level=LISN Factor+Cable Loss+Reading.  
 2.If the average limit is met when using a quasi-peak detector, the EUT shall be deemed to meet both limits and measurement with average detector is unnecessary.

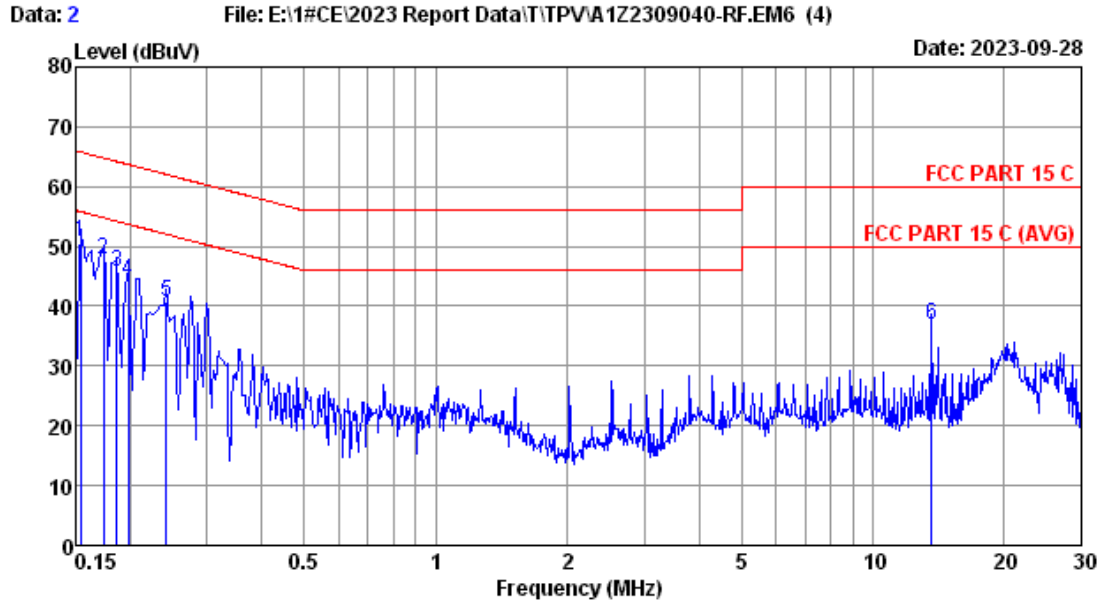

Site no :1# CE Data No :2  
 Dis./Lisn :2023 ENV216-N  
 Limit :FCC PART 15 C  
 Env./Ins. :24.3\*C/52% Engineer :Sucy  
 EUT :  
 Power Rating :AC 120V/60Hz  
 Test Mode :WIFI 2.4G TX

No	Freq (MHz)	LISN Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.154	9.69	0.01	41.00	50.70	65.78	15.08	QP
2	0.174	9.69	0.01	38.23	47.93	64.77	16.84	QP
3	0.186	9.70	0.01	36.16	45.87	64.20	18.33	QP
4	0.198	9.70	0.01	34.46	44.17	63.71	19.54	QP
5	0.242	9.70	0.01	31.06	40.77	62.04	21.27	QP
6	13.623	8.80	0.07	27.90	36.77	60.00	23.23	QP

Remarks: 1.Emission Level=LISN Factor+Cable Loss+Reading.  
 2.If the average limit is met when using a quasi-peak detector, the EUT shall be deemed to meet both limits and measurement with average detector is unnecessary.

## 4. RADIATED EMISSION TEST

### 4.1. Test Equipments

#### 4.1.1. For frequency range 30MHz~1000MHz (In 3m Anechoic Chamber)

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	3m Chamber(NSA)	AUDIX	N/A	N/A	Aug.11,22	3Year
2.	3m Chamber(SE)	AUDIX	N/A	N/A	Sep.16,22	3 Year
3.	Signal Analyzer	Rohde & Schwarz	FSV30	103670	Jun.25,23	1 Year
4.	Tri-log-Broadband Antenna	SCHWARZBECK	VULB 9168	01317	Oct.28,22	1 Year
5.	NSA Cable	HUBER+SUHNER	CFD400NL-LW	No.3+190411	Sep.20,23	1 Year
6.	Coaxial Switch	Anritsu	MP59B	6201397223	Apr.02,23	1 Year
7.	EMI Test Receiver	Rohde & Schwarz	ESR3	101931	Apr.01,23	1 Year
8.	Broadband Amplifier	SCHWARZBECK	BBV9744	00259	Jun.25,23	1 Year
9.	Test Software	AUDIX	e3	6.100913a	N/A	N/A

Note: N/A means Not applicable.


#### 4.1.2. For frequency range 1GHz~25GHz (In 3m Anechoic Chamber)

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	3mChamber(Svswr)	AUDIX	N/A	N/A	Aug.09,22	3Year
2.	3mChamber(SE)	AUDIX	N/A	N/A	Sep.16,22	3Year
3.	Signal Analyzer	Rohde & Schwarz	FSV30	104050	Apr.01,23	1 Year
4.	Amplifier	Agilent	83017A	MY53270084	Sep.20,23	1 Year
5.	RF Cable	EMCI	EMC104-SM-SM-15000	190407	Jun.25,23	1 Year
6.	Test Software	AUDIX	e3	6.100913a	N/A	N/A
7.	Horn Antenna	ETC	MCTD 1209	DRH15F03006	Aug.23,23	1 Year


Note: N/A means Not applicable.

### 4.2. Block Diagram of Test Setup

For frequency range 30MHz-1000MHz

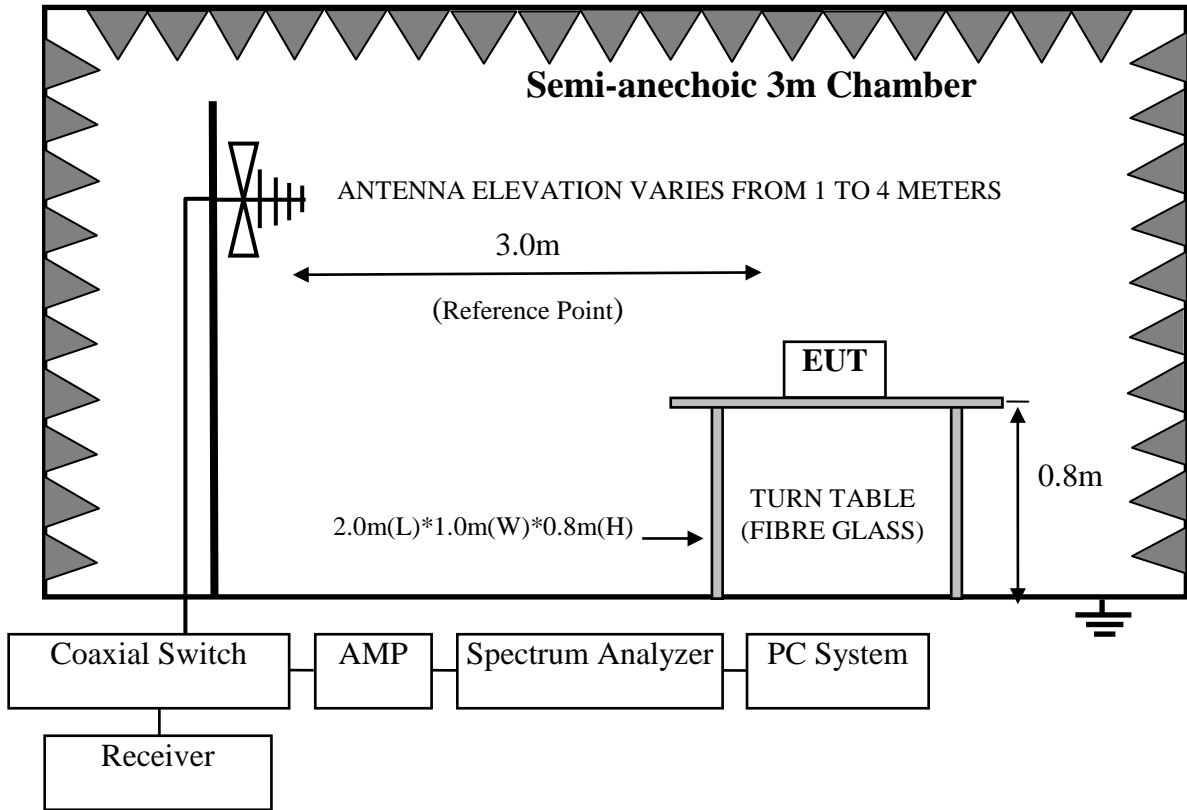

For frequency range 1GHz-25GHz

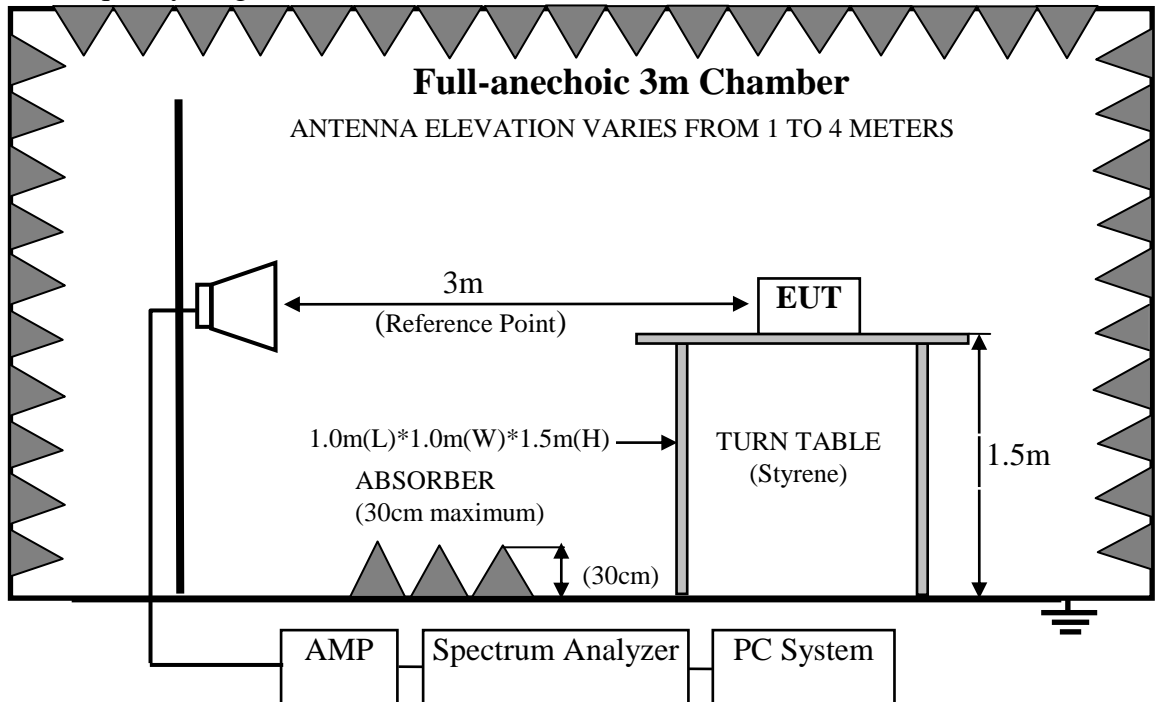



### 4.3. Radiated Emission Limits

#### 4.3.1. 15.247&209 limits

FREQUENCY MHz	DISTANCE Meters	FIELD STRENGTHS LIMIT	
		μV/m	dB(μV)/m
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
960 ~ 1000	3	500	54.0
Above 1000	3	74.0 dB(μV)/m (Peak) 54.0 dB(μV)/m (Average)	

- Remark : (1) Emission Level (dBμV/m) = Reading (Receiver) (dBμV) + Antenna Factor (dB/m) + Cable Loss (dB)  
 Emission Level (dBμV/m) = Reading (Spectrum) (dBμV) + Antenna Factor (dB/m) – Amp Factor (dB) + Cable Loss (dB)(above 1000MHz)
- (2) The smaller limits shall apply at the cross point between two frequency bands.
- (3) Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.

#### 4.3.2. 15.205 Restricted bands of operation

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
<sup>1</sup> 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	( <sup>2</sup> )

All the emissions appearing within 15.205 restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions shall be at least 20dB below the fundamental emissions, or comply with 15.209 limits.

### 4.4. EUT Configuration on Test

The following equipment are installed on Power Line Conducted Emission Test to meet the commission requirement and operating regulations in a manner which tends to maximize its emission characteristics in a normal application.

#### 4.4.1. Room Booking Panel (EUT)

Model No. : IAD-18010H  
 Serial No. : N/A

4.4.2. Support Equipment: As Tested Supporting System Details, in Section 2.2.

#### 4.5. Operating Condition of EUT

4.5.1. Setup the EUT and simulator as shown as Section 4.2.

4.5.2. Turn on the power of all equipments.

4.5.3. Let EUT work in Tx(WiFi 2.4GHz) mode

#### 4.6. Test Procedure

##### **Frequency below 30MHz:**

The EUT setup on the turn table which has 0.8 m height to the ground. The turn table rotated 360 degrees and antenna fixed to 1 m to find the maximum emission level. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10 regulation.

EUT and its simulators are placed on a turn table, which is 0.8 meter high above ground for frequency 30MHz~1000MHz, 1.5 meter high above ground for frequency above 1GHz and put the absorbing with 2.4m(L)\*2.4m(W)\*0.3m(H) on the ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. Power on the EUT and let it working in test mode, then test it. EUT is set 3 meters away from the receiving antenna, which is mounted on a antenna tower. The antenna can be moved up and down between 1 meter and 4 meters to find out the maximum emission level. Broadband antenna (calibrated bilog antenna) is used as receiving antenna for frequency 30MHz~1000MHz, and the Horn antenna is used as receiving antenna for frequency above 1GHz. Both horizontal and vertical polarization of the antenna are set on test.

This test was performed with EUT in X, Y, Z position, and the worse case was found and reported.

The bandwidth of the EMI test receiver is set at 120kHz for frequency range from 30MHz to 1000 MHz.

The bandwidth of the Spectrum's VBW is set at 3MHz and RBW is set at 1MHz for peak emissions measurement above 1GHz and 1MHz RBW, 10Hz VBW for average emissions measure above 1GHz

The frequency range from 30MHz to 10<sup>th</sup> harmonic (25GHz) are checked. and no any emissions were found from 18GHz to 25GHz, So the radiated emissions from 18GHz to 25GHz were not record.

#### 4.7. Radiated Emission Test Results


**PASS.**

All the emissions from 30MHz to 25 GHz were comply with 15.209 limits.

Note 1: For emissions above 1GHz, if peak level comply with average limit, then the average level is deemed to comply with average limit.


Note 2: The emissions (9kHz~30MHz) not reported for there is no emission be found.

### Duty cycle

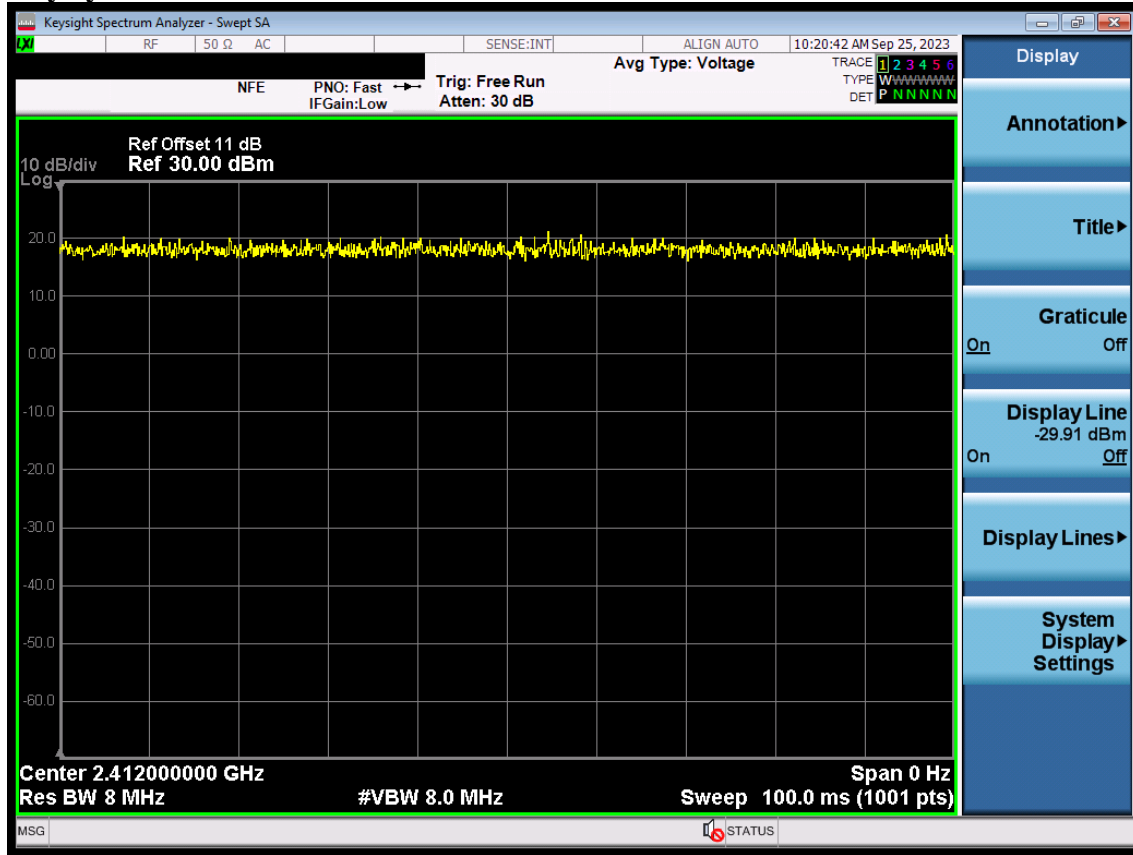

**Note: The duty cycle of the test signal is 100%.**


Frequency: 30MHz~1GHz

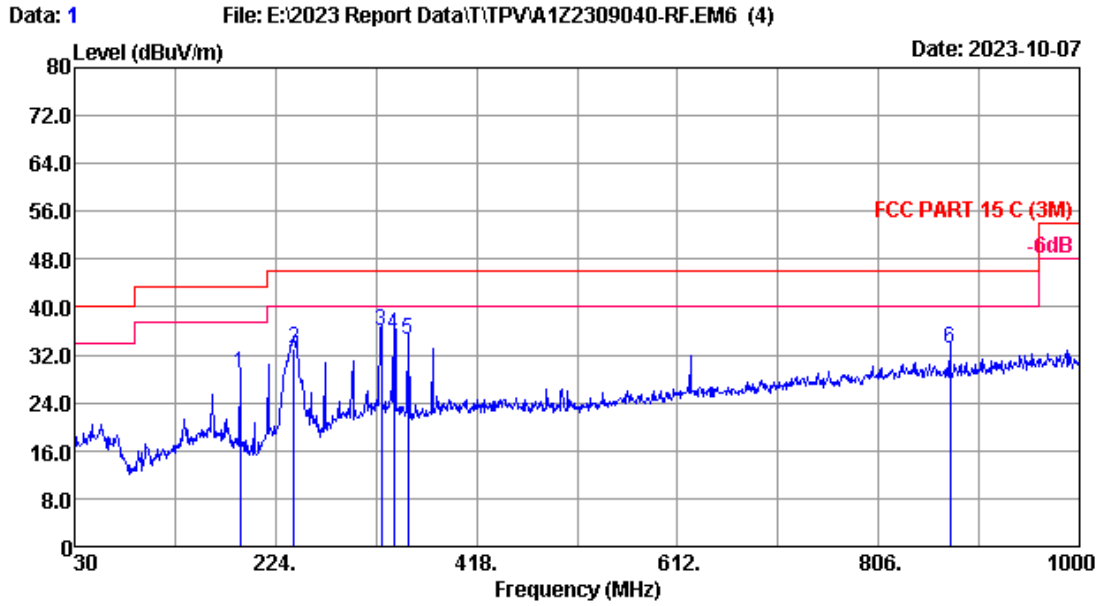

Site no. : 3m Chamber Data no. : 1  
 Dis. / Ant. : 3m 2022 VULB 9168-01317 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15 C (3M)  
 Env. / Ins. : 23.2\*C/59% Engineer : Abel  
 Test Mode : WIFI 2.4G

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	190.050	16.60	1.13	11.05	28.78	43.50	14.72	QP
2	241.460	17.63	1.31	14.14	33.08	46.00	12.92	QP
3	325.850	20.20	1.47	14.34	36.01	46.00	9.99	QP
4	338.460	20.20	1.50	13.69	35.39	46.00	10.61	QP
5	352.040	20.24	1.53	12.81	34.58	46.00	11.42	QP
6	874.870	28.50	2.57	2.00	33.07	46.00	12.93	QP

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.  
 2. The emission levels that are 20dB below the official limit are not reported.

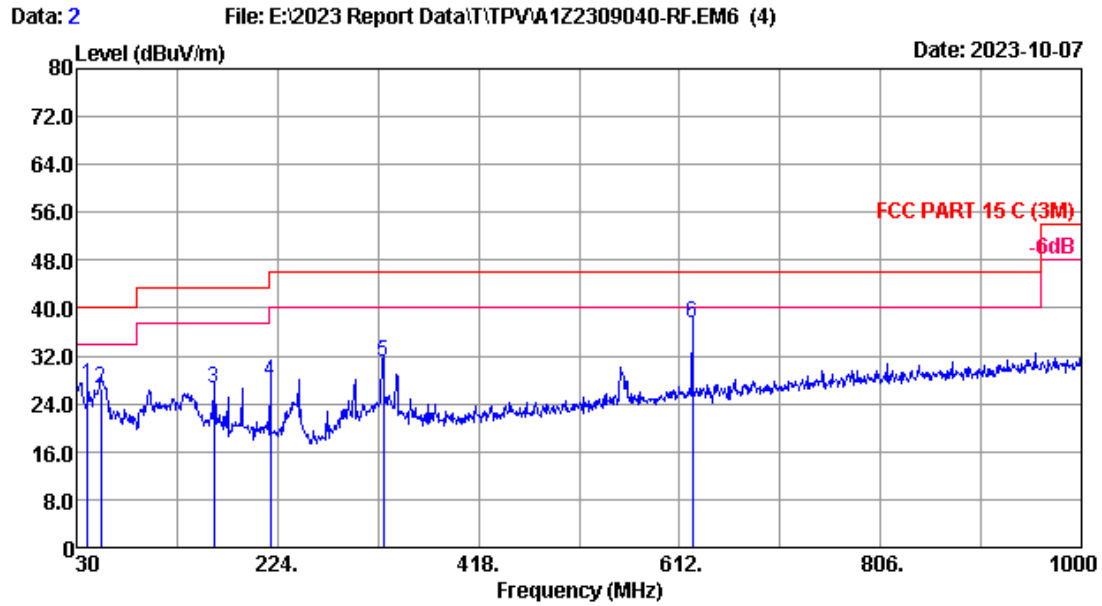


Site no. : 3m Chamber Data no. : 2  
 Dis. / Ant. : 3m 2022 VULB 9168-01317 Ant. pol. : VERTICAL  
 Limit : FCC PART 15 C (3M)  
 Env. / Ins. : 23.2°C/59% Engineer : Abel  
 Test Mode : WIFI 2.4G

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	40.670	19.50	0.58	7.10	27.18	40.00	12.82	QP
2	53.280	19.70	0.66	6.35	26.71	40.00	13.29	QP
3	162.890	19.20	1.05	6.28	26.53	43.50	16.97	QP
4	217.210	15.68	1.23	10.84	27.75	46.00	18.25	QP
5	325.850	20.20	1.47	9.33	31.00	46.00	15.00	QP
6	624.610	26.10	2.10	9.33	37.53	46.00	8.47	QP

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.  
 2. The emission levels that are 20dB below the official limit are not reported.


**Frequency: 1GHz~18GHz**

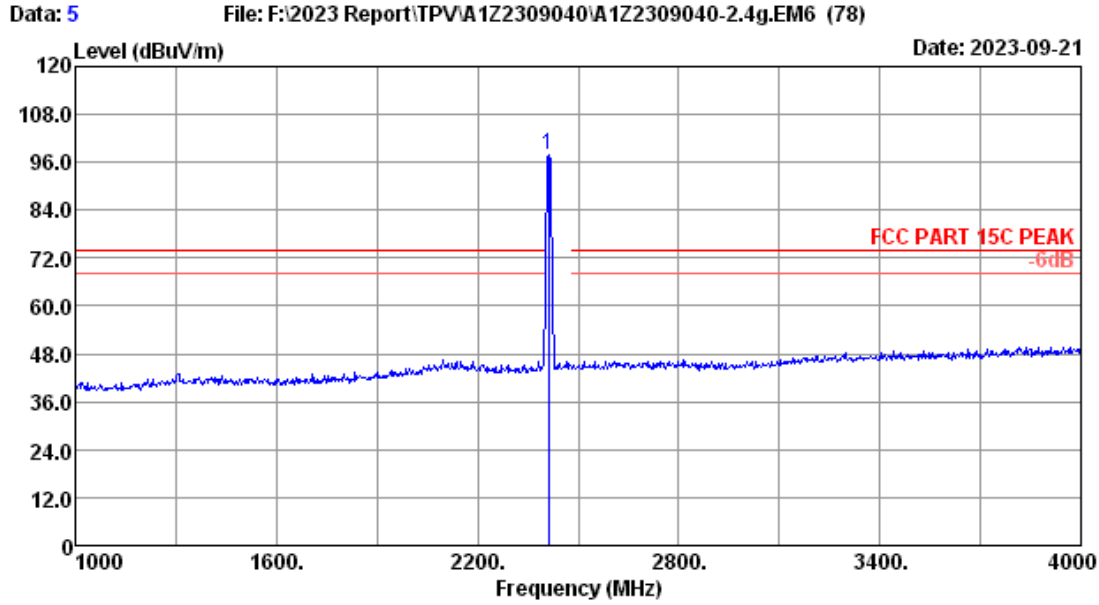

Site no. : 3m Chamber Data no. : 5  
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 21.2°C/50.5% Engineer : Allen  
 Test Mode : 11b 2412MHz TX

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2412.00	27.65	4.87	99.85	34.36	98.01	-----	-----	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

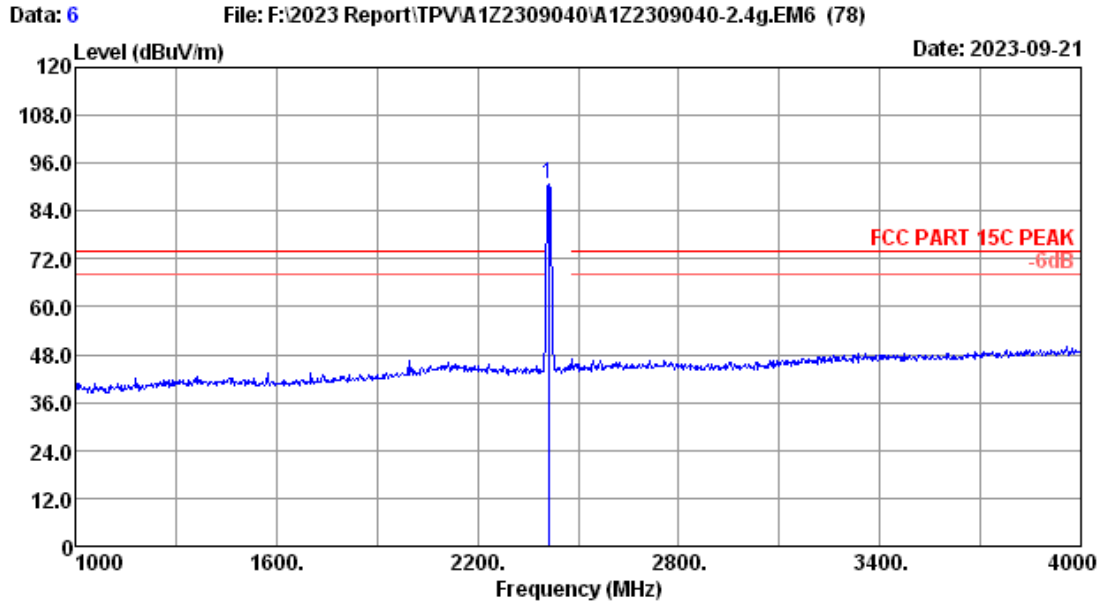

Site no. : 3m Chamber Data no. : 6  
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 21.2\*C/50.5% Engineer : Allen  
 Test Mode : 11b 2412MHz TX

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2412.00	27.65	4.87	92.43	34.36	90.59	-----	-----	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

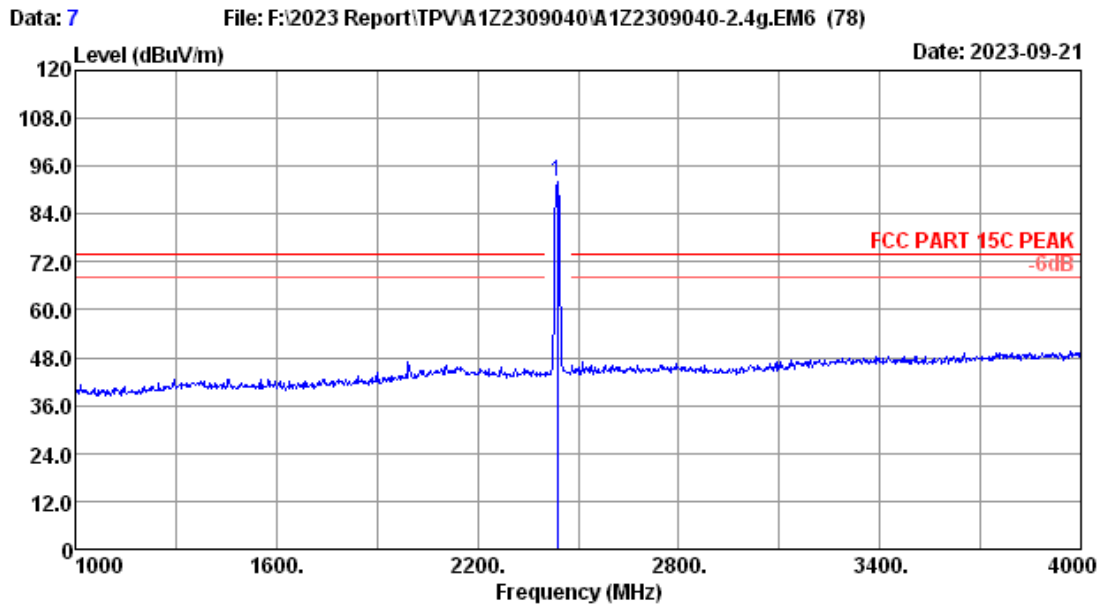


Site no. : 3m Chamber Data no. : 7  
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 21.2\*C/50.5% Engineer : Allen  
 Test Mode : 11b 2437MHz TX

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2437.00	27.75	4.89	93.77	34.36	92.05	-----	-----	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.




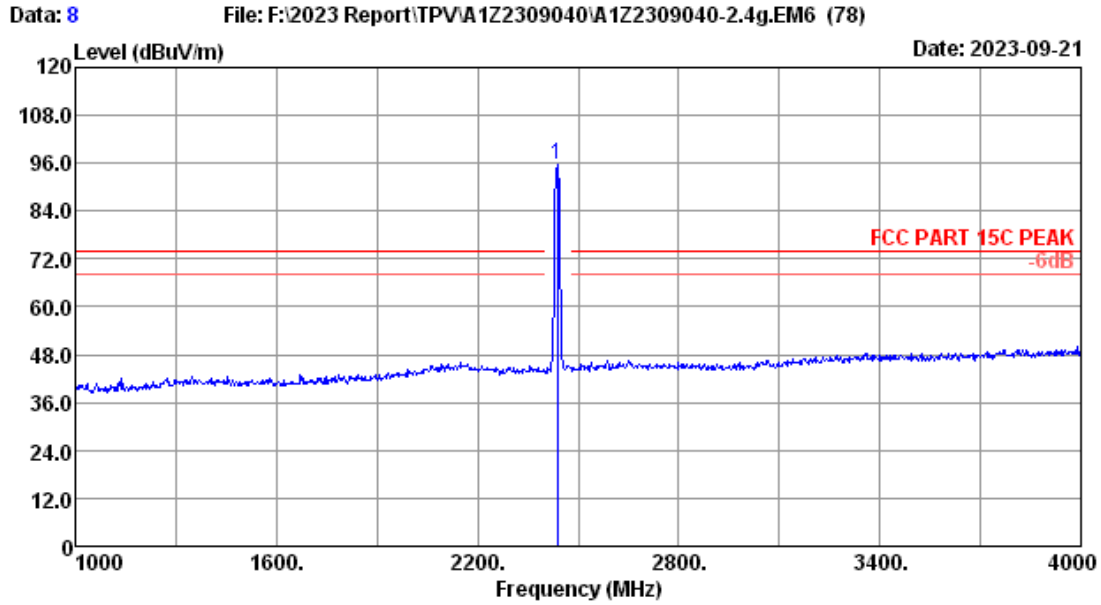

Site no. : 3m Chamber Data no. : 8  
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 21.2\*C/50.5% Engineer : Allen  
 Test Mode : 11b 2437MHz TX

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2437.00	27.75	4.89	97.56	34.36	95.84	-----	-----	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

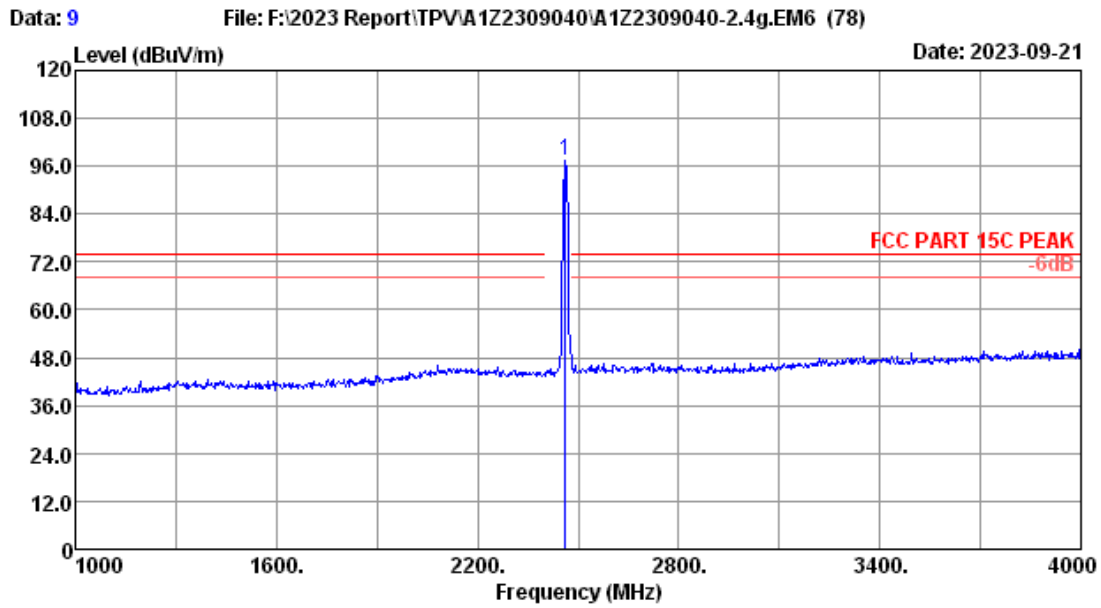

Site no. : 3m Chamber Data no. : 9  
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 21.2\*C/50.5% Engineer : Allen  
 Test Mode : 11b 2462MHz TX

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2462.00	27.80	4.92	98.83	34.35	97.20	-----	-----	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

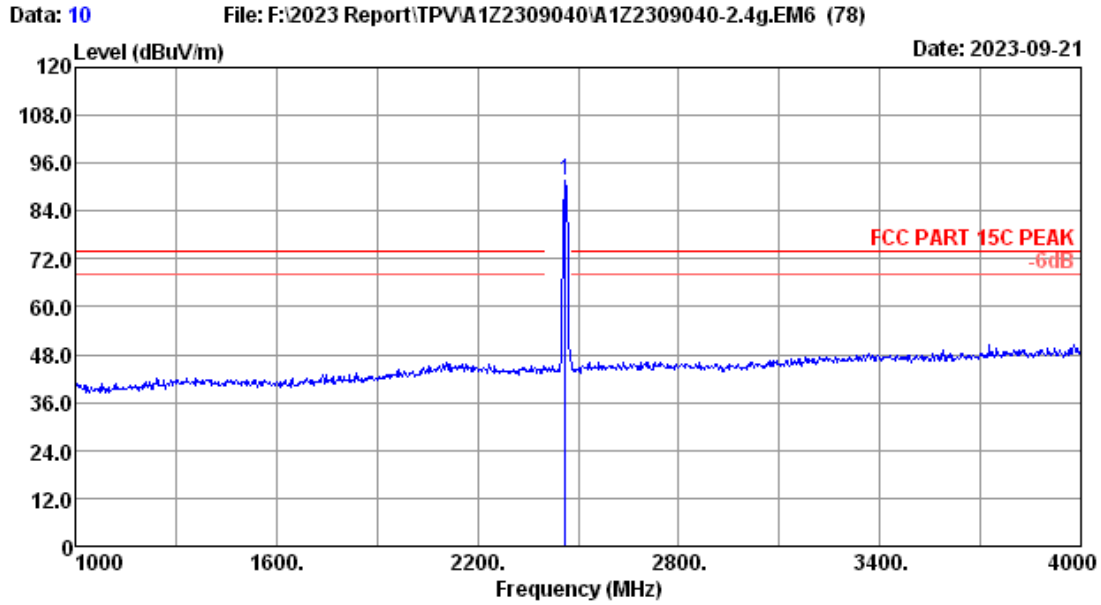

Site no.	: 3m Chamber	Data no.	: 10
Dis. / Ant.	: 3m 2023 MCTD1209-3006	Ant. pol.	: VERTICAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 21.2°C/50.5%	Engineer	: Allen
Test Mode	: 11b 2462MHz TX		

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2462.00	27.80	4.92	93.21	34.35	91.58	-----	-----	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

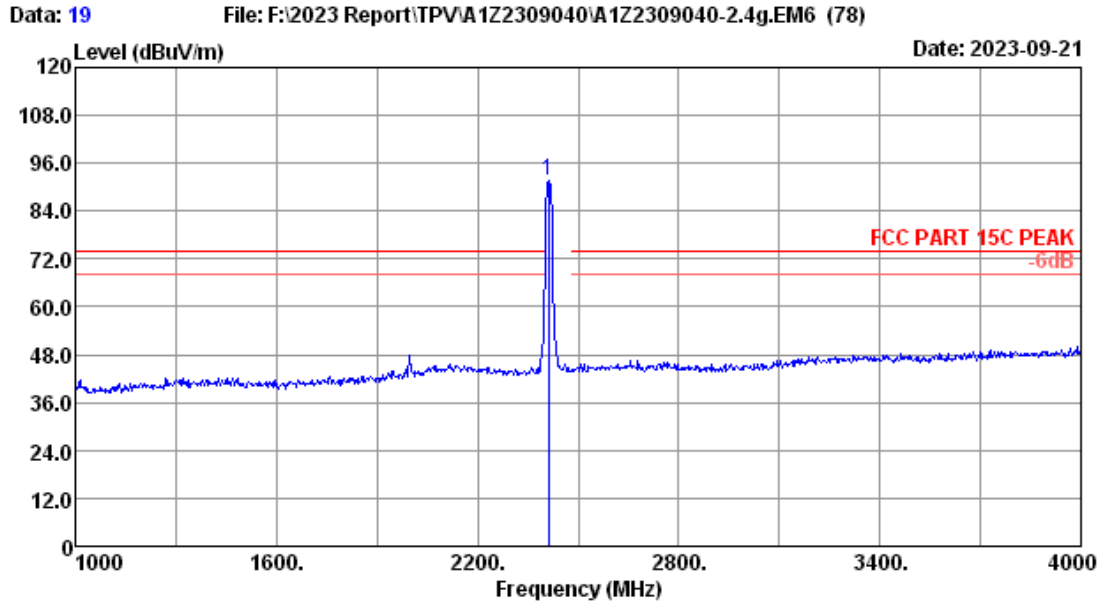

Site no. : 3m Chamber Data no. : 19  
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 21.2\*C/50.5% Engineer : Allen  
 Test Mode : 11g 2412MHz TX

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2412.00	27.65	4.87	93.65	34.36	91.81	-----	-----	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

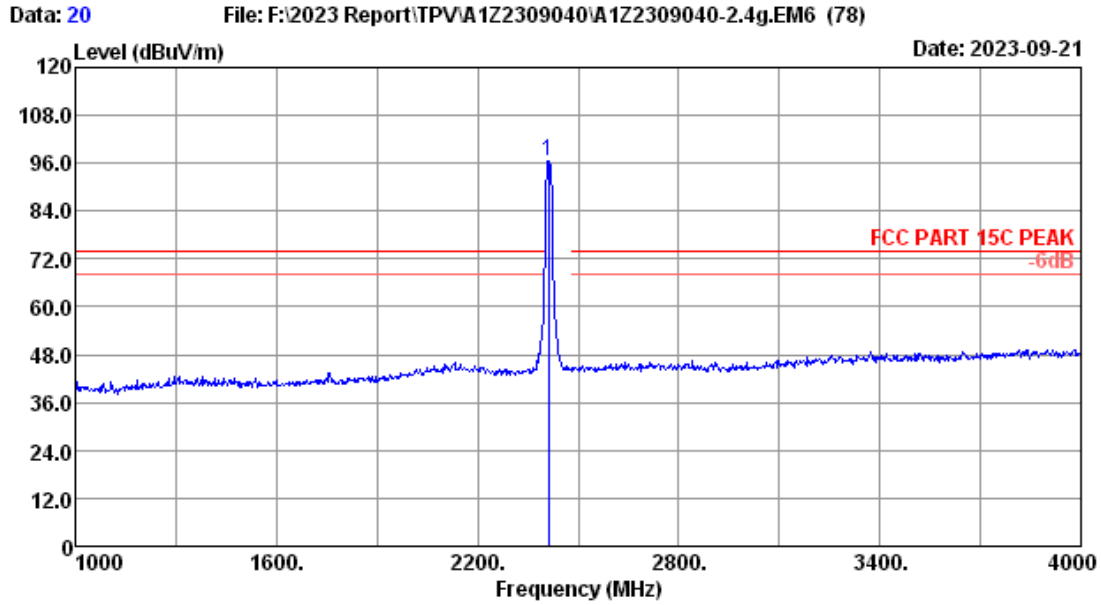

Site no. : 3m Chamber Data no. : 20  
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 21.2\*C/50.5% Engineer : Allen  
 Test Mode : 11g 2412MHz TX

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2412.00	27.65	4.87	98.29	34.36	96.45	-----	-----	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

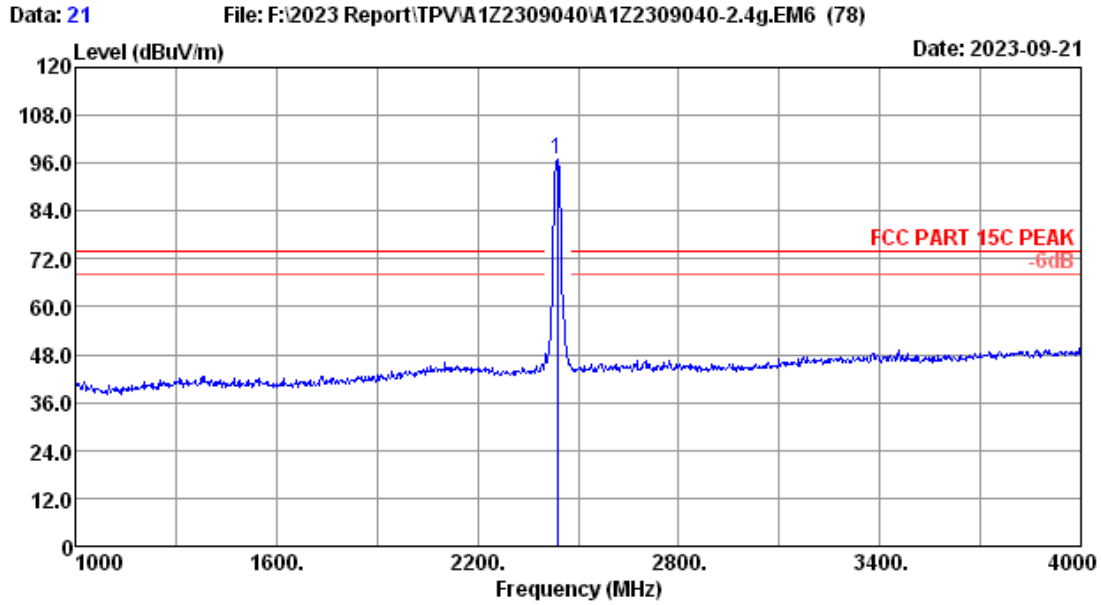

Site no. : 3m Chamber Data no. : 21  
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 21.2°C/50.5% Engineer : Allen  
 Test Mode : 11g 2437MHz TX

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2437.00	27.75	4.89	98.79	34.36	97.07	-----	-----	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

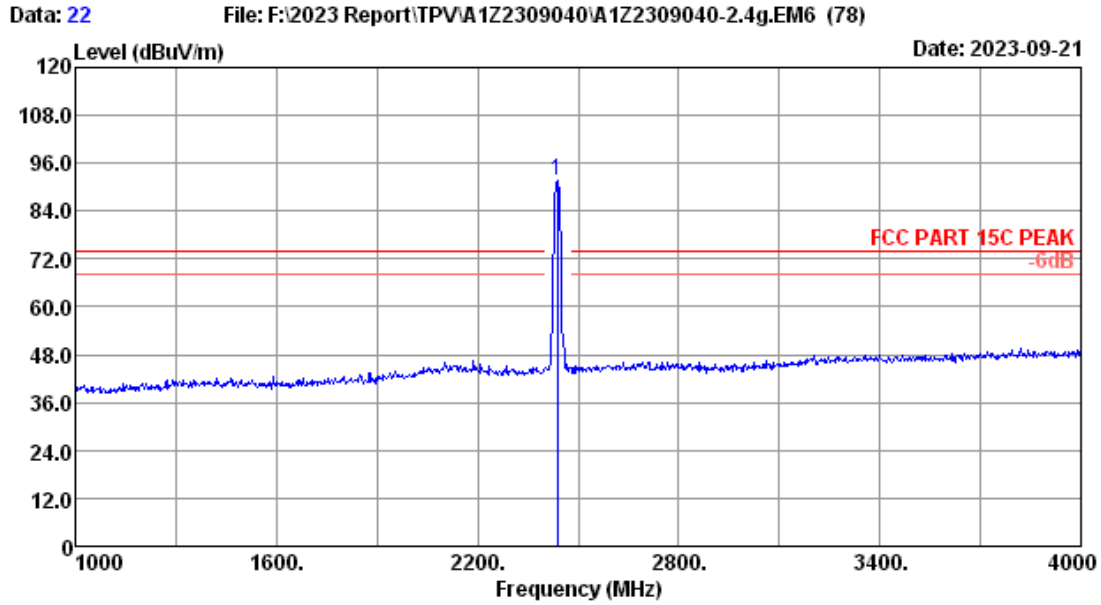

Site no. : 3m Chamber Data no. : 22  
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 21.2°C/50.5% Engineer : Allen  
 Test Mode : 11g 2437MHz TX

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2437.00	27.75	4.89	93.49	34.36	91.77	-----	-----	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

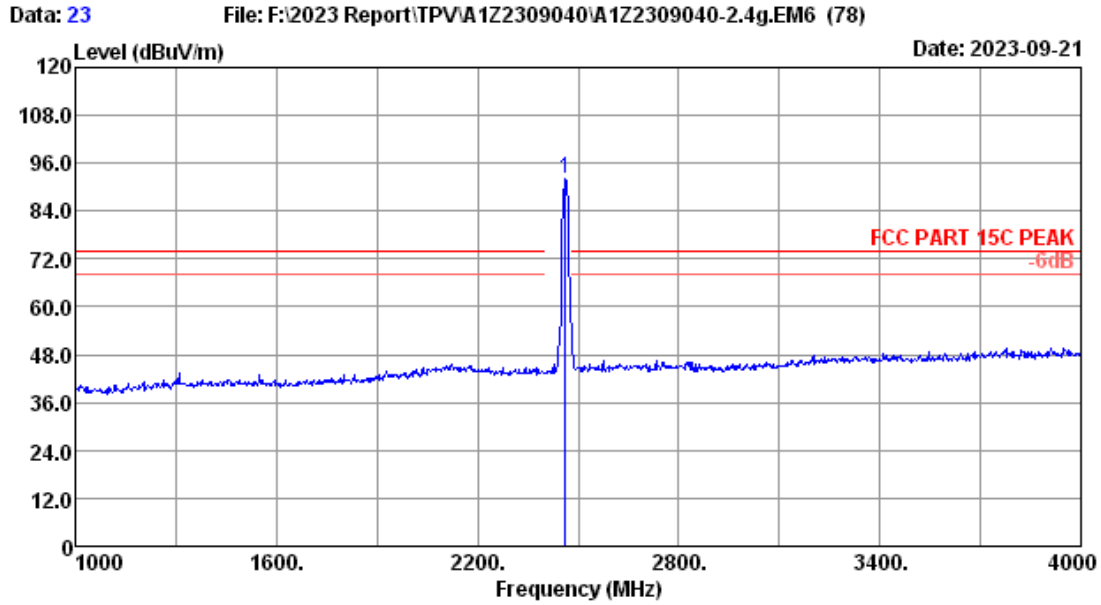


Site no.	: 3m Chamber	Data no.	: 23
Dis. / Ant.	: 3m 2023 MCTD1209-3006	Ant. pol.	: VERTICAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 21.2°C/50.5%	Engineer	: Allen
Test Mode	: 11g 2462MHz TX		

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2462.00	27.80	4.92	93.73	34.35	92.10	-----	-----	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.




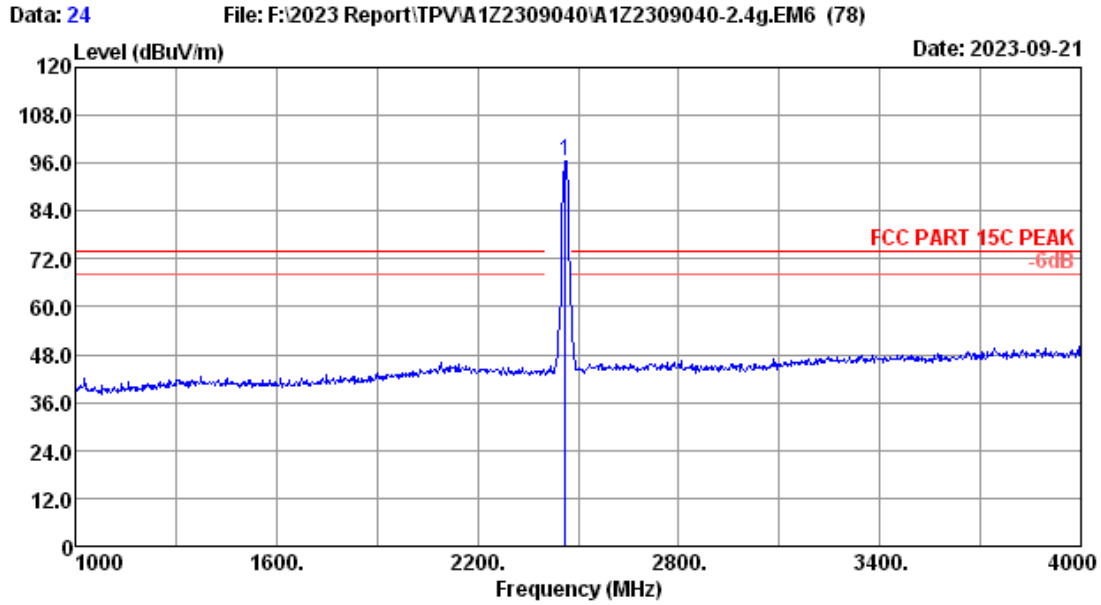

Site no. : 3m Chamber Data no. : 24  
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 21.2°C/50.5% Engineer : Allen  
 Test Mode : 11g 2462MHz TX

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2462.00	27.80	4.92	98.13	34.35	96.50	-----	-----	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

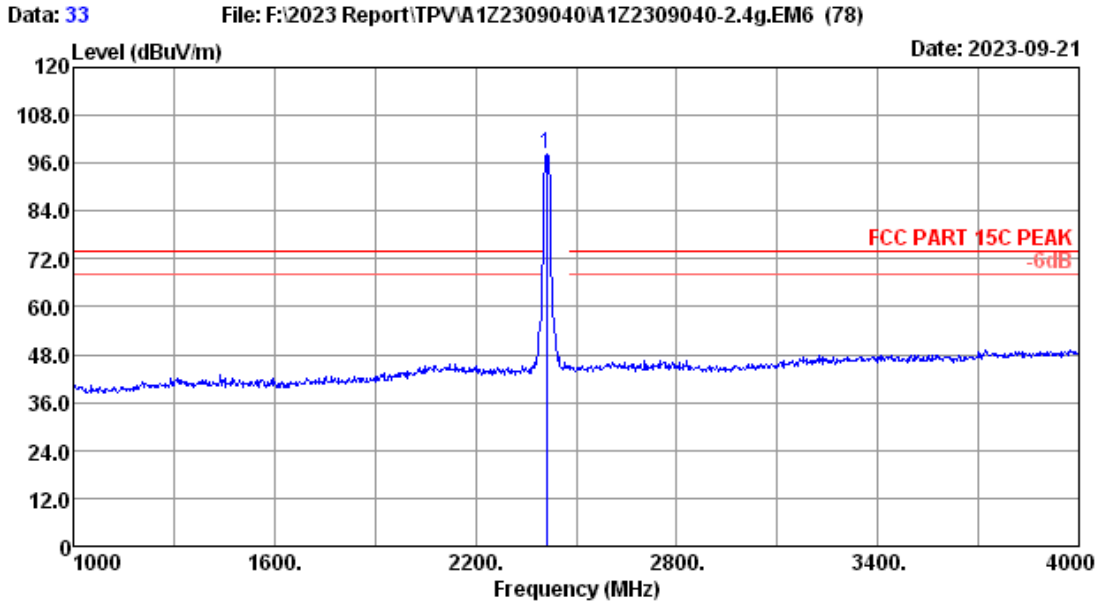

Site no. : 3m Chamber Data no. : 33  
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 21.2\*C/50.5% Engineer : Allen  
 Test Mode : 11n20 2412MHz TX

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2412.00	27.65	4.87	100.25	34.36	98.41	-----	-----	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

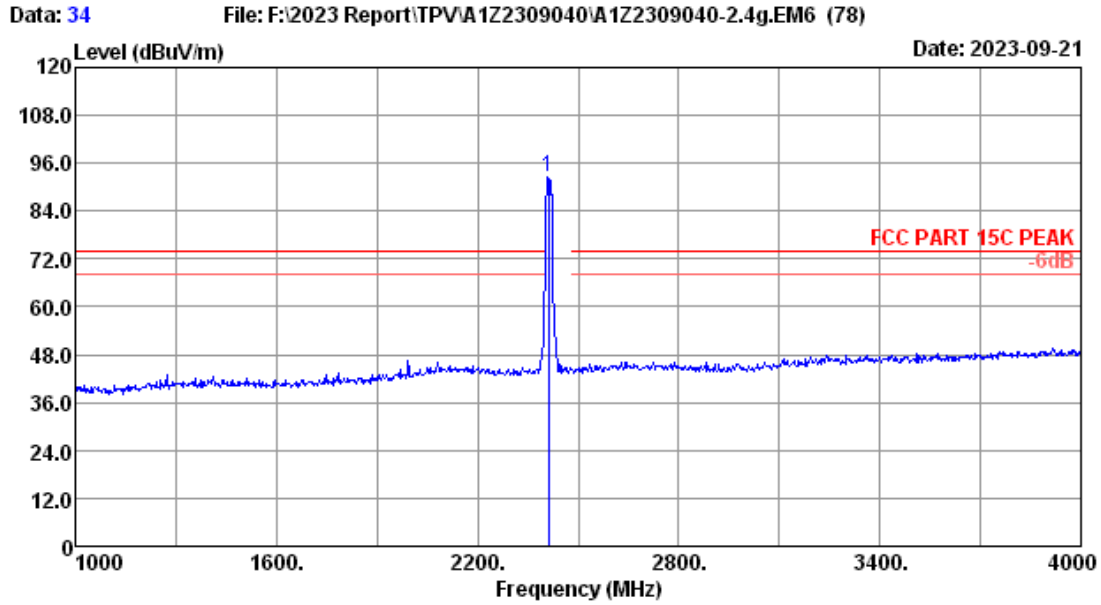

Site no.	: 3m Chamber	Data no.	: 34
Dis. / Ant.	: 3m 2023 MCTD1209-3006	Ant. pol.	: VERTICAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 21.2°C/50.5%	Engineer	: Allen
Test Mode	: 11n20 2412MHz TX		

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2412.00	27.65	4.87	94.33	34.36	92.49	-----	-----	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

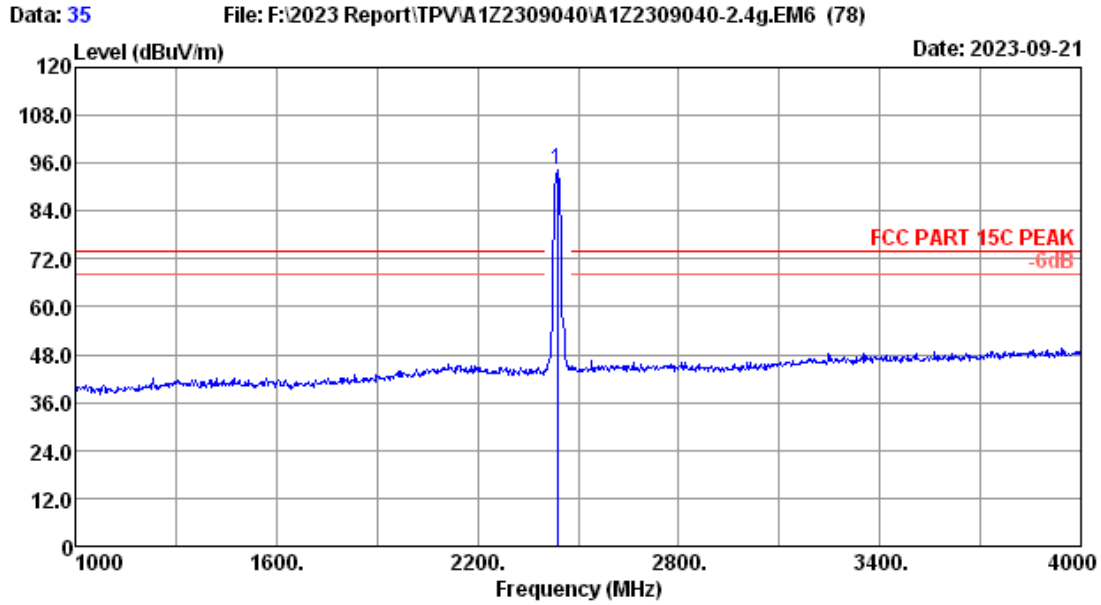

Site no. : 3m Chamber Data no. : 35  
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 21.2\*C/50.5% Engineer : Allen  
 Test Mode : 11n20 2437MHz TX

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2437.00	27.75	4.89	96.11	34.36	94.39	-----	-----	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

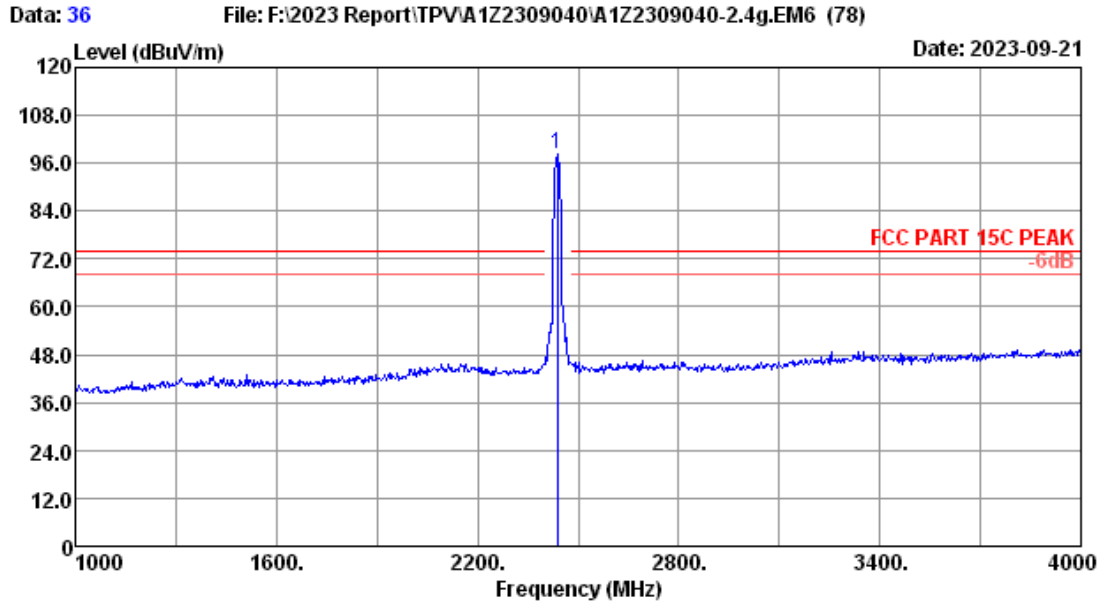

Site no. : 3m Chamber Data no. : 36  
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 21.2\*C/50.5% Engineer : Allen  
 Test Mode : 11n20 2437MHz TX

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2437.00	27.75	4.89	99.85	34.36	98.13	-----	-----	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

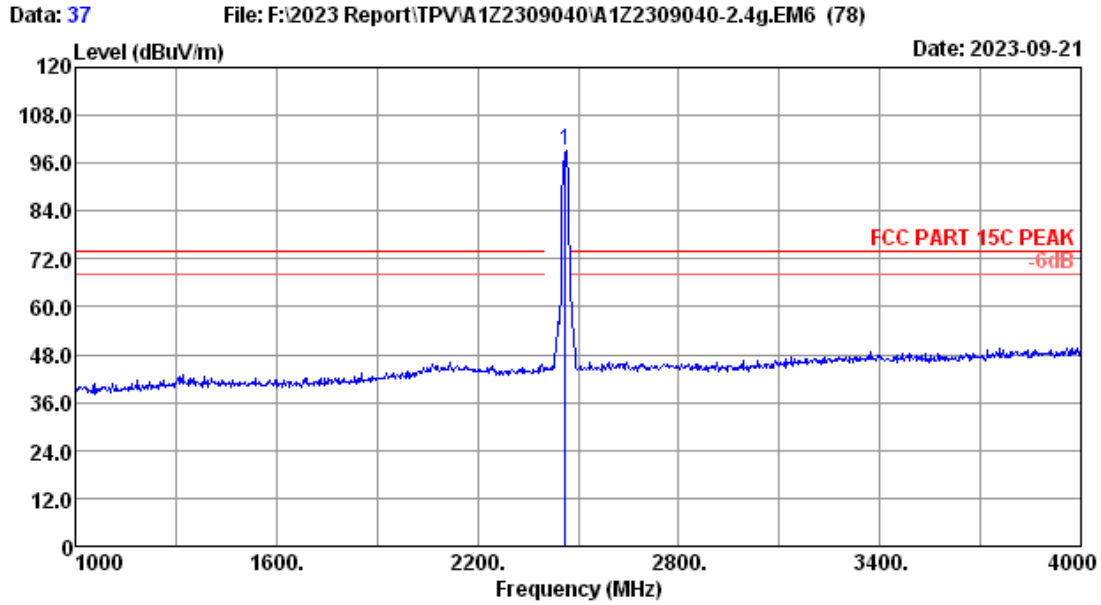

Site no. : 3m Chamber Data no. : 37  
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 21.2°C/50.5% Engineer : Allen  
 Test Mode : 11n20 2462MHz TX

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2462.00	27.80	4.92	100.86	34.35	99.23	-----	-----	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

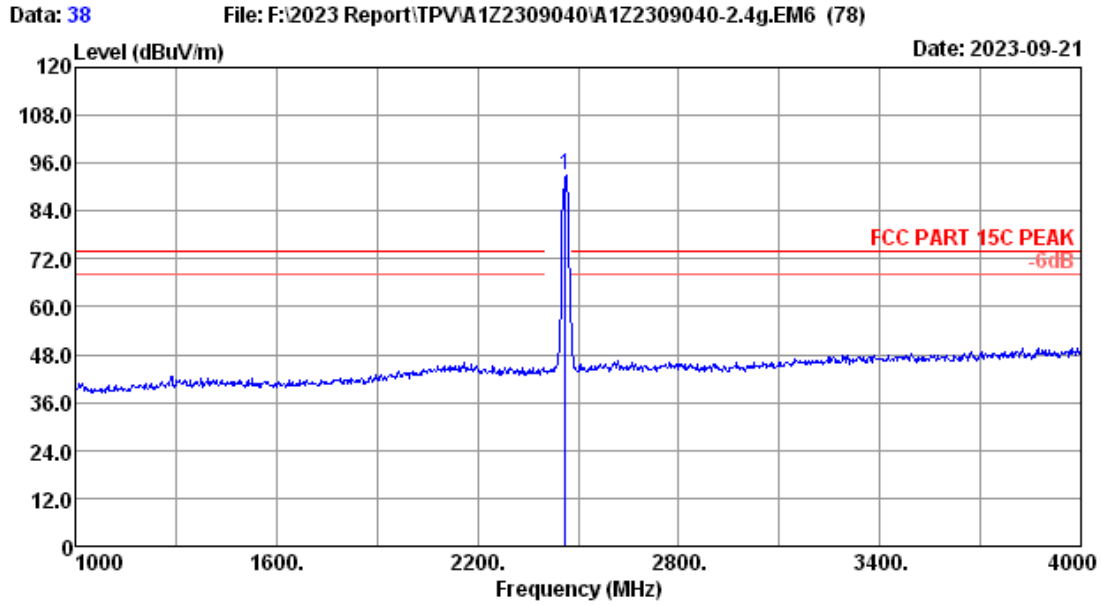

Site no. : 3m Chamber Data no. : 38  
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 21.2\*C/50.5% Engineer : Allen  
 Test Mode : 11n20 2462MHz TX


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2462.00	27.80	4.92	94.77	34.35	93.14	-----	-----	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

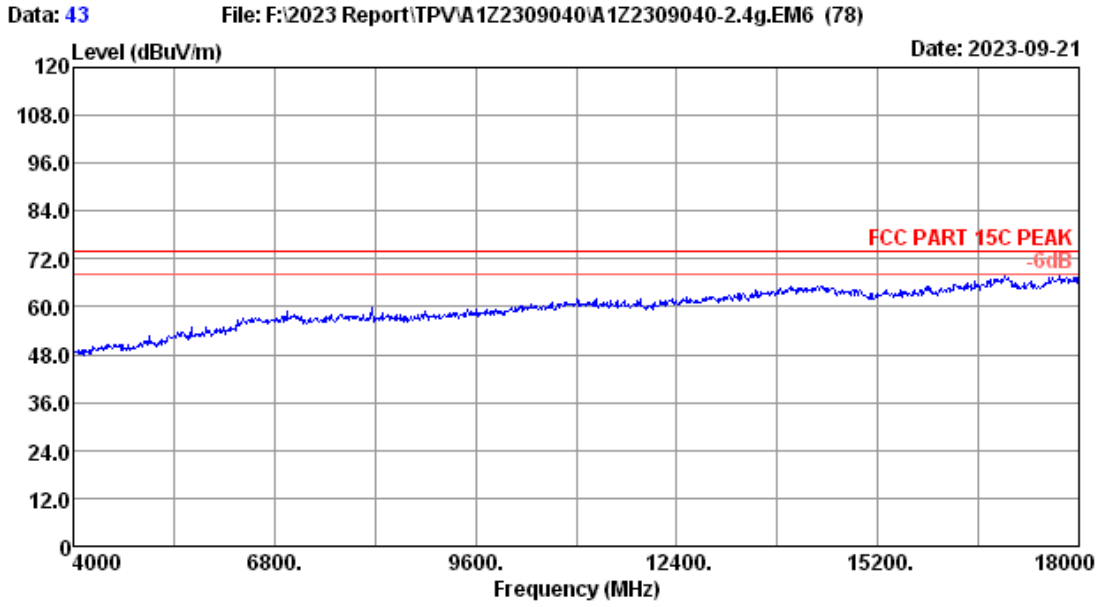

Site no.	: 3m Chamber	Data no.	: 43
Dis. / Ant.	: 3m 2023 MCTD1209-3006	Ant. pol.	: VERTICAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 21.2*C/50.5%	Engineer	: Allen
Test Mode	: 11b 2412MHz TX		




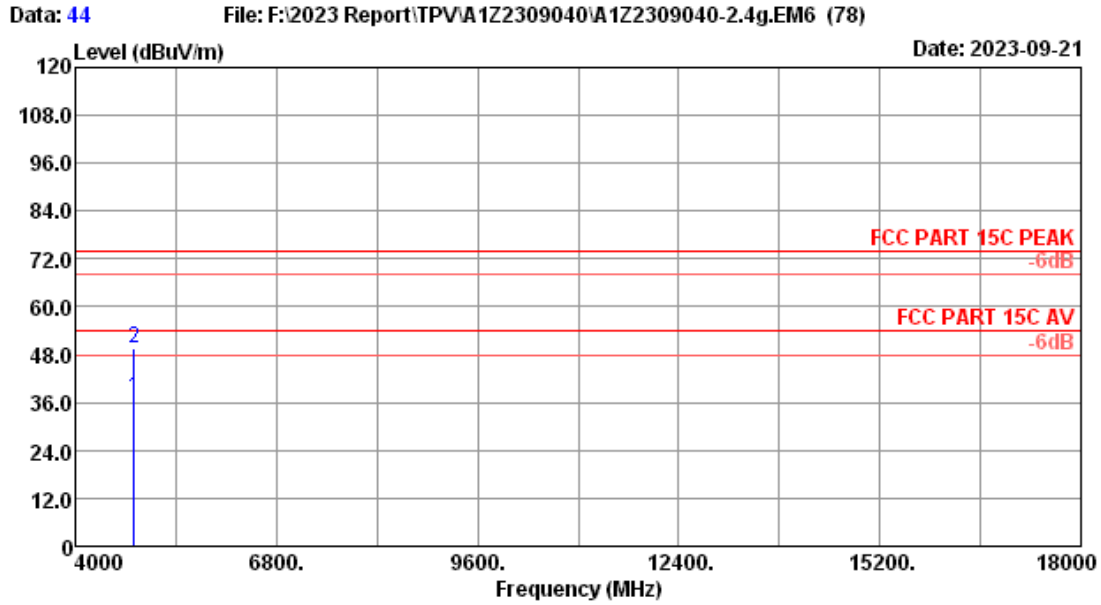


Site no. : 3m Chamber	Data no. : 44
Dis. / Ant. : 3m 2023 MCTD1209-3006	Ant. pol. : VERTICAL
Limit : FCC PART 15C PEAK	
Env. / Ins. : 21.2*C/50.5%	Engineer : Allen
Test Mode : 11b 2412MHz TX	

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4824.00	31.20	6.51	33.13	33.68	37.16	54.00	16.84	Average
2	4824.00	31.20	6.51	45.74	33.68	49.77	74.00	24.23	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

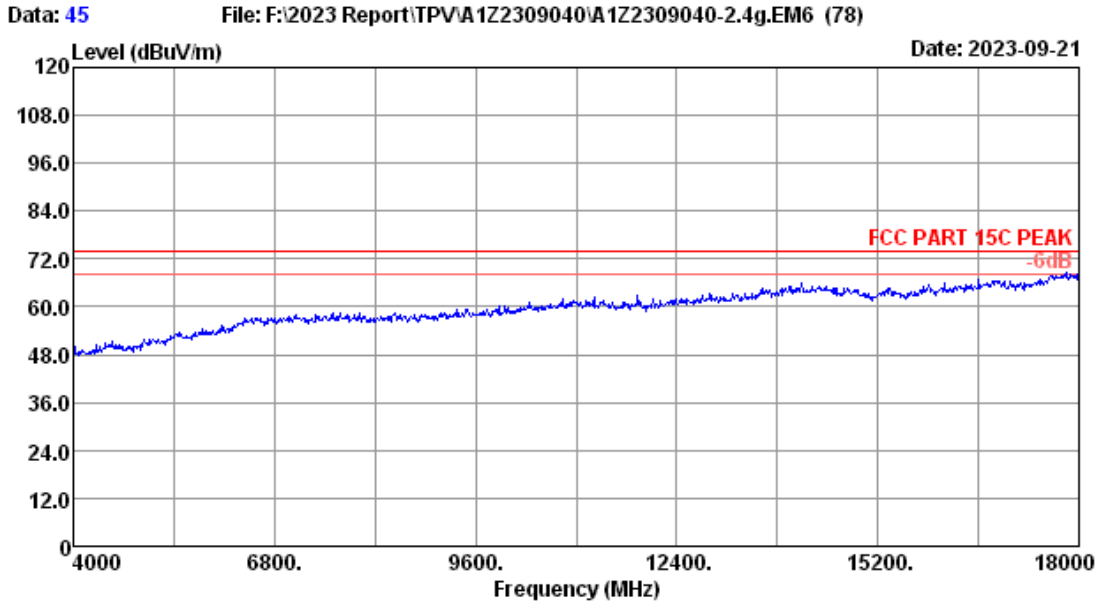


Site no.	: 3m Chamber	Data no.	: 45
Dis. / Ant.	: 3m 2023 MCTD1209-3006	Ant. pol.	: HORIZONTAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 21.2*C/50.5%	Engineer	: Allen
Test Mode	: 11b 2412MHz TX		

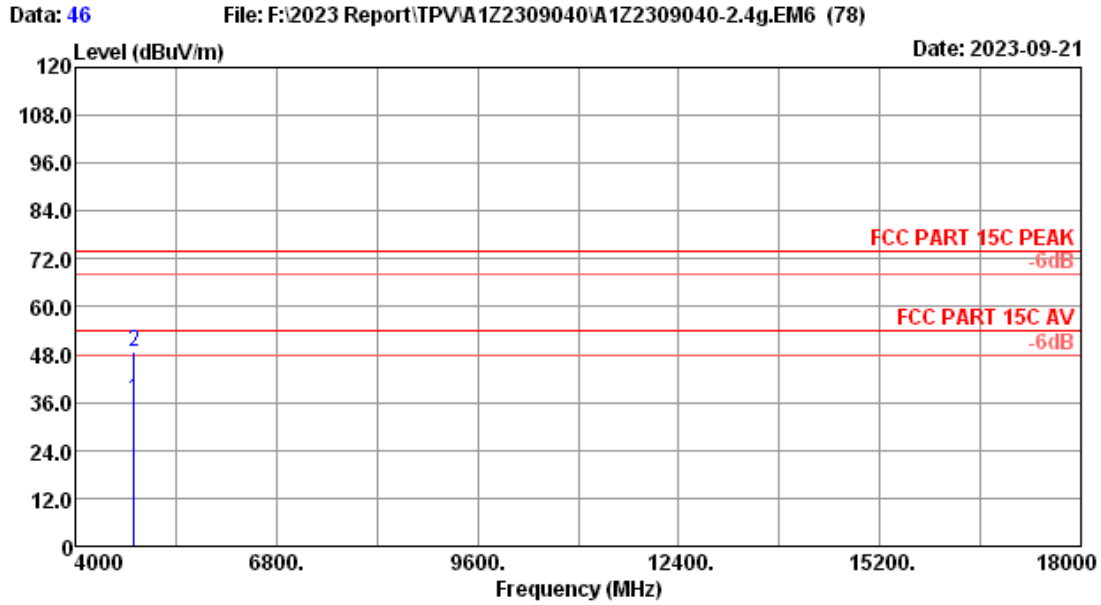


Site no. : 3m Chamber Data no. : 46  
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 21.2\*C/50.5% Engineer : Allen  
 Test Mode : 11b 2412MHz TX

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4824.00	31.20	6.51	32.56	33.68	36.59	74.00	37.41	Average
2	4824.00	31.20	6.51	44.85	33.68	48.88	74.00	25.12	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

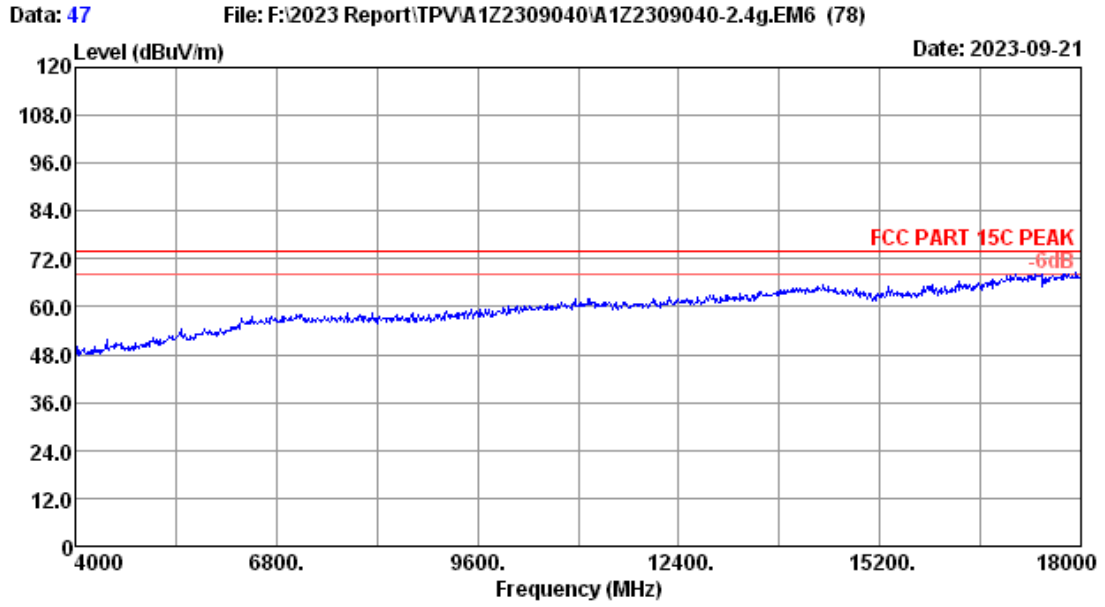


Site no.	: 3m Chamber	Data no.	: 47
Dis. / Ant.	: 3m 2023 MCTD1209-3006	Ant. pol.	: HORIZONTAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 21.2*C/50.5%	Engineer	: Allen
Test Mode	: 11b 2437MHz TX		

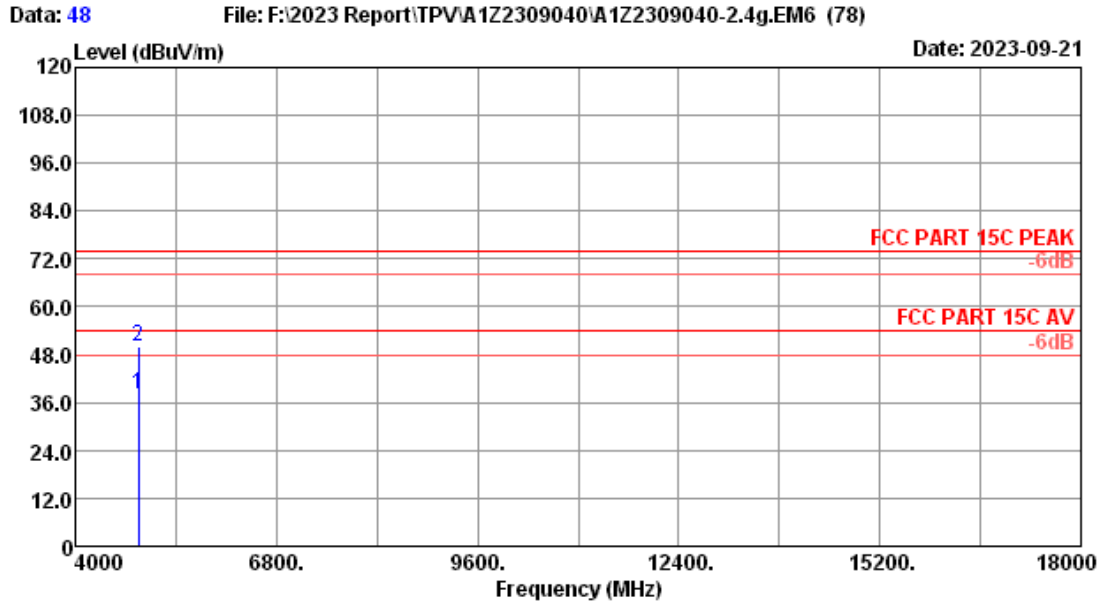


Site no. : 3m Chamber Data no. : 48  
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 21.2\*C/50.5% Engineer : Allen  
 Test Mode : 11b 2437MHz TX

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4874.00	31.39	6.54	33.79	33.69	38.03	74.00	35.97	Average
2	4874.00	31.39	6.54	45.68	33.69	49.92	74.00	24.08	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

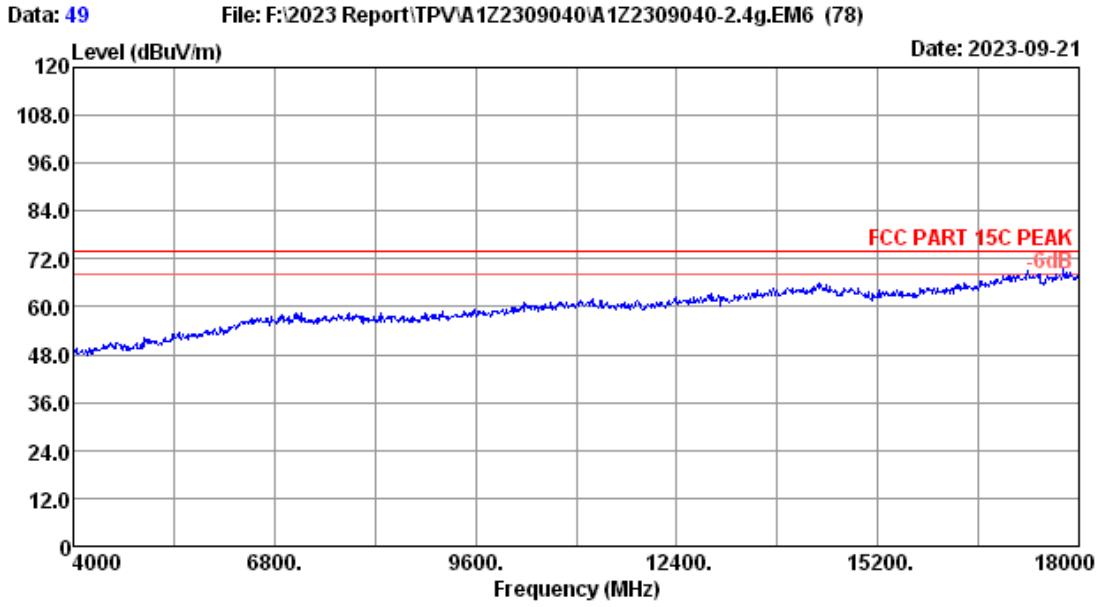


Site no.	: 3m Chamber	Data no.	: 49
Dis. / Ant.	: 3m 2023 MCTD1209-3006	Ant. pol.	: VERTICAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 21.2*C/50.5%	Engineer	: Allen
Test Mode	: 11b 2437MHz TX		

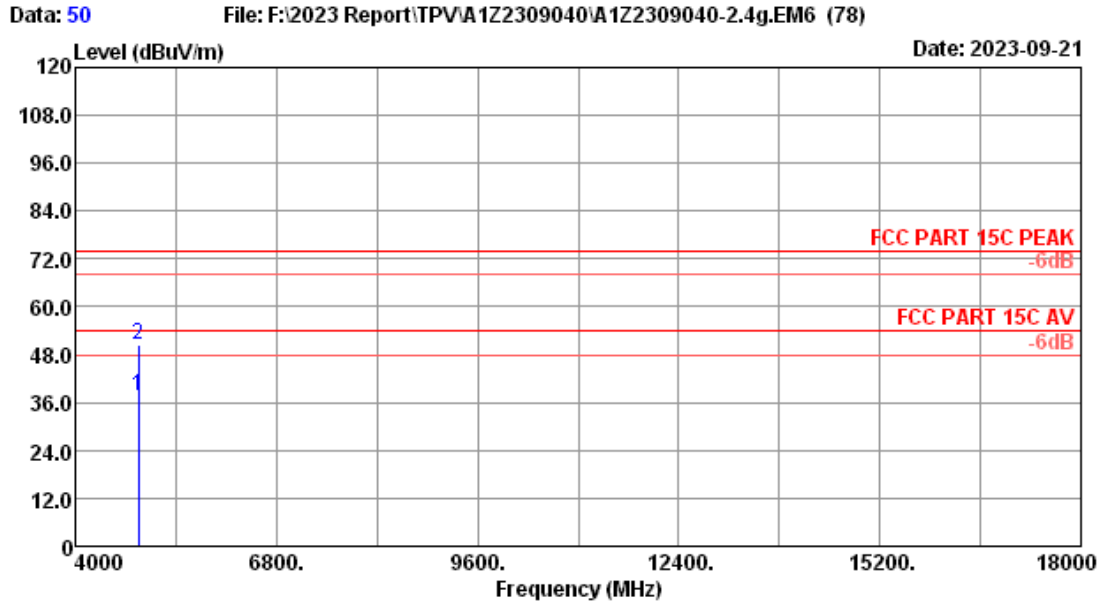

Site no. : 3m Chamber Data no. : 50  
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 21.2\*C/50.5% Engineer : Allen  
 Test Mode : 11b 2437MHz TX


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4874.00	31.39	6.54	33.28	33.69	37.52	74.00	36.48	Average
2	4874.00	31.39	6.54	46.05	33.69	50.29	74.00	23.71	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

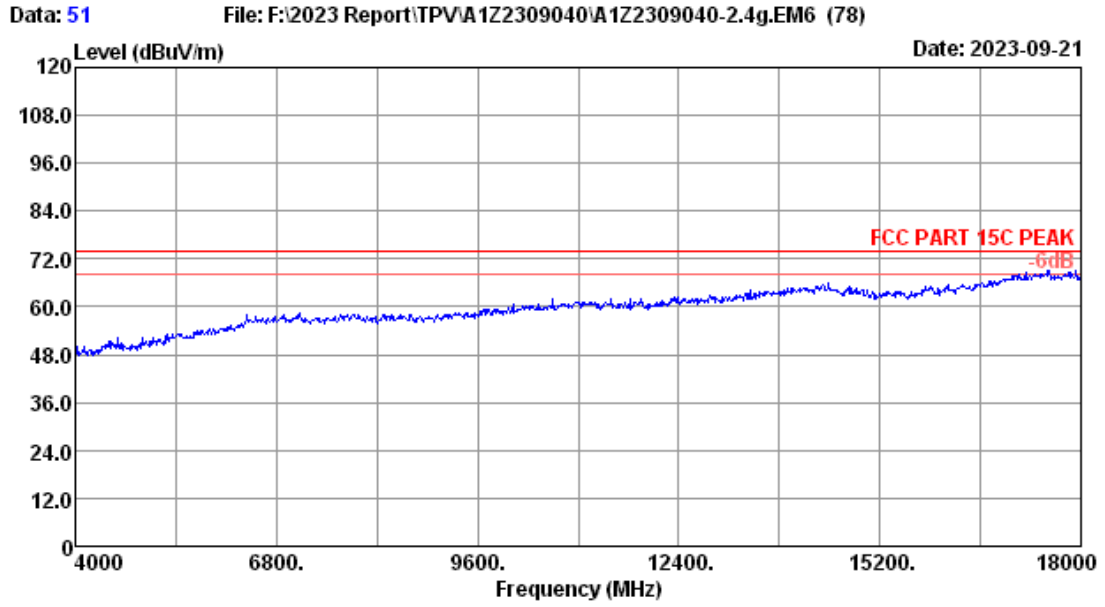

Site no.	: 3m Chamber	Data no.	: 51
Dis. / Ant.	: 3m 2023 MCTD1209-3006	Ant. pol.	: VERTICAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 21.2*C/50.5%	Engineer	: Allen
Test Mode	: 11b 2462MHz TX		




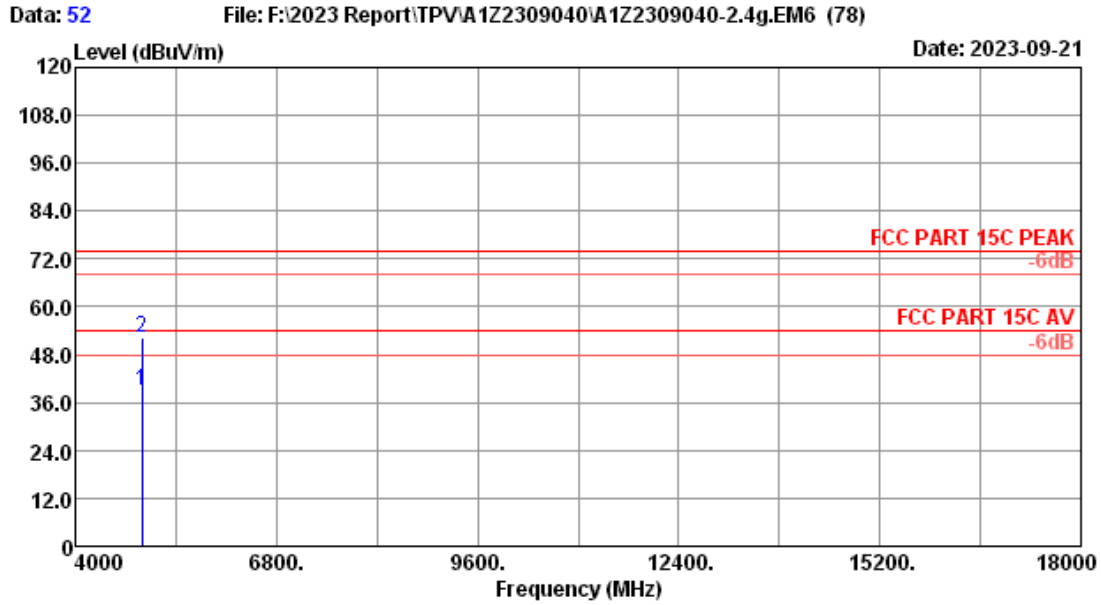


Site no. : 3m Chamber Data no. : 52  
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 21.2\*C/50.5% Engineer : Allen  
 Test Mode : 11b 2462MHz TX

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4924.00	31.74	6.56	34.16	33.69	38.77	74.00	35.23	Average
2	4924.00	31.74	6.56	47.62	33.69	52.23	74.00	21.77	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

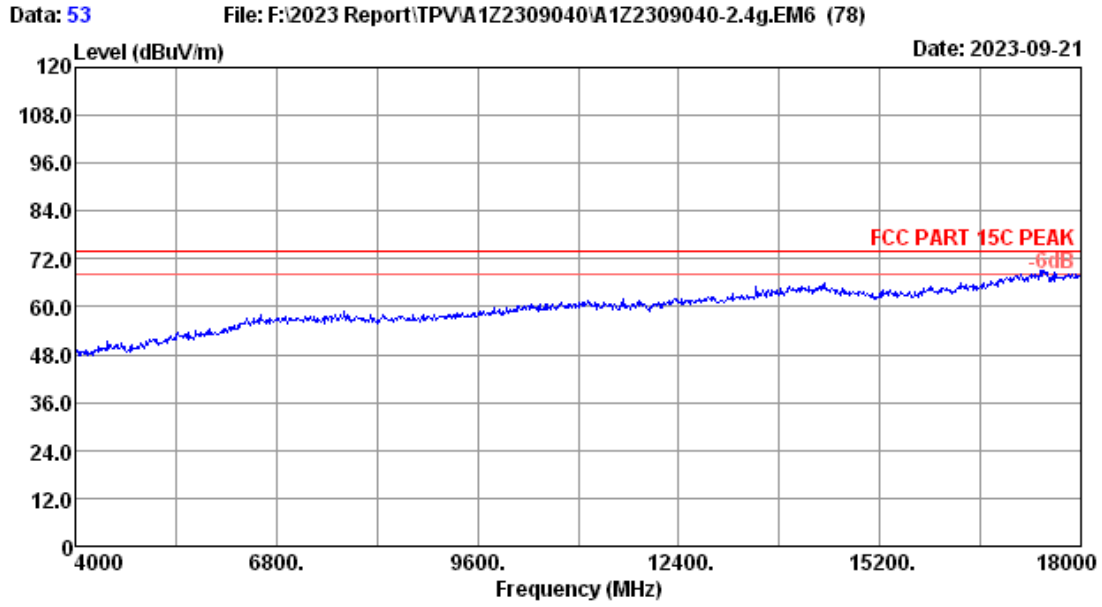


Site no.	: 3m Chamber	Data no.	: 53
Dis. / Ant.	: 3m 2023 MCTD1209-3006	Ant. pol.	: HORIZONTAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 21.2*C/50.5%	Engineer	: Allen
Test Mode	: 11b 2462MHz TX		

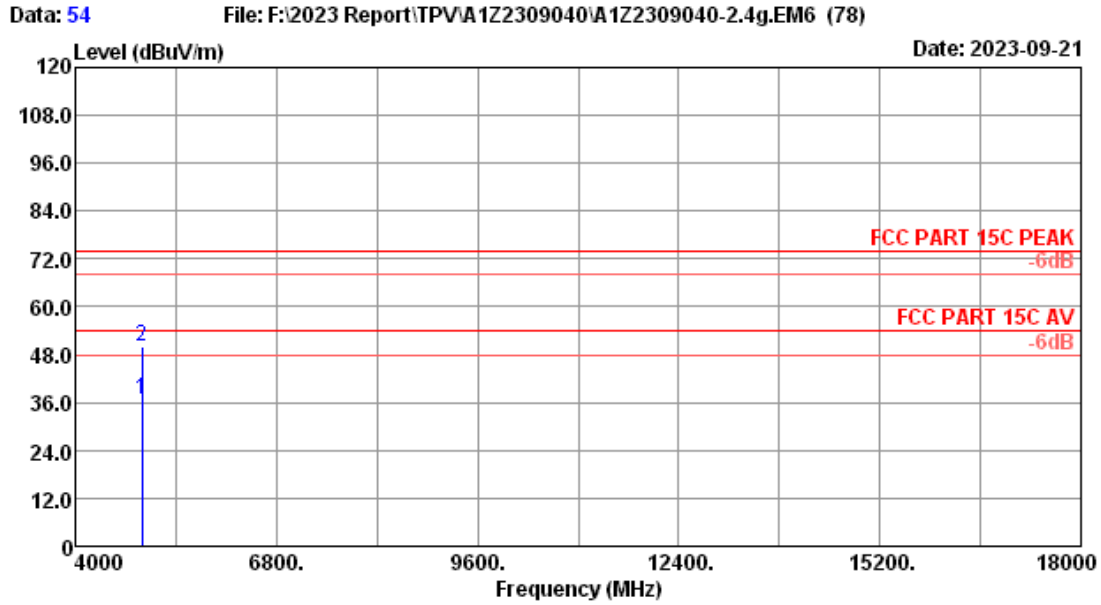


Site no. : 3m Chamber Data no. : 54  
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 21.2\*C/50.5% Engineer : Allen  
 Test Mode : 11b 2462MHz TX

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4924.00	31.74	6.56	32.16	33.69	36.77	74.00	37.23	Average
2	4924.00	31.74	6.56	45.62	33.69	50.23	74.00	23.77	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

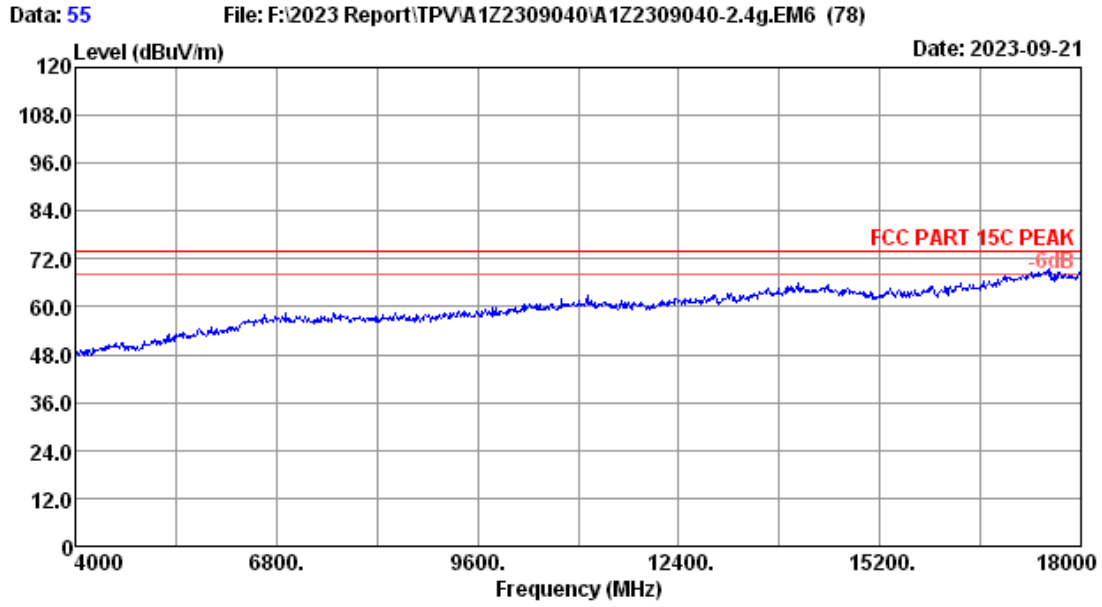


Site no.	: 3m Chamber	Data no.	: 55
Dis. / Ant.	: 3m 2023 MCTD1209-3006	Ant. pol.	: HORIZONTAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 21.2*C/50.5%	Engineer	: Allen
Test Mode	: 11g 2412MHz TX		

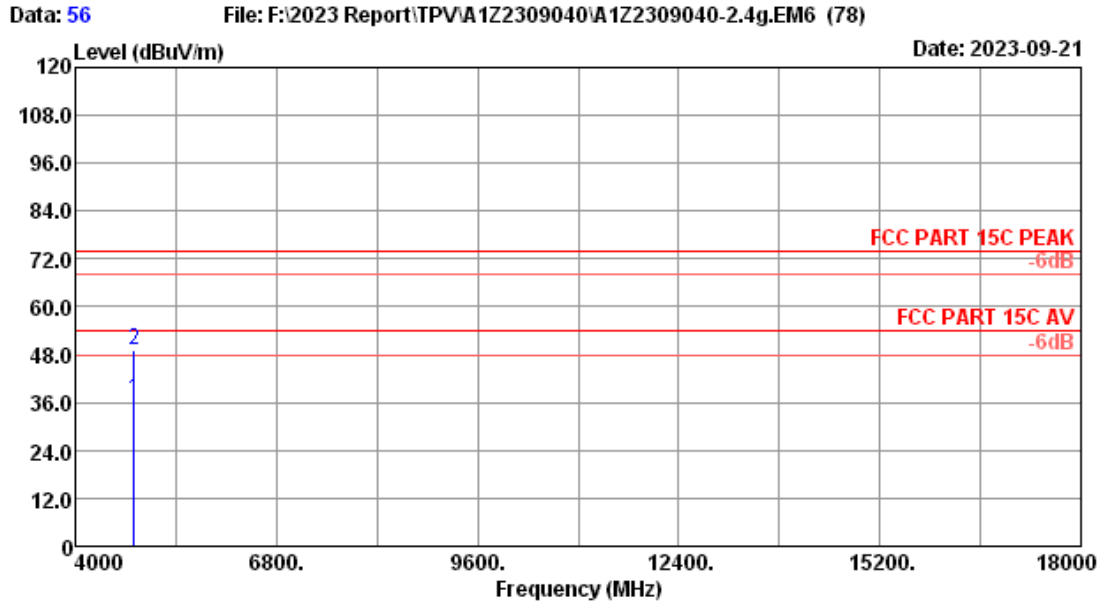


Site no. : 3m Chamber Data no. : 56  
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 21.2\*C/50.5% Engineer : Allen  
 Test Mode : 11g 2412MHz TX

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4824.00	31.20	6.51	32.61	33.68	36.64	74.00	37.36	Average
2	4824.00	31.20	6.51	45.28	33.68	49.31	74.00	24.69	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

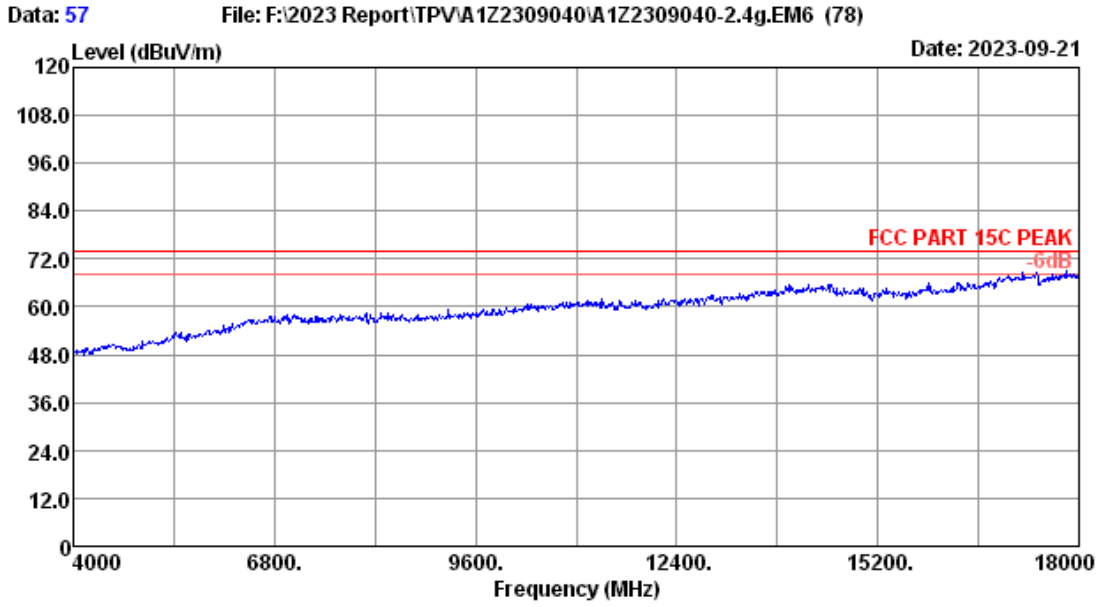


Site no.	: 3m Chamber	Data no.	: 57
Dis. / Ant.	: 3m 2023 MCTD1209-3006	Ant. pol.	: VERTICAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 21.2*C/50.5%	Engineer	: Allen
Test Mode	: 11g 2412MHz TX		

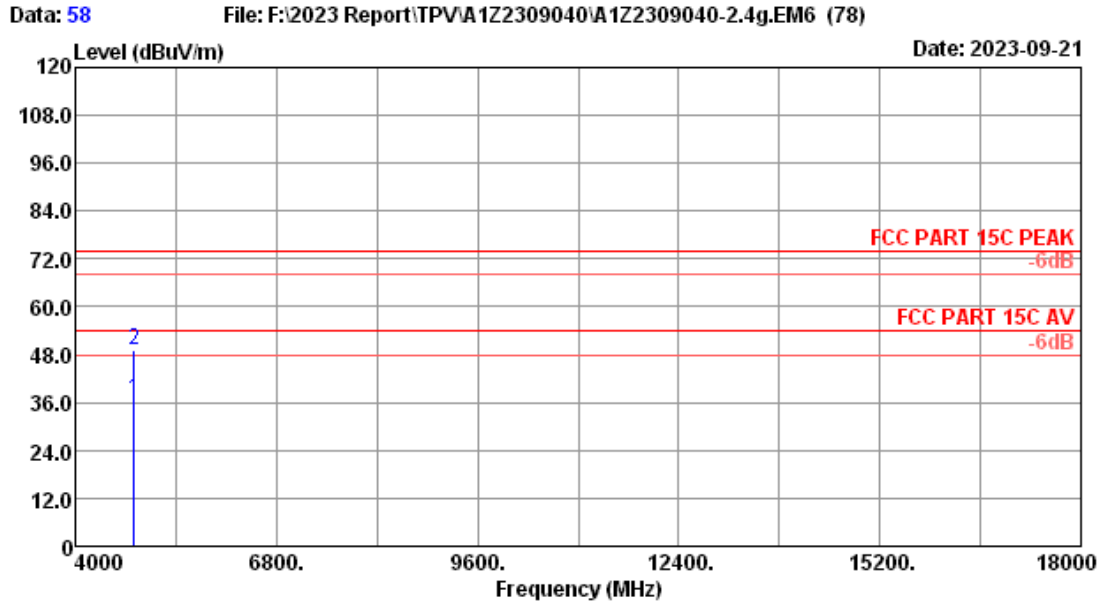

Site no. : 3m Chamber Data no. : 58  
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 21.2\*C/50.5% Engineer : Allen  
 Test Mode : 11g 2412MHz TX


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4824.00	31.20	6.51	32.53	33.68	36.56	74.00	37.44	Average
2	4824.00	31.20	6.51	45.34	33.68	49.37	74.00	24.63	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

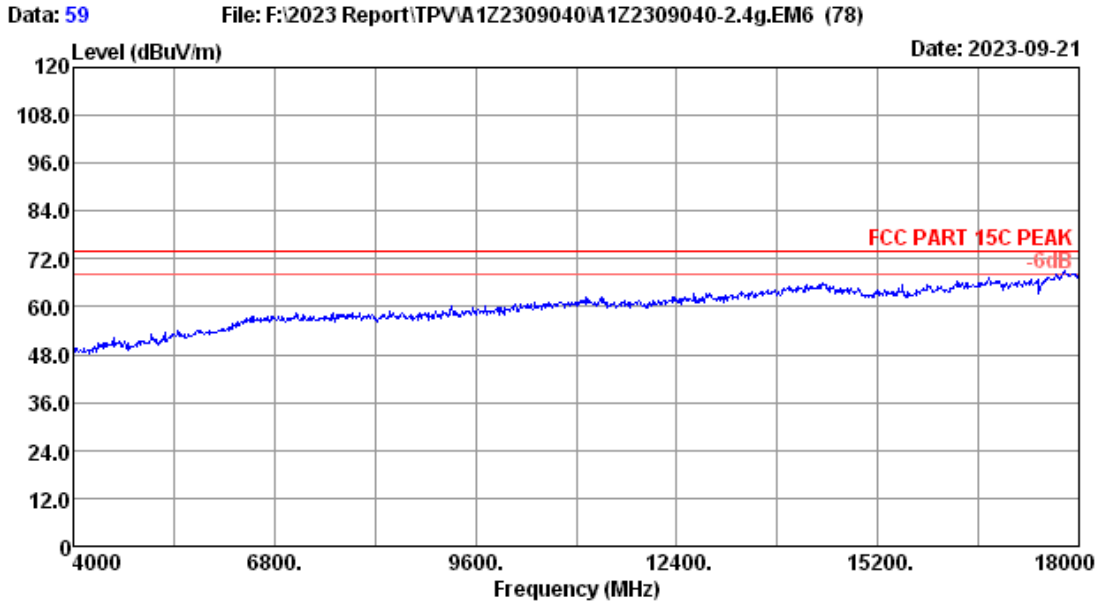

Site no.	: 3m Chamber	Data no.	: 59
Dis. / Ant.	: 3m 2023 MCTD1209-3006	Ant. pol.	: HORIZONTAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 21.2*C/50.5%	Engineer	: Allen
Test Mode	: 11g 2437MHz TX		




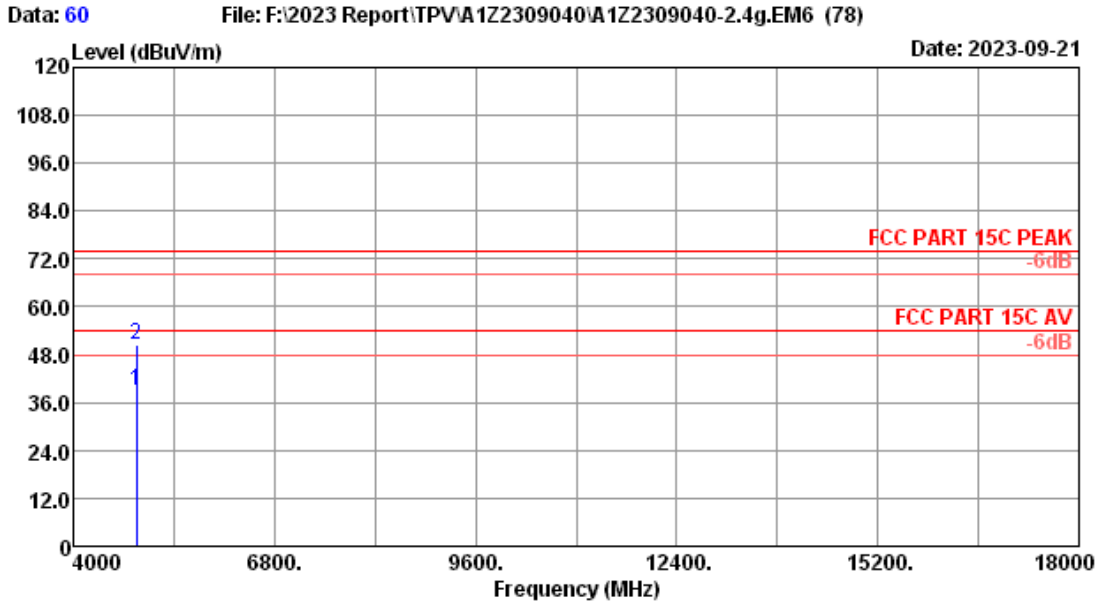


Site no. : 3m Chamber Data no. : 60  
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 21.2\*C/50.5% Engineer : Allen  
 Test Mode : 11g 2437MHz TX

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4874.00	31.39	6.54	34.59	33.69	38.83	74.00	35.17	Average
2	4874.00	31.39	6.54	46.11	33.69	50.35	74.00	23.65	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

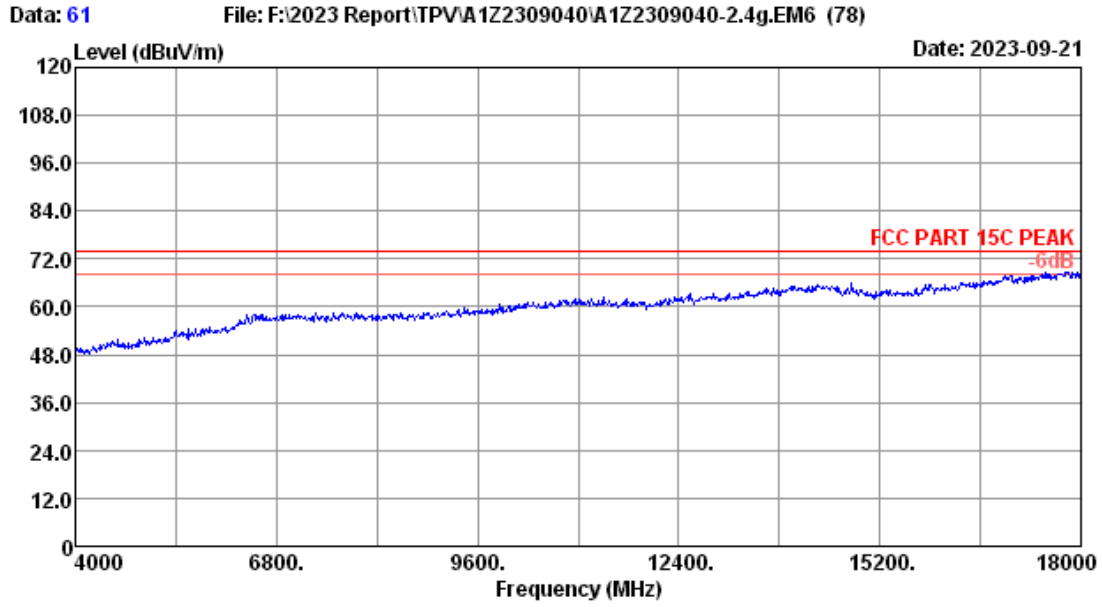


Site no.	: 3m Chamber	Data no.	: 61
Dis. / Ant.	: 3m 2023 MCTD1209-3006	Ant. pol.	: VERTICAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 21.2*C/50.5%	Engineer	: Allen
Test Mode	: 11g 2437MHz TX		

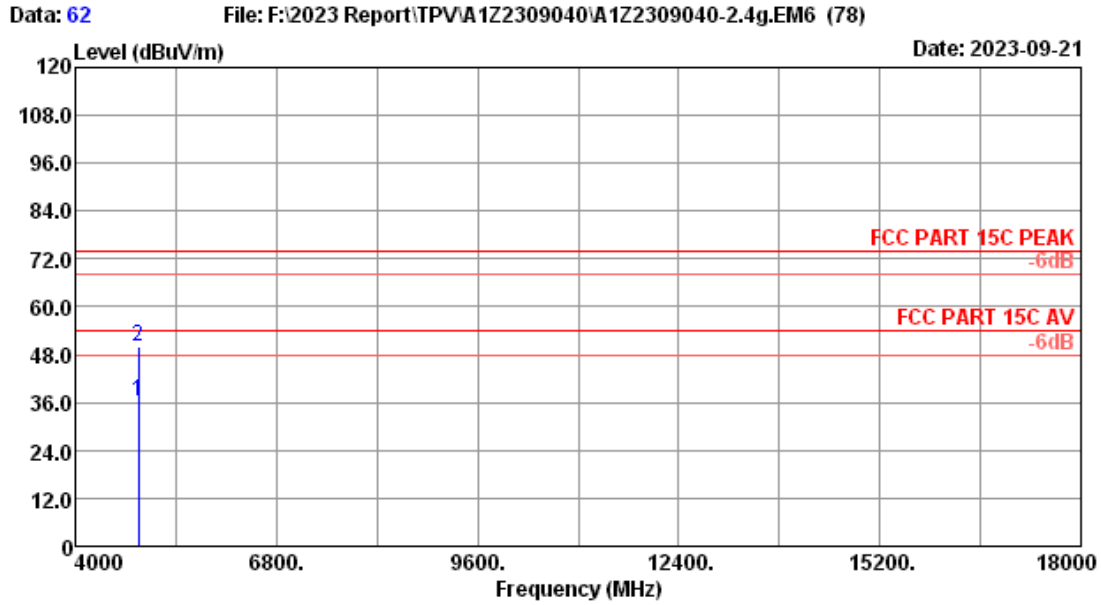


Site no. : 3m Chamber Data no. : 62  
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 21.2\*C/50.5% Engineer : Allen  
 Test Mode : 11g 2437MHz TX

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4874.00	31.39	6.54	32.16	33.69	36.40	74.00	37.60	Average
2	4874.00	31.39	6.54	45.92	33.69	50.16	74.00	23.84	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

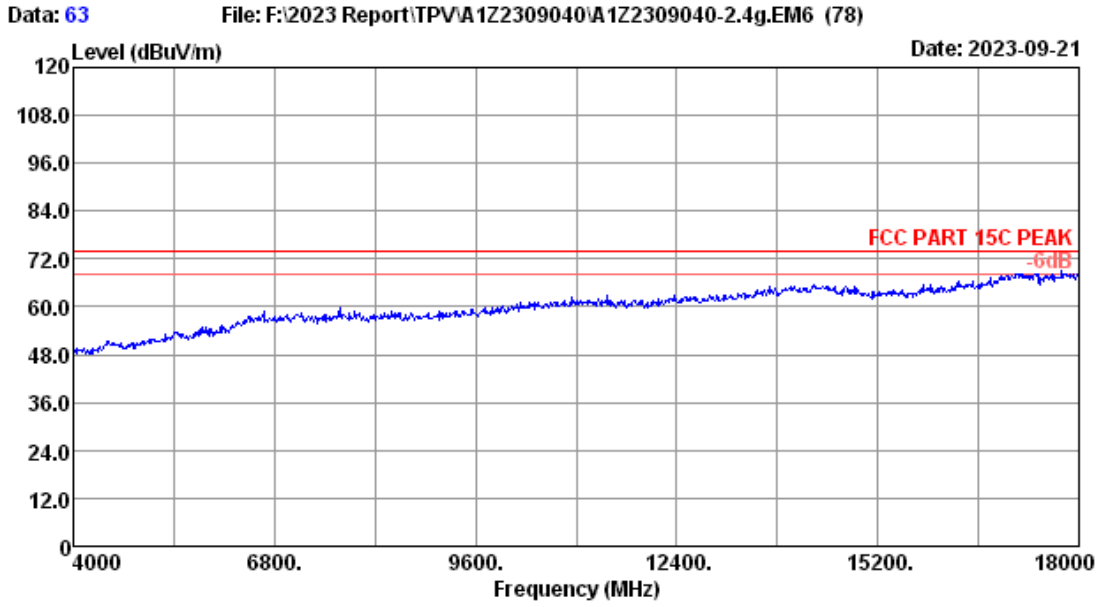


Site no.	: 3m Chamber	Data no.	: 63
Dis. / Ant.	: 3m 2023 MCTD1209-3006	Ant. pol.	: VERTICAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 21.2*C/50.5%	Engineer	: Allen
Test Mode	: 11g 2462MHz TX		

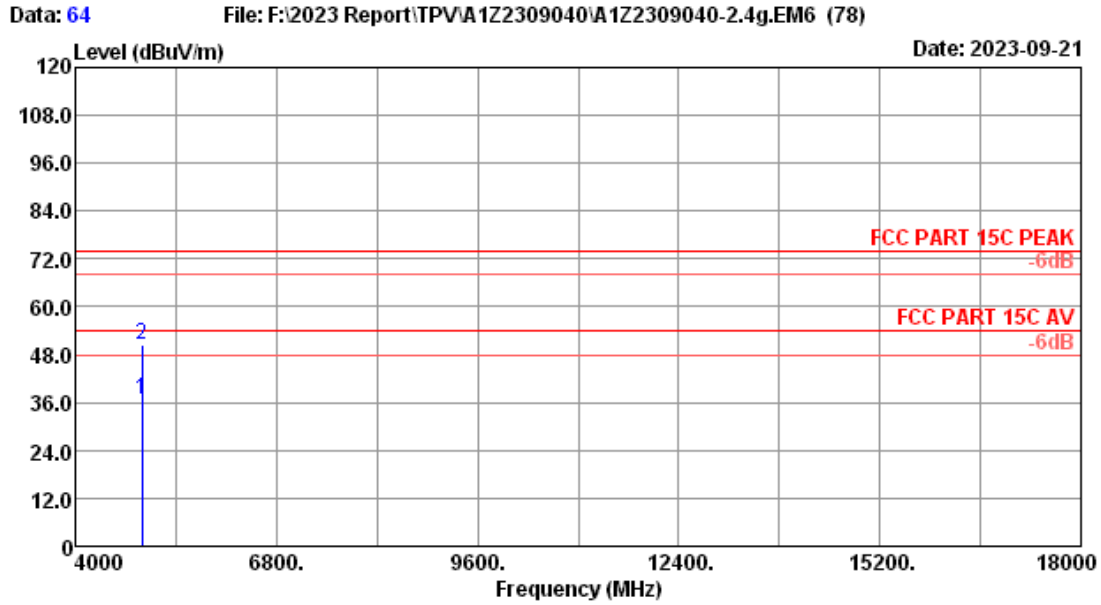


Site no. : 3m Chamber Data no. : 64  
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 21.2\*C/50.5% Engineer : Allen  
 Test Mode : 11g 2462MHz TX

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4924.00	31.74	6.56	32.16	33.69	36.77	74.00	37.23	Average
2	4924.00	31.74	6.56	45.78	33.69	50.39	74.00	23.61	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

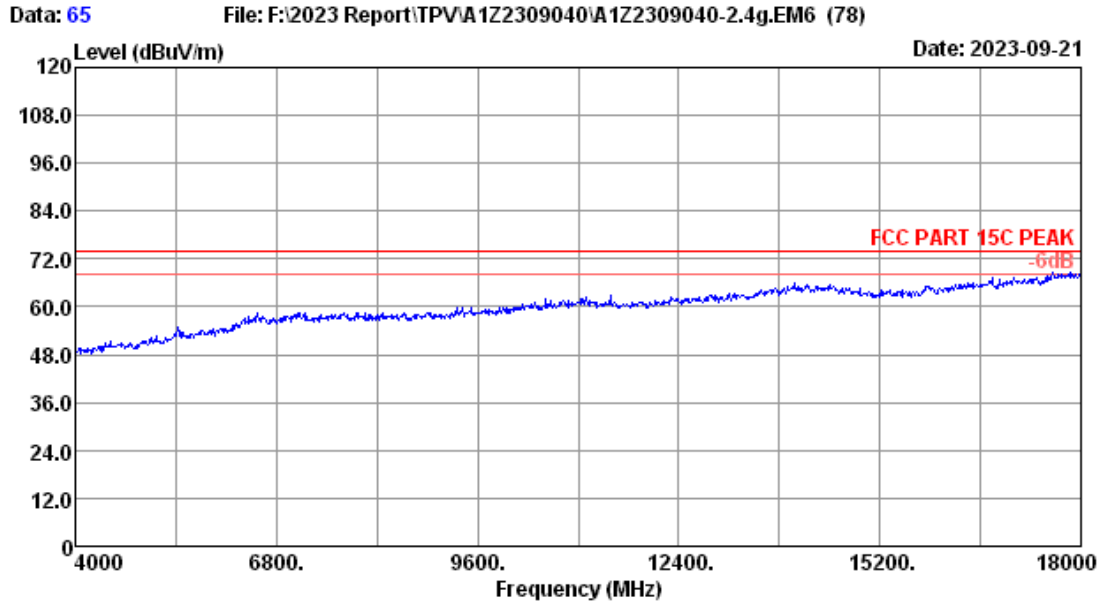


Site no.	: 3m Chamber	Data no.	: 65
Dis. / Ant.	: 3m 2023 MCTD1209-3006	Ant. pol.	: HORIZONTAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 21.2*C/50.5%	Engineer	: Allen
Test Mode	: 11g 2462MHz TX		

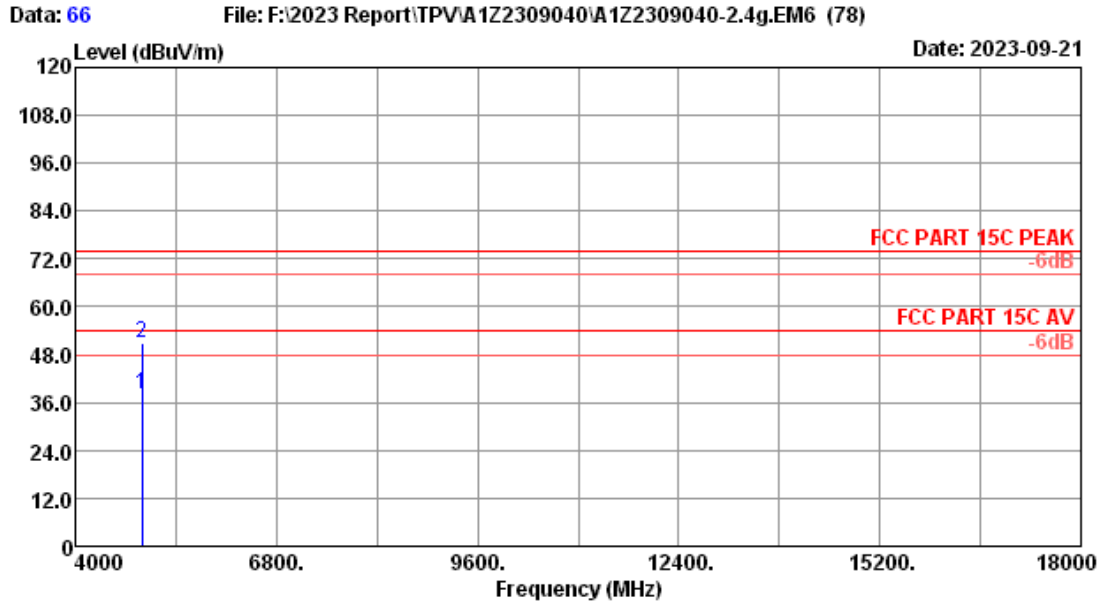

Site no. : 3m Chamber Data no. : 66  
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 21.2\*C/50.5% Engineer : Allen  
 Test Mode : 11g 2462MHz TX


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4924.00	31.74	6.56	33.29	33.69	37.90	74.00	36.10	Average
2	4924.00	31.74	6.56	46.51	33.69	51.12	74.00	22.88	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

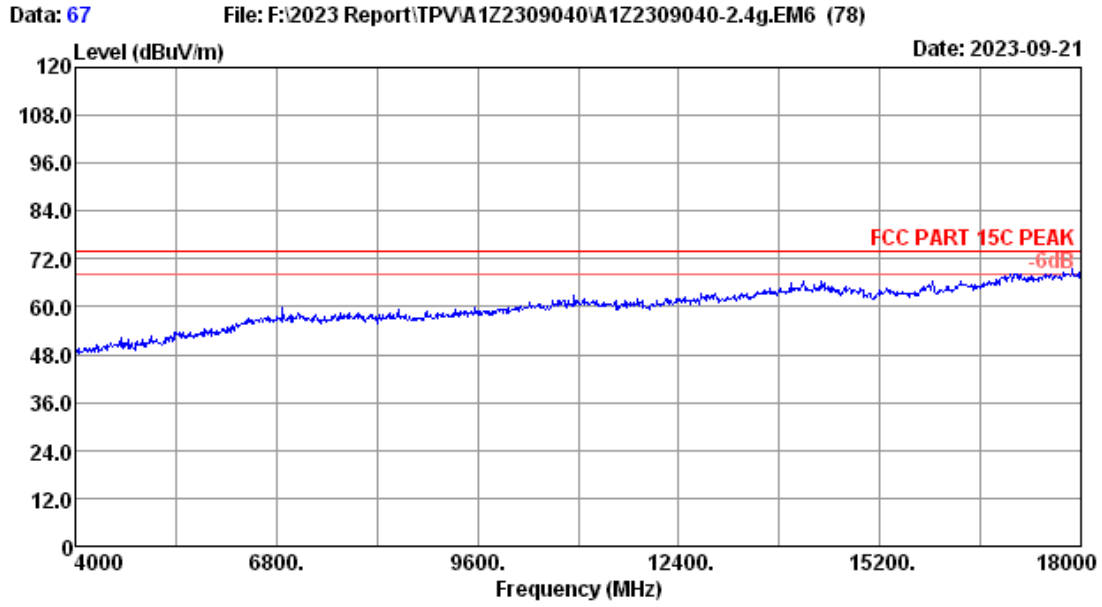

Site no.	: 3m Chamber	Data no.	: 67
Dis. / Ant.	: 3m 2023 MCTD1209-3006	Ant. pol.	: HORIZONTAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 21.2*C/50.5%	Engineer	: Allen
Test Mode	: 11n20 2412MHz TX		




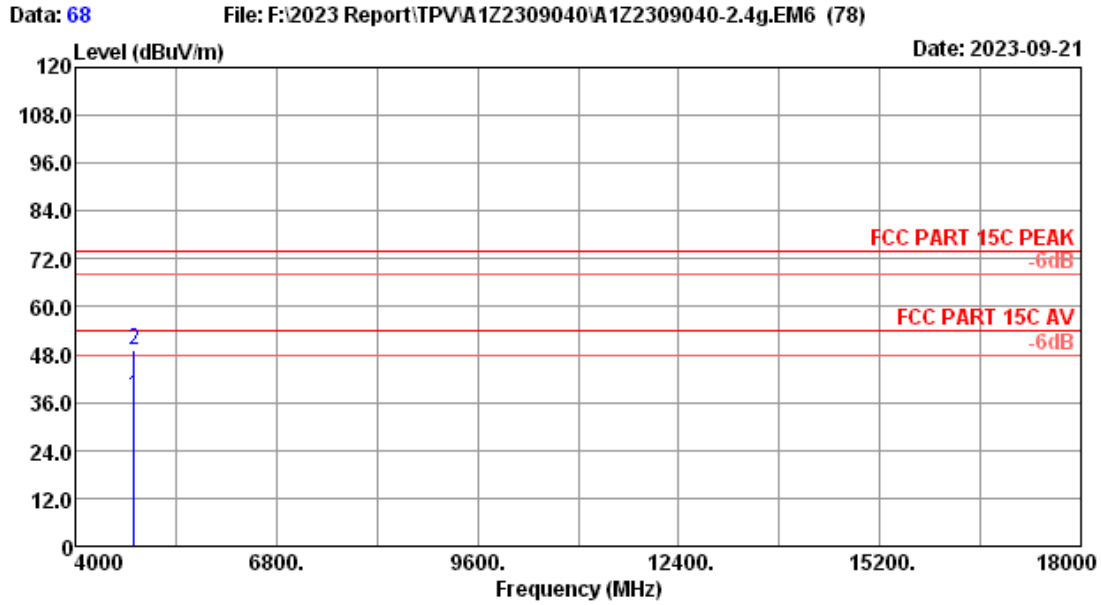


Site no. : 3m Chamber Data no. : 68  
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 21.2\*C/50.5% Engineer : Allen  
 Test Mode : 11n20 2412MHz TX

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4824.00	31.20	6.51	33.53	33.68	37.56	74.00	36.44	Average
2	4824.00	31.20	6.51	45.27	33.68	49.30	74.00	24.70	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

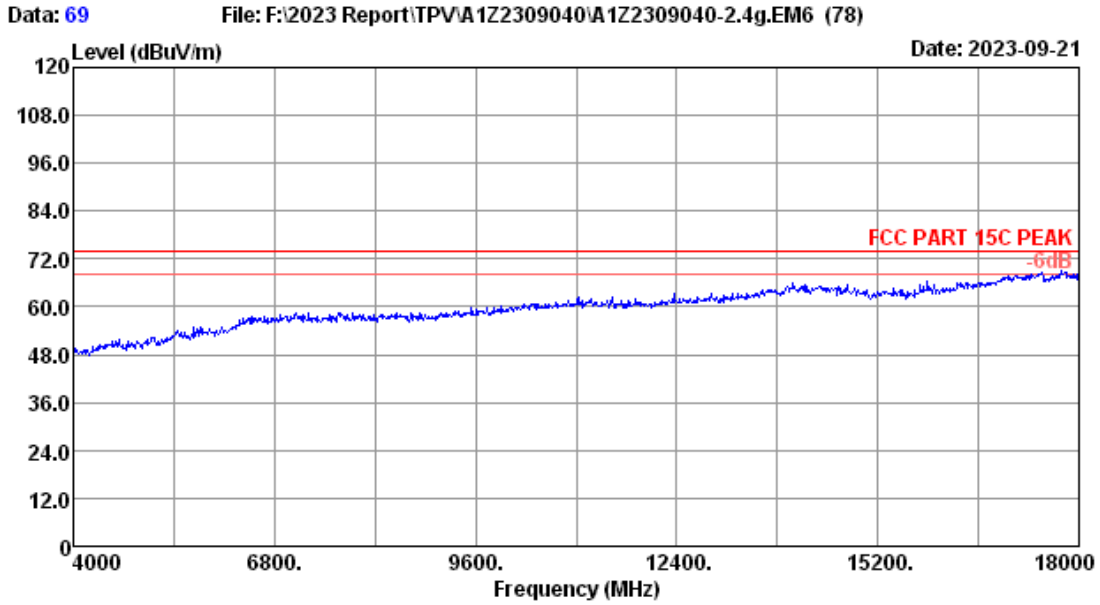


Site no.	: 3m Chamber	Data no.	: 69
Dis. / Ant.	: 3m 2023 MCTD1209-3006	Ant. pol.	: VERTICAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 21.2*C/50.5%	Engineer	: Allen
Test Mode	: 11n20 2412MHz TX		

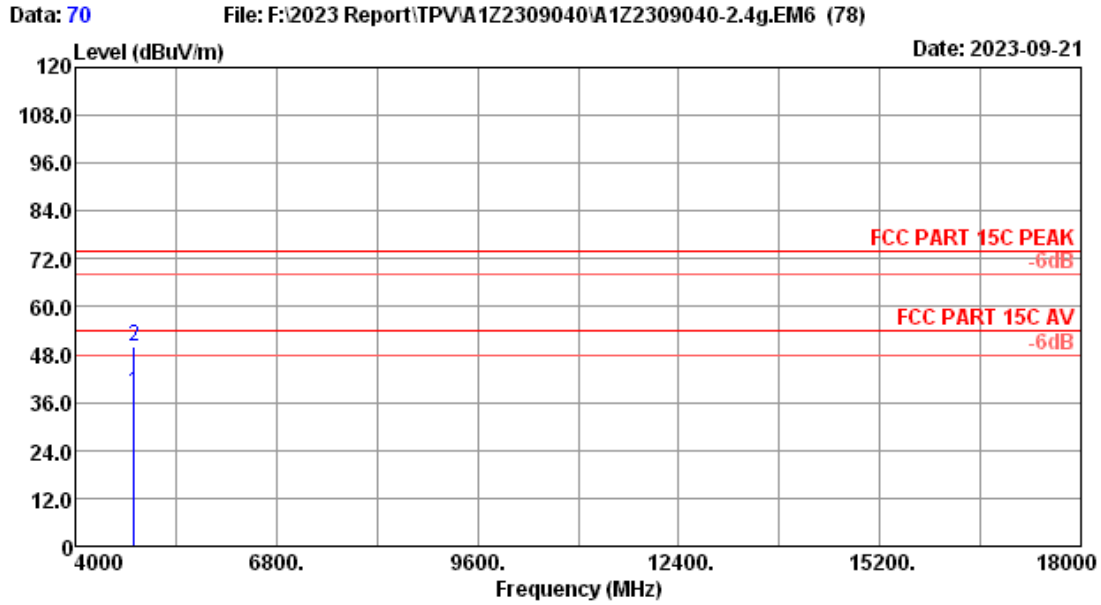


Site no. : 3m Chamber Data no. : 70  
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 21.2\*C/50.5% Engineer : Allen  
 Test Mode : 11n20 2412MHz TX

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4824.00	31.20	6.51	34.57	33.68	38.60	74.00	35.40	Average
2	4824.00	31.20	6.51	46.18	33.68	50.21	74.00	23.79	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

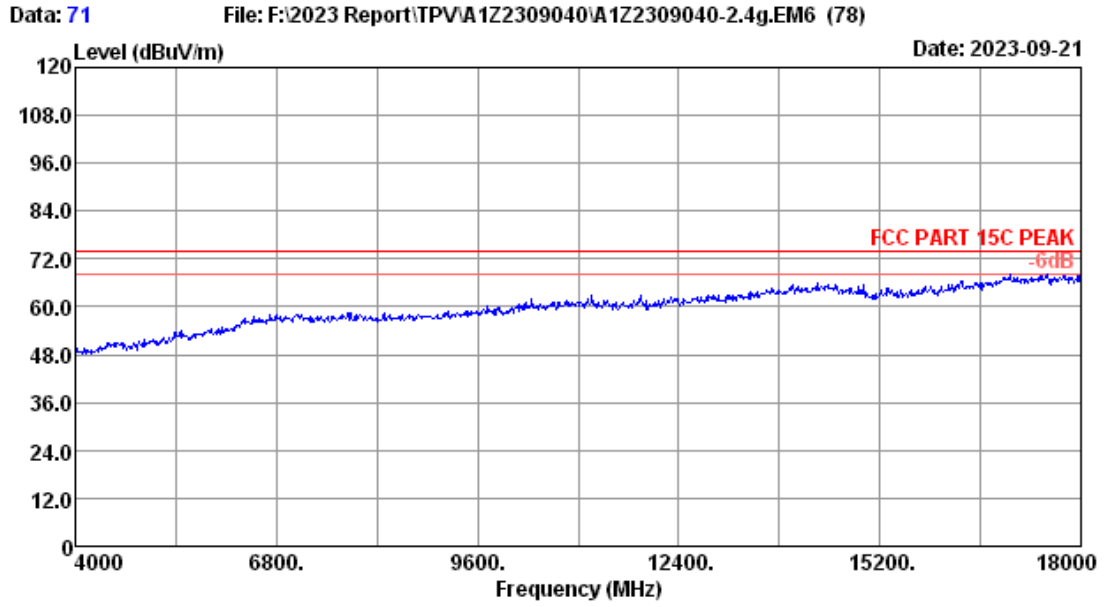


Site no.	: 3m Chamber	Data no.	: 71
Dis. / Ant.	: 3m 2023 MCTD1209-3006	Ant. pol.	: VERTICAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 21.2*C/50.5%	Engineer	: Allen
Test Mode	: 11n20 2437MHz TX		

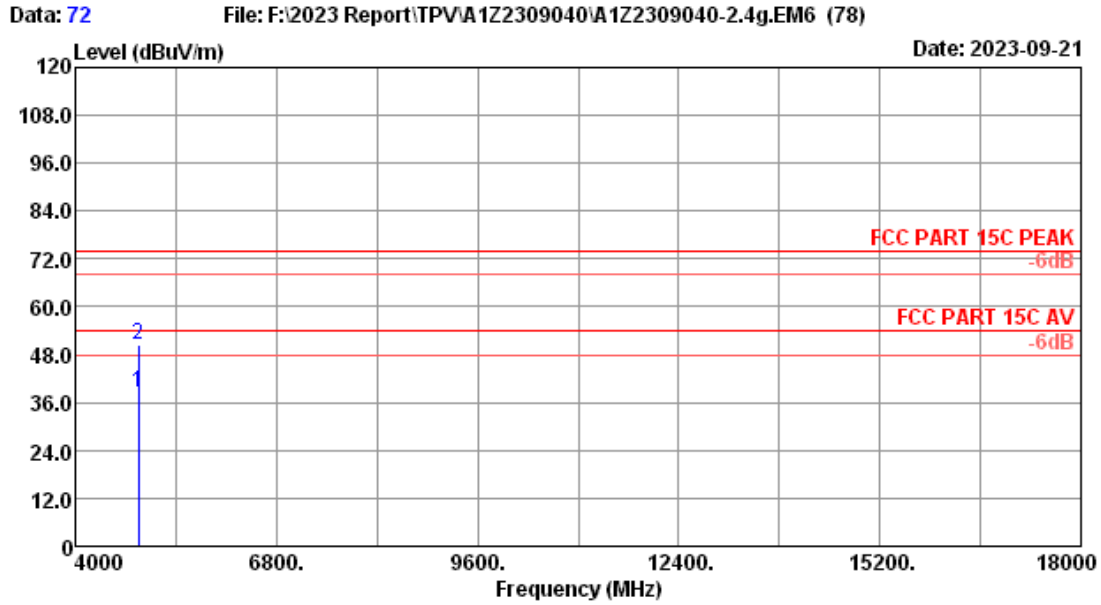


Site no. : 3m Chamber Data no. : 72  
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 21.2\*C/50.5% Engineer : Allen  
 Test Mode : 11n20 2437MHz TX

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4874.00	31.39	6.54	34.29	33.69	38.53	74.00	35.47	Average
2	4874.00	31.39	6.54	46.03	33.69	50.27	74.00	23.73	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

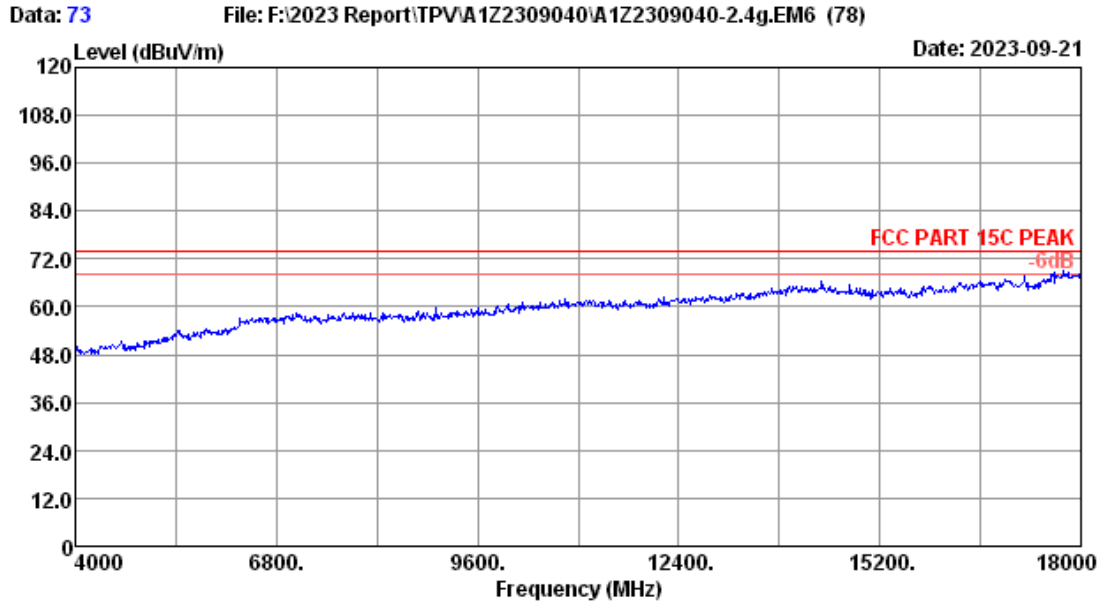


Site no.	: 3m Chamber	Data no.	: 73
Dis. / Ant.	: 3m 2023 MCTD1209-3006	Ant. pol.	: HORIZONTAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 21.2*C/50.5%	Engineer	: Allen
Test Mode	: 11n20 2437MHz TX		

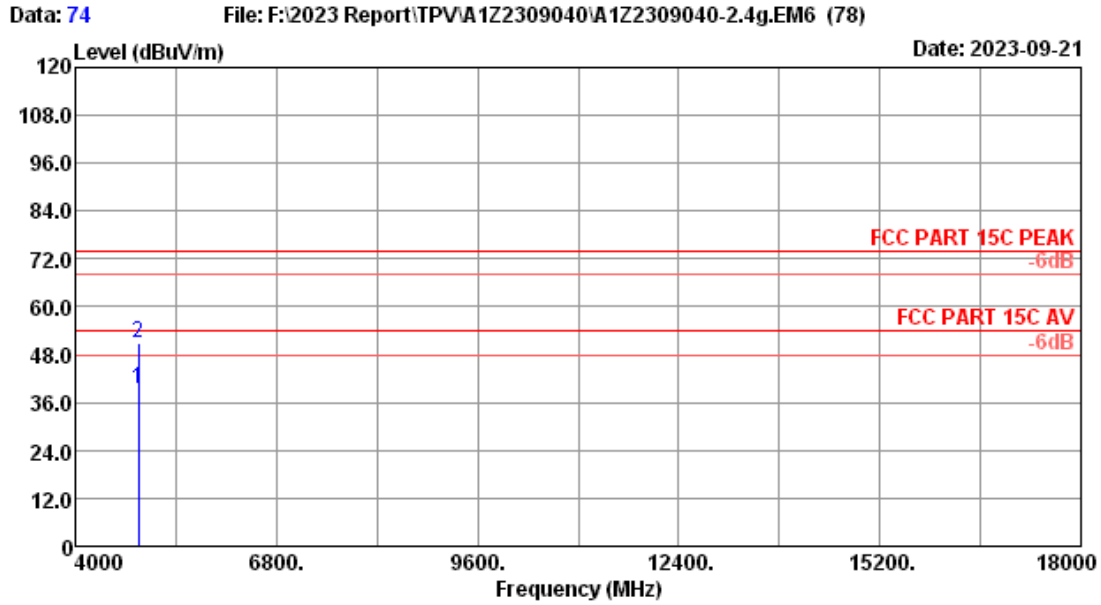

Site no. : 3m Chamber Data no. : 74  
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 21.2\*C/50.5% Engineer : Allen  
 Test Mode : 11n20 2437MHz TX


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4874.00	31.39	6.54	34.97	33.69	39.21	74.00	34.79	Average
2	4874.00	31.39	6.54	46.60	33.69	50.84	74.00	23.16	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

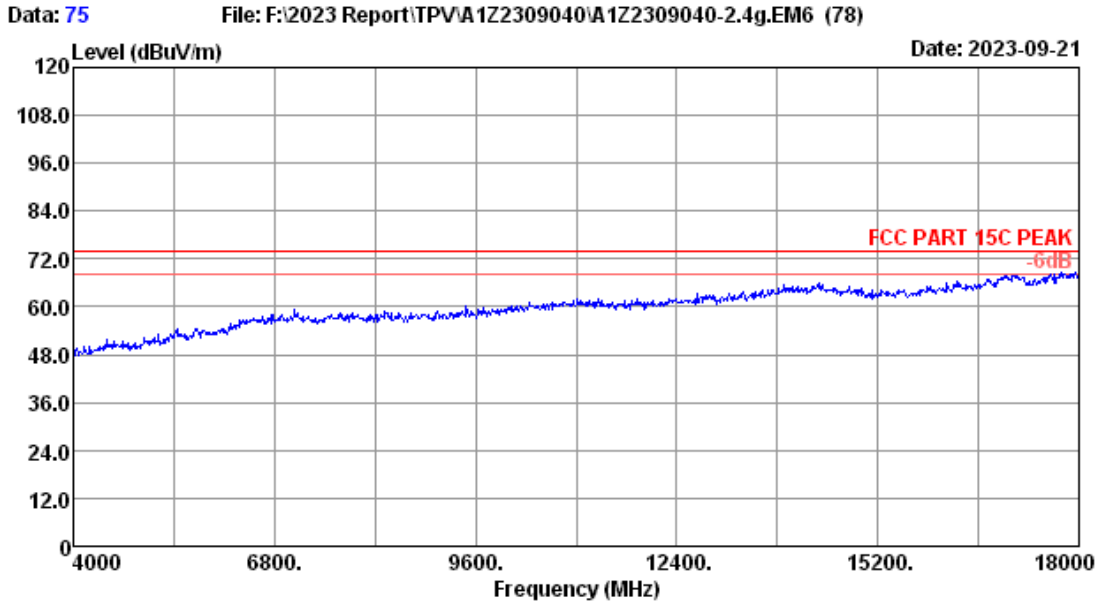

Site no.	: 3m Chamber	Data no.	: 75
Dis. / Ant.	: 3m 2023 MCTD1209-3006	Ant. pol.	: HORIZONTAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 21.2*C/50.5%	Engineer	: Allen
Test Mode	: 11n20 2462MHz TX		




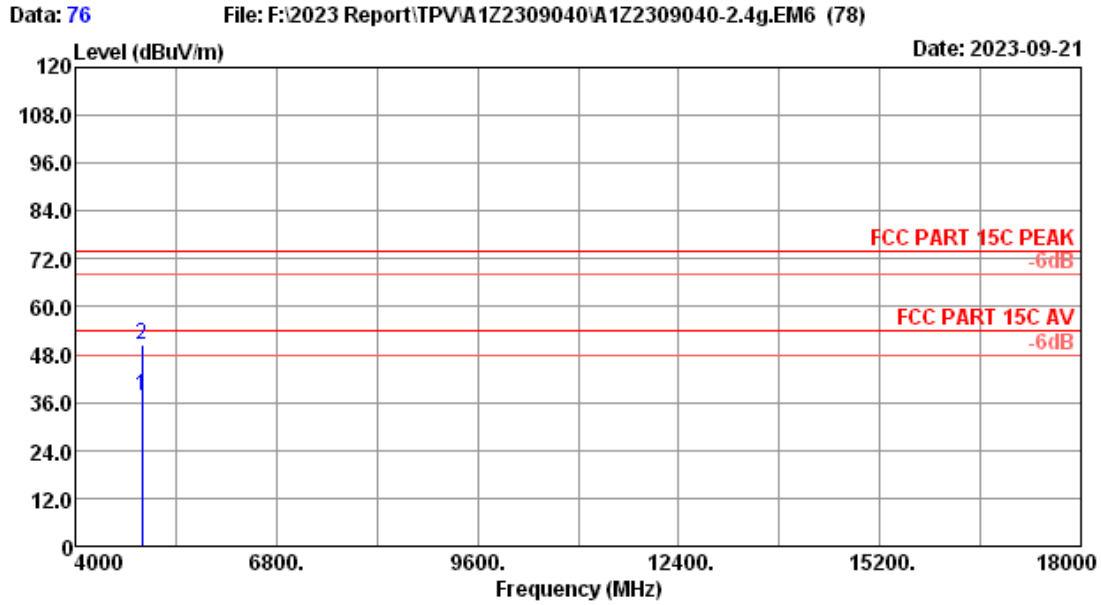


Site no. : 3m Chamber Data no. : 76  
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 21.2\*C/50.5% Engineer : Allen  
 Test Mode : 11n20 2462MHz TX

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4924.00	31.74	6.56	33.21	33.69	37.82	74.00	36.18	Average
2	4924.00	31.74	6.56	46.00	33.69	50.61	74.00	23.39	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.

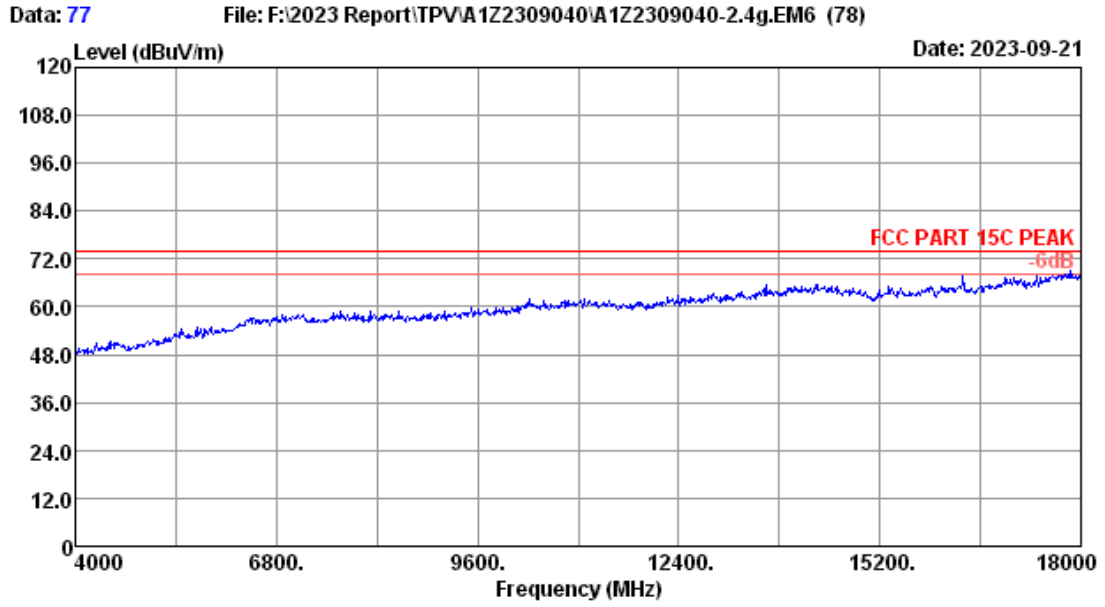

Site no.	: 3m Chamber	Data no.	: 77
Dis. / Ant.	: 3m 2023 MCTD1209-3006	Ant. pol.	: VERTICAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 21.2*C/50.5%	Engineer	: Allen
Test Mode	: 11n20 2462MHz TX		

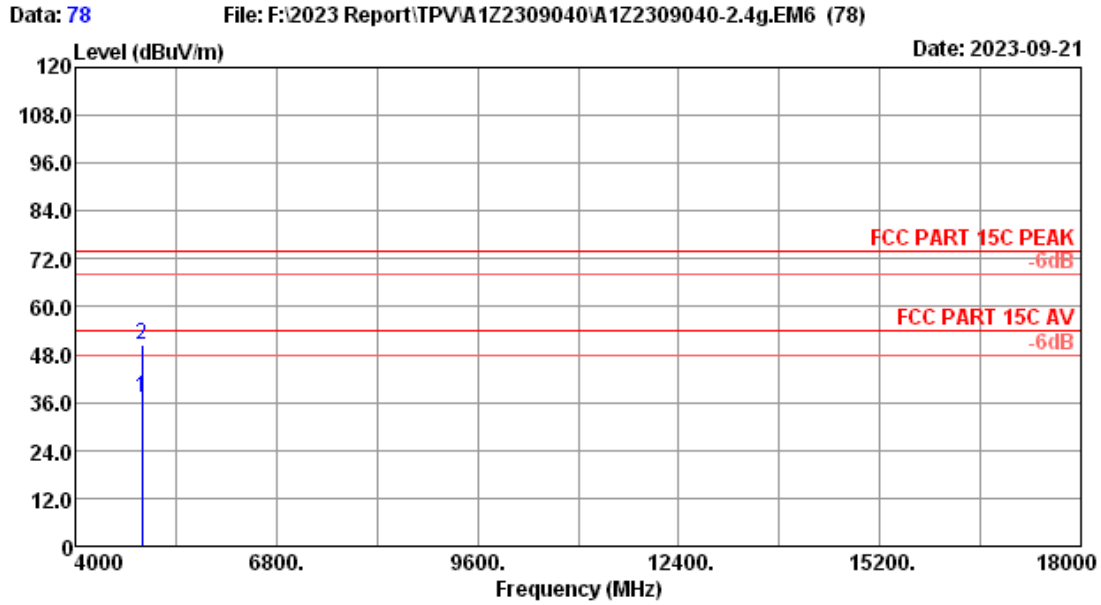

Site no. : 3m Chamber Data no. : 78  
 Dis. / Ant. : 3m 2023 MCTD1209-3006 Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK  
 Env. / Ins. : 21.2\*C/50.5% Engineer : Allen  
 Test Mode : 11n20 2462MHz TX

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4924.00	31.74	6.56	32.58	33.69	37.19	74.00	36.81	Average
2	4924.00	31.74	6.56	45.96	33.69	50.57	74.00	23.43	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp factor.  
 2. The emission levels that are 20dB below the official limit are not reported.