

# RADIO TEST REPORT

REP033952

Date of issue: May 15, 2024

Applicant:

Radio Activity Srl  
Via Privata Cascia, 11 – 20128 Milano (MI) – Italy

Product:

Multi-protocol analog and digital transceiver

Model:

KA-450e

FCC ID:

Y9M-KA450E

Specifications:

- ◆ FCC 47 CFR Part 22, Subpart C and E
- ◆ FCC 47 CFR Part 90, Subpart I

---

Test location

Company name	Nemko S.p.A.
Address	Via Del Carroccio, 4
City	Biassono
Province	MB
Postal code	20853
Country	Italy
Telephone	+39 039 220 12 01
Facsimile	+39 039 220 12 21
Website	<a href="http://www.nemko.com">www.nemko.com</a>
Site number	FCC: 682159; IC: 9109A

Tested by	O. Frau
Test engineer signature	
Reviewed by	R. Giampaglia
Reviewer signature	

---

Limits of responsibility

Note that the results contained in this report relate only to the items tested and were obtained in the period between the date of initial receipt of samples and the date of issue of the report.

This test report has been completed in accordance with the requirements of ISO/IEC 17025. All results contained in this report are within Nemko S.p.A. ISO/IEC 17025 accreditation.

---

Copyright notification

Nemko S.p.A. authorizes the applicant to reproduce this report provided it is reproduced in its entirety and for use by the company's employees only. Any use which a third party makes of this report, or any reliance on or decisions to be made based on it, are the responsibility of such third parties.

Nemko S.p.A. accepts no responsibility for damages, if any, suffered by any third party as a result of decisions made or actions based on this report.

## Table of Contents

<b>Table of Contents .....</b>	<b>4</b>
<b>Section 1      Report summary .....</b>	<b>5</b>
1.1    Test specifications .....	5
1.2    Test methods .....	5
1.3    Exclusions .....	5
1.4    Statement of compliance .....	5
1.5    Test report revision history .....	5
<b>Section 2      Engineering considerations .....</b>	<b>6</b>
2.1    Modifications incorporated in the EUT for compliance .....	6
2.2    Technical judgment .....	6
2.3    Deviations from laboratory tests procedures .....	6
<b>Section 3      Test conditions .....</b>	<b>7</b>
3.1    Atmospheric conditions .....	7
3.2    Power supply range .....	7
<b>Section 4      Measurement uncertainty .....</b>	<b>8</b>
4.1    Uncertainty of measurement .....	8
<b>Section 5      Information provided by the applicant .....</b>	<b>9</b>
5.1    Disclaimer .....	9
5.2    Applicant/Manufacture .....	9
5.3    EUT information .....	9
5.4    Technical information .....	10
5.5    EUT setup details .....	10
<b>Section 6      Summary of test results .....</b>	<b>15</b>
6.1    Testing location .....	15
6.2    Testing period .....	15
6.3    Sample information .....	15
6.4    FCC Part 2 and 90 Subpart I test requirements results .....	15
6.5    FCC Part 22 Subpart C and E test requirements results .....	15
<b>Section 7      Testing data .....</b>	<b>16</b>
7.1    Number of frequencies .....	16
7.2    Modulation characteristic .....	17
7.3    Transmitter Output Power .....	30
7.4    Bandwidth limitations .....	35
7.5    Spectrum mask and spurious emissions .....	49
7.6    Transient frequency behavior .....	196
7.7    Transmitter frequency stability .....	202
<b>Section 8      Photos .....</b>	<b>204</b>
8.1    Photos of the test set-up .....	204
8.2    Photos of the EUT .....	206

## Section 1 Report summary

---

### 1.1 Test specifications

---

FCC 47 CFR Part 90, Subpart I	Private land mobile radio services. General technical standards
FCC 47 CFR Part 22, Subpart C	Public Mobile Services. Operational and Technical Requirements
FCC 47 CFR Part 22, Subpart E	Public Mobile Services. Paging and Radiotelephone Service

### 1.2 Test methods

---

ANSI C63.26-2015	American National Standard for Compliance Testing of Transmitters Used in Licensed Radio Services
FCC 47 CFR Part 2, Subpart J	Equipment authorization procedures

### 1.3 Exclusions

---

None

### 1.4 Statement of compliance

---

In the configuration tested, the EUT was found compliant.

Testing was performed against all relevant requirements of the test standard except as noted in section 1.3 above. Results obtained indicate that the product under test complies in full with the requirements tested. The test results relate only to the items tested.

See "Summary of test results" for full details.

### 1.5 Test report revision history

---

*Table 1.5-1: Test report revision history*

Revision #	Date of issue	Details of changes made to test report
REP033952	2024-05-15	Original report issued

## Section 2 Engineering considerations

---

### 2.1 Modifications incorporated in the EUT for compliance

---

There were no modifications performed to the EUT during this assessment.

### 2.2 Technical judgment

---

None

### 2.3 Deviations from laboratory tests procedures

---

No deviations were made from laboratory procedures.

## Section 3 Test conditions

---

### 3.1 Atmospheric conditions

---

In the laboratory, the following ambient conditions are respected for each test reported below:

Ambient temperature: 18 ÷ 33 °C<sup>(1)</sup>

Relative Humidity: 25 ÷ 70 %<sup>(2)</sup>

Atmospheric pressure: 860 ÷ 1060 hPa

The following instruments are used to monitor the environmental conditions:

Equipment	Manufacturer	Model	Serial N°
Thermo-hygrometer data loggers	Testo	175-H2	20012380/305
Thermo-hygrometer data loggers	Testo	175-H2	38203337/703
Barometer	Castle	GPB 3300	072015

### 3.2 Power supply range

---

The normal test voltage for equipment to be connected to the mains shall be the nominal mains voltage. For the purpose of the present document, the nominal voltage shall be the declared voltage, or any of the declared voltages  $\pm 5\%$ , for which the equipment was designed.

## Section 4 Measurement uncertainty

### 4.1 Uncertainty of measurement

The measurement uncertainty was calculated for each test and quantity listed in this test report, according to CISPR 16-4-2, ETSI TR 100 028-1, ETSI TR 100 028-2 and other specific test standards and is documented in Nemko Spa working manuals WML1002 and WML0078.

The assessment of conformity for each test performed on the equipment is performed not taking into account the measurement uncertainty. The two following possible verdicts are stated in the report:

P (Pass) - The measured values of the equipment respect the specification limit at the points tested. The specific risk of false accept is up to 50% when the measured result is close to the limit.

F (Fail) - One or more measured values of the equipment do not respect the specification limit at the points tested. The specific risk of false reject is up to 50% when the measured result is close to the limit.

Hereafter Nemko's measurement uncertainties are reported:

EUT	Type	Test	Range	Measurement Uncertainty	Notes
Transmitter	Conducted	Frequency error	0.001 MHz ÷ 40 GHz	0.08 ppm	(1)
		Carrier power	0.009 MHz ÷ 30 MHz	1.1 dB	(1)
		RF Output Power	30 MHz ÷ 18 GHz	1.5 dB	(1)
			18 MHz ÷ 40 GHz	3.0 dB	(1)
			40 MHz ÷ 140 GHz	5.0 dB	(1)
		Adjacent channel power	1 MHz ÷ 18 GHz	1.4 dB	(1)
		Conducted spurious emissions	0.009 MHz ÷ 18 GHz	3.0 dB	(1)
			18 GHz ÷ 40 GHz	4.2 dB	(1)
			40 GHz ÷ 220 GHz	6.0 dB	(1)
		Intermodulation attenuation	1 MHz ÷ 18 GHz	2.2 dB	(1)
		Attack time – frequency behaviour	1 MHz ÷ 18 GHz	2.0 ms	(1)
		Attack time – power behaviour	1 MHz ÷ 18 GHz	2.5 ms	(1)
		Release time – frequency behaviour	1 MHz ÷ 18 GHz	2.0 ms	(1)
		Release time – power behaviour	1 MHz ÷ 18 GHz	2.5 ms	(1)
		Transient behaviour of the transmitter – Transient frequency behaviour	1 MHz ÷ 18 GHz	0.2 kHz	(1)
		Transient behaviour of the transmitter – Power level slope	1 MHz ÷ 18 GHz	9%	(1)
		Frequency deviation - Maximum permissible frequency deviation	0.001 MHz ÷ 18 GHz	1.3%	(1)
		Frequency deviation - Response of the transmitter to modulation frequencies above 3 kHz	0.001 MHz ÷ 18 GHz	0.5 dB	(1)
	Radiated	Dwell time	-	3%	(1)
		Hopping Frequency Separation	0.01 MHz ÷ 18 GHz	1%	(1)
		Occupied Channel Bandwidth	0.01 MHz ÷ 18 GHz	2%	(1)
		Modulation Bandwidth	0.01 MHz ÷ 18 GHz	2%	(1)
		Radiated spurious emissions	0.009 MHz ÷ 26.5 GHz	6.0 dB	(1)
			26.5 GHz ÷ 66 GHz	8.0 dB	(1)
			66 GHz ÷ 220 GHz	10 dB	(1)
	Effective radiated power transmitter		10 kHz ÷ 26.5 GHz	6.0 dB	(1)
			26.5 GHz ÷ 66 GHz	8.0 dB	(1)
			66 GHz ÷ 220 GHz	10 dB	(1)

NOTES:

(1) The reported expanded uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor  $k = 2$ , which for a normal distribution corresponds to a coverage probability of approximately 95 %

## Section 5 Information provided by the applicant

---

### 5.1 Disclaimer

---

This section contains information provided by the applicant and has been utilized to support the test plan. Inaccurate information provided by the applicant can affect the validity of the results contained within this test report. Nemko accepts no responsibility for the information contained within this section and the impact it may have on the test plan and resulting measurements.

### 5.2 Applicant/Manufacture

---

Applicant name	Radio Activity Srl
Applicant address	Via Privata Cascia, 11 – 20128 Milano (MI) – Italy
Manufacture name	Same as applicant
Manufacture address	Same as applicant

### 5.3 EUT information

---

Product name	Multi-protocol analog and digital transceiver
Model	KA-450e
Model variant(s)	--
Serial number	PRJ00505310003 (Assigned by Nemko S.p.A.)
Part number	--
Power supply requirements	13.6 V DC, 10 A max
Product description and theory of operation	The EUT is a radio base station for fixed installation
Software version	--


## 5.4 Technical information

System type	<input type="checkbox"/> Mobile system <input checked="" type="checkbox"/> Base/Fixed point-to-point system	
Frequency band	406.1 MHz – 430 MHz and 450 MHz – 470 MHz	
Frequency Min (MHz)	406.1 MHz and 450 MHz	
Frequency Max (MHz)	430.0 MHz and 470 MHz	
RF power Max (W), Conducted	42 W (46.26 dBm)	
Field strength, dB $\mu$ V/m @ 3 m	N/A	
Measured BW (kHz), 99% OBW	9.45	
Emission designators	Analogue	FM 11K0F3E / 14K0F3E / 16K0F3E (12.5 / 20 / 25 kHz)
	Analog	PM 11K0G3E / 14K0G3E / 16K0G3E (12.5 / 20 / 25 kHz)
	DMR 4FSK Voice & Data	7K77FXE
	DMR 4FSK Data	7K77FXD
	P25 C4FM Voice & Data	8K10F1E
	P25 C4FM Data	8K10F1D
Transmitter spurious, dBm @ 3 m	-23.7 @ 1263.2500 MHz	
Antenna information	External antenna not provided	

## 5.5 EUT setup details

### 5.5.1 Radio exercise details

The following software has been used to set the EUT.

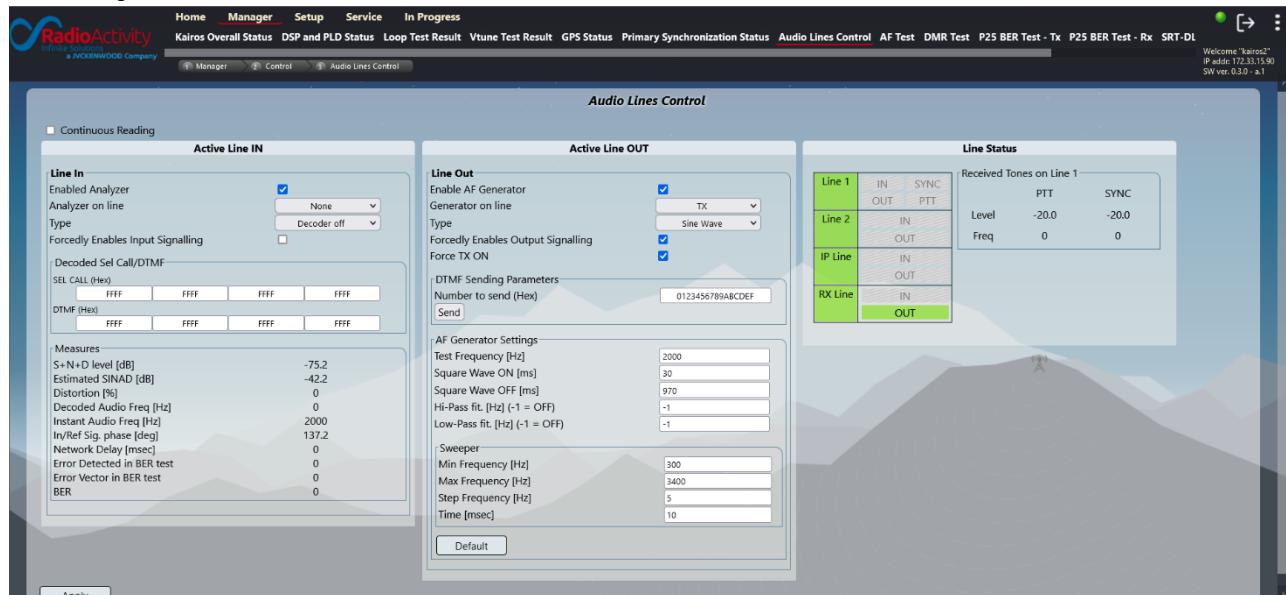

RadioActivity  
Innovative Radio Solutions  
A JVCKENWOOD Company

Home Manager Setup Service In Progress  
Network Settings Logging Options Main Setup TRX Operating Modes Channel Table Calibration Parameters Primary Synchronization TX control RX control Audio Lines Configuration Subtone Control Stat

Manager Config Channel Table

Welcome "karos2"  
IP address 172.31.15.90  
SN: 0302-a1

**Channel Definition**

**Enable features**

- ANALOG Mode
- ETSI / MotoTRBO (TM) DMR Mode
- P25 Digital Mode
- POCSSAG Mode
- Squelch Tail Cutoff on TX
- Squelch Tail Cutoff on RX
- Multi-tone TCS

**Frequencies & Levels**

RX Frequency [MHz]	467.100000
TX Frequency [MHz]	488.500000
TX Power [W]	1
Channel Bandwidth [kHz]	12.5
Max Continuous TX [s]	1000
TX Cutoff Delay [ms]	500
RX Squelch level [dB]	20.0
RX Squelch Hysteresis [dB]	6.0

**Main Sub-tone**

Tx	<input checked="" type="checkbox"/> TCS Freq. [Hz]	0
	<input type="checkbox"/> DCS Code [oct]	
RX	<input checked="" type="checkbox"/> TCS Freq. [Hz]	0
	<input type="checkbox"/> DCS Code [oct]	

**Sub-tones**

RX Emergency Sub-tone [Hz]	0
TCS Hold on RX [Hz]	250
Sub-tone Deviation [Hz]	0
Super-audio Frequency [Hz]	0

**Color code**

Main DMR Color Code	1	1
Aux DMR Color Code	1	1

**Tx Configuration**

Modulation: FM

Refresh Apply (Send even if same)

### 5.5.2 EUT sub assemblies

--

### 5.5.3 EUT interface ports

Port	Name	Type <sup>1</sup>	Cable Max. >3m	Cable Shielded	Description
0	Enclosure	N/E	—	—	—
1	13.6 Vdc input	DC	<input checked="" type="checkbox"/>	<input type="checkbox"/>	Two wires cable
2	LAN	TP	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	Standard cable with RJ45 connector
3	RF TX antenna	ANT	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	Coaxial cable with SMA connector
4	RF RX main antenna	ANT	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	Coaxial cable with SMA connector
5	RF RX diversity antenna	ANT	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	Coaxial cable with SMA connector
6	Main GPS antenna	ANT	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	Coaxial cable with SMA connector
7	USB type A	I/O	—	—	Normally not used
8	15 pole HD	I/O	<input type="checkbox"/>	<input type="checkbox"/>	Multi wires cable


Notes:

<sup>1</sup> Port type:  
 AC = AC Power Port      DC = DC Power Port      N/E = Non-Electrical      ANT = Antenna Port  
 I/O = Signal/Control Input or Output Port      TP = Wired network or telecommunication Port


### 5.5.4 Support equipment

Product Type	Manufacturer	Model	Comments
Notebook	DELL	Latitude	—


## 5.5.5 Radiated testing block diagram (below 1 GHz)

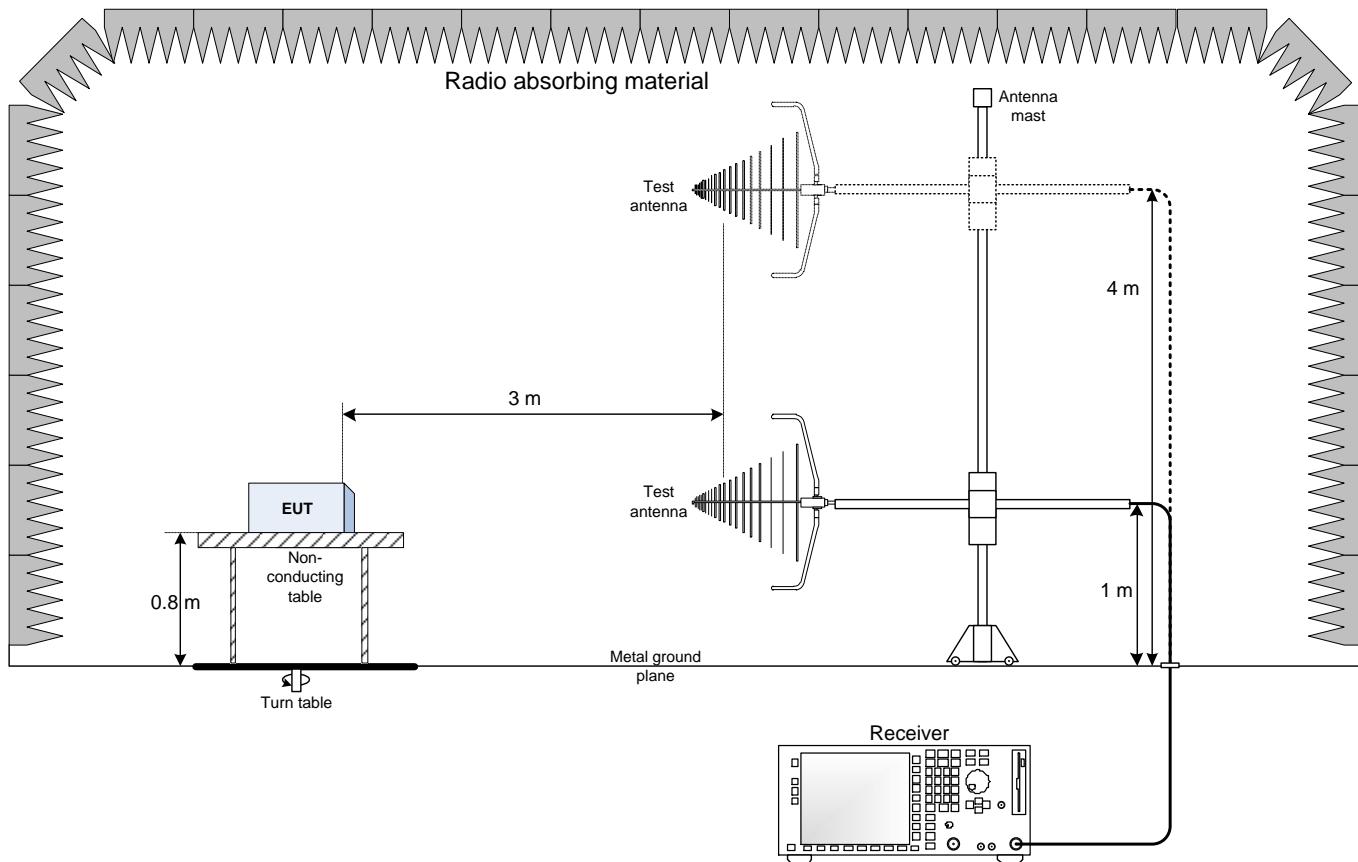

## 5.5.6 Radiated testing block diagram (above 1 GHz)

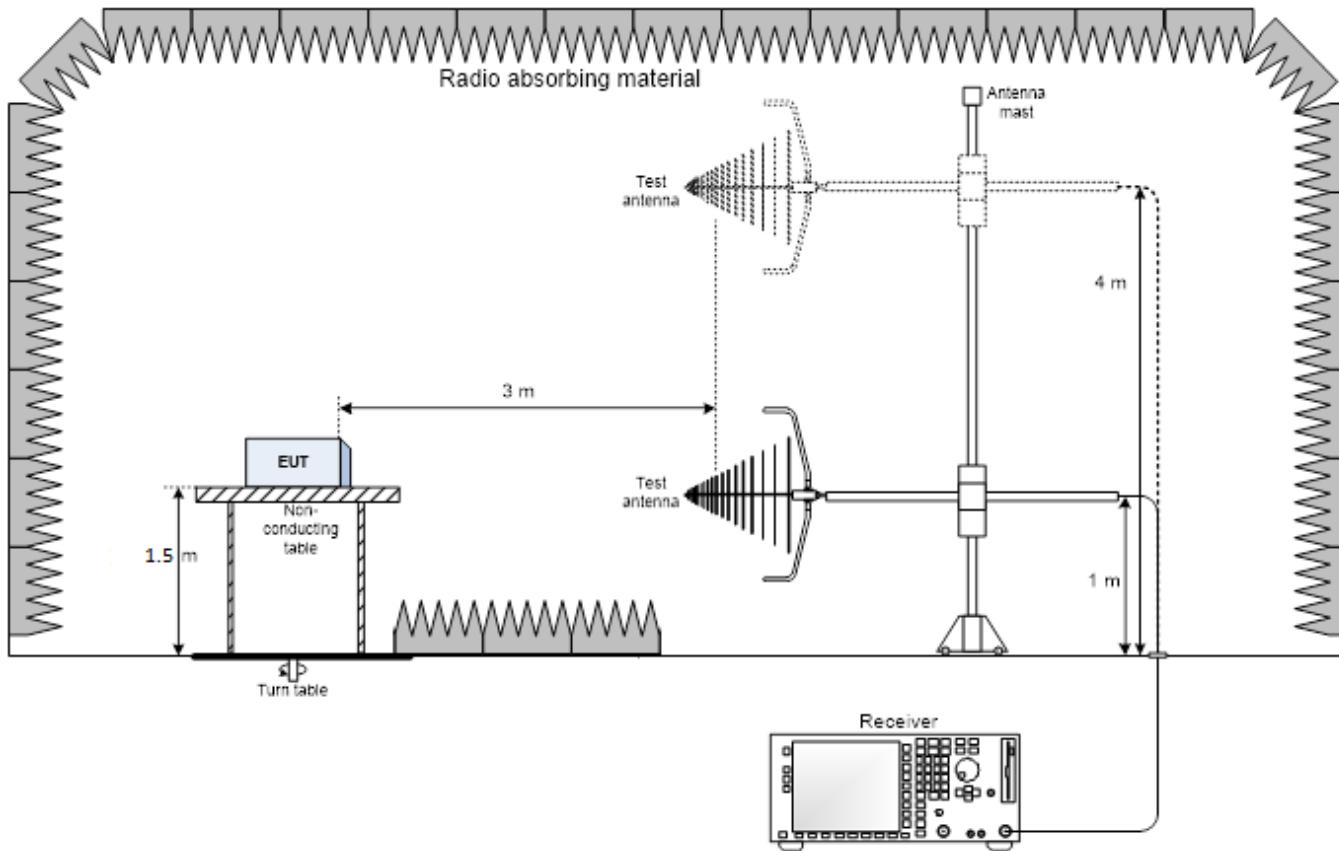

## 5.5.7 Antenna port testing block diagram

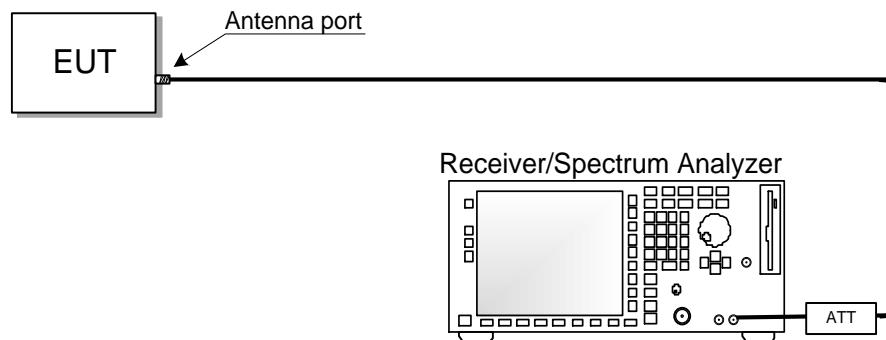

## Section 6 Summary of test results

---

### 6.1 Testing location

---

Test location (s)	Nemko Spa
-------------------	-----------

### 6.2 Testing period

---

Test start date	2024-03-25	Test end date	2024-04-30
-----------------	------------	---------------	------------

### 6.3 Sample information

---

Receipt date	2024-01-19	Nemko sample ID number(s)	PRJ00505310003 (Assigned by Nemko S.p.A.)
--------------	------------	---------------------------	--

### 6.4 FCC Part 2 and 90 Subpart I test requirements results

---

Table 6.4-1: FCC requirements results

Part	Test description	Verdict
§2.1047	Modulation characteristics	Pass
§90.205(h)	Transmitter output power	Pass
§90.209(b)	Bandwidth limitations	Pass
§90.210	Spectrum mask and spurious emissions	Pass
§90.214	Transient frequency behavior	Pass
§90.213(a)	Transmitter frequency stability	Pass

Notes: --

### 6.5 FCC Part 22 Subpart C and E test requirements results

---

Table 6.4-1: FCC requirements results

Part	Test description	Verdict
§22.565	Transmitter output power	Pass
§22.561	Bandwidth limitations	Pass
§22.359	Spectrum mask and spurious emissions	Pass
§22.355	Transmitter frequency stability	Pass

Notes: --

## Section 7 Testing data

---

### 7.1 Number of frequencies

---

#### 7.1.1 References, definitions and limits

---

**ANSI C63.26, Clause 5.1.2:**

Measurements of transmitters shall be performed and, if required, reported for each frequency band in which the EUT can be operated with the device transmitting at the number of frequencies in each band specified in table below.

*Table 7.1-1: Frequency Range of Operation*

Frequency range over which the device operates (in each band)	Number of test frequencies required	Location of measurement frequency inside the operating frequency range
1 MHz or less	1	Center (middle of the band)
1–10 MHz	2	1 near high end, 1 near low end
Greater than 10 MHz	3	1 near high end, 1 near center and 1 near low end

Notes: "near" means as close as possible to or at the centre / low end / high end of the frequency range over which the device operates.

#### 7.1.2 Test summary

---

Verdict	Pass		
Tested by	O. Frau	Test date	March 25, 2024

#### 7.1.3 Observations, settings and special notes

---

None

#### 7.1.4 Test data

---

*Table 7.1-2: Test channels selection*

Start of Frequency range, MHz	End of Frequency range, MHz	Frequency range bandwidth, MHz	Low channel, MHz	Mid channel, MHz	High channel, MHz
406.0	421.0	15.0	406.1	413.5	420.9
421.0	430.0	10.0	421.1	--	429.9
450.0	470.0	20.0	450.1	460.0	469.9

## 7.2 Modulation characteristic

### 7.2.1 References, definitions and limits

#### FCC §2.1047:

- (a) Voice modulated communication equipment. A curve or equivalent data showing the frequency response of the audio modulating circuit over a range of 100 to 5000 Hz shall be submitted. For equipment required to have an audio low-pass filter, a curve showing the frequency response of the filter, or of all circuitry installed between the modulation limiter and the modulated stage shall be submitted.
- (b) Equipment which employs modulation limiting. A curve or family of curves showing the percentage of modulation versus the modulation input voltage shall be supplied. The information submitted shall be sufficient to show modulation limiting capability throughout the range of modulating frequencies and input modulating signal levels employed

### 7.2.2 Test summary

Verdict	Pass
Tested by	O. Frau
Test date	April 09, 2024

### 7.2.3 Observations, settings and special notes

Per ANSI C63.26 Subclause 5.3.1: The audio frequency response is the degree of closeness to which the frequency deviation of the transmitter follows a prescribed characteristic.

Spectrum analyser settings:

Receiver mode	RMS deviation
Audio frequency generator tone	100 Hz and 5000 Hz

Reference voltage measurement: Apply a 1000 Hz tone and adjust the audio frequency generator to produce 20% of the rated system deviation. Record the DMM reading as  $V_{REF}$ .

Calculation of the audio frequency response at the present frequency:  $20 \times \log_{10} (V_{FREQ} / V_{REF})$

Per ANSI C63.26 Subclause 5.3.2: Modulation limiting is the ability of a transmitter circuit to limit the transmitter from producing deviations in excess of a rated system deviation.

Spectrum analyser settings:

Receiver mode	Peak positive and negative deviation
Audio frequency generator tone	300 Hz, 2500 Hz and 3000 Hz


Reference voltage measurement: Apply a 1000 Hz tone and adjust the audio frequency generator to produce 60% of the rated system deviation. This is the 0 dB reference level. Plot the data set as a percentage of deviation relative to the 0 dB reference point versus input voltage.

### 7.2.4 Test equipment list


Equipment	Manufacturer	Model no.	Asset no.	Cal cycle	Next cal.
Spectrum Analyzer	Rohde & Schwarz	FSW43	101767	2023-09	2024-09
Shielded room	Siemens	10m control room	1947	NCR	NCR
Radiocommunication Tester	R&S	CMT	883152/001	2024-01	2027-01
Audio Generator	Rohde & Schwarz	APN04	860 093/017	2023-12	2025-12
Cable set	Rosenberger	ST.ALO-02	1.650	2023-10	2024-10

Note: NCR - no calibration required, VOU - verify on use


## 7.2.5 Test data

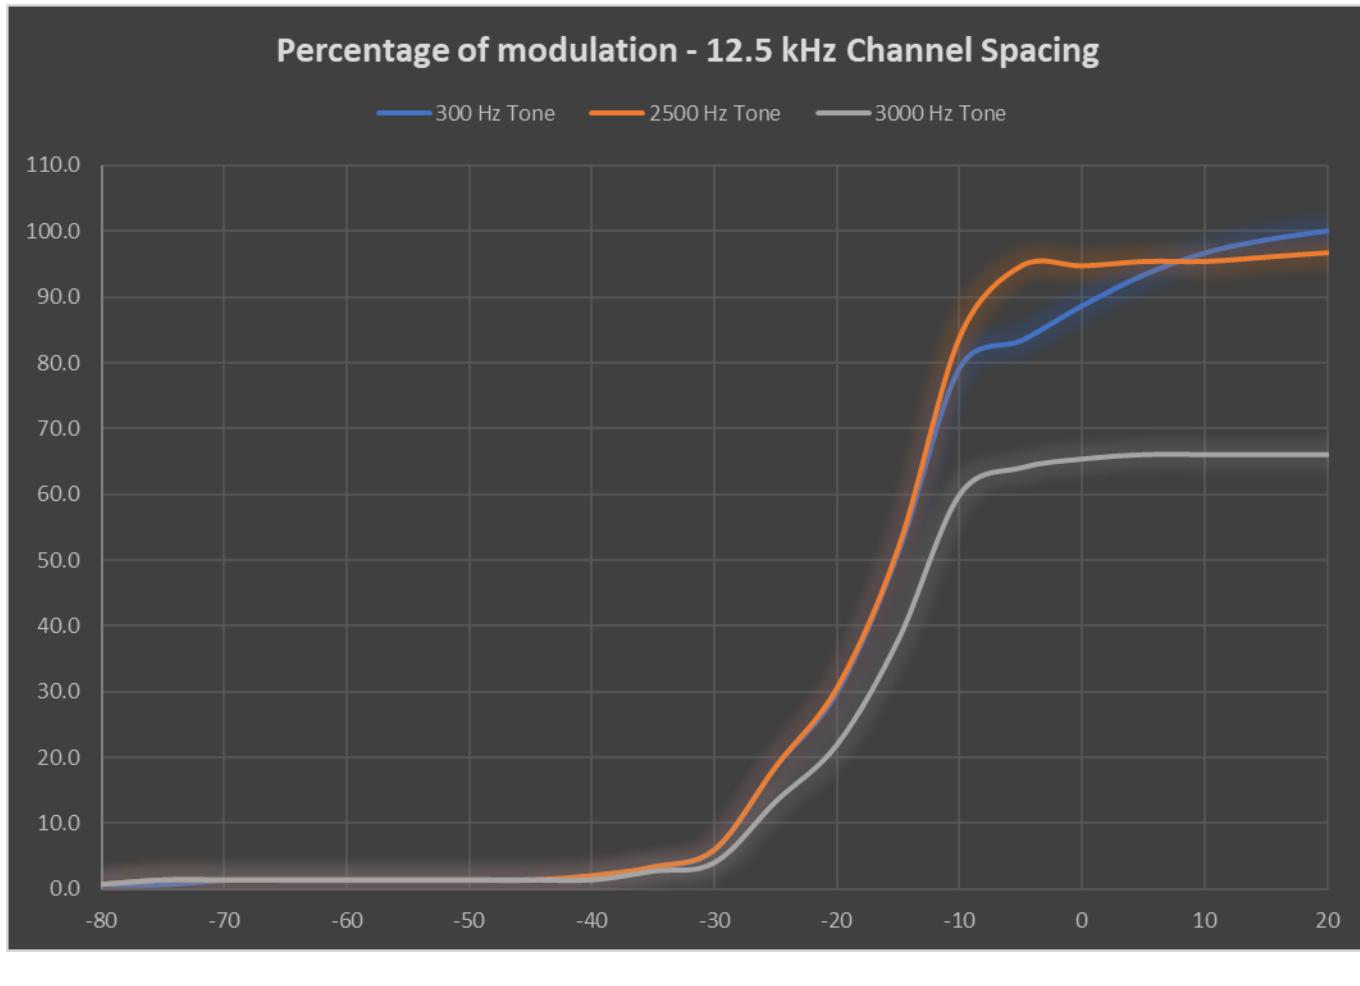


Test data, continued

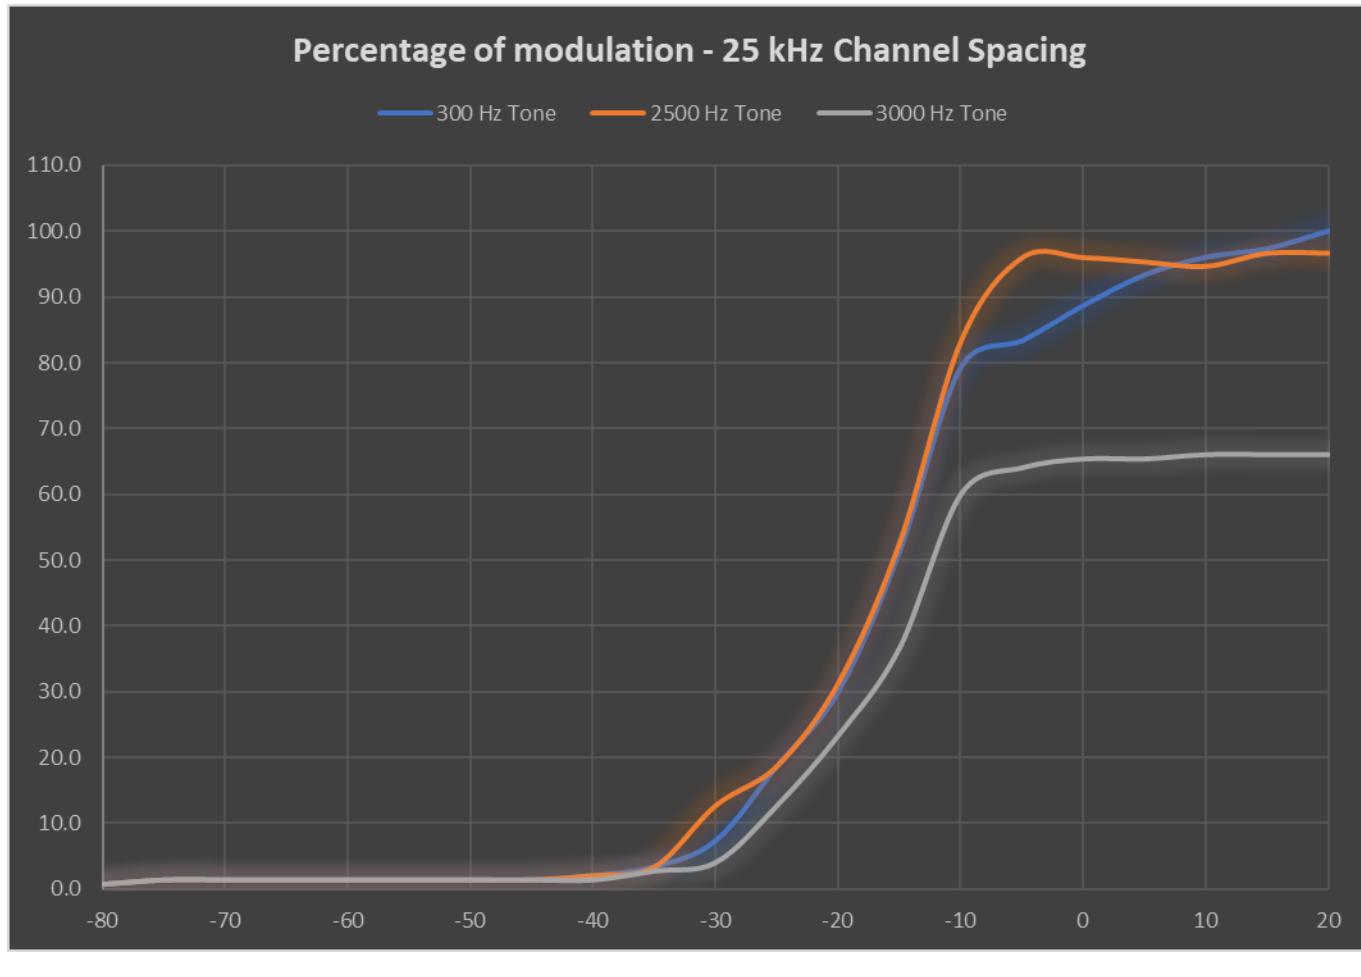


Test data, continued

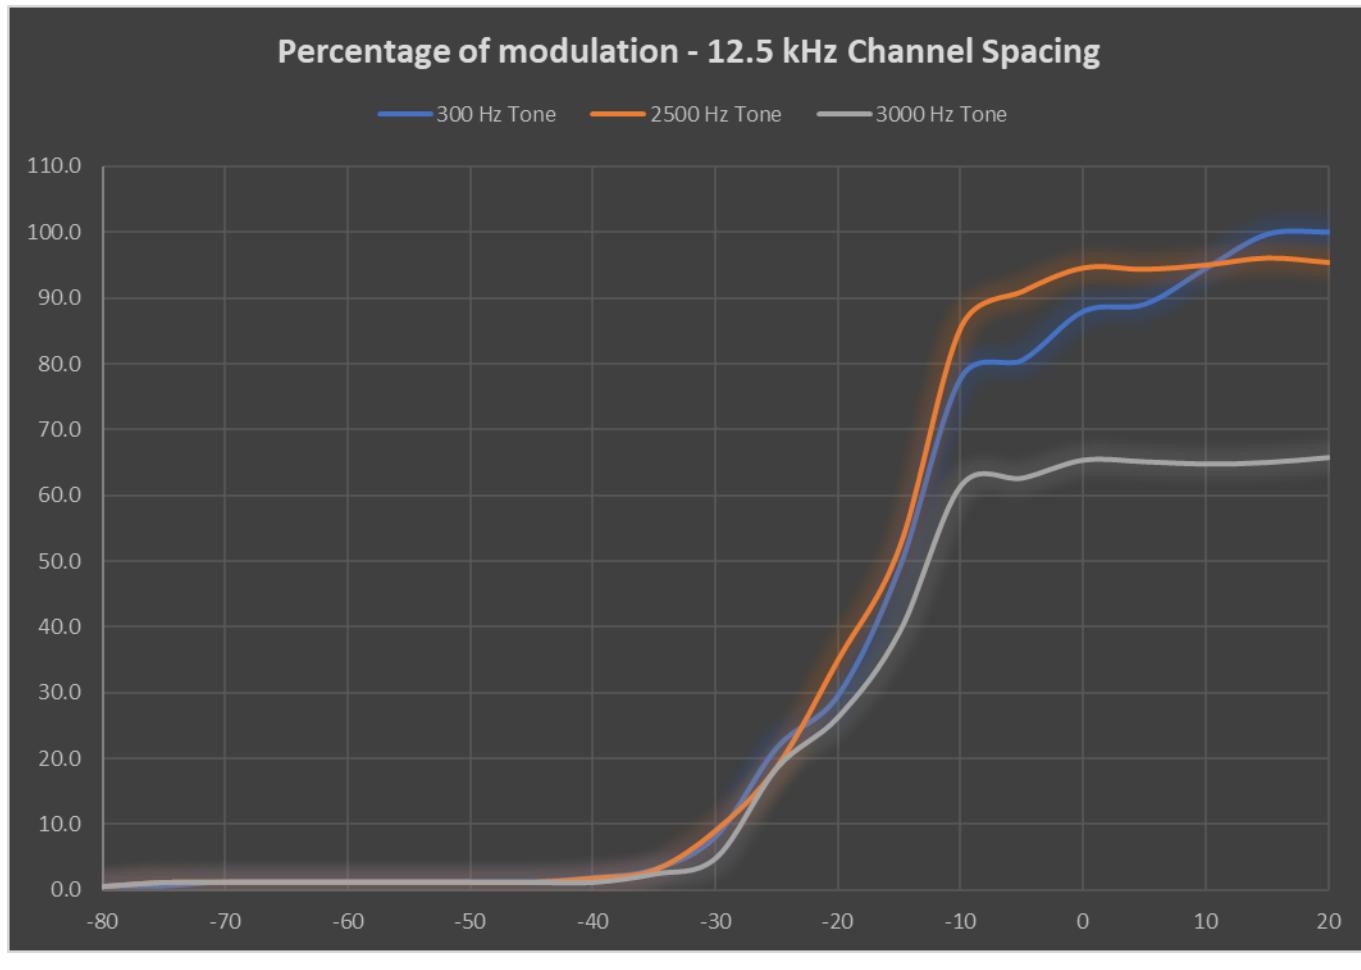


Test data, continued

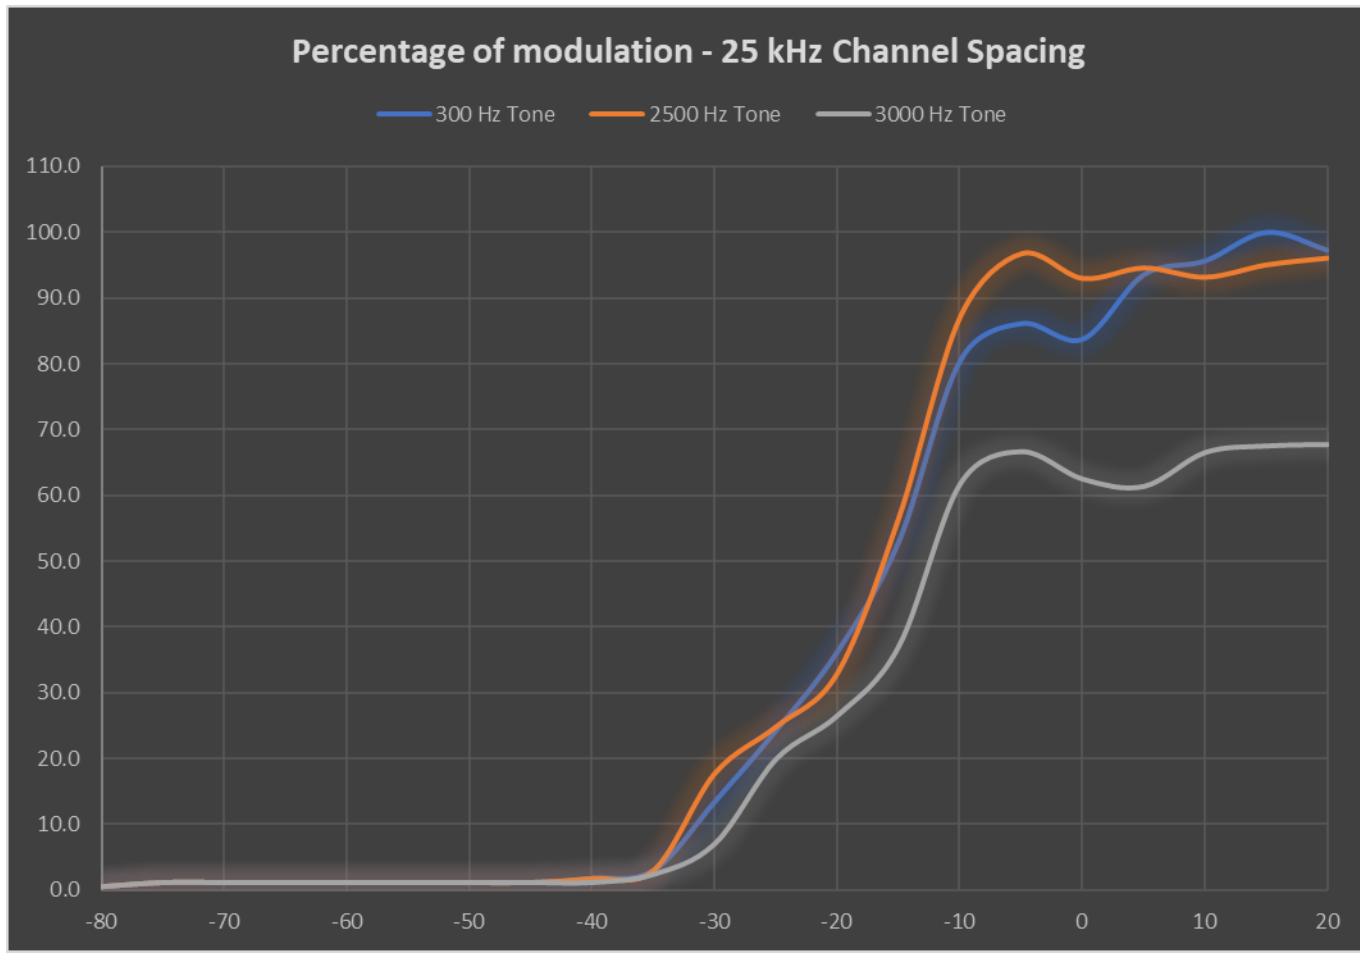


Test data, continued

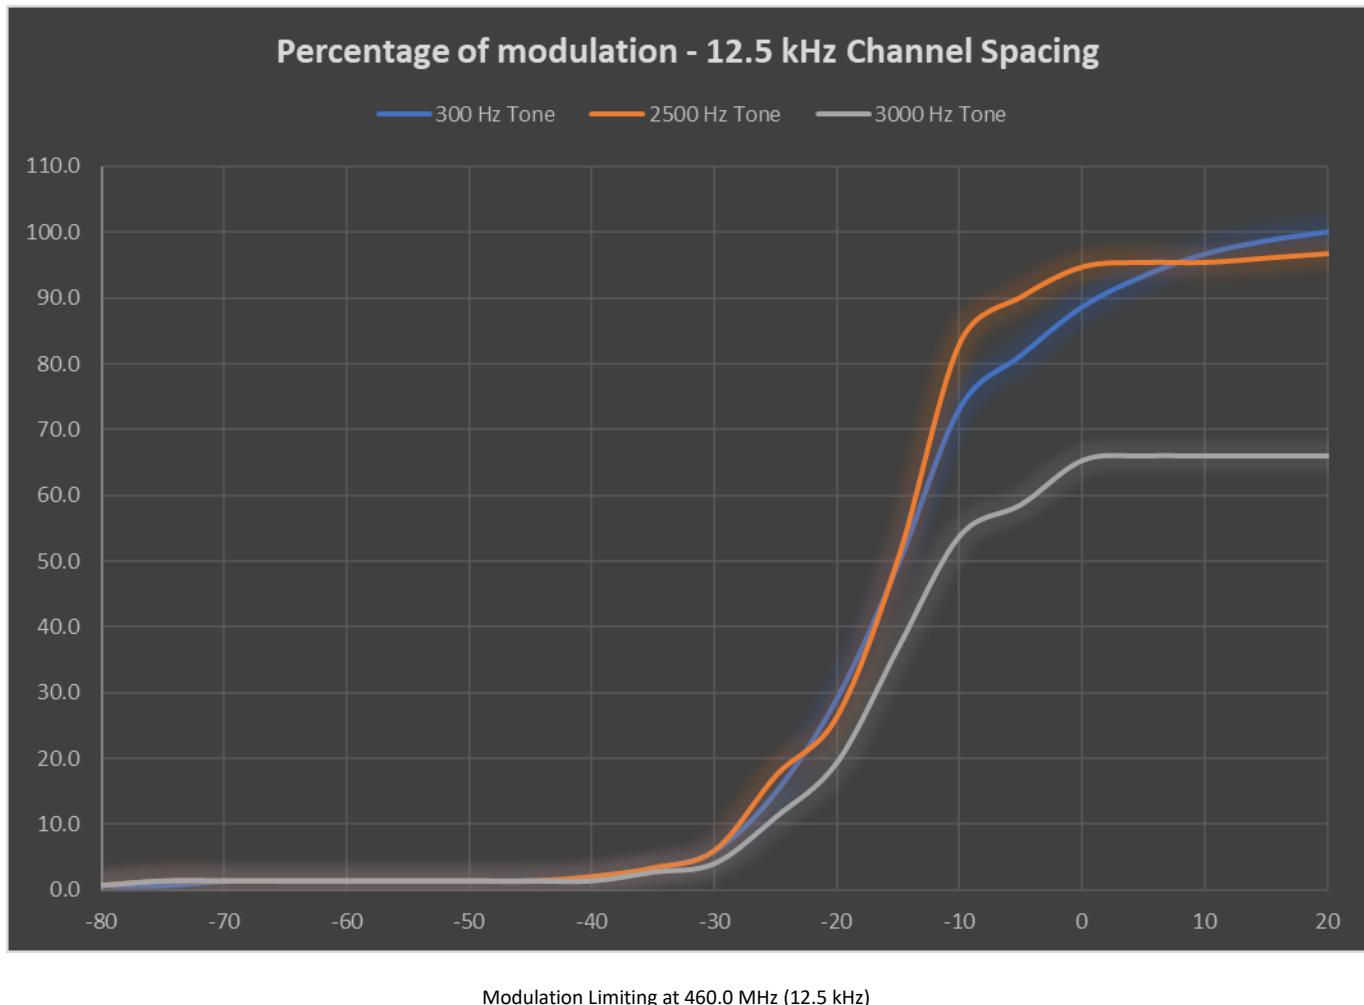

Test data, continued

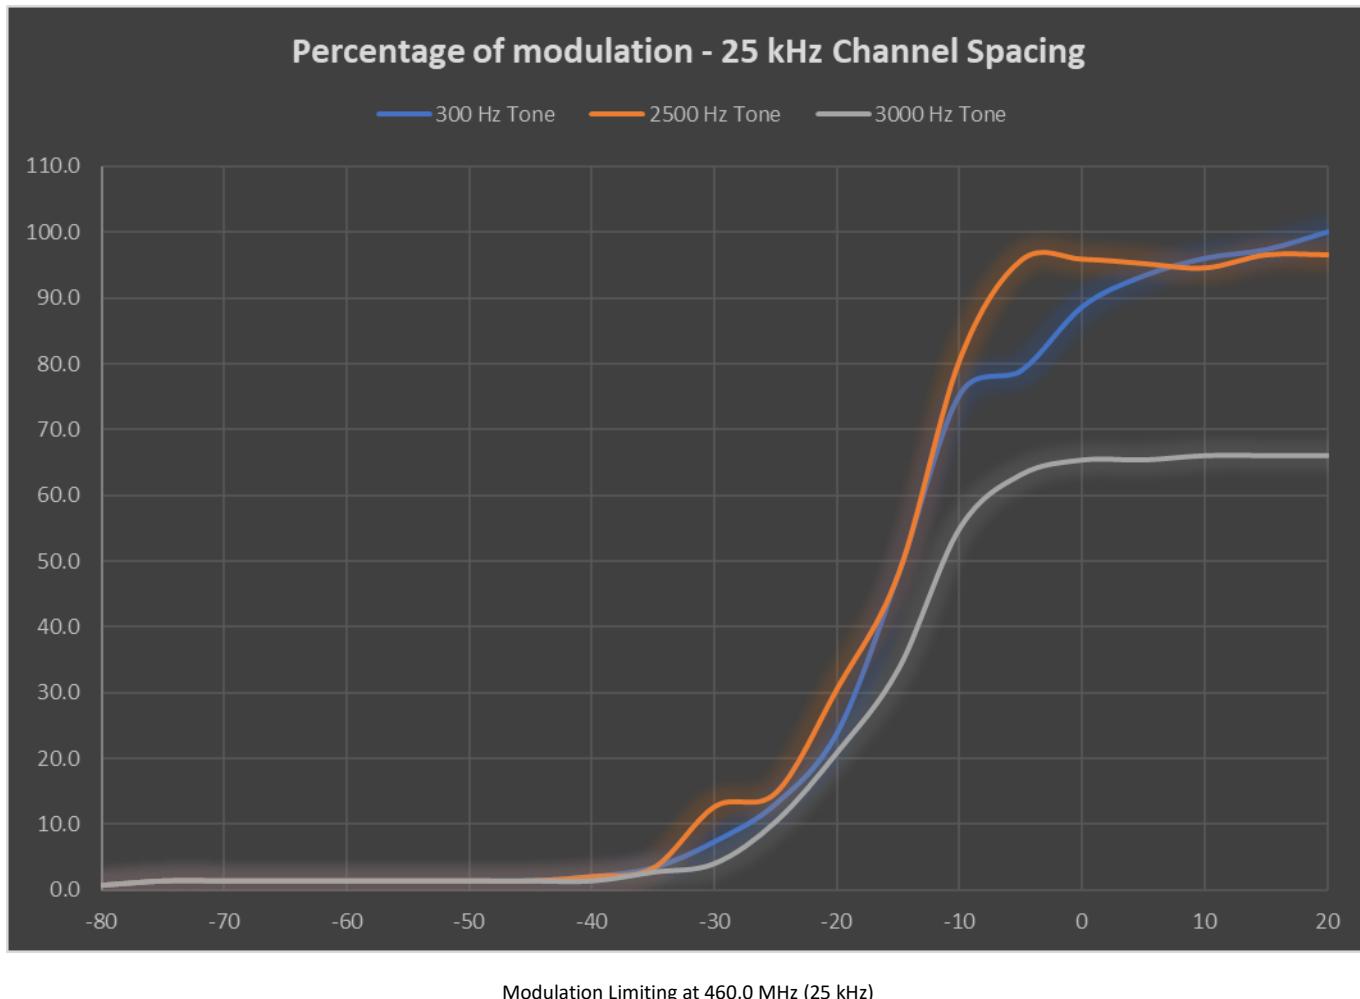


Test data, continued

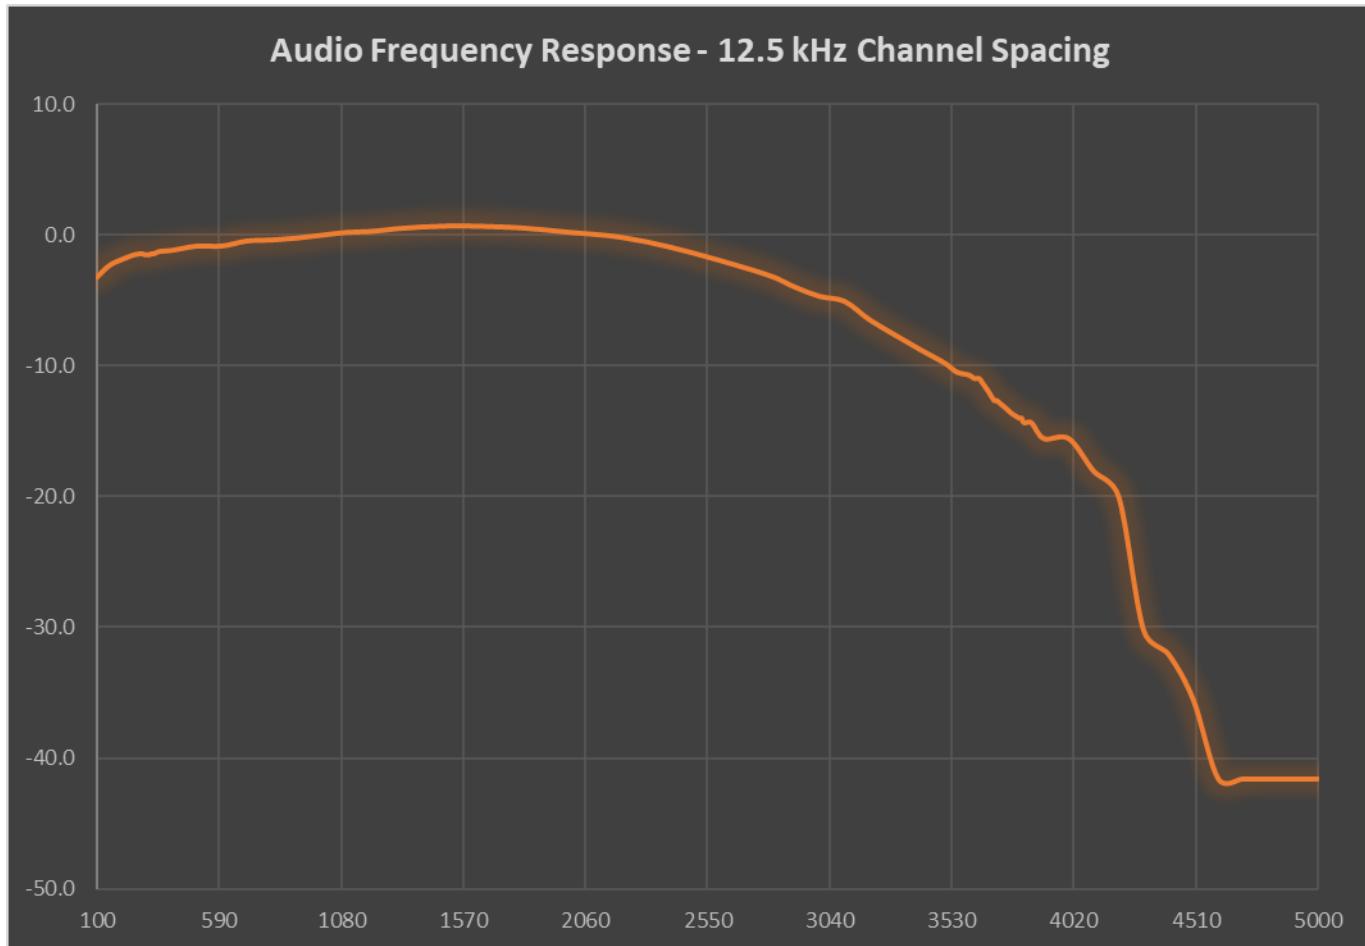


Audio frequency response at 413.5 MHz (12.5 kHz)

Test data, continued

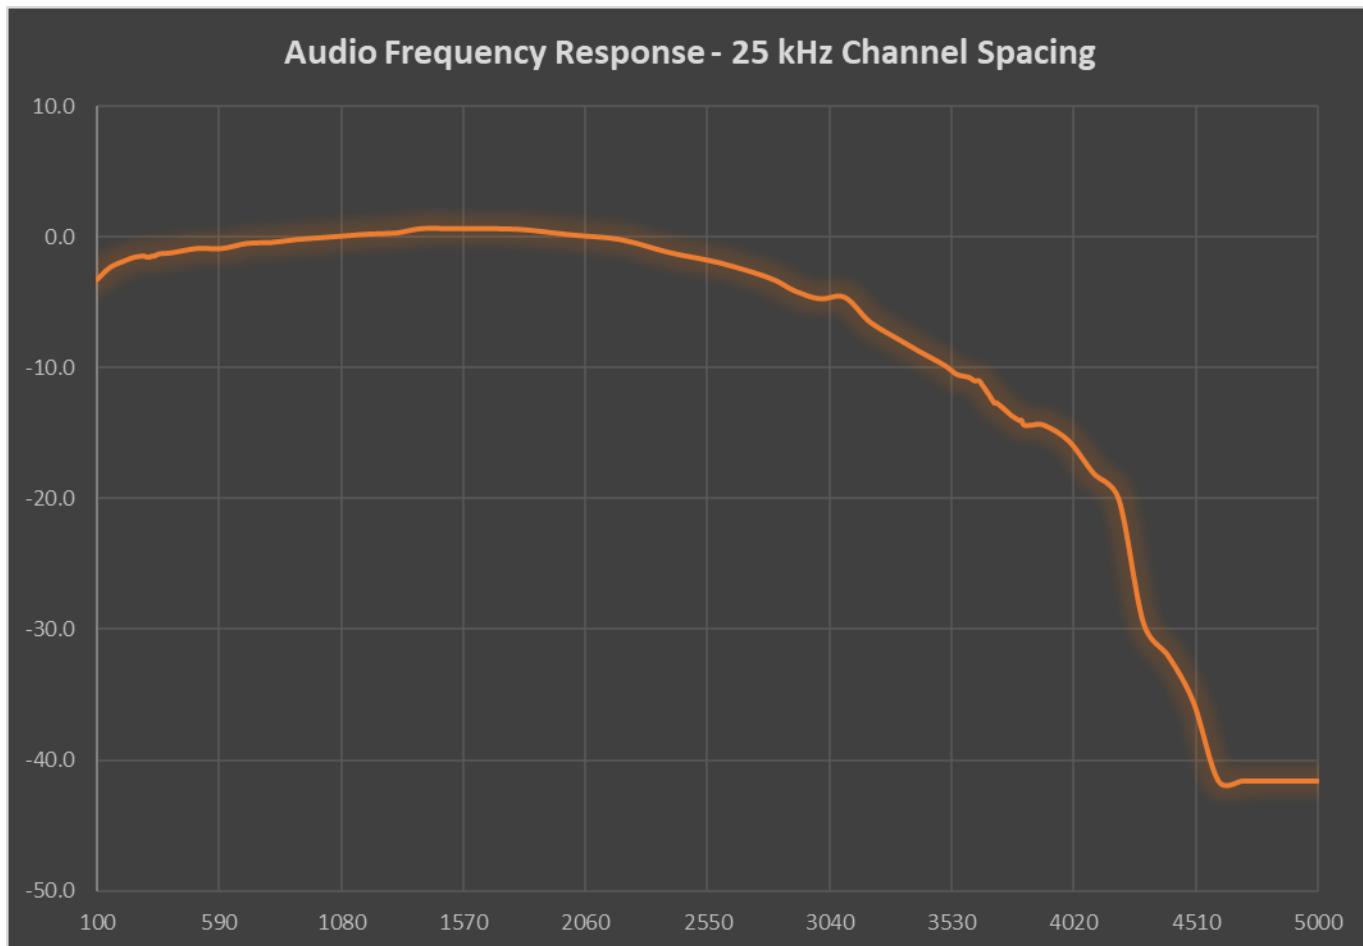


Audio frequency response at 413.5 MHz (25 kHz)

Test data, continued

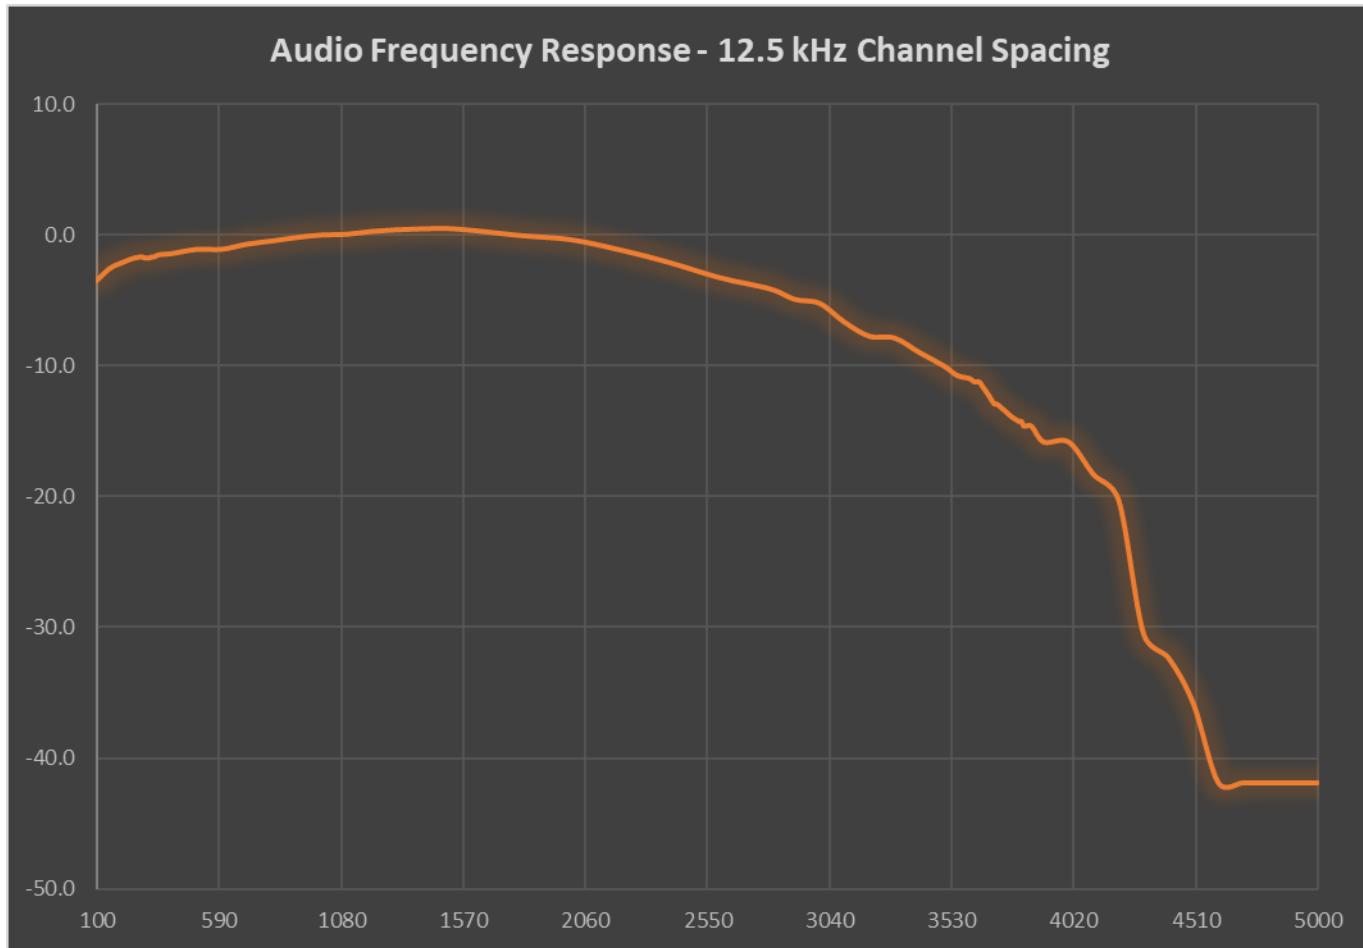


Audio frequency response at 421.1 MHz (12.5 kHz)

Test data, continued

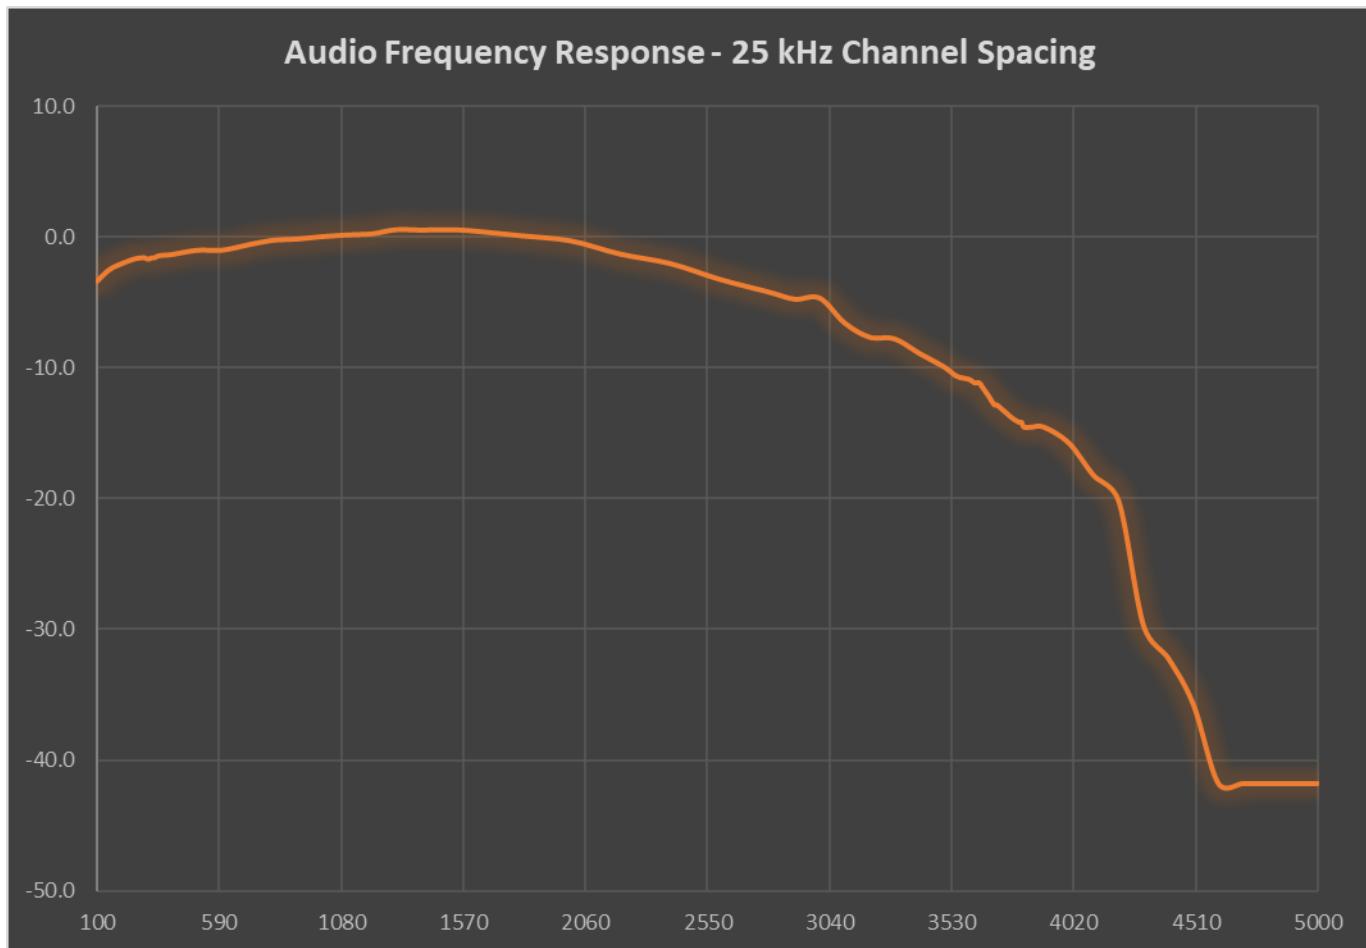


Audio frequency response at 421.1 MHz (25 kHz)

Test data, continued

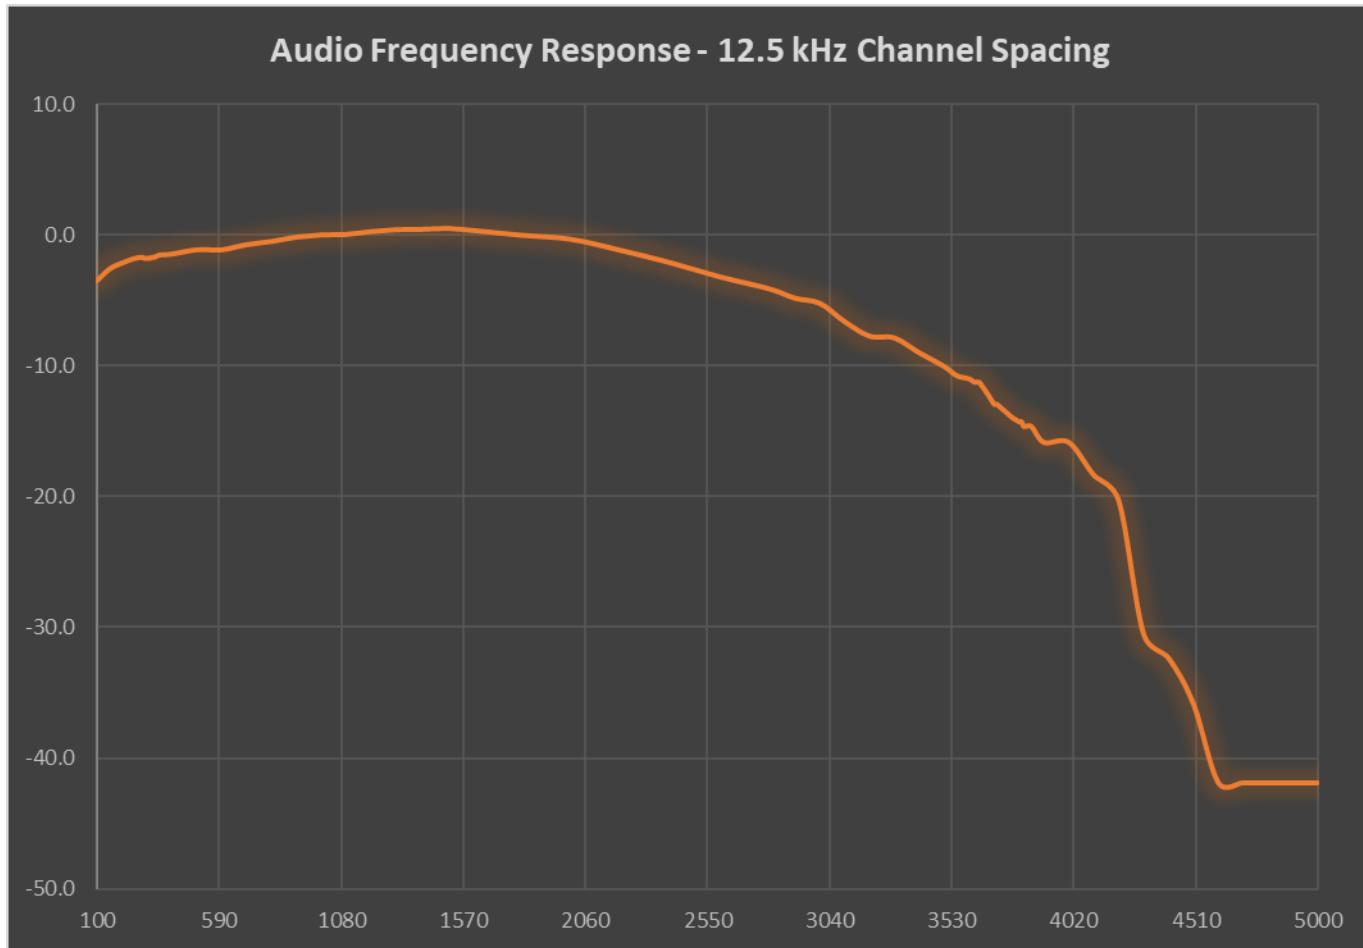

Audio frequency response at 460.0 MHz (12.5 kHz)

Test data, continued

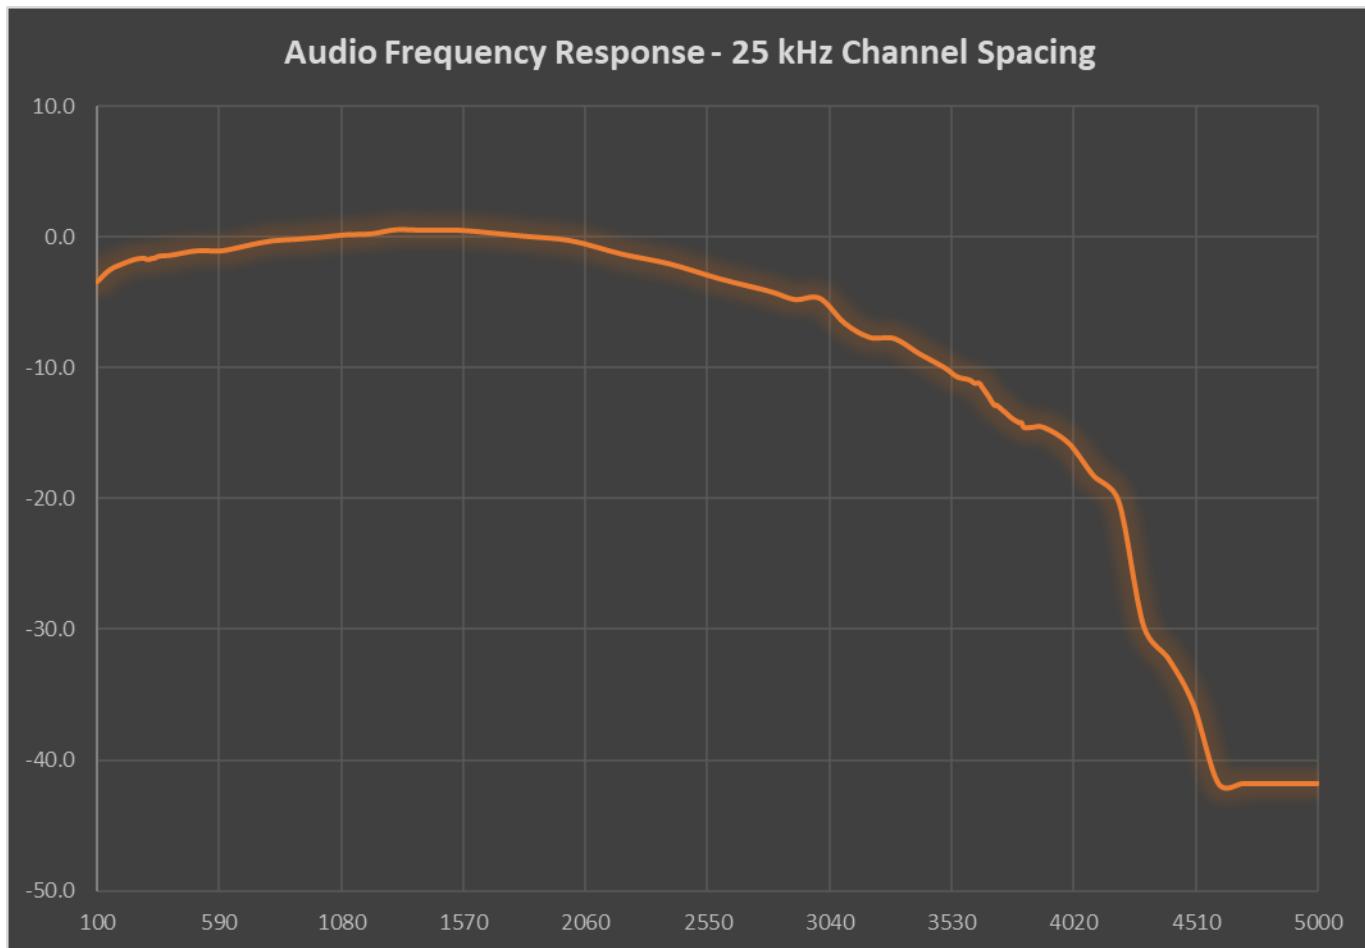

Audio frequency response at 460.0 MHz (25 kHz)

## 7.3 Transmitter Output Power

### 7.3.1 References, definitions and limits

#### FCC §22.565:

The transmitting power of base, mobile and fixed transmitters operating on the channels listed in § 22.561 must not exceed the limits in this section.

- (a) Maximum ERP. The effective radiated power (ERP) of base and fixed transmitters must not exceed the applicable limits in this paragraph under any circumstances.

*Table 7.3-1: Maximum ERP*

Frequency range (MHz)	Maximum ERP (watts)
152 – 153	1400
157 – 159	150
454 – 455	3500
459 – 460	150

- (b) Basic power limit. Except as provided in paragraph (d) of this section, the ERP of base transmitters must not exceed 500 Watts.
- (c) Height-power limits. Except as provided in paragraph (d) of this section, the ERP of base transmitters must not exceed the amount that would result in an average distance to the service contour of 41.6 kilometers (26 miles) for VHF channels or 30.7 kilometers (19 miles) for UHF channels. The average distance to the service contour is calculated by taking the arithmetic mean of the distances determined using the procedures specified in § 22.567 for the eight cardinal radial directions, excluding cardinal radial directions for which 90% or more of the distance so calculated is over water.
- (d) Encompassed interfering contour areas. Base transmitters are exempt from the basic power and height-power limits of this section if the area within their interfering contours is totally encompassed by the interfering contours of operating co-channel based transmitters controlled by the same licensee. For the purpose of this paragraph, operating transmitters are authorized transmitters that are providing service to subscribers.
- (e) Adjacent channel protection. The ERP of base and fixed transmitters must not exceed 500 Watts if they transmit on channel 454.025 MHz and are located less than 7 kilometers (4.3 miles) from any Private Radio Services station receiving on adjacent channel 454.0000 MHz.
- (f) Mobile transmitters. The transmitter output power of mobile transmitters must not exceed 60 watts.

#### FCC §90.205:

- (g) 421-430 MHz. Limitations on power and antenna heights are specified in § 90.279.
- (h) Power and antenna height limits within 450–470 MHz.
- (1) The maximum allowable station effective radiated power (ERP) is dependent upon the station's antenna HAAT and required service area and will be authorized in accordance with table below. Applicants requesting an ERP in excess of that listed in table below must submit an engineering analysis based upon generally accepted engineering practices and standards that includes coverage contours to demonstrate that the requested station parameters will not produce coverage in excess of that which the applicant requires.
- (2) Applications for stations where special circumstances exist that make it necessary to deviate from the ERP and antenna heights in Table below will be submitted to the frequency coordinator accompanied by a technical analysis, based upon generally accepted engineering practices and standards, that demonstrates that the requested station parameters will not produce a signal strength in excess of 39 dBu at any point along the edge of the requested service area. The coordinator may then recommend any ERP appropriate to meet this condition.
- (3) An applicant for a station with a service area radius greater than 32 km (20 mi) must justify the requested service area radius, which may be authorized only in accordance with table below, note 4. For base stations with service areas greater than 80 km, all operations 80 km or less from the base station will be on a primary basis and all operations outside of 80 km from the base station will be on a secondary basis and will be entitled to no protection from primary operations.

Table 7.3-2: Maximum ERP/Reference HAAT for a Specific Service Area Radius (FCC)

Service area radius (km):	3	8	13	16	24	32	40 <sup>4</sup>	48 <sup>4</sup>	64 <sup>4</sup>	80 <sup>4</sup>
Maximum ERP (w) <sup>1</sup> :	2	100	<sup>2</sup> 500							
Up to reference HAAT (m) <sup>3</sup> :	15	15	15	27	63	125	250	410	950	2700

Notes: <sup>1</sup>Maximum ERP indicated provides for a 39 dBu signal strength at the edge of the service area per FCC Report R-6602, Fig. 29 (See §73.699, Fig. 10 b).

<sup>2</sup>Maximum ERP of 500 watts allowed. Signal strength at the service area contour may be less than 39 dBu.

<sup>3</sup>When the actual antenna HAAT is greater than the reference HAAT, the allowable ERP will be reduced in accordance with the following equation:

$$ERP_{allow} = ERP_{max} \times (HAAT_{ref} / HAAT_{actual})^2.$$

<sup>4</sup>Applications for this service area radius may be granted upon specific request with justification and must include a technical demonstration that the signal strength at the edge of the service area does not exceed 39 dBu.

- (r) All other frequency bands. Requested transmitter power will be considered and authorized on a case by case basis.
- (s) The output power shall not exceed by more than 20 percent either the output power shown in the Radio Equipment List [available in accordance with § 90.203(a)(1)] for transmitters included in this list or when not so listed, the manufacturer's rated output power for the particular transmitter specifically listed on the authorization.

#### FCC §90.279:

Power limitations applicable to the 421–430 MHz band

- (a) Base station authorizations in the 421–430 MHz band will be subject to Effective Radiated Power (ERP) and Effective Antenna Height (EAH) limitations as shown in the table below. ERP is defined as the product of the power supplied to the antenna and its gain relative to a half-wave dipole in a given direction. EAH is calculated by subtracting the Assumed Average Terrain Elevation (AATE) as listed in table 7 of § 90.619 from the antenna height above mean sea level.

Table 7.3-3: Limits of Effective Radiated Power (ERP) Corresponding to Effective Antenna Heights (EAH) of Base Stations in the 421–430 MHz Band

Effective antenna height (EAH) in meters (feet)	Maximum effective radiated power (ERP) (watts)
0–152 (0–500)	250
Above 152–305 (above 500–1000)	150
Above 305–457 (above 1000–1500)	75
Above 457–610 (above 1500–2000)	40
Above 610–762 (above 2000–2500)	20
Above 762–914 (above 2500–3000)	15
Above 914–1219 (above 3000–4000)	10
Above 1219 (above 4000)	5

#### 7.3.2 Test summary

Verdict	Pass
Tested by	O. Frau

Test date

March 25, 2024

#### 7.3.3 Observations, settings and special notes

Manufacturer's rated output power is 50 W or 47 dBm. 20% of the output power is 47.8 dBm

Measurement of peak power was performed per ANSI C63.26 subclause 5.2.3.3. Spectrum analyser settings:

Resolution bandwidth	≥ OBW
Video bandwidth	≥ 3 × RBW
Frequency span	≥ 2 × OBW
Detector mode	Peak
Trace mode	Max Hold
Sweep time	≥ 10 × (number of points in sweep) × (transmission symbol period)

#### 7.3.4 Test equipment list

Equipment	Manufacturer	Model no.	Asset no.	Cal cycle	Next cal.
Spectrum Analyzer	Rohde & Schwarz	FSW43	101767	2024-01	2025-01
Shielded room	Siemens	10m control room	1947	NCR	NCR

Note: NCR - no calibration required, VOU - verify on use

#### 7.3.5 Test data

Table 7.3-4: **Transmitter power results**


Modulation	Frequency, MHz	Output power, dBm	Antenna gain, dB	Max ERP limit, dBm
FM 12.5 kHz	406.1	46.19	4.81	51
FM 20 kHz	406.1	46.20	4.80	51
FM 25.0 kHz	406.1	46.25	4.75	51
DMR 4FSK	406.1	46.26	4.74	51
P25 C4FM	406.1	46.25	4.75	51
FM 12.5 kHz	413.5	45.01	5.99	51
FM 20 kHz	413.5	45.02	5.98	51
FM 25.0 kHz	413.5	45.03	5.97	51
DMR 4FSK	413.5	44.99	6.01	51
P25 C4FM	413.5	45.03	5.97	51
FM 12.5 kHz	420.9	44.61	6.39	51
FM 20 kHz	420.9	44.66	6.34	51
FM 25.0 kHz	420.9	44.63	6.37	51
DMR 4FSK	420.9	44.63	6.37	51
P25 C4FM	420.9	44.65	6.35	51
FM 12.5 kHz	421.1	44.66	6.34	51
FM 20 kHz	421.1	44.64	6.36	51
FM 25.0 kHz	421.1	44.64	6.36	51
DMR 4FSK	421.1	44.64	6.36	51
P25 C4FM	421.1	44.68	6.32	51
FM 12.5 kHz	429.9	44.95	6.05	51
FM 20 kHz	429.9	44.96	6.04	51
FM 25.0 kHz	429.9	44.96	6.04	51
DMR 4FSK	429.9	44.96	6.04	51
P25 C4FM	429.9	44.91	6.09	51
FM 12.5 kHz	450.1	46.01	4.99	51
FM 20 kHz	450.1	46.02	4.98	51
FM 25.0 kHz	450.1	46.00	5.00	51
DMR 4FSK	450.1	46.09	4.91	51
P25 C4FM	450.1	46.04	4.96	51
FM 12.5 kHz	460.0	46.05	4.95	51
FM 20 kHz	460.0	46.05	4.95	51
FM 25.0 kHz	460.0	46.04	4.96	51
DMR 4FSK	460.0	46.05	4.95	51
P25 C4FM	460.0	45.97	5.03	51
FM 12.5 kHz	469.9	46.15	4.85	51
FM 20 kHz	469.9	46.14	4.86	51
FM 25.0 kHz	469.9	46.16	4.84	51
DMR 4FSK	469.9	46.15	4.85	51
P25 C4FM	469.9	46.15	4.85	51

Test data, continued

Table 7.3-5: **Rated vs measured power**

Modulation	Frequency, MHz	Rated output power, dBm	Measured output power, dBm	Difference, dB	Difference limit, dB	Margin, dB
FM 12.5 kHz	406.1	47	46.19	-0.81	+0.8	1.6
FM 25.0 kHz	406.1	47	46.25	-0.75	+0.8	1.6
DMR 4FSK	406.1	47	46.26	-0.74	+0.8	1.5
P25 C4FM	406.1	47	46.25	-0.75	+0.8	1.6
FM 12.5 kHz	413.5	47	45.01	-1.99	+0.8	2.8
FM 25.0 kHz	413.5	47	45.03	-1.97	+0.8	2.8
DMR 4FSK	413.5	47	44.99	-2.01	+0.8	2.8
P25 C4FM	413.5	47	45.03	-1.97	+0.8	2.8
FM 12.5 kHz	420.9	47	44.61	-2.39	+0.8	3.2
FM 25.0 kHz	420.9	47	44.63	-2.37	+0.8	3.2
DMR 4FSK	420.9	47	44.63	-2.37	+0.8	3.2
P25 C4FM	420.9	47	44.65	-2.35	+0.8	3.2
FM 12.5 kHz	421.1	47	44.66	-2.34	+0.8	3.1
FM 25.0 kHz	421.1	47	44.64	-2.36	+0.8	3.2
DMR 4FSK	421.1	47	44.64	-2.36	+0.8	3.2
P25 C4FM	421.1	47	44.68	-2.32	+0.8	3.1
FM 12.5 kHz	429.9	47	44.95	-2.05	+0.8	2.9
FM 25.0 kHz	429.9	47	44.96	-2.04	+0.8	2.8
DMR 4FSK	429.9	47	44.96	-2.04	+0.8	2.8
P25 C4FM	429.9	47	44.91	-2.09	+0.8	2.9
FM 12.5 kHz	450.1	47	46.01	-0.99	+0.8	1.8
FM 25.0 kHz	450.1	47	46.00	-1.00	+0.8	1.8
DMR 4FSK	450.1	47	46.09	-0.91	+0.8	1.7
P25 C4FM	450.1	47	46.04	-0.96	+0.8	1.8
FM 12.5 kHz	460.0	47	46.05	-0.95	+0.8	1.8
FM 25.0 kHz	460.0	47	46.04	-0.96	+0.8	1.8
DMR 4FSK	460.0	47	46.05	-0.95	+0.8	1.8
P25 C4FM	460.0	47	45.97	-1.03	+0.8	1.8
FM 12.5 kHz	469.9	47	46.15	-0.85	+0.8	1.7
FM 25.0 kHz	469.9	47	46.16	-0.84	+0.8	1.6
DMR 4FSK	469.9	47	46.15	-0.85	+0.8	1.7
P25 C4FM	469.9	47	46.15	-0.85	+0.8	1.7

## Test data, continued

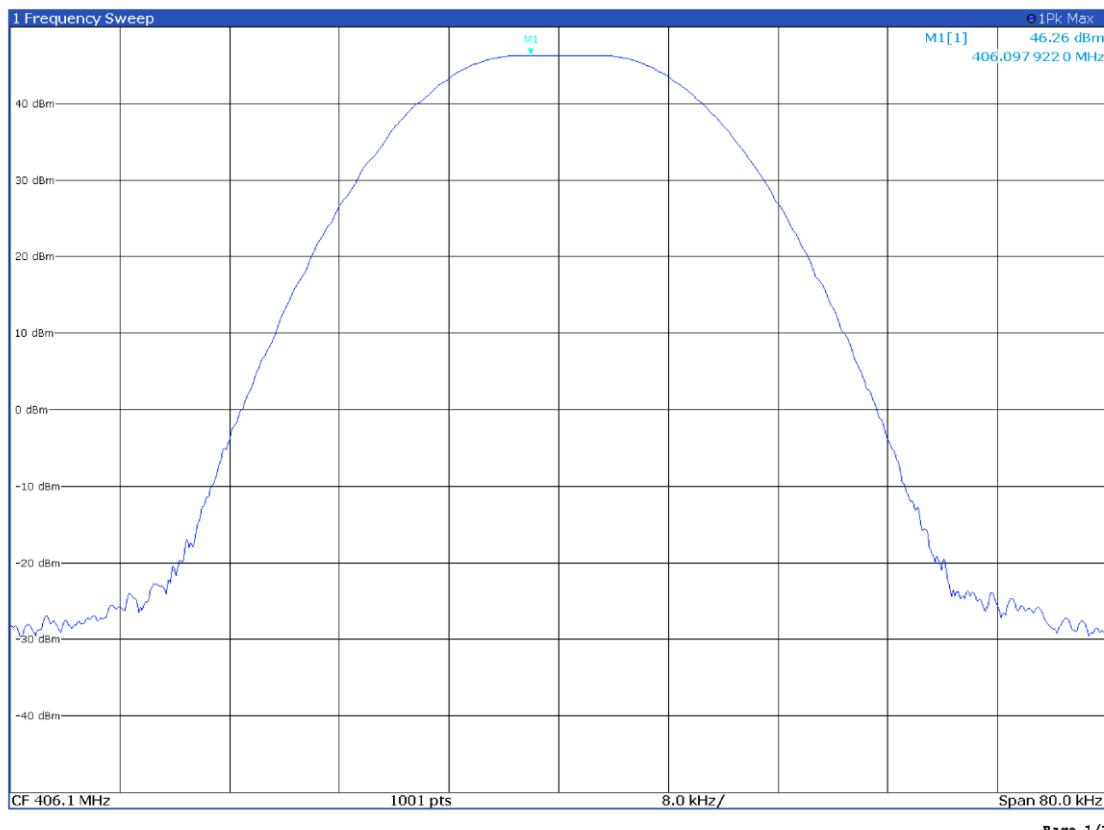

Example of output power (modulation DMR 4FSK @ 406.1 MHz)

## 7.4 Bandwidth limitations

### 7.4.1 References, definitions and limits

#### FCC §22.561:

The following channels are allocated for paired assignment to transmitters that provide (or support other transmitters that provide) one-way or two-way public land mobile service, either individually or collectively under a paging geographic area authorization. The paging geographic areas used for these channels are the EAs (see § 22.503(b)(3)). These channels may be assigned for use by mobile or base transmitters as indicated, and or by fixed transmitters (including control, repeater or other fixed transmitters). The mobile channels may also be assigned for use by base or fixed transmitters under certain circumstances (see § 22.567(h)). Unless otherwise indicated, all channels have a bandwidth of 20 kHz and are designated by their center frequencies in MegaHertz.

Table 7.4-1: UHF Channels

Base, MHz	Mobile, MHz	Base, MHz	Mobile, MHz
454.025	459.025	454.350	459.350
454.050	459.050	454.375	459.375
454.075	459.075	454.400	459.400
454.100	459.100	454.425	459.425
454.125	459.125	454.450	459.450
454.150	459.150	454.475	459.475
454.175	459.175	454.500	459.500
454.200	459.200	454.525	459.525
454.225	459.225	454.550	459.550
454.250	459.250	454.575	459.575
454.275	459.275	454.600	459.600
454.300	459.300	454.625	459.625
454.325	459.325	454.650	459.650

#### FCC §90.209:

- (b) The maximum authorized single channel bandwidth of emission corresponding to the type of emission specified in §90.207 is as follows:
- (5) Unless specified elsewhere, channel spacings and bandwidths that will be authorized in the following frequency bands are given in the following table.

Table 7.4-2: Standard Channel Spacing/Bandwidth

Frequency band, MHz	Channel spacing, kHz	Authorized bandwidth <sup>1</sup> , kHz
406-421	6.25	20 / 11.25 / 6
421-430	6.25	20 / 11.25 / 6
450-470	6.25	20 / 11.25 / 6

Note: <sup>1</sup>Operations using equipment designed to operate with a 25 kHz channel bandwidth will be authorized a 20 kHz bandwidth. Operations using equipment designed to operate with a 12.5 kHz channel bandwidth will be authorized a 11.25 kHz bandwidth. Operations using equipment designed to operate with a 6.25 kHz channel bandwidth will be authorized a 6 kHz bandwidth. All stations must operate on channels with a bandwidth of 12.5 kHz or less beginning January 1, 2013

- (6)(i) Beginning January 1, 2011, no new applications for the 421–512 MHz bands will be acceptable for filing if the applicant utilizes channels with an authorized bandwidth exceeding 11.25 kHz, unless specified elsewhere or the operations meet the efficiency standards of §90.203(j)(3).

#### 7.4.2 Test summary

Verdict	Pass
Tested by	O. Frau
	Test date
	March 28, 2024

#### 7.4.3 Observations, settings and special notes

The test was performed as per ANSI C63.26, subclause 5.4.4.

Spectrum analyser settings:

Resolution bandwidth	1–5% of OBW
Video bandwidth	$\geq 3 \times$ RBW
Frequency span	1.5 $\times$ OBW
Detector mode	Peak
Trace mode	Max Hold

#### 7.4.4 Test equipment list

Equipment	Manufacturer	Model no.	Asset no.	Cal cycle	Next cal.
Spectrum Analyzer	Rohde & Schwarz	FSW43	101767	2023-09	2024-09
Shielded room	Siemens	10m control room	1947	NCR	NCR
Cable set	Rosenberger	ST.ALO-02	1.650	2023-10	2024-10


Note: NCR - no calibration required, VOU - verify on use

#### 7.4.5 Test data

Table 7.4-3: 99% occupied bandwidth results


Modulation	Frequency, MHz	99% occupied bandwidth, kHz	Limit, kHz	Margin, kHz
FM 12.5 kHz	413.5	4.17	11.25	-7.08
FM 25.0 kHz	413.5	8.09	20.00	-11.91
DMR 4FSK	413.5	7.61	11.25	-2.35
P25 C4FM	413.5	6.39	11.25	-4.86
FM 12.5 kHz	421.1	4.19	11.25	-7.06
FM 25.0 kHz	421.1	8.10	20.00	-11.90
DMR 4FSK	421.1	7.77	11.25	-1.80
P25 C4FM	421.1	6.46	11.25	-4.79
FM 12.5 kHz	460.0	4.17	11.25	-7.08
FM 25.0 kHz	460.0	8.08	20.00	-11.92
DMR 4FSK	460.0	7.60	11.25	-3.65
P25 C4FM	460.0	6.34	11.25	-4.91

## Test data, continued

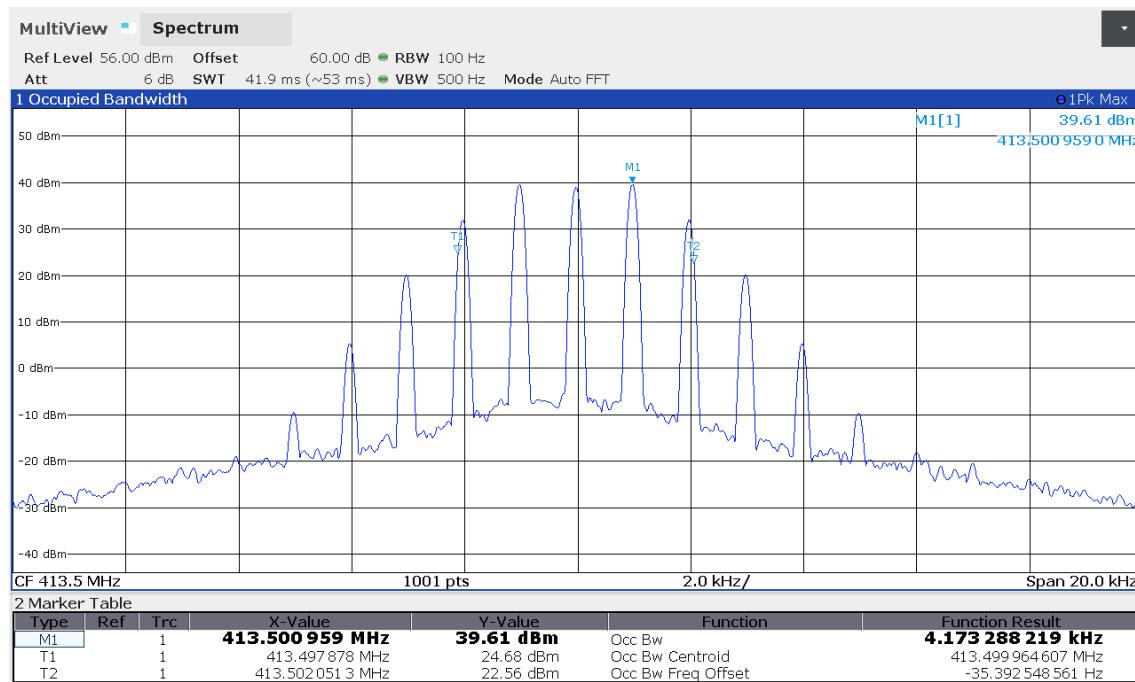

99% occupied bandwidth with modulation FM 12.5 kHz at 413.5 MHz

Test data, continued

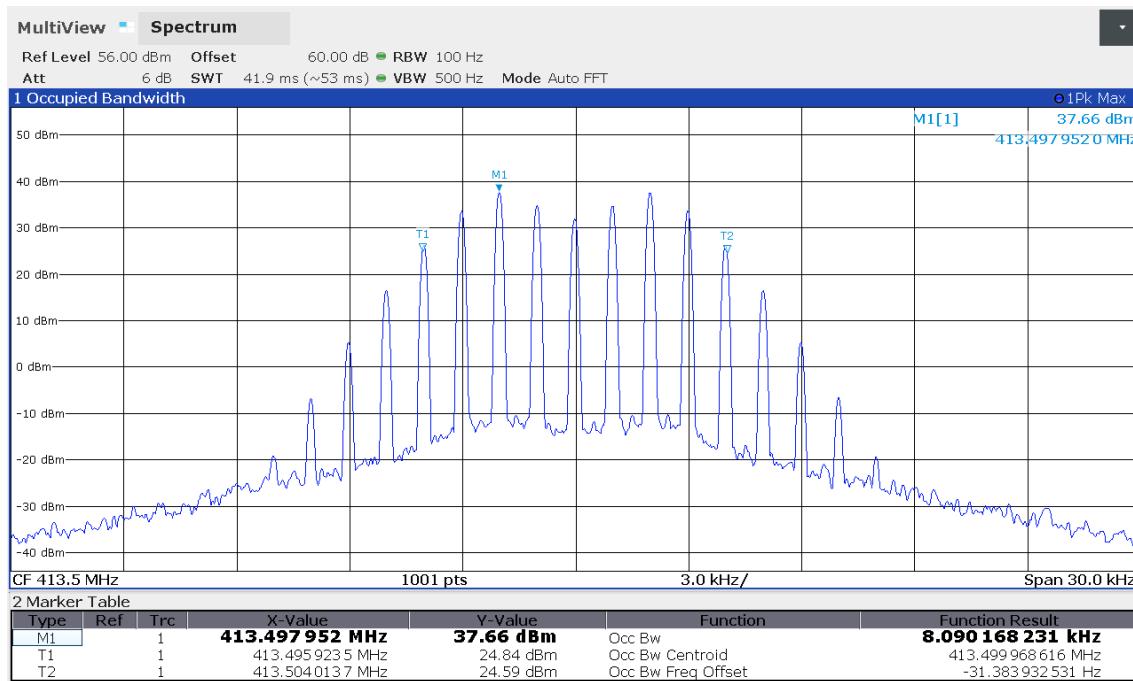


## Test data, continued




99% occupied bandwidth with modulation DMR 4FSK at 413.5 MHz


## Test data, continued

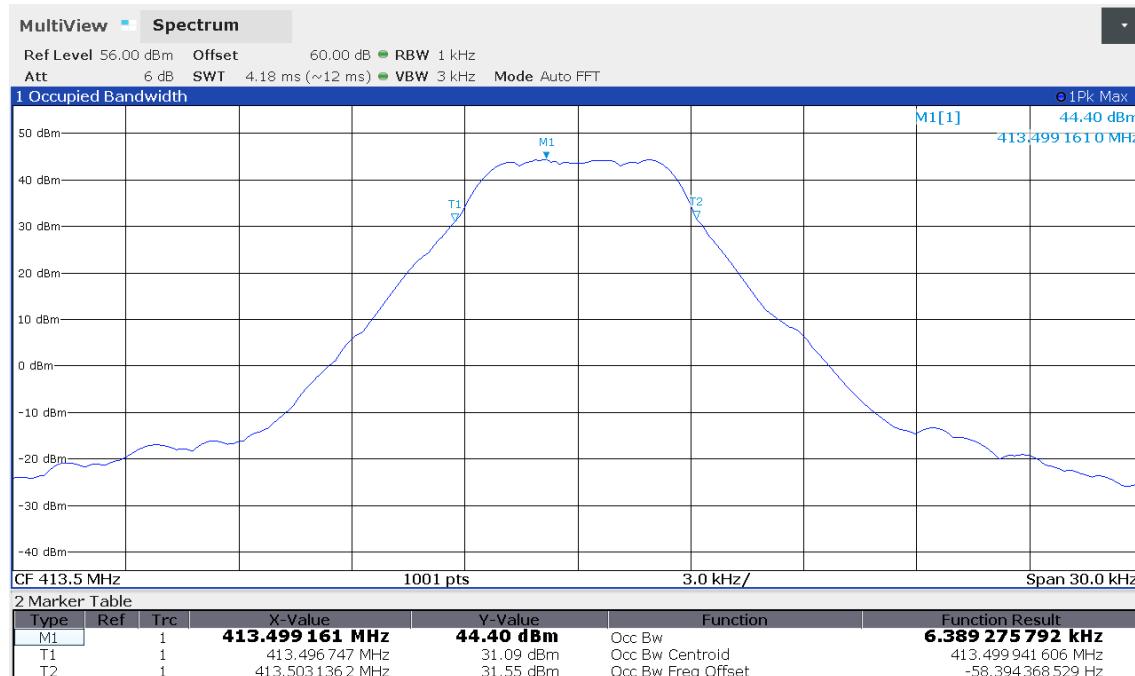

Test data, continued

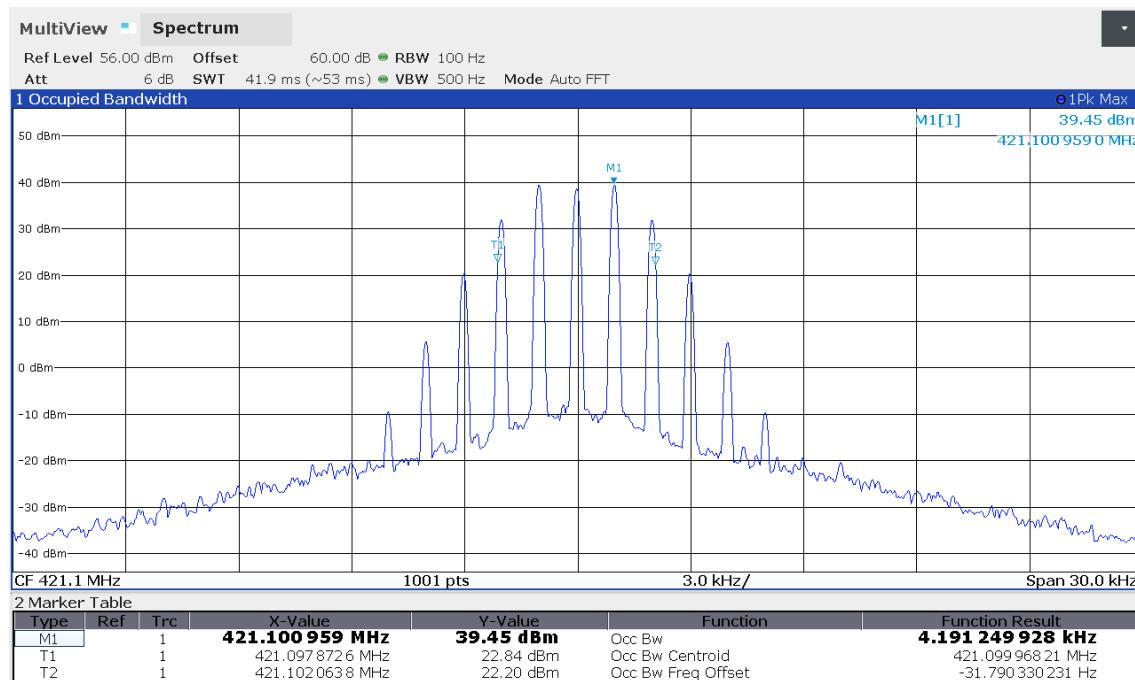


Test data, continued

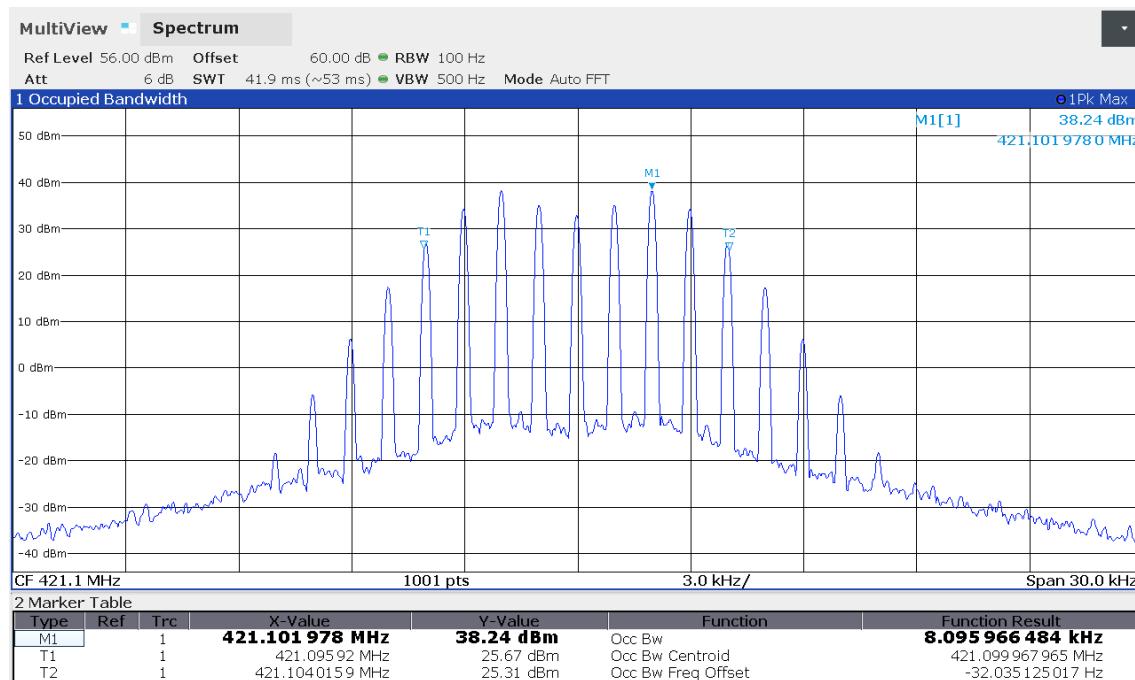


99% occupied bandwidth with modulation FM 25 kHz at 421.1 MHz

## Test data, continued

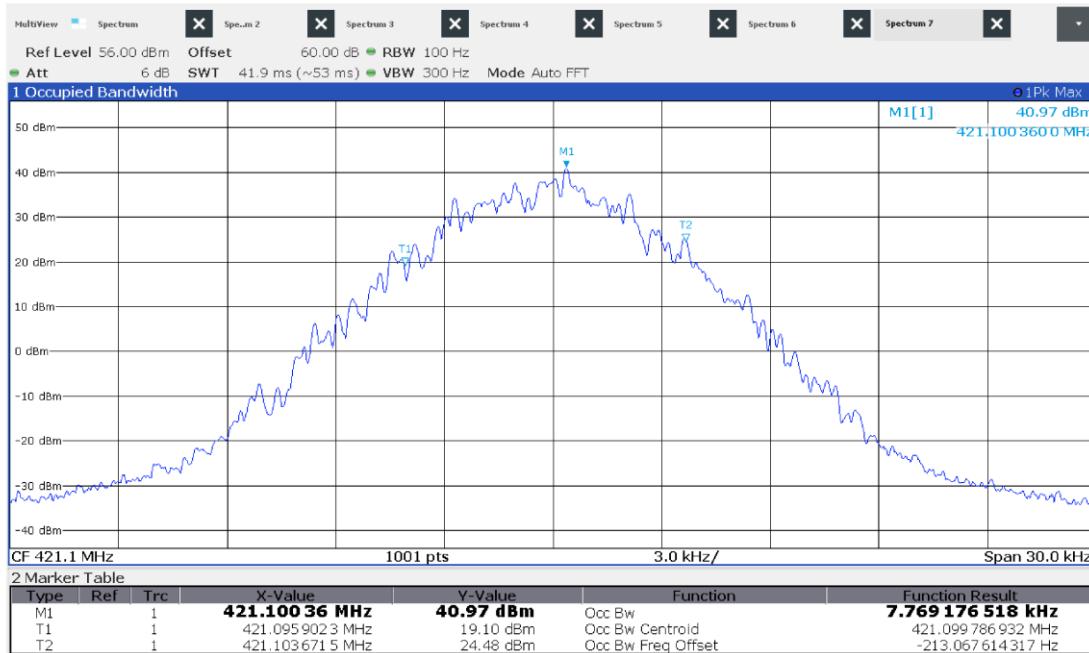


99% occupied bandwidth with modulation DMR 4FSK at 421.1 MHz

## Test data, continued

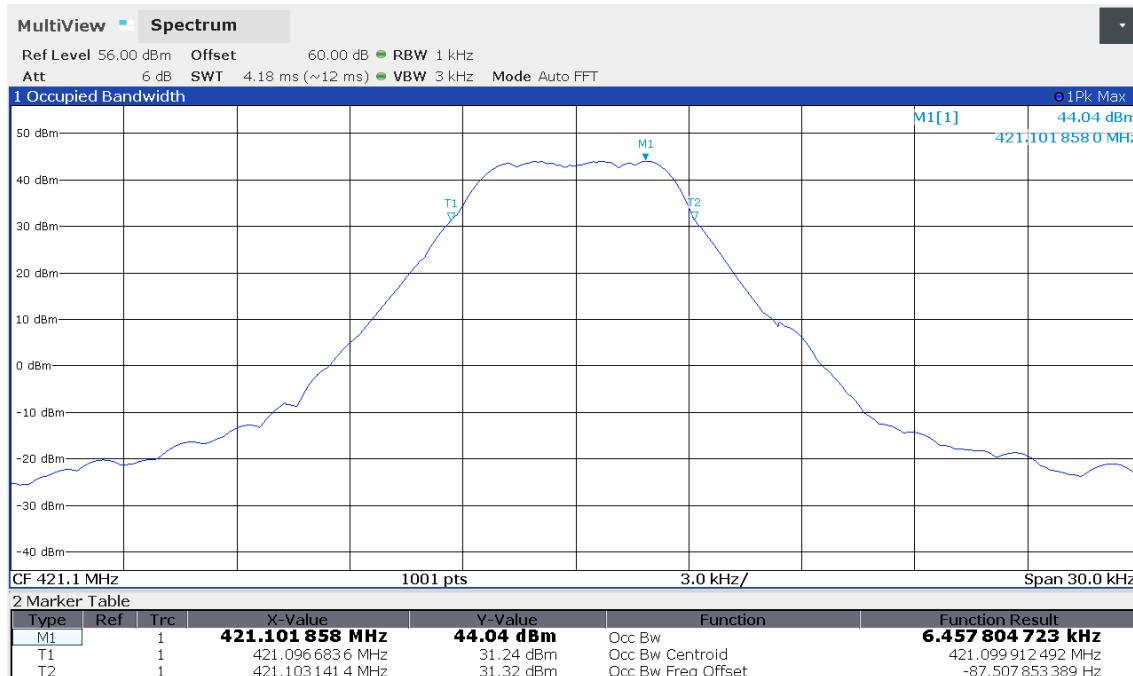


99% occupied bandwidth with modulation P25 C4FM at 421.1 MHz

Test data, continued

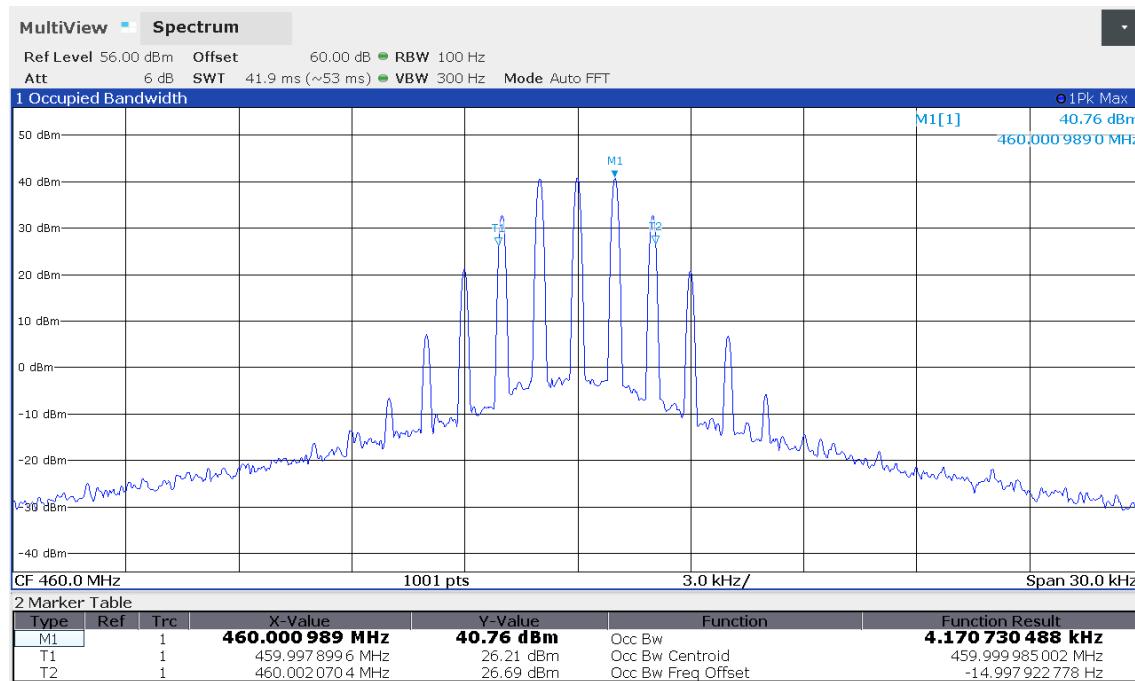


## Test data, continued

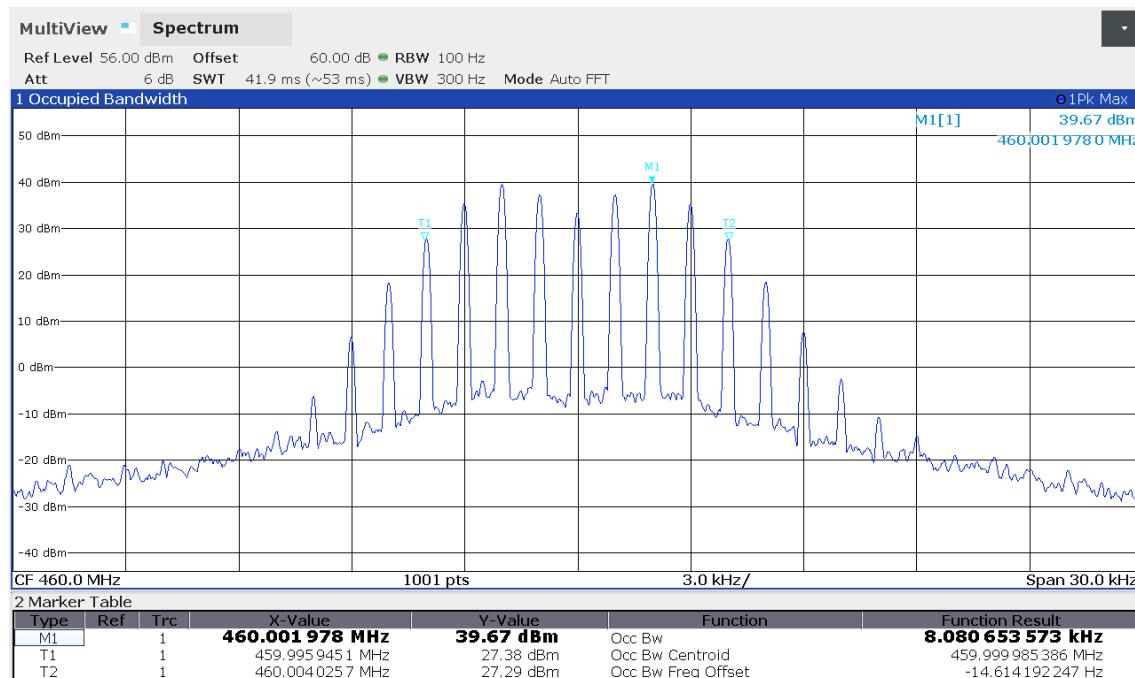

99% occupied bandwidth with modulation FM 25 kHz at 460 MHz

## Test data, continued

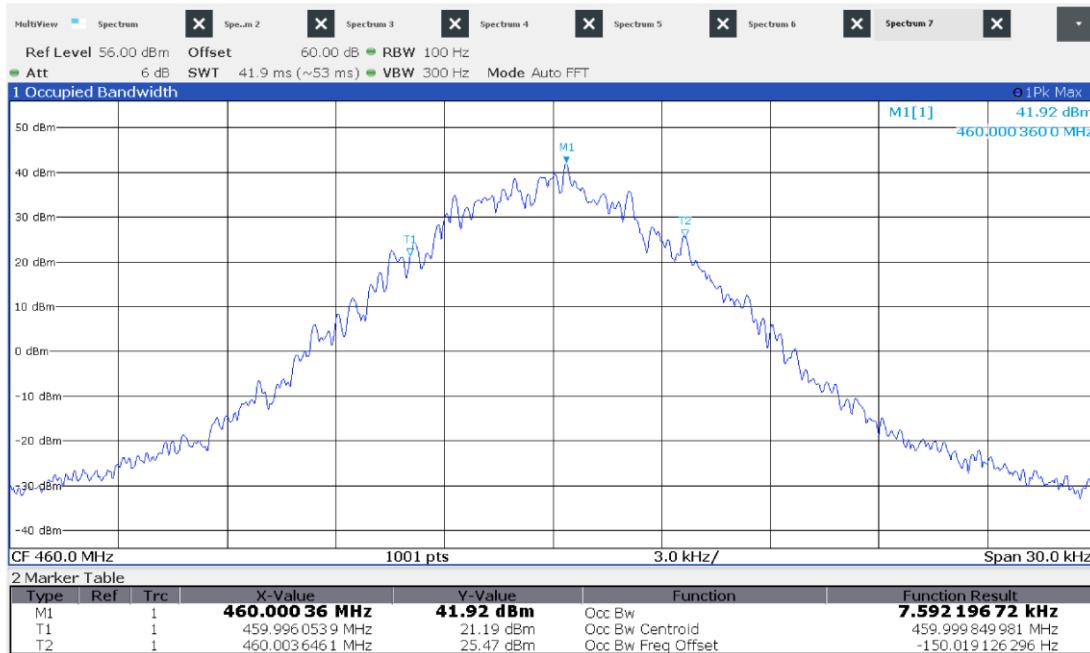

99% occupied bandwidth with modulation DMR 4FSK at 460 MHz

## Test data, continued



99% occupied bandwidth with modulation P25 C4FM at 460 MHz

## 7.5 Spectrum mask and spurious emissions

### 7.5.1 References, definitions and limits

#### FCC §22.359:

- The rules in this section govern the spectral characteristics of emissions in the Public Mobile Services, except for the Air-Ground Radiotelephone Service (see § 22.861, instead) and the Cellular Radiotelephone Service (see § 22.917, instead).
- (a) Out of band emissions. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log (P)$  dB.
  - (b) Measurement procedure. Compliance with these rules is based on the use of measurement instrumentation employing a resolution bandwidth of 30 kHz or more. In the 60 kHz bands immediately outside and adjacent to the authorized frequency range or channel, a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (i.e., 30 kHz or 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.
  - (c) Alternative out of band emission limit. Licensees in the Public Mobile Services may establish an alternative out of band emission limit to be used at specified frequencies (band edges) in specified geographical areas, in lieu of that set forth in this section, pursuant to a private contractual arrangement of all affected licensees and applicants. In this event, each party to such contract shall maintain a copy of the contract in their station files and disclose it to prospective assignees or transferees and, upon request, to the FCC.
  - (d) Interference caused by out of band emissions. If any emission from a transmitter operating in any of the Public Mobile Services results in interference to users of another radio service, the FCC may require a greater attenuation of that emission than specified in this section.

#### FCC §90.210:

Except as indicated elsewhere in this part, transmitters used in the radio services governed by this part must comply with the emission masks outlined in this section. Unless otherwise stated, per paragraphs (d)(4), (e)(4), and (o) of this section, measurements of emission power can be expressed in either peak or average values provided that emission powers are expressed with the same parameters used to specify the unmodulated transmitter carrier power. For transmitters that do not produce a full power unmodulated carrier, reference to the unmodulated transmitter carrier power refers to the total power contained in the channel bandwidth. Unless indicated elsewhere in this part, the table in this section specifies the emission masks for equipment operating under this part.

Table 7.5-1: Applicable Emission Masks

Frequency band, MHz	Mask for equipment with audio low pass filter	Mask for equipment with audio low pass filter
421–512 <sup>1,2</sup>	B, D, or E	C, D, or E
All other bands	B	C

Notes:

- <sup>1</sup>Equipment designed to operate with a 25 kHz channel bandwidth must meet the requirements of Emission Mask B or C, as applicable. Equipment designed to operate with a 12.5 kHz channel bandwidth must meet the requirements of Emission Mask D, and equipment designed to operate with a 6.25 kHz channel bandwidth must meet the requirements of Emission Mask E.
- <sup>2</sup>Equipment designed to operate on 25 kilohertz bandwidth channels must meet the requirements of either Emission Mask B or G, whichever is applicable, while equipment designed to operate on 12.5 kilohertz bandwidth channels must meet the requirements of Emission Mask D. Equipment designed to operate on 25 kilohertz bandwidth channels may alternatively meet the Adjacent Channel Power limits of §90.221.

- (b) **Emission Mask B.** For transmitters that are equipped with an audio low-pass filter, the power of any emission must be attenuated below the unmodulated carrier power (P) as follows:
  - (1) On any frequency removed from the assigned frequency by more than 50 percent, but not more than 100 percent of the authorized bandwidth: At least 25 dB.
  - (2) On any frequency removed from the assigned frequency by more than 100 percent, but not more than 250 percent of the authorized bandwidth: At least 35 dB.
  - (3) On any frequency removed from the assigned frequency by more than 250 percent of the authorized bandwidth: At least  $43 + 10 \log (P)$  dB.

- (c) **Emission Mask C.** For transmitters that are not equipped with an audio low-pass filter, the power of any emission must be attenuated below the unmodulated carrier output power (P) as follows:
- (1) On any frequency removed from the center of the authorized bandwidth by a displacement frequency ( $f_d$  in kHz) of more than 5 kHz, but not more than 10 kHz: At least  $83 \log (f_d/5)$  dB;
  - (2) On any frequency removed from the center of the authorized bandwidth by a displacement frequency ( $f_d$  in kHz) of more than 10 kHz, but not more than 250 percent of the authorized bandwidth: At least  $29 \log (f_d^2/11)$  dB or 50 dB, whichever is the lesser attenuation;
  - (3) On any frequency removed from the center of the authorized bandwidth by more than 250 percent of the authorized bandwidth: At least  $43 + 10 \log (P)$  dB.
- (d) **Emission Mask D—12.5 kHz channel bandwidth equipment.** For transmitters designed to operate with a 12.5 kHz channel bandwidth, any emission must be attenuated below the power (P) of the highest emission contained within the authorized bandwidth as follows:
- (1) On any frequency from the center of the authorized bandwidth  $f_0$  to 5.625 kHz removed from  $f_0$ : Zero dB.
  - (2) On any frequency removed from the center of the authorized bandwidth by a displacement frequency ( $f_d$  in kHz) of more than 5.625 kHz but no more than 12.5 kHz: At least  $7.27(f_d-2.88 \text{ kHz})$  dB.
  - (3) On any frequency removed from the center of the authorized bandwidth by a displacement frequency ( $f_d$  in kHz) of more than 12.5 kHz: At least  $50 + 10 \log (P)$  dB or 70 dB, whichever is the lesser attenuation.
  - (4) The reference level for showing compliance with the emission mask shall be established using a resolution bandwidth sufficiently wide (usually two or three times the channel bandwidth) to capture the true peak emission of the equipment under test. In order to show compliance with the emission mask up to and including 50 kHz removed from the edge of the authorized bandwidth, adjust the resolution bandwidth to 100 Hz with the measuring instrument in a peak hold mode. A sufficient number of sweeps must be measured to insure that the emission profile is developed. If video filtering is used, its bandwidth must not be less than the instrument resolution bandwidth. For emissions beyond 50 kHz from the edge of the authorized bandwidth, see paragraph (o) of this section. If it can be shown that use of the above instrumentation settings do not accurately represent the true interference potential of the equipment under test, an alternate procedure may be used provided prior Commission approval is obtained.
- (e) **Emission Mask E—6.25 kHz or less channel bandwidth equipment.** For transmitters designed to operate with a 6.25 kHz or less bandwidth, any emission must be attenuated below the power (P) of the highest emission contained within the authorized bandwidth as follows:
- (1) On any frequency from the center of the authorized bandwidth  $f_0$  to 3.0 kHz removed from  $f_0$ : Zero dB.
  - (2) On any frequency removed from the center of the authorized bandwidth by a displacement frequency ( $f_d$  in kHz) of more than 3.0 kHz but no more than 4.6 kHz: At least  $30 + 16.67(f_d-3 \text{ kHz})$  or  $55 + 10 \log (P)$  or 65 dB, whichever is the lesser attenuation.
  - (3) On any frequency removed from the center of the authorized bandwidth by more than 4.6 kHz: At least  $55 + 10 \log (P)$  or 65 dB, whichever is the lesser attenuation.
  - (4) The reference level for showing compliance with the emission mask shall be established using a resolution bandwidth sufficiently wide (usually two or three times the channel bandwidth) to capture the true peak emission of the equipment under test. In order to show compliance with the emission mask up to and including 50 kHz removed from the edge of the authorized bandwidth, adjust the resolution bandwidth to 100 Hz with the measuring instrument in a peak hold mode. A sufficient number of sweeps must be measured to insure that the emission profile is developed. If video filtering is used, its bandwidth must not be less than the instrument resolution bandwidth. For emissions beyond 50 kHz from the edge of the authorized bandwidth, see paragraph (o) of this section. If it can be shown that use of the above instrumentation settings do not accurately represent the true interference potential of the equipment under test, an alternate procedure may be used provided prior Commission approval is obtained.

### 7.5.2 Test summary

Verdict	Pass		
Tested by	O. Frau	Test date	From March 28, 2024 to April 30, 2024

### 7.5.3 Observations, settings and special notes

Spectrum analyser settings for spectrum mask:

Resolution bandwidth:	100 Hz / 300 Hz
Video bandwidth:	> RBW
Detector mode:	Peak
Trace mode:	Max Hold

Spectrum analyser settings for spurious emissions:


Resolution bandwidth:	100 kHz (below 1 GHz); 1 MHz (above 1 GHz)
Video bandwidth:	> RBW
Detector mode:	Peak
Trace mode:	Max Hold

### 7.5.4 Test equipment list

Equipment	Manufacturer	Model no.	Asset no.	Cal cycle	Next cal.
EMI Receiver	Rohde & Schwarz	ESW44	101620	2023-09	2024-09
Spectrum Analyzer	Rohde & Schwarz	FSW43	101767	2023-09	2024-09
Trilog Broadband Antenna	Schwarzbeck	VULB 9162	9162-025	2021-07	2024-07
Antenna 1 - 18 GHz	Schwarzbeck Mess-Elektronik	STLP9148	STLP 9148-152	2021-09	2024-09
Broadband Amplifier	Schwarzbeck Mess-Elektronik	BBV9718C	00121	2024-03	2025-03
Controller	Maturo	FCU3.0	10041	NCR	NCR
Tilt antenna mast	Maturo	TAM4.0-E	10042	NCR	NCR
Turntable	Maturo	TT4.0-5T	2.527	NCR	NCR
Semi-anechoic chamber	Nemko	10m semi-anechoic chamber	530	2023-09	2025-09
Shielded room	Siemens	10m control room	1947	NCR	NCR
3m Semi anechoic chamber	Comtest	SAC-3	1711-150	2022-09	2024-09
Software turntable and mast	Maturo	mcApp	8.1.0.5410	NCR	NCR
Cable set	Rosenberger and Huber + Suhner	RE01+RE02	1.654+1.655	2023-09	2024-09


Note: NCR - no calibration required, VOU - verify on use

## 7.5.5 Test data

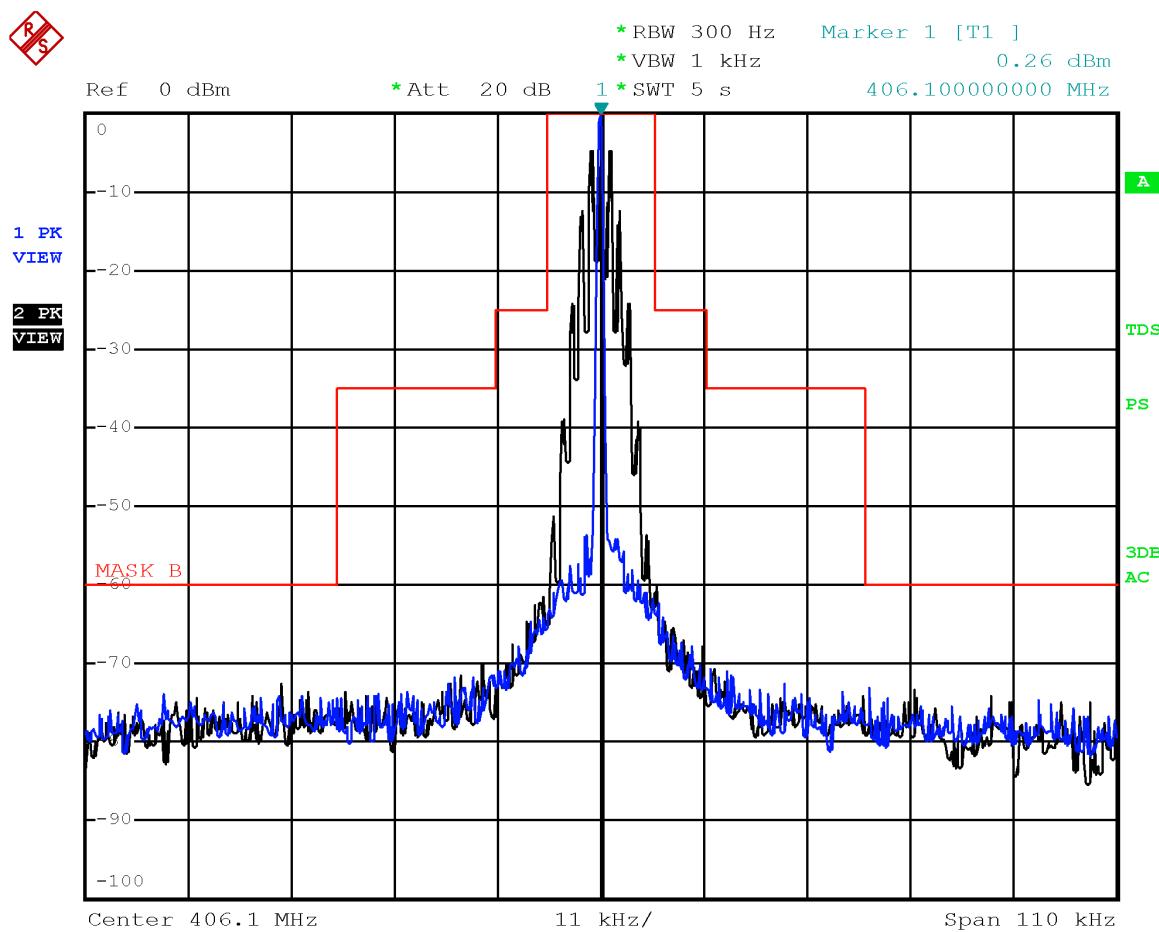


Emission mask B with modulation FM 12.5 kHz at 406.1 MHz

## Test data, continued

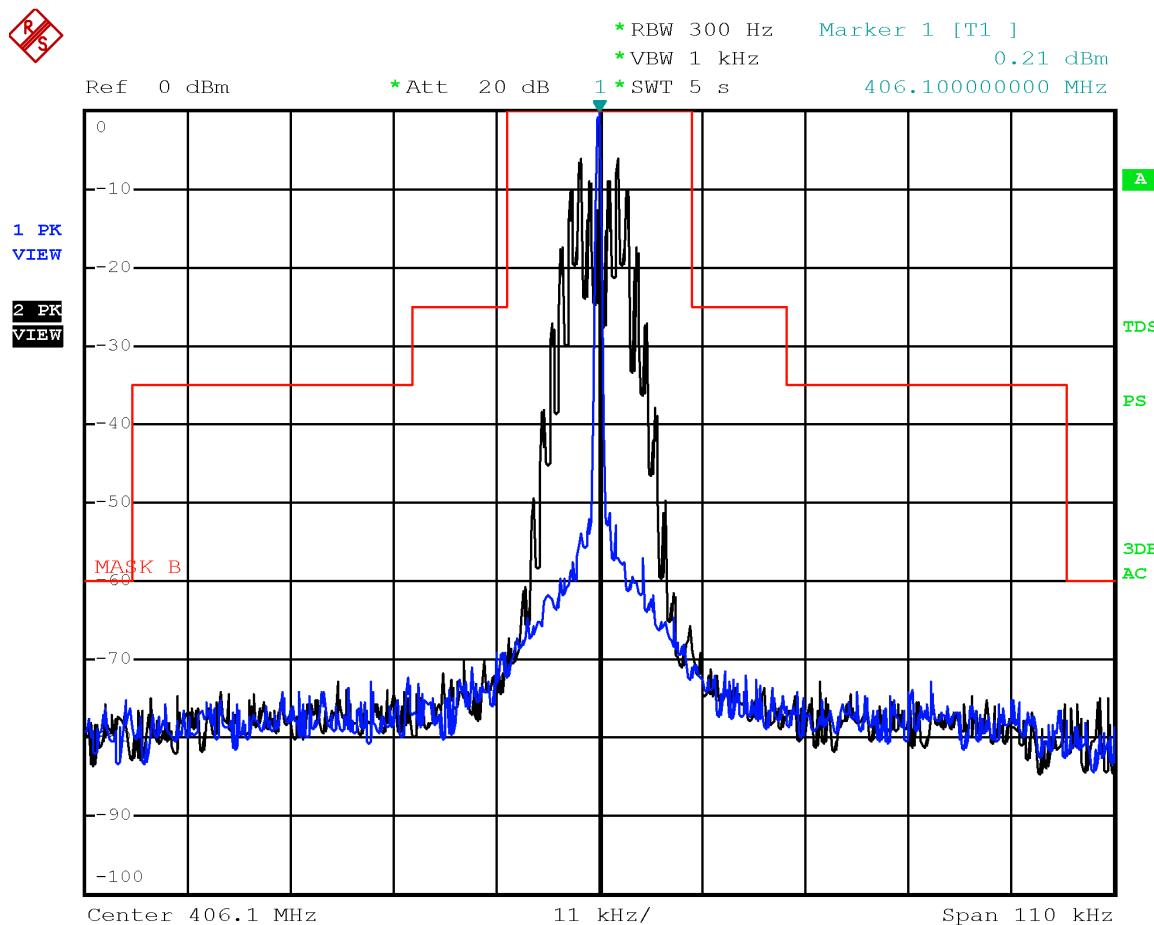


Emission mask B with modulation FM 25.0 kHz at 406.1 MHz

## Test data, continued

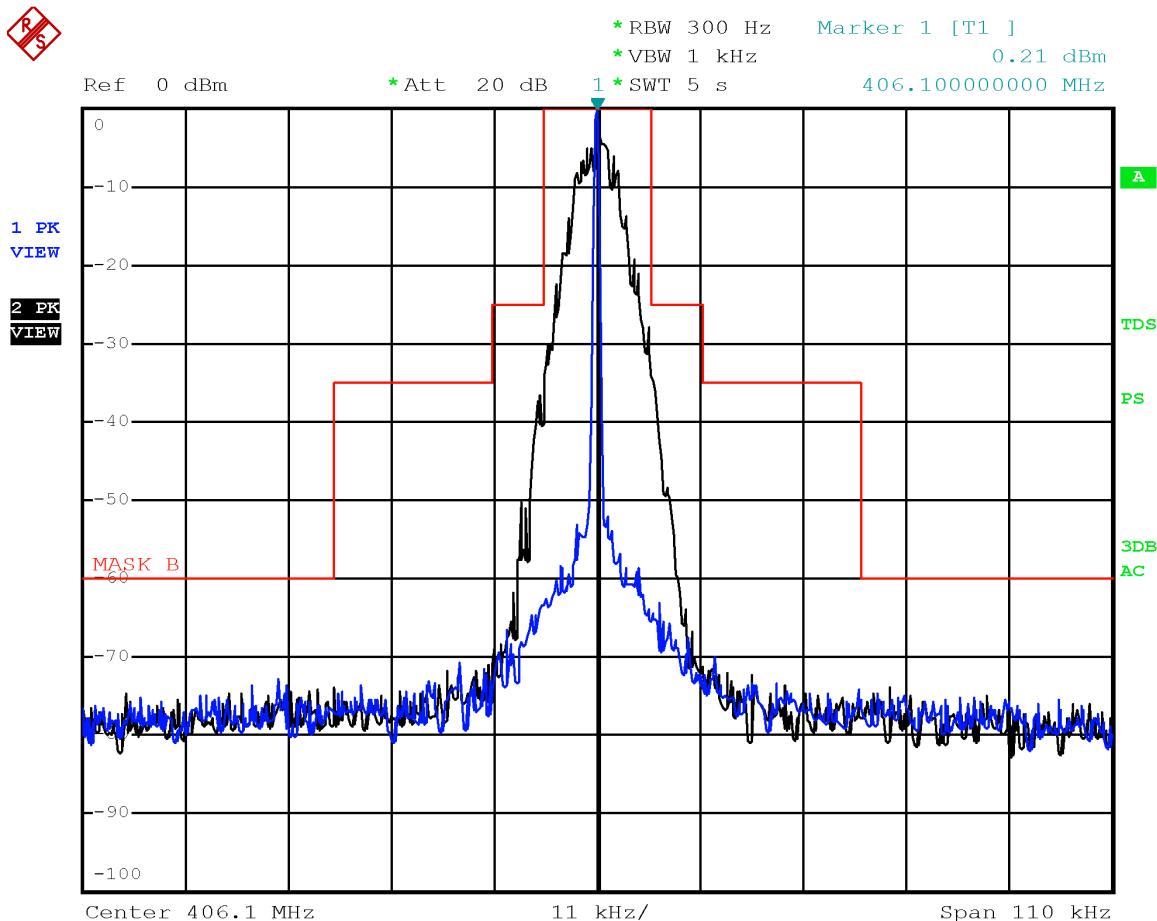


Emission mask B with modulation DMR 4FSK at 406.1 MHz

## Test data, continued

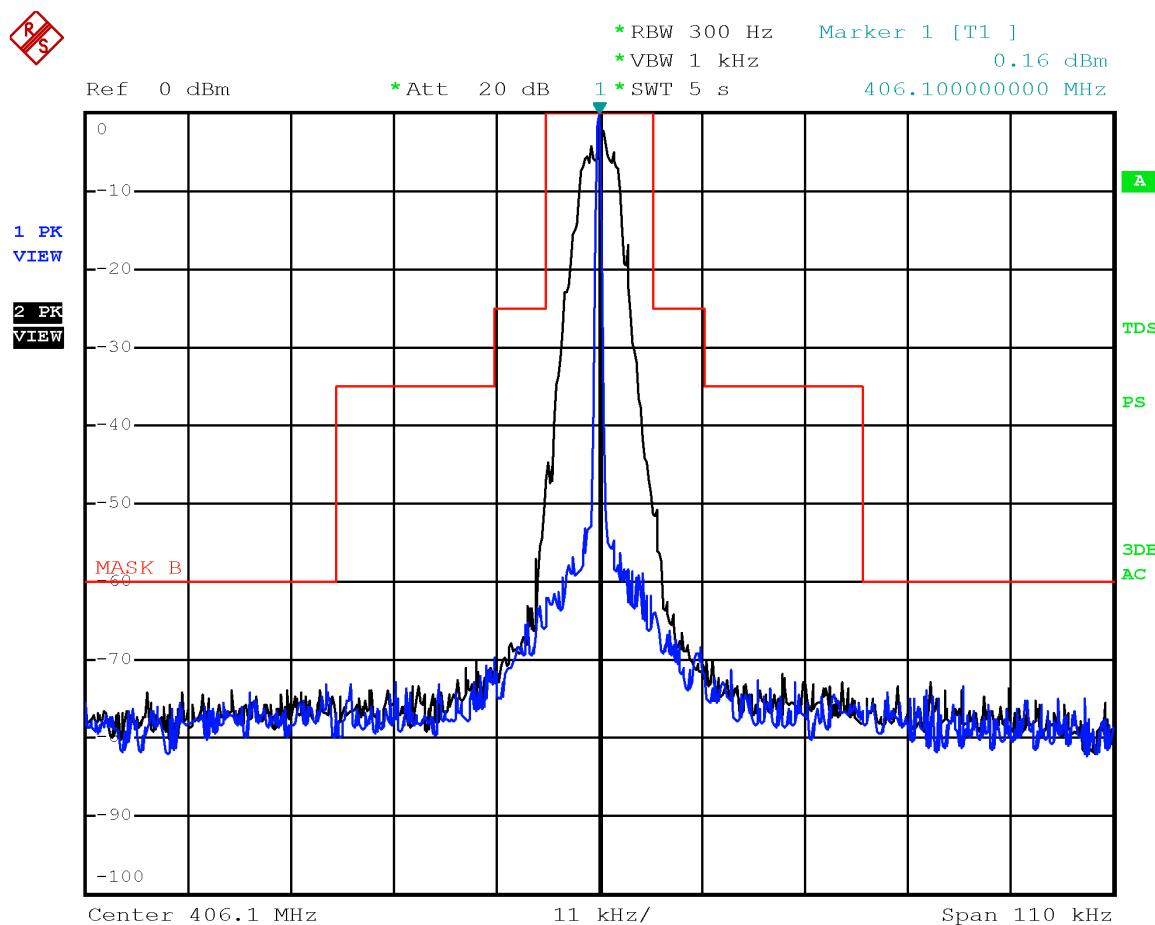


Emission mask D with modulation P25 C4FM at 406.1 MHz

## Test data, continued

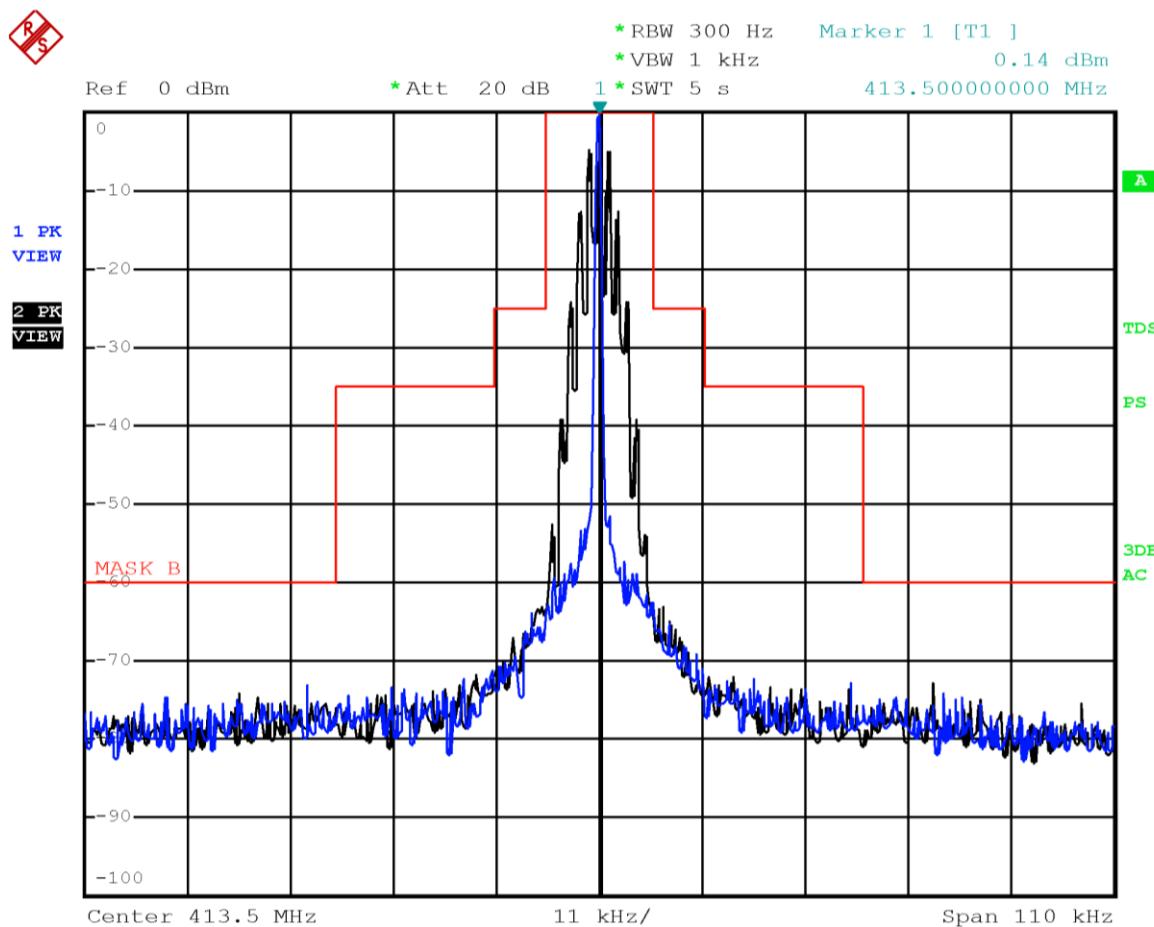


Emission mask B with modulation FM 12.5 kHz at 413.5 MHz

## Test data, continued

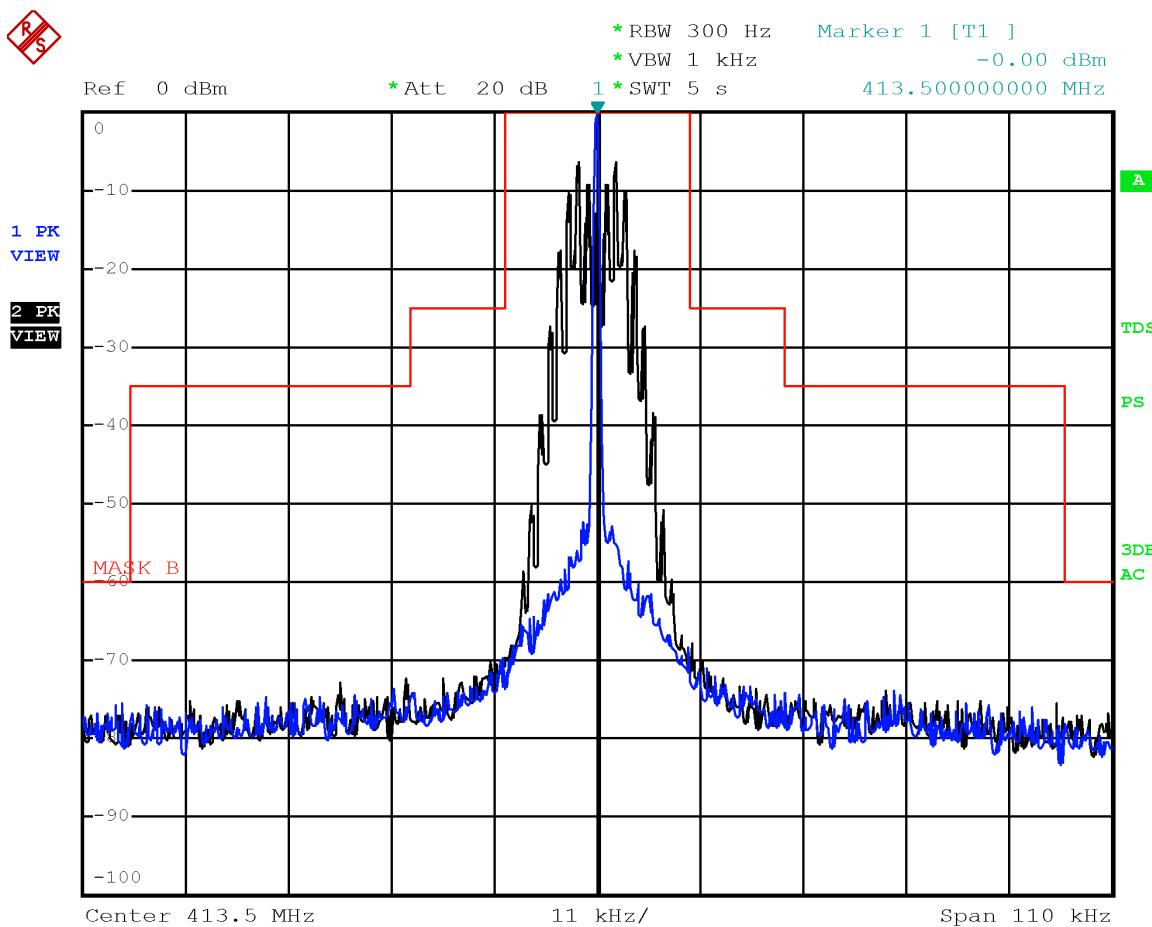


Emission mask B with modulation FM 25 kHz at 413.5 MHz

## Test data, continued

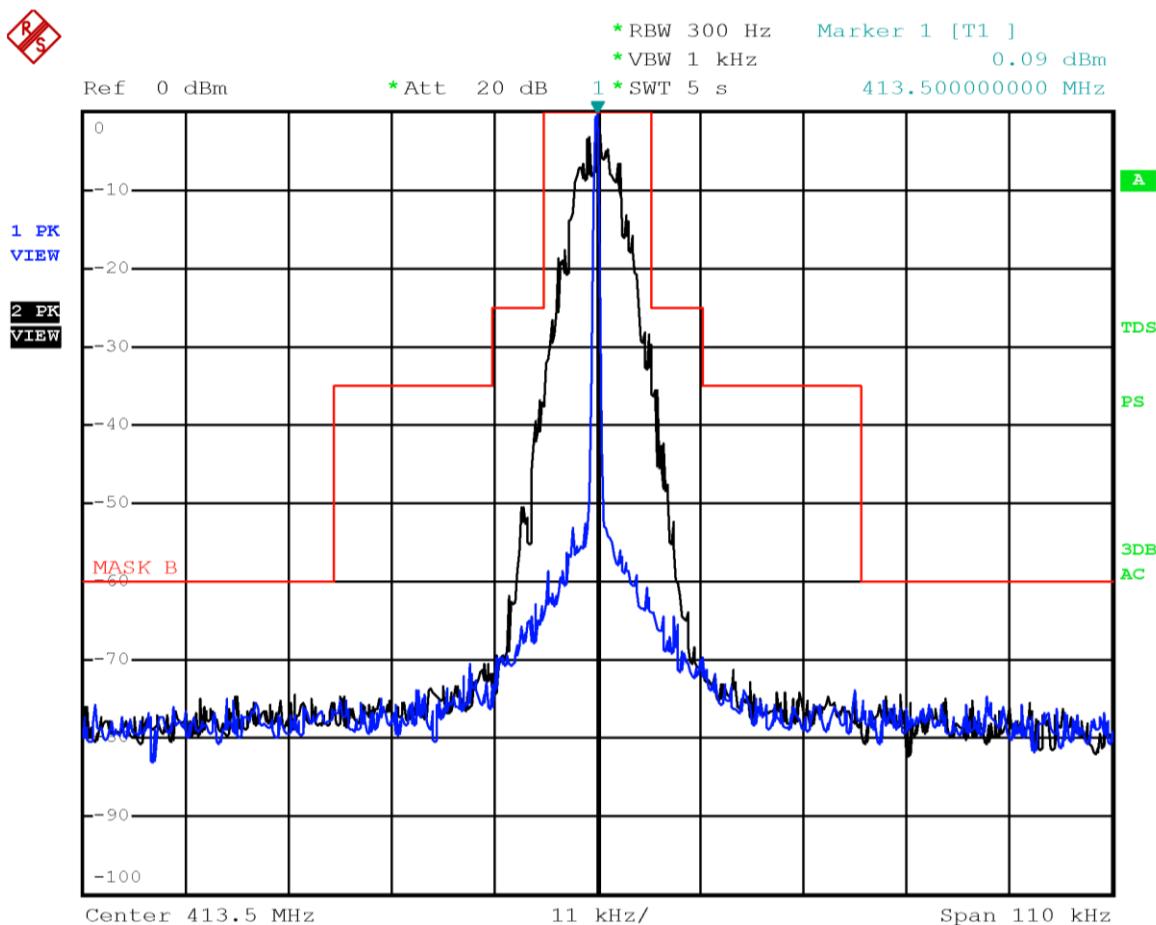


Emission mask B with modulation DMR 4FSK at 413.5 MHz

## Test data, continued

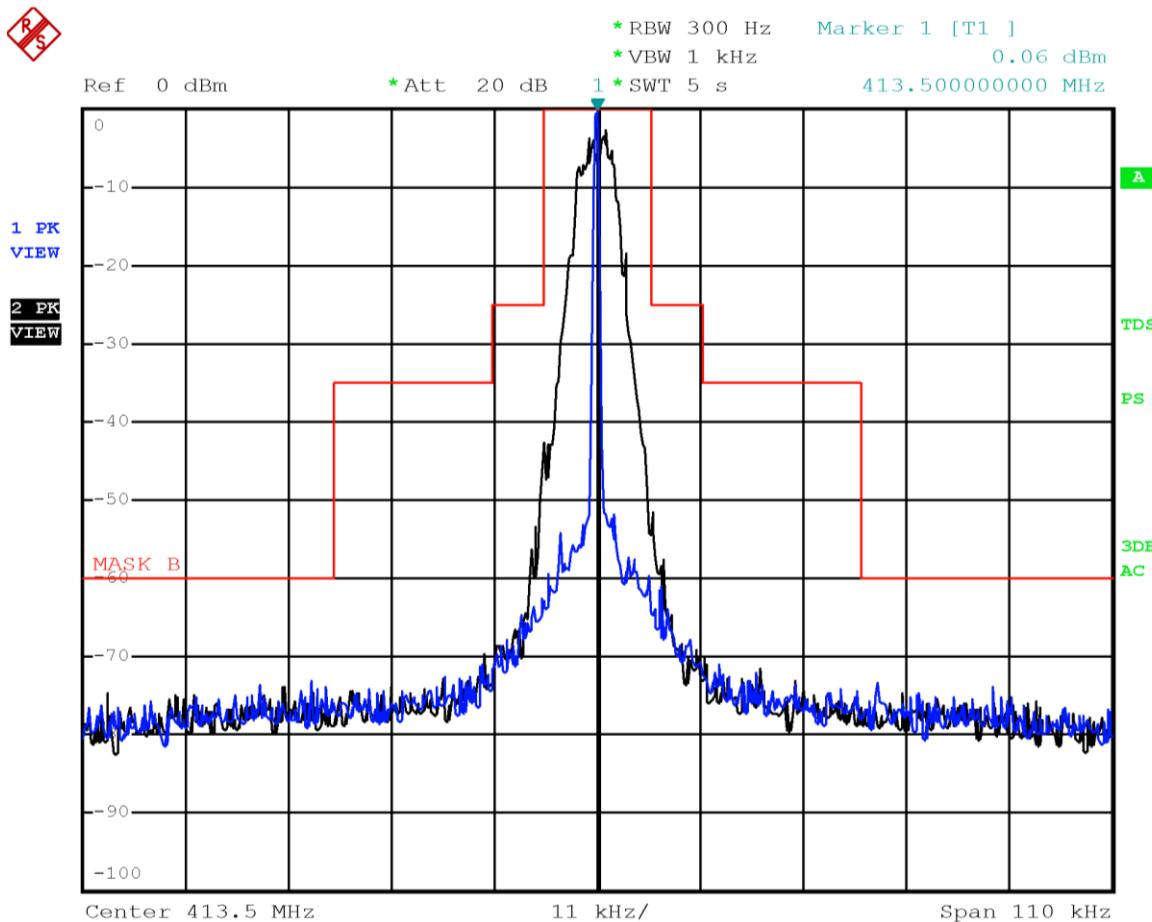


Emission mask B with modulation P25 C4FM at 413.5 MHz

## Test data, continued

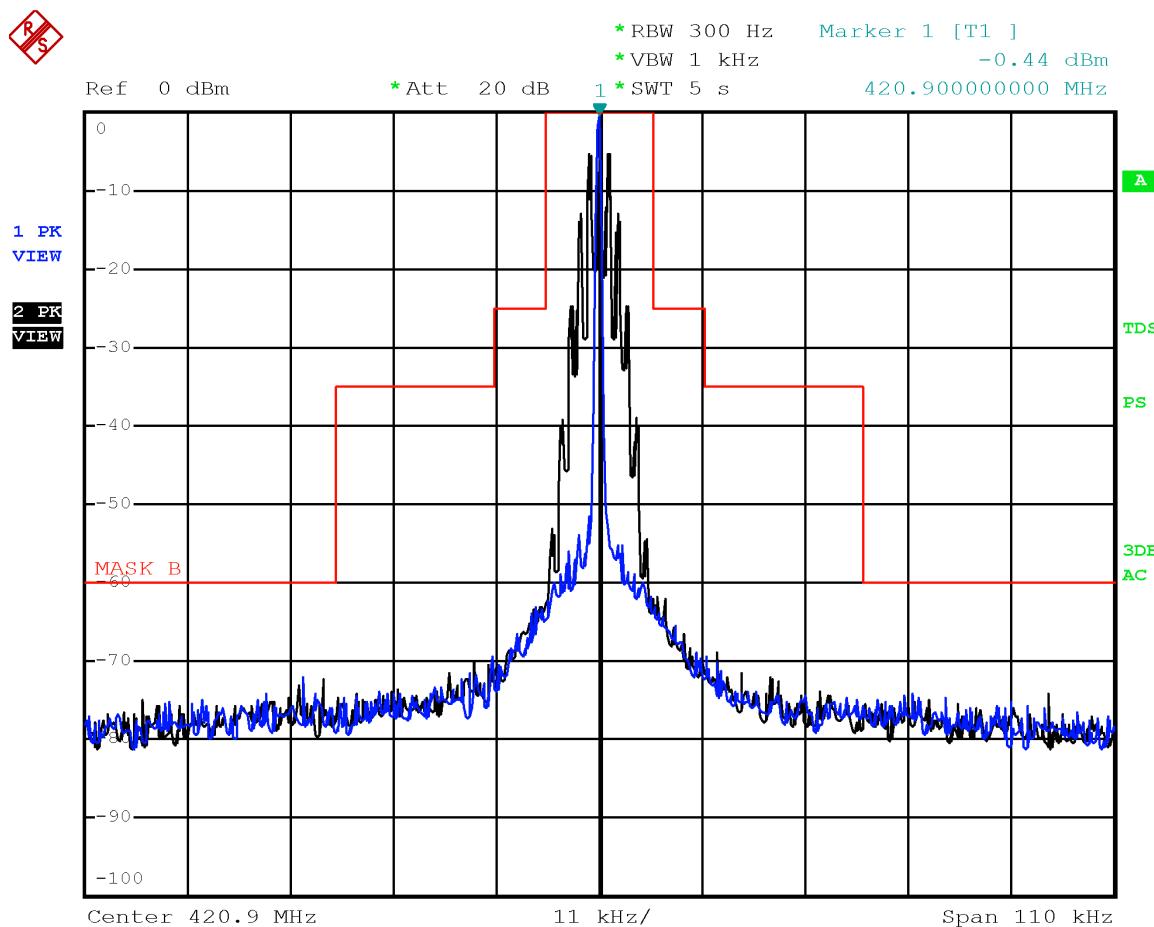


Emission mask B with modulation FM 12.5 kHz at 420.9 MHz

## Test data, continued

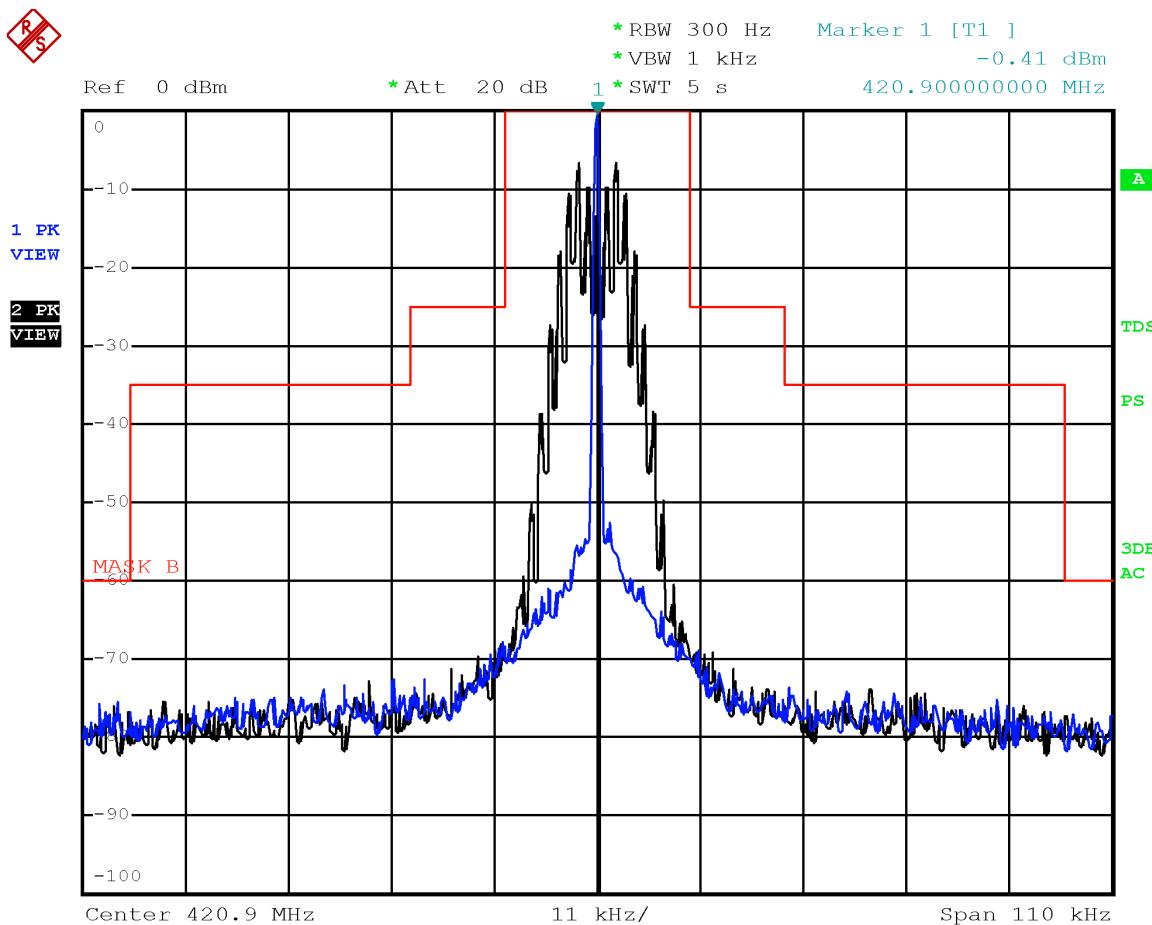


Emission mask B with modulation FM 25 kHz at 420.9 MHz

## Test data, continued

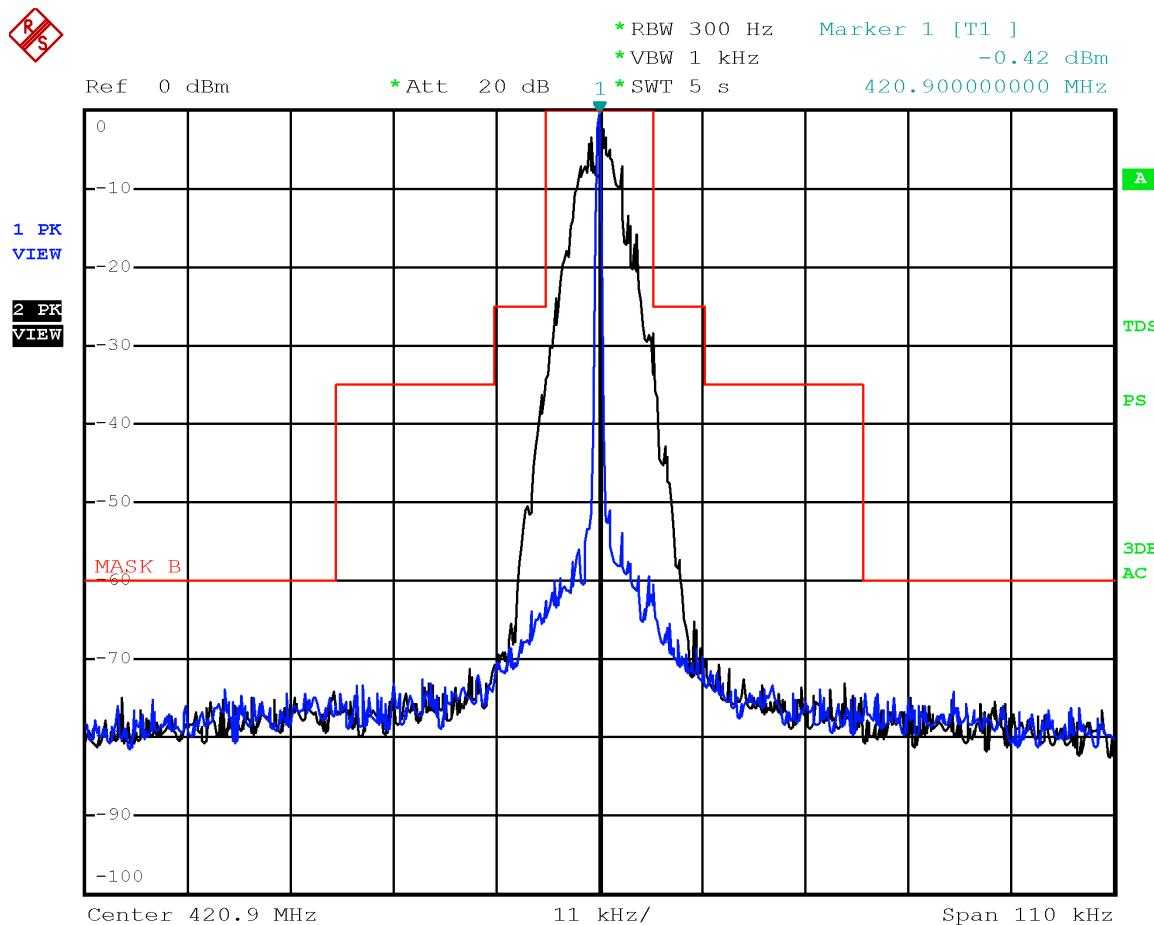


Emission mask B with modulation DMR 4FSK at 420.9 MHz

## Test data, continued

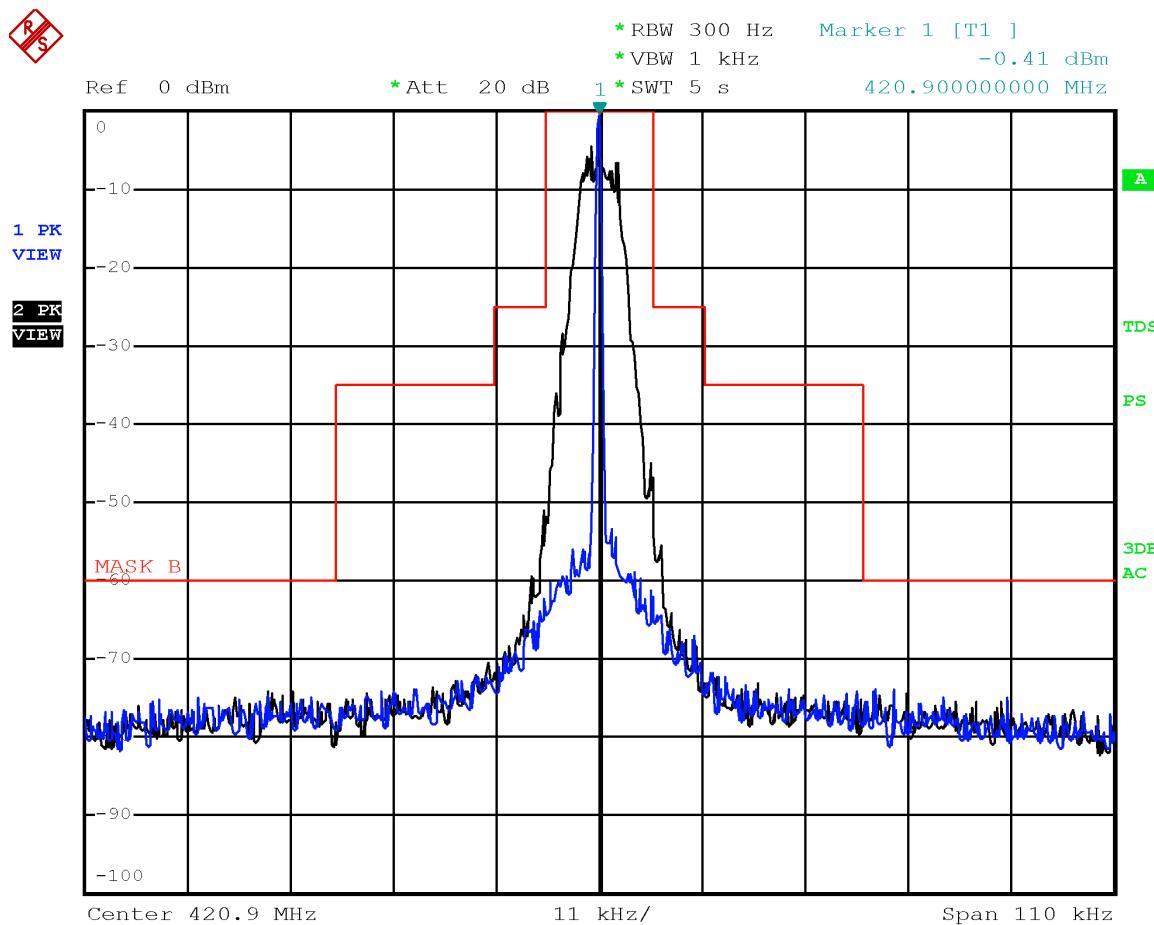


Emission mask B with modulation P25 C4FM at 420.9 MHz

Test data, continued

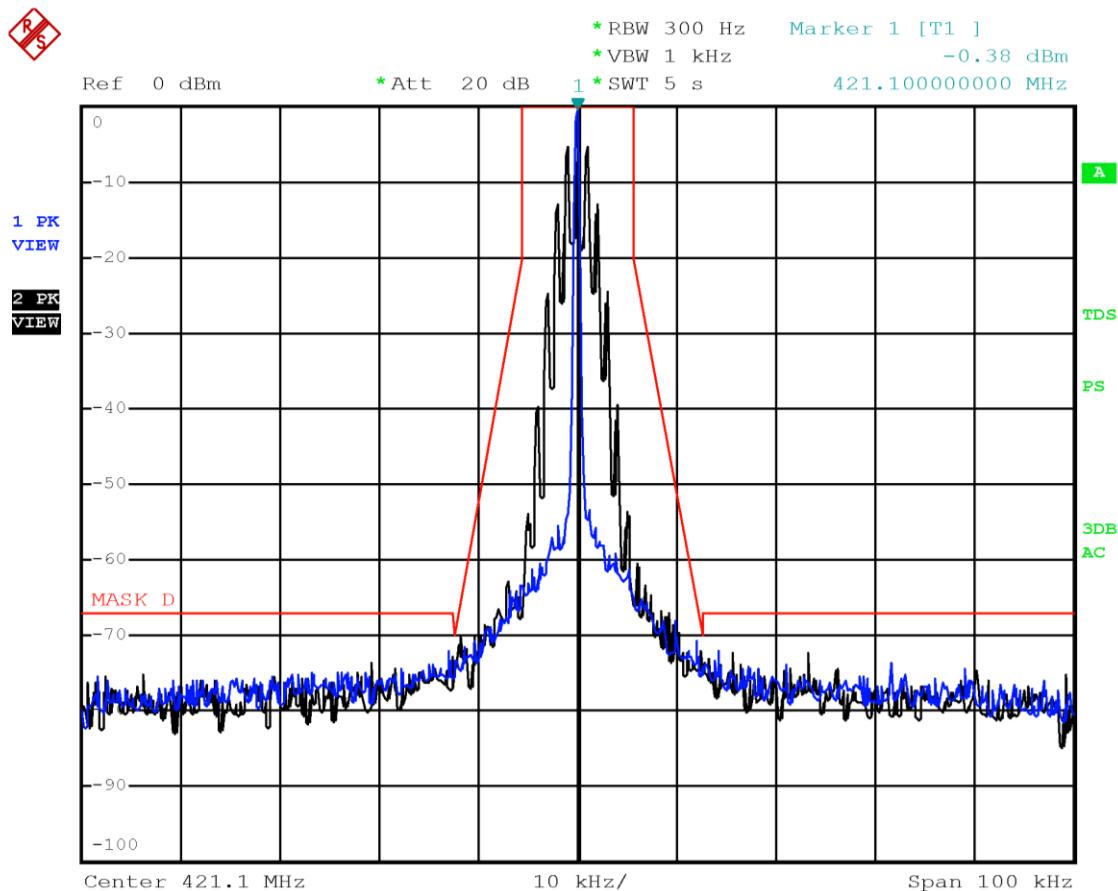


Emission mask D with modulation FM 12.5 kHz at 421.1 MHz

Test data, continued

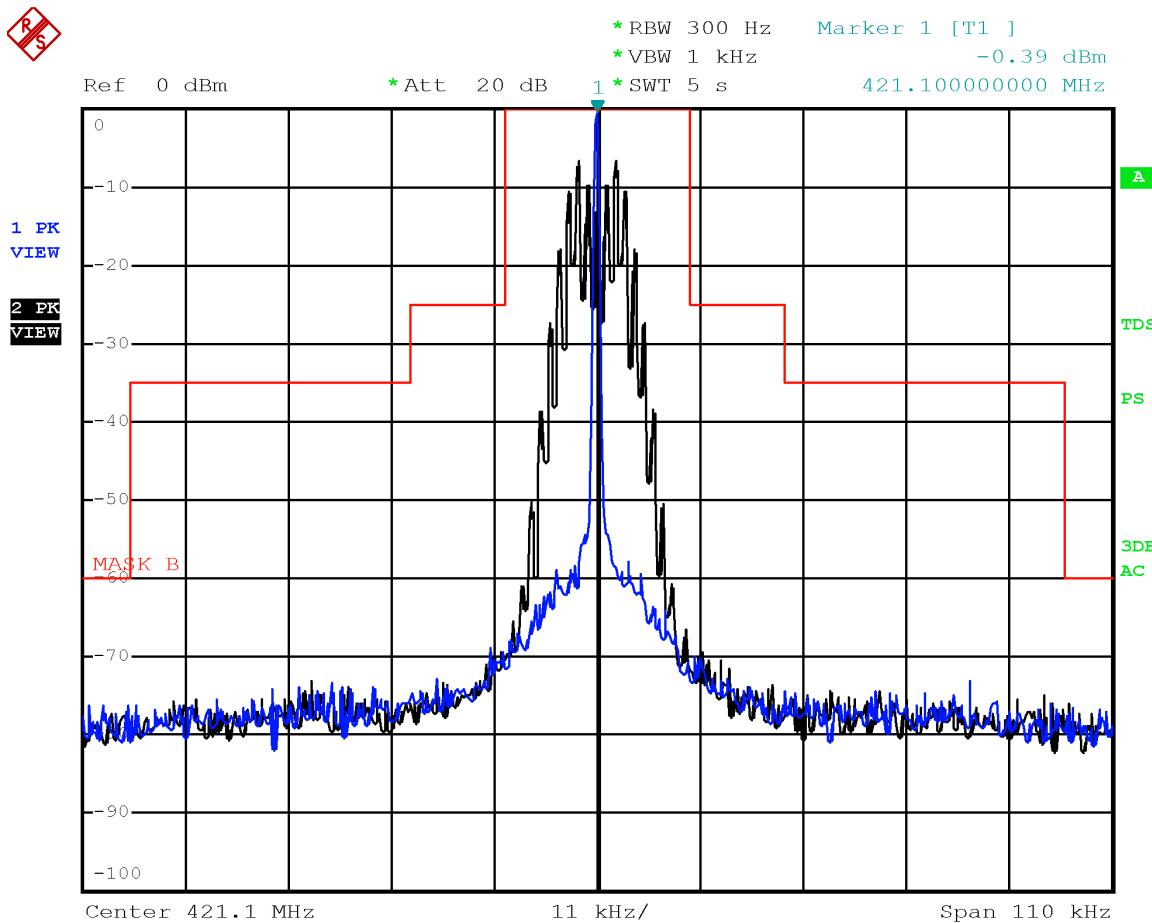


Emission mask B with modulation FM 25 kHz at 421.1 MHz

## Test data, continued

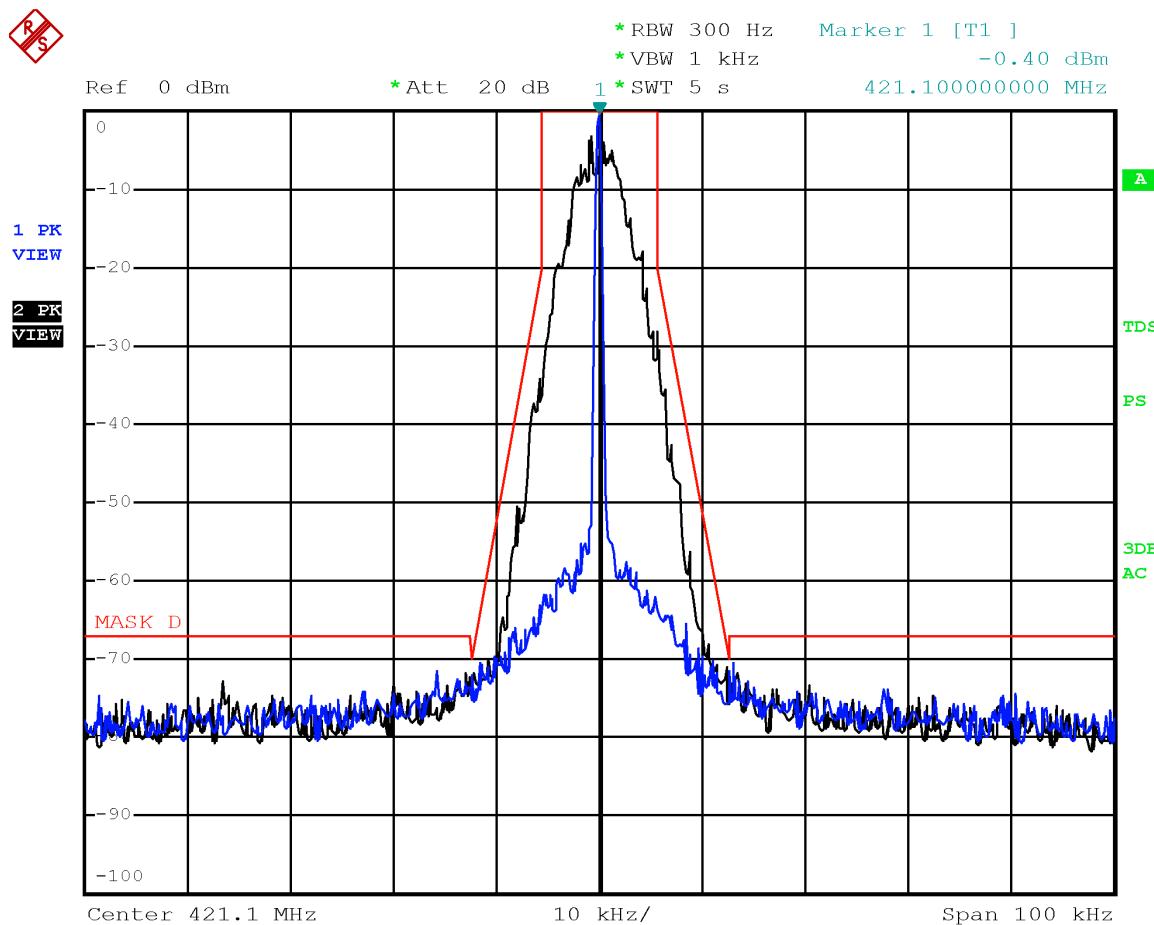


Emission mask D with modulation DMR 4FSK at 421.1 MHz

## Test data, continued

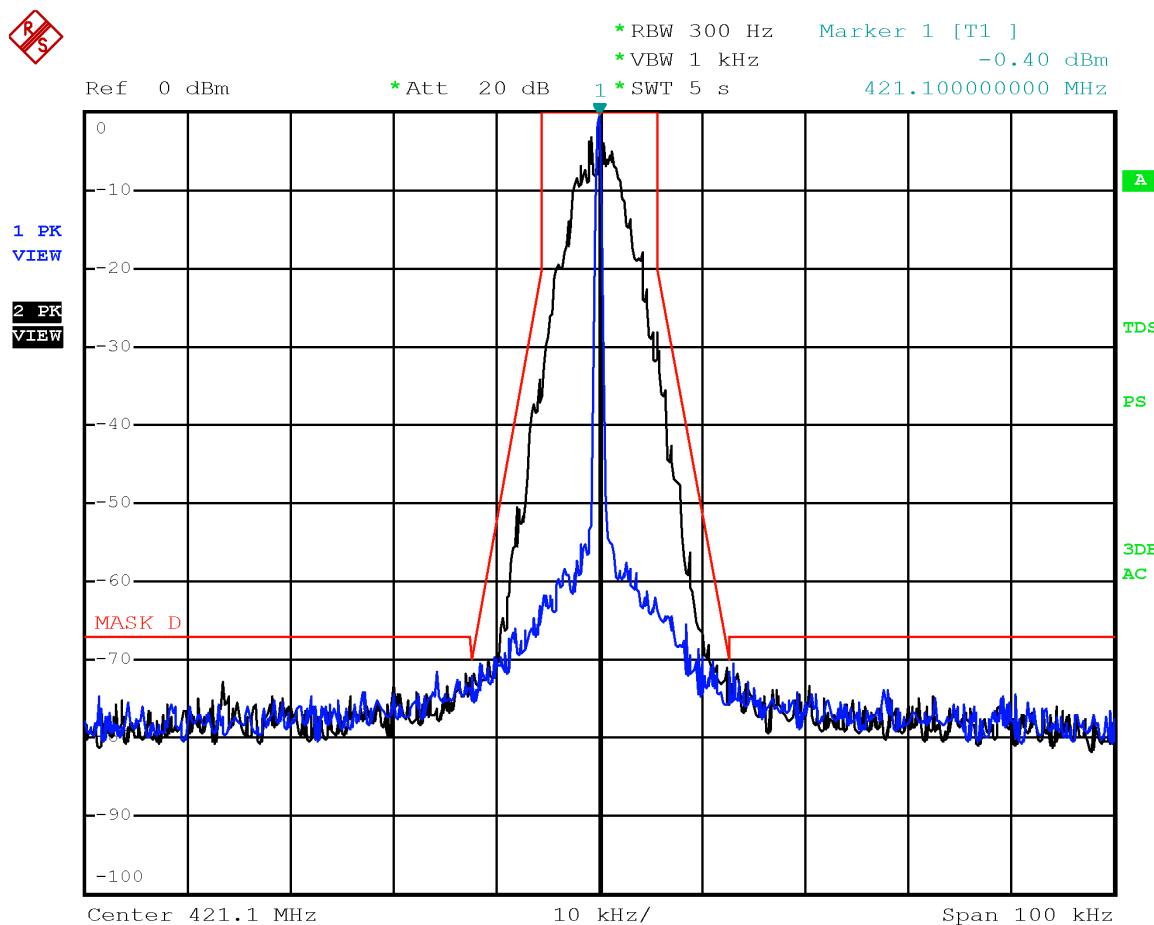


Emission mask D with modulation P25 C4FM at 421.1 MHz

Test data, continued

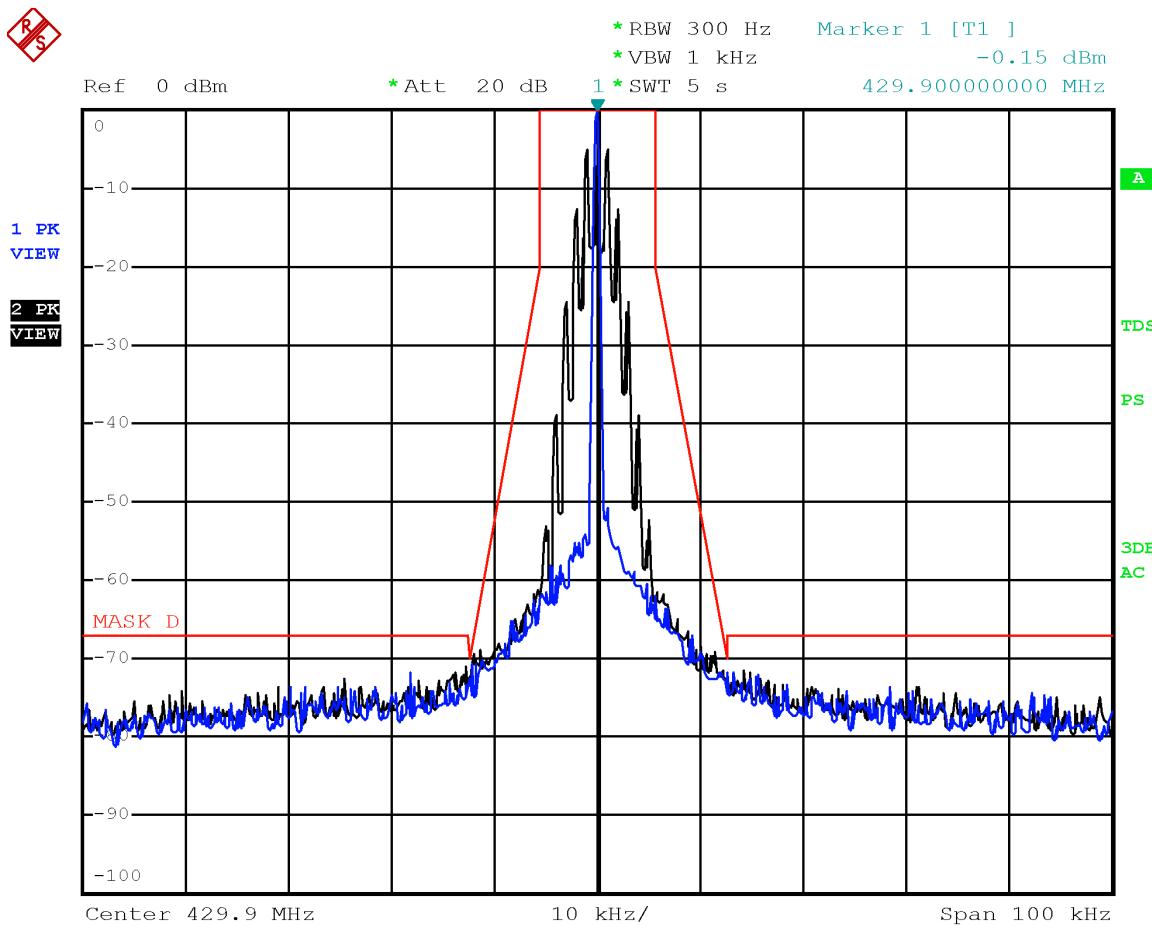


Emission mask D with modulation FM 12.5 kHz at 429.9 MHz

## Test data, continued

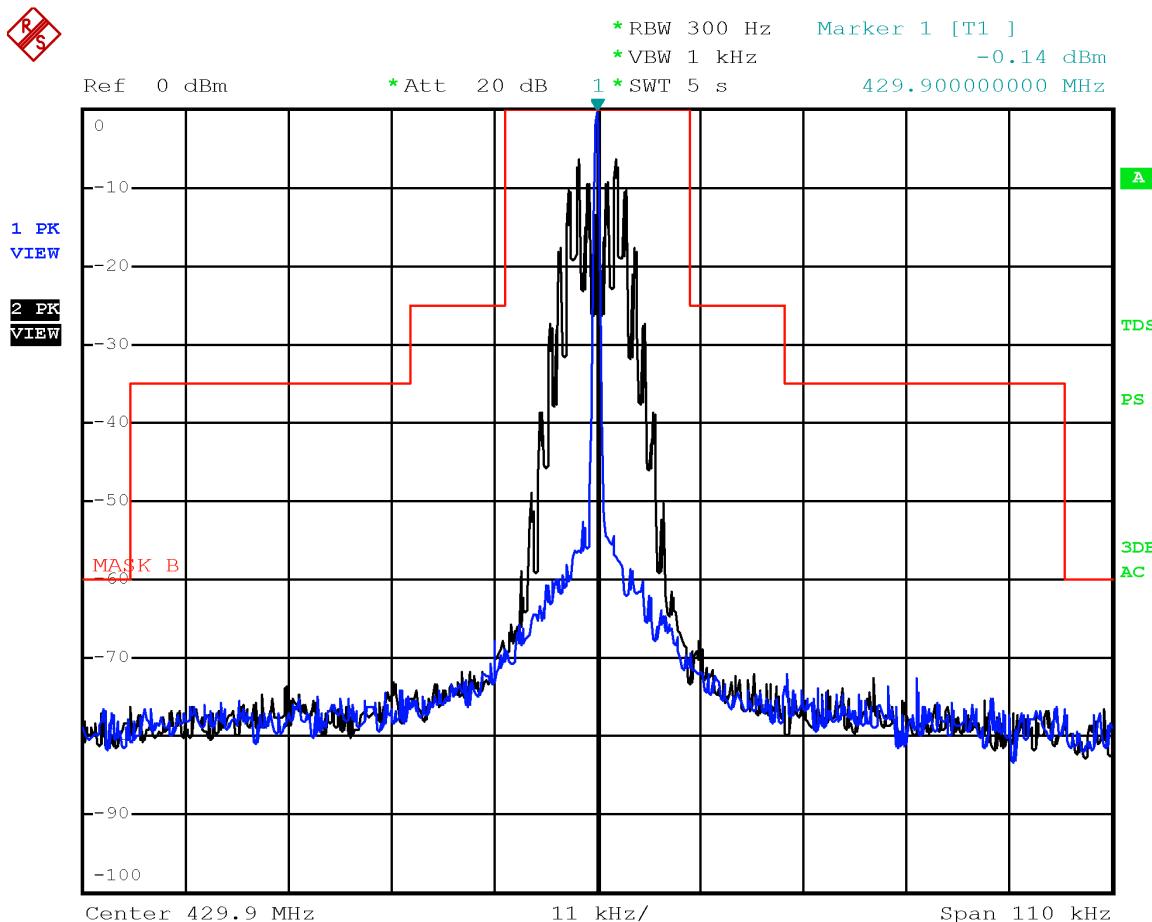


Emission mask B with modulation FM 25 kHz at 429.9 MHz

## Test data, continued

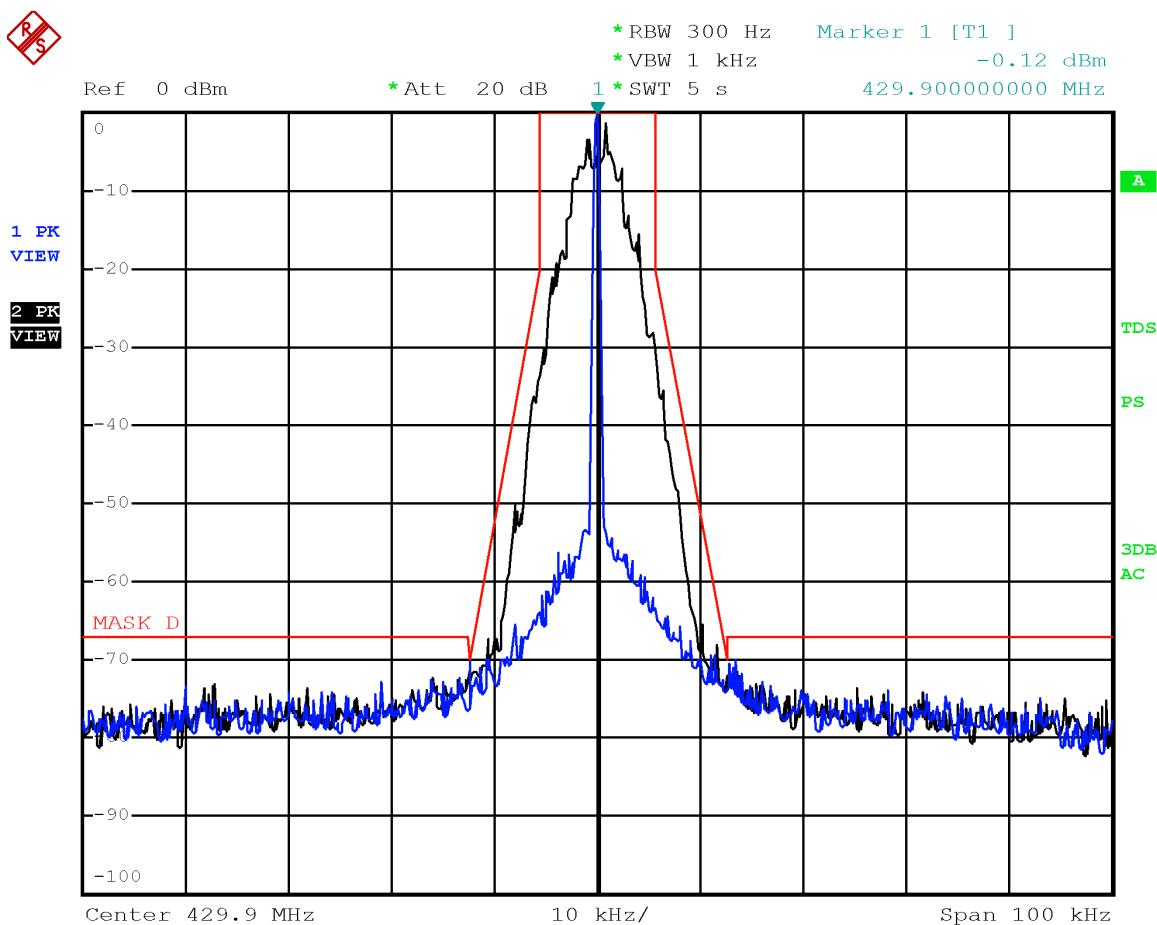


Emission mask D with modulation DMR 4FSK at 429.9 MHz

## Test data, continued

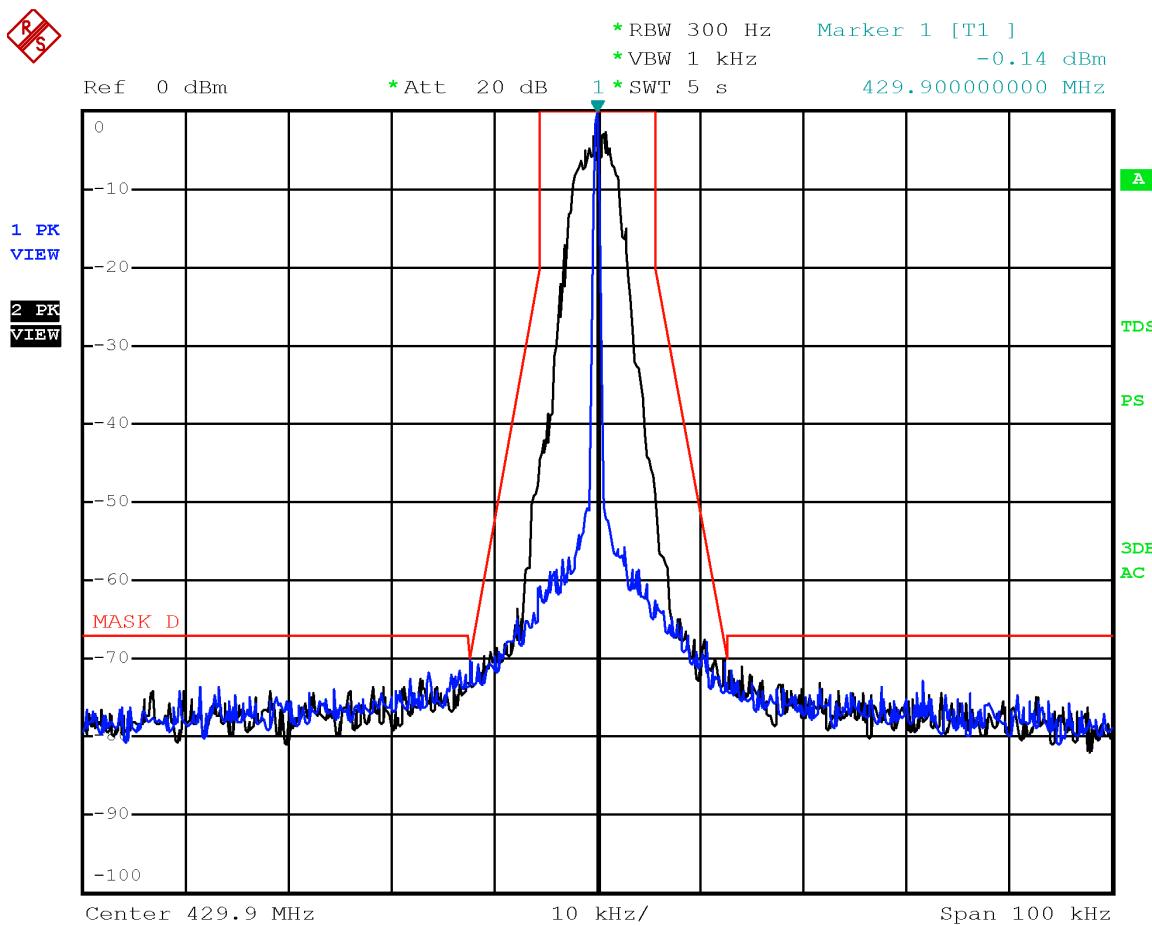


Emission mask D with modulation P25 C4FM at 429.9 MHz

Test data, continued

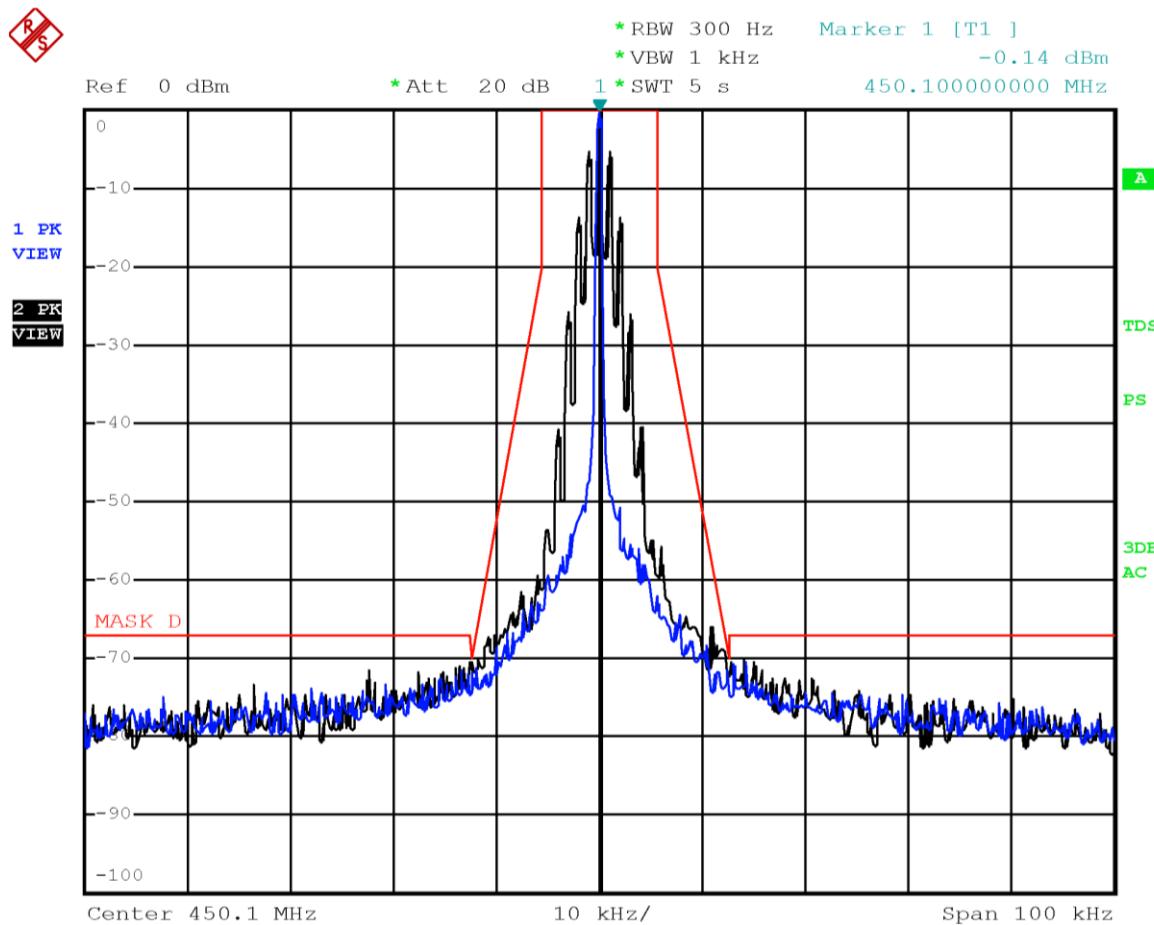


Emission mask D with modulation FM 12.5 kHz at 450.1 MHz

Test data, continued

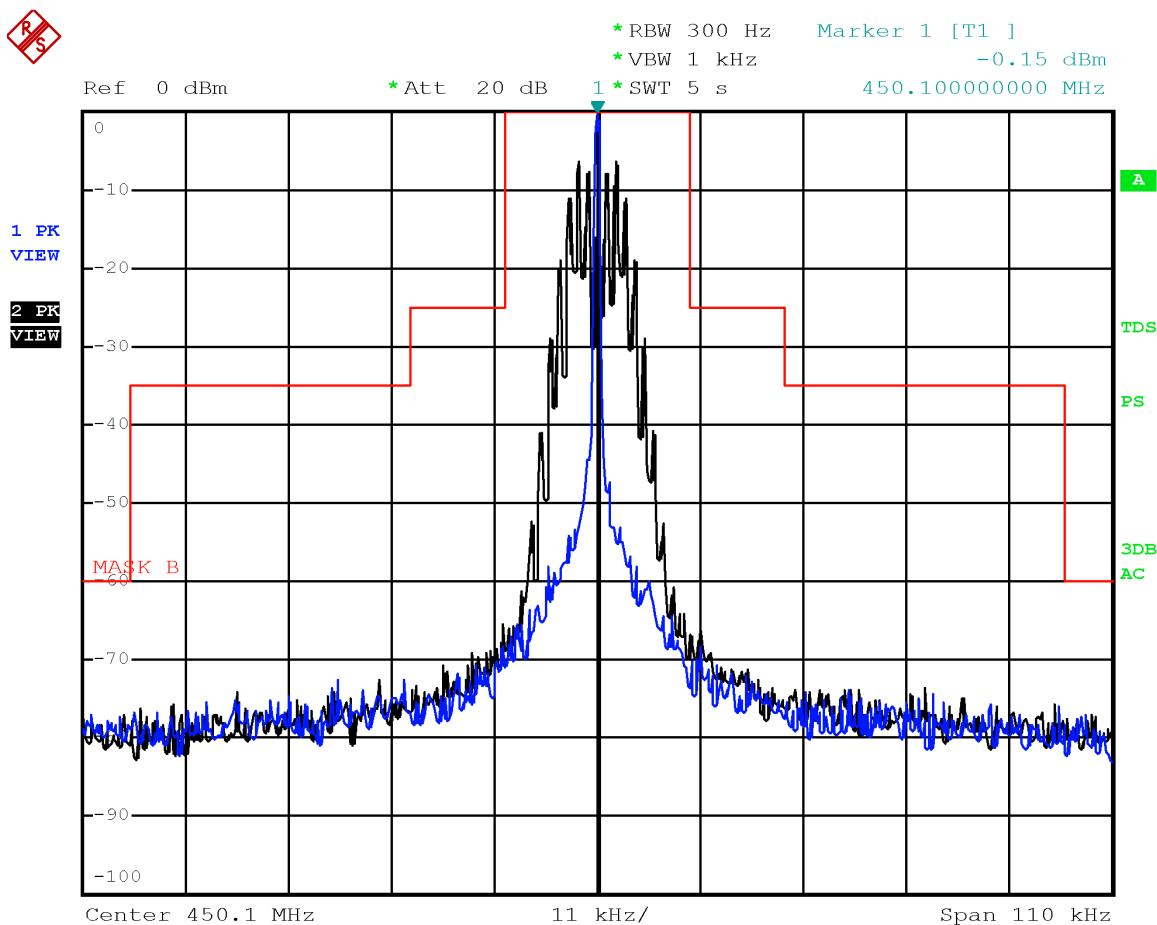


Emission mask B with modulation FM 25 kHz at 450.1 MHz

## Test data, continued

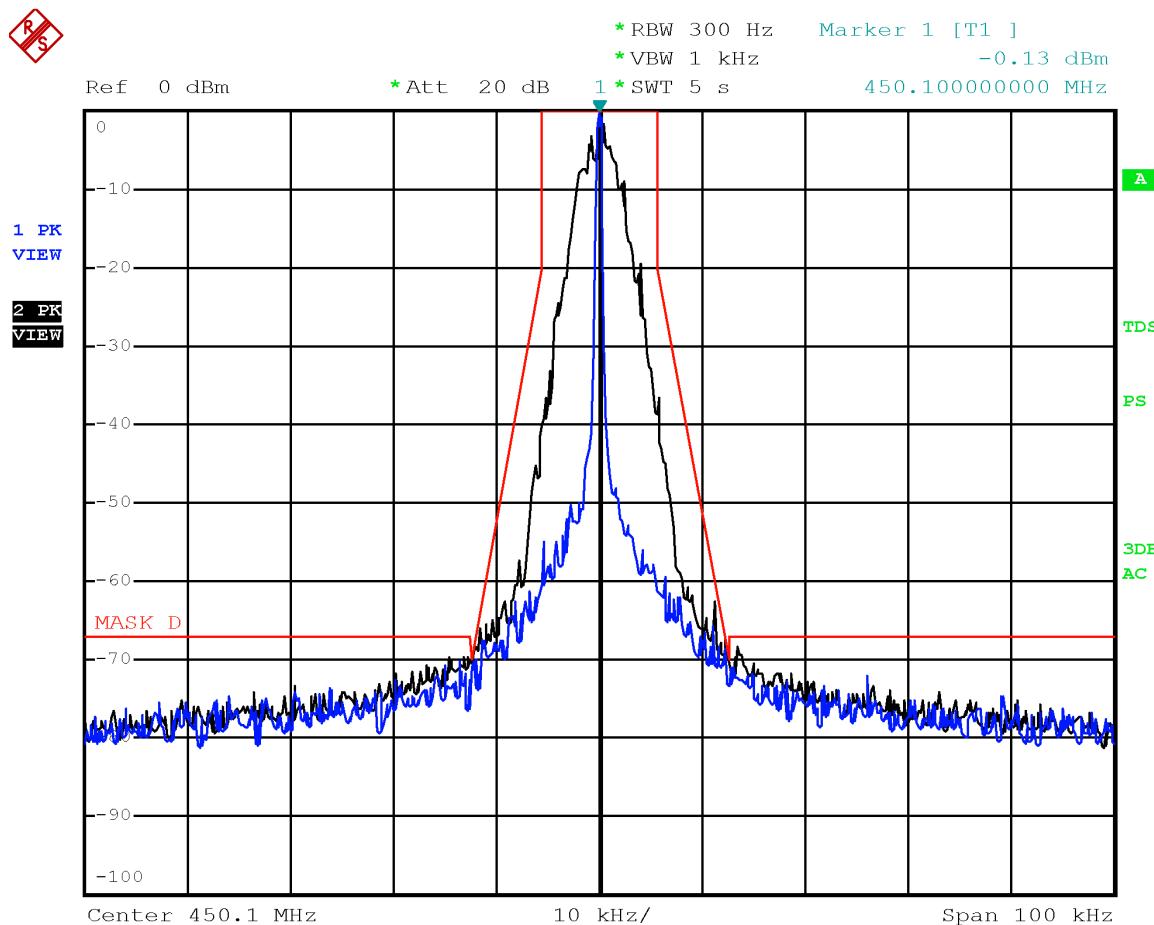


Emission mask D with modulation DMR 4FSK at 450.1 MHz

## Test data, continued

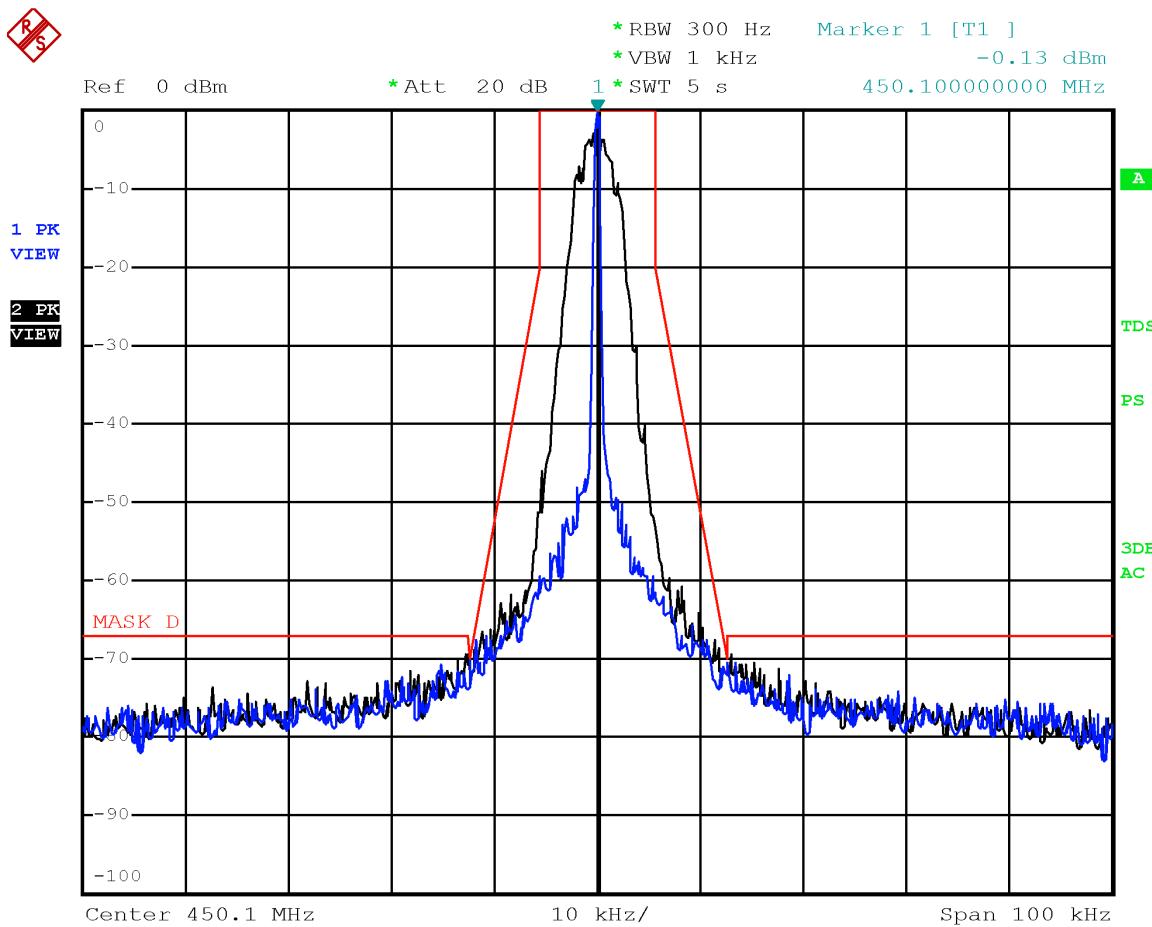


Emission mask D with modulation P25 C4FM at 450.1 MHz

## Test data, continued

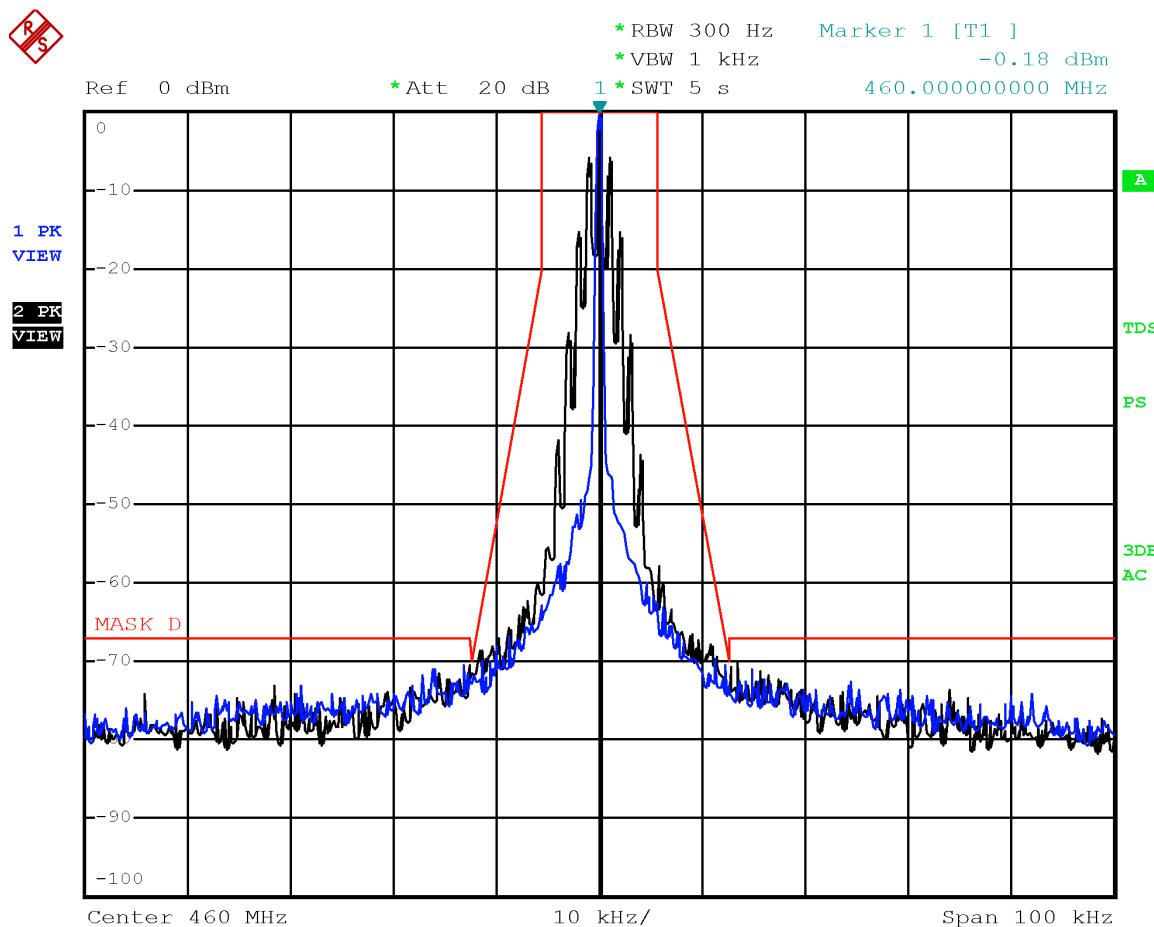


Emission mask D with modulation FM 12.5 kHz at 460 MHz

## Test data, continued

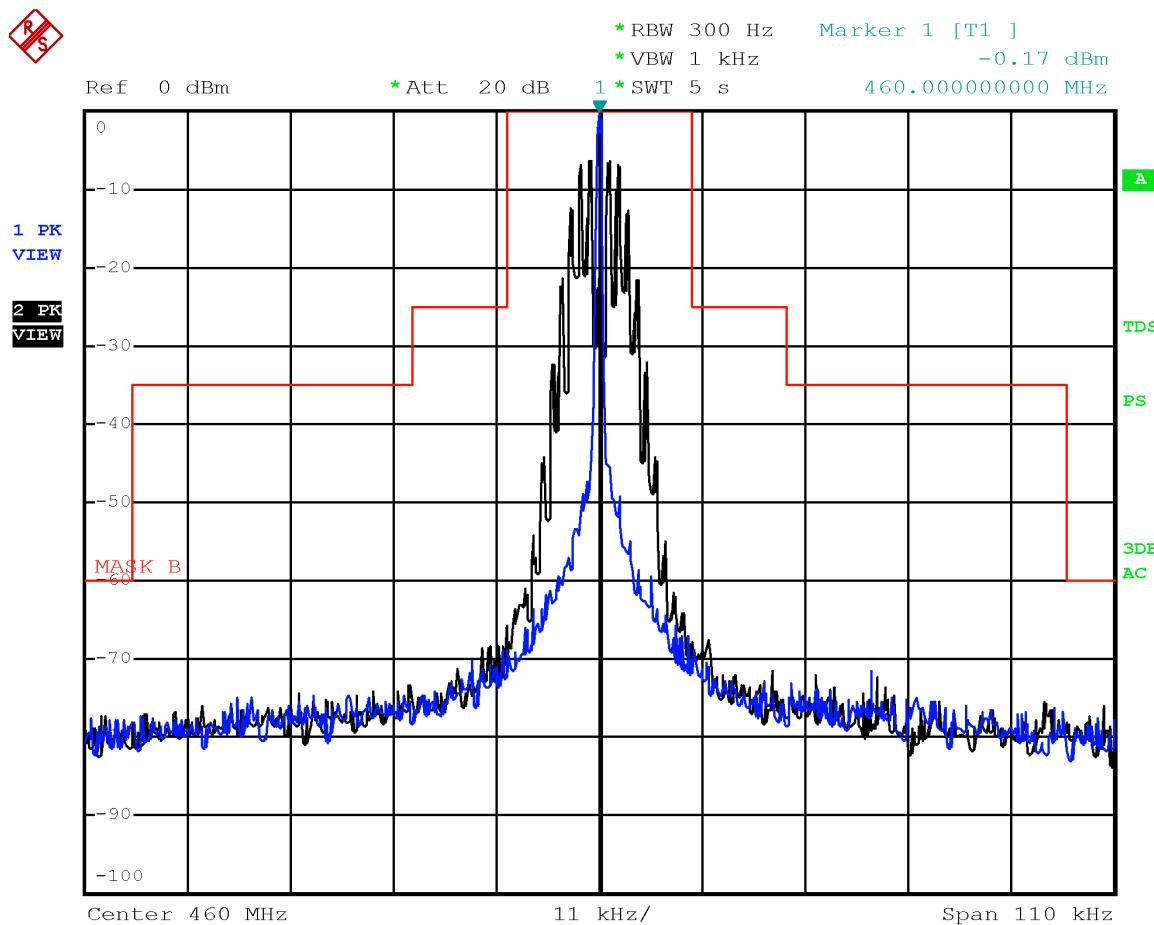


Emission mask B with modulation FM 25 kHz at 460 MHz

## Test data, continued

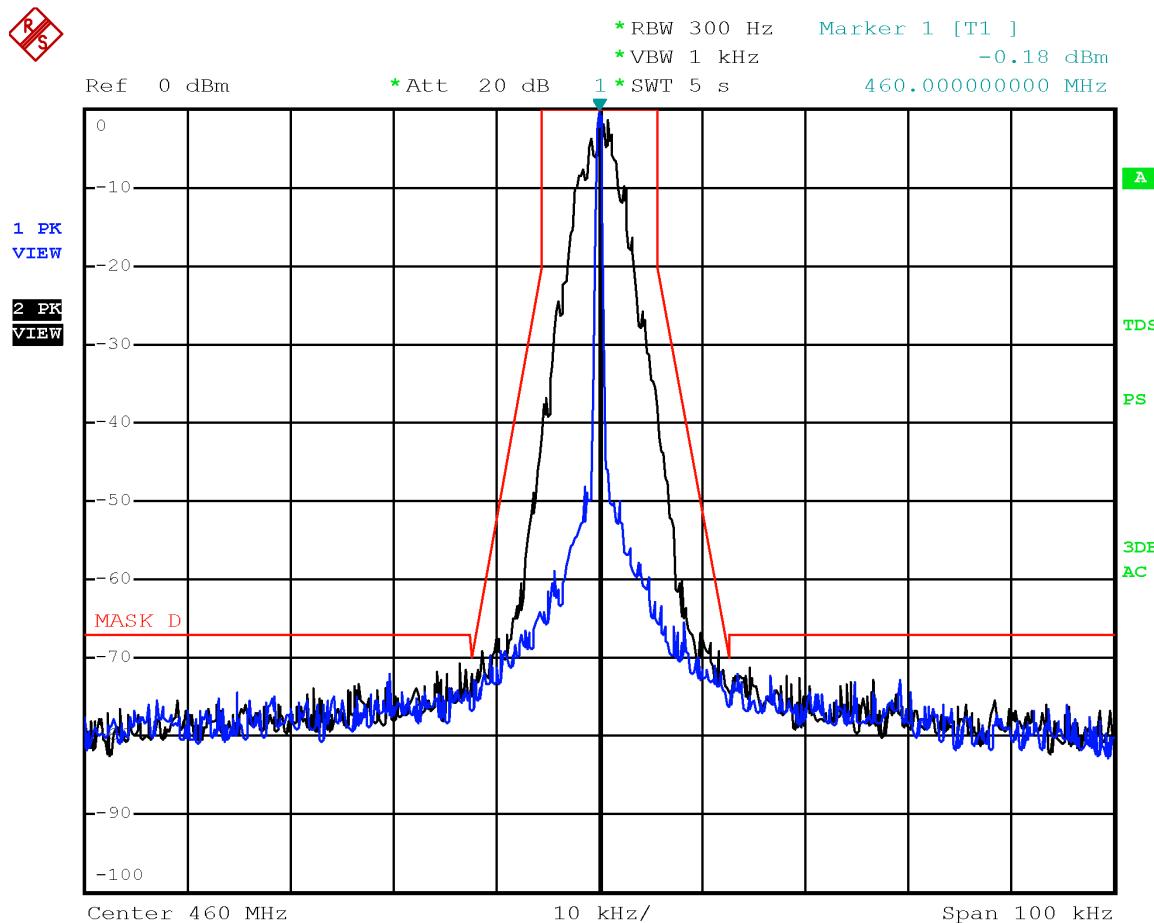


Emission mask D with modulation DMR 4FSK at 460 MHz

## Test data, continued

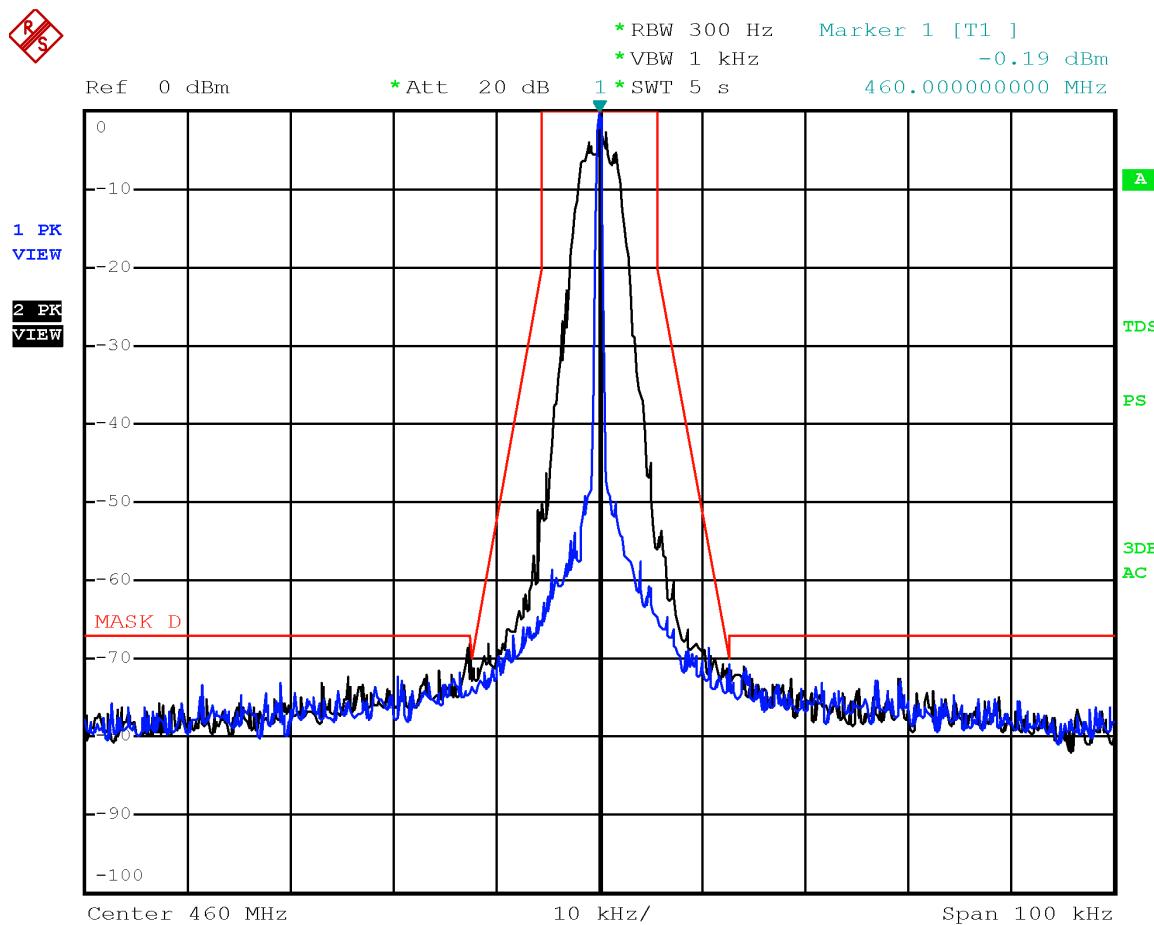


Emission mask D with modulation P25 C4FM at 460 MHz

## Test data, continued

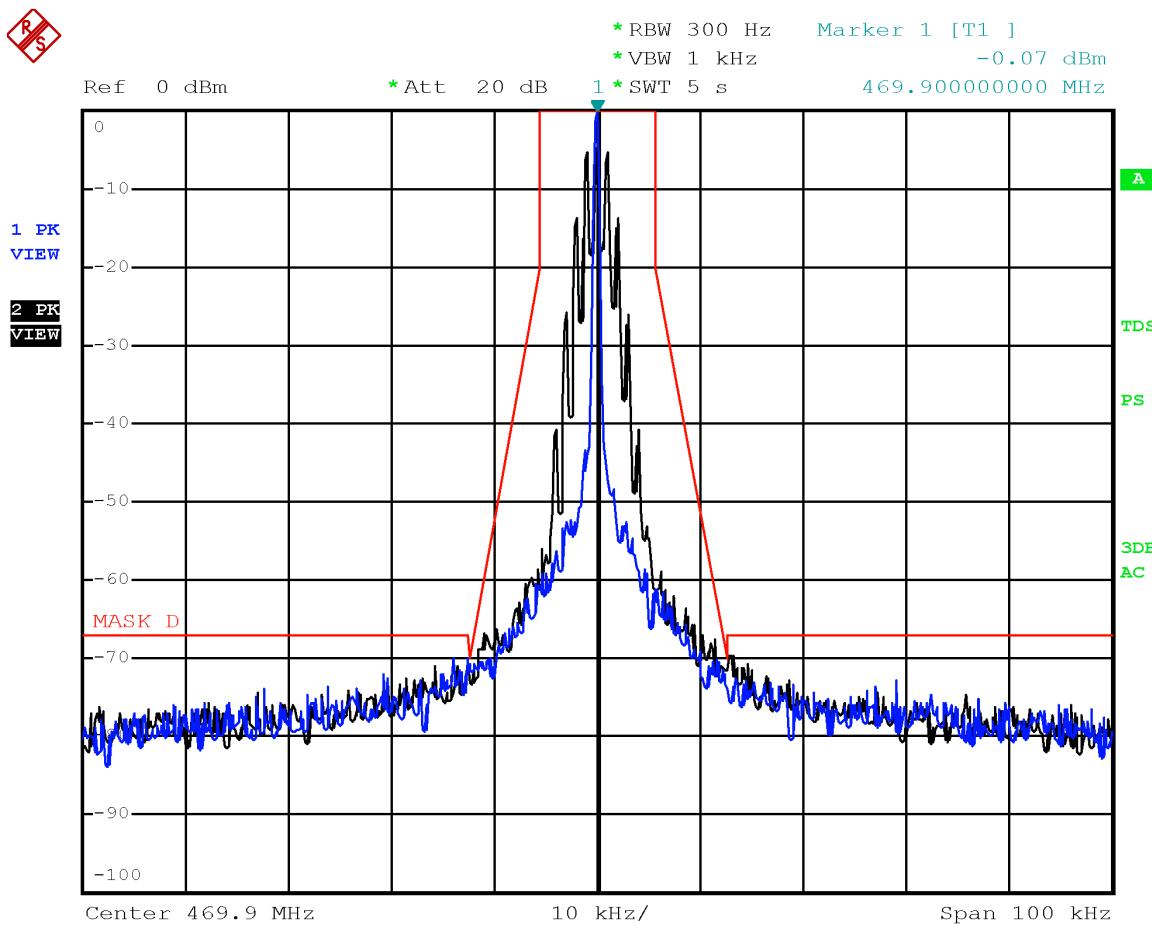


Emission mask D with modulation FM 12.5 kHz at 469.9 MHz

## Test data, continued

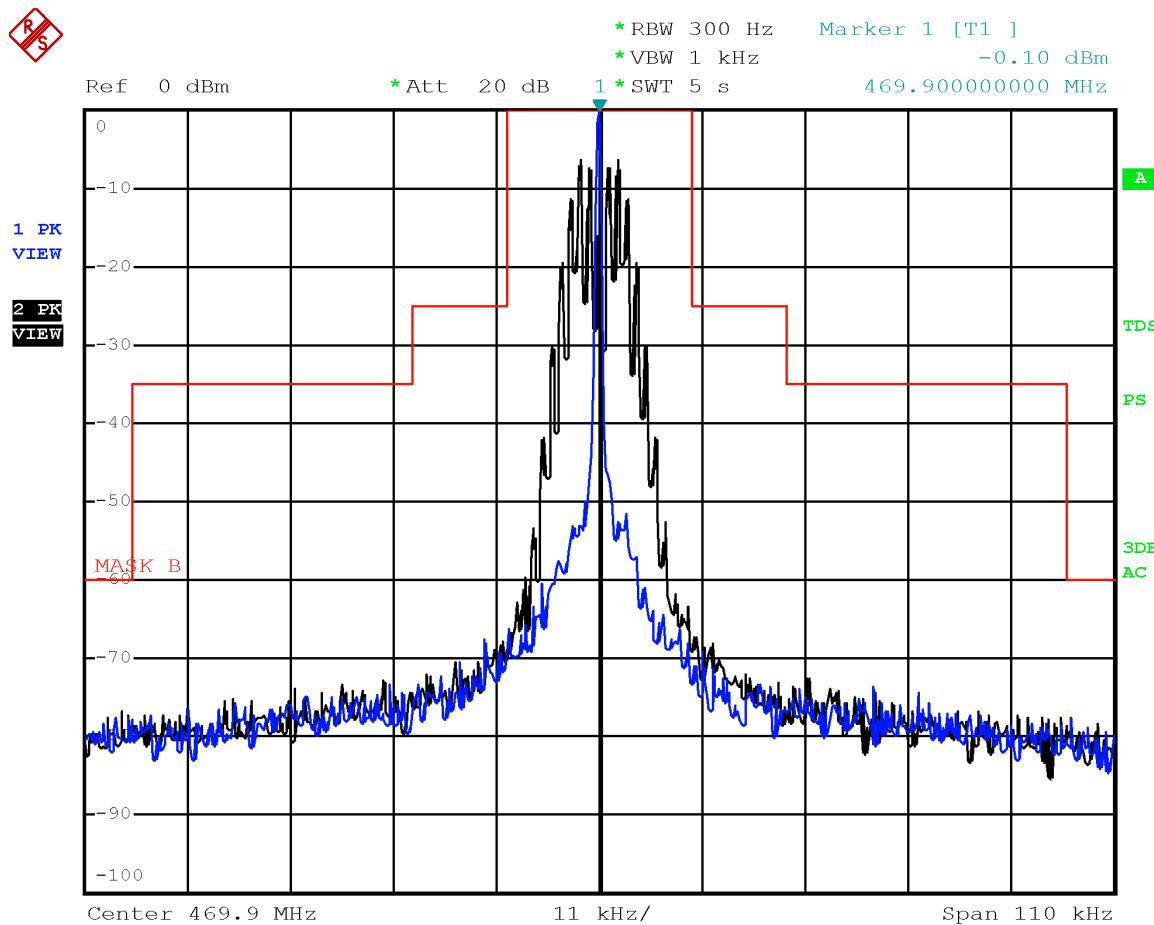


Emission mask B with modulation FM 25 kHz at 469.9 MHz

## Test data, continued

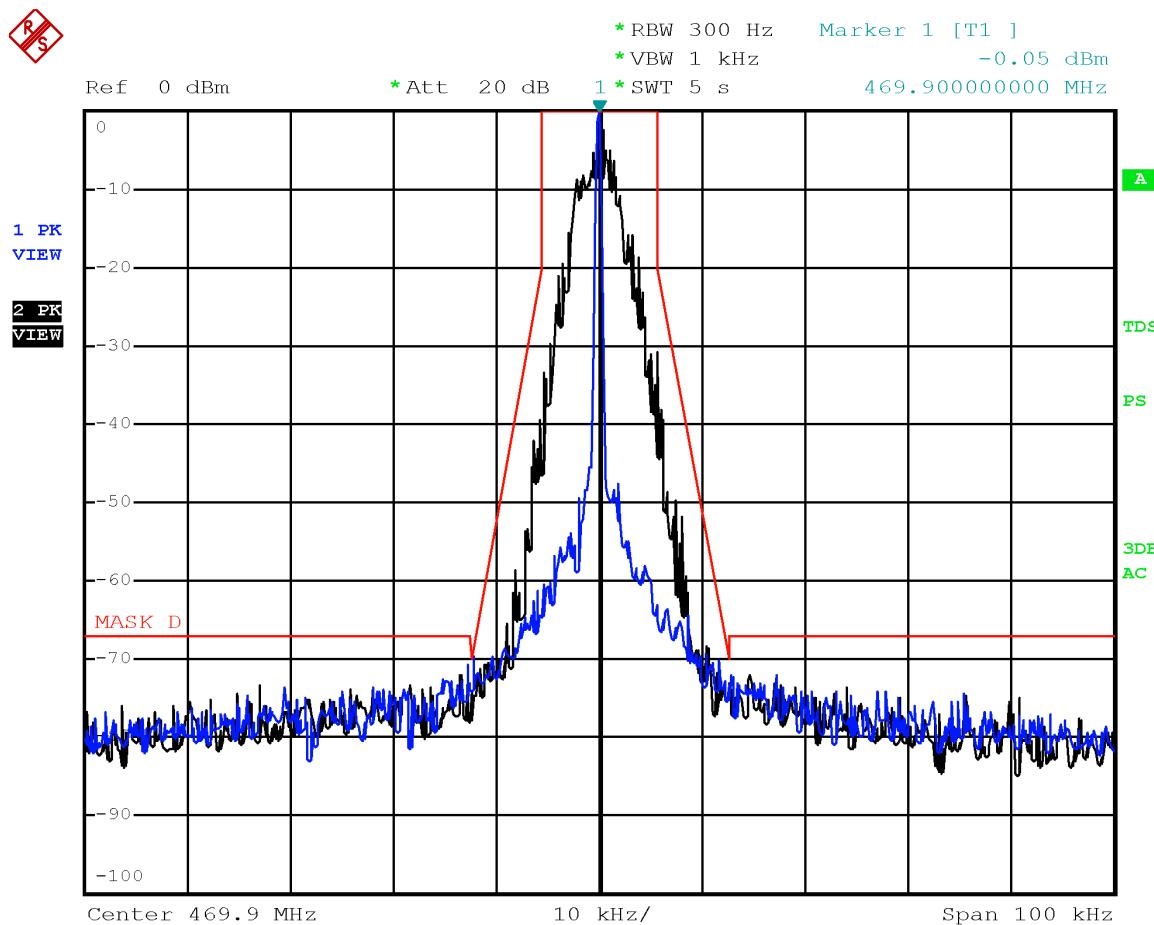


Emission mask D with modulation DMR 4FSK at 469.9 MHz

## Test data, continued

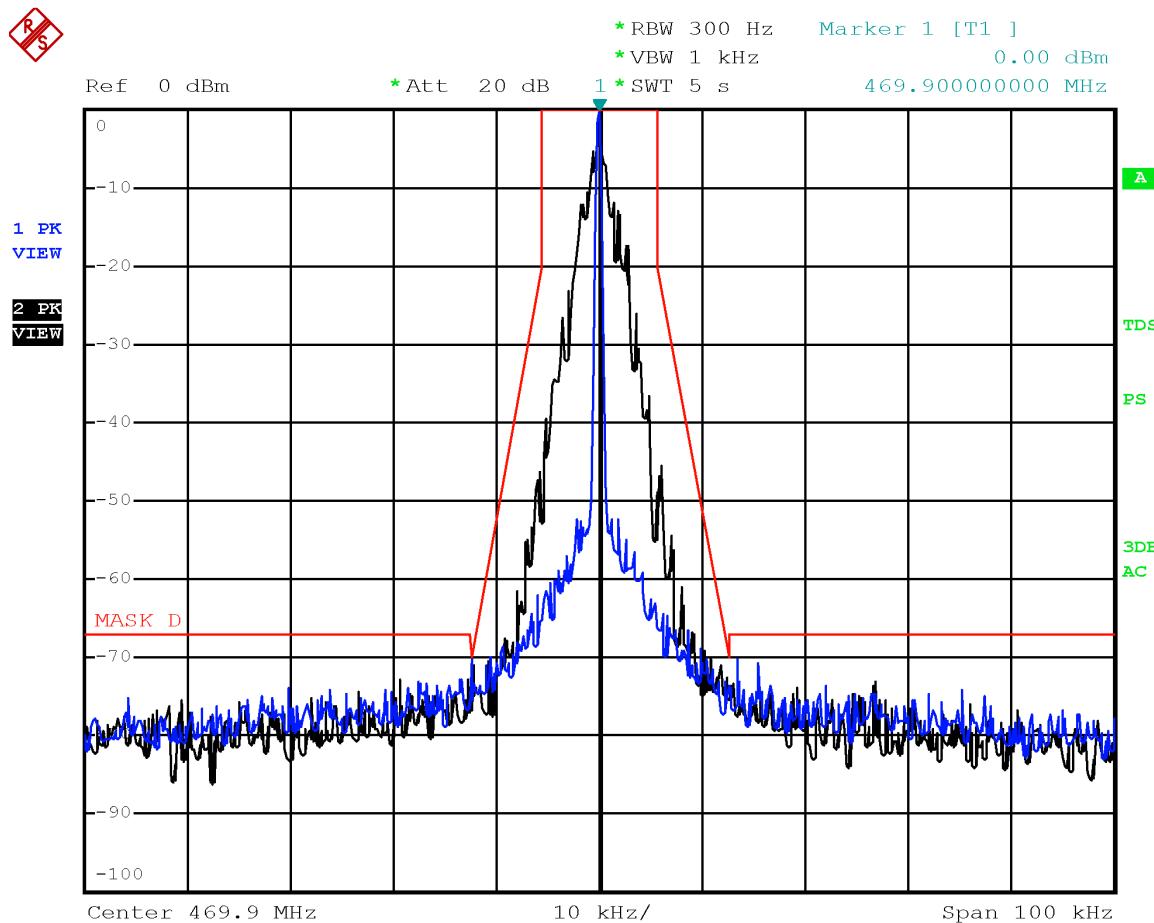

Emission mask D with modulation P25 C4FM at 469.9 MHz

Test data, continued

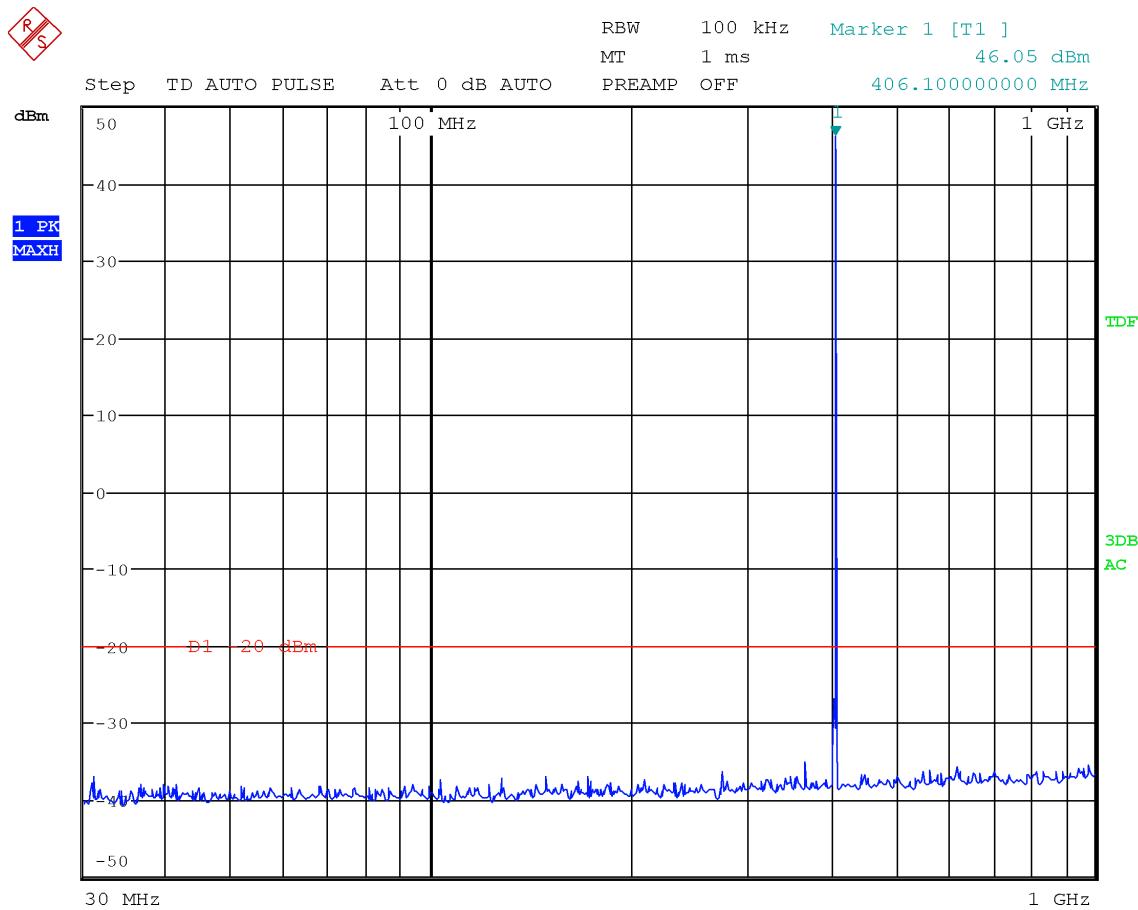


Conducted spurious emissions with modulation FM 12.5 kHz at 406.1 MHz (30 MHz to 1 GHz)

Limit exceeded by the carrier


Test data, continued
 

---

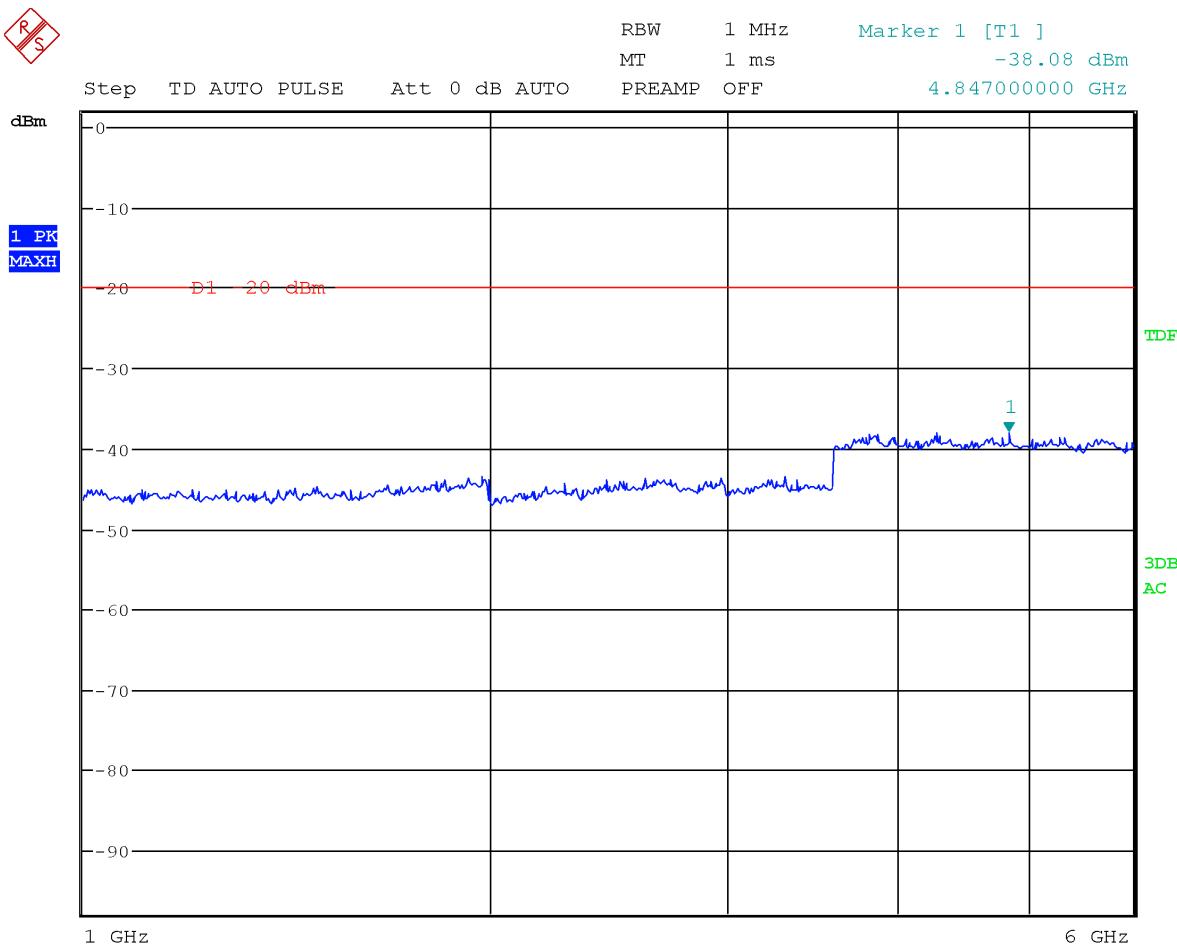

Conducted spurious emissions with modulation FM 12.5 kHz at 406.1 MHz (1 to 6 GHz)

Test data, continued

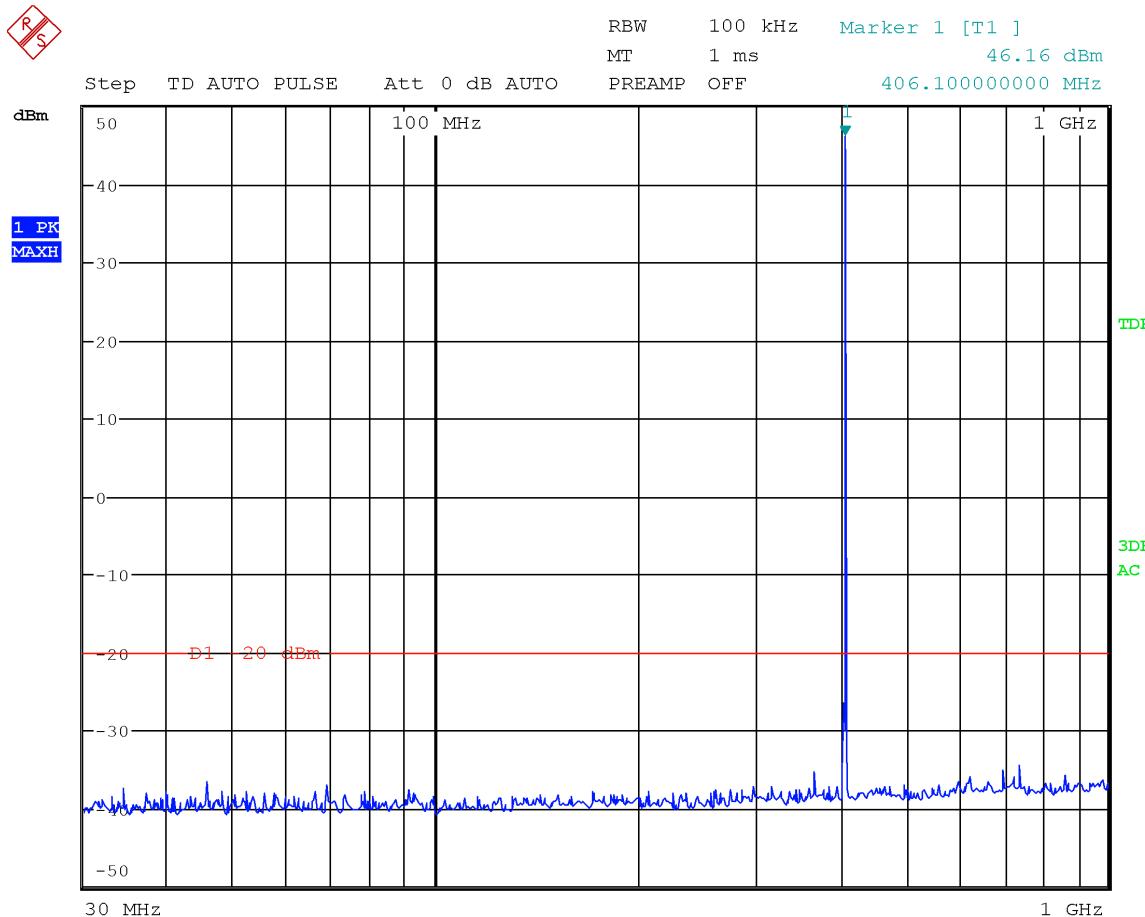

Conducted spurious emissions with modulation FM 25 kHz at 406.1 MHz (30 MHz to 1 GHz)

Limit exceeded by the carrier