



I. 850MHz Band RESULTS

<u>TYPE</u>	<u>PARAMETERS</u>
<u>Phone</u>	<u>Measurement 1:</u> Right Head with Cheek device position on Low Channel in GSM850 mode <u>Measurement 2:</u> Right Head with Cheek device position on Middle Channel in GSM850 mode <u>Measurement 3:</u> Right Head with Cheek device position on High Channel in GSM850 mode <u>Measurement 4:</u> Right Head with Tilt device position on Low Channel in GSM850 mode <u>Measurement 5:</u> Right Head with Tilt device position on Middle Channel in GSM850 mode <u>Measurement 6:</u> Right Head with Tilt device position on High Channel in GSM850 mode <u>Measurement 7:</u> Left Head with Cheek device position on Low Channel in GSM850 mode <u>Measurement 8:</u> Left Head with Cheek device position on Middle Channel in GSM850 mode <u>Measurement 9:</u> Left Head with Cheek device position on High Channel in GSM850 mode <u>Measurement 10:</u> Left Head with Tilt device position on Low Channel in GSM850 mode <u>Measurement 11:</u> Left Head with Tilt device position on Middle Channel in GSM850 mode <u>Measurement 12:</u> Left Head with Tilt device position on High Channel in GSM850 mode <u>Measurement 13:</u> FrontSide toward phantom 15mm, Low Channel in GSM850 mode <u>Measurement 14:</u> FrontSide toward phantom 15mm, Middle Channel in GSM850 mode <u>Measurement 15:</u> FrontSide toward phantom 15mm, High Channel in GSM850 mode <u>Measurement 16:</u> BackSide toward phantom 15mm, Low Channel in GSM850 mode <u>Measurement 17:</u> BackSide toward phantom 15mm, Middle Channel in GSM850 mode <u>Measurement 18:</u> BackSide toward phantom 15mm, High Channel in GSM850 mode <u>Measurement 19:</u> FrontSide toward phantom 15mm, Low Channel in GPRS850 mode <u>Measurement 20:</u> FrontSide toward phantom 15mm, Middle Channel in GPRS850 mode <u>Measurement 21:</u> FrontSide toward phantom 15mm, High Channel in GPRS850 mode <u>Measurement 22:</u> BackSide toward phantom 15mm, Low Channel in GPRS850 mode <u>Measurement 23:</u> BackSide toward phantom 15mm, Middle Channel in GPRS850 mode <u>Measurement 24:</u> BackSide toward phantom 15mm, High Channel in GPRS850 mode <u>Measurement 25:</u> FrontSide toward phantom 15mm, Low Channel in EDGE850 mode <u>Measurement 26:</u> FrontSide toward phantom 15mm, Middle Channel in EDGE850 mode <u>Measurement 27:</u> FrontSide toward phantom 15mm, High Channel in EDGE850 mode <u>Measurement 28:</u> BackSide toward phantom 15mm, Low Channel in EDGE850 mode <u>Measurement 29:</u> BackSide toward phantom 15mm, Middle Channel in EDGE850 mode <u>Measurement 30:</u> BackSide toward phantom 15mm, High Channel in EDGE850 mode



MEASUREMENT 1

Date of measurement: 02/20/2011**Area Scan: 7 x 7 x 1****dx=15mm****dy=15mm****Zoom Scan: 5 x 5 x 7****dx=5mm****dy=5mm****dz=5mm****Z Axis Scan: 1 x 1 x 21****dx=20mm****dy=20mm****dz=5mm**

A. Experimental conditions.

Phantom File	zinf15.txt, Adaptive 2 max
Phantom	Right head
Device Position	Cheek
Band	GSM850
Channels	Low
Signal	GSM

B. Instrumentations.

PC	HP (Pentium(R) V3.06GHz, SN:375052-AA1)	Calibrated: N/A
Wireless Communication Test Set	R&S (CMU200, SN:B23-03291)	Calibration Due: 05/25/2011
Network Analyzer	Agilent(E5071B, MY42301382)	Calibration Due: 03/24/2011
Voltmeter	Keithley (2000, SN:1015843)	Calibration Due: 05/25/2011
Signal Generator	Agilent (E8257C, SN:MY43321570)	Calibration Due: 03/24/2011
Amplifier	Mini-Circuits (ZHL-42, SN:110405)	Calibration Due: 07/29/2011
Power Meter	Agilent (E4416A, SN:QB41292714)	Calibration Due: 03/24/2011
Probe	Antennessa (SN:SN_1109_EP_100)	Calibration Due: 05/04/2011
DIPOLE 835	Antennessa (DIPI32,SN 48/05)	Calibration Due: 02/09/2012
Phantom	Antennessa (SN:SN41_05_SAM29)	Calibrated: N/A
Liquid	Antennessa	Calibrated: N/A
Measurement SW	OPEN SAR V2.1	Calibrated: N/A

C. SAR Measurement Results


Frequency (MHz)	824.200012
Relative permittivity (real part)	41.466999
Relative permittivity (imaginary part)	19.511101
Conductivity (S/m)	0.923392
Variation (%)	-1.490000
Ambient Temperature:	21 °C
Liquid Temperature:	20 °C
ConvF:	20.66, 20.51, 28.36




Crest factor:

1:8

SURFACE SAR

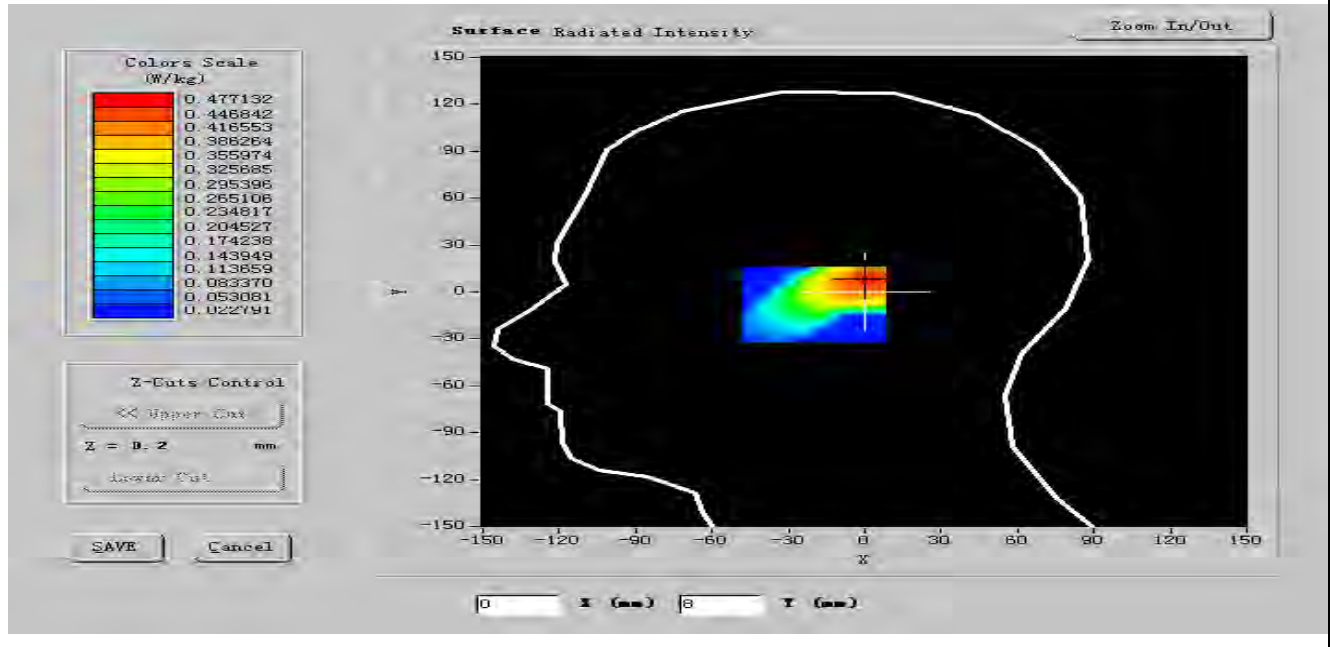

VOLUME SAR

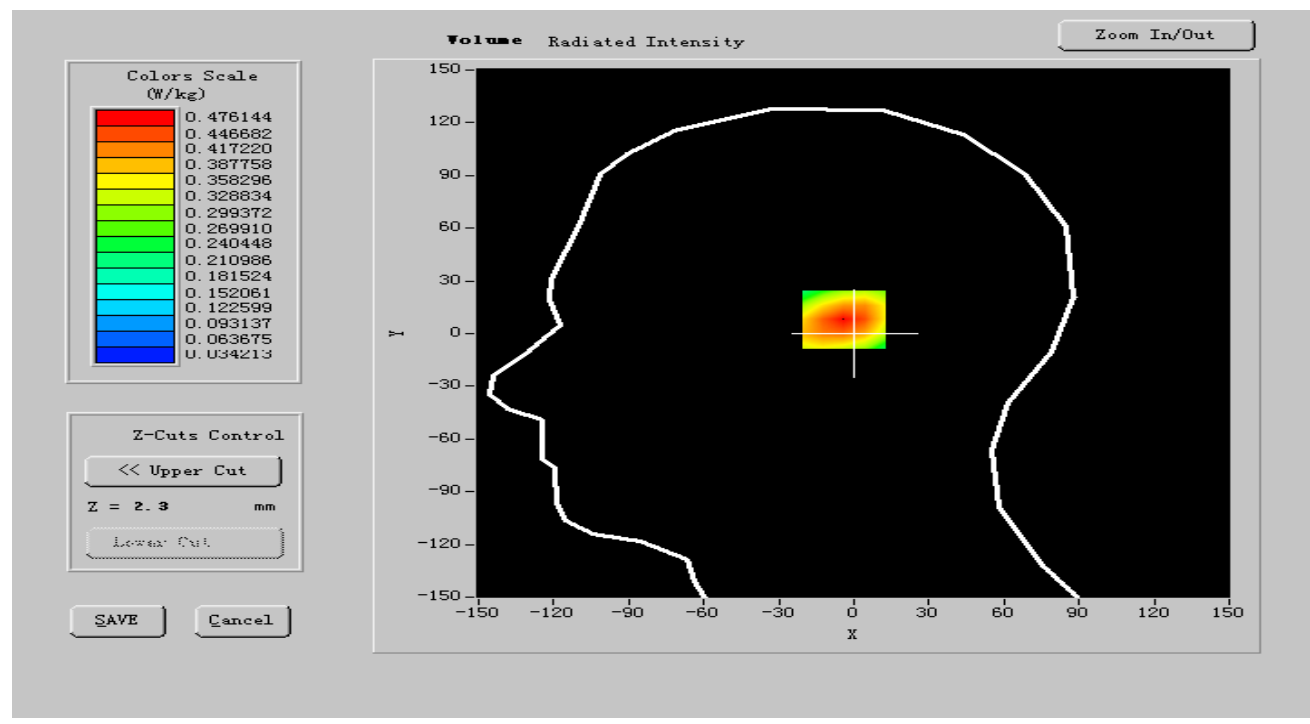




Maximum location: X=-13.00, Y=-3.00

SAR 10g (W/Kg)	0.544232
SAR 1g (W/Kg)	0.849195

Z Axis Scan

SAR, Z Axis Scan (X = -13, Y = -3)

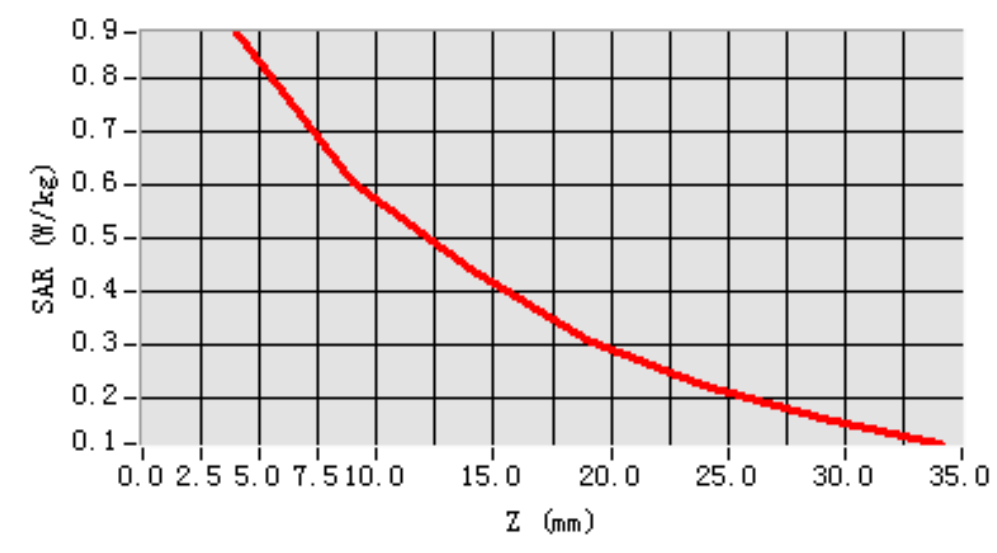



MEASUREMENT 2

Date of measurement: 02/20/2011**Area Scan: 7 x 7 x 1****dx=15mm****dy=15mm****Zoom Scan: 5 x 5 x 7****dx=5mm****dy=5mm****dz=5mm****Z Axis Scan: 1 x 1 x 21****dx=20mm****dy=20mm****dz=5mm**

A. Experimental conditions.

Phantom File	zinf15.txt, Adaptive 2 max
Phantom	Right head
Device Position	Cheek
Band	GSM850
Channels	Middle
Signal	GSM

B. Instrumentations.

PC	HP (Pentium(R) V3.06GHz, SN:375052-AA1)	Calibrated: N/A
Wireless Communication Test Set	R&S (CMU200, SN:B23-03291)	Calibration Due: 05/25/2011
Network Analyzer	Agilent(E5071B, MY42301382)	Calibration Due: 03/24/2011
Voltmeter	Keithley (2000, SN:1015843)	Calibration Due: 05/25/2011
Signal Generator	Agilent (E8257C, SN:MY43321570)	Calibration Due: 03/24/2011
Amplifier	Mini-Circuits (ZHL-42, SN:110405)	Calibration Due: 07/29/2011
Power Meter	Agilent (E4416A, SN:QB41292714)	Calibration Due: 03/24/2011
Probe	Antennessa (SN:SN_1109_EP_100)	Calibration Due: 05/04/2011
DIPOLE 835	Antennessa (DIPI32,SN 48/05)	Calibration Due: 02/09/2012
Phantom	Antennessa (SN:SN41_05_SAM29)	Calibrated: N/A
Liquid	Antennessa	Calibrated: N/A
Measurement SW	OPEN SAR V2.1	Calibrated: N/A

C. SAR Measurement Results


Frequency (MHz)	836.600024
Relative permittivity (real part)	41.466999
Relative permittivity (imaginary part)	19.511101
Conductivity (S/m)	0.916616
Variation (%)	-0.110000
Ambient Temperature:	21 °C
Liquid Temperature:	20 °C
ConvF:	20.66, 20.51, 28.36




Crest factor:

1:8

SURFACE SAR

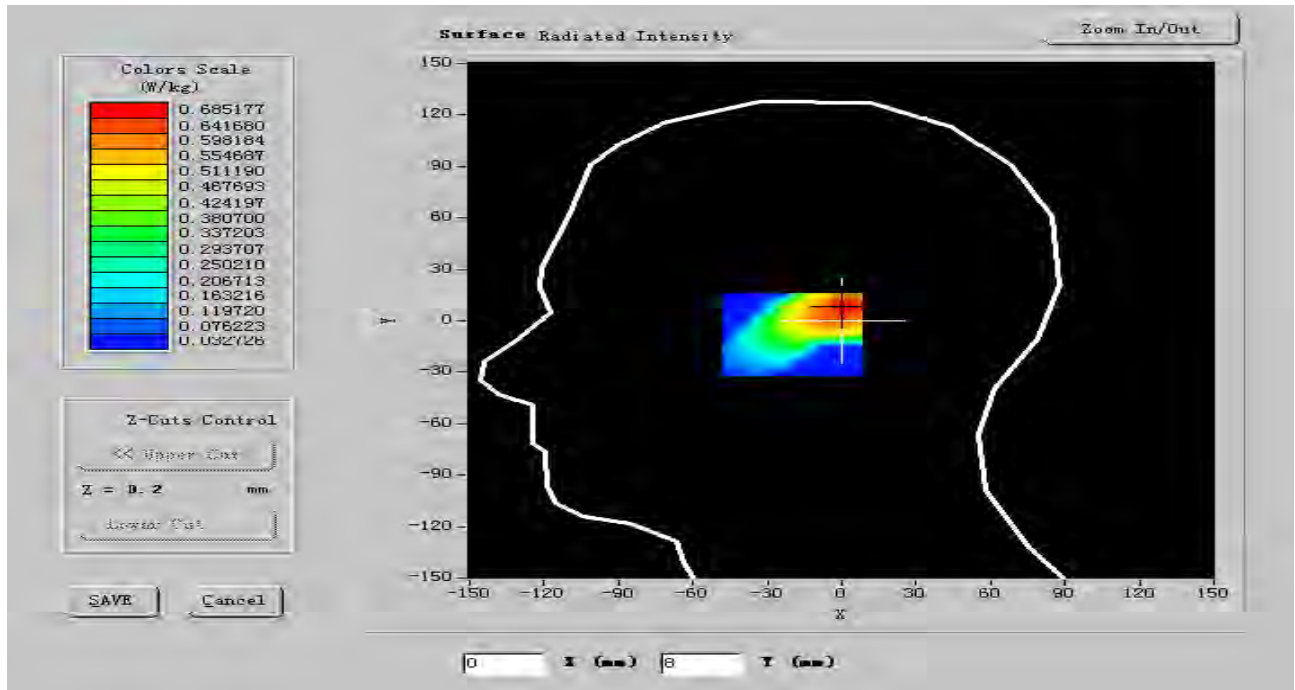

VOLUME SAR

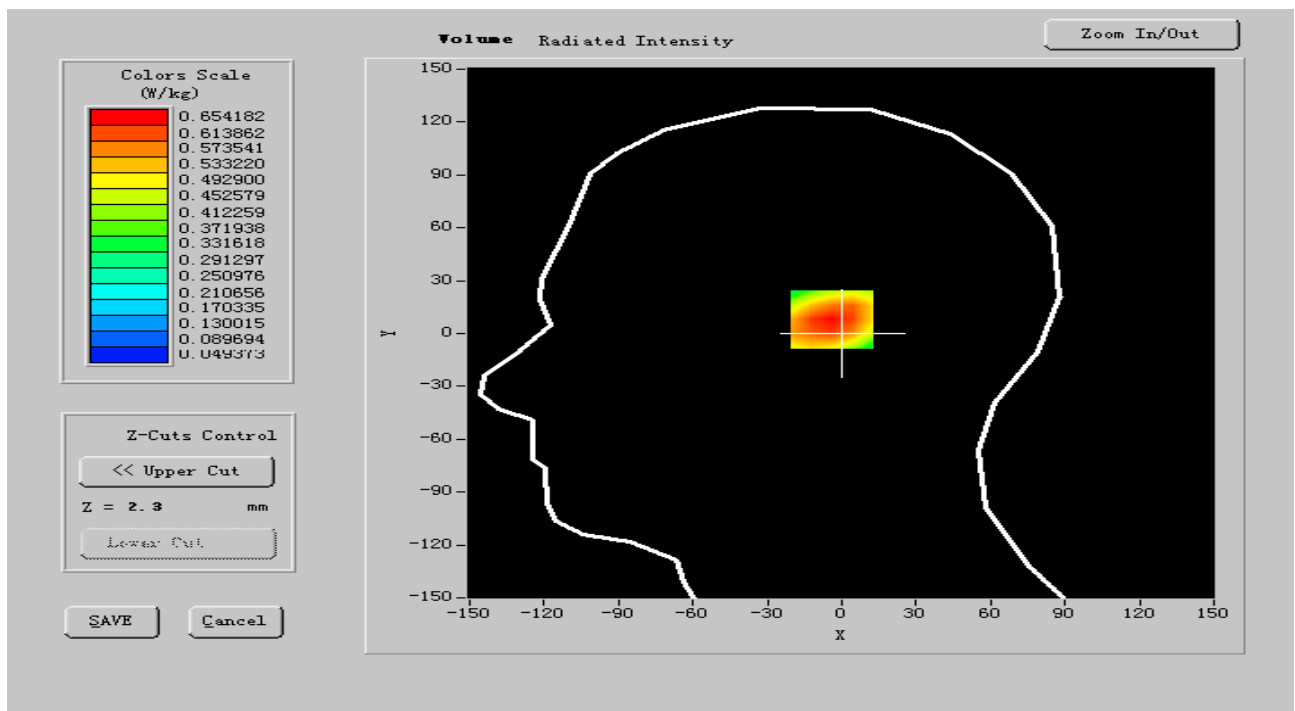




Maximum location: X=-13.00, Y=-3.00

SAR 10g (W/Kg)	0.562540
SAR 1g (W/Kg)	0.868381

Z Axis Scan

SAR, Z Axis Scan (X = -13, Y = -3)

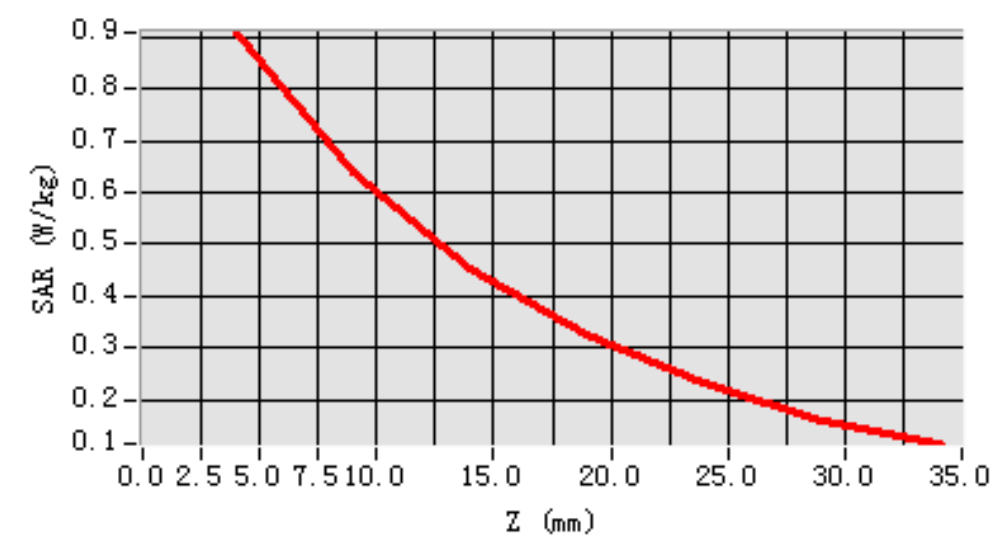



MEASUREMENT 3

Date of measurement: 02/20/2011**Area Scan: 7 x 7 x 1****dx=15mm****dy=15mm****Zoom Scan: 5 x 5 x 7****dx=5mm****dy=5mm****dz=5mm****Z Axis Scan: 1 x 1 x 21****dx=20mm****dy=20mm****dz=5mm**

A. Experimental conditions.

Phantom File	zinf15.txt, Adaptative 2 max
Phantom	Right head
Device Position	Cheek
Band	GSM850
Channels	High
Signal	GSM

B. Instrumentations.

PC	HP (Pentium(R) V3.06GHz, SN:375052-AA1)	Calibrated: N/A
Wireless Communication Test Set	R&S (CMU200, SN:B23-03291)	Calibration Due: 05/25/2011
Network Analyzer	Agilent(E5071B, MY42301382)	Calibration Due: 03/24/2011
Voltmeter	Keithley (2000, SN:1015843)	Calibration Due: 05/25/2011
Signal Generator	Agilent (E8257C, SN:MY43321570)	Calibration Due: 03/24/2011
Amplifier	Mini-Circuits (ZHL-42, SN:110405)	Calibration Due: 07/29/2011
Power Meter	Agilent (E4416A, SN:QB41292714)	Calibration Due: 03/24/2011
Probe	Antennessa (SN:SN_1109_EP_100)	Calibration Due: 05/04/2011
DIPOLE 835	Antennessa (DIPI32,SN 48/05)	Calibration Due: 02/09/2012
Phantom	Antennessa (SN:SN41_05_SAM29)	Calibrated: N/A
Liquid	Antennessa	Calibrated: N/A
Measurement SW	OPEN SAR V2.1	Calibrated: N/A

C. SAR Measurement Results


Frequency (MHz)	848.599976
Relative permittivity (real part)	41.262001
Relative permittivity (imaginary part)	19.598200
Conductivity (S/m)	0.923946
Variation (%)	-0.110000
Ambient Temperature:	21 °C
Liquid Temperature:	20 °C
ConvF:	20.66, 20.51, 28.36




Crest factor:

1:8

SURFACE SAR

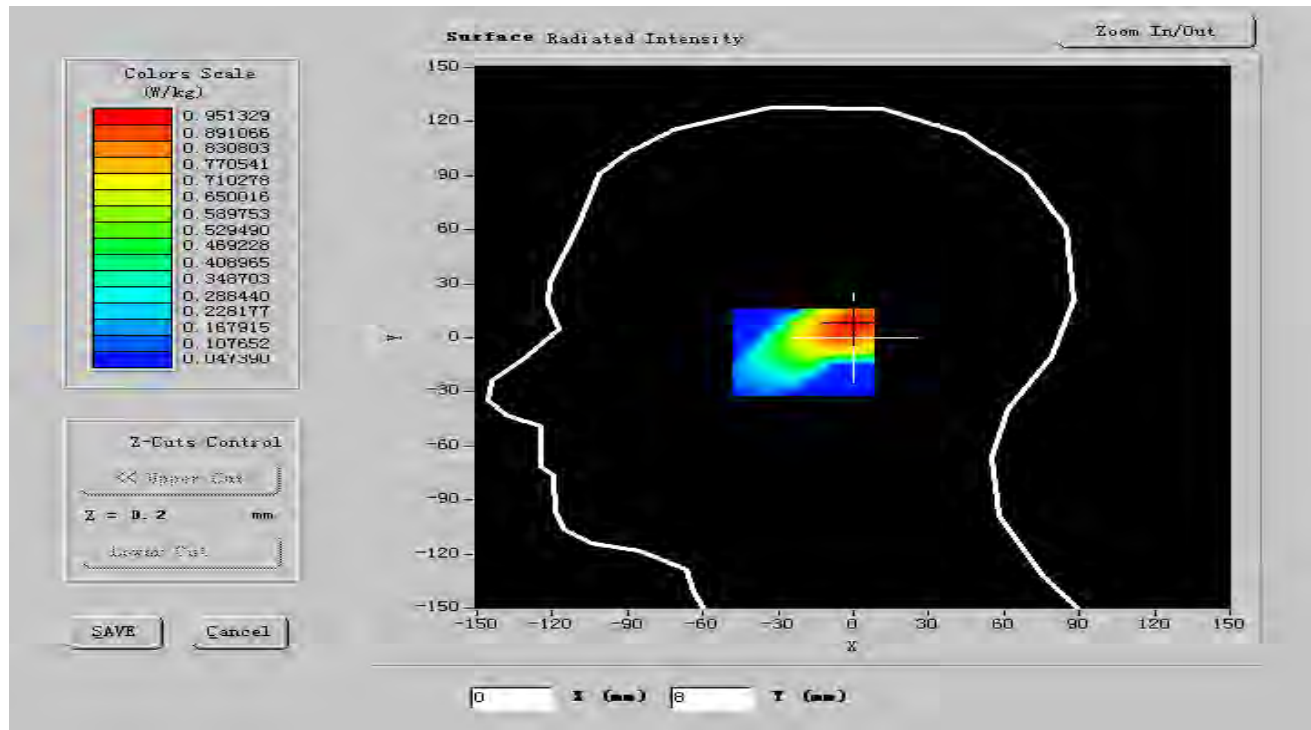

VOLUME SAR

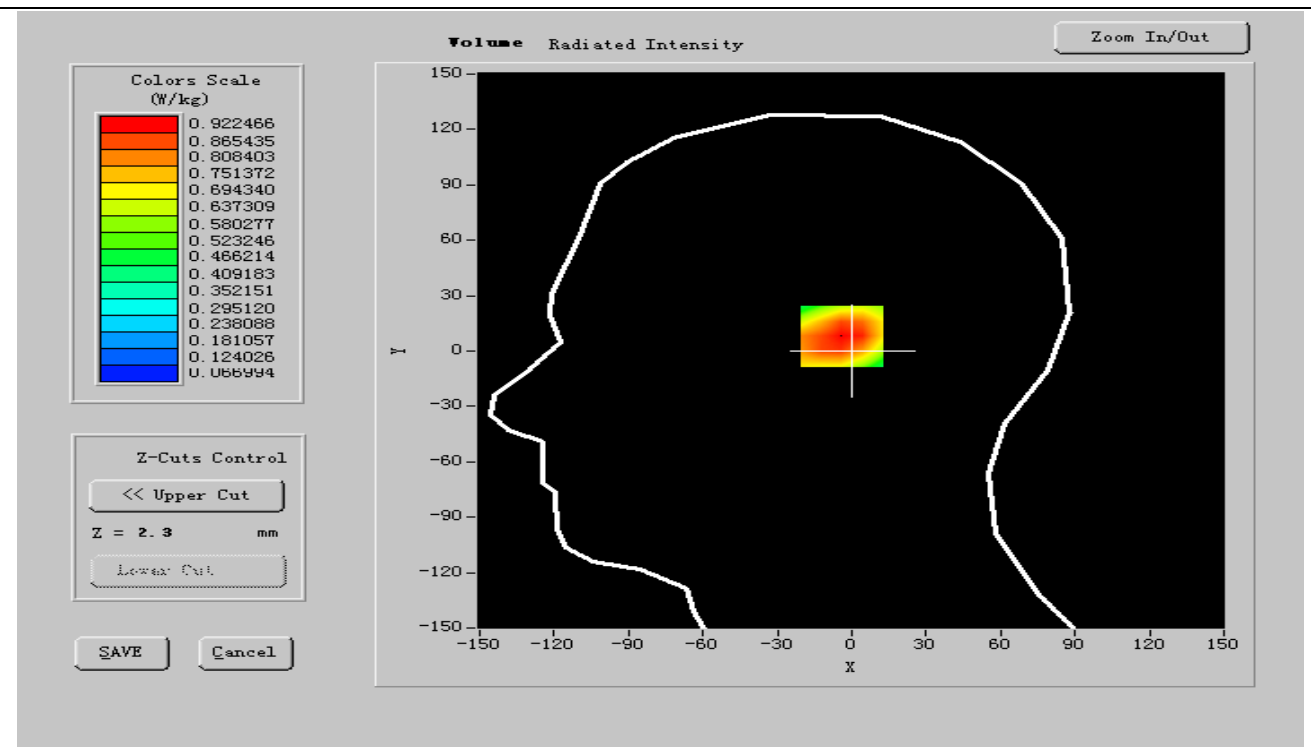




Maximum location: X=-13.00, Y=-3.00

SAR 10g (W/Kg)	0.555620
SAR 1g (W/Kg)	0.844465

Z Axis Scan

SAR, Z Axis Scan (X = -13, Y = -3)

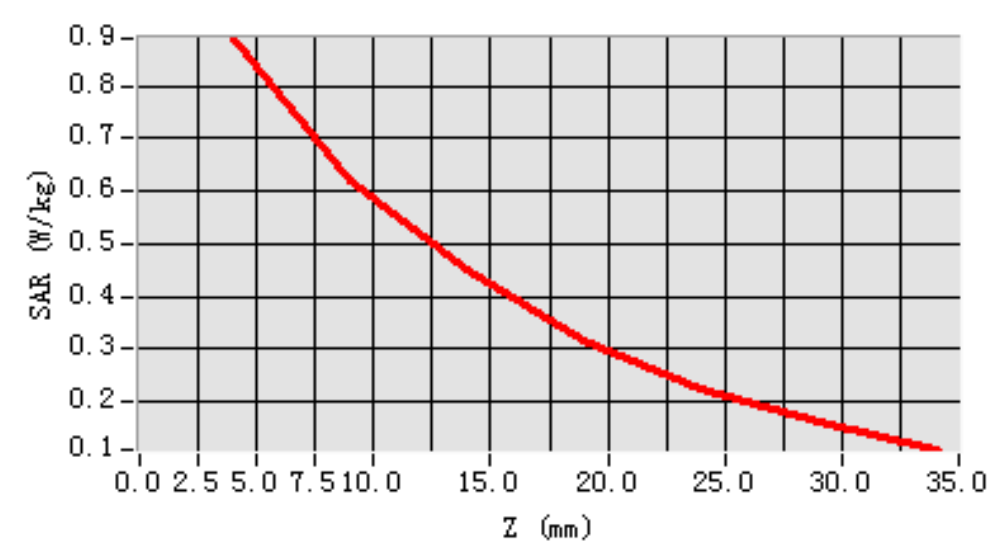



MEASUREMENT 4

Date of measurement: 02/20/2011**Area Scan: 7 x 7 x 1****dx=15mm****dy=15mm****Zoom Scan: 5 x 5 x 7****dx=5mm****dy=5mm****dz=5mm****Z Axis Scan: 1 x 1 x 21****dx=20mm****dy=20mm****dz=5mm**

A. Experimental conditions.

Phantom File	zinf15.txt, Adaptive 2 max
Phantom	Right head
Device Position	Tilt
Band	GSM850
Channels	Low
Signal	GSM

B. Instrumentations.

PC	HP (Pentium(R) V3.06GHz, SN:375052-AA1)	Calibrated: N/A
Wireless Communication Test Set	R&S (CMU200, SN:B23-03291)	Calibration Due: 05/25/2011
Network Analyzer	Agilent(E5071B, MY42301382)	Calibration Due: 03/24/2011
Voltmeter	Keithley (2000, SN:1015843)	Calibration Due: 05/25/2011
Signal Generator	Agilent (E8257C, SN:MY43321570)	Calibration Due: 03/24/2011
Amplifier	Mini-Circuits (ZHL-42, SN:110405)	Calibration Due: 07/29/2011
Power Meter	Agilent (E4416A, SN:QB41292714)	Calibration Due: 03/24/2011
Probe	Antennessa (SN:SN_1109_EP_100)	Calibration Due: 05/04/2011
DIPOLE 835	Antennessa (DIPI32,SN 48/05)	Calibration Due: 02/09/2012
Phantom	Antennessa (SN:SN41_05_SAM29)	Calibrated: N/A
Liquid	Antennessa	Calibrated: N/A
Measurement SW	OPEN SAR V2.1	Calibrated: N/A

C. SAR Measurement Results


Frequency (MHz)	824.200012
Relative permittivity (real part)	41.466999
Relative permittivity (imaginary part)	19.511101
Conductivity (S/m)	0.913392
Variation (%)	-3.070000
Ambient Temperature:	21 °C
Liquid Temperature:	20 °C
ConvF:	20.66, 20.51, 28.36




Crest factor:

1:8

SURFACE SAR

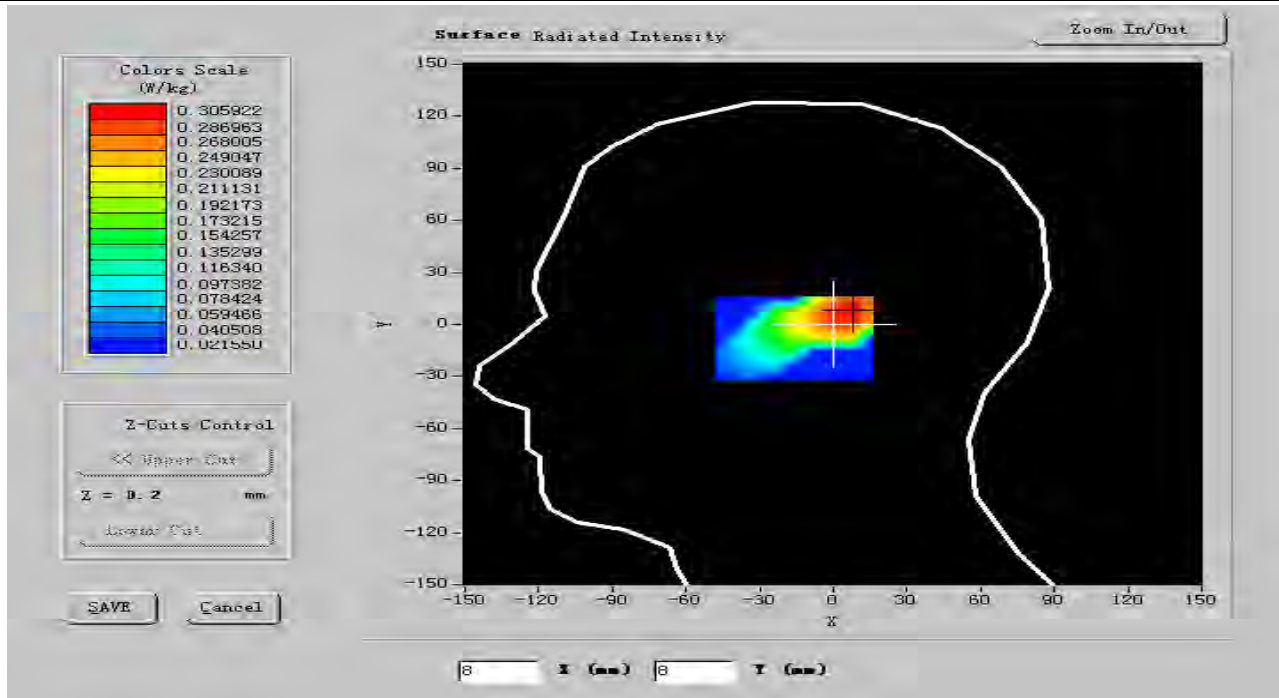

VOLUME SAR

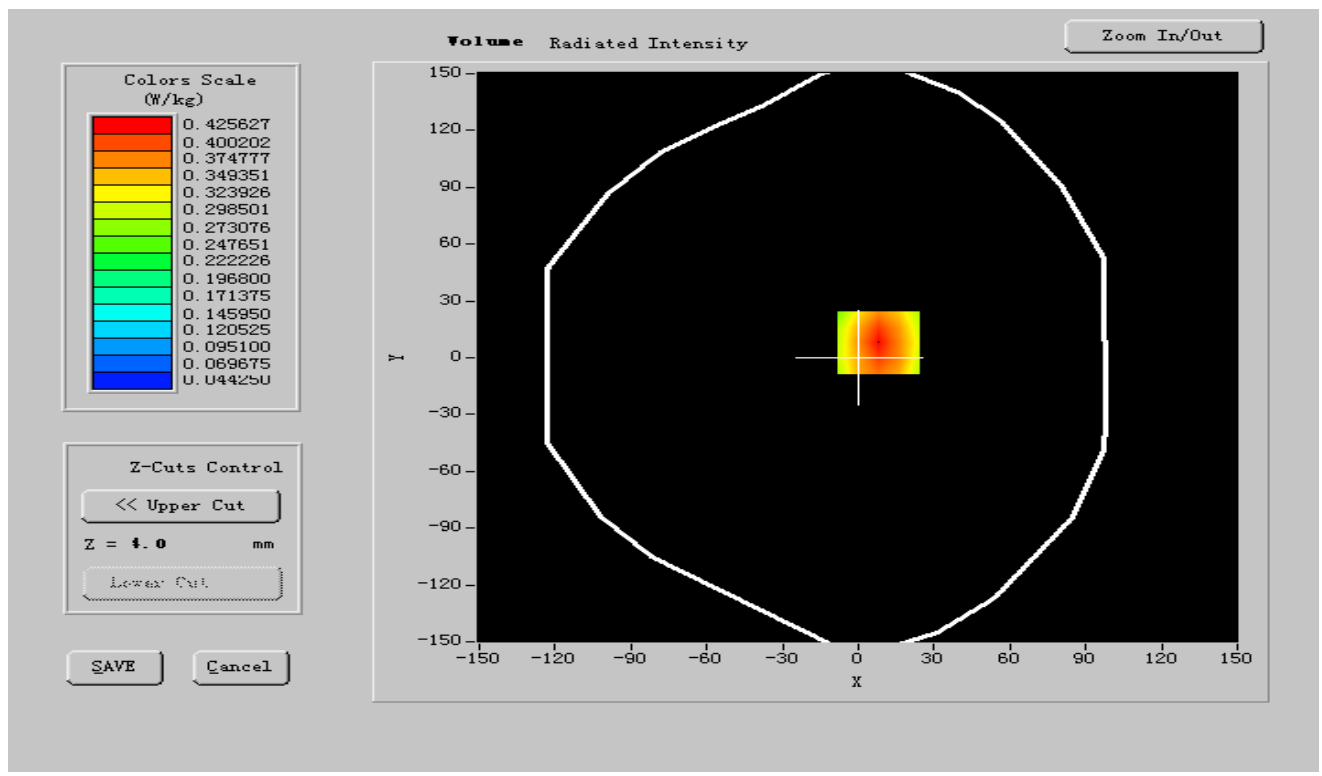




Maximum location: X=-13.00, Y=-3.00

SAR 10g (W/Kg)	0.365920
SAR 1g (W/Kg)	0.575698

Z Axis Scan

SAR, Z Axis Scan (X = -9, Y = -6)

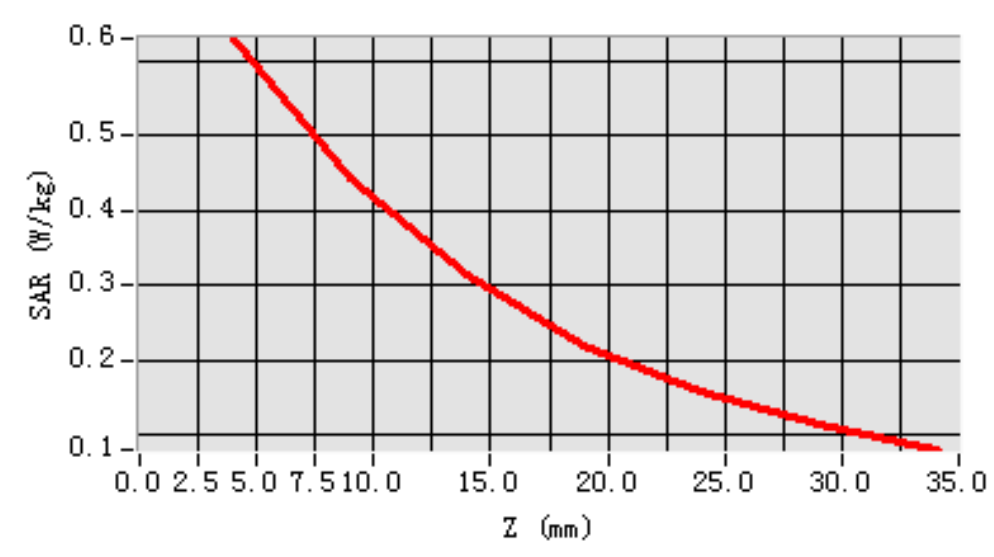



MEASUREMENT 5

Date of measurement: 02/20/2011**Area Scan: 7 x 7 x 1****dx=15mm****dy=15mm****Zoom Scan: 5 x 5 x 7****dx=5mm****dy=5mm****dz=5mm****Z Axis Scan: 1 x 1 x 21****dx=20mm****dy=20mm****dz=5mm**

A. Experimental conditions.

Phantom File	zinf15.txt, Adaptive 2 max
Phantom	Right head
Device Position	Tilt
Band	GSM850
Channels	Middle
Signal	GSM

B. Instrumentations.

PC	HP (Pentium(R) V3.06GHz, SN:375052-AA1)	Calibrated: N/A
Wireless Communication Test Set	R&S (CMU200, SN:B23-03291)	Calibration Due: 05/25/2011
Network Analyzer	Agilent(E5071B, MY42301382)	Calibration Due: 03/24/2011
Voltmeter	Keithley (2000, SN:1015843)	Calibration Due: 05/25/2011
Signal Generator	Agilent (E8257C, SN:MY43321570)	Calibration Due: 03/24/2011
Amplifier	Mini-Circuits (ZHL-42, SN:110405)	Calibration Due: 07/29/2011
Power Meter	Agilent (E4416A, SN:QB41292714)	Calibration Due: 03/24/2011
Probe	Antennessa (SN:SN_1109_EP_100)	Calibration Due: 05/04/2011
DIPOLE 835	Antennessa (DIPI32,SN 48/05)	Calibration Due: 02/09/2012
Phantom	Antennessa (SN:SN41_05_SAM29)	Calibrated: N/A
Liquid	Antennessa	Calibrated: N/A
Measurement SW	OPEN SAR V2.1	Calibrated: N/A

C. SAR Measurement Results


Frequency (MHz)	836.600024
Relative permittivity (real part)	41.466999
Relative permittivity (imaginary part)	19.511101
Conductivity (S/m)	0.913636
Variation (%)	-0.880000
Ambient Temperature:	21 °C
Liquid Temperature:	20 °C
ConvF:	20.66, 20.51, 28.36




Crest factor:

1:8

SURFACE SAR

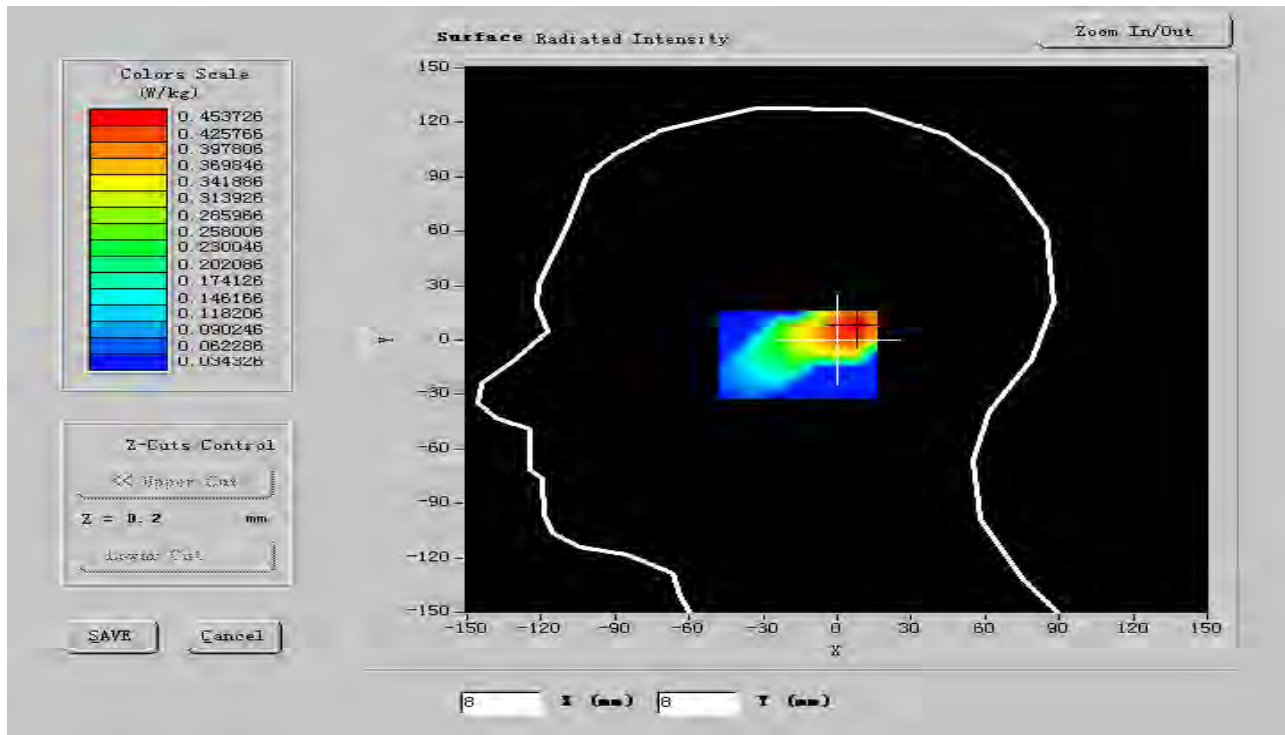

VOLUME SAR

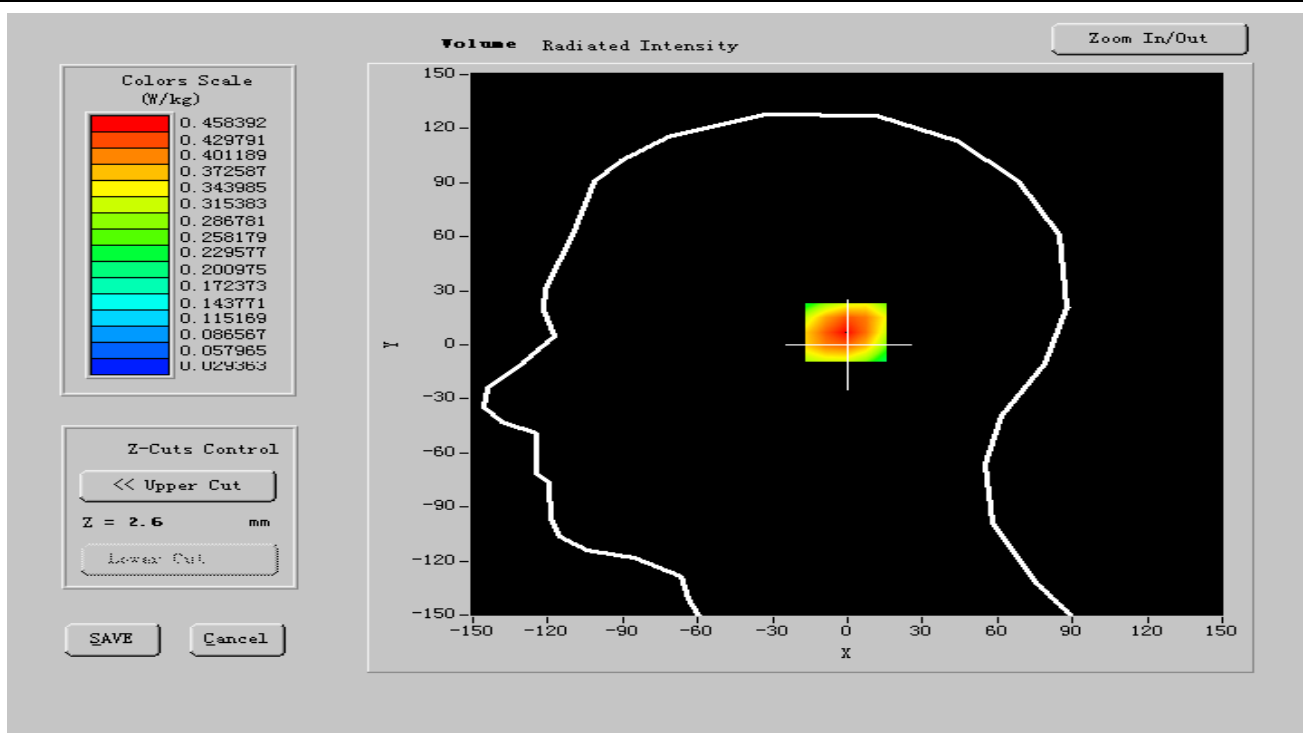




Maximum location: X=-13.00, Y=-3.00

SAR 10g (W/Kg)	0.412358
SAR 1g (W/Kg)	0.592981

Z Axis Scan

SAR, Z Axis Scan (X = -9, Y = -6)

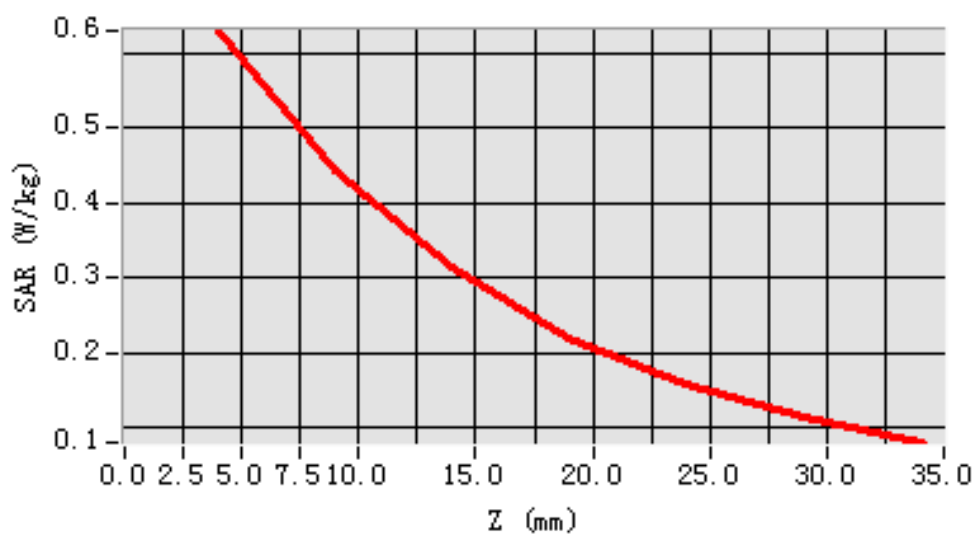



MEASUREMENT 6

Date of measurement: 02/20/2011**Area Scan: 7 x 7 x 1****dx=15mm****dy=15mm****Zoom Scan: 5 x 5 x 7****dx=5mm****dy=5mm****dz=5mm****Z Axis Scan: 1 x 1 x 21****dx=20mm****dy=20mm****dz=5mm**

A. Experimental conditions.

Phantom File	zinf15.txt, Adaptative 2 max
Phantom	Right head
Device Position	Tilt
Band	GSM850
Channels	High
Signal	GSM

B. Instrumentations.

PC	HP (Pentium(R) V3.06GHz, SN:375052-AA1)	Calibrated: N/A
Wireless Communication Test Set	R&S (CMU200, SN:B23-03291)	Calibration Due: 05/25/2011
Network Analyzer	Agilent(E5071B, MY42301382)	Calibration Due: 03/24/2011
Voltmeter	Keithley (2000, SN:1015843)	Calibration Due: 05/25/2011
Signal Generator	Agilent (E8257C, SN:MY43321570)	Calibration Due: 03/24/2011
Amplifier	Mini-Circuits (ZHL-42, SN:110405)	Calibration Due: 07/29/2011
Power Meter	Agilent (E4416A, SN:QB41292714)	Calibration Due: 03/24/2011
Probe	Antennessa (SN:SN_1109_EP_100)	Calibration Due: 05/04/2011
DIPOLE 835	Antennessa (DIPI32,SN 48/05)	Calibration Due: 02/09/2012
Phantom	Antennessa (SN:SN41_05_SAM29)	Calibrated: N/A
Liquid	Antennessa	Calibrated: N/A
Measurement SW	OPEN SAR V2.1	Calibrated: N/A

C. SAR Measurement Results


Frequency (MHz)	848.599976
Relative permittivity (real part)	41.262001
Relative permittivity (imaginary part)	19.598200
Conductivity (S/m)	0.923946
Variation (%)	-3.070000
Ambient Temperature:	21 °C
Liquid Temperature:	20 °C
ConvF:	20.66, 20.51, 28.36




Crest factor:

1:8

SURFACE SAR

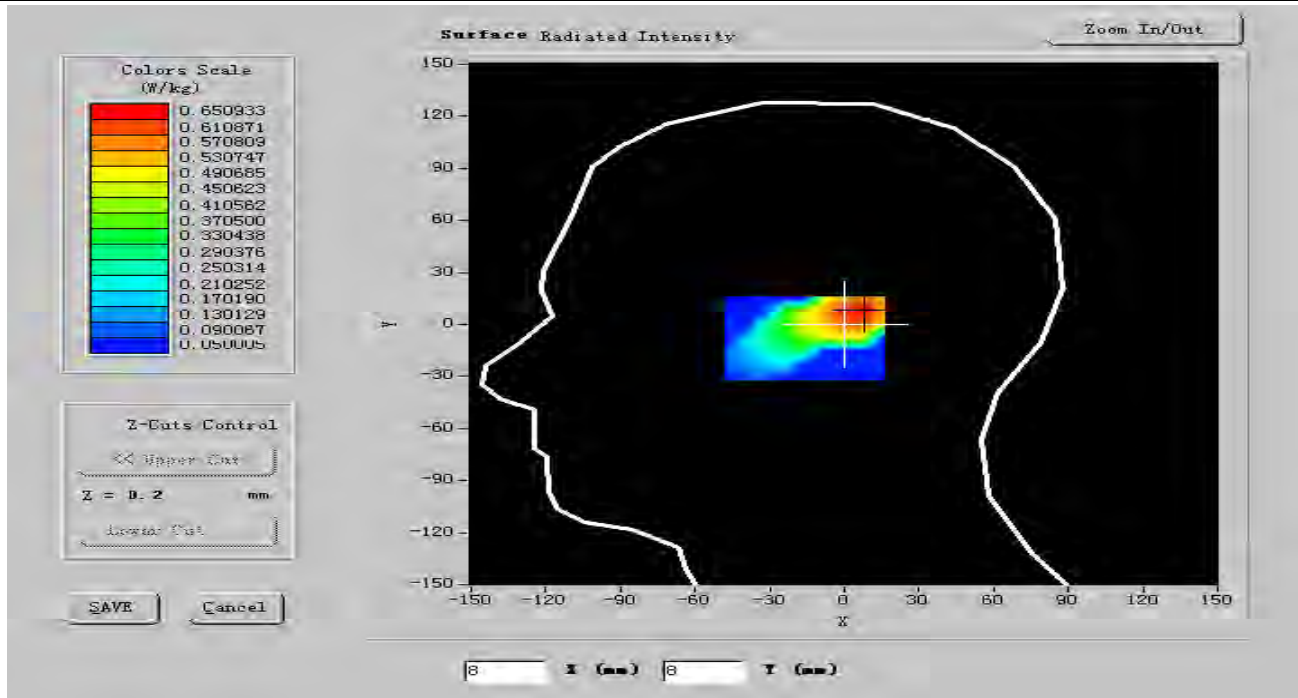

VOLUME SAR

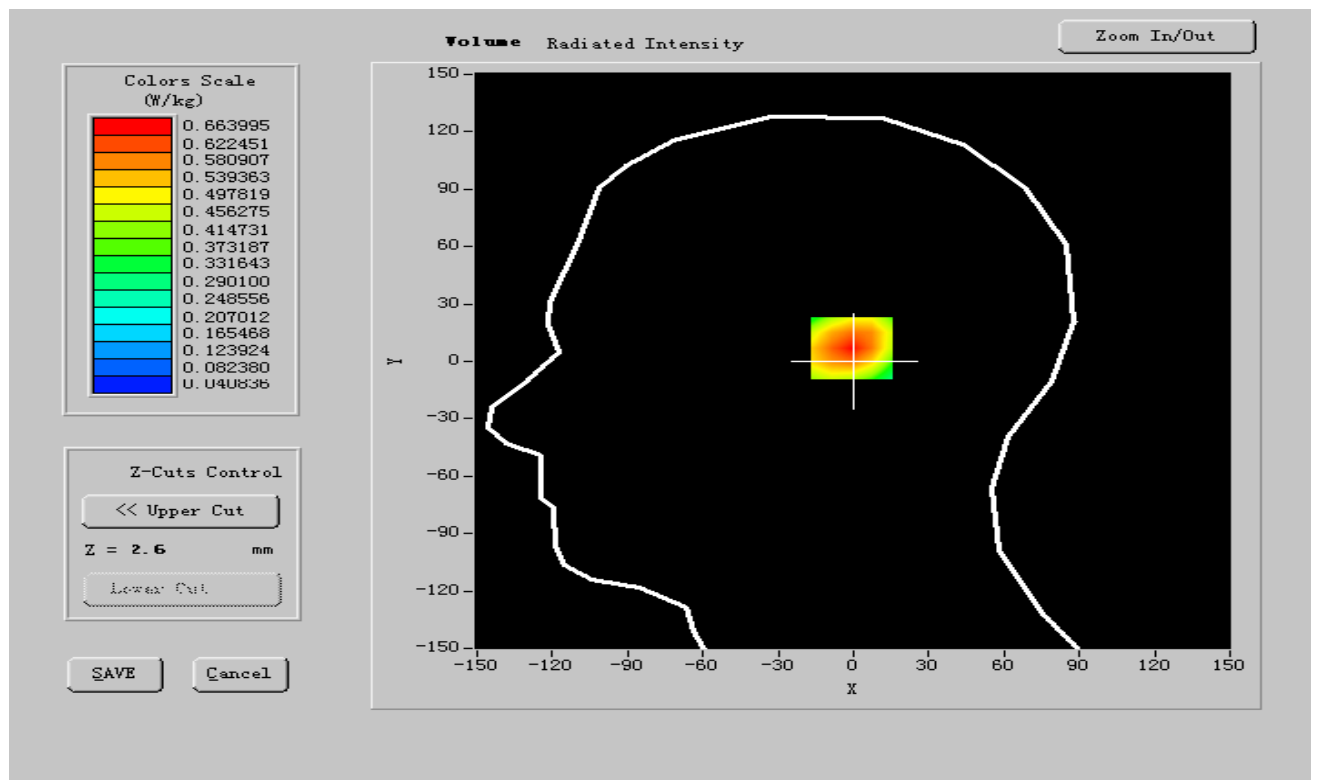




Maximum location: X=-13.00, Y=-3.00

SAR 10g (W/Kg)	0.416354
SAR 1g (W/Kg)	0.599428

Z Axis Scan

SAR, Z Axis Scan (X = -9, Y = -6)

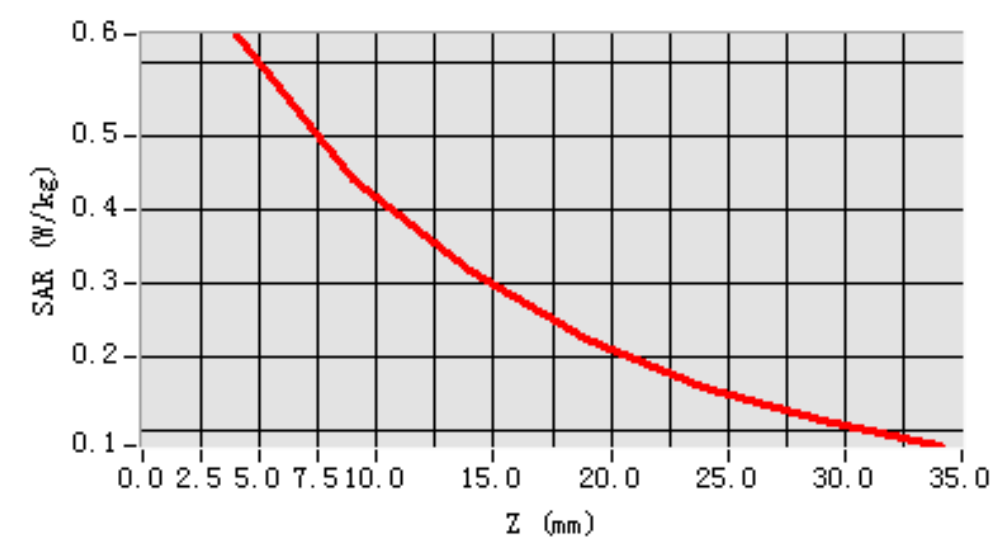



MEASUREMENT 7

Date of measurement: 02/20/2011

Area Scan: 7 x 7 x 1

dx=15mm

dy=15mm

Zoom Scan: 5 x 5 x 7

dx=5mm

dy=5mm

dz=5mm

Z Axis Scan: 1 x 1 x 21

dx=20mm

dy=20mm

dz=5mm

A. Experimental conditions.

Phantom File	zinf15.txt, Adaptive 2 max
Phantom	Left head
Device Position	Cheek
Band	GSM850
Channels	Low
Signal	GSM

B. Instrumentations.

PC	HP (Pentium(R) V3.06GHz, SN:375052-AA1)	Calibrated: N/A
Wireless Communication Test Set	R&S (CMU200, SN:B23-03291)	Calibration Due: 05/25/2011
Network Analyzer	Agilent(E5071B, MY42301382)	Calibration Due: 03/24/2011
Voltmeter	Keithley (2000, SN:1015843)	Calibration Due: 05/25/2011
Signal Generator	Agilent (E8257C, SN:MY43321570)	Calibration Due: 03/24/2011
Amplifier	Mini-Circuits (ZHL-42, SN:110405)	Calibration Due: 07/29/2011
Power Meter	Agilent (E4416A, SN:QB41292714)	Calibration Due: 03/24/2011
Probe	Antennessa (SN:SN_1109_EP_100)	Calibration Due: 05/04/2011
DIPOLE 835	Antennessa (DIPI32,SN 48/05)	Calibration Due: 02/09/2012
Phantom	Antennessa (SN:SN41_05_SAM29)	Calibrated: N/A
Liquid	Antennessa	Calibrated: N/A
Measurement SW	OPEN SAR V2.1	Calibrated: N/A

C. SAR Measurement Results


Frequency (MHz)	824.200012
Relative permittivity (real part)	41.466999
Relative permittivity (imaginary part)	19.511101
Conductivity (S/m)	0.923372
Variation (%)	-1.240000
Ambient Temperature:	21 °C
Liquid Temperature:	20 °C
ConvF:	20.66, 20.51, 28.36




Crest factor:

1:8

SURFACE SAR

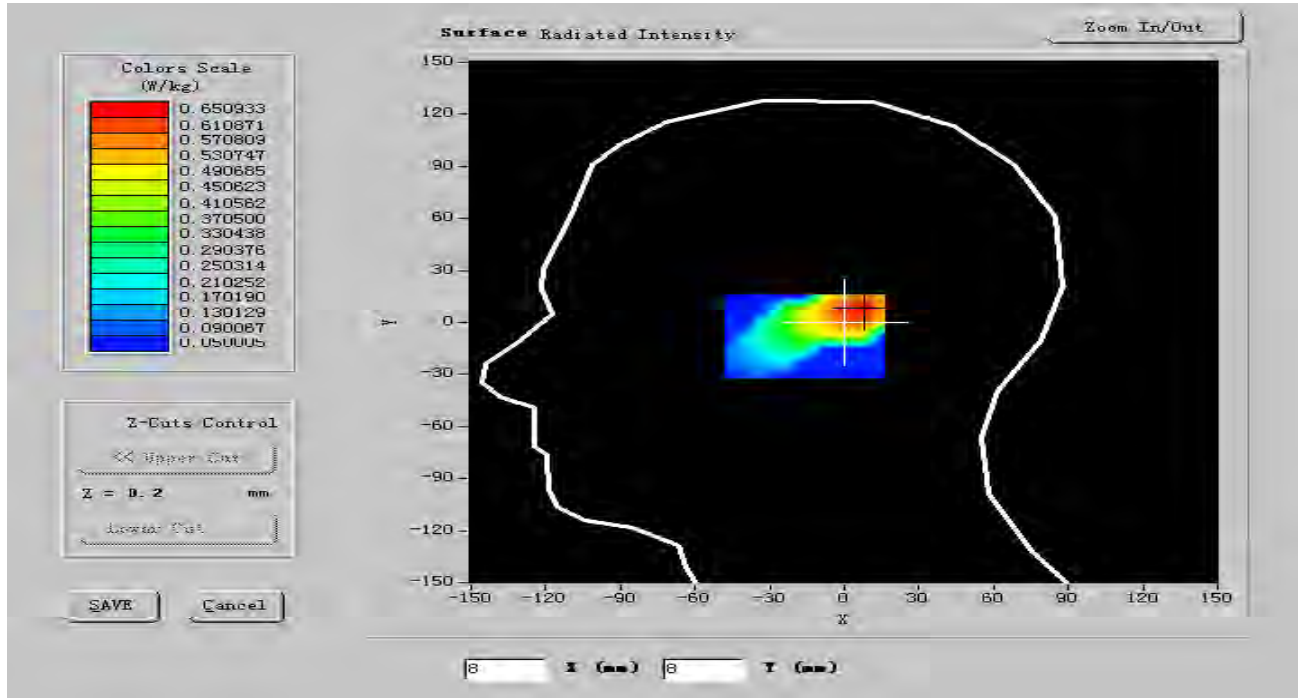

VOLUME SAR

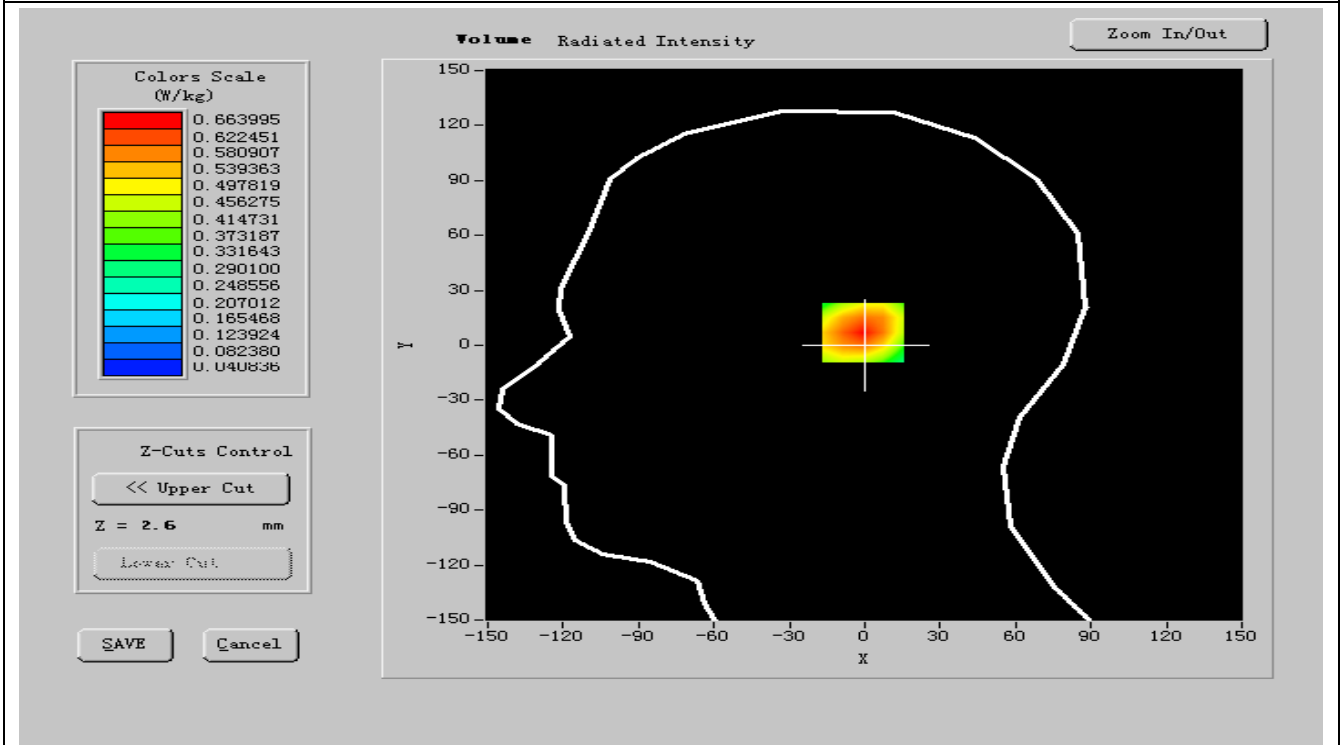




Maximum location: X=-13.00, Y=-3.00

SAR 10g (W/Kg)	0.536541
SAR 1g (W/Kg)	0.839028

Z Axis Scan

SAR, Z Axis Scan (X = -25, Y = -11)

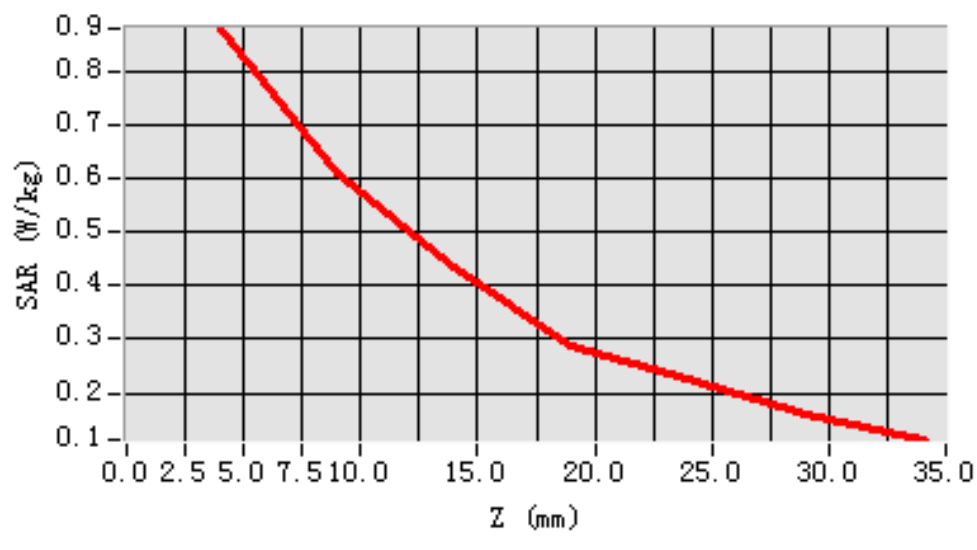



MEASUREMENT 8

Date of measurement: 02/20/2011**Area Scan: 7 x 7 x 1****dx=15mm****dy=15mm****Zoom Scan: 5 x 5 x 7****dx=5mm****dy=5mm****dz=5mm****Z Axis Scan: 1 x 1 x 21****dx=20mm****dy=20mm****dz=5mm**

A. Experimental conditions.

Phantom File	zinf15.txt, Adaptive 2 max
Phantom	Left head
Device Position	Cheek
Band	GSM850
Channels	Middle
Signal	GSM

B. Instrumentations.

PC	HP (Pentium(R) V3.06GHz, SN:375052-AA1)	Calibrated: N/A
Wireless Communication Test Set	R&S (CMU200, SN:B23-03291)	Calibration Due: 05/25/2011
Network Analyzer	Agilent(E5071B, MY42301382)	Calibration Due: 03/24/2011
Voltmeter	Keithley (2000, SN:1015843)	Calibration Due: 05/25/2011
Signal Generator	Agilent (E8257C, SN:MY43321570)	Calibration Due: 03/24/2011
Amplifier	Mini-Circuits (ZHL-42, SN:110405)	Calibration Due: 07/29/2011
Power Meter	Agilent (E4416A, SN:QB41292714)	Calibration Due: 03/24/2011
Probe	Antennessa (SN:SN_1109_EP_100)	Calibration Due: 05/04/2011
DIPOLE 835	Antennessa (DIPI32,SN 48/05)	Calibration Due: 02/09/2012
Phantom	Antennessa (SN:SN41_05_SAM29)	Calibrated: N/A
Liquid	Antennessa	Calibrated: N/A
Measurement SW	OPEN SAR V2.1	Calibrated: N/A

C. SAR Measurement Results


Frequency (MHz)	836.600024
Relative permittivity (real part)	41.466999
Relative permittivity (imaginary part)	19.511101
Conductivity (S/m)	0.9163242
Variation (%)	-1.240000
Ambient Temperature:	21 °C
Liquid Temperature:	20 °C
ConvF:	20.66, 20.51, 28.36




Crest factor:

1:8

SURFACE SAR

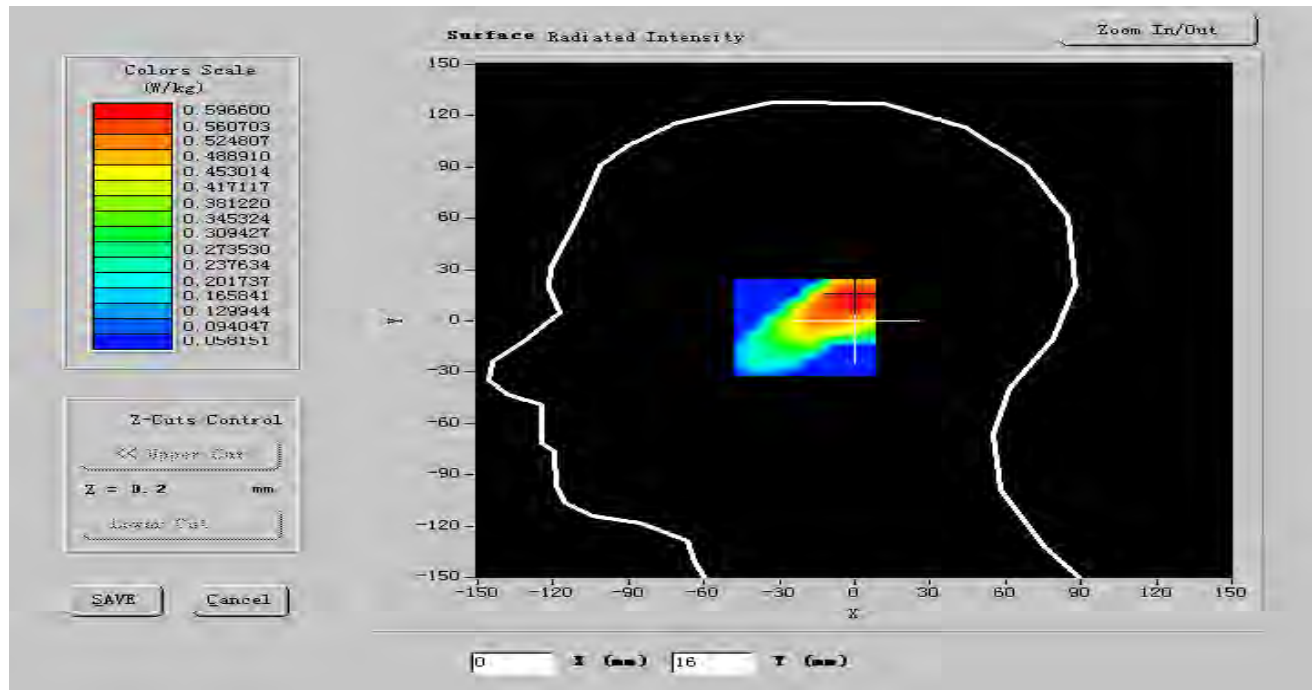

VOLUME SAR

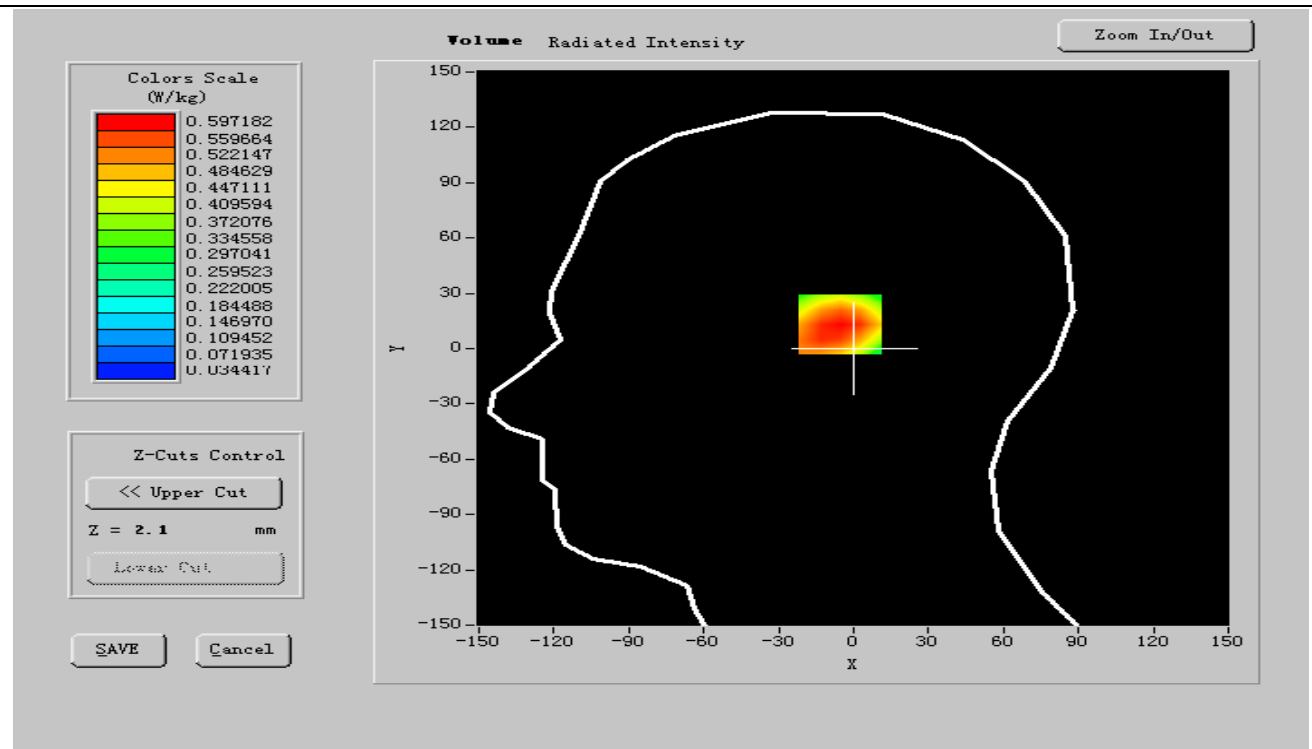




Maximum location: X=-13.00, Y=-3.00

SAR 10g (W/Kg)	0.559310
SAR 1g (W/Kg)	0.850731

Z Axis Scan

SAR, Z Axis Scan (X = -25, Y = -11)

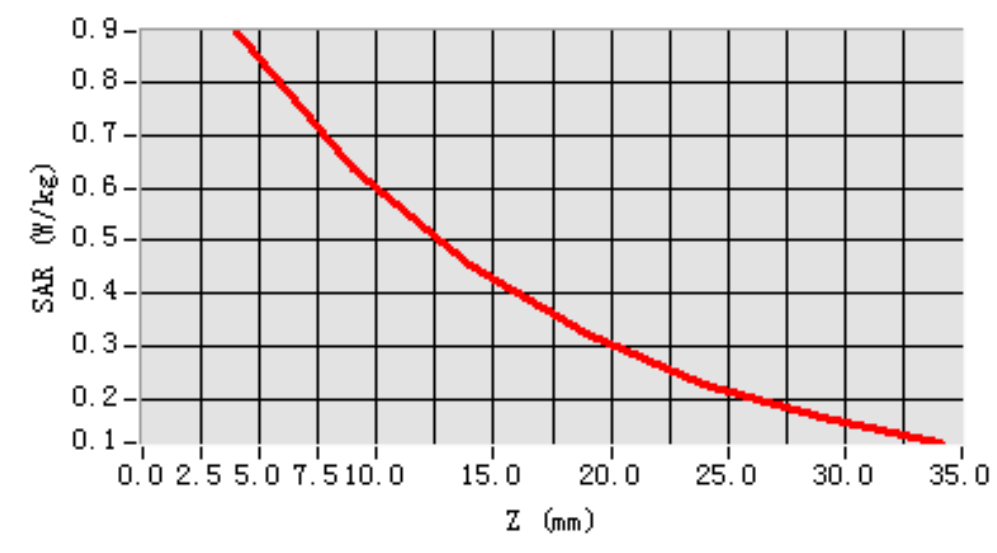



MEASUREMENT 9

Date of measurement: 02/20/2011**Area Scan: 7 x 7 x 1****dx=15mm****dy=15mm****Zoom Scan: 5 x 5 x 7****dx=5mm****dy=5mm****dz=5mm****Z Axis Scan: 1 x 1 x 21****dx=20mm****dy=20mm****dz=5mm**

A. Experimental conditions.

Phantom File	zinf15.txt, Adaptive 2 max
Phantom	Left head
Device Position	Cheek
Band	GSM850
Channels	High
Signal	GSM

B. Instrumentations.

PC	HP (Pentium(R) V3.06GHz, SN:375052-AA1)	Calibrated: N/A
Wireless Communication Test Set	R&S (CMU200, SN:B23-03291)	Calibration Due: 05/25/2011
Network Analyzer	Agilent(E5071B, MY42301382)	Calibration Due: 03/24/2011
Voltmeter	Keithley (2000, SN:1015843)	Calibration Due: 05/25/2011
Signal Generator	Agilent (E8257C, SN:MY43321570)	Calibration Due: 03/24/2011
Amplifier	Mini-Circuits (ZHL-42, SN:110405)	Calibration Due: 07/29/2011
Power Meter	Agilent (E4416A, SN:QB41292714)	Calibration Due: 03/24/2011
Probe	Antennessa (SN:SN_1109_EP_100)	Calibration Due: 05/04/2011
DIPOLE 835	Antennessa (DIPI32,SN 48/05)	Calibration Due: 02/09/2012
Phantom	Antennessa (SN:SN41_05_SAM29)	Calibrated: N/A
Liquid	Antennessa	Calibrated: N/A
Measurement SW	OPEN SAR V2.1	Calibrated: N/A

C. SAR Measurement Results


Frequency (MHz)	848.599976
Relative permittivity (real part)	41.278801
Relative permittivity (imaginary part)	19.598200
Conductivity (S/m)	0.923946
Variation (%)	-1.200000
Ambient Temperature:	21 °C
Liquid Temperature:	20 °C
ConvF:	20.66, 20.51, 28.36




Crest factor:

1:8

SURFACE SAR

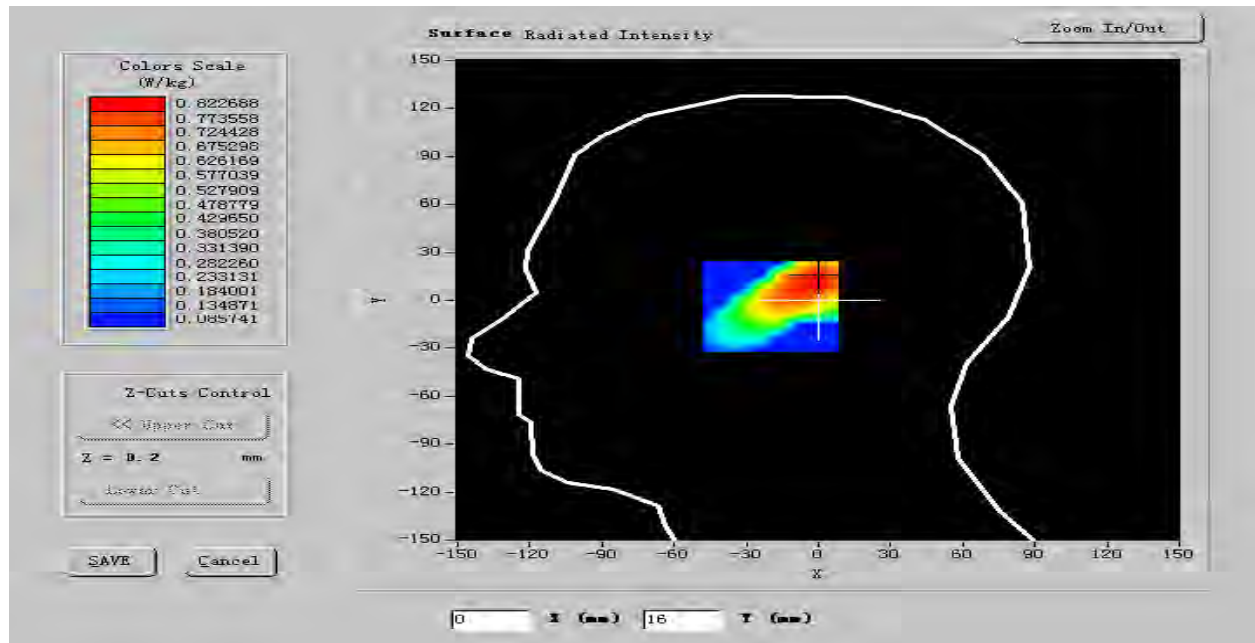

VOLUME SAR

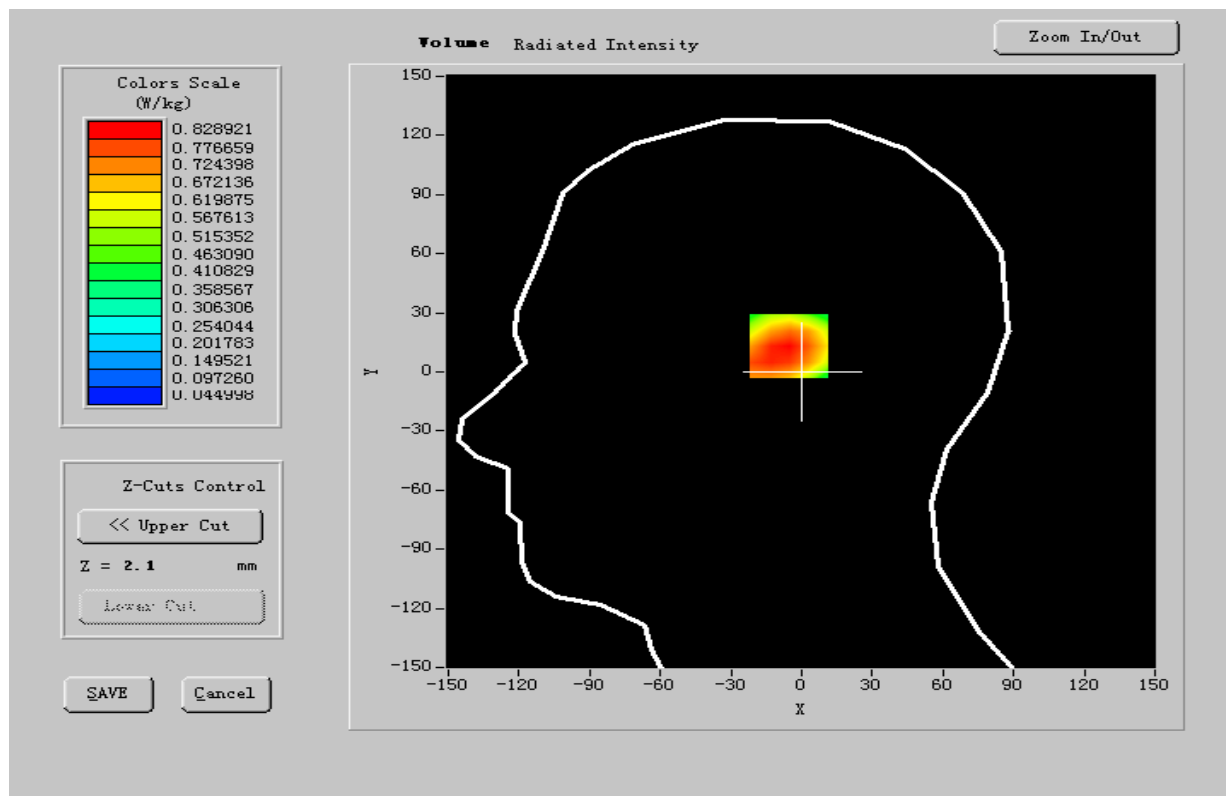




Maximum location: X=-13.00, Y=-3.00

SAR 10g (W/Kg)	0.538640
SAR 1g (W/Kg)	0.812950

Z Axis Scan

SAR, Z Axis Scan (X = -25, Y = -11)

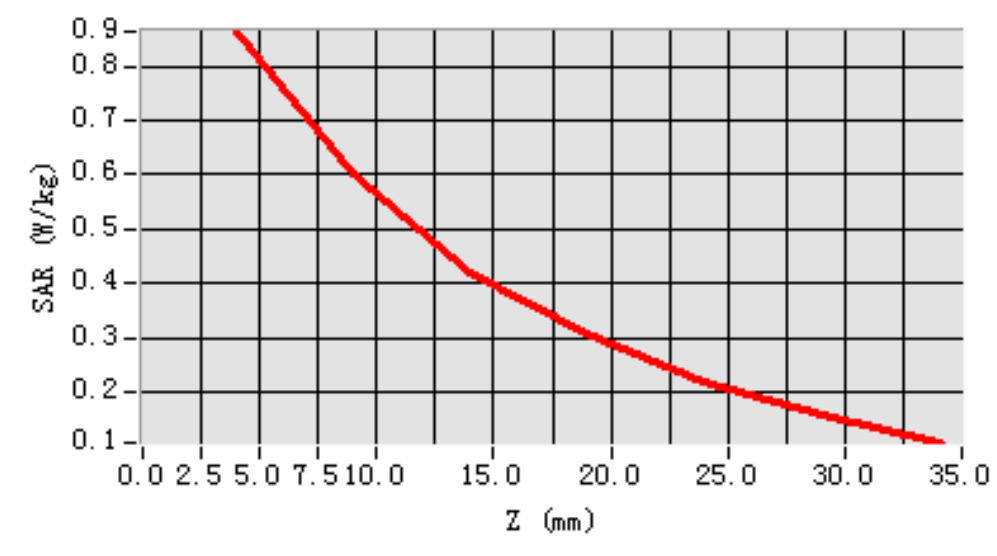



MEASUREMENT 10

Date of measurement: 02/20/2011

Area Scan: 7 x 7 x 1

dx=15mm

dy=15mm

Zoom Scan: 5 x 5 x 7

dx=5mm

dy=5mm

dz=5mm

Z Axis Scan: 1 x 1 x 21

dx=20mm

dy=20mm

dz=5mm

A. Experimental conditions.

Phantom File	zinf15.txt, Adaptive 2 max
Phantom	Left head
Device Position	Tilt
Band	GSM850
Channels	Low
Signal	GSM

B. Instrumentations.

PC	HP (Pentium(R) V3.06GHz, SN:375052-AA1)	Calibrated: N/A
Wireless Communication Test Set	R&S (CMU200, SN:B23-03291)	Calibration Due: 05/25/2011
Network Analyzer	Agilent(E5071B, MY42301382)	Calibration Due: 03/24/2011
Voltmeter	Keithley (2000, SN:1015843)	Calibration Due: 05/25/2011
Signal Generator	Agilent (E8257C, SN:MY43321570)	Calibration Due: 03/24/2011
Amplifier	Mini-Circuits (ZHL-42, SN:110405)	Calibration Due: 07/29/2011
Power Meter	Agilent (E4416A, SN:QB41292714)	Calibration Due: 03/24/2011
Probe	Antennessa (SN:SN_1109_EP_100)	Calibration Due: 05/04/2011
DIPOLE 835	Antennessa (DIPI32,SN 48/05)	Calibration Due: 02/09/2012
Phantom	Antennessa (SN:SN41_05_SAM29)	Calibrated: N/A
Liquid	Antennessa	Calibrated: N/A
Measurement SW	OPEN SAR V2.1	Calibrated: N/A

C. SAR Measurement Results


Frequency (MHz)	824.200012
Relative permittivity (real part)	41.466365
Relative permittivity (imaginary part)	19.511101
Conductivity (S/m)	0.923253
Variation (%)	-0.170000
Ambient Temperature:	21 °C
Liquid Temperature:	20 °C
ConvF:	20.66, 20.51, 28.36




Crest factor:

1:8

SURFACE SAR

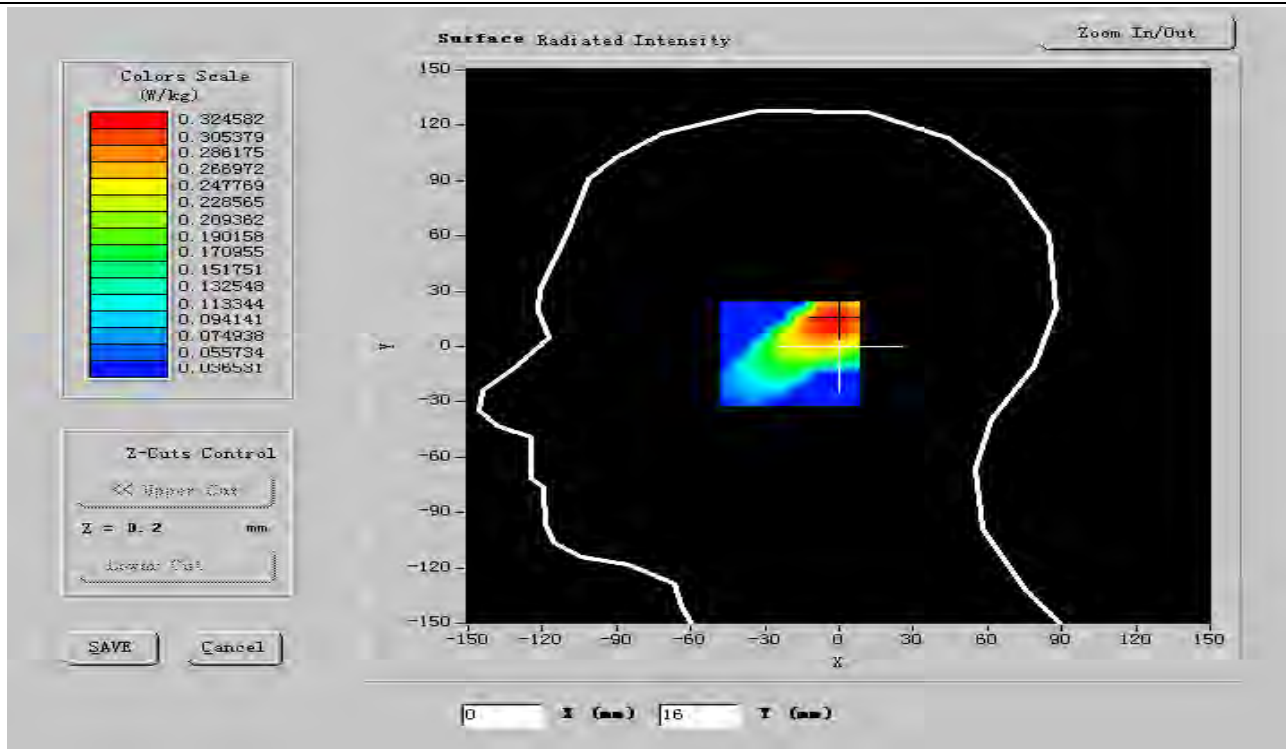

VOLUME SAR

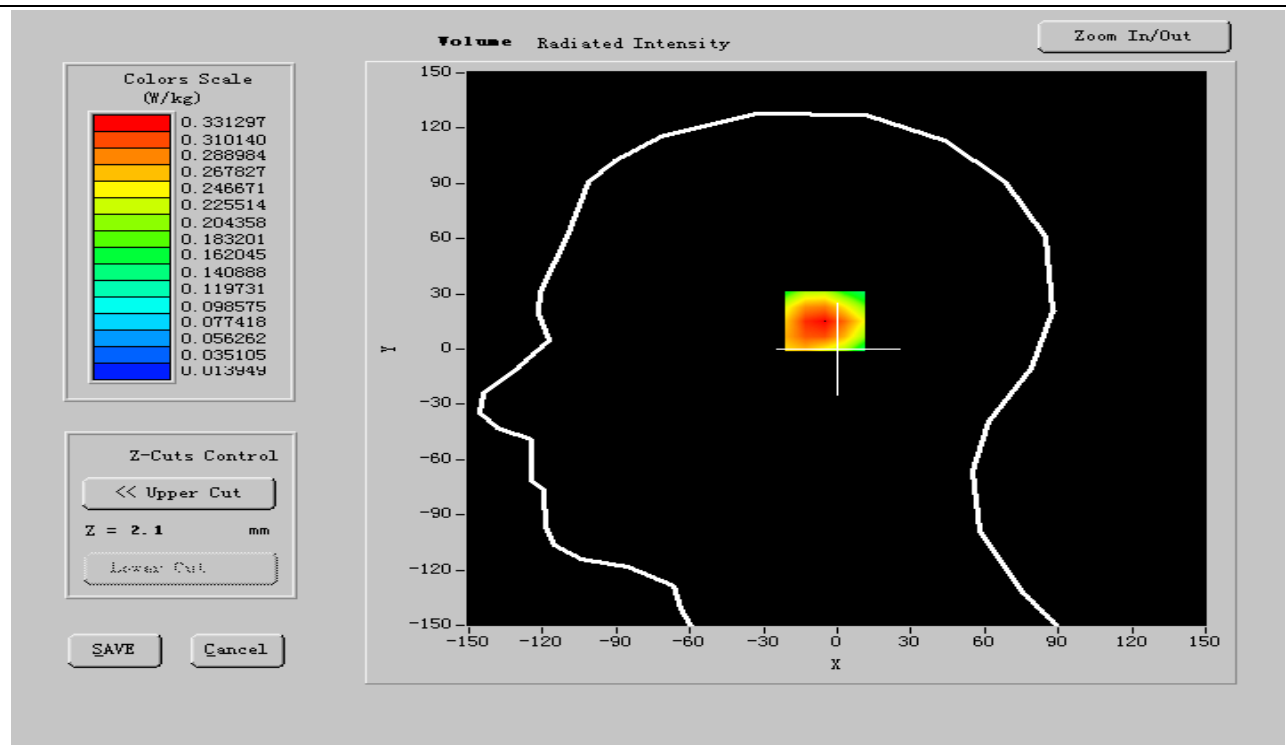




Maximum location: X=-13.00, Y=-3.00

SAR 10g (W/Kg)	0.333695
SAR 1g (W/Kg)	0.491852

Z Axis Scan

SAR, Z Axis Scan (X = -22, Y = -6)

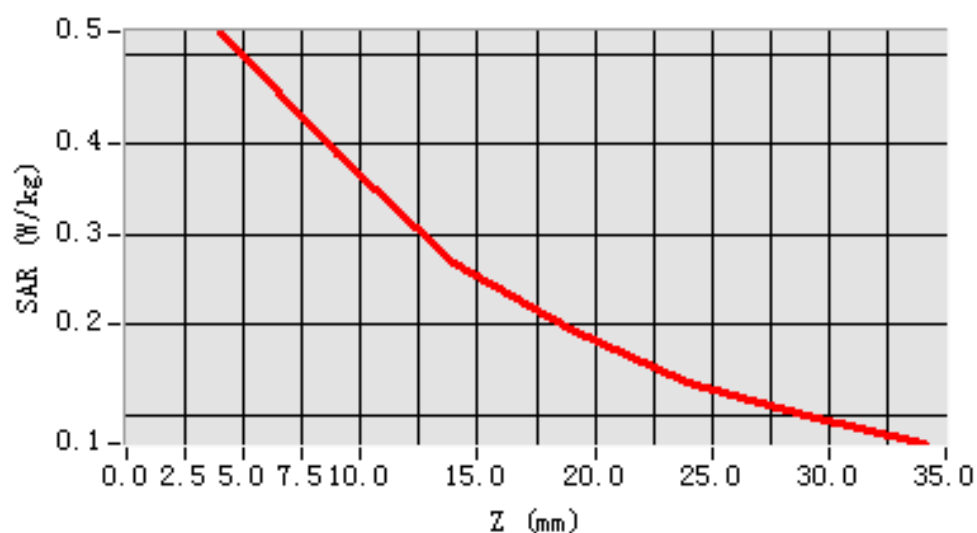



MEASUREMENT 11

Date of measurement: 02/20/2011**Area Scan: 7 x 7 x 1****dx=15mm****dy=15mm****Zoom Scan: 5 x 5 x 7****dx=5mm****dy=5mm****dz=5mm****Z Axis Scan: 1 x 1 x 21****dx=20mm****dy=20mm****dz=5mm**

A. Experimental conditions.

Phantom File	zinf15.txt, Adaptive 2 max
Phantom	Left head
Device Position	Tilt
Band	GSM850
Channels	Middle
Signal	GSM

B. Instrumentations.

PC	HP (Pentium(R) V3.06GHz, SN:375052-AA1)	Calibrated: N/A
Wireless Communication Test Set	R&S (CMU200, SN:B23-03291)	Calibration Due: 05/25/2011
Network Analyzer	Agilent(E5071B, MY42301382)	Calibration Due: 03/24/2011
Voltmeter	Keithley (2000, SN:1015843)	Calibration Due: 05/25/2011
Signal Generator	Agilent (E8257C, SN:MY43321570)	Calibration Due: 03/24/2011
Amplifier	Mini-Circuits (ZHL-42, SN:110405)	Calibration Due: 07/29/2011
Power Meter	Agilent (E4416A, SN:QB41292714)	Calibration Due: 03/24/2011
Probe	Antennessa (SN:SN_1109_EP_100)	Calibration Due: 05/04/2011
DIPOLE 835	Antennessa (DIPI32,SN 48/05)	Calibration Due: 02/09/2012
Phantom	Antennessa (SN:SN41_05_SAM29)	Calibrated: N/A
Liquid	Antennessa	Calibrated: N/A
Measurement SW	OPEN SAR V2.1	Calibrated: N/A


C. SAR Measurement Results

Frequency (MHz)	836.600024
Relative permittivity (real part)	41.467953
Relative permittivity (imaginary part)	19.511101
Conductivity (S/m)	0.916214
Variation (%)	-1.170000
Ambient Temperature:	21 °C




Liquid Temperature:	20 °C
ConvF:	20.66, 20.51, 28.36
Crest factor:	1:8

SURFACE SAR

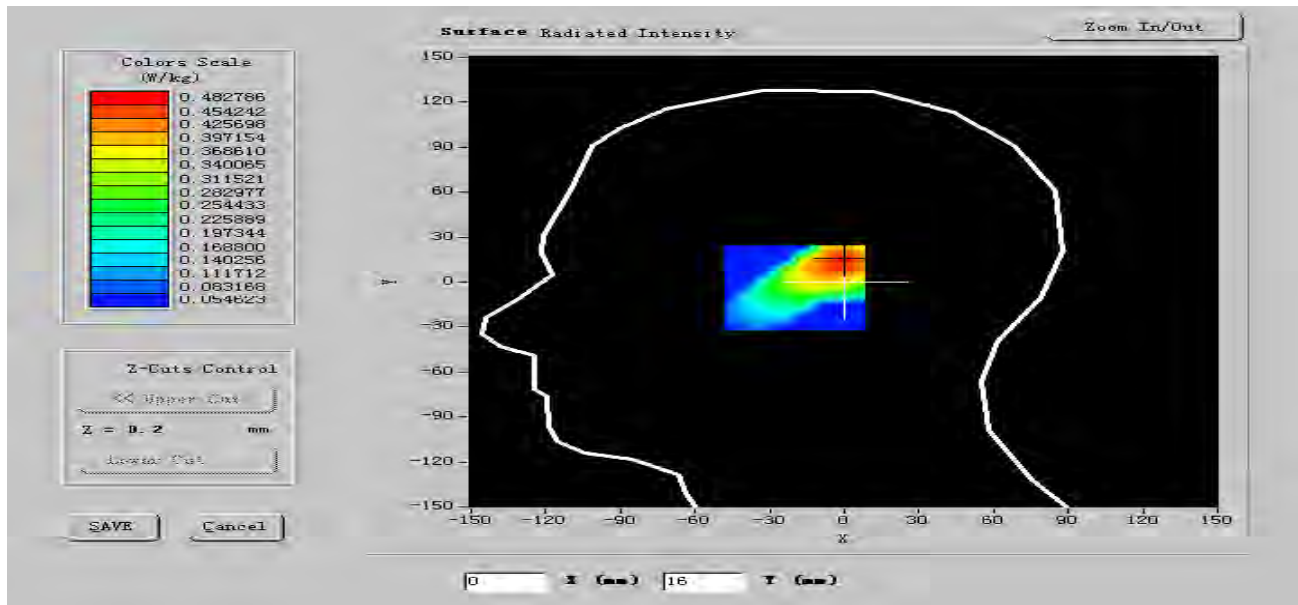

VOLUME SAR

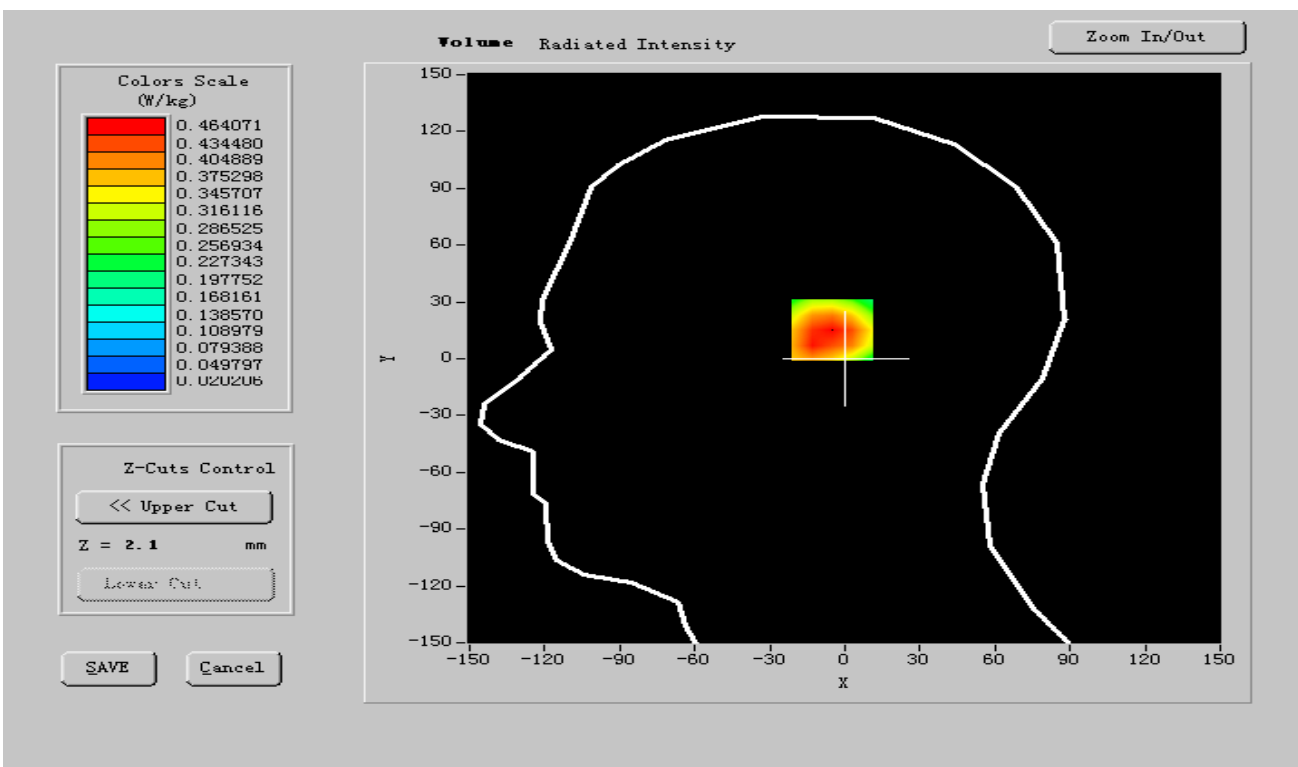




Maximum location: X=-13.00, Y=-3.00

SAR 10g (W/Kg)	0.368301
SAR 1g (W/Kg)	0.553397

Z Axis Scan

SAR, Z Axis Scan (X = -22, Y = -6)

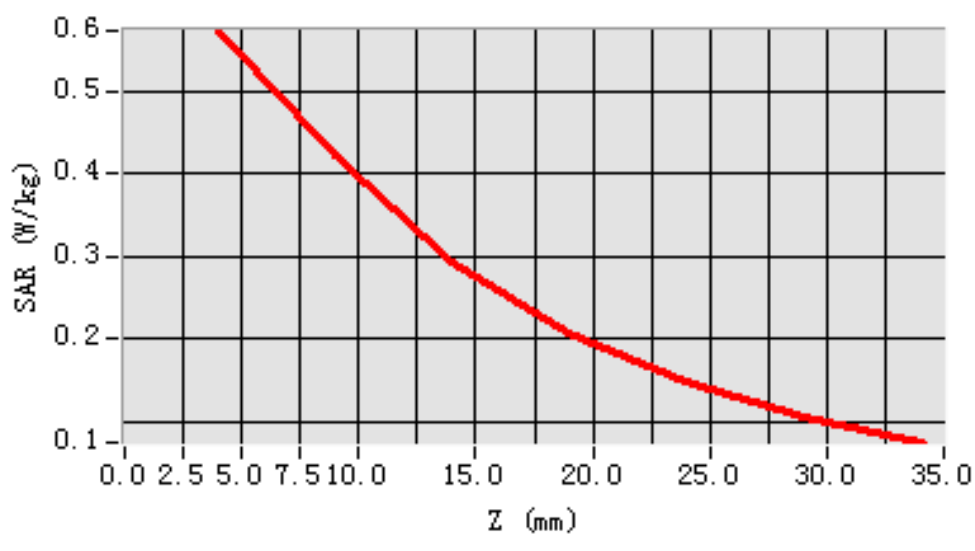



MEASUREMENT 12

Date of measurement: 02/20/2011

Area Scan: 7 x 7 x 1

dx=15mm

dy=15mm

Zoom Scan: 5 x 5 x 7

dx=5mm

dy=5mm

dz=5mm

Z Axis Scan: 1 x 1 x 21

dx=20mm

dy=20mm

dz=5mm

A. Experimental conditions.

Phantom File	zinf15.txt, Adaptive 2 max
Phantom	Left head
Device Position	Tilt
Band	GSM850
Channels	High
Signal	GSM

B. Instrumentations.

PC	HP (Pentium(R) V3.06GHz, SN:375052-AA1)	Calibrated: N/A
Wireless Communication Test Set	R&S (CMU200, SN:B23-03291)	Calibration Due: 05/25/2011
Network Analyzer	Agilent(E5071B, MY42301382)	Calibration Due: 03/24/2011
Voltmeter	Keithley (2000, SN:1015843)	Calibration Due: 05/25/2011
Signal Generator	Agilent (E8257C, SN:MY43321570)	Calibration Due: 03/24/2011
Amplifier	Mini-Circuits (ZHL-42, SN:110405)	Calibration Due: 07/29/2011
Power Meter	Agilent (E4416A, SN:QB41292714)	Calibration Due: 03/24/2011
Probe	Antennessa (SN:SN_1109_EP_100)	Calibration Due: 05/04/2011
DIPOLE 835	Antennessa (DIPI32,SN 48/05)	Calibration Due: 02/09/2012
Phantom	Antennessa (SN:SN41_05_SAM29)	Calibrated: N/A
Liquid	Antennessa	Calibrated: N/A
Measurement SW	OPEN SAR V2.1	Calibrated: N/A

C. SAR Measurement Results


Frequency (MHz)	848.599976
Relative permittivity (real part)	41.262023
Relative permittivity (imaginary part)	19.598200
Conductivity (S/m)	0.923946
Variation (%)	-1.000000
Ambient Temperature:	21 °C
Liquid Temperature:	20 °C
ConvF:	20.66, 20.51, 28.36




Crest factor:

1:8

SURFACE SAR

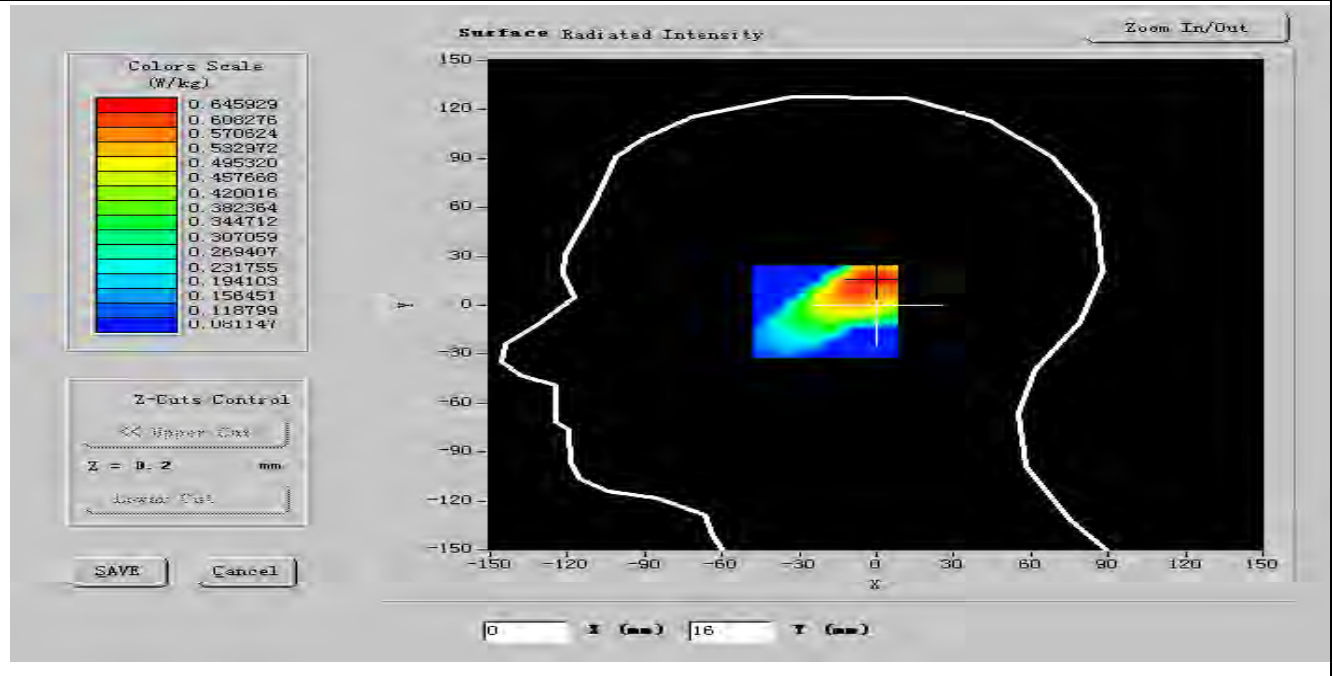

VOLUME SAR

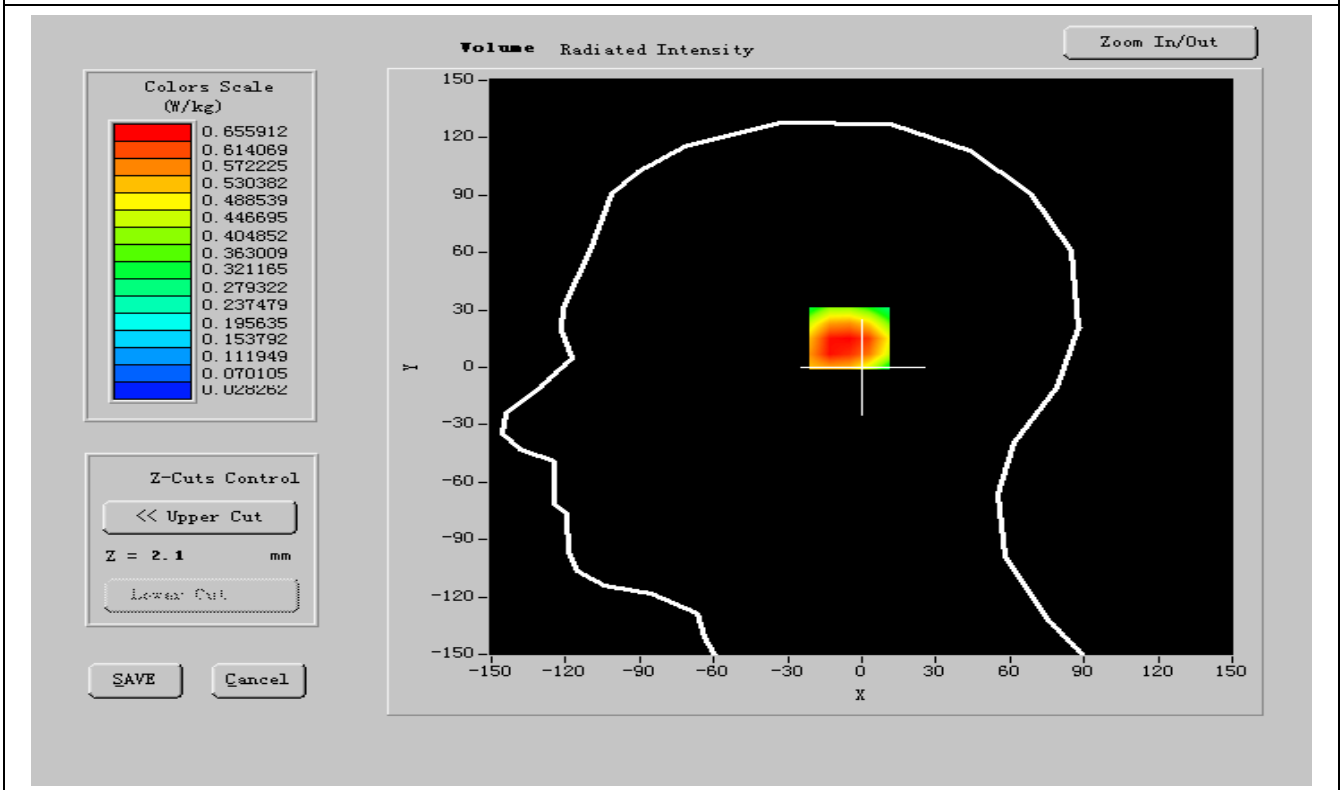




Maximum location: X=-13.00, Y=-3.00

SAR 10g (W/Kg)	0.359632
SAR 1g (W/Kg)	0.551006

Z Axis Scan

SAR, Z Axis Scan (X = -22, Y = -6)

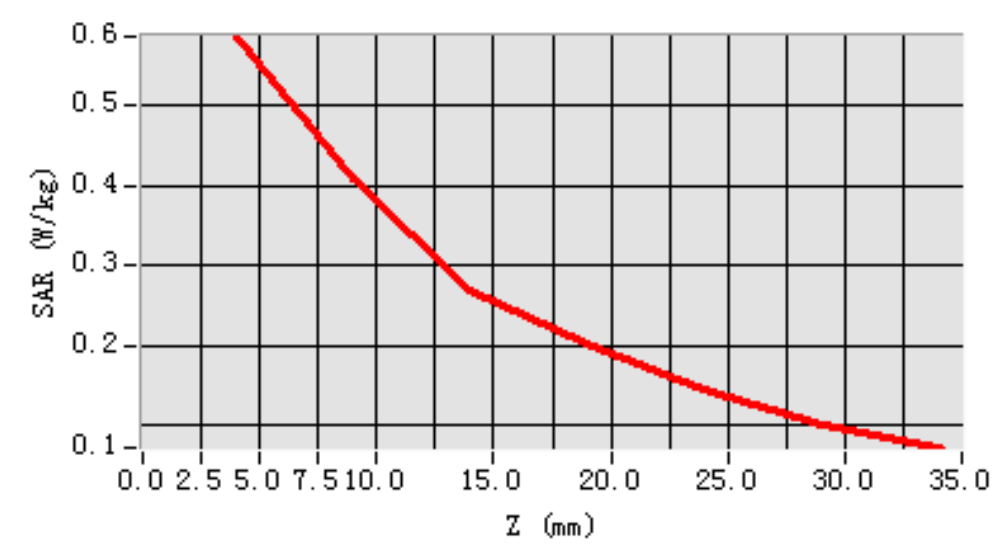



MEASUREMENT 13

Date of measurement: 02/20/2011**Area Scan: 7 x 7 x 1****dx=15mm****dy=15mm****Zoom Scan: 5 x 5 x 7****dx=5mm****dy=5mm****dz=5mm****Z Axis Scan: 1 x 1 x 21****dx=20mm****dy=20mm****dz=5mm**

A. Experimental conditions.

Phantom File	zinf15.txt, Adaptative 2 max
Phantom	Body
Device Position	FrontSide toward phantom
Band	GSM850
Channels	Low
Signal	GSM

B. Instrumentations.

PC	HP (Pentium(R) V3.06GHz, SN:375052-AA1)	Calibrated: N/A
Wireless Communication Test Set	R&S (CMU200, SN:B23-03291)	Calibration Due: 05/25/2011
Network Analyzer	Agilent(E5071B, MY42301382)	Calibration Due: 03/24/2011
Voltmeter	Keithley (2000, SN:1015843)	Calibration Due: 05/25/2011
Signal Generator	Agilent (E8257C, SN:MY43321570)	Calibration Due: 03/24/2011
Amplifier	Mini-Circuits (ZHL-42, SN:110405)	Calibration Due: 07/29/2011
Power Meter	Agilent (E4416A, SN:QB41292714)	Calibration Due: 03/24/2011
Probe	Antennessa (SN:SN_1109_EP_100)	Calibration Due: 05/04/2011
DIPOLE 835	Antennessa (DIPI32,SN 48/05)	Calibration Due: 02/09/2012
Phantom	Antennessa (SN:SN41_05_SAM29)	Calibrated: N/A
Liquid	Antennessa	Calibrated: N/A
Measurement SW	OPEN SAR V2.1	Calibrated: N/A

C. SAR Measurement Results


Frequency (MHz)	824.200012
Relative permittivity (real part)	56.514000
Relative permittivity (imaginary part)	21.654150
Conductivity (S/m)	0.984519
Variation (%)	-2.120000
Ambient Temperature:	21 °C
Liquid Temperature:	20 °C
ConvF:	20.00, 19.88, 27.77




Crest factor:

1:8

SURFACE SAR

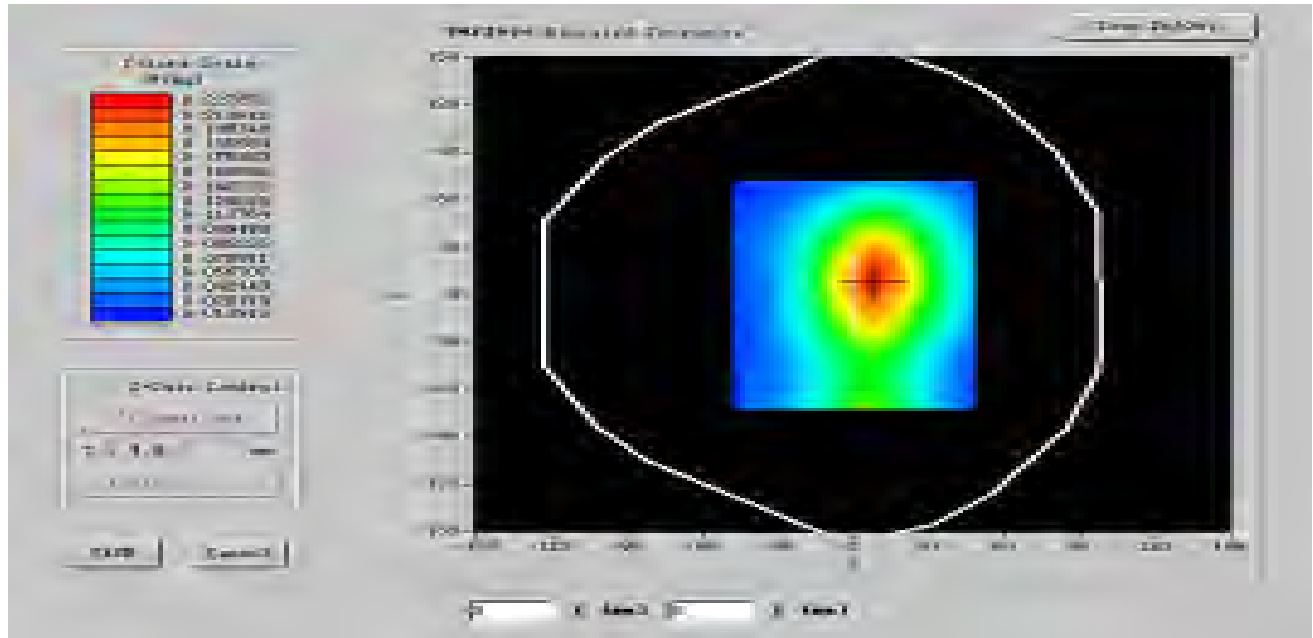

VOLUME SAR

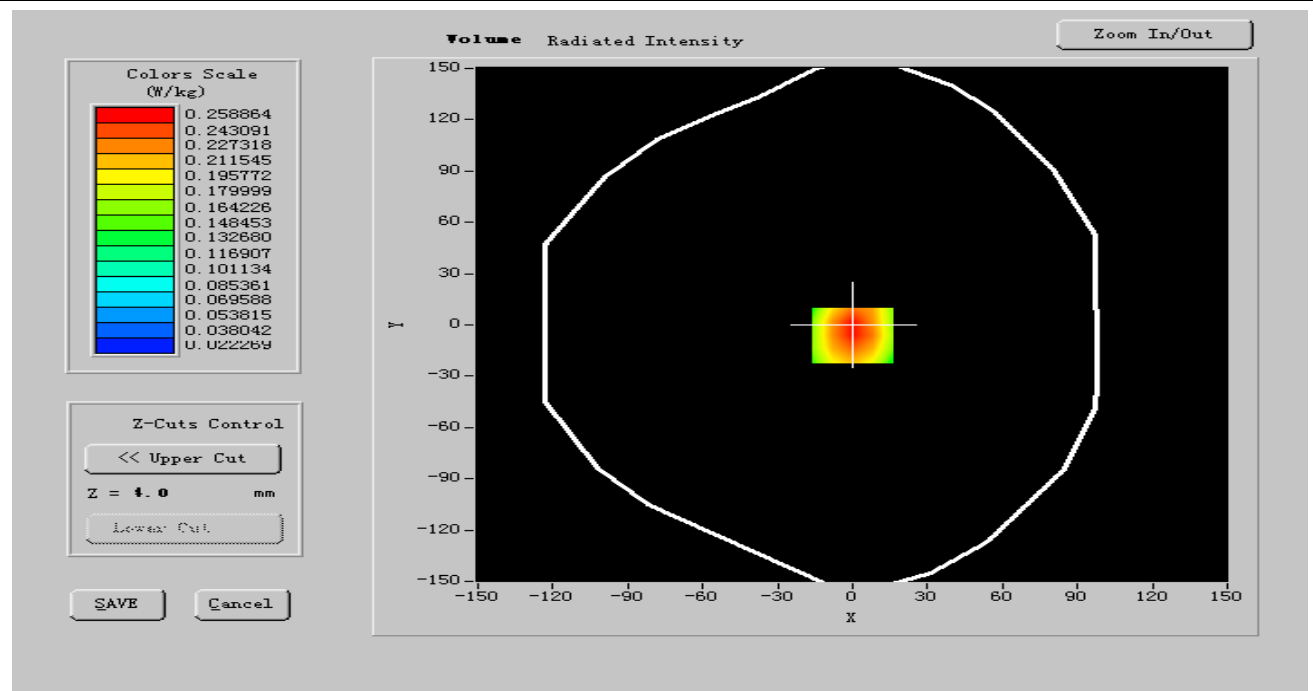




Maximum location: X=-13.00, Y=-3.00

SAR 10g (W/Kg)	0.166891
SAR 1g (W/Kg)	0.251297

Z Axis Scan

SAR, Z Axis Scan (X = 0, Y = -6)

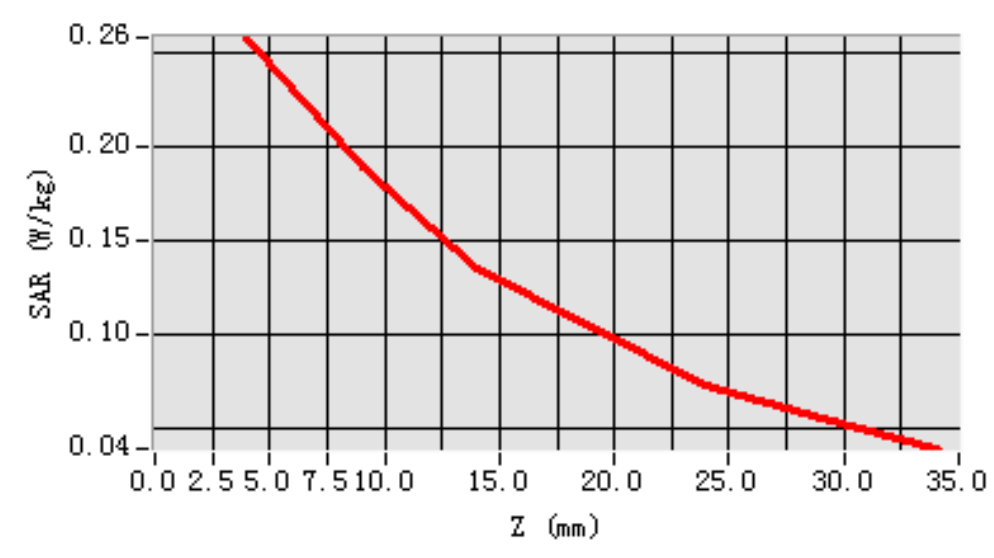



MEASUREMENT 14

Date of measurement: 02/20/2011

Area Scan: 7 x 7 x 1

dx=15mm

dy=15mm

Zoom Scan: 5 x 5 x 7

dx=5mm

dy=5mm

dz=5mm

Z Axis Scan: 1 x 1 x 21

dx=20mm

dy=20mm

dz=5mm

A. Experimental conditions.

Phantom File	zinf15.txt, Adaptive 2 max
Phantom	Body
Device Position	FrontSide toward phantom
Band	GSM850
Channels	Middle
Signal	GSM

B. Instrumentations.

PC	HP (Pentium(R) V3.06GHz, SN:375052-AA1)	Calibrated: N/A
Wireless Communication Test Set	R&S (CMU200, SN:B23-03291)	Calibration Due: 05/25/2011
Network Analyzer	Agilent(E5071B, MY42301382)	Calibration Due: 03/24/2011
Voltmeter	Keithley (2000, SN:1015843)	Calibration Due: 05/25/2011
Signal Generator	Agilent (E8257C, SN:MY43321570)	Calibration Due: 03/24/2011
Amplifier	Mini-Circuits (ZHL-42, SN:110405)	Calibration Due: 07/29/2011
Power Meter	Agilent (E4416A, SN:QB41292714)	Calibration Due: 03/24/2011
Probe	Antennessa (SN:SN_1109_EP_100)	Calibration Due: 05/04/2011
DIPOLE 835	Antennessa (DIPI32,SN 48/05)	Calibration Due: 02/09/2012
Phantom	Antennessa (SN:SN41_05_SAM29)	Calibrated: N/A
Liquid	Antennessa	Calibrated: N/A
Measurement SW	OPEN SAR V2.1	Calibrated: N/A

C. SAR Measurement Results


Frequency (MHz)	836.600024
Relative permittivity (real part)	56.501935
Relative permittivity (imaginary part)	21.866249
Conductivity (S/m)	0.986052
Variation (%)	-2.120000
Ambient Temperature:	21 °C
Liquid Temperature:	20 °C
ConvF:	20.00, 19.88, 27.77




Crest factor:

1:8

SURFACE SAR

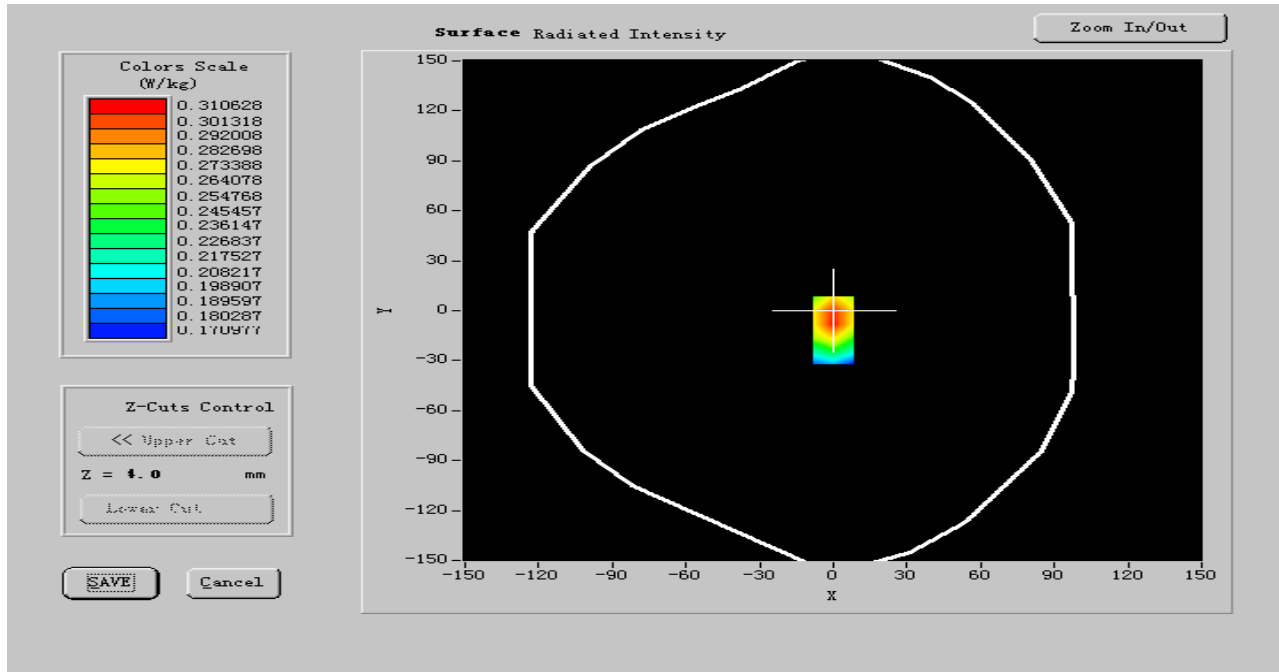

VOLUME SAR

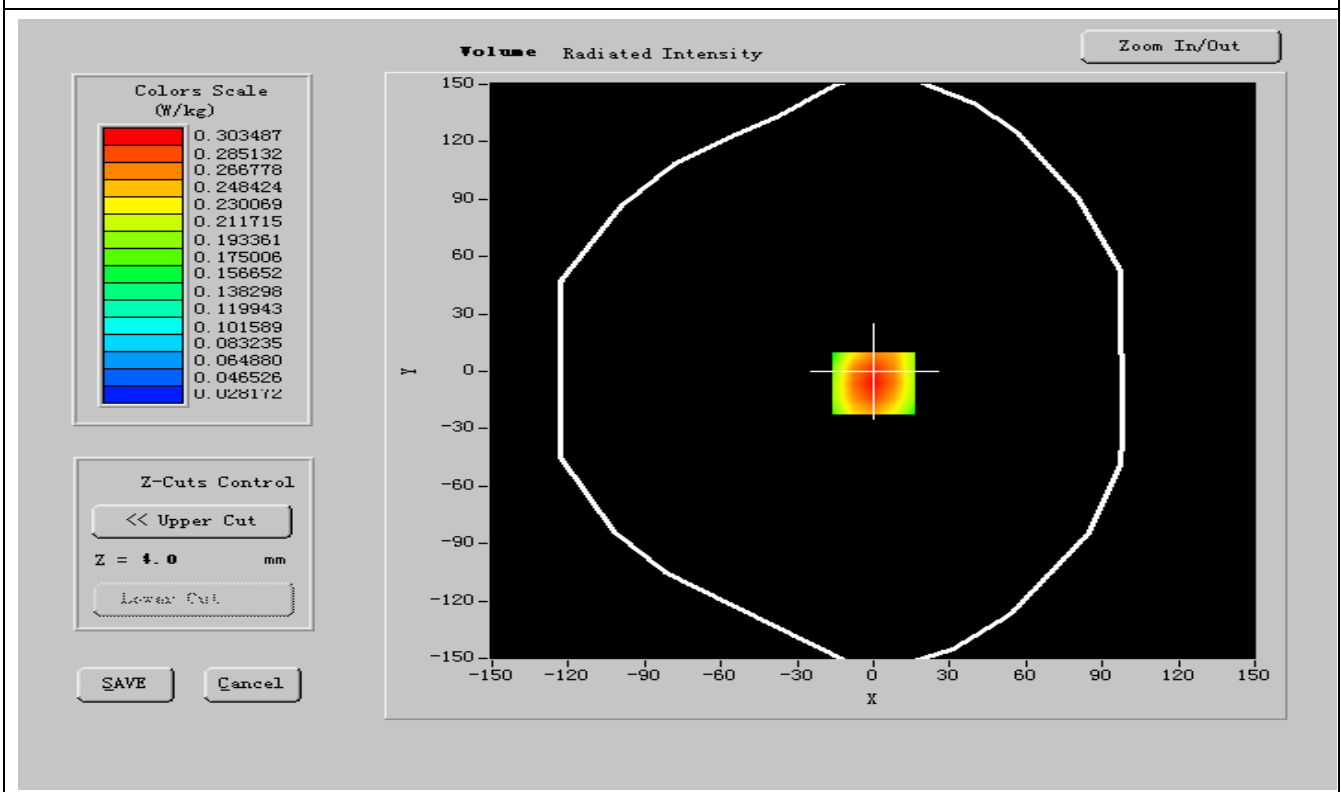




Maximum location: X=-13.00, Y=-3.00

SAR 10g (W/Kg)	0.216520
SAR 1g (W/Kg)	0.289084

Z Axis Scan

SAR, Z Axis Scan (X = 0, Y = -6)

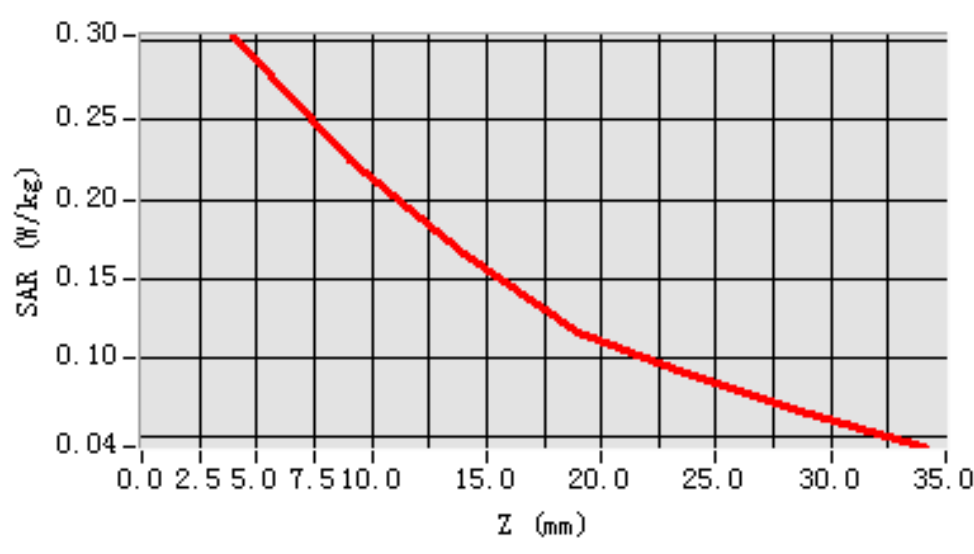



MEASUREMENT 15

Date of measurement: 02/20/2011**Area Scan: 7 x 7 x 1****dx=15mm****dy=15mm****Zoom Scan: 5 x 5 x 7****dx=5mm****dy=5mm****dz=5mm****Z Axis Scan: 1 x 1 x 21****dx=20mm****dy=20mm****dz=5mm**

A. Experimental conditions.

Phantom File	zinf15.txt, Adaptive 2 max
Phantom	Body
Device Position	FrontSide toward phantom
Band	GSM850
Channels	High
Signal	GSM

B. Instrumentations.

PC	HP (Pentium(R) V3.06GHz, SN:375052-AA1)	Calibrated: N/A
Wireless Communication Test Set	R&S (CMU200, SN:B23-03291)	Calibration Due: 05/25/2011
Network Analyzer	Agilent(E5071B, MY42301382)	Calibration Due: 03/24/2011
Voltmeter	Keithley (2000, SN:1015843)	Calibration Due: 05/25/2011
Signal Generator	Agilent (E8257C, SN:MY43321570)	Calibration Due: 03/24/2011
Amplifier	Mini-Circuits (ZHL-42, SN:110405)	Calibration Due: 07/29/2011
Power Meter	Agilent (E4416A, SN:QB41292714)	Calibration Due: 03/24/2011
Probe	Antennessa (SN:SN_1109_EP_100)	Calibration Due: 05/04/2011
DIPOLE 835	Antennessa (DIPI32,SN 48/05)	Calibration Due: 02/09/2012
Phantom	Antennessa (SN:SN41_05_SAM29)	Calibrated: N/A
Liquid	Antennessa	Calibrated: N/A
Measurement SW	OPEN SAR V2.1	Calibrated: N/A

C. SAR Measurement Results

Frequency (MHz)	848.599976
Relative permittivity (real part)	56.508121
Relative permittivity (imaginary part)	21.726601
Conductivity (S/m)	0.983288
Variation (%)	-1.120000
Ambient Temperature:	21 °C
Liquid Temperature:	20 °C




ConvF:

20.00, 19.88, 27.77


Crest factor:

1:8

SURFACE SAR

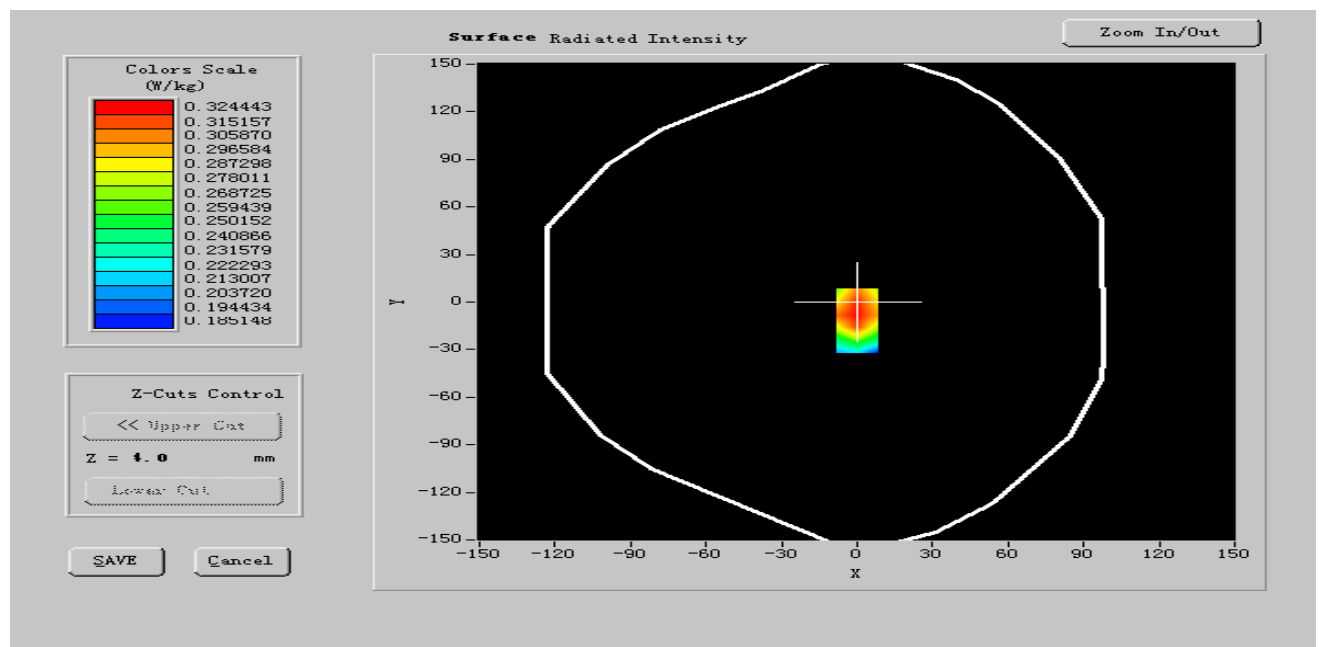

VOLUME SAR

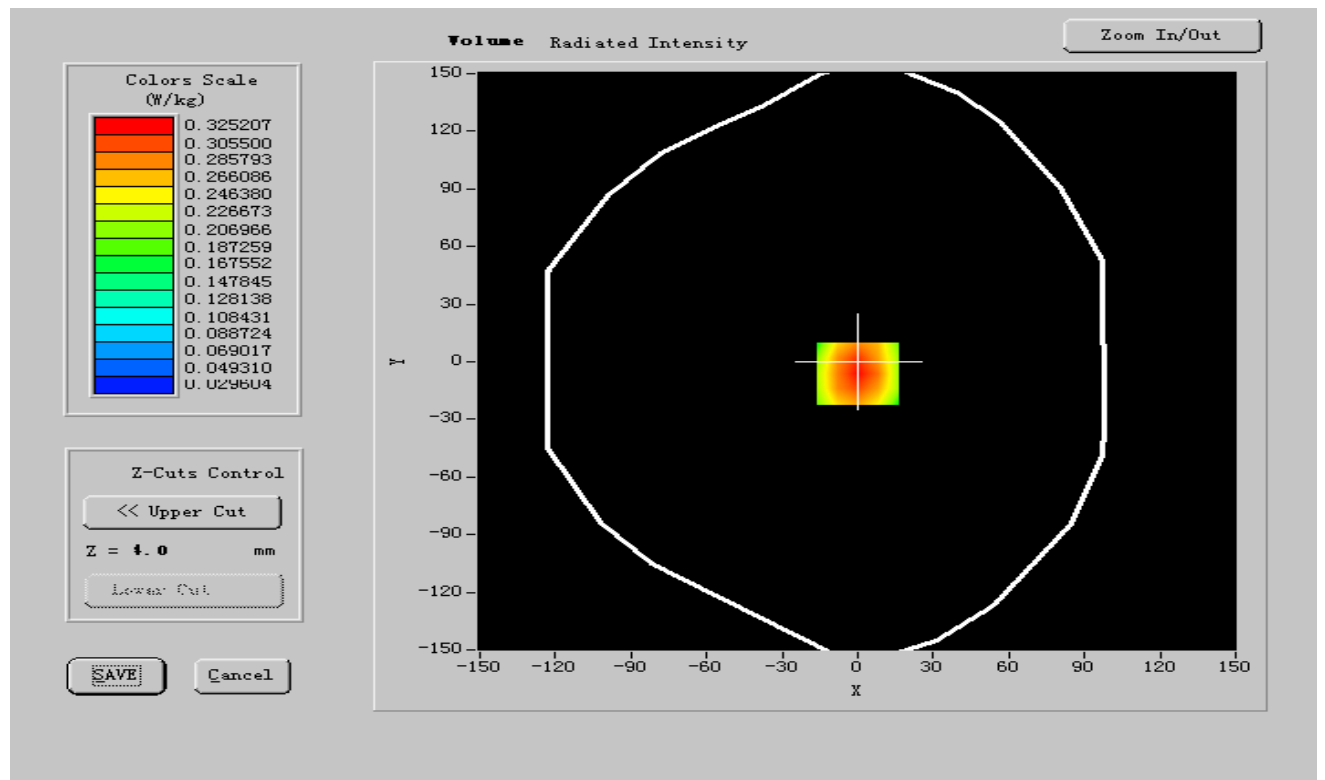




Maximum location: X=-13.00, Y=-3.00

SAR 10g (W/Kg)	0.214581
SAR 1g (W/Kg)	0.306369

Z Axis Scan

SAR, Z Axis Scan (X = 0, Y = -6)

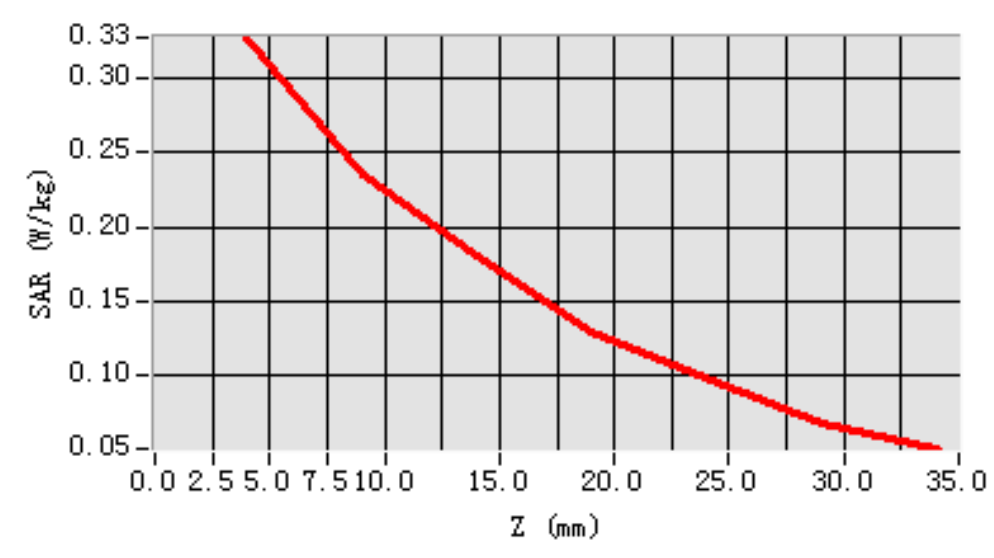



MEASUREMENT 16

Date of measurement: 02/20/2011**Area Scan: 7 x 7 x 1****dx=15mm****dy=15mm****Zoom Scan: 5 x 5 x 7****dx=5mm****dy=5mm****dz=5mm****Z Axis Scan: 1 x 1 x 21****dx=20mm****dy=20mm****dz=5mm**

A. Experimental conditions.

Phantom File	zinf15.txt, Adaptive 2 max
Phantom	Body
Device Position	BackSide toward phantom
Band	GSM850
Channels	Low
Signal	GSM

B. Instrumentations.

PC	HP (Pentium(R) V3.06GHz, SN:375052-AA1)	Calibrated: N/A
Wireless Communication Test Set	R&S (CMU200, SN:B23-03291)	Calibration Due: 05/25/2011
Network Analyzer	Agilent(E5071B, MY42301382)	Calibration Due: 03/24/2011
Voltmeter	Keithley (2000, SN:1015843)	Calibration Due: 05/25/2011
Signal Generator	Agilent (E8257C, SN:MY43321570)	Calibration Due: 03/24/2011
Amplifier	Mini-Circuits (ZHL-42, SN:110405)	Calibration Due: 07/29/2011
Power Meter	Agilent (E4416A, SN:QB41292714)	Calibration Due: 03/24/2011
Probe	Antennessa (SN:SN_1109_EP_100)	Calibration Due: 05/04/2011
DIPOLE 835	Antennessa (DIPI32,SN 48/05)	Calibration Due: 02/09/2012
Phantom	Antennessa (SN:SN41_05_SAM29)	Calibrated: N/A
Liquid	Antennessa	Calibrated: N/A
Measurement SW	OPEN SAR V2.1	Calibrated: N/A


C. SAR Measurement Results

Frequency (MHz)	824.200012
Relative permittivity (real part)	56.514000
Relative permittivity (imaginary part)	21.654150
Conductivity (S/m)	0.984519
Variation (%)	-2.120000
Ambient Temperature:	21 °C
Liquid Temperature:	20 °C




ConvF:	20.00, 19.88, 27.77
Crest factor:	1:8

SURFACE SAR

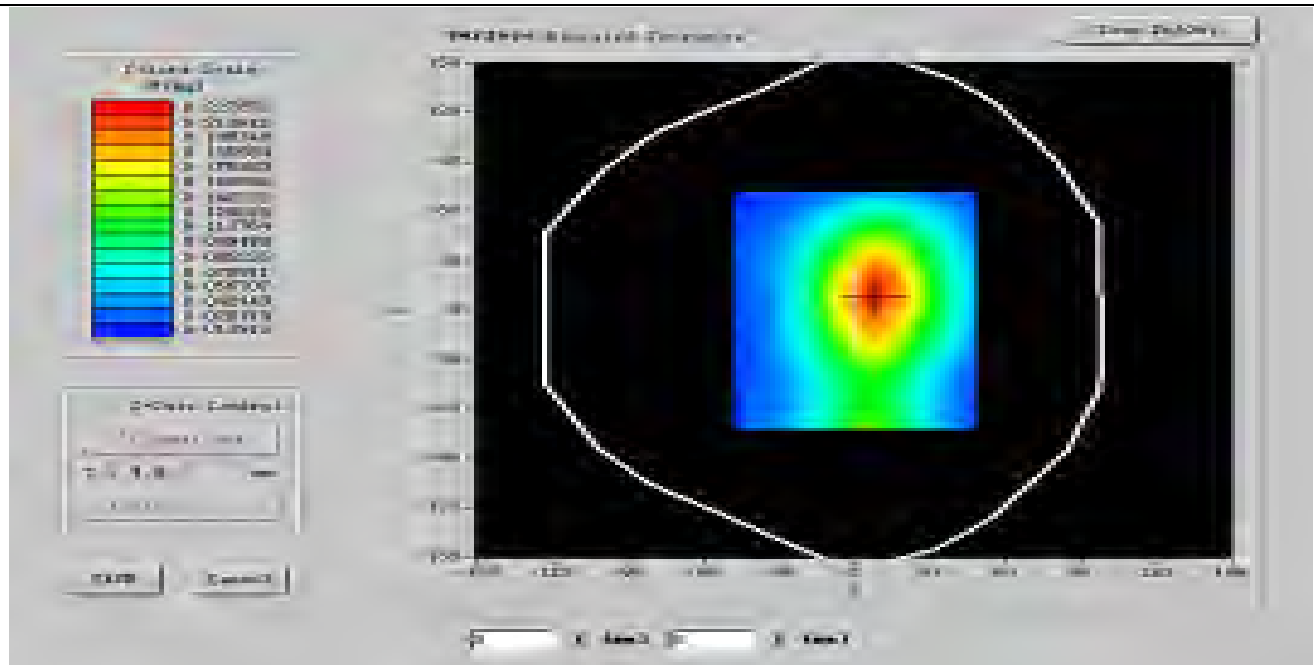

VOLUME SAR

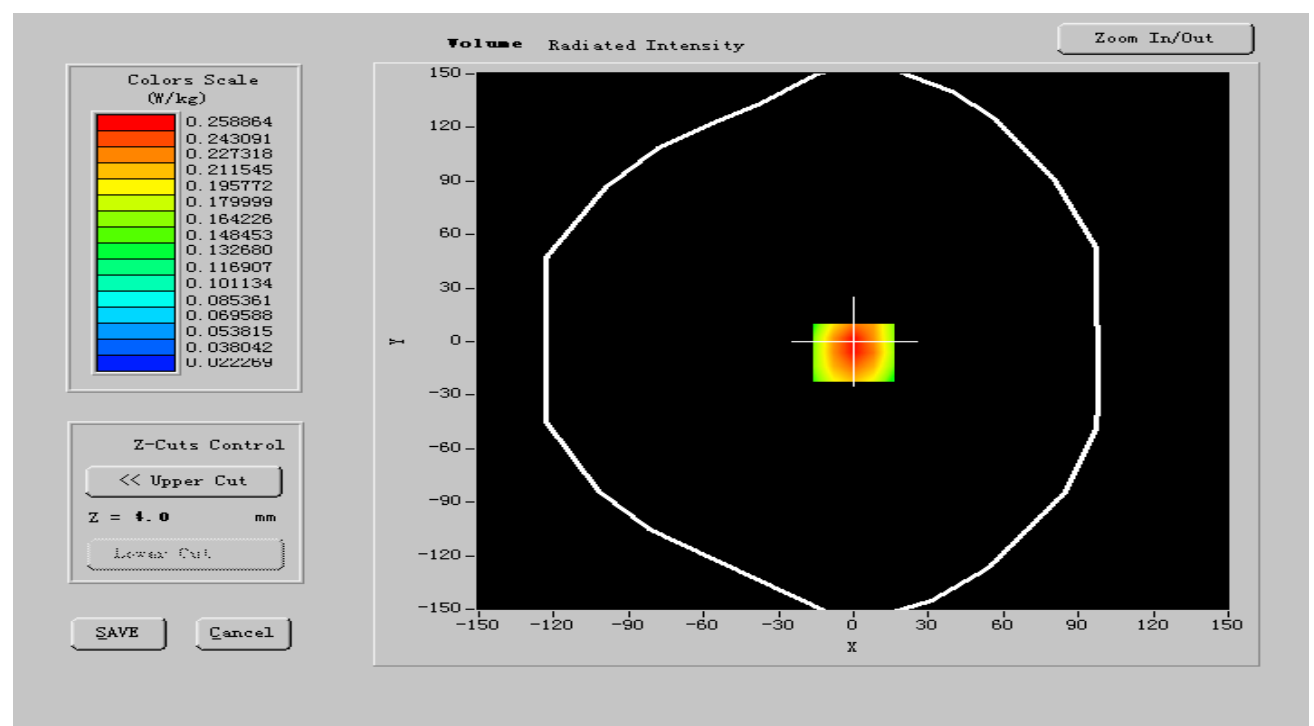




Maximum location: X=-13.00, Y=-3.00

SAR 10g (W/Kg)	0.165358
SAR 1g (W/Kg)	0.235741

Z Axis Scan

SAR, Z Axis Scan (X = 0, Y = -6)

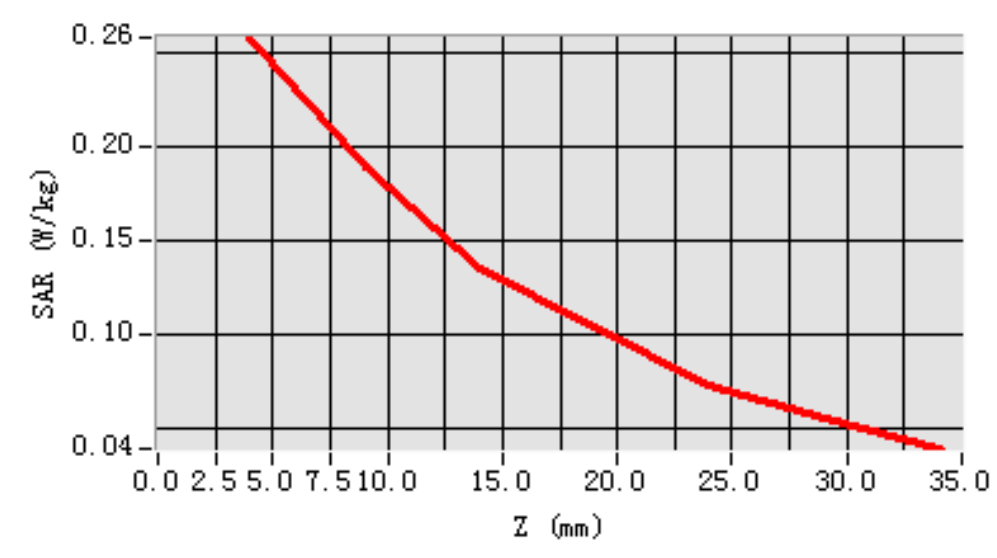



MEASUREMENT 17

Date of measurement: 02/20/2011**Area Scan: 7 x 7 x 1****dx=15mm****dy=15mm****Zoom Scan: 5 x 5 x 7****dx=5mm****dy=5mm****dz=5mm****Z Axis Scan: 1 x 1 x 21****dx=20mm****dy=20mm****dz=5mm**

A. Experimental conditions.

Phantom File	zinf15.txt, Adaptive 2 max
Phantom	Body
Device Position	BackSide toward phantom
Band	GSM850
Channels	Middle
Signal	GSM

B. Instrumentations.

PC	HP (Pentium(R) V3.06GHz, SN:375052-AA1)	Calibrated: N/A
Wireless Communication Test Set	R&S (CMU200, SN:B23-03291)	Calibration Due: 05/25/2011
Network Analyzer	Agilent(E5071B, MY42301382)	Calibration Due: 03/24/2011
Voltmeter	Keithley (2000, SN:1015843)	Calibration Due: 05/25/2011
Signal Generator	Agilent (E8257C, SN:MY43321570)	Calibration Due: 03/24/2011
Amplifier	Mini-Circuits (ZHL-42, SN:110405)	Calibration Due: 07/29/2011
Power Meter	Agilent (E4416A, SN:QB41292714)	Calibration Due: 03/24/2011
Probe	Antennessa (SN:SN_1109_EP_100)	Calibration Due: 05/04/2011
DIPOLE 835	Antennessa (DIPI32,SN 48/05)	Calibration Due: 02/09/2012
Phantom	Antennessa (SN:SN41_05_SAM29)	Calibrated: N/A
Liquid	Antennessa	Calibrated: N/A
Measurement SW	OPEN SAR V2.1	Calibrated: N/A

C. SAR Measurement Results

Frequency (MHz)	836.600024
Relative permittivity (real part)	56.501935
Relative permittivity (imaginary part)	21.866249
Conductivity (S/m)	0.986052
Variation (%)	-2.120000
Ambient Temperature:	21 °C
Liquid Temperature:	20 °C




ConvF:

20.00, 19.88, 27.77


Crest factor:

1:8

SURFACE SAR

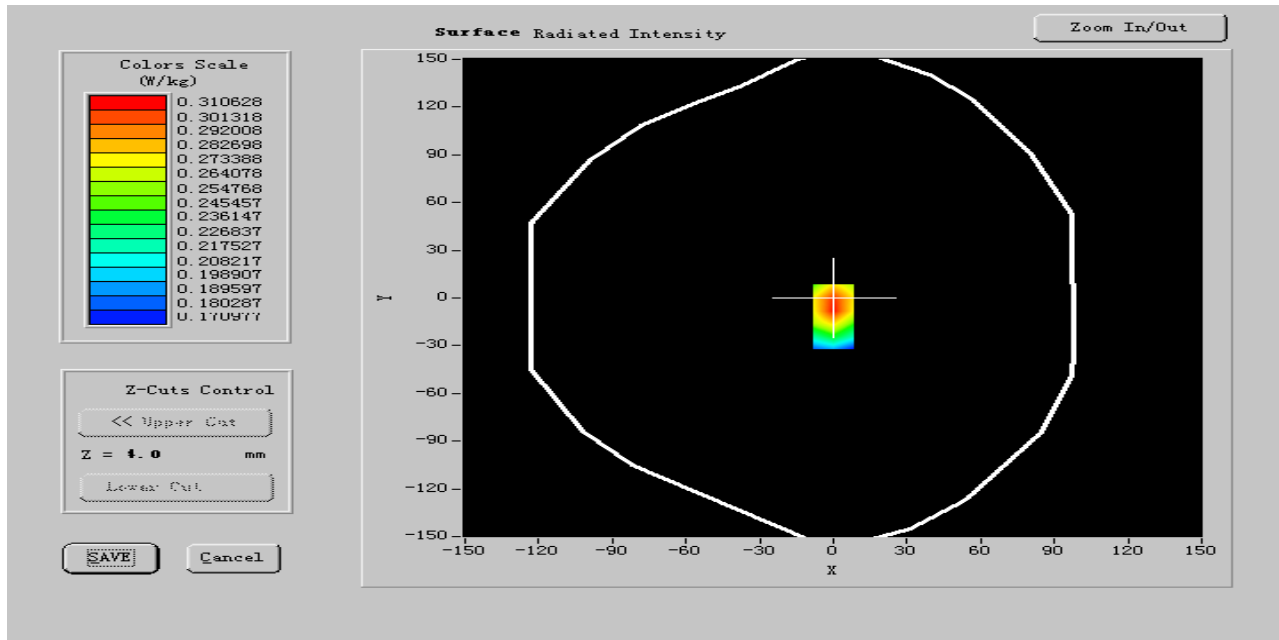

VOLUME SAR

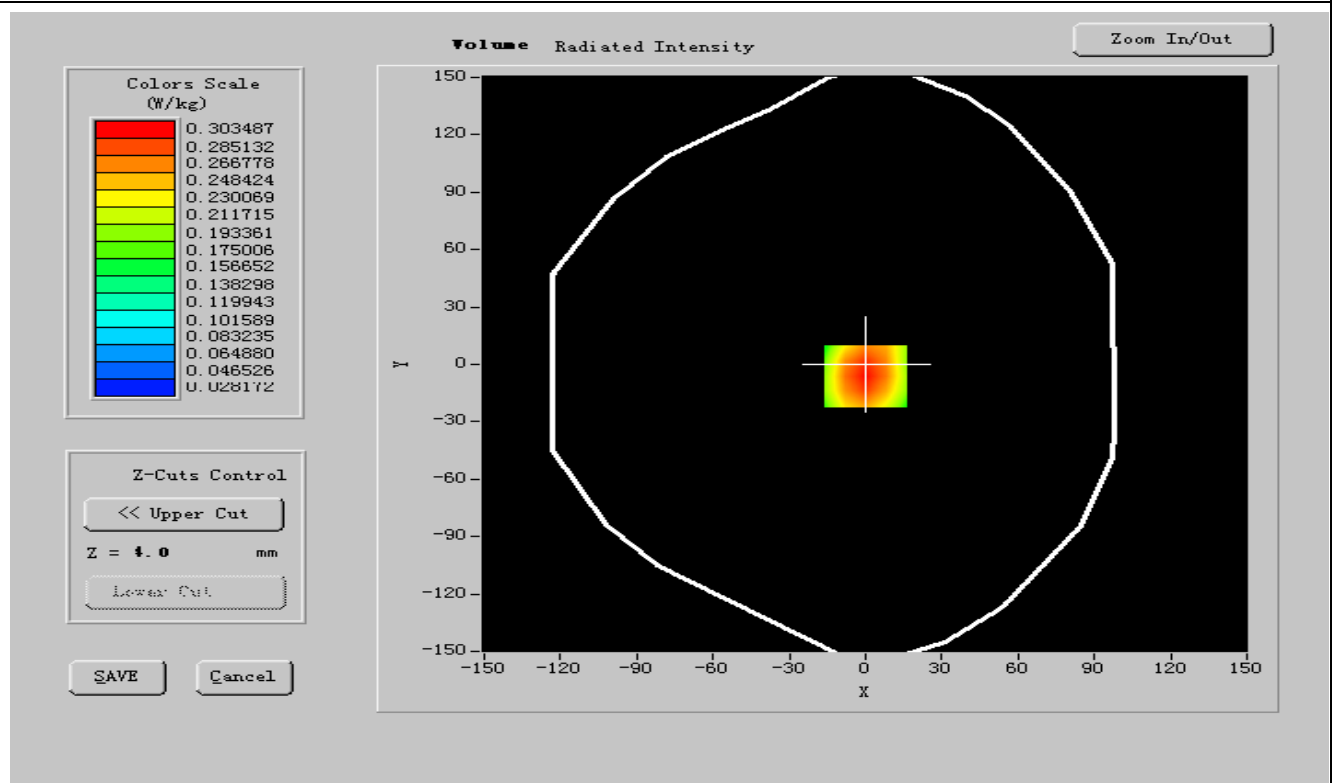




Maximum location: X=-13.00, Y=-3.00

SAR 10g (W/Kg)	0.203681
SAR 1g (W/Kg)	0.259353

Z Axis Scan

SAR, Z Axis Scan (X = 0, Y = -6)

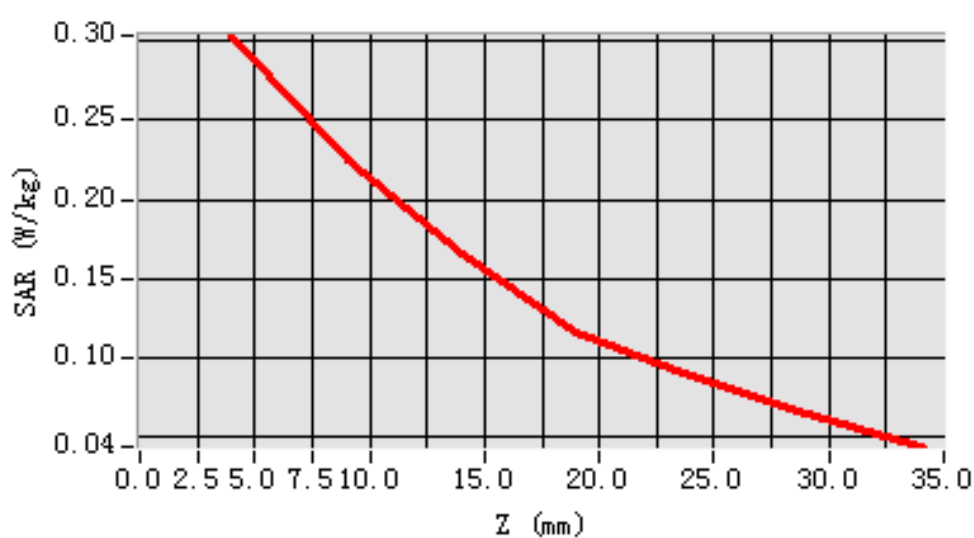



MEASUREMENT 18

Date of measurement: 02/20/2011**Area Scan: 7 x 7 x 1****dx=15mm****dy=15mm****Zoom Scan: 5 x 5 x 7****dx=5mm****dy=5mm****dz=5mm****Z Axis Scan: 1 x 1 x 21****dx=20mm****dy=20mm****dz=5mm**

A. Experimental conditions.

Phantom File	zinf15.txt, Adaptive 2 max
Phantom	Body
Device Position	BackSide toward phantom
Band	GSM850
Channels	High
Signal	GSM

B. Instrumentations.

PC	HP (Pentium(R) V3.06GHz, SN:375052-AA1)	Calibrated: N/A
Wireless Communication Test Set	R&S (CMU200, SN:B23-03291)	Calibration Due: 05/25/2011
Network Analyzer	Agilent(E5071B, MY42301382)	Calibration Due: 03/24/2011
Voltmeter	Keithley (2000, SN:1015843)	Calibration Due: 05/25/2011
Signal Generator	Agilent (E8257C, SN:MY43321570)	Calibration Due: 03/24/2011
Amplifier	Mini-Circuits (ZHL-42, SN:110405)	Calibration Due: 07/29/2011
Power Meter	Agilent (E4416A, SN:QB41292714)	Calibration Due: 03/24/2011
Probe	Antennessa (SN:SN_1109_EP_100)	Calibration Due: 05/04/2011
DIPOLE 835	Antennessa (DIPI32,SN 48/05)	Calibration Due: 02/09/2012
Phantom	Antennessa (SN:SN41_05_SAM29)	Calibrated: N/A
Liquid	Antennessa	Calibrated: N/A
Measurement SW	OPEN SAR V2.1	Calibrated: N/A

C. SAR Measurement Results

Frequency (MHz)	848.599976
Relative permittivity (real part)	56.508121
Relative permittivity (imaginary part)	21.726601
Conductivity (S/m)	0.983288
Variation (%)	-1.120000
Ambient Temperature:	21 °C
Liquid Temperature:	20 °C




ConvF:

20.00, 19.88, 27.77


Crest factor:

1:8

SURFACE SAR

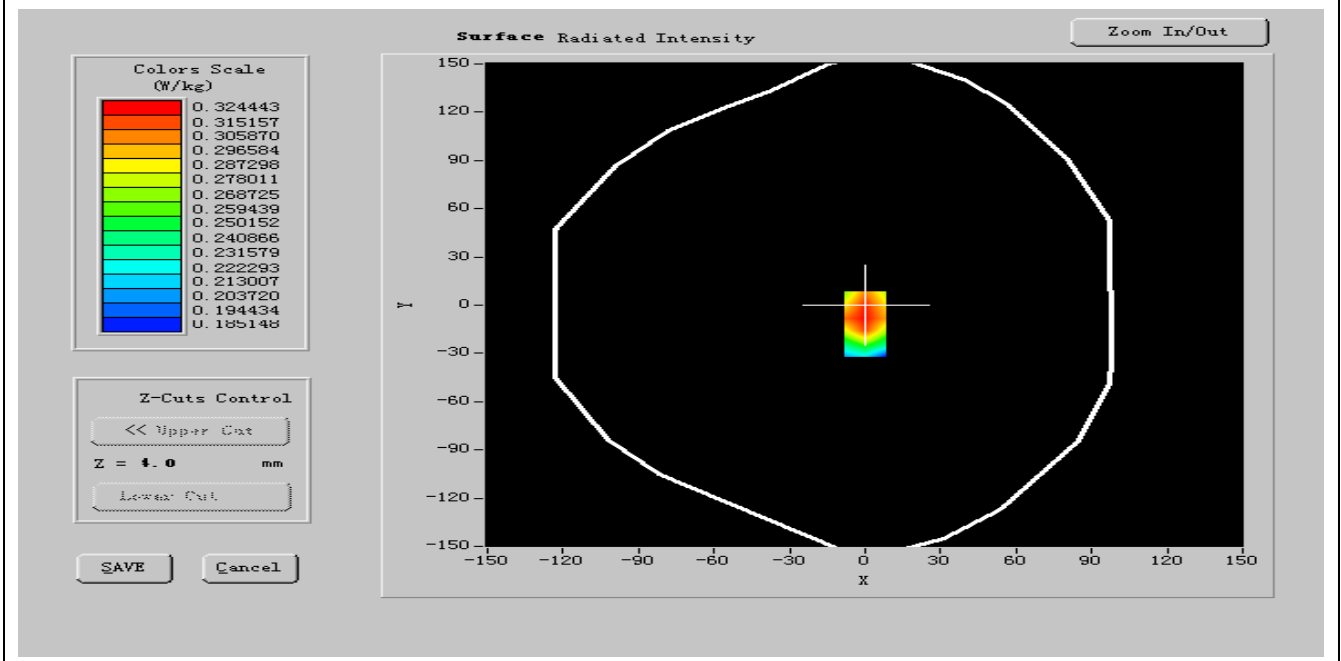

VOLUME SAR

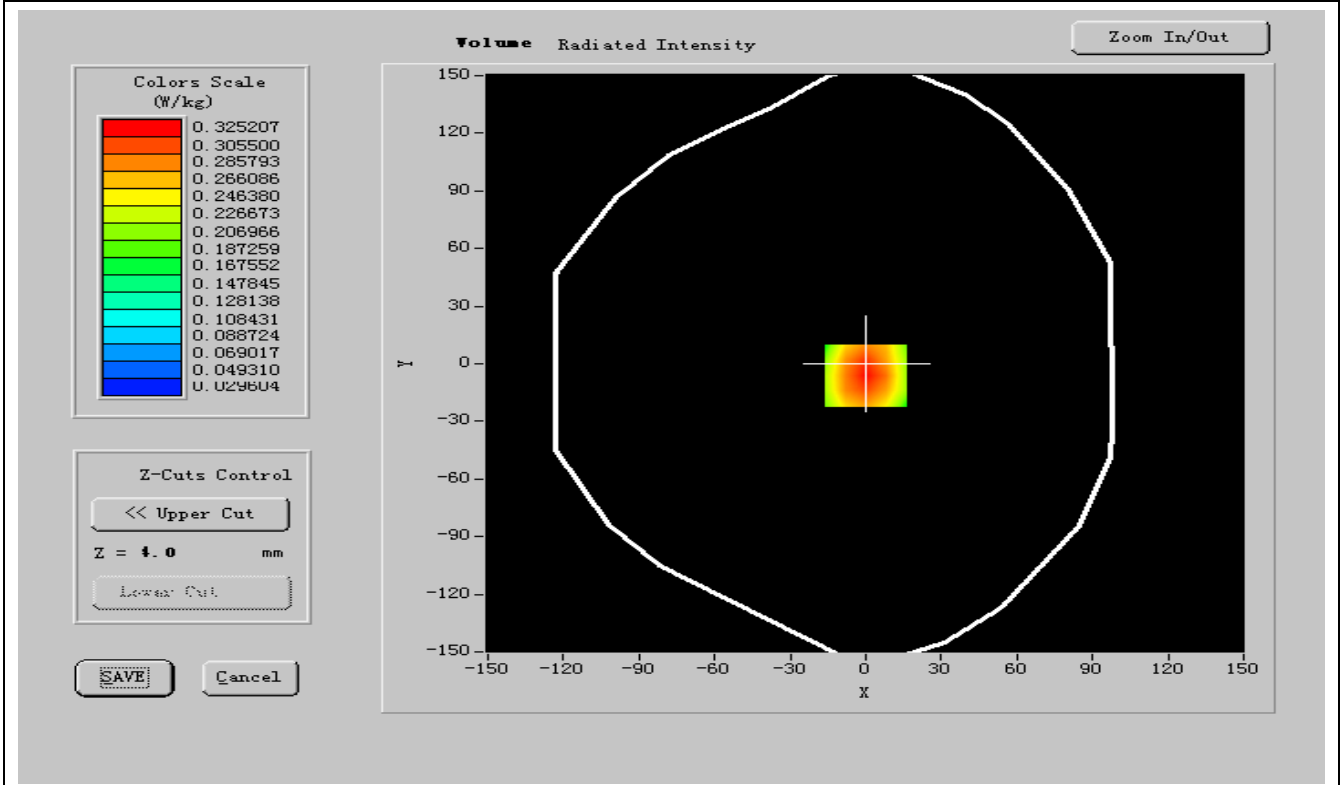




Maximum location: X=-13.00, Y=-3.00

SAR 10g (W/Kg)	0.226851
SAR 1g (W/Kg)	0.278657

Z Axis Scan

SAR, Z Axis Scan (X = 0, Y = -6)

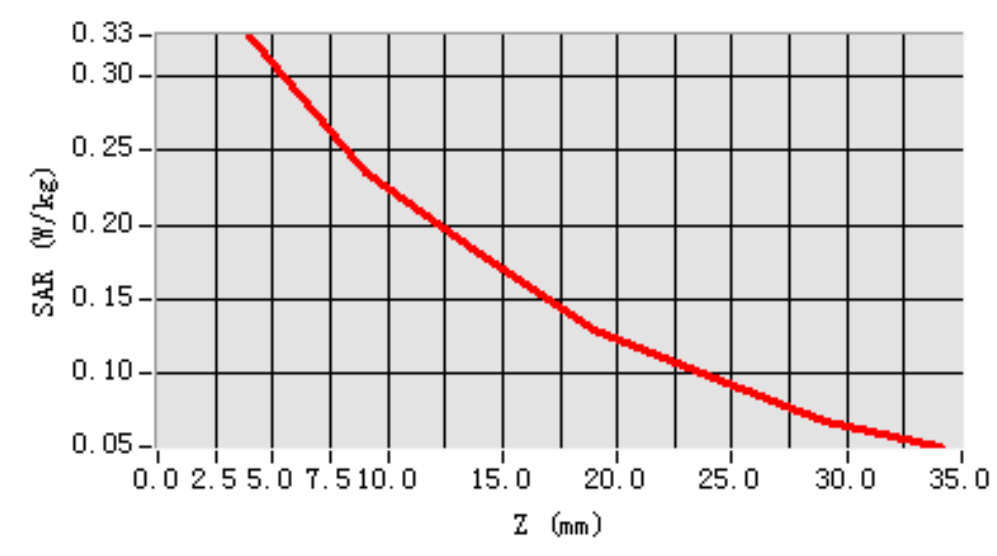



MEASUREMENT 19

Date of measurement: 02/20/2011

Area Scan: 7 x 7 x 1

dx=15mm

dy=15mm

Zoom Scan: 5 x 5 x 7

dx=5mm

dy=5mm

dz=5mm

Z Axis Scan: 1 x 1 x 21

dx=20mm

dy=20mm

dz=5mm

A. Experimental conditions.

Phantom File	zinf15.txt, Adaptive 2 max
Phantom	Body
Device Position	FrontSide toward phantom
Band	GPRS850
Channels	Low
Signal	GPRS

B. Instrumentations.

PC	HP (Pentium(R) V3.06GHz, SN:375052-AA1)	Calibrated: N/A
Wireless Communication Test Set	R&S (CMU200, SN:B23-03291)	Calibration Due: 05/25/2011
Network Analyzer	Agilent(E5071B, MY42301382)	Calibration Due: 03/24/2011
Voltmeter	Keithley (2000, SN:1015843)	Calibration Due: 05/25/2011
Signal Generator	Agilent (E8257C, SN:MY43321570)	Calibration Due: 03/24/2011
Amplifier	Mini-Circuits (ZHL-42, SN:110405)	Calibration Due: 07/29/2011
Power Meter	Agilent (E4416A, SN:QB41292714)	Calibration Due: 03/24/2011
Probe	Antennessa (SN:SN_1109_EP_100)	Calibration Due: 05/04/2011
DIPOLE 835	Antennessa (DIPI32,SN 48/05)	Calibration Due: 02/09/2012
Phantom	Antennessa (SN:SN41_05_SAM29)	Calibrated: N/A
Liquid	Antennessa	Calibrated: N/A
Measurement SW	OPEN SAR V2.1	Calibrated: N/A

C. SAR Measurement Results

Frequency (MHz)	824.200012
Relative permittivity (real part)	56.584000
Relative permittivity (imaginary part)	21.654150
Conductivity (S/m)	0.971519
Variation (%)	-1.120000
Ambient Temperature:	21 °C
Liquid Temperature:	20 °C




ConvF:

20.00, 19.88, 27.77


Crest factor:

1:2

SURFACE SAR

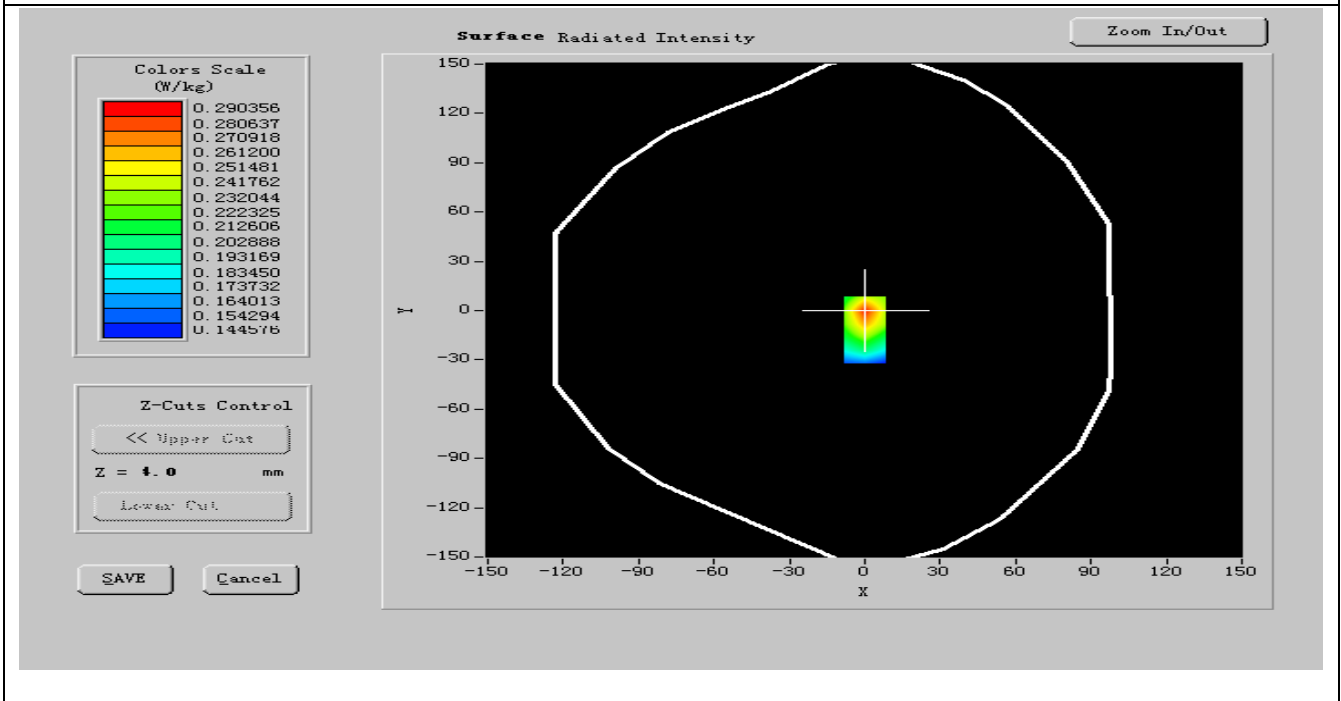

VOLUME SAR

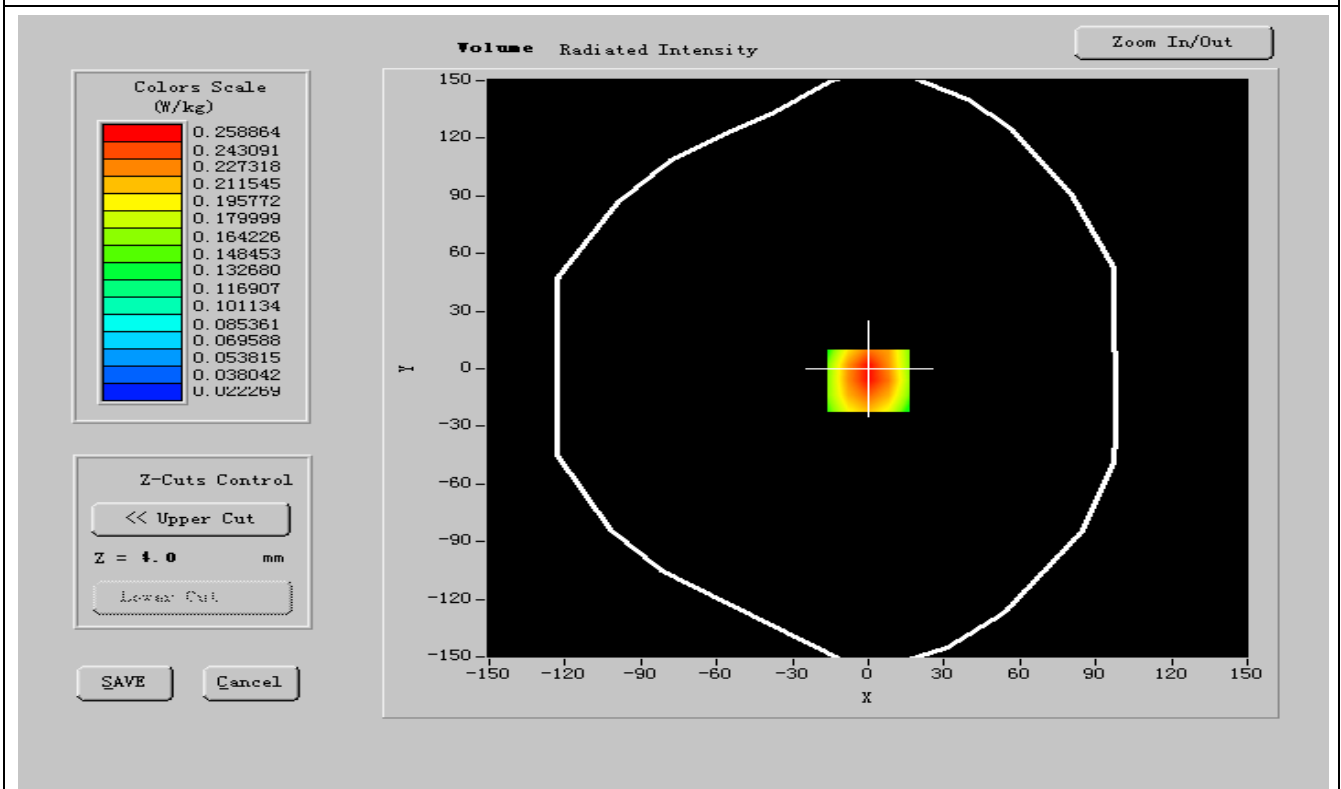




Maximum location: X=-13.00, Y=-3.00

SAR 10g (W/Kg)	0.161258
SAR 1g (W/Kg)	0.287832

Z Axis Scan

SAR, Z Axis Scan (X = 0, Y = -6)

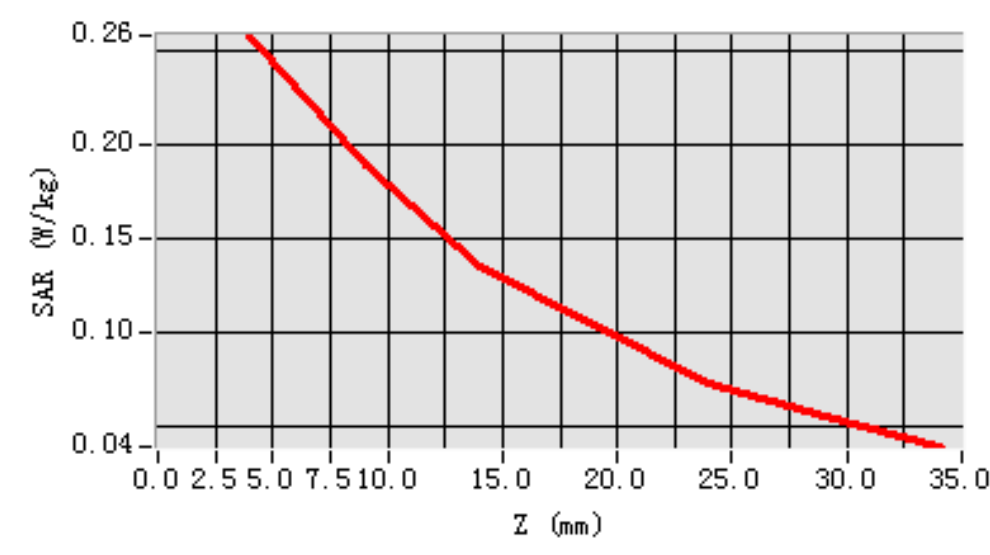



MEASUREMENT 20

Date of measurement: 02/20/2011

Area Scan: 7 x 7 x 1

dx=15mm

dy=15mm

Zoom Scan: 5 x 5 x 7

dx=5mm

dy=5mm

dz=5mm

Z Axis Scan: 1 x 1 x 21

dx=20mm

dy=20mm

dz=5mm

A. Experimental conditions.

Phantom File	zinf15.txt, Adaptive 2 max
Phantom	Body
Device Position	FrontSide toward phantom
Band	GPRS850
Channels	Middle
Signal	GPRS

B. Instrumentations.

PC	HP (Pentium(R) V3.06GHz, SN:375052-AA1)	Calibrated: N/A
Wireless Communication Test Set	R&S (CMU200, SN:B23-03291)	Calibration Due: 05/25/2011
Network Analyzer	Agilent(E5071B, MY42301382)	Calibration Due: 03/24/2011
Voltmeter	Keithley (2000, SN:1015843)	Calibration Due: 05/25/2011
Signal Generator	Agilent (E8257C, SN:MY43321570)	Calibration Due: 03/24/2011
Amplifier	Mini-Circuits (ZHL-42, SN:110405)	Calibration Due: 07/29/2011
Power Meter	Agilent (E4416A, SN:QB41292714)	Calibration Due: 03/24/2011
Probe	Antennessa (SN:SN_1109_EP_100)	Calibration Due: 05/04/2011
DIPOLE 835	Antennessa (DIPI32,SN 48/05)	Calibration Due: 02/09/2012
Phantom	Antennessa (SN:SN41_05_SAM29)	Calibrated: N/A
Liquid	Antennessa	Calibrated: N/A
Measurement SW	OPEN SAR V2.1	Calibrated: N/A


C. SAR Measurement Results

Frequency (MHz)	836.600024
Relative permittivity (real part)	55.501999
Relative permittivity (imaginary part)	21.866249
Conductivity (S/m)	1.006342
Variation (%)	-0.200000
Ambient Temperature:	21 °C




Liquid Temperature:	20 °C
ConvF:	20.00, 19.88, 27.77
Crest factor:	1:2

SURFACE SAR

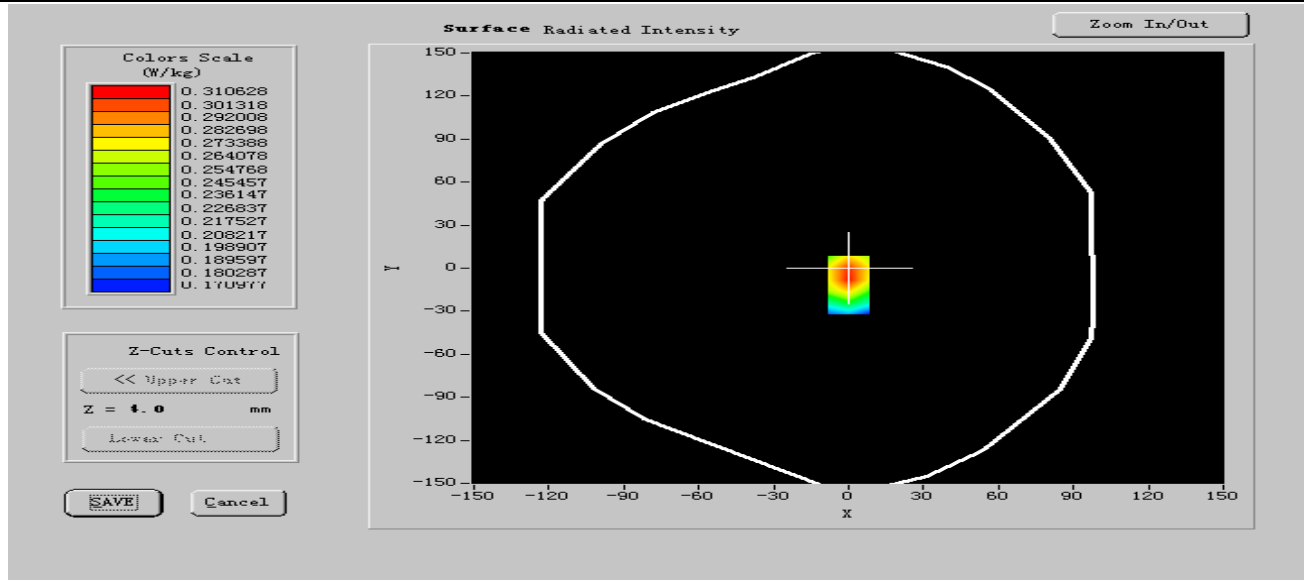

VOLUME SAR

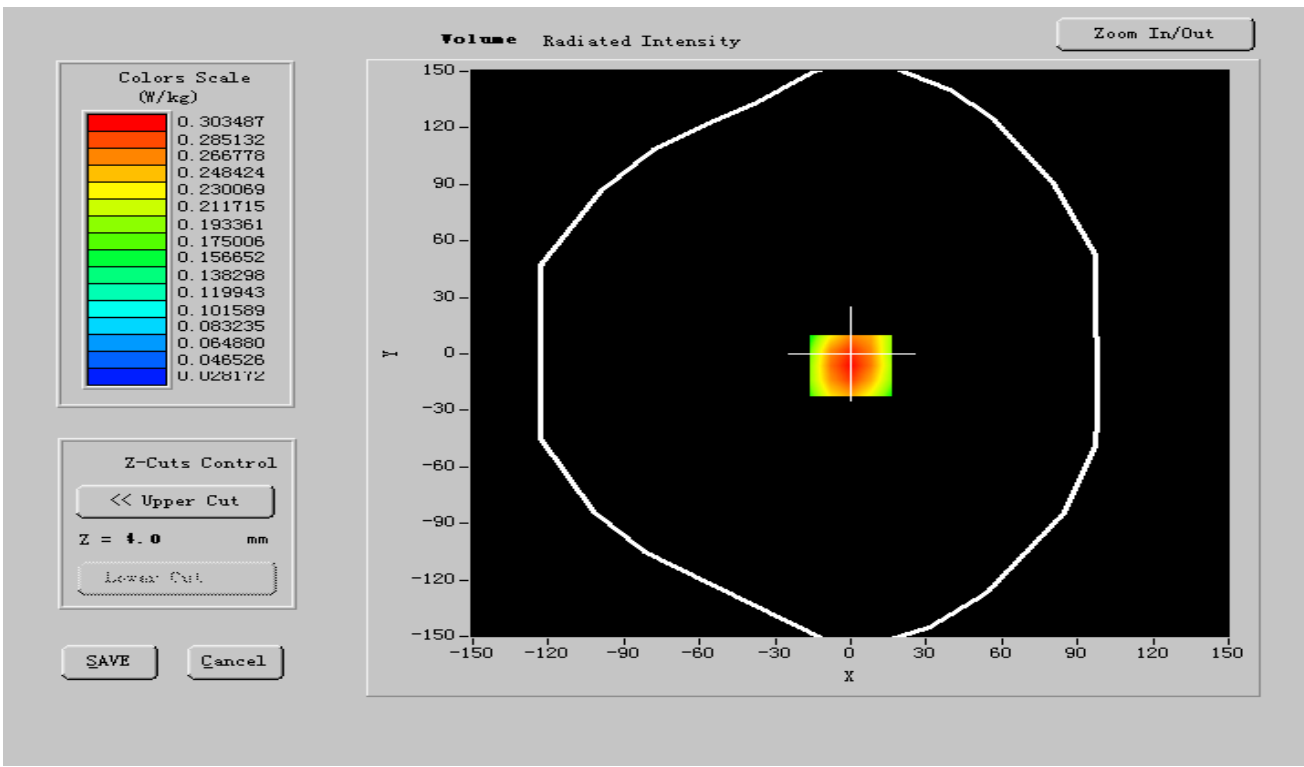




Maximum location: X=-13.00, Y=-3.00

SAR 10g (W/Kg)	0.233695
SAR 1g (W/Kg)	0.292963

Z Axis Scan

SAR, Z Axis Scan (X = 0, Y = -6)

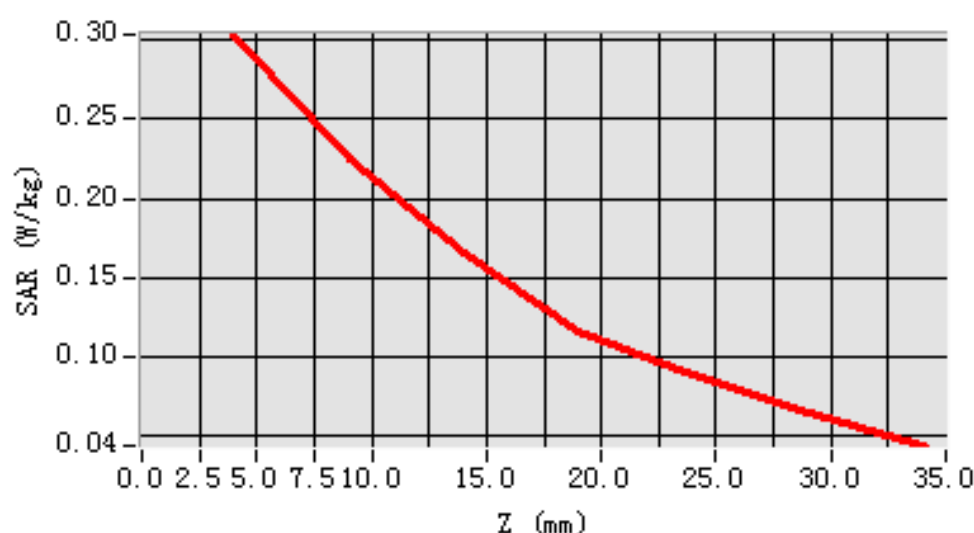



MEASUREMENT 21

Date of measurement: 02/20/2011

Area Scan: 7 x 7 x 1

dx=15mm

dy=15mm

Zoom Scan: 5 x 5 x 7

dx=5mm

dy=5mm

dz=5mm

Z Axis Scan: 1 x 1 x 21

dx=20mm

dy=20mm

dz=5mm

A. Experimental conditions.

Phantom File	zinf15.txt, Adaptive 2 max
Phantom	Body
Device Position	FrontSide toward phantom
Band	GPRS850
Channels	High
Signal	GPRS

B. Instrumentations.

PC	HP (Pentium(R) V3.06GHz, SN:375052-AA1)	Calibrated: N/A
Wireless Communication Test Set	R&S (CMU200, SN:B23-03291)	Calibration Due: 05/25/2011
Network Analyzer	Agilent(E5071B, MY42301382)	Calibration Due: 03/24/2011
Voltmeter	Keithley (2000, SN:1015843)	Calibration Due: 05/25/2011
Signal Generator	Agilent (E8257C, SN:MY43321570)	Calibration Due: 03/24/2011
Amplifier	Mini-Circuits (ZHL-42, SN:110405)	Calibration Due: 07/29/2011
Power Meter	Agilent (E4416A, SN:QB41292714)	Calibration Due: 03/24/2011
Probe	Antennessa (SN:SN_1109_EP_100)	Calibration Due: 05/04/2011
DIPOLE 835	Antennessa (DIPI32,SN 48/05)	Calibration Due: 02/09/2012
Phantom	Antennessa (SN:SN41_05_SAM29)	Calibrated: N/A
Liquid	Antennessa	Calibrated: N/A
Measurement SW	OPEN SAR V2.1	Calibrated: N/A

C. SAR Measurement Results


Frequency (MHz)	848.599976
Relative permittivity (real part)	55.576000
Relative permittivity (imaginary part)	21.726601
Conductivity (S/m)	0.974288
Variation (%)	-0.220000
Ambient Temperature:	21 °C
Liquid Temperature:	20 °C
ConvF:	20.00, 19.88, 27.77




Crest factor:

1:2

SURFACE SAR

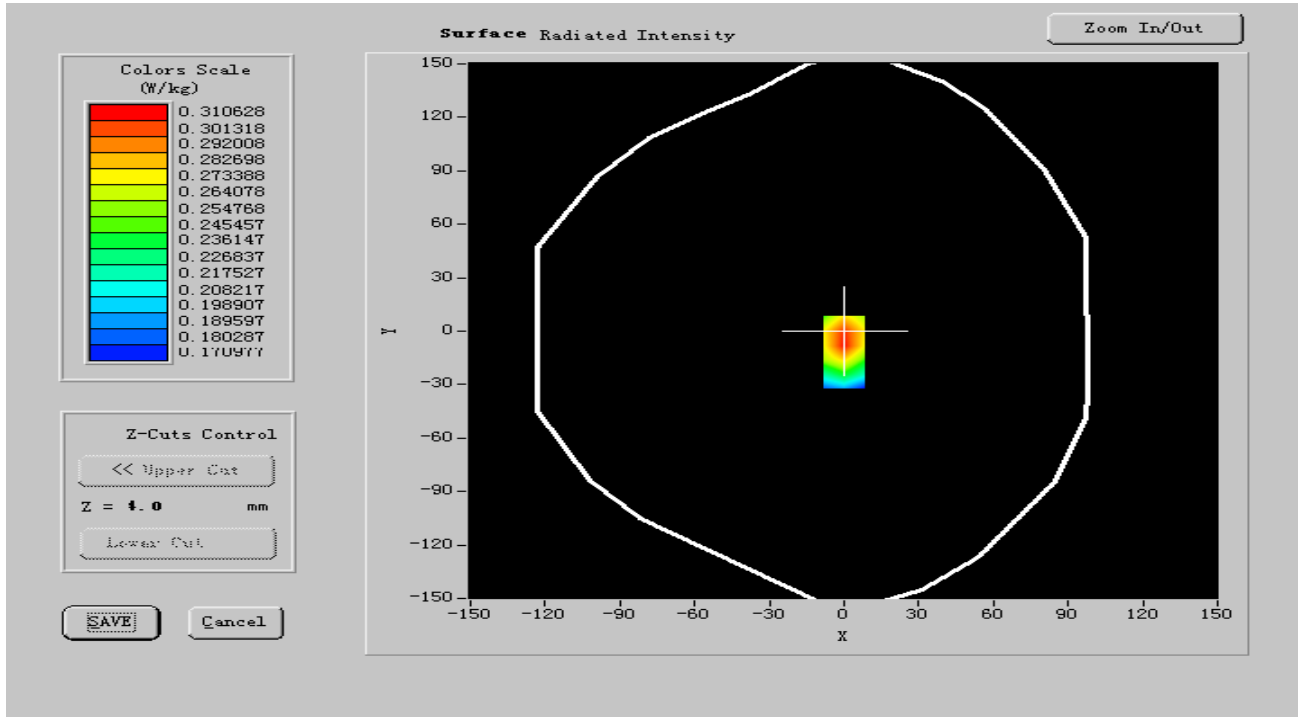

VOLUME SAR

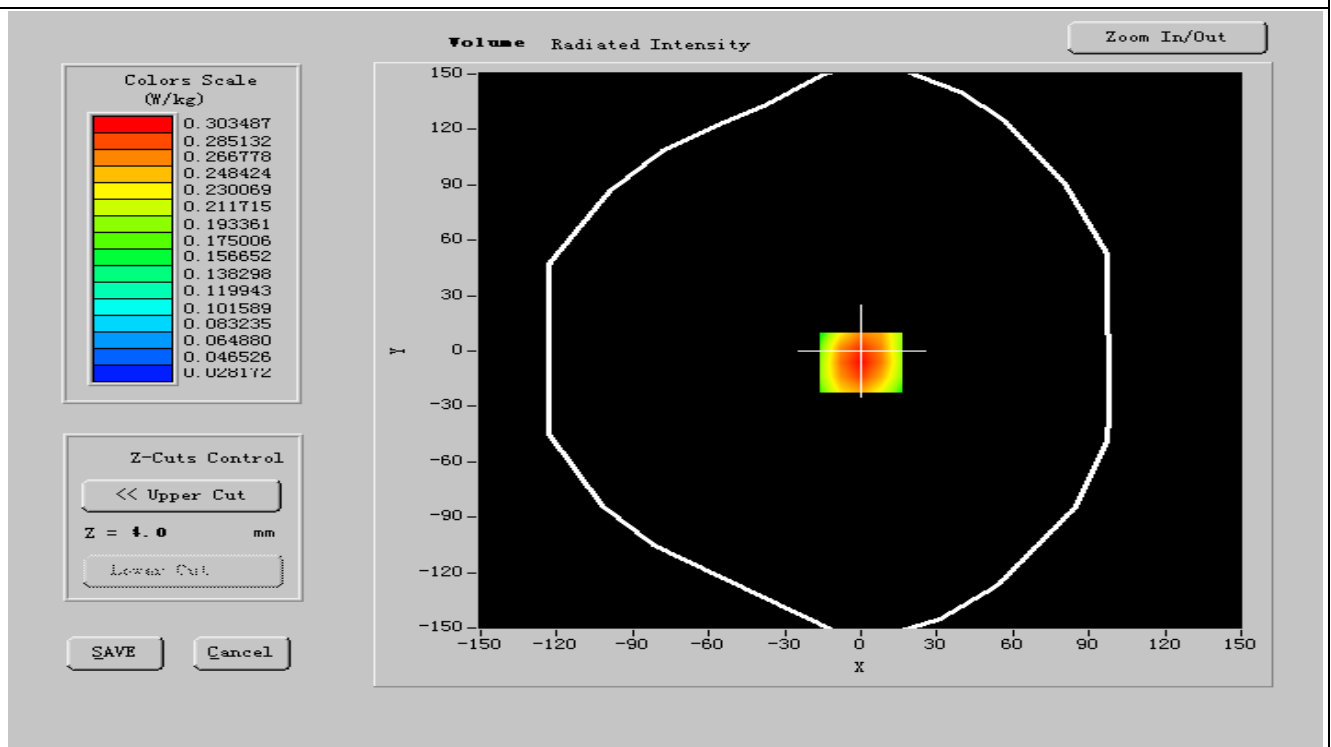




Maximum location: X=-13.00, Y=-3.00

SAR 10g (W/Kg)	0.211258
SAR 1g (W/Kg)	0.323258

Z Axis Scan

SAR, Z Axis Scan (X = 0, Y = -6)

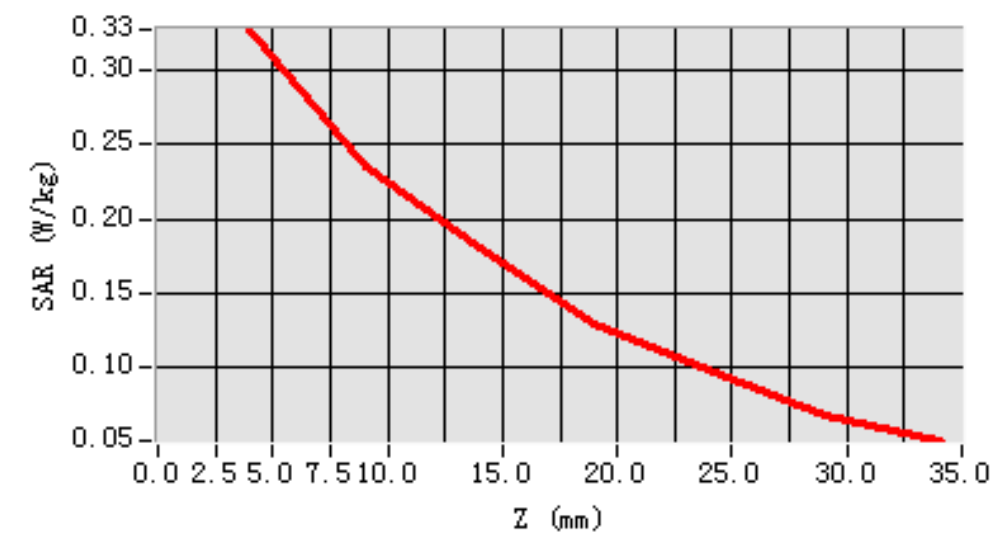

**MEASUREMENT 22****Date of measurement: 02/20/2011****Area Scan: 7 x 7 x 1****dx=15mm****dy=15mm****Zoom Scan: 5 x 5 x 7****dx=5mm****dy=5mm****dz=5mm****Z Axis Scan: 1 x 1 x 21****dx=20mm****dy=20mm****dz=5mm****A. Experimental conditions.**

Phantom File	zinf15.txt, Adaptive 2 max
Phantom	Body
Device Position	BackSide toward phantom
Band	GPRS850
Channels	Low
Signal	GPRS

B. Instrumentations.

PC	HP (Pentium(R) V3.06GHz, SN:375052-AA1)	Calibrated: N/A
Wireless Communication Test Set	R&S (CMU200, SN:B23-03291)	Calibration Due: 05/25/2011
Network Analyzer	Agilent(E5071B, MY42301382)	Calibration Due: 03/24/2011
Voltmeter	Keithley (2000, SN:1015843)	Calibration Due: 05/25/2011
Signal Generator	Agilent (E8257C, SN:MY43321570)	Calibration Due: 03/24/2011
Amplifier	Mini-Circuits (ZHL-42, SN:110405)	Calibration Due: 07/29/2011
Power Meter	Agilent (E4416A, SN:QB41292714)	Calibration Due: 03/24/2011
Probe	Antennessa (SN:SN_1109_EP_100)	Calibration Due: 05/04/2011
DIPOLE 835	Antennessa (DIPI32,SN 48/05)	Calibration Due: 02/09/2012
Phantom	Antennessa (SN:SN41_05_SAM29)	Calibrated: N/A
Liquid	Antennessa	Calibrated: N/A
Measurement SW	OPEN SAR V2.1	Calibrated: N/A

C. SAR Measurement Results


Frequency (MHz)	824.200012
Relative permittivity (real part)	56.585000
Relative permittivity (imaginary part)	21.654170
Conductivity (S/m)	0.970587
Variation (%)	-1.100000
Ambient Temperature:	21 °C
Liquid Temperature:	20 °C
ConvF:	20.00, 19.88, 27.77




Crest factor:

1:2

SURFACE SAR

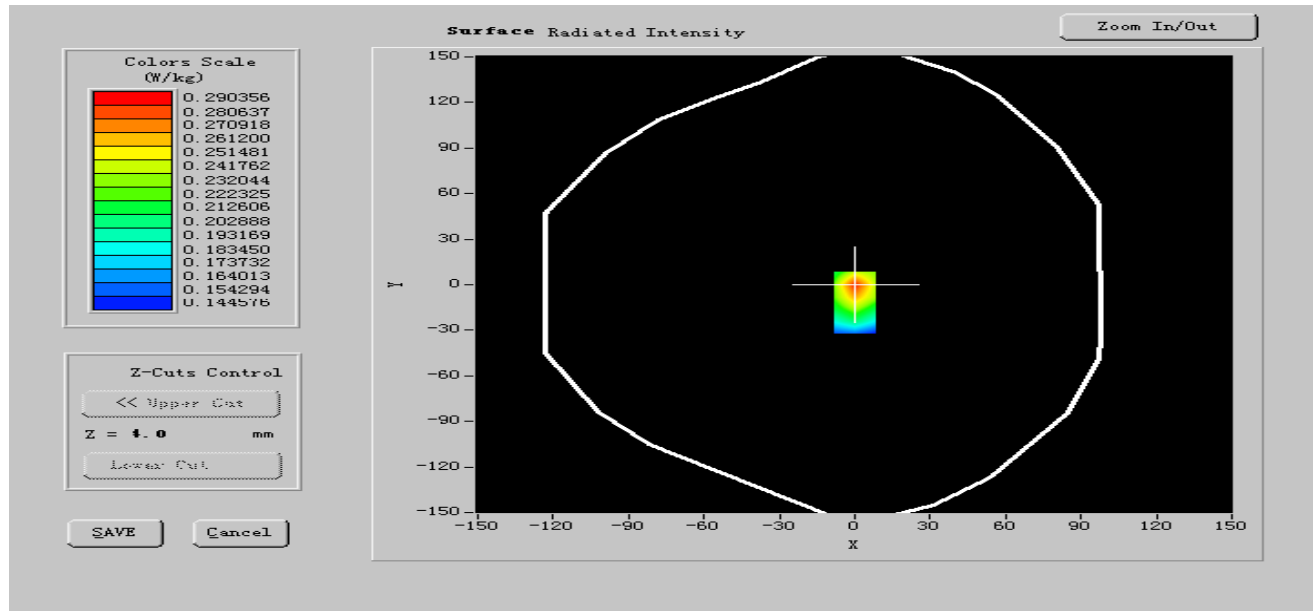

VOLUME SAR

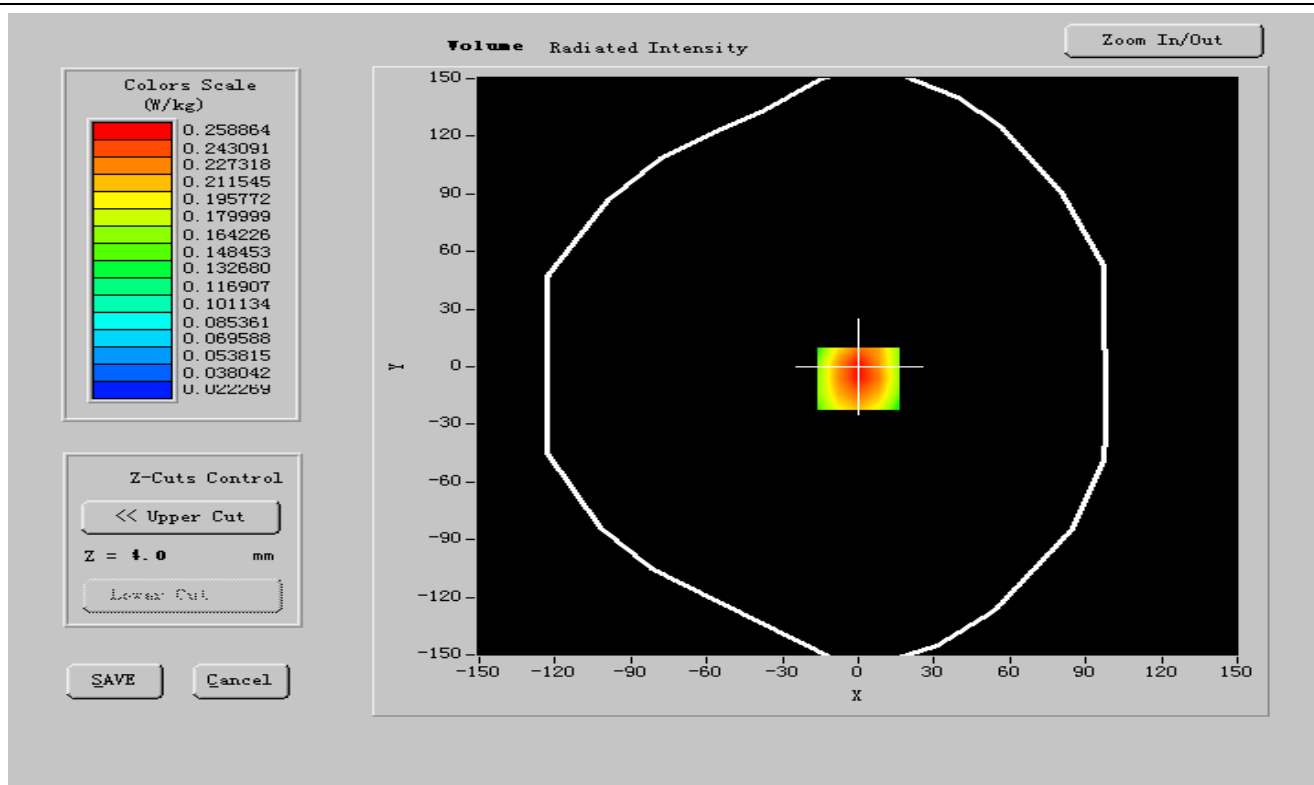




Maximum location: X=-13.00, Y=-3.00

SAR 10g (W/Kg)	0.162658
SAR 1g (W/Kg)	0.247122

Z Axis Scan

SAR, Z Axis Scan (X = 0, Y = -6)

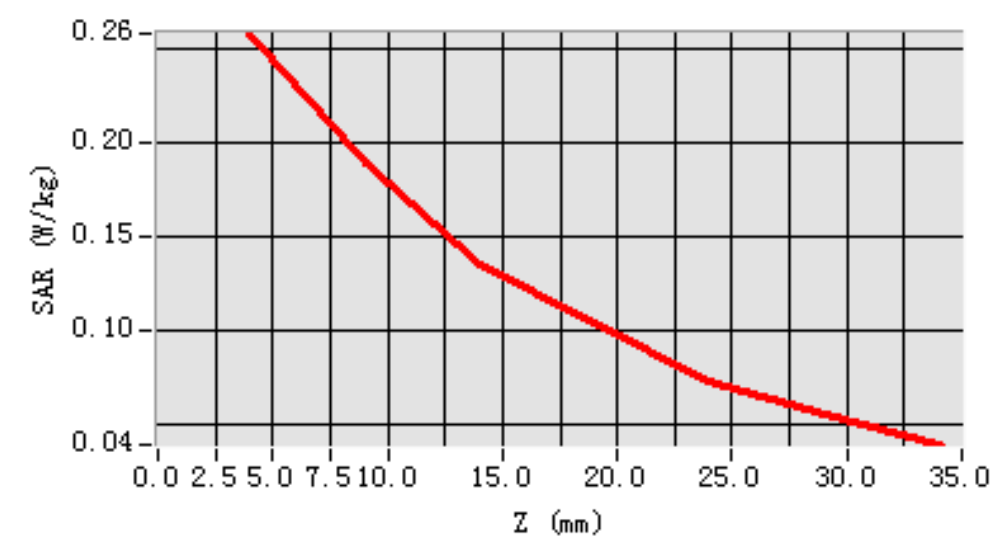



MEASUREMENT 23

Date of measurement: 02/20/2011**Area Scan: 7 x 7 x 1****dx=15mm****dy=15mm****Zoom Scan: 5 x 5 x 7****dx=5mm****dy=5mm****dz=5mm****Z Axis Scan: 1 x 1 x 21****dx=20mm****dy=20mm****dz=5mm**

A. Experimental conditions.

Phantom File	zinf15.txt, Adaptive 2 max
Phantom	Body
Device Position	BackSide toward phantom
Band	GPRS850
Channels	Middle
Signal	GPRS

B. Instrumentations.

PC	HP (Pentium(R) V3.06GHz, SN:375052-AA1)	Calibrated: N/A
Wireless Communication Test Set	R&S (CMU200, SN:B23-03291)	Calibration Due: 05/25/2011
Network Analyzer	Agilent(E5071B, MY42301382)	Calibration Due: 03/24/2011
Voltmeter	Keithley (2000, SN:1015843)	Calibration Due: 05/25/2011
Signal Generator	Agilent (E8257C, SN:MY43321570)	Calibration Due: 03/24/2011
Amplifier	Mini-Circuits (ZHL-42, SN:110405)	Calibration Due: 07/29/2011
Power Meter	Agilent (E4416A, SN:QB41292714)	Calibration Due: 03/24/2011
Probe	Antennessa (SN:SN_1109_EP_100)	Calibration Due: 05/04/2011
DIPOLE 835	Antennessa (DIPI32,SN 48/05)	Calibration Due: 02/09/2012
Phantom	Antennessa (SN:SN41_05_SAM29)	Calibrated: N/A
Liquid	Antennessa	Calibrated: N/A
Measurement SW	OPEN SAR V2.1	Calibrated: N/A

C. SAR Measurement Results

Frequency (MHz)	836.600024
Relative permittivity (real part)	55.502419
Relative permittivity (imaginary part)	21.863712
Conductivity (S/m)	0.985102
Variation (%)	-1.200000
Ambient Temperature:	21 °C
Liquid Temperature:	20 °C




ConvF:

20.00, 19.88, 27.77


Crest factor:

1:2

SURFACE SAR

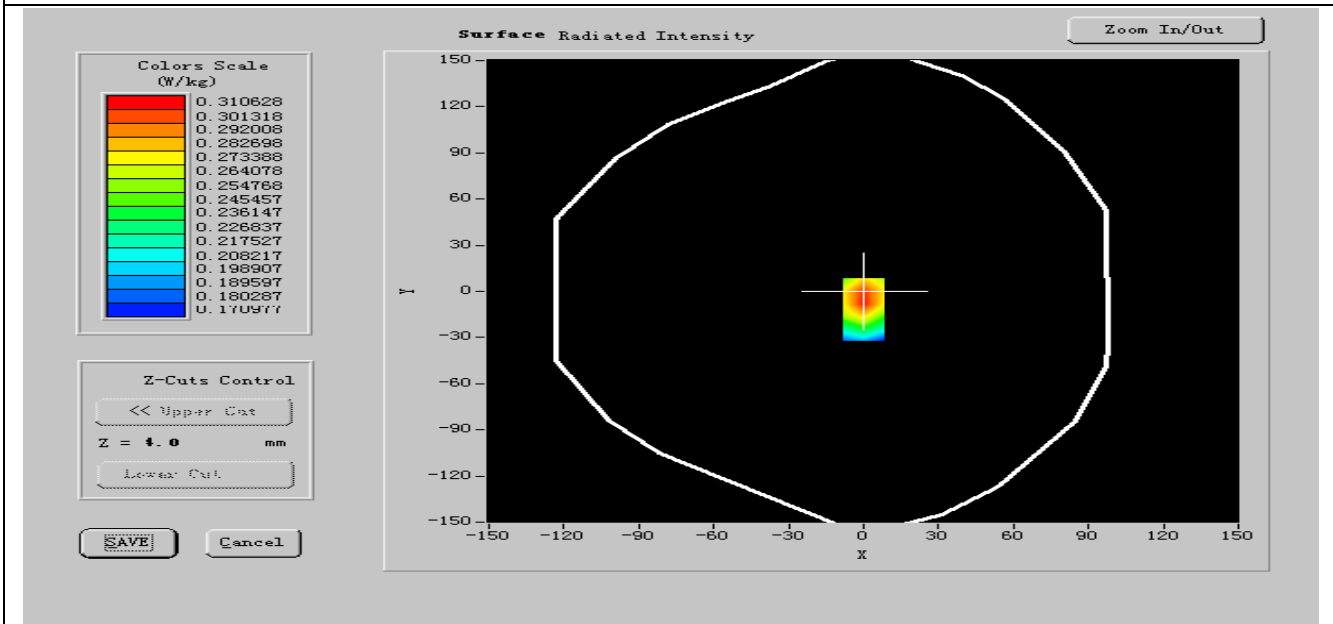

VOLUME SAR

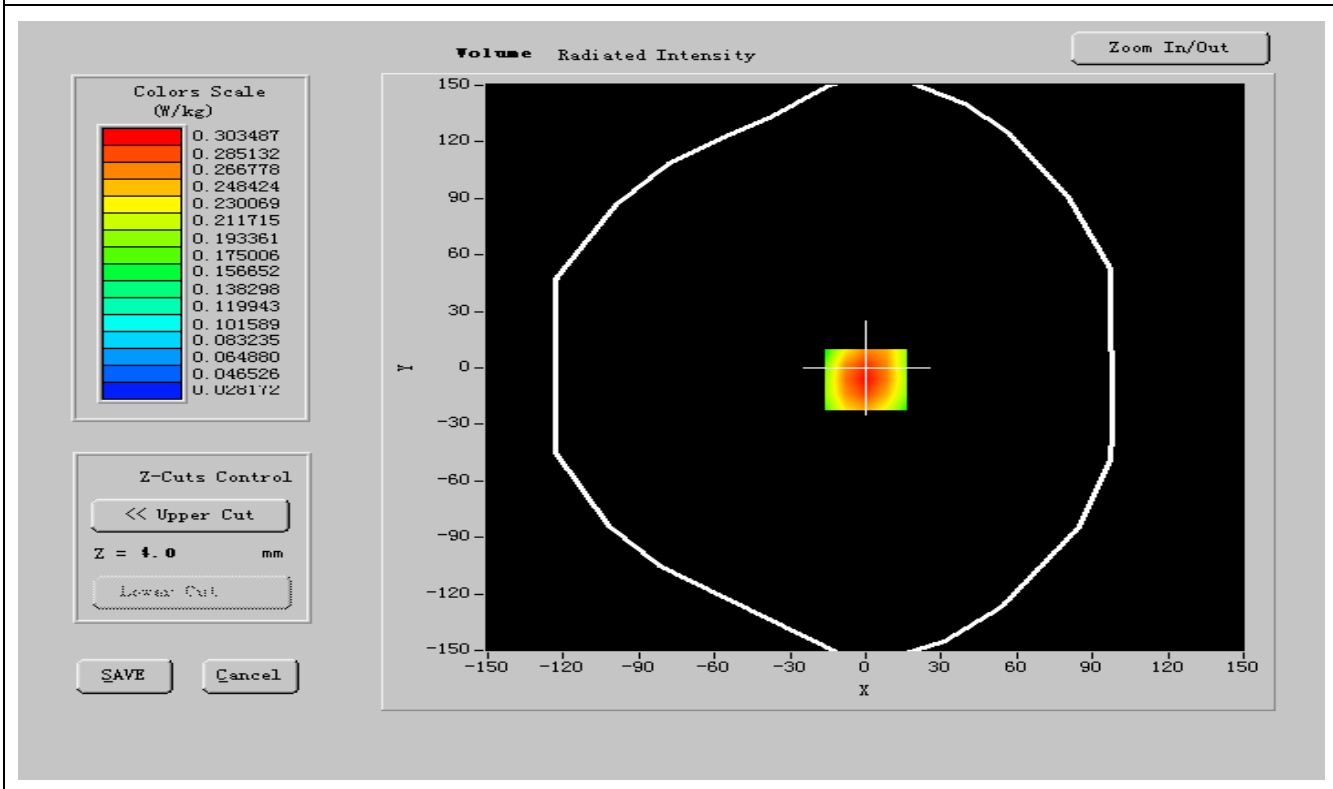




Maximum location: X=-13.00, Y=-3.00

SAR 10g (W/Kg)	0.212035
SAR 1g (W/Kg)	0.265124

Z Axis Scan

SAR, Z Axis Scan (X = 0, Y = -6)

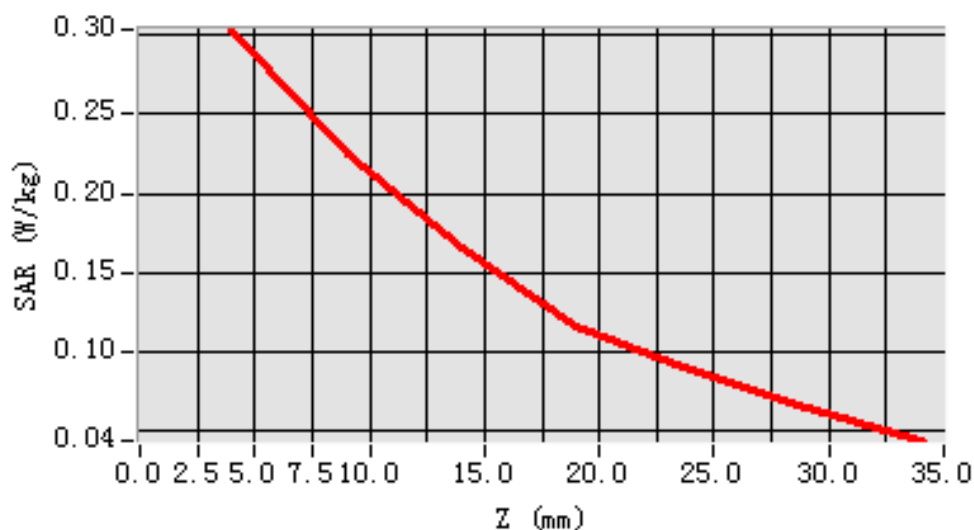



MEASUREMENT 24

Date of measurement: 02/20/2011

Area Scan: 7 x 7 x 1

dx=15mm

dy=15mm

Zoom Scan: 5 x 5 x 7

dx=5mm

dy=5mm

dz=5mm

Z Axis Scan: 1 x 1 x 21

dx=20mm

dy=20mm

dz=5mm

A. Experimental conditions.

Phantom File	zinf15.txt, Adaptive 2 max
Phantom	Body
Device Position	BackSide toward phantom
Band	GPRS850
Channels	High
Signal	GPRS

B. Instrumentations.

PC	HP (Pentium(R) V3.06GHz, SN:375052-AA1)	Calibrated: N/A
Wireless Communication Test Set	R&S (CMU200, SN:B23-03291)	Calibration Due: 05/25/2011
Network Analyzer	Agilent(E5071B, MY42301382)	Calibration Due: 03/24/2011
Voltmeter	Keithley (2000, SN:1015843)	Calibration Due: 05/25/2011
Signal Generator	Agilent (E8257C, SN:MY43321570)	Calibration Due: 03/24/2011
Amplifier	Mini-Circuits (ZHL-42, SN:110405)	Calibration Due: 07/29/2011
Power Meter	Agilent (E4416A, SN:QB41292714)	Calibration Due: 03/24/2011
Probe	Antennessa (SN:SN_1109_EP_100)	Calibration Due: 05/04/2011
DIPOLE 835	Antennessa (DIPI32,SN 48/05)	Calibration Due: 02/09/2012
Phantom	Antennessa (SN:SN41_05_SAM29)	Calibrated: N/A
Liquid	Antennessa	Calibrated: N/A
Measurement SW	OPEN SAR V2.1	Calibrated: N/A

C. SAR Measurement Results

Frequency (MHz)	848.599976
Relative permittivity (real part)	55.574700
Relative permittivity (imaginary part)	21.725721
Conductivity (S/m)	0.981218
Variation (%)	-0.200000
Ambient Temperature:	21 °C
Liquid Temperature:	20 °C




ConvF:

20.00, 19.88, 27.77


Crest factor:

1:2

SURFACE SAR

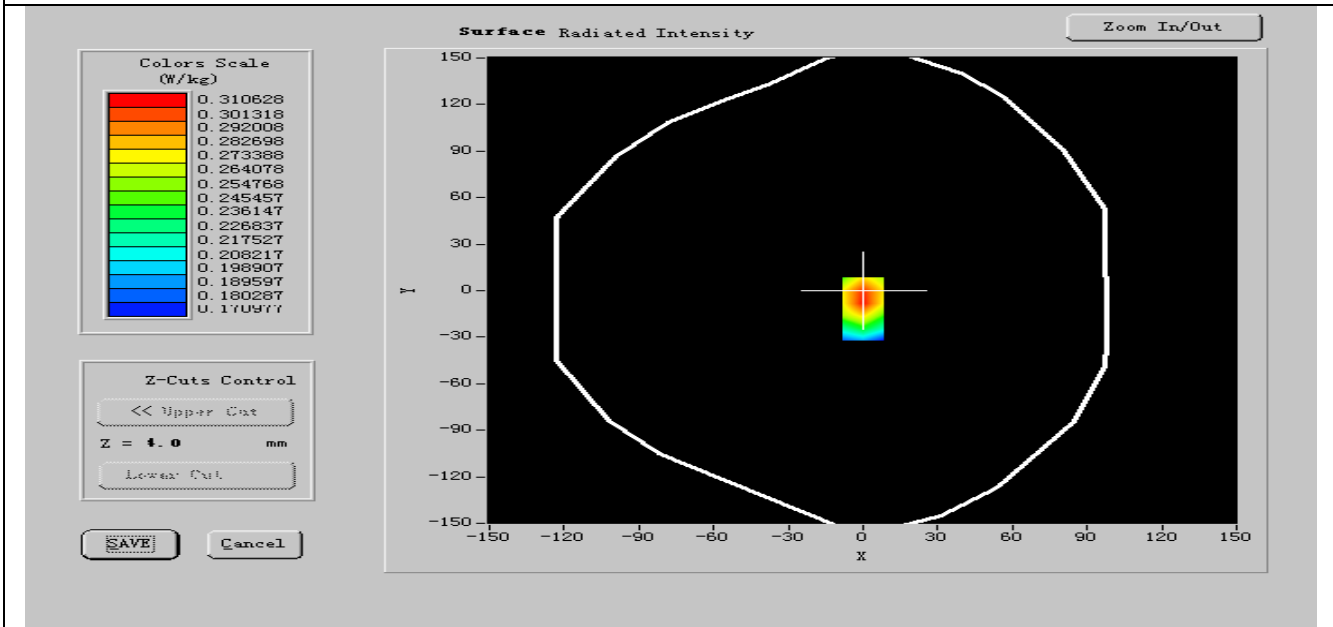

VOLUME SAR

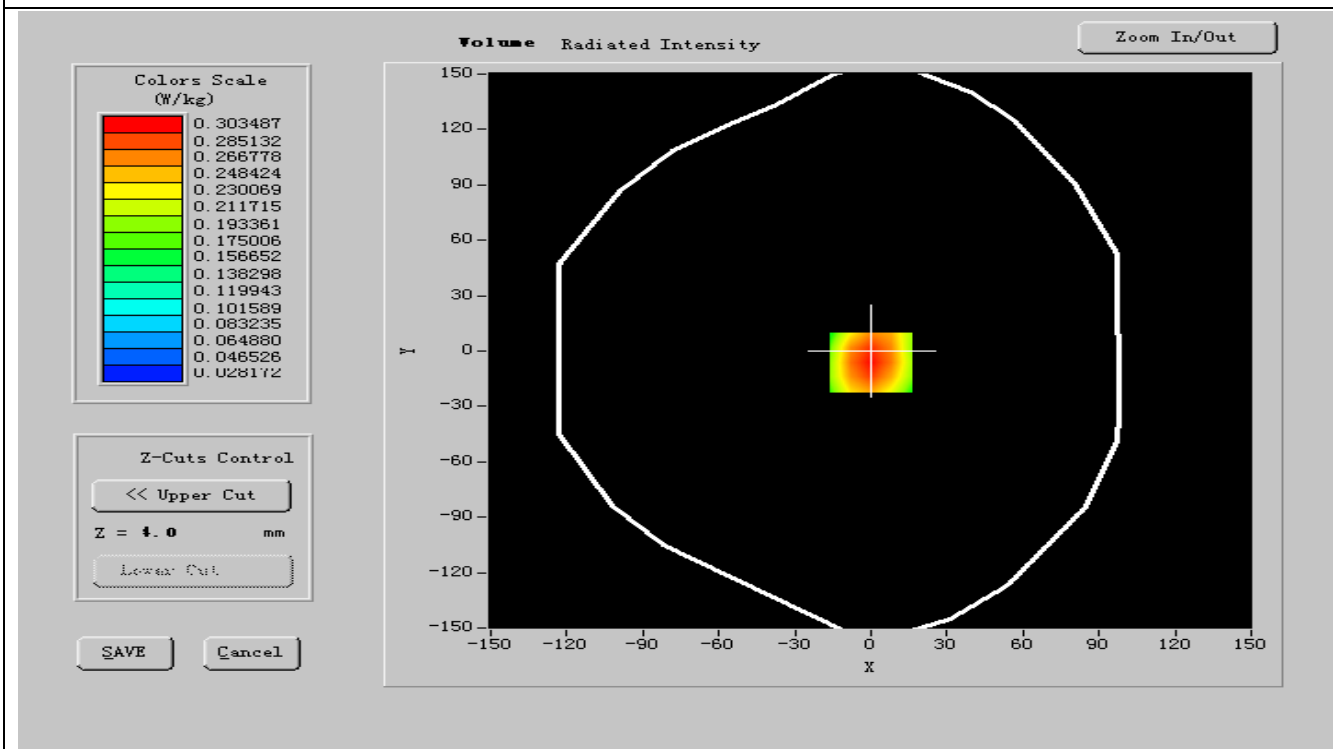




Maximum location: X=-13.00, Y=-3.00

SAR 10g (W/Kg)	0.210146
SAR 1g (W/Kg)	0.298258

Z Axis Scan

SAR, Z Axis Scan (X = 0, Y = -6)

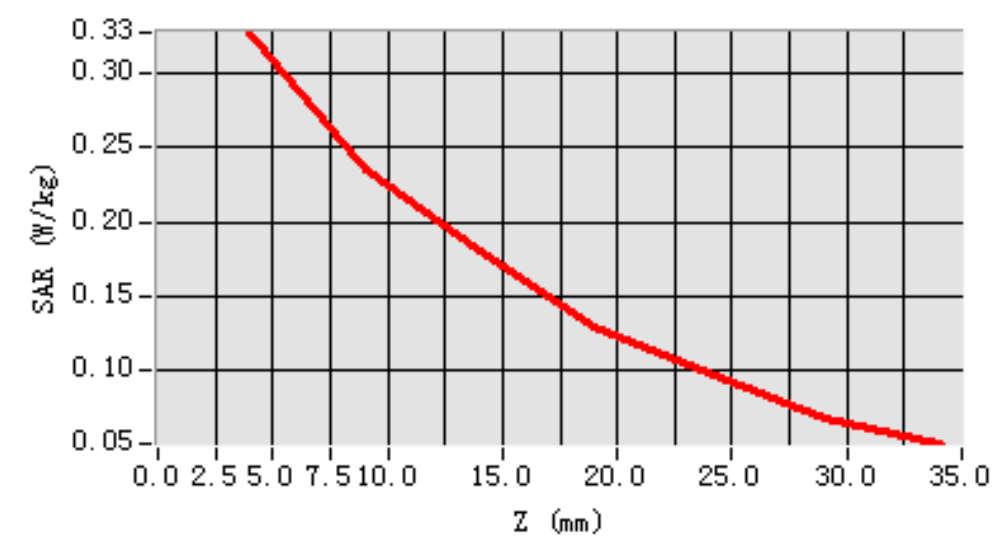

**MEASUREMENT 25****Date of measurement: 02/20/2011****Area Scan: 7 x 7 x 1****dx=15mm****dy=15mm****Zoom Scan: 5 x 5 x 7****dx=5mm****dy=5mm****dz=5mm****Z Axis Scan: 1 x 1 x 21****dx=20mm****dy=20mm****dz=5mm****A. Experimental conditions.**

Phantom File	zinf15.txt, Adaptative 2 max
Phantom	Body
Device Position	FrontSide toward phantom
Band	EDGE850
Channels	Low
Signal	EDGE

B. Instrumentations.

PC	HP (Pentium(R) V3.06GHz, SN:375052-AA1)	Calibrated: N/A
Wireless Communication Test Set	R&S (CMU200, SN:B23-03291)	Calibration Due: 05/25/2011
Network Analyzer	Agilent(E5071B, MY42301382)	Calibration Due: 03/24/2011
Voltmeter	Keithley (2000, SN:1015843)	Calibration Due: 05/25/2011
Signal Generator	Agilent (E8257C, SN:MY43321570)	Calibration Due: 03/24/2011
Amplifier	Mini-Circuits (ZHL-42, SN:110405)	Calibration Due: 07/29/2011
Power Meter	Agilent (E4416A, SN:QB41292714)	Calibration Due: 03/24/2011
Probe	Antennessa (SN:SN_1109_EP_100)	Calibration Due: 05/04/2011
DIPOLE 835	Antennessa (DIPI32,SN 48/05)	Calibration Due: 02/09/2012
Phantom	Antennessa (SN:SN41_05_SAM29)	Calibrated: N/A
Liquid	Antennessa	Calibrated: N/A
Measurement SW	OPEN SAR V2.1	Calibrated: N/A

C. SAR Measurement Results


Frequency (MHz)	824.200012
Relative permittivity (real part)	56.574000
Relative permittivity (imaginary part)	21.654150
Conductivity (S/m)	0.970219
Variation (%)	-1.110000
Ambient Temperature:	21 °C
Liquid Temperature:	20 °C
ConvF:	20.00, 19.88, 27.77




Crest factor:

1:2

SURFACE SAR

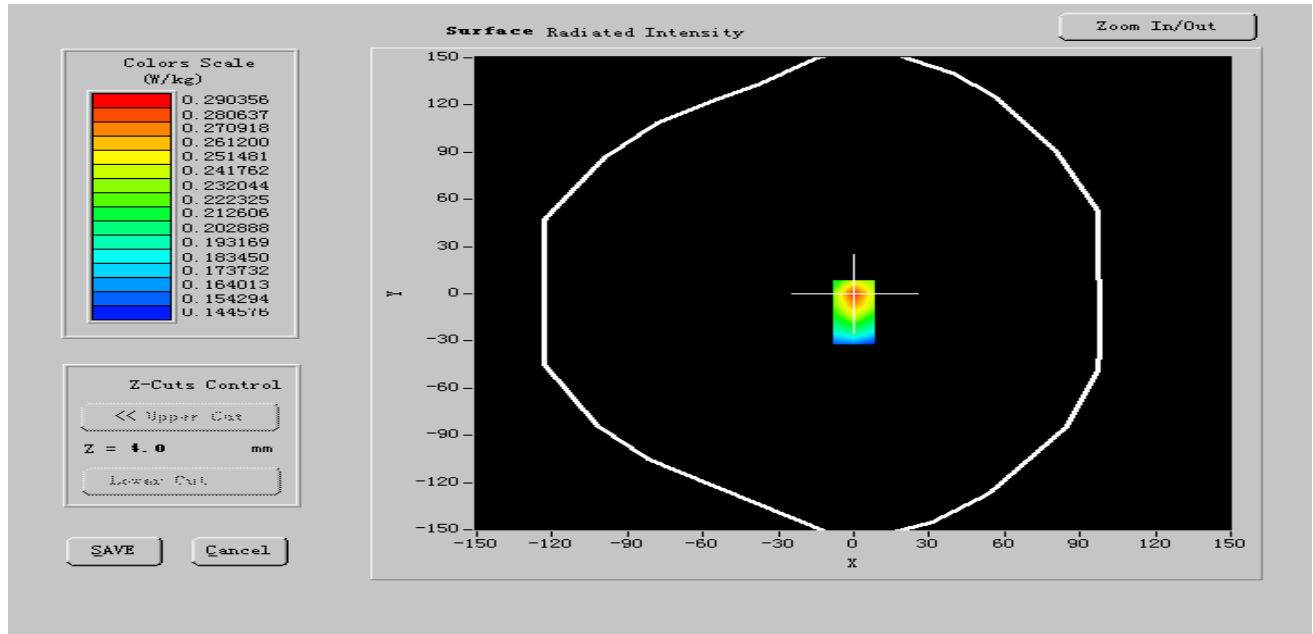

VOLUME SAR

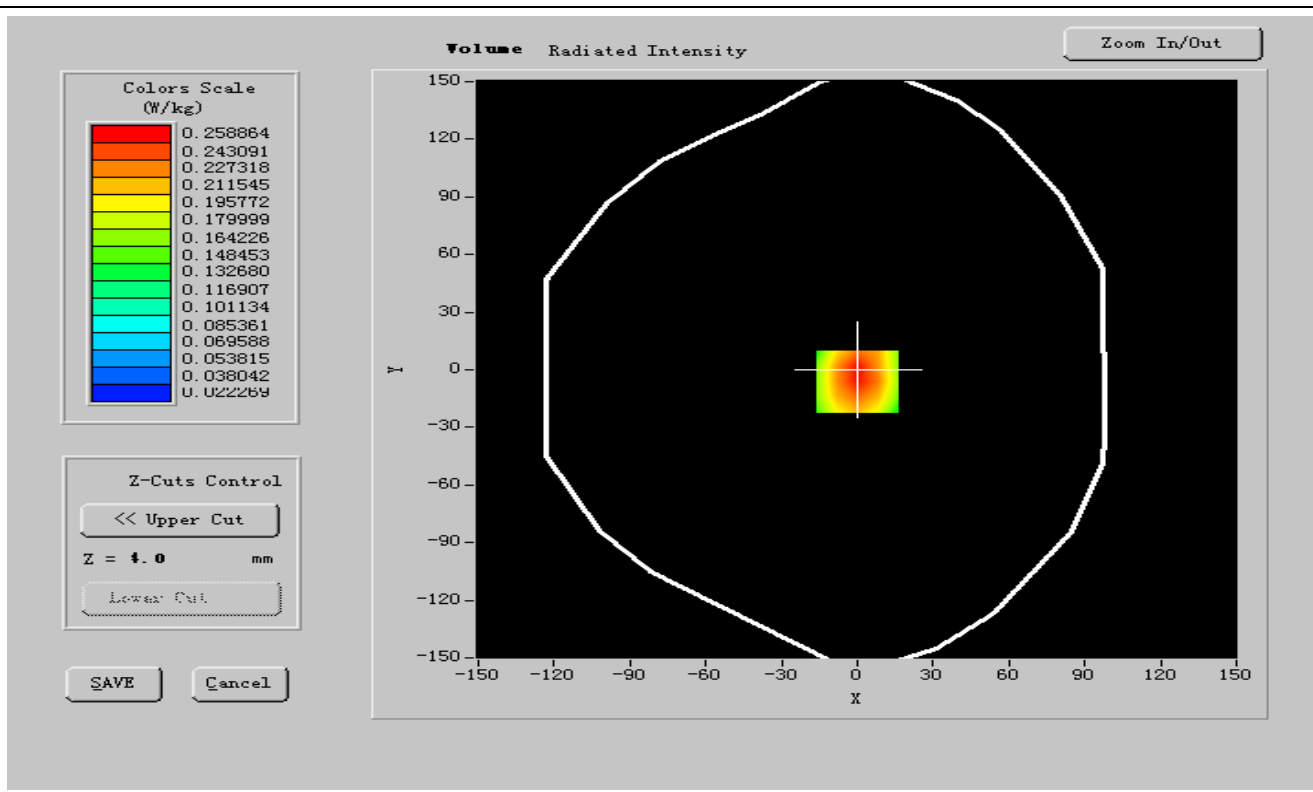




Maximum location: X=-13.00, Y=-3.00

SAR 10g (W/Kg)	0.152358
SAR 1g (W/Kg)	0.262141

Z Axis Scan

SAR, Z Axis Scan (X = 0, Y = -6)

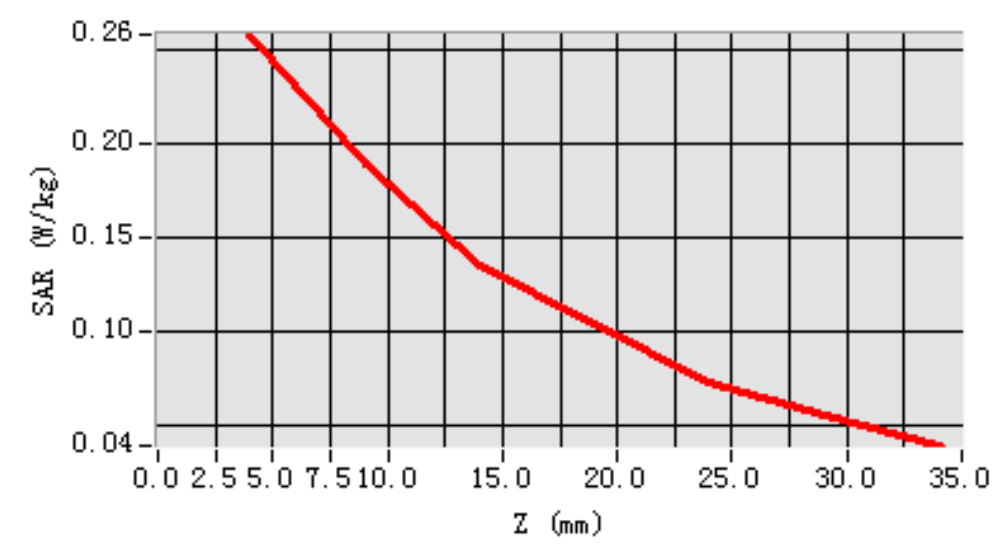



MEASUREMENT 26

Date of measurement: 02/20/2011**Area Scan: 7 x 7 x 1****dx=15mm****dy=15mm****Zoom Scan: 5 x 5 x 7****dx=5mm****dy=5mm****dz=5mm****Z Axis Scan: 1 x 1 x 21****dx=20mm****dy=20mm****dz=5mm**

A. Experimental conditions.

Phantom File	zinf15.txt, Adaptive 2 max
Phantom	Body
Device Position	FrontSide toward phantom
Band	EDGE850
Channels	Middle
Signal	EDGE

B. Instrumentations.

PC	HP (Pentium(R) V3.06GHz, SN:375052-AA1)	Calibrated: N/A
Wireless Communication Test Set	R&S (CMU200, SN:B23-03291)	Calibration Due: 05/25/2011
Network Analyzer	Agilent(E5071B, MY42301382)	Calibration Due: 03/24/2011
Voltmeter	Keithley (2000, SN:1015843)	Calibration Due: 05/25/2011
Signal Generator	Agilent (E8257C, SN:MY43321570)	Calibration Due: 03/24/2011
Amplifier	Mini-Circuits (ZHL-42, SN:110405)	Calibration Due: 07/29/2011
Power Meter	Agilent (E4416A, SN:QB41292714)	Calibration Due: 03/24/2011
Probe	Antennessa (SN:SN_1109_EP_100)	Calibration Due: 05/04/2011
DIPOLE 835	Antennessa (DIPI32,SN 48/05)	Calibration Due: 02/09/2012
Phantom	Antennessa (SN:SN41_05_SAM29)	Calibrated: N/A
Liquid	Antennessa	Calibrated: N/A
Measurement SW	OPEN SAR V2.1	Calibrated: N/A

C. SAR Measurement Results

Frequency (MHz)	836.600024
Relative permittivity (real part)	55.501999
Relative permittivity (imaginary part)	21.86949
Conductivity (S/m)	1.006142
Variation (%)	-0.210000
Ambient Temperature:	21 °C
Liquid Temperature:	20 °C




ConvF:

20.00, 19.88, 27.77


Crest factor:

1:2

SURFACE SAR

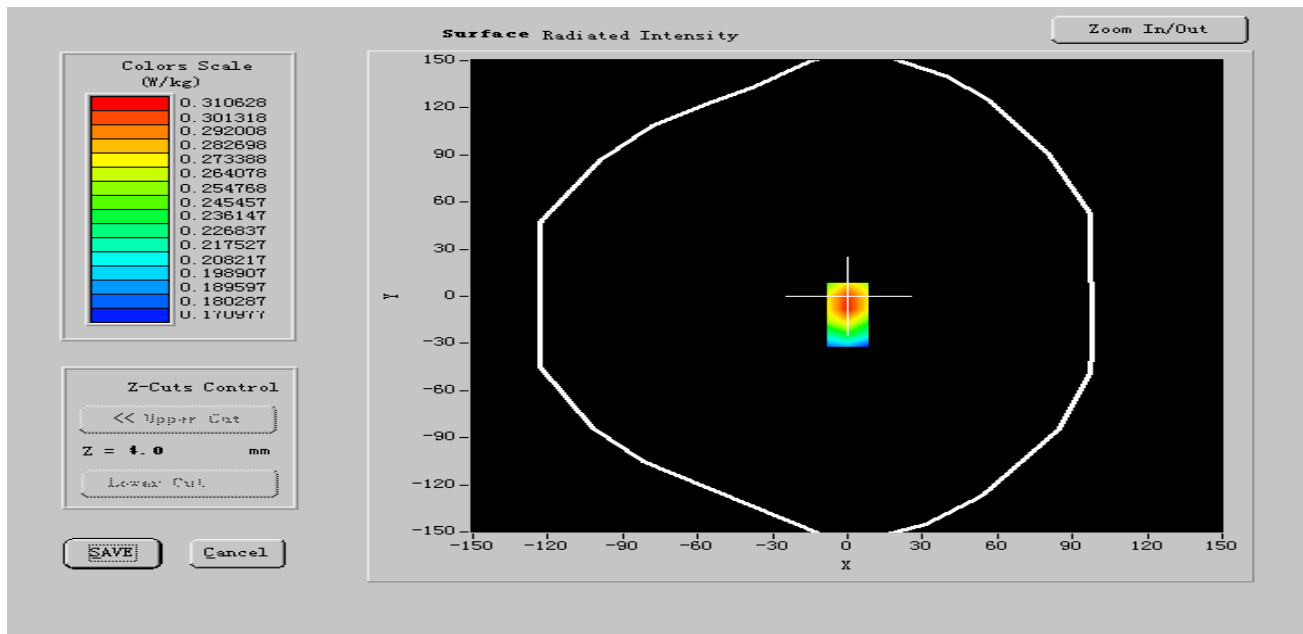

VOLUME SAR

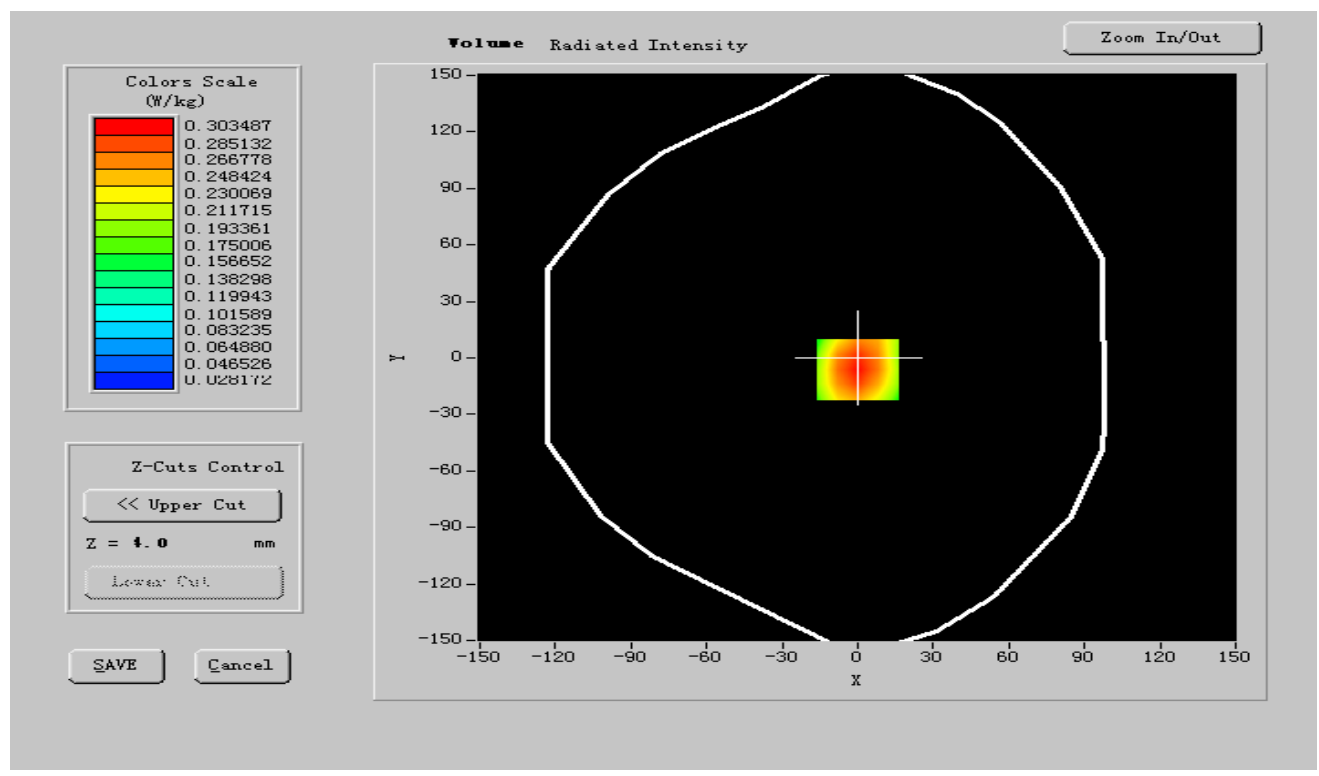




Maximum location: X=-13.00, Y=-3.00

SAR 10g (W/Kg)	0.212395
SAR 1g (W/Kg)	0.281213

Z Axis Scan

SAR, Z Axis Scan (X = 0, Y = -6)

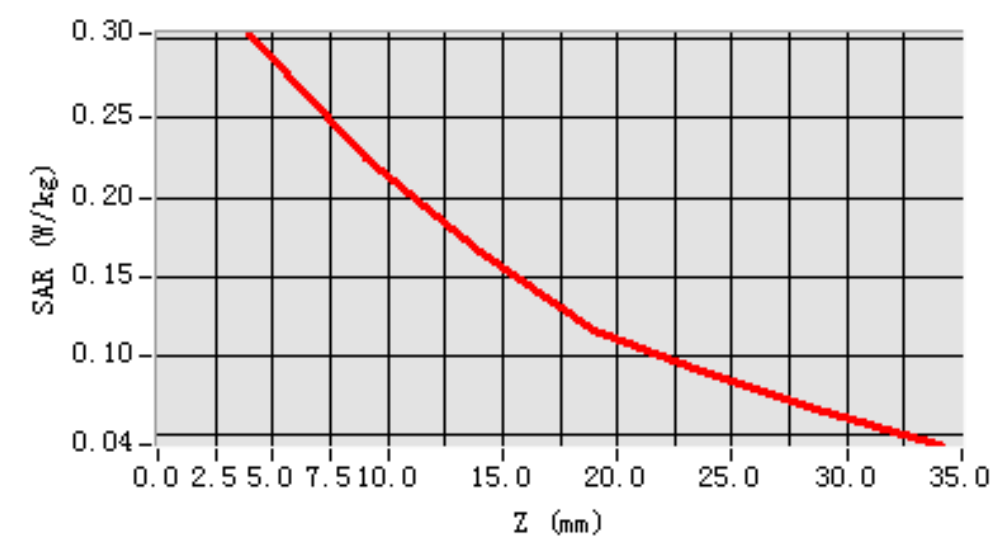



MEASUREMENT 27

Date of measurement: 02/20/2011**Area Scan: 7 x 7 x 1****dx=15mm****dy=15mm****Zoom Scan: 5 x 5 x 7****dx=5mm****dy=5mm****dz=5mm****Z Axis Scan: 1 x 1 x 21****dx=20mm****dy=20mm****dz=5mm**

A. Experimental conditions.

Phantom File	zinf15.txt, Adaptive 2 max
Phantom	Body
Device Position	FrontSide toward phantom
Band	EDGE850
Channels	High
Signal	EDGE

B. Instrumentations.

PC	HP (Pentium(R) V3.06GHz, SN:375052-AA1)	Calibrated: N/A
Wireless Communication Test Set	R&S (CMU200, SN:B23-03291)	Calibration Due: 05/25/2011
Network Analyzer	Agilent(E5071B, MY42301382)	Calibration Due: 03/24/2011
Voltmeter	Keithley (2000, SN:1015843)	Calibration Due: 05/25/2011
Signal Generator	Agilent (E8257C, SN:MY43321570)	Calibration Due: 03/24/2011
Amplifier	Mini-Circuits (ZHL-42, SN:110405)	Calibration Due: 07/29/2011
Power Meter	Agilent (E4416A, SN:QB41292714)	Calibration Due: 03/24/2011
Probe	Antennessa (SN:SN_1109_EP_100)	Calibration Due: 05/04/2011
DIPOLE 835	Antennessa (DIPI32,SN 48/05)	Calibration Due: 02/09/2012
Phantom	Antennessa (SN:SN41_05_SAM29)	Calibrated: N/A
Liquid	Antennessa	Calibrated: N/A
Measurement SW	OPEN SAR V2.1	Calibrated: N/A

C. SAR Measurement Results

Frequency (MHz)	848.599976
Relative permittivity (real part)	55.576000
Relative permittivity (imaginary part)	21.726601
Conductivity (S/m)	0.974288
Variation (%)	-0.220000
Ambient Temperature:	21 °C
Liquid Temperature:	20 °C




ConvF:

20.00, 19.88, 27.77


Crest factor:

1:2

SURFACE SAR

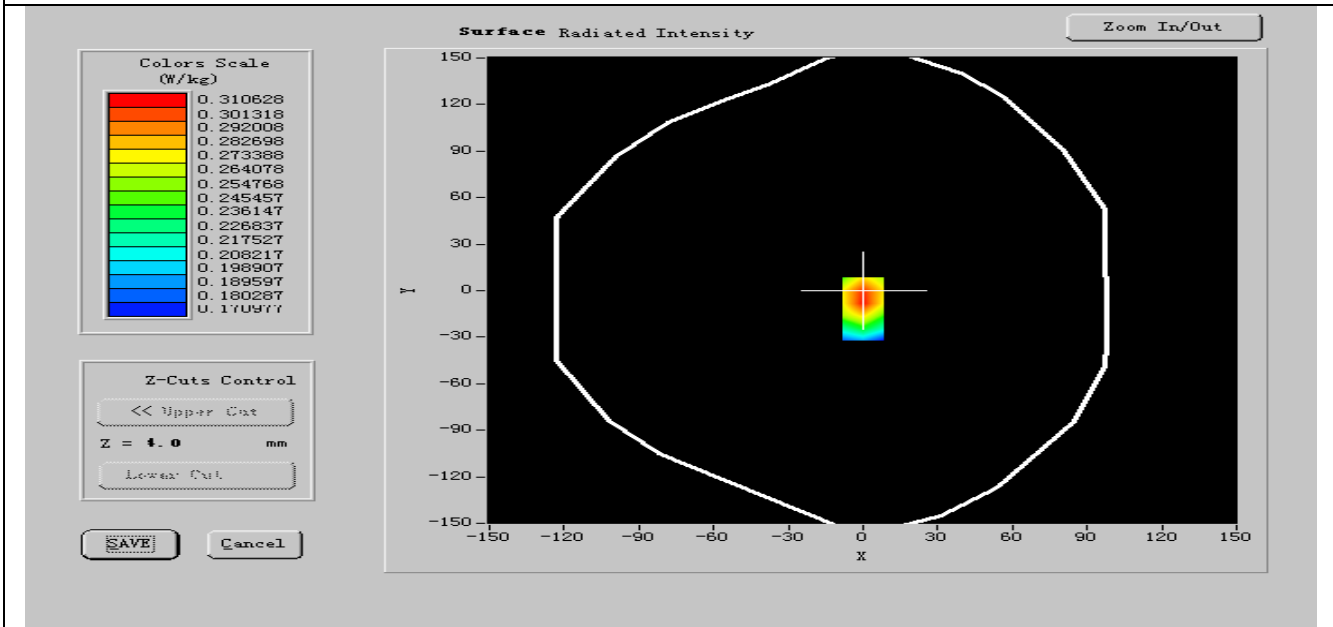

VOLUME SAR

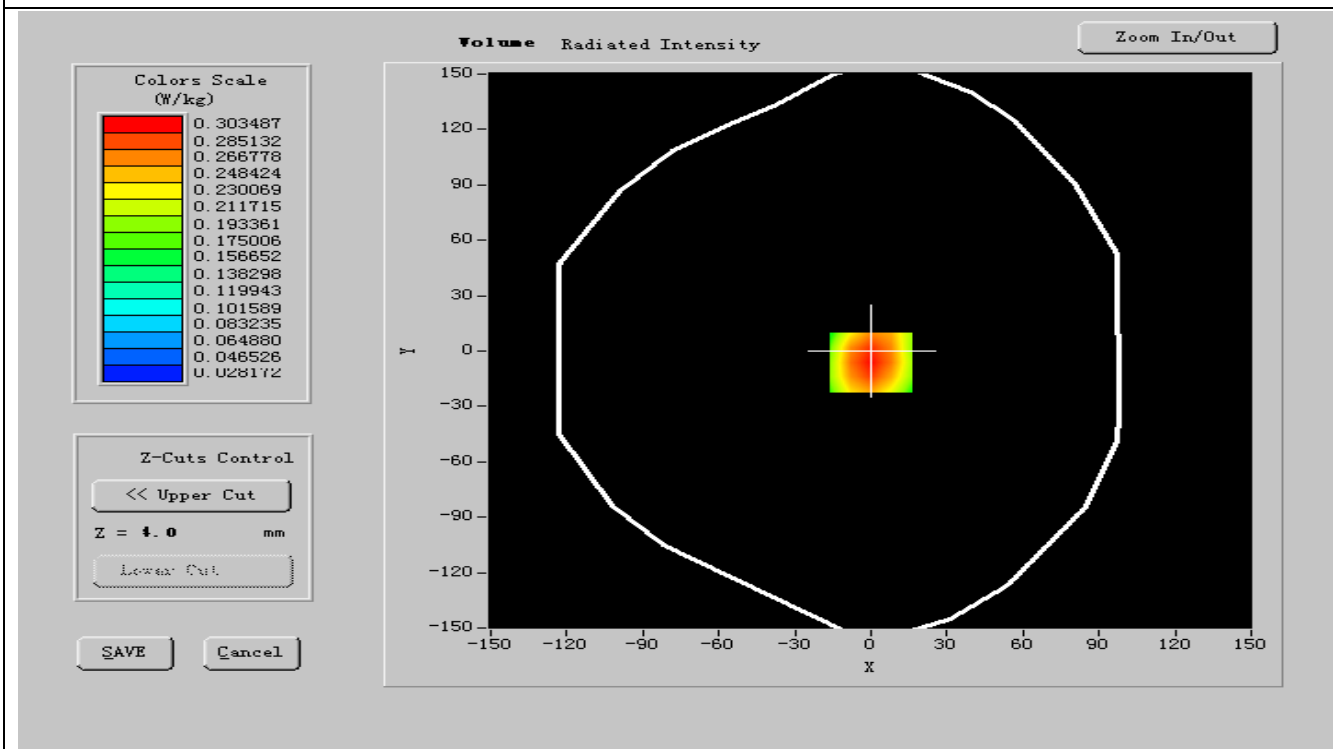




Maximum location: X=-13.00, Y=-3.00

SAR 10g (W/Kg)	0.192258
SAR 1g (W/Kg)	0.312258

Z Axis Scan

SAR, Z Axis Scan (X = 0, Y = -6)

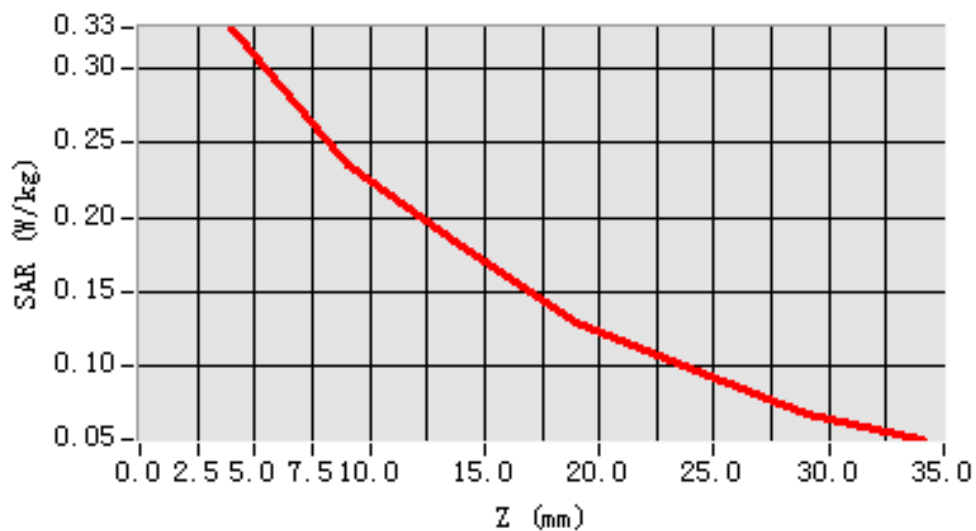

**MEASUREMENT 28****Date of measurement: 02/20/2011****Area Scan: 7 x 7 x 1****dx=15mm****dy=15mm****Zoom Scan: 5 x 5 x 7****dx=5mm****dy=5mm****dz=5mm****Z Axis Scan: 1 x 1 x 21****dx=20mm****dy=20mm****dz=5mm****A. Experimental conditions.**

Phantom File	zinf15.txt, Adaptive 2 max
Phantom	Body
Device Position	BackSide toward phantom
Band	EDGE850
Channels	Low
Signal	EDGE

B. Instrumentations.

PC	HP (Pentium(R) V3.06GHz, SN:375052-AA1)	Calibrated: N/A
Wireless Communication Test Set	R&S (CMU200, SN:B23-03291)	Calibration Due: 05/25/2011
Network Analyzer	Agilent(E5071B, MY42301382)	Calibration Due: 03/24/2011
Voltmeter	Keithley (2000, SN:1015843)	Calibration Due: 05/25/2011
Signal Generator	Agilent (E8257C, SN:MY43321570)	Calibration Due: 03/24/2011
Amplifier	Mini-Circuits (ZHL-42, SN:110405)	Calibration Due: 07/29/2011
Power Meter	Agilent (E4416A, SN:QB41292714)	Calibration Due: 03/24/2011
Probe	Antennessa (SN:SN_1109_EP_100)	Calibration Due: 05/04/2011
DIPOLE 835	Antennessa (DIPI32,SN 48/05)	Calibration Due: 02/09/2012
Phantom	Antennessa (SN:SN41_05_SAM29)	Calibrated: N/A
Liquid	Antennessa	Calibrated: N/A
Measurement SW	OPEN SAR V2.1	Calibrated: N/A

C. SAR Measurement Results


Frequency (MHz)	824.200012
Relative permittivity (real part)	56.565820
Relative permittivity (imaginary part)	21.653148
Conductivity (S/m)	0.975719
Variation (%)	-1.100000
Ambient Temperature:	21 °C
Liquid Temperature:	20 °C
ConvF:	20.00, 19.88, 27.77




Crest factor:

1:2

SURFACE SAR

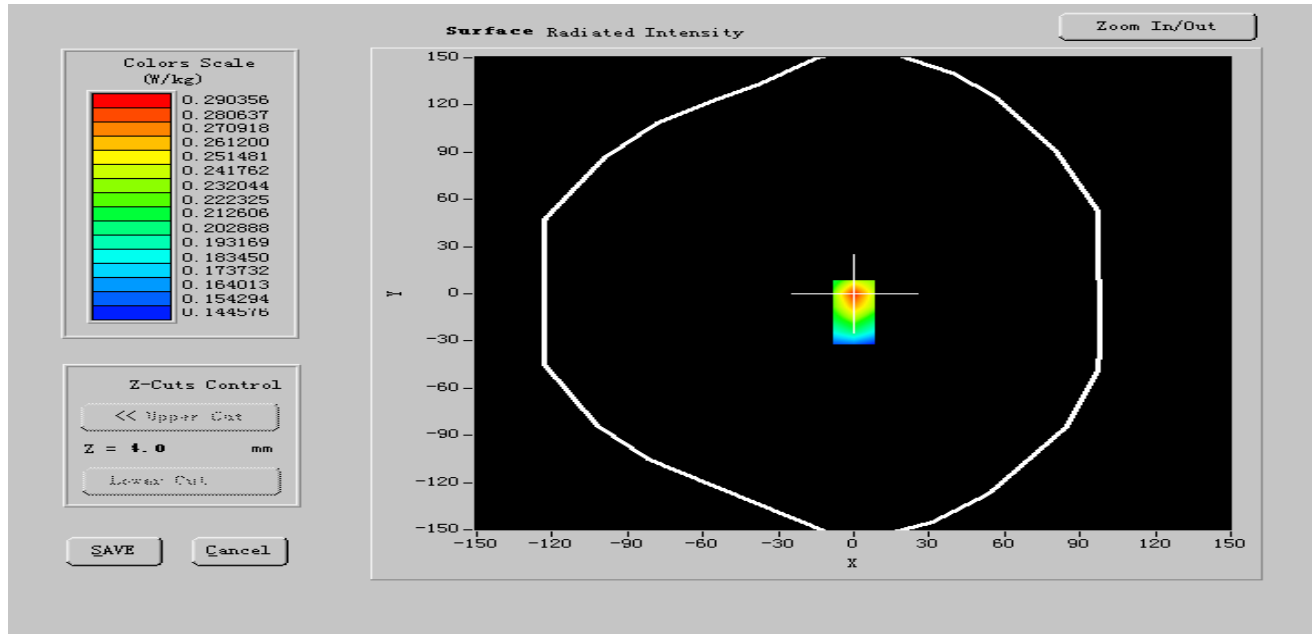

VOLUME SAR

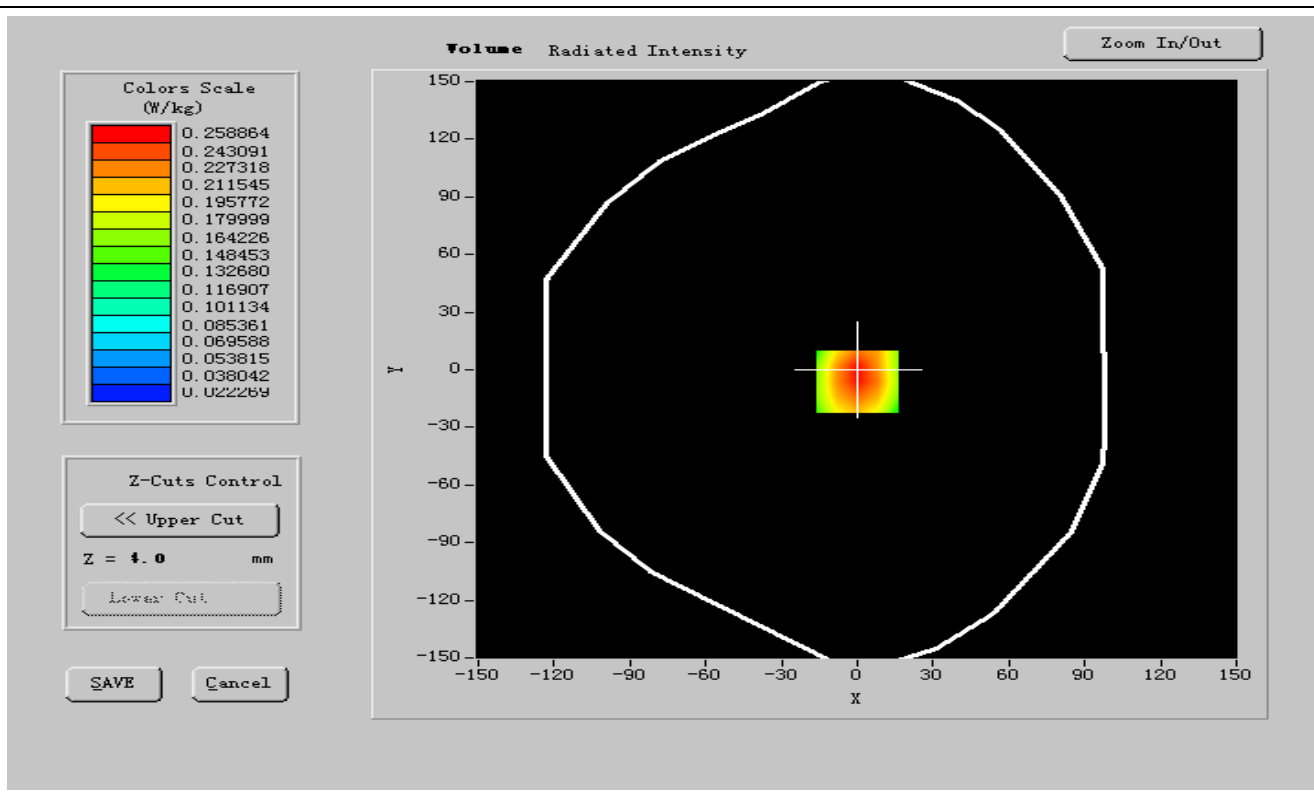




Maximum location: X=-13.00, Y=-3.00

SAR 10g (W/Kg)	0.156581
SAR 1g (W/Kg)	0.235870

Z Axis Scan

SAR, Z Axis Scan (X = 0, Y = -6)

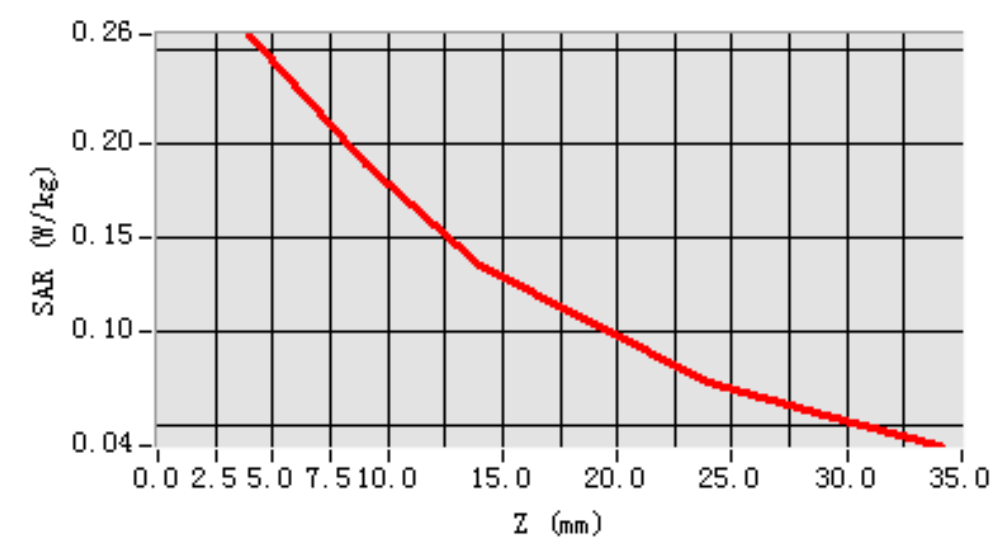



MEASUREMENT 29

Date of measurement: 02/20/2011**Area Scan: 7 x 7 x 1****dx=15mm****dy=15mm****Zoom Scan: 5 x 5 x 7****dx=5mm****dy=5mm****dz=5mm****Z Axis Scan: 1 x 1 x 21****dx=20mm****dy=20mm****dz=5mm**

A. Experimental conditions.

Phantom File	zinf15.txt, Adaptive 2 max
Phantom	Body
Device Position	BackSide toward phantom
Band	EDGE850
Channels	Middle
Signal	EDGE

B. Instrumentations.

PC	HP (Pentium(R) V3.06GHz, SN:375052-AA1)	Calibrated: N/A
Wireless Communication Test Set	R&S (CMU200, SN:B23-03291)	Calibration Due: 05/25/2011
Network Analyzer	Agilent(E5071B, MY42301382)	Calibration Due: 03/24/2011
Voltmeter	Keithley (2000, SN:1015843)	Calibration Due: 05/25/2011
Signal Generator	Agilent (E8257C, SN:MY43321570)	Calibration Due: 03/24/2011
Amplifier	Mini-Circuits (ZHL-42, SN:110405)	Calibration Due: 07/29/2011
Power Meter	Agilent (E4416A, SN:QB41292714)	Calibration Due: 03/24/2011
Probe	Antennessa (SN:SN_1109_EP_100)	Calibration Due: 05/04/2011
DIPOLE 835	Antennessa (DIPI32,SN 48/05)	Calibration Due: 02/09/2012
Phantom	Antennessa (SN:SN41_05_SAM29)	Calibrated: N/A
Liquid	Antennessa	Calibrated: N/A
Measurement SW	OPEN SAR V2.1	Calibrated: N/A

C. SAR Measurement Results

Frequency (MHz)	836.600024
Relative permittivity (real part)	55.501999
Relative permittivity (imaginary part)	21.858743
Conductivity (S/m)	1.122012
Variation (%)	-0.200000
Ambient Temperature:	21 °C
Liquid Temperature:	20 °C




ConvF:

20.00, 19.88, 27.77


Crest factor:

1:2

SURFACE SAR

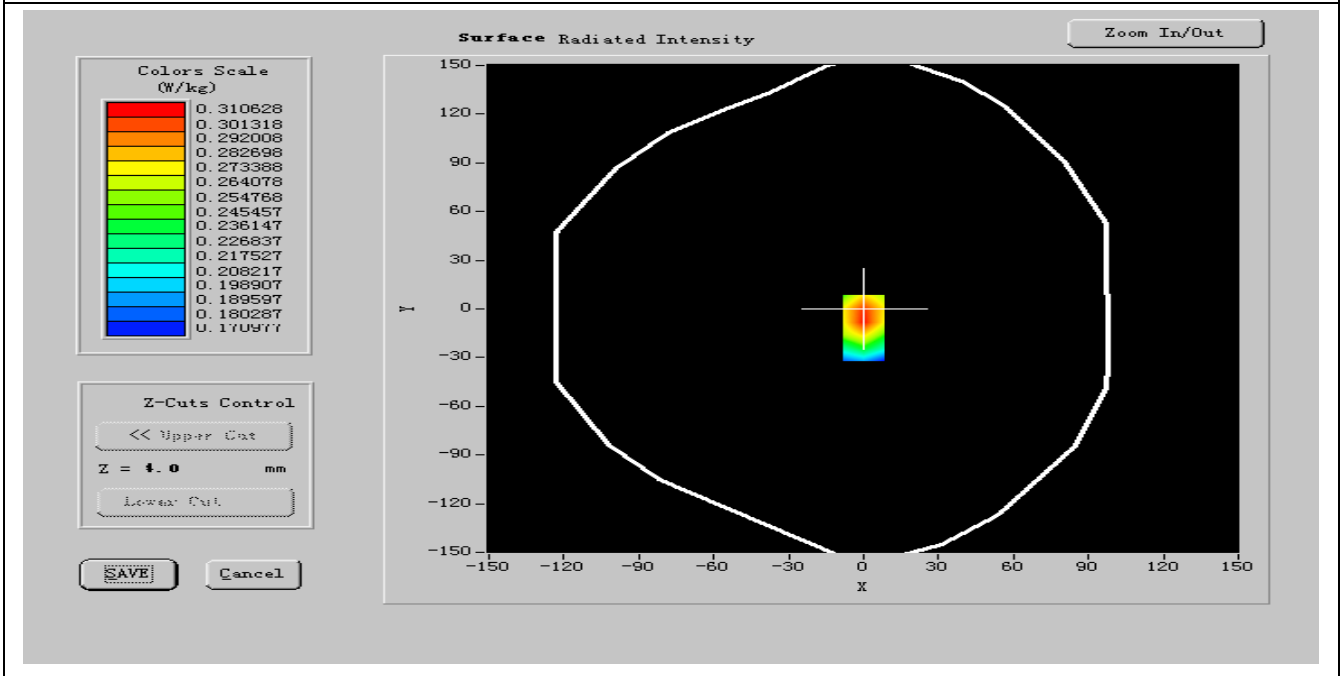

VOLUME SAR

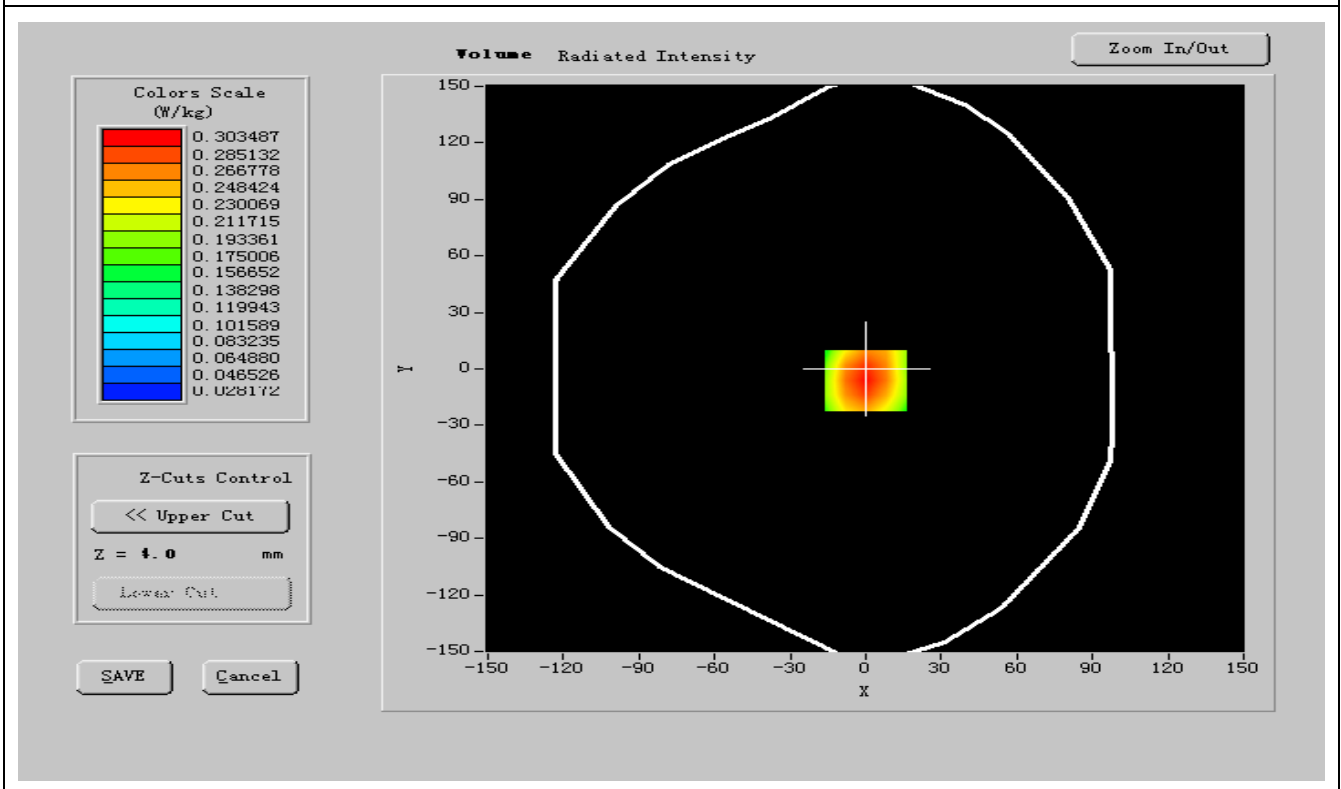




Maximum location: X=-13.00, Y=-3.00

SAR 10g (W/Kg)	0.224101
SAR 1g (W/Kg)	0.265814

Z Axis Scan

SAR, Z Axis Scan (X = 0, Y = -6)

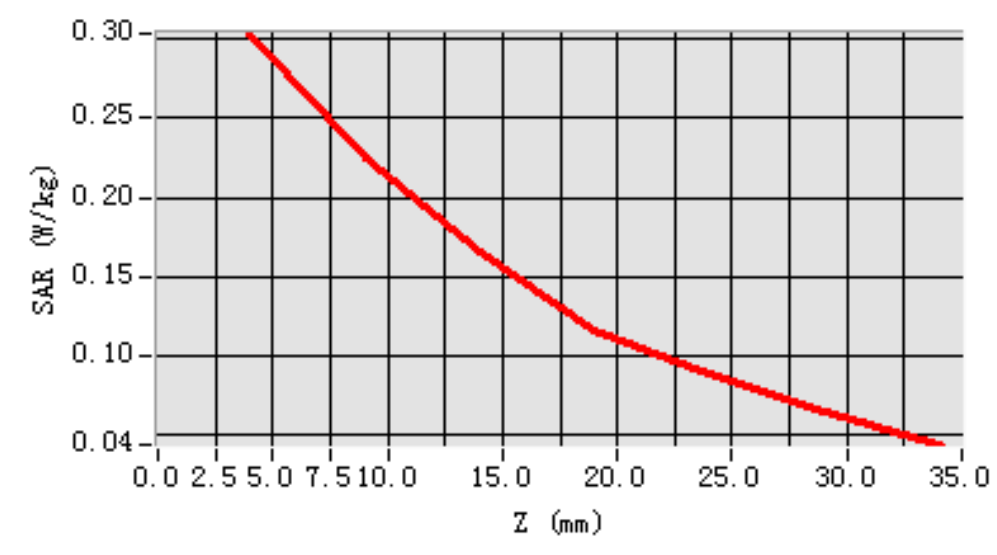



MEASUREMENT 30

Date of measurement: 02/20/2011**Area Scan: 7 x 7 x 1****dx=15mm****dy=15mm****Zoom Scan: 5 x 5 x 7****dx=5mm****dy=5mm****dz=5mm****Z Axis Scan: 1 x 1 x 21****dx=20mm****dy=20mm****dz=5mm**

A. Experimental conditions.

Phantom File	zinf15.txt, Adaptive 2 max
Phantom	Body
Device Position	BackSide toward phantom
Band	EDGE850
Channels	High
Signal	EDGE

B. Instrumentations.

PC	HP (Pentium(R) V3.06GHz, SN:375052-AA1)	Calibrated: N/A
Wireless Communication Test Set	R&S (CMU200, SN:B23-03291)	Calibration Due: 05/25/2011
Network Analyzer	Agilent(E5071B, MY42301382)	Calibration Due: 03/24/2011
Voltmeter	Keithley (2000, SN:1015843)	Calibration Due: 05/25/2011
Signal Generator	Agilent (E8257C, SN:MY43321570)	Calibration Due: 03/24/2011
Amplifier	Mini-Circuits (ZHL-42, SN:110405)	Calibration Due: 07/29/2011
Power Meter	Agilent (E4416A, SN:QB41292714)	Calibration Due: 03/24/2011
Probe	Antennessa (SN:SN_1109_EP_100)	Calibration Due: 05/04/2011
DIPOLE 835	Antennessa (DIPI32,SN 48/05)	Calibration Due: 02/09/2012
Phantom	Antennessa (SN:SN41_05_SAM29)	Calibrated: N/A
Liquid	Antennessa	Calibrated: N/A
Measurement SW	OPEN SAR V2.1	Calibrated: N/A

C. SAR Measurement Results

Frequency (MHz)	848.599976
Relative permittivity (real part)	55.578700
Relative permittivity (imaginary part)	21.726811
Conductivity (S/m)	0.973988
Variation (%)	-0.220000
Ambient Temperature:	21 °C
Liquid Temperature:	20 °C




ConvF:

20.00, 19.88, 27.77


Crest factor:

1:2

SURFACE SAR

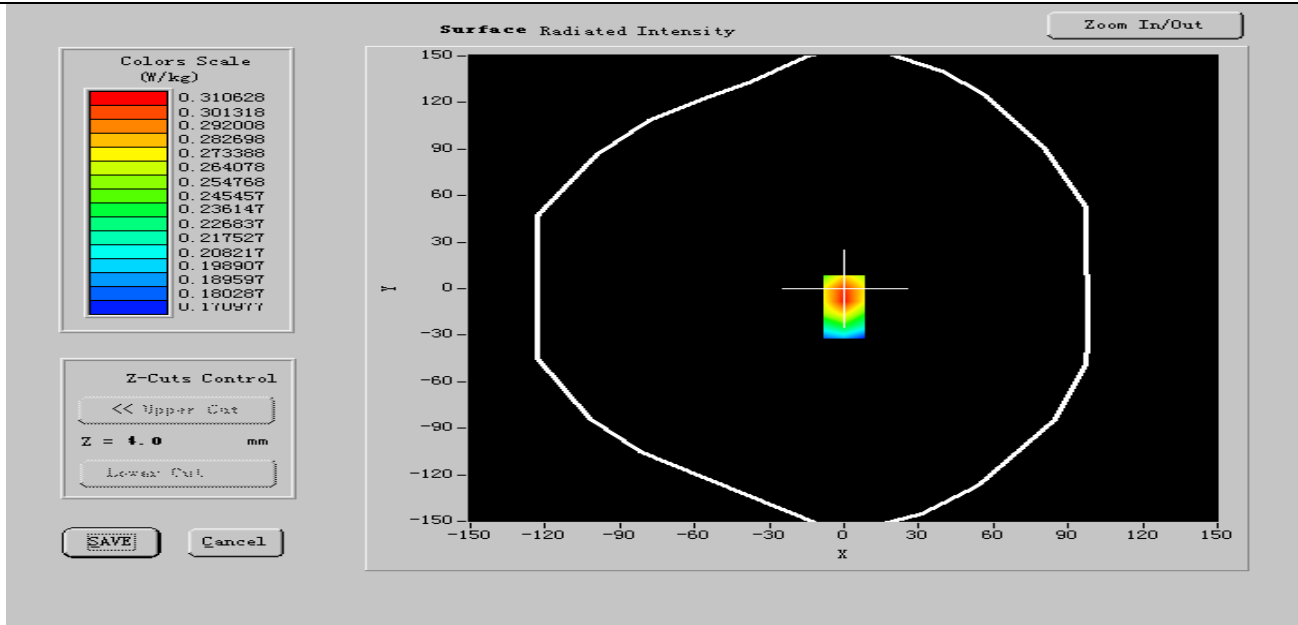

VOLUME SAR

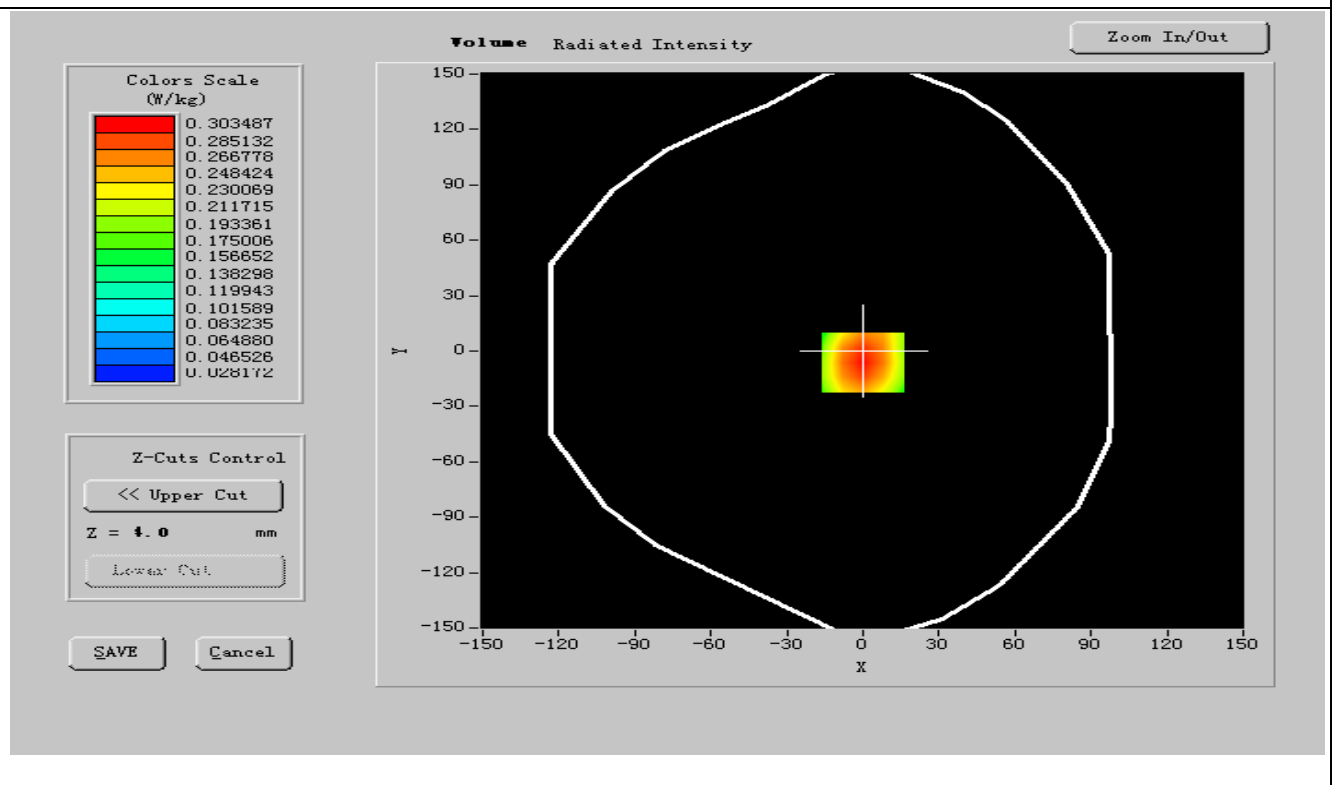




Maximum location: X=-13.00, Y=-3.00

SAR 10g (W/Kg)	0.193518
SAR 1g (W/Kg)	0.278968

Z Axis Scan

SAR, Z Axis Scan (X = 0, Y = -6)

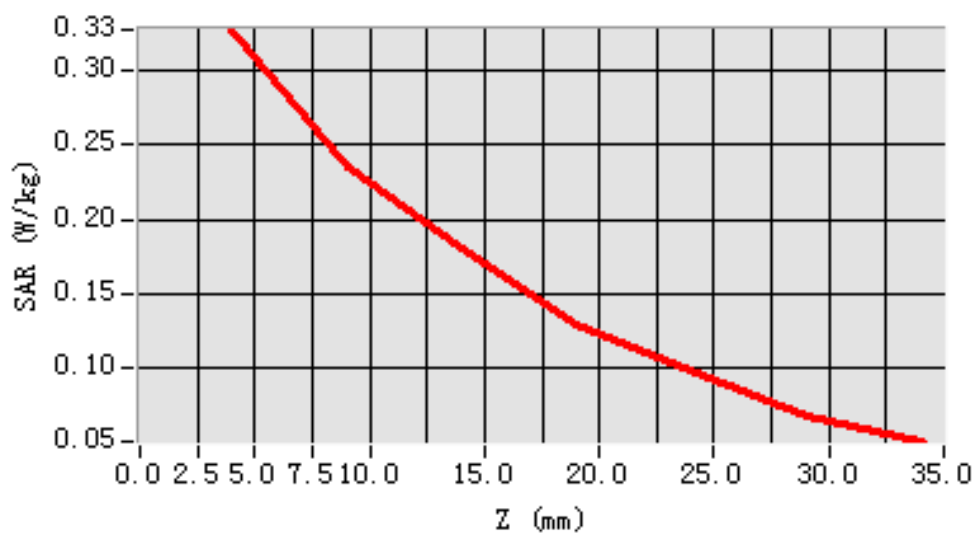



II. 1900MHz Band RESULTS

<u>TYPE</u>	<u>PARAMETERS</u>
<u>Phone</u>	<u>Measurement 1:</u> Right Head with Cheek device position on Low Channel in GSM1900 mode <u>Measurement 2:</u> Right Head with Cheek device position on Middle Channel in GSM1900 mode <u>Measurement 3:</u> Right Head with Cheek device position on High Channel in GSM1900 mode <u>Measurement 4:</u> Right Head with Tilt device position on Low Channel in GSM1900 mode <u>Measurement 5:</u> Right Head with Tilt device position on Middle Channel in GSM1900 mode <u>Measurement 6:</u> Right Head with Tilt device position on High Channel in GSM1900 mode <u>Measurement 7:</u> Left Head with Cheek device position on Low Channel in GSM1900 mode <u>Measurement 8:</u> Left Head with Cheek device position on Middle Channel in GSM1900 mode <u>Measurement 9:</u> Left Head with Cheek device position on High Channel in GSM1900 mode <u>Measurement 10:</u> Left Head with Tilt device position on Low Channel in GSM1900 mode <u>Measurement 11:</u> Left Head with Tilt device position on Middle Channel in GSM1900 mode <u>Measurement 12:</u> Left Head with Tilt device position on High Channel in GSM1900 mode <u>Measurement 13:</u> FrontSide toward phantom 15mm, Low Channel in GSM1900 mode <u>Measurement 14:</u> FrontSide toward phantom 15mm, Middle Channel in GSM1900 mode <u>Measurement 15:</u> FrontSide toward phantom 15mm, High Channel in GSM1900 mode <u>Measurement 16:</u> BackSide toward phantom 15mm, Low Channel in GSM1900 mode <u>Measurement 17:</u> BackSide toward phantom 15mm, Middle Channel in GSM1900 mode <u>Measurement 18:</u> BackSide toward phantom 15mm, High Channel in GSM1900 mode <u>Measurement 19:</u> FrontSide toward phantom 15mm, Low Channel in GPRS1900 mode <u>Measurement 20:</u> FrontSide toward phantom 15mm, Middle



	Channel in GPRS1900 mode <u>Measurement 21:</u> FrontSide toward phantom 15mm, High Channel in GPRS1900 mode <u>Measurement 22:</u> BackSide toward phantom 15mm, Low Channel in GPRS1900 mode <u>Measurement 23:</u> BackSide toward phantom 15mm, Middle Channel in GPRS1900 mode <u>Measurement 24:</u> BackSide toward phantom 15mm, High Channel in GPRS1900 mode <u>Measurement 25:</u> FrontSide toward phantom 15mm, Low Channel in EDGE1900 mode <u>Measurement 26:</u> FrontSide toward phantom 15mm, Middle Channel in EDGE1900 mode <u>Measurement 27:</u> FrontSide toward phantom 15mm, High Channel in EDGE1900 mode <u>Measurement 28:</u> BackSide toward phantom 15mm, Low Channel in EDGE1900 mode <u>Measurement 29:</u> BackSide toward phantom 15mm, Middle Channel in EDGE1900 mode <u>Measurement 30:</u> BackSide toward phantom 15mm, High Channel in EDGE1900 mode
--	---



MEASUREMENT 1

Date of measurement: 02/20/2011**Area Scan: 7 x 7 x 1****dx=15mm****dy=15mm****Zoom Scan: 5 x 5 x 7****dx=5mm****dy=5mm****dz=5mm****Z Axis Scan: 1 x 1 x 21****dx=20mm****dy=20mm****dz=5mm**

A. Experimental conditions.

Phantom File	zinf15.txt, Adaptive 2 max
Phantom	Right head
Device Position	Cheek
Band	GSM1900
Channels	Low
Signal	GSM

B. Instrumentations.

PC	HP (Pentium(R) V3.06GHz, SN:375052-AA1)	Calibrated: N/A
Wireless Communication Test Set	R&S (CMU200, SN:B23-03291)	Calibration Due: 05/25/2011
Network Analyzer	Agilent(E5071B, MY42301382)	Calibration Due: 03/24/2011
Voltmeter	Keithley (2000, SN:1015843)	Calibration Due: 05/25/2011
Signal Generator	Agilent (E8257C, SN:MY43321570)	Calibration Due: 03/24/2011
Amplifier	Mini-Circuits (ZHL-42, SN:110405)	Calibration Due: 07/29/2011
Power Meter	Agilent (E4416A, SN:QB41292714)	Calibration Due: 03/24/2011
Probe	Antennessa (SN:SN_1109_EP_100)	Calibration Due: 05/04/2011
DIPOLE 1900	Antennessa (DIPI36, SN 48/05)	Calibration Due: 02/09/2012
Phantom	Antennessa (SN:SN41_05_SAM29)	Calibrated: N/A
Liquid	Antennessa	Calibrated: N/A
Measurement SW	OPEN SAR V2.1	Calibrated: N/A

C. SAR Measurement Results


Frequency (MHz)	1850.400024
Relative permittivity (real part)	40.213000
Relative permittivity (imaginary part)	13.584900
Conductivity (S/m)	1.410528
Variation (%)	-1.220000
Ambient Temperature:	21 °C
Liquid Temperature:	20 °C
ConvF:	41.91, 43.15, 56.44




Crest factor:

1:8

SURFACE SAR

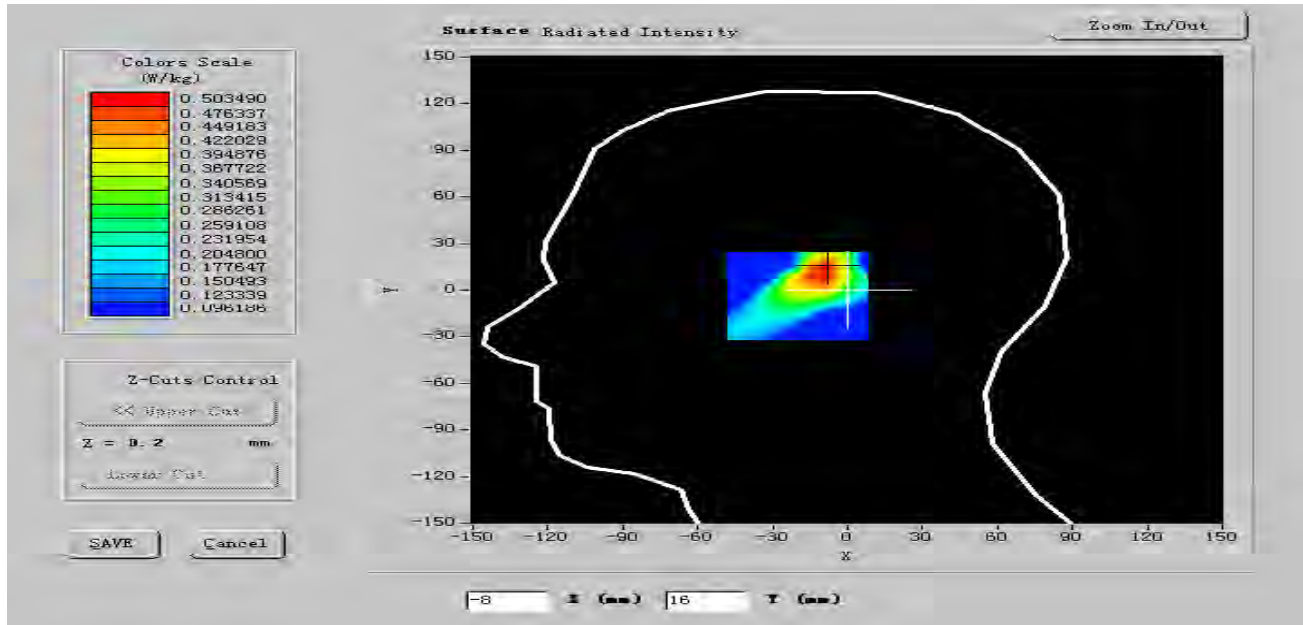

VOLUME SAR

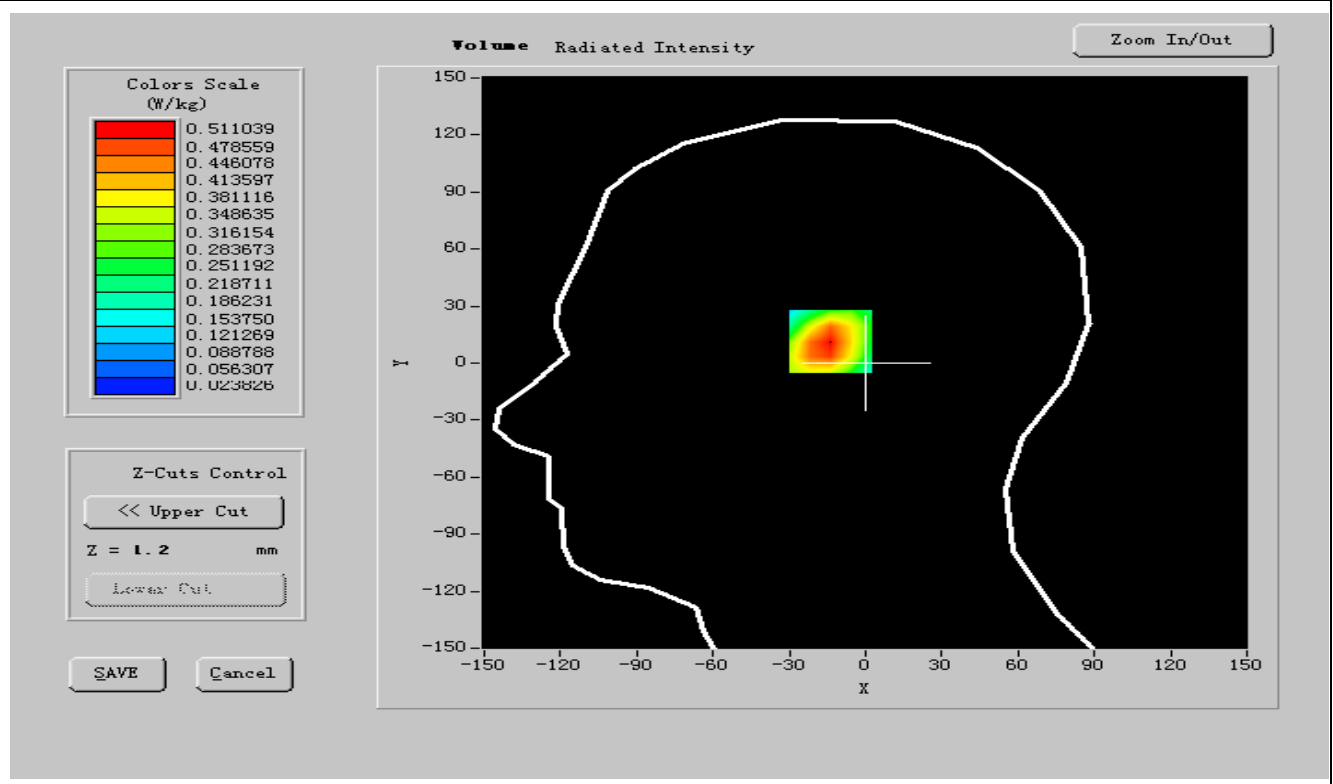




Maximum location: X=-13.00, Y=-3.00

SAR 10g (W/Kg)	0.278521
SAR 1g (W/Kg)	0.473368

Z Axis Scan

SAR, Z Axis Scan (X = -10, Y = 12)

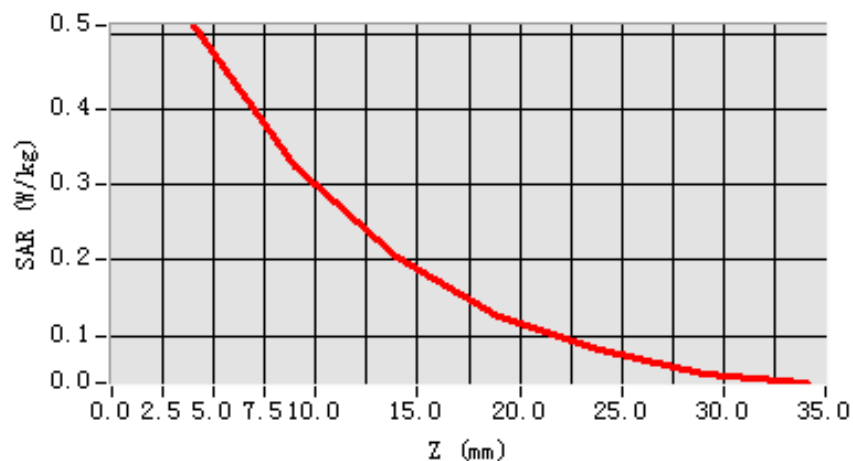



MEASUREMENT 2

Date of measurement: 02/20/2011**Area Scan: 7 x 7 x 1****dx=15mm****dy=15mm****Zoom Scan: 5 x 5 x 7****dx=5mm****dy=5mm****dz=5mm****Z Axis Scan: 1 x 1 x 21****dx=20mm****dy=20mm****dz=5mm**

A. Experimental conditions.

Phantom File	zinf15.txt, Adaptive 2 max
Phantom	Right head
Device Position	Cheek
Band	GSM1900
Channels	Middle
Signal	GSM

B. Instrumentations.

PC	HP (Pentium(R) V3.06GHz, SN:375052-AA1)	Calibrated: N/A
Wireless Communication Test Set	R&S (CMU200, SN:B23-03291)	Calibration Due: 05/25/2011
Network Analyzer	Agilent(E5071B, MY42301382)	Calibration Due: 03/24/2011
Voltmeter	Keithley (2000, SN:1015843)	Calibration Due: 05/25/2011
Signal Generator	Agilent (E8257C, SN:MY43321570)	Calibration Due: 03/24/2011
Amplifier	Mini-Circuits (ZHL-42, SN:110405)	Calibration Due: 07/29/2011
Power Meter	Agilent (E4416A, SN:QB41292714)	Calibration Due: 03/24/2011
Probe	Antennessa (SN:SN_1109_EP_100)	Calibration Due: 05/04/2011
DIPOLE 1900	Antennessa (DIPI36, SN 48/05)	Calibration Due: 02/09/2012
Phantom	Antennessa (SN:SN41_05_SAM29)	Calibrated: N/A
Liquid	Antennessa	Calibrated: N/A
Measurement SW	OPEN SAR V2.1	Calibrated: N/A

C. SAR Measurement Results

Frequency (MHz)	1880.000000
Relative permittivity (real part)	40.198001
Relative permittivity (imaginary part)	13.813800
Conductivity (S/m)	1.422775
Variation (%)	-0.210000
Ambient Temperature:	21 °C
Liquid Temperature:	20 °C




ConvF:

41.91, 43.15, 56.44


Crest factor:

1:8

SURFACE SAR

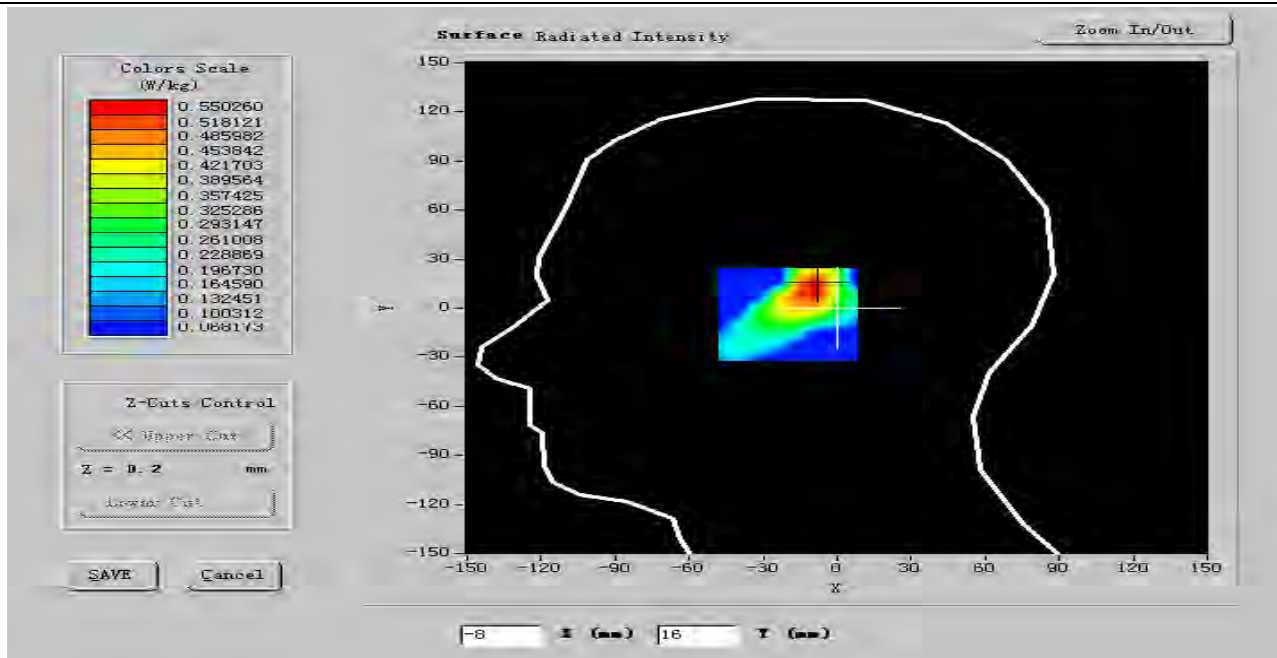

VOLUME SAR

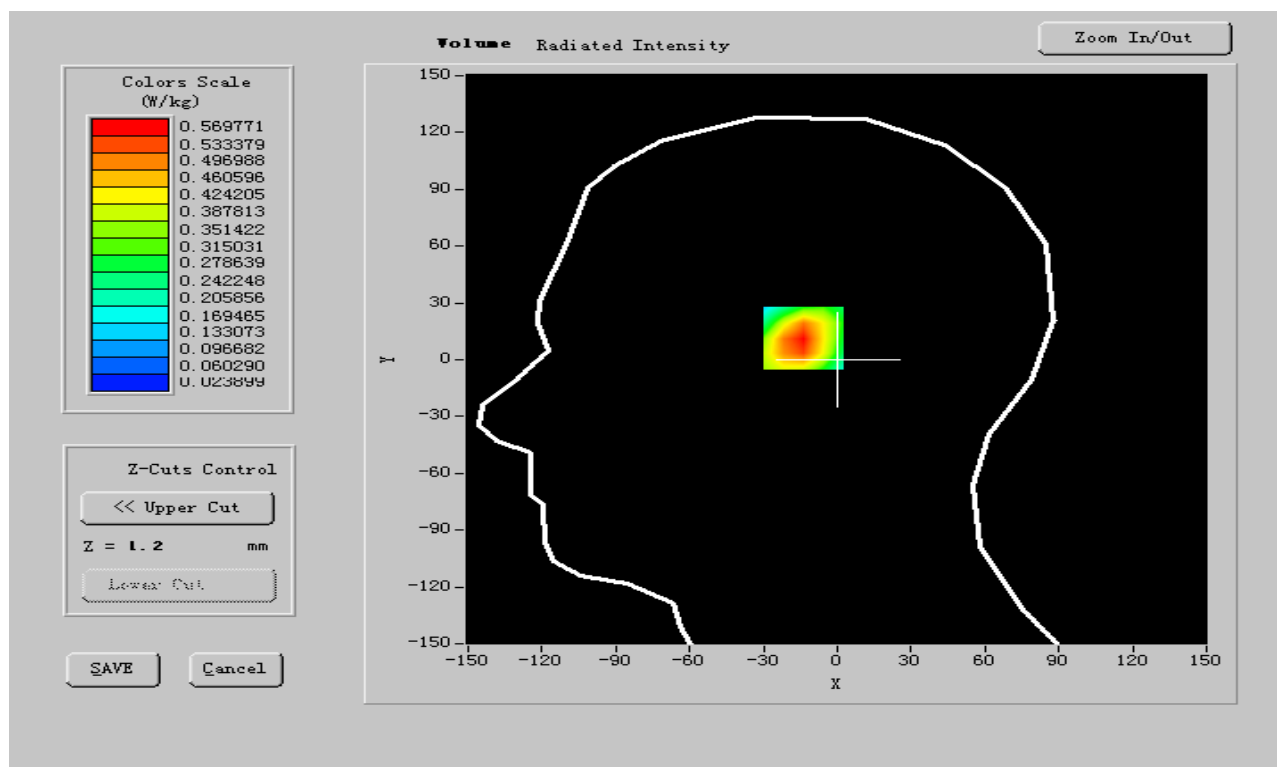




Maximum location: X=-13.00, Y=-3.00

SAR 10g (W/Kg)	0.309541
SAR 1g (W/Kg)	0.515497

Z Axis Scan

SAR, Z Axis Scan (X = -10, Y = 12)

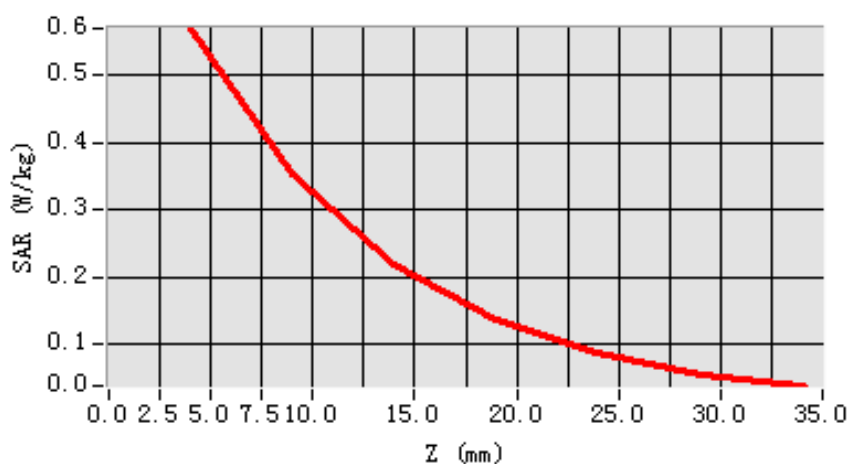



MEASUREMENT 3

Date of measurement: 02/20/2011**Area Scan: 7 x 7 x 1****dx=15mm****dy=15mm****Zoom Scan: 5 x 5 x 7****dx=5mm****dy=5mm****dz=5mm****Z Axis Scan: 1 x 1 x 21****dx=20mm****dy=20mm****dz=5mm**

A. Experimental conditions.

Phantom File	zinf15.txt, Adaptive 2 max
Phantom	Right head
Device Position	Cheek
Band	GSM1900
Channels	High
Signal	GSM

B. Instrumentations.

PC	HP (Pentium(R) V3.06GHz, SN:375052-AA1)	Calibrated: N/A
Wireless Communication Test Set	R&S (CMU200, SN:B23-03291)	Calibration Due: 05/25/2011
Network Analyzer	Agilent(E5071B, MY42301382)	Calibration Due: 03/24/2011
Voltmeter	Keithley (2000, SN:1015843)	Calibration Due: 05/25/2011
Signal Generator	Agilent (E8257C, SN:MY43321570)	Calibration Due: 03/24/2011
Amplifier	Mini-Circuits (ZHL-42, SN:110405)	Calibration Due: 07/29/2011
Power Meter	Agilent (E4416A, SN:QB41292714)	Calibration Due: 03/24/2011
Probe	Antennessa (SN:SN_1109_EP_100)	Calibration Due: 05/04/2011
DIPOLE 1900	Antennessa (DIPI36, SN 48/05)	Calibration Due: 02/09/2012
Phantom	Antennessa (SN:SN41_05_SAM29)	Calibrated: N/A
Liquid	Antennessa	Calibrated: N/A
Measurement SW	OPEN SAR V2.1	Calibrated: N/A

C. SAR Measurement Results

Frequency (MHz)	1909.599976
Relative permittivity (real part)	40.205999
Relative permittivity (imaginary part)	13.669900
Conductivity (S/m)	1.420413
Variation (%)	-0.030000
Ambient Temperature:	21 °C
Liquid Temperature:	20 °C




ConvF:

41.91, 43.15, 56.44


Crest factor:

1:8

SURFACE SAR

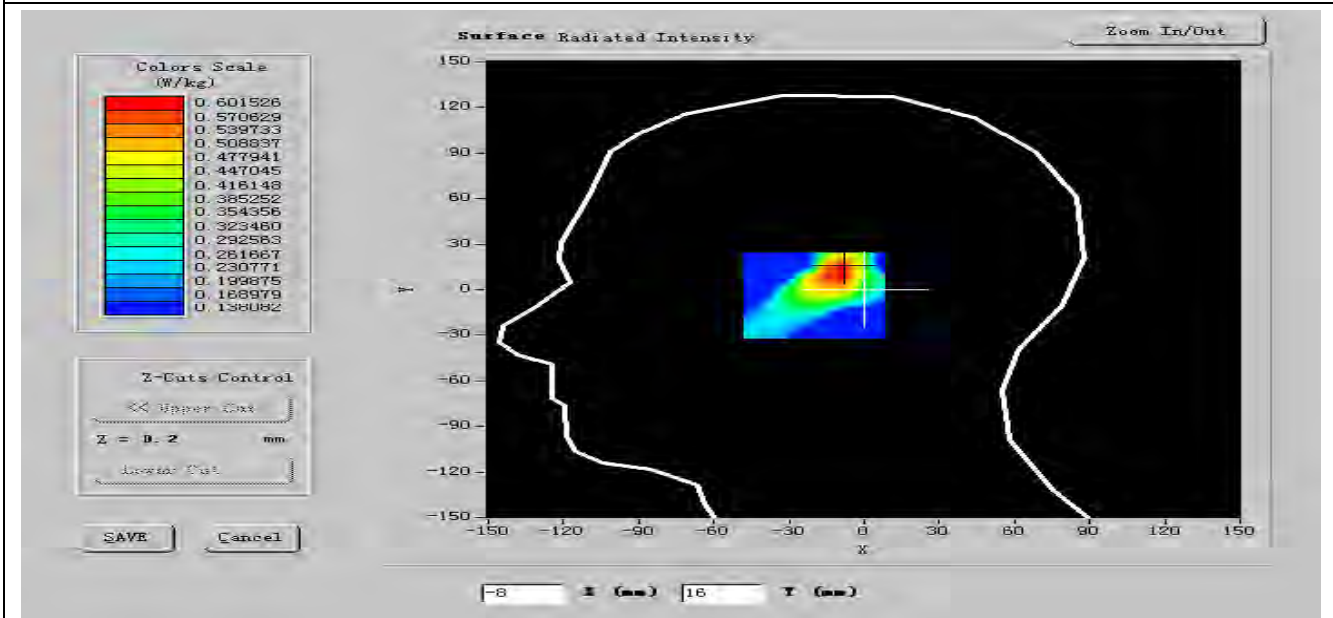

VOLUME SAR

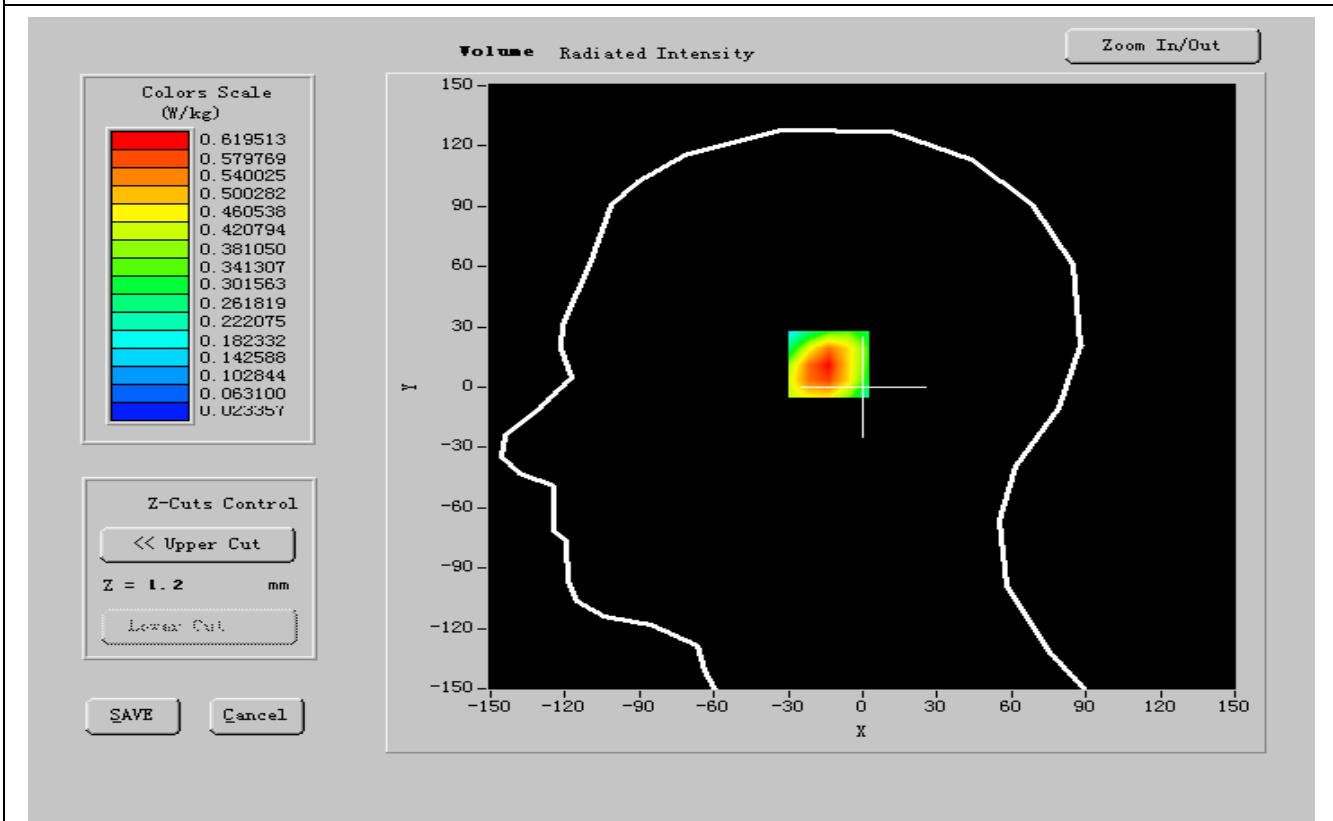




Maximum location: X=-13.00, Y=-3.00

SAR 10g (W/Kg)	0.348952
SAR 1g (W/Kg)	0.573654

Z Axis Scan

SAR, Z Axis Scan (X = -10, Y = 12)

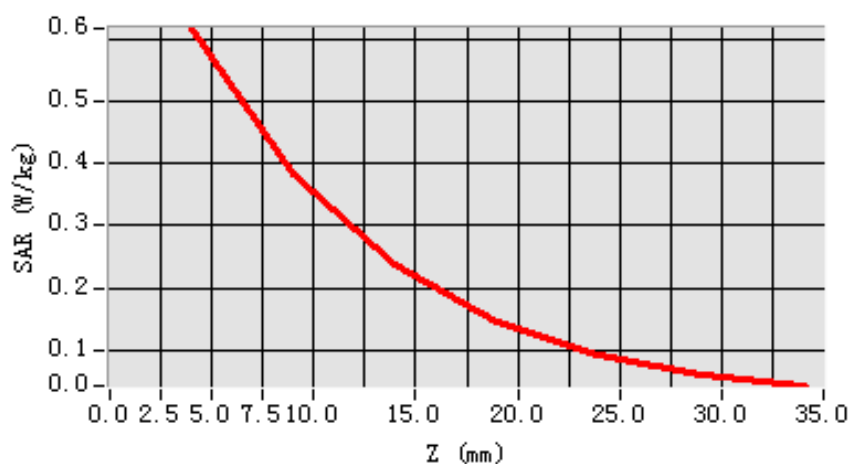



MEASUREMENT 4

Date of measurement: 02/20/2011**Area Scan: 7 x 7 x 1****dx=15mm****dy=15mm****Zoom Scan: 5 x 5 x 7****dx=5mm****dy=5mm****dz=5mm****Z Axis Scan: 1 x 1 x 21****dx=20mm****dy=20mm****dz=5mm**

A. Experimental conditions.

Phantom File	zinf15.txt, Adaptive 2 max
Phantom	Right head
Device Position	Tilt
Band	GSM1900
Channels	Low
Signal	GSM

B. Instrumentations.

PC	HP (Pentium(R) V3.06GHz, SN:375052-AA1)	Calibrated: N/A
Wireless Communication Test Set	R&S (CMU200, SN:B23-03291)	Calibration Due: 05/25/2011
Network Analyzer	Agilent(E5071B, MY42301382)	Calibration Due: 03/24/2011
Voltmeter	Keithley (2000, SN:1015843)	Calibration Due: 05/25/2011
Signal Generator	Agilent (E8257C, SN:MY43321570)	Calibration Due: 03/24/2011
Amplifier	Mini-Circuits (ZHL-42, SN:110405)	Calibration Due: 07/29/2011
Power Meter	Agilent (E4416A, SN:QB41292714)	Calibration Due: 03/24/2011
Probe	Antennessa (SN:SN_1109_EP_100)	Calibration Due: 05/04/2011
DIPOLE 1900	Antennessa (DIPI36, SN 48/05)	Calibration Due: 02/09/2012
Phantom	Antennessa (SN:SN41_05_SAM29)	Calibrated: N/A
Liquid	Antennessa	Calibrated: N/A
Measurement SW	OPEN SAR V2.1	Calibrated: N/A

C. SAR Measurement Results

Frequency (MHz)	1850.400024
Relative permittivity (real part)	40.213000
Relative permittivity (imaginary part)	13.584900
Conductivity (S/m)	1.426657
Variation (%)	-1.400000
Ambient Temperature:	21 °C
Liquid Temperature:	20 °C




ConvF:

41.91, 43.15, 56.44


Crest factor:

1:8

SURFACE SAR

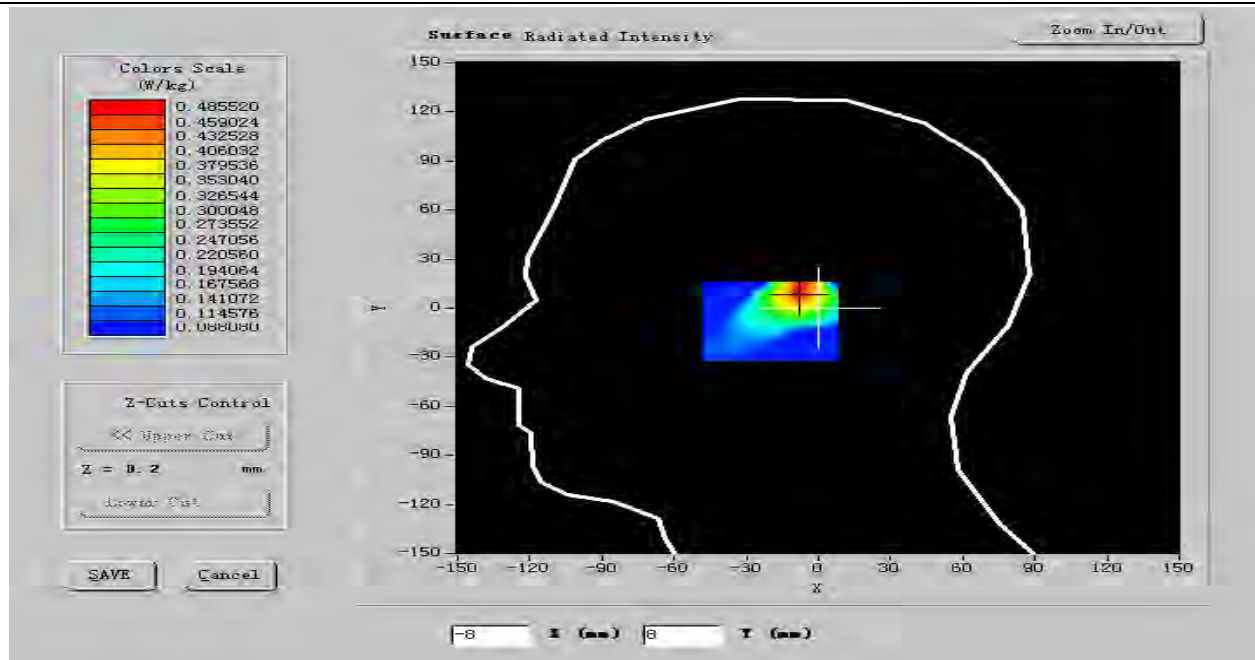

VOLUME SAR

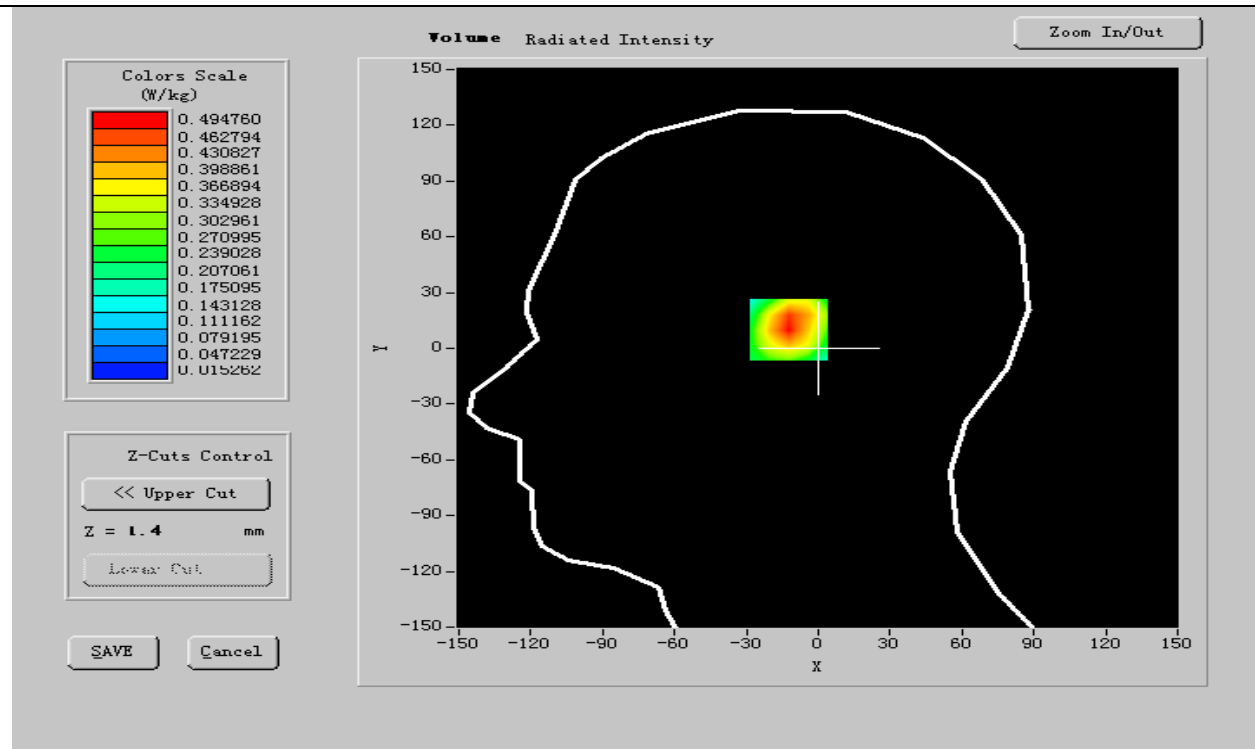




Maximum location: X=-13.00, Y=-3.00

SAR 10g (W/Kg)	0.259871
SAR 1g (W/Kg)	0.456381

Z Axis Scan

SAR, Z Axis Scan (X = -8, Y = 10)

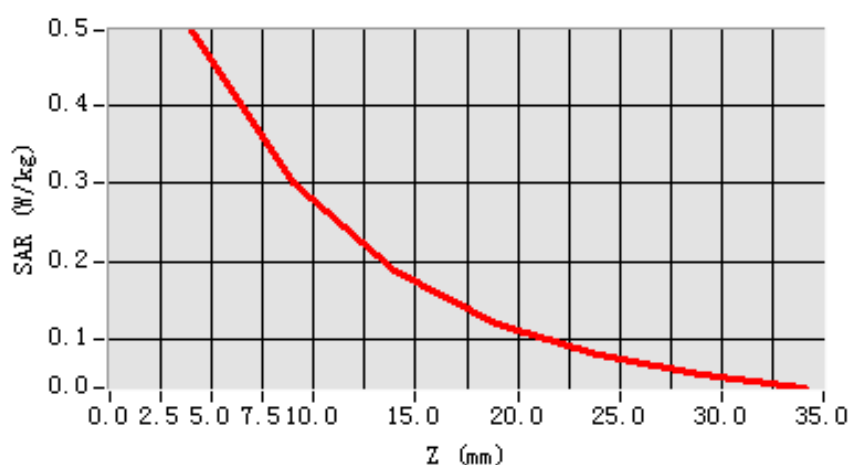



MEASUREMENT 5

Date of measurement: 02/20/2011**Area Scan: 7 x 7 x 1****dx=15mm****dy=15mm****Zoom Scan: 5 x 5 x 7****dx=5mm****dy=5mm****dz=5mm****Z Axis Scan: 1 x 1 x 21****dx=20mm****dy=20mm****dz=5mm**

A. Experimental conditions.

Phantom File	zinf15.txt, Adaptive 2 max
Phantom	Right head
Device Position	Tilt
Band	GSM1900
Channels	Middle
Signal	GSM

B. Instrumentations.

PC	HP (Pentium(R) V3.06GHz, SN:375052-AA1)	Calibrated: N/A
Wireless Communication Test Set	R&S (CMU200, SN:B23-03291)	Calibration Due: 05/25/2011
Network Analyzer	Agilent(E5071B, MY42301382)	Calibration Due: 03/24/2011
Voltmeter	Keithley (2000, SN:1015843)	Calibration Due: 05/25/2011
Signal Generator	Agilent (E8257C, SN:MY43321570)	Calibration Due: 03/24/2011
Amplifier	Mini-Circuits (ZHL-42, SN:110405)	Calibration Due: 07/29/2011
Power Meter	Agilent (E4416A, SN:QB41292714)	Calibration Due: 03/24/2011
Probe	Antennessa (SN:SN_1109_EP_100)	Calibration Due: 05/04/2011
DIPOLE 1900	Antennessa (DIPI36, SN 48/05)	Calibration Due: 02/09/2012
Phantom	Antennessa (SN:SN41_05_SAM29)	Calibrated: N/A
Liquid	Antennessa	Calibrated: N/A
Measurement SW	OPEN SAR V2.1	Calibrated: N/A

C. SAR Measurement Results

Frequency (MHz)	1880.000000
Relative permittivity (real part)	40.193001
Relative permittivity (imaginary part)	13.813800
Conductivity (S/m)	1.422173
Variation (%)	-0.420000
Ambient Temperature:	21 °C
Liquid Temperature:	20 °C




ConvF:

41.91, 43.15, 56.44


Crest factor:

1:8

SURFACE SAR

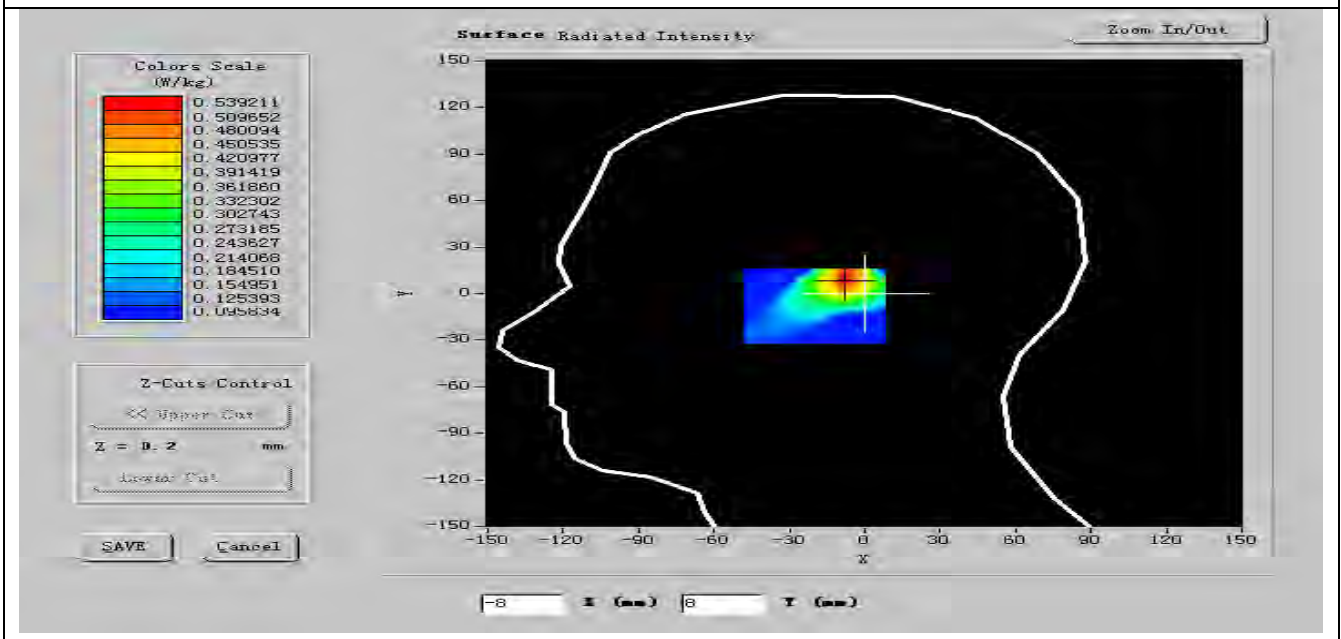

VOLUME SAR

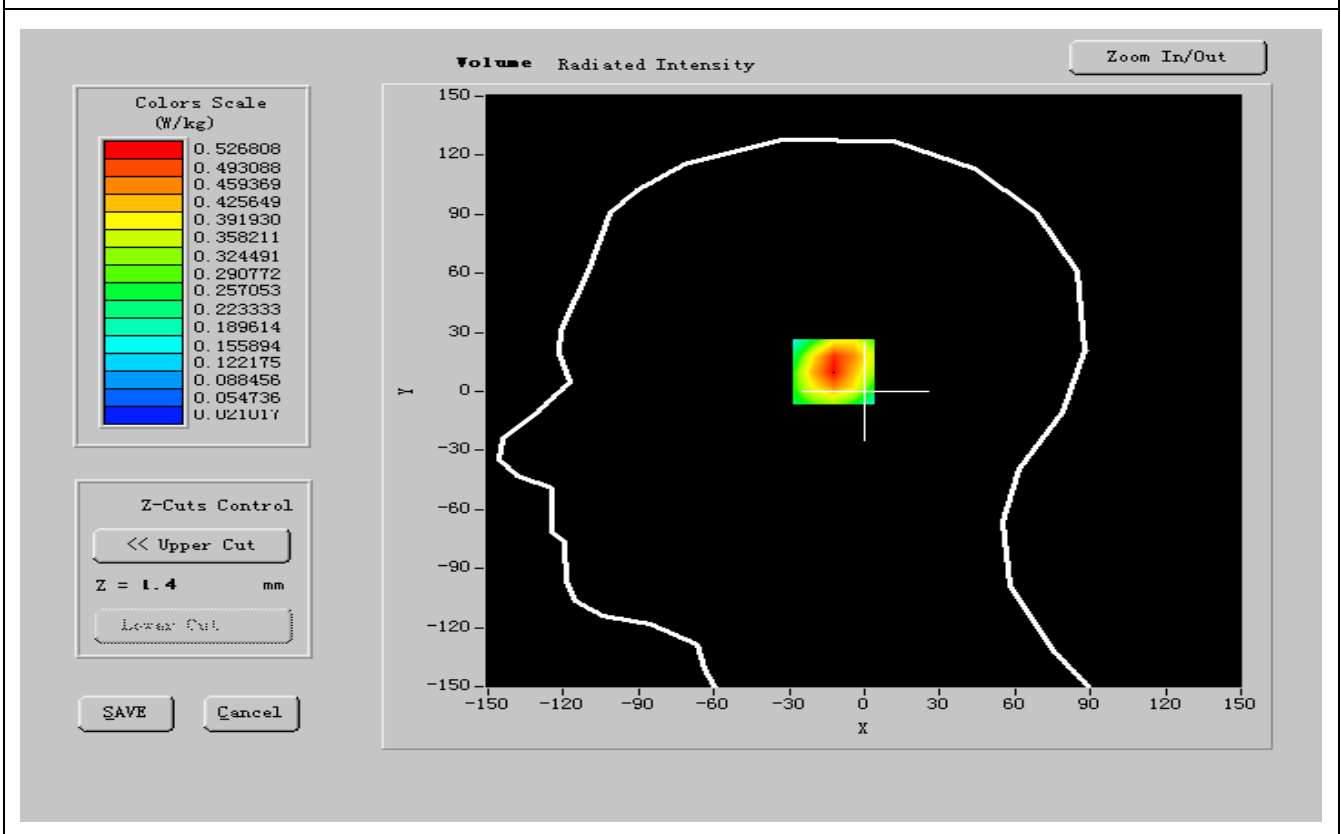




Maximum location: X=-13.00, Y=-3.00

SAR 10g (W/Kg)	0.289652
SAR 1g (W/Kg)	0.481892

Z Axis Scan

SAR, Z Axis Scan (X = -8, Y = 10)

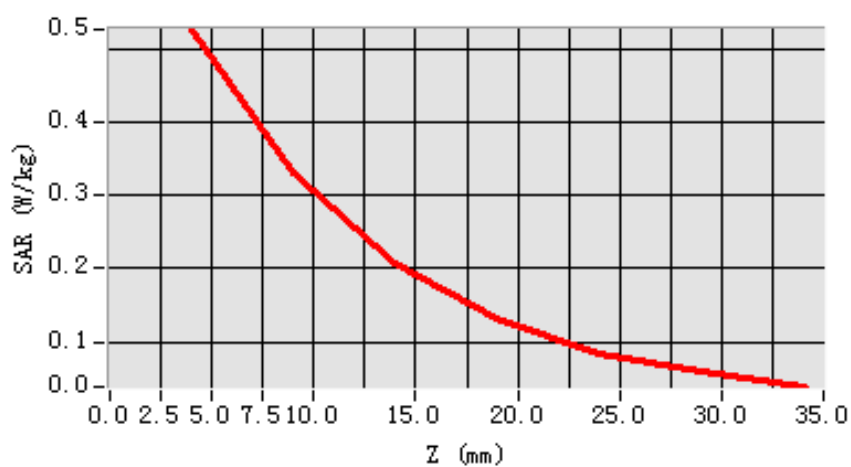



MEASUREMENT 6

Date of measurement: 02/20/2011**Area Scan: 7 x 7 x 1****dx=15mm****dy=15mm****Zoom Scan: 5 x 5 x 7****dx=5mm****dy=5mm****dz=5mm****Z Axis Scan: 1 x 1 x 21****dx=20mm****dy=20mm****dz=5mm**

A. Experimental conditions.

Phantom File	zinf15.txt, Adaptive 2 max
Phantom	Right head
Device Position	Tilt
Band	GSM1900
Channels	High
Signal	GSM

B. Instrumentations.

PC	HP (Pentium(R) V3.06GHz, SN:375052-AA1)	Calibrated: N/A
Wireless Communication Test Set	R&S (CMU200, SN:B23-03291)	Calibration Due: 05/25/2011
Network Analyzer	Agilent(E5071B, MY42301382)	Calibration Due: 03/24/2011
Voltmeter	Keithley (2000, SN:1015843)	Calibration Due: 05/25/2011
Signal Generator	Agilent (E8257C, SN:MY43321570)	Calibration Due: 03/24/2011
Amplifier	Mini-Circuits (ZHL-42, SN:110405)	Calibration Due: 07/29/2011
Power Meter	Agilent (E4416A, SN:QB41292714)	Calibration Due: 03/24/2011
Probe	Antennessa (SN:SN_1109_EP_100)	Calibration Due: 05/04/2011
DIPOLE 1900	Antennessa (DIPI36, SN 48/05)	Calibration Due: 02/09/2012
Phantom	Antennessa (SN:SN41_05_SAM29)	Calibrated: N/A
Liquid	Antennessa	Calibrated: N/A
Measurement SW	OPEN SAR V2.1	Calibrated: N/A

C. SAR Measurement Results

Frequency (MHz)	1909.599976
Relative permittivity (real part)	40.205999
Relative permittivity (imaginary part)	13.669900
Conductivity (S/m)	1.400224
Variation (%)	-1.500000
Ambient Temperature:	21 °C
Liquid Temperature:	20 °C




ConvF:

41.91, 43.15, 56.44


Crest factor:

1:8

SURFACE SAR

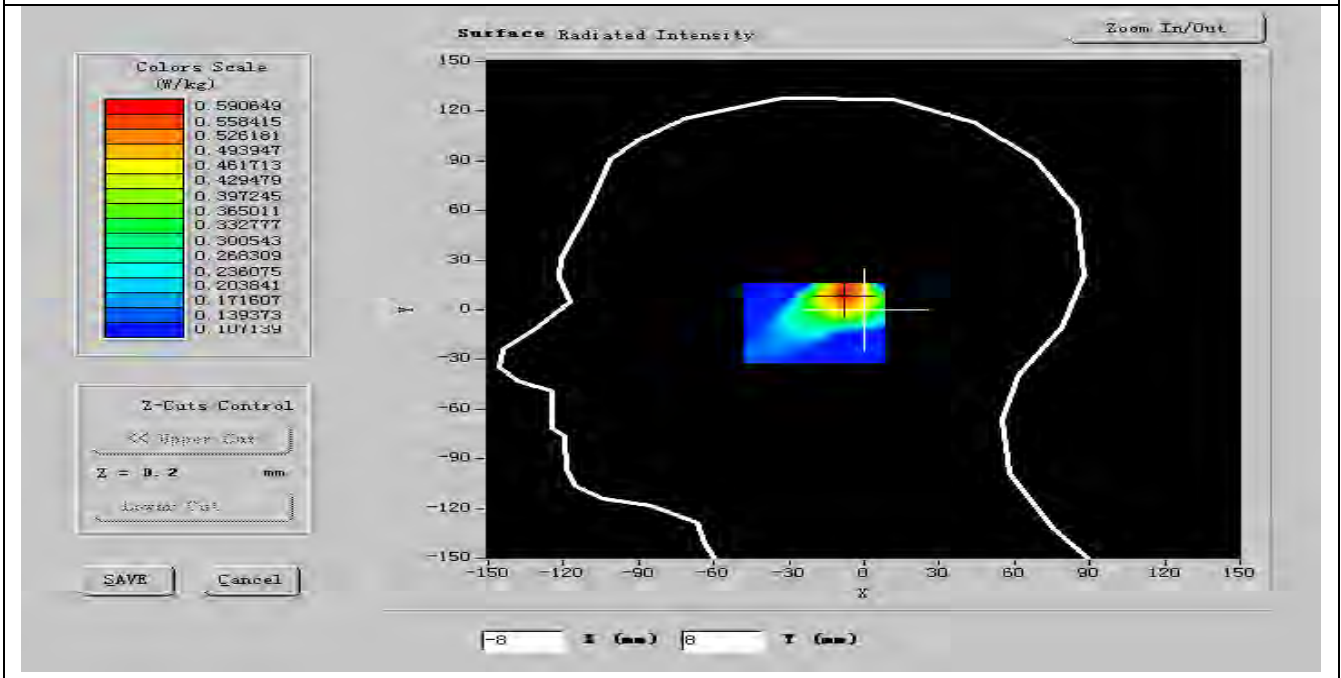

VOLUME SAR

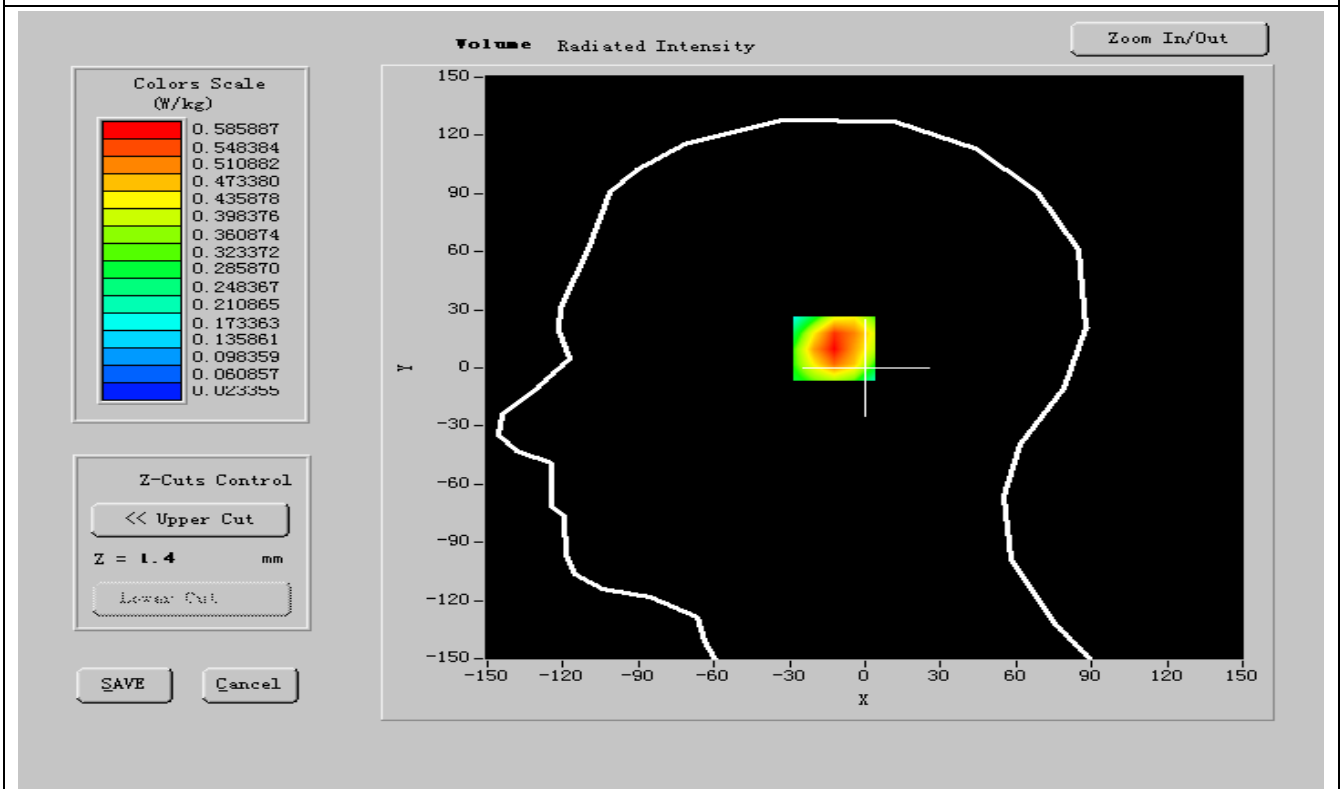




Maximum location: X=-13.00, Y=-3.00

SAR 10g (W/Kg)	0.316982
SAR 1g (W/Kg)	0.535985

Z Axis Scan

SAR, Z Axis Scan (X = -8, Y = 10)

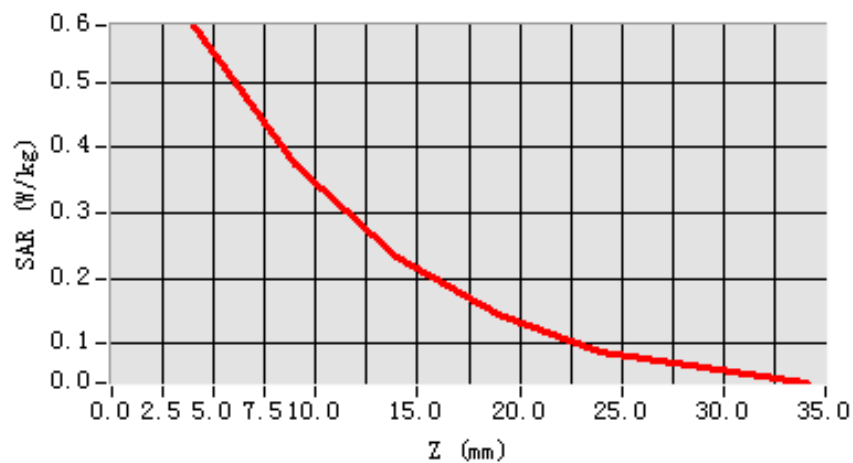



MEASUREMENT 7

Date of measurement: 02/20/2011**Area Scan: 7 x 7 x 1****dx=15mm****dy=15mm****Zoom Scan: 5 x 5 x 7****dx=5mm****dy=5mm****dz=5mm****Z Axis Scan: 1 x 1 x 21****dx=20mm****dy=20mm****dz=5mm**

A. Experimental conditions.

Phantom File	zinf15.txt, Adaptive 2 max
Phantom	Left head
Device Position	Cheek
Band	GSM1900
Channels	Low
Signal	GSM

B. Instrumentations.

PC	HP (Pentium(R) V3.06GHz, SN:375052-AA1)	Calibrated: N/A
Wireless Communication Test Set	R&S (CMU200, SN:B23-03291)	Calibration Due: 05/25/2011
Network Analyzer	Agilent(E5071B, MY42301382)	Calibration Due: 03/24/2011
Voltmeter	Keithley (2000, SN:1015843)	Calibration Due: 05/25/2011
Signal Generator	Agilent (E8257C, SN:MY43321570)	Calibration Due: 03/24/2011
Amplifier	Mini-Circuits (ZHL-42, SN:110405)	Calibration Due: 07/29/2011
Power Meter	Agilent (E4416A, SN:QB41292714)	Calibration Due: 03/24/2011
Probe	Antennessa (SN:SN_1109_EP_100)	Calibration Due: 05/04/2011
DIPOLE 1900	Antennessa (DIPI36, SN 48/05)	Calibration Due: 02/09/2012
Phantom	Antennessa (SN:SN41_05_SAM29)	Calibrated: N/A
Liquid	Antennessa	Calibrated: N/A
Measurement SW	OPEN SAR V2.1	Calibrated: N/A

C. SAR Measurement Results

Frequency (MHz)	1850.400024
Relative permittivity (real part)	40.313000
Relative permittivity (imaginary part)	13.584900
Conductivity (S/m)	1.416528
Variation (%)	0.400000
Ambient Temperature:	21 °C
Liquid Temperature:	20 °C




ConvF:

41.91, 43.15, 56.44


Crest factor:

1:8

SURFACE SAR

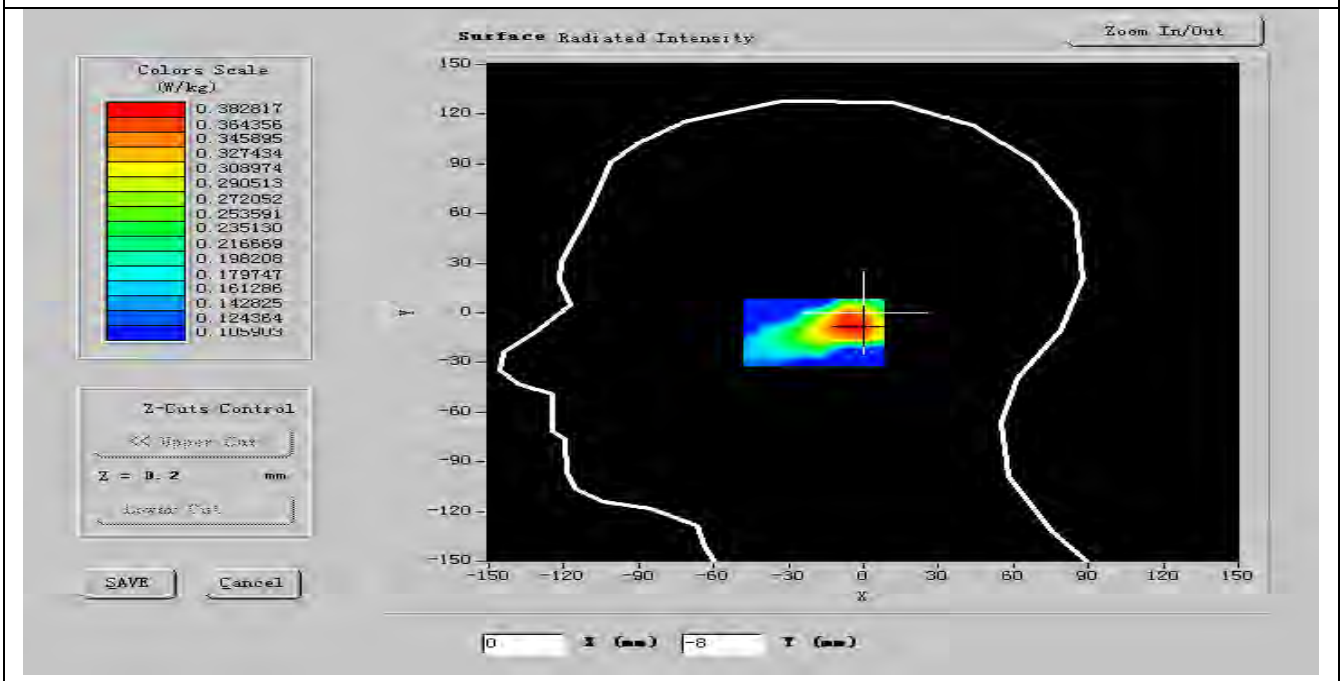

VOLUME SAR

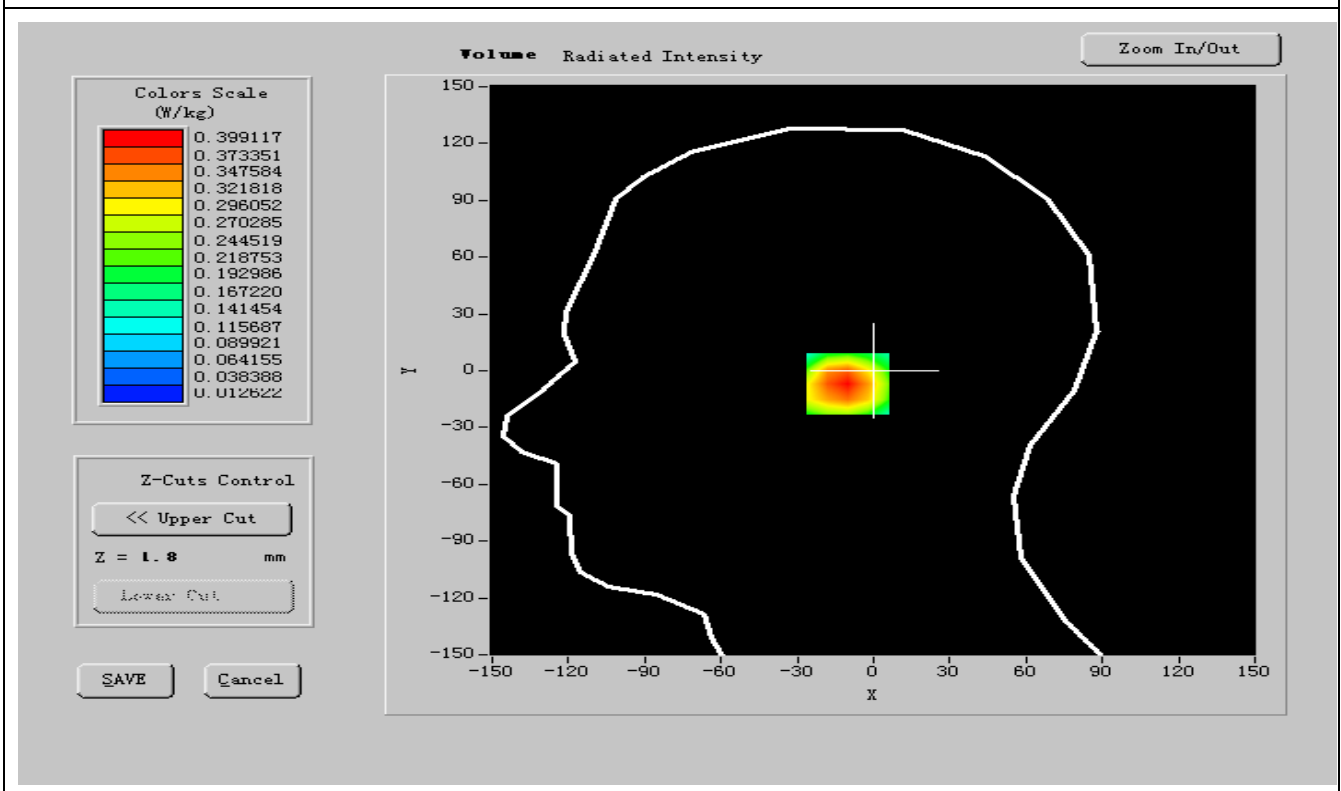




Maximum location: X=-13.00, Y=-3.00

SAR 10g (W/Kg)	0.229650
SAR 1g (W/Kg)	0.361058

Z Axis Scan

SAR, Z Axis Scan (X = -3, Y = -7)

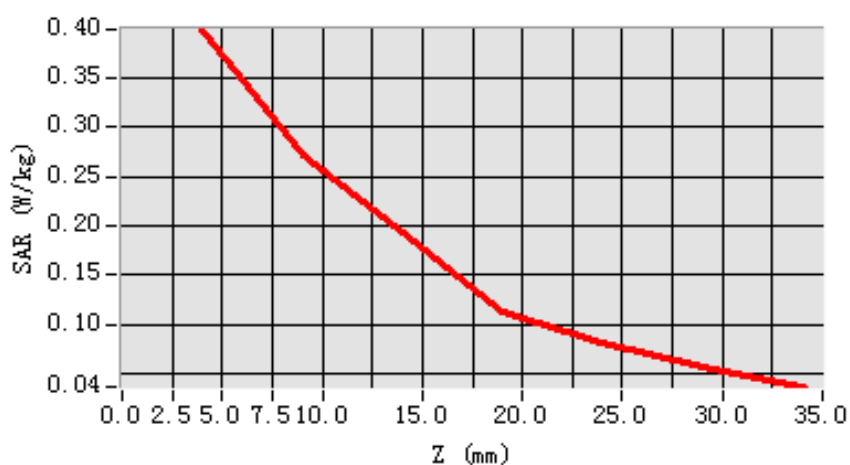



MEASUREMENT 8

Date of measurement: 02/20/2011**Area Scan: 7 x 7 x 1****dx=15mm****dy=15mm****Zoom Scan: 5 x 5 x 7****dx=5mm****dy=5mm****dz=5mm****Z Axis Scan: 1 x 1 x 21****dx=20mm****dy=20mm****dz=5mm**

A. Experimental conditions.

Phantom File	zinf15.txt, Adaptive 2 max
Phantom	Left head
Device Position	Cheek
Band	GSM1900
Channels	Middle
Signal	GSM

B. Instrumentations.

PC	HP (Pentium(R) V3.06GHz, SN:375052-AA1)	Calibrated: N/A
Wireless Communication Test Set	R&S (CMU200, SN:B23-03291)	Calibration Due: 05/25/2011
Network Analyzer	Agilent(E5071B, MY42301382)	Calibration Due: 03/24/2011
Voltmeter	Keithley (2000, SN:1015843)	Calibration Due: 05/25/2011
Signal Generator	Agilent (E8257C, SN:MY43321570)	Calibration Due: 03/24/2011
Amplifier	Mini-Circuits (ZHL-42, SN:110405)	Calibration Due: 07/29/2011
Power Meter	Agilent (E4416A, SN:QB41292714)	Calibration Due: 03/24/2011
Probe	Antennessa (SN:SN_1109_EP_100)	Calibration Due: 05/04/2011
DIPOLE 1900	Antennessa (DIPI36, SN 48/05)	Calibration Due: 02/09/2012
Phantom	Antennessa (SN:SN41_05_SAM29)	Calibrated: N/A
Liquid	Antennessa	Calibrated: N/A
Measurement SW	OPEN SAR V2.1	Calibrated: N/A

C. SAR Measurement Results

Frequency (MHz)	1880.000000
Relative permittivity (real part)	40.193001
Relative permittivity (imaginary part)	13.813800
Conductivity (S/m)	1.412324
Variation (%)	1.300000
Ambient Temperature:	21 °C
Liquid Temperature:	20 °C




ConvF:

41.91, 43.15, 56.44


Crest factor:

1:8

SURFACE SAR

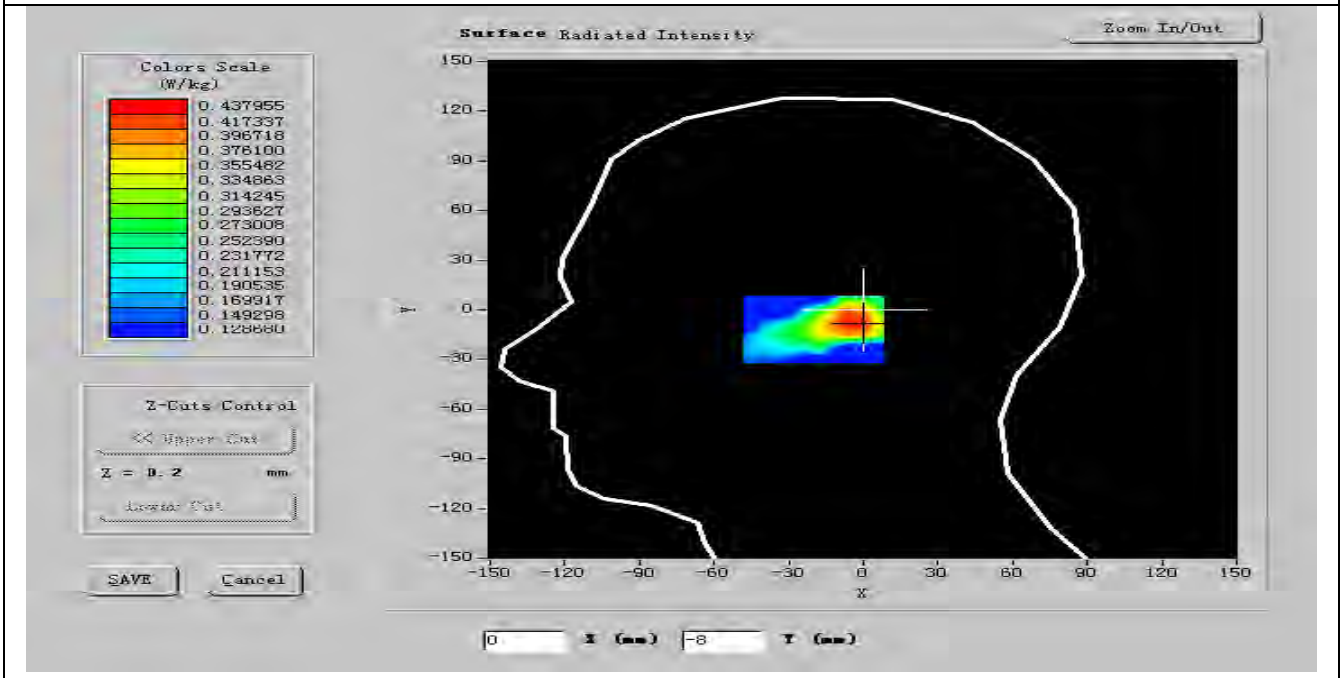

VOLUME SAR

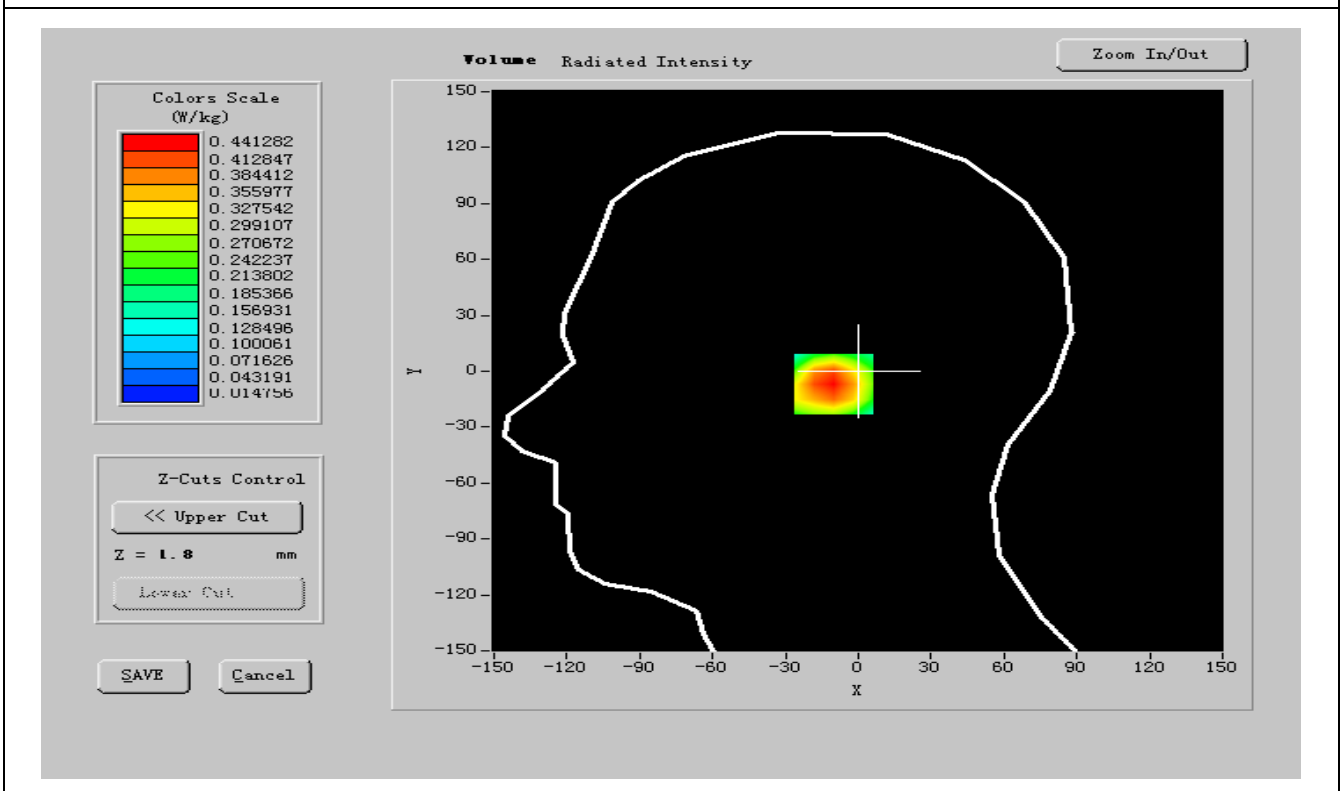




Maximum location: X=-13.00, Y=-3.00

SAR 10g (W/Kg)	0.262184
SAR 1g (W/Kg)	0.423335

Z Axis Scan

SAR, Z Axis Scan (X = -3, Y = -7)

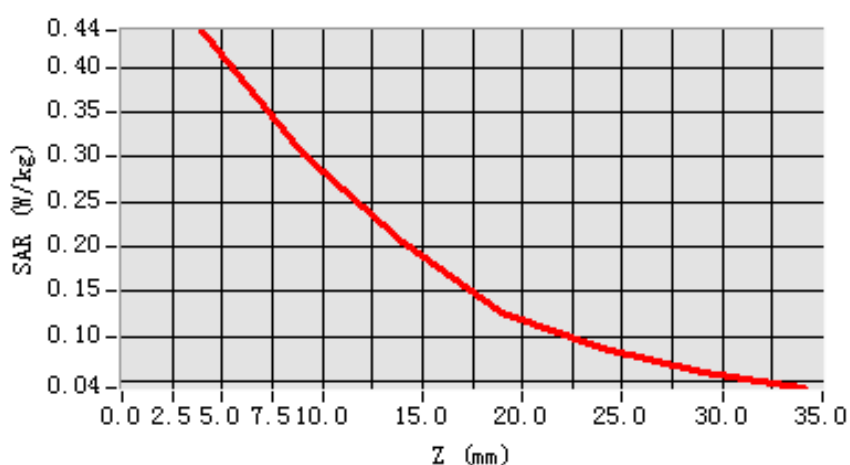



MEASUREMENT 9

Date of measurement: 02/20/2011**Area Scan: 7 x 7 x 1****dx=15mm****dy=15mm****Zoom Scan: 5 x 5 x 7****dx=5mm****dy=5mm****dz=5mm****Z Axis Scan: 1 x 1 x 21****dx=20mm****dy=20mm****dz=5mm**

A. Experimental conditions.

Phantom File	zinf15.txt, Adaptive 2 max
Phantom	Left head
Device Position	Cheek
Band	GSM1900
Channels	High
Signal	GSM

B. Instrumentations.

PC	HP (Pentium(R) V3.06GHz, SN:375052-AA1)	Calibrated: N/A
Wireless Communication Test Set	R&S (CMU200, SN:B23-03291)	Calibration Due: 05/25/2011
Network Analyzer	Agilent(E5071B, MY42301382)	Calibration Due: 03/24/2011
Voltmeter	Keithley (2000, SN:1015843)	Calibration Due: 05/25/2011
Signal Generator	Agilent (E8257C, SN:MY43321570)	Calibration Due: 03/24/2011
Amplifier	Mini-Circuits (ZHL-42, SN:110405)	Calibration Due: 07/29/2011
Power Meter	Agilent (E4416A, SN:QB41292714)	Calibration Due: 03/24/2011
Probe	Antennessa (SN:SN_1109_EP_100)	Calibration Due: 05/04/2011
DIPOLE 1900	Antennessa (DIPI36, SN 48/05)	Calibration Due: 02/09/2012
Phantom	Antennessa (SN:SN41_05_SAM29)	Calibrated: N/A
Liquid	Antennessa	Calibrated: N/A
Measurement SW	OPEN SAR V2.1	Calibrated: N/A

C. SAR Measurement Results

Frequency (MHz)	1909.599976
Relative permittivity (real part)	40.285999
Relative permittivity (imaginary part)	13.669900
Conductivity (S/m)	1.410242
Variation (%)	0.400000
Ambient Temperature:	21 °C
Liquid Temperature:	20 °C




ConvF:

41.91, 43.15, 56.44


Crest factor:

1:8

SURFACE SAR

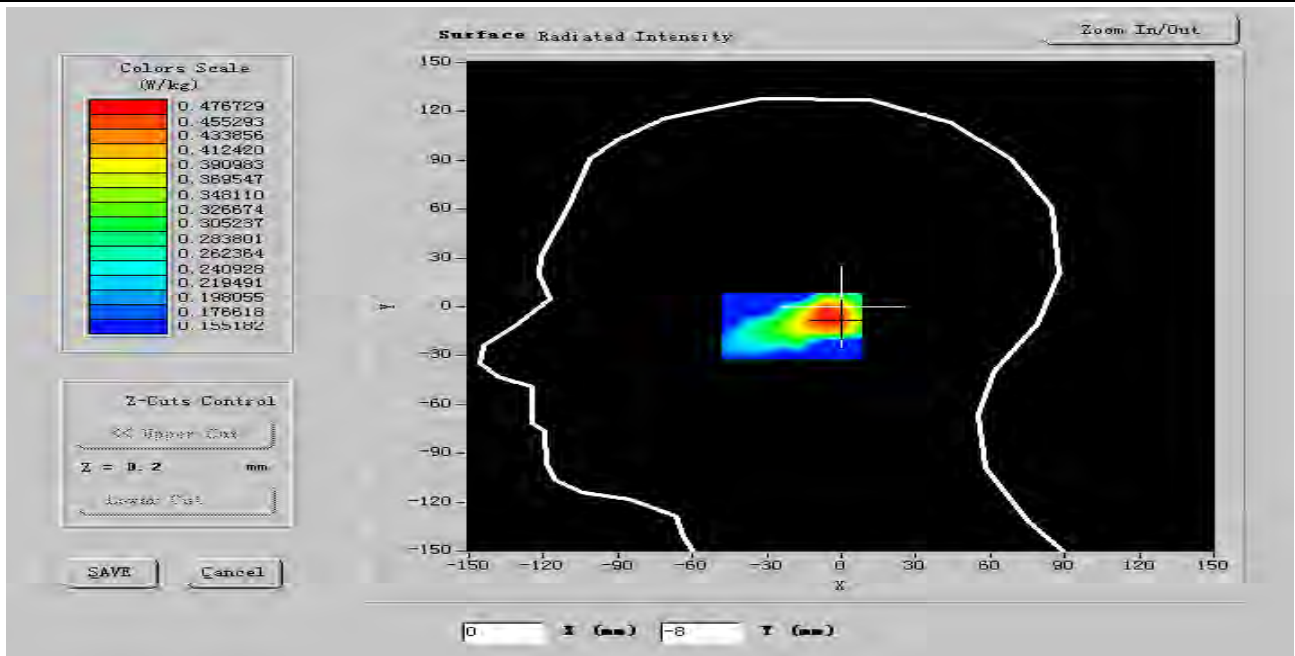

VOLUME SAR

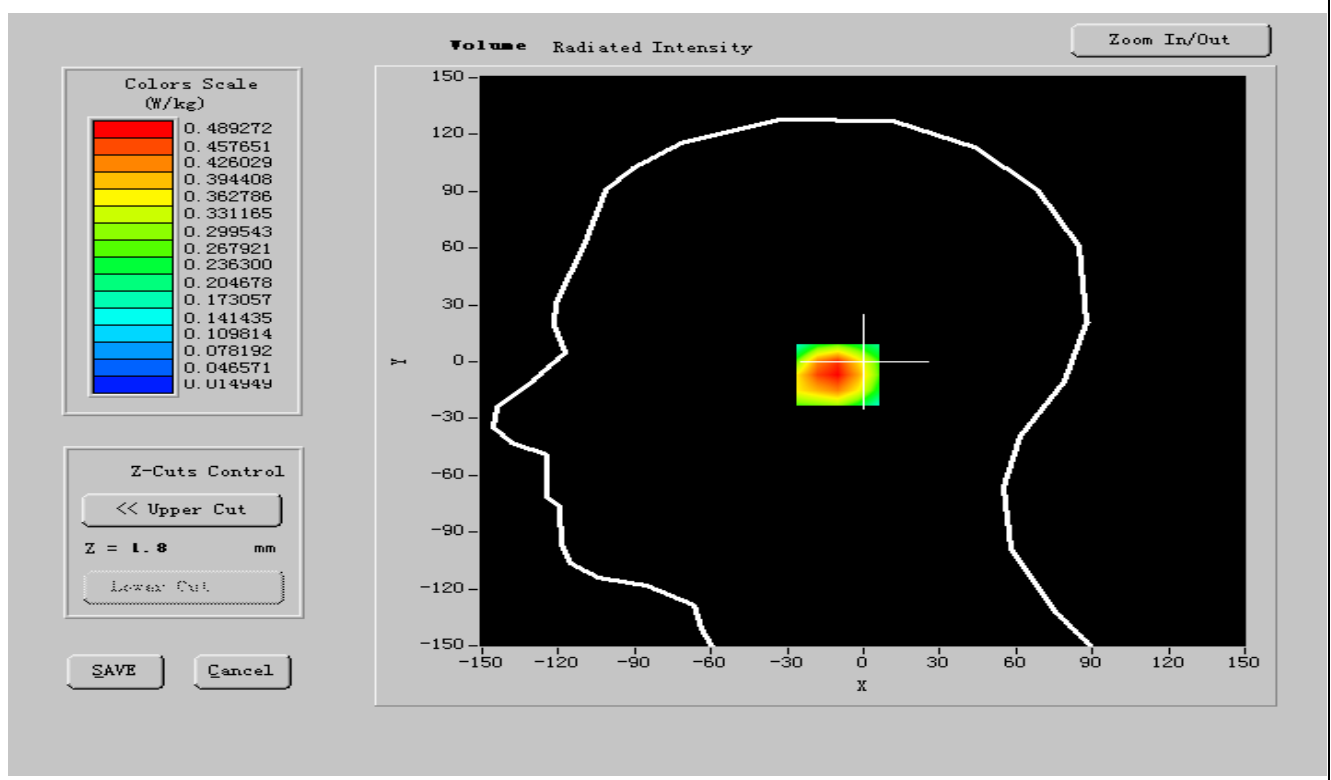




Maximum location: X=-13.00, Y=-3.00

SAR 10g (W/Kg)	0.291874
SAR 1g (W/Kg)	0.449005

Z Axis Scan

SAR, Z Axis Scan (X = -3, Y = -7)

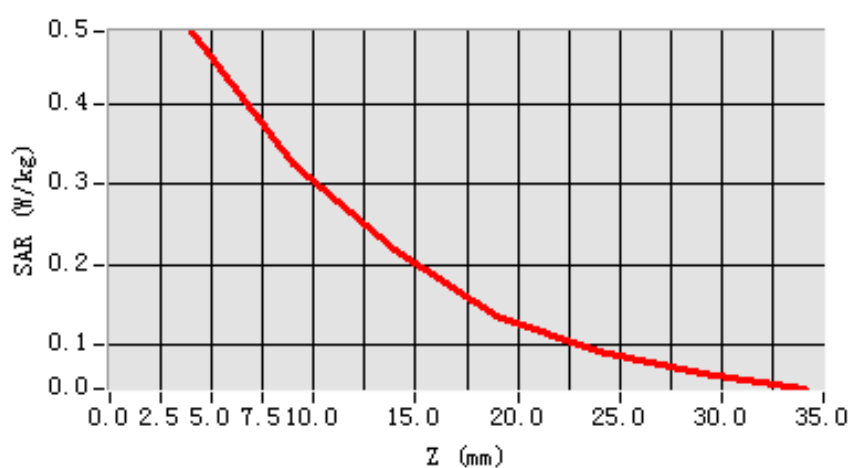



MEASUREMENT 10

Date of measurement: 02/20/2011

Area Scan: 7 x 7 x 1 **dx=15mm** **dy=15mm**
Zoom Scan: 5 x 5 x 7 **dx=5mm** **dy=5mm** **dz=5mm**
Z Axis Scan: 1 x 1 x 21 **dx=20mm** **dy=20mm** **dz=5mm**

A. Experimental conditions.

Phantom File	zinf15.txt, Adaptive 2 max
Phantom	Left head
Device Position	Tilt
Band	GSM1900
Channels	Low
Signal	GSM

B. Instrumentations.

PC	HP (Pentium(R) V3.06GHz, SN:375052-AA1)	Calibrated: N/A
Wireless Communication Test Set	R&S (CMU200, SN:B23-03291)	Calibration Due: 05/25/2011
Network Analyzer	Agilent(E5071B, MY42301382)	Calibration Due: 03/24/2011
Voltmeter	Keithley (2000, SN:1015843)	Calibration Due: 05/25/2011
Signal Generator	Agilent (E8257C, SN:MY43321570)	Calibration Due: 03/24/2011
Amplifier	Mini-Circuits (ZHL-42, SN:110405)	Calibration Due: 07/29/2011
Power Meter	Agilent (E4416A, SN:QB41292714)	Calibration Due: 03/24/2011
Probe	Antennessa (SN:SN_1109_EP_100)	Calibration Due: 05/04/2011
DIPOLE 1900	Antennessa (DIPI36, SN 48/05)	Calibration Due: 02/09/2012
Phantom	Antennessa (SN:SN41_05_SAM29)	Calibrated: N/A
Liquid	Antennessa	Calibrated: N/A
Measurement SW	OPEN SAR V2.1	Calibrated: N/A


C. SAR Measurement Results

Frequency (MHz)	1850.400024
Relative permittivity (real part)	40.313134
Relative permittivity (imaginary part)	13.584900
Conductivity (S/m)	1.416243
Variation (%)	-0.700000
Ambient Temperature:	21 °C
Liquid Temperature:	20 °C




ConvF:	41.91, 43.15, 56.44
Crest factor:	1:8

SURFACE SAR

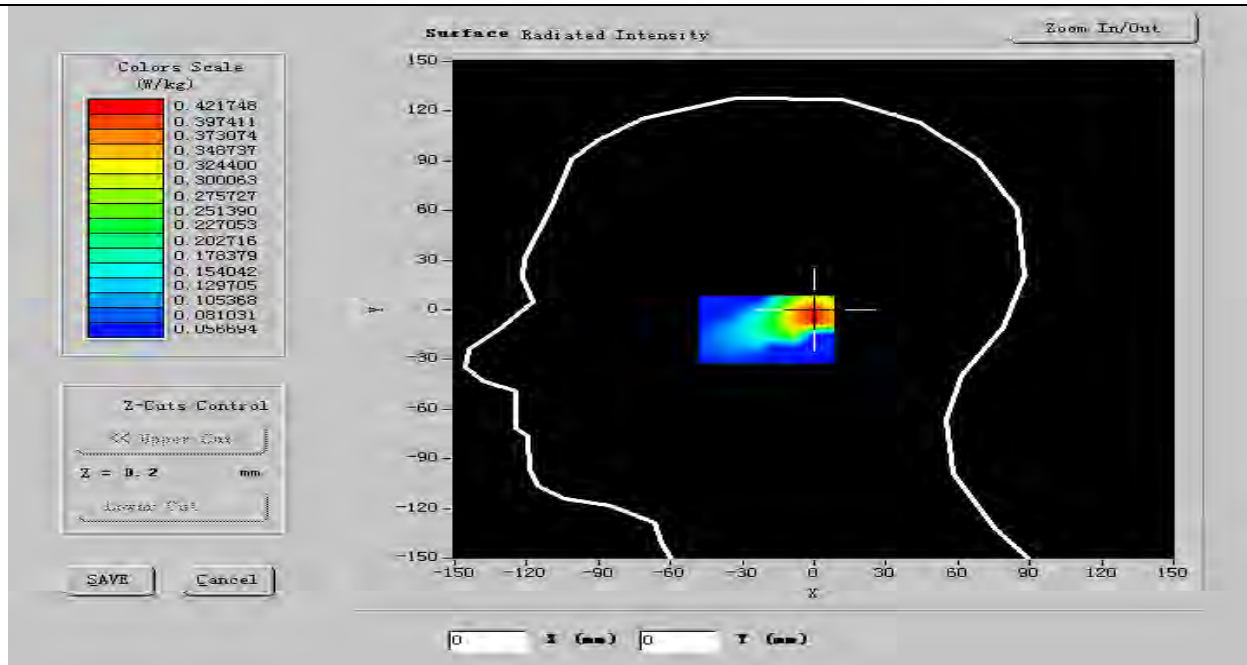

VOLUME SAR

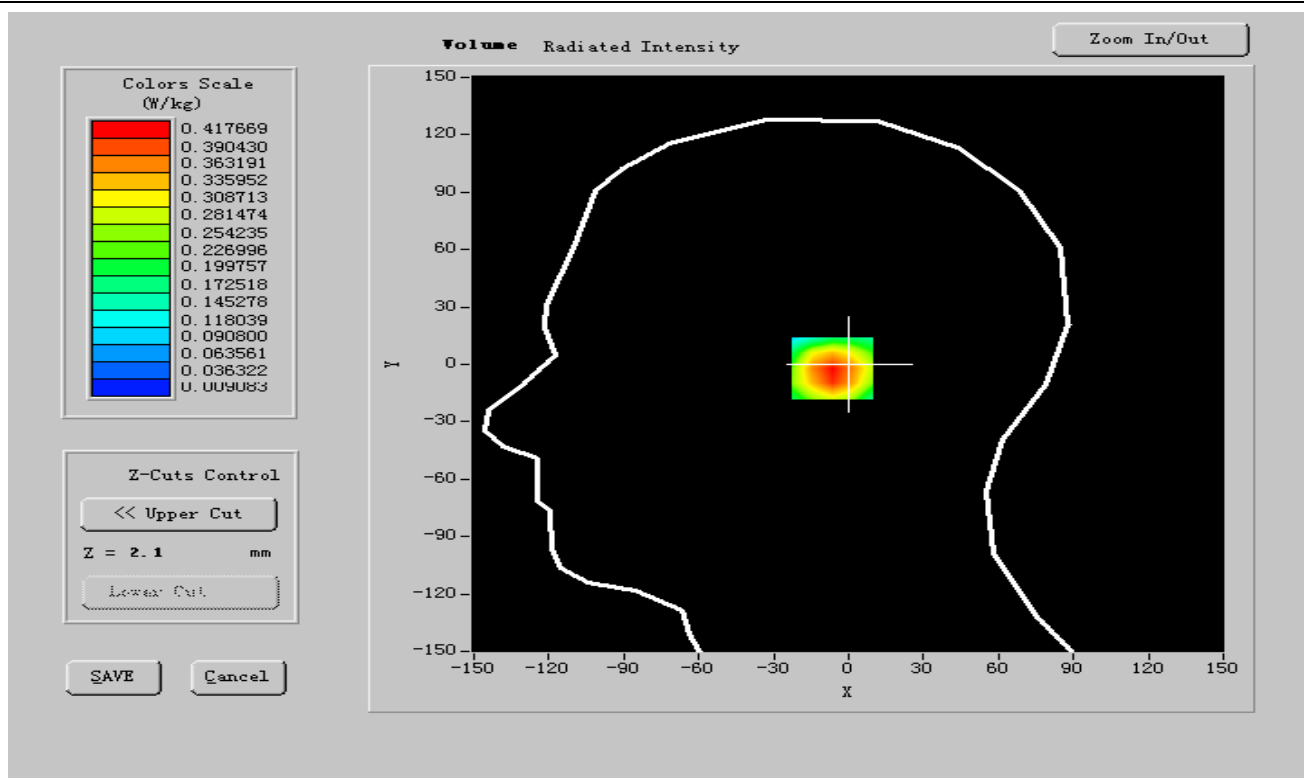




Maximum location: X=-13.00, Y=-3.00

SAR 10g (W/Kg)	0.256978
SAR 1g (W/Kg)	0.403289

Z Axis Scan

SAR, Z Axis Scan (X = 0, Y = -2)

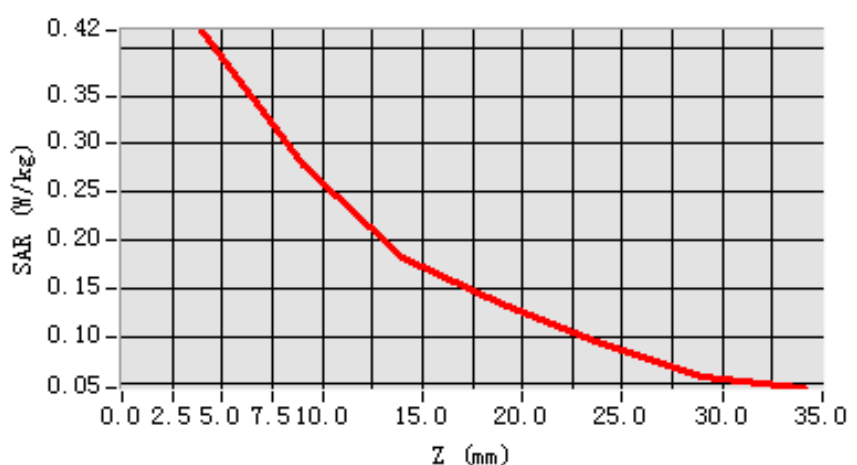



MEASUREMENT 11

Date of measurement: 02/20/2011**Area Scan: 7 x 7 x 1****dx=15mm****dy=15mm****Zoom Scan: 5 x 5 x 7****dx=5mm****dy=5mm****dz=5mm****Z Axis Scan: 1 x 1 x 21****dx=20mm****dy=20mm****dz=5mm**

A. Experimental conditions.

Phantom File	zinf15.txt, Adaptive 2 max
Phantom	Left head
Device Position	Tilt
Band	GSM1900
Channels	Middle
Signal	GSM

B. Instrumentations.

PC	HP (Pentium(R) V3.06GHz, SN:375052-AA1)	Calibrated: N/A
Wireless Communication Test Set	R&S (CMU200, SN:B23-03291)	Calibration Due: 05/25/2011
Network Analyzer	Agilent(E5071B, MY42301382)	Calibration Due: 03/24/2011
Voltmeter	Keithley (2000, SN:1015843)	Calibration Due: 05/25/2011
Signal Generator	Agilent (E8257C, SN:MY43321570)	Calibration Due: 03/24/2011
Amplifier	Mini-Circuits (ZHL-42, SN:110405)	Calibration Due: 07/29/2011
Power Meter	Agilent (E4416A, SN:QB41292714)	Calibration Due: 03/24/2011
Probe	Antennessa (SN:SN_1109_EP_100)	Calibration Due: 05/04/2011
DIPOLE 1900	Antennessa (DIPI36, SN 48/05)	Calibration Due: 02/09/2012
Phantom	Antennessa (SN:SN41_05_SAM29)	Calibrated: N/A
Liquid	Antennessa	Calibrated: N/A
Measurement SW	OPEN SAR V2.1	Calibrated: N/A

C. SAR Measurement Results

Frequency (MHz)	1880.000000
Relative permittivity (real part)	40.193001
Relative permittivity (imaginary part)	13.813800
Conductivity (S/m)	1.413245
Variation (%)	-1.100000
Ambient Temperature:	21 °C
Liquid Temperature:	20 °C




ConvF:

41.91, 43.15, 56.44


Crest factor:

1:8

SURFACE SAR

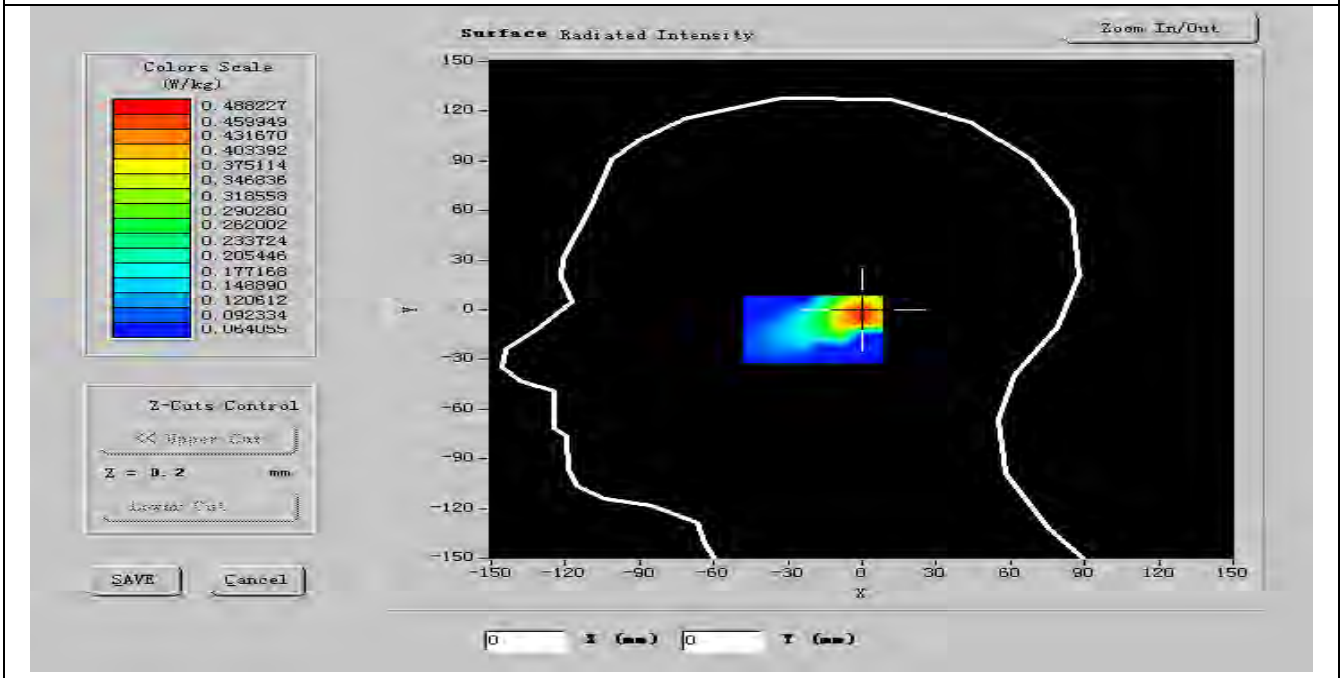

VOLUME SAR

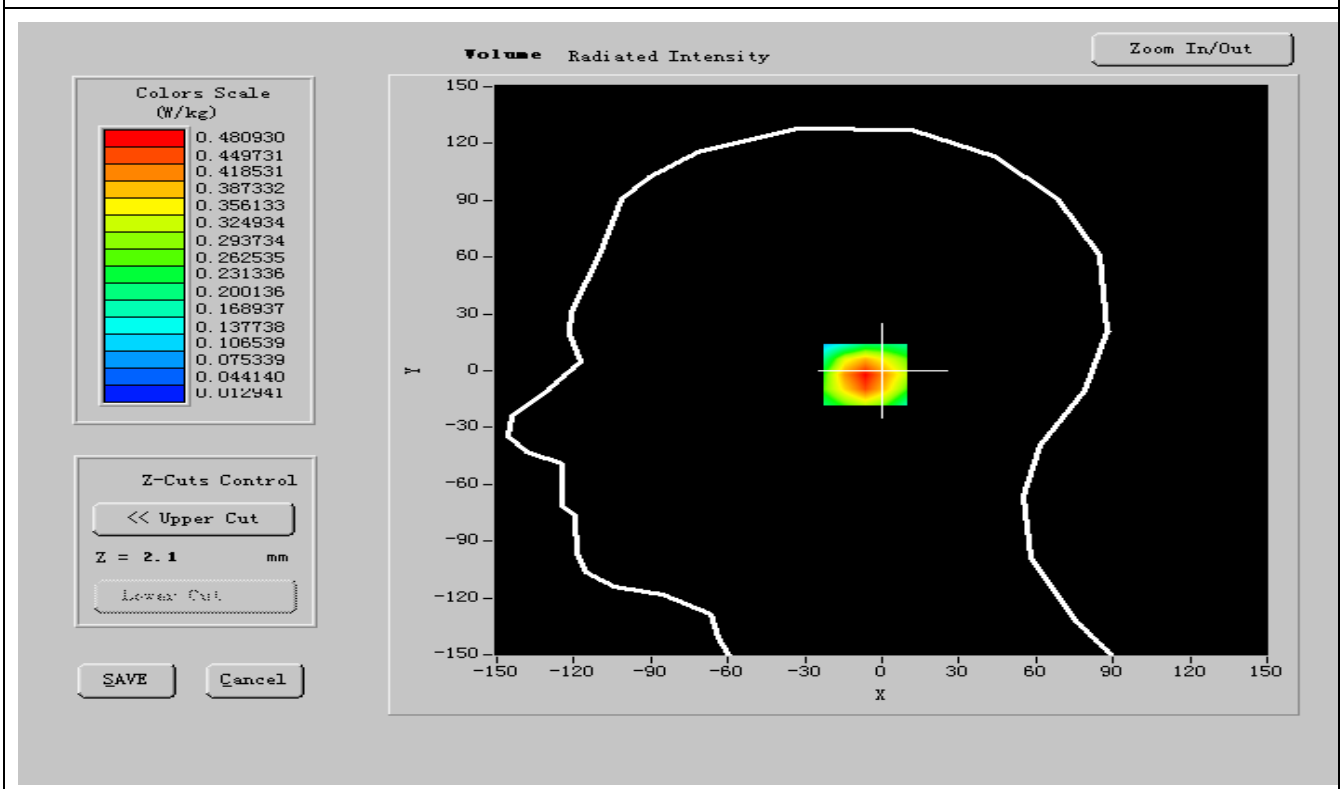




Maximum location: X=-13.00, Y=-3.00

SAR 10g (W/Kg)	0.256123
SAR 1g (W/Kg)	0.446892

Z Axis Scan

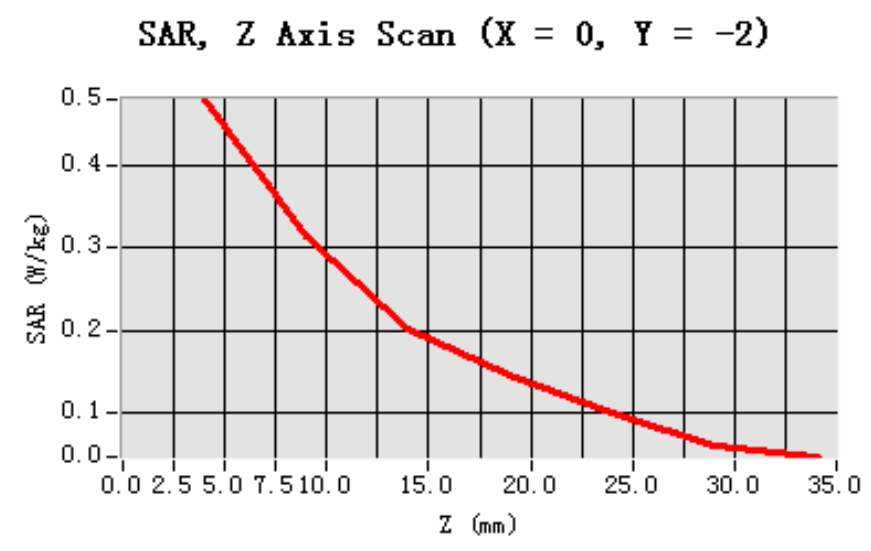



MEASUREMENT 12

Date of measurement: 02/20/2011**Area Scan: 7 x 7 x 1****dx=15mm****dy=15mm****Zoom Scan: 5 x 5 x 7****dx=5mm****dy=5mm****dz=5mm****Z Axis Scan: 1 x 1 x 21****dx=20mm****dy=20mm****dz=5mm**

A. Experimental conditions.

Phantom File	zinf15.txt, Adaptive 2 max
Phantom	Left head
Device Position	Tilt
Band	GSM1900
Channels	High
Signal	GSM

B. Instrumentations.

PC	HP (Pentium(R) V3.06GHz, SN:375052-AA1)	Calibrated: N/A
Wireless Communication Test Set	R&S (CMU200, SN:B23-03291)	Calibration Due: 05/25/2011
Network Analyzer	Agilent(E5071B, MY42301382)	Calibration Due: 03/24/2011
Voltmeter	Keithley (2000, SN:1015843)	Calibration Due: 05/25/2011
Signal Generator	Agilent (E8257C, SN:MY43321570)	Calibration Due: 03/24/2011
Amplifier	Mini-Circuits (ZHL-42, SN:110405)	Calibration Due: 07/29/2011
Power Meter	Agilent (E4416A, SN:QB41292714)	Calibration Due: 03/24/2011
Probe	Antennessa (SN:SN_1109_EP_100)	Calibration Due: 05/04/2011
DIPOLE 1900	Antennessa (DIPI36, SN 48/05)	Calibration Due: 02/09/2012
Phantom	Antennessa (SN:SN41_05_SAM29)	Calibrated: N/A
Liquid	Antennessa	Calibrated: N/A
Measurement SW	OPEN SAR V2.1	Calibrated: N/A

C. SAR Measurement Results

Frequency (MHz)	1909.599976
Relative permittivity (real part)	40.285999
Relative permittivity (imaginary part)	13.669900
Conductivity (S/m)	1.420225
Variation (%)	-1.130000
Ambient Temperature:	21 °C
Liquid Temperature:	20 °C




ConvF:

41.91, 43.15, 56.44


Crest factor:

1:8

SURFACE SAR

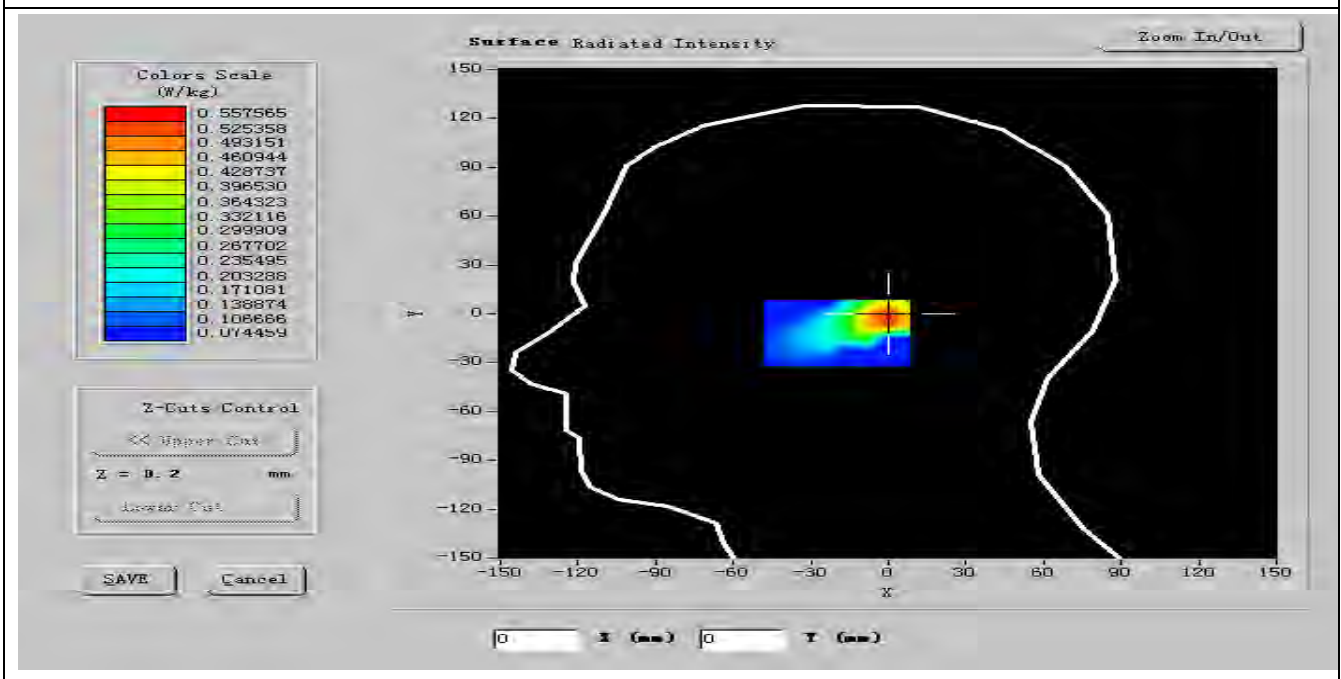

VOLUME SAR

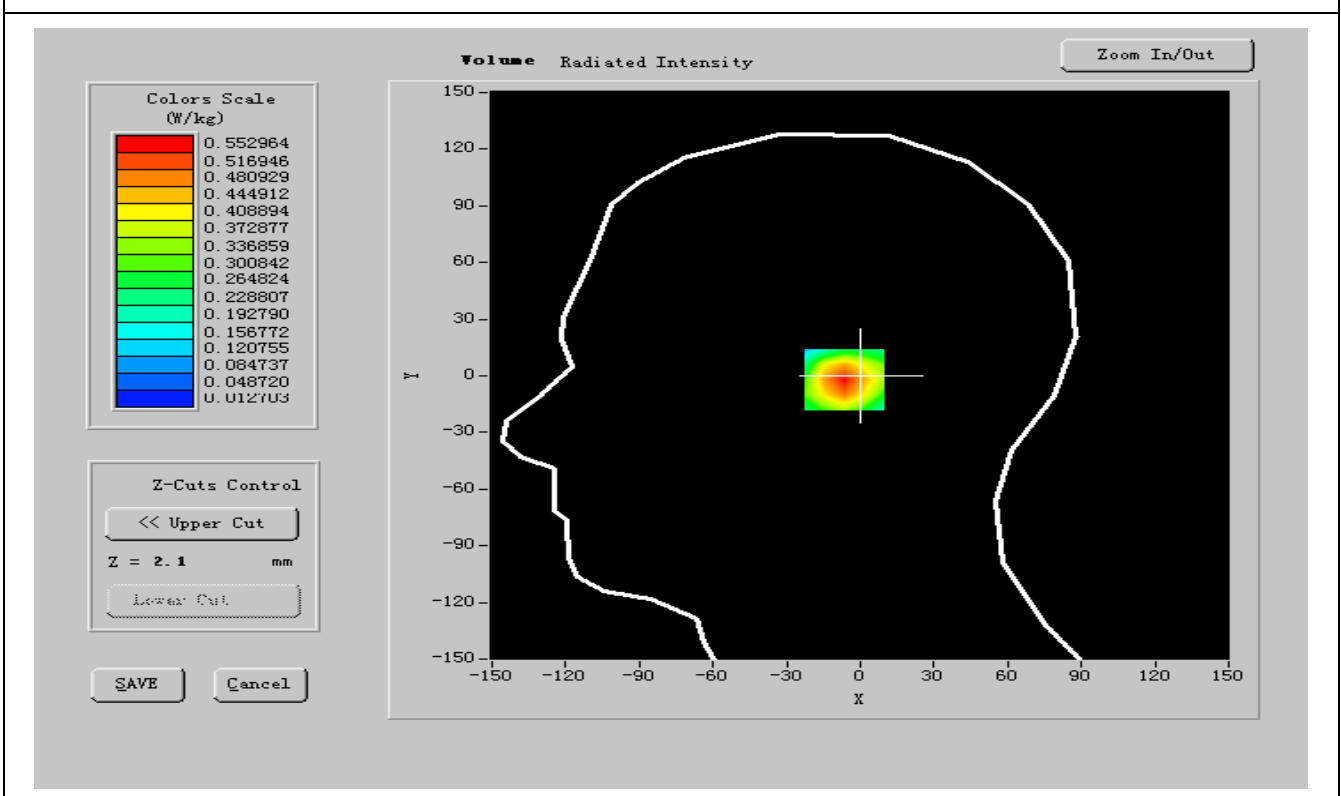




Maximum location: X=-13.00, Y=-3.00

SAR 10g (W/Kg)	0.365651
SAR 1g (W/Kg)	0.487752

Z Axis Scan

SAR, Z Axis Scan (X = 0, Y = -2)

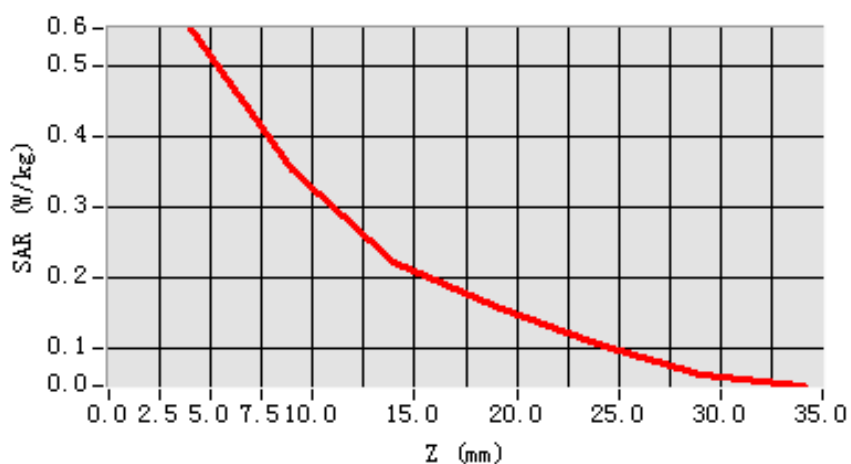



MEASUREMENT 13

Date of measurement: 02/20/2011**Area Scan: 7 x 7 x 1****dx=15mm****dy=15mm****Zoom Scan: 5 x 5 x 7****dx=5mm****dy=5mm****dz=5mm****Z Axis Scan: 1 x 1 x 21****dx=20mm****dy=20mm****dz=5mm**

A. Experimental conditions.

Phantom File	zinf15.txt, Adaptive 2 max
Phantom	Body
Device Position	FrontSide toward phantom
Band	GSM1900
Channels	Low
Signal	GSM

B. Instrumentations.

PC	HP (Pentium(R) V3.06GHz, SN:375052-AA1)	Calibrated: N/A
Wireless Communication Test Set	R&S (CMU200, SN:B23-03291)	Calibration Due: 05/25/2011
Network Analyzer	Agilent(E5071B, MY42301382)	Calibration Due: 03/24/2011
Voltmeter	Keithley (2000, SN:1015843)	Calibration Due: 05/25/2011
Signal Generator	Agilent (E8257C, SN:MY43321570)	Calibration Due: 03/24/2011
Amplifier	Mini-Circuits (ZHL-42, SN:110405)	Calibration Due: 07/29/2011
Power Meter	Agilent (E4416A, SN:QB41292714)	Calibration Due: 03/24/2011
Probe	Antennessa (SN:SN_1109_EP_100)	Calibration Due: 05/04/2011
DIPOLE 1900	Antennessa (DIPI36, SN 48/05)	Calibration Due: 02/09/2012
Phantom	Antennessa (SN:SN41_05_SAM29)	Calibrated: N/A
Liquid	Antennessa	Calibrated: N/A
Measurement SW	OPEN SAR V2.1	Calibrated: N/A

C. SAR Measurement Results

Frequency (MHz)	1850.400024
Relative permittivity (real part)	52.313000
Relative permittivity (imaginary part)	13.584900
Conductivity (S/m)	1.416522
Variation (%)	-0.130000
Ambient Temperature:	21 °C
Liquid Temperature:	20 °C




ConvF:

41.01, 42.41, 55.65


Crest factor:

1:8

SURFACE SAR

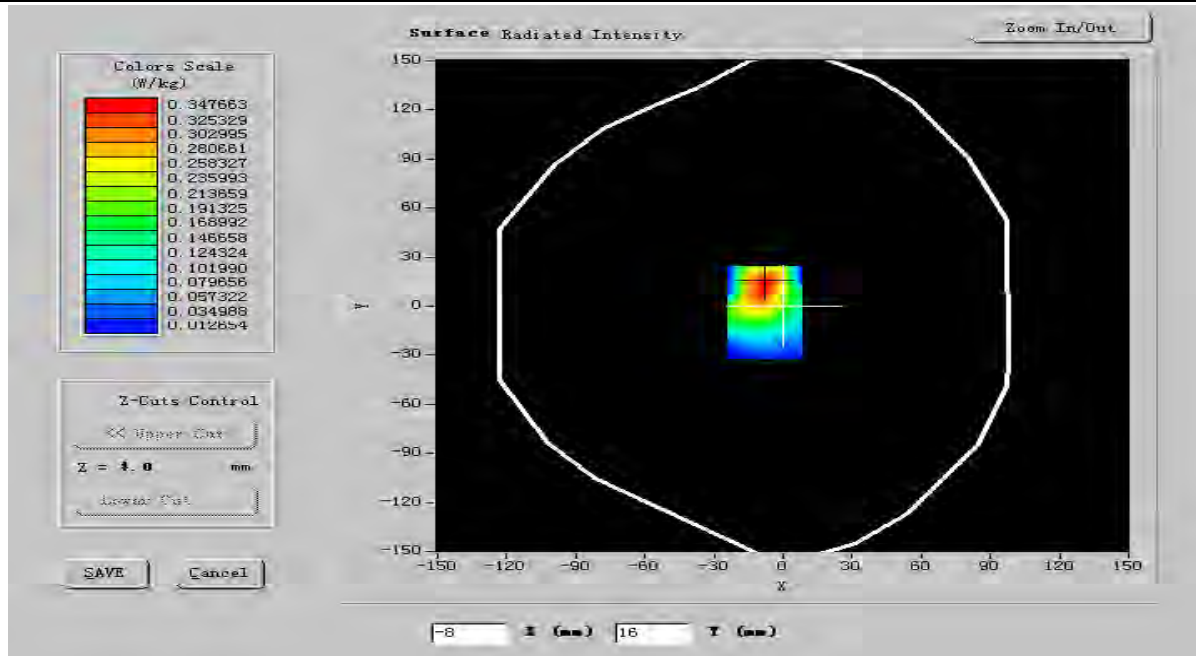

VOLUME SAR

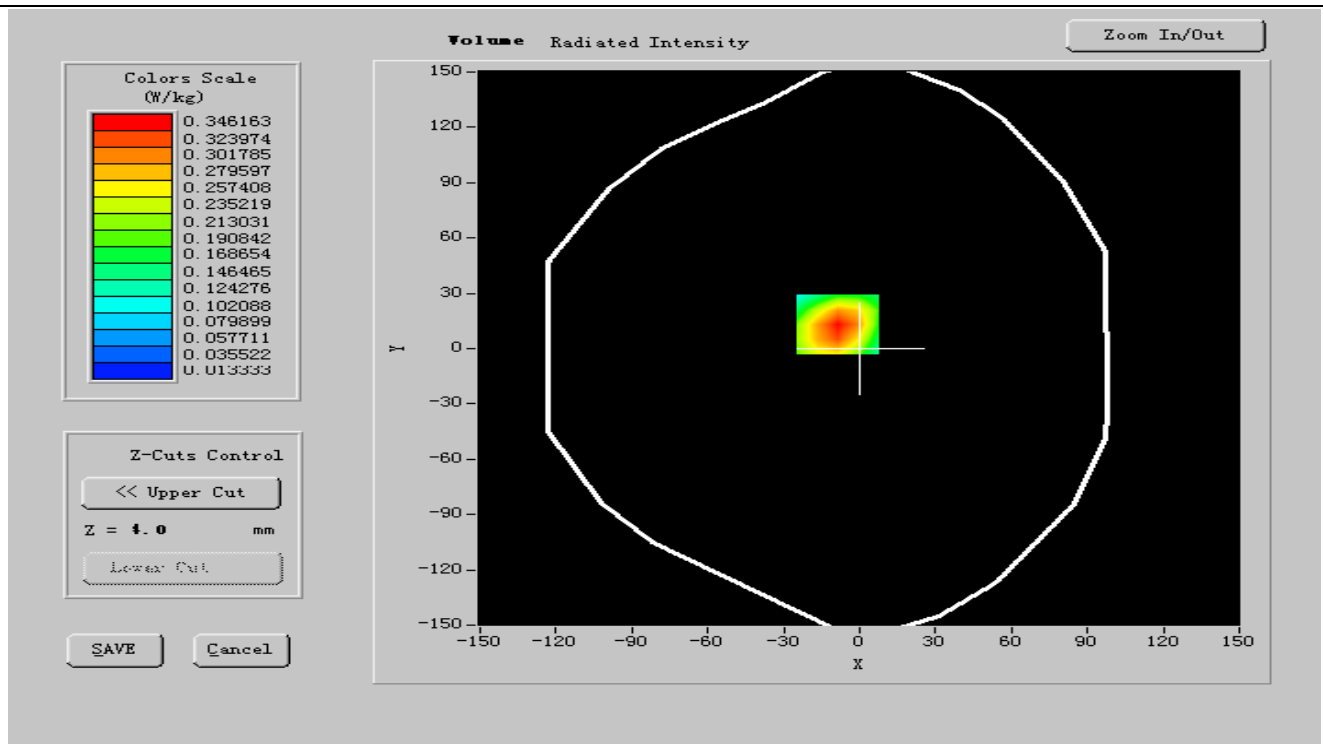




Maximum location: X=-13.00, Y=-3.00

SAR 10g (W/Kg)	0.200652
SAR 1g (W/Kg)	0.313356

Z Axis Scan

SAR, Z Axis Scan (X = -9, Y = 13)

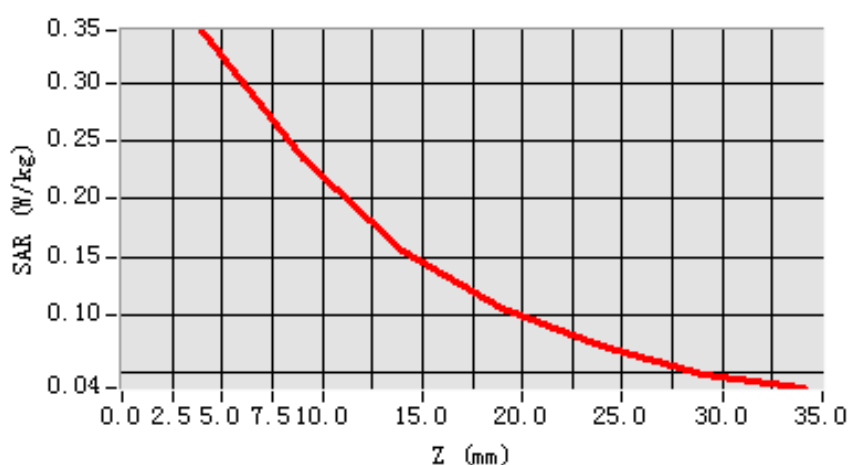



MEASUREMENT 14

Date of measurement: 02/20/2011**Area Scan: 7 x 7 x 1****dx=15mm****dy=15mm****Zoom Scan: 5 x 5 x 7****dx=5mm****dy=5mm****dz=5mm****Z Axis Scan: 1 x 1 x 21****dx=20mm****dy=20mm****dz=5mm**

A. Experimental conditions.

Phantom File	zinf15.txt, Adaptive 2 max
Phantom	Body
Device Position	FrontSide toward phantom
Band	GSM1900
Channels	Middle
Signal	GSM

B. Instrumentations.

PC	HP (Pentium(R) V3.06GHz, SN:375052-AA1)	Calibrated: N/A
Wireless Communication Test Set	R&S (CMU200, SN:B23-03291)	Calibration Due: 05/25/2011
Network Analyzer	Agilent(E5071B, MY42301382)	Calibration Due: 03/24/2011
Voltmeter	Keithley (2000, SN:1015843)	Calibration Due: 05/25/2011
Signal Generator	Agilent (E8257C, SN:MY43321570)	Calibration Due: 03/24/2011
Amplifier	Mini-Circuits (ZHL-42, SN:110405)	Calibration Due: 07/29/2011
Power Meter	Agilent (E4416A, SN:QB41292714)	Calibration Due: 03/24/2011
Probe	Antennessa (SN:SN_1109_EP_100)	Calibration Due: 05/04/2011
DIPOLE 1900	Antennessa (DIPI36, SN 48/05)	Calibration Due: 02/09/2012
Phantom	Antennessa (SN:SN41_05_SAM29)	Calibrated: N/A
Liquid	Antennessa	Calibrated: N/A
Measurement SW	OPEN SAR V2.1	Calibrated: N/A

C. SAR Measurement Results

Frequency (MHz)	1880.000000
Relative permittivity (real part)	52.893001
Relative permittivity (imaginary part)	13.813800
Conductivity (S/m)	1.512775
Variation (%)	-0.700000
Ambient Temperature:	21 °C
Liquid Temperature:	20 °C




ConvF:

41.01, 42.41, 55.65


Crest factor:

1:8

SURFACE SAR

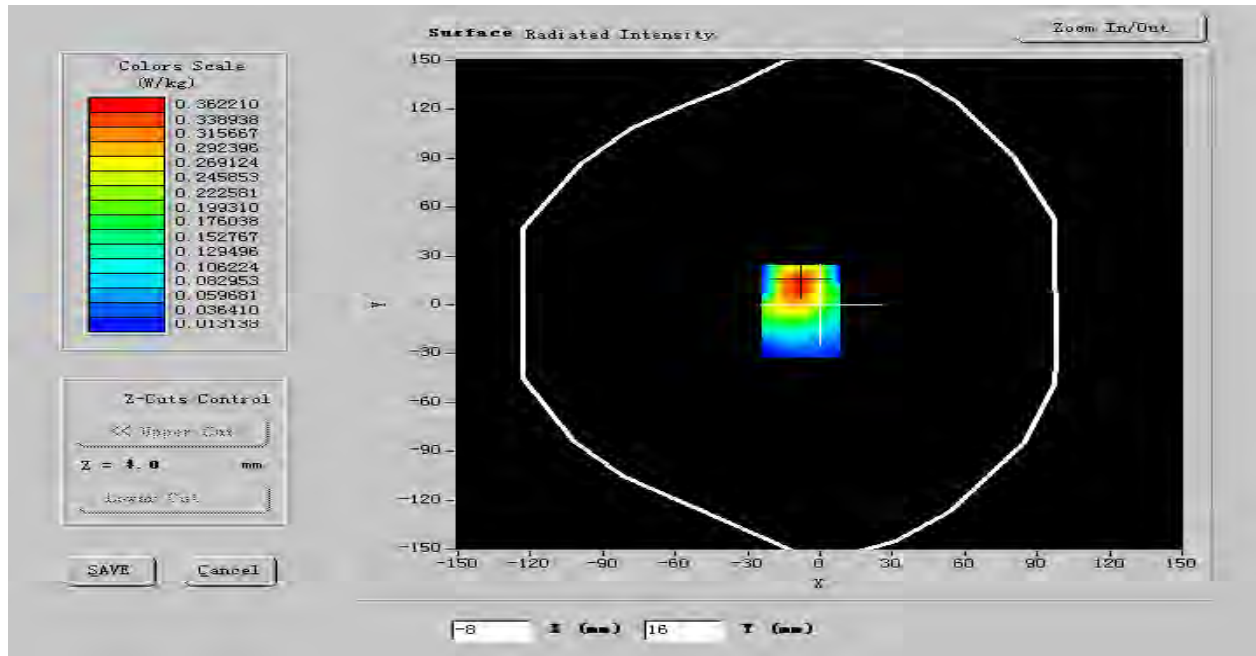

VOLUME SAR

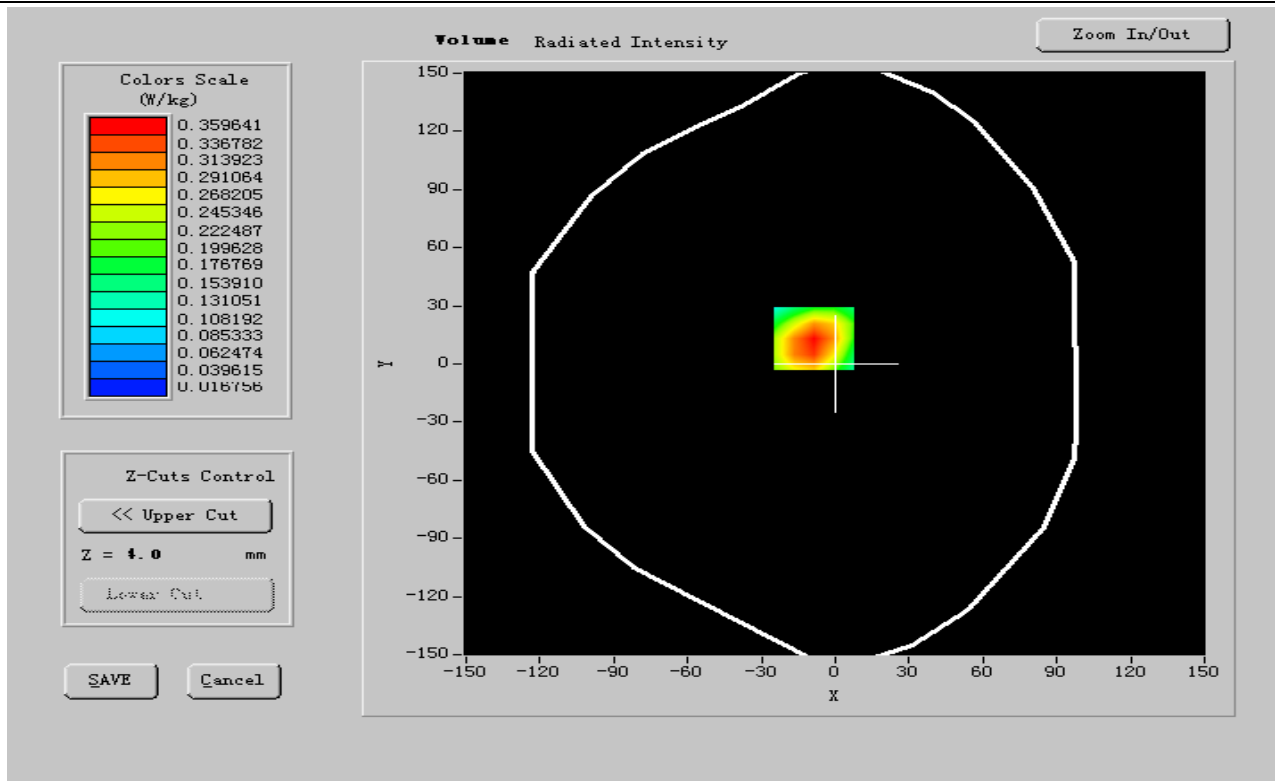




Maximum location: X=-13.00, Y=-3.00

SAR 10g (W/Kg)	0.203691
SAR 1g (W/Kg)	0.315239

Z Axis Scan

SAR, Z Axis Scan (X = -9, Y = 13)

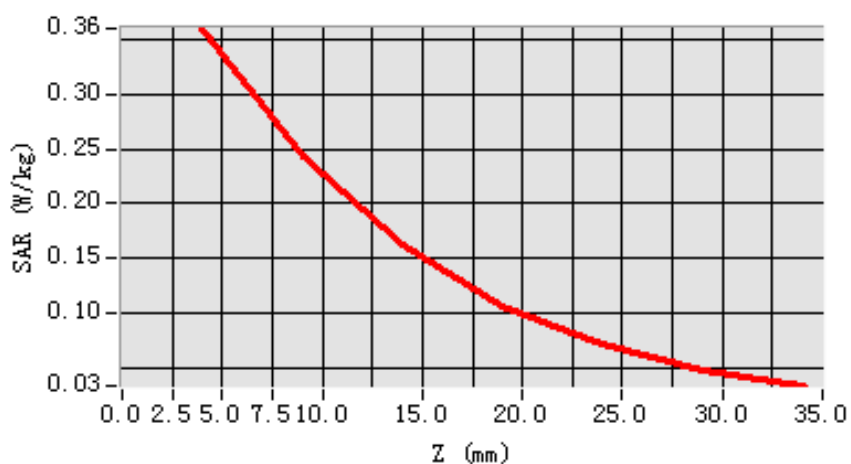



MEASUREMENT 15

Date of measurement: 02/20/2011**Area Scan: 7 x 7 x 1****dx=15mm****dy=15mm****Zoom Scan: 5 x 5 x 7****dx=5mm****dy=5mm****dz=5mm****Z Axis Scan: 1 x 1 x 21****dx=20mm****dy=20mm****dz=5mm**

A. Experimental conditions.

Phantom File	zinf15.txt, Adaptive 2 max
Phantom	Body
Device Position	FrontSide toward phantom
Band	GSM1900
Channels	High
Signal	GSM

B. Instrumentations.

PC	HP (Pentium(R) V3.06GHz, SN:375052-AA1)	Calibrated: N/A
Wireless Communication Test Set	R&S (CMU200, SN:B23-03291)	Calibration Due: 05/25/2011
Network Analyzer	Agilent(E5071B, MY42301382)	Calibration Due: 03/24/2011
Voltmeter	Keithley (2000, SN:1015843)	Calibration Due: 05/25/2011
Signal Generator	Agilent (E8257C, SN:MY43321570)	Calibration Due: 03/24/2011
Amplifier	Mini-Circuits (ZHL-42, SN:110405)	Calibration Due: 07/29/2011
Power Meter	Agilent (E4416A, SN:QB41292714)	Calibration Due: 03/24/2011
Probe	Antennessa (SN:SN_1109_EP_100)	Calibration Due: 05/04/2011
DIPOLE 1900	Antennessa (DIPI36, SN 48/05)	Calibration Due: 02/09/2012
Phantom	Antennessa (SN:SN41_05_SAM29)	Calibrated: N/A
Liquid	Antennessa	Calibrated: N/A
Measurement SW	OPEN SAR V2.1	Calibrated: N/A

C. SAR Measurement Results

Frequency (MHz)	1909.599976
Relative permittivity (real part)	52.885999
Relative permittivity (imaginary part)	13.669900
Conductivity (S/m)	1.510225
Variation (%)	-0.600000
Ambient Temperature:	21 °C
Liquid Temperature:	20 °C




ConvF:

41.01, 42.41, 55.65


Crest factor:

1:8

SURFACE SAR

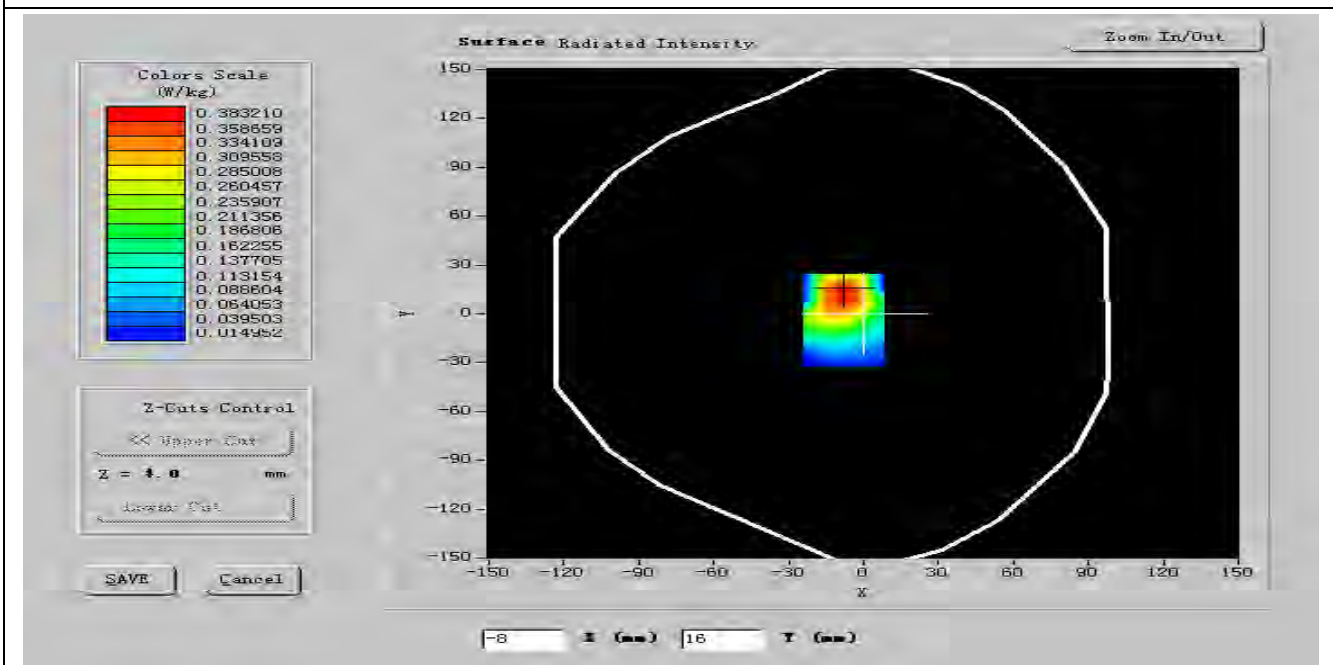

VOLUME SAR

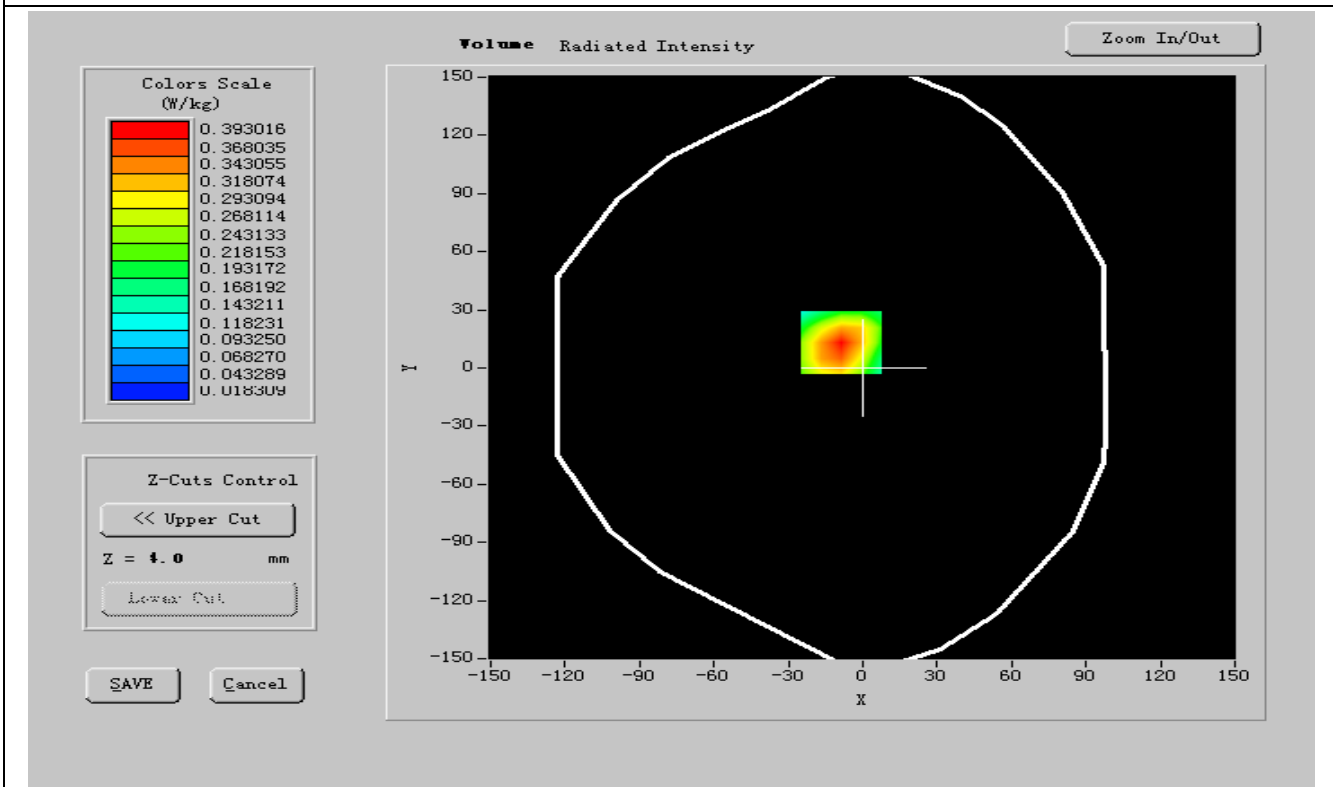




Maximum location: X=-13.00, Y=-3.00

SAR 10g (W/Kg)	0.245223
SAR 1g (W/Kg)	0.357196

Z Axis Scan

SAR, Z Axis Scan (X = -9, Y = 13)

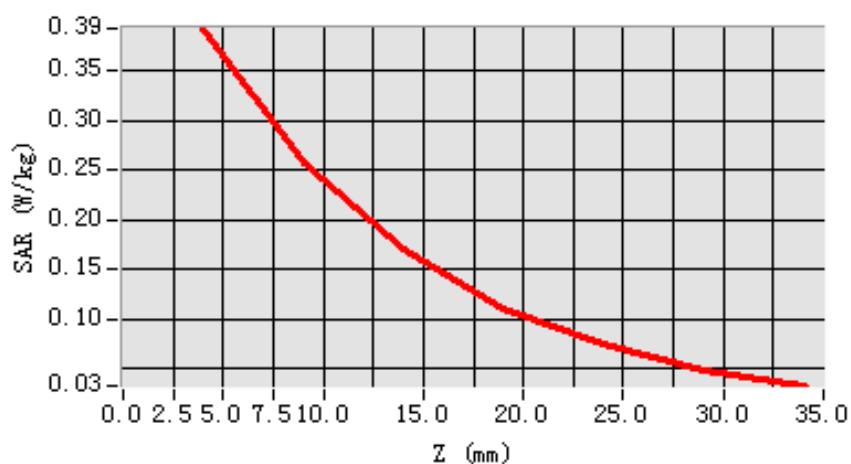

**MEASUREMENT 16****Date of measurement: 02/20/2011****Area Scan: 7 x 7 x 1****dx=15mm****dy=15mm****Zoom Scan: 5 x 5 x 7****dx=5mm****dy=5mm****dz=5mm****Z Axis Scan: 1 x 1 x 21****dx=20mm****dy=20mm****dz=5mm****A. Experimental conditions.**

Phantom File	zinf15.txt, Adaptive 2 max
Phantom	Body
Device Position	BackSide toward phantom
Band	GSM1900
Channels	Low
Signal	GSM

B. Instrumentations.

PC	HP (Pentium(R) V3.06GHz, SN:375052-AA1)	Calibrated: N/A
Wireless Communication Test Set	R&S (CMU200, SN:B23-03291)	Calibration Due: 05/25/2011
Network Analyzer	Agilent(E5071B, MY42301382)	Calibration Due: 03/24/2011
Voltmeter	Keithley (2000, SN:1015843)	Calibration Due: 05/25/2011
Signal Generator	Agilent (E8257C, SN:MY43321570)	Calibration Due: 03/24/2011
Amplifier	Mini-Circuits (ZHL-42, SN:110405)	Calibration Due: 07/29/2011
Power Meter	Agilent (E4416A, SN:QB41292714)	Calibration Due: 03/24/2011
Probe	Antennessa (SN:SN_1109_EP_100)	Calibration Due: 05/04/2011
DIPOLE 1900	Antennessa (DIPI36, SN 48/05)	Calibration Due: 02/09/2012
Phantom	Antennessa (SN:SN41_05_SAM29)	Calibrated: N/A
Liquid	Antennessa	Calibrated: N/A
Measurement SW	OPEN SAR V2.1	Calibrated: N/A

C. SAR Measurement Results


Frequency (MHz)	1850.400024
Relative permittivity (real part)	52.321420
Relative permittivity (imaginary part)	13.568140
Conductivity (S/m)	1.402642
Variation (%)	-0.120000
Ambient Temperature:	21 °C
Liquid Temperature:	20 °C
ConvF:	41.01, 42.41, 55.65




Crest factor:

1:8

SURFACE SAR

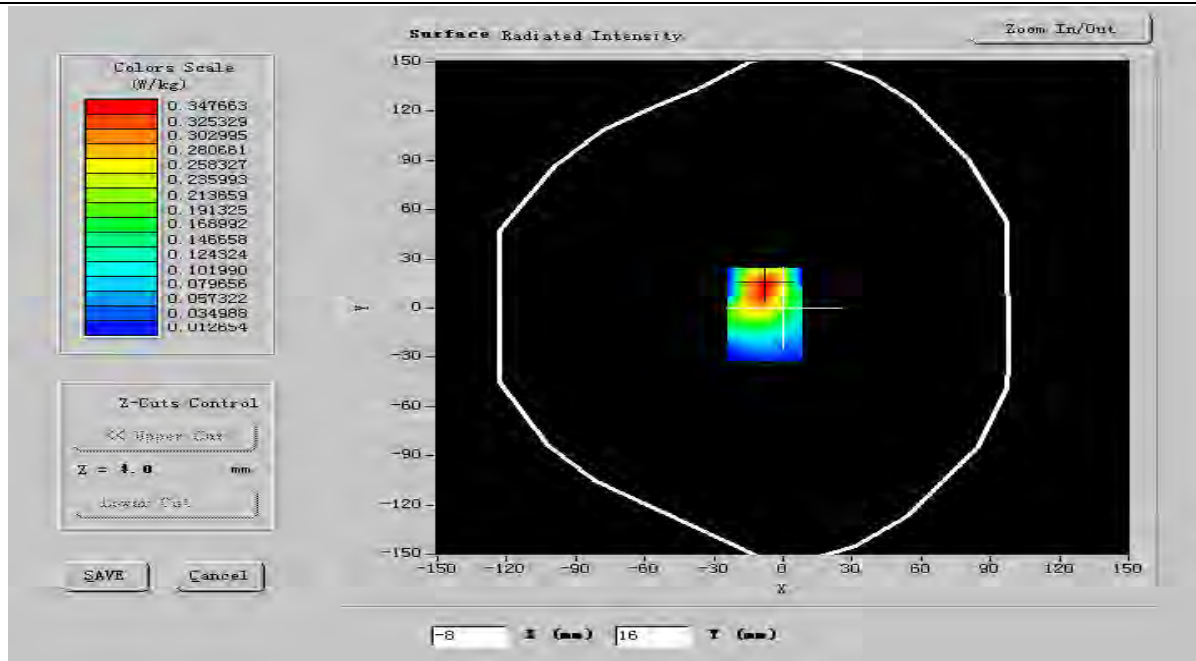

VOLUME SAR

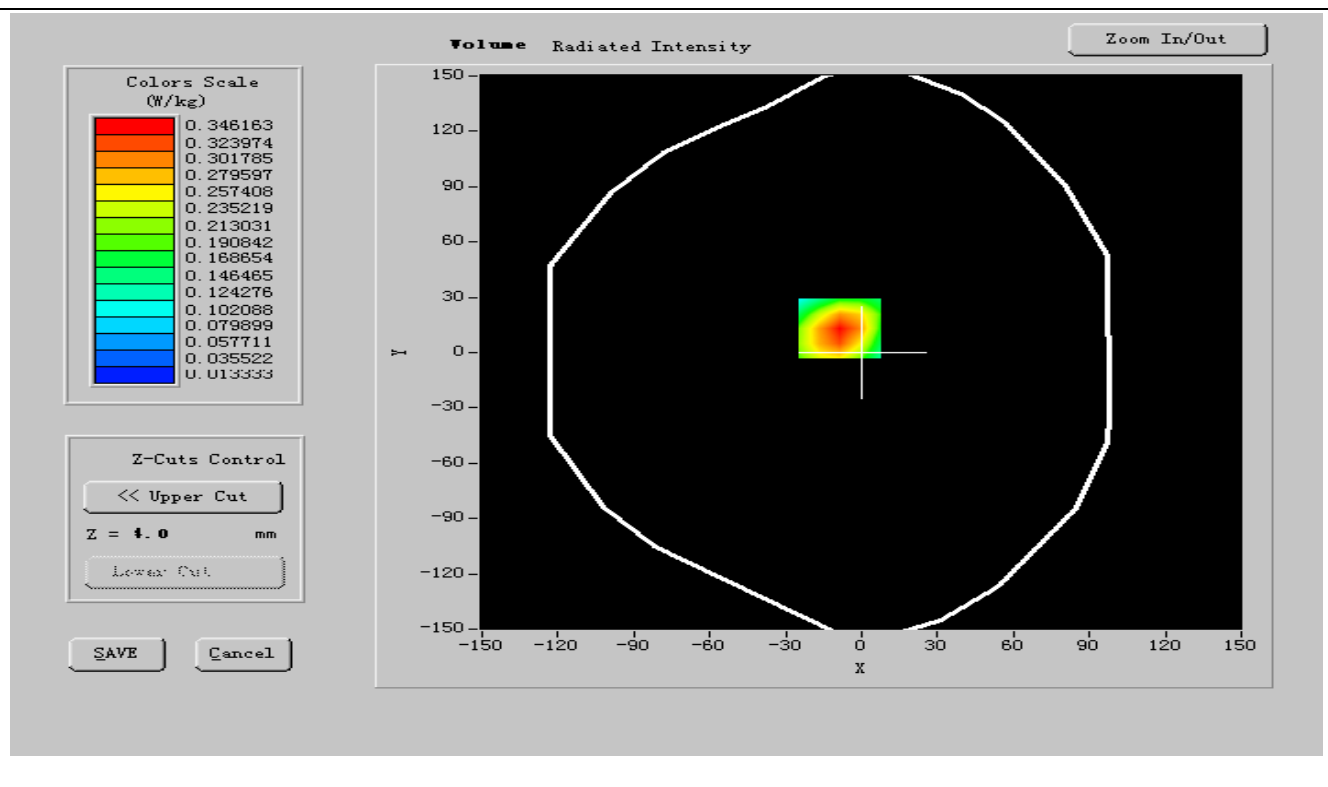




Maximum location: X=-13.00, Y=-3.00

SAR 10g (W/Kg)	0.202552
SAR 1g (W/Kg)	0.275963

Z Axis Scan

SAR, Z Axis Scan (X = -9, Y = 13)

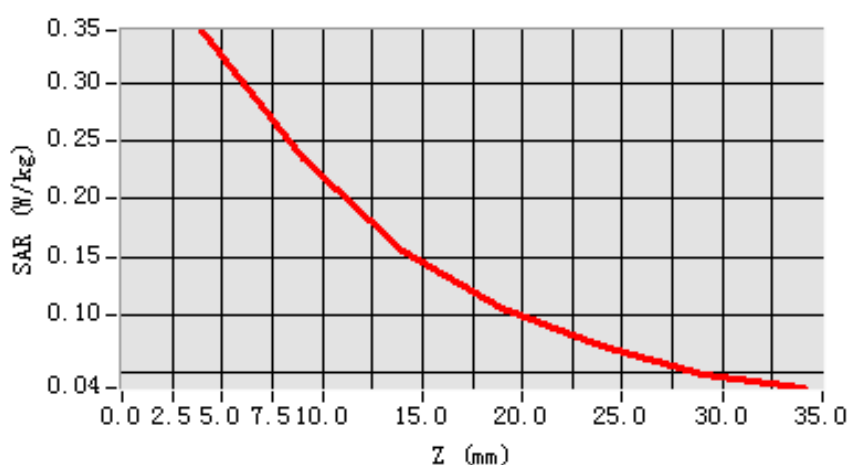



MEASUREMENT 17

Date of measurement: 02/20/2011**Area Scan: 7 x 7 x 1****dx=15mm****dy=15mm****Zoom Scan: 5 x 5 x 7****dx=5mm****dy=5mm****dz=5mm****Z Axis Scan: 1 x 1 x 21****dx=20mm****dy=20mm****dz=5mm**

A. Experimental conditions.

Phantom File	zinf15.txt, Adaptive 2 max
Phantom	Body
Device Position	BackSide toward phantom
Band	GSM1900
Channels	Middle
Signal	GSM

B. Instrumentations.

PC	HP (Pentium(R) V3.06GHz, SN:375052-AA1)	Calibrated: N/A
Wireless Communication Test Set	R&S (CMU200, SN:B23-03291)	Calibration Due: 05/25/2011
Network Analyzer	Agilent(E5071B, MY42301382)	Calibration Due: 03/24/2011
Voltmeter	Keithley (2000, SN:1015843)	Calibration Due: 05/25/2011
Signal Generator	Agilent (E8257C, SN:MY43321570)	Calibration Due: 03/24/2011
Amplifier	Mini-Circuits (ZHL-42, SN:110405)	Calibration Due: 07/29/2011
Power Meter	Agilent (E4416A, SN:QB41292714)	Calibration Due: 03/24/2011
Probe	Antennessa (SN:SN_1109_EP_100)	Calibration Due: 05/04/2011
DIPOLE 1900	Antennessa (DIPI36, SN 48/05)	Calibration Due: 02/09/2012
Phantom	Antennessa (SN:SN41_05_SAM29)	Calibrated: N/A
Liquid	Antennessa	Calibrated: N/A
Measurement SW	OPEN SAR V2.1	Calibrated: N/A

C. SAR Measurement Results

Frequency (MHz)	1880.000000
Relative permittivity (real part)	52.875621
Relative permittivity (imaginary part)	13.814200
Conductivity (S/m)	1.513241
Variation (%)	-0.720000
Ambient Temperature:	21 °C
Liquid Temperature:	20 °C




ConvF:

41.01, 42.41, 55.65


Crest factor:

1:8

SURFACE SAR

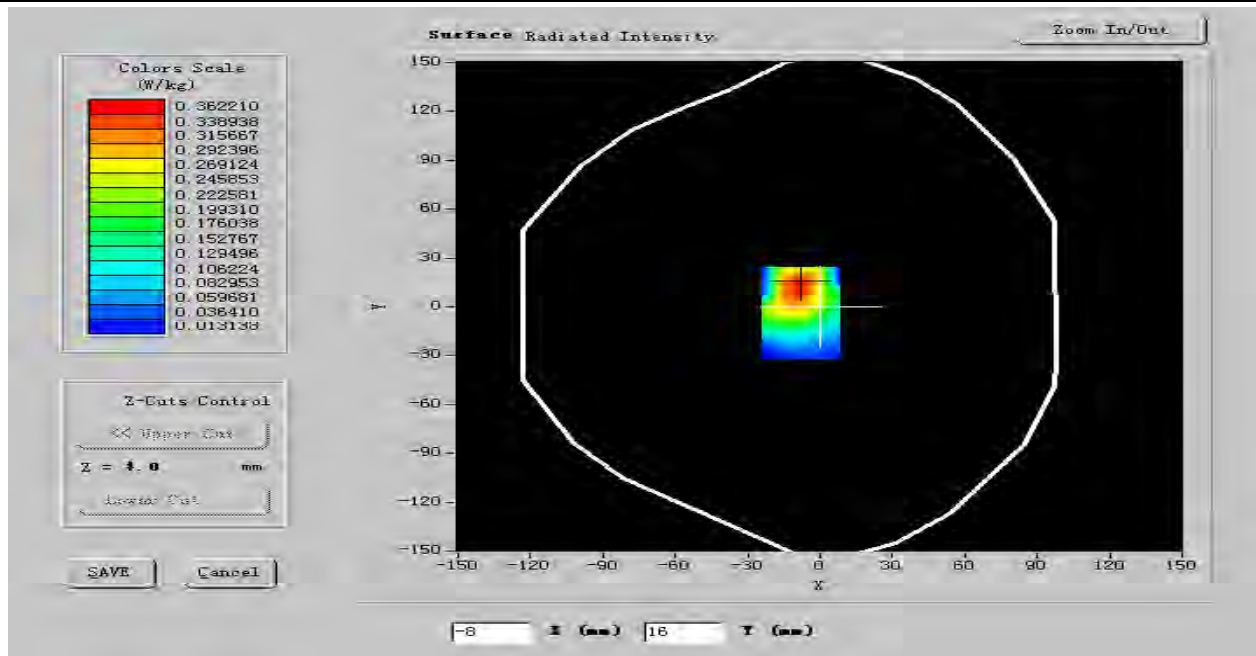

VOLUME SAR

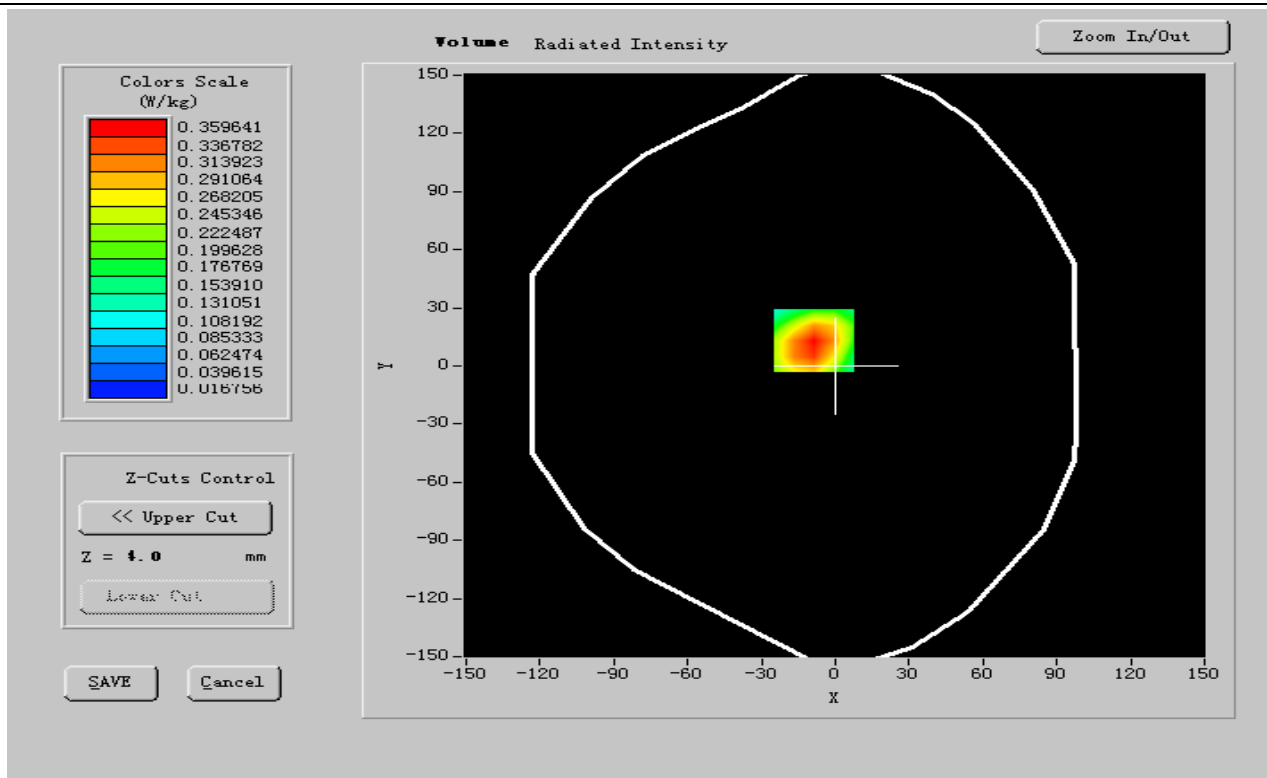




Maximum location: X=-13.00, Y=-3.00

SAR 10g (W/Kg)	0.212051
SAR 1g (W/Kg)	0.296349

Z Axis Scan

SAR, Z Axis Scan (X = -9, Y = 13)

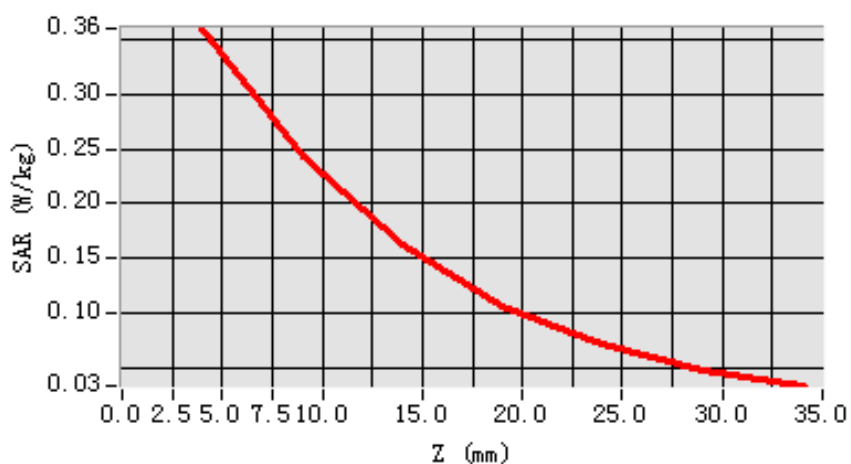



MEASUREMENT 18

Date of measurement: 02/20/2011**Area Scan: 7 x 7 x 1****dx=15mm****dy=15mm****Zoom Scan: 5 x 5 x 7****dx=5mm****dy=5mm****dz=5mm****Z Axis Scan: 1 x 1 x 21****dx=20mm****dy=20mm****dz=5mm**

A. Experimental conditions.

Phantom File	zinf15.txt, Adaptive 2 max
Phantom	Body
Device Position	BackSide toward phantom
Band	GSM1900
Channels	High
Signal	GSM

B. Instrumentations.

PC	HP (Pentium(R) V3.06GHz, SN:375052-AA1)	Calibrated: N/A
Wireless Communication Test Set	R&S (CMU200, SN:B23-03291)	Calibration Due: 05/25/2011
Network Analyzer	Agilent(E5071B, MY42301382)	Calibration Due: 03/24/2011
Voltmeter	Keithley (2000, SN:1015843)	Calibration Due: 05/25/2011
Signal Generator	Agilent (E8257C, SN:MY43321570)	Calibration Due: 03/24/2011
Amplifier	Mini-Circuits (ZHL-42, SN:110405)	Calibration Due: 07/29/2011
Power Meter	Agilent (E4416A, SN:QB41292714)	Calibration Due: 03/24/2011
Probe	Antennessa (SN:SN_1109_EP_100)	Calibration Due: 05/04/2011
DIPOLE 1900	Antennessa (DIPI36, SN 48/05)	Calibration Due: 02/09/2012
Phantom	Antennessa (SN:SN41_05_SAM29)	Calibrated: N/A
Liquid	Antennessa	Calibrated: N/A
Measurement SW	OPEN SAR V2.1	Calibrated: N/A

C. SAR Measurement Results

Frequency (MHz)	1909.599976
Relative permittivity (real part)	52.884854
Relative permittivity (imaginary part)	13.658620
Conductivity (S/m)	1.510225
Variation (%)	-0.600000
Ambient Temperature:	21 °C
Liquid Temperature:	20 °C




ConvF:

41.01, 42.41, 55.65


Crest factor:

1:8

SURFACE SAR

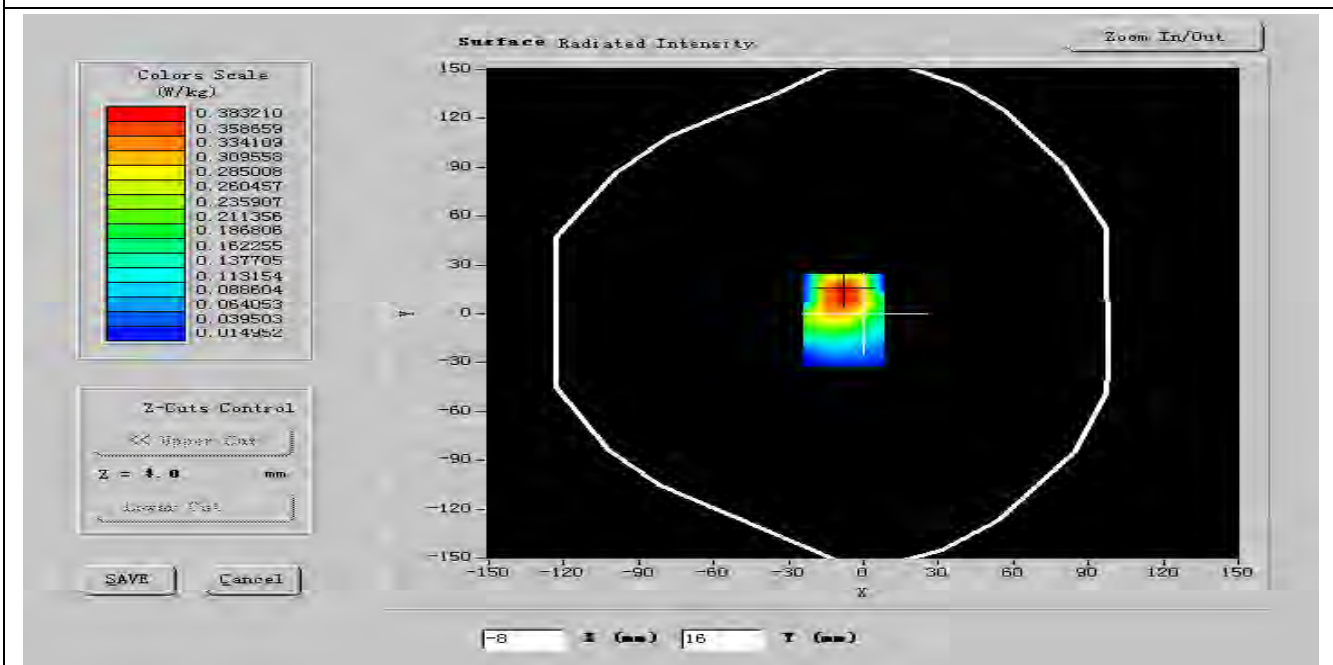

VOLUME SAR

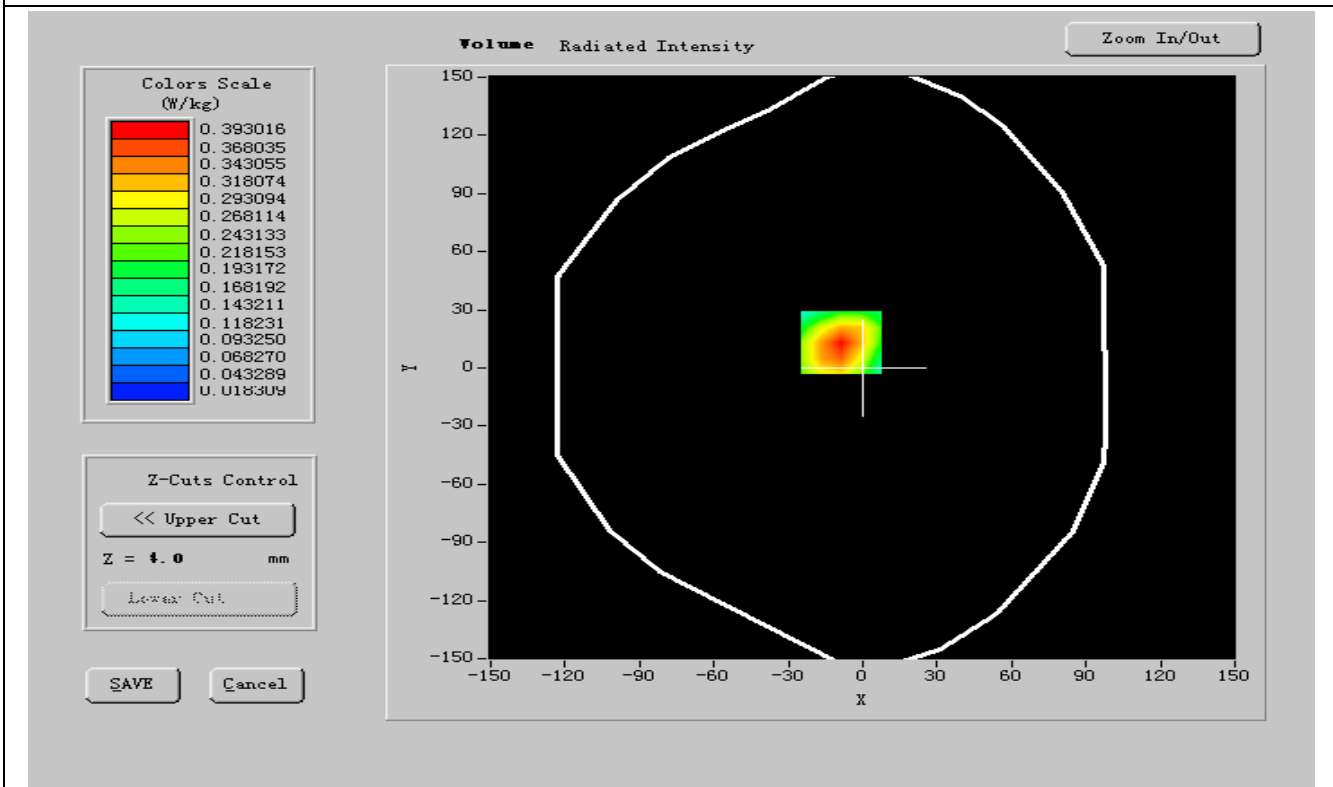




Maximum location: X=-13.00, Y=-3.00

SAR 10g (W/Kg)	0.242136
SAR 1g (W/Kg)	0.327830

Z Axis Scan

SAR, Z Axis Scan (X = -9, Y = 13)

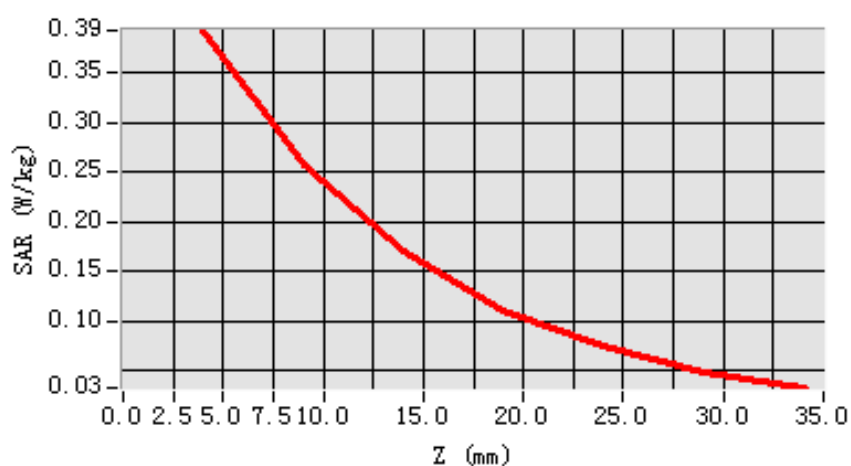

**MEASUREMENT 19****Date of measurement: 02/20/2011****Area Scan: 7 x 7 x 1****dx=15mm****dy=15mm****Zoom Scan: 5 x 5 x 7****dx=5mm****dy=5mm****dz=5mm****Z Axis Scan: 1 x 1 x 21****dx=20mm****dy=20mm****dz=5mm****A. Experimental conditions.**

Phantom File	zinf15.txt, Adaptive 2 max
Phantom	Body
Device Position	FrontSide toward phantom
Band	GPRS1900
Channels	Low
Signal	GPRS

B. Instrumentations.

PC	HP (Pentium(R) V3.06GHz, SN:375052-AA1)	Calibrated: N/A
Wireless Communication Test Set	R&S (CMU200, SN:B23-03291)	Calibration Due: 05/25/2011
Network Analyzer	Agilent(E5071B, MY42301382)	Calibration Due: 03/24/2011
Voltmeter	Keithley (2000, SN:1015843)	Calibration Due: 05/25/2011
Signal Generator	Agilent (E8257C, SN:MY43321570)	Calibration Due: 03/24/2011
Amplifier	Mini-Circuits (ZHL-42, SN:110405)	Calibration Due: 07/29/2011
Power Meter	Agilent (E4416A, SN:QB41292714)	Calibration Due: 03/24/2011
Probe	Antennessa (SN:SN_1109_EP_100)	Calibration Due: 05/04/2011
DIPOLE 1900	Antennessa (DIPI36, SN 48/05)	Calibration Due: 02/09/2012
Phantom	Antennessa (SN:SN41_05_SAM29)	Calibrated: N/A
Liquid	Antennessa	Calibrated: N/A
Measurement SW	OPEN SAR V2.1	Calibrated: N/A

C. SAR Measurement Results


Frequency (MHz)	1710.199951
Relative permittivity (real part)	52.347400
Relative permittivity (imaginary part)	14.450693
Conductivity (S/m)	1.533698
Variation (%)	-0.400000
Ambient Temperature:	21 °C
Liquid Temperature:	20 °C
ConvF:	41.01, 42.41, 55.65




Crest factor:

1:2

SURFACE SAR

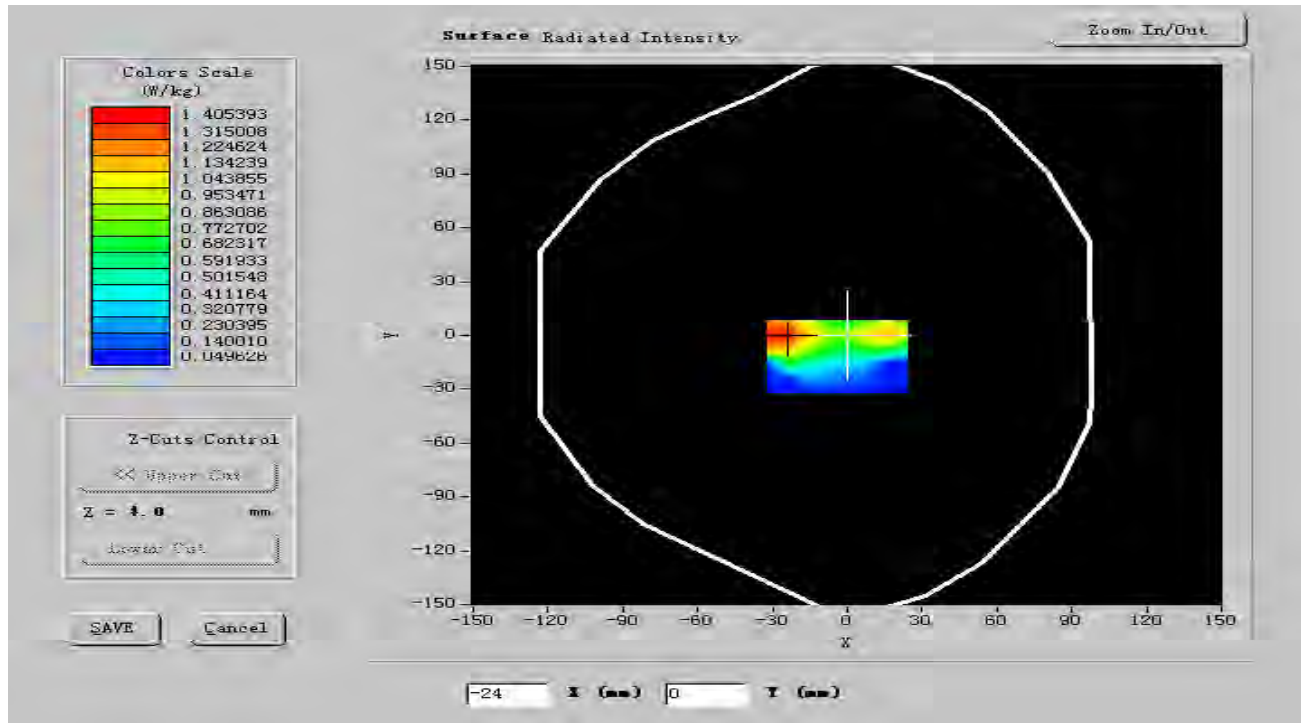

VOLUME SAR

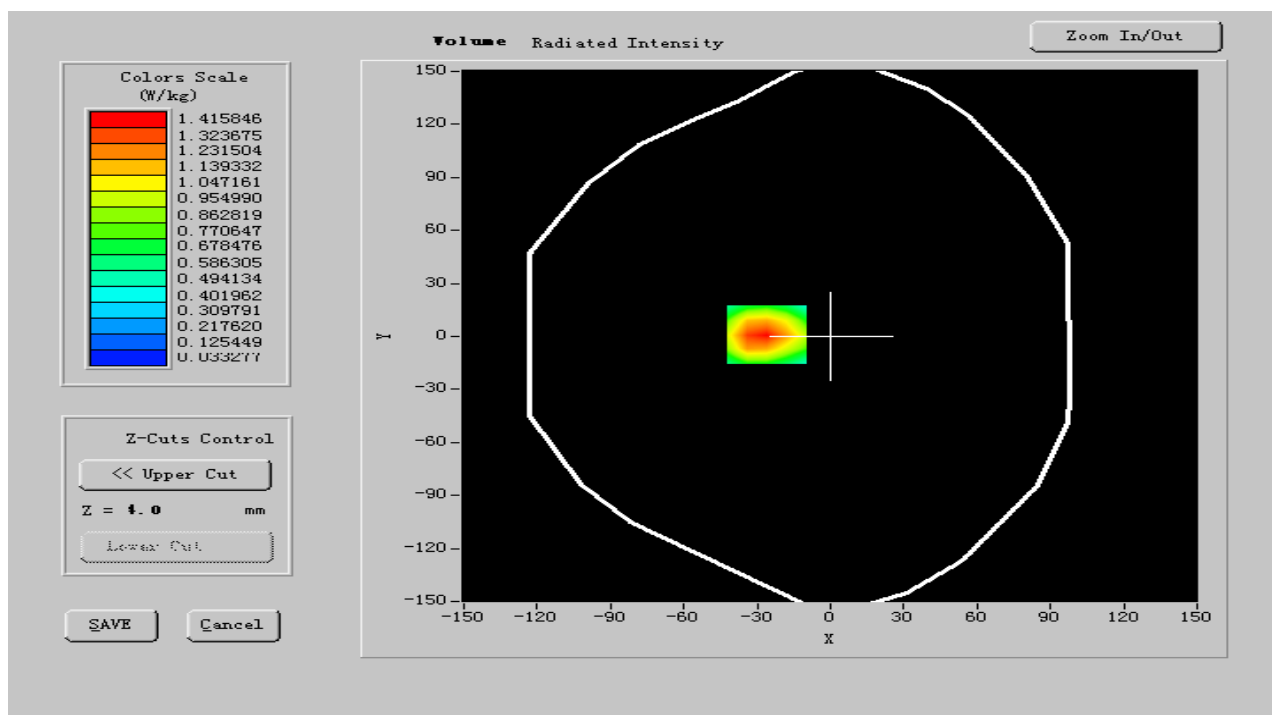




Maximum location: X=-13.00, Y=-3.00

SAR 10g (W/Kg)	0.219562
SAR 1g (W/Kg)	0.418852

Z Axis Scan

SAR, Z Axis Scan (X = -10, Y = 12)

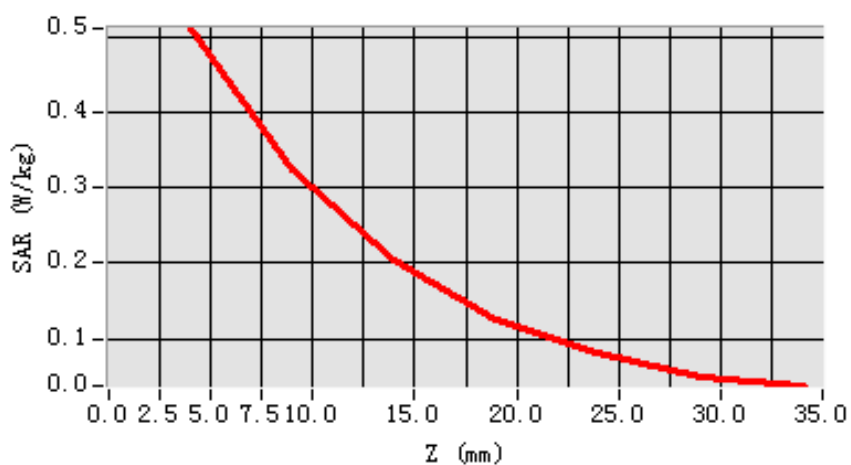



MEASUREMENT 20

Date of measurement: 02/20/2011**Area Scan: 7 x 7 x 1****dx=15mm****dy=15mm****Zoom Scan: 5 x 5 x 7****dx=5mm****dy=5mm****dz=5mm****Z Axis Scan: 1 x 1 x 21****dx=20mm****dy=20mm****dz=5mm**

A. Experimental conditions.

Phantom File	zinf15.txt, Adaptive 2 max
Phantom	Body
Device Position	FrontSide toward phantom
Band	GPRS1900
Channels	Middle
Signal	GPRS

B. Instrumentations.

PC	HP (Pentium(R) V3.06GHz, SN:375052-AA1)	Calibrated: N/A
Wireless Communication Test Set	R&S (CMU200, SN:B23-03291)	Calibration Due: 05/25/2011
Network Analyzer	Agilent(E5071B, MY42301382)	Calibration Due: 03/24/2011
Voltmeter	Keithley (2000, SN:1015843)	Calibration Due: 05/25/2011
Signal Generator	Agilent (E8257C, SN:MY43321570)	Calibration Due: 03/24/2011
Amplifier	Mini-Circuits (ZHL-42, SN:110405)	Calibration Due: 07/29/2011
Power Meter	Agilent (E4416A, SN:QB41292714)	Calibration Due: 03/24/2011
Probe	Antennessa (SN:SN_1109_EP_100)	Calibration Due: 05/04/2011
DIPOLE 1900	Antennessa (DIPI36, SN 48/05)	Calibration Due: 02/09/2012
Phantom	Antennessa (SN:SN41_05_SAM29)	Calibrated: N/A
Liquid	Antennessa	Calibrated: N/A
Measurement SW	OPEN SAR V2.1	Calibrated: N/A

C. SAR Measurement Results

Frequency (MHz)	1747.400004
Relative permittivity (real part)	51.417028
Relative permittivity (imaginary part)	14.293556
Conductivity (S/m)	1.514286
Variation (%)	-1.010000
Ambient Temperature:	21 °C
Liquid Temperature:	20 °C




ConvF:

41.01, 42.41, 55.65


Crest factor:

1:2

SURFACE SAR

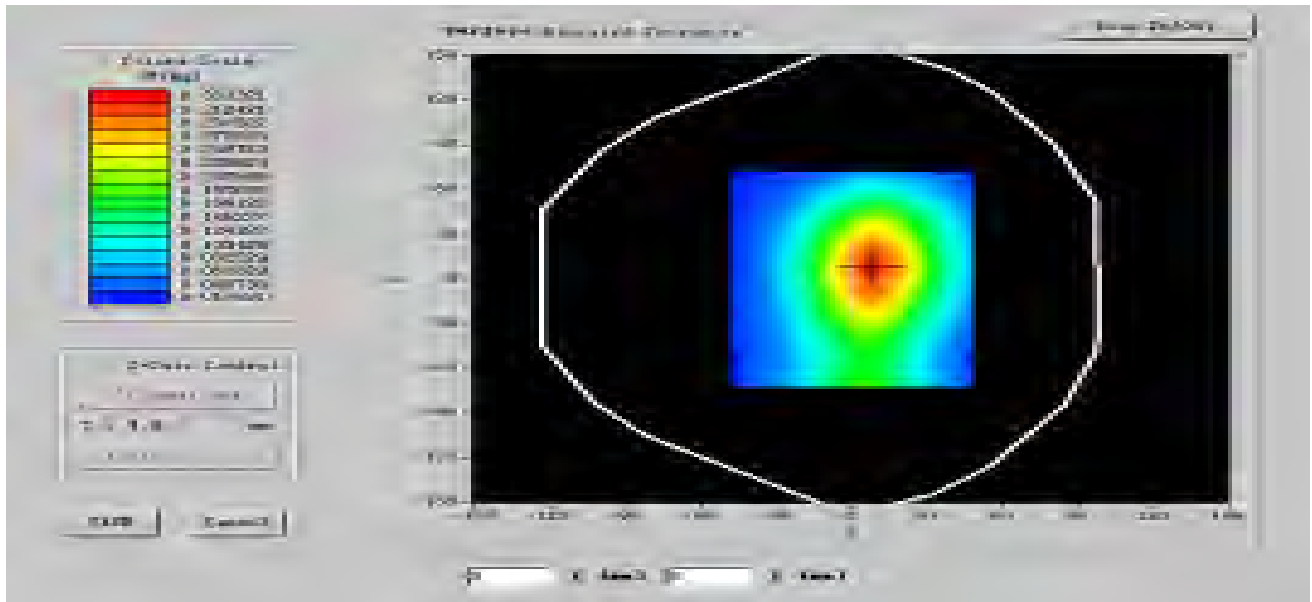

VOLUME SAR

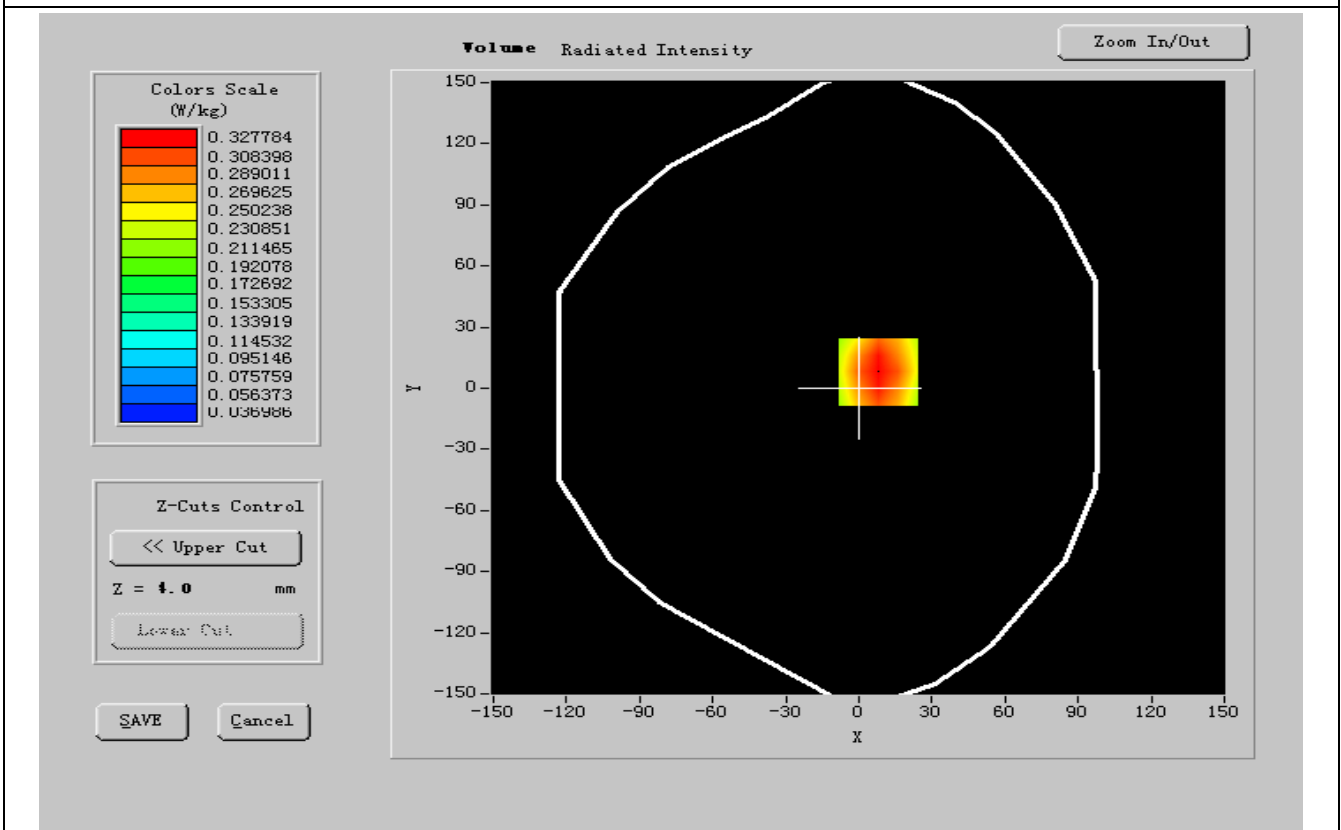




Maximum location: X=-13.00, Y=-3.00

SAR 10g (W/Kg)	0.215362
SAR 1g (W/Kg)	0.424258

Z Axis Scan

SAR, Z Axis Scan (X = -10, Y = 12)

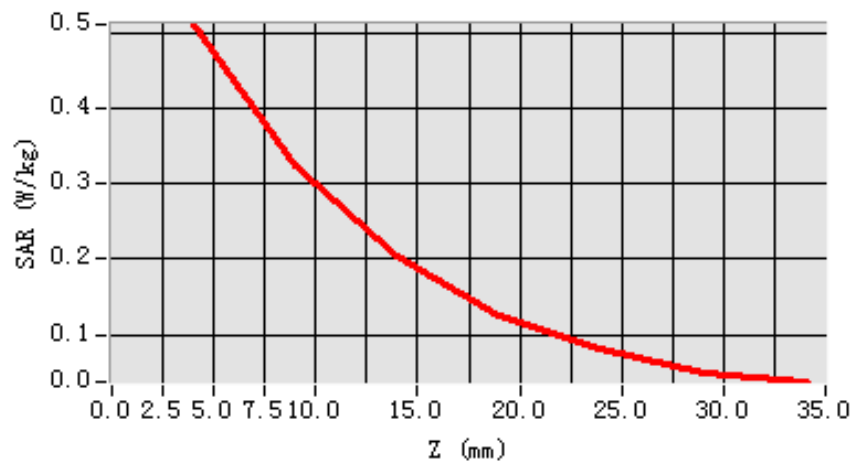



MEASUREMENT 21

Date of measurement: 02/20/2011**Area Scan: 7 x 7 x 1****dx=15mm****dy=15mm****Zoom Scan: 5 x 5 x 7****dx=5mm****dy=5mm****dz=5mm****Z Axis Scan: 1 x 1 x 21****dx=20mm****dy=20mm****dz=5mm**

A. Experimental conditions.

Phantom File	zinf15.txt, Adaptive 2 max
Phantom	Body
Device Position	FrontSide toward phantom
Band	GPRS1900
Channels	High
Signal	GPRS

B. Instrumentations.

PC	HP (Pentium(R) V3.06GHz, SN:375052-AA1)	Calibrated: N/A
Wireless Communication Test Set	R&S (CMU200, SN:B23-03291)	Calibration Due: 05/25/2011
Network Analyzer	Agilent(E5071B, MY42301382)	Calibration Due: 03/24/2011
Voltmeter	Keithley (2000, SN:1015843)	Calibration Due: 05/25/2011
Signal Generator	Agilent (E8257C, SN:MY43321570)	Calibration Due: 03/24/2011
Amplifier	Mini-Circuits (ZHL-42, SN:110405)	Calibration Due: 07/29/2011
Power Meter	Agilent (E4416A, SN:QB41292714)	Calibration Due: 03/24/2011
Probe	Antennessa (SN:SN_1109_EP_100)	Calibration Due: 05/04/2011
DIPOLE 1900	Antennessa (DIPI36, SN 48/05)	Calibration Due: 02/09/2012
Phantom	Antennessa (SN:SN41_05_SAM29)	Calibrated: N/A
Liquid	Antennessa	Calibrated: N/A
Measurement SW	OPEN SAR V2.1	Calibrated: N/A

C. SAR Measurement Results

Frequency (MHz)	1784.599036
Relative permittivity (real part)	51.813332
Relative permittivity (imaginary part)	14.319230
Conductivity (S/m)	1.513224
Variation (%)	-0.130000
Ambient Temperature:	21 °C
Liquid Temperature:	20 °C




ConvF:

41.01, 42.41, 55.65


Crest factor:

1:2

SURFACE SAR

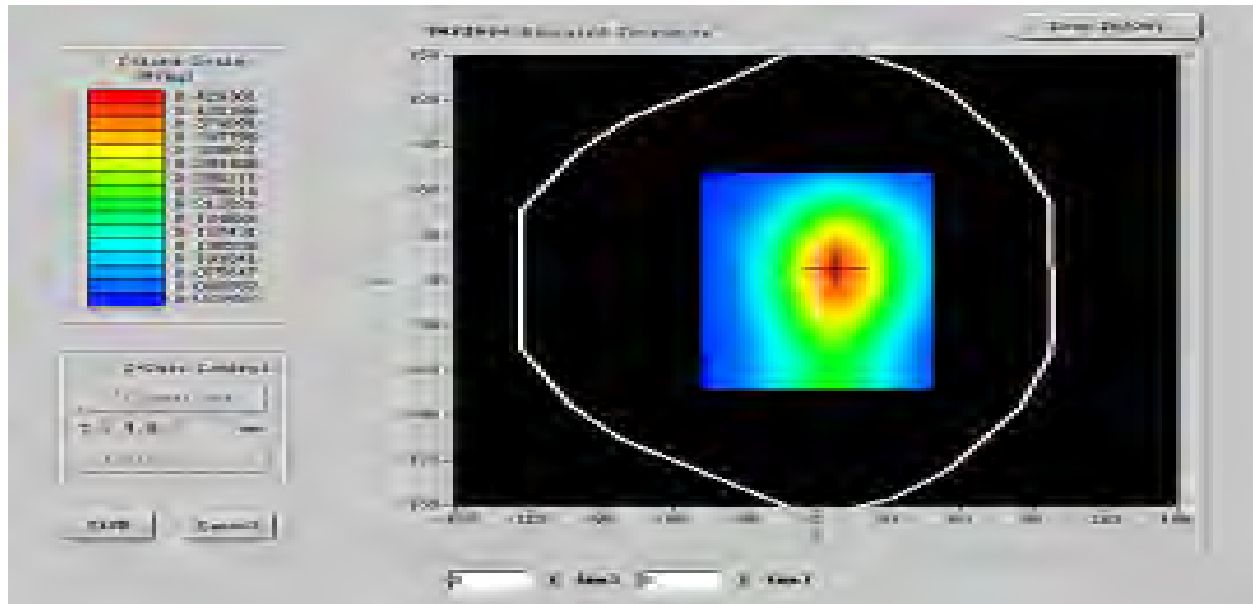

VOLUME SAR

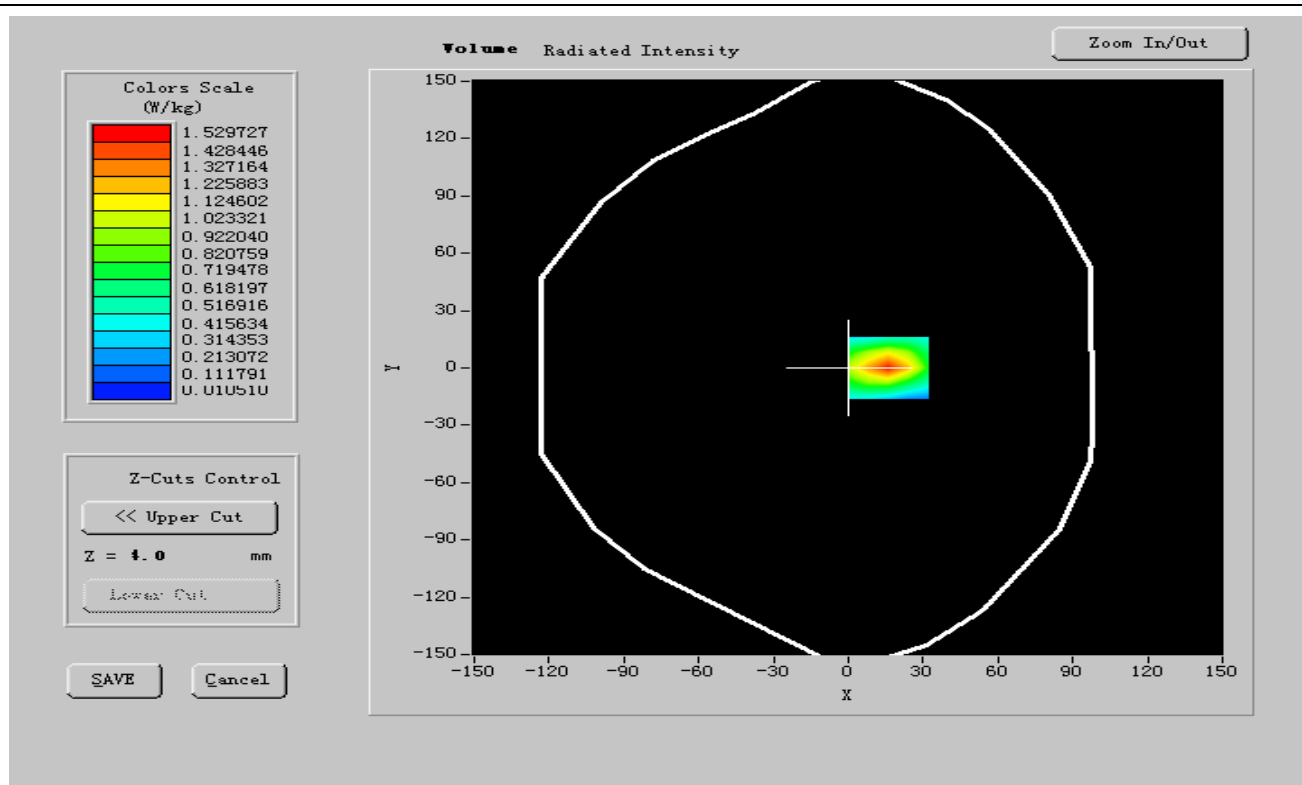




Maximum location: X=-13.00, Y=-3.00

SAR 10g (W/Kg)	0.265841
SAR 1g (W/Kg)	0.446721

Z Axis Scan

SAR, Z Axis Scan (X = -10, Y = 12)

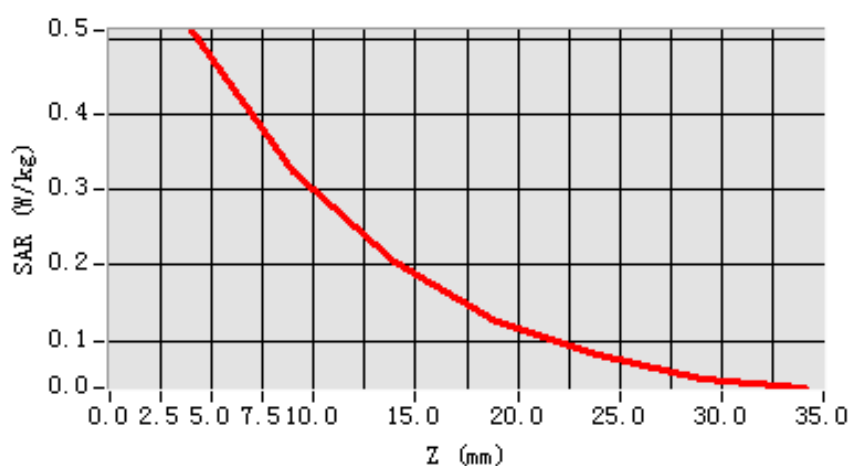

**MEASUREMENT 22****Date of measurement: 02/20/2011****Area Scan: 7 x 7 x 1****dx=15mm****dy=15mm****Zoom Scan: 5 x 5 x 7****dx=5mm****dy=5mm****dz=5mm****Z Axis Scan: 1 x 1 x 21****dx=20mm****dy=20mm****dz=5mm****A. Experimental conditions.**

Phantom File	zinf15.txt, Adaptive 2 max
Phantom	Body
Device Position	BackSide toward phantom
Band	GPRS1900
Channels	Low
Signal	GPRS

B. Instrumentations.

PC	HP (Pentium(R) V3.06GHz, SN:375052-AA1)	Calibrated: N/A
Wireless Communication Test Set	R&S (CMU200, SN:B23-03291)	Calibration Due: 05/25/2011
Network Analyzer	Agilent(E5071B, MY42301382)	Calibration Due: 03/24/2011
Voltmeter	Keithley (2000, SN:1015843)	Calibration Due: 05/25/2011
Signal Generator	Agilent (E8257C, SN:MY43321570)	Calibration Due: 03/24/2011
Amplifier	Mini-Circuits (ZHL-42, SN:110405)	Calibration Due: 07/29/2011
Power Meter	Agilent (E4416A, SN:QB41292714)	Calibration Due: 03/24/2011
Probe	Antennessa (SN:SN_1109_EP_100)	Calibration Due: 05/04/2011
DIPOLE 1900	Antennessa (DIPI36, SN 48/05)	Calibration Due: 02/09/2012
Phantom	Antennessa (SN:SN41_05_SAM29)	Calibrated: N/A
Liquid	Antennessa	Calibrated: N/A
Measurement SW	OPEN SAR V2.1	Calibrated: N/A

C. SAR Measurement Results


Frequency (MHz)	1710.199951
Relative permittivity (real part)	52.362100
Relative permittivity (imaginary part)	14.448303
Conductivity (S/m)	1.520398
Variation (%)	-0.200000
Ambient Temperature:	21 °C
Liquid Temperature:	20 °C
ConvF:	41.01, 42.41, 55.65




Crest factor:

1:2

SURFACE SAR

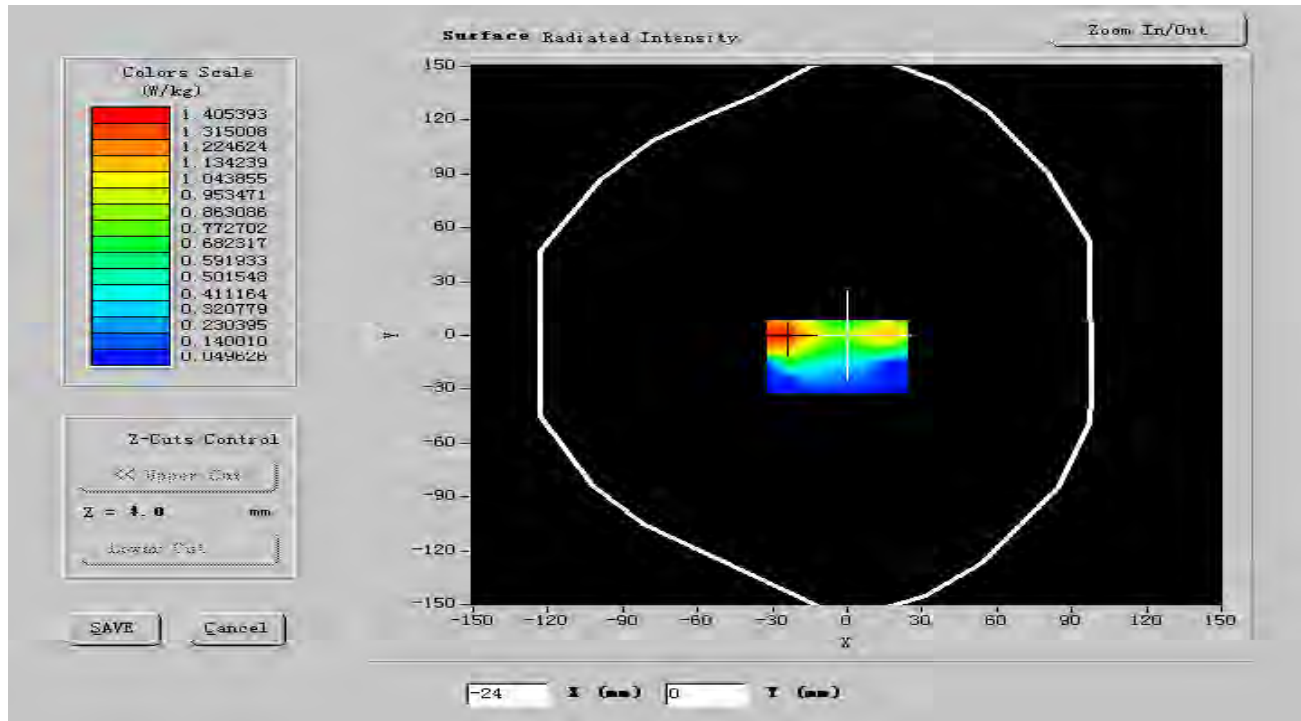

VOLUME SAR

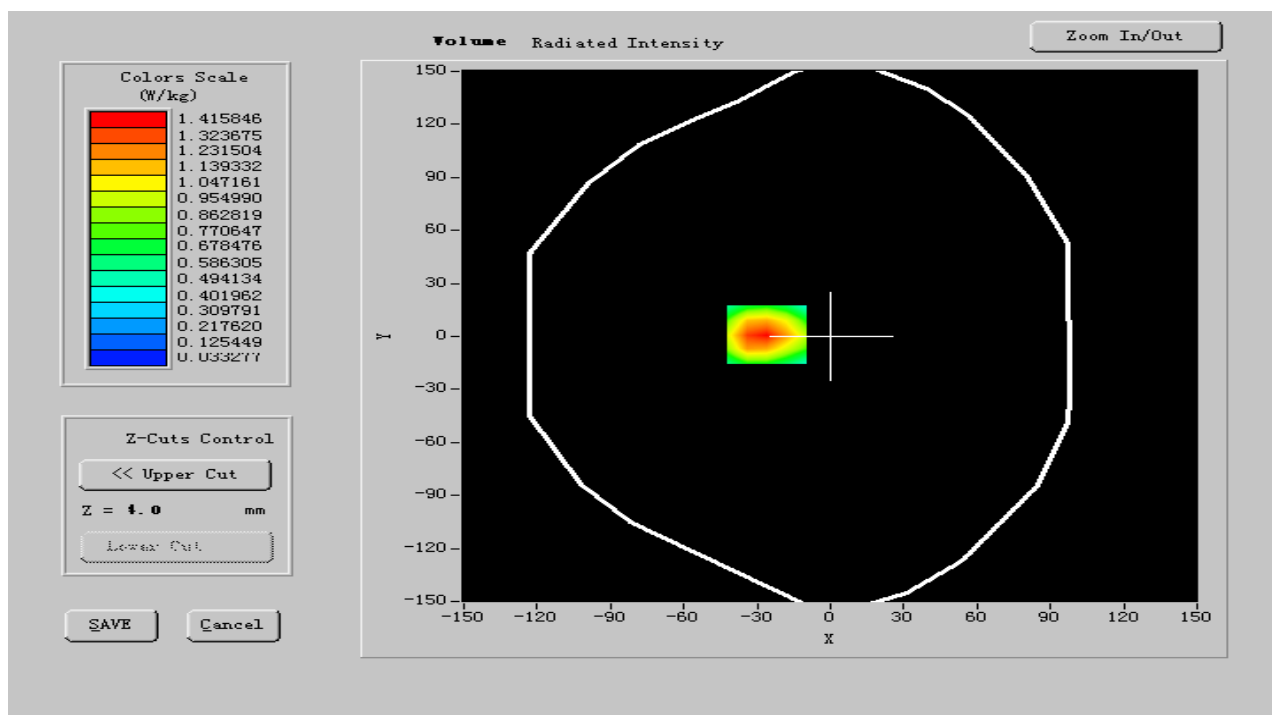




Maximum location: X=-13.00, Y=-3.00

SAR 10g (W/Kg)	0.203682
SAR 1g (W/Kg)	0.442510

Z Axis Scan

SAR, Z Axis Scan (X = -10, Y = 12)

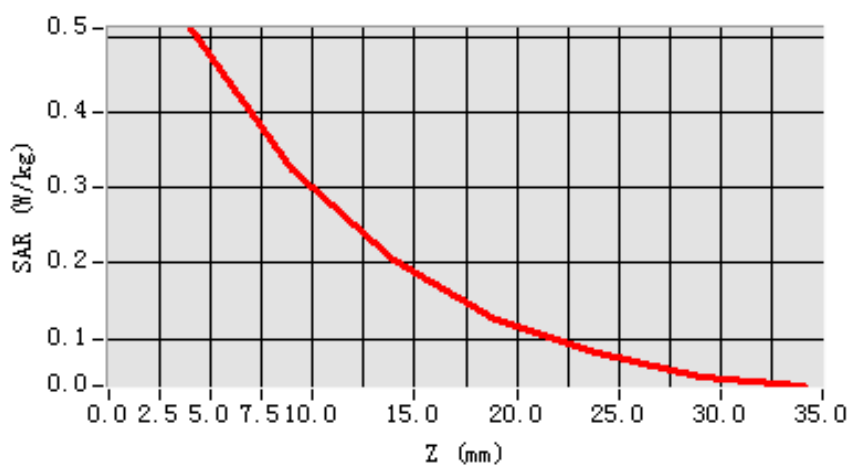



MEASUREMENT 23

Date of measurement: 02/20/2011**Area Scan: 7 x 7 x 1****dx=15mm****dy=15mm****Zoom Scan: 5 x 5 x 7****dx=5mm****dy=5mm****dz=5mm****Z Axis Scan: 1 x 1 x 21****dx=20mm****dy=20mm****dz=5mm**

A. Experimental conditions.

Phantom File	zinf15.txt, Adaptive 2 max
Phantom	Body
Device Position	BackSide toward phantom
Band	GPRS1900
Channels	Middle
Signal	GPRS

B. Instrumentations.

PC	HP (Pentium(R) V3.06GHz, SN:375052-AA1)	Calibrated: N/A
Wireless Communication Test Set	R&S (CMU200, SN:B23-03291)	Calibration Due: 05/25/2011
Network Analyzer	Agilent(E5071B, MY42301382)	Calibration Due: 03/24/2011
Voltmeter	Keithley (2000, SN:1015843)	Calibration Due: 05/25/2011
Signal Generator	Agilent (E8257C, SN:MY43321570)	Calibration Due: 03/24/2011
Amplifier	Mini-Circuits (ZHL-42, SN:110405)	Calibration Due: 07/29/2011
Power Meter	Agilent (E4416A, SN:QB41292714)	Calibration Due: 03/24/2011
Probe	Antennessa (SN:SN_1109_EP_100)	Calibration Due: 05/04/2011
DIPOLE 1900	Antennessa (DIPI36, SN 48/05)	Calibration Due: 02/09/2012
Phantom	Antennessa (SN:SN41_05_SAM29)	Calibrated: N/A
Liquid	Antennessa	Calibrated: N/A
Measurement SW	OPEN SAR V2.1	Calibrated: N/A

C. SAR Measurement Results

Frequency (MHz)	1747.400004
Relative permittivity (real part)	51.414928
Relative permittivity (imaginary part)	14.293740
Conductivity (S/m)	1.513216
Variation (%)	-1.000000
Ambient Temperature:	21 °C
Liquid Temperature:	20 °C




ConvF:

41.01, 42.41, 55.65


Crest factor:

1:2

SURFACE SAR

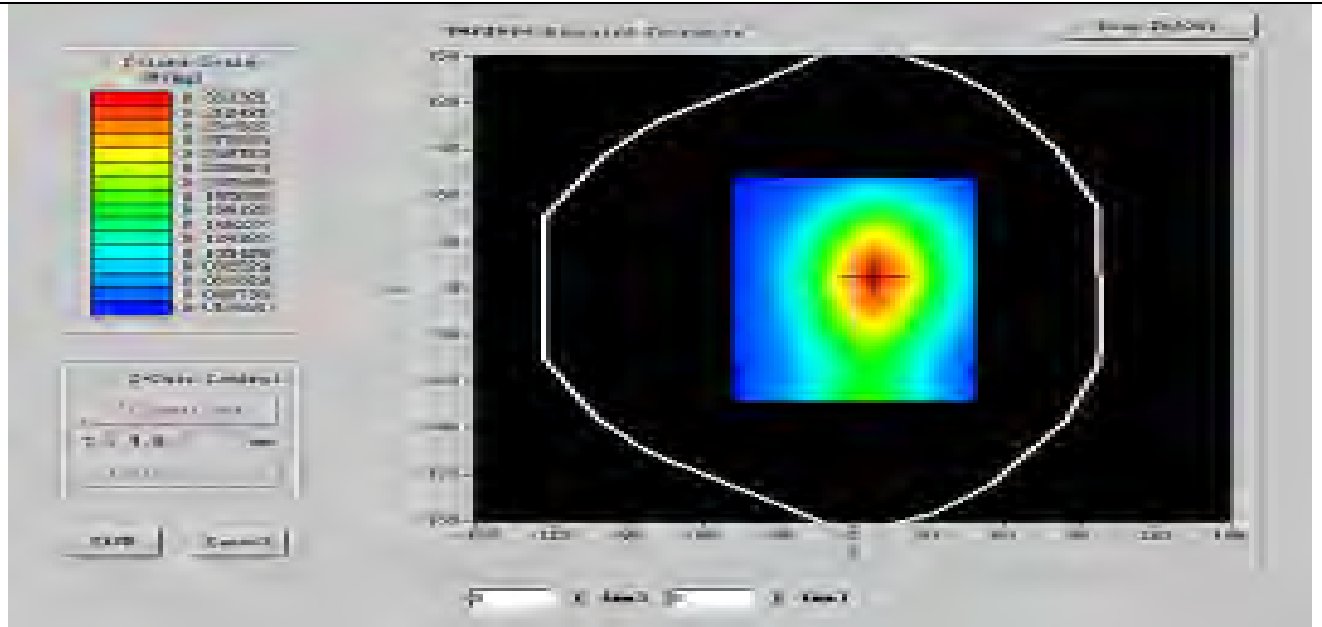

VOLUME SAR

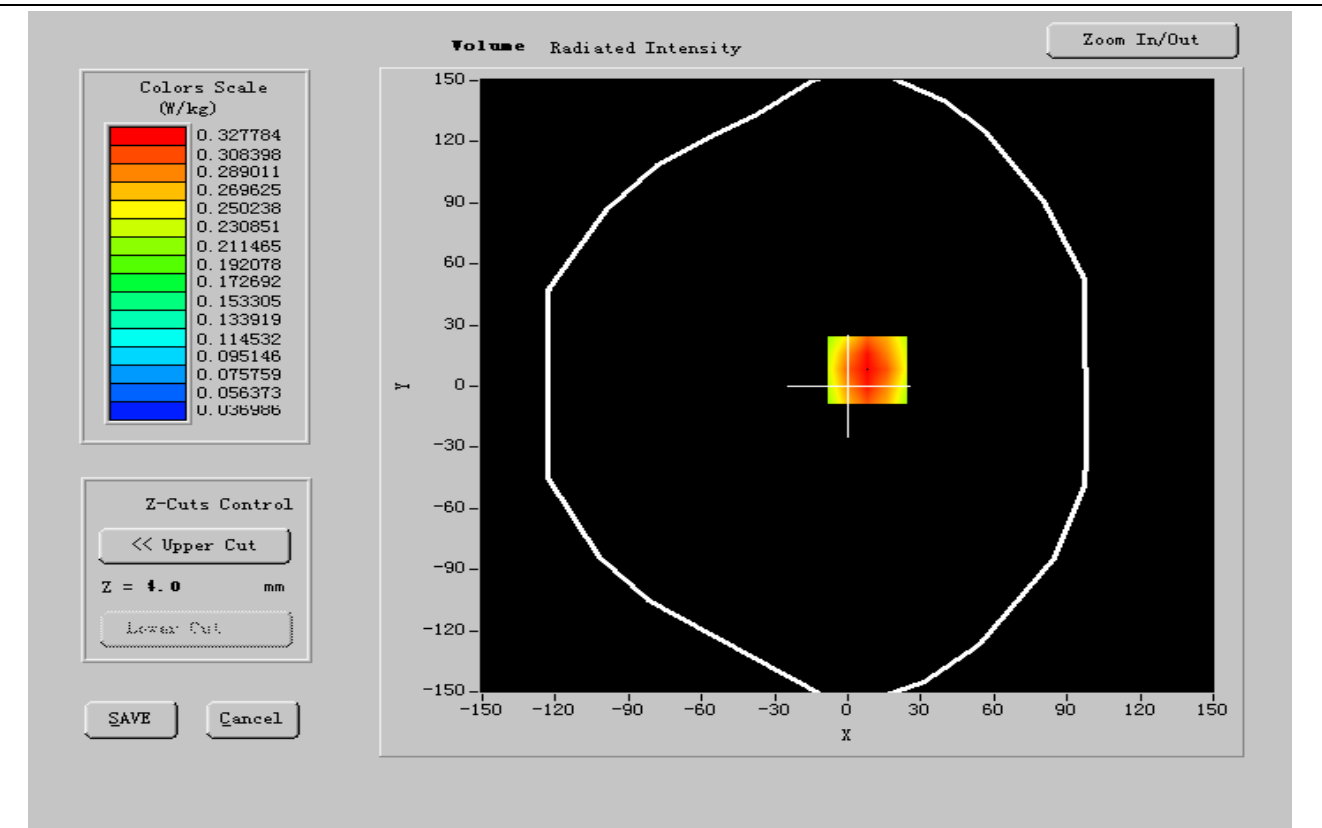




Maximum location: X=-13.00, Y=-3.00

SAR 10g (W/Kg)	0.215462
SAR 1g (W/Kg)	0.395658

Z Axis Scan

SAR, Z Axis Scan (X = -10, Y = 12)

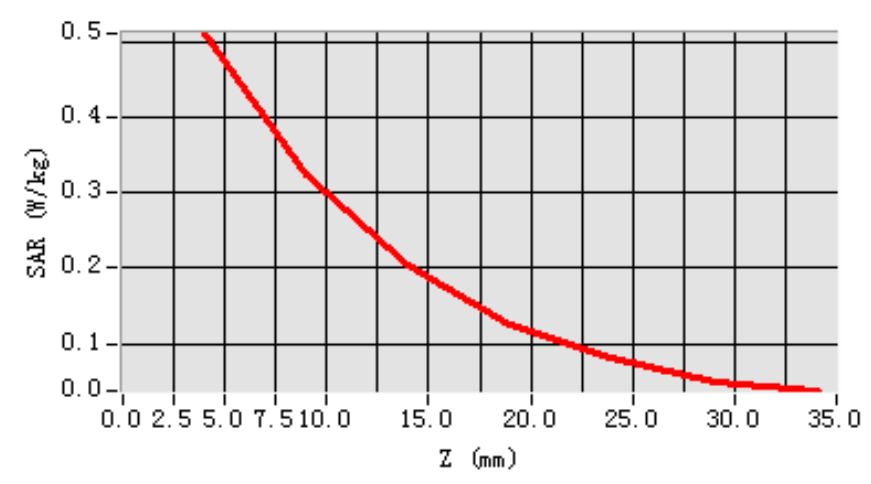



MEASUREMENT 24

Date of measurement: 02/20/2011**Area Scan: 7 x 7 x 1****dx=15mm****dy=15mm****Zoom Scan: 5 x 5 x 7****dx=5mm****dy=5mm****dz=5mm****Z Axis Scan: 1 x 1 x 21****dx=20mm****dy=20mm****dz=5mm**

A. Experimental conditions.

Phantom File	zinf15.txt, Adaptive 2 max
Phantom	Body
Device Position	BackSide toward phantom
Band	GPRS1900
Channels	High
Signal	GPRS

B. Instrumentations.

PC	HP (Pentium(R) V3.06GHz, SN:375052-AA1)	Calibrated: N/A
Wireless Communication Test Set	R&S (CMU200, SN:B23-03291)	Calibration Due: 05/25/2011
Network Analyzer	Agilent(E5071B, MY42301382)	Calibration Due: 03/24/2011
Voltmeter	Keithley (2000, SN:1015843)	Calibration Due: 05/25/2011
Signal Generator	Agilent (E8257C, SN:MY43321570)	Calibration Due: 03/24/2011
Amplifier	Mini-Circuits (ZHL-42, SN:110405)	Calibration Due: 07/29/2011
Power Meter	Agilent (E4416A, SN:QB41292714)	Calibration Due: 03/24/2011
Probe	Antennessa (SN:SN_1109_EP_100)	Calibration Due: 05/04/2011
DIPOLE 1900	Antennessa (DIPI36, SN 48/05)	Calibration Due: 02/09/2012
Phantom	Antennessa (SN:SN41_05_SAM29)	Calibrated: N/A
Liquid	Antennessa	Calibrated: N/A
Measurement SW	OPEN SAR V2.1	Calibrated: N/A

C. SAR Measurement Results

Frequency (MHz)	1784.599036
Relative permittivity (real part)	51.811452
Relative permittivity (imaginary part)	14.323150
Conductivity (S/m)	1.514304
Variation (%)	-0.120000
Ambient Temperature:	21 °C
Liquid Temperature:	20 °C




ConvF:

41.01, 42.41, 55.65


Crest factor:

1:2

SURFACE SAR

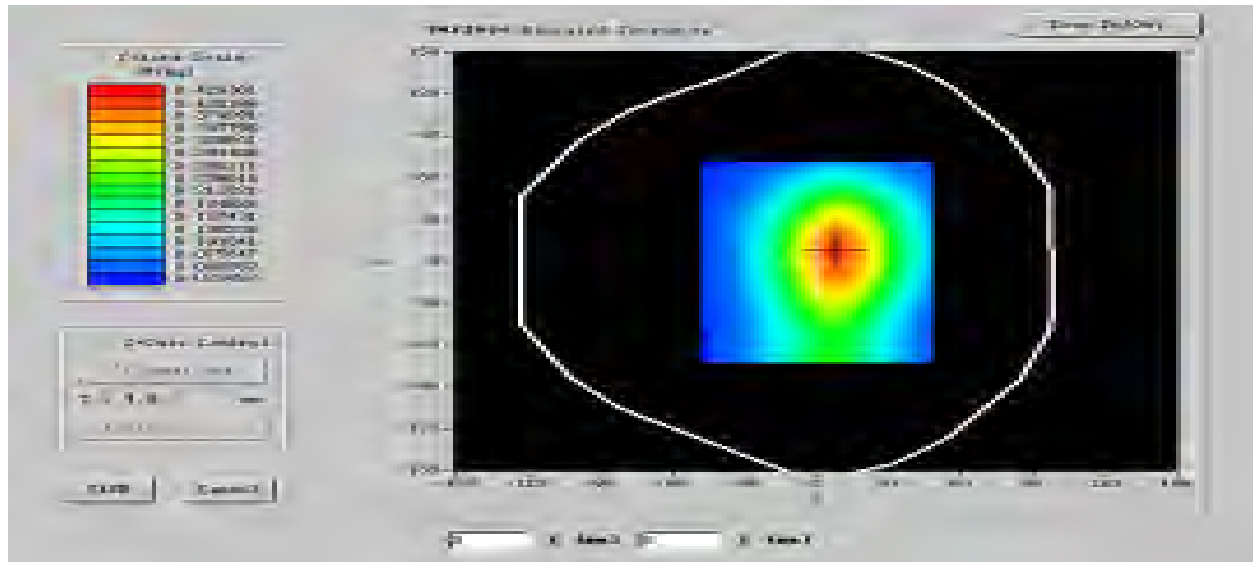

VOLUME SAR

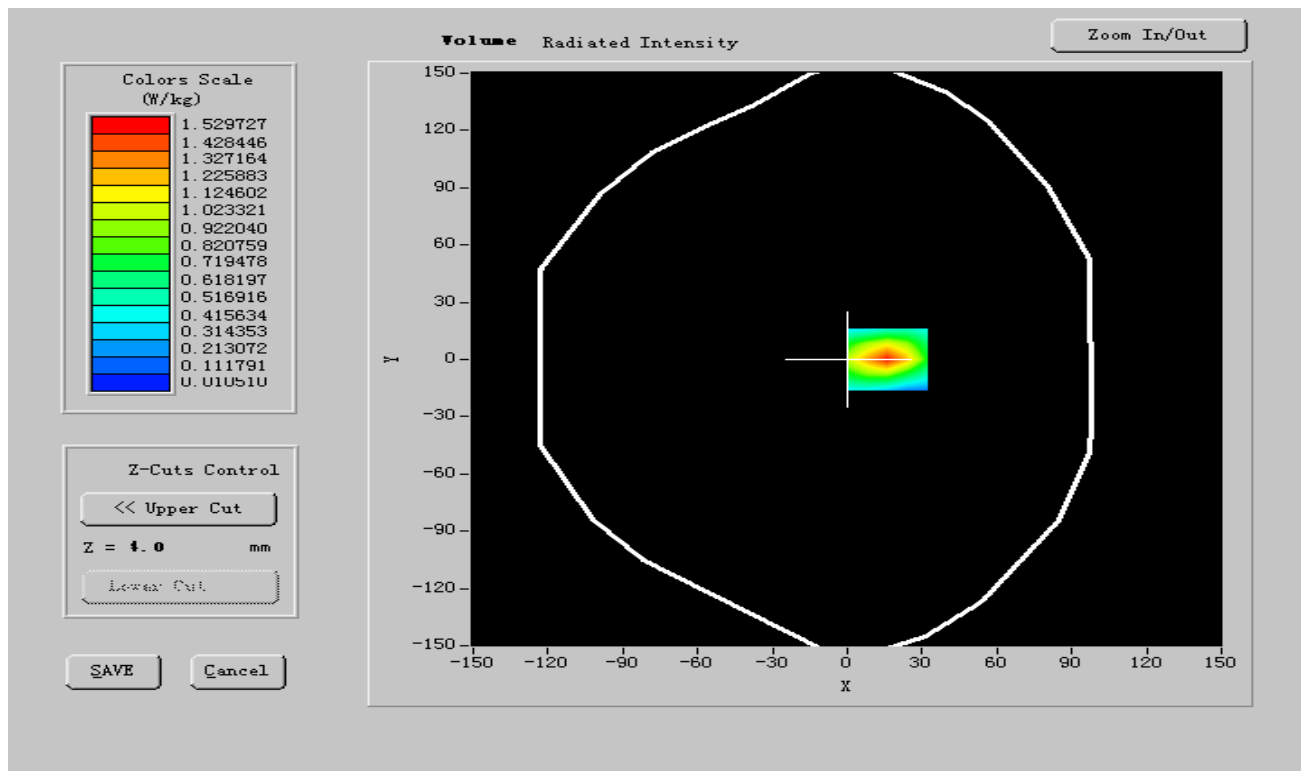




Maximum location: X=-13.00, Y=-3.00

SAR 10g (W/Kg)	0.246921
SAR 1g (W/Kg)	0.406312

Z Axis Scan

SAR, Z Axis Scan (X = -10, Y = 12)

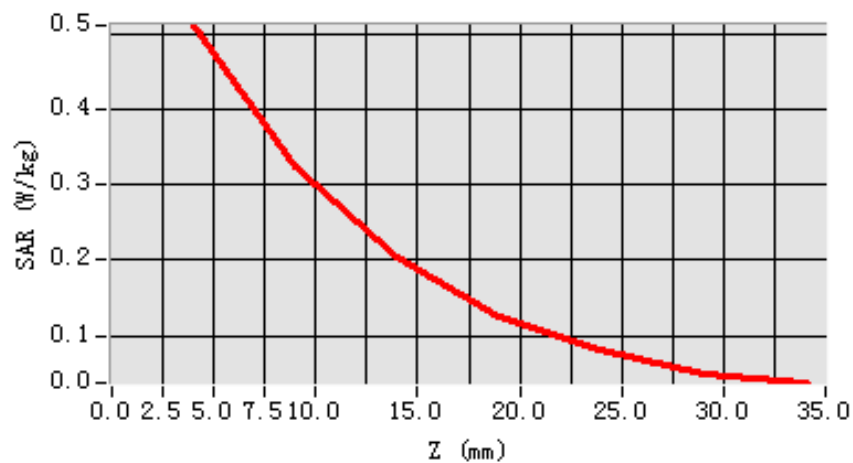

**MEASUREMENT 25****Date of measurement: 02/20/2011****Area Scan: 7 x 7 x 1****dx=15mm****dy=15mm****Zoom Scan: 5 x 5 x 7****dx=5mm****dy=5mm****dz=5mm****Z Axis Scan: 1 x 1 x 21****dx=20mm****dy=20mm****dz=5mm****A. Experimental conditions.**

Phantom File	zinf15.txt, Adaptive 2 max
Phantom	Body
Device Position	FrontSide toward phantom
Band	EDGE1900
Channels	Low
Signal	EDGE

B. Instrumentations.

PC	HP (Pentium(R) V3.06GHz, SN:375052-AA1)	Calibrated: N/A
Wireless Communication Test Set	R&S (CMU200, SN:B23-03291)	Calibration Due: 05/25/2011
Network Analyzer	Agilent(E5071B, MY42301382)	Calibration Due: 03/24/2011
Voltmeter	Keithley (2000, SN:1015843)	Calibration Due: 05/25/2011
Signal Generator	Agilent (E8257C, SN:MY43321570)	Calibration Due: 03/24/2011
Amplifier	Mini-Circuits (ZHL-42, SN:110405)	Calibration Due: 07/29/2011
Power Meter	Agilent (E4416A, SN:QB41292714)	Calibration Due: 03/24/2011
Probe	Antennessa (SN:SN_1109_EP_100)	Calibration Due: 05/04/2011
DIPOLE 1900	Antennessa (DIPI36, SN 48/05)	Calibration Due: 02/09/2012
Phantom	Antennessa (SN:SN41_05_SAM29)	Calibrated: N/A
Liquid	Antennessa	Calibrated: N/A
Measurement SW	OPEN SAR V2.1	Calibrated: N/A

C. SAR Measurement Results


Frequency (MHz)	1710.199951
Relative permittivity (real part)	52.347400
Relative permittivity (imaginary part)	14.450693
Conductivity (S/m)	1.533698
Variation (%)	-0.400000
Ambient Temperature:	21 °C
Liquid Temperature:	20 °C
ConvF:	41.01, 42.41, 55.65




Crest factor:

1:2

SURFACE SAR

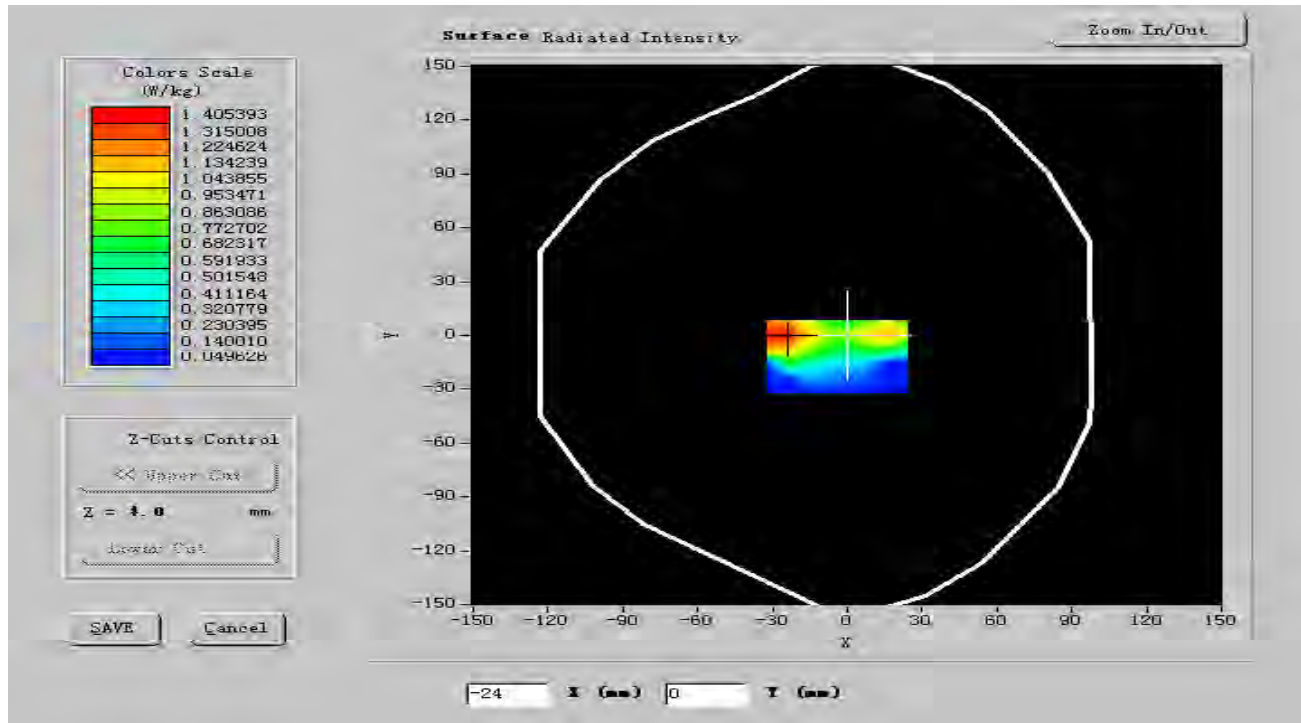

VOLUME SAR

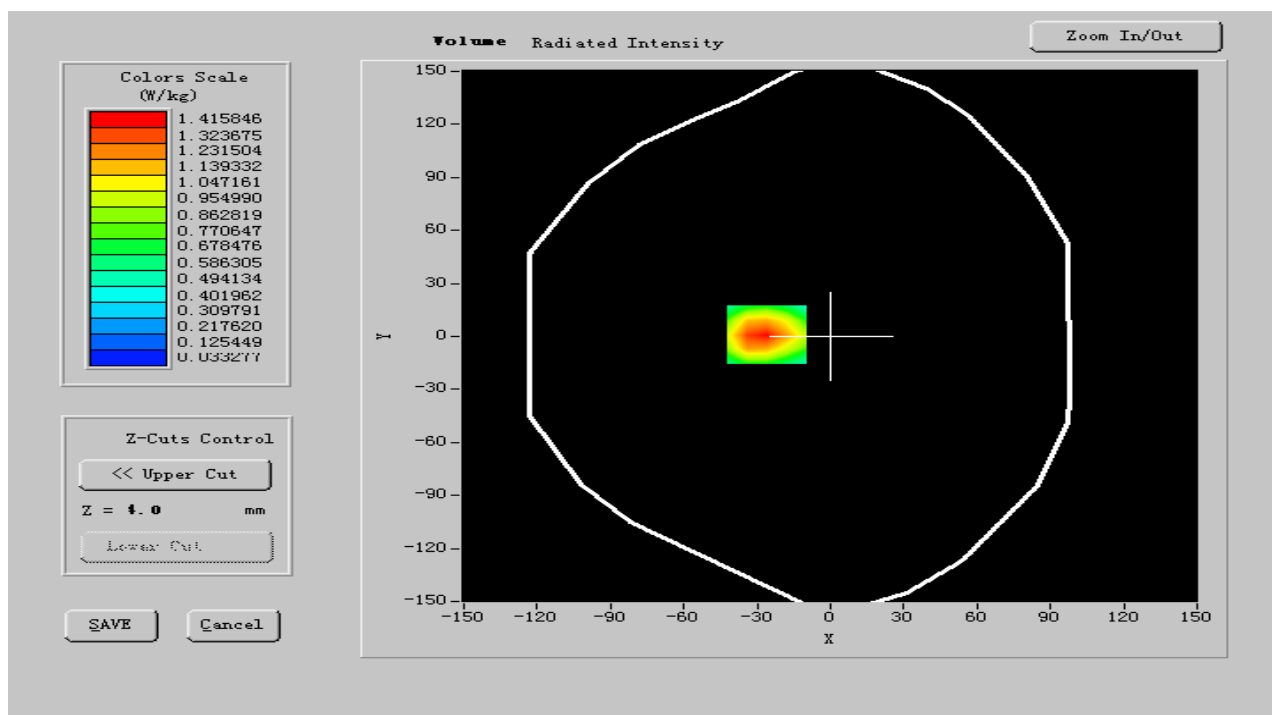




Maximum location: X=-13.00, Y=-3.00

SAR 10g (W/Kg)	0.192140
SAR 1g (W/Kg)	0.452101

Z Axis Scan

SAR, Z Axis Scan (X = -10, Y = 12)

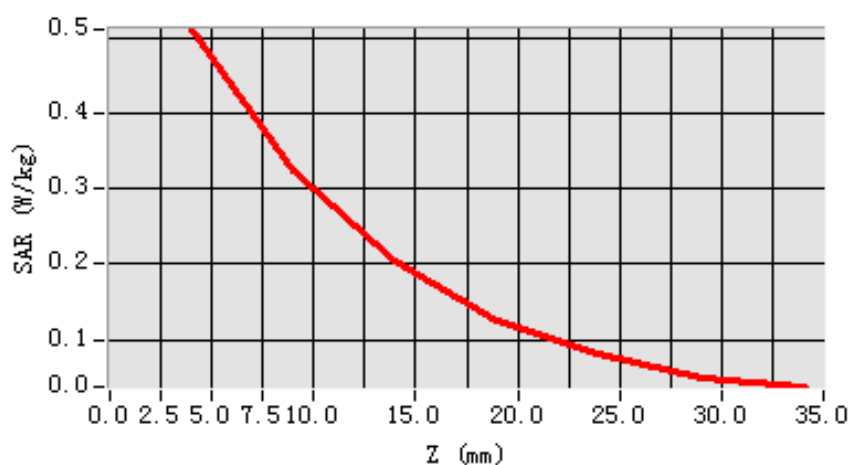



MEASUREMENT 26

Date of measurement: 02/20/2011**Area Scan: 7 x 7 x 1****dx=15mm****dy=15mm****Zoom Scan: 5 x 5 x 7****dx=5mm****dy=5mm****dz=5mm****Z Axis Scan: 1 x 1 x 21****dx=20mm****dy=20mm****dz=5mm**

A. Experimental conditions.

Phantom File	zinf15.txt, Adaptive 2 max
Phantom	Body
Device Position	FrontSide toward phantom
Band	EDGE 1900
Channels	Middle
Signal	EDGE

B. Instrumentations.

PC	HP (Pentium(R) V3.06GHz, SN:375052-AA1)	Calibrated: N/A
Wireless Communication Test Set	R&S (CMU200, SN:B23-03291)	Calibration Due: 05/25/2011
Network Analyzer	Agilent(E5071B, MY42301382)	Calibration Due: 03/24/2011
Voltmeter	Keithley (2000, SN:1015843)	Calibration Due: 05/25/2011
Signal Generator	Agilent (E8257C, SN:MY43321570)	Calibration Due: 03/24/2011
Amplifier	Mini-Circuits (ZHL-42, SN:110405)	Calibration Due: 07/29/2011
Power Meter	Agilent (E4416A, SN:QB41292714)	Calibration Due: 03/24/2011
Probe	Antennessa (SN:SN_1109_EP_100)	Calibration Due: 05/04/2011
DIPOLE 1900	Antennessa (DIPI36, SN 48/05)	Calibration Due: 02/09/2012
Phantom	Antennessa (SN:SN41_05_SAM29)	Calibrated: N/A
Liquid	Antennessa	Calibrated: N/A
Measurement SW	OPEN SAR V2.1	Calibrated: N/A

C. SAR Measurement Results

Frequency (MHz)	1747.400004
Relative permittivity (real part)	51.417028
Relative permittivity (imaginary part)	14.293556
Conductivity (S/m)	1.514286
Variation (%)	-1.010000
Ambient Temperature:	21 °C
Liquid Temperature:	20 °C




ConvF:

41.01, 42.41, 55.65


Crest factor:

1:2

SURFACE SAR

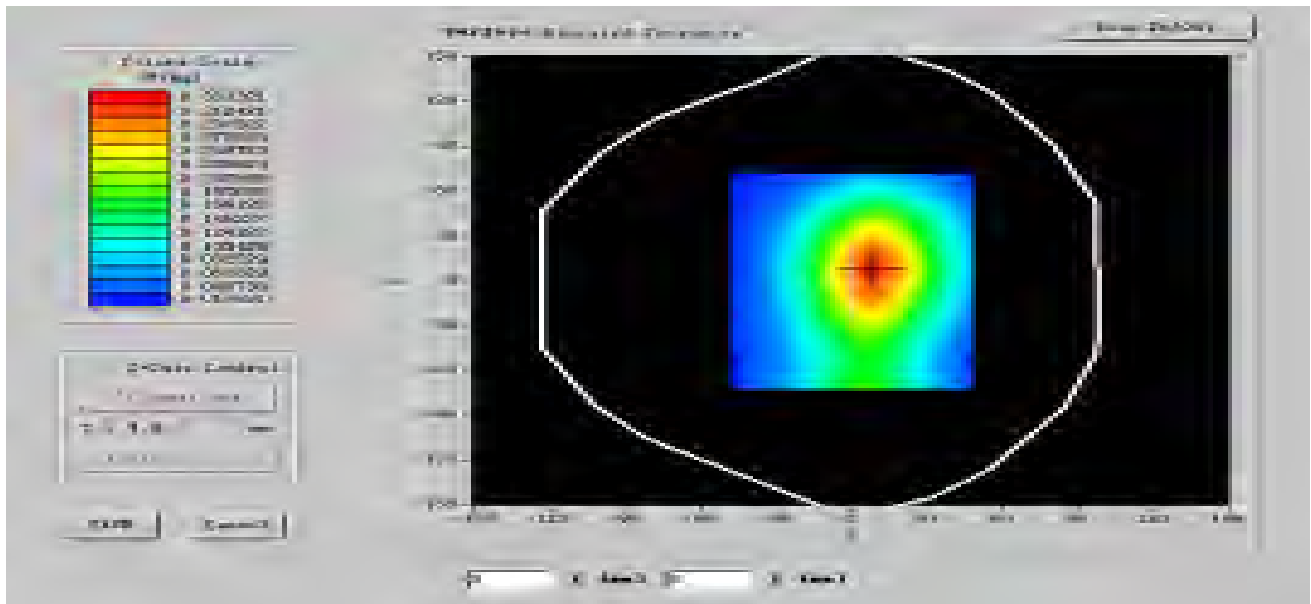

VOLUME SAR

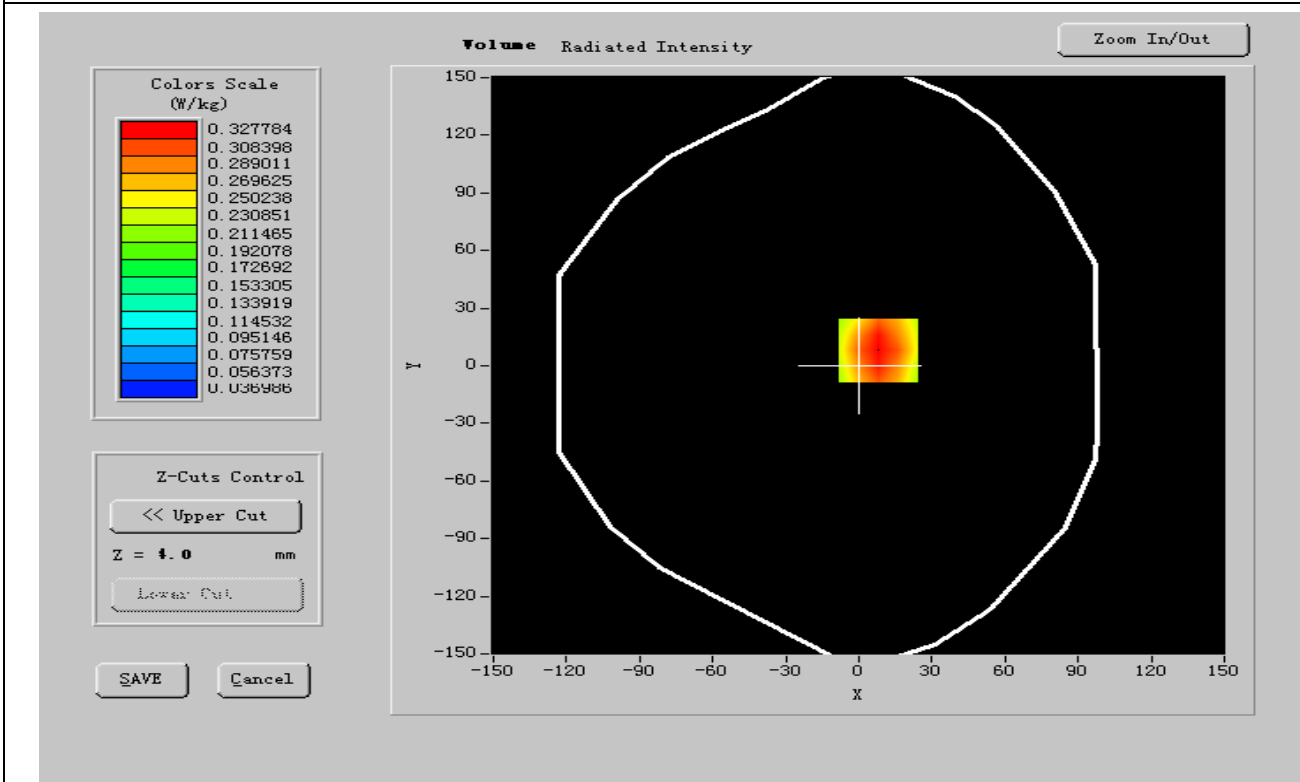




Maximum location: X=-13.00, Y=-3.00

SAR 10g (W/Kg)	0.210212
SAR 1g (W/Kg)	0.403521

Z Axis Scan

SAR, Z Axis Scan (X = -10, Y = 12)

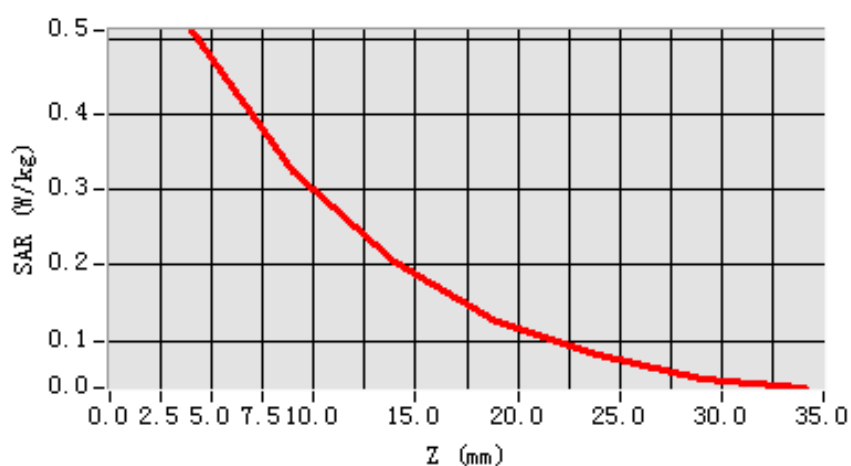



MEASUREMENT 27

Date of measurement: 02/20/2011**Area Scan: 7 x 7 x 1****dx=15mm****dy=15mm****Zoom Scan: 5 x 5 x 7****dx=5mm****dy=5mm****dz=5mm****Z Axis Scan: 1 x 1 x 21****dx=20mm****dy=20mm****dz=5mm**

A. Experimental conditions.

Phantom File	zinf15.txt, Adaptive 2 max
Phantom	Body
Device Position	FrontSide toward phantom
Band	EDGE 1900
Channels	High
Signal	EDGE

B. Instrumentations.

PC	HP (Pentium(R) V3.06GHz, SN:375052-AA1)	Calibrated: N/A
Wireless Communication Test Set	R&S (CMU200, SN:B23-03291)	Calibration Due: 05/25/2011
Network Analyzer	Agilent(E5071B, MY42301382)	Calibration Due: 03/24/2011
Voltmeter	Keithley (2000, SN:1015843)	Calibration Due: 05/25/2011
Signal Generator	Agilent (E8257C, SN:MY43321570)	Calibration Due: 03/24/2011
Amplifier	Mini-Circuits (ZHL-42, SN:110405)	Calibration Due: 07/29/2011
Power Meter	Agilent (E4416A, SN:QB41292714)	Calibration Due: 03/24/2011
Probe	Antennessa (SN:SN_1109_EP_100)	Calibration Due: 05/04/2011
DIPOLE 1900	Antennessa (DIPI36, SN 48/05)	Calibration Due: 02/09/2012
Phantom	Antennessa (SN:SN41_05_SAM29)	Calibrated: N/A
Liquid	Antennessa	Calibrated: N/A
Measurement SW	OPEN SAR V2.1	Calibrated: N/A

C. SAR Measurement Results

Frequency (MHz)	1784.599036
Relative permittivity (real part)	51.813332
Relative permittivity (imaginary part)	14.319230
Conductivity (S/m)	1.513224
Variation (%)	-0.130000
Ambient Temperature:	21 °C
Liquid Temperature:	20 °C




ConvF:

41.01, 42.41, 55.65


Crest factor:

1:2

SURFACE SAR

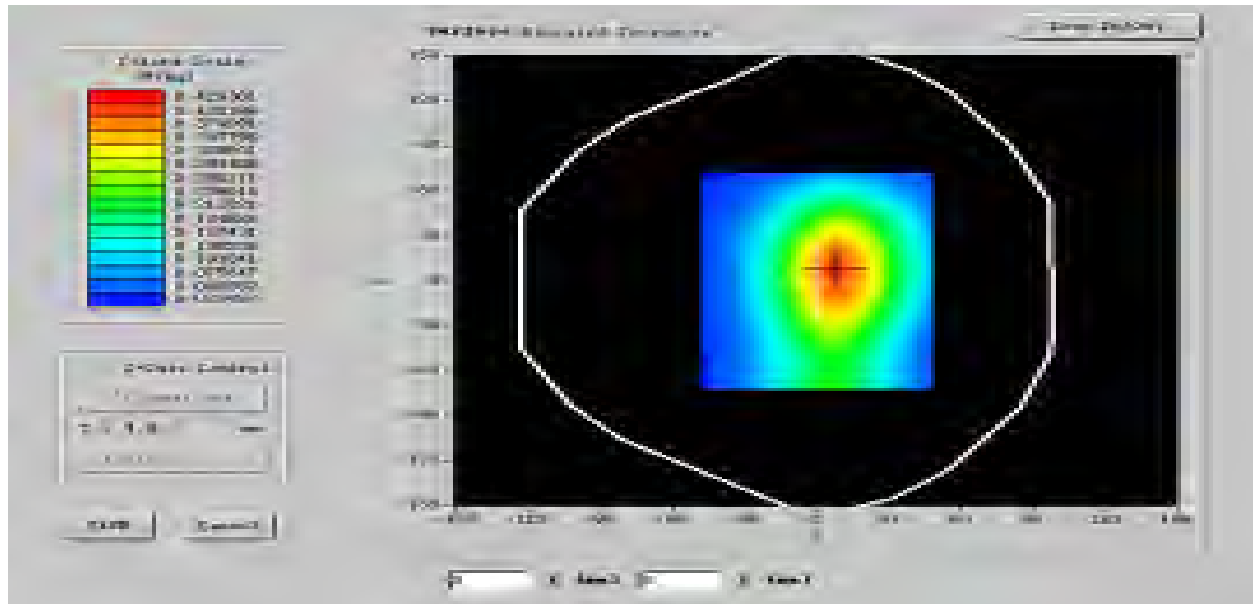

VOLUME SAR

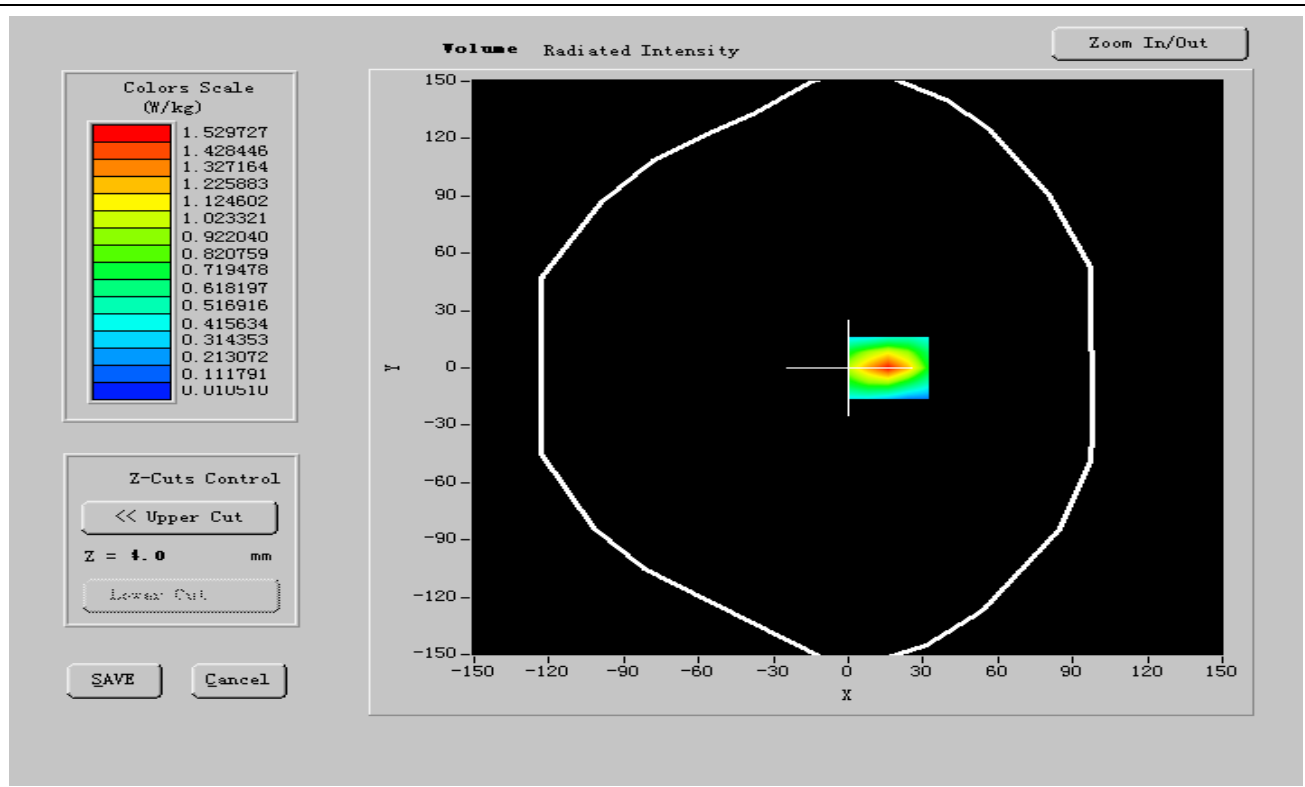




Maximum location: X=-13.00, Y=-3.00

SAR 10g (W/Kg)	0.261441
SAR 1g (W/Kg)	0.405411

Z Axis Scan

SAR, Z Axis Scan (X = -10, Y = 12)

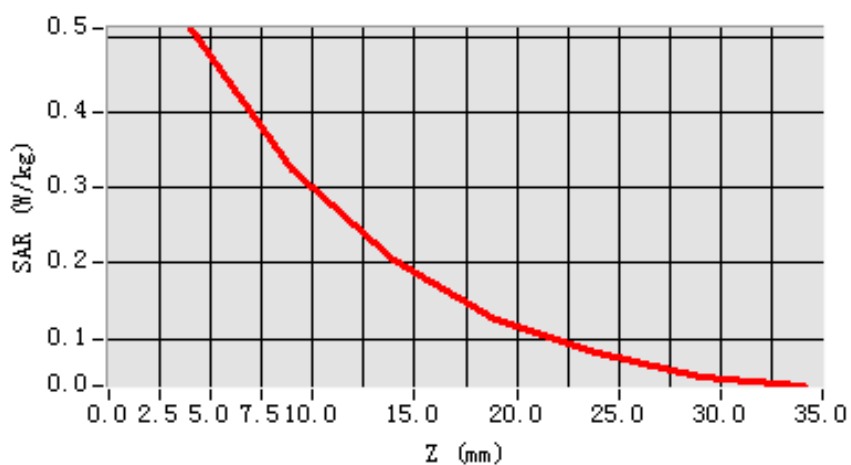

**MEASUREMENT 28****Date of measurement: 02/20/2011****Area Scan: 7 x 7 x 1****dx=15mm****dy=15mm****Zoom Scan: 5 x 5 x 7****dx=5mm****dy=5mm****dz=5mm****Z Axis Scan: 1 x 1 x 21****dx=20mm****dy=20mm****dz=5mm****A. Experimental conditions.**

Phantom File	zinf15.txt, Adaptive 2 max
Phantom	Body
Device Position	BackSide toward phantom
Band	EDGE1900
Channels	Low
Signal	EDGE

B. Instrumentations.

PC	HP (Pentium(R) V3.06GHz, SN:375052-AA1)	Calibrated: N/A
Wireless Communication Test Set	R&S (CMU200, SN:B23-03291)	Calibration Due: 05/25/2011
Network Analyzer	Agilent(E5071B, MY42301382)	Calibration Due: 03/24/2011
Voltmeter	Keithley (2000, SN:1015843)	Calibration Due: 05/25/2011
Signal Generator	Agilent (E8257C, SN:MY43321570)	Calibration Due: 03/24/2011
Amplifier	Mini-Circuits (ZHL-42, SN:110405)	Calibration Due: 07/29/2011
Power Meter	Agilent (E4416A, SN:QB41292714)	Calibration Due: 03/24/2011
Probe	Antennessa (SN:SN_1109_EP_100)	Calibration Due: 05/04/2011
DIPOLE 1900	Antennessa (DIPI36, SN 48/05)	Calibration Due: 02/09/2012
Phantom	Antennessa (SN:SN41_05_SAM29)	Calibrated: N/A
Liquid	Antennessa	Calibrated: N/A
Measurement SW	OPEN SAR V2.1	Calibrated: N/A

C. SAR Measurement Results


Frequency (MHz)	1710.199951
Relative permittivity (real part)	52.347300
Relative permittivity (imaginary part)	14.451641
Conductivity (S/m)	1.533698
Variation (%)	-0.400000
Ambient Temperature:	21 °C
Liquid Temperature:	20 °C
ConvF:	41.01, 42.41, 55.65




Crest factor:

1:2

SURFACE SAR

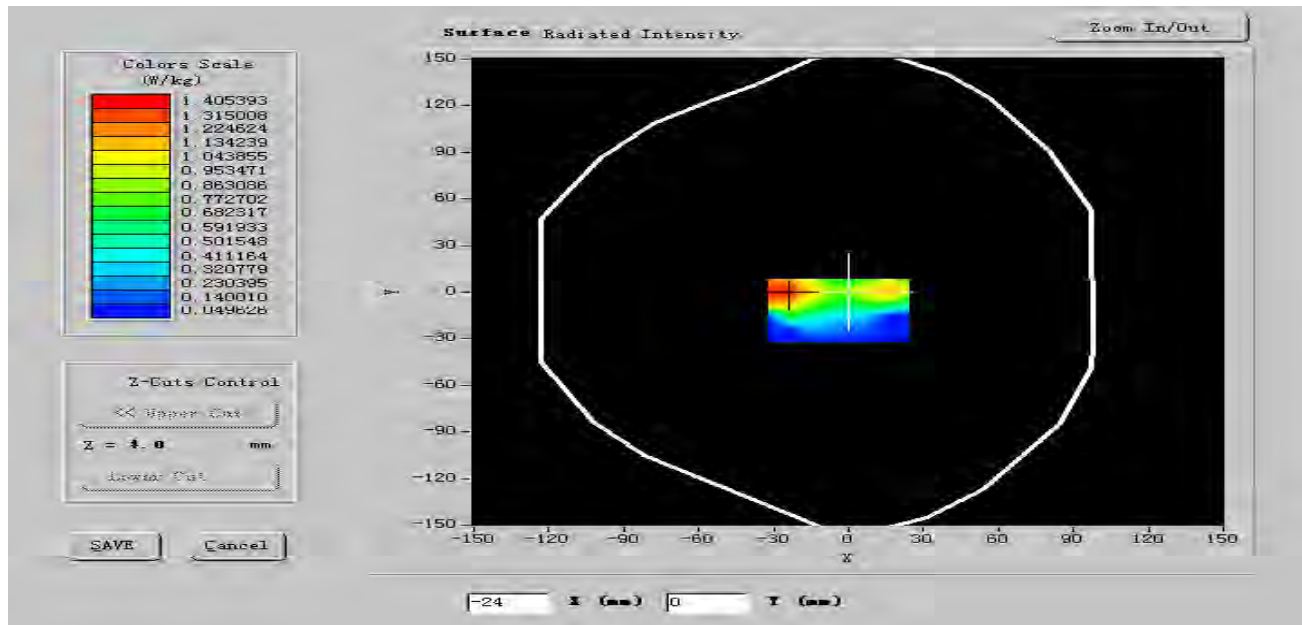

VOLUME SAR

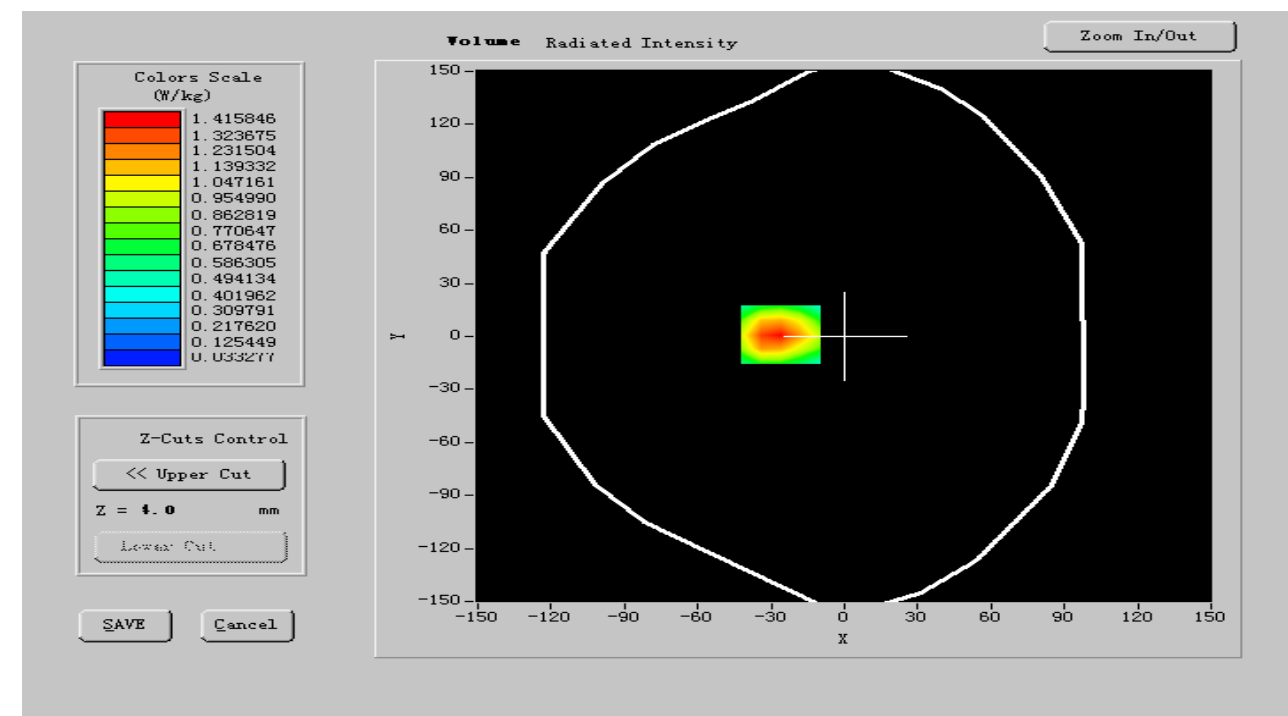




Maximum location: X=-13.00, Y=-3.00

SAR 10g (W/Kg)	0.212662
SAR 1g (W/Kg)	0.415521

Z Axis Scan

SAR, Z Axis Scan (X = -10, Y = 12)

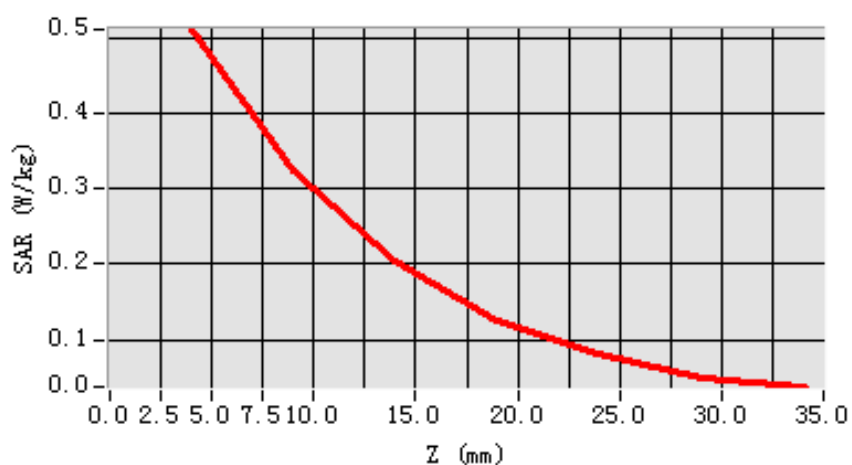



MEASUREMENT 29

Date of measurement: 02/20/2011**Area Scan: 7 x 7 x 1****dx=15mm****dy=15mm****Zoom Scan: 5 x 5 x 7****dx=5mm****dy=5mm****dz=5mm****Z Axis Scan: 1 x 1 x 21****dx=20mm****dy=20mm****dz=5mm**

A. Experimental conditions.

Phantom File	zinf15.txt, Adaptive 2 max
Phantom	Body
Device Position	BackSide toward phantom
Band	EDGE 1900
Channels	Middle
Signal	EDGE

B. Instrumentations.

PC	HP (Pentium(R) V3.06GHz, SN:375052-AA1)	Calibrated: N/A
Wireless Communication Test Set	R&S (CMU200, SN:B23-03291)	Calibration Due: 05/25/2011
Network Analyzer	Agilent(E5071B, MY42301382)	Calibration Due: 03/24/2011
Voltmeter	Keithley (2000, SN:1015843)	Calibration Due: 05/25/2011
Signal Generator	Agilent (E8257C, SN:MY43321570)	Calibration Due: 03/24/2011
Amplifier	Mini-Circuits (ZHL-42, SN:110405)	Calibration Due: 07/29/2011
Power Meter	Agilent (E4416A, SN:QB41292714)	Calibration Due: 03/24/2011
Probe	Antennessa (SN:SN_1109_EP_100)	Calibration Due: 05/04/2011
DIPOLE 1900	Antennessa (DIPI36, SN 48/05)	Calibration Due: 02/09/2012
Phantom	Antennessa (SN:SN41_05_SAM29)	Calibrated: N/A
Liquid	Antennessa	Calibrated: N/A
Measurement SW	OPEN SAR V2.1	Calibrated: N/A

C. SAR Measurement Results

Frequency (MHz)	1747.400004
Relative permittivity (real part)	51.418410
Relative permittivity (imaginary part)	14.293614
Conductivity (S/m)	1.514284
Variation (%)	-1.010000
Ambient Temperature:	21 °C
Liquid Temperature:	20 °C




ConvF:

41.01, 42.41, 55.65


Crest factor:

1:2

SURFACE SAR

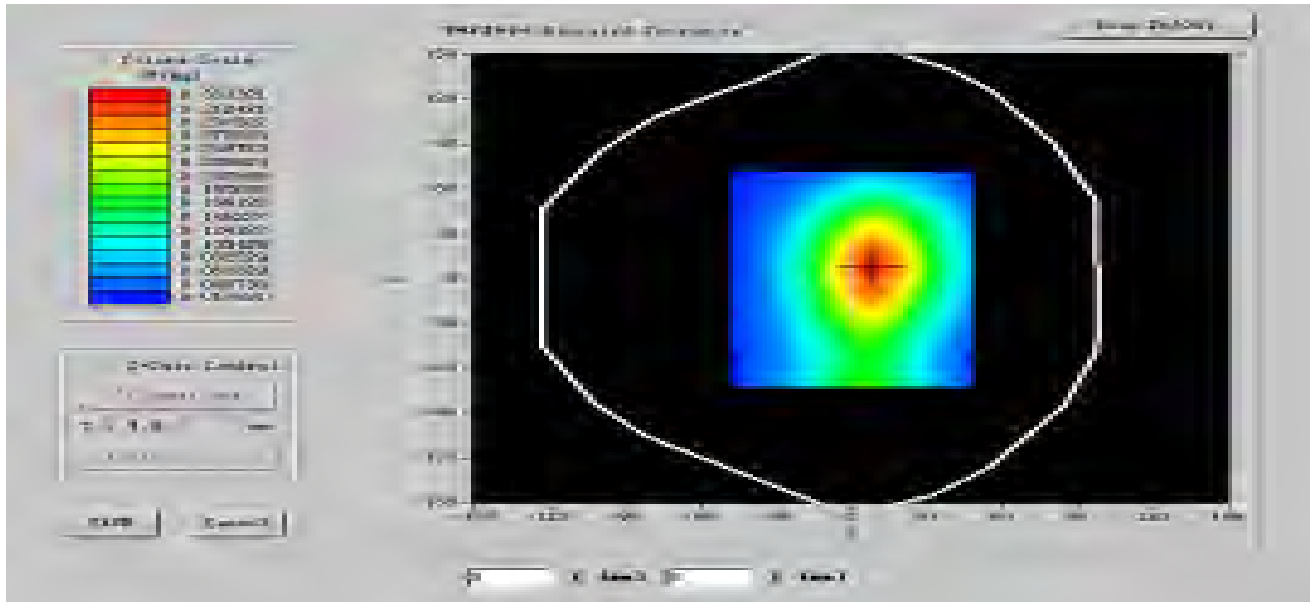

VOLUME SAR

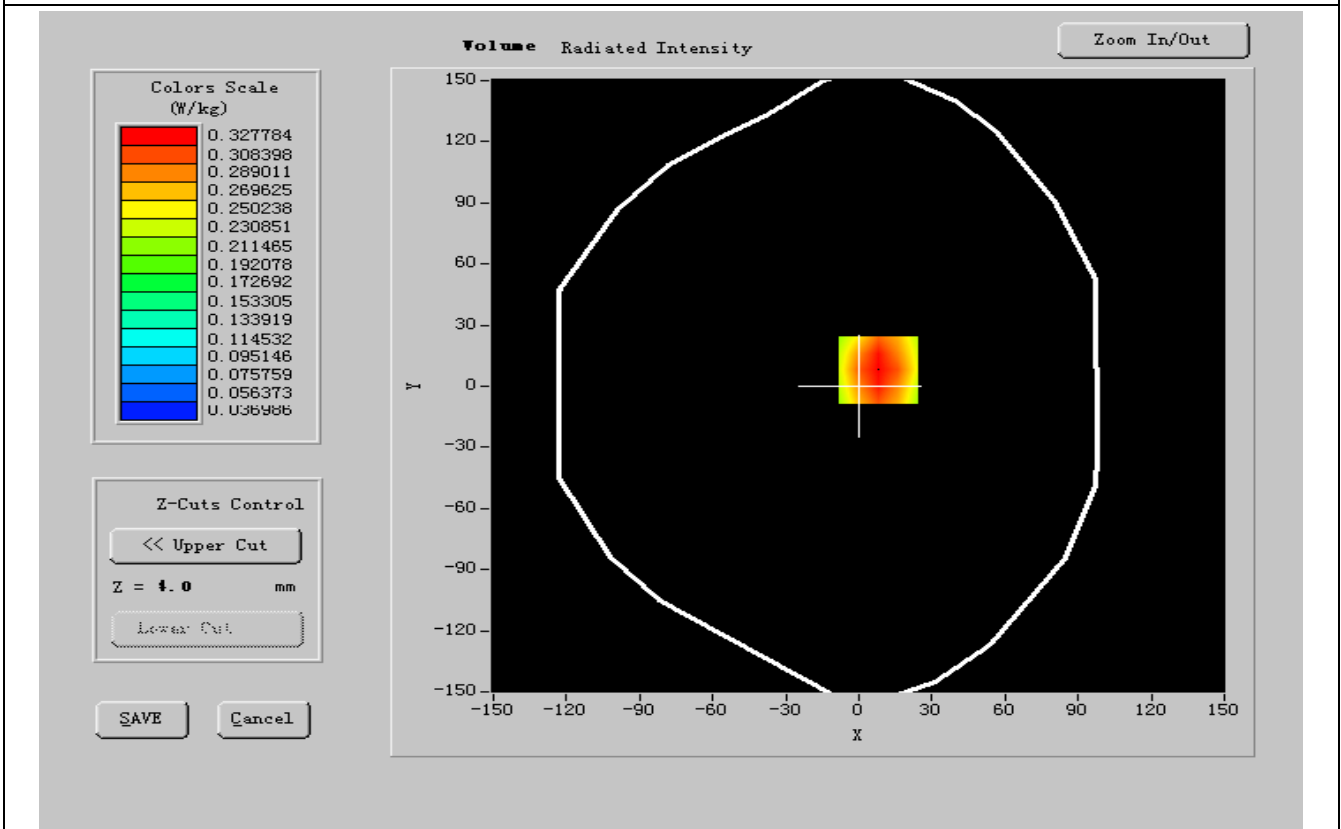




Maximum location: X=-13.00, Y=-3.00

SAR 10g (W/Kg)	0.212300
SAR 1g (W/Kg)	0.378911

Z Axis Scan

SAR, Z Axis Scan (X = -10, Y = 12)

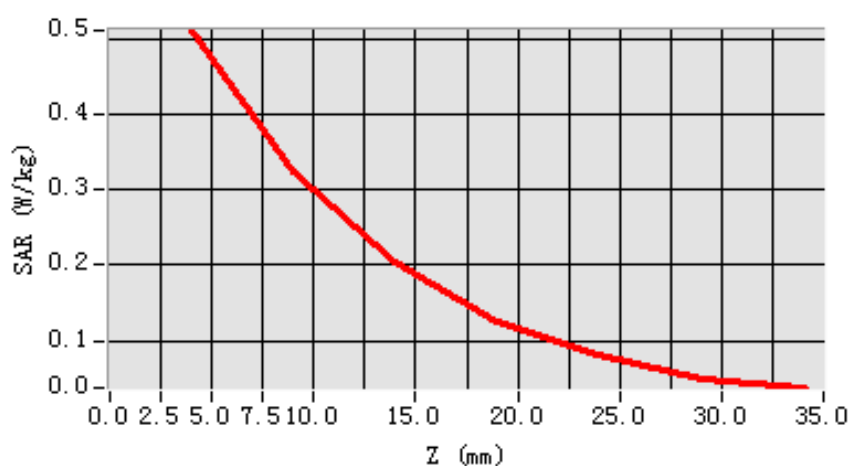



MEASUREMENT 30

Date of measurement: 02/20/2011**Area Scan: 7 x 7 x 1****dx=15mm****dy=15mm****Zoom Scan: 5 x 5 x 7****dx=5mm****dy=5mm****dz=5mm****Z Axis Scan: 1 x 1 x 21****dx=20mm****dy=20mm****dz=5mm**

A. Experimental conditions.

Phantom File	zinf15.txt, Adaptive 2 max
Phantom	Body
Device Position	BackSide toward phantom
Band	EDGE 1900
Channels	High
Signal	EDGE

B. Instrumentations.

PC	HP (Pentium(R) V3.06GHz, SN:375052-AA1)	Calibrated: N/A
Wireless Communication Test Set	R&S (CMU200, SN:B23-03291)	Calibration Due: 05/25/2011
Network Analyzer	Agilent(E5071B, MY42301382)	Calibration Due: 03/24/2011
Voltmeter	Keithley (2000, SN:1015843)	Calibration Due: 05/25/2011
Signal Generator	Agilent (E8257C, SN:MY43321570)	Calibration Due: 03/24/2011
Amplifier	Mini-Circuits (ZHL-42, SN:110405)	Calibration Due: 07/29/2011
Power Meter	Agilent (E4416A, SN:QB41292714)	Calibration Due: 03/24/2011
Probe	Antennessa (SN:SN_1109_EP_100)	Calibration Due: 05/04/2011
DIPOLE 1900	Antennessa (DIPI36, SN 48/05)	Calibration Due: 02/09/2012
Phantom	Antennessa (SN:SN41_05_SAM29)	Calibrated: N/A
Liquid	Antennessa	Calibrated: N/A
Measurement SW	OPEN SAR V2.1	Calibrated: N/A

C. SAR Measurement Results

Frequency (MHz)	1784.599036
Relative permittivity (real part)	51.815412
Relative permittivity (imaginary part)	14.318561
Conductivity (S/m)	1.513224
Variation (%)	-0.130000
Ambient Temperature:	21 °C
Liquid Temperature:	20 °C




ConvF:

41.01, 42.41, 55.65


Crest factor:

1:2

SURFACE SAR

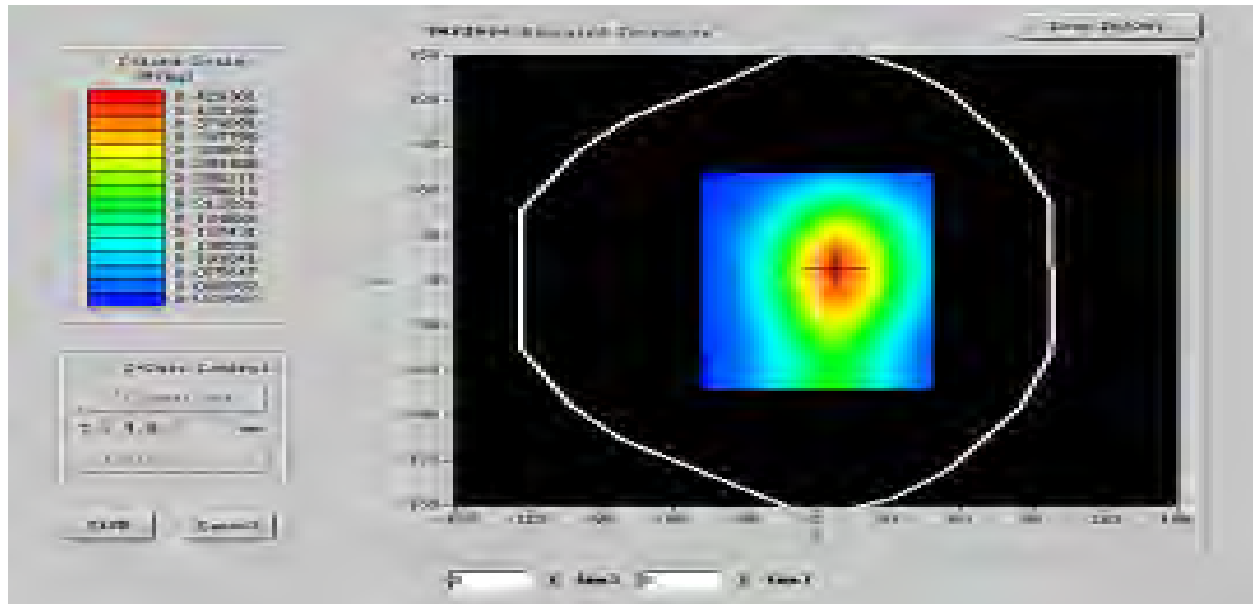

VOLUME SAR

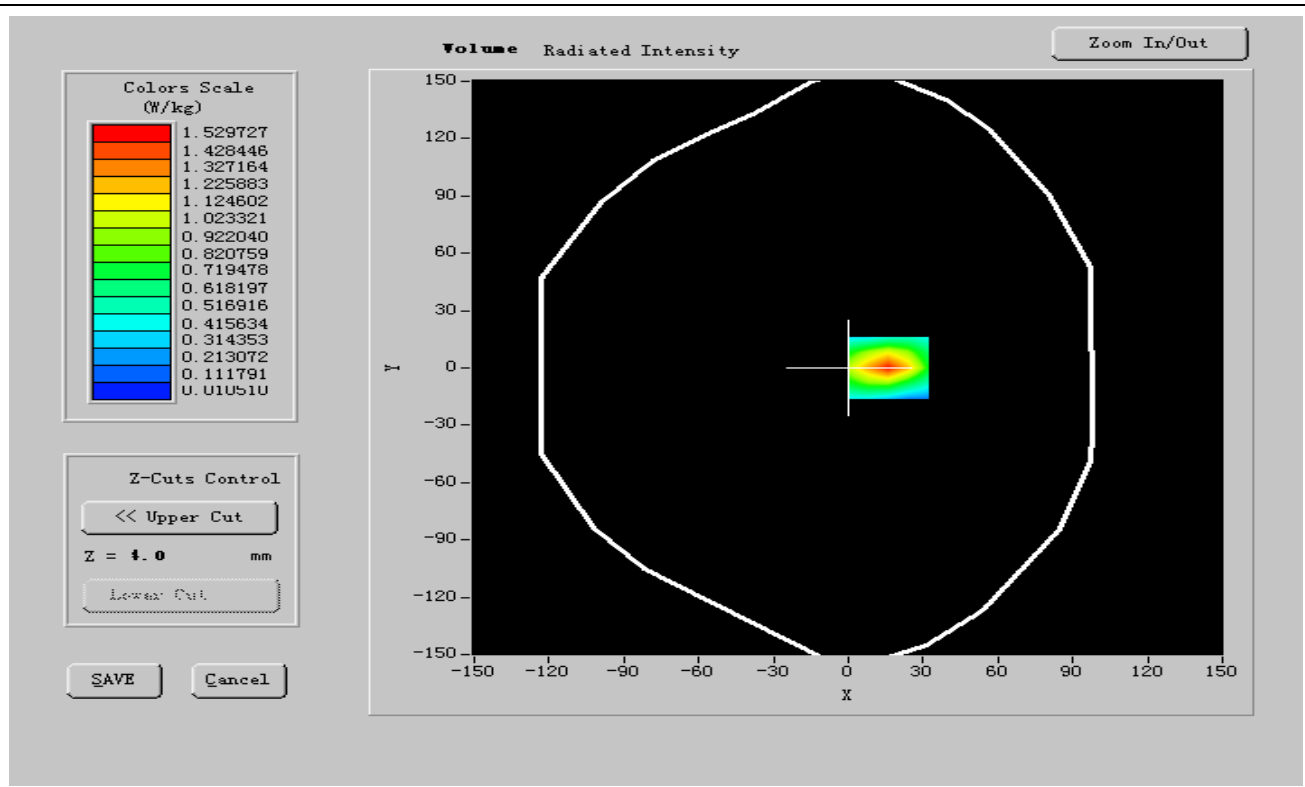




Maximum location: X=-13.00, Y=-3.00

SAR 10g (W/Kg)	0.267412
SAR 1g (W/Kg)	0.395411

Z Axis Scan

SAR, Z Axis Scan (X = -10, Y = 12)

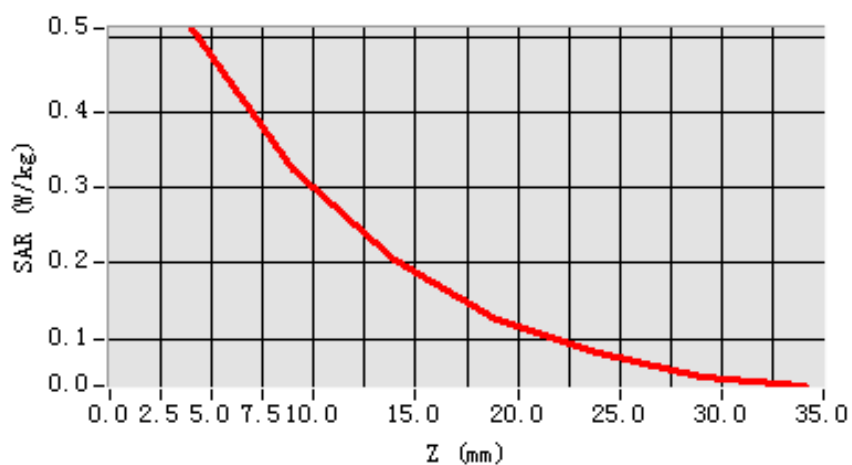



III. WCDMA BAND V RESULTS

<u>TYPE</u>	<u>PARAMETERS</u>
<u>Phone</u>	<u>Measurement 1:</u> Right Head with Cheek device position on Low Channel in WCDMA band V mode <u>Measurement 2:</u> Right Head with Cheek device position on Middle Channel in WCDMA band V mode <u>Measurement 3:</u> Right Head with Cheek device position on High Channel in WCDMA band V mode <u>Measurement 4:</u> Right Head with Tilt device position on Low Channel in WCDMA band V mode <u>Measurement 5:</u> Right Head with Tilt device position on Middle Channel in WCDMA band V mode <u>Measurement 6:</u> Right Head with Tilt device position on High Channel in WCDMA band V mode <u>Measurement 7:</u> Left Head with Cheek device position on Low Channel in WCDMA band V mode <u>Measurement 8:</u> Left Head with Cheek device position on Middle Channel in WCDMA band V mode <u>Measurement 9:</u> Left Head with Cheek device position on High Channel in WCDMA band V mode <u>Measurement 10:</u> Left Head with Tilt device position on Low Channel in WCDMA band V mode <u>Measurement 11:</u> Left Head with Tilt device position on Middle Channel in WCDMA band V mode <u>Measurement 12:</u> Left Head with Tilt device position on High Channel in WCDMA band V mode <u>Measurement 13:</u> FrontSide toward phantom 15mm on Low Channel in WCDMA band V mode <u>Measurement 14:</u> FrontSide toward phantom 15mm on Middle Channel in WCDMA band V mode <u>Measurement 15:</u> FrontSide toward phantom 15mm on High Channel in WCDMA band V mode <u>Measurement 16:</u> BackSide toward phantom 15mm on Low Channel in WCDMA band V mode <u>Measurement 17:</u> BackSide toward phantom 15mm on Middle Channel in WCDMA band V mode <u>Measurement 18:</u> BackSide toward phantom 15mm on High Channel in WCDMA band V mode <u>Measurement 19:</u> FrontSide toward phantom 15mm on Low Channel in HSDPA band V mode <u>Measurement 20:</u> FrontSide toward phantom 15mm on Middle



	Channel in HSDPA band V mode <u>Measurement 21:</u> FrontSide toward phantom 15mm on High Channel in HSDPA band V mode <u>Measurement 22:</u> BackSide toward phantom 15mm on Low Channel in HSDPA band V mode <u>Measurement 23:</u> BackSide toward phantom 15mm on Middle Channel in HSDPA band V mode <u>Measurement 24:</u> BackSide toward phantom 15mm on High Channel in HSDPA band V mode
--	--



MEASUREMENT 1

Date of measurement: 02/20/2011**Area Scan: 7 x 7 x 1****dx=15mm****dy=15mm****Zoom Scan: 5 x 5 x 7****dx=5mm****dy=5mm****dz=5mm****Z Axis Scan: 1 x 1 x 21****dx=20mm****dy=20mm****dz=5mm**

A. Experimental conditions.

Phantom File	zinf15.txt, Adaptive 2 max
Phantom	Right head
Device Position	Cheek
Band	WCDMA band V
Channels	Low
Signal	WCDMA

B. Instrumentations.

PC	HP (Pentium(R) V3.06GHz, SN:375052-AA1)	Calibrated: N/A
Wireless Communication Test Set	R&S (CMU200, SN:B23-03291)	Calibration Due: 05/25/2011
Network Analyzer	Agilent(E5071B, MY42301382)	Calibration Due: 03/24/2011
Voltmeter	Keithley (2000, SN:1015843)	Calibration Due: 05/25/2011
Signal Generator	Agilent (E8257C, SN:MY43321570)	Calibration Due: 03/24/2011
Amplifier	Mini-Circuits (ZHL-42, SN:110405)	Calibration Due: 07/29/2011
Power Meter	Agilent (E4416A, SN:QB41292714)	Calibration Due: 03/24/2011
Probe	Antennessa (SN:SN_1109_EP_100)	Calibration Due: 05/04/2011
DIPOLE 835	Antennessa (DIPI32,SN 48/05)	Calibration Due: 02/09/2012
Phantom	Antennessa (SN:SN41_05_SAM29)	Calibrated: N/A
Liquid	Antennessa	Calibrated: N/A
Measurement SW	OPEN SAR V2.1	Calibrated: N/A

C. SAR Measurement Results


Frequency (MHz)	826.200001
Relative permittivity (real part)	41.491777
Relative permittivity (imaginary part)	19.510000
Conductivity (S/m)	0.923144
Variation (%)	-1.450000
Ambient Temperature:	21 °C
Liquid Temperature:	20 °C
ConvF:	20.66, 20.51, 28.36




Crest factor:

1:1

SURFACE SAR

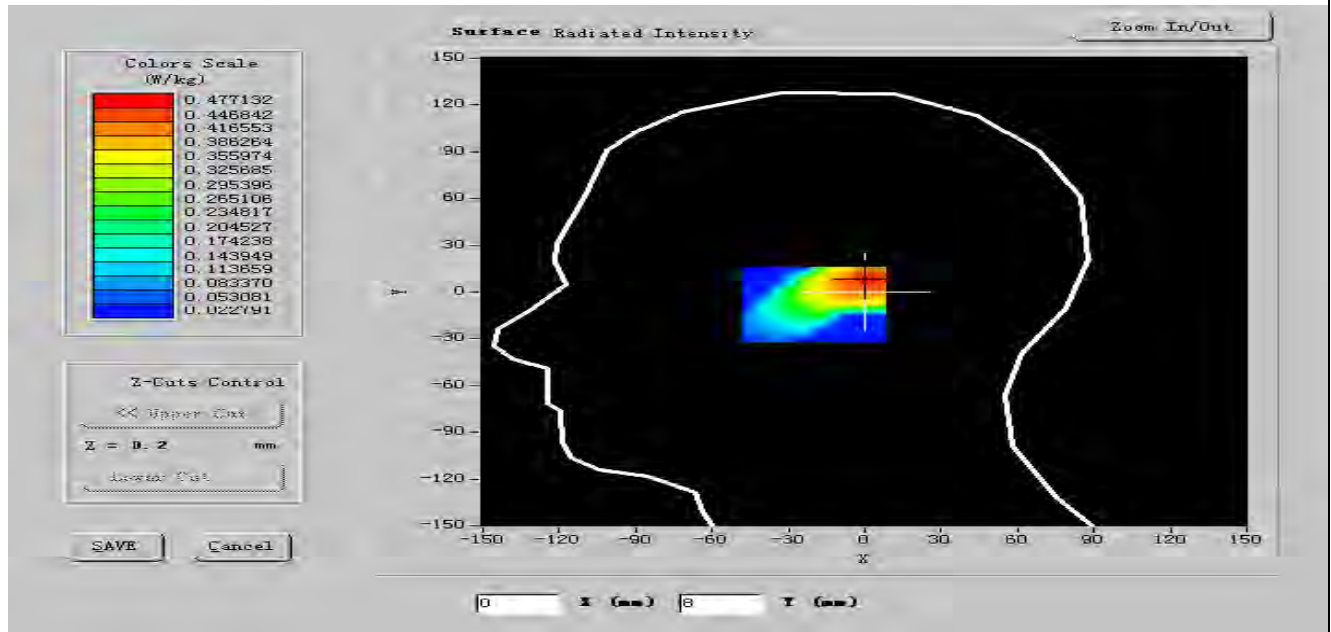

VOLUME SAR

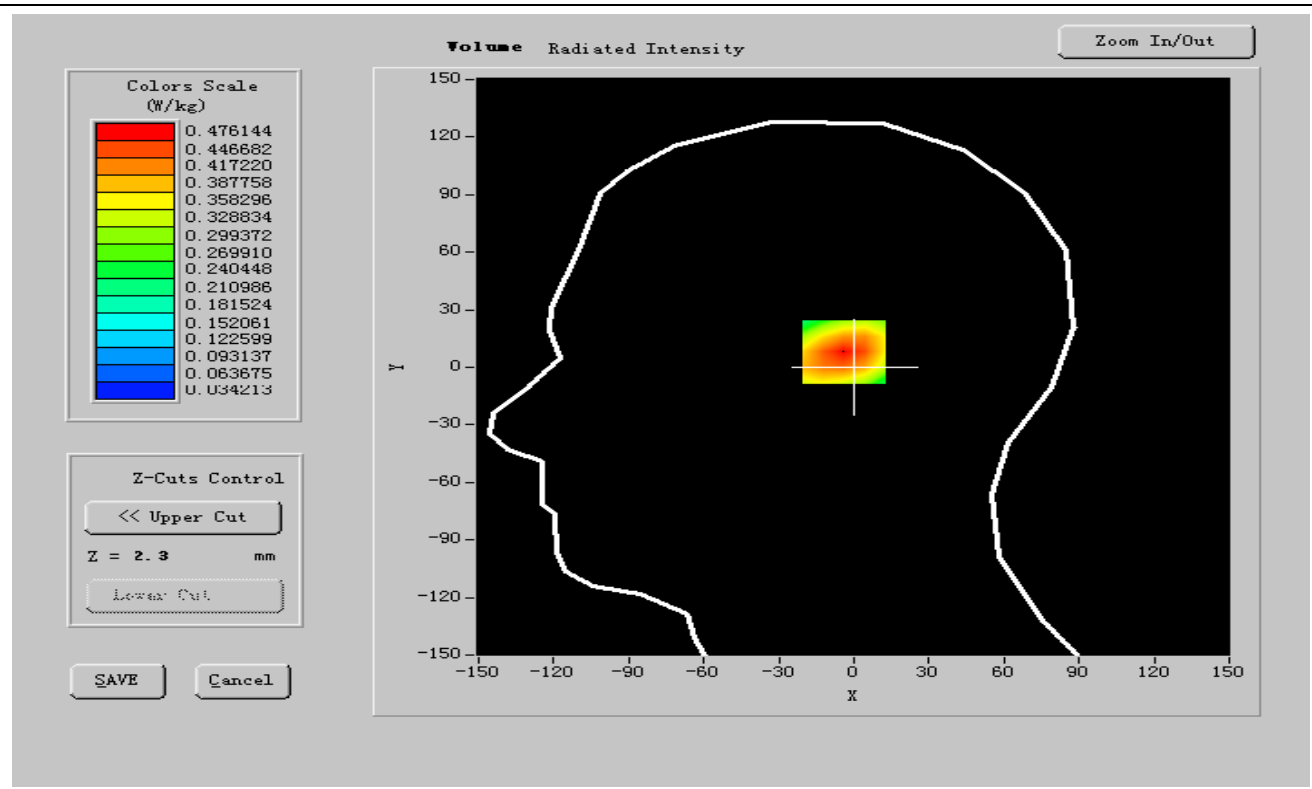




Maximum location: X=-13.00, Y=-3.00

SAR 10g (W/Kg)	0.110129
SAR 1g (W/Kg)	0.243204

Z Axis Scan

SAR, Z Axis Scan (X = -13, Y = -3)

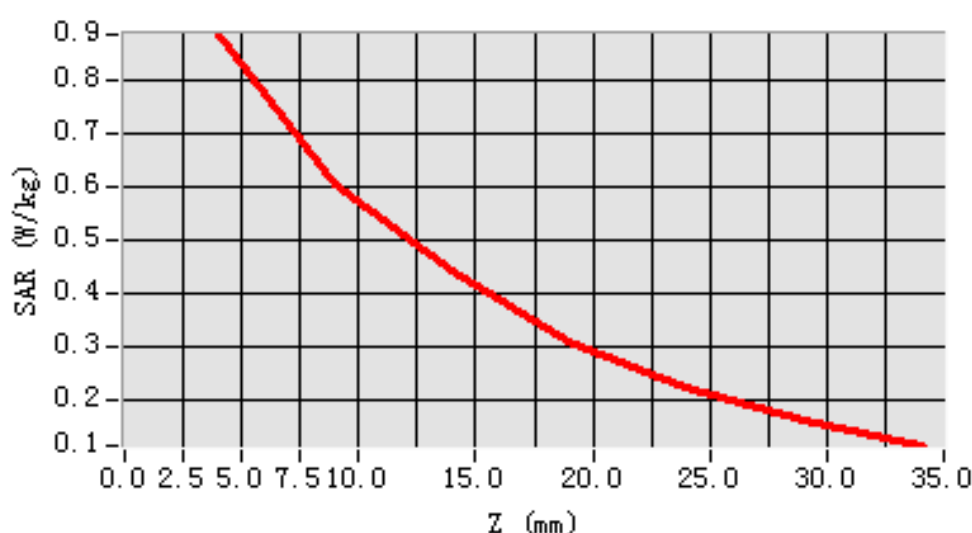



MEASUREMENT 2

Date of measurement: 02/20/2011**Area Scan: 7 x 7 x 1****dx=15mm****dy=15mm****Zoom Scan: 5 x 5 x 7****dx=5mm****dy=5mm****dz=5mm****Z Axis Scan: 1 x 1 x 21****dx=20mm****dy=20mm****dz=5mm**

A. Experimental conditions.

Phantom File	zinf15.txt, Adaptive 2 max
Phantom	Right head
Device Position	Cheek
Band	WCDMA band V
Channels	Middle
Signal	WCDMA

B. Instrumentations.

PC	HP (Pentium(R) V3.06GHz, SN:375052-AA1)	Calibrated: N/A
Wireless Communication Test Set	R&S (CMU200, SN:B23-03291)	Calibration Due: 05/25/2011
Network Analyzer	Agilent(E5071B, MY42301382)	Calibration Due: 03/24/2011
Voltmeter	Keithley (2000, SN:1015843)	Calibration Due: 05/25/2011
Signal Generator	Agilent (E8257C, SN:MY43321570)	Calibration Due: 03/24/2011
Amplifier	Mini-Circuits (ZHL-42, SN:110405)	Calibration Due: 07/29/2011
Power Meter	Agilent (E4416A, SN:QB41292714)	Calibration Due: 03/24/2011
Probe	Antennessa (SN:SN_1109_EP_100)	Calibration Due: 05/04/2011
DIPOLE 835	Antennessa (DIPI32,SN 48/05)	Calibration Due: 02/09/2012
Phantom	Antennessa (SN:SN41_05_SAM29)	Calibrated: N/A
Liquid	Antennessa	Calibrated: N/A
Measurement SW	OPEN SAR V2.1	Calibrated: N/A

C. SAR Measurement Results

Frequency (MHz)	836.590001
Relative permittivity (real part)	41.444610
Relative permittivity (imaginary part)	19.522697
Conductivity (S/m)	0.916555
Variation (%)	-0.200000
Ambient Temperature:	21 °C
Liquid Temperature:	20 °C




ConvF:

20.66, 20.51, 28.36


Crest factor:

1:1

SURFACE SAR

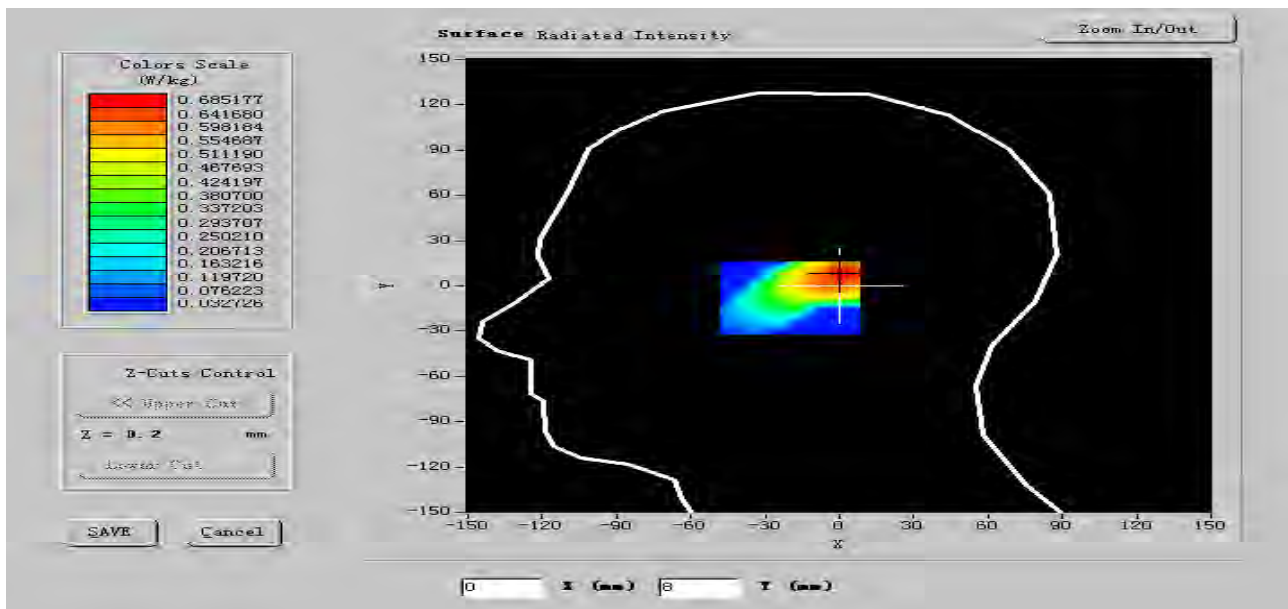

VOLUME SAR

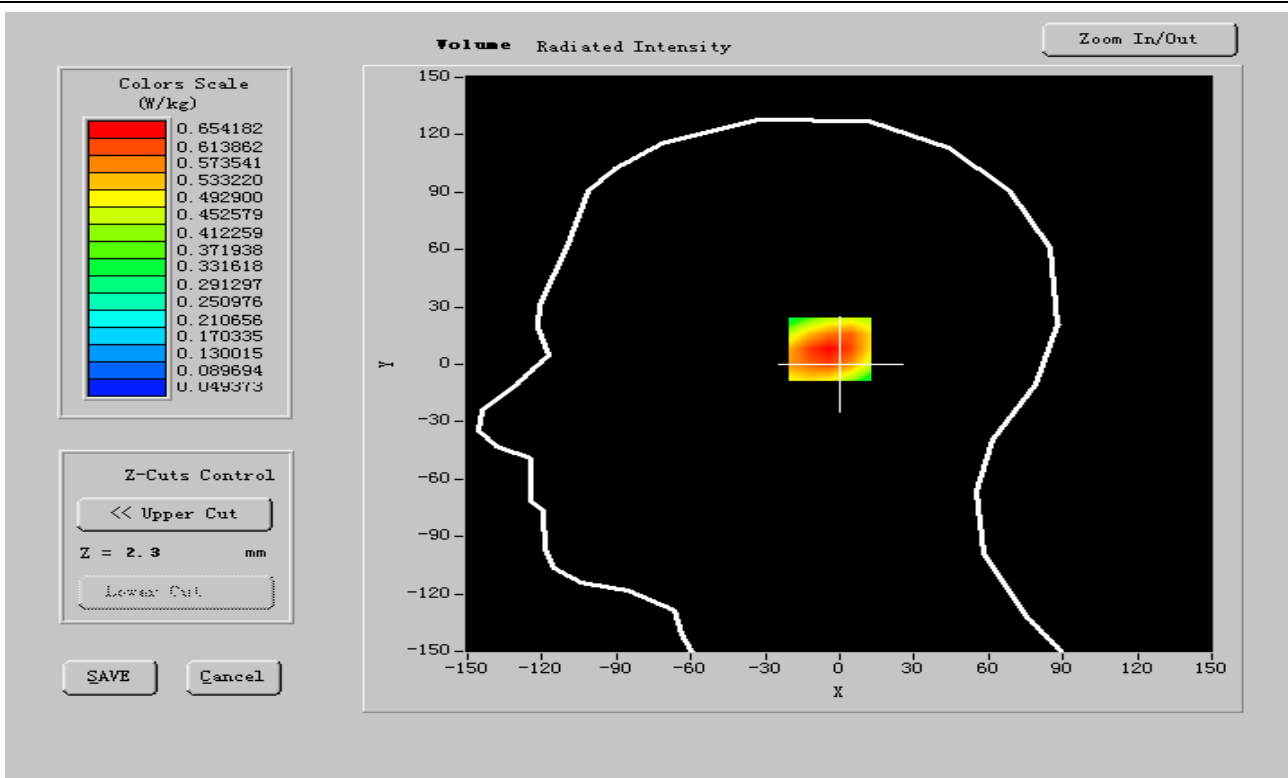




Maximum location: X=-13.00, Y=-3.00

SAR 10g (W/Kg)	0.161427
SAR 1g (W/Kg)	0.284104

Z Axis Scan

SAR, Z Axis Scan (X = -13, Y = -3)

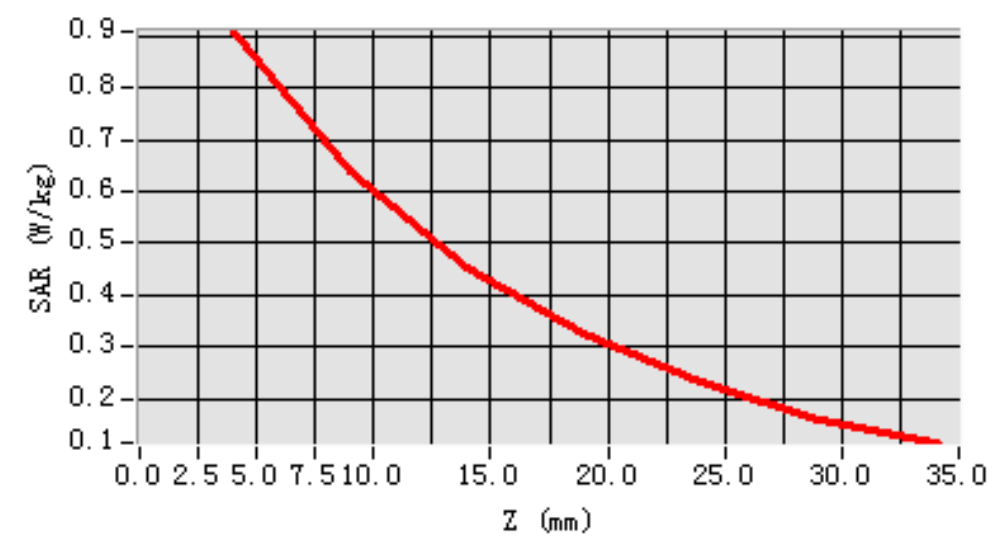



MEASUREMENT 3

Date of measurement: 02/20/2011**Area Scan: 7 x 7 x 1****dx=15mm****dy=15mm****Zoom Scan: 5 x 5 x 7****dx=5mm****dy=5mm****dz=5mm****Z Axis Scan: 1 x 1 x 21****dx=20mm****dy=20mm****dz=5mm**

A. Experimental conditions.

Phantom File	zinf15.txt, Adaptive 2 max
Phantom	Right head
Device Position	Cheek
Band	WCDMA band V
Channels	High
Signal	WCDMA

B. Instrumentations.

PC	HP (Pentium(R) V3.06GHz, SN:375052-AA1)	Calibrated: N/A
Wireless Communication Test Set	R&S (CMU200, SN:B23-03291)	Calibration Due: 05/25/2011
Network Analyzer	Agilent(E5071B, MY42301382)	Calibration Due: 03/24/2011
Voltmeter	Keithley (2000, SN:1015843)	Calibration Due: 05/25/2011
Signal Generator	Agilent (E8257C, SN:MY43321570)	Calibration Due: 03/24/2011
Amplifier	Mini-Circuits (ZHL-42, SN:110405)	Calibration Due: 07/29/2011
Power Meter	Agilent (E4416A, SN:QB41292714)	Calibration Due: 03/24/2011
Probe	Antennessa (SN:SN_1109_EP_100)	Calibration Due: 05/04/2011
DIPOLE 835	Antennessa (DIPI32,SN 48/05)	Calibration Due: 02/09/2012
Phantom	Antennessa (SN:SN41_05_SAM29)	Calibrated: N/A
Liquid	Antennessa	Calibrated: N/A
Measurement SW	OPEN SAR V2.1	Calibrated: N/A

C. SAR Measurement Results


Frequency (MHz)	846.799999
Relative permittivity (real part)	41.400523
Relative permittivity (imaginary part)	19.611047
Conductivity (S/m)	0.922155
Variation (%)	-0.200000
Ambient Temperature:	21 °C
Liquid Temperature:	20 °C
ConvF:	20.66, 20.51, 28.36




Crest factor:

1:1

SURFACE SAR

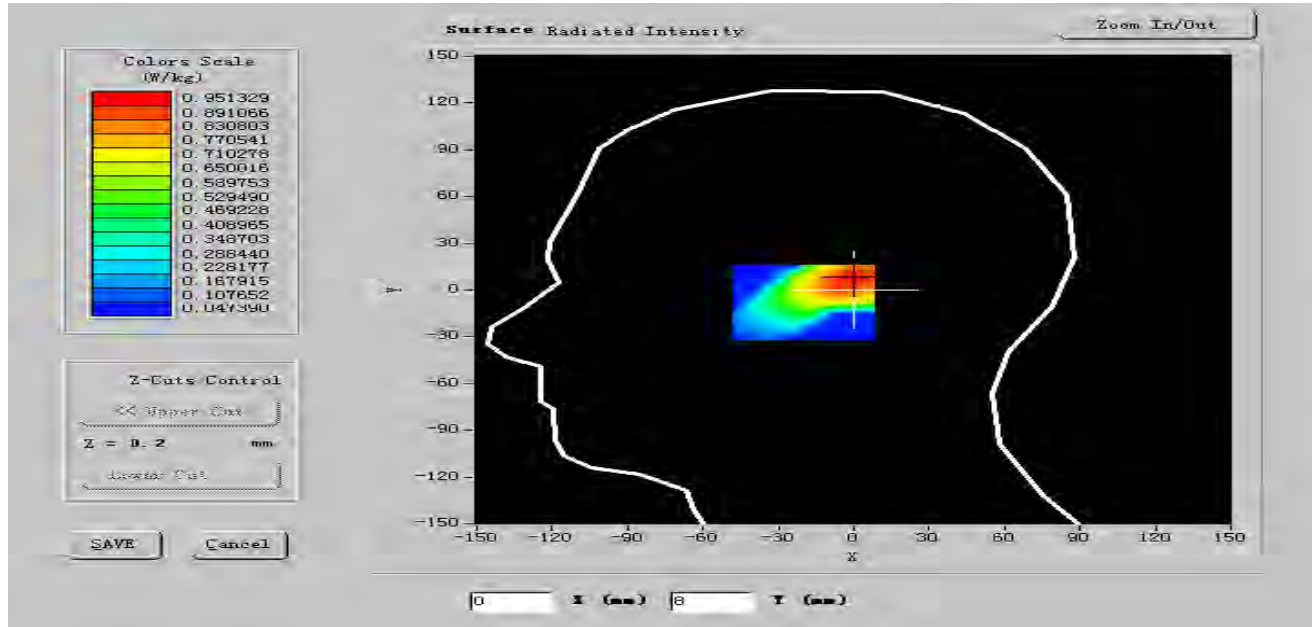

VOLUME SAR

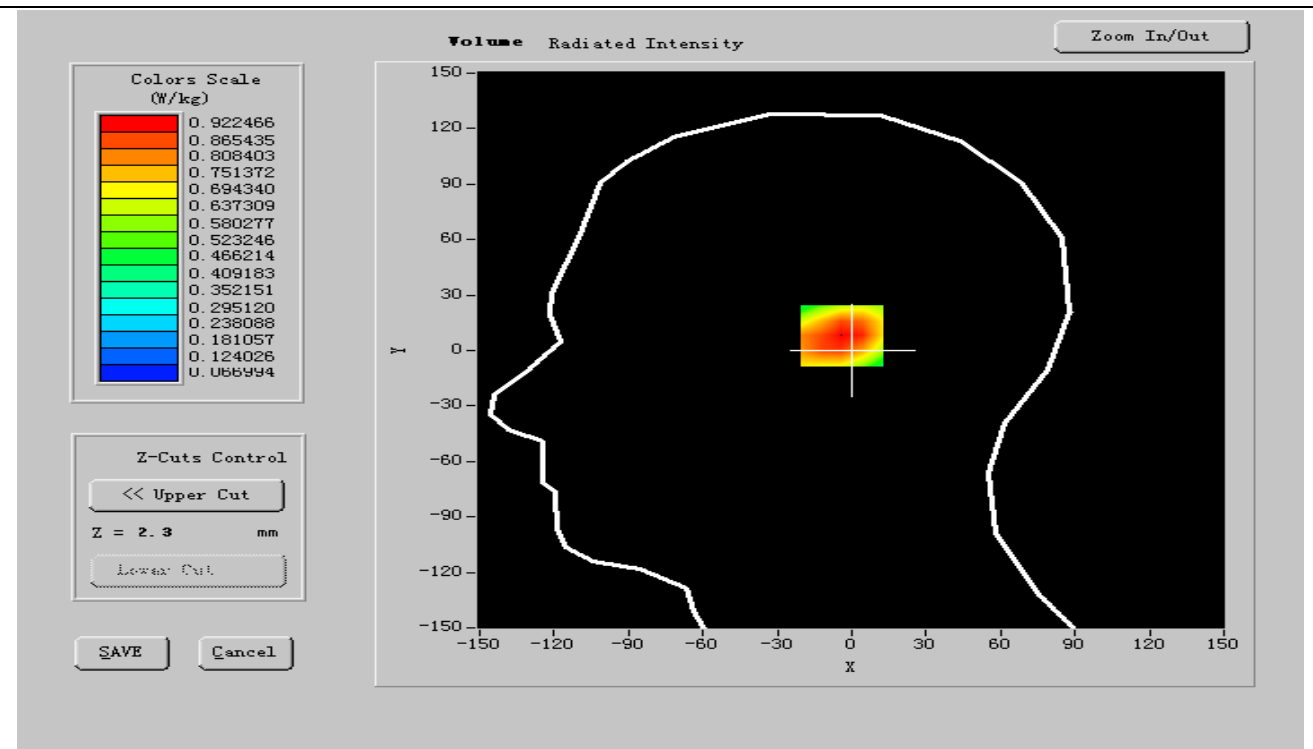




Maximum location: X=-13.00, Y=-3.00

SAR 10g (W/Kg)	0.103215
SAR 1g (W/Kg)	0.262142

Z Axis Scan

SAR, Z Axis Scan (X = -13, Y = -3)

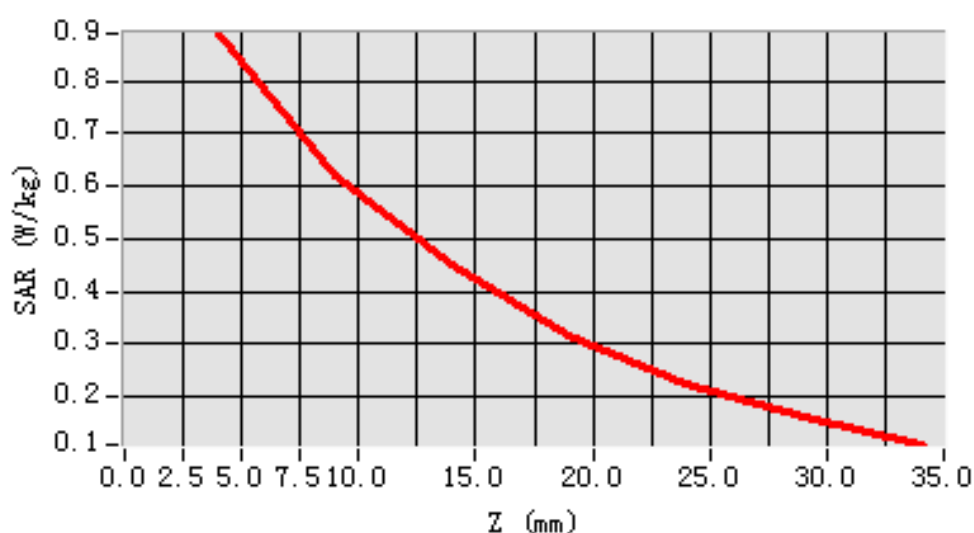



MEASUREMENT 4

Date of measurement: 02/20/2011**Area Scan: 7 x 7 x 1****dx=15mm****dy=15mm****Zoom Scan: 5 x 5 x 7****dx=5mm****dy=5mm****dz=5mm****Z Axis Scan: 1 x 1 x 21****dx=20mm****dy=20mm****dz=5mm**

A. Experimental conditions.

Phantom File	zinf15.txt, Adaptive 2 max
Phantom	Right head
Device Position	Tilt
Band	WCDMA band V
Channels	Low
Signal	WCDMA

B. Instrumentations.

PC	HP (Pentium(R) V3.06GHz, SN:375052-AA1)	Calibrated: N/A
Wireless Communication Test Set	R&S (CMU200, SN:B23-03291)	Calibration Due: 05/25/2011
Network Analyzer	Agilent(E5071B, MY42301382)	Calibration Due: 03/24/2011
Voltmeter	Keithley (2000, SN:1015843)	Calibration Due: 05/25/2011
Signal Generator	Agilent (E8257C, SN:MY43321570)	Calibration Due: 03/24/2011
Amplifier	Mini-Circuits (ZHL-42, SN:110405)	Calibration Due: 07/29/2011
Power Meter	Agilent (E4416A, SN:QB41292714)	Calibration Due: 03/24/2011
Probe	Antennessa (SN:SN_1109_EP_100)	Calibration Due: 05/04/2011
DIPOLE 835	Antennessa (DIPI32,SN 48/05)	Calibration Due: 02/09/2012
Phantom	Antennessa (SN:SN41_05_SAM29)	Calibrated: N/A
Liquid	Antennessa	Calibrated: N/A
Measurement SW	OPEN SAR V2.1	Calibrated: N/A

C. SAR Measurement Results

Frequency (MHz)	826.202012
Relative permittivity (real part)	41.443276
Relative permittivity (imaginary part)	19.581064
Conductivity (S/m)	0.914617
Variation (%)	-1.300000
Ambient Temperature:	21 °C
Liquid Temperature:	20 °C




ConvF:

20.66, 20.51, 28.36


Crest factor:

1:1

SURFACE SAR

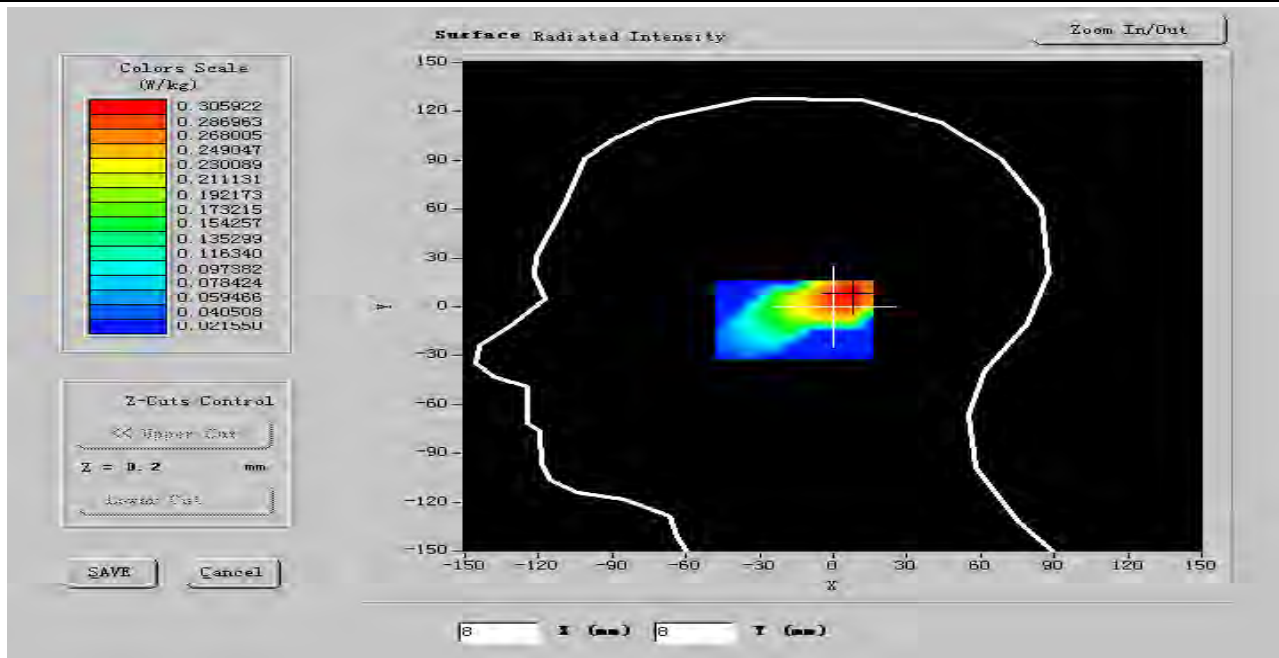

VOLUME SAR

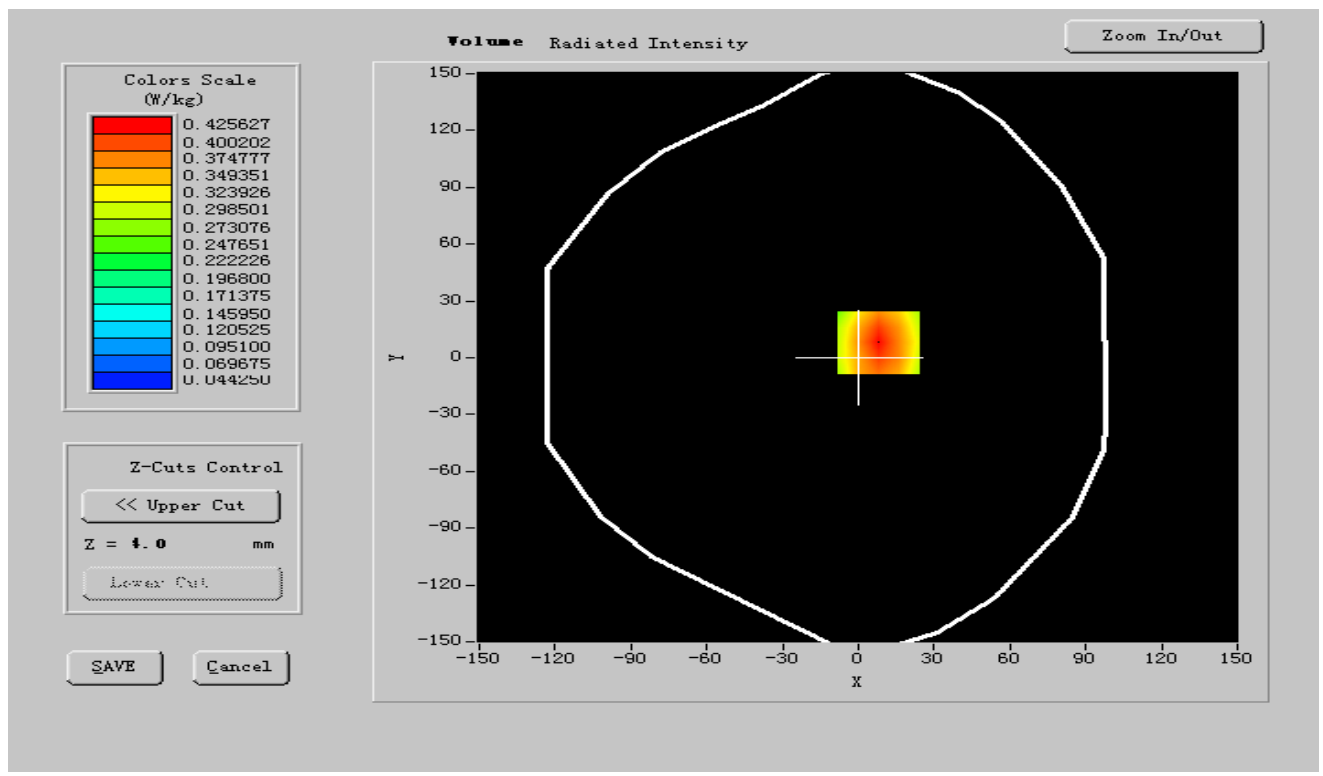




Maximum location: X=-13.00, Y=-3.00

SAR 10g (W/Kg)	0.083021
SAR 1g (W/Kg)	0.140325

Z Axis Scan

SAR, Z Axis Scan (X = -9, Y = -6)

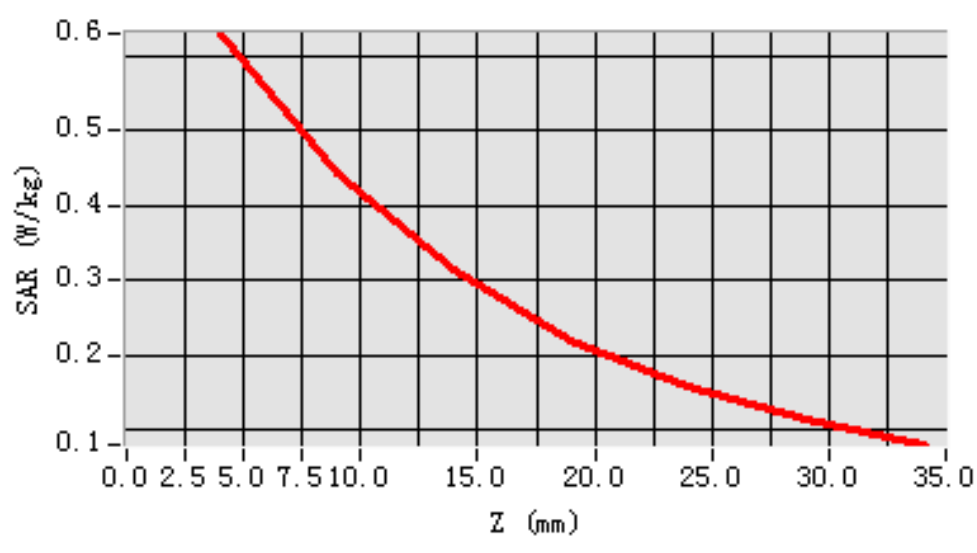



MEASUREMENT 5

Date of measurement: 02/20/2011**Area Scan: 7 x 7 x 1****dx=15mm****dy=15mm****Zoom Scan: 5 x 5 x 7****dx=5mm****dy=5mm****dz=5mm****Z Axis Scan: 1 x 1 x 21****dx=20mm****dy=20mm****dz=5mm**

A. Experimental conditions.

Phantom File	zinf15.txt, Adaptive 2 max
Phantom	Right head
Device Position	Tilt
Band	WCDMA band V
Channels	Middle
Signal	WCDMA

B. Instrumentations.

PC	HP (Pentium(R) V3.06GHz, SN:375052-AA1)	Calibrated: N/A
Wireless Communication Test Set	R&S (CMU200, SN:B23-03291)	Calibration Due: 05/25/2011
Network Analyzer	Agilent(E5071B, MY42301382)	Calibration Due: 03/24/2011
Voltmeter	Keithley (2000, SN:1015843)	Calibration Due: 05/25/2011
Signal Generator	Agilent (E8257C, SN:MY43321570)	Calibration Due: 03/24/2011
Amplifier	Mini-Circuits (ZHL-42, SN:110405)	Calibration Due: 07/29/2011
Power Meter	Agilent (E4416A, SN:QB41292714)	Calibration Due: 03/24/2011
Probe	Antennessa (SN:SN_1109_EP_100)	Calibration Due: 05/04/2011
DIPOLE 835	Antennessa (DIPI32,SN 48/05)	Calibration Due: 02/09/2012
Phantom	Antennessa (SN:SN41_05_SAM29)	Calibrated: N/A
Liquid	Antennessa	Calibrated: N/A
Measurement SW	OPEN SAR V2.1	Calibrated: N/A

C. SAR Measurement Results

Frequency (MHz)	836.600210
Relative permittivity (real part)	41.470244
Relative permittivity (imaginary part)	19.571880
Conductivity (S/m)	0.921224
Variation (%)	-0.890000
Ambient Temperature:	21 °C
Liquid Temperature:	20 °C




ConvF:

20.66, 20.51, 28.36


Crest factor:

1:1

SURFACE SAR

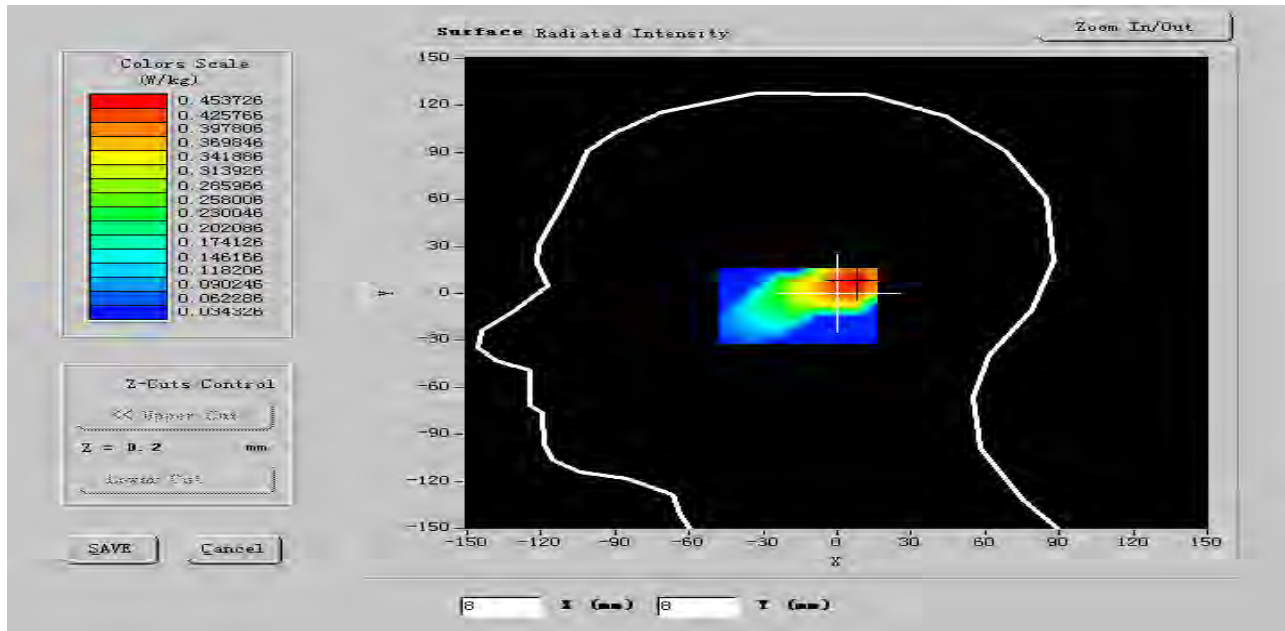

VOLUME SAR

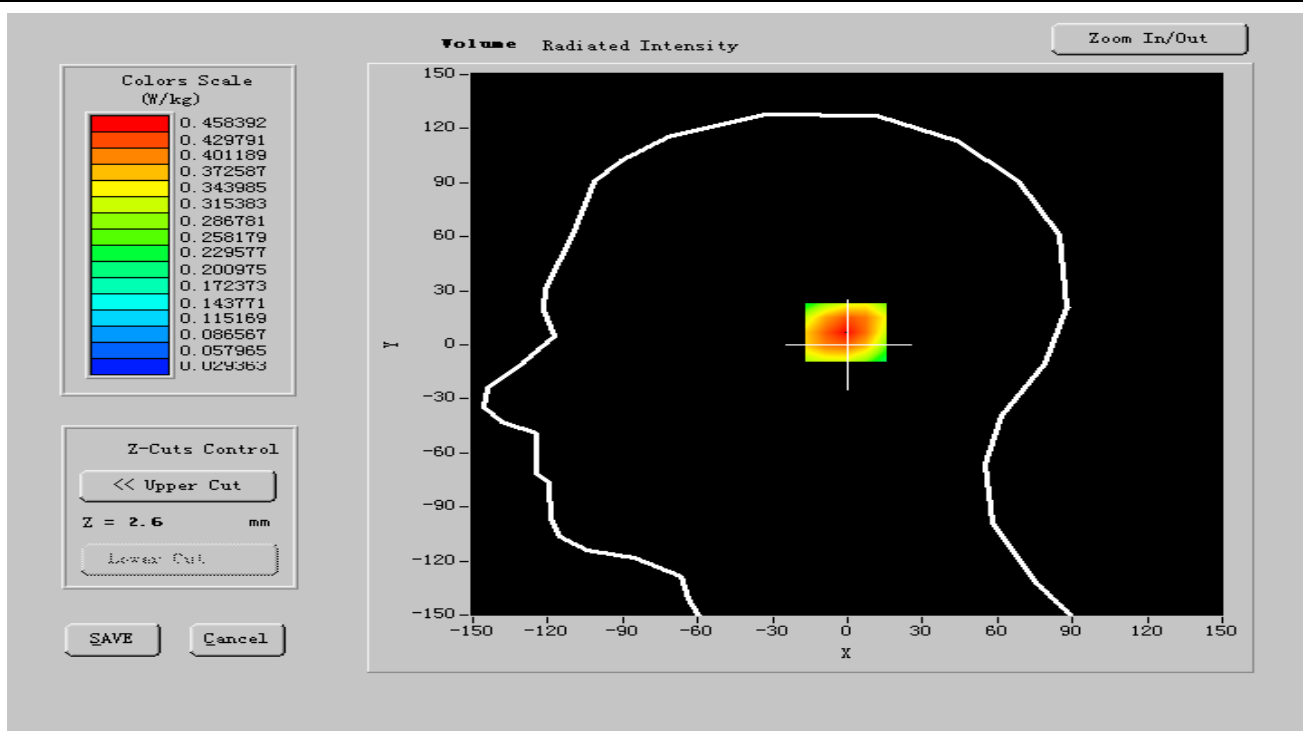



Maximum location: X=-13.00, Y=-3.00

SAR 10g (W/Kg)	0.120244
SAR 1g (W/Kg)	0.167174

Z Axis Scan

SAR, Z Axis Scan (X = -9, Y = -6)

