

Test Report

Product	System Control Unit with NFMI, Bluetooth Basic Rate and Low Energy		
Name and address of the applicant	3M Svenska AB Box 2341, 331 02 Värnamo Sweden		
Name and address of the manufacturer	3M Svenska AB Box 2341, 331 02 Värnamo Sweden		
Model	SCU-300NA		
Rating	3.0V _{DC} (2x AAA cells, Alkaline Batteries)		
Trademark	Comtac VII		
Serial number	102		
Additional information	NFMI		
Tested according to	FCC Part 15.209 Operation within the general radiated emission limits Industry Canada RSS-GEN, Issue 5 Operation within the general radiated emission limits		
Order number	383891		
Tested in period	2020-02-25		
Issue date	2020-04-28		
Name and address of the testing laboratory	 Instituttveien 6 Kjeller, Norway www.nemko.com	CAB Number: FCC: NO0001 ISED: NO0470 TEL: +47 22 96 03 30 FAX: +47 22 96 05 50	 
An accredited technical test executed under the Norwegian accreditation scheme			
 Prepared by [Frode Sveinsen]		 Approved by [G.Suhanthakumar]	
This report shall not be reproduced except in full without the written approval of Nemko. Opinions and interpretations expressed within this report are not part of the current accreditation. This report was originally distributed electronically with digital signatures. For more information contact Nemko.			

CONTENTS

1	INFORMATION	3
1.1	Test Item.....	3
1.2	Normal test condition	4
1.3	Test Engineer(s)	4
1.4	Description of modification for Modification Filing.....	4
1.5	Family List Rational	4
1.6	Antenna Requirement.....	4
1.7	Worst-Case Configuration and Mode.....	4
1.8	Comments	4
2	TEST REPORT SUMMARY	5
2.1	General.....	5
2.2	Test Summary	6
3	TEST RESULTS.....	7
3.1	Occupied Bandwidth (99% BW) and Emission Bandwidth	7
3.2	Field Strength of Fundamental.....	9
3.3	Restricted Bands of operation.....	11
3.4	Radiated Emissions, 9 kHz – 30 MHz.....	12
3.5	Radiated Emission, 30 – 200 MHz.....	14
4	Measurement Uncertainty.....	17
5	LIST OF TEST EQUIPMENT.....	18
6	BLOCK DIAGRAM.....	19
6.1	Power Line Conducted Emission.....	19
6.2	Test Site Radiated Emission.....	19

1 INFORMATION

1.1 Test Item

Name	Comtac VII
Model/version	SCU-300NA
FCC ID	Y9ZSCU300
ISED ID	4406A-SCU300
Serial number	Radiated Sample: Nr. 103
Hardware identity and/or version	K399Ava05
Software identity and/or version	K399-st-application-0.9.0
Frequency Range	9.983 – 11.771 MHz
Number of Channels	4 (9.983 MHz, 10.579 MHz, 11.175 MHz, 11.771 MHz)
Type of Modulation	8DPSK+PTCM
User Frequency Adjustment	None
Rated Output Power	N/A
Type of Power Supply	Primary Batteries (2x AAA alkaline cells)
Antenna Connector	None (Integral Antenna)
Number of Antennas	1
Desktop Charger	N/A
Interfaces	Proprietary Connector

Description of Test Item

The SCU300 is a System Control Unit (SCU) with integrated NFMI radio and Bluetooth (Basic, EDR and BLE) communications. The NFMI is audio based for using with the headset Comtac VII.

The headset can also be connected to the SCU using cable. The Bluetooth is a dual radio chip with one antenna path that allows the user to connect the Comtac VII to a cellular phone or an external radio. The SCU can also be connected to external radio by wires. The SCU is powered by 2 x 1.5V by AAA/LR03 alkaline batteries or rechargeable NiMH batteries. The batteries can not be charged while in the SCU.

1.2 Normal test condition

Temperature:	20 - 24 °C
Relative humidity:	20 - 50 %
Normal test voltage:	3.0 V _{DC} (Nominal Battery Voltage)

The values are the limit registered during the test period.

1.3 Test Engineer(s)

Frode Sveinsen

1.4 Description of modification for Modification Filing

Not applicable.

1.5 Family List Rational

Not Applicable.

1.6 Antenna Requirement

Is the antenna detachable? Yes No

If detachable, is the antenna connector non-standard? Yes No

Type of antenna connector: N/A

Ref. FCC §15.203

1.7 Worst-Case Configuration and Mode

Radiated Emissions and Power Line Conducted Emissions were performed with the EUT set to transmit at the channel with the highest output power as worst-case scenario.

1.8 Comments

All measurements were done with the EUT powered by new batteries.

2 TEST REPORT SUMMARY

2.1 General

All measurements are traceable to national standards.

The tests were conducted for demonstrating compliance with FCC CFR 47 Part 15, paragraph 15.249 and Industry Canada RSS-210 Issue 9 and RSS-GEN Issue 5.

Tests were performed in accordance with ANSI C63.4-2014 and and ANSI C63.10-2013.

Radiated tests were made in a semi-anechoic chamber at measuring distances of 3m.

A description of the test facility is on file with FCC and ISED.

- | | |
|---|---|
| <input type="checkbox"/> New Submission | <input checked="" type="checkbox"/> Production Unit |
| <input type="checkbox"/> Class II Permissive Change | <input type="checkbox"/> Pre-production Unit |
| DXT Equipment Code | <input type="checkbox"/> Family Listing |



THIS TEST REPORT APPLIES ONLY TO THE ITEM(S) AND CONFIGURATIONS TESTED.

Deviations from, additions to, or exclusions from the test specifications are described in "Summary of Test Data".

Nemko Group authorizes the above named entity to reproduce this report provided it is reproduced in its entirety and for use by the entity's employees only. Any reproduction of parts of this report requires approval in writing from Nemko Group.

Any use that a third party makes of this report, or any reliance on or decisions to be made based on it, are the responsibility of such third parties. Nemko Group accepts no responsibility for damages suffered by any third party caused by decisions made or actions based on this report.

2.2 Test Summary

Name of test	FCC Part 15 reference	RSS-247 Issue 2, RSS-GEN Issue 5 reference	ANSI C63.10-2013 Reference	Result
Supply Voltage Variations	15.31(e)	6.11 (RSS-GEN)	5.13	N/A
Number of Frequencies	15.31(m)	6.9 (RSS-GEN)	N/A	Complies
Antenna Requirement	15.203	6.8 (RSS-GEN)	5.8	Complies
Power Line Conducted Emission	15.207(a)	7.2 / 8.8 (RSS-GEN)	6.2	N/A
Occupied Bandwidth (99% BW)	15.215(c)	6.7 (RSS-GEN)	6.9.3	Complies
Radiated Emissions	15.209(a)	B.10(a)(b) (RSS-210) 7.3 (RSS-GEN) 8.9 (RSS-GEN)	6.3, 6.5, 6.6 6.10	Complies

3 TEST RESULTS

3.1 Occupied Bandwidth (99% BW) and Emission Bandwidth

FCC Part 15.215 (c)

ISED Canada RSS-GEN Issue 5, Clause 6.7

Measurement procedure: ANSI C63.10-2013 Clause 6.9.3

Test Results: Complies


Measurement Data:

Carrier Frequency	Occupied Bandwidth (99% BW)
9.979 MHz	520 kHz

See attached plots.

Requirements:

No limit specified for 99% BW, reported for information only.

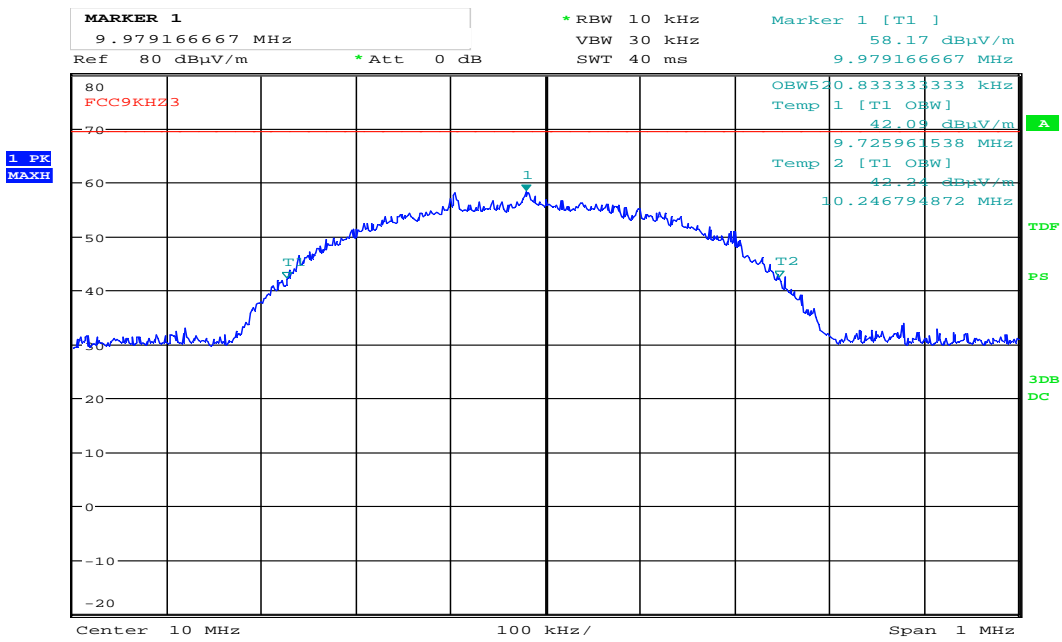

Date: 28.FEB.2020 10:55:23

Occupied BW, 99%, Lower Channel

3.2 Field Strength of Fundamental

FCC 15.209 (a)(c)(e)

ISED Canada RSS-210 Issue 9, B.10(a)

Test Results: Complies

Measurement Data:

Maximum Field Strength @1.5m, Max Power			
	9.98 MHz	11.77 MHz	Limit
Peak Field Strength @1.5m	62.2 dB μ V/m	65.5 dB μ V/m	81.5 dB μ V/m
Calculated Field Strength @3m	50.2 dB μ V/m	53.5 dB μ V/m	69.5 dB μ V/m


Field Strength reported is Maximum Field Strength.

See attached plots.

Requirements:


The field strength of fundamental, measured at 3m, shall not exceed 69.5 dB μ V/m.

Limit is converted to 3 m using 40 dB/decade according to 15.31 (f) (2).

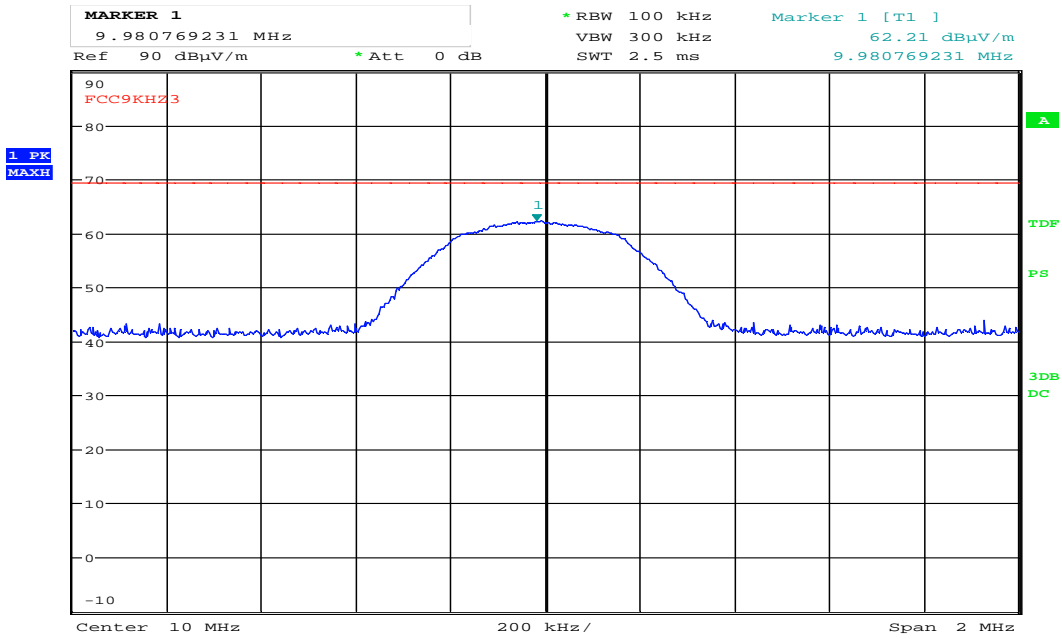

Date: 28.FEB.2020 11:01:54

Field Strength of Fundamental, Lower Channel, @1.5m

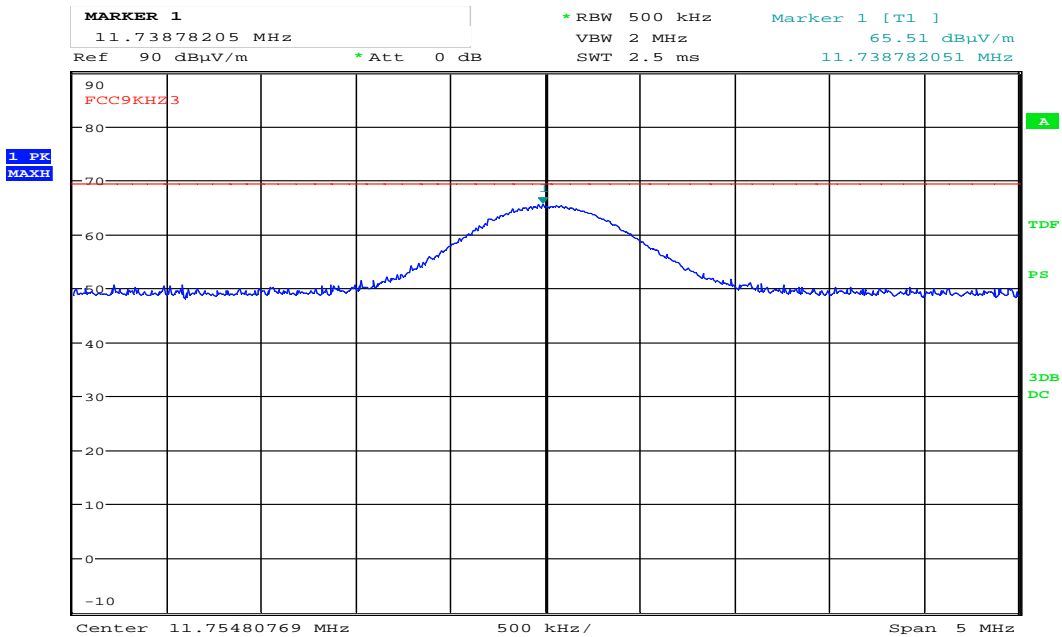

Date: 28.FEB.2020 12:08:01

Field Strength of Fundamental, Upper Channel, @1.5m

3.3 Restricted Bands of operation

Restricted Bands of operation for FCC and ISED are defined in FCC Part 15.205 and ISED RSS-GEN, Issue 5 clause 8.10.

Generally, no fundamentals are allowed in the restricted bands and all emissions must comply with the limits in FCC 15.209 or RSS-GEN, Issue 5, clause 8.9.

FCC (MHz)	ISED (MHz)	FCC (GHz)	ISED (GHz)
0.090-0.110		0.96-1.24 1.3-1.427	0.96-1.427
0.495-0.505		1.435-1.6265	
2.1735-2.1905		1.6455-1.6465	
	3.020-3.026	1.660-1.710	
4.125-4.128		1.7188-1.7222	
4.17725-4.17775		2.2-2.3	
4.20725-4.20775		2.31-2.39	
	5.677-5.683	2.4835-2.5	
6.215-6.218		2.69-2.9	2.655-2.9
6.26775-6.26825		3.26-3.267	
6.31175-6.31225		3.332-3.339	
8.291-8.294		3.3458-3.358	
8.362-8.366		3.6-4.4	3.5-4.4
8.37625-8.38675		4.5-5.15	
8.41425-8.41475		5.35-5.46	
12.29-12.293		7.25-7.75	
12.51975-12.52025		8.025-8.5	
12.57675-12.57725		9.0-9.2	
13.36-13.41		9.3-9.5	
16.42-16.423		10.6-12.7	
16.69475-16.69525		13.25-13.4	
16.80425-16.80475		14.47-14.5	
25.5-25.67		15.35-16.2	
37.5-38.25		17.7-21.4	
73-74.6		22.01-23.12	
74.8-75.2		23.6-24.0	
108-121.94 123-138	108-138	31.2-31.8	
149.9-150.05		36.43-36.5	
156.52475-156.52525		Above 38.6	
156.7-156.9			
162.0125-167.17			
167.72-173.2			
240-285			
322-335.4			
399.9-410			
608-614			

Frequencies in **Bold** text are specific for FCC or ISED, all other frequencies are common.

3.4 Radiated Emissions, 9 kHz – 30 MHz.

FCC Part 15.209 (a)

ISED Canada RSS-GEN Issue 5, Clause 7.3/8.9


Measurement procedure: ANSI C63.10-2013 Clause 11.12

Test Results: Complies


See plots

Measuring distance 3 m, Peak detector.

Limit is converted to 3 m using 40 dB/decade according to 15.31 (f) (2).

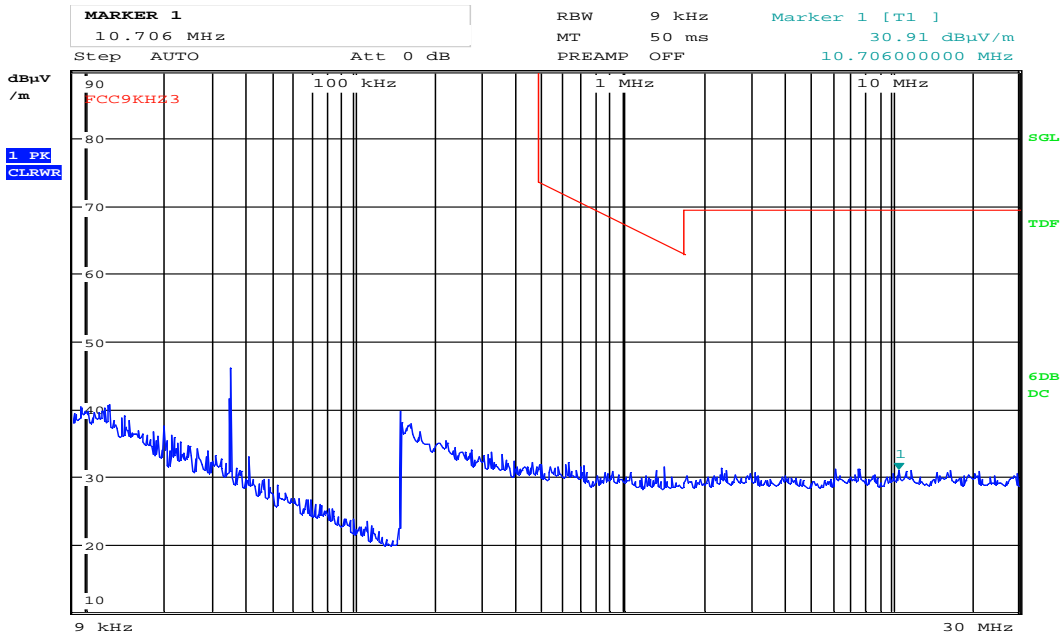

Date: 28.FEB.2020 11:49:44

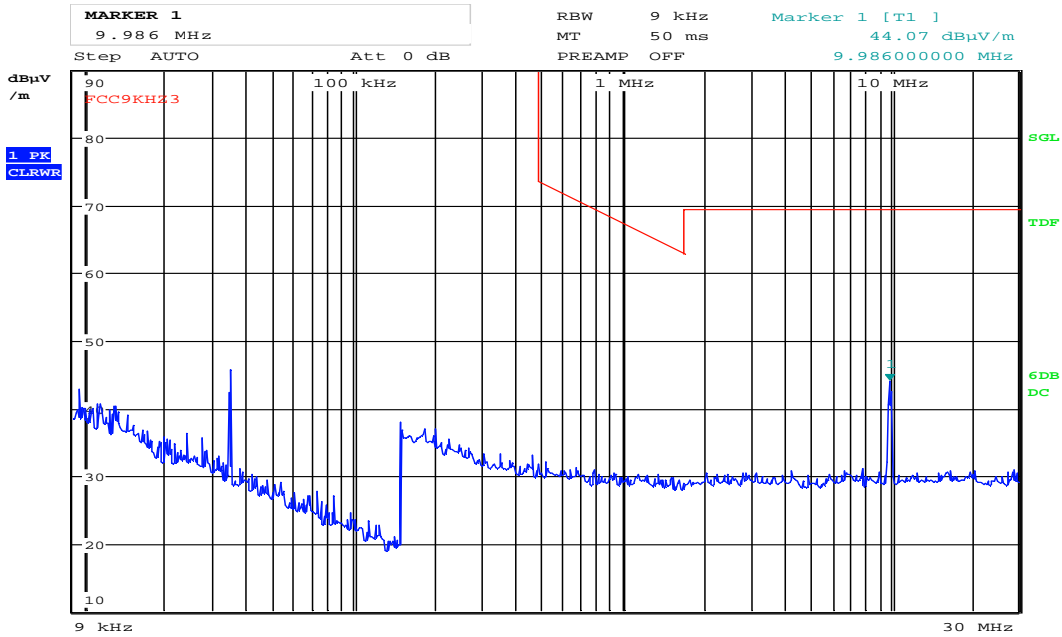

Date: 28.FEB.2020 11:23:41

3.5 Radiated Emission, 30 – 200 MHz.

FCC Part 15.209(a)

ISED Canada RSS-GEN Issue 5, Clause 7.3 / 8.9

Measurement procedure: ANSI C63.10-2013 Clause 6.5

Test Results: Complies

Measurement Data:

Detector: Peak

Measuring distance: 3 m

Tested in > mode with active connection

Frequency MHz	Field strength @3m QP Det., dB μ V/m	Limit dB μ V/m	Margin dB
30 – 88	< 20	40.0	> 20
88 – 200	< 20	43.5	> 23.5

See attached plots


Requirements/Limit

The field strength of harmonic emissions, measured at 3 m, shall not exceed 0.5 mV/m (54 dB μ V/m).

The field strength limits shall be measured using an average detector.


Emissions radiated outside of the specified frequency bands, except for harmonic emissions, shall be attenuated by at least 50 dB below the level of the fundamental emissions or to the general field strength limits listed in RSS-Gen or §15.209, whichever is less stringent.

FCC	Part 15.209 @ frequencies defined in §15.205	
ISED	RSS-GEN Issue 5, Clause 8.9 @ frequencies defined in clause 8.10	
Frequency	Radiated emission limit @3 meters	
30 – 88 MHz	100 μ V/m	40.0 dB μ V/m
88 – 216 MHz	150 μ V/m	43.5 dB μ V/m
216 – 960 MHz	200 μ V/m	46.0 dB μ V/m
960 – 1000 MHz	500 μ V/m	54.0 dB μ V/m
	Limits above are with Quasi Peak Detector	

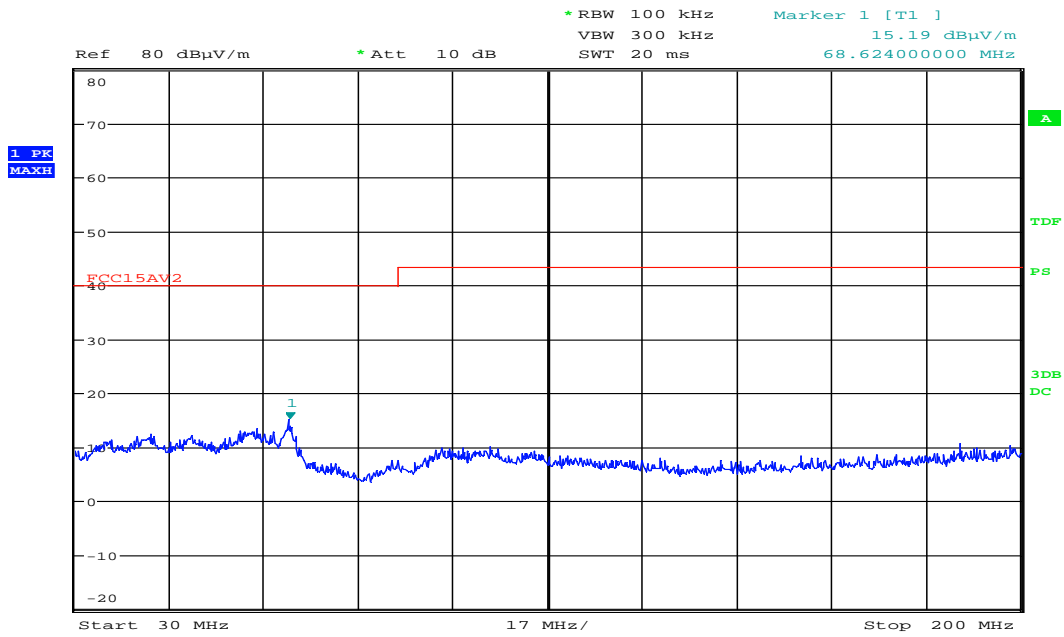


Date: 28.FEB.2020 13:21:11

Radiated Emissions 30 – 200MHz, EUT V, HP

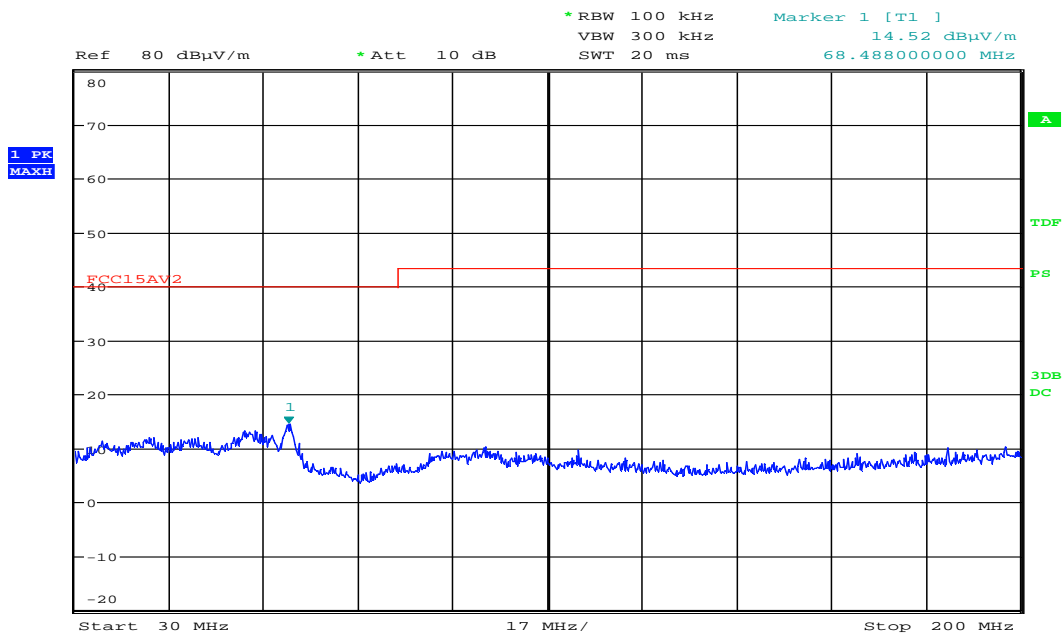


Date: 28.FEB.2020 13:19:31

Radiated Emissions 30 – 200MHz, EUT V, VP

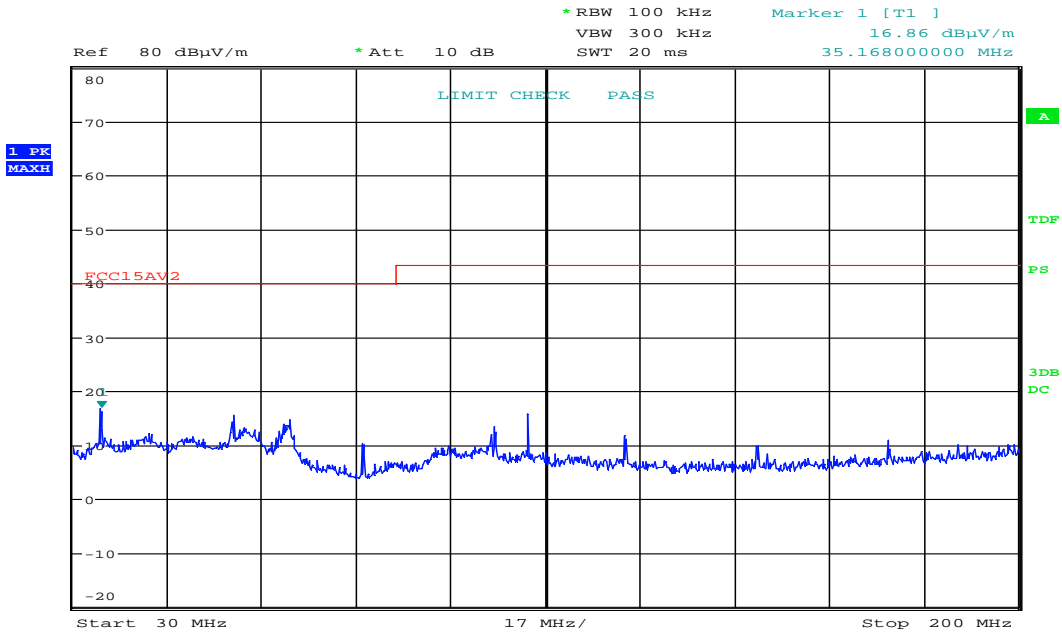

Date: 28.FEB.2020 12:44:39

Radiated Emissions 30 – 200MHz, EUT H, HP

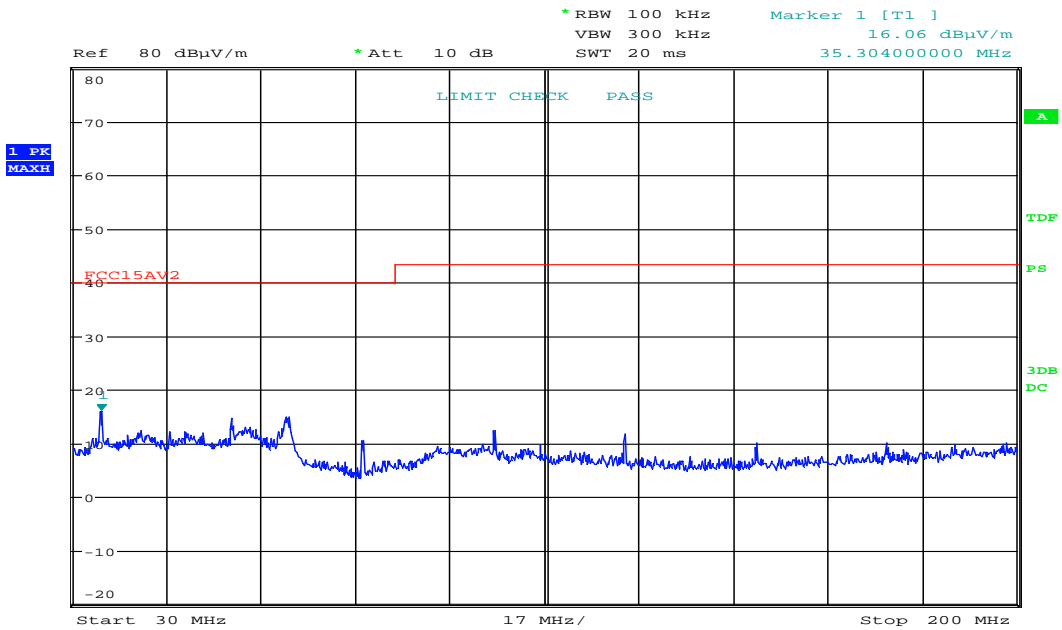

Date: 28.FEB.2020 12:42:59

Radiated Emissions 30 – 200MHz, EUT H, VP

4 Measurement Uncertainty

Measurement Uncertainty Values		
Test Item		Uncertainty
Spurious Emissions, Radiated	< 1 GHz	±2.5 dB
	> 1 GHz	±2.2 dB
Emission Bandwidth		±4 %
Power Line Conducted Emissions		+2.9 / -4.1 dB
Temperature Uncertainty		±1 °C

All uncertainty values are expanded standard uncertainty to give a confidence level of 95%, based on coverage factor k=2

5 LIST OF TEST EQUIPMENT

To facilitate inclusion on each page of the test equipment used for related tests, each item of test equipment and ancillaries are identified (numbered) by the Test Laboratory.

No.	Model number	Description	Manufacturer	Ref. no.	Cal. date	Cal. Due
1	ESU40	Measuring Receiver	Rohde & Schwarz	LR 1639	2020.01	2021.01
2	HFH2-Z2	Active Loop Antenna	Rohde & Schwarz	LR 1660	2019-06	2022-06
3	VULB 9163	BiLog Antenna	Schwarzbech	LR 1616	2020-01	2023-01
4	317	Preamplifier	Sonoma Instruments	LR 1687	2019-07	2020-07

The software listed below has been used for one or more tests.


No.	Manufacturer	Name	Version	Comment
1	Rohde & Schwarz	GPIBSHOT	2.7	Screenshots from R&S Spectrum Analyzers
2				

Revision history


Revision	Date	Comment	Sign
00	2020-04-28	First edition	FS

6 BLOCK DIAGRAM

6.1 Power Line Conducted Emission

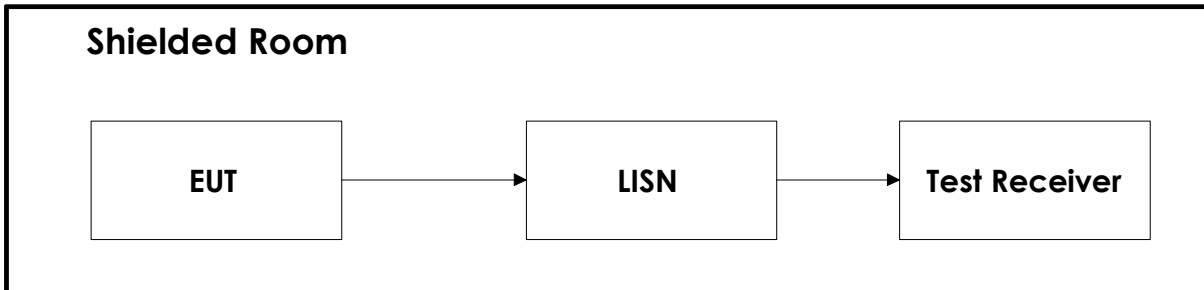

6.2 Test Site Radiated Emission

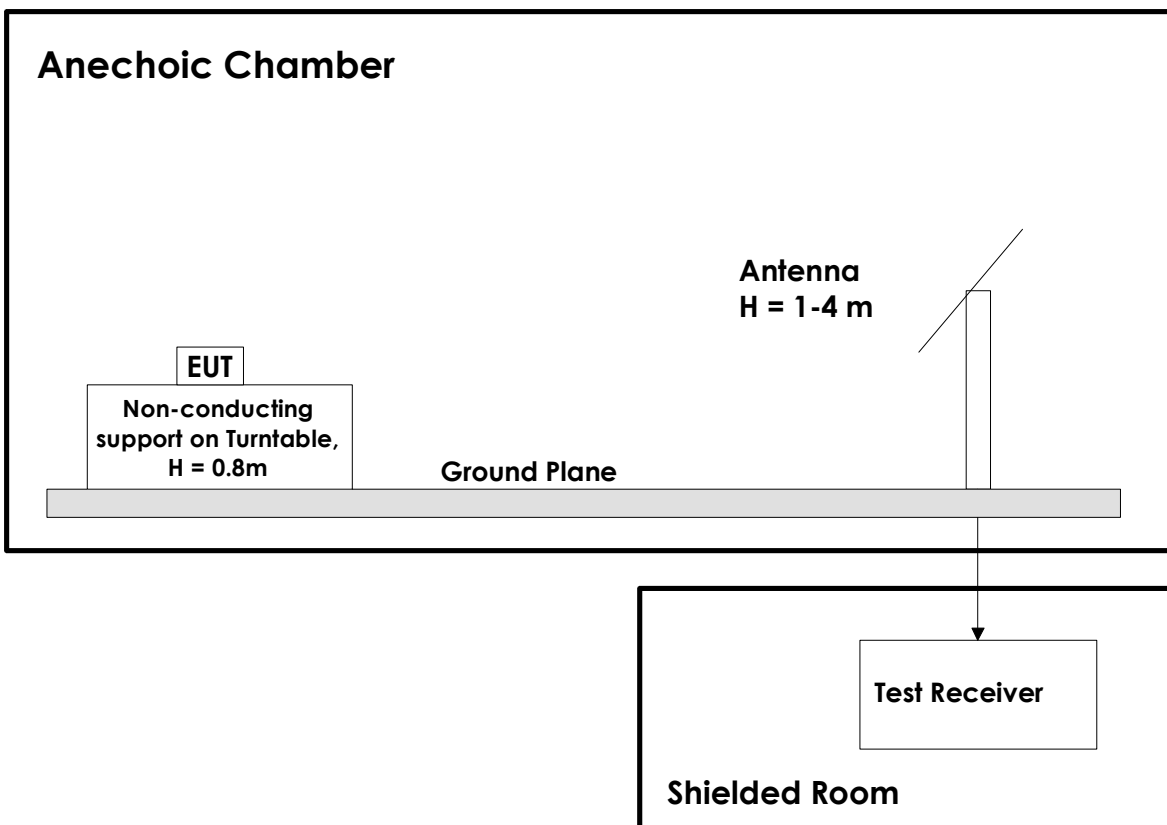

This test setup is used for all radiated emissions tests. For frequencies below 30 MHz the measuring distance is 10m, for all other frequencies it is 3m or 1m. Emissions above 1 GHz are measured with a Spectrum Analyzer and Horn Antenna. For measurements above 18 GHz the test receiver is moved inside the anechoic chamber and located next to the antenna to minimize the cable loss. All measurements at 1GHz and above were performed with turntable height 1.5m and with the ground plane covered by absorbers. A pre-amplifier is used for all measurements above 30 MHz, and High-Pass or Band-Pass filter is used for all harmonics.