



Prüfbericht-Nr.: <i>Test report no.:</i>	CN222OAB(P15C-BLE) 001	Auftrags-Nr.: <i>Order no.:</i>	238538954	Seite 1 von 27 Page 1 of 27
Kunden-Referenz-Nr.: <i>Client reference no.:</i>	N/A	Auftragsdatum: <i>Order date:</i>	2022-01-20	
Auftraggeber: <i>Client:</i>	InnoComm Mobile Technology Corporation 3F, No. 6, Hsin Ann Rd., Hsinchu Science Park, Hsinchu 30078, Taiwan			
Prüfgegenstand: <i>Test item:</i>	BLE Single Mode Module			
Bezeichnung / Typ-Nr.: <i>Identification / Type no.:</i>	BM10_AN R3			
Auftrags-Inhalt: <i>Order content:</i>	FCC Part 15C Test report (BLE)			
Prüfgrundlage: <i>Test specification:</i>	FCC 47CFR Part 15: Subpart C Section 15.247			
Wareneingangsdatum: <i>Date of sample receipt:</i>	2022-01-24			
Prüfmuster-Nr.: <i>Test sample no.:</i>	A003205394-005			
Prüfzeitraum: <i>Testing period:</i>	2022-01-27 - 2022-02-14			
Ort der Prüfung: <i>Place of testing:</i>	EMC/RF Taipei Testing Site			
Prüflaboratorium: <i>Testing laboratory:</i>	Taipei Testing Laboratories			
Prüfergebnis*: <i>Test result*:</i>	Pass			
zusammengestellt von: <i>compiled by:</i>		genehmigt von: <i>authorized by:</i>		
Datum: <i>Date:</i>	2022-02-21	Ausstellungsdatum: <i>Issue date:</i>	2022-02-21	
Stellung / Position:	Senior Project Manager	Stellung / Position:	Senior Project Manager	
Sonstiges / Other:				
Zustand des Prüfgegenstandes bei Anlieferung: <i>Condition of the test item at delivery:</i>	Prüfmuster vollständig und unbeschädigt <i>Test item complete and undamaged</i>			
* Legende:	1 = sehr gut P(ass) = entspricht o.g. Prüfgrundlage(n)	2 = gut F(ail) = entspricht nicht o.g. Prüfgrundlage(n)	3 = befriedigend N/A = nicht anwendbar	4 = ausreichend N/T = nicht getestet
* Legend:	1 = very good P(ass) = passed a.m. test specification(s)	2 = good F(ail) = failed a.m. test specification(s)	3 = satisfactory N/A = not applicable	4 = sufficient N/T = not tested
Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens. <i>This test report only relates to the a. m. test sample. Without permission of the test center this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any test mark.</i>				

TEST SUMMARY

Report Section	FCC Clause	Test Item	Result
5.1.1	15.247(b) & 15.203	Antenna Requirement	Pass
5.1.2	15.247(b)(3)	Peak Output Power	Pass
5.1.3	15.247(a)(2)	6 dB Bandwidth	Pass
5.1.3	2.1049	99% Occupied Bandwidth	Pass
5.1.4	15.247(e)	Power Spectral Density	Pass
5.1.5	15.247(d)	Conducted Spurious Emissions and Band Edges	Pass
5.1.6	15.247(d) & 15.205 & 15.209	Radiated Spurious Emissions and Band Edges	Pass
5.2.1	15.207	Mains Conducted Emission	Pass

Note: Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

Contents

HISTORY OF THIS TEST REPORT	5
1. GENERAL REMARKS	6
1.1 COMPLEMENTARY MATERIALS.....	6
1.2 DECISION RULE OF CONFORMITY	6
2. TEST SITES	7
2.1 TEST LABORATORY	7
2.2 TEST FACILITY.....	7
2.3 TRACEABILITY	8
2.4 CALIBRATION	8
2.5 MEASUREMENT UNCERTAINTY	8
3. GENERAL PRODUCT INFORMATION.....	9
3.1 PRODUCT FUNCTION AND INTENDED USE	9
3.2 SYSTEM DETAILS AND RATINGS.....	9
3.3 NOISE GENERATING AND NOISE SUPPRESSING PARTS	10
3.4 SUBMITTED DOCUMENTS.....	10
4. TEST SET-UP AND OPERATION MODES.....	11
4.1 PRINCIPLE OF CONFIGURATION SELECTION	11
4.2 CARRIER FREQUENCY AND CHANNEL.....	11
4.3 TEST OPERATION AND TEST SOFTWARE.....	12
4.4 SPECIAL ACCESSORIES AND AUXILIARY EQUIPMENT	13
4.5 TEST SETUP DIAGRAM	14
5. TEST RESULTS	15
5.1 TRANSMITTER REQUIREMENT & TEST SUITES	15
5.1.1 <i>Antenna Requirement</i>	<i>15</i>
5.1.2 <i>Peak Output Power</i>	<i>16</i>
5.1.3 <i>6 dB Bandwidth and 99% Occupied Bandwidth.....</i>	<i>18</i>
5.1.4 <i>Power Spectral Density.....</i>	<i>19</i>
5.1.5 <i>Conducted Spurious Emissions and Frequency Band Edges Measured in 100kHz Bandwidth.....</i>	<i>20</i>
5.1.6 <i>Radiated Spurious Emissions and Band Edges</i>	<i>21</i>
5.2 MAINS EMISSION	26
5.2.1 <i>Mains Conducted Emission.....</i>	<i>26</i>

Prüfbericht - Nr.: CN222OAB(P15C-BLE) 001
Test Report No.

Seite 4 von 27
Page 4 of 27

APPENDIX A - TEST RESULT OF CONDUCTED

APPENDIX B - TEST RESULT OF RADIATED EMISSIONS & MAINS CONDUCTED EMISSION

APPENDIX SP - PHOTOGRAPHS OF TEST SETUP

APPENDIX EP - PHOTOGRAPHS OF EUT

Prüfbericht - Nr.: CN222OAB(P15C-BLE) 001
Test Report No.

Seite 5 von 27
Page 5 of 27

HISTORY OF THIS TEST REPORT

Report No.	Description	Date Issued
CN222OAB(P15C-BLE) 001	Original Release	2022-02-21

1. General Remarks

1.1 Complementary Materials

All attachments are integral parts of this test report. This applies especially to the following appendix:

Appendix A - Test Result of Conducted

Appendix B - Test Result of Radiated Emissions & Mains Conducted Emission

Appendix SP - Photographs of Test Setup

Appendix EP - Photographs of EUT

Applied Standard and Test Levels

Radio
FCC 47CFR Part 15: Subpart C Section 15.247
FCC 47CFR Part 2: Subpart J Section 2.1049
ANSI C63.10:2013
KDB 558074 D01 15.247 Meas Guidance v05r02

1.2 Decision Rule of Conformity

The decision rule of conformity of this test report is following the requirements of the requested standard in the quotation, and agreed among testing laboratory and manufacturer (applicant) to exclude the consideration of Measurement Uncertainty, unless it is required by the specific standard.

2. Test Sites

2.1 Test Laboratory

Taipei Testing Laboratories

11F. No.758, Sec. 4, Bade Rd., Songshan Dist.
Taipei City 105
Taiwan (R.O.C.)

2.2 Test Facility

Taipei Testing Laboratories

No.458-18, Sec. 2, Fenliao Rd., Linkou Dist.,
New Taipei City 244
Taiwan (R.O.C.)
FCC Registration No.: 226631
ISED Registration No.: 25563

2.3 Traceability

All measurement equipment calibrations are traceable to NML(Taiwan)/NIST(USA) or where calibration is performed outside Taiwan, to equivalent nationally recognized standards organizations.

2.4 Calibration

Equipment requiring calibration is calibrated periodically in a suitably accredited Calibration Lab. Additionally all equipment is verified for proper performance on a regular basis using in house standards or comparisons.

2.5 Measurement Uncertainty

All measurement uncertainty values are shown with a coverage factor of $k=2$ to indicate a 95% level of confidence.

Emission Measurement Uncertainty

Parameter	Uncertainty
Radiated Emission (9 kHz ~ 30 MHz)	± 1.15 dB
Radiated Emission (30 MHz ~ 200 MHz)	± 1.32 dB
Radiated Emission (200 MHz ~ 1 GHz)	± 1.31 dB
Radiated Emission (1 GHz ~ 18 GHz)	± 1.53 dB
Radiated Emission (18 GHz ~ 40 GHz)	± 2.50 dB
Mains Conducted Emission	± 1.65 dB

3. General Product Information

3.1 Product Function and Intended Use

The EUT is a BLE Single Mode Module. It contains a Bluetooth compatible module enabling the user to communicate data through a Wireless interface.

For details refer to the User Guide, Data Sheet and Circuit Diagram.

3.2 System Details and Ratings

Basic Information of EUT

Item	EUT information
Kind of Equipment/Test Item	BLE Single Mode Module
Type Identification	BM10_AN R3
FCC ID	YAIBM10R3

Technical Specification of EUT

Item	EUT information
Operating Frequency	2402 MHz ~ 2480 MHz
Channel Spacing	2 MHz
Channel Number	40
Data Rate	1Mbps, 2Mbps
Operation Voltage	1.9 ~ 3.8Vdc (Tested at 5Vdc USB)
Modulation	GFSK
Maximum Output Power (mW)	3.24
Antenna Information	Refer to 5.1.1
Accessory Device	Refer to 4.4

3.3 Noise Generating and Noise Suppressing Parts

Refer to the Circuit Diagram.

3.4 Submitted Documents

- Circuit Diagram
- Instruction Manual
- Rating Label
- Technical Description

4. Test Set-up and Operation Modes

4.1 Principle of Configuration Selection

The test modes were adapted accordingly in reference to the instructions for use.

During testing, Channel and Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output expected by the customer and is going to be fixed on the firmware of the final end product.

Table for Parameters of Test Software Setting

Frequency (MHz)	Power Setting
2402	4
2440	4
2480	4

4.2 Carrier Frequency and Channel

Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)
0	2402	10	2422	20	2442	30	2462
1	2404	11	2424	21	2444	31	2464
2	2406	12	2426	22	2446	32	2466
3	2408	13	2428	23	2448	33	2468
4	2410	14	2430	24	2450	34	2470
5	2412	15	2432	25	2452	35	2472
6	2414	16	2434	26	2454	36	2474
7	2416	17	2436	27	2456	37	2476
8	2418	18	2438	28	2458	38	2478
9	2420	19	2440	29	2460	39	2480

4.3 Test Operation and Test Software

Setup for testing: Test samples are provided with a USB interface which makes it possible to control them through a test software installed on a notebook computer.
 This software was running on the laptop computer connected to the EUT. It was used to enable the operation modes listed as below.

Test Software	Smart RF Studio 7
---------------	-------------------

The samples were used as follows:
 A003205394-005 for conducted and radiated tests
 Full test was applied on all test modes, but only worst case was shown.

EUT Configure Mode	Applicable To				Description
	Antenna Port Conducted Measurement	Radiated Spurious Emissions above 1 GHz	Radiated Spurious Emissions below 1 GHz	Mains Conducted Emission	
-	√	√	√	√	-

Note:

1. The EUT had been pre-tested on the positioned of each 3 axis. The worst case was found when position on X-plane.
2. "-" means no effect.

Antenna Port Conducted Measurement

- Pre-Scan full test was applied on all test modes, but only worst case was shown.
- Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Available Frequency (MHz)	Tested Frequency (MHz)	Date Rate (Mbps)
-	2402 to 2480	2402, 2440, 2480	1
-	2402 to 2480	2402, 2440, 2480	2

Radiated Spurious Emissions (Above 1 GHz)

- Pre-Scan full test was applied on all test modes, but only worst case was shown.
- Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Available Frequency (MHz)	Tested Frequency (MHz)	Date Rate (Mbps)
-	2402 to 2480	2402, 2440, 2480	1
-	2402 to 2480	2402, 2440, 2480	2

Radiated Spurious Emissions (Below 1 GHz)

- Pre-Scan full test was applied on all test modes, but only worst case was shown.
- Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Available Frequency (MHz)	Tested Frequency (MHz)	Date Rate (Mbps)
-	2402 to 2480	2402	1

Mains Conducted Emission

- Pre-Scan full test was applied on all test modes, but only worst case was shown.
- Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Available Frequency (MHz)	Tested Frequency (MHz)	Date Rate (Mbps)
-	2402 to 2480	2402	1

Test Condition

Test Item	Ambient Temperature	Relative Humidity	Tested by
Conducted Measurement	23.9-24.6 °C	55-59.5 %	Andy Chen
Radiated Spurious Emissions above 1 GHz	23.3-25.3 °C	54-59 %	Blake Wang
Radiated Spurious Emissions below 1 GHz	23.3-25.3 °C	54-59 %	Blake Wang
Mains Conducted Emission	20.1-20.9 °C	53-57 %	Hunter Wang

4.4 Special Accessories and Auxiliary Equipment

The product has been tested together with the following additional accessories:

Accessory of EUT


None.

Support Unit


No.	Description	Brand	Model	S/N	Remark
Radiated Test					
1	Notebook	HP	15s-du0007TX	CND93662VF	-
2	USB Cable	TUV	TUV-001	-	62 cm non-shielded cable w/o core
A	PCB	InnoComm Mobile	SN10-2X	-	-
Mains Conducted Emission Test					
1	Notebook	Lenovo	81BL	MP1DCD6Y	-
2	USB Cable	TUV	TUV-001	-	145 cm non-shielded cable w/o core
A	PCB	InnoComm Mobile	SN10-2X	-	-
Conducted Test					
-	Notebook	HP	TPN-C135	CND9111RJB	-
-	PCB	InnoComm Mobile	SN10-2X	-	-
-	USB Cable	TUV	TUV-001	-	62 cm non-shielded cable w/o core

4.5 Test Setup Diagram

<Radiated Spurious Emissions mode>

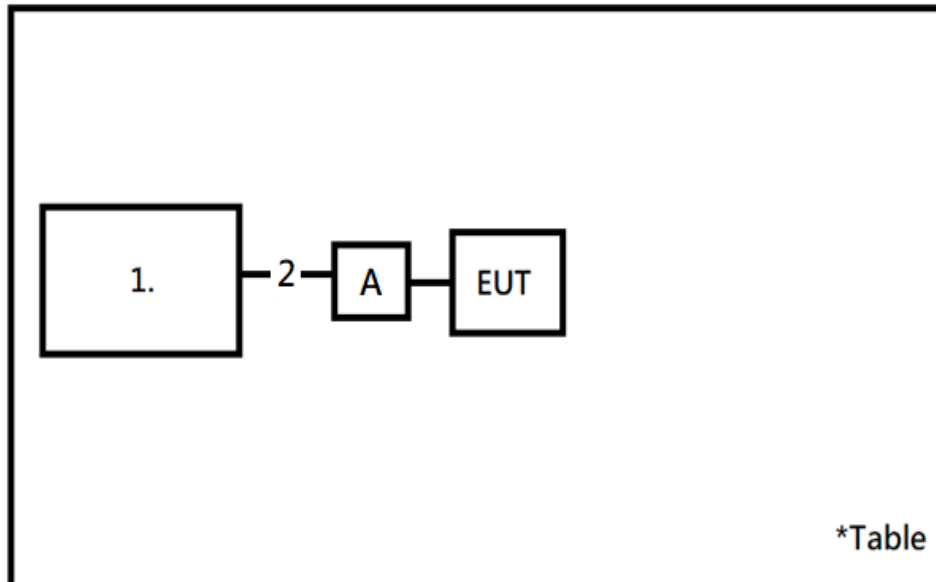

<Mains Conducted Emission mode>

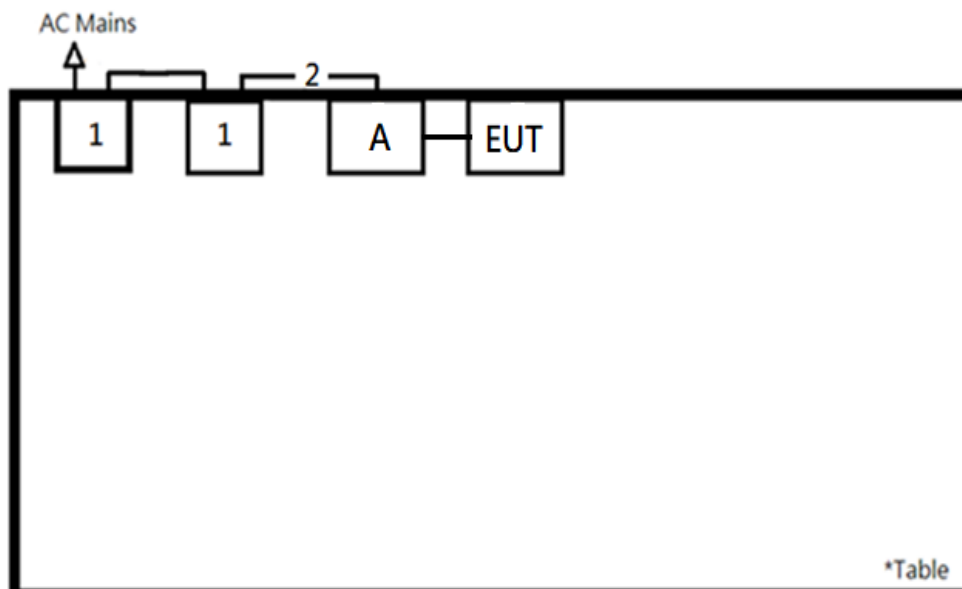

5. Test Results

5.1 Transmitter Requirement & Test Suites

5.1.1 Antenna Requirement

Requirement Use of approved antennas only


According to the manufacturer declaration, the EUT has an antenna with a directional gain of 0.98 dBi. The antenna is a PCB antenna with no possibility of replacement with a non-approved antenna by the end-user. Therefore, the EUT is considered to comply with this provision.
Refer to EUT photo for details.

5.1.2 Peak Output Power

Limit 1 watt (30 dBm)

Kind of Test Site Shielded room

Test Setup



Test Instruments

Kind of Equipment	Manufacturer	Type	S/N	Calibration Date	Calibration Due Date	Test Date	
						From	Until
Power Meter	Anritsu	ML2495A	1901008	2021/3/24	2022/3/23	2022/1/27	2022/1/27
Power Sensor	Anritsu	MA2411B	1725269	2021/3/24	2022/3/23	2022/1/27	2022/1/27

Test Procedures

A peak power sensor was used on the output port of the EUT. A power meter was used to read the response of the peak power sensor. Record the power level.

Average power sensor was used to perform output power measurement, trigger and gating function of wide band power meter is enabled to measure max output power of TX on burst. Duty factor is not added to measured value.

Test Result
Peak Output Power
<1Mbps>

Channel	Channel Frequency	Peak Output Power		Limit (dBm)
	(MHz)	(dBm)	(mW)	
Low Channel	2402	5.11	3.24	30
Middle Channel	2440	4.92	3.10	30
High Channel	2480	4.71	2.96	30

<2Mbps>

Channel	Channel Frequency	Peak Output Power		Limit (dBm)
	(MHz)	(dBm)	(mW)	
Low Channel	2402	5.06	3.21	30
Middle Channel	2440	4.84	3.05	30
High Channel	2480	4.64	2.91	30

Average Power
<1Mbps>

Channel	Channel Frequency	Average Power	
	(MHz)	(dBm)	(mW)
Low Channel	2402	5.09	3.23
Middle Channel	2440	4.89	3.08
High Channel	2480	4.69	2.94

<2Mbps>


Channel	Channel Frequency	Average Power	
	(MHz)	(dBm)	(mW)
Low Channel	2402	5.04	3.19
Middle Channel	2440	4.83	3.04
High Channel	2480	4.62	2.90

5.1.3 6 dB Bandwidth and 99% Occupied Bandwidth

Limit The minimum 6 dB bandwidth shall be at least 500 kHz.

Kind of Test Site Shielded room

Test Setup



Test Instruments

Kind of Equipment	Manufacturer	Type	S/N	Calibration Date	Calibration Due Date	Test Date	
						From	Until
Spectrum Analyzer	R&S	FSV40	101512	2021/1/29	2022/1/28	2022/1/27	2022/1/27

Test Procedure

- a. Set resolution bandwidth (RBW) = 100 kHz
- b. Set the video bandwidth (VBW) $\geq 3 \times$ RBW, Detector = Peak.
- c. Trace mode = max hold.
- d. Sweep = auto couple.
- e. Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.
- f. For 99% occupied bandwidth measurement, the transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with resolution bandwidth in the range of 1% to 5% of the anticipated emission bandwidth, and a video bandwidth at least 3x the resolution bandwidth and set the detector to PEAK. The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean power of a given emission.

Test Results


Please refer to Appendix A.

5.1.4 Power Spectral Density

Limit

The power spectral density shall not be greater than 8 dBm in any 3 kHz band.

Kind of Test Site Shielded room

Test Setup

Test Instruments

Kind of Equipment	Manufacturer	Type	S/N	Calibration Date	Calibration Due Date	Test Date	
						From	Until
Spectrum Analyzer	R&S	FSV40	101512	2021/1/29	2022/1/28	2022/1/27	2022/1/27

Test Procedure

- a. Set analyzer center frequency to DTS channel center frequency.
- b. Set the span to 1.5 times the DTS bandwidth.
- c. Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- d. Set the VBW $\geq 3 \times \text{RBW}$.
- e. Detector = peak.
- f. Sweep time = auto couple.
- g. Trace mode = max hold.
- h. Allow trace to fully stabilize.
- i. Use the peak marker function to determine the maximum amplitude level within the RBW.

Test Results

Please refer to Appendix A.


5.1.5 Conducted Spurious Emissions and Frequency Band Edges Measured in 100kHz Bandwidth

Limit

20dB (below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power.)

Kind of Test Site Shielded room

Test Setup



Test Instruments

Kind of Equipment	Manufacturer	Type	S/N	Calibration Date	Calibration Due Date	Test Date	
						From	Until
Spectrum Analyzer	R&S	FSV40	101512	2021/1/29	2022/1/28	2022/1/27	2022/1/27

Test Procedure

Measurement procedure REF

1. Set the RBW = 100 kHz.
2. Set the VBW \geq 300 kHz.
3. Detector = peak.
4. Sweep time = auto couple.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.

Measurement procedure OOBE

1. Set RBW = 100 kHz.
2. Set VBW \geq 300 kHz.
3. Detector = peak.
4. Sweep = auto couple.
5. Trace Mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum amplitude level.

Test Results

Please refer to Appendix A.

5.1.6 Radiated Spurious Emissions and Band Edges

Limit


Radiated emissions which fall in the restricted bands, as defined in §15.205(a), must comply with the radiated emission limits specified in §15.209(a).

Emissions radiated outside the restricted and authorized frequency bands must either comply with the radiated emission limits specified for the restricted bands or in §15.247(d).


Kind of Test Site 3m Semi-Anechoic Chamber

Test Setup


<Radiated Emissions below 30 MHz>

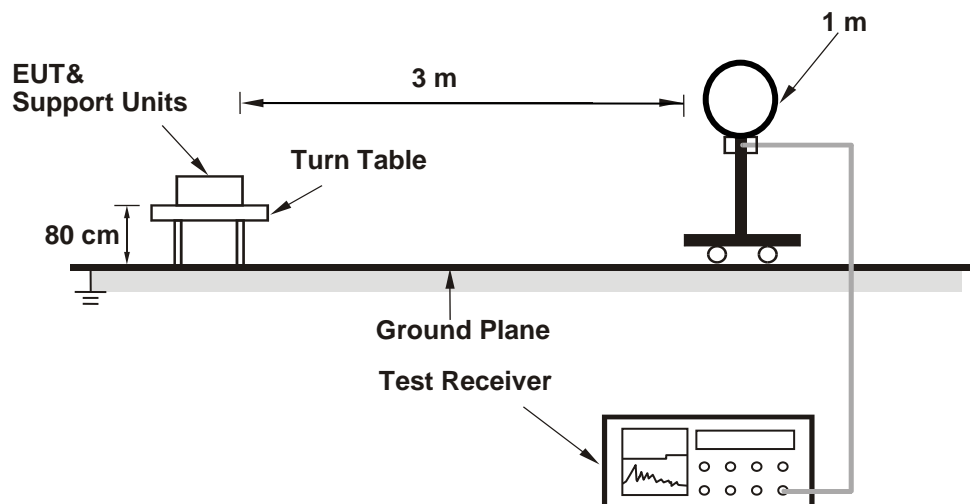

<Radiated Emissions 30 MHz to 1 GHz>

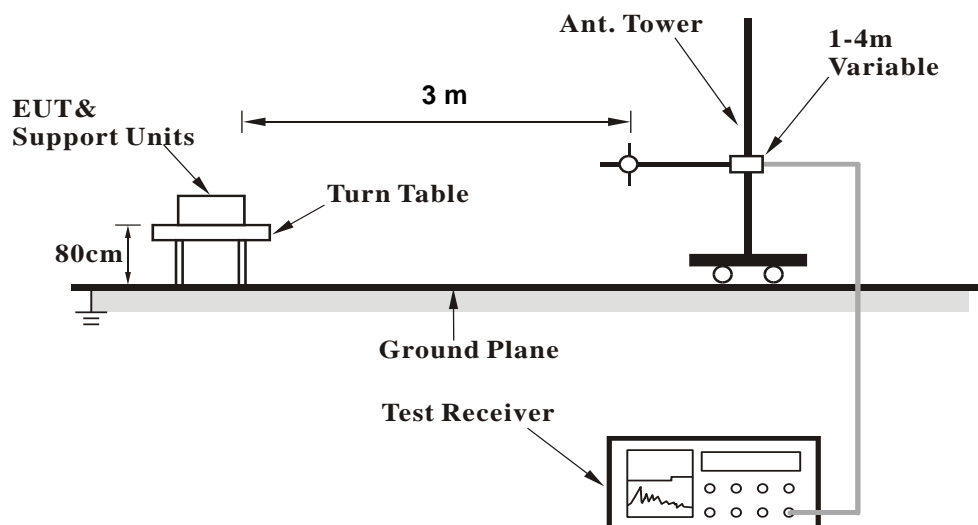

<Radiated Emissions above 1 GHz>

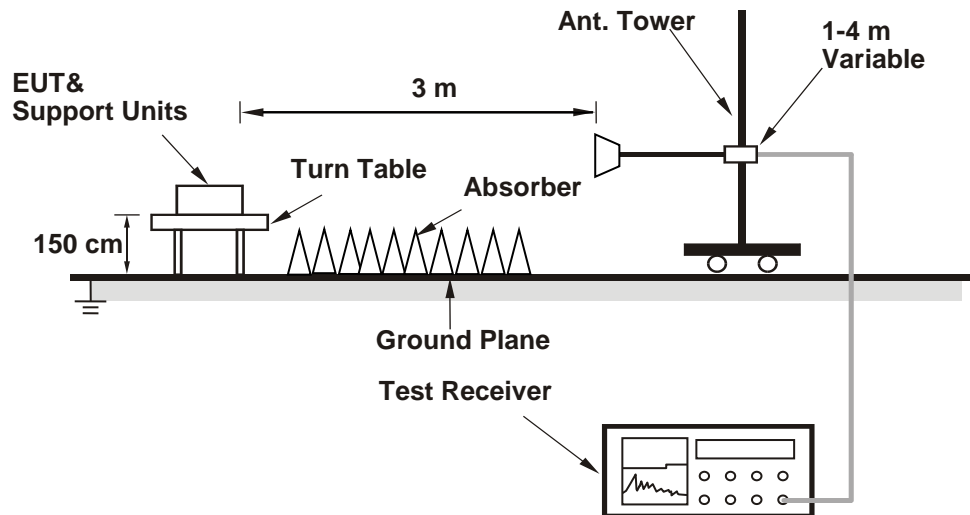

For the actual test configuration, please refer to the attached file (Test Setup Photo).

Test Instruments

Test Date: 2022/02/03 – 2022/02/04

Kind of Equipment	Manufacturer	Type	S/N	Calibration Date	Calibration Due Date
Receiver	R&S	ESR7	102109	2021/03/16	2022/03/15
Signal Analyzer	R&S	FSV40	101508	2021/03/16	2022/03/15
Bilog Antenna	SCHWARZBECK	VULB-9168	00951	2021/02/18	2022/02/17
Horn Antenna	ETS-Lindgren	3117	00218929	2021/11/25	2022/11/24
Horn Antenna	SCHWARZBECK	BBHA 9170	00887	2021/04/08	2022/04/07
LF-AMP	Agilent	8447D	2944A10772	2021/02/18	2022/02/17
HF-AMP + AC source	EMCI	EMC051845SE	980633	2021/02/09	2022/02/08
HF-AMP + AC source	EMCI	EMC184045SE	980656	2022/01/20	2023/01/19
Microwave Cable	HUBER+SUHNER	SUCOFLEX 104EA	800056/4EA	2021/03/17	2022/03/16
Microwave Cable	HUBER+SUHNER	SUCOFLEX 104	804680/4	2021/03/17	2022/03/16
Microwave Cable	HUBER+SUHNER	SUCOFLEX 104	MY37202/4	2021/03/17	2022/03/16
Microwave Cable	HUBER+SUHNER	SUCOFLEX 102EA	800898/2EA	2021/04/16	2022/04/15
Microwave Cable	HUBER+SUHNER	SUCOFLEX 102EA	800901/2EA	2021/04/16	2022/04/15
Microwave Cable	HUBER+SUHNER	SUCOFLEX 102EA	801027/2EA	2021/04/16	2022/04/15
Loop Antenna	SCHWARZBECK	FMZB1519B	00215	2021/12/08	2022/12/07

Test Procedures**For Radiated Emissions below 30 MHz**

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. Parallel (OPEN), perpendicular (CLOSE), and ground-parallel (GROUND) orientations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

Note:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9 kHz at frequency below 30 MHz.
2. All modes of operation were investigated and the worst-case emissions are reported.

For Radiated Emissions above 30 MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters (for 30 MHz ~ 1 GHz) / 1.5 meters (for above 1 GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detected function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Note:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasi-peak detection (QP) or Peak detection (PK) at frequency below 1 GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1 GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is $\geq 1/T$ (Duty cycle < 98 %) or 10 Hz (Duty cycle ≥ 98 %) for Average detection (AV) at frequency above 1 GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.
5. The Radiated Emissions testing was performed in the X(E1), Y(H) and Z(E2) axis orientation. The worst-case Axis orientation is recorded in this test report.

Prüfbericht - Nr.: **CN222OAB(P15C-BLE) 001**
Test Report No.

Seite 25 von 27
Page 25 of 27

Test Results

Factor (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)
Level (dBuV/m) = Reading (dBuV) + Factor (dB/m)

Please refer to Appendix B.


5.2 Mains Emission

5.2.1 Mains Conducted Emission

Limit

Mains Conducted Emission as defined in §15.207 must comply with the mains conducted emission limits.

Kind of Test Site Shielded room

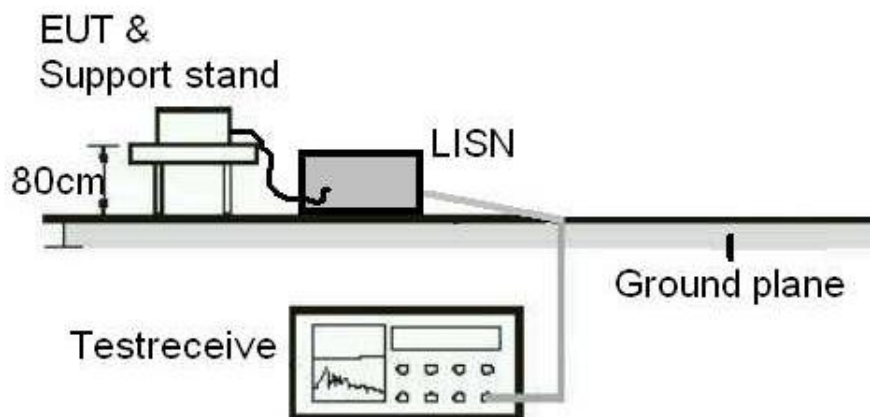Test Setup

Test Instruments

Kind of Equipment	Manufacturer	Type	S/N	Calibration Date	Calibration Due Date
RF Cable	N/A	N/A	EMC-003	2021/3/16	2022/3/15
Two-Line V-Network	Rohde & Schwarz	ENV216	101938	2021/9/23	2022/9/22
EMI Test Receiver	R&S	ESCI	1816063	2021/11/15	2022/11/14

Test Procedures

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/50 uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150 kHz to 30 MHz was searched. Emission levels under (Limit – 20 dB) was not recorded.

Note: The resolution bandwidth and video bandwidth of test receiver is 9 kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15 MHz – 30 MHz.

Test Results


Please refer to Appendix B.

Appendix A: Test Results of Conducted Test

Test Result of 6 dB Bandwidth


BLE_1M

Channel	Channel Frequency (MHz)	6 dB Bandwidth (kHz)	Limit (kHz)	Result
Low Channel	2402	740.26	> 500	Pass
Middle Channel	2440	710.29	> 500	Pass
High Channel	2480	707.29	> 500	Pass

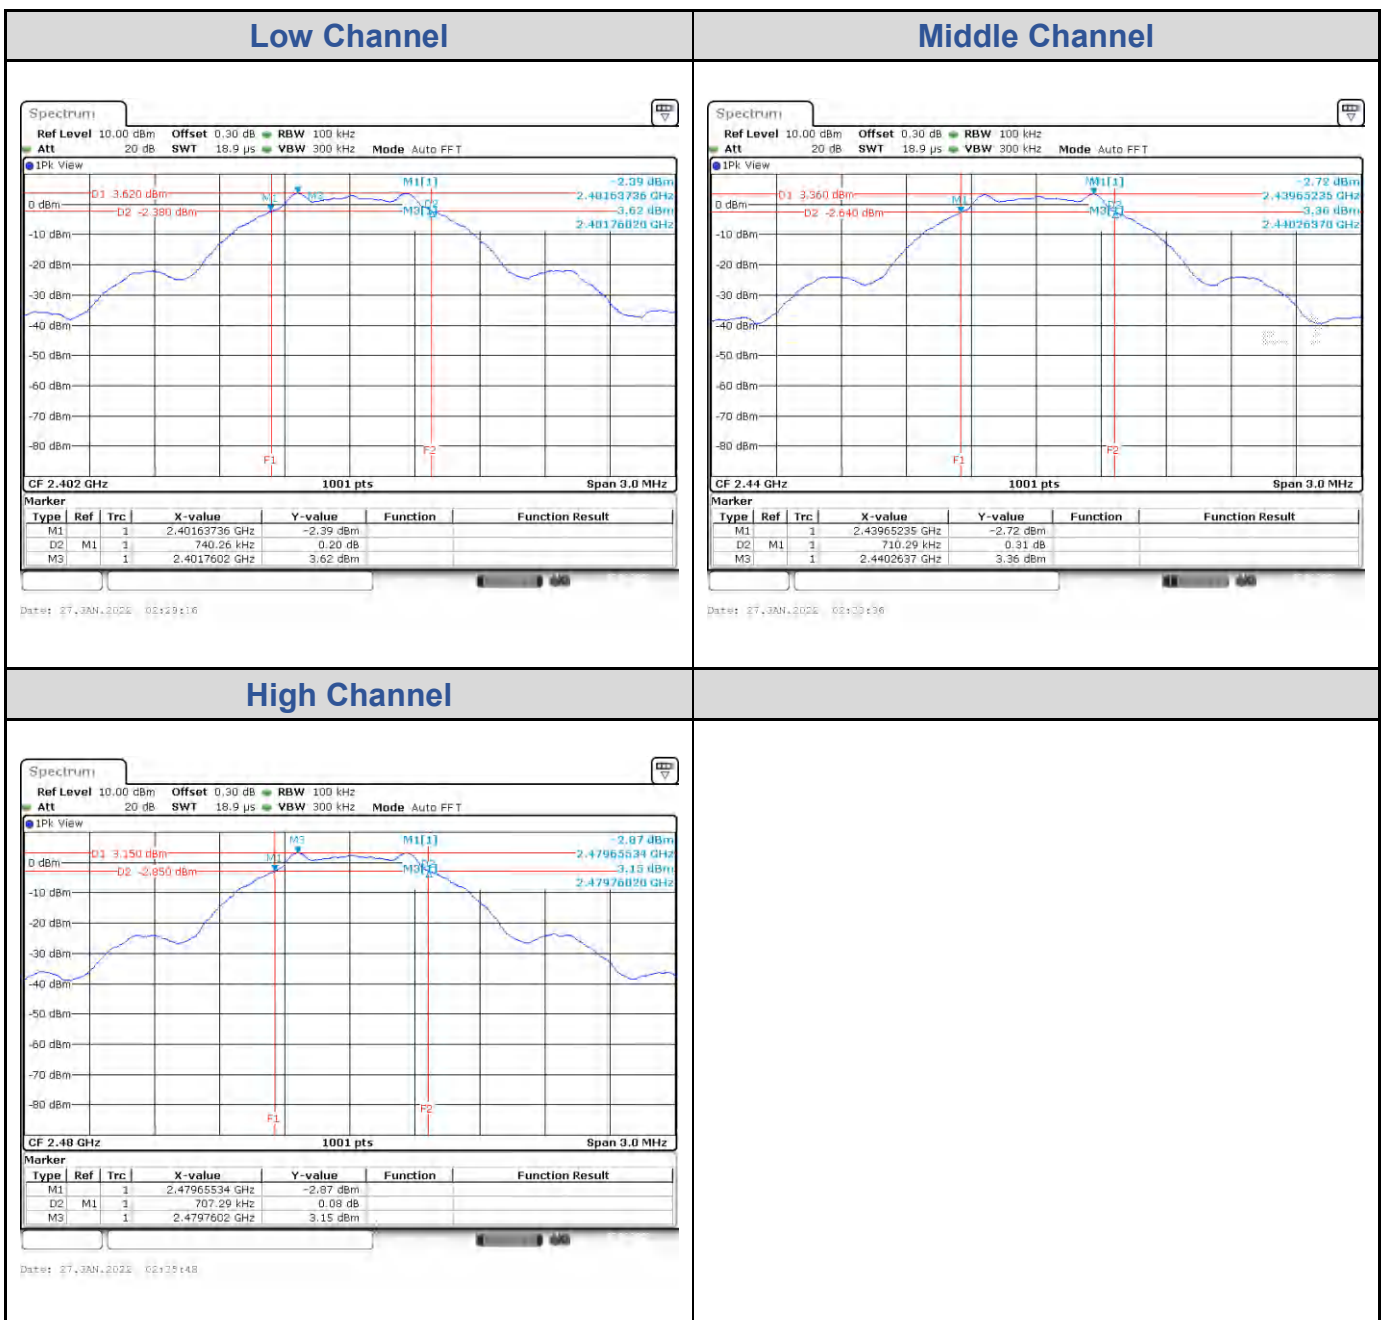

BLE_2M


Channel	Channel Frequency (MHz)	6 dB Bandwidth (kHz)	Limit (kHz)	Result
Low Channel	2402	1348.65	> 500	Pass
Middle Channel	2440	1418.58	> 500	Pass
High Channel	2480	1323.68	> 500	Pass

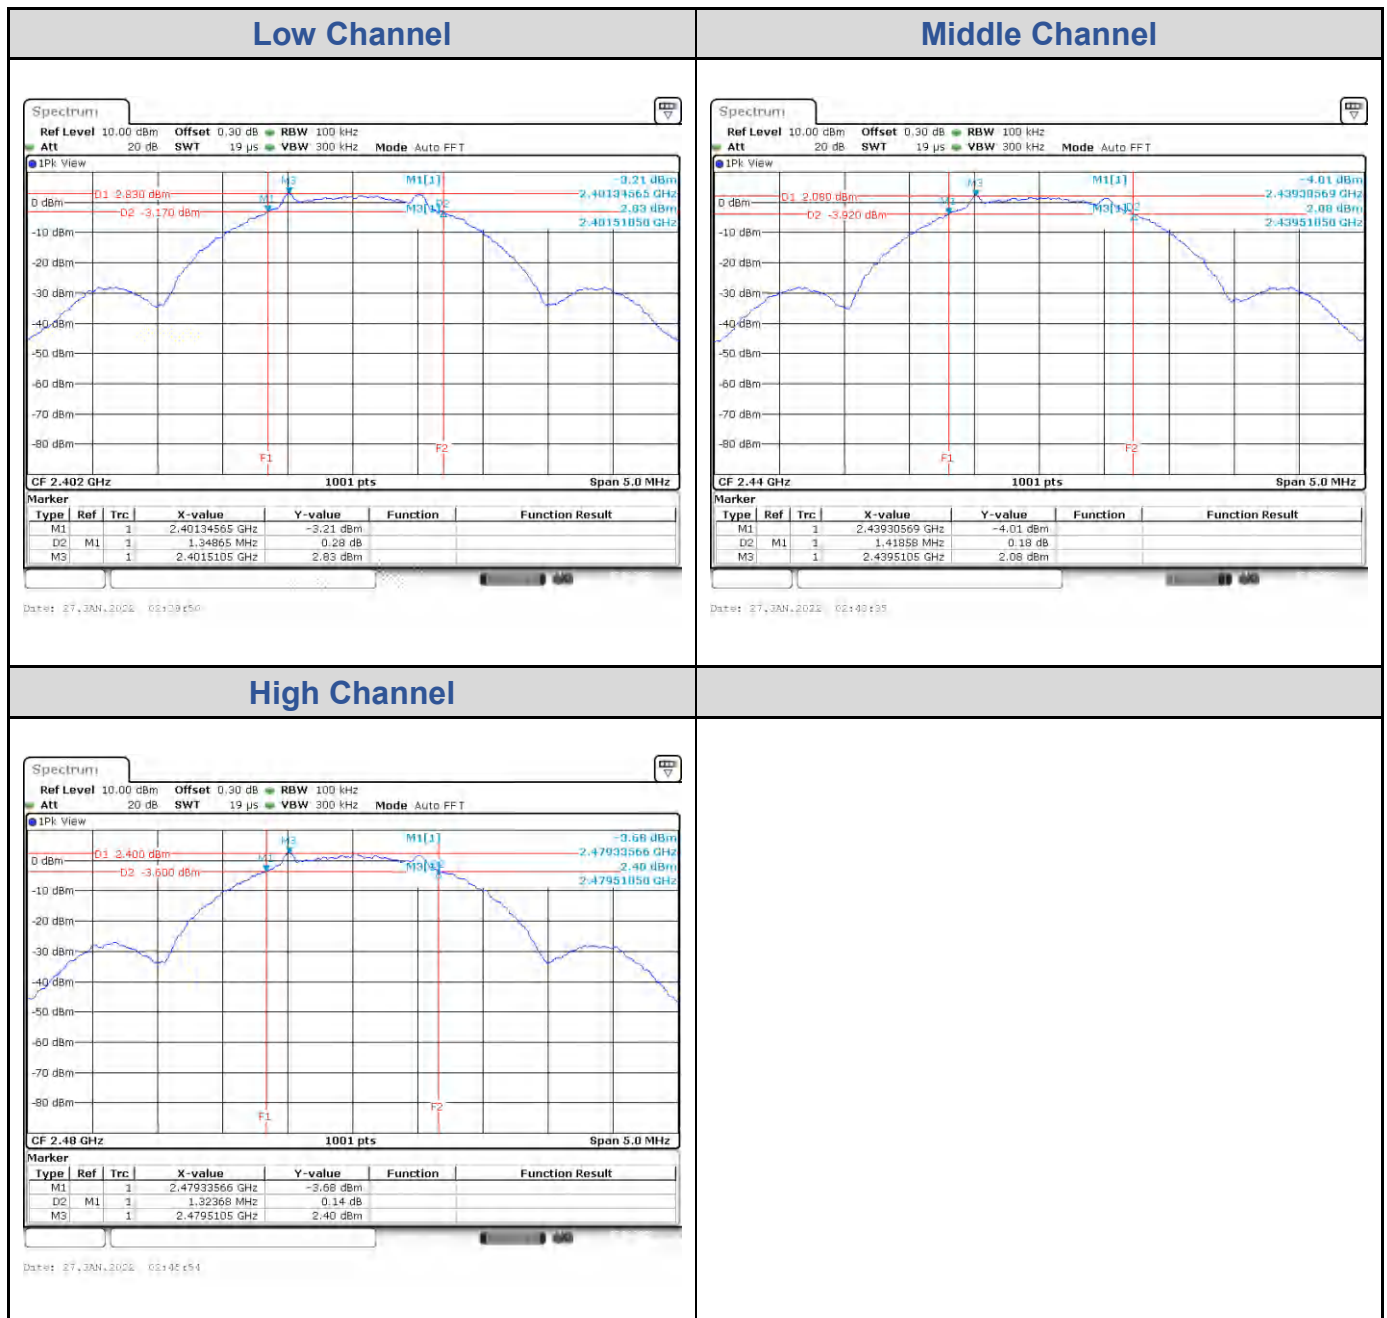

Test Result of 99% Occupied Bandwidth


BLE_1M

Channel	Channel Frequency (MHz)	99% Bandwidth (MHz)
Low Channel	2402	1.12
Middle Channel	2440	1.09
High Channel	2480	1.09

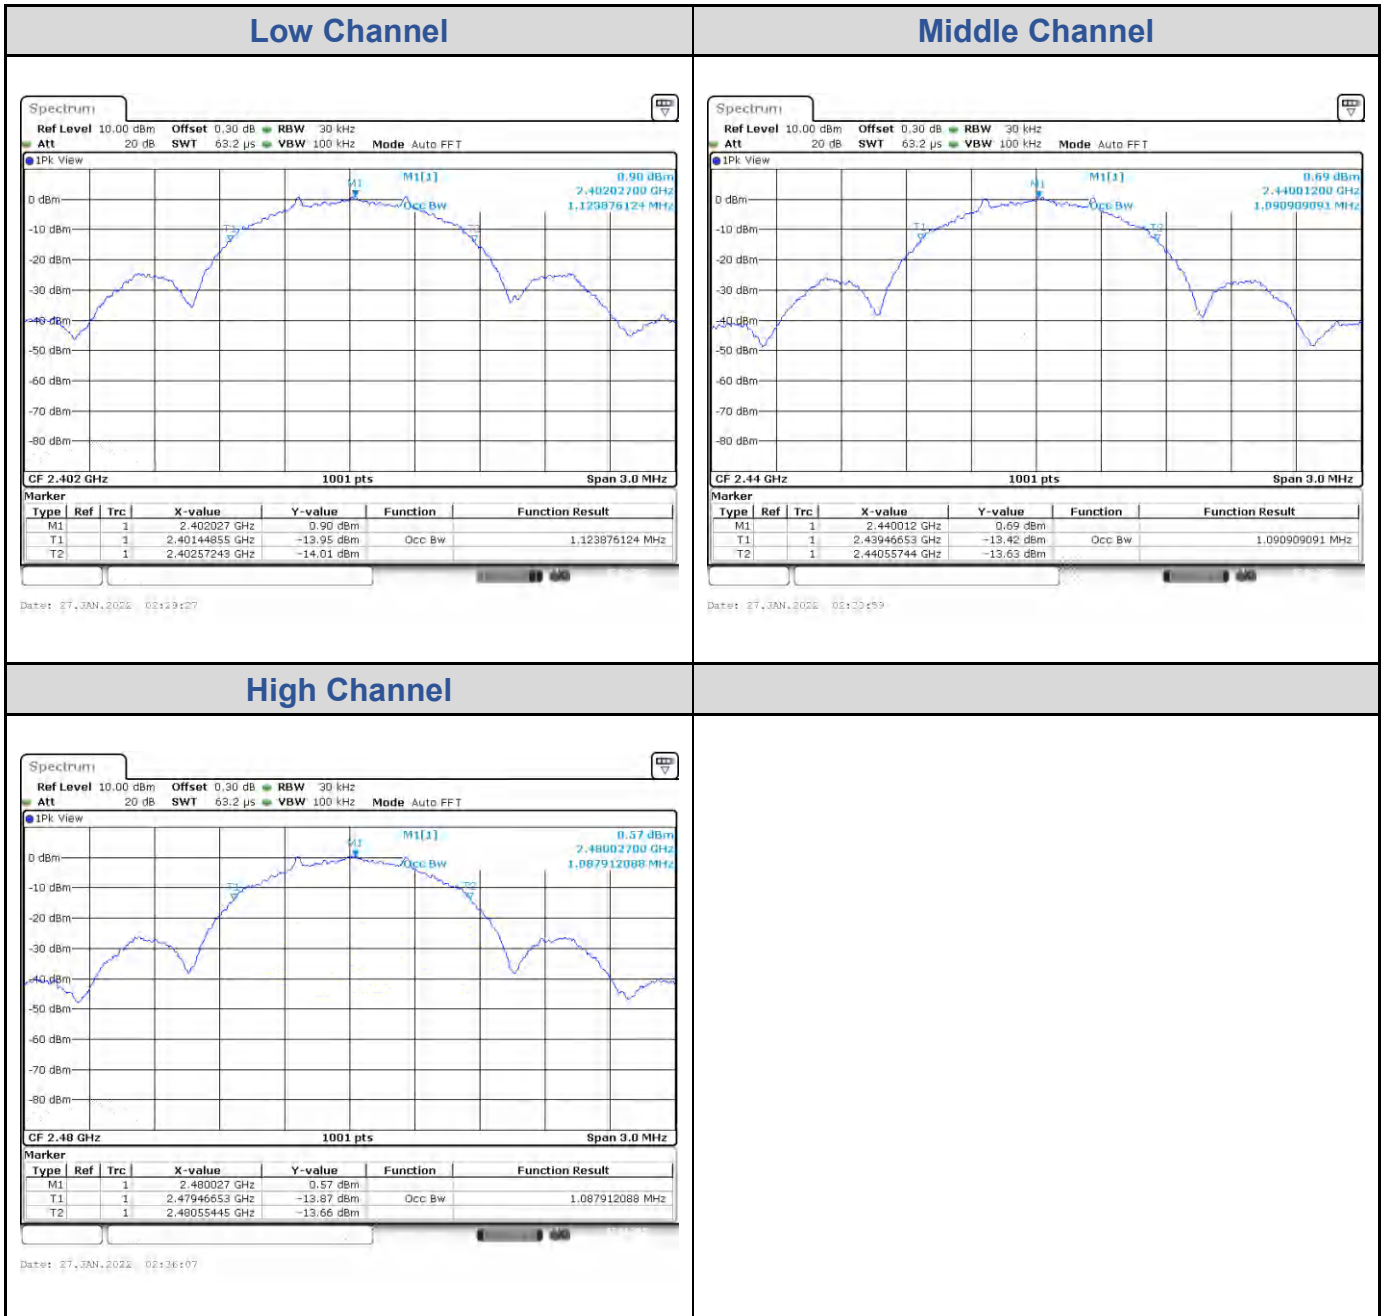

BLE_2M

Channel	Channel Frequency (MHz)	99% Bandwidth (MHz)
Low Channel	2402	2.06
Middle Channel	2440	2.08
High Channel	2480	2.10

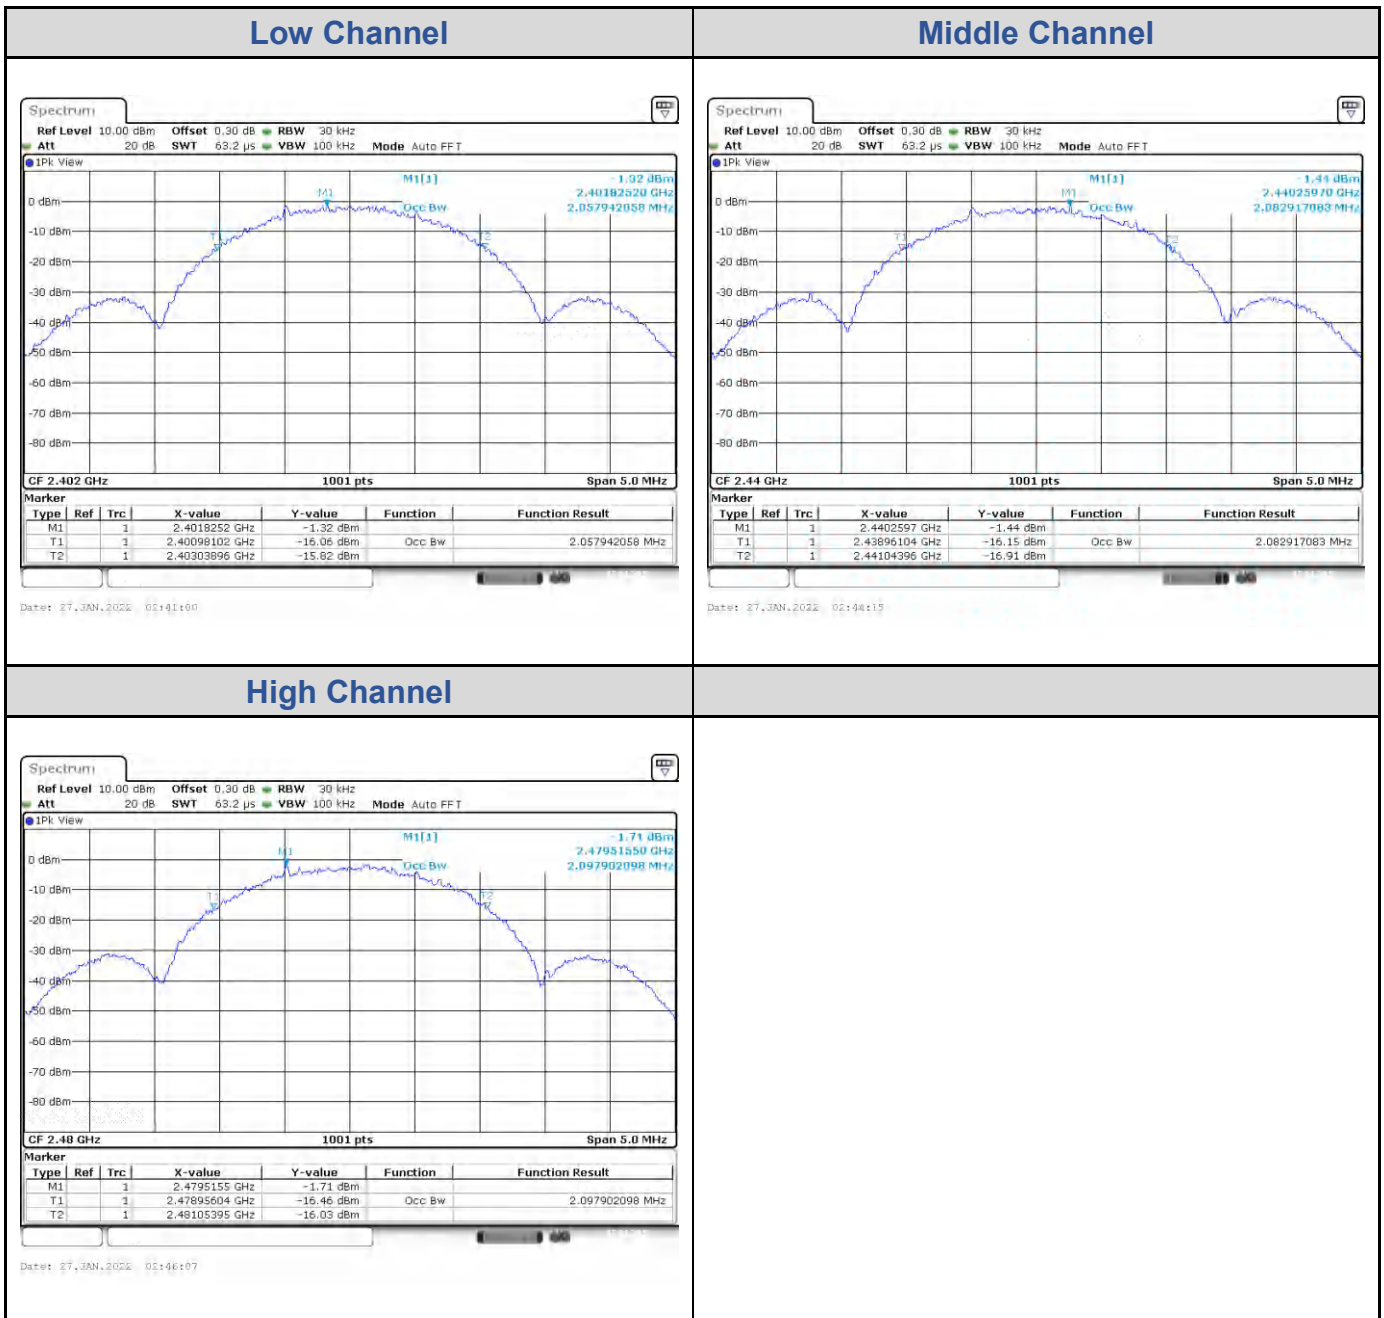


Test Result of Power Spectral Density


BLE_1M

Channel	Channel Frequency (MHz)	Power Density (dBm/3kHz)	Limit (dBm/3kHz)	Result
Low Channel	2402	-5.75	8	Pass
Middle Channel	2440	-5.63	8	Pass
High Channel	2480	-5.63	8	Pass


Low Channel

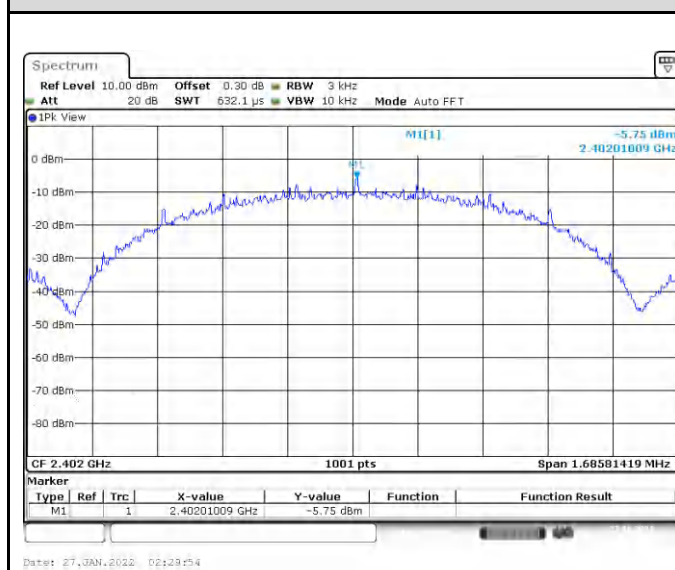

Middle Channel

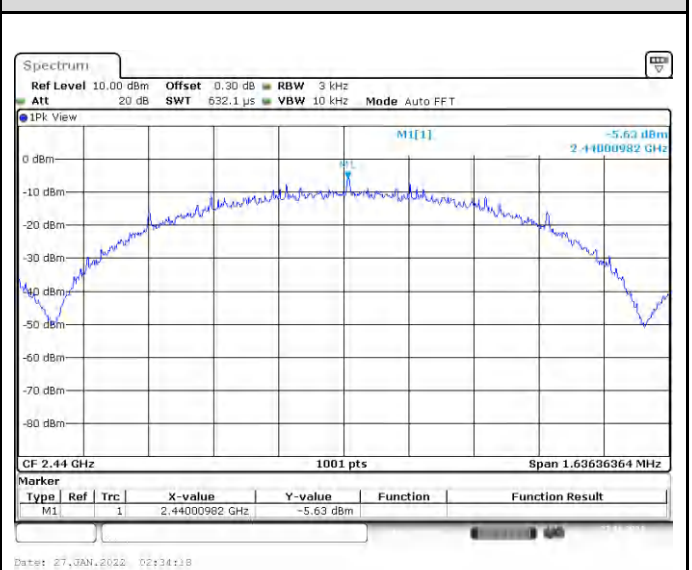


High Channel

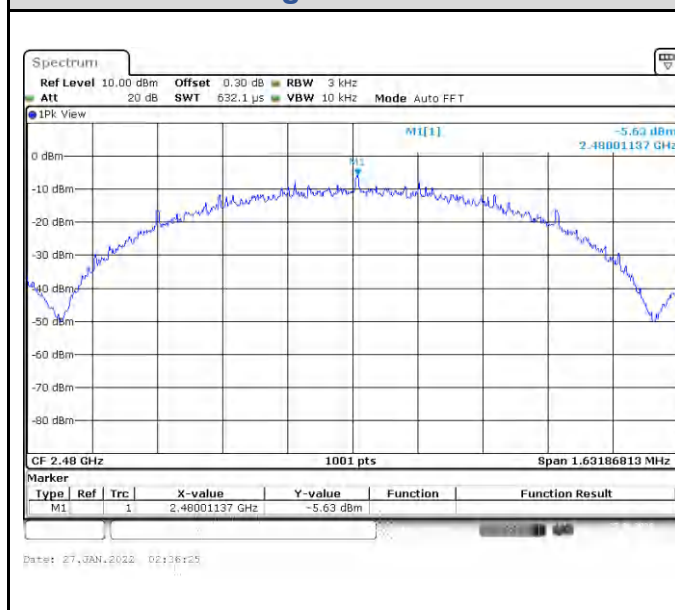


BLE_2M

Channel	Channel Frequency (MHz)	Power Density (dBm/3kHz)	Limit (dBm/3kHz)	Result
Low Channel	2402	-9.70	8	Pass
Middle Channel	2440	-9.75	8	Pass
High Channel	2480	-10.38	8	Pass

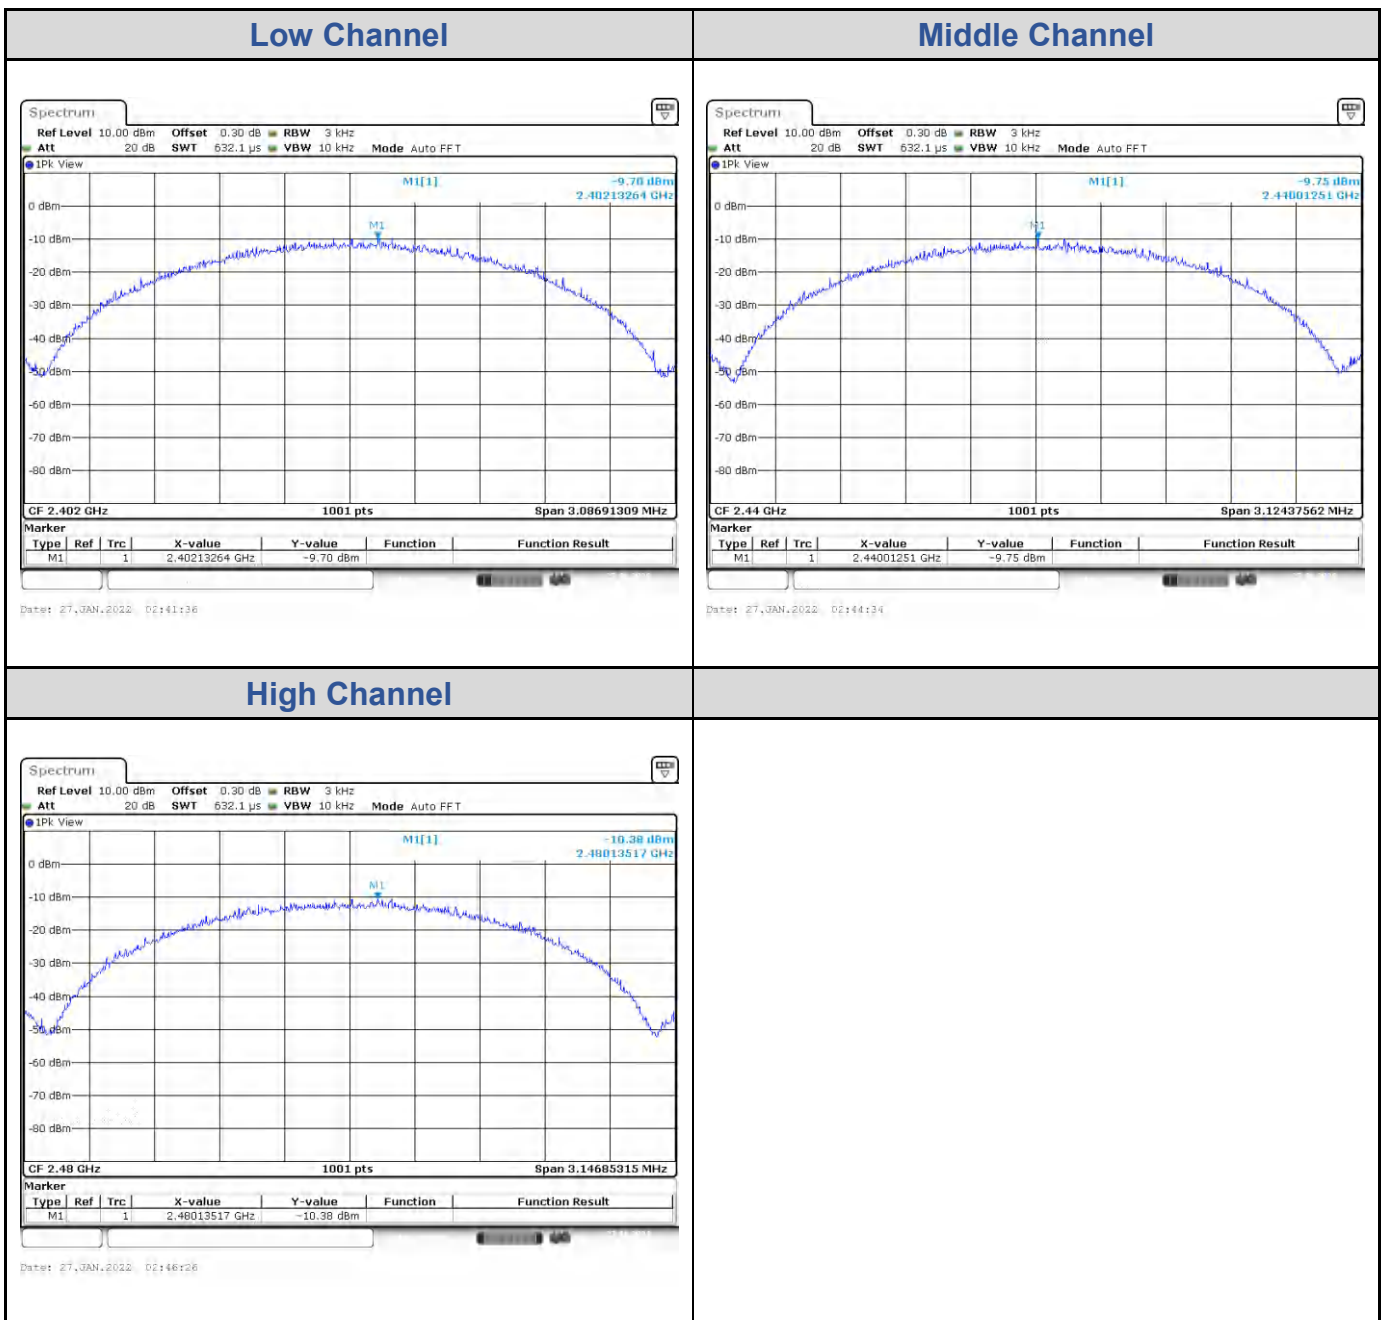


Test Result of Conducted Spurious Emissions, Tx Mode


BLE_1M

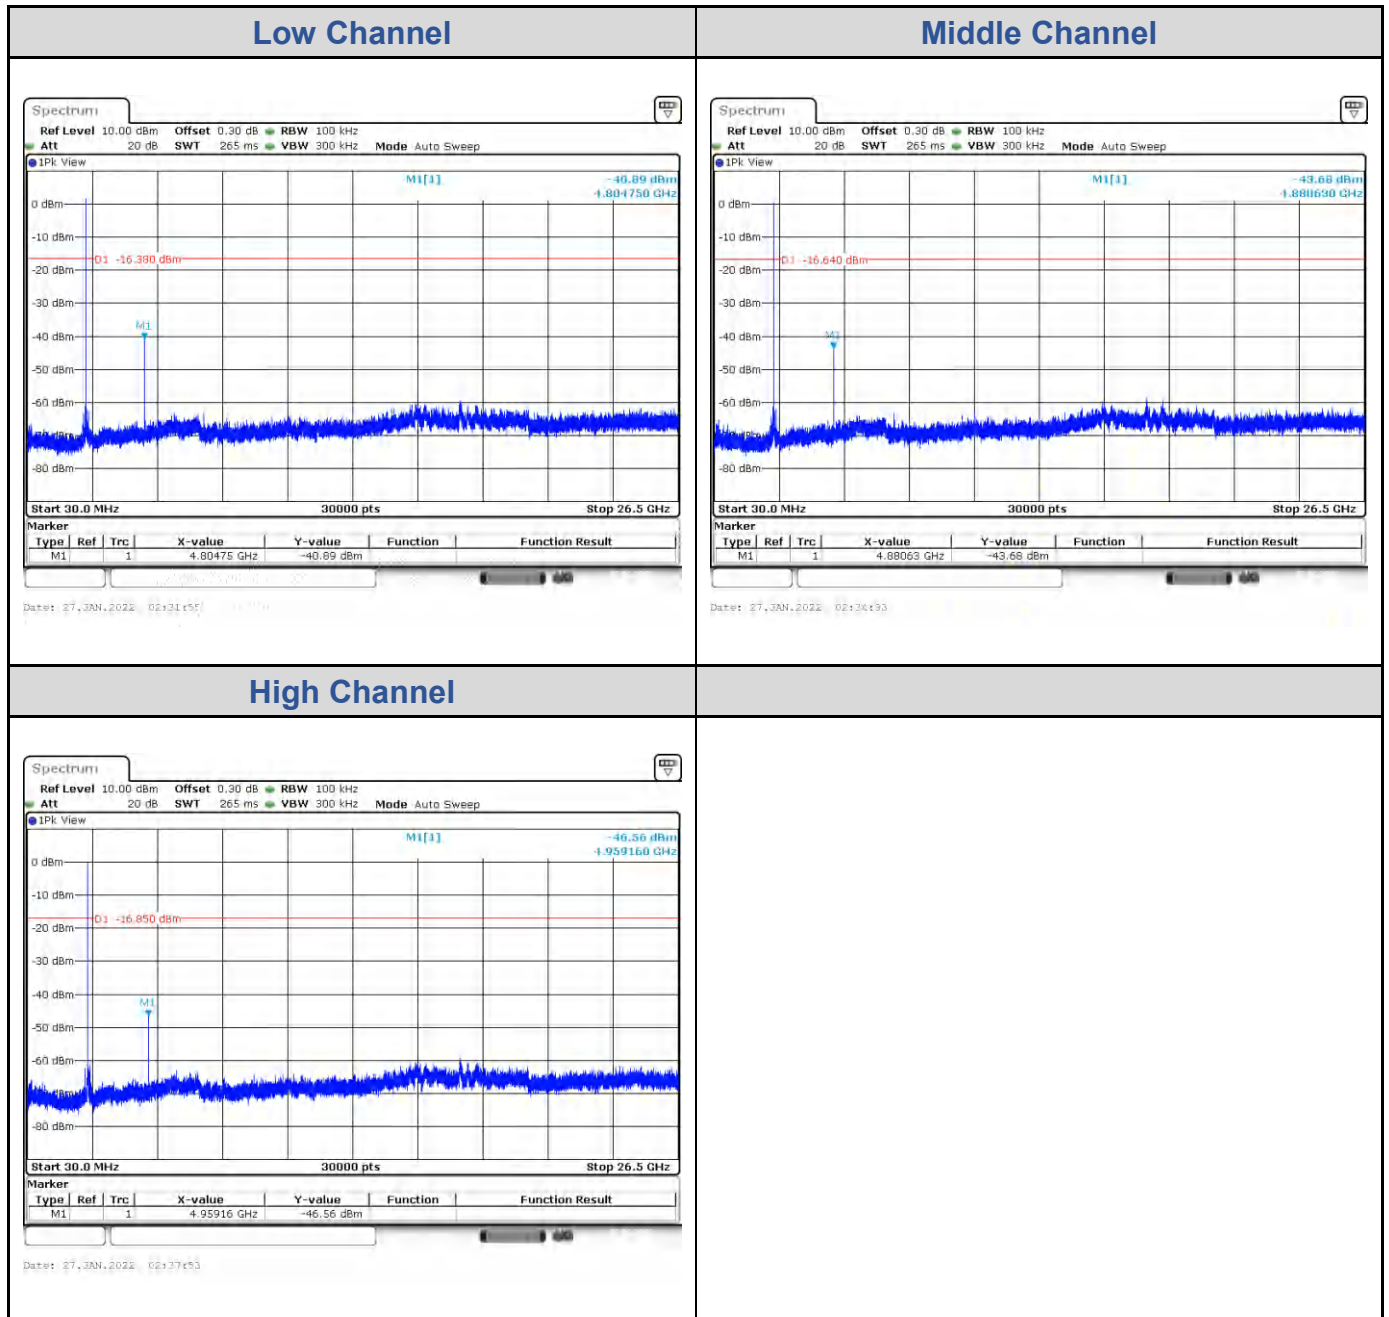


BLE_2M

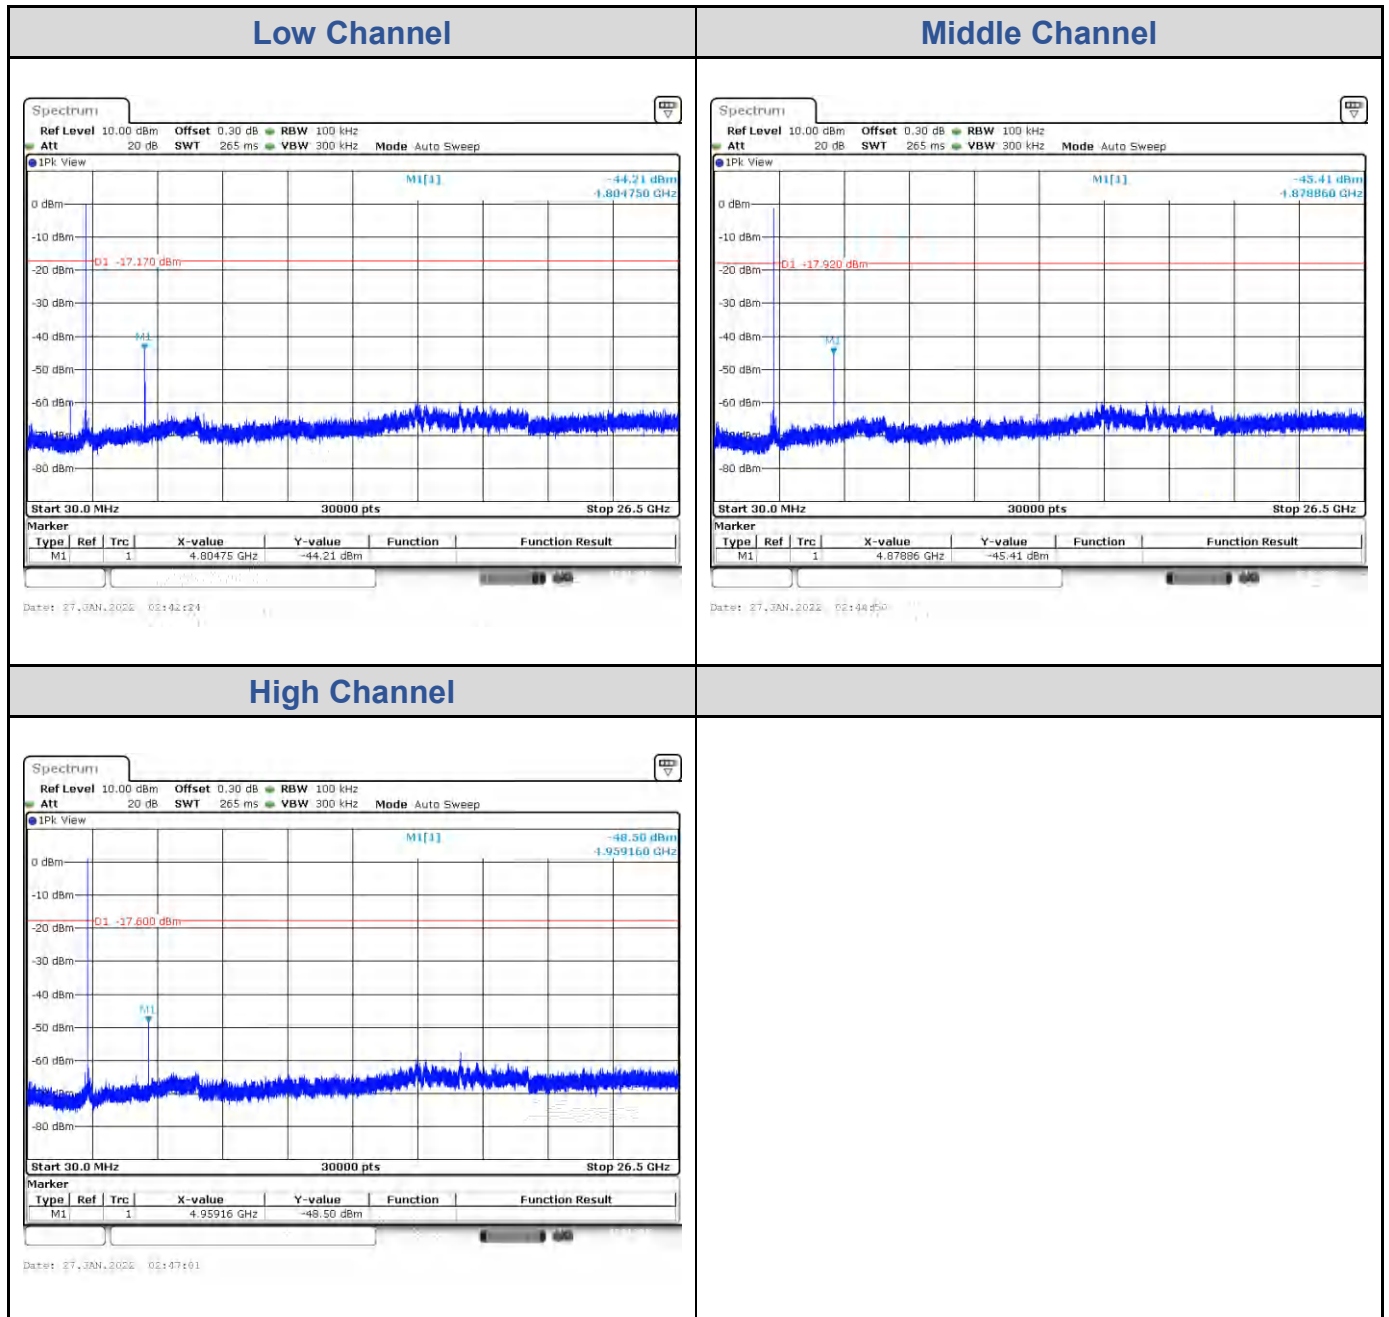

Test Result of Conducted Band Edge, Tx Mode
BLE_1M

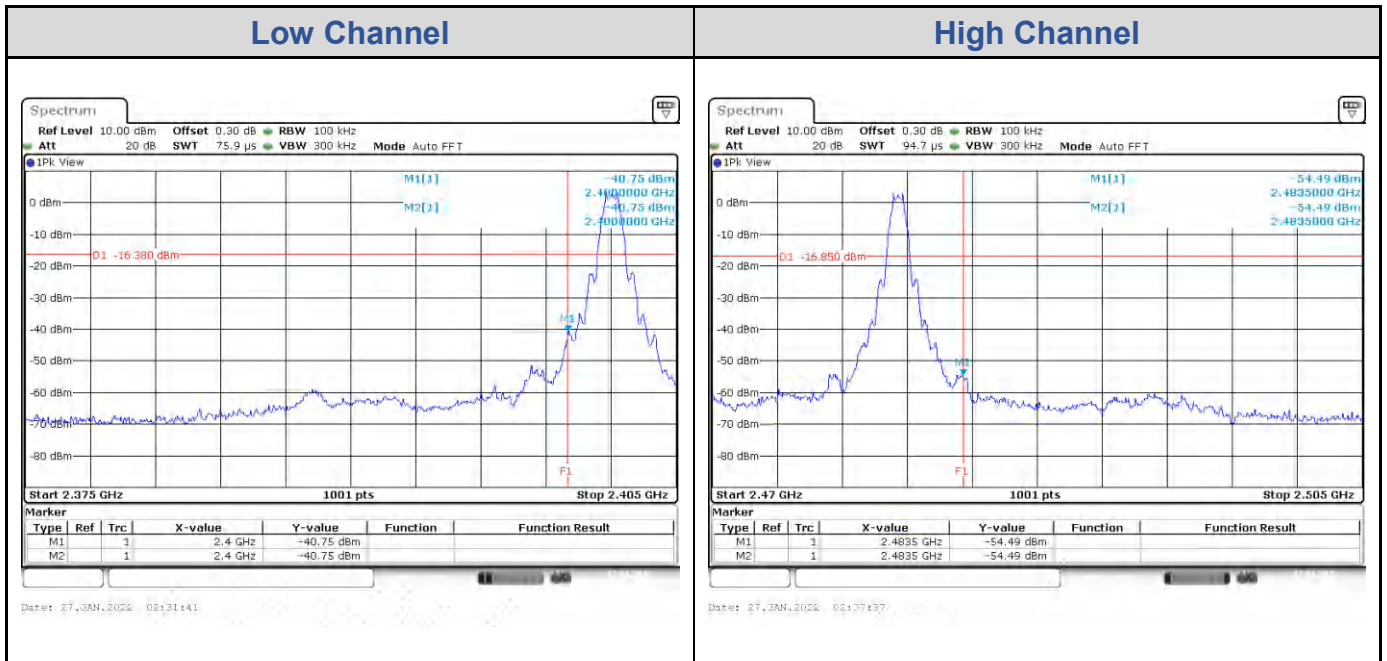


BLE_2M

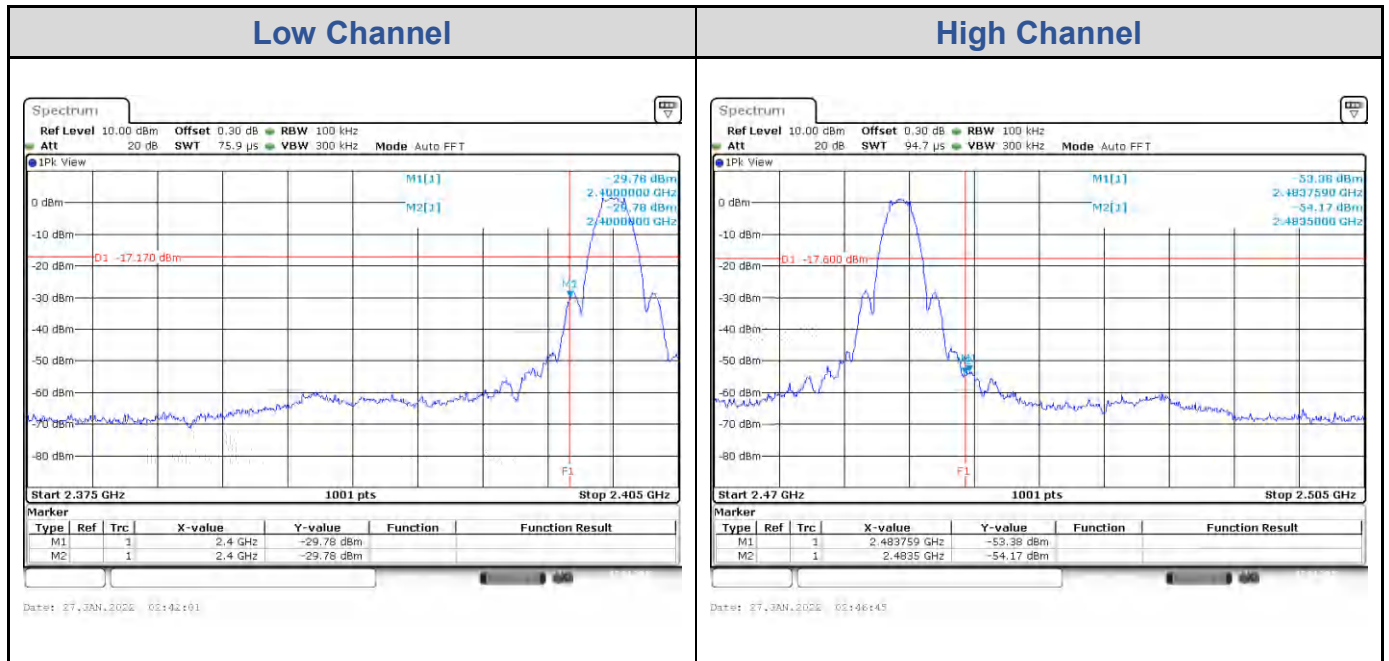

Appendix B: Test Results of Radiated Spurious Emissions & Mains Conducted Emission Test

Band Edges, 2.31GHz ~ 2.9GHz

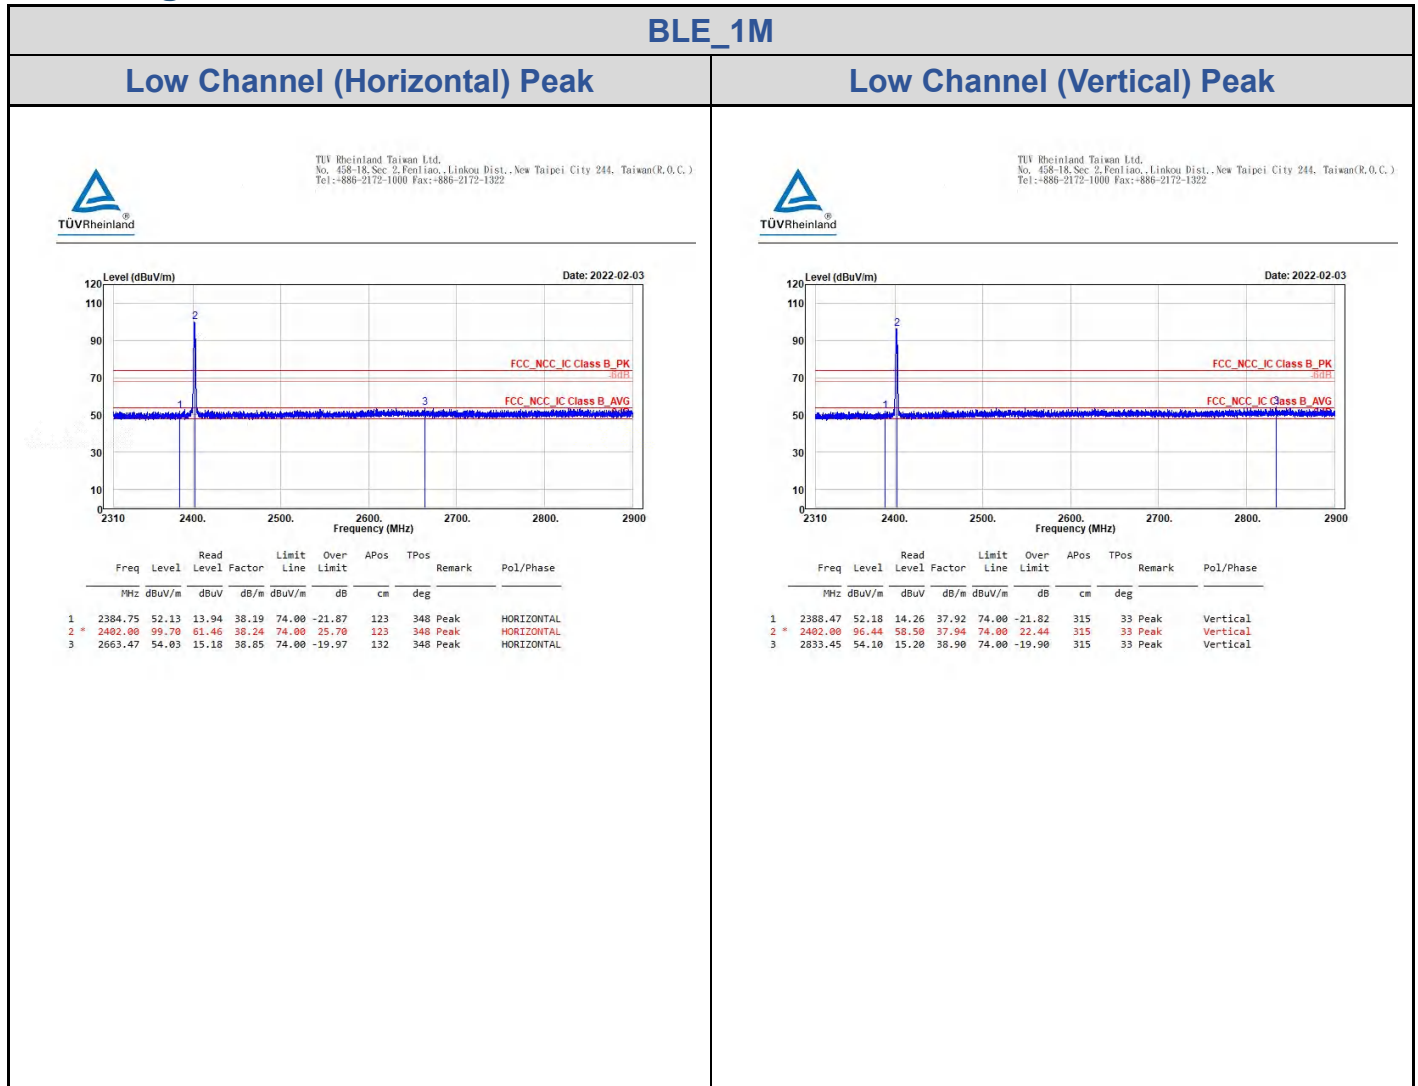



BLE_1M

Low Channel (Horizontal) Average

Low Channel (Vertical) Average

TÜVRheinland
TUV Rheinland Taiwan Ltd.
No. 458-18, Sec. 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322


TÜVRheinland
TUV Rheinland Taiwan Ltd.
No. 458-18, Sec. 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

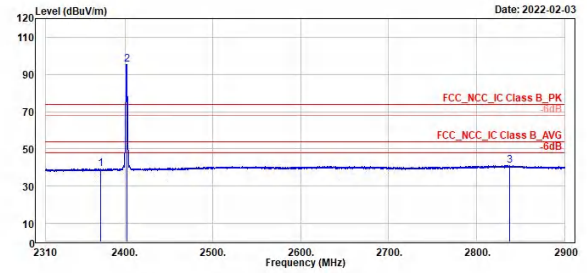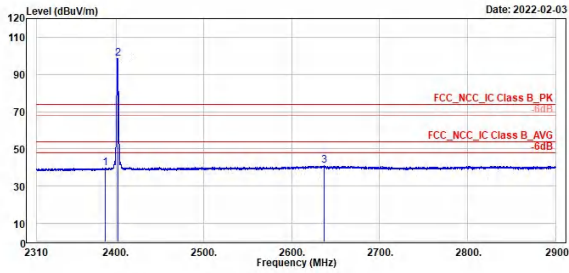


Freq	Level	Read	Limit	Over	APos	TPos	Remark	Pol/Phase
MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg	
1	2388.29	39.05	1.65	38.20	54.00	-14.15	123	348 Average HORIZONTAL
2 *	2482.00	98.78	60.46	38.24	54.00	44.70	123	348 Average HORIZONTAL
3	2636.74	40.98	2.14	38.64	54.00	-13.02	123	348 Average HORIZONTAL

Freq	Level	Read	Limit	Over	APos	TPos	Remark	Pol/Phase
MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg	
1	2372.07	39.35	1.45	37.90	54.00	-14.65	315	33 Average Vertical
2 *	2482.00	95.48	57.54	37.94	54.00	41.48	315	33 Average Vertical
3	2837.17	41.05	2.15	38.90	54.00	-12.95	315	33 Average Vertical

BLE_1M
High Channel (Horizontal) Peak
High Channel (Vertical) Peak

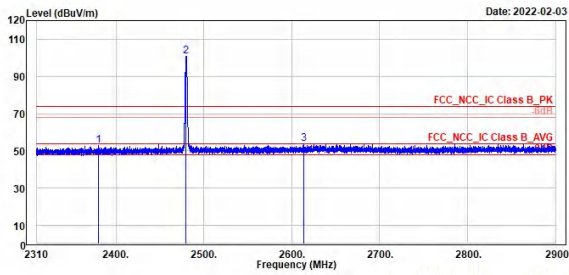
 TÜV Rheinland Taiwan Ltd.
 No. 458-18, Sec. 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
 Tel: +886-2172-1000 Fax: +886-2172-1322


1	2	3							
Level	Level	Level							
Factor	Factor	Factor							
Line	Line	Line							
Limit	Limit	Limit							
Over	Over	Over							
Limit	Limit	Limit							
APos	APos	APos							
TPos	TPos	TPos							
Remark	Remark	Remark							
Pol/Phase	Pol/Phase	Pol/Phase							
2379.97	52.01	14.64	38.17	74.00	-21.19	273	268	Peak	Horizontal
2488.00	101.06	62.84	38.22	74.00	27.06	273	268	Peak	Horizontal
2613.67	53.94	15.13	38.81	74.00	-20.06	273	268	Peak	Horizontal

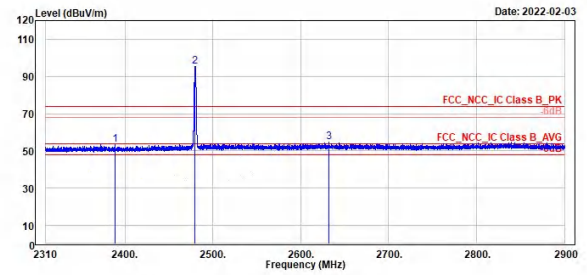

 TÜV Rheinland Taiwan Ltd.
 No. 458-18, Sec. 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
 Tel: +886-2172-1000 Fax: +886-2172-1322


1	2	3							
Level	Level	Level							
Factor	Factor	Factor							
Line	Line	Line							
Limit	Limit	Limit							
Over	Over	Over							
Limit	Limit	Limit							
APos	APos	APos							
TPos	TPos	TPos							
Remark	Remark	Remark							
Pol/Phase	Pol/Phase	Pol/Phase							
2389.18	53.27	15.35	37.92	74.00	-20.73	293	16	Peak	Vertical
2488.00	95.51	57.19	38.32	74.00	21.51	293	16	Peak	Vertical
2632.14	54.72	16.14	38.58	74.00	-19.28	293	16	Peak	Vertical

BLE_1M
High Channel (Horizontal) Average
High Channel (Vertical) Average

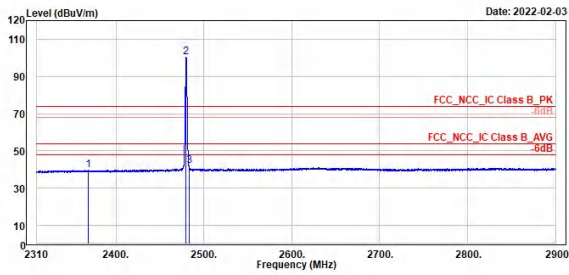
 TÜV Rheinland Taiwan Ltd.
 No. 458-18, Sec. 2, Penliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
 Tel: +886-2172-1000 Fax: +886-2172-1322


1	2	3
2368.59	2488.00	2483.52
39.51	100.21	41.83
1.37	61.99	3.62
38.14	38.22	38.21
54.00	54.00	54.00
-14.49	46.21	-12.17
273	273	273
268	268	268
Average	Average	Average
Horizontal	Horizontal	Horizontal

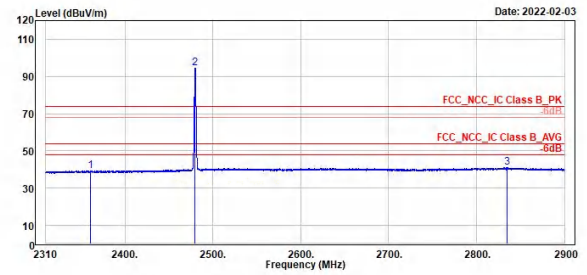

 TÜV Rheinland Taiwan Ltd.
 No. 458-18, Sec. 2, Penliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
 Tel: +886-2172-1000 Fax: +886-2172-1322


1	2	3
2368.68	2488.00	2834.75
39.37	94.56	41.08
1.48	56.24	2.18
37.89	38.32	38.90
54.00	54.00	54.00
-14.63	40.56	-12.92
293	293	293
16	16	16
Average	Average	Average
Vertical	Vertical	Vertical

BLE_2M
Low Channel (Horizontal) Peak
Low Channel (Vertical) Peak

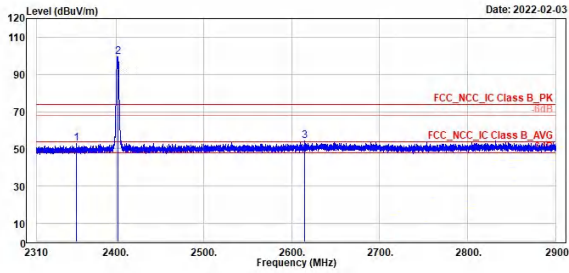 TÜV Rheinland Taiwan Ltd.
 No. 458-18, Sec. 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
 Tel: +886-2172-1000 Fax: +886-2172-1322


1	2	3
2355.31	2402.00	2615.09
52.01	99.43	54.38
14.72	61.19	15.57
38.09	38.24	38.81
74.00	74.00	74.00
-21.19	25.43	-19.62
227	227	227
351	351	351
Peak	Peak	Peak
Horizontal	Horizontal	Horizontal

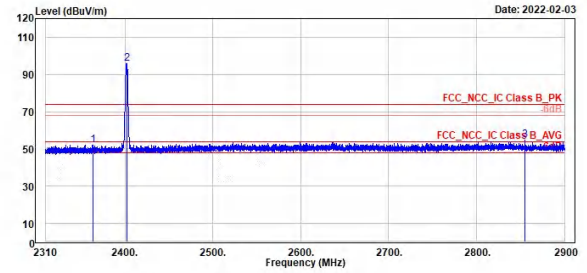
 TÜV Rheinland Taiwan Ltd.
 No. 458-18, Sec. 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
 Tel: +886-2172-1000 Fax: +886-2172-1322


1	2	3
2363.63	2402.00	2854.75
52.14	96.00	54.66
14.25	58.06	15.77
37.09	37.94	38.89
74.00	74.00	74.00
-21.86	22.00	-19.34
354	354	354
32	32	32
Peak	Peak	Peak
Vertical	Vertical	Vertical


BLE_2M

Low Channel (Horizontal) Average

Low Channel (Vertical) Average




TUV Rheinland Taiwan Ltd.
No. 458-18, Sec. 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

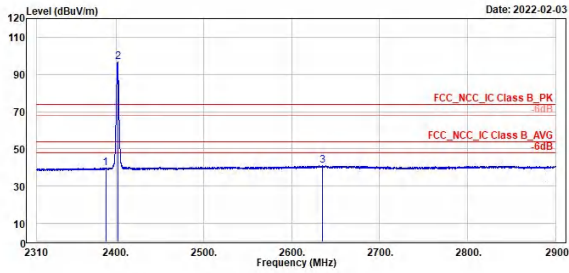

1	2	3
2388.41	2482.80	2634.62
39.79	96.62	40.94
1.59	50.58	2.10
38.20	38.24	38.64
54.00	54.00	54.00
-14.21	42.82	-13.06
227	227	227
351	351	351
Average	Average	Average
Horizontal	Horizontal	Horizontal



TUV Rheinland Taiwan Ltd.
No. 458-18, Sec. 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

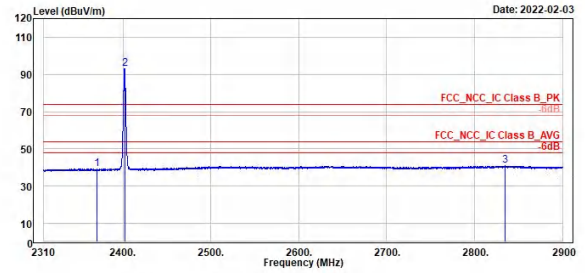

1	2	3
2378.42	2482.80	2834.57
39.41	93.12	40.85
1.51	55.18	1.95
37.90	37.94	38.90
54.00	54.00	54.00
-14.59	39.12	-13.15
354	354	354
32	32	32
Average	Average	Average
Vertical	Vertical	Vertical


BLE_2M

High Channel (Horizontal) Peak

High Channel (Vertical) Peak




TÜV Rheinland Taiwan Ltd.
No. 458-18, Sec. 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

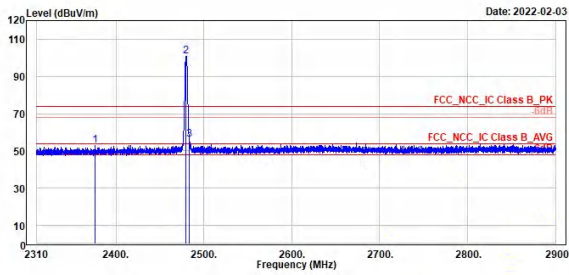

1	2	3								
Freq	Level	Read	Level	Factor	Limit	Over	Apos	TPos	Remark	Pol/Phase
MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg			
2376.26	52.72	14.56	38.16	74.00	-21.28	273	270	Peak	Horizontal	
2488.00	100.92	62.78	38.22	74.00	26.92	273	270	Peak	Horizontal	
2483.52	55.96	17.75	38.21	74.00	-18.04	273	270	Peak	Horizontal	



TÜV Rheinland Taiwan Ltd.
No. 458-18, Sec. 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

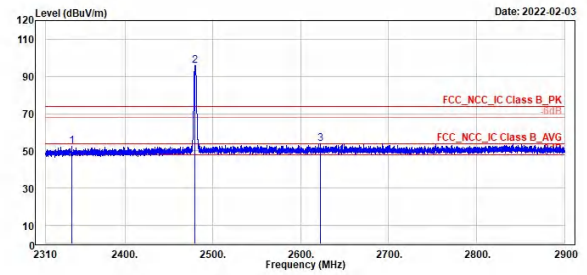

1	2	3								
Freq	Level	Read	Level	Factor	Limit	Over	Apos	TPos	Remark	Pol/Phase
MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg			
2339.44	52.62	14.82	37.80	74.00	-21.38	298	15	Peak	Vertical	
2488.00	95.92	57.68	38.32	74.00	21.92	298	15	Peak	Vertical	
2622.41	54.02	15.44	38.58	74.00	-19.98	298	15	Peak	Vertical	


BLE_2M

High Channel (Horizontal) Average

High Channel (Vertical) Average




TÜV Rheinland Taiwan Ltd.
No. 458-18, Sec. 2, Penliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

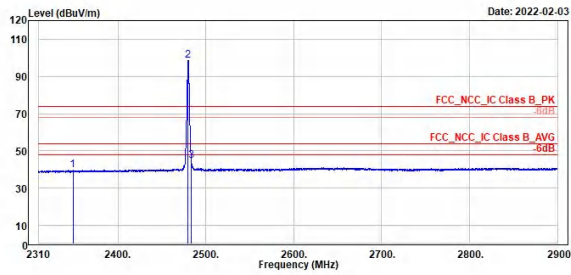

1	2	3						
Freq	Level	Read	Limit	Over	APos	TPos	Remark	Pol/Phase
MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg	
2348.88	39.59	1.52	38.07	54.00	-14.41	273	270 Average	Horizontal
2480.00	98.43	60.21	38.22	54.00	44.43	273	270 Average	Horizontal
2483.46	44.71	6.50	38.21	54.00	-9.29	273	270 Average	Horizontal



TÜV Rheinland Taiwan Ltd.
No. 458-18, Sec. 2, Penliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

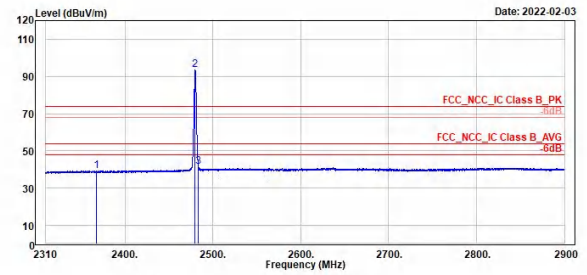

1	2	3						
Freq	Level	Read	Limit	Over	APos	TPos	Remark	Pol/Phase
MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg	
2368.06	39.41	1.52	37.89	54.00	-14.59	290	15 Average	Vertical
2480.00	93.39	55.07	38.32	54.00	39.39	290	15 Average	Vertical
2483.52	41.55	3.21	38.34	54.00	-12.45	290	15 Average	Vertical

Spurious Emissions, Tx Mode, 9kHz ~ 30MHz


BLE_1M

Low Channel (Open) 9kHz~150kHz

Low Channel (Open) 150kHz~30MHz




TÜV Rheinland Taiwan Ltd.
No. 438-18, Sec. 2, Penfiao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

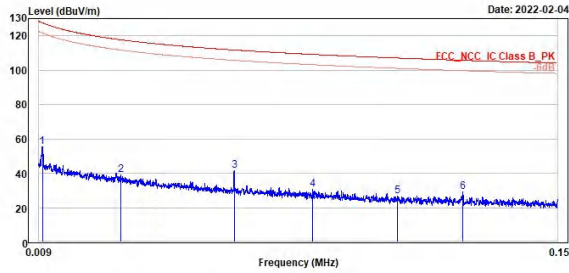

1	2	3	4	5	6
0.01	0.03	0.06	0.08	0.11	0.12
55.47	39.27	41.60	30.56	26.53	29.37
37.76	19.77	22.56	11.99	8.29	11.07
17.71	19.50	19.04	18.57	18.24	18.30
127.60	117.69	111.73	109.17	107.04	105.71
-72.13	-78.42	-79.13	-78.61	-80.51	-76.34
100	100	100	100	100	100
157	94	170	148	322	360
QP	QP	QP	QP	QP	QP
Open	Open	Open	Open	Open	Open



TÜV Rheinland Taiwan Ltd.
No. 438-18, Sec. 2, Penfiao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

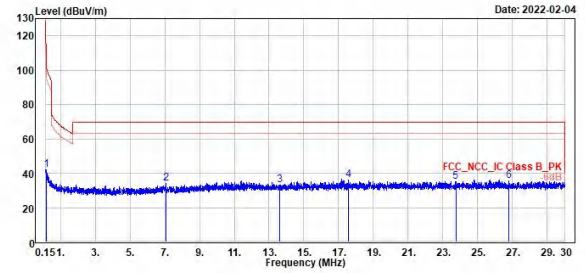

1	2	3	4	5	6
0.17	7.06	13.60	17.55	23.74	26.70
42.16	34.11	33.15	36.24	35.27	35.74
23.70	13.90	11.39	14.21	12.90	13.24
18.46	20.21	21.76	22.03	22.37	22.50
103.10	69.50	69.50	69.50	69.50	69.50
-60.94	-35.39	-36.35	-33.26	-34.23	-33.76
100	100	100	100	100	100
328	186	14	352	344	320
QP	QP	QP	QP	QP	QP
Open	Open	Open	Open	Open	Open


BLE_1M

Low Channel (Close) 9kHz~150kHz

Low Channel (Close) 150kHz~30MHz




TÜV Rheinland Taiwan Ltd.
No. 458-18, Sec. 2, Penfiao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

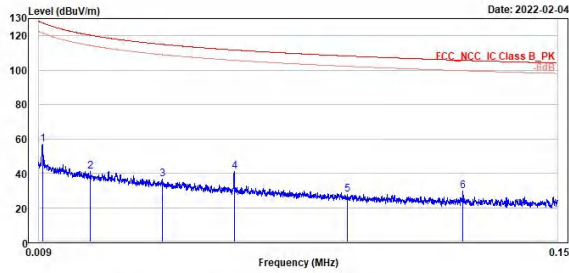

Freq	Level	Read	Limit	Over	APos	TPos	Remark	Pol/Phase
MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg	
1	0.01	56.73	39.02	17.71	127.57	-70.84	100	201 QP
2	0.02	40.94	22.06	18.88	120.36	-79.42	100	308 QP
3	0.04	36.65	17.27	19.38	115.01	-78.36	100	302 QP
4	0.06	41.21	22.17	19.04	111.73	-70.52	100	120 QP
5	0.09	27.57	9.20	18.37	108.23	-80.66	100	345 QP
6	0.12	29.52	11.22	18.30	105.71	-76.19	100	215 QP



TÜV Rheinland Taiwan Ltd.
No. 458-18, Sec. 2, Penfiao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

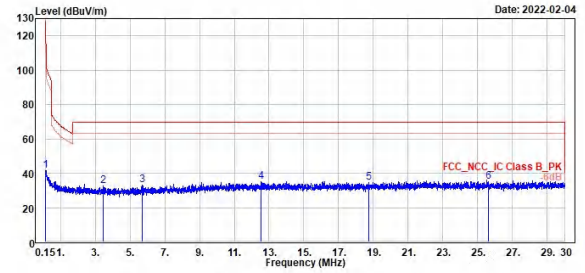

Freq	Level	Read	Limit	Over	APos	TPos	Remark	Pol/Phase
MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg	
1	0.15	41.74	23.34	18.40	104.00	-62.34	100	44 QP
2	3.48	32.64	13.16	19.48	69.50	-36.86	100	31 QP
3	5.69	33.11	13.47	19.64	69.50	-36.39	100	115 QP
4	12.54	35.31	13.63	21.68	69.50	-34.19	100	134 QP
5	18.73	34.69	12.58	22.11	69.50	-34.81	100	253 QP
6	25.60	35.26	12.61	22.45	69.50	-34.24	100	266 QP

Spurious Emissions, Tx Mode, 30MHz ~ 1GHz


BLE_1M

Low Channel (Horizontal)

Low Channel (Vertical)




TUV Rheinland Taiwan Ltd.
No. 438-18, Sec 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

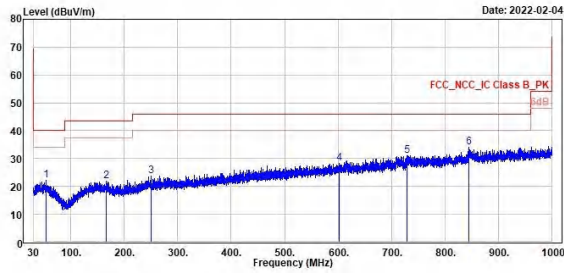

1	2	3	4	5	6
Freq	Level	Read	Limit	Over	APos
MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB
53.67	22.25	28.46	-6.21	48.00	-17.75
165.79	21.93	27.63	-5.70	43.50	-21.57
258.38	23.82	30.21	-6.39	46.00	-22.18
682.98	28.36	27.97	0.39	46.00	-17.64
729.66	31.12	29.04	2.08	46.00	-14.88
844.90	33.92	29.82	4.10	46.00	-12.08



TUV Rheinland Taiwan Ltd.
No. 438-18, Sec 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

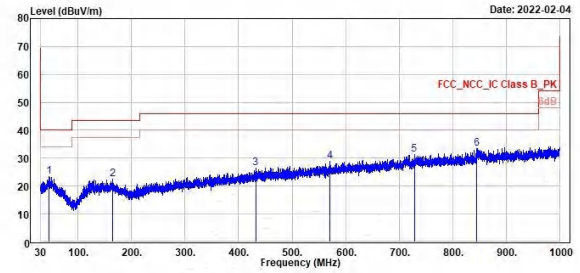

1	2	3	4	5	6
Freq	Level	Read	Limit	Over	APos
MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB
45.62	23.28	29.14	-5.86	49.00	-16.72
165.02	22.46	28.09	-5.63	43.50	-21.04
431.77	26.60	28.84	-2.24	46.00	-19.40
578.18	28.94	29.28	-0.34	46.00	-17.06
728.40	31.41	29.35	2.06	46.00	-14.59
845.29	33.58	29.48	4.10	46.00	-12.42

Spurious Emissions, Tx Mode, 1GHz ~ 26.5GHz


BLE_1M

Low Channel (Horizontal)

Low Channel (Vertical)




TÜV Rheinland Taiwan Ltd.
No. 458-18, Sec. 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

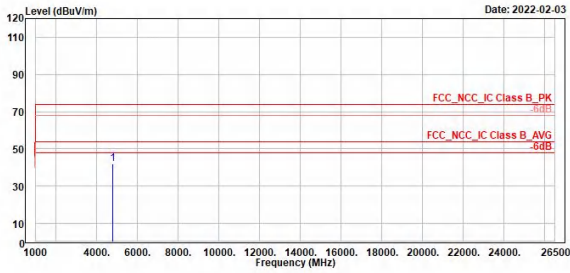

1	4884.00	41.98	52.70	-10.72	74.00	-32.02	300	115	Peak	Horizontal
---	---------	-------	-------	--------	-------	--------	-----	-----	------	------------



TÜV Rheinland Taiwan Ltd.
No. 458-18, Sec. 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

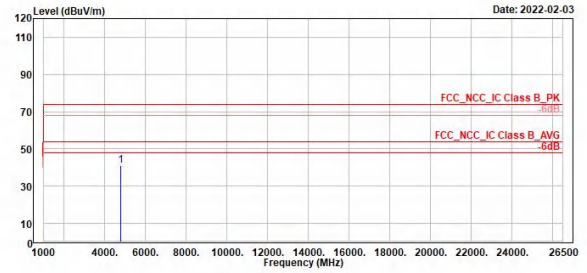

1	4884.00	41.25	52.36	-11.11	74.00	-32.75	300	93	Peak	Vertical
---	---------	-------	-------	--------	-------	--------	-----	----	------	----------


BLE_1M

Middle Channel (Horizontal)

Middle Channel (Vertical)




TUV Rheinland Taiwan Ltd.
No. 458-18, Sec. 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

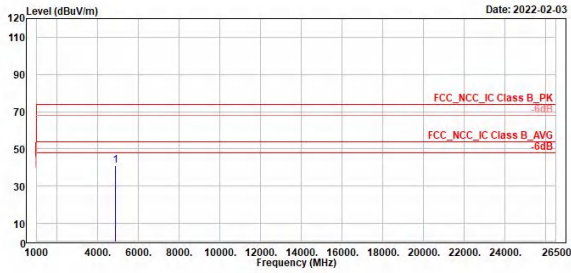

1	4880.00	41.11	51.81	-10.70	74.00	-32.89	300	114	Peak	Horizontal
---	---------	-------	-------	--------	-------	--------	-----	-----	------	------------



TUV Rheinland Taiwan Ltd.
No. 458-18, Sec. 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

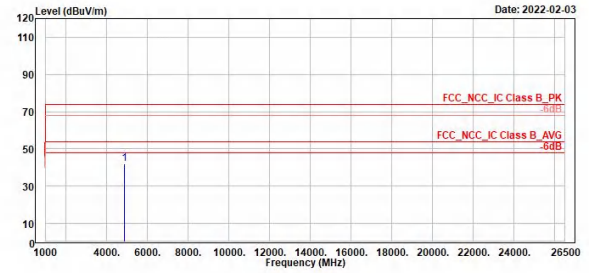

1	4880.00	41.98	53.04	-11.06	74.00	-32.02	300	90	Peak	Vertical
---	---------	-------	-------	--------	-------	--------	-----	----	------	----------

BLE_1M

High Channel (Horizontal)



High Channel (Vertical)



TUV Rheinland Taiwan Ltd.
No. 458-18, Sec. 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322



TUV Rheinland Taiwan Ltd.
No. 458-18, Sec. 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

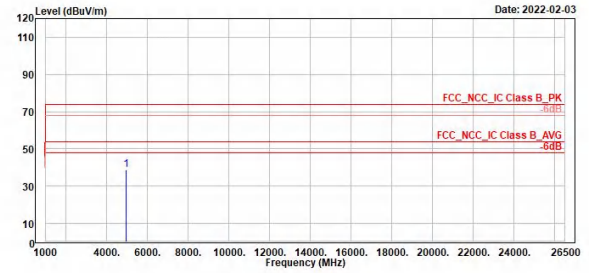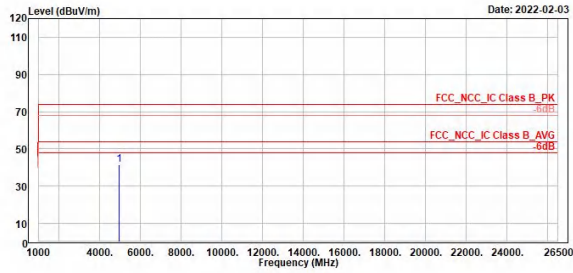

Freq	Level	Read	Limit	Over	APos	TPos	Remark	Pol/Phase
MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg	
1	4960.00	41.37	51.96	-10.59	74.00	-32.63	300	140 Peak Horizontal

Freq	Level	Read	Limit	Over	APos	TPos	Remark	Pol/Phase
MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg	
1	4960.00	38.93	49.90	-10.97	74.00	-35.07	300	297 Peak Vertical


BLE_2M

Low Channel (Horizontal)

Low Channel (Vertical)




TUV Rheinland Taiwan Ltd.
No. 458-18, Sec. 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

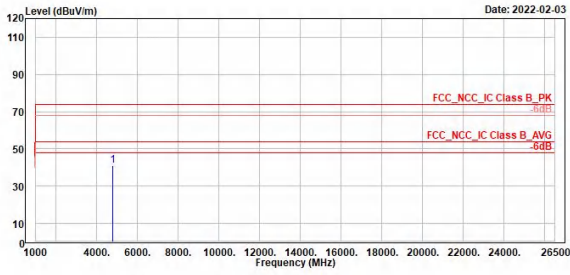

Line	Freq	Level	Read Level	Factor	Limit Line	Over Limit	APos	TPos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg		
1	4884.00	48.95	51.67	-10.72	74.00	-33.05	300	103	Peak	Horizontal



TUV Rheinland Taiwan Ltd.
No. 458-18, Sec. 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

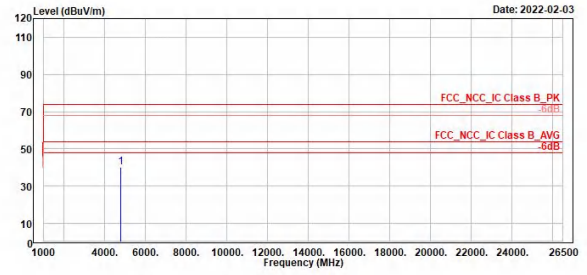

Line	Freq	Level	Read Level	Factor	Limit Line	Over Limit	APos	TPos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg		
1	4884.00	48.14	51.25	-11.11	74.00	-33.86	300	333	Peak	Vertical

BLE_2M

Middle Channel (Horizontal)



Middle Channel (Vertical)



TUV Rheinland Taiwan Ltd.
No. 458-18, Sec. 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322



TUV Rheinland Taiwan Ltd.
No. 458-18, Sec. 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

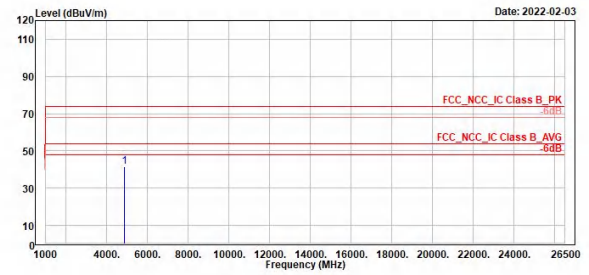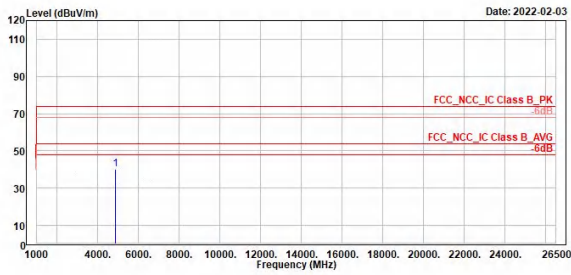

1	4880.00	39.95	50.65	-10.70	74.00	-34.05	200	112	Peak	Horizontal
---	---------	-------	-------	--------	-------	--------	-----	-----	------	------------

1	4880.00	41.45	52.51	-11.06	74.00	-32.55	300	96	Peak	Vertical
---	---------	-------	-------	--------	-------	--------	-----	----	------	----------


BLE_2M

High Channel (Horizontal)

High Channel (Vertical)




TUV Rheinland Taiwan Ltd.
No. 458-18, Sec. 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

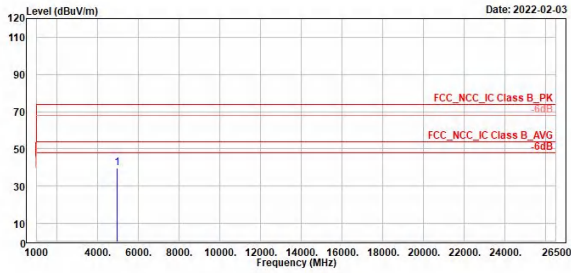

Freq	Level	Read Level	Factor	Limit Line	Over Limit	APos	TPos	Remark	Pol/Phase
MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg		
1	4960.00	39.50	50.09	-10.59	74.00	-34.50	300	143 Peak	Horizontal




TUV Rheinland Taiwan Ltd.
No. 458-18, Sec. 2, Fenliao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
Tel: +886-2172-1000 Fax: +886-2172-1322

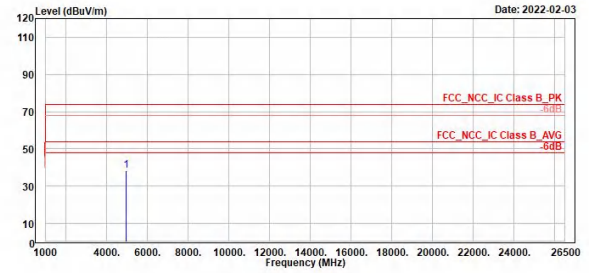


Freq	Level	Read Level	Factor	Limit Line	Over Limit	APos	TPos	Remark	Pol/Phase
MHz	dBuV/m	dBuV	dB/m	dBuV/m	dB	cm	deg		
1	4960.00	38.34	49.31	-10.97	74.00	-35.66	300	267 Peak	Vertical

Mains Conducted Emission, Tx Mode, 150kHz ~ 30MHz
Worst Band
(Line)
(Neutral)

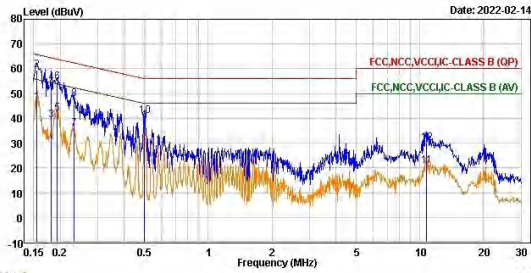 TÜV Rheinland Taiwan Ltd.
 No. 458-18, Sec. 2, Fenhiao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
 Tel: +886-2172-1000 Fax: +886-2172-1022


Trace: 1

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	Remark	Pol/Phase	Note
	MHz	dBuV	dBuV	dB	dBuV	dB			
1	0.15	46.35	36.66	9.69	55.75	-9.40	Average	line1	
2	0.15	59.40	49.71	9.69	65.75	-6.35	QP	line1	
3	0.18	39.36	29.68	9.68	54.43	-15.07	Average	line1	
4	0.18	54.25	44.57	9.68	64.43	-10.18	QP	line1	
5	0.19	41.90	32.22	9.68	53.89	-11.99	Average	line1	
6	0.19	54.55	44.87	9.68	63.89	-9.34	QP	line1	
7	0.23	35.99	26.31	9.68	52.40	-16.41	Average	line1	
8	0.23	47.86	38.18	9.68	62.40	-14.54	QP	line1	
9	0.50	38.44	28.76	9.68	46.02	-7.58	Average	line1	
10	0.50	41.15	31.47	9.68	56.02	-14.87	QP	line1	
11	10.74	20.71	10.90	9.81	50.00	-29.29	Average	line1	
12	10.74	30.02	20.21	9.81	60.00	-29.98	QP	line1	

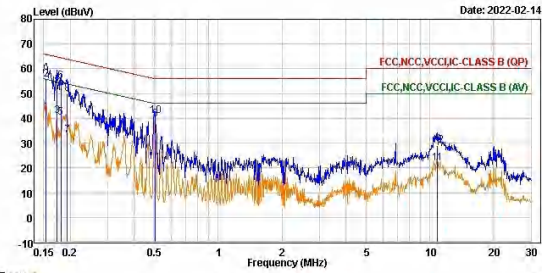
 TÜV Rheinland Taiwan Ltd.
 No. 458-18, Sec. 2, Fenhiao, Linkou Dist., New Taipei City 244, Taiwan(R.O.C.)
 Tel: +886-2172-1000 Fax: +886-2172-1022


Trace: 1

	Freq	Level	Read Level	Factor	Limit Line	Over Limit	Remark	Pol/Phase	Note
	MHz	dBuV	dBuV	dB	dBuV	dB			
1	0.15	42.27	32.60	9.67	55.79	-13.52	Average	neutral	
2	0.15	55.68	46.01	9.67	65.79	-10.11	QP	neutral	
3	0.17	41.09	31.42	9.67	54.84	-13.75	Average	neutral	
4	0.17	53.93	44.26	9.67	64.84	-10.91	QP	neutral	
5	0.18	40.35	30.69	9.66	54.47	-14.12	Average	neutral	
6	0.18	54.91	45.25	9.66	64.47	-9.56	QP	neutral	
7	0.19	33.15	23.49	9.66	53.99	-20.78	Average	neutral	
8	0.19	40.98	31.32	9.66	63.99	-15.95	QP	neutral	
9	0.50	39.58	29.92	9.66	46.00	-6.42	Average	neutral	
10	0.50	40.89	31.23	9.66	56.00	-15.11	QP	neutral	
11	10.85	21.94	12.14	9.80	50.00	-28.06	Average	neutral	
12	10.85	28.88	19.08	9.80	60.00	-31.12	QP	neutral	