
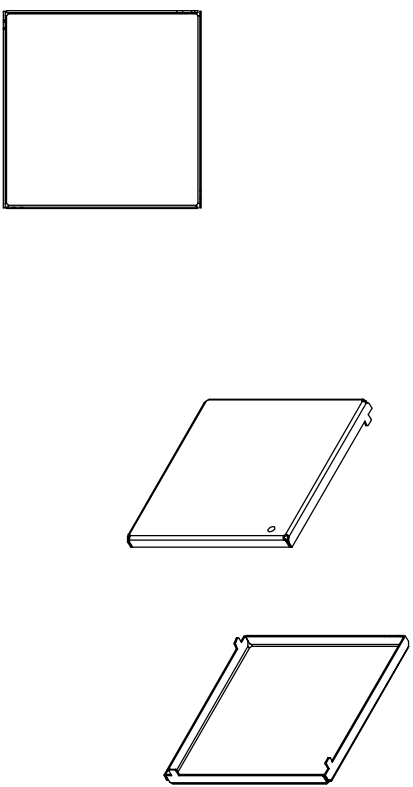


| MODIFICATION | | |
|--------------|-------------|------|
| VER | DESCRIPTION | DATE |
| | | |
| | | |
| | | |

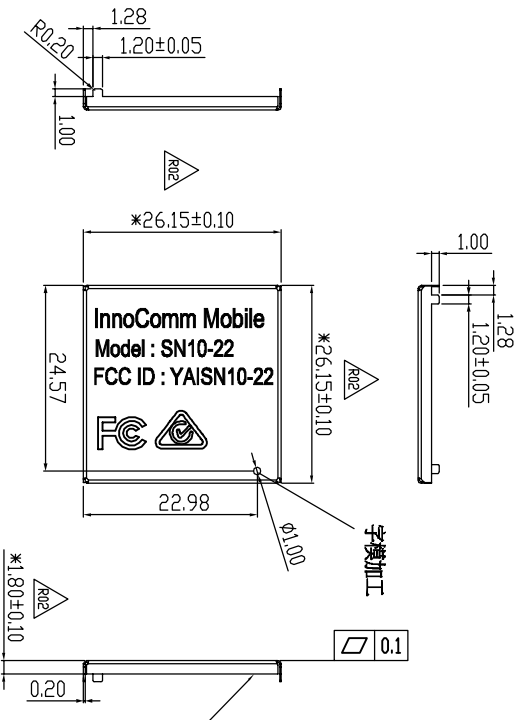

- Note :
- 1.The general tolerance is $\pm 0.10\text{mm}$ / Angle is $\pm 1.0^\circ$.
 - 2."*" Critical dimensions.
 - 3.Critical dimensions CPK measurement must above 1.33.
 - 4.The thickness is 0.2mm
 - 5.Material: 洋白銅
 - 6.Burr 0.05mm max.
 - 7.Need to comply with ROHS

InnoComm Mobile Technology Corp.

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF INNOCOMM MOBILE TECHNOLOGY CORP. AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR DEVICES WITHOUT PERMISSION.

Drawn: Willey Lee
 Designed: Willey Lee
 Checked:
 Approved:

| DIMENSIONAL TOLERANCES | M1 | M2 | S1 | S2 | P1 | P2 | C | Material: | THIRD ANGLE PROJECTION | DWG TITL: |
|------------------------|------|------|------|------|------|------|-----|------------|------------------------|--------------|
| 0-6 | 0.05 | 0.10 | 0.15 | 0.20 | 0.05 | 0.10 | 0.5 | | | DWG NO.: |
| 6-30 | 0.10 | 0.20 | 0.15 | 0.25 | 0.10 | 0.15 | 1.0 | | | SHEET 1 OF 1 |
| 30-80 | 0.15 | 0.25 | 0.20 | 0.30 | 0.20 | 0.40 | 2.0 | Treatment: | | DATE |
| 80-180 | 0.15 | 0.30 | 0.25 | 0.45 | 0.40 | 0.80 | 3.0 | | | REV. |
| 180-315 | 0.20 | 0.50 | 0.40 | 0.60 | 0.60 | 1.20 | 3.0 | | | |
| 315-800 | 0.30 | 0.80 | 0.70 | 1.10 | 0.80 | 1.50 | 4.0 | | | |

SCALE 1:1000 UNITS MM USED ON

DWG NAME: XXXXXXXXXXXXXXXX DWG NO. XXX-XXXXX-XXXXX