



Compliance Engineering Ireland Ltd
RAYSTOWN, RATOATH ROAD, ASHBOURNE, CO. MEATH, IRELAND
Tel: +353 1 8256722 Fax: +353 1 8256733

Project Number: 10E3363-2

Prepared for:

Biancamed Ltd

By

Compliance Engineering Ireland Ltd
Ratoath Road
Ashbourne
Co. Meath

FCC Site Registration: 92592

Date


20th January 2011

FCC EQUIPMENT AUTHORISATION
Test Report

EUT Description

Motion Sensor

Authorised:

A handwritten signature in blue ink, appearing to read 'John Mc Anby', written over a horizontal line.

List of Exhibits

Title Page

List of Exhibits

Exhibit A – Technical Report

Exhibit B – Photographs

THIS REPORT SHALL NOT BE REPRODUCED EXCEPT IN FULL, WITHOUT THE
WRITTEN APPROVAL OF COMPLIANCE ENGINEERING IRELAND LTD

Exhibit A – Technical Report

**Biancamed Ltd.,
Sleepminder Motion Sensor**

FCC ID: YAKBM08

Applicant Name and Address

The system covered under this authorisation report was designed, manufactured and assembled by Biancamed Ltd. The company's full name and mailing address is given below:

**BiancaMed Limited,
NovaUCD,
Belfield Innovation Park,
Dublin 4,
Ireland.**

Model Name

The model number for the EUT covered under this application report is:

Sleepminder

Description of Equipment

The EUT was a motion detector module using a short range 10.525 GHz transceiver to detect motion, intended for use in consumer and clinical sleep trials in the volunteers' own home. It comprises a motherboard PCBA, an integral RF PCBA, die cast RF metalwork and a custom plastic anti-tamper enclosure. Events were logged to a data card using a separate logger PCB, which could later be analyzed on a computer using a custom algorithm to distinguish chest movement from background motion (not supplied by the manufacturer during testing).

Equipment Details

Description:	Field Disturbance Sensor / Device, Motion Sensor Module
Brand Name:	SleepMinder
Model Name or Number:	BM08
Serial Number:	A10
Hardware Version Number:	L3d
Software Version Number:	Ver3
FCC ID Number:	YAKBM08

Manufacturer:	Friwo
Description:	700mA DC power supply

Tested Technology:	Motion Sensor	
Category of Equipment:	Field Disturbance Sensor	
Type of Equipment:	Transmitter	
Intended Operating Environment:	Residential / Commercial	
Highest Internally Generated Clock or Oscillator Frequency:	4 MHz	
Modulation Type:	50 % duty cycle pulsed wave. Transmit pulse ~500nS width with PRF of ~1MHz	
Power Supply Requirement:	DC supply	12V via mains adaptor
Transmit Frequency Range:	10.525 GHz	
Transmit Channels Tested:	Channel ID	Channel Frequency (GHz)
	Single Channel	10.525

Modifications

There were no modifications incorporated in the EUT.

Operating Conditions during Test:

Normal Scanning

Table of Contents

APPLICANT NAME AND ADDRESS	3
MODEL NAME	3
DESCRIPTION OF EQUIPMENT	4
1.0 EUT DESCRIPTION	6
1.1 EUT OPERATION	6
1.2 MODIFICATIONS	6
1.3 DATE OF TEST	6
2 ELECTROMAGNETIC EMISSIONS TESTING.....	7
2.2.1 MEASUREMENT UNCERTAINTY	7
2.3 TEST CRITERIA.....	7
2.4 CONDUCTED EMISSIONS MEASUREMENTS	7
2.4.1 TEST PROCEDURE	7
3 RADIATED EMISSIONS MEASUREMENTS.....	8
3.2 TEST PROCEDURE.....	8
3.3 TEST CRITERIA.....	8
4 FIELD STRENGTH OF FUNDAMENTAL	9
4.2 TEST DATA – FIELD STRENGTH OF FUNDAMENTAL	9
5 FIELD STRENGTH OF HARMONICS	11
6 FIELD STRENGTH OF SPURIOUS RADIATED EMISSIONS	11
7 LIST OF TEST EQUIPMENT	12

1.0 EUT Description

The EUT was a motion detector module using a short range 10.525 GHz transceiver to detect motion, intended for use in consumer and clinical sleep trials in the volunteers' own home. It comprises a motherboard PCBA, an integral RF PCBA, die cast RF metalwork and a custom plastic anti-tamper enclosure. Events were logged to a data card using a separate logger PCB, which could later be analyzed on a computer using a custom algorithm to distinguish chest movement from background motion (not supplied by the manufacturer during testing).

1.1 EUT Operation

The EUT was tested in normal scanning mode.

1.2 Modifications

There were no modifications incorporated in the EUT.

1.3 Date of Test

The tests were carried out during the month of December 2010.

2 Electromagnetic Emissions Testing

The guidelines of CISPR 16-4 were used for all uncertainty calculations, estimates and expressions thereof for EMC testing. A copy of Compliance Engineering Ireland Ltd.'s policy for EMC Measurement Uncertainty is available on request.

RF Requirements: Spurious emissions in accordance with FCC CFR 15.209 and 15.245. Tests were carried out to the requirements of CISPR 16-4 and ANSI C63.4-2009.

2.2.1 Measurement Uncertainty

The measurement uncertainty (with a 95% confidence level) for the conducted emissions test was ± 3.5 dB.

The measurement uncertainty (with a 95% confidence level) for the radiated emissions test was ± 5.3 dB (from 30 to 100 MHz), ± 4.7 dB (from 100 to 300 MHz), ± 3.9 dB (from 300 to 1000 MHz) and ± 3.8 dB (from 1 GHz to 40 GHz).

2.3 Test Criteria

The FCC Part 15 Class B conducted limits are given below.

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

2.4 Conducted Emissions Measurements


2.4.1 Test Procedure

The measurements were taken using a Line Impedance Stabilisation Network (LISN). A Rohde and Schwarz ESHS30 Receiver with a bandwidth of 9 kHz was used to measure the conducted emissions. The measurements were carried out using the receiver analysis feature, which uses three detectors; peak, quasi peak and average. Using this mode the voltage emission spectrum was scanned in peak detection mode and the emissions which exceeded a sub range margin relevant to the respective limits were further measured using the quasi peak and average detectors. The live and neutral conductors were examined individually to determine the maximum. The receiver bandwidth was set to 10 kHz. Appendix A shows the plots from the test.

The excess interface cables were bundled in a non-inductive arrangement at the approximate centre of the cable with the bundle 30 to 40 centimetres in length. The conducted emissions were maximised by varying the operating states and configuration of the EUT.

The results of conducted emissions are shown in Appendix A, Figures 1 and 2.

Result: Pass



3 Radiated Emissions Measurements

Radiated Emissions measurements were made at the Compliance Engineering Ireland Ltd Site located in Ashbourne, Co. Meath, Ireland to determine the radio noise radiated from the EUT. A "Description of Measurement Facilities" has been submitted to the FCC and approved pursuant to Section 2.948 of CFR 47 of the FCC rules.

3.2 Test Procedure

The EUT was centred on a motorised turntable, which allows 360 degree rotation. From frequencies between 30 MHz and 1000 MHz, a measurement antenna was positioned at a distance of 10 meters as measured from the closest point of the EUT. The radiated emissions were maximised by configuring the EUT, by rotating the EUT, and by raising and lowering the antenna from 1 to 4 meters.

Emissions above 1 GHz were made at a 3 metre distance. There were no emissions identified between 1 GHz and 40 GHz excepting the intended emission at 5.8 GHz.

A measuring receiver with peak detection was used to find the maximums of the radiated emissions during the variability testing below 1 GHz. All final measurements were taken using the quasi peak detector with a measurement bandwidth of 120 kHz. A drawing showing the test setup is given as Figure 2.

3.3 Test Criteria

The FCC Part 15.209 radiated limits are given below for a measurement distance of 3 meters.

Frequency (MHz)	Field Strength $\mu\text{V/m}$	Field Strength (dB $\mu\text{V/m}$)
30-88	100	40.0
88-216	150	43.52
216-960	200	46.0
above 960	500	54.0

4 Field Strength of Fundamental


Test Specification: FCC PART 15, SECTION 47 CFR 15.209, CFR15.245.

The EUT was set up as described above. The measurement instrumentation used was a Spectrum Analyser with bandwidth parameters as stipulated in ANSI C63.4-2009.

The final measurements were carried out on the open area test site.

4.2 Test Data – Field Strength of Fundamental

The measurement plot below represents the maximum worst-case result from the measurement performed in accordance to the requirements of this section.

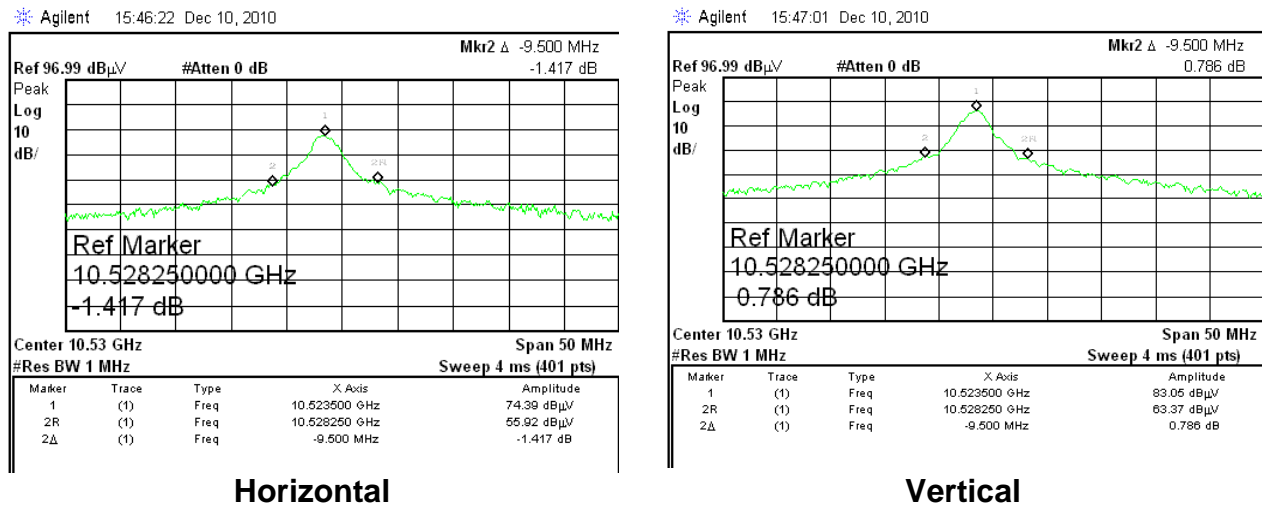

Indicated		Correction			Corr	Turntable/Antenna			Class B		Det	EUT
Freq	Ampl	Ant	Cabl	Amp	Ampl	Ang	Ht	Pol	Ampl	Marg		Orien
GHz	dBµV	dB	dB	dB	dB µV/m	deg	m	V/H	dBµV/m	dB		
10.5235	74.39	38.3	4.3	-31.7	85.3	0	1.1	H	127	41.71	Pk	V
10.5235	83.05	38.3	4.3	-31.7	93.9	0	1.0	V	127	33.05	Pk	V

The margin is calculated as follows:
Margin = Corrected Amplitude – Limit, where Corrected Amplitude = Spectrum Analyser Amplitude + Cable Loss +Antenna Factor – Pre-Amp Gain.

Test-Data Summary – Peak Measurement:

Center Frequency	=	10523.5 MHz
Peak Level:	=	83.05 dB μ V/m
Peak Limit (15.209)	=	127.00 dB μ V/m

Conclusion

Sensor meets the requirements of the test reference for Fundamental Frequency Field Strength per FCC Part 15C

Result: Pass

A handwritten signature in blue ink, reading "John M. Aubrey".

5 Field Strength of Harmonics

Harmonics were measured up 26 GHz.

Indicated		Correction			Corr	Turntable/Antenna			Class B		Det	EUT
Freq	Ampl	Ant	Cabl	Amp	Ampl	Ang	Ht	Pol	Ampl	Marg		Orien
GHz	dBμV	dB	dB	dB	dB μV/m	deg	m	V/H	dBμV/m	dB		
21.0470	35.16	42.0	6.7	-30.8	53.06	0	1.0	H	88	34.94	Pk	V
21.0470	34.17	42.0	6.7	-30.8	52.07	0	1.0	V	88	35.93	Pk	V

Result: Pass

6 Field Strength of Spurious Radiated Emissions

Test Specification: FCC PART 15, SECTION 47 CFR 15.209

For the spurious and harmonics measurements, below 1GHz, the EUT was set up at a 3 meter distance from the receiving antenna, on an Open Area Test Site (OATS), with the EUT running in a continuous mode. The EUT was rotated 360 degrees azimuth and the search antenna height varied 1 to 4m in order to maximize the emissions. Significant peaks from the EUT had previously been recorded in a 3m semi anechoic chamber. For measurements above 1GHz, the EUT was set up at a 3 meter distance from the antenna, in a semi-anechoic chamber, with the EUT running in a continuous mode. The EUT was rotated 360 degrees azimuth and the search antenna height varied 1 to 4m in order to maximize the emissions. Significant peaks from the EUT were then recorded to determine margin to the limits.

Appendix A shows the results of the measurements in the anechoic chamber.

Result: Pass

John Mc Aubey

7 List of Test Equipment

Instrument	Mftr.	Model	Calibration Due
Measuring Receiver	Rohde and Schwarz	ESVS30	07/04/11
Bilog Antenna	Chase	CBL6111	16/09/11
Spectrum Analyser	Agilent	8565EC	10/2/11
Measuring Receiver	Rohde and Schwarz	ESHS30	27/10/11
LISN	Rohde and Schwarz	ESH3-Z5	13/08/11
Spectrum Analyser	Agilent	E4408B	05/08/11
Horn Antenna	EMCO	3115	05/11/11
Preamplifier	Hewlett Packard	83017A	23/09/11
Crystal Detector	Hewlett Packard	8470B	29/04/11
Oscilloscope	Tektronix	794D	30/04/11

Appendix A Test Results

**Table 1 - Radiated Emissions on OATS
30 MHz to 1 GHz**

Horizontal and Vertical Maximum

Antenna Distance: 3m
Frequency Range: 30 MHz - 1000 MHz
Detector Type: Quasi peak

Frequency (MHz)	Q.P. Level dB(μV/m)	Q.P. Limit dB(μV/m)	Polarisation	Antenna Height (m)	Margin dB(μV/m)
30.12	23.8	40	Vertical	1	-16.2
38.45	27.2	40	Vertical	1	-12.8
54.12	24.2	40	Vertical	1	-15.8
60.23	31.6	40	Vertical	1	-8.4
81.25	21.2	40	Vertical	1	-18.8
112.56	20.8	43.52	Vertical	1.2	-22.72

Corrected Level = Recorded Level + Antenna Factor + Cable Loss

COMMENT: PASS

Compliance Engineering Ireland Ltd

09 Dec 2010 10:22

Conducted Emissions

EUT: SleepMinder
Manuf: BiancaMed
Op Cond:
Operator: Paul Reilly
Test Spec: FCC Part 15
Comment: Live

Scan Settings		(1 Range)		Receiver Settings				
Frequencies		Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge
Start	Stop							
150kHz	30MHz	5kHz	10kHz	PK+AV	20msec	Auto	OFF	60dB
Final Measurement:		Detectors:	X QP / + AV					
		Meas Time:	1sec					
		Subranges:	25					
		Acc Margin:	20 dB					

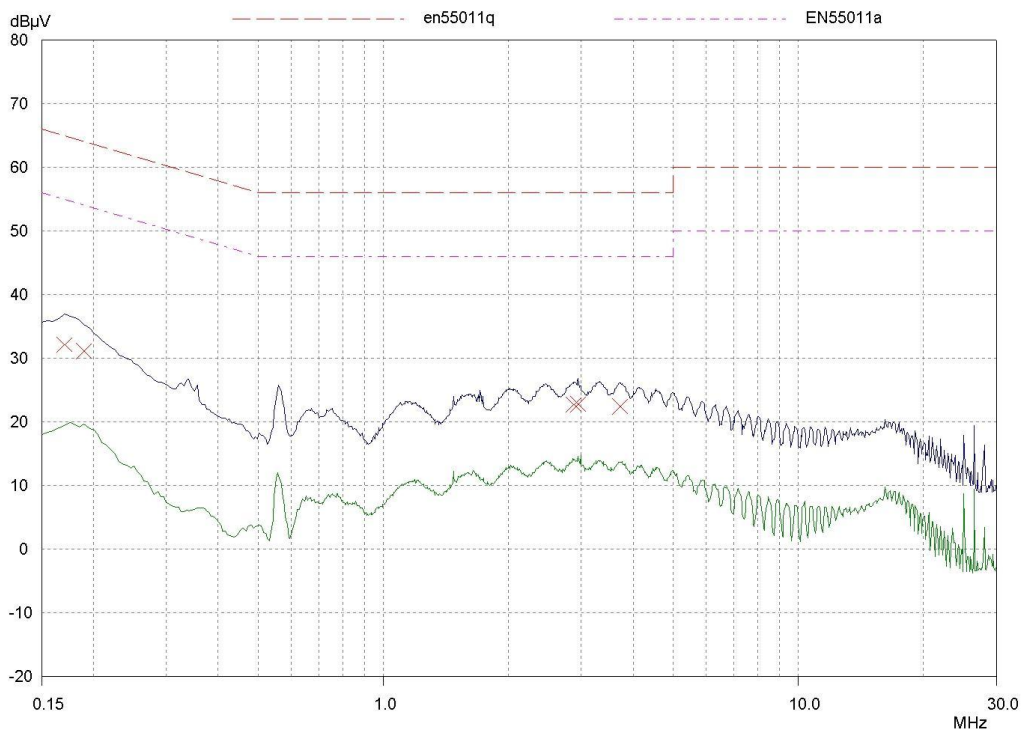


Figure 1: Conducted Emissions (Live)

Compliance Engineering Ireland Ltd

09 Dec 2010 10:06

Conducted Emissions

EUT: SleepMinder
Manuf: BiancaMed
Op Cond:
Operator: Paul Reilly
Test Spec: FCC Part 15
Comment: Neutral

Scan Settings		(1 Range)		Receiver Settings				
Frequencies		Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge
Start	Stop							
150kHz	30MHz	5kHz	10kHz	PK+AV	20msec	Auto	OFF	60dB
Final Measurement:		Detectors:	X QP / + AV					
		Meas Time:	1sec					
		Subranges:	25					
		Acc Margin:	20 dB					

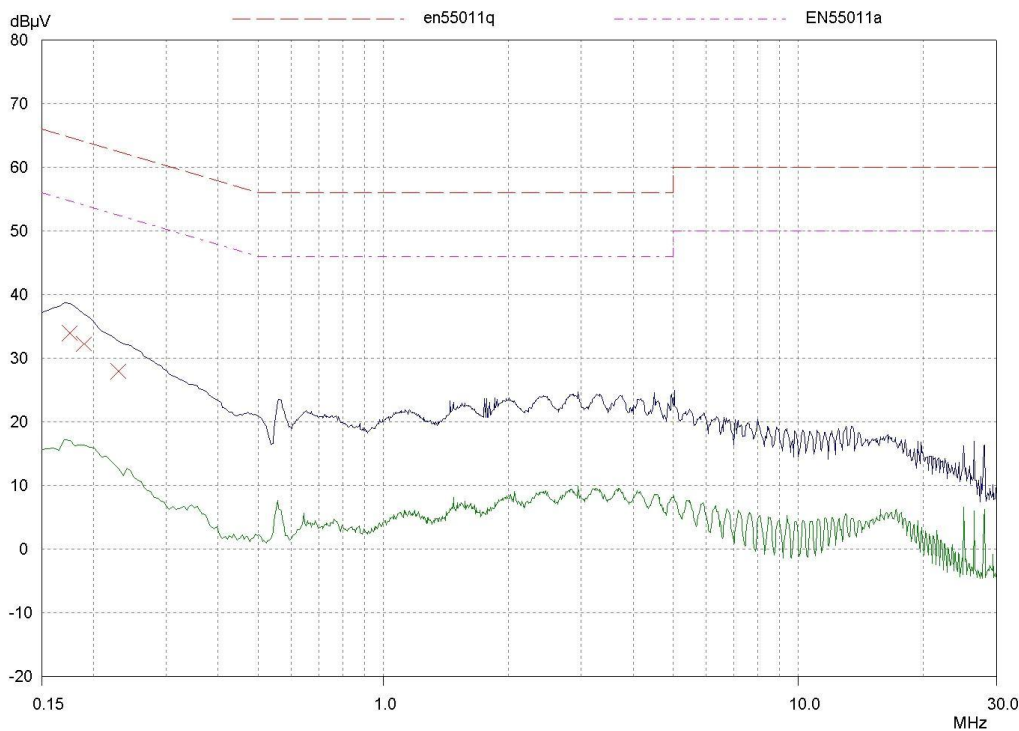


Figure 2: Conducted Emissions (Neutral)

RADIATED EMISSIONS

10. Dec 10 16:13

Op Cond: Normal
Operator: P Reilly
Test Spec: FCC
Comment: NO CABLES

Scan Settings (1 Range)

Frequencies				Receiver Settings				
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge
30M	1000M	120k	120k	PK	5ms	0dBLN	OFF	60dB

Final Measurement: x Hor-Max / + Vert-Max
Meas Time: 1 s
Subranges: 8
Acc Margin: 0dB

Transducer No.	Start	Stop	Name
3	9	20M	1000M
19	30M	1000M	CEIL615

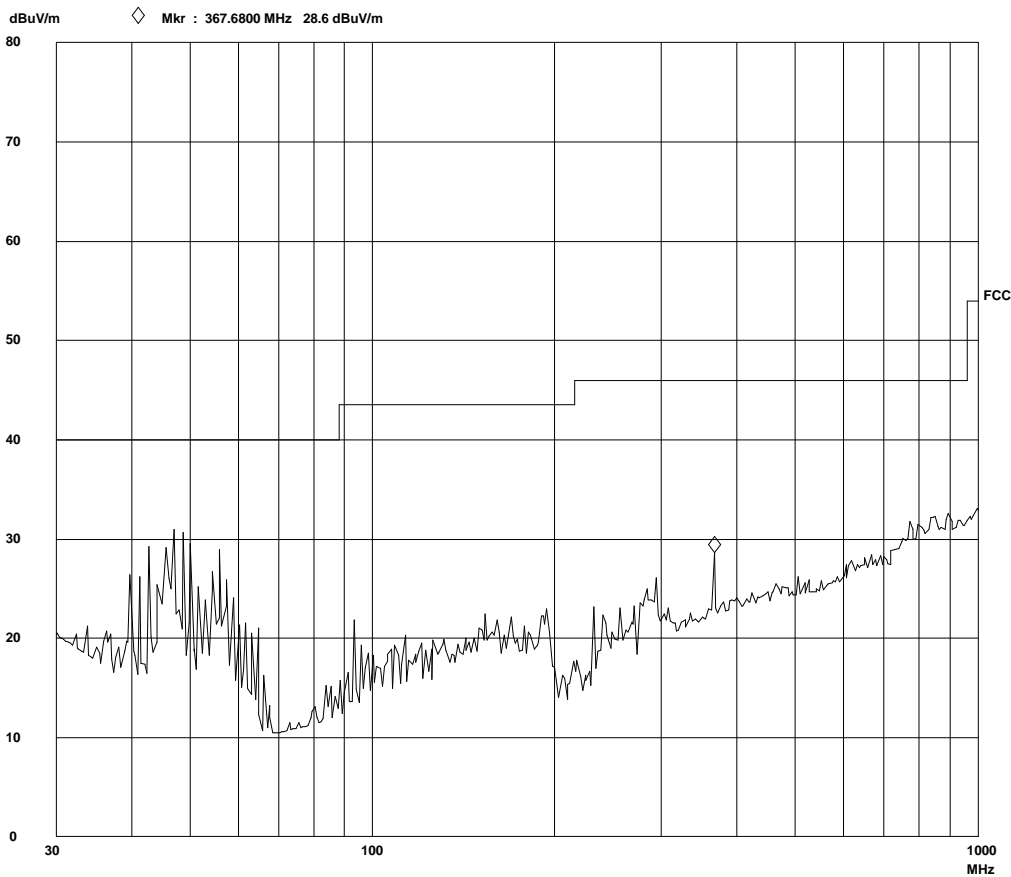


Figure 3: 3m scan from 30 MHz to 1000 MHz in anechoic chamber (vertical)

RADIATED EMISSIONS

10. Dec 10 16:38

Op Cond: Normal
Operator: P Reilly
Test Spec: FCC
Comment: NO CABLES

Scan Settings (1 Range)									
Frequencies					Receiver Settings				
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge	
30M	1000M	120k	120k	PK	5ms	0dBLN	OFF	60dB	

Final Measurement: x Hor-Max / + Vert-Max

Meas Time: 1 s

Subranges: 8

Acc Margin: 0dB

Transducer No.	Start	Stop	Name
3	9	20M	1000M
19	30M	1000M	BILOG

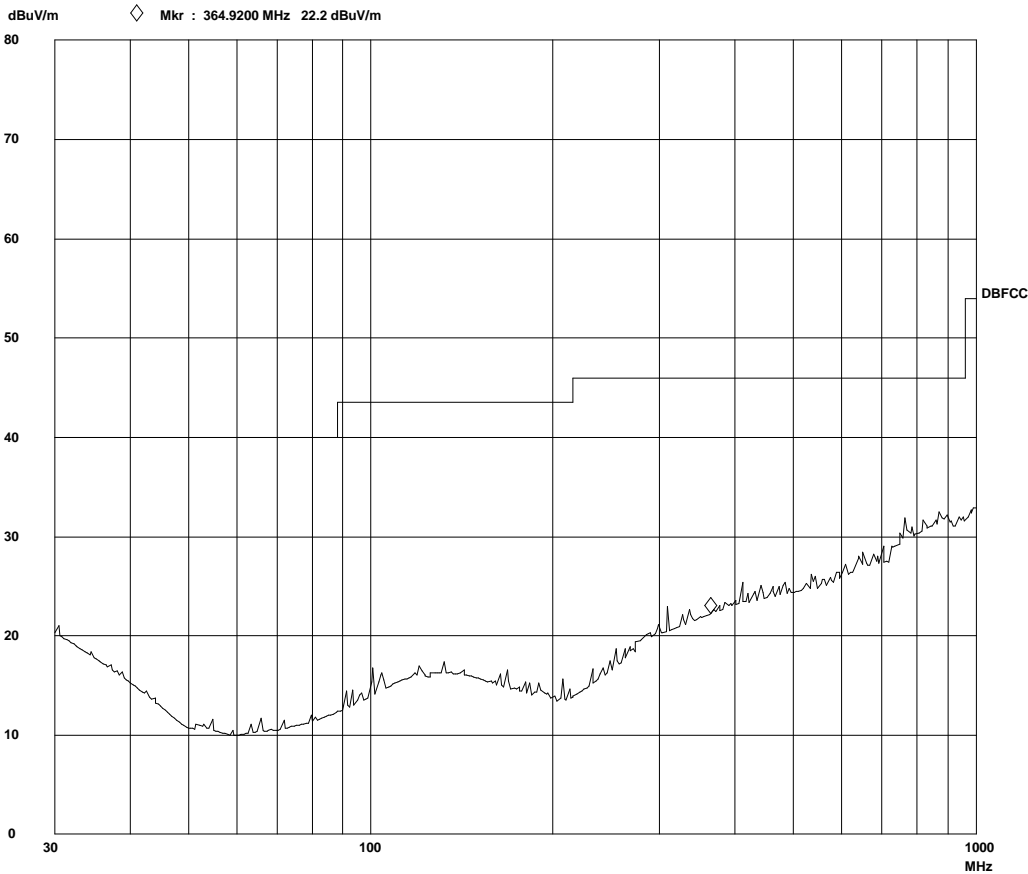


Figure 4: 3m scan from 300 MHz to 1000 MHz in anechoic chamber (horizontal)

Agilent 15:28:19 Dec 10, 2010

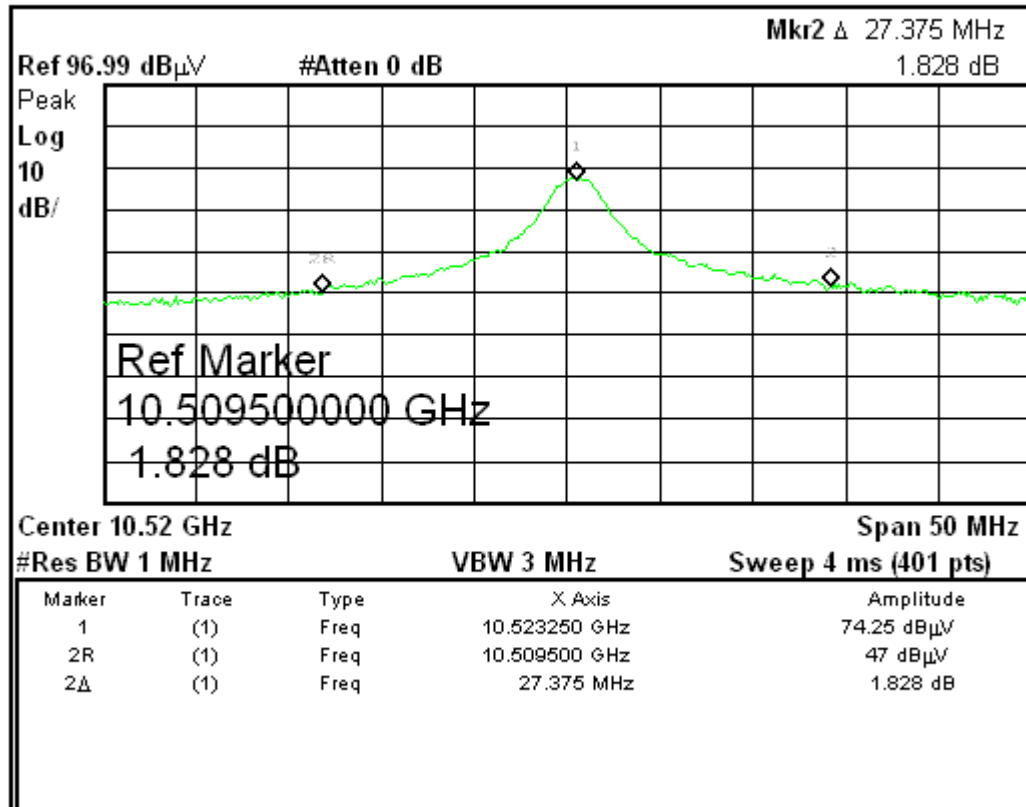


Figure 5: Occupied Bandwidth

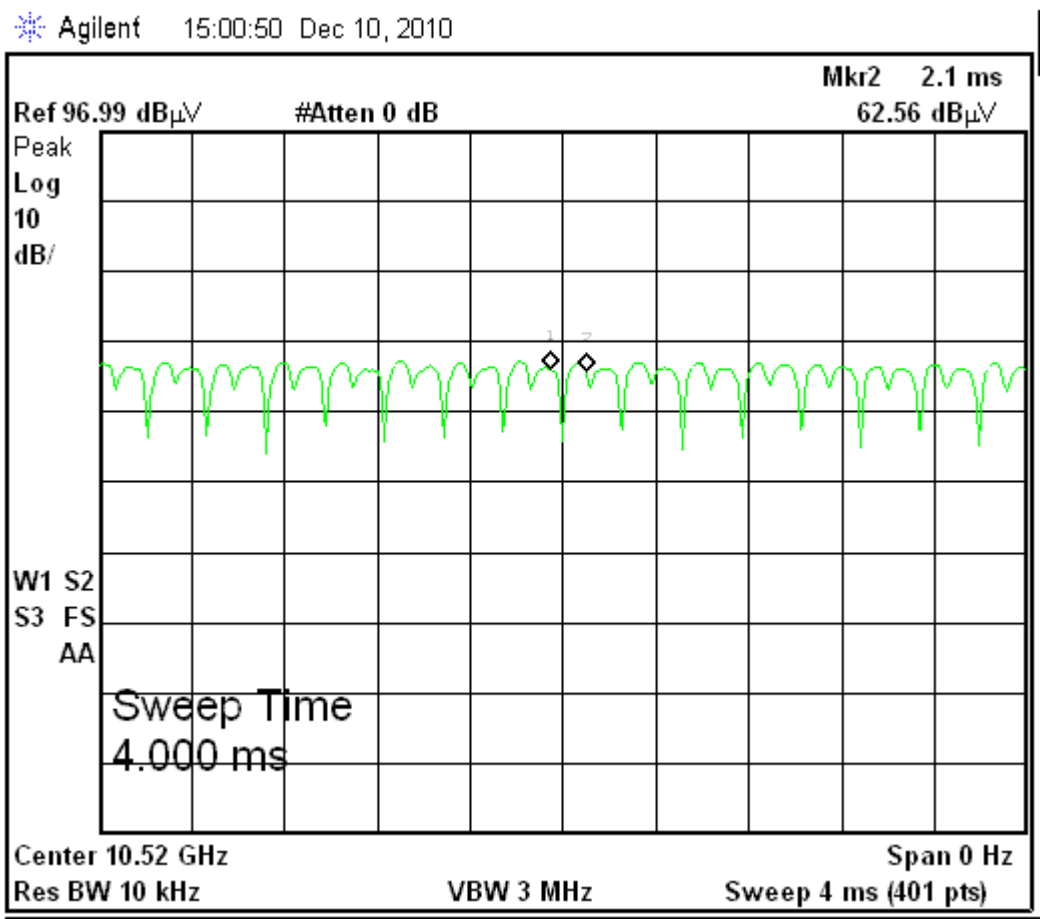
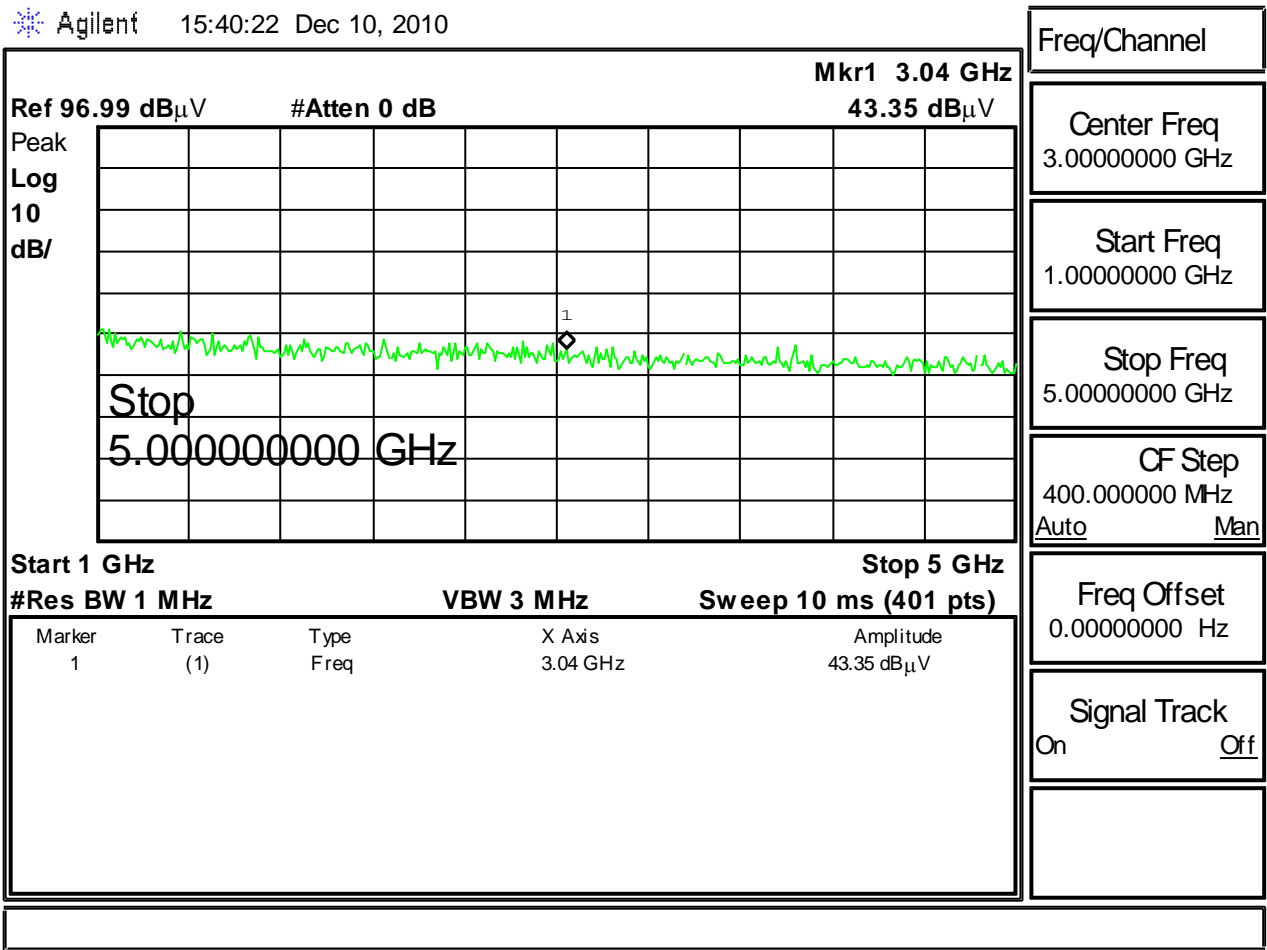


Figure 6: Repetition Rate



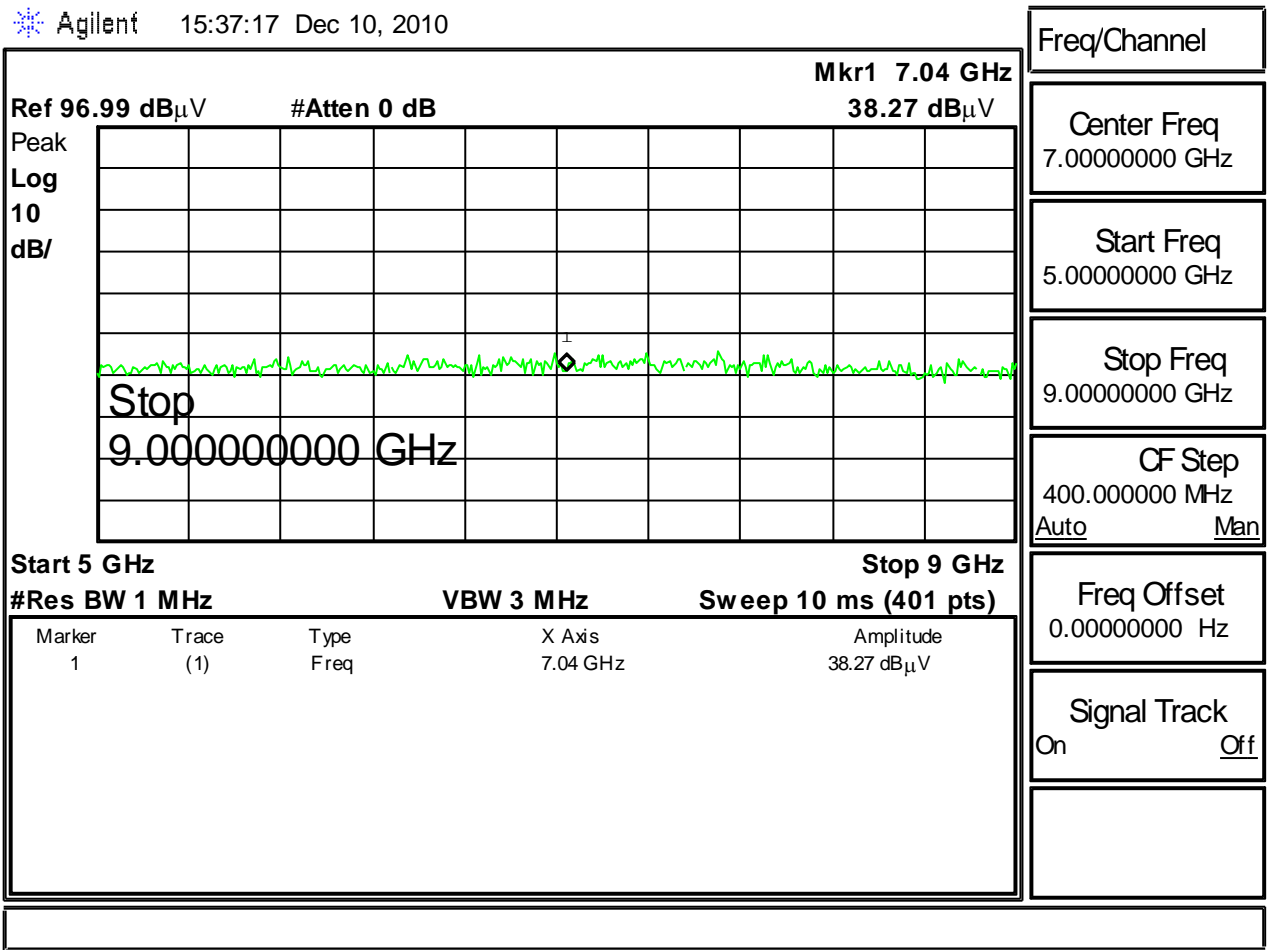
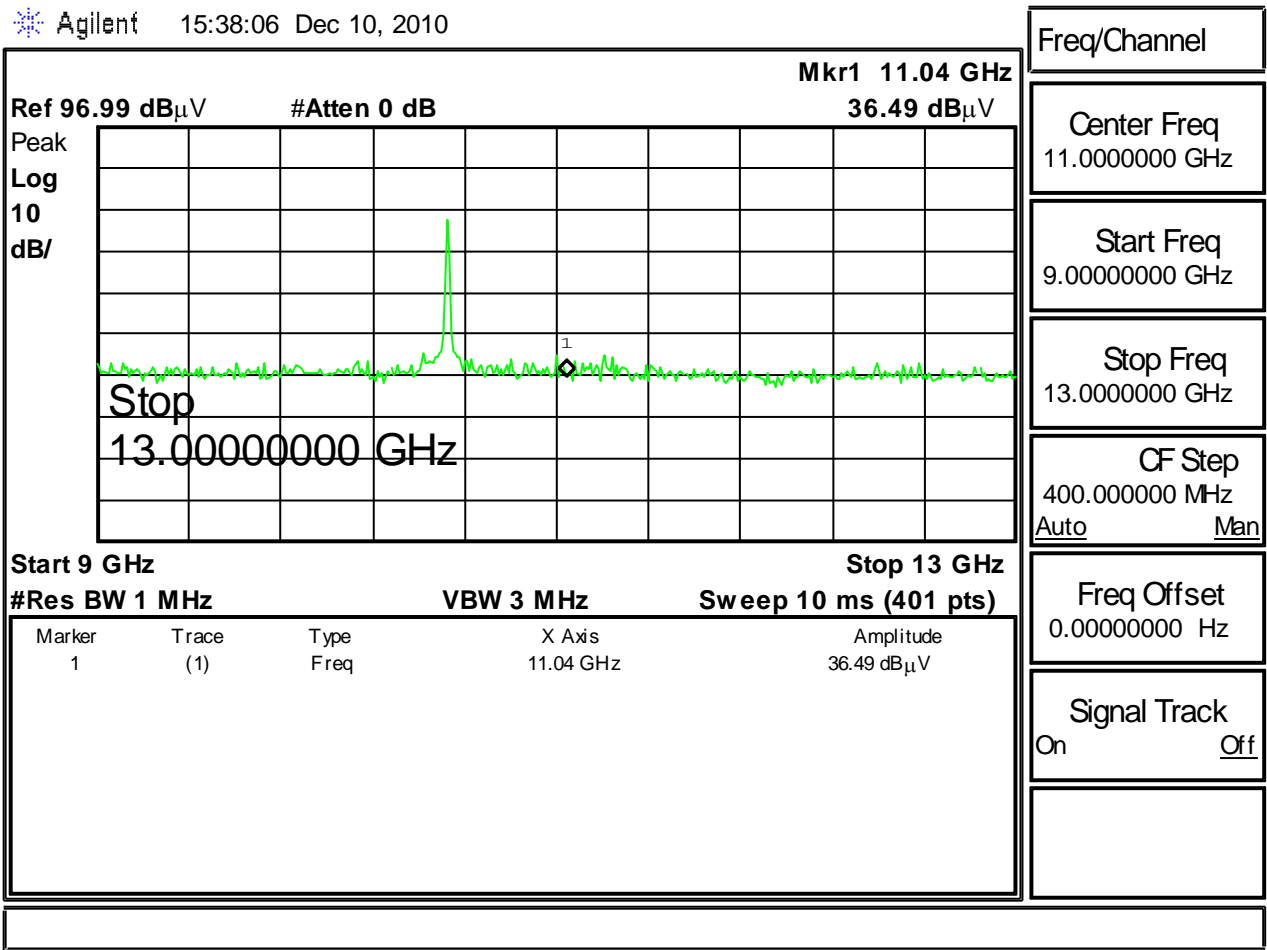


Figure 8: 5 GHz to 9 GHz



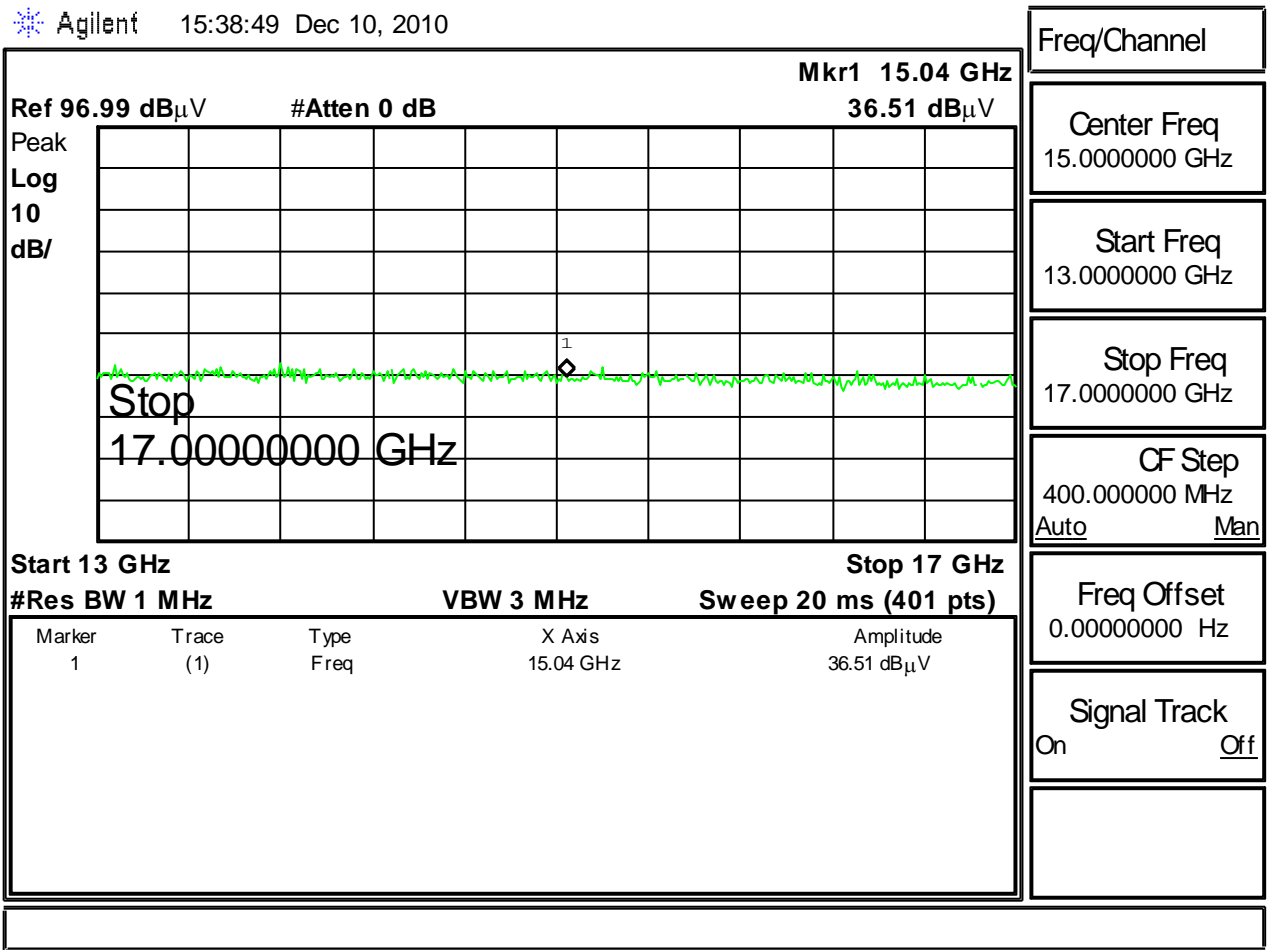


Figure 10: 13 GHz to 17 GHz


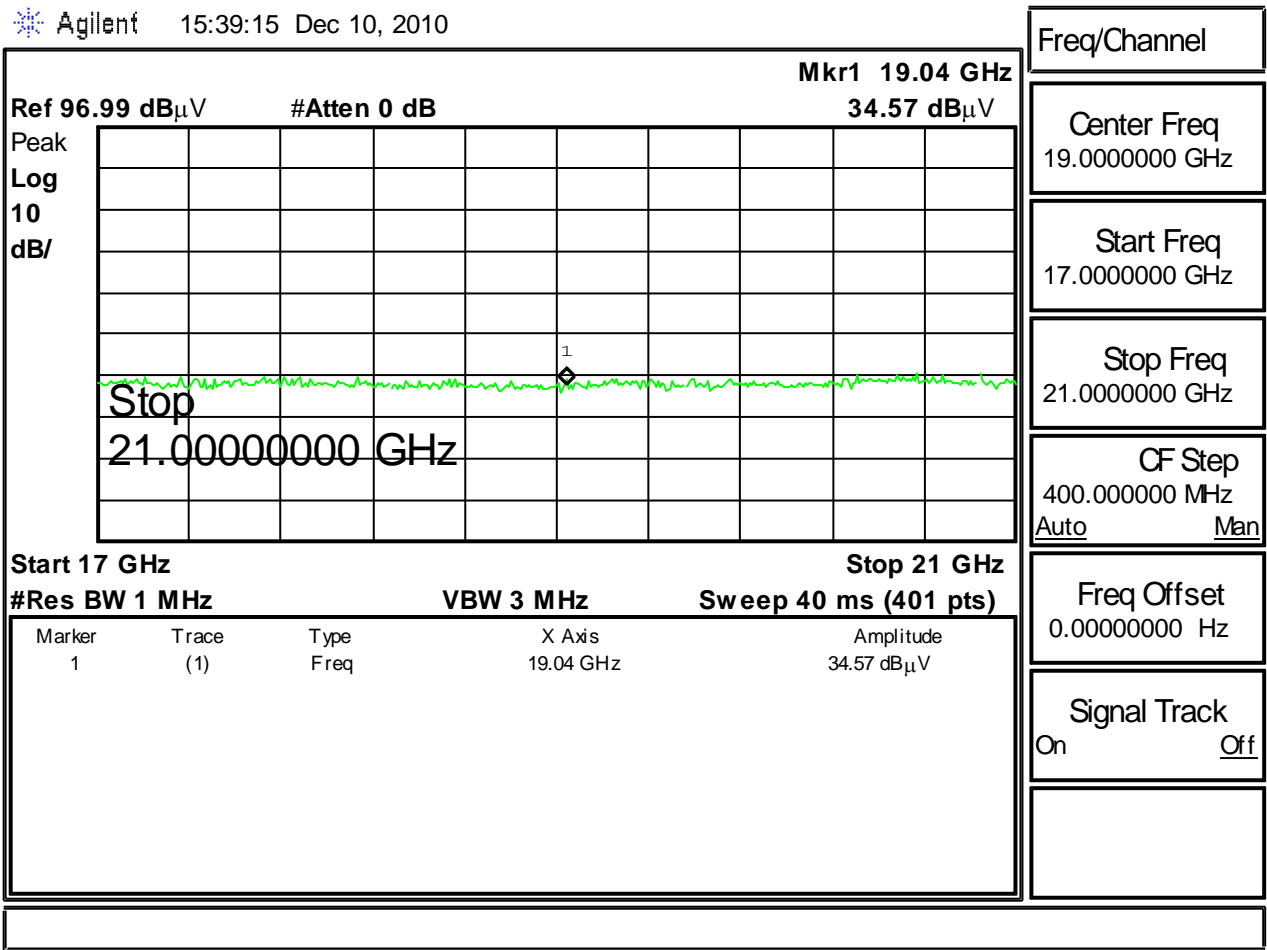


Figure 11: 17 GHz to 21 GHz

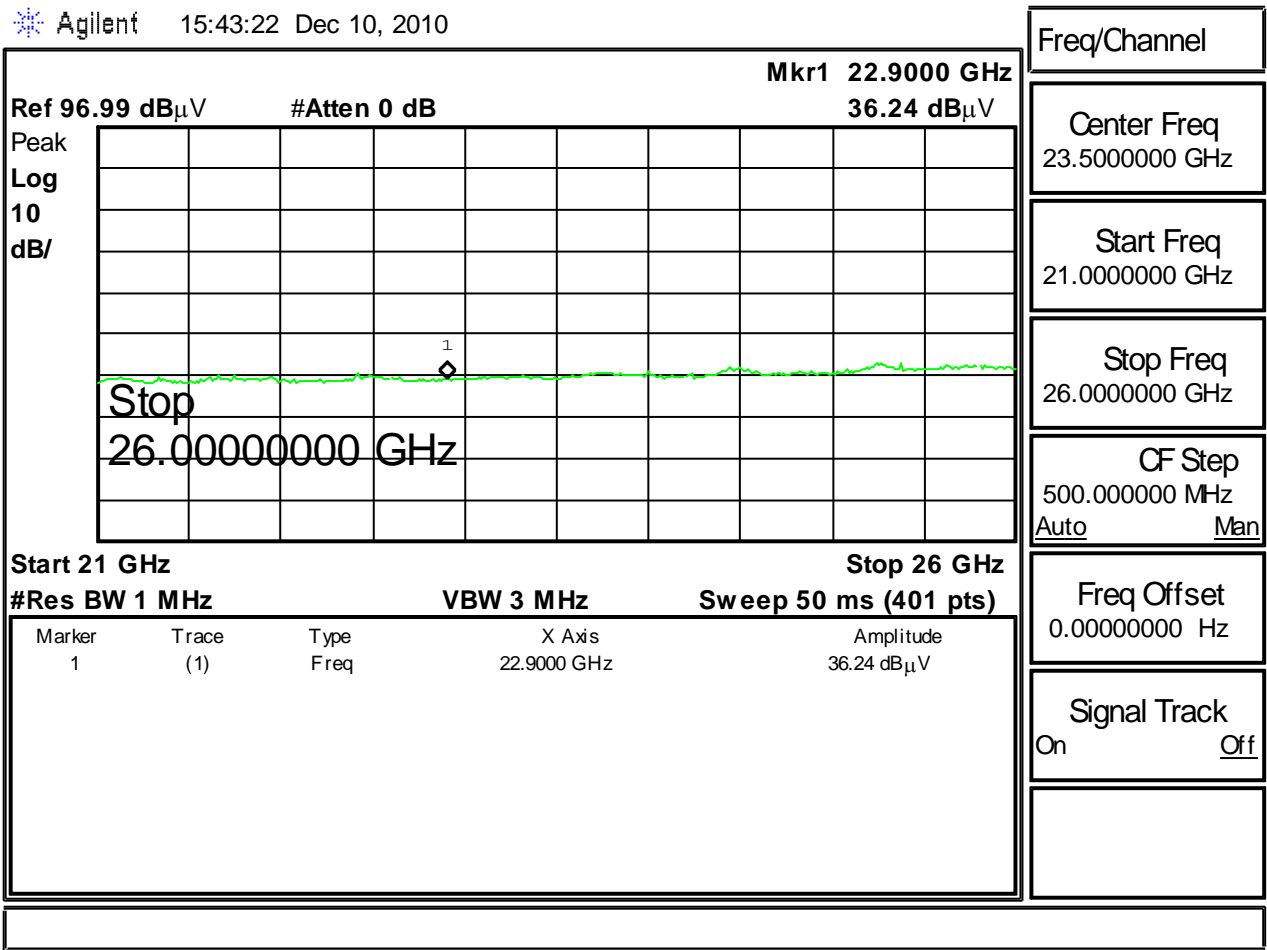

Appendix B Test Setups

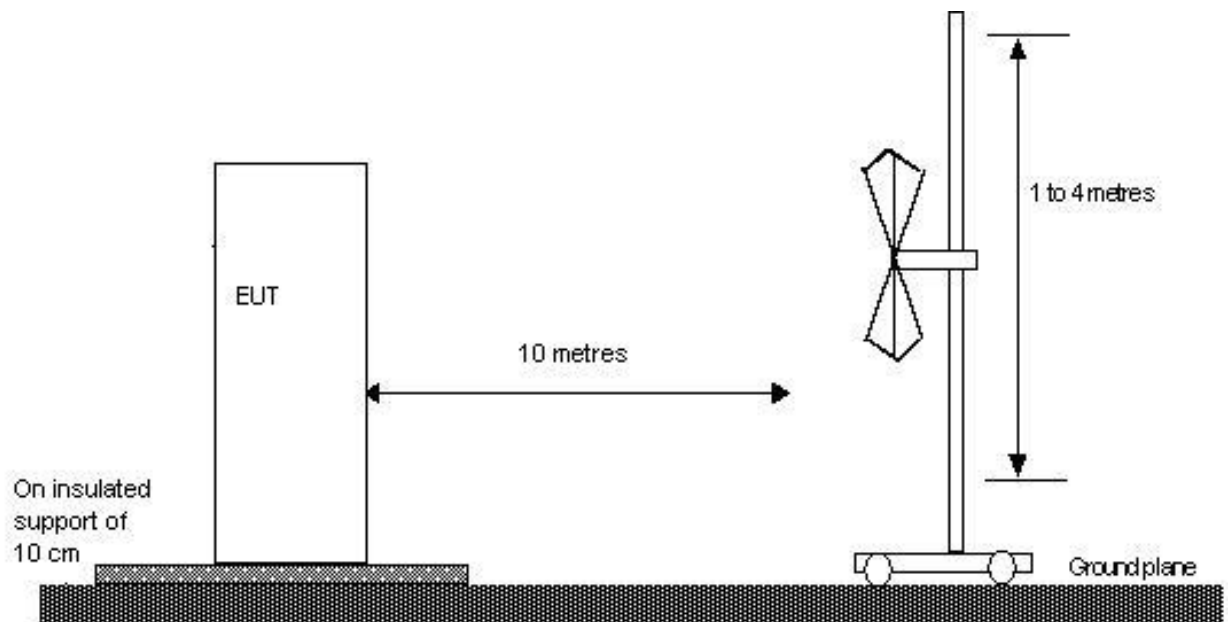
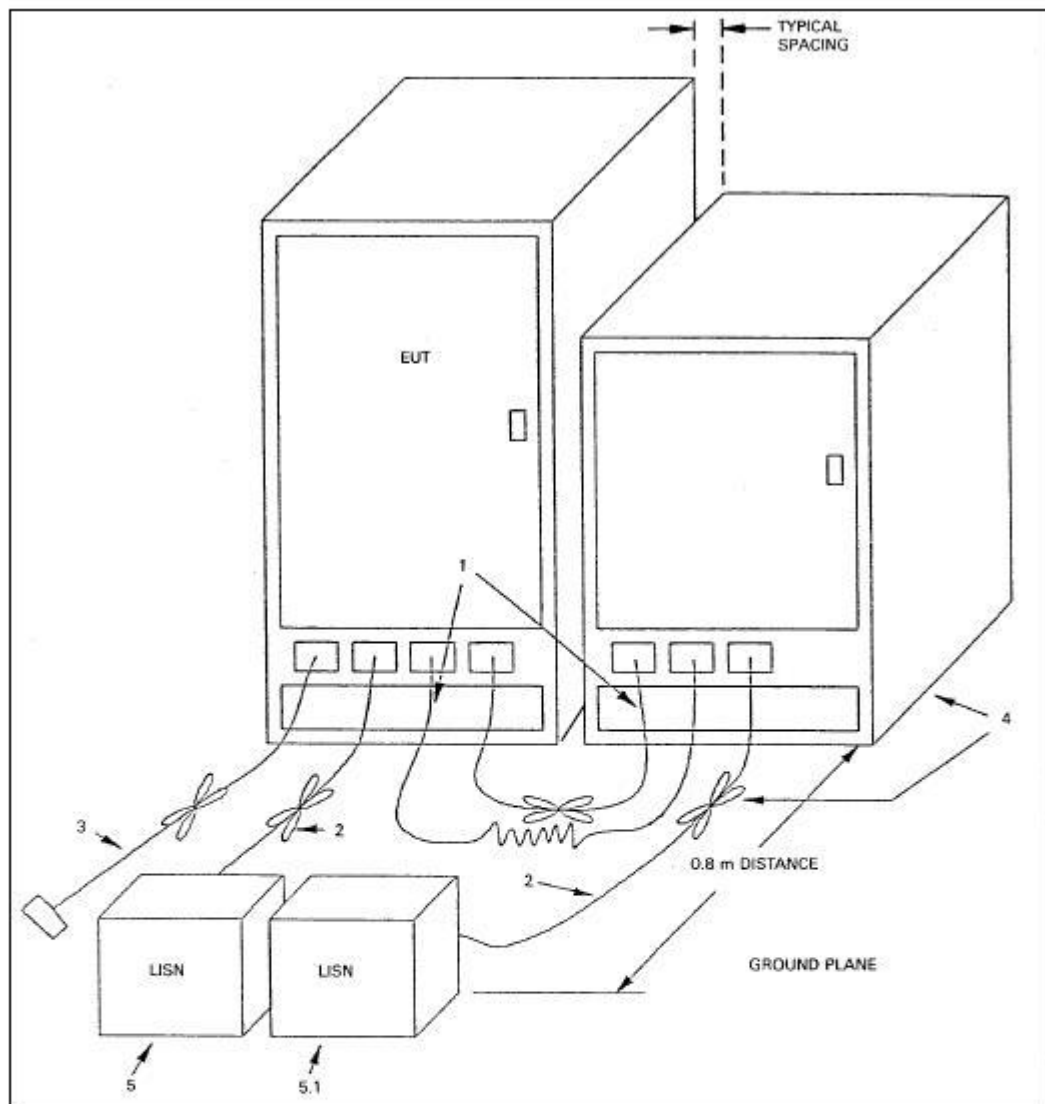


FIGURE 1: Radiated Emissions Test Setup – Test Distance 3m

**LEGEND:**

- 1) Excess I/O cables shall be bundled in the center. If bundling is not possible, the cables shall be arranged in serpentine fashion. Bundling shall not exceed 40 cm in length (see 6.1.4 and 11.2.4).
- 2) Excess power cords shall be bundled in the center or shortened to appropriate length (see 7.2.1).
- 3) I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. If bundling is not possible, the cable shall be arranged in serpentine fashion (see 6.1.4).
- 4) EUT and all cables shall be insulated, if required, from the groundplane by up to 12 mm of insulating material (see 6.1.4 and 6.2.2).
- 5) EUT connected to one LISN. LISN can be placed on top of, or immediately beneath, the groundplane.
 - 5.1) All other equipment powered from a second LISN or additional LISN(s) (see 5.2.3 and 7.2.1).
 - 5.2) Multiple outlet strip can be used for multiple power cords of non-EUT equipment.

FIGURE 2: Conducted Emissions Test Setup