

FCC PART 22, 74, 80 and 90

TEST REPORT

For

Hytera Communications Co., Ltd.

Hyt Tower, Hi-Tech Industrial Park North, Nanshan District, Shenzhen, China

FCC ID: YAMPD36XUC

Report Type: Class II Permissive Change	Product Type: Digital Portable Radio
Test Engineer: Gardon Zhang	<i>Gardon Zhang</i>
Report Number: RSZ140409004-00A1	
Report Date: 2014-07-03	
Reviewed By: Jimmy Xiao RF Engineer	<i>Jimmy Xiao</i>
Prepared By: Bay Area Compliance Laboratories Corp. (Shenzhen) 6/F, the 3rd Phase of WanLi Industrial Building, ShiHua Road, FuTian Free Trade Zone Shenzhen, Guangdong, China Tel: +86-755-33320018 Fax: +86-755-33320008 www.baclcorp.com.cn	

Note: This test report is prepared for the customer shown above and for the equipment described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp.

TABLE OF CONTENTS

GENERAL INFORMATION	3
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	3
OBJECTIVE.....	3
RELATED SUBMITTAL(S)/GRANT(S).....	3
TEST METHODOLOGY.....	4
TEST FACILITY.....	4
SYSTEM TEST CONFIGURATION	5
DESCRIPTION OF TEST CONFIGURATION.....	5
EUT EXERCISE SOFTWARE.....	5
SPECIAL ACCESSORIES.....	5
EQUIPMENT MODIFICATIONS.....	5
BLOCK DIAGRAM OF TEST SETUP.....	5
SUMMARY OF TEST RESULTS	6
FCC §1.1307(b) & §2.1093 - RF EXPOSURE	7
APPLICABLE STANDARD.....	7
FCC §2.1053 & §22.861 & §74.462 & § 80.211 & §90.210 - RADIATED SPURIOUS EMISSIONS	8
APPLICABLE STANDARD.....	8
TEST EQUIPMENT LIST AND DETAILS.....	8
TEST PROCEDURE.....	8
TEST DATA.....	9
PRODUCT SIMILARITY DECLARATION LETTER	11

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

The *Hytera Communications Co., Ltd.*'s product, model number: *PD352 Uc (FCC ID: YAMPD36XUC)* or the "EUT" in this report was a *Digital Portable Radio*, which was measured approximately: 124 mm (L) x 55 mm (W) x 22 mm (H), rated with input voltage: DC 3.7V battery or DC 5.0V from adapter.

Charger Adapter Information:

Model: HKA00605010-2B

Input: AC 100-240V, 50/60 Hz, 0.2A,

Output: DC 5.0V, 1.0A

Note: The product, series model PD350 Uc, PD352 Uc, PD355 Uc, PD356 Uc and PD358 Uc are electrically identical, they are just different in model number due to market purposes, which was explained in the attached declaration letter. And the model PD352 Uc was selected for fully testing.

** All measurement and test data in this report was gathered from production sample serial number: 1404043 (Assigned by BACL, Shenzhen). The EUT supplied by the applicant was received on 2014-04-09.*

Objective

This test report is prepared on behalf of *Hytera Communications Co., Ltd.* in accordance with Part 2, and Part 90 of the Federal Communication Commissions rules.

This is a CIIPC application of the device, the differences between the original device and the current one are as follows:

- 1) Changing the model number, the original models are PD360 Uc, PD362 Uc, PD365 Uc, PD366 Uc, PD368 Uc, and the new models are PD350 Uc, PD352 Uc, PD355 Uc, PD356 Uc, PD358 Uc
- 2) Changing the appearance
- 3) The direction of the antenna is different. One is Vertical, the other is horizontal.

For the change made to the device, the test item "spurious radiated emissions" was performed.

Related Submittal(s)/Grant(s)

No related submittal.

Test Methodology

All tests and measurements indicated in this document were performed in accordance with the Code of federal Regulations Title 47 Part 2, Sub-part J as well as the following individual parts:

Part 22 – Public Mobile Service

Part 74 – Experimental Radio, Auxiliary, Special Broadcast and other Program Distributonal Service

Part 80 – Stantions in the Maritme Service

Part 90 – Private Land Mobile Radio Service

Applicable Standards: TIA 603-D and ANSI 63.4-2009.

All emissions measurement was performed and Bay Area Compliance Laboratories Corp. (Shenzhen). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Measurement uncertainty with radiated emission is 5.91 dB for 30MHz-1GHz.and 4.92 dB for above 1GHz, 1.95dB for conducted measurement.

Test Facility

The test site used by Bay Area Compliance Laboratories Corp. (Shenzhen) to collect test data is located on the 6/F, the 3rd Phase of WanLi Industrial Building, ShiHua Road, FuTian Free Trade Zone Shenzhen, Guangdong, China.

Test site at Bay Area Compliance Laboratories Corp. (Shenzhen) has been fully described in reports submitted to the Federal Communication Commission (FCC). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on December 06, 2010. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2009.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 382179. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system was configured for testing in a test mode which has been done in the factory.

EUT Exercise Software

No exercise software was used.


Special Accessories

No special accessory was used.

Equipment Modifications

No modification was made to the EUT tested.

Block Diagram of Test Setup

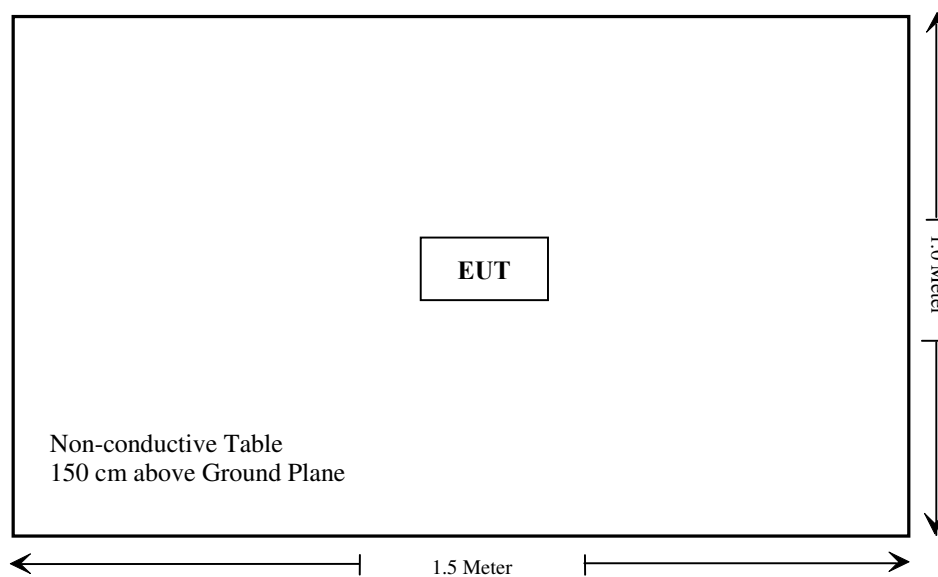

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Results
§1.1307(b), §2.1093	RF Exposure	Compliance
§2.1046; § 22.727; §74.461; § 80.215; §90.205	RF Output Power	Compliance*
§2.1047; §74.463; §80.213;§90.207	Modulation Characteristic	Compliance*
§2.1049;§22.357;§ 22.731; §74.462; § 80.205; § 80.207;§90.209; §90.210	Occupied Bandwidth & Emission Mask	Compliance*
§2.1051; §22.861; §74.462; § 80.211;§90.210	Spurious Emission at Antenna Terminal	Compliance*
§2.1053; §22.861; §74.462; § 80.211;§90.210	Spurious Radiated Emissions	Compliance
§2.1055; § 22.355; §74.464; § 80.209;§90.213	Frequency Stability	Compliance*
§90.214	Transient Frequency Behavior	Compliance*

Compliance*: Please referred to FCC ID: YAMPD36XUC granted on 2014-07-01, report No.: RSZ140409001-00A, which was tested by Bay Area Compliance Laboratories Corp.

FCC §1.1307(b) & §2.1093 - RF EXPOSURE

Applicable Standard

According to FCC §1.1307(b) and §2.1093, portable device operates Part 90 should be subjected to routine environmental evaluation for RF exposure prior or equipment authorization or use.

Result: Compliance.

Please refer to SAR Report Number: RSZ140409004-20BA1.

FCC §2.1053 & §22.861 & §74.462 & § 80.211 & §90.210 - RADIATED SPURIOUS EMISSIONS

Applicable Standard

FCC §2.1053, §22.861, §74.462, § 80.211 and §90.210

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	101122	2013-09-25	2014-09-25
HP	Amplifier	8447E	1937A01046	2013-09-30	2014-09-30
Sunol Sciences	Broadband Antenna	JB1	A040904-2	2011-11-28	2014-11-27
Rohde & Schwarz	Signal Analyzer	FSIQ26	8386001028	2013-11-12	2014-11-12
Sunol Sciences	Horn Antenna	DRH-118	A052304	2011-12-01	2014-11-30
HP	Synthesized Sweeper	8341B	2624A00116	2014-06-03	2015-06-03
Mini-Circuits	Amplifier	ZVA-183-S+	5969001149	2014-04-03	2015-04-03
A.H. System	Horn Antenna	SAS-200/571	135	2012-02-11	2015-02-10
COM POWER	Dipole Antenna	AD-100	041000	NCR	NCR

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements, traceable to National Primary Standards and International System of Units (SI).

Test Procedure

The transmitter was placed on a wooden turntable, and it was transmitting into a non-radiating load, which was also placed on the turntable.

The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis.

The frequency range up to teeth harmonic of the fundamental frequency was investigated.

Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution.

Spurious emissions in dB =10 lg (TXpwr in Watts/0.001)-the absolute level

Spurious attenuation limit in dB =50+10 Log₁₀ (power out in Watts) for EUT with a 12.5 kHz channel bandwidth.

Test Data**Environmental Conditions**

Temperature:	26 °C
Relative Humidity:	56 %
ATM Pressure:	101.0 kPa

The testing was performed by Gardon Zhang on 2014-07-03.

Test Mode: Transmitting

30MHz - 5GHz:

Frequency (MHz)	Receiver Reading (dBμV)	Turn Table Angle Degree	Rx Antenna		Substituted			Absolute Level (dBm)	FCC Part 22/74/80/90	
			Height (m)	Polar (H/V)	SG Level (dBm)	Cable Loss (dB)	Antenna Gain (dB)		Limit (dBm)	Margin (dB)
Analog Modulation (450.0125 MHz for FCC Part 74/90)										
900.03	50.51	265	1.7	H	-46.5	0.74	0	-47.24	-20	27.24
900.03	55.12	44	1.8	V	-41.9	0.74	0	-42.64	-20	22.64
1350.04	44.03	94	1.1	H	-56.6	0.88	9.00	-48.48	-20	28.48
1350.04	48.60	243	2.0	V	-52.9	0.88	9.00	-44.78	-20	24.78
Analog Modulation (454.0125 MHz for FCC Part 22)										
908.03	43.46	191	2.4	H	-53.5	0.74	0	-54.24	-13	41.24
908.03	45.58	279	2.2	V	-51.4	0.74	0	-52.14	-13	39.14
1362.04	43.28	29	1.7	H	-57.3	0.88	9.00	-49.18	-13	36.18
1362.04	45.12	298	1.3	V	-56.4	0.88	9.00	-48.28	-13	35.28
Analog Modulation (468.9875 MHz for FCC Part 80)										
937.98	43.59	193	1.3	H	-53.4	0.75	0	-54.15	-13	41.15
937.98	43.48	211	1.3	V	-53.5	0.75	0	-54.25	-13	41.25
1406.96	45.23	14	1.4	H	-55.4	0.88	9.00	-47.28	-13	34.28
1406.96	44.07	136	1.4	V	-57.4	0.88	9.00	-49.28	-13	36.28
Digital Modulation (450.0125 MHz for FCC Part 74/90)										
900.03	50.51	273	2.1	H	-46.5	0.74	0	-47.24	-20	27.24
900.03	53.47	299	2.0	V	-43.5	0.74	0	-44.24	-20	24.24
1350.04	43.11	12	2.2	H	-57.5	0.88	9.00	-49.38	-20	29.38
1350.04	47.60	141	2.2	V	-53.9	0.88	9.00	-45.78	-20	25.78
Digital Modulation (454.0125 MHz for FCC Part 22)										
908.03	42.37	308	1.4	H	-54.6	0.74	0	-55.34	-13	42.34
908.03	42.36	157	2.0	V	-54.6	0.74	0	-55.34	-13	42.34
1362.04	45.18	281	1.9	H	-55.4	0.88	9.00	-47.28	-13	34.28
1362.04	43.45	139	1.1	V	-58.0	0.88	9.00	-49.88	-13	36.88

Frequency (MHz)	Receiver Reading (dBµV)	Turn Table Angle Degree	Rx Antenna		Substituted			Absolute Level (dBm)	FCC Part 22/74/80/90	
			Height (m)	Polar (H/V)	SG Level (dBm)	Cable Loss (dB)	Antenna Gain (dB)		Limit (dBm)	Margin (dB)
Digital Modulation (468.9875 MHz for FCC Part 80)										
937.98	41.78	232	1.9	H	-55.2	0.75	0	-55.95	-13	42.95
937.98	41.88	3	2.2	V	-55.1	0.75	0	-55.85	-13	42.85
1406.96	43.42	176	1.3	H	-57.2	0.88	9.00	-49.08	-13	36.08
1406.96	42.39	84	1.2	V	-59.1	0.88	9.00	-50.98	-13	37.98

Note:

Absolute Level = SG Level - Cable loss + Antenna Gain

Margin = Limit- Absolute Level

PRODUCT SIMILARITY DECLARATION LETTER



Hytera Communications Corporation Ltd.

Add: HYT Tower, Hi-Tech Industrial Park North, Nanshan District, Shenzhen China.
518057

Tel: +86-0755-26972999

Fax: +86-755-86137130

06/24/2014

Product Similarity Declaration

To Whom It May Concern,

We, Hytera Communications Corporation Ltd., hereby declare that our Digital Portable Radio, Model Number: PD350 Uc, PD355 Uc, PD356 Uc, and PD358 Uc are electrically identical with the model number PD352 Uc that was tested by BACL. They are just different in model numbers due to marketing purpose.

Please contact me if you have any question.

A handwritten signature in black ink that reads "Lei Xiong". The signature is fluid and cursive, with a long horizontal stroke extending to the right.

Lei Xiong
General Director

******* END OF REPORT *******