



FCC PART 22, 74, 80 and 90

## TEST REPORT

For

### Hytera Communications Corporation Limited

Hytera Tower, Hi-Tech Industrial Park North, 9108# Beihuan Road, Nanshan District, Shenzhen, 518057 China

**FCC ID: YAMPD60XIUHF**

<b>Report Type:</b> Original Report	<b>Product Type:</b> Digital Portable Radio
<b>Report Number:</b>	<u>RDG171207009-00B</u>
<b>Report Date:</b>	<u>2018-03-01</u>
<b>Reviewed By:</b>	Candy Li <i>Candy . Li</i> RF Engineer
<b>Prepared By:</b>	Bay Area Compliance Laboratories Corp. (Shenzhen) 6/F., West Wing, Third Phase of Wanli Industrial Building, Shihua Road, Futian Free Trade Zone, Shenzhen, Guangdong, China Tel: +86-755-33320018 Fax: +86-755-33320008 <a href="http://www.baclcorp.com.cn">www.baclcorp.com.cn</a>

**Note:** This report must not be used by the customer to claim product certification, approval, or endorsement by NVLAP\* or any agency of the Federal Government. \* This report may contain data that are not covered by the NVLAP accreditation and are marked with an asterisk “\*”

**TABLE OF CONTENTS**

**GENERAL INFORMATION.....4**

    PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT) .....4

    OBJECTIVE .....4

    RELATED SUBMITTAL(S)/GRANT(S).....4

    TEST METHODOLOGY .....4

    MEASUREMENT UNCERTAINTY.....5

    TEST FACILITY .....5

**SYSTEM TEST CONFIGURATION .....6**

    DESCRIPTION OF TEST CONFIGURATION .....6

    EUT EXERCISE SOFTWARE .....6

    SPECIAL ACCESSORIES.....6

    EQUIPMENT MODIFICATIONS .....6

    SUPPORT EQUIPMENT LIST AND DETAILS .....6

    EXTERNAL I/O CABLE.....6

    BLOCK DIAGRAM OF TEST SETUP .....7

**SUMMARY OF TEST RESULTS .....8**

**TEST EQUIPMENT LIST .....9**

**FCC §1.1307(b) & §2.1093 - RF EXPOSURE.....10**

    APPLICABLE STANDARD .....10

**FCC §2.1046 & § 22.727 & §74.461 & §80.215 & §90.205 - RF OUTPUT POWER.....11**

    APPLICABLE STANDARD .....11

    TEST PROCEDURE .....11

    TEST DATA .....11

**FCC §2.1047 - MODULATION CHARACTERISTIC .....13**

    APPLICABLE STANDARD .....13

    TEST PROCEDURE .....13

    TEST DATA .....13

**FCC §2.1049 & §22.357 & § 22.731 & §74.462 & § 80.205 & § 80.207 & §90.209 & §90.210 – OCCUPIED BANDWIDTH & EMISSION MASK.....24**

    APPLICABLE STANDARD .....24

    TEST PROCEDURE .....24

    TEST DATA .....24

**FCC §2.1051 & §22.861 & §74.462 & § 80.211 & §90.210 - SPURIOUS EMISSIONS AT ANTENNA TERMINALS .....41**

    APPLICABLE STANDARD .....41

    TEST PROCEDURE .....41

    TEST DATA .....41

**FCC §2.1053 & §22.861 & §74.462 & § 80.211 & §90.210 - RADIATED SPURIOUS EMISSIONS.....49**

    APPLICABLE STANDARD .....49

    TEST PROCEDURE .....49

    TEST DATA .....49

**FCC §2.1055 & § 22.355 & §74.464 & § 80.209 & §90.213 - FREQUENCY STABILITY .....52**

    APPLICABLE STANDARD .....52

---

TEST PROCEDURE .....	52
TEST DATA .....	52
<b>FCC §90.214 - TRANSIENT FREQUENCY BEHAVIOR.....</b>	<b>57</b>
APPLICABLE STANDARD .....	57
TEST PROCEDURE .....	57
TEST DATA .....	57

## GENERAL INFORMATION

### Product Description for Equipment under Test (EUT)

The *Hytera Communications Corporation Limited's* product, model number: *PD602i Um* (FCC ID: *YAMPD60XIUHF*) in this report is a *Digital Portable Radio*, which was measured approximately: 128 mm (L) x 58 mm (W) x 28 mm (H), rated with input voltage: 7.4V Battery and charging with DC 12.0V from adapter.

#### Radio Specification

Frequency Range (MHz)	400-512
Modulation	FM/4FSK
Channel Spacing(kHz)	12.5/25(FM),12.5(4FSK)
Power (dBm)	30 (Low)/36(High)

#### Adapter Information:

Model: HKA01212010-XQ

Input: AC 100-240V, 50/60Hz, 0.5A

Output: DC 12.0V, 1.0 A

*Notes: This series products model: PD605i Um, PD606i Um, PD608i Um and PD602i Um are identical; they have the same or similar appearance, structure, PCB, Material and function to the testing products, Model PD602i Um was selected for fully testing, the detailed information can be referred to the attached declaration which was stated and guaranteed by the applicant.*

*\* All measurement and test data in this report was gathered from production sample serial number: 171207009. (Assigned by BACL, Shenzhen). The EUT supplied by the applicant was received on 2017-12-07.*

### Objective

This test report is prepared on behalf of *Hytera Communications Corporation Limited* in accordance with Part 2, and Part 22,74,80,90 of the Federal Communication Commissions rules.

### Related Submittal(s)/Grant(s)

No Related Submittal(s)/Grant(s).

### Test Methodology

All tests and measurements indicated in this document were performed in accordance with the Code of federal Regulations Title 47 Part 2, Sub-part J as well as the following individual parts:

Part 22 – Public Mobile Service

Part 74 – Experimental Radio, Auxiliary, Special Broadcast and other Program Distributonal Service

Part 80 – Stantions in the Maritme Service

Part 90 – Private Land Mobile Radio Service

Applicable Standards: TIA 603-D.

All emissions measurement was performed at Bay Area Compliance Laboratories Corp. (Kunshan). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

**Measurement Uncertainty**

Parameter	uncertainty
Occupied Channel Bandwidth	±5%
RF output power, conducted	±1.5dB
Unwanted Emission, conducted	±1.5dB
All emissions, radiated	±4.88dB
Temperature	±1 °C
Supply voltages	±0.4%

**Test Facility**

The Test site used by Bay Area Compliance Laboratories Corp. (Shenzhen) to collect test data is located on the 6/F., West Wing, Third Phase of Wanli Industrial Building, Shihua Road, Futian Free Trade Zone, Shenzhen, Guangdong, China.

The test site has been approved by the FCC under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 382179, the FCC Designation No. : CN5001.

The test site has been registered with ISED Canada under ISED Canada Registration Number 3062B.

## SYSTEM TEST CONFIGURATION

---

### Description of Test Configuration

The system was configured for testing in a test mode which has been done in the factory.

### EUT Exercise Software

No exercise software was used.

### Special Accessories

No special accessory was used.

### Equipment Modifications

No modification was made to the EUT tested.


### Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
N/A	Load(50 Ohm)	100W	N/A

### External I/O Cable

Cable Description	Length (m)	From Port	To
N/A	N/A	N/A	N/A

### Block Diagram of Test Setup

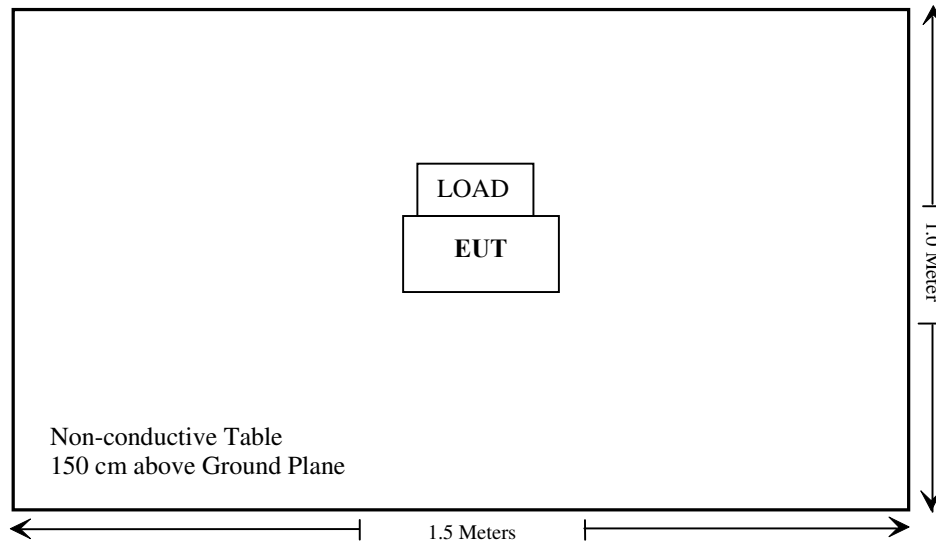

**SUMMARY OF TEST RESULTS**

<b>FCC Rules</b>	<b>Description of Test</b>	<b>Results</b>
FCC §1.1307(b) & §2.1093	RF Exposure	Compliance
§2.1046; § 22.727; §74.461; § 80.215; §90.205	RF Output Power	Compliance
§2.1047; §74.463; §80.213; §90.207	Modulation Characteristic	Compliance
§2.1049; §22.357; § 22.731; §74.462; § 80.205; § 80.207; §90.209; §90.210	Occupied Bandwidth & Emission Mask	Compliance
§2.1051; §22.861; §74.462; § 80.211; §90.210	Spurious Emission at Antenna Terminal	Compliance
§2.1053; §22.861; §74.462; § 80.211; §90.210	Spurious Radiated Emissions	Compliance
§2.1055; § 22.355; §74.464; § 80.209; §90.213	Frequency Stability	Compliance
§90.214	Transient Frequency Behavior	Compliance



**TEST EQUIPMENT LIST**

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
<b>Radiated Emission Test</b>					
Sunol Sciences	Horn Antenna	DRH-118	A052604	2014-12-29	2017-12-28
Sunol Sciences	Horn Antenna	DRH-118	A052604	2017-12-22	2020-12-21
Rohde & Schwarz	Signal Generator	FSIQ26	8386001028	2017-04-24	2018-04-24
Sunol Sciences	Bi-log Antenna	JB1	A040904-2	2017-12-17	2020-12-17
Mini	Pre-amplifier	ZVA-183-S+	5969001149	2017-02-14	2018-02-14
HP	Amplifier	HP8447E	1937A01046	2017-11-19	2018-05-21
Anritsu	Signal Generator	68369B	004114	2017-12-05	2018-12-05
Rohde & Schwarz	EMI Test Receiver	ESCI	101120	2017-12-07	2018-12-07
COM POWER	Dipole Antenna	AD-100	041000	NCR	NCR
A.H. System	Horn Antenna	SAS-200/571	135	2015-08-18	2018-08-17
Ducommun technologies	RF Cable	UFA210A-1-4724-30050U	MFR64369 223410-001	2017-11-19	2018-05-21
Ducommun technologies	RF Cable	104PEA	218124002	2017-11-19	2018-05-21
Ducommun technologies	RF Cable	RG-214	1	2017-11-19	2018-05-21
Ducommun technologies	RF Cable	RG-214	2	2017-11-22	2018-05-22
<b>RF Conducted Test</b>					
Rohde & Schwarz	Signal Analyzer	FSW13	103533	2017-06-15	2018-06-14
ESPEC	Temperature & Humidity Chamber	EL-10KA	09107726	2017-11-22	2018-11-22
Long Wei	DC Power Supply	TPR-6420D	398363	NCR	NCR
Rohde & Schwarz	Vector Signal Generator	SMW200A	102522	2017-06-15	2018-06-14
BEW	Coaxial Attenuator	TS300-6-40	N/A	2017-06-15	2018-06-14
MICABLE	RF Cable	D02	N/A	2017-06-15	2018-06-14

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

## **FCC §1.1307(b) & §2.1093 - RF EXPOSURE**

---

### **Applicable Standard**

According to FCC §1.1307(b) and §2.1093, portable device operates Part 90 should be subjected to routine environmental evaluation for RF exposure prior or equipment authorization or use.

**Result:** Compliance.

Please refer to SAR Report Number: RDG171207009-20.

**FCC §2.1046 & § 22.727 & §74.461 & §80.215 & §90.205 - RF OUTPUT POWER****Applicable Standard**

FCC §2.1046, § 22.727, §74.461, § 80.215 and §90.205

**Test Procedure**

Conducted RF Output Power:

The RF output of the transmitter was connected to the input of the spectrum analyzer through sufficient attenuation.

Spectrum Analyzer Setting:

R B/W	Video B/W
100 kHz	300 kHz

**Test Data****Environmental Conditions**

<b>Temperature:</b>	25 °C
<b>Relative Humidity:</b>	56 %
<b>ATM Pressure:</b>	101.0 kPa

*The testing was performed by Rocky Kang on 2017-12-20.*

*Test Mode: Transmitting*

**Test Result:** Compliance. Please refer to following table.

Mode	Frequency Spacing (kHz)	Frequency (MHz)	Power level	Output (dBm)	Output Power(W)	Note
Analog	12.5	400.0125	High	35.96	3.94	For Federal
			Low	30.31	1.07	
		453.2125	High	36.01	3.99	Part 90&74
			Low	30.35	1.08	
		454.9875	High	35.97	3.95	Part 22
			Low	30.59	1.15	
		511.9875	High	35.80	3.80	Part 22/90
			Low	30.20	1.05	
	25	400.0125	High	35.79	3.79	For Federal
			Low	30.52	1.13	
		453.2125	High	35.83	3.83	Part 74
			Low	30.11	1.03	
		454.9875	High	35.88	3.87	Part 22/80
			Low	30.20	1.05	
		459.9875	High	35.94	3.93	Part 22/80
			Low	30.14	1.03	
511.9875	High	35.88	3.87	Part 22		
	Low	30.77	1.19			

Mode	Frequency Spacing (kHz)	Frequency (MHz)	Power level	Output (dBm)	Output Power(W)	Note
Digital	12.5	400.0125	High	35.79	3.79	For Federal
			Low	30.52	1.13	
		453.2125	High	35.83	3.83	Part 90&74
			Low	30.11	1.03	
		454.9875	High	35.88	3.87	Part 22
			Low	30.20	1.05	
		511.9875	High	35.88	3.87	Part 22/90
			Low	30.77	1.19	

Rated power: 36dBm(High power),30dBm(Low power)

## **FCC §2.1047 - MODULATION CHARACTERISTIC**

### **Applicable Standard**

FCC§2.1047:

- (a) Equipment which utilizes voice modulated communication shall show the frequency response of the audio modulating circuit over a range of 100 to 5000 Hz. for equipment which is required to have a low pass filter, the frequency response of the filter, or all of the circuitry installed between the modulation limited and the modulated stage shall be supplied.
- (b) Equipment which employs modulation limiting, a curve showing the percentage of modulation versus the modulation input voltage shall be supplied.

### **Test Procedure**

Test Method: TIA/EIA-603 2.2.3

### **Test Data**

#### **Environmental Conditions**

<b>Temperature:</b>	24~26 °C
<b>Relative Humidity:</b>	51~56 %
<b>ATM Pressure:</b>	100.9~101.0 kPa

*The testing was performed by Rocky Kang on 2017-12-20.*


*Test Mode: Transmitting*

**Result:** Compliance.

**MODULATION LIMITING**

Carrier Frequency: 453.2125 MHz, Channel Separation=12.5 kHz

Audio Frequency (Hz)	Instantaneous		Steady-state		FCC Limit [kHz]
	DEVIATION (@+20dB) [kHz]	DEVIATION (@-20dB) [kHz]	DEVIATION (@+20dB) [kHz]	DEVIATION (@-20dB) [kHz]	
300	1.269	0.069	1.259	0.078	2.5
400	1.526	0.105	1.546	0.110	2.5
500	1.745	0.103	1.639	0.114	2.5
600	1.768	0.142	1.724	0.132	2.5
700	1.762	0.149	1.745	0.134	2.5
800	1.774	0.173	1.746	0.152	2.5
900	1.796	0.158	1.726	0.162	2.5
1000	1.765	0.192	1.738	0.178	2.5
1200	1.812	0.221	1.802	0.236	2.5
1400	1.796	0.273	1.785	0.247	2.5
1600	1.812	0.264	1.806	0.257	2.5
1800	1.815	0.312	1.802	0.305	2.5
2000	1.824	0.327	1.735	0.319	2.5
2100	1.806	0.352	1.811	0.368	2.5
2200	1.811	0.364	1.845	0.366	2.5
2300	1.789	0.376	1.769	0.357	2.5
2400	1.788	0.369	1.754	0.326	2.5
2500	1.768	0.401	1.736	0.396	2.5
2600	1.749	0.418	1.725	0.415	2.5
2700	1.742	0.432	1.742	0.418	2.5
2800	1.732	0.464	1.715	0.432	2.5
2900	1.658	0.451	1.658	0.425	2.5
3000	1.658	0.425	1.635	0.421	2.5

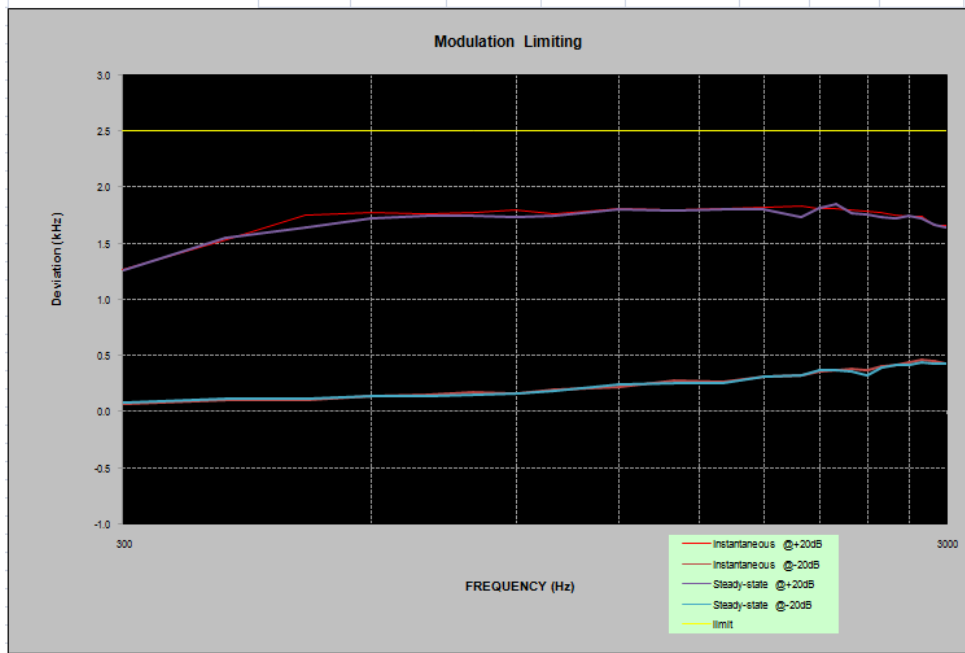


**Audio Frequency Response**

Carrier Frequency: 453.2125 MHz, Channel Separation=12.5 kHz

<b>Audio Frequency (Hz)</b>	<b>Response Attenuation (dB)</b>
300	-10.40
400	-8.22
500	-5.95
600	-3.96
700	-2.83
800	-2.20
900	-0.90
1000	0.00
1200	0.97
1400	2.57
1600	3.36
1800	4.75
2000	5.43
2100	5.85
2200	6.51
2300	6.46
2400	6.75
2500	7.09
2600	7.23
2700	7.51
2800	7.45
2900	8.12
3000	7.86




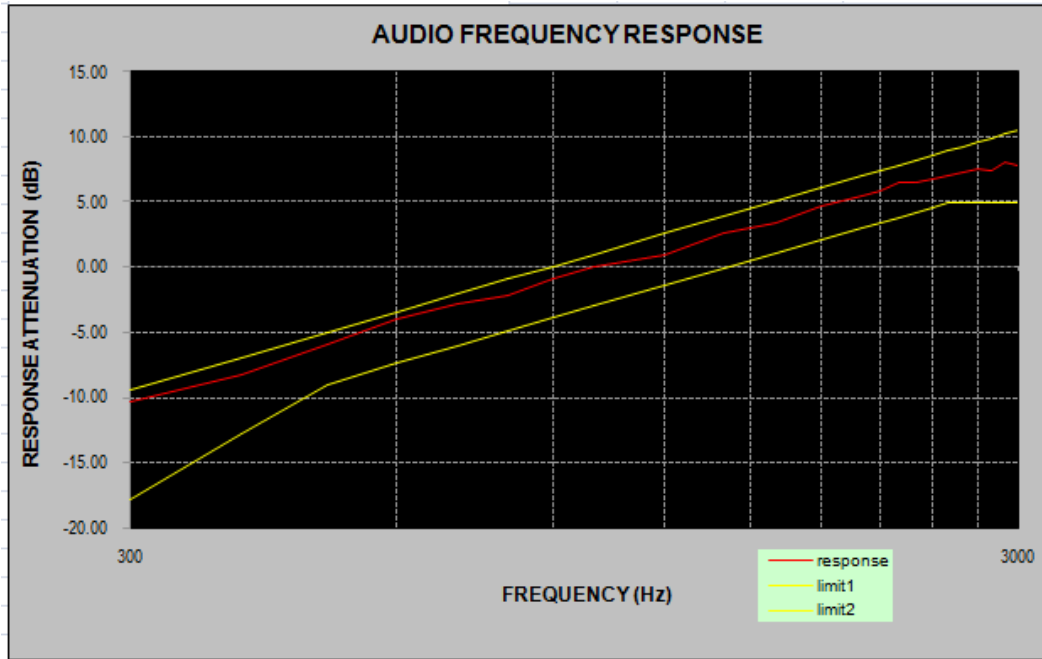

**Audio frequency lows pass filter response**

Carrier Frequency: 453.2125 MHz, Channel Separation=12.5 kHz


Audio Frequency (kHz)	Response Attenuation (dB)	Limit (dB)
1.0	0.0	/
3.0	-18.6	0.0
4.0	-77.6	-7.5
5.0	-85.3	-13.3
6.0	-87.4	-18.1
7.0	-89.7	-22.1
8.0	-86.2	-25.6
9.0	-89.5	-28.6
10.0	-94.2	-31.4
15.0	-91.7	-41.9
20.0	-92.3	-50.0
30.0	-91.8	-50.0
40.0	-91.9	-50.0
50.0	-92.6	-50.0
60.0	-89.3	-50.0
70.0	-91.7	-50.0

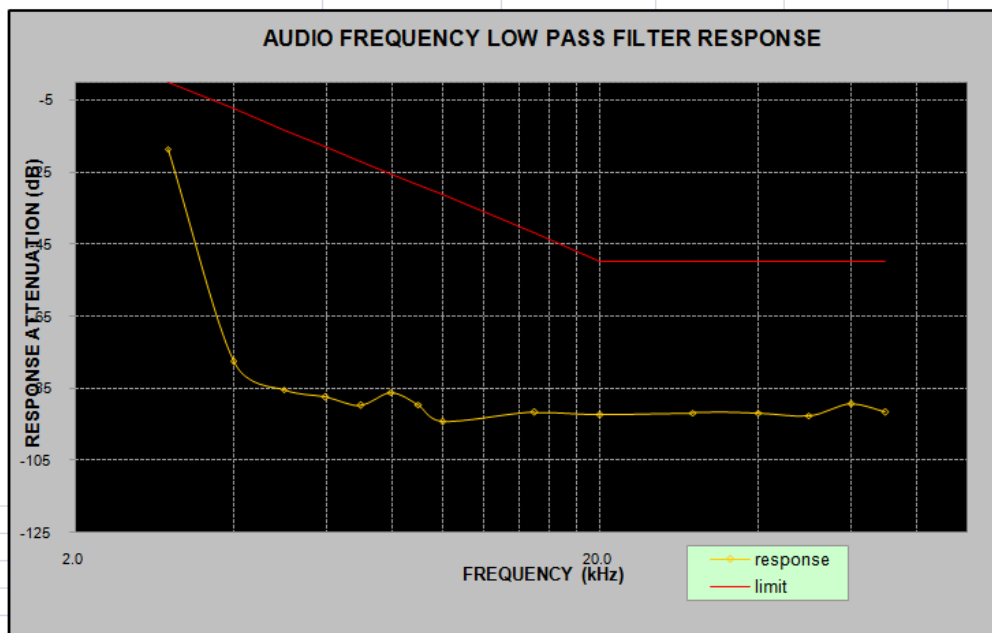

**MODULATION LIMITING**

Carrier Frequency: 459.9875 MHz, Channel Separation=25 kHz


Audio Frequency (Hz)	Instantaneous		Steady-state		FCC Limit [kHz]
	DEVIATION (@+20dB) [kHz]	DEVIATION (@-20dB) [kHz]	DEVIATION (@+20dB) [kHz]	DEVIATION (@-20dB) [kHz]	
300	2.685	0.163	2.569	0.135	5
400	3.115	0.147	3.258	0.129	5
500	3.526	0.367	3.456	0.187	5
600	3.647	0.258	3.625	0.214	5
700	3.685	0.289	3.689	0.265	5
800	3.569	0.316	3.674	0.312	5
900	3.539	0.279	3.625	0.298	5
1000	3.724	0.398	3.698	0.329	5
1200	3.726	0.435	3.741	0.463	5
1400	3.765	0.472	3.752	0.475	5
1600	3.812	0.563	3.852	0.528	5
1800	3.825	0.588	3.863	0.542	5
2000	3.865	0.625	3.856	0.638	5
2100	3.846	0.689	3.715	0.662	5
2200	3.748	0.741	3.769	0.724	5
2300	3.728	0.736	3.746	0.746	5
2400	3.657	0.724	3.689	0.725	5
2500	3.625	0.785	3.658	0.772	5
2600	3.758	0.825	3.637	0.749	5
2700	3.815	0.836	3.853	0.836	5
2800	3.875	0.847	3.836	0.848	5
2900	3.836	0.869	3.874	0.876	5
3000	3.826	0.847	3.871	0.869	5

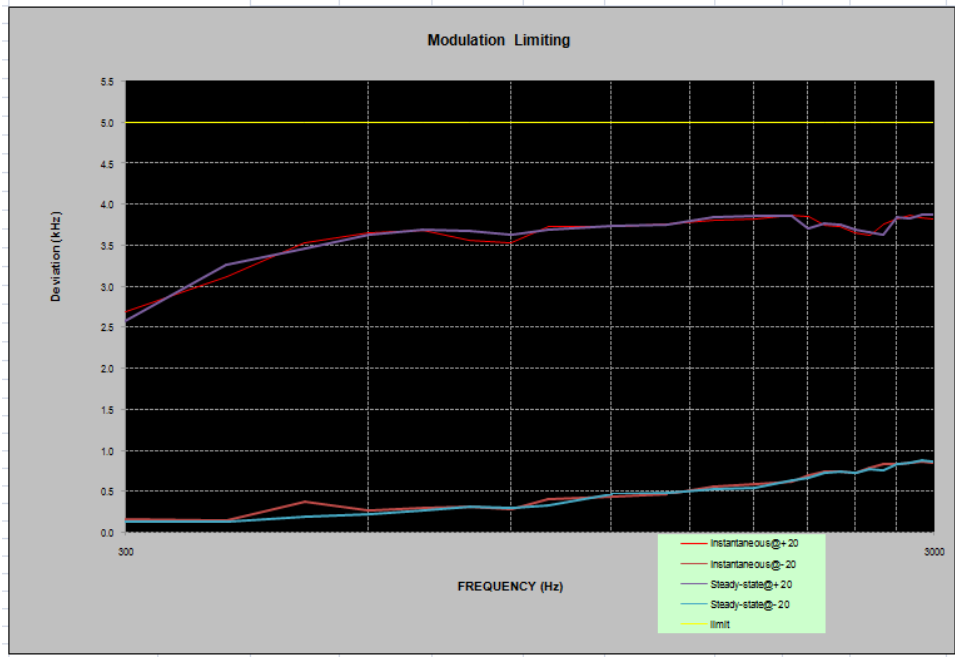

**Audio Frequency Response**

Carrier Frequency: 459.9875 MHz, Channel Separation=25 kHz


<b>Audio Frequency (Hz)</b>	<b>Response Attenuation (dB)</b>
300	-11.84
400	-8.57
500	-6.39
600	-4.25
700	-3.16
800	-2.26
900	-1.16
1000	0.00
1200	1.15
1400	2.81
1600	3.80
1800	4.92
2000	5.88
2100	6.23
2200	6.67
2300	6.84
2400	7.14
2500	7.48
2600	7.83
2700	7.96
2800	8.21
2900	8.93
3000	9.02

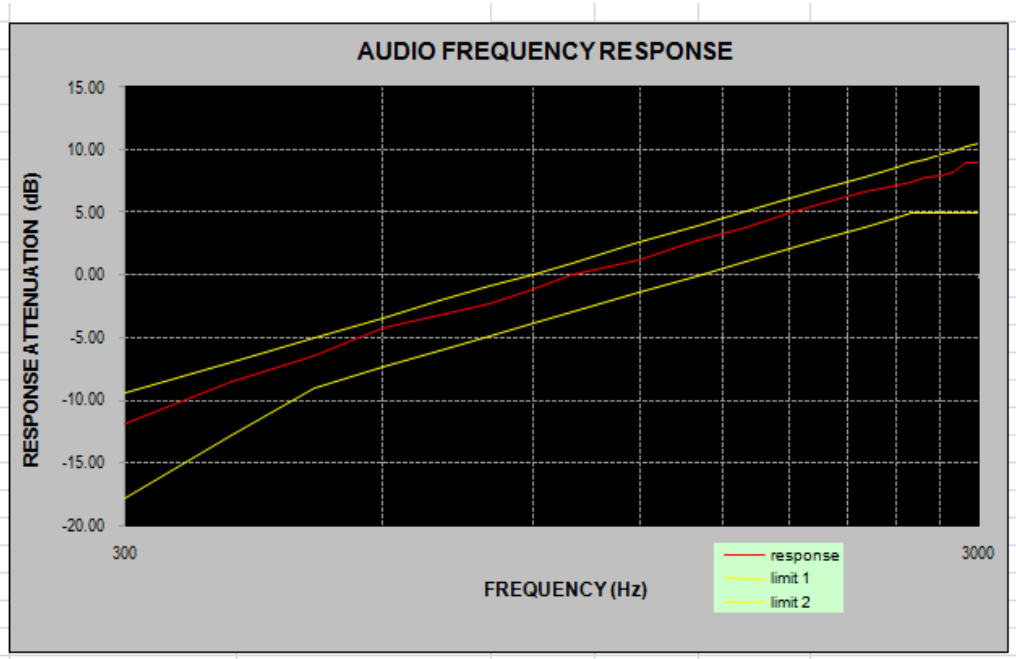

**Audio frequency lows pass filter response**

Carrier Frequency: 459.9875 MHz, Channel Separation=25 kHz

Audio Frequency (kHz)	Response Attenuation (dB)	Limit (dB)
1.0	0.0	/
3.0	-16.9	0.0
4.0	-77.5	-7.5
5.0	-82.3	-13.3
6.0	-87.3	-18.1
7.0	-88.7	-22.1
8.0	-89.3	-25.6
9.0	-91.2	-28.6
10.0	-93.7	-31.4
15.0	-92.3	-41.9
20.0	-90.8	-50.0
30.0	-91.8	-50.0
40.0	-91.2	-50.0
50.0	-92.5	-50.0
60.0	-94.6	-50.0
70.0	-92.8	-50.0

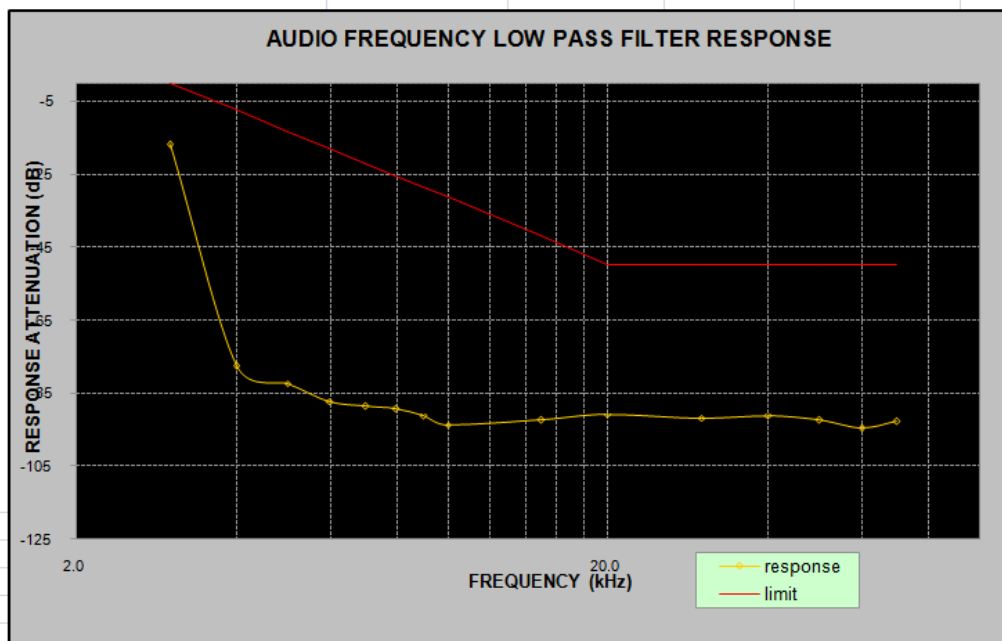

## **FCC §2.1049 & §22.357 & § 22.731 & §74.462 & § 80.205 & § 80.207 & §90.209 & §90.210 – OCCUPIED BANDWIDTH & EMISSION MASK**

### **Applicable Standard**

FCC §2.1049, §22.357, § 22.731, §74.462, § 80.205, § 80.207, §90.209 and §90.210

Emission Mask D—12.5 kHz channel bandwidth equipment. For transmitters designed to operate with a 12.5 kHz channel bandwidth, any emission must be attenuated below the power (P) of the highest emission contained within the authorized bandwidth as follows:

- 1) For any frequency removed from the center of the authorized bandwidth  $f_0$  to 5.625 kHz removed from  $f_0$ , 0 dB.
- 2) On any frequency removed from the center of the authorized bandwidth by a displacement frequency ( $f_d$  in kHz) of more than 5.626 kHz but no more than 12.5 kHz, at least  $7.27(f_d - 2.88)$  dB.
- 3) On any frequency removed from the center of the authorized bandwidth by a displacement frequency ( $f_d$  in kHz) of more than 12.5 kHz: At least  $50 + 10 \log(P)$  dB or 70 dB, whichever is the lesser attenuation.

Emission Mask B. For transmitters that are equipped with an audio low-pass filter, the power of any emission must be attenuated below the unmodulated carrier power (P) as follows:

- (1) On any frequency removed from the assigned frequency by more than 50 percent, but not more than 100 percent of the authorized bandwidth: At least 25 dB.
- (2) On any frequency removed from the assigned frequency by more than 100 percent, but not more than 250 percent of the authorized bandwidth: At least 35 dB.
- (3) On any frequency removed from the assigned frequency by more than 250 percent of the authorized bandwidth: At least  $43 + 10 \log(P)$  dB.

### **Test Procedure**

The RF output of the transmitter was connected to the input of the spectrum analyzer through sufficient attenuation.

The resolution bandwidth of the spectrum analyzer was set at 100 Hz for 12.5kHz channel spacing, 300Hz for 25kHz channel spacing.

### **Test Data**

#### **Environmental Conditions**

<b>Temperature:</b>	24~27 °C
<b>Relative Humidity:</b>	50~57 %
<b>ATM Pressure:</b>	100.9~101.0 kPa

*The testing was performed by Rocky Kang from 2017-12-15 to 2018-03-01.*



Modulation	Channel Separation (kHz)	Frequency (MHz)	Power Level	99% Occupied Bandwidth (kHz)	26 dB Emissions Bandwidth (kHz)	Note
Analog	12.5	453.2125	High	9.936	10.176	Part 90&74
	12.5		Low	9.936	10.176	
	12.5	454.9875	High	9.936	10.176	Part 22
	12.5		Low	9.936	10.176	
Digital	12.5	453.2125	High	7.50	9.74	Part 90&74
	12.5		Low	6.90	9.26	
	12.5	454.9875	High	7.10	9.82	Part 22
	12.5		Low	7.20	9.14	

Emission Designator Per CFR 47 §2.201 & §2.202,  $B_n = 2M + 2D$

**For FM Mode (Channel Spacing: 12.5 kHz)**

Emission Designator 11K0F3E In this case, the maximum modulating frequency is 3.0 kHz with a 2.5 kHz deviation.  $BW = 2(M+D) = 2*(3.0 \text{ kHz} + 2.5 \text{ kHz}) = 11 \text{ kHz} \rightarrow 11K0$

F3E portion of the designator represents an FM voice transmission Therefore, the entire designator for 12.5 kHz channel spacing FM mode is 11K0F3E.

**For Digital Mode (Channel Spacing: 12.5 kHz)**

Emission Designator 7K60F1D and 7K60F1E


The 99% energy rule (title 47CFR 2.1049) was used for digital mode. It basically states that 99% of the modulation energy falls within X kHz, in this case, 7.60 kHz. The emission mask was obtained from 47CFR 90.210(d).

F1D and F1E portion of the designator indicates digital information.

Therefore, the entire designator for 12.5 kHz channel spacing digital mode is 7K60F1D and 7K60F1E.


**Analog Modulation:**

**Frequency 453.2125 MHz: 99% Occupied & 26 dB Bandwidth, High Power**

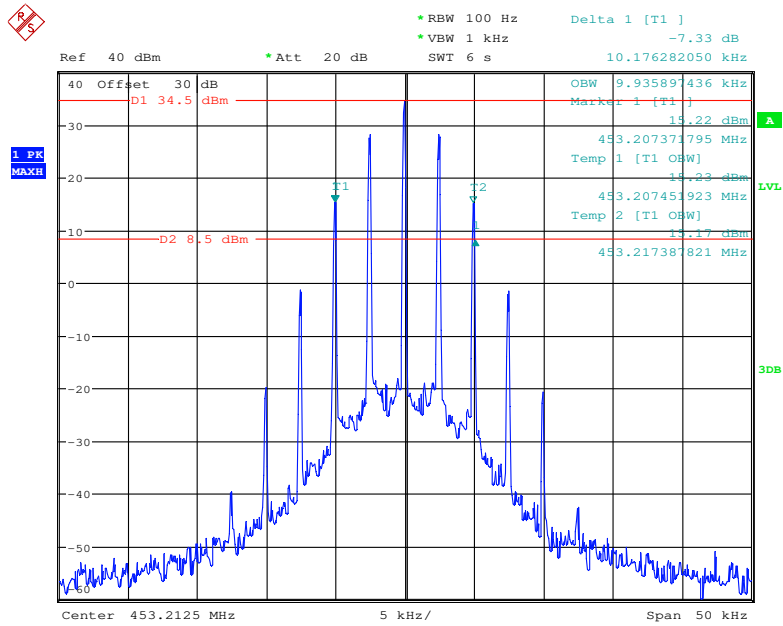


Date: 29.JAN.2018 10:45:11

**Frequency 453.2125 MHz: 99% Occupied & 26 dB Bandwidth, Low Power**

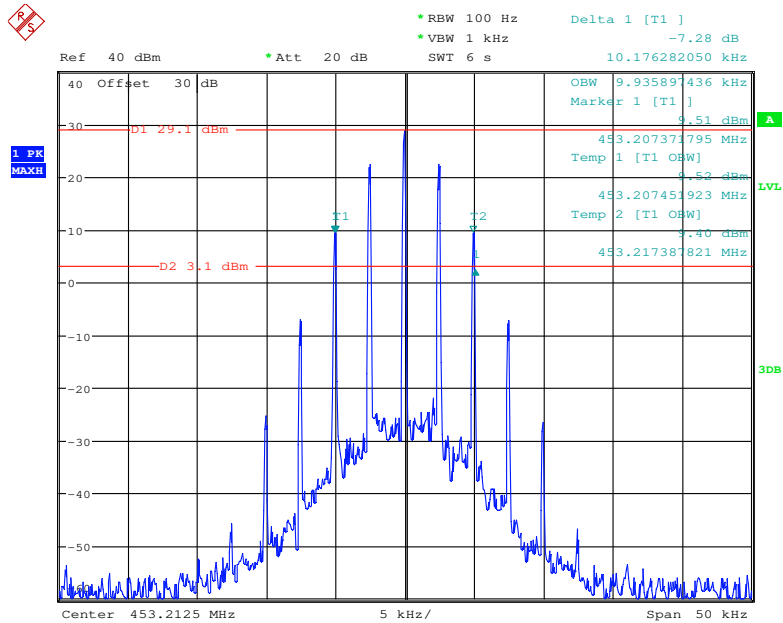


Date: 29.JAN.2018 10:46:14

**Frequency 453.2125 MHz: Emission Mask D, High Power, FCC part 74.462&90.210**

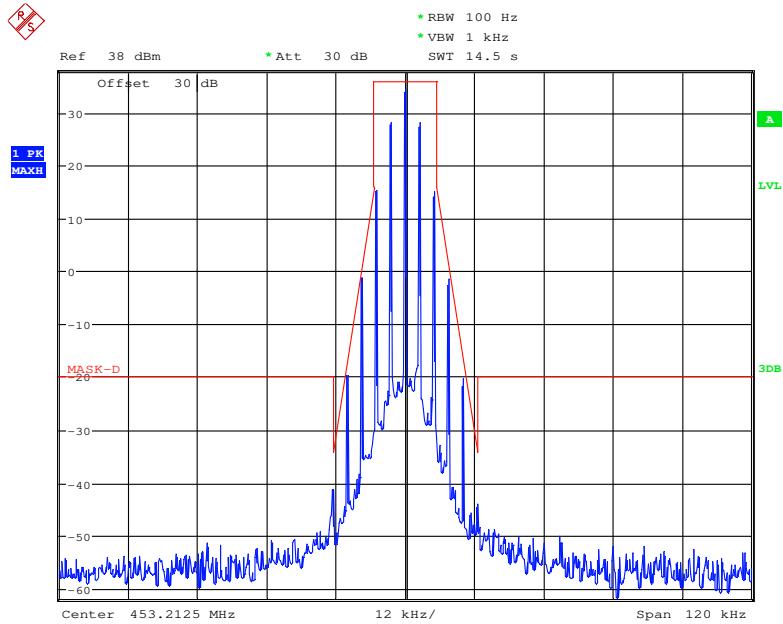


Date: 29.JAN.2018 10:38:52

**Frequency 453.2125 MHz: Emission Mask D, Low Power, FCC part 74.462&90.210**

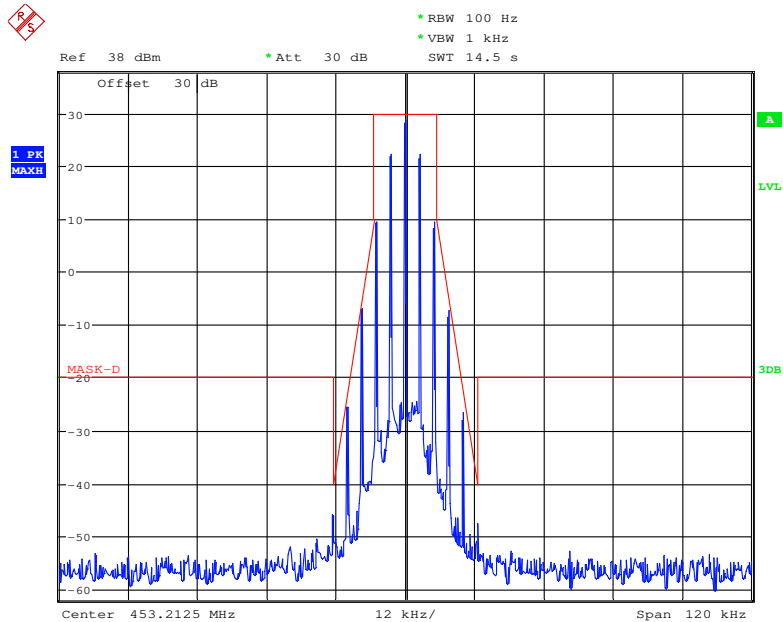


Date: 29.JAN.2018 10:36:43

**Frequency 454.9875 MHz: 99% Occupied & 26 dB Bandwidth, High Power**

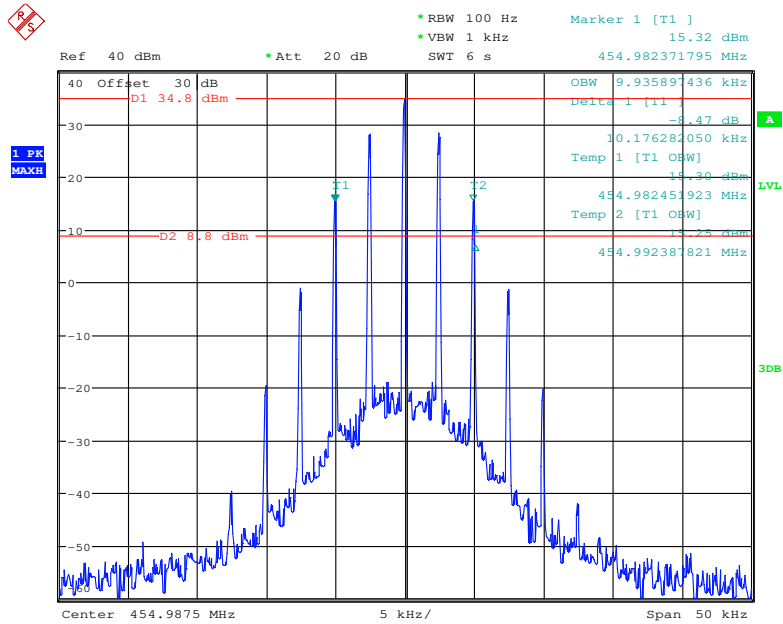


Date: 29.JAN.2018 10:48:26

**Frequency 454.9875 MHz: 99% Occupied & 26 dB Bandwidth, Low Power**

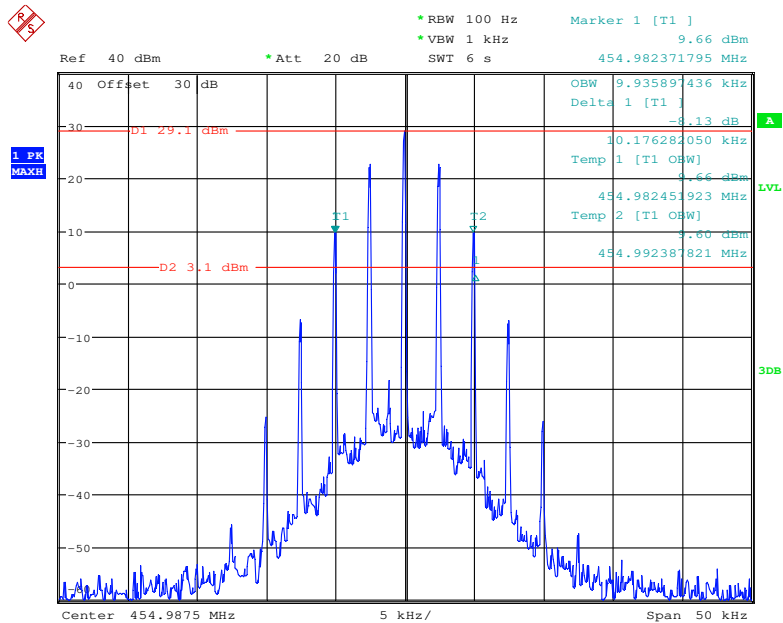


Date: 29.JAN.2018 10:47:15

### Frequency 454.9875 MHz: Emission Mask, High Power, FCC part 22.359

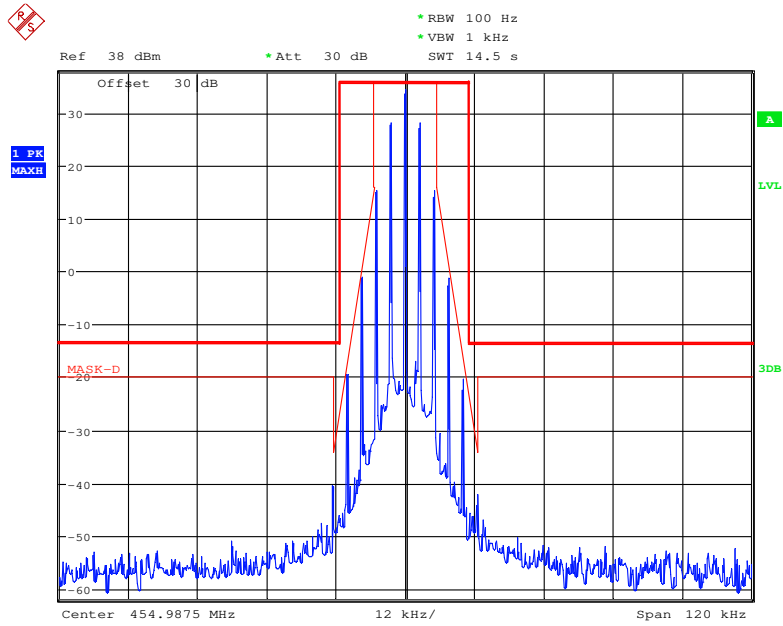

Date: 29.JAN.2018 10:32:28


### Frequency 454.9875 MHz: Emission Mask D, Low Power, FCC part 22.359

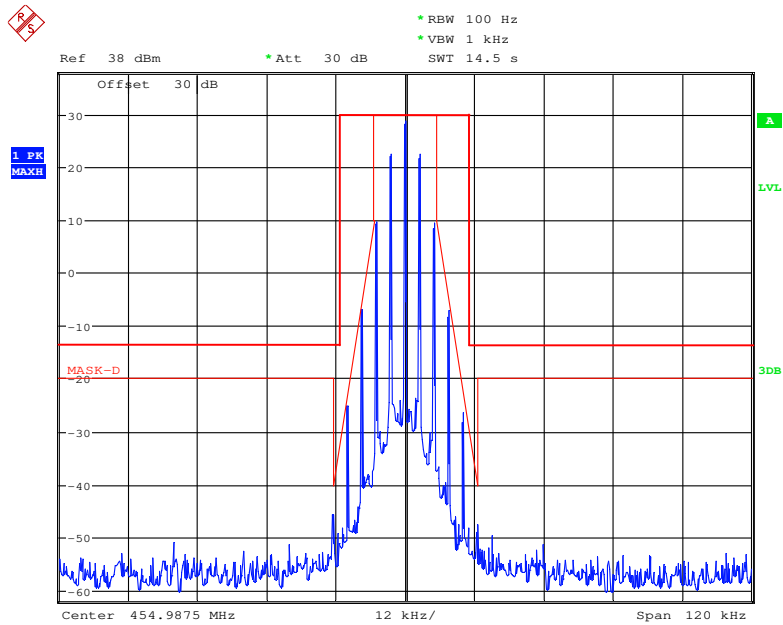

Date: 29.JAN.2018 10:34:26


**Digital Modulation:**

**Frequency 453.2125 MHz: 99% Occupied & 26 dB Bandwidth, High Power**

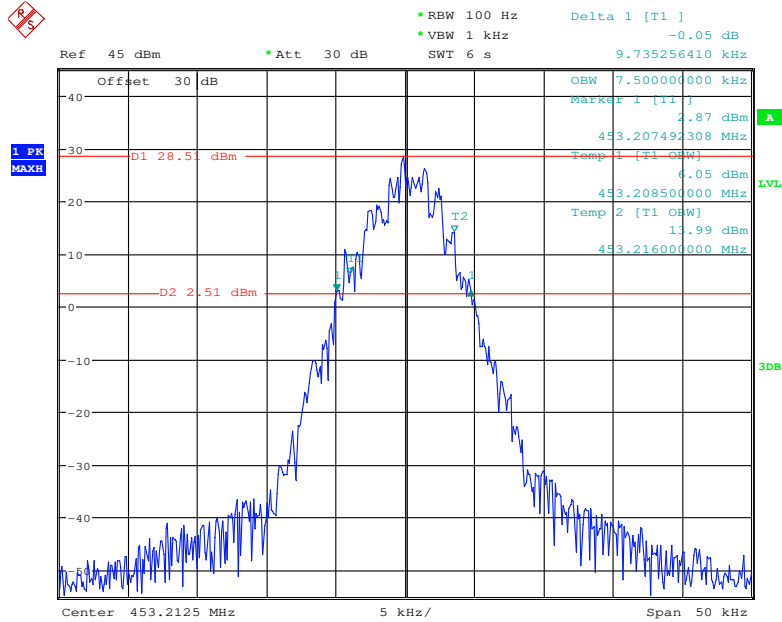


Date: 20.DEC.2017 09:43:27

**Frequency 453.2125 MHz: 99% Occupied & 26 dB Bandwidth, Low Power**

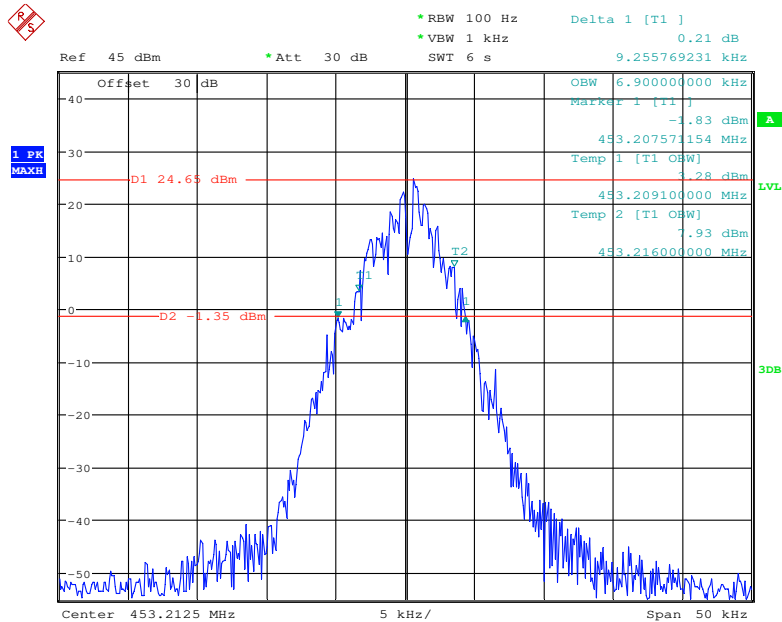


Date: 20.DEC.2017 09:44:37

**Frequency 453.2125 MHz: Emission Mask D, High Power, FCC part 74.462&90.210**

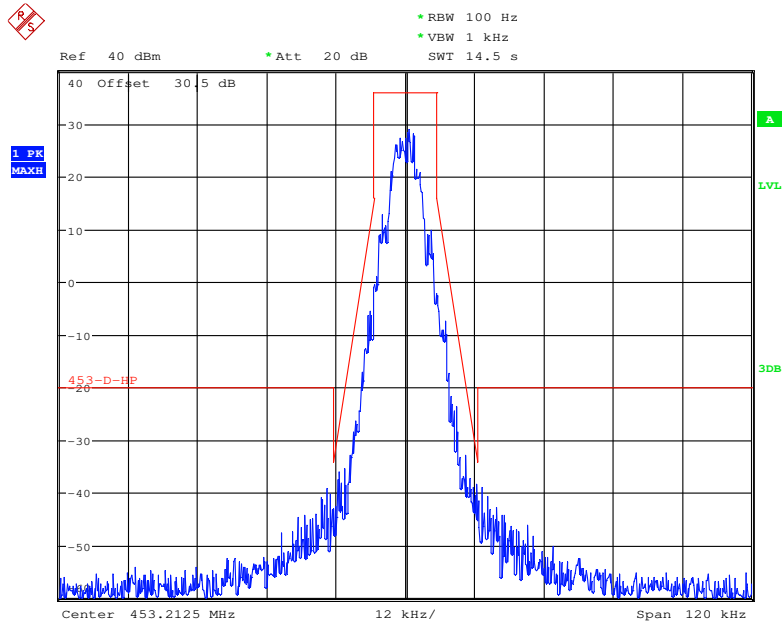


Date: 15.DEC.2017 22:12:00

**Frequency 453.2125 MHz: Emission Mask D, Low Power, FCC part 74.462&90.210**

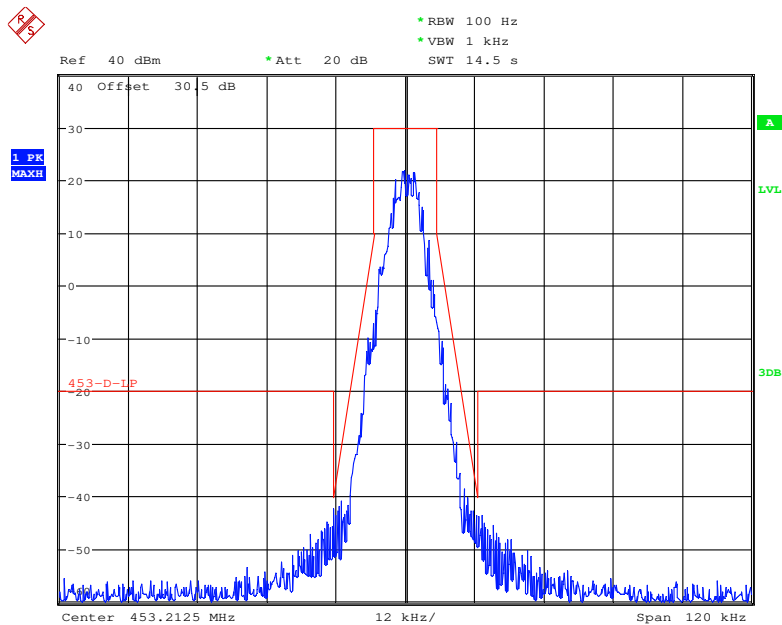


Date: 15.DEC.2017 22:16:23

**Frequency 454.9875 MHz: 99% Occupied & 26 dB Bandwidth, High Power**

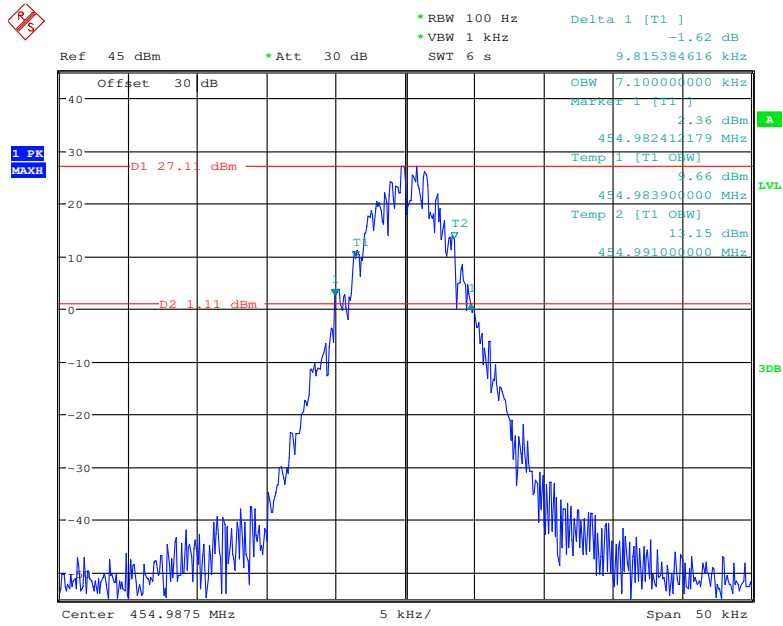

Date: 20.DEC.2017 09:45:47


**Frequency 454.9875 MHz: 99% Occupied & 26 dB Bandwidth, Low Power**

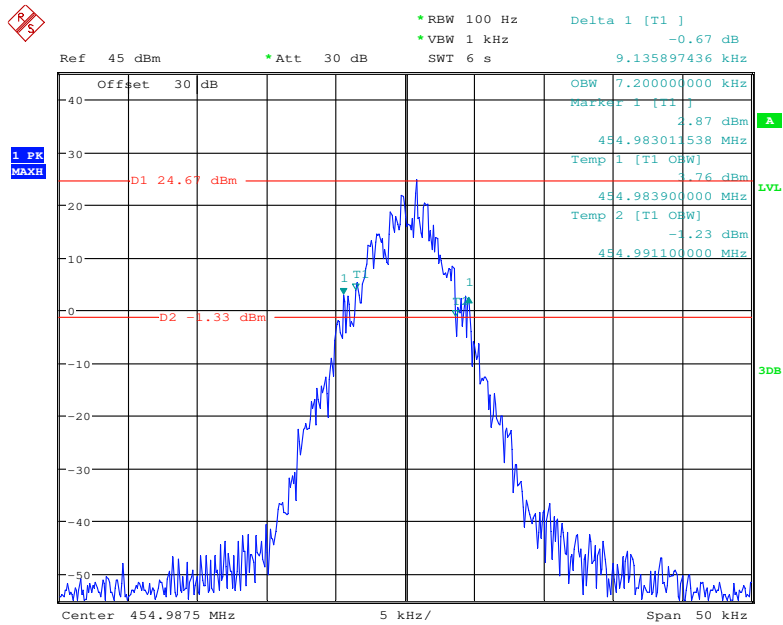

Date: 20.DEC.2017 09:46:52




### Frequency 454.9875 MHz: Emission Mask, High Power, FCC part 22.359

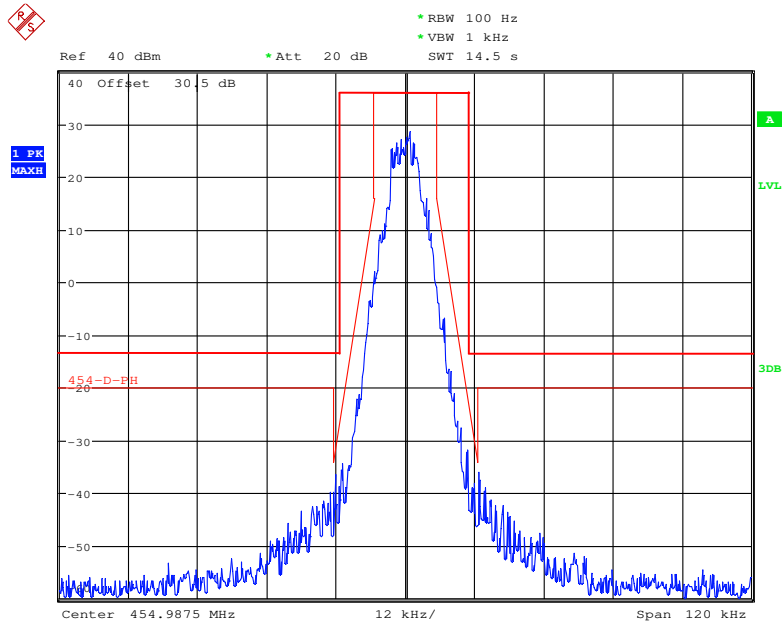

Date: 15.DEC.2017 22:18:46

### Frequency 454.9875 MHz: Emission Mask, Low Power, FCC part 22.359

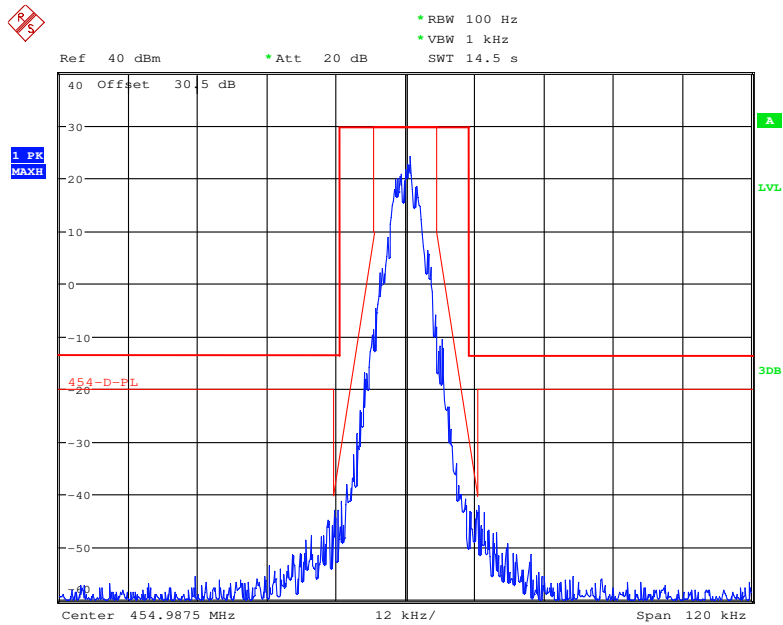

Date: 15.DEC.2017 22:23:34

Modulation	Channel Separation (kHz)	Frequency (MHz)	Power Level	99% Occupied Bandwidth (kHz)	26 dB Emissions Bandwidth (kHz)	Note
Analog	25	453.2125	High	15.00	15.79	Part 74
	25		Low	15.00	15.79	
	25	454.9875	High	15.064	15.625	Part 22
	25		Low	14.984	15.625	
	25	459.9875	High	14.984	15.625	Part 80
	25		Low	15.064	15.625	


*Emission Designator Per CFR 47 §2.201 & §2.202,  $B_n = 2M + 2D$*

**For FM Mode (Channel Spacing: 25 kHz)**

*Emission Designator 16K0F3E In this case, the maximum modulating frequency is 5.0 kHz with a 3 kHz deviation.  $BW = 2(M+D) = 2*(5\text{ kHz} + 3\text{ kHz}) = 16\text{ kHz} \rightarrow 16K0$   
 F3E portion of the designator represents an FM voice transmission Therefore, the entire designator for 25 kHz channel spacing FM mode is 16K0F3E.*


**Analog Modulation**

**Frequency 453.2125MHz: 99% Occupied & 26 dB Bandwidth, High Power**

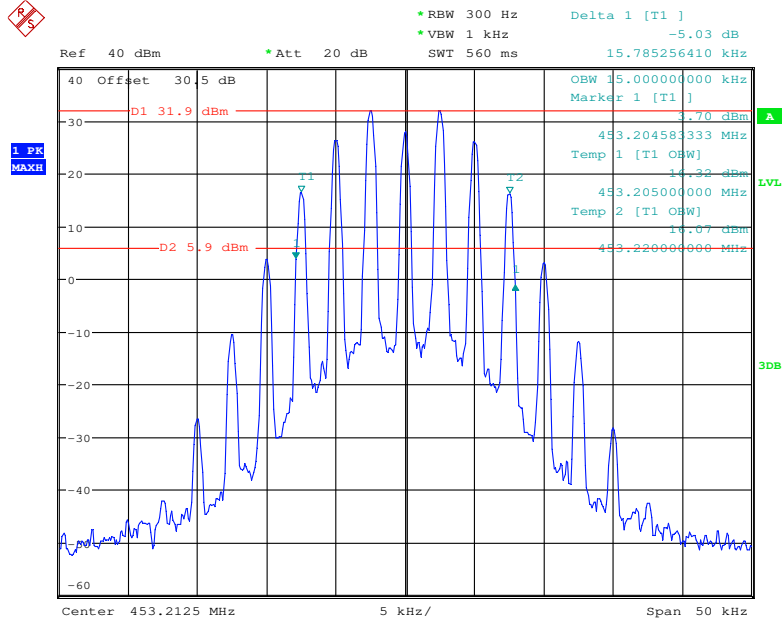


Date: 1.MAR.2018 21:13:50

**Frequency 453.2125 MHz: 99% Occupied & 26 dB Bandwidth, Low Power**

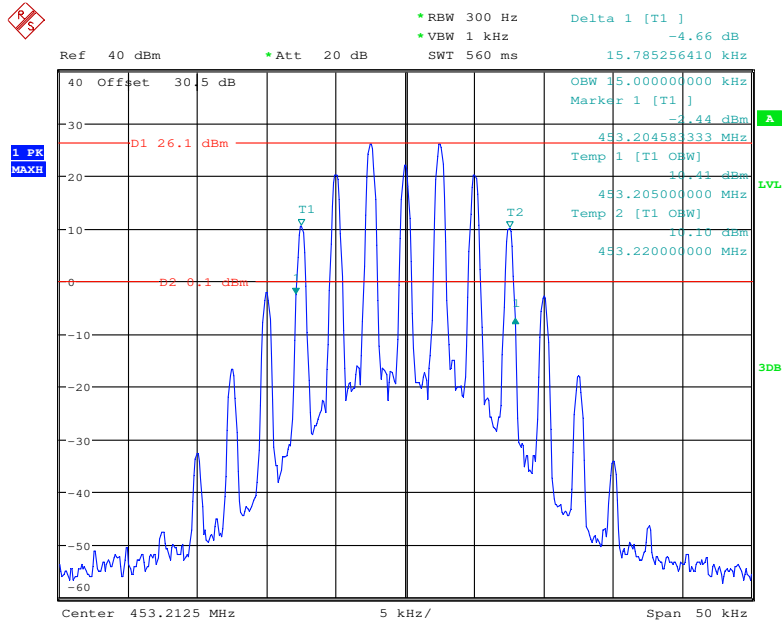


Date: 1.MAR.2018 21:13:04

### Frequency 453.2125 MHz: Emission Mask B, High Power, FCC part 74.462

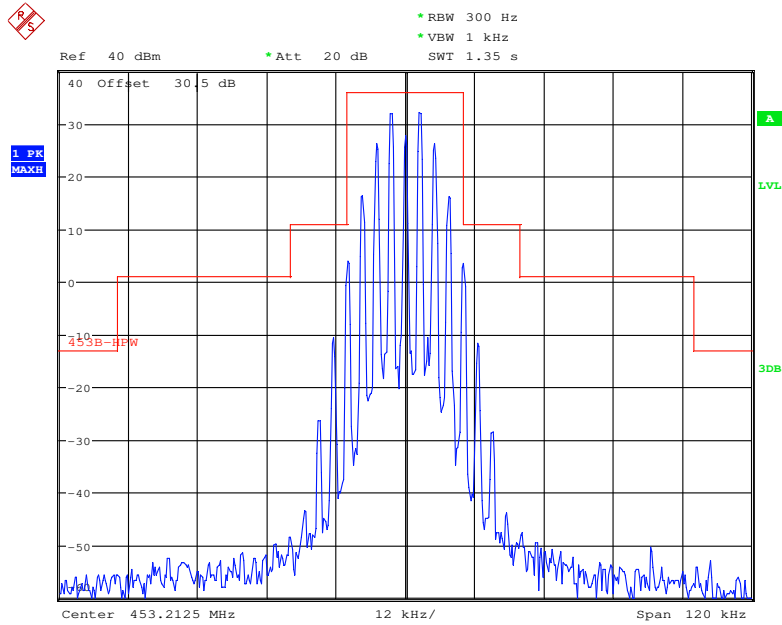


Date: 1.MAR.2018 20:43:31

### Frequency 453.2125 MHz: Emission Mask B, Low Power, FCC part 74.462

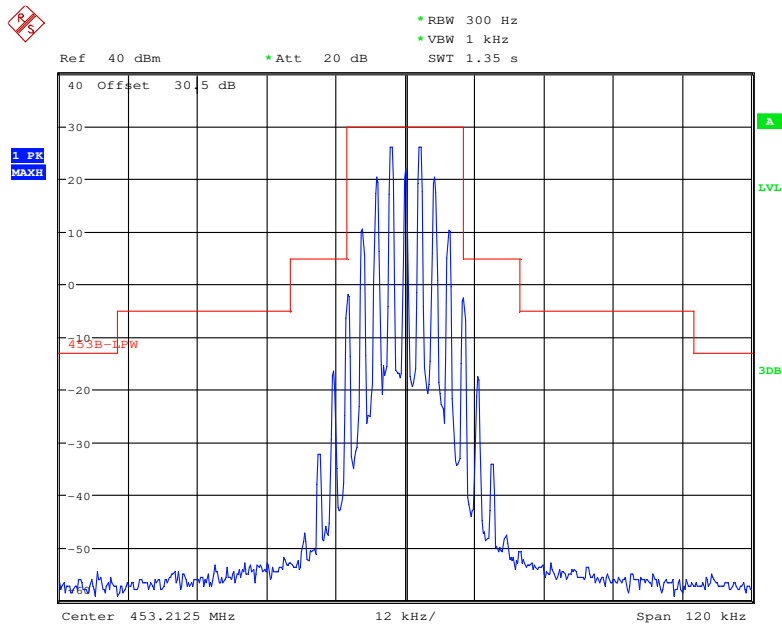


Date: 1.MAR.2018 20:51:25

### Frequency 454.9875 MHz: 99% Occupied & 26 dB Bandwidth, High Power

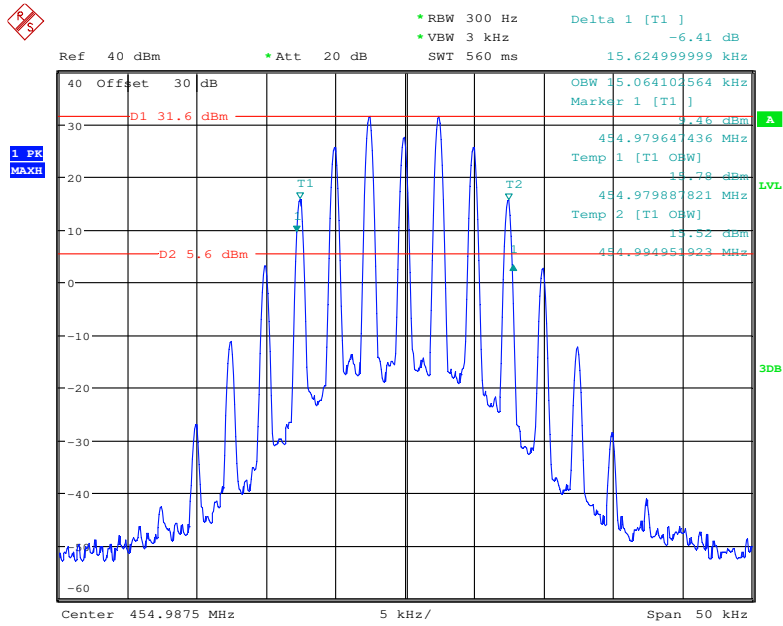


Date: 29.JAN.2018 10:56:10

### Frequency 454.9875 MHz: 99% Occupied & 26 dB Bandwidth, Low Power

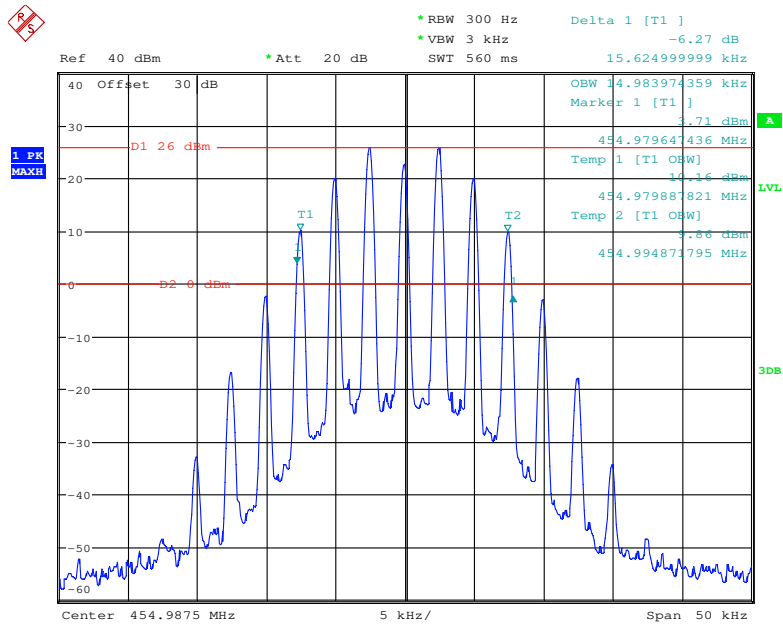


Date: 29.JAN.2018 10:55:13

### Frequency 454.9875 MHz: Emission Mask , High Power, FCC part 22.359

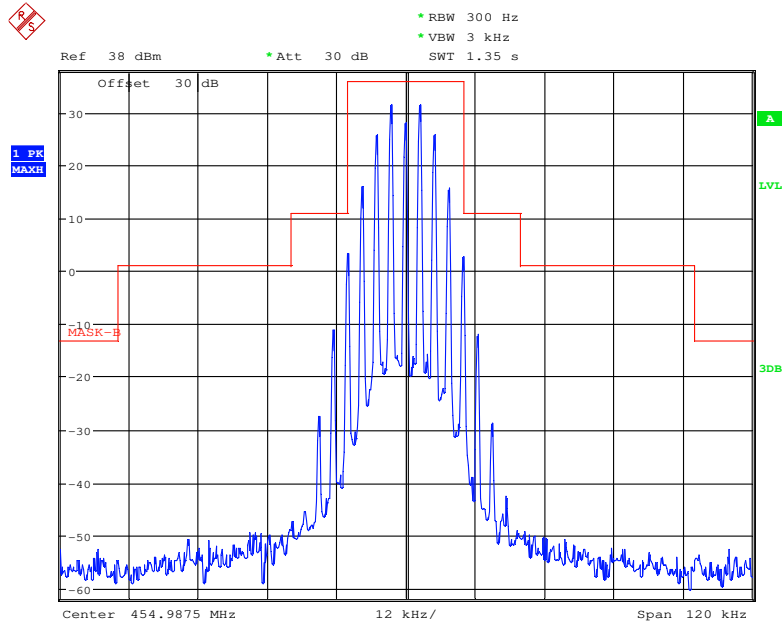


Date: 29.JAN.2018 10:25:14

### Frequency 454.9875 MHz: Emission Mask , Low Power, FCC part 22.359

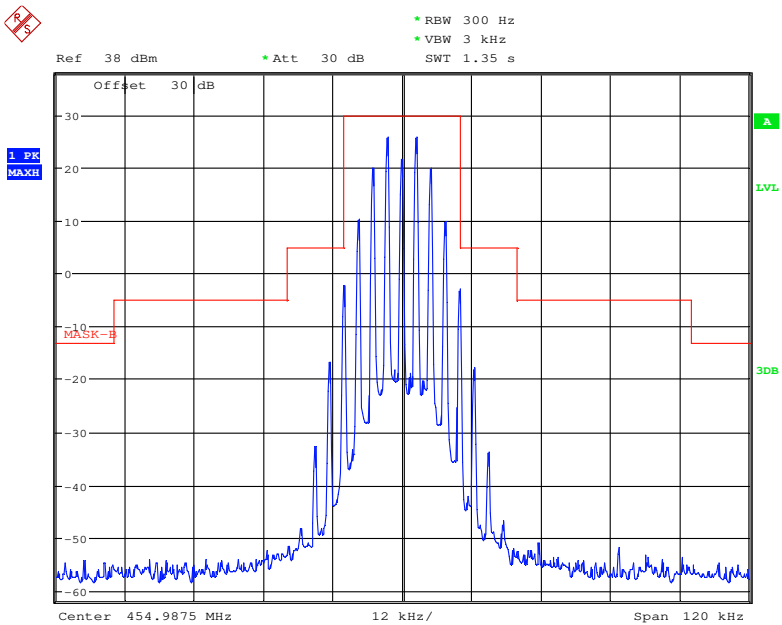


Date: 29.JAN.2018 10:27:24

**Frequency 459.9875 MHz: 99% Occupied & 26 dB Bandwidth, High Power**

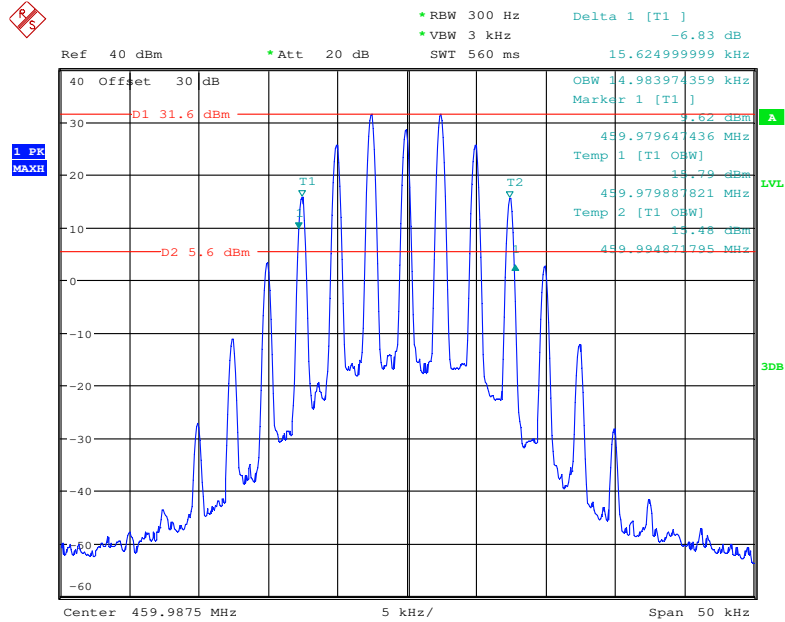


Date: 29.JAN.2018 10:53:25

**Frequency 459.9875 MHz: 99% Occupied & 26 dB Bandwidth, Low Power**

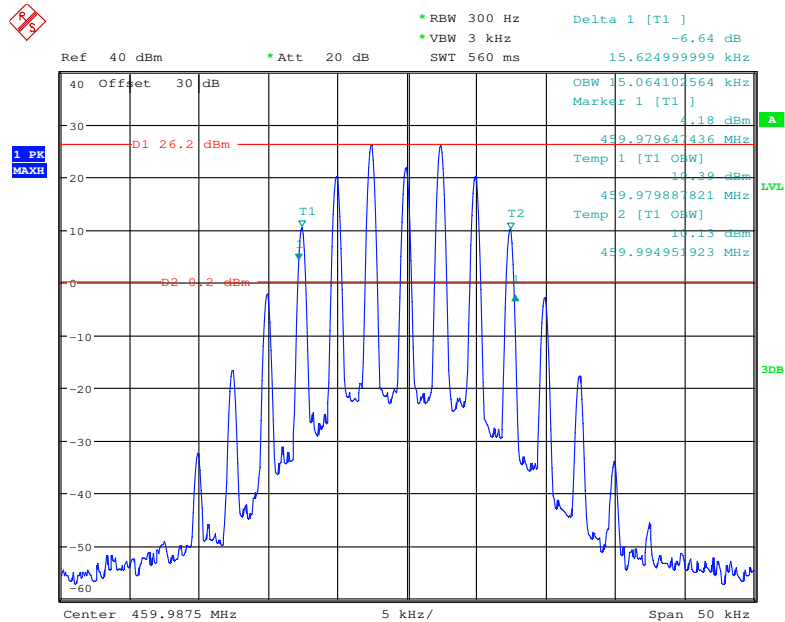


Date: 29.JAN.2018 10:54:17

### Frequency 459.9875 MHz: Emission Mask B, High Power, FCC part 80.211

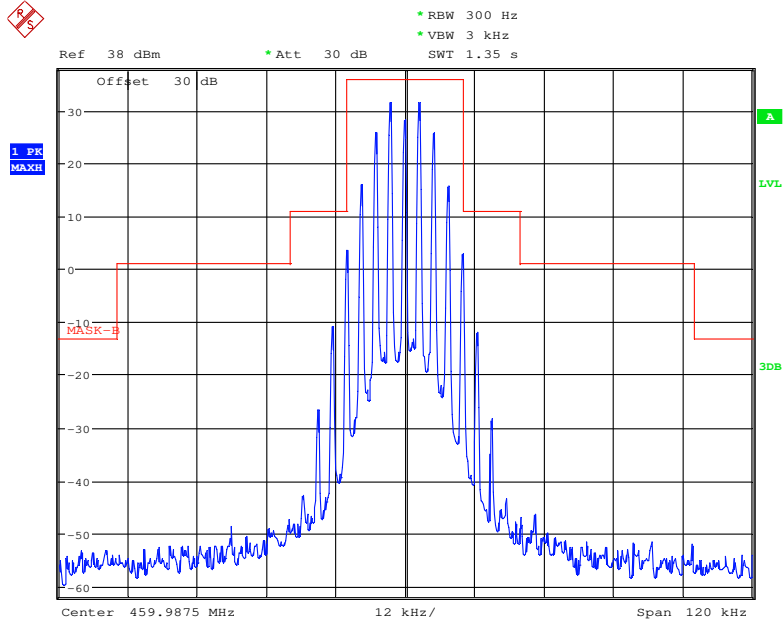

Date: 29.JAN.2018 10:24:23

### Frequency 459.9875 MHz: Emission Mask B, Low Power, FCC part 80.211

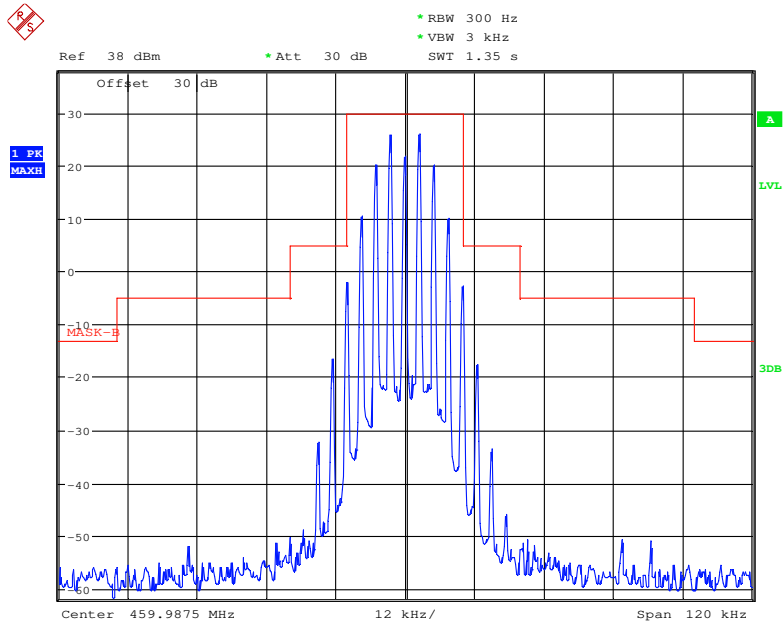

Date: 29.JAN.2018 10:23:07



## FCC §2.1051 & §22.861 & §74.462 & § 80.211 & §90.210 - SPURIOUS EMISSIONS AT ANTENNA TERMINALS

### Applicable Standard

Emission Mask D—12.5 kHz channel bandwidth equipment. For transmitters designed to operate with a 12.5 kHz channel bandwidth, any emission must be attenuated below the power (P) of the highest emission contained within the authorized bandwidth as follows:

- 1) For any frequency removed from the center of the authorized bandwidth  $f_0$  to 5.625 kHz removed from  $f_0$ , 0 dB.
- 2) On any frequency removed from the center of the authorized bandwidth by a displacement frequency ( $f_d$  in kHz) of more than 5.626 kHz but no more than 12.5 kHz, at least  $7.27 (f_d - 2.88 \text{ kHz})$  dB.
- 3) On any frequency removed from the center of the authorized bandwidth by a displacement frequency ( $f_d$  in kHz) of more than 12.5 kHz: At least  $50 + 10 \log (P)$  dB or 70 dB, whichever is the lesser attenuation.

Emission Mask B. For transmitters that are equipped with an audio low-pass filter, the power of any emission must be attenuated below the unmodulated carrier power (P) as follows:

- (1) On any frequency removed from the assigned frequency by more than 50 percent, but not more than 100 percent of the authorized bandwidth: At least 25 dB.
- (2) On any frequency removed from the assigned frequency by more than 100 percent, but not more than 250 percent of the authorized bandwidth: At least 35 dB.
- (3) On any frequency removed from the assigned frequency by more than 250 percent of the authorized bandwidth: At least  $43 + 10 \log (P)$  dB.

### Test Procedure

The RF output of the EUT was connected to a spectrum analyzer through appropriate attenuation. The resolution bandwidth of the spectrum analyzer was set at 100kHz for below 1GHz, and 1MHz for above 1GHz. Sufficient scans were taken to show any out of band emissions up to 10<sup>th</sup> harmonic.

### Test Data


#### Environmental Conditions

<b>Temperature:</b>	24~26 °C
<b>Relative Humidity:</b>	50~56 %
<b>ATM Pressure:</b>	100.9~101.0 kPa

*The testing was performed by Rocky Kang from 2017-12-15 to 2018-03-01.*


*Test Mode: Transmitting, please refer to the following plots.*

**Analog Modulation:  
30MHz – 1 GHz, Channel Spacing 12.5 kHz, 453.2125 MHz For FCC part 90&74**

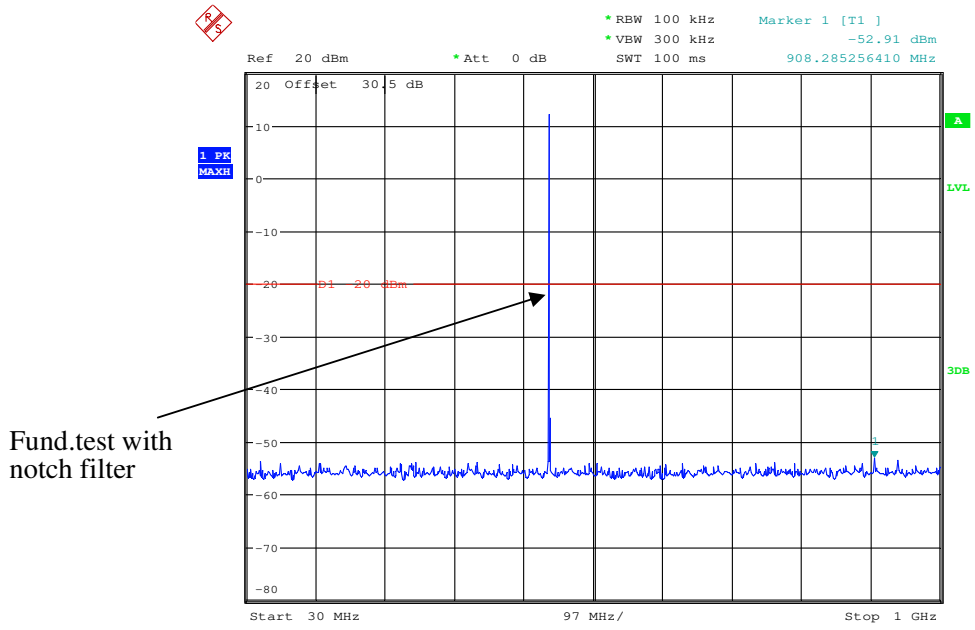


Date: 27.DEC.2017 20:36:46

**1 GHz – 5 GHz, Channel Spacing 12.5 kHz, 453.2125 MHz For FCC part 90&74**

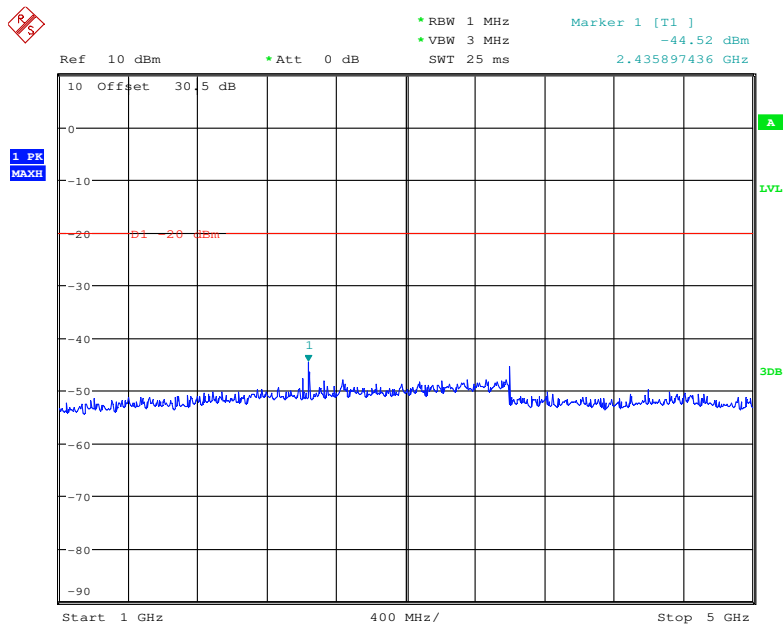


Date: 27.DEC.2017 20:56:01

### 30MHz – 1 GHz, Channel Spacing 12.5 kHz, 454.9875 MHz For FCC part 22

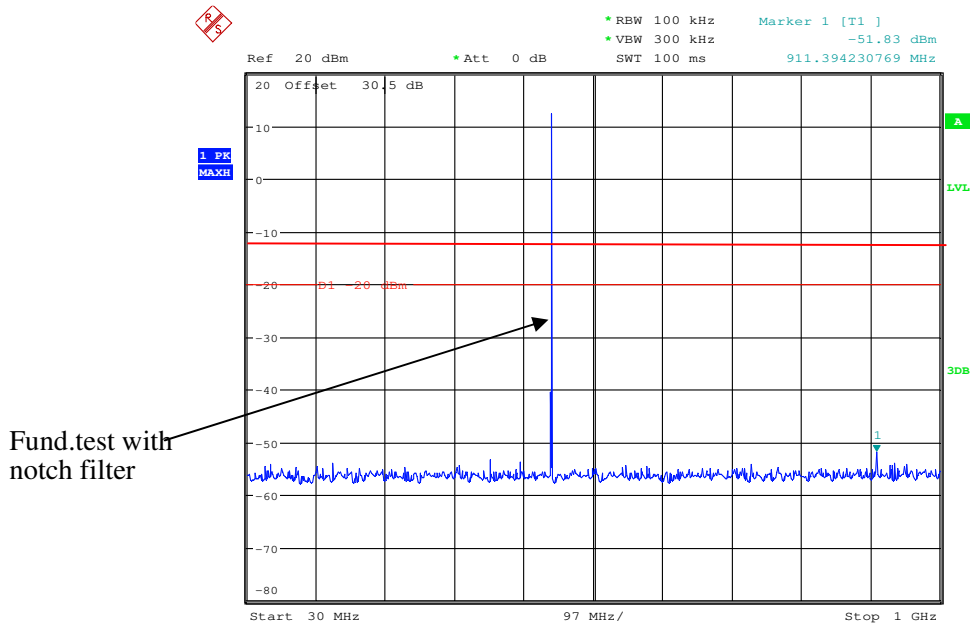


Date: 27.DEC.2017 20:37:04

### 1 GHz – 5 GHz, Channel Spacing 12.5 kHz, 454.9875 MHz For FCC part 22

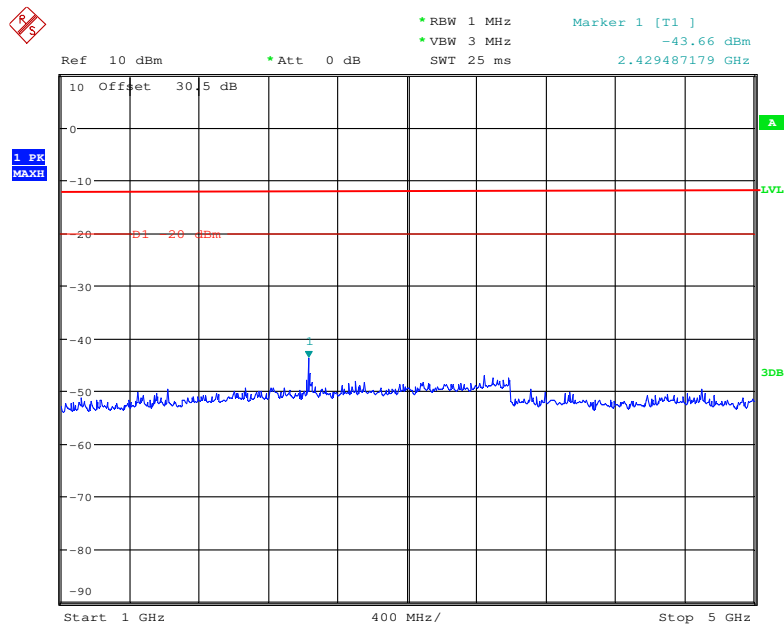


Date: 27.DEC.2017 20:55:21

### 30MHz – 1 GHz, Channel Spacing 25 kHz, 453.2125 MHz For FCC part 74

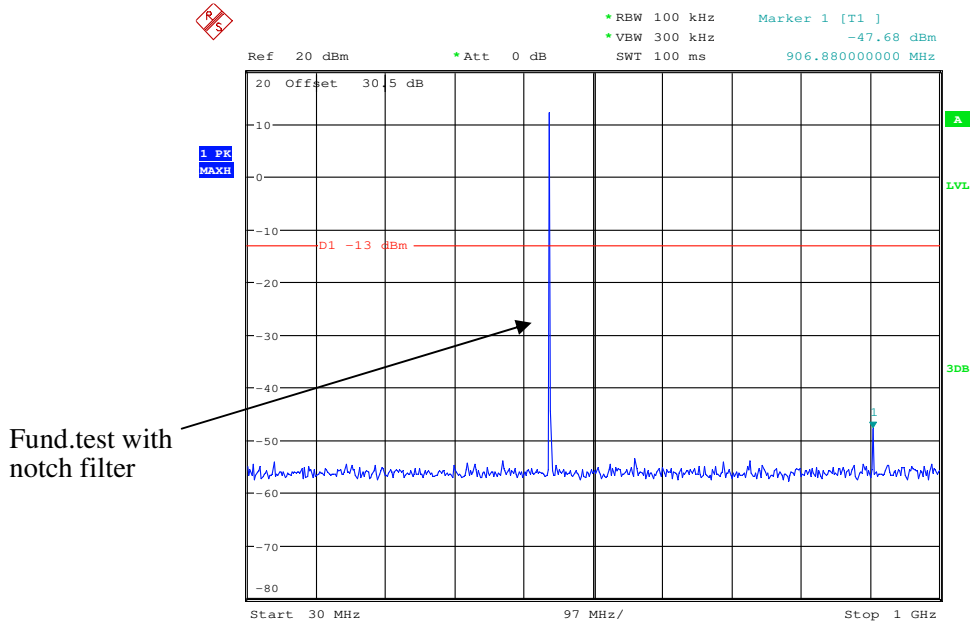


Date: 1.MAR.2018 20:01:01

### 1 GHz – 5 GHz, Channel Spacing 25 kHz, 453.2125 MHz For FCC part 74

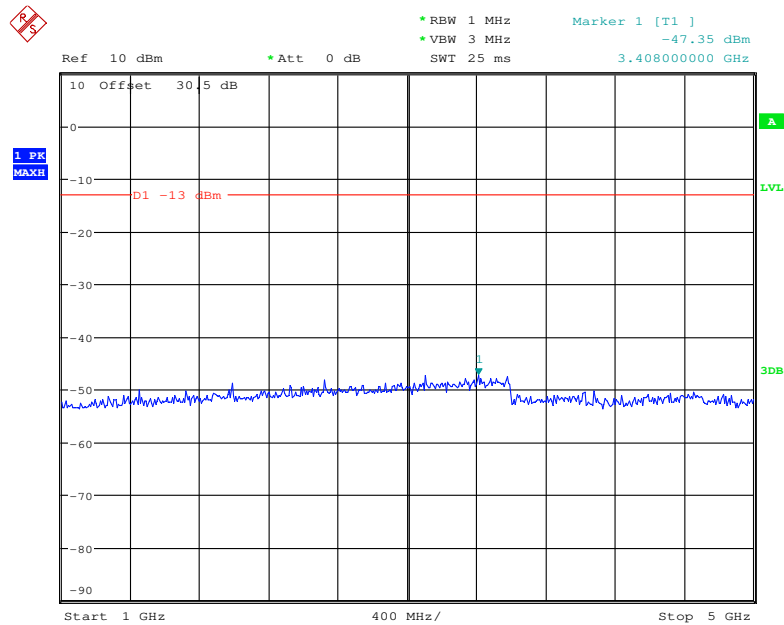


Date: 1.MAR.2018 19:59:26

### 30MHz – 1 GHz, Channel Spacing 25 kHz, 454.9875 MHz For FCC part 22

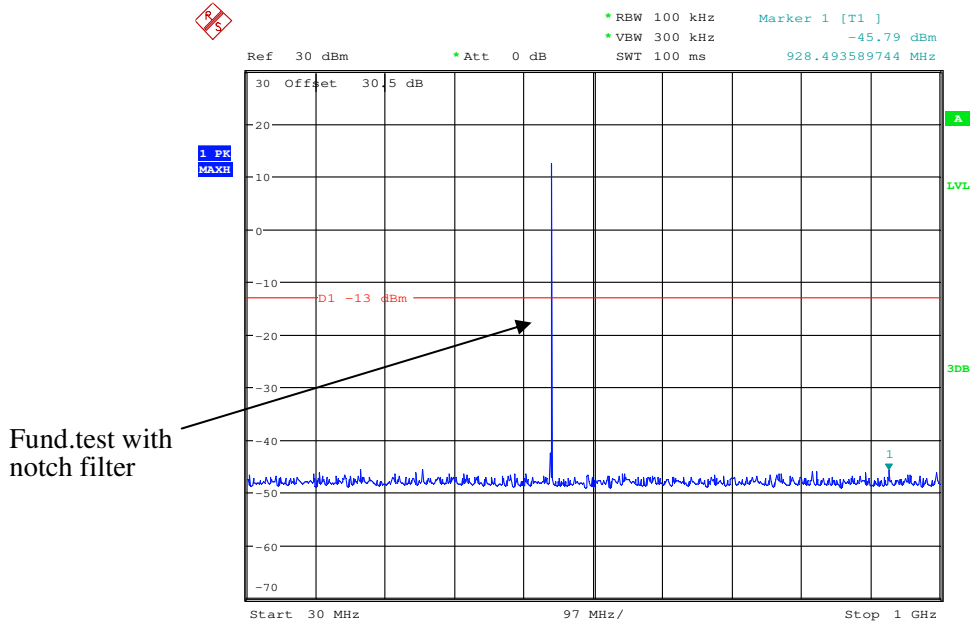


Date: 27.DEC.2017 20:38:58

### 1 GHz – 5 GHz, Channel Spacing 25 kHz, 454.9875 MHz For FCC part 22

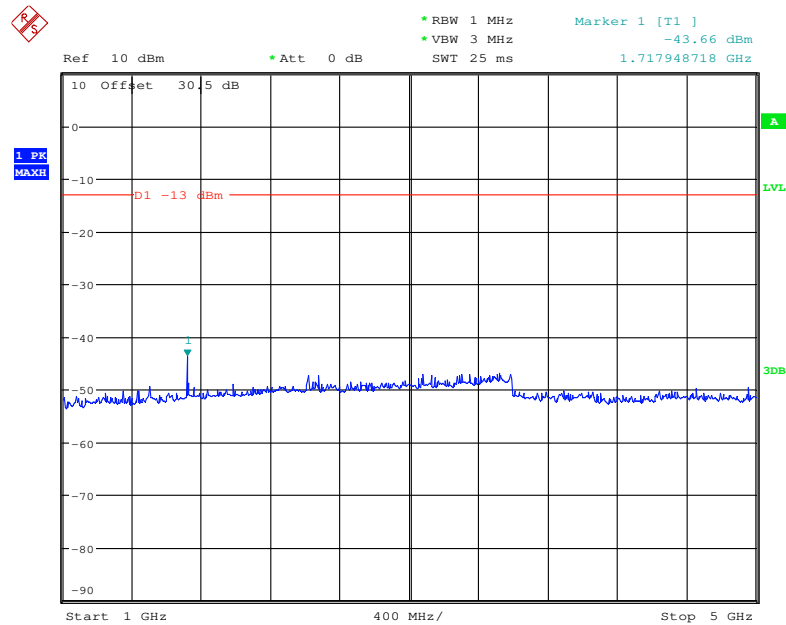


Date: 27.DEC.2017 20:48:11

30MHz – 1 GHz, Channel Spacing 25 kHz, 459.9875 MHz For FCC part 80

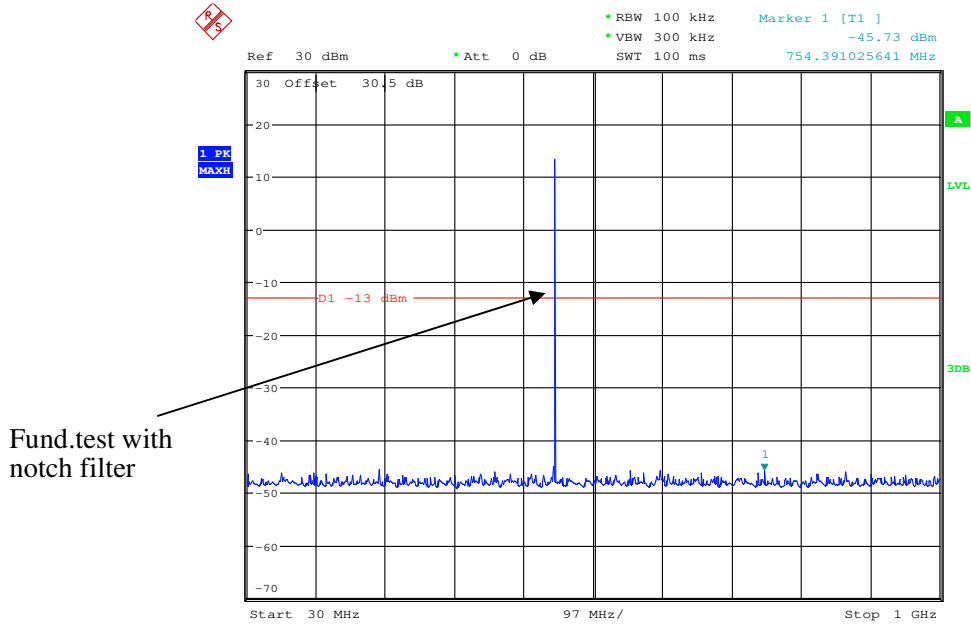

Date: 27.DEC.2017 20:39:25


1 GHz – 5 GHz, Channel Spacing 25 kHz, 459.9875 MHz For FCC part 80

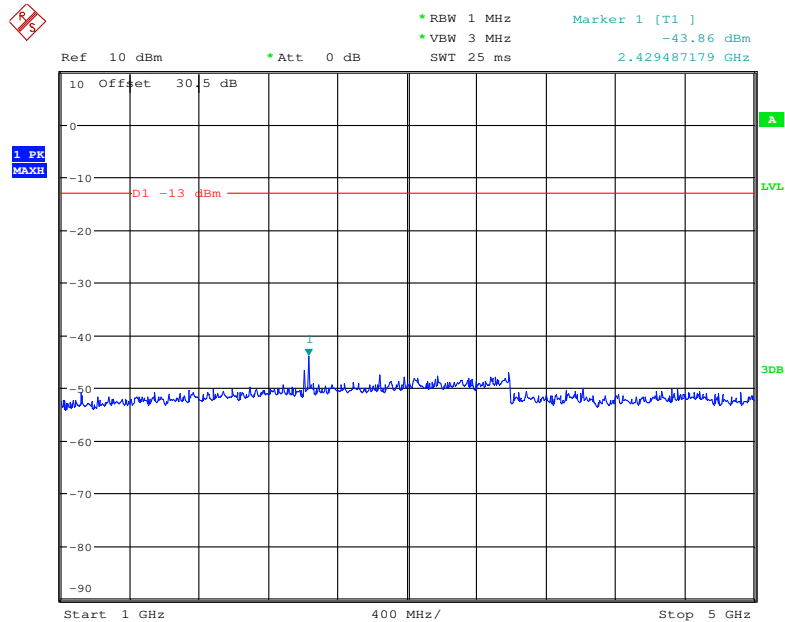

Date: 27.DEC.2017 20:46:59


Digital Modulation:

30MHz – 1 GHz, 453.2125 MHz For FCC part 90&74

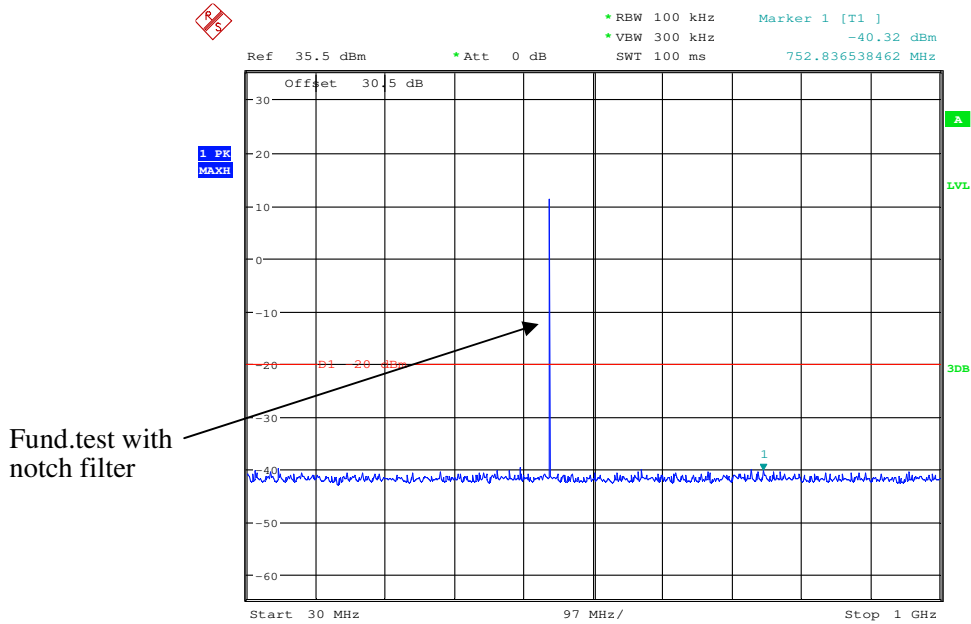


Date: 15.DEC.2017 21:45:20

1 GHz – 5 GHz, 453.2125 MHz For FCC part 90&74

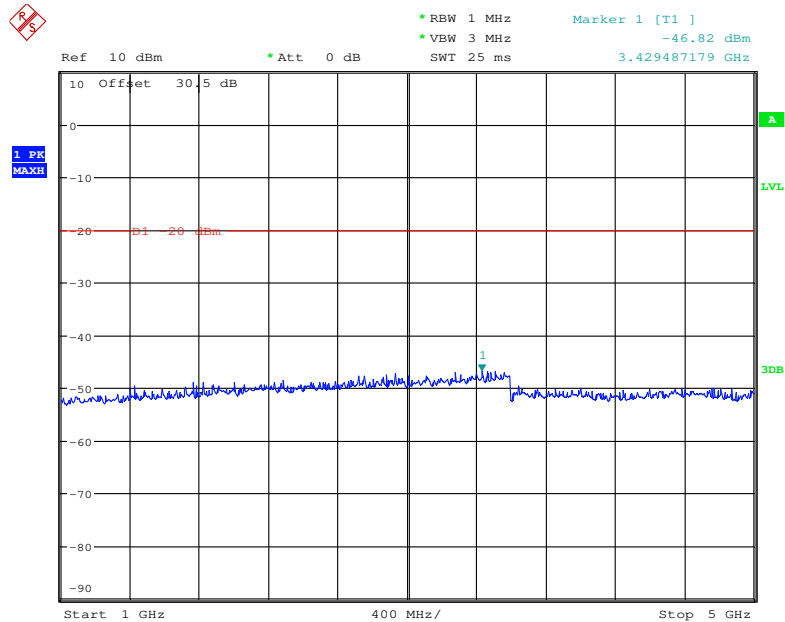


Date: 15.DEC.2017 21:54:34

### 30MHz – 1 GHz, 454.9875 MHz For FCC part 22

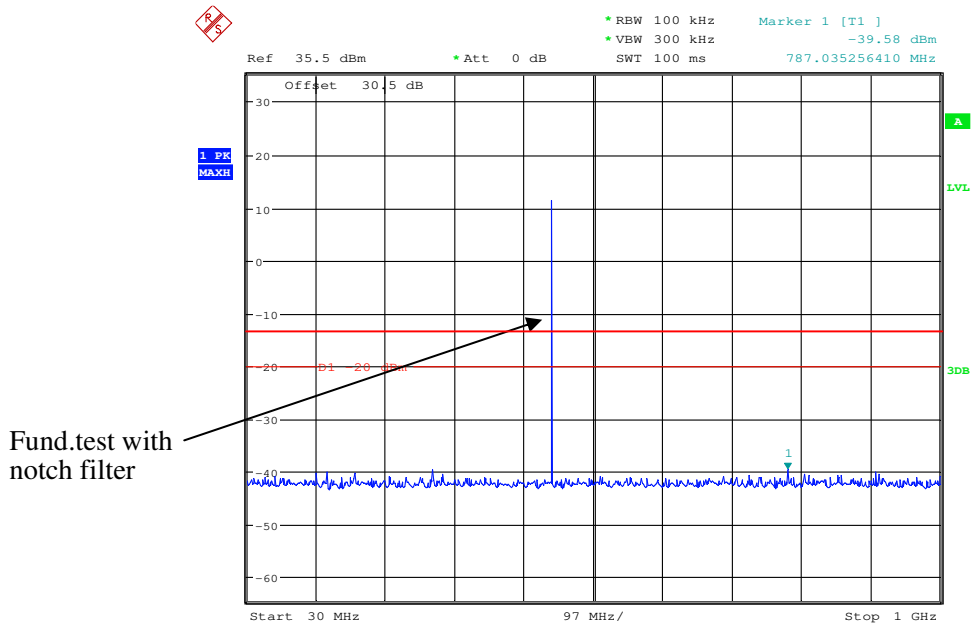

Date: 15.DEC.2017 21:46:15

### 1 GHz – 5 GHz, 454.9875 MHz For FCC part 22

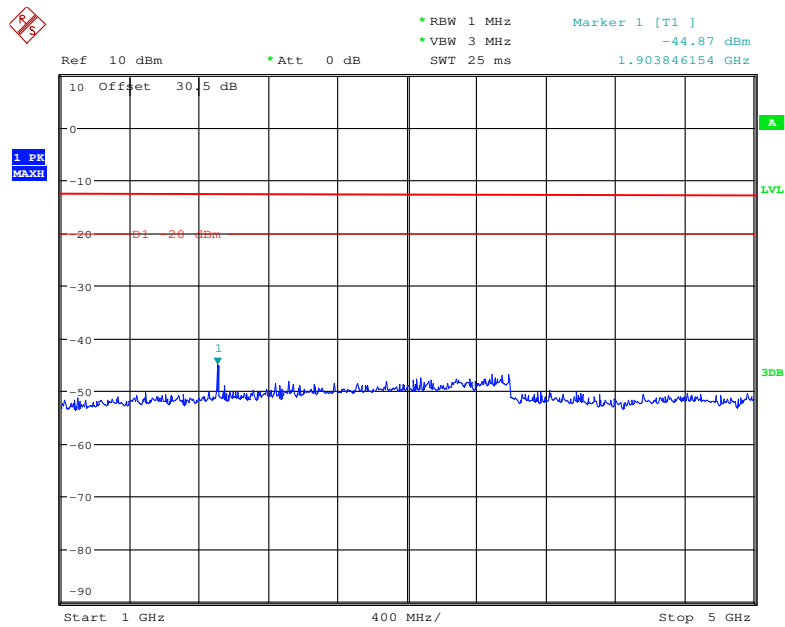

Date: 15.DEC.2017 21:54:08



## FCC §2.1053 & §22.861 & §74.462 & § 80.211 & §90.210 - RADIATED SPURIOUS EMISSIONS

### Applicable Standard

FCC §2.1053, §22.861, §74.462, § 80.211 and §90.210

### Test Procedure

The transmitter was placed on a wooden turntable, and it was transmitting into a non-radiating load, which was also placed on the turntable.

The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis.

The frequency range up to teeth harmonic of the fundamental frequency was investigated.

Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution.

Spurious emissions in dB = 10 lg (TXpwr in Watts/0.001)-the absolute level

Spurious attenuation limit in dB = 50 + 10 Log<sub>10</sub> (power out in Watts) for EUT with a 12.5 kHz channel bandwidth.

Spurious attenuation limit in dB = 43 + 10 Log<sub>10</sub> (power out in Watts) for EUT with a 25 kHz channel bandwidth.

### Test Data

#### Environmental Conditions

Temperature:	24~26 °C
Relative Humidity:	51~55 %
ATM Pressure:	100.9~101.0 kPa

*The testing was performed by Rocky Kang on 2017-12-17.*

*Test Mode: Transmitting*

**30MHz - 2GHz:**

Frequency (MHz)	Receiver Reading (dBµV)	Turn Table Angle Degree	Rx Antenna		Substituted			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Height (m)	Polar (H/V)	Level (dBm)	Cable Loss (dB)	Antenna Gain (dB)			
Analog Modulation 400.0125MHz-12.5 kHz For Fedral										
800.025	43.69	30	1.0	H	-55.5	0.67	0.0	-56.17	-20	36.17
800.025	44.31	72	1.8	V	-52.0	0.67	0.0	-52.67	-20	32.67
1200.04	43.47	336	1.1	H	-64.5	1.50	7.20	-58.80	-20	38.80
1200.04	43.83	240	2.3	V	-63.8	1.50	7.20	-58.10	-20	38.10
1600.05	43.52	252	2.5	H	-64.8	1.40	8.90	-57.30	-20	37.30
1600.05	43.61	50	2.1	V	-64.5	1.40	8.90	-57.00	-20	37.00
Digital Modulation 400.0125MHz-12.5 kHz For Fedral										
800.025	42.6	351	2.3	H	-56.6	0.67	0.0	-57.27	-20	37.27
800.025	43.2	264	1.3	V	-53.1	0.67	0.0	-53.77	-20	33.77
1200.04	42.82	229	1.3	H	-65.2	1.50	7.20	-59.50	-20	37.70
1200.04	43.1	86	1.6	V	-64.6	1.50	7.20	-58.90	-20	38.60
1600.05	43.39	112	2.1	H	-64.9	1.40	8.90	-57.40	-20	36.10
1600.05	44.58	352	1.8	V	-63.5	1.40	8.90	-56.00	-20	35.20
Analog Modulation 453.2125MHz-12.5 kHz For FCC part 74/90										
906.425	43.98	186	2.0	H	-51.7	0.70	0.0	-52.40	-20	32.40
906.425	44.24	92	1.7	V	-50.0	0.70	0.0	-50.70	-20	30.70
1359.64	44.67	254	1.5	H	-63.3	1.60	8.30	-56.60	-20	36.60
1359.64	43.28	90	2.5	V	-64.9	1.60	8.30	-58.20	-20	38.20
1812.85	43.94	140	1.7	H	-62.5	1.30	8.50	-55.30	-20	35.30
1812.85	43.12	294	1.4	V	-62.9	1.30	8.50	-55.70	-20	35.70
Digital Modulation 453.2125MHz-12.5 kHz For FCC part 74/90										
906.425	43.6	35	1.7	H	-52.1	0.70	0.0	-52.80	-20	32.80
906.425	44.2	188	2.0	V	-50.1	0.70	0.0	-50.80	-20	30.80
1359.64	43.63	175	2.1	H	-64.3	1.60	8.30	-57.60	-20	37.60
1359.64	42.72	169	1.2	V	-65.5	1.60	8.30	-58.80	-20	38.80
1812.85	43.81	328	2.2	H	-62.6	1.30	8.50	-55.40	-20	35.40
1812.85	43.28	255	1.4	V	-62.8	1.30	8.50	-55.60	-20	35.60

Frequency (MHz)	Receiver Reading (dBµV)	Turn Table Angle Degree	Rx Antenna		Substituted			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Height (m)	Polar (H/V)	Level (dBm)	Cable Loss (dB)	Antenna Gain (dB)			
Analog Modulation 454.9875MHz-12.5 kHz For FCC part 22										
909.975	43.81	302	2.0	H	-51.9	0.70	0.0	-52.60	-13	39.60
909.975	45.39	72	1.2	V	-48.9	0.70	0.0	-49.60	-13	36.60
1364.96	43.84	199	1.4	H	-64.1	1.60	8.30	-57.40	-13	44.40
1364.96	43.19	268	2.3	V	-65.0	1.60	8.30	-58.30	-13	45.30
1819.95	43.08	47	2.1	H	-63.4	1.30	8.50	-56.20	-13	43.20
1819.95	43.12	46	1.6	V	-62.9	1.30	8.50	-55.70	-13	42.70
Digital Modulation 454.9875MHz-12.5 kHz For FCC part 22										
909.975	44.35	318	2.5	H	-51.4	0.70	0.0	-52.10	-13	39.10
909.975	44.62	21	2.2	V	-49.6	0.70	0.0	-50.30	-13	37.30
1364.96	43.58	124	2.4	H	-64.4	1.60	8.30	-57.70	-13	44.70
1364.96	42.89	310	1.6	V	-65.3	1.60	8.30	-58.60	-13	45.60
1819.95	43.1	164	1.9	H	-63.3	1.30	8.50	-56.10	-13	43.10
1819.95	43.62	10	1.5	V	-62.4	1.30	8.50	-55.20	-13	42.20
Analog Modulation 453.2125 MHz-25 kHz For FCC part 74										
906.425	45.35	59	1.2	H	-50.4	0.7	0	-51.1	-13	38.1
906.425	45.08	165	1.7	V	-49.2	0.7	0	-49.9	-13	36.9
1359.64	43.77	35	1.5	H	-64.2	1.6	8.3	-57.5	-13	44.5
1359.64	43.29	202	1.4	V	-64.9	1.6	8.3	-58.2	-13	45.2
1812.85	43.68	164	1.9	H	-62.7	1.3	8.5	-55.5	-13	42.5
1812.85	43.11	125	1.1	V	-62.9	1.3	8.5	-55.7	-13	42.7
Analog Modulation 454.9875 MHz-25 kHz For FCC part 74										
909.975	45.26	36	1.5	H	-50.5	0.70	0.0	-51.20	-13	38.20
909.975	45.61	69	2.3	V	-48.6	0.70	0.0	-49.30	-13	36.30
1364.96	43.9	170	2.3	H	-64.1	1.60	8.30	-57.40	-13	44.40
1364.96	47.29	219	1.7	V	-60.9	1.60	8.30	-54.20	-13	41.20
1819.95	43.46	267	2.4	H	-63.0	1.30	8.50	-55.80	-13	42.80
1819.95	43.76	40	2.0	V	-62.3	1.30	8.50	-55.10	-13	42.10
Analog Modulation 459.9875MHz-25 kHz For FCC part 80										
919.975	44.49	304	1.4	H	-50.9	0.70	0.0	-51.60	-13	38.60
919.975	45.87	279	1.3	V	-47.8	0.70	0.0	-48.50	-13	35.50
1364.96	43.58	5	1.8	H	-64.4	1.60	8.30	-57.70	-13	44.70
1379.96	48.27	308	2.2	V	-59.9	1.60	8.30	-53.20	-13	40.20
1819.95	43.91	26	1.2	H	-62.5	1.30	8.50	-55.30	-13	42.30
1819.95	43.41	8	1.8	V	-62.6	1.30	8.50	-55.40	-13	42.40

**Note:**

Absolute Level = Substituted Level - Cable loss + Antenna Gain

Margin = Limit- Absolute Level

## **FCC §2.1055 & § 22.355 & §74.464 & § 80.209 & §90.213 - FREQUENCY STABILITY**

---

### **Applicable Standard**

FCC §2.1055, § 22.355, §74.464, § 80.209 and §90.213

### **Test Procedure**

Frequency Stability vs. Temperature: The equipment under test was connected to an external DC power supply and the RF output was connected to a frequency counter via feed-through attenuators. The EUT was placed inside the temperature chamber. The DC leads and RF output cable exited the chamber through an opening made for the purpose.

After the temperature stabilized for approximately 20 minutes, the frequency output was recorded from the counter.

### **Test Data**

#### **Environmental Conditions**

<b>Temperature:</b>	26 °C
<b>Relative Humidity:</b>	56 %
<b>ATM Pressure:</b>	101.0 kPa

*The testing was performed by Rocky Kang on 2017-12-28.*

*Test Mode: Transmitting*

For 12.5 kHz:

<b>Analog Modulation, Reference Frequency: 453.2125MHz, Limit: ±2.5 ppm</b>			
<b>Test Environment</b>		<b>Frequency Measure with Time Elapsed</b>	
<b>Temperature (°C)</b>	<b>Voltage Supplied (V<sub>DC</sub>)</b>	<b>Measured Frequency (MHz)</b>	<b>Frequency Error (ppm)</b>
Frequency Stability versus Input Temperature			
50	7.40	453.21240	-0.2317
40	7.40	453.21243	-0.1655
30	7.40	453.21243	-0.1655
20	7.40	453.21241	-0.2096
10	7.40	453.21243	-0.1655
0	7.40	453.21241	-0.2096
-10	7.40	453.21238	-0.2758
-20	7.40	453.21237	-0.2979
-30	7.40	453.21237	-0.2979
Frequency Stability versus Input Voltage			
20	6.40	453.21242	-0.1875

<b>Digital Modulation, Reference Frequency: 453.2125 MHz, Limit: ±2.5 ppm</b>			
<b>Test Environment</b>		<b>Frequency Measure with Time Elapsed</b>	
<b>Temperature (°C)</b>	<b>Voltage Supplied (V<sub>DC</sub>)</b>	<b>Measured Frequency (MHz)</b>	<b>Frequency Error (ppm)</b>
Frequency Stability versus Input Temperature			
50	7.40	453.21242	-0.1853
40	7.40	453.21238	-0.2736
30	7.40	453.21237	-0.2957
20	7.40	453.21239	-0.2515
10	7.40	453.21240	-0.2295
0	7.40	453.21242	-0.1853
-10	7.40	453.21239	-0.2515
-20	7.40	453.21239	-0.2515
-30	7.40	453.21238	-0.2736
Frequency Stability versus Input Voltage			
20	6.40	453.21238	-0.2736

<b>Analog Modulation, Reference Frequency: 454.9875MHz, Limit: ±2.5 ppm</b>			
<b>Test Environment</b>		<b>Frequency Measure with Time Elapsed</b>	
<b>Temperature (°C)</b>	<b>Voltage Supplied (V<sub>DC</sub>)</b>	<b>Measured Frequency (MHz)</b>	<b>Frequency Error (ppm)</b>
Frequency Stability versus Input Temperature			
50	7.40	454.98740	-0.2308
40	7.40	454.98739	-0.2528
30	7.40	454.98744	-0.1429
20	7.40	454.98739	-0.2528
10	7.40	454.98743	-0.1648
0	7.40	454.98737	-0.2967
-10	7.40	454.98736	-0.3187
-20	7.40	454.98737	-0.2967
-30	7.40	454.98736	-0.3187
Frequency Stability versus Input Voltage			
20	6.40	454.98738	-0.2747

<b>Digital Modulation, Reference Frequency: 454.9875 MHz, Limit: ±2.5 ppm</b>			
<b>Test Environment</b>		<b>Frequency Measure with Time Elapsed</b>	
<b>Temperature (°C)</b>	<b>Voltage Supplied (V<sub>DC</sub>)</b>	<b>Measured Frequency (MHz)</b>	<b>Frequency Error (ppm)</b>
Frequency Stability versus Input Temperature			
50	7.40	454.98742	-0.1846
40	7.40	454.98746	-0.0967
30	7.40	454.98746	-0.0967
20	7.40	454.98745	-0.1187
10	7.40	454.98740	-0.2286
0	7.40	454.98745	-0.1187
-10	7.40	454.98746	-0.0967
-20	7.40	454.98740	-0.2286
-30	7.40	454.98740	-0.2286
Frequency Stability versus Input Voltage			
20	6.40	454.98738	-0.2725

For 25 kHz:

<b>Analog Modulation, Reference Frequency: 453.2125 MHz, Limit: ±5 ppm</b>			
<b>Test Environment</b>		<b>Frequency Measure with Time Elapsed</b>	
<b>Temperature (°C)</b>	<b>Voltage Supplied (V<sub>DC</sub>)</b>	<b>Measured Frequency (MHz)</b>	<b>Frequency Error (ppm)</b>
Frequency Stability versus Input Temperature			
50	7.40	453.21241	-0.2074
40	7.40	453.21246	-0.0971
30	7.40	453.21239	-0.2515
20	7.40	453.21238	-0.2736
10	7.40	453.21238	-0.2736
0	7.40	453.21242	-0.1853
-10	7.40	453.21242	-0.1853
-20	7.40	453.21244	-0.1412
-30	7.40	453.21244	-0.1412
Frequency Stability versus Input Voltage			
20	6.40	453.21245	-0.1191

<b>Analog Modulation, Reference Frequency: 454.9875 MHz, Limit: ±5 ppm</b>			
<b>Test Environment</b>		<b>Frequency Measure with Time Elapsed</b>	
<b>Temperature (°C)</b>	<b>Voltage Supplied (V<sub>DC</sub>)</b>	<b>Measured Frequency (MHz)</b>	<b>Frequency Error (ppm)</b>
Frequency Stability versus Input Temperature			
50	7.40	454.98742	-0.1846
40	7.40	454.98743	-0.1626
30	7.40	454.98742	-0.1846
20	7.40	454.98743	-0.1626
10	7.40	454.98744	-0.1407
0	7.40	454.98739	-0.2506
-10	7.40	454.98740	-0.2286
-20	7.40	454.98745	-0.1187
-30	7.40	454.98747	-0.0747
Frequency Stability versus Input Voltage			
20	6.40	454.98745	-0.1187

<b>Analog Modulation, Reference Frequency: 459.9875MHz, Limit: ±5 ppm</b>			
<b>Test Environment</b>		<b>Frequency Measure with Time Elapsed</b>	
<b>Temperature (°C)</b>	<b>Voltage Supplied (V<sub>DC</sub>)</b>	<b>Measured Frequency (MHz)</b>	<b>Frequency Error (ppm)</b>
Frequency Stability versus Input Temperature			
50	7.40	459.98742	-0.1826
40	7.40	459.98739	-0.2478
30	7.40	459.98739	-0.2478
20	7.40	459.98741	-0.2044
10	7.40	459.98745	-0.1174
0	7.40	459.98742	-0.1826
-10	7.40	459.98737	-0.2913
-20	7.40	459.98744	-0.1391
-30	7.40	459.98739	-0.2478
Frequency Stability versus Input Voltage			
20	6.40	459.98740	-0.2261



## FCC §90.214 - TRANSIENT FREQUENCY BEHAVIOR


### Applicable Standard

Regulations: FCC §90.214

Test method: ANSI/TIA-603-D 2010, section 2.2.19.3

### Test Procedure

- a) Connect the EUT and test equipment as shown on the following block diagram.
- b) Set the Spectrum Analyzer to measure FM deviation, and tune the RF frequency to the transmitter assigned frequency.
- c) Set the signal generator to the assigned transmitter frequency and modulate it with a 1 kHz tone at  $\pm 12.5$  kHz deviation and set its output level to -100dBm.
- d) Turn on the transmitter.
- e) Supply sufficient attenuation via the RF attenuator to provide an input level to the Spectrum Analyzer that is 40 dB below the maximum allowed input power when the transmitter is operating at its rated power level. Note this power level on the Spectrum Analyzer as  $P_0$ .
- f) Turn off the transmitter.
- g) Adjust the RF level of the signal generator to provide RF power equal to  $P_0$ . This signal generator RF level shall be maintained throughout the rest of the measurement.
- h) Remove the attenuation 1, so the input power to the Spectrum Analyzer is increased by 30 dB when the transmitter is turned on.
- i) Adjust the vertical amplitude control of the spectrum analyzer to display the 1000 Hz at  $\pm 4$  divisions vertically centered on the display. Set trigger mode of the Spectrum Analyzer to "Video", and tune the "trigger level" on suitable level. Then set the "trigger offset" to -10ms for turn on and -15ms for turn off.
- j) Turn on the transmitter and the transient wave will be captured on the screen of Spectrum Analyzer. Observe the stored display. The instant when the 1 kHz test signal is completely suppressed is considered to be  $t_{on}$ . The trace should be maintained within the allowed divisions during the period  $t_1$  and  $t_2$ .
- k) Then turn off the transmitter, and another transient wave will be captured on the screen of Spectrum Analyzer. The trace should be maintained within the allowed divisions during the period  $t_3$ .

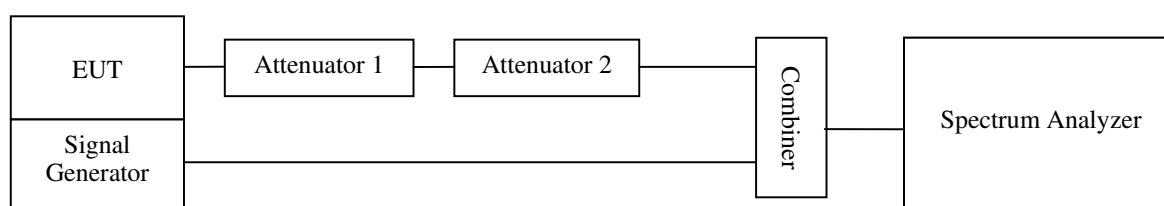

### Test Data

#### Environmental Conditions

<b>Temperature:</b>	25 °C
<b>Relative Humidity:</b>	56 %
<b>ATM Pressure:</b>	101.0 kPa


*The testing was performed by Rocky Kang on 2017-12-28.*

Channel Separation (kHz)	Transient Period (ms)	Transient Frequency	Result
12.5	10 (t1)	<+/-12.5 kHz	Pass
	25(t2)	<+/-6.25 kHz	
	10 (t3)	<+/-12.5 kHz	


Please refer to the following plots.

Channel: 453.2125 MHz

Turn on

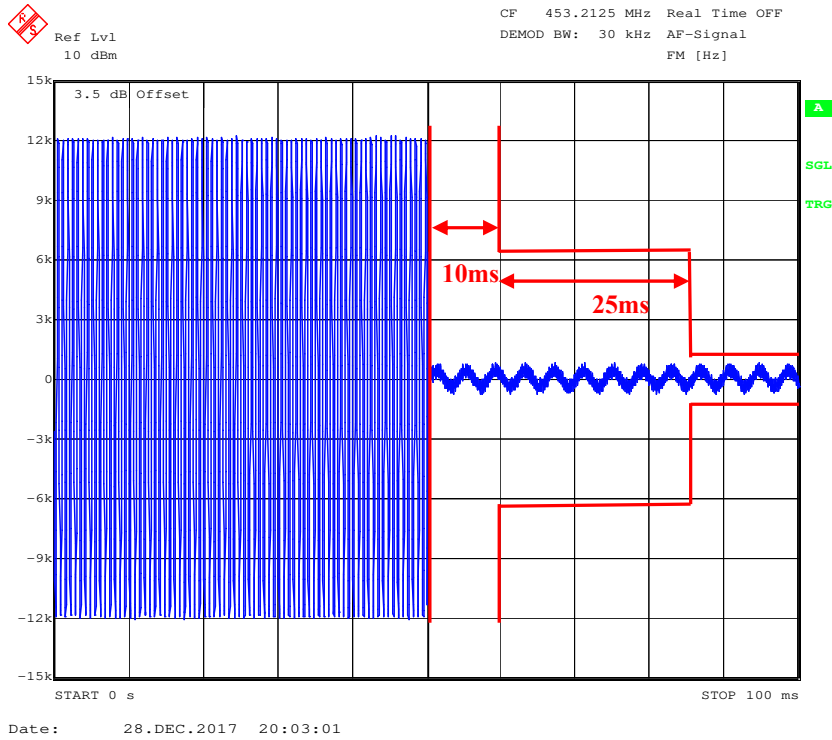

Turn off

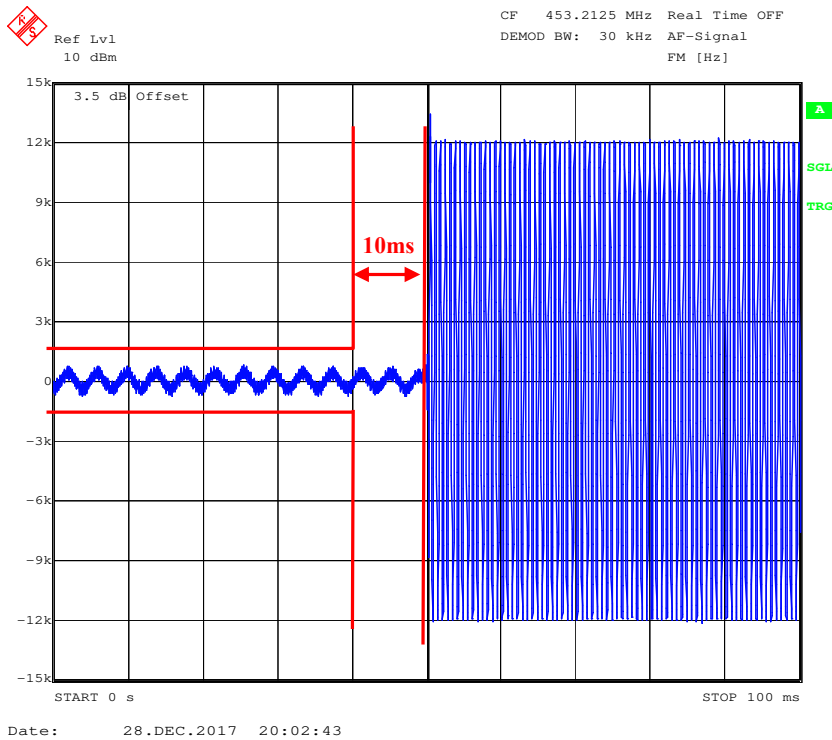

\*\*\*\*\* END OF REPORT \*\*\*\*\*