

**Test Plot 1#: GSM 850\_Head Left Cheek\_Low****DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic GSM; Frequency: 824.2 MHz; Duty Cycle: 1:8  
Medium parameters used:  $f = 824.2$  MHz;  $\sigma = 0.863$  S/m;  $\epsilon_r = 42.458$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.57, 6.57, 6.57); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x61x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.257 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.256 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.318 W/kg

**SAR(1 g) = 0.250 W/kg; SAR(10 g) = 0.190 W/kg**

Maximum value of SAR (measured) = 0.262 W/kg

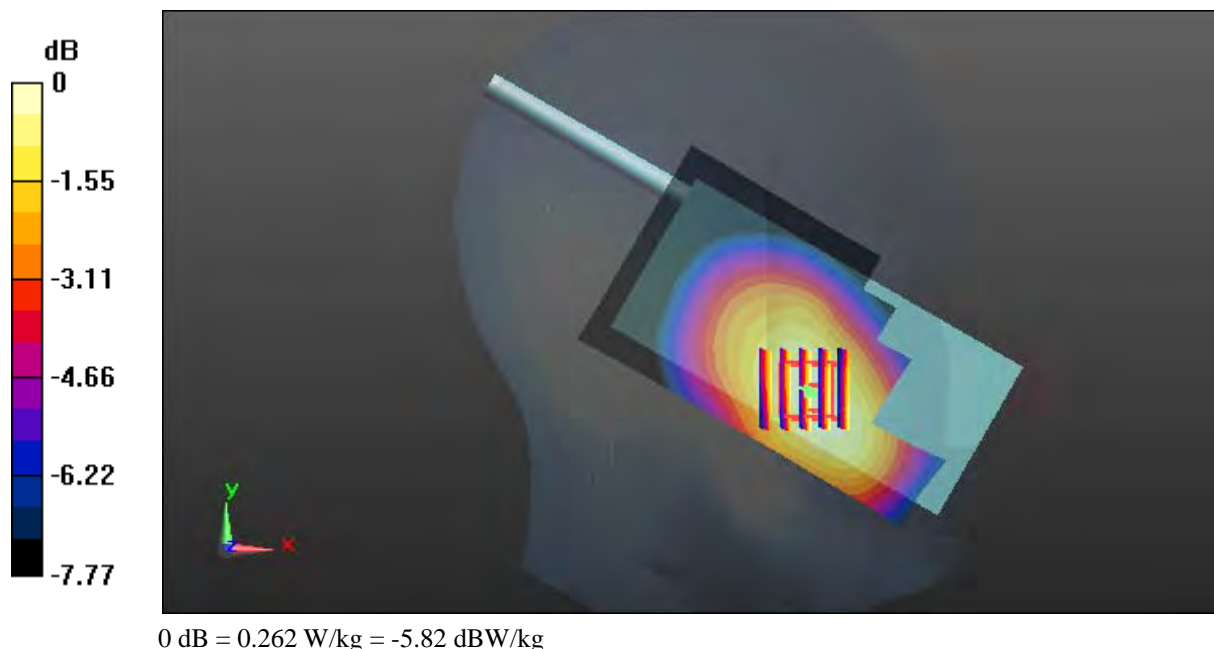

**Test Plot 2#: GSM 850\_Head Left Cheek\_Middle**

**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic GSM; Frequency: 836.6 MHz; Duty Cycle: 1:8  
 Medium parameters used:  $f = 836.6 \text{ MHz}$ ;  $\sigma = 0.88 \text{ S/m}$ ;  $\epsilon_r = 42.316$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.57, 6.57, 6.57); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x61x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.294 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 8.338 V/m; Power Drift = 0.0 dB

Peak SAR (extrapolated) = 0.357 W/kg

**SAR(1 g) = 0.281 W/kg; SAR(10 g) = 0.214 W/kg**

Maximum value of SAR (measured) = 0.294 W/kg

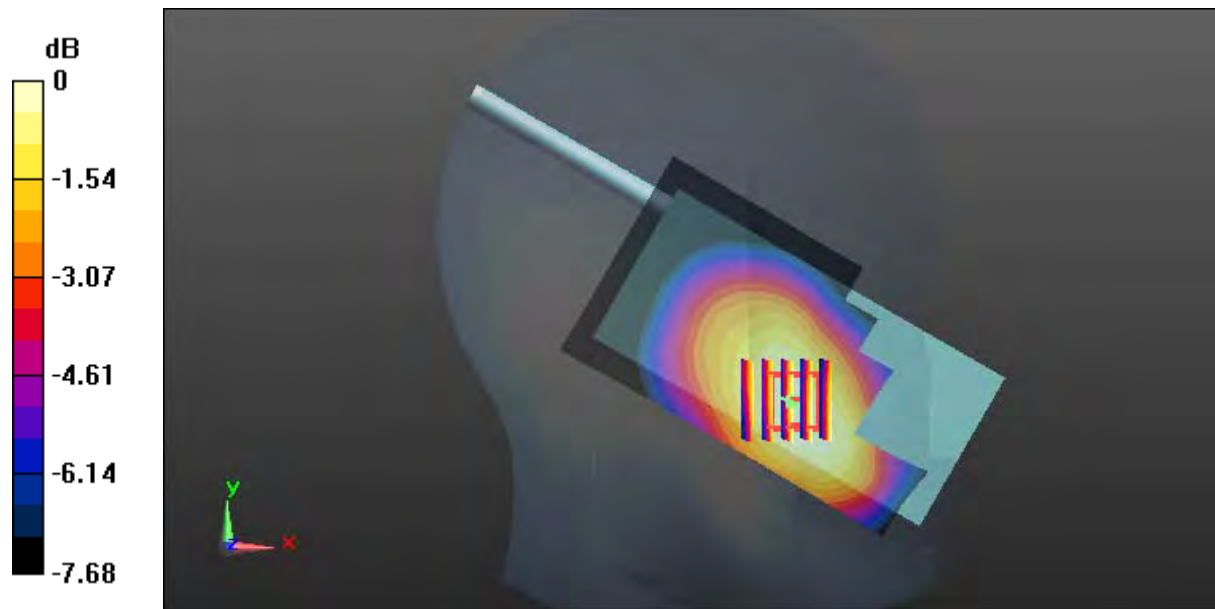

0 dB = 0.294 W/kg = -5.32 dBW/kg

**Test Plot 3#: GSM 850\_Head Left Cheek\_High****DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic GSM; Frequency: 848.8 MHz; Duty Cycle: 1:8  
Medium parameters used:  $f = 848.8$  MHz;  $\sigma = 0.889$  S/m;  $\epsilon_r = 42.072$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.57, 6.57, 6.57); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x61x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.339 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.633 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 0.413 W/kg

**SAR(1 g) = 0.327 W/kg; SAR(10 g) = 0.249 W/kg**

Maximum value of SAR (measured) = 0.342 W/kg

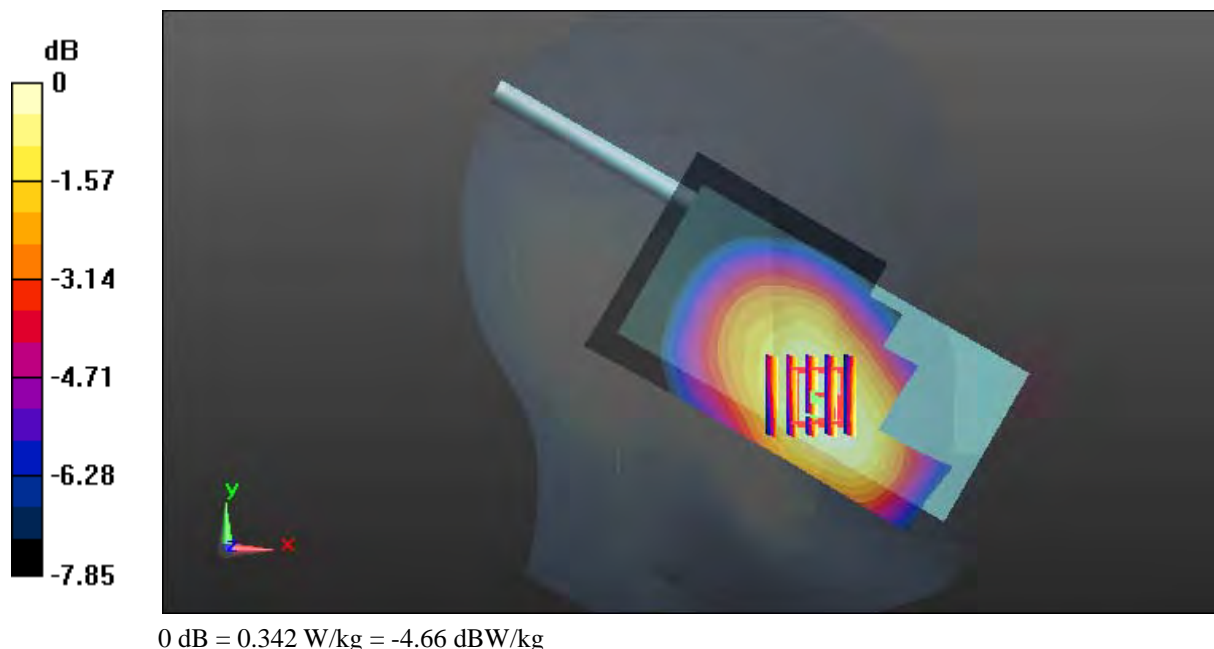

**Test Plot 4#: GSM 850\_Head Left Tilt\_Middle****DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic GSM; Frequency: 836.6 MHz; Duty Cycle: 1:8  
Medium parameters used:  $f = 836.6$  MHz;  $\sigma = 0.88$  S/m;  $\epsilon_r = 42.316$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.57, 6.57, 6.57); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x61x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.201 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.90 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 0.232 W/kg

**SAR(1 g) = 0.191 W/kg; SAR(10 g) = 0.148 W/kg**

Maximum value of SAR (measured) = 0.201 W/kg

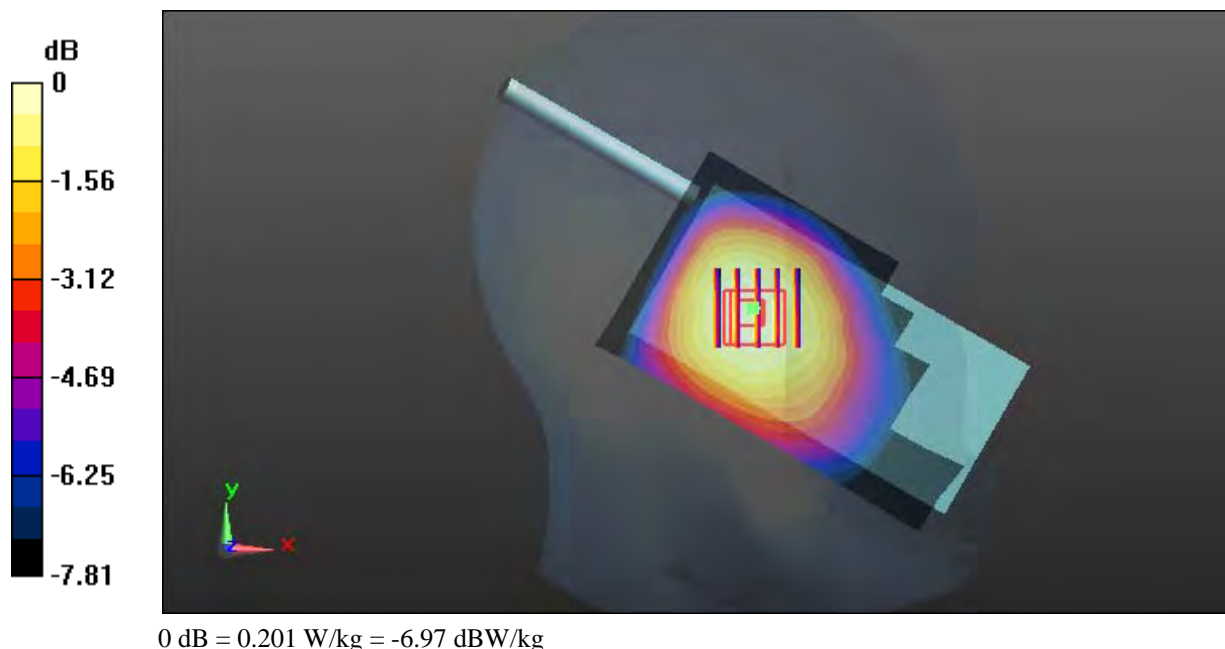

**Test Plot 5#: GSM 850\_Head Right Cheek\_Middle****DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic GSM; Frequency: 836.6 MHz; Duty Cycle: 1:8  
Medium parameters used:  $f = 836.6$  MHz;  $\sigma = 0.88$  S/m;  $\epsilon_r = 42.316$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.57, 6.57, 6.57); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x61x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.272 W/kg


**Zoom Scan (6x6x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.68 V/m; Power Drift = -0.19 dB

Peak SAR (extrapolated) = 0.302 W/kg

**SAR(1 g) = 0.246 W/kg; SAR(10 g) = 0.197 W/kg**

Maximum value of SAR (measured) = 0.258 W/kg

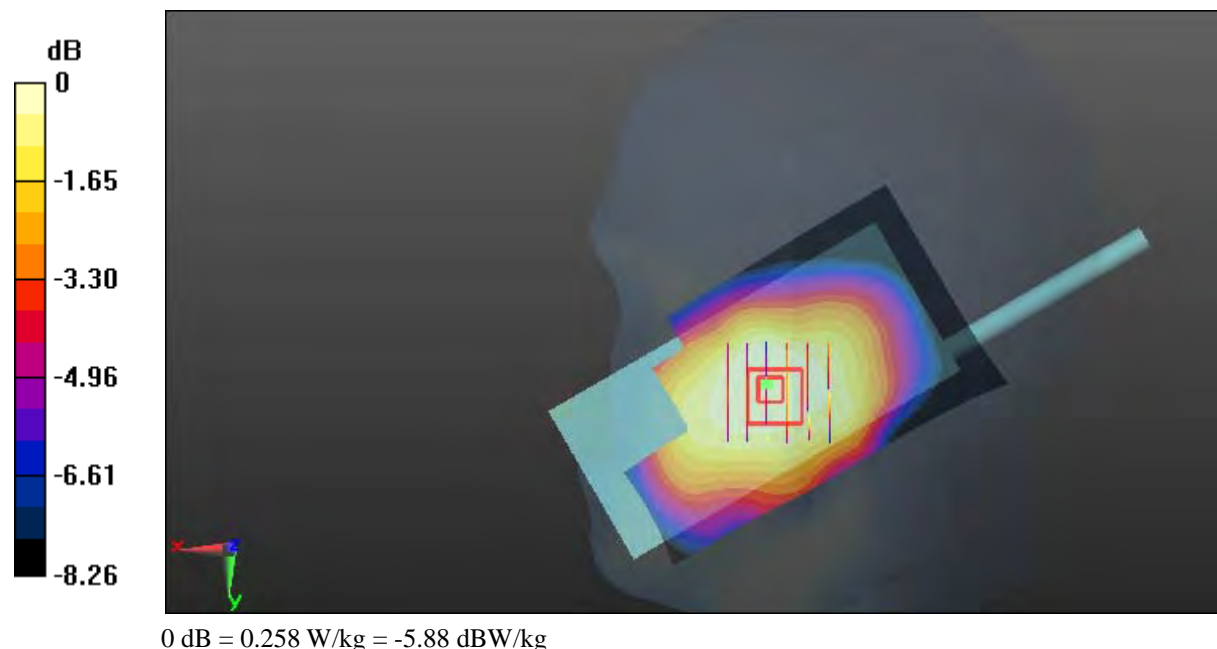

**Test Plot 6#: GSM 850\_Head Right Tilt\_Middle****DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic GSM; Frequency: 836.6 MHz; Duty Cycle: 1:8  
Medium parameters used:  $f = 836.6$  MHz;  $\sigma = 0.88$  S/m;  $\epsilon_r = 42.316$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.57, 6.57, 6.57); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x61x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.161 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.20 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.186 W/kg

**SAR(1 g) = 0.155 W/kg; SAR(10 g) = 0.120 W/kg**

Maximum value of SAR (measured) = 0.161 W/kg

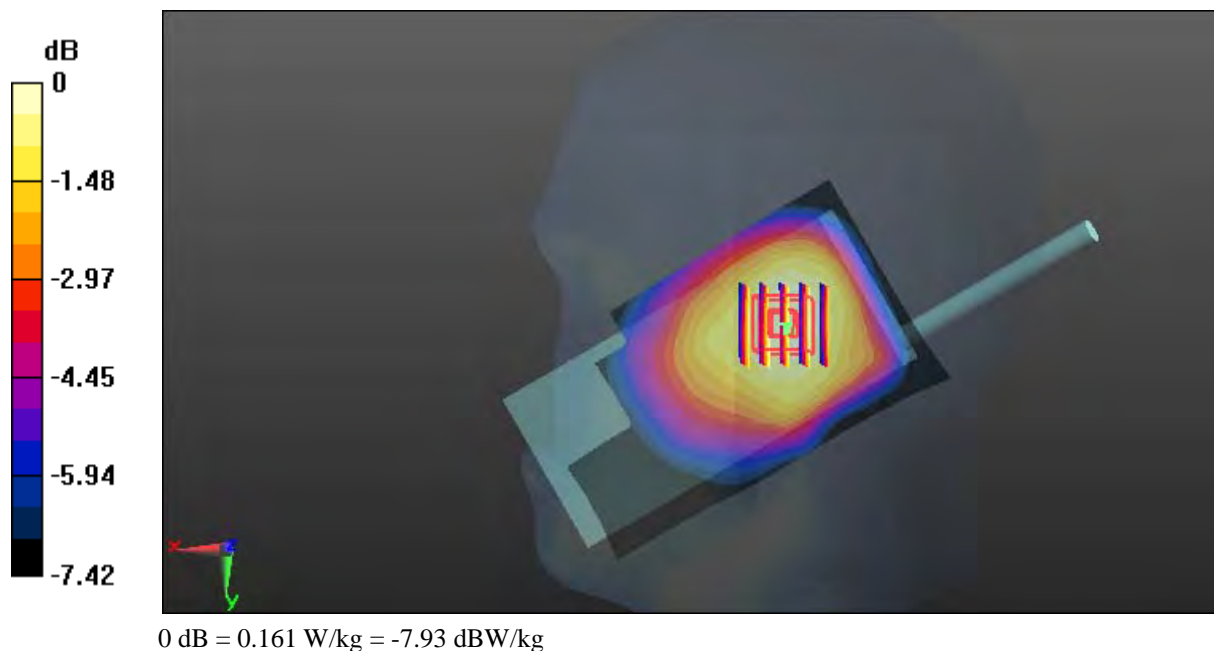

**Test Plot 7#: GSM 850\_Face Up\_Middle**

**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic GPRS-3 slots; Frequency: 836.6 MHz; Duty Cycle: 1:2.66  
 Medium parameters used:  $f = 836.6 \text{ MHz}$ ;  $\sigma = 0.88 \text{ S/m}$ ;  $\epsilon_r = 42.316$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.57, 6.57, 6.57); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x61x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.154 W/kg


**Zoom Scan (6x6x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 12.94 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.188 W/kg

**SAR(1 g) = 0.146 W/kg; SAR(10 g) = 0.112 W/kg**

Maximum value of SAR (measured) = 0.153 W/kg

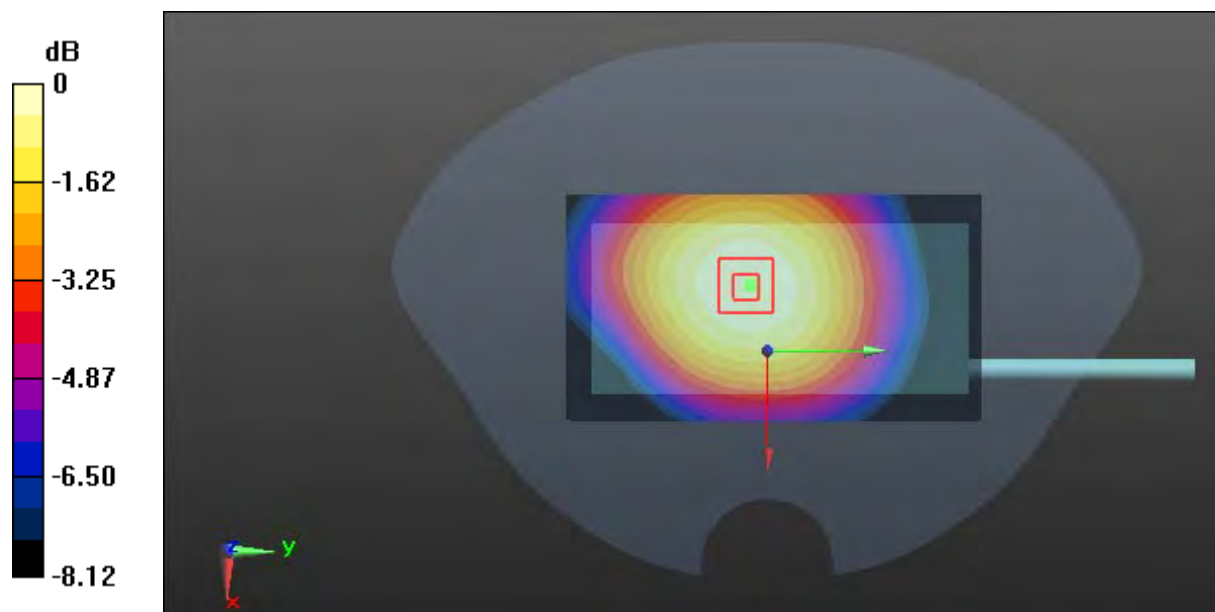

0 dB = 0.153 W/kg = -8.15 dBW/kg

**Test Plot 8#: GSM 850\_Body Worn Back\_Middle**

**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic GSM; Frequency: 836.6 MHz; Duty Cycle: 1:8  
 Medium parameters used:  $f = 836.6 \text{ MHz}$ ;  $\sigma = 0.955 \text{ S/m}$ ;  $\epsilon_r = 57.276$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.42, 6.42, 6.42); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x61x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.229 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 12.73 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 0.258 W/kg

**SAR(1 g) = 0.215 W/kg; SAR(10 g) = 0.167 W/kg**

Maximum value of SAR (measured) = 0.225 W/kg

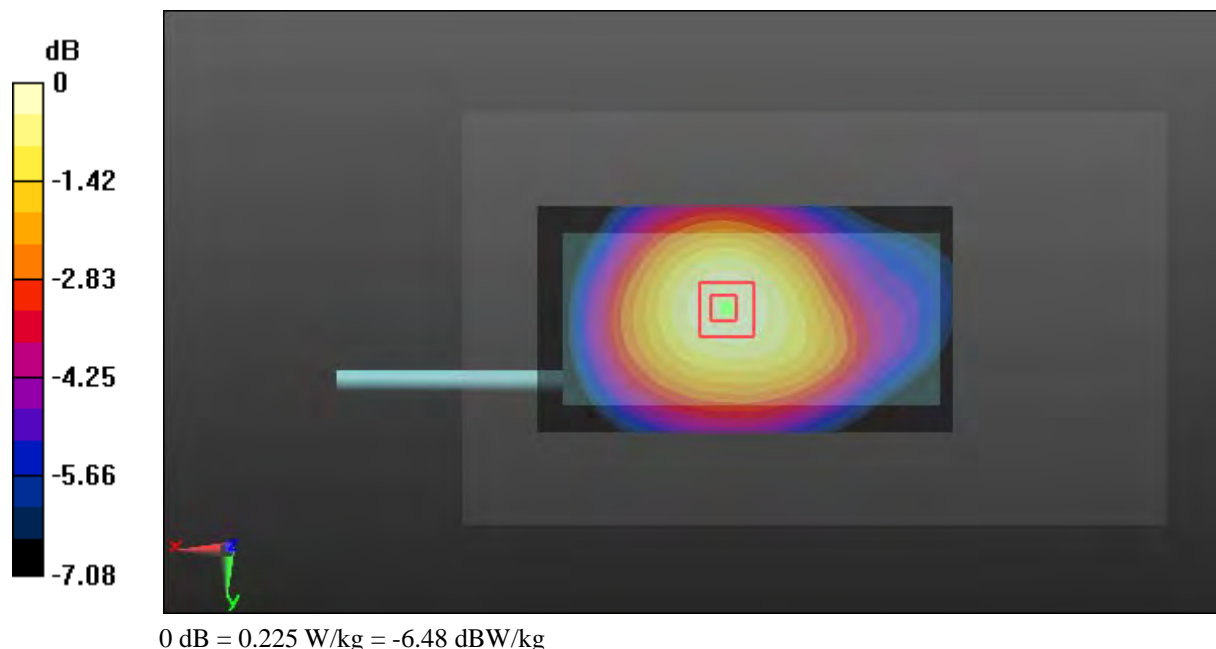



**Test Plot 9#: GSM 850\_Body Front \_Low**

**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic GPRS-3 slots; Frequency: 824.2 MHz; Duty Cycle: 1:2.66  
 Medium parameters used:  $f = 824.2 \text{ MHz}$ ;  $\sigma = 0.939 \text{ S/m}$ ;  $\epsilon_r = 57.433$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.42, 6.42, 6.42); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x61x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.363 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 17.58 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.460 W/kg

**SAR(1 g) = 0.334 W/kg; SAR(10 g) = 0.235 W/kg**

Maximum value of SAR (measured) = 0.355 W/kg

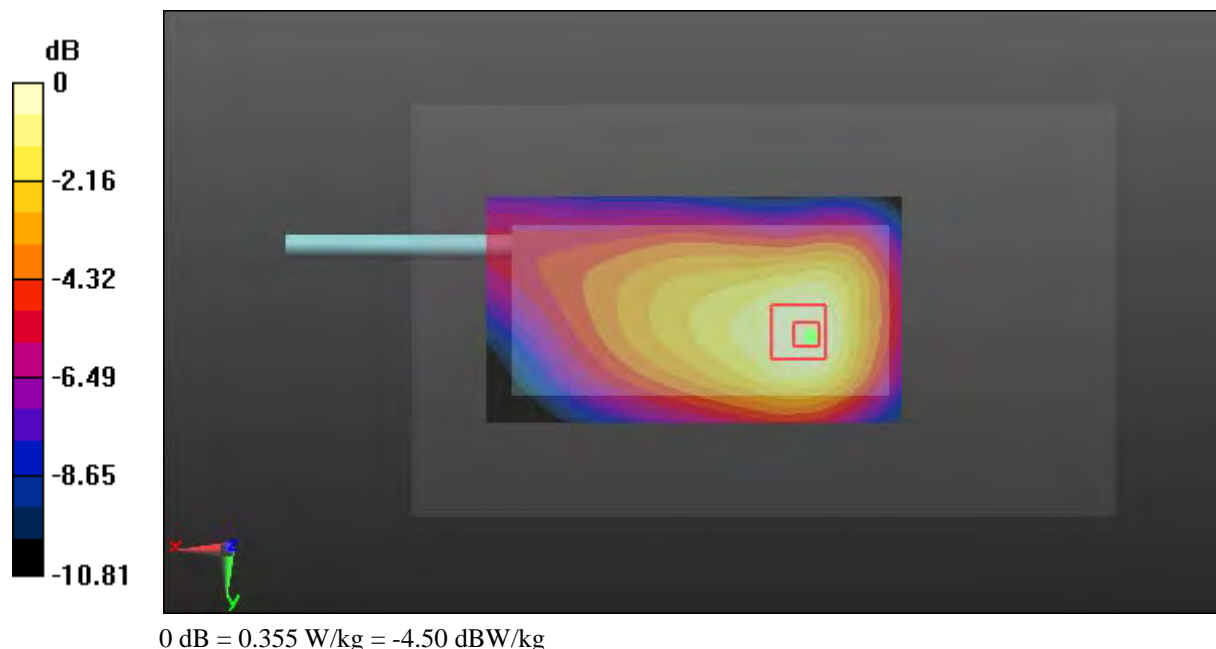

**Test Plot 10#: GSM 850\_Body Front \_Middle**

**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic GPRS-3 slots; Frequency: 836.6 MHz; Duty Cycle: 1:2.66  
 Medium parameters used:  $f = 836.6 \text{ MHz}$ ;  $\sigma = 0.955 \text{ S/m}$ ;  $\epsilon_r = 57.276$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.42, 6.42, 6.42); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x61x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.343 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 17.80 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.371 W/kg

**SAR(1 g) = 0.323 W/kg; SAR(10 g) = 0.259 W/kg**

Maximum value of SAR (measured) = 0.337 W/kg

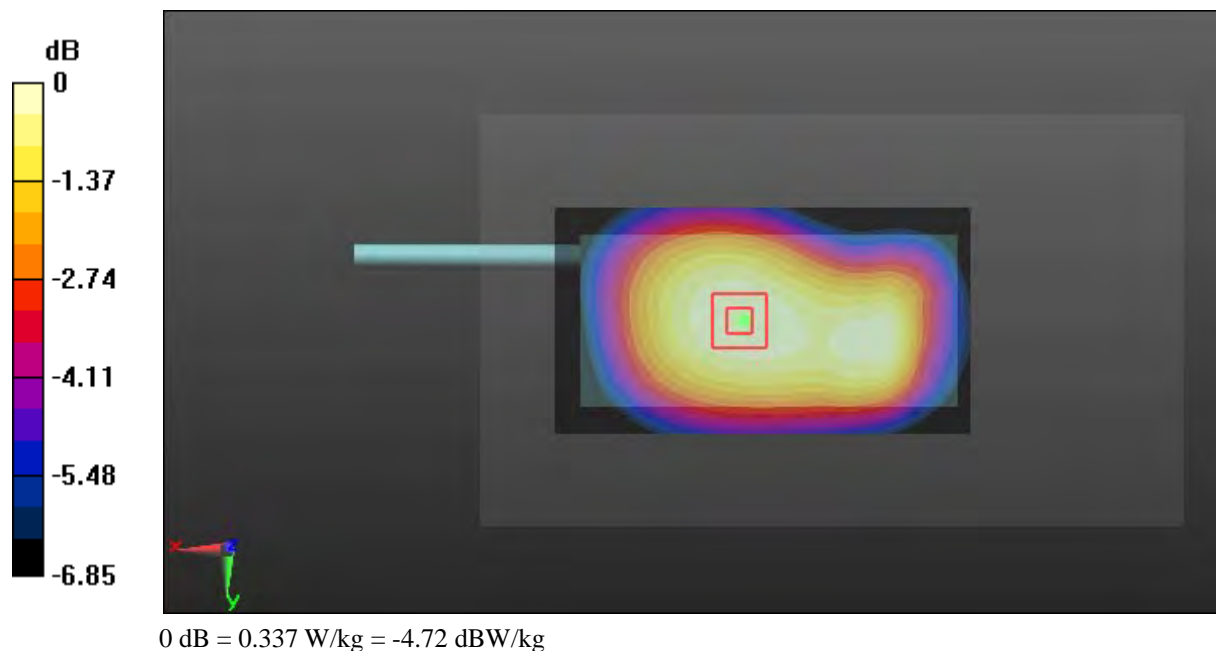

**Test Plot 11#: GSM 850\_Body Front \_High**

**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic GPRS-3 slots; Frequency: 848.8 MHz; Duty Cycle: 1:2.66  
 Medium parameters used:  $f = 848.8 \text{ MHz}$ ;  $\sigma = 0.966 \text{ S/m}$ ;  $\epsilon_r = 56.852$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.42, 6.42, 6.42); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x61x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.453 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 19.83 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 0.562 W/kg

**SAR(1 g) = 0.417 W/kg; SAR(10 g) = 0.299 W/kg**

Maximum value of SAR (measured) = 0.443 W/kg

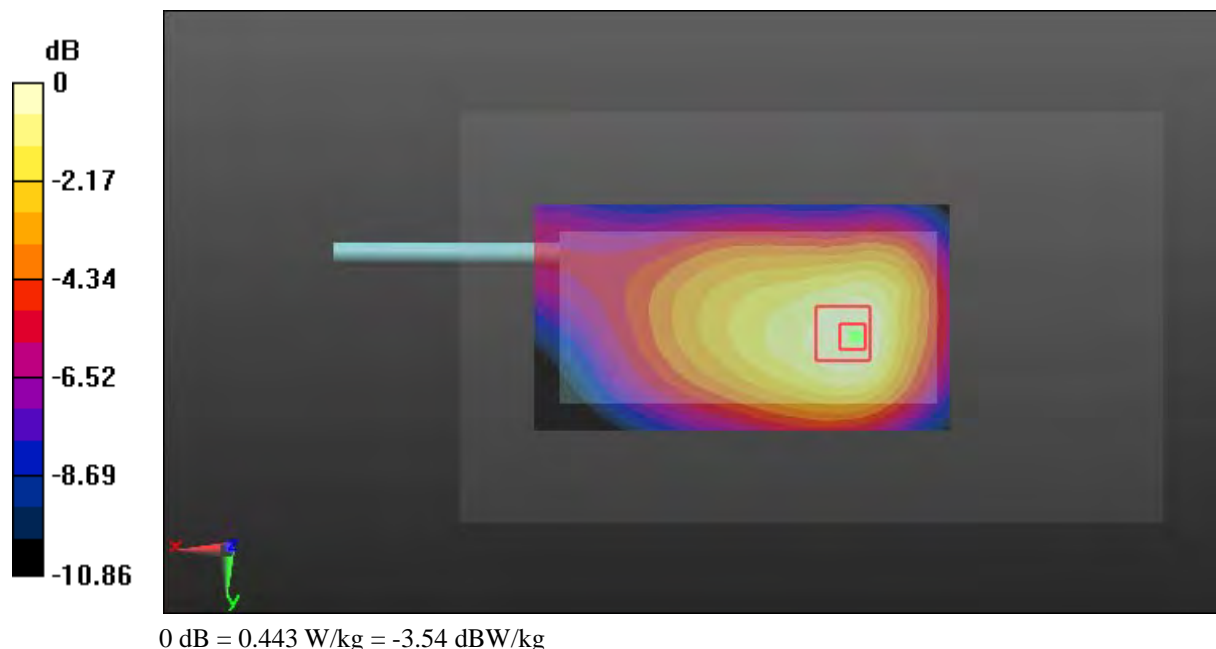

**Test Plot 12#: GSM 850\_Body Back\_Middle**

**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic GPRS-3 slots; Frequency: 836.6 MHz; Duty Cycle: 1:2.66  
 Medium parameters used:  $f = 836.6 \text{ MHz}$ ;  $\sigma = 0.955 \text{ S/m}$ ;  $\epsilon_r = 57.276$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.42, 6.42, 6.42); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x61x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.179 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 10.61 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.199 W/kg

**SAR(1 g) = 0.168 W/kg; SAR(10 g) = 0.131 W/kg**

Maximum value of SAR (measured) = 0.175 W/kg

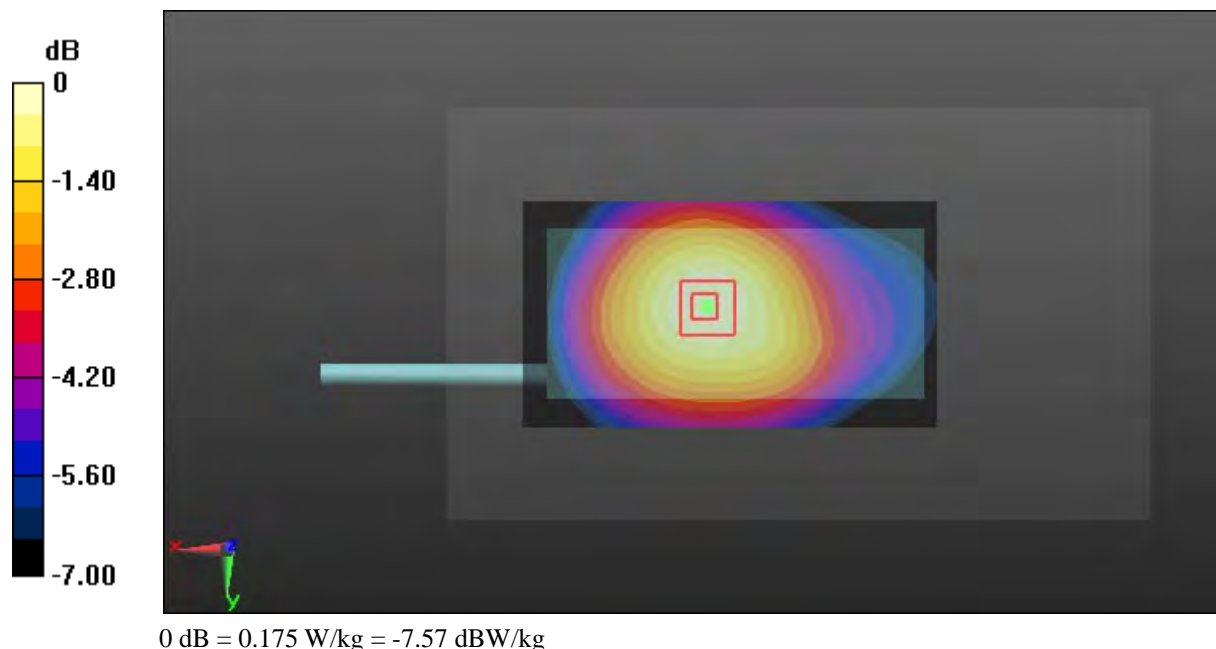

**Test Plot 13#: GSM 850\_Body Left\_Middle**

**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic GPRS-3 slots; Frequency: 836.6 MHz; Duty Cycle: 1:2.66  
 Medium parameters used:  $f = 836.6 \text{ MHz}$ ;  $\sigma = 0.955 \text{ S/m}$ ;  $\epsilon_r = 57.276$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.42, 6.42, 6.42); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x51x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.190 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 11.50 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.218 W/kg

**SAR(1 g) = 0.177 W/kg; SAR(10 g) = 0.134 W/kg**

Maximum value of SAR (measured) = 0.187 W/kg

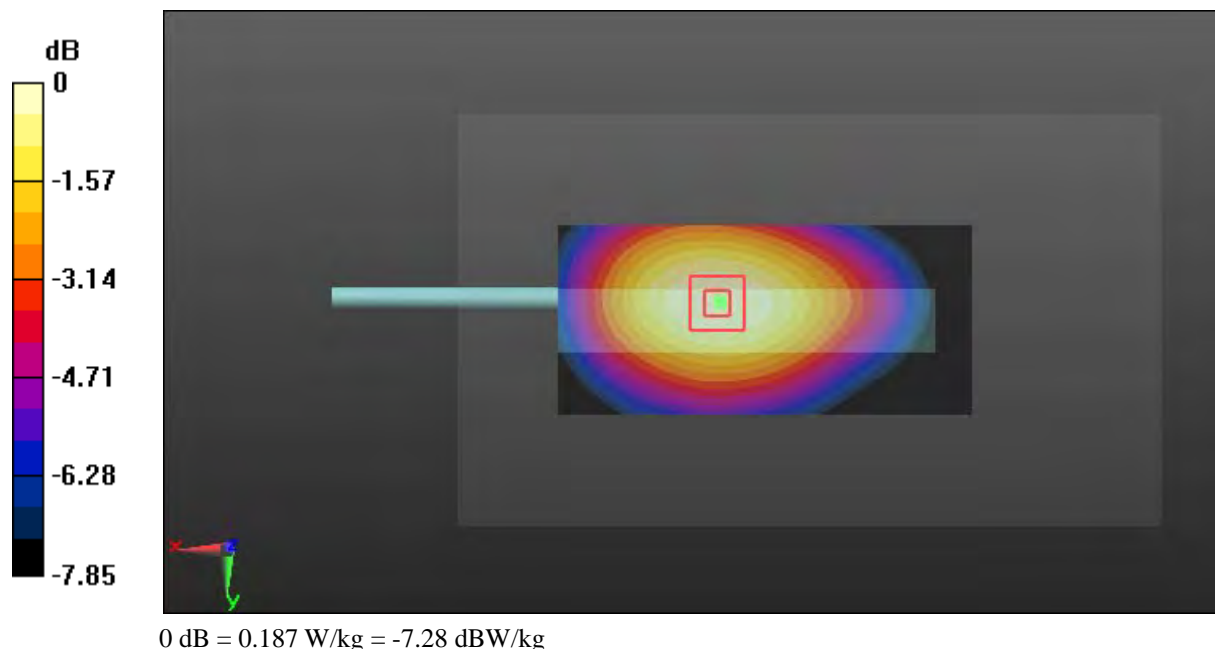

**Test Plot 14#: GSM 850\_Body Right\_Middle**

**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic GPRS-3 slots; Frequency: 836.6 MHz; Duty Cycle: 1:2.66  
 Medium parameters used:  $f = 836.6 \text{ MHz}$ ;  $\sigma = 0.955 \text{ S/m}$ ;  $\epsilon_r = 57.276$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.42, 6.42, 6.42); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x51x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.252 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 12.35 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 0.276 W/kg

**SAR(1 g) = 0.222 W/kg; SAR(10 g) = 0.168 W/kg**

Maximum value of SAR (measured) = 0.234 W/kg

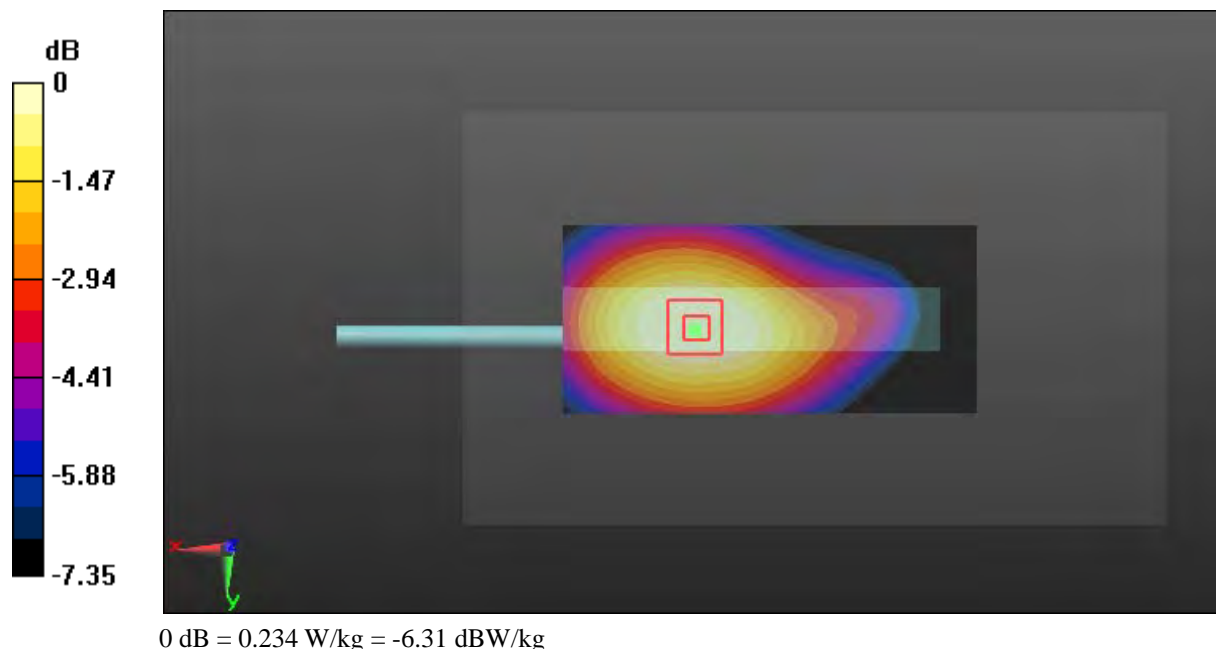

**Test Plot 15#: GSM 850\_Body Bottom\_Middle**

**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic GPRS-3 slots; Frequency: 836.6 MHz; Duty Cycle: 1:2.66  
 Medium parameters used:  $f = 836.6 \text{ MHz}$ ;  $\sigma = 0.955 \text{ S/m}$ ;  $\epsilon_r = 57.276$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.42, 6.42, 6.42); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (51x81x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.148 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 11.34 V/m; Power Drift = -0.19 dB

Peak SAR (extrapolated) = 0.303 W/kg

**SAR(1 g) = 0.134 W/kg; SAR(10 g) = 0.072 W/kg**

Maximum value of SAR (measured) = 0.142 W/kg

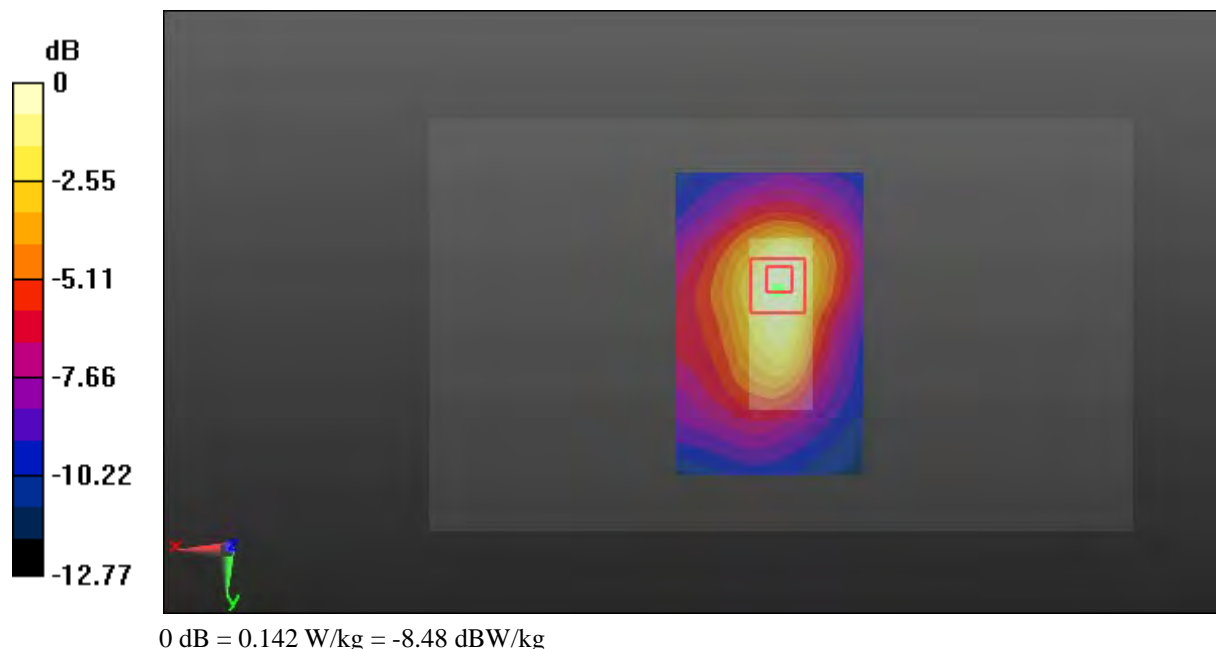

**Test Plot 16#: GSM 1900\_Head Left Cheek\_Low**

**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic GSM; Frequency: 1850.2 MHz; Duty Cycle: 1:8  
 Medium parameters used:  $f = 1850.2 \text{ MHz}$ ;  $\sigma = 1.339 \text{ S/m}$ ;  $\epsilon_r = 40.732$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.93, 4.93, 4.93); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x71x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.267 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 5.659 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.396 W/kg

**SAR(1 g) = 0.256 W/kg; SAR(10 g) = 0.162 W/kg**

Maximum value of SAR (measured) = 0.272 W/kg

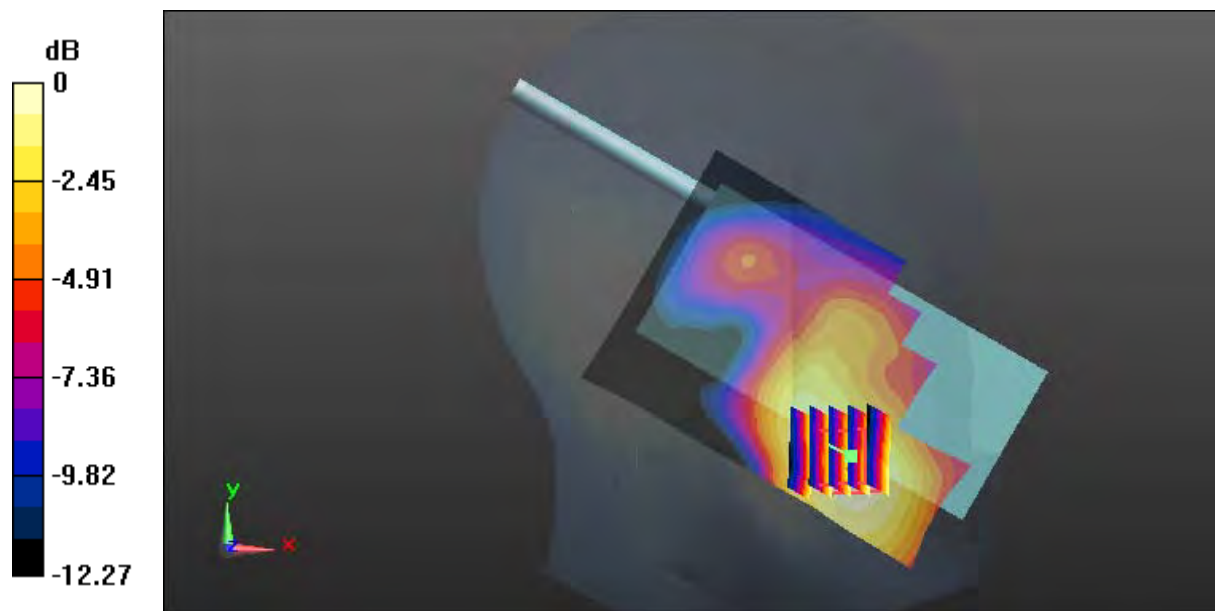

0 dB = 0.272 W/kg = -5.65 dBW/kg



**Test Plot 17#: GSM 1900\_Head Left Cheek\_Middle****DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic GSM; Frequency: 1880 MHz; Duty Cycle: 1:8  
Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.36$  S/m;  $\epsilon_r = 40.47$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.93, 4.93, 4.93); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x71x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.323 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.141 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.466 W/kg

**SAR(1 g) = 0.298 W/kg; SAR(10 g) = 0.188 W/kg**

Maximum value of SAR (measured) = 0.317 W/kg

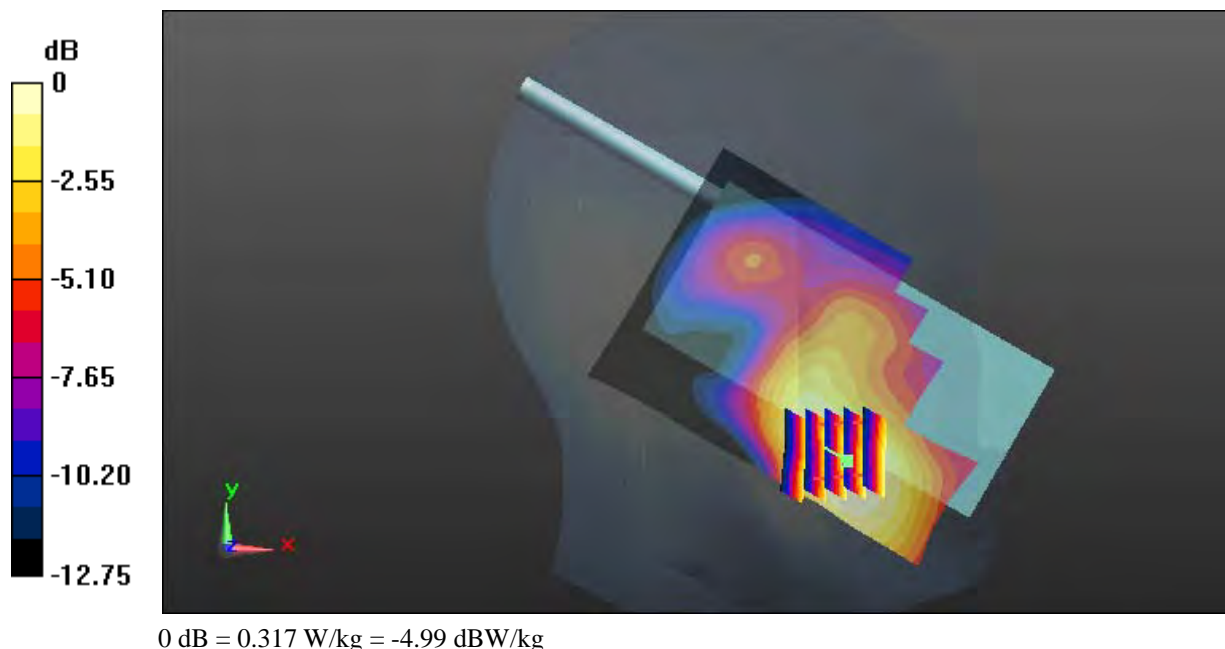

**Test Plot 18#: GSM 1900\_Head Left Cheek\_High****DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic GSM; Frequency: 1909.8 MHz; Duty Cycle: 1:8  
Medium parameters used:  $f = 1909.8$  MHz;  $\sigma = 1.409$  S/m;  $\epsilon_r = 40.302$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.93, 4.93, 4.93); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x71x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.315 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.755 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.481 W/kg

**SAR(1 g) = 0.296 W/kg; SAR(10 g) = 0.184 W/kg**

Maximum value of SAR (measured) = 0.314 W/kg

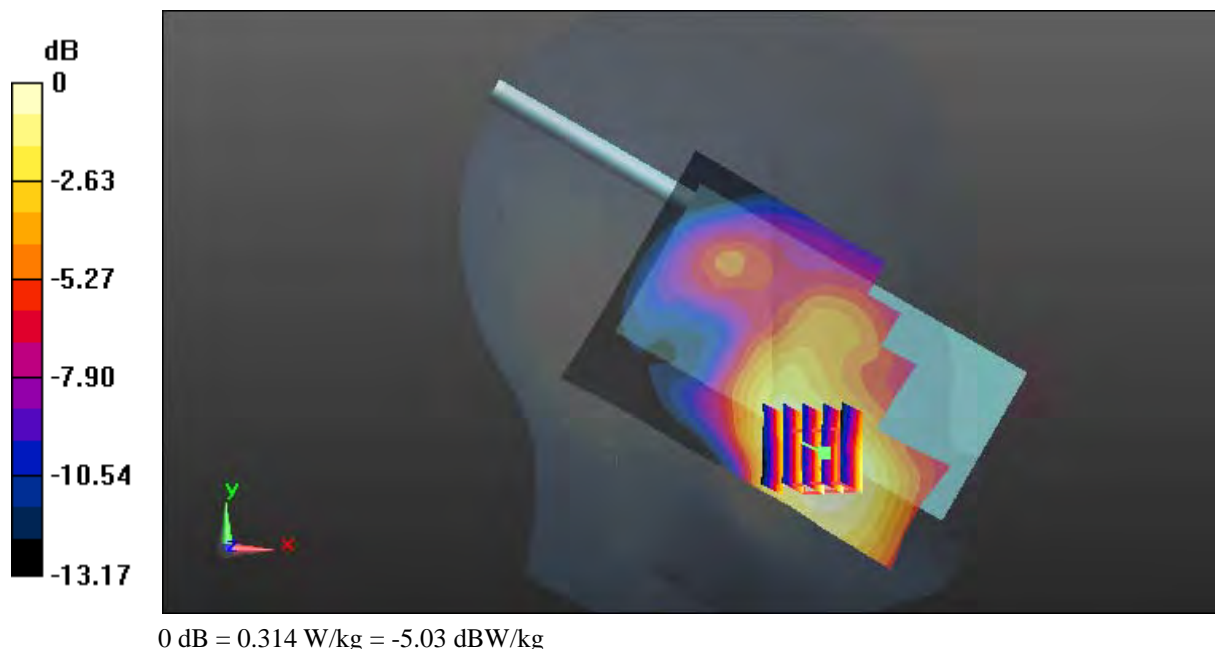

**Test Plot 19#: GSM 1900\_Head Left Tilt\_Middle****DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic GSM; Frequency: 1880 MHz; Duty Cycle: 1:8  
Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.36$  S/m;  $\epsilon_r = 40.47$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.93, 4.93, 4.93); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (11x61x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.192 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.625 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.263 W/kg

**SAR(1 g) = 0.166 W/kg; SAR(10 g) = 0.099 W/kg**

Maximum value of SAR (measured) = 0.180 W/kg

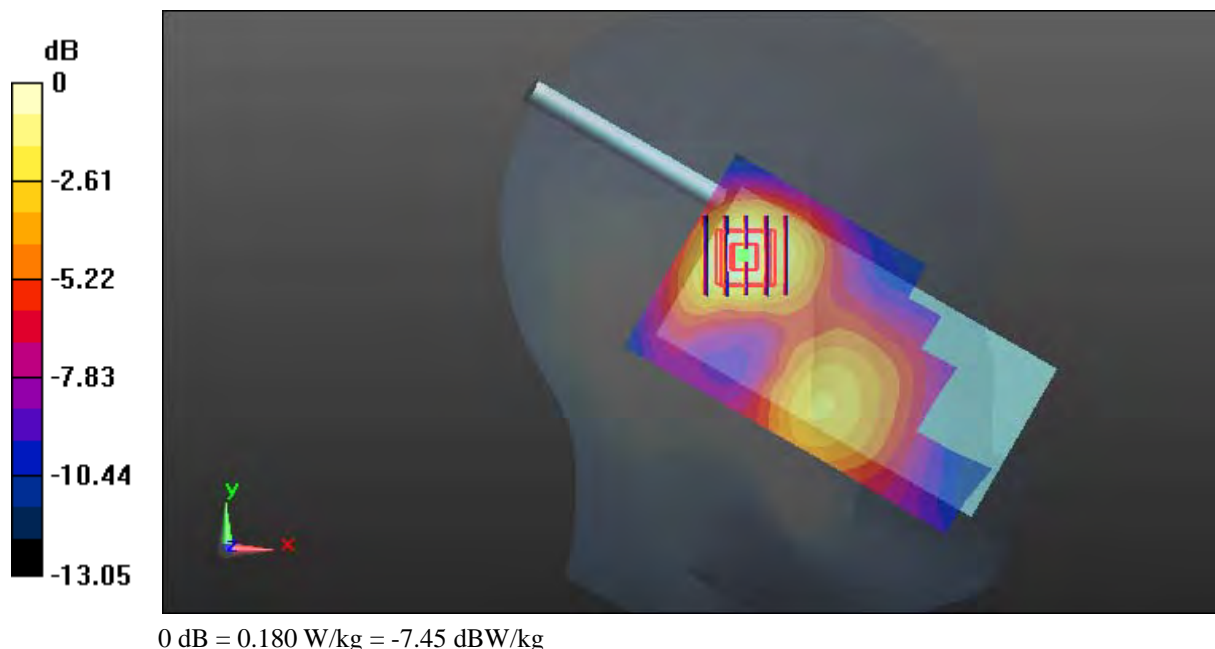

**Test Plot 20#: GSM 1900\_Head Right Cheek\_Middle****DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic GSM; Frequency: 1880 MHz; Duty Cycle: 1:8  
Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.36$  S/m;  $\epsilon_r = 40.47$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.93, 4.93, 4.93); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x61x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.178 W/kg


**Zoom Scan (6x6x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.725 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.228 W/kg

**SAR(1 g) = 0.169 W/kg; SAR(10 g) = 0.121 W/kg**

Maximum value of SAR (measured) = 0.178 W/kg

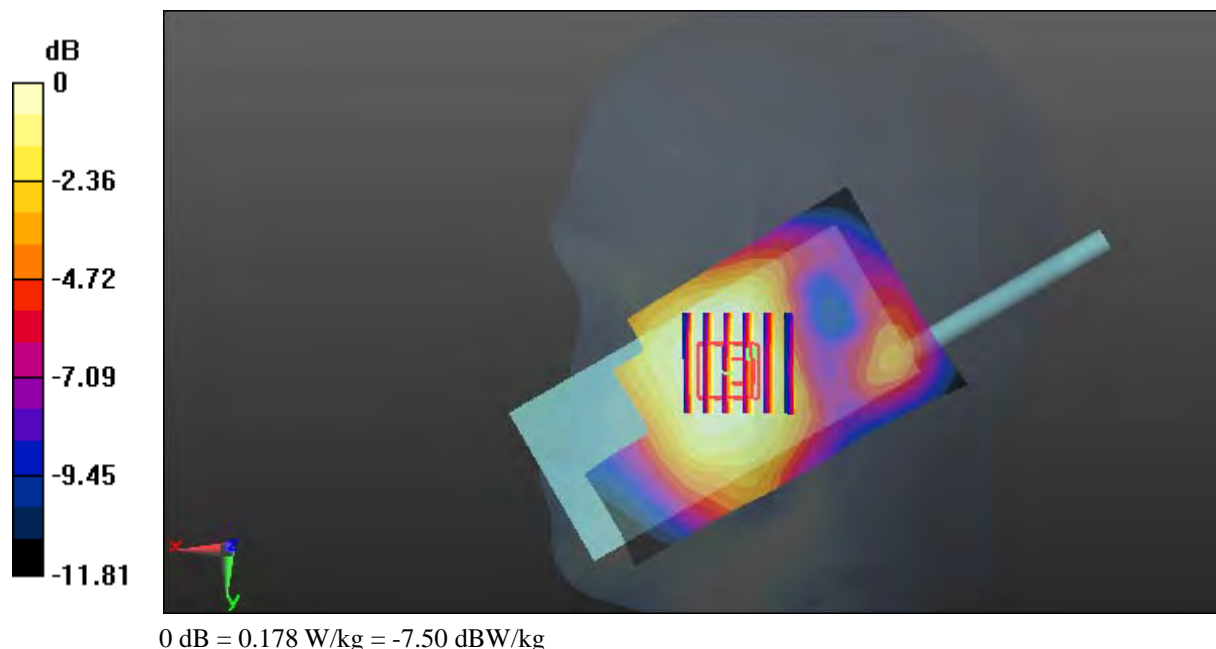

**Test Plot 21#: GSM 1900\_Head Right Tilt\_Middle****DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic GSM; Frequency: 1880 MHz; Duty Cycle: 1:8  
Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.36$  S/m;  $\epsilon_r = 40.47$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.93, 4.93, 4.93); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x61x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.109 W/kg


**Zoom Scan (6x6x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.488 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.135 W/kg

**SAR(1 g) = 0.094 W/kg; SAR(10 g) = 0.060 W/kg**

Maximum value of SAR (measured) = 0.101 W/kg

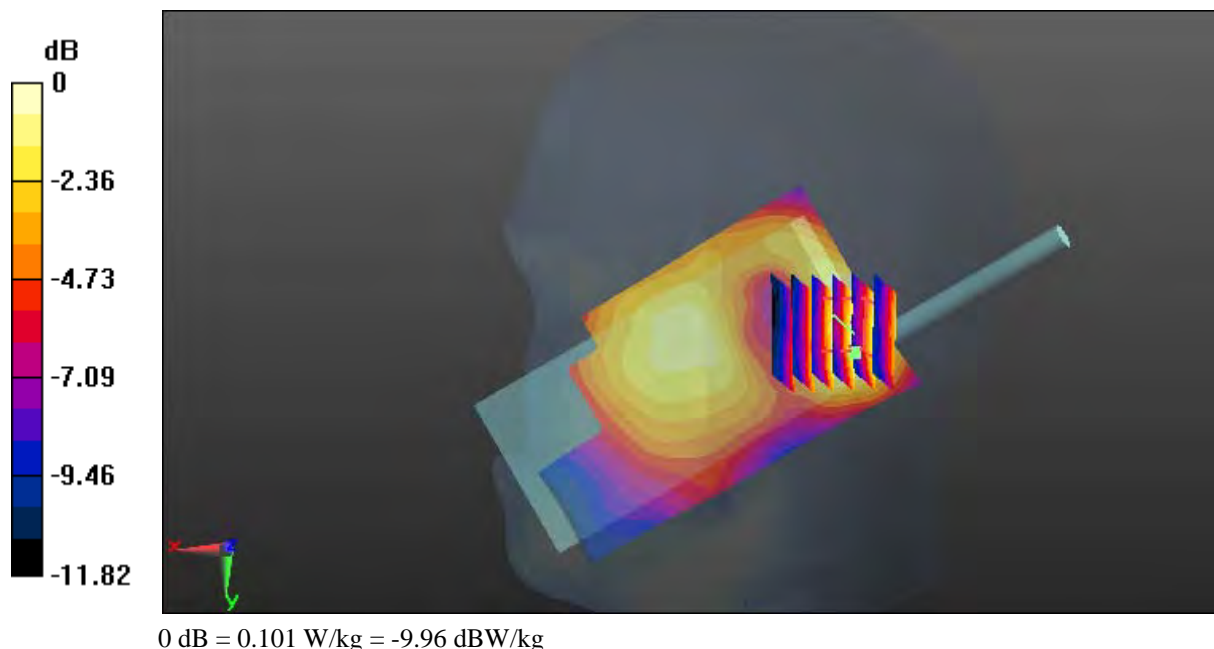

**Test Plot 22#: GSM 1900\_Face Up\_Middle****DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic GPRS-3 slots; Frequency: 1880 MHz; Duty Cycle: 1:2.66  
Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.36$  S/m;  $\epsilon_r = 40.47$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.93, 4.93, 4.93); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x61x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0758 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.951 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.0990 W/kg

**SAR(1 g) = 0.068 W/kg; SAR(10 g) = 0.045 W/kg**

Maximum value of SAR (measured) = 0.0732 W/kg

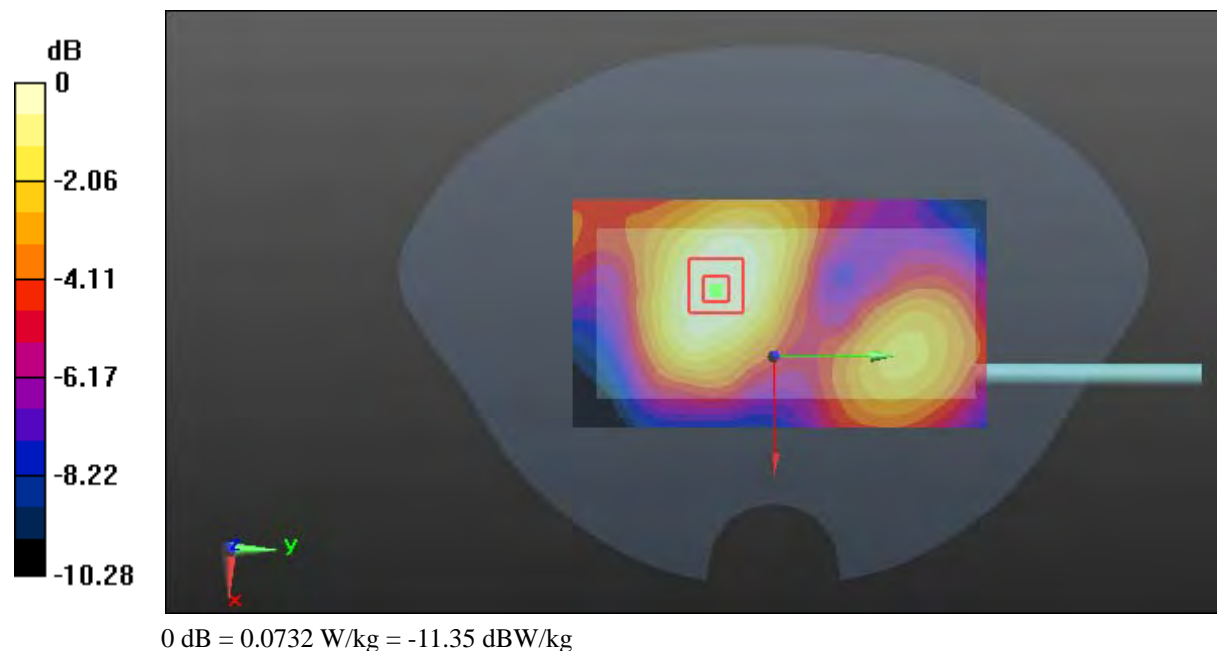

**Test Plot 23#: GSM 1900\_Body Worn Back\_Middle****DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic GSM; Frequency: 1880 MHz; Duty Cycle: 1:8  
Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.479$  S/m;  $\epsilon_r = 54.231$ ;  $\rho = 1000$  kg/m<sup>3</sup>;  
Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.65, 4.65, 4.65); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x61x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.103 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.160 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.132 W/kg

**SAR(1 g) = 0.093 W/kg; SAR(10 g) = 0.061 W/kg**

Maximum value of SAR (measured) = 0.100 W/kg

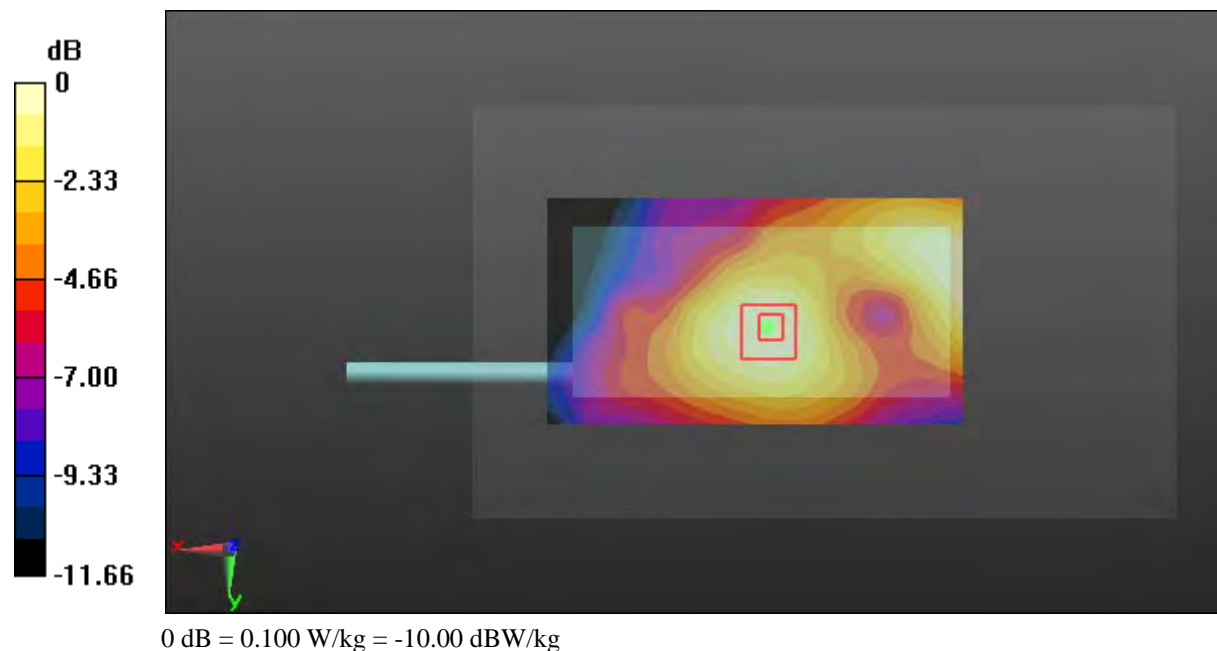

**Test Plot 24#: GSM 1900\_Body Front \_Middle****DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic GPRS-3 slots; Frequency: 1880 MHz; Duty Cycle: 1:2.66  
Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.479$  S/m;  $\epsilon_r = 54.231$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.65, 4.65, 4.65); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x61x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.149 W/kg


**Zoom Scan (7x6x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.783 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.226 W/kg

**SAR(1 g) = 0.138 W/kg; SAR(10 g) = 0.090 W/kg**

Maximum value of SAR (measured) = 0.149 W/kg

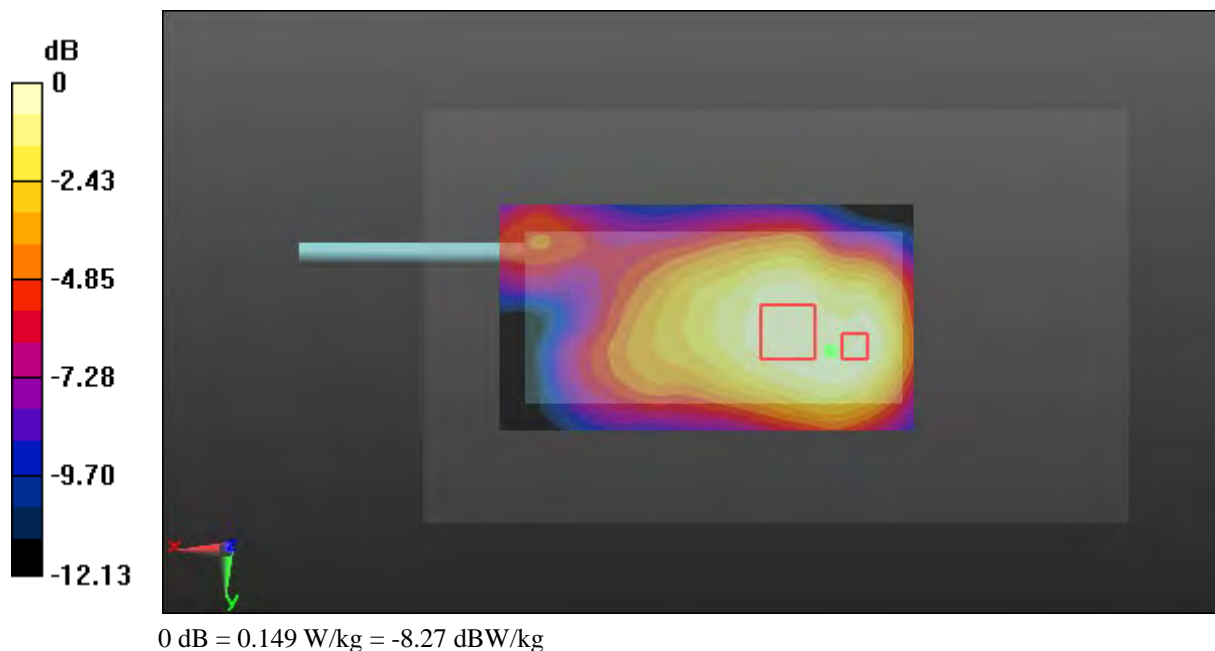



**Test Plot 25#: GSM 1900\_Body Back\_Middle**

**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic GPRS-3 slots; Frequency: 1880 MHz; Duty Cycle: 1:2.66  
 Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.479$  S/m;  $\epsilon_r = 54.231$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
 Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.65, 4.65, 4.65); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x61x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0984 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.635 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 0.137 W/kg

**SAR(1 g) = 0.087 W/kg; SAR(10 g) = 0.056 W/kg**

Maximum value of SAR (measured) = 0.0941 W/kg

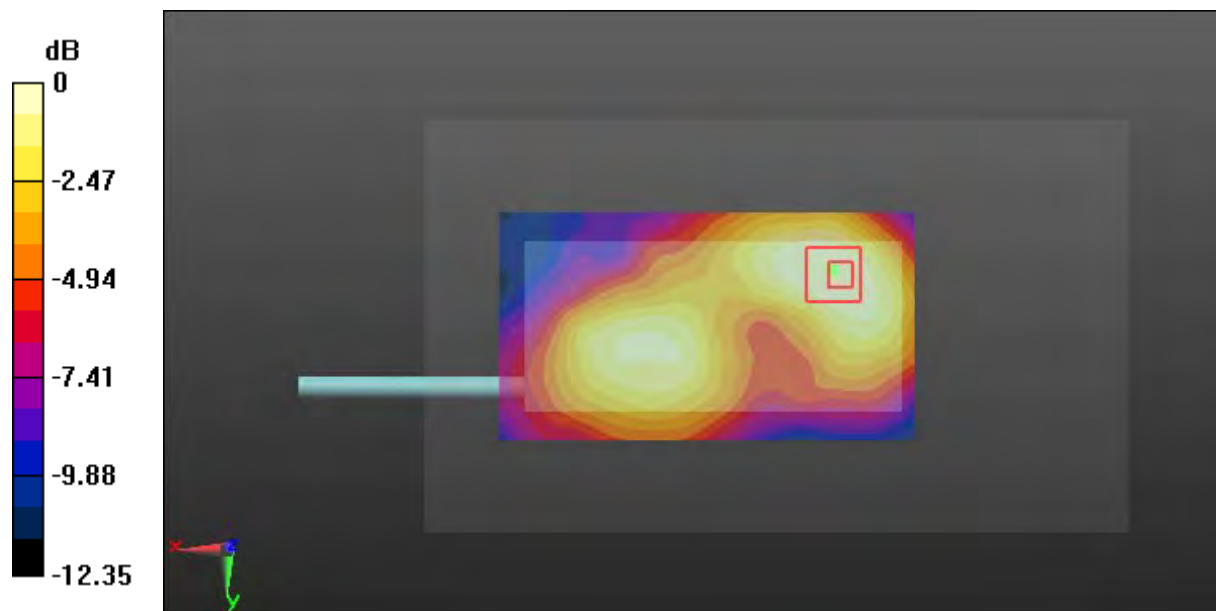

0 dB = 0.0941 W/kg = -10.26 dBW/kg

**Test Plot 26#: GSM 1900\_Body Left\_Middle**

**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic GPRS-3 slots; Frequency: 1880 MHz; Duty Cycle: 1:2.66  
 Medium parameters used:  $f = 1880 \text{ MHz}$ ;  $\sigma = 1.479 \text{ S/m}$ ;  $\epsilon_r = 54.231$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.65, 4.65, 4.65); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x51x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.182 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 11.15 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.268 W/kg

**SAR(1 g) = 0.170 W/kg; SAR(10 g) = 0.105 W/kg**

Maximum value of SAR (measured) = 0.184 W/kg

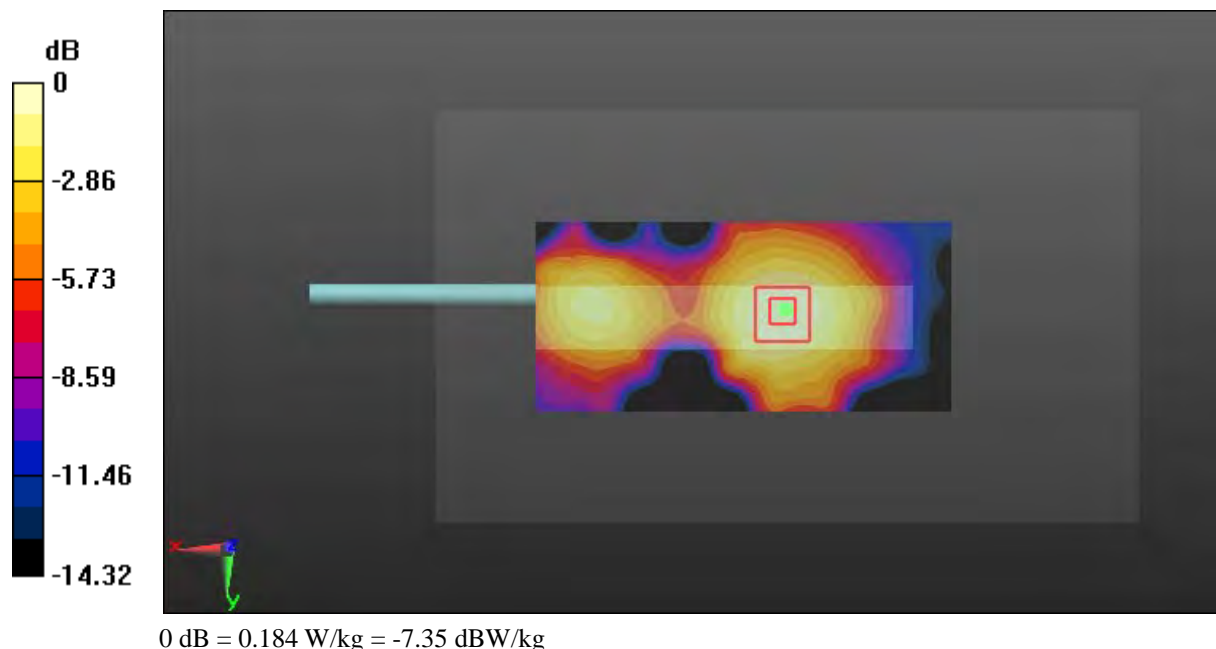

**Test Plot 27#: GSM 1900\_Body Right\_Middle**

**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic GPRS-3 slots; Frequency: 1880 MHz; Duty Cycle: 1:2.66  
 Medium parameters used:  $f = 1880 \text{ MHz}$ ;  $\sigma = 1.479 \text{ S/m}$ ;  $\epsilon_r = 54.231$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.65, 4.65, 4.65); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x51x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.0796 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 4.662 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 0.108 W/kg

**SAR(1 g) = 0.069 W/kg; SAR(10 g) = 0.043 W/kg**

Maximum value of SAR (measured) = 0.0768 W/kg

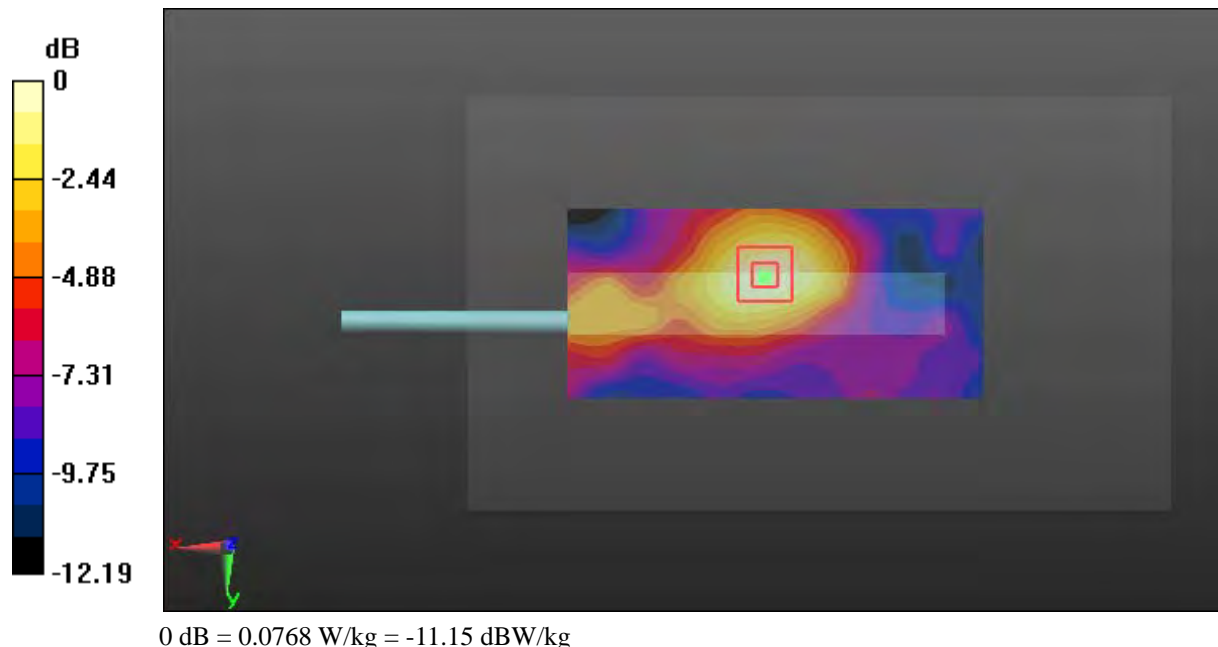

**Test Plot 28#: GSM 1900\_Body Bottom\_Low****DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic GPRS-3 slots; Frequency: 1850.2 MHz; Duty Cycle: 1:2.66  
Medium parameters used:  $f = 1850.2$  MHz;  $\sigma = 1.454$  S/m;  $\epsilon_r = 54.636$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.65, 4.65, 4.65); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (51x81x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.328 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.19 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.503 W/kg

**SAR(1 g) = 0.281 W/kg; SAR(10 g) = 0.154 W/kg**

Maximum value of SAR (measured) = 0.309 W/kg

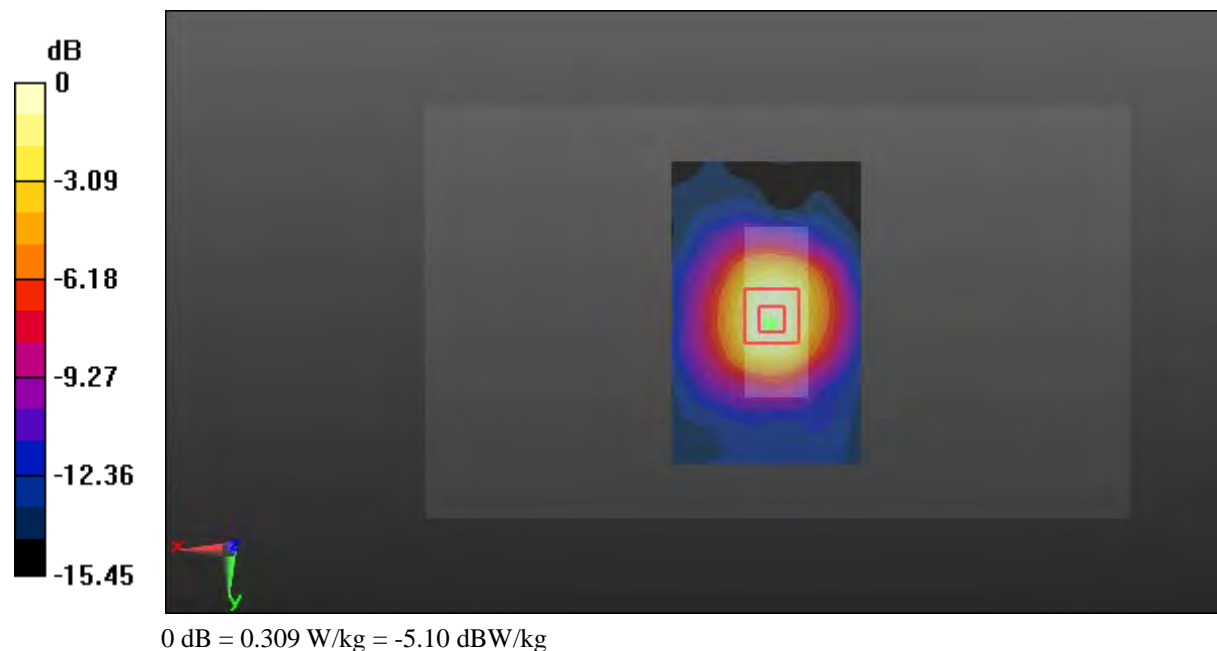

**Test Plot 29#: GSM 1900\_Body Bottom\_Middle**

**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic GPRS-3 slots; Frequency: 1880 MHz; Duty Cycle: 1:2.66  
 Medium parameters used:  $f = 1880 \text{ MHz}$ ;  $\sigma = 1.479 \text{ S/m}$ ;  $\epsilon_r = 54.231$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.65, 4.65, 4.65); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (51x81x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) =  $0.328 \text{ W/kg}$


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value =  $14.29 \text{ V/m}$ ; Power Drift =  $-0.16 \text{ dB}$

Peak SAR (extrapolated) =  $0.500 \text{ W/kg}$

**SAR(1 g) =  $0.283 \text{ W/kg}$ ; SAR(10 g) =  $0.159 \text{ W/kg}$**

Maximum value of SAR (measured) =  $0.308 \text{ W/kg}$

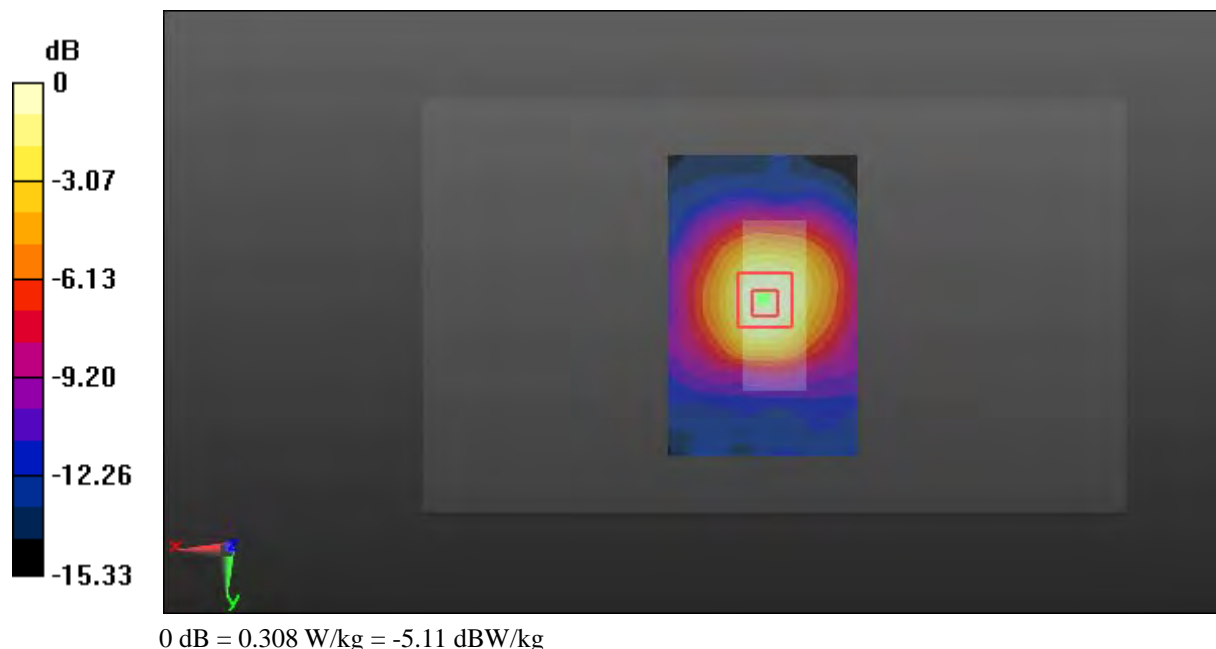

**Test Plot 30#: GSM 1900\_Body Bottom\_High**

**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic GPRS-3 slots; Frequency: 1909.8 MHz; Duty Cycle: 1:2.66  
 Medium parameters used:  $f = 1909.8 \text{ MHz}$ ;  $\sigma = 1.529 \text{ S/m}$ ;  $\epsilon_r = 54.103$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.65, 4.65, 4.65); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (51x81x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.331 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 14.53 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.525 W/kg

**SAR(1 g) = 0.293 W/kg; SAR(10 g) = 0.163 W/kg**

Maximum value of SAR (measured) = 0.319 W/kg

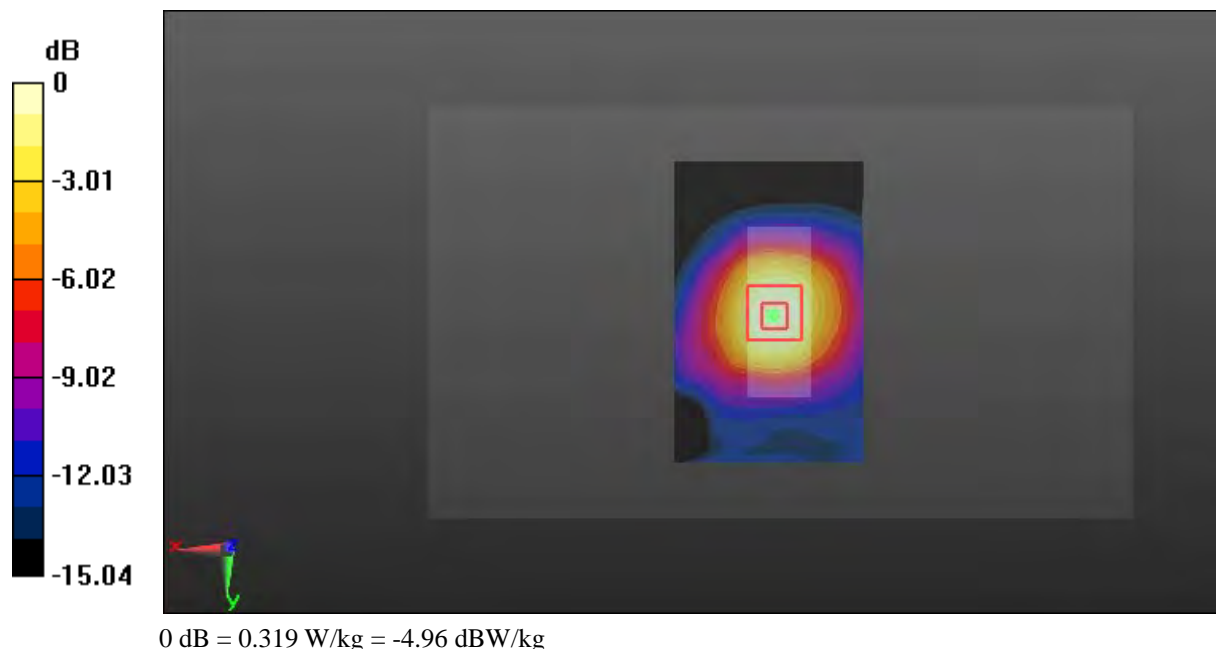

**Test Plot 31#: WCDMA Band 2\_Head Left Cheek\_Low****DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic WCDMA; Frequency: 1852.4 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 1852.4$  MHz;  $\sigma = 1.348$  S/m;  $\epsilon_r = 40.698$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.93, 4.93, 4.93); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x71x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.702 W/kg


**Zoom Scan (6x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.239 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 1.08 W/kg

**SAR(1 g) = 0.677 W/kg; SAR(10 g) = 0.426 W/kg**

Maximum value of SAR (measured) = 0.721 W/kg

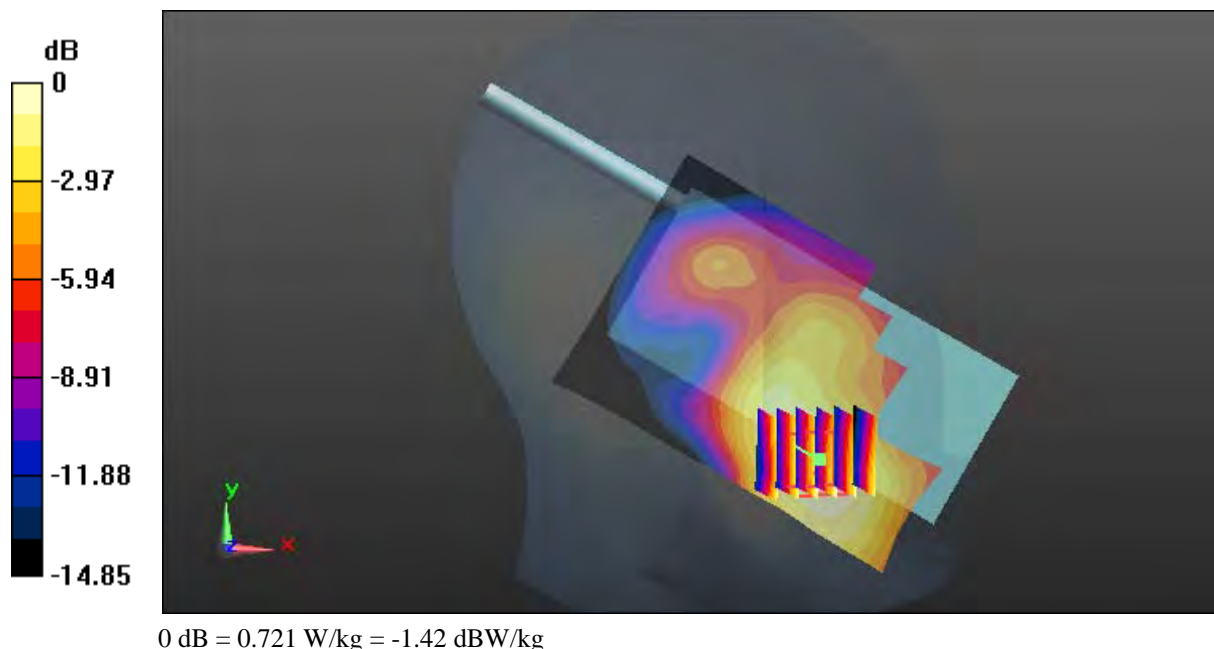

**Test Plot 32#: WCDMA Band 2\_Head Left Cheek\_Middle****DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic WCDMA; Frequency: 1880 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.36$  S/m;  $\epsilon_r = 40.47$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.93, 4.93, 4.93); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x71x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.689 W/kg


**Zoom Scan (6x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.784 V/m; Power Drift = -0.00 dB

Peak SAR (extrapolated) = 1.06 W/kg

**SAR(1 g) = 0.672 W/kg; SAR(10 g) = 0.418 W/kg**

Maximum value of SAR (measured) = 0.730 W/kg

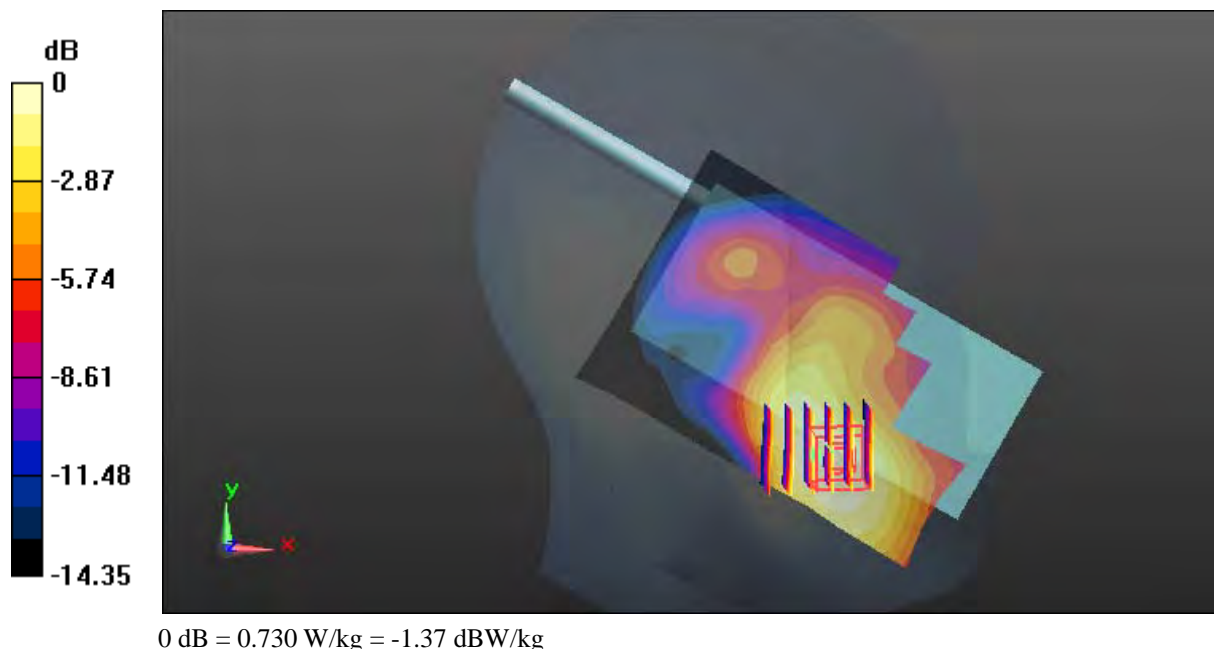



**Test Plot 33#: WCDMA Band 2\_Head Left Cheek\_High****DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic WCDMA; Frequency: 1907.6 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 1907.6$  MHz;  $\sigma = 1.398$  S/m;  $\epsilon_r = 40.355$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.93, 4.93, 4.93); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x71x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.654 W/kg


**Zoom Scan (6x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.983 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.992 W/kg

**SAR(1 g) = 0.613 W/kg; SAR(10 g) = 0.379 W/kg**

Maximum value of SAR (measured) = 0.652 W/kg

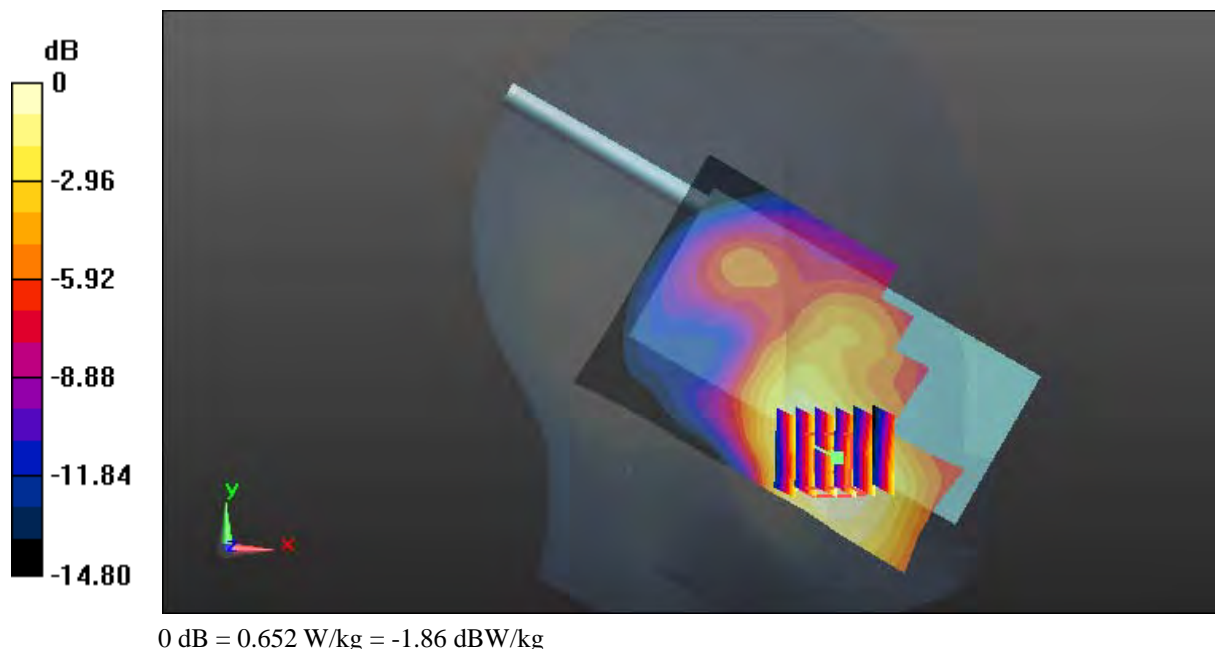

**Test Plot 34#: WCDMA Band 2\_Head Left Tilt\_Middle****DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic WCDMA; Frequency: 1880 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.36$  S/m;  $\epsilon_r = 40.47$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.93, 4.93, 4.93); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x61x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.397 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.68 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 0.552 W/kg

**SAR(1 g) = 0.346 W/kg; SAR(10 g) = 0.203 W/kg**

Maximum value of SAR (measured) = 0.378 W/kg

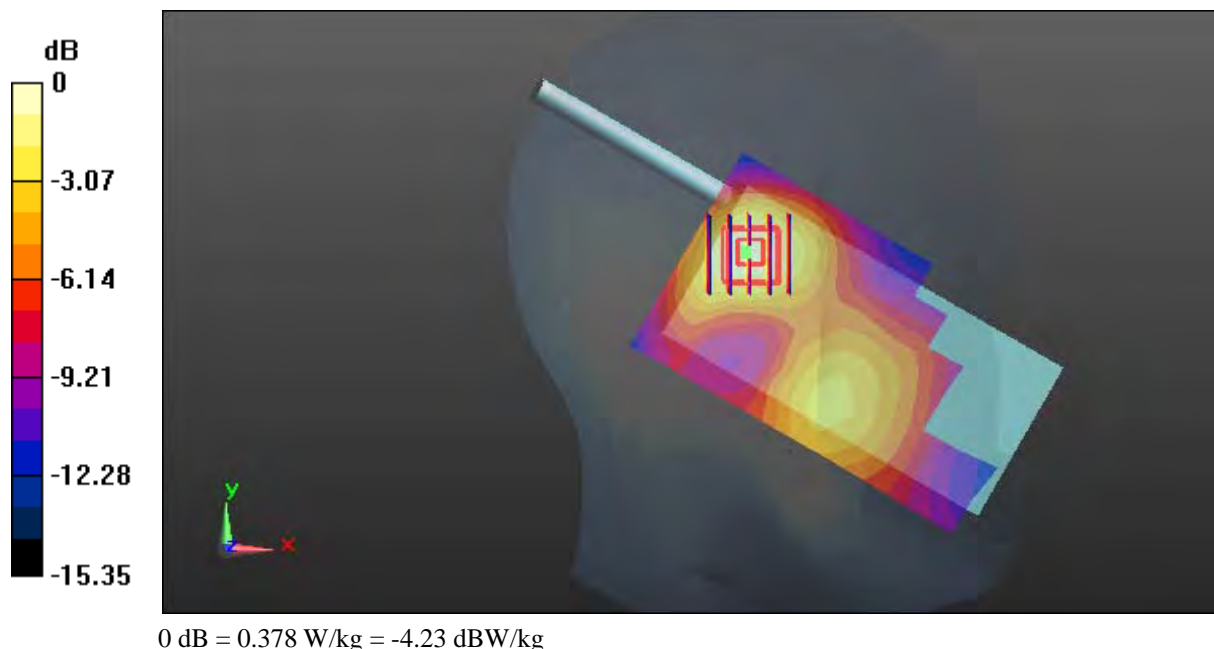

**Test Plot 35#: WCDMA Band 2\_Head Right Cheek\_Middle****DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic WCDMA; Frequency: 1880 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.36$  S/m;  $\epsilon_r = 40.47$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.93, 4.93, 4.93); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x61x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.367 W/kg


**Zoom Scan (6x6x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.288 V/m; Power Drift = 0.20 dB

Peak SAR (extrapolated) = 0.520 W/kg

**SAR(1 g) = 0.352 W/kg; SAR(10 g) = 0.239 W/kg**

Maximum value of SAR (measured) = 0.375 W/kg

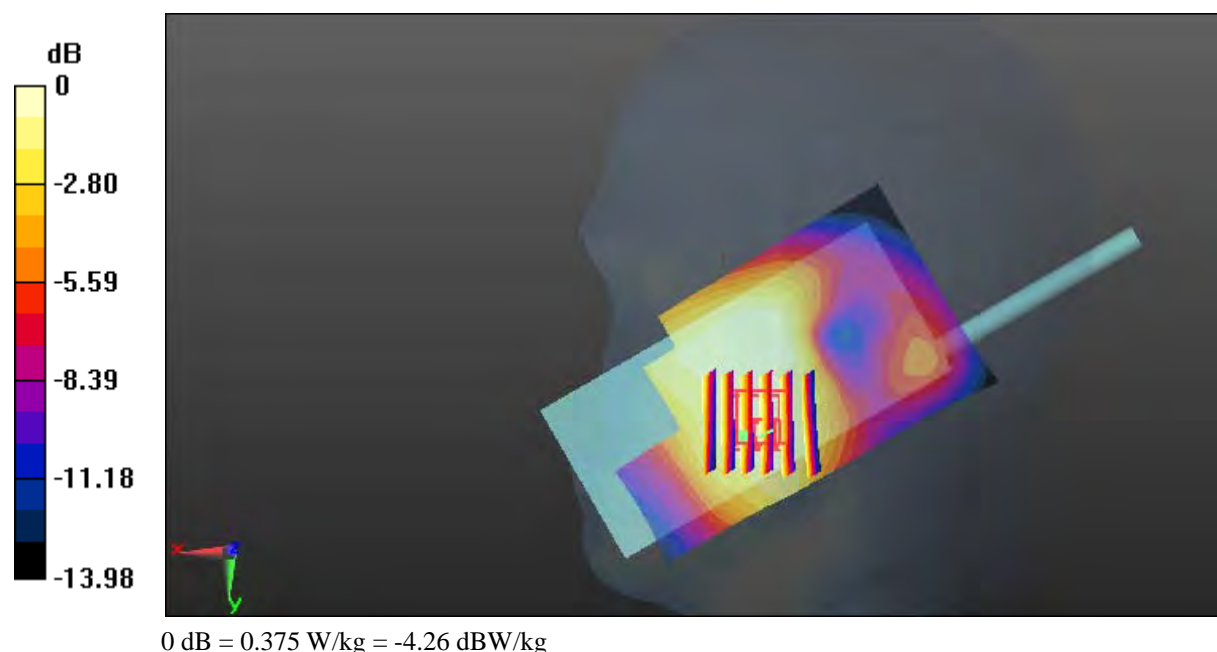

**Test Plot 36#: WCDMA Band 2\_Head Right Tilt\_Middle****DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic WCDMA; Frequency: 1880 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.36$  S/m;  $\epsilon_r = 40.47$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.93, 4.93, 4.93); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x61x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.244 W/kg


**Zoom Scan (6x6x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.180 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 0.297 W/kg

**SAR(1 g) = 0.196 W/kg; SAR(10 g) = 0.122 W/kg**

Maximum value of SAR (measured) = 0.210 W/kg

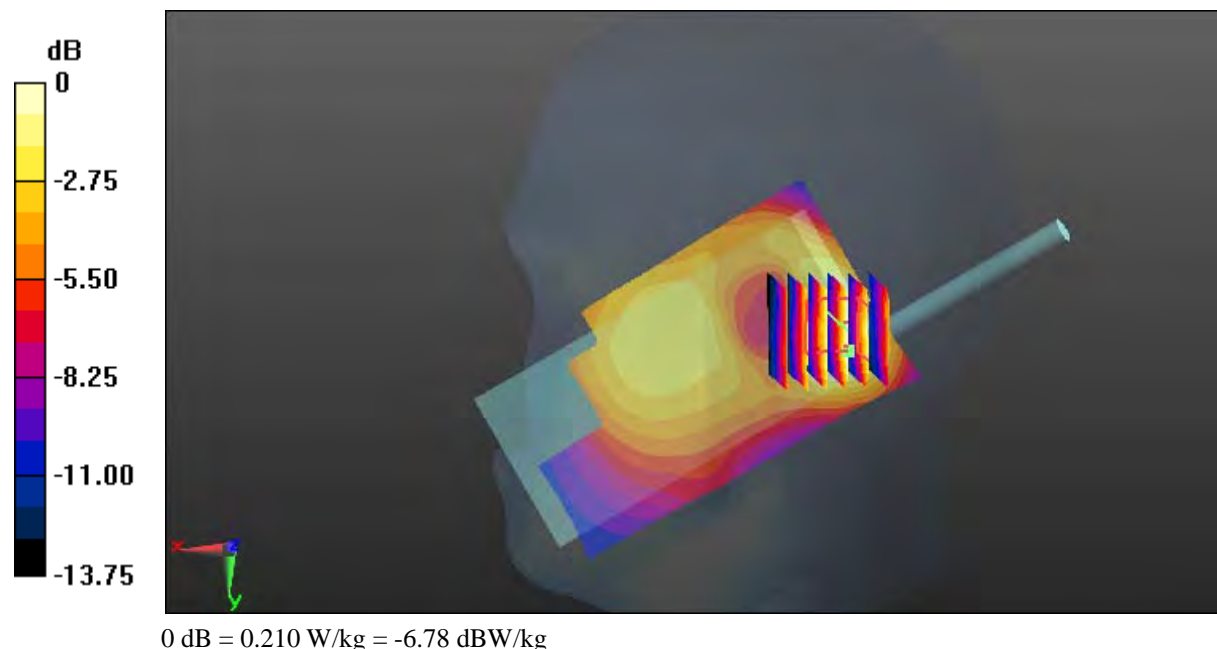

**Test Plot 37#: WCDMA Band 2\_Face Up\_Middle****DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic WCDMA; Frequency: 1880 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.36$  S/m;  $\epsilon_r = 40.47$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.93, 4.93, 4.93); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x61x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.304 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.06 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.412 W/kg

**SAR(1 g) = 0.274 W/kg; SAR(10 g) = 0.175 W/kg**

Maximum value of SAR (measured) = 0.295 W/kg

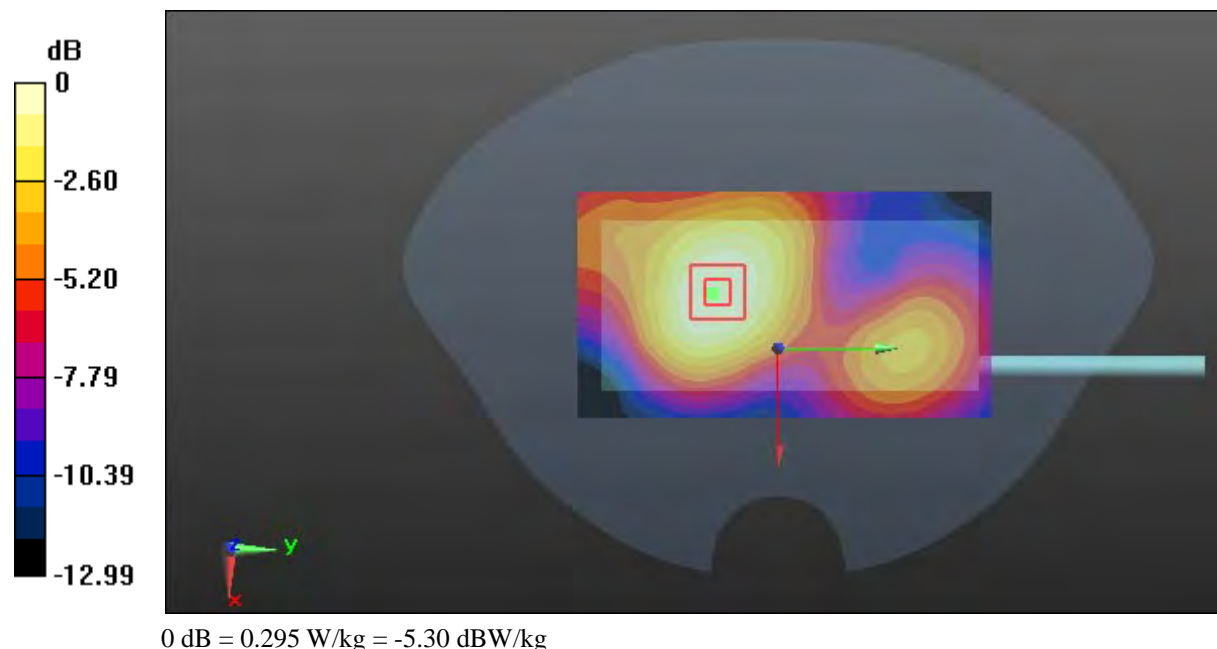

**Test Plot 38#: WCDMA Band 2\_Body Front \_Middle**

**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic WCDMA; Frequency: 1880 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 1880 \text{ MHz}$ ;  $\sigma = 1.479 \text{ S/m}$ ;  $\epsilon_r = 54.231$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.65, 4.65, 4.65); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x61x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.442 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 15.74 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.652 W/kg

**SAR(1 g) = 0.416 W/kg; SAR(10 g) = 0.267 W/kg**

Maximum value of SAR (measured) = 0.442 W/kg

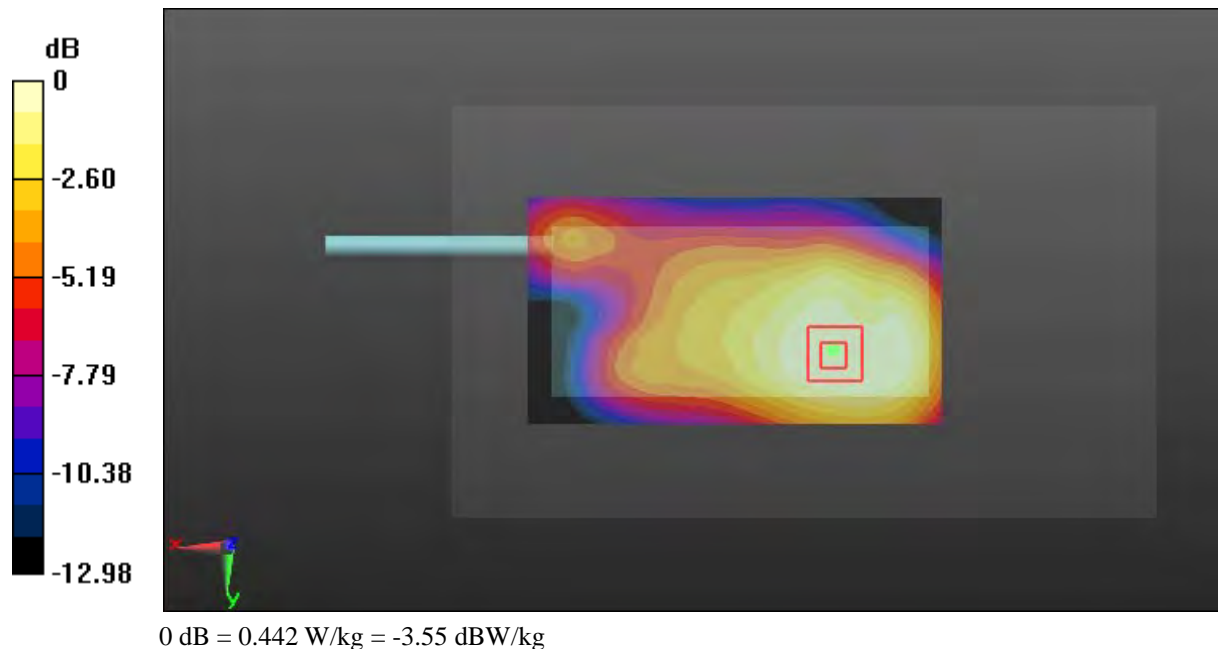

**Test Plot 39#: WCDMA Band 2\_Body Back\_Middle**

**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic WCDMA; Frequency: 1880 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 1880 \text{ MHz}$ ;  $\sigma = 1.479 \text{ S/m}$ ;  $\epsilon_r = 54.231$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.65, 4.65, 4.65); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x61x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.463 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 8.104 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.661 W/kg

**SAR(1 g) = 0.406 W/kg; SAR(10 g) = 0.245 W/kg**

Maximum value of SAR (measured) = 0.437 W/kg

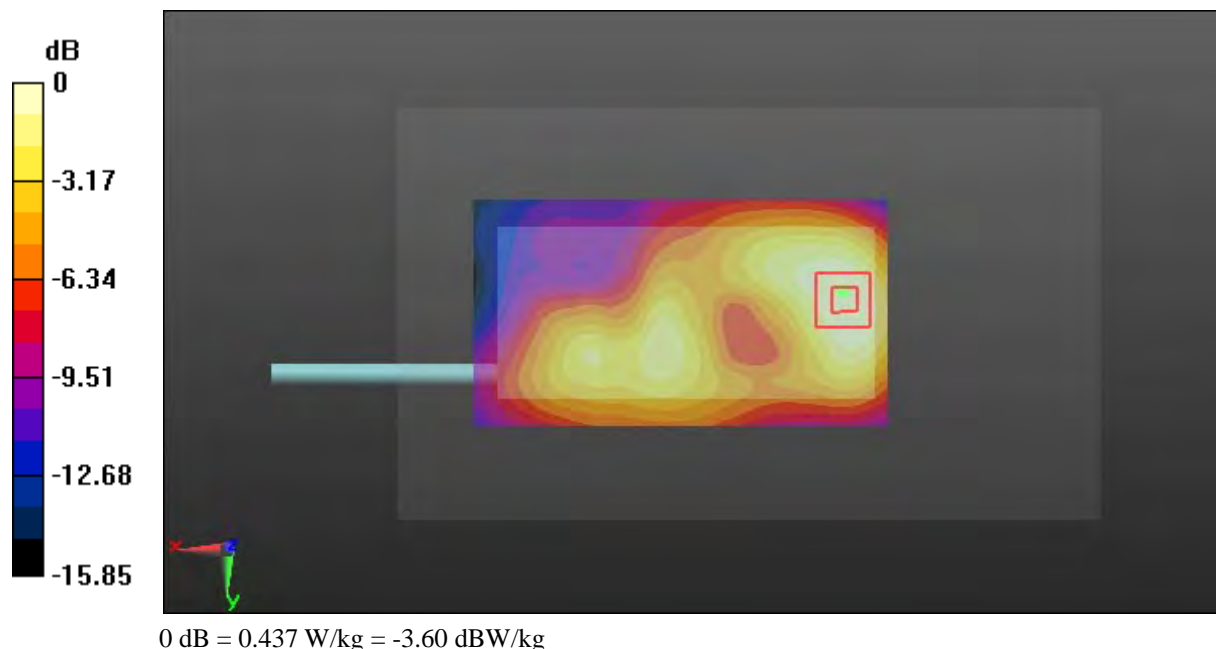

**Test Plot 40#: WCDMA Band 2\_Body Left\_Middle****DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic WCDMA; Frequency: 1880 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.479$  S/m;  $\epsilon_r = 54.231$ ;  $\rho = 1000$  kg/m<sup>3</sup>;  
Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.65, 4.65, 4.65); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x51x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.647 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 20.92 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.965 W/kg

**SAR(1 g) = 0.593 W/kg; SAR(10 g) = 0.359 W/kg**

Maximum value of SAR (measured) = 0.639 W/kg

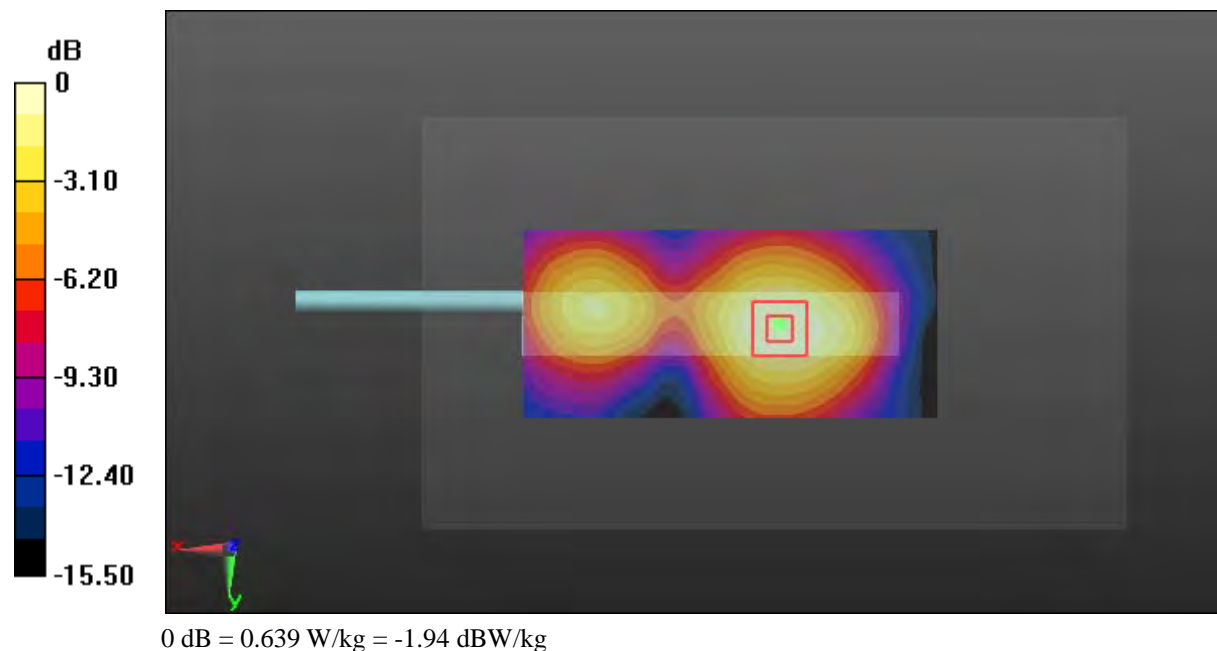



**Test Plot 41#: WCDMA Band 2\_Body Right\_Middle**

**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic WCDMA; Frequency: 1880 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 1880 \text{ MHz}$ ;  $\sigma = 1.479 \text{ S/m}$ ;  $\epsilon_r = 54.231$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.65, 4.65, 4.65); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x51x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.263 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 10.46 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 0.386 W/kg

**SAR(1 g) = 0.234 W/kg; SAR(10 g) = 0.139 W/kg**

Maximum value of SAR (measured) = 0.254 W/kg

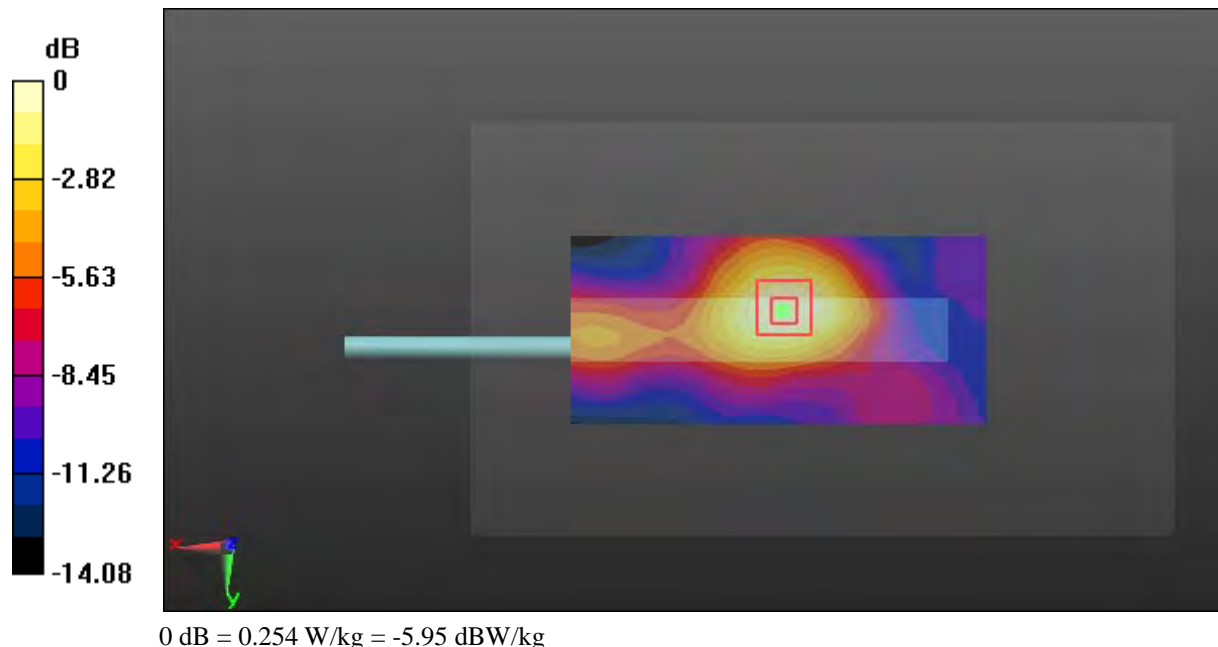

**Test Plot 42#: WCDMA Band 2\_Body Bottom\_Low**

**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic WCDMA; Frequency: 1852.4 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 1852.4 \text{ MHz}$ ;  $\sigma = 1.464 \text{ S/m}$ ;  $\epsilon_r = 54.598$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.65, 4.65, 4.65); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (51x81x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.866 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 23.27 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 1.32 W/kg

**SAR(1 g) = 0.731 W/kg; SAR(10 g) = 0.398 W/kg**

Maximum value of SAR (measured) = 0.797 W/kg

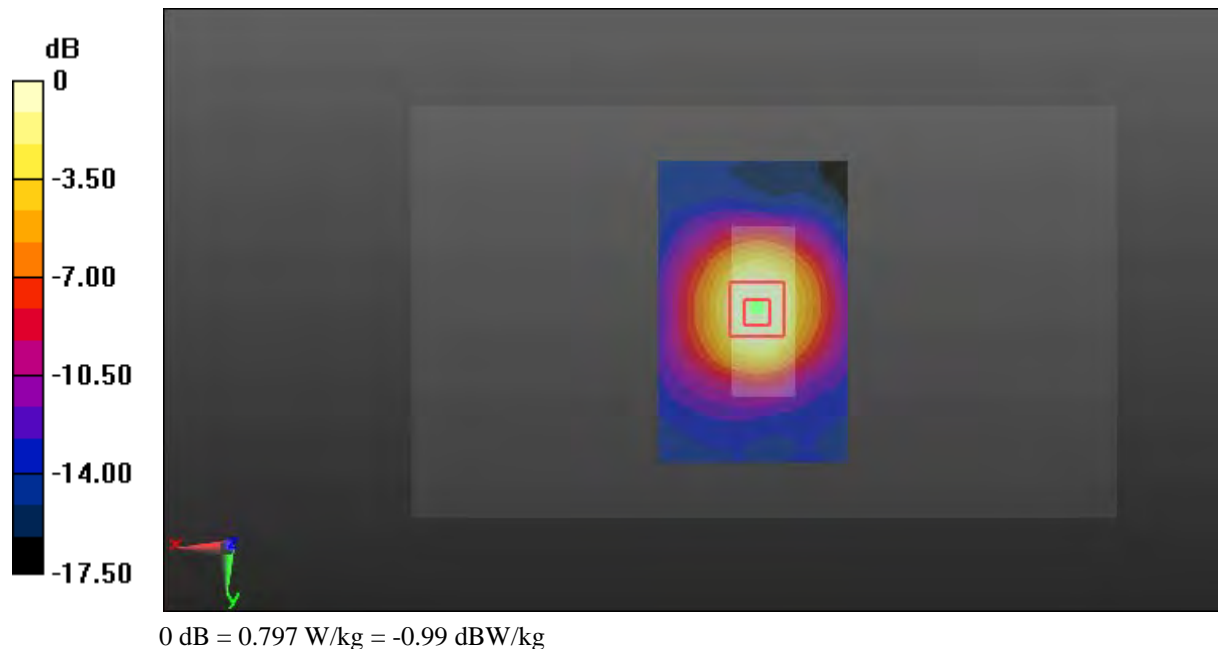

**Test Plot 43#: WCDMA Band 2\_Body Bottom\_Middle**

**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic WCDMA; Frequency: 1880 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 1880 \text{ MHz}$ ;  $\sigma = 1.479 \text{ S/m}$ ;  $\epsilon_r = 54.231$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.65, 4.65, 4.65); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (51x81x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.765 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 22.44 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 1.19 W/kg

**SAR(1 g) = 0.669 W/kg; SAR(10 g) = 0.370 W/kg**

Maximum value of SAR (measured) = 0.715 W/kg

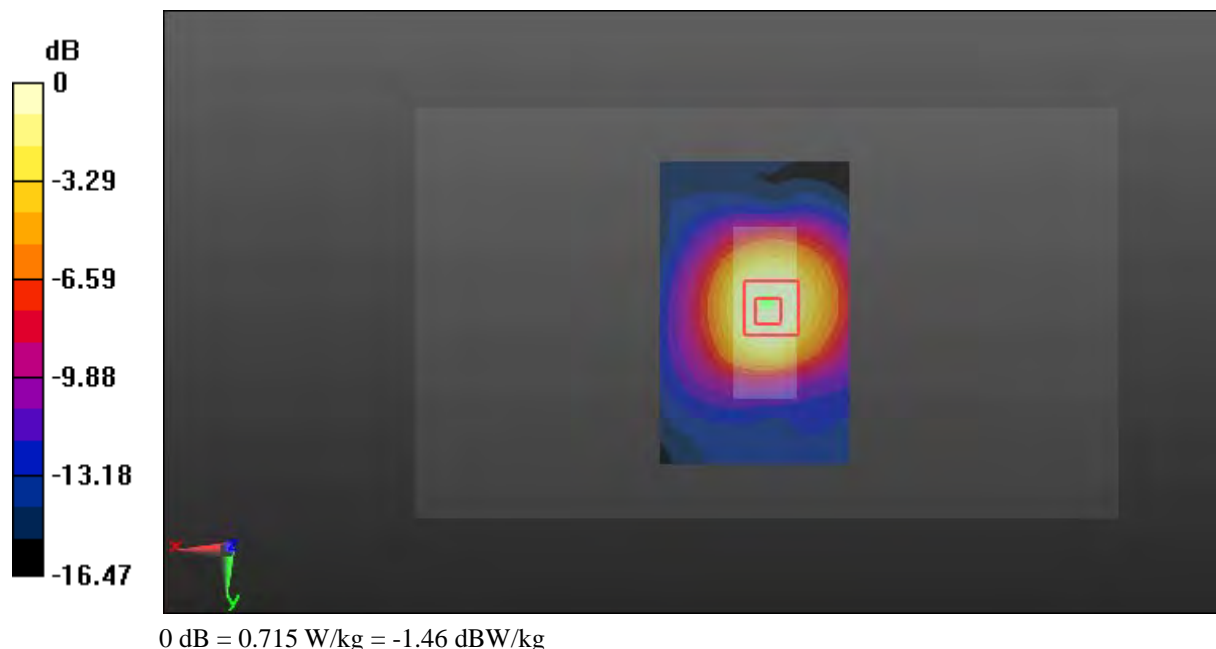

**Test Plot 44#: WCDMA Band 2\_Body Bottom\_High**

**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic WCDMA; Frequency: 1907.6 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 1907.6 \text{ MHz}$ ;  $\sigma = 1.516 \text{ S/m}$ ;  $\epsilon_r = 54.148$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.65, 4.65, 4.65); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (51x81x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.873 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 23.08 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 1.33 W/kg

**SAR(1 g) = 0.734 W/kg; SAR(10 g) = 0.405 W/kg**

Maximum value of SAR (measured) = 0.778 W/kg

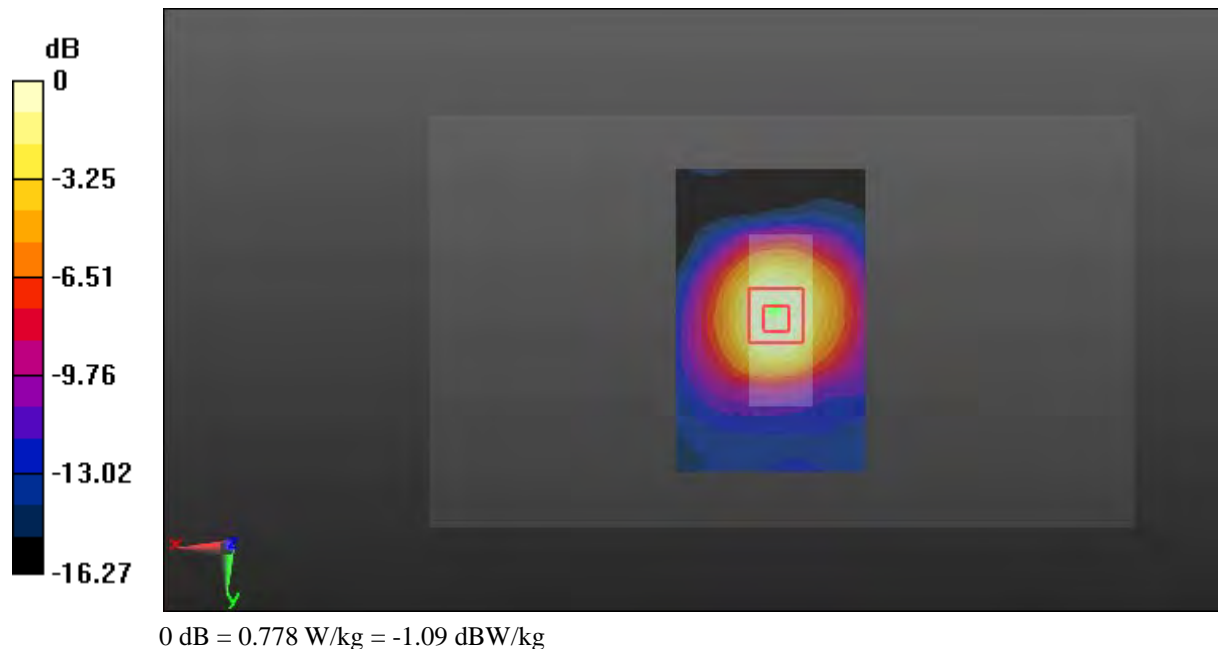

**Test Plot 45#: WCDMA Band 4\_Head Left Cheek\_Middle****DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic WCDMA; Frequency: 1732.6 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 1732.6$  MHz;  $\sigma = 1.341$  S/m;  $\epsilon_r = 41.215$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(5.13, 5.13, 5.13); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x71x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.202 W/kg


**Zoom Scan (5x6x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.120 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.266 W/kg

**SAR(1 g) = 0.190 W/kg; SAR(10 g) = 0.128 W/kg**

Maximum value of SAR (measured) = 0.203 W/kg

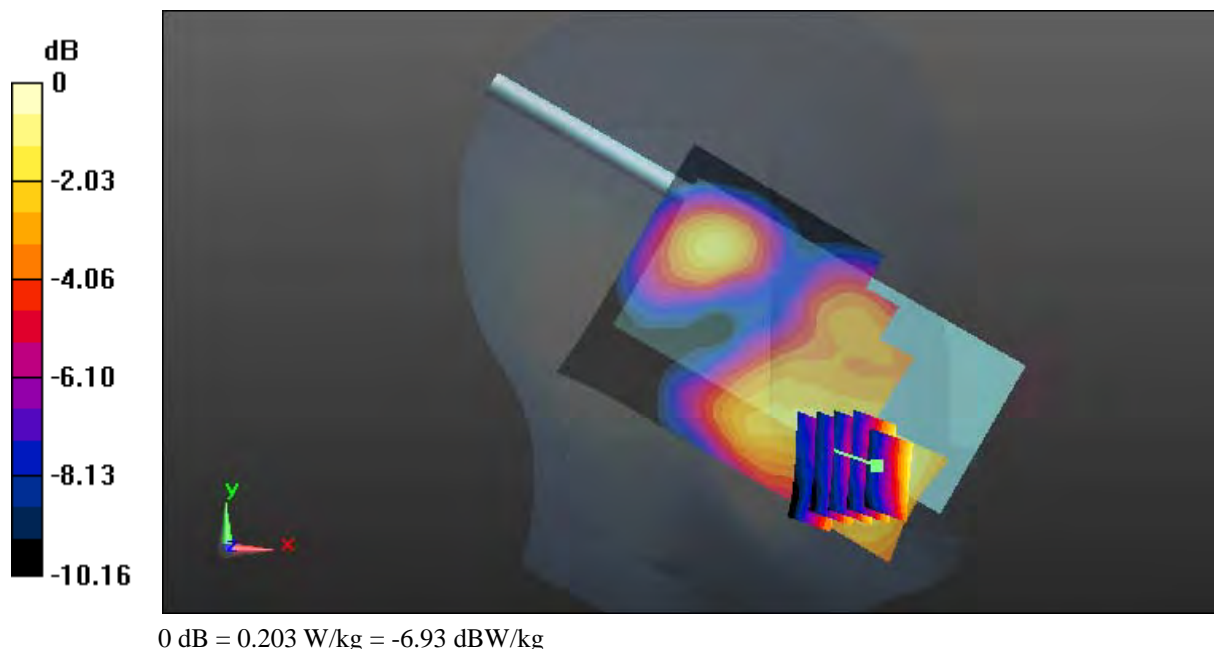

**Test Plot 46#: WCDMA Band 4\_Head Left Tilt\_Middle****DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic WCDMA; Frequency: 1732.6 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 1732.6$  MHz;  $\sigma = 1.341$  S/m;  $\epsilon_r = 41.215$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(5.13, 5.13, 5.13); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x61x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.130 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.629 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.151 W/kg

**SAR(1 g) = 0.117 W/kg; SAR(10 g) = 0.077 W/kg**

Maximum value of SAR (measured) = 0.127 W/kg

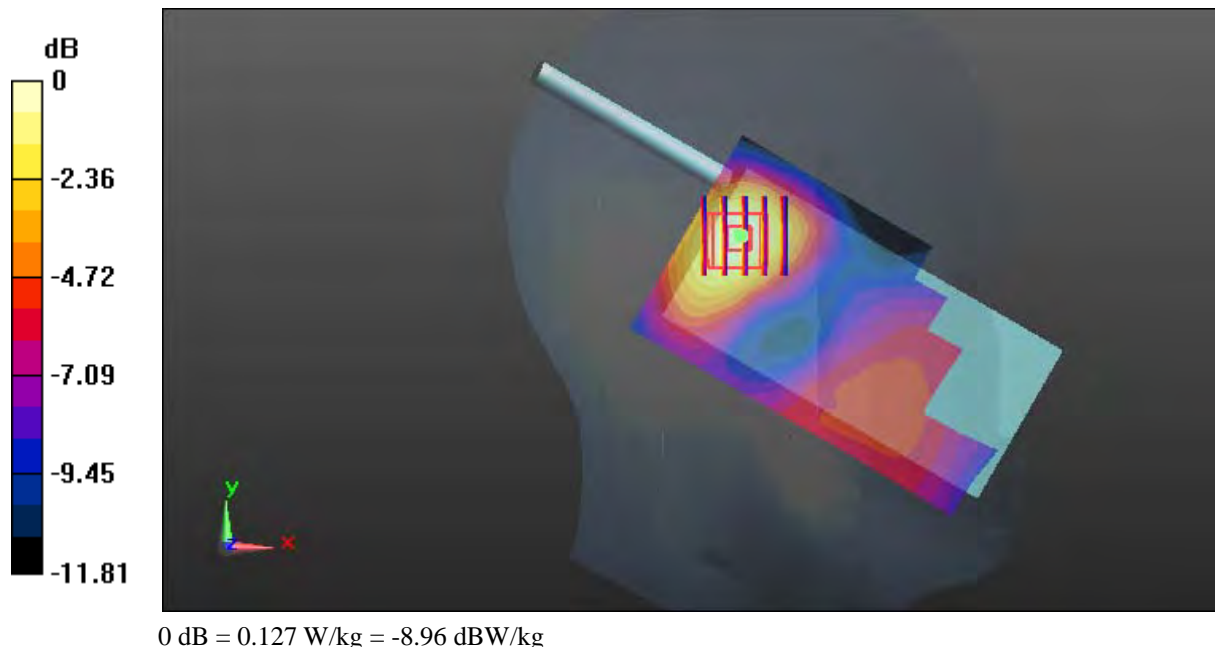

**Test Plot 47#: WCDMA Band 4\_Head Right Cheek\_Middle****DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic WCDMA; Frequency: 1732.6 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 1732.6$  MHz;  $\sigma = 1.341$  S/m;  $\epsilon_r = 41.215$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(5.13, 5.13, 5.13); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x61x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.163 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.676 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.224 W/kg

**SAR(1 g) = 0.148 W/kg; SAR(10 g) = 0.105 W/kg**

Maximum value of SAR (measured) = 0.158 W/kg

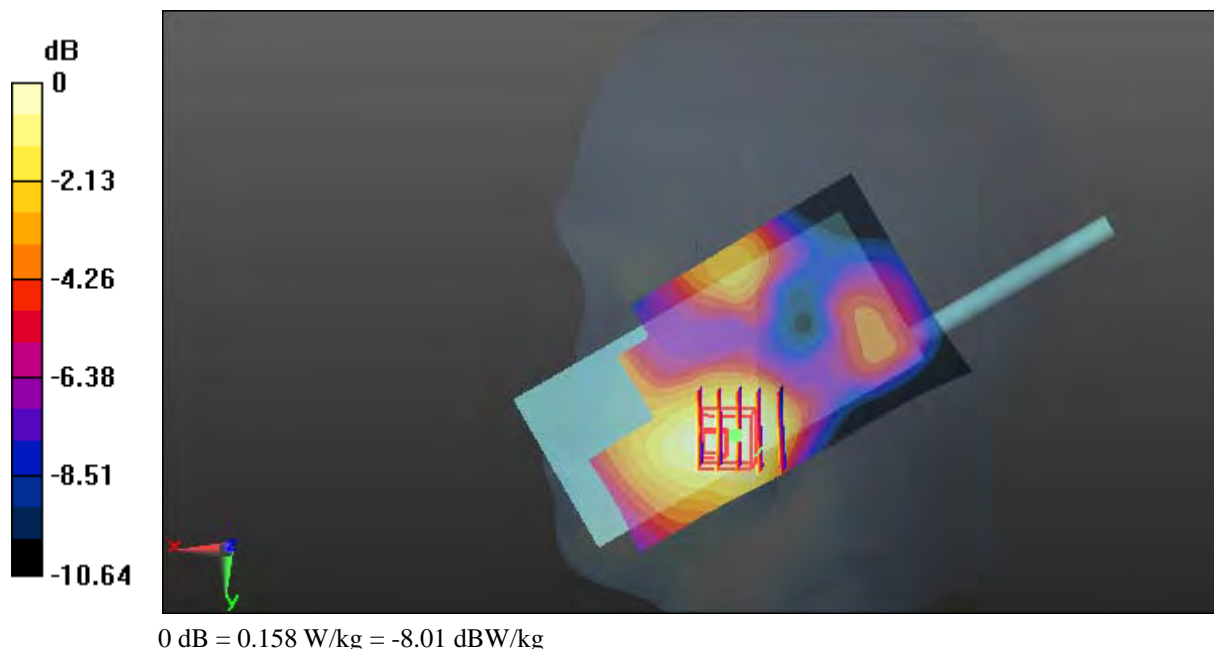

**Test Plot 48#: WCDMA Band 4\_Head Right Tilt\_Middle****DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic WCDMA; Frequency: 1732.6 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 1732.6$  MHz;  $\sigma = 1.341$  S/m;  $\epsilon_r = 41.215$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(5.13, 5.13, 5.13); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x61x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0975 W/kg


**Zoom Scan (6x6x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.525 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 0.105 W/kg

**SAR(1 g) = 0.077 W/kg; SAR(10 g) = 0.053 W/kg**

Maximum value of SAR (measured) = 0.0821 W/kg

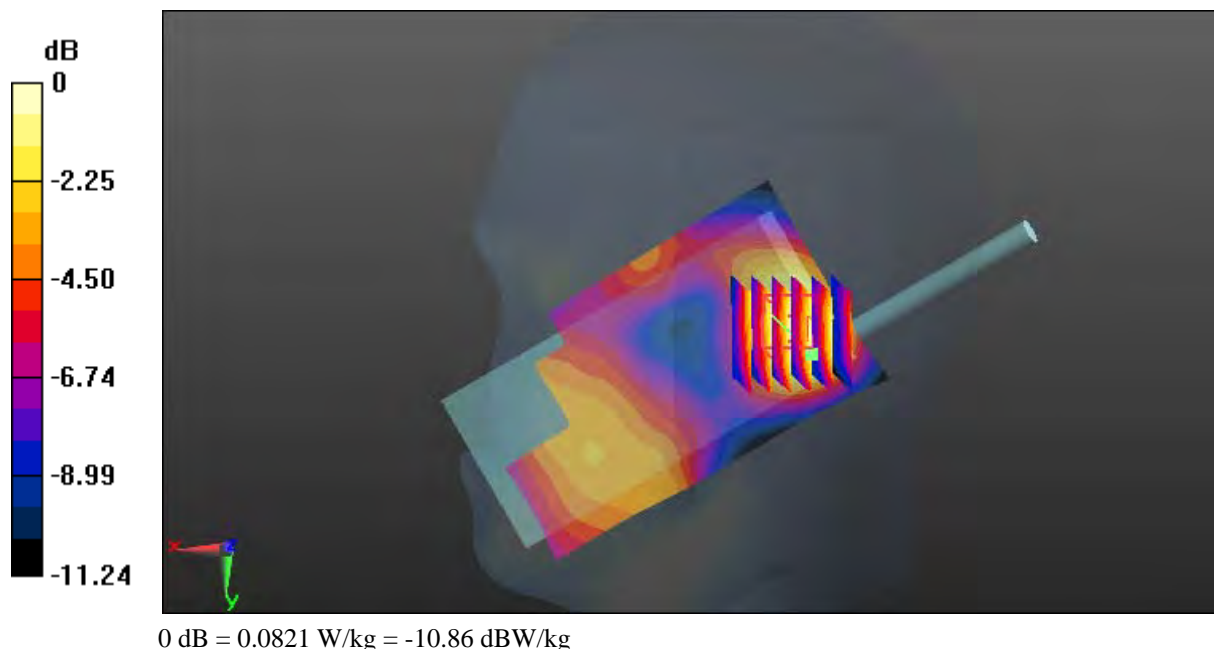



**Test Plot 49#: WCDMA Band 4\_Face Up\_Low**

**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic WCDMA; Frequency: 1712.4 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 1712.4 \text{ MHz}$ ;  $\sigma = 1.319 \text{ S/m}$ ;  $\epsilon_r = 41.364$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(5.13, 5.13, 5.13); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x61x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.267 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 8.093 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.358 W/kg

**SAR(1 g) = 0.254 W/kg; SAR(10 g) = 0.173 W/kg**

Maximum value of SAR (measured) = 0.271 W/kg

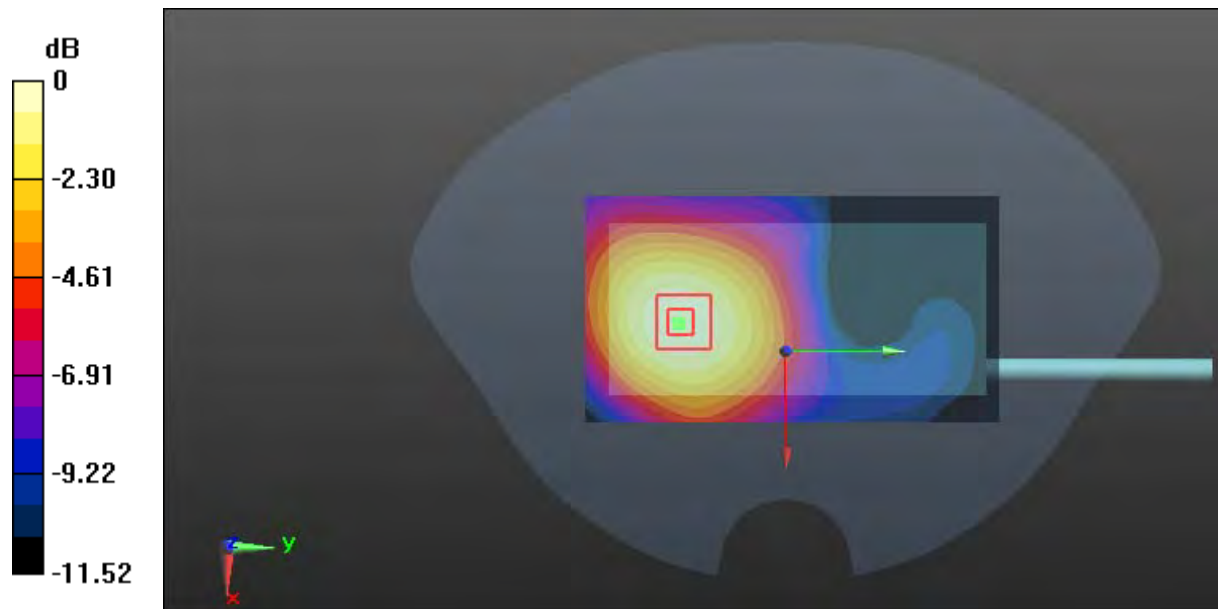

0 dB = 0.271 W/kg = -5.67 dBW/kg

**Test Plot 50#: WCDMA Band 4\_Face Up\_Middle**

**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic WCDMA; Frequency: 1732.6 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 1732.6 \text{ MHz}$ ;  $\sigma = 1.528 \text{ S/m}$ ;  $\epsilon_r = 52.811$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(5.13, 5.13, 5.13); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x61x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.227 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 7.756 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.298 W/kg

**SAR(1 g) = 0.217 W/kg; SAR(10 g) = 0.149 W/kg**

Maximum value of SAR (measured) = 0.232 W/kg

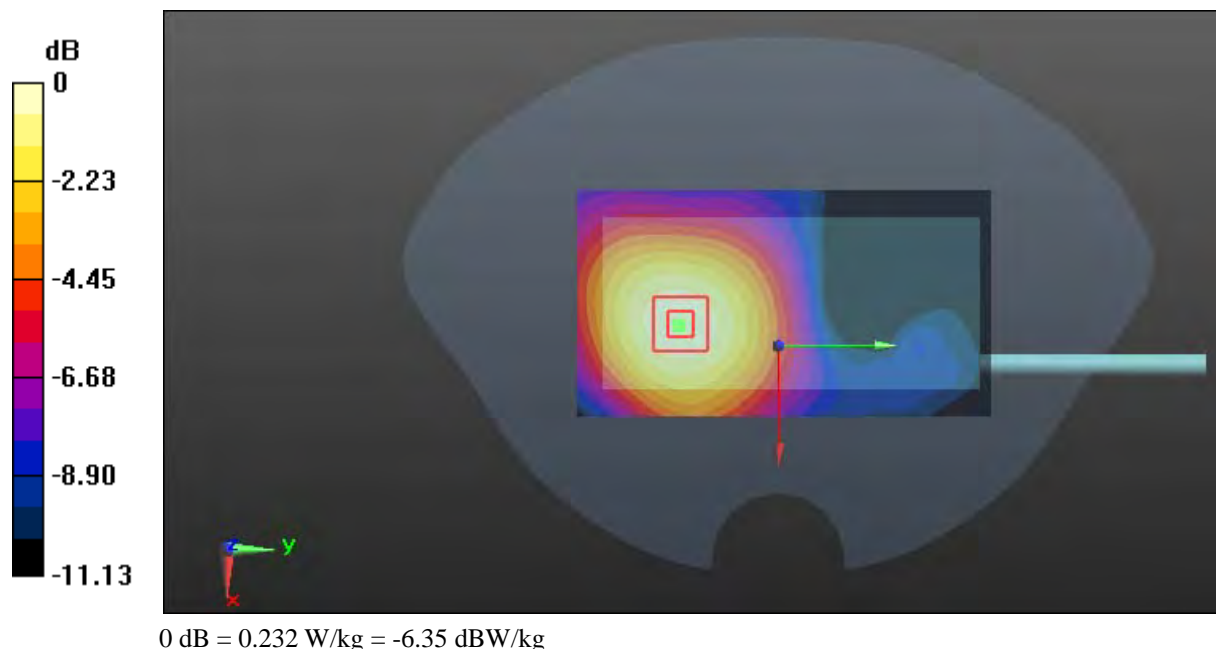

**Test Plot 51#: WCDMA Band 4\_Face Up\_High**

**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic WCDMA; Frequency: 1752.6 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 1752.6 \text{ MHz}$ ;  $\sigma = 1.366 \text{ S/m}$ ;  $\epsilon_r = 41.021$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(5.13, 5.13, 5.13); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);


**Area Scan (111x61x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) = 0.280 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value = 9.412 V/m; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 0.382 W/kg

**SAR(1 g) = 0.265 W/kg; SAR(10 g) = 0.180 W/kg**

Maximum value of SAR (measured) = 0.283 W/kg

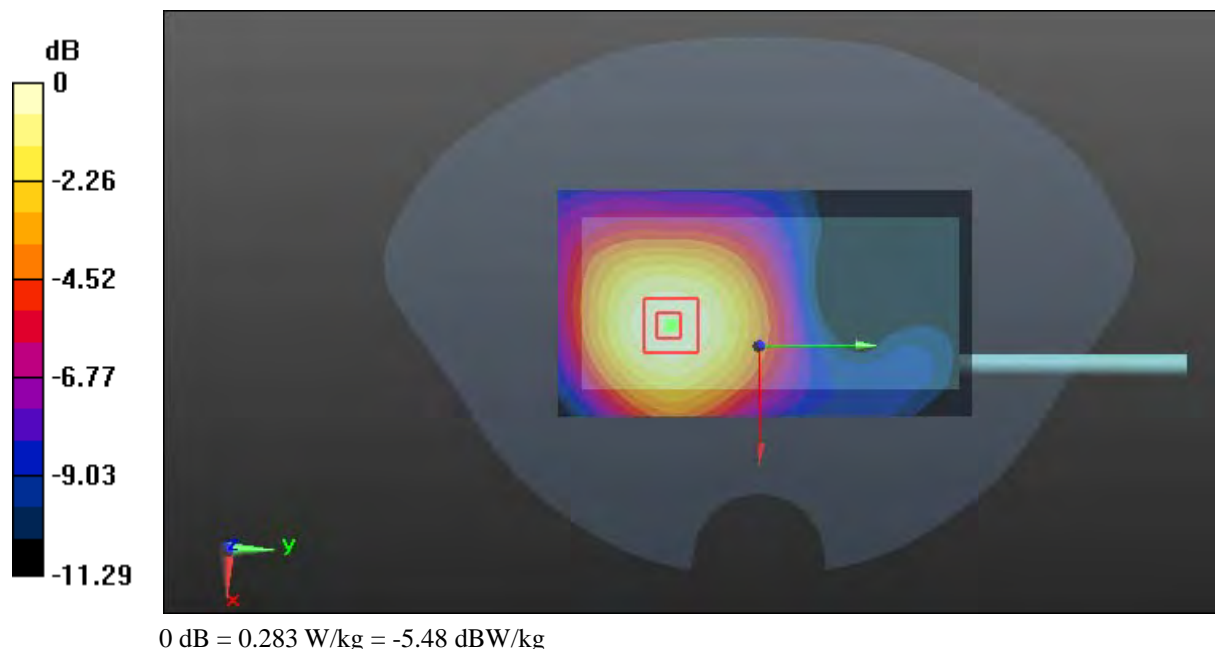

**Test Plot 52#: WCDMA Band 4\_Body Front \_Middle****DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic WCDMA; Frequency: 1732.6 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 1732.6$  MHz;  $\sigma = 1.528$  S/m;  $\epsilon_r = 52.811$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.84, 4.84, 4.84); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x61x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.607 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.97 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 0.883 W/kg

**SAR(1 g) = 0.560 W/kg; SAR(10 g) = 0.345 W/kg**

Maximum value of SAR (measured) = 0.607 W/kg

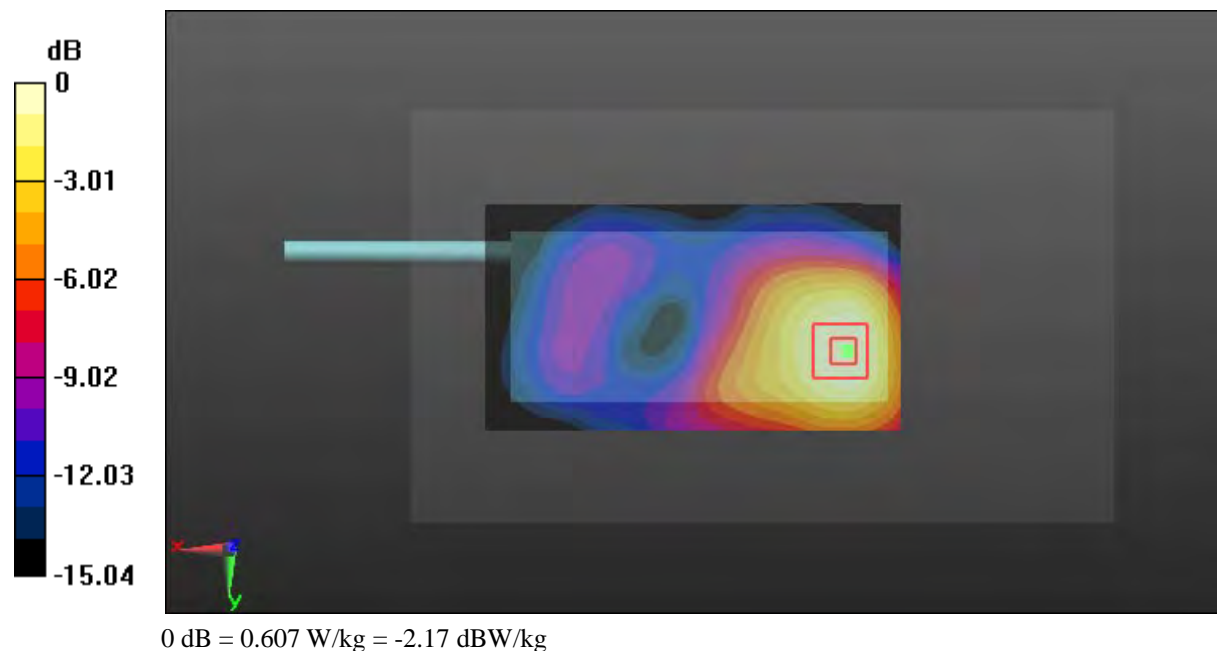

**Test Plot 53#: WCDMA Band 4\_Body Back\_Middle****DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic WCDMA; Frequency: 1732.6 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 1732.6$  MHz;  $\sigma = 1.528$  S/m;  $\epsilon_r = 52.811$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.84, 4.84, 4.84); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x61x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.384 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.92 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.515 W/kg

**SAR(1 g) = 0.350 W/kg; SAR(10 g) = 0.231 W/kg**

Maximum value of SAR (measured) = 0.374 W/kg

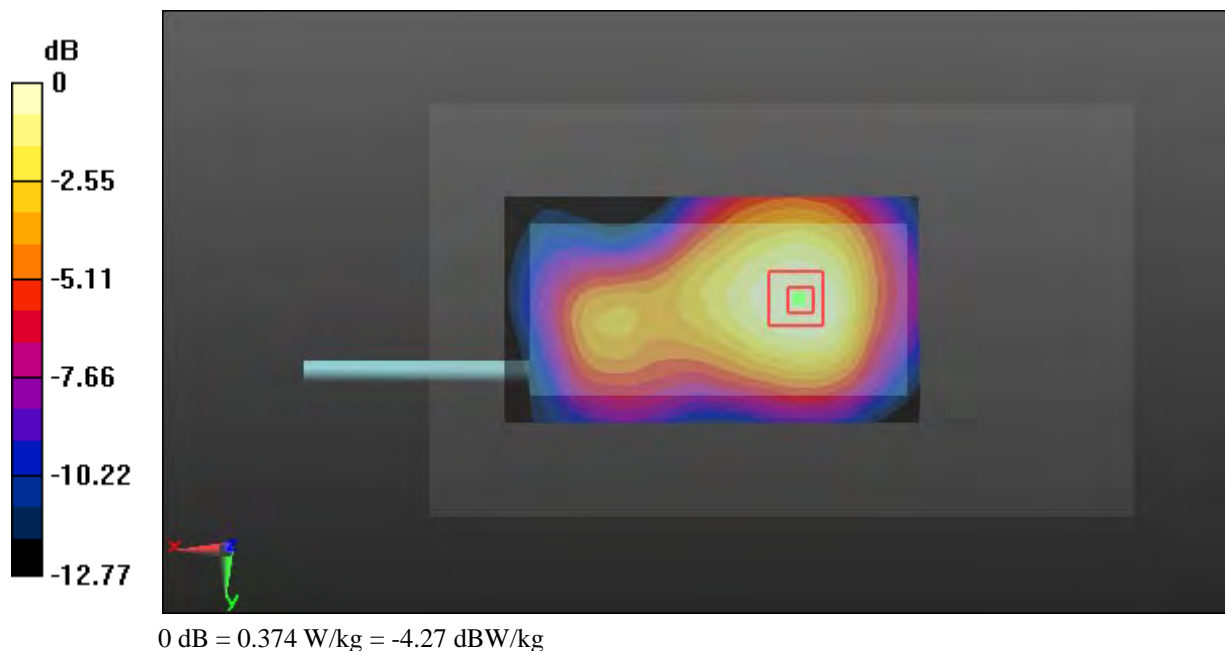

**Test Plot 54#: WCDMA Band 4\_Body Left\_Middle**

**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic WCDMA; Frequency: 1732.6 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 1732.6 \text{ MHz}$ ;  $\sigma = 1.528 \text{ S/m}$ ;  $\epsilon_r = 52.811$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.84, 4.84, 4.84); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x51x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.389 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 16.47 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.555 W/kg

**SAR(1 g) = 0.358 W/kg; SAR(10 g) = 0.225 W/kg**

Maximum value of SAR (measured) = 0.387 W/kg

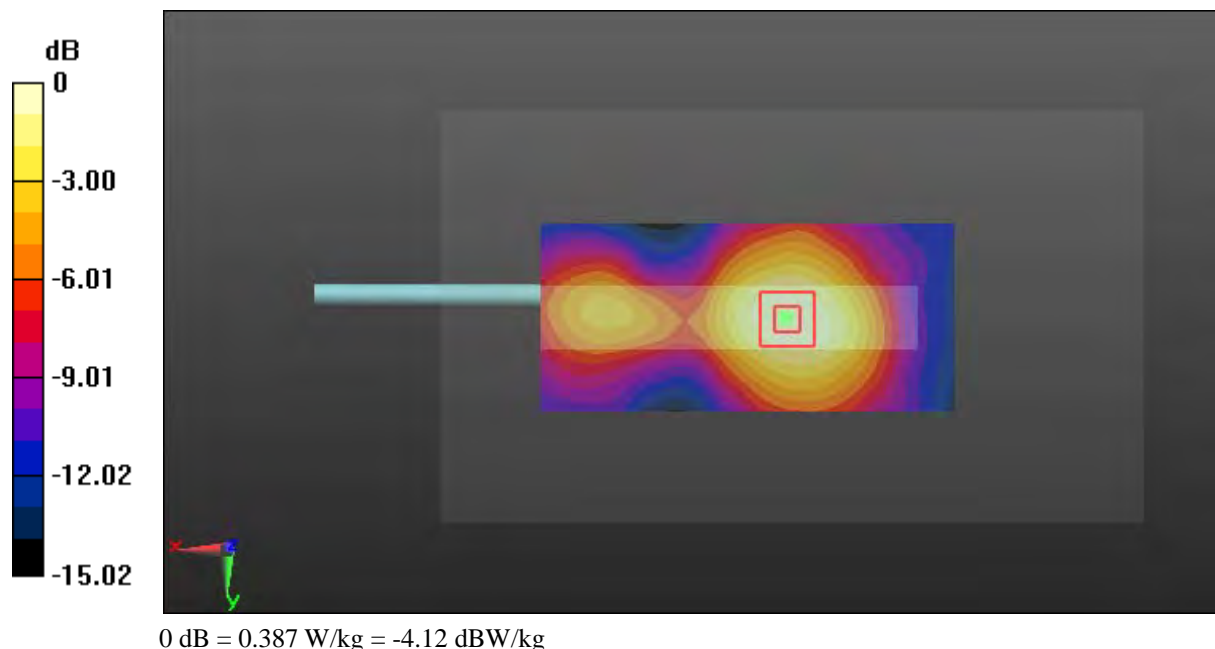

**Test Plot 55#: WCDMA Band 4\_Body Right\_Middle**

**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic WCDMA; Frequency: 1732.6 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 1732.6 \text{ MHz}$ ;  $\sigma = 1.528 \text{ S/m}$ ;  $\epsilon_r = 52.811$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.84, 4.84, 4.84); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x51x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.121 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 8.354 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.154 W/kg

**SAR(1 g) = 0.108 W/kg; SAR(10 g) = 0.070 W/kg**

Maximum value of SAR (measured) = 0.116 W/kg

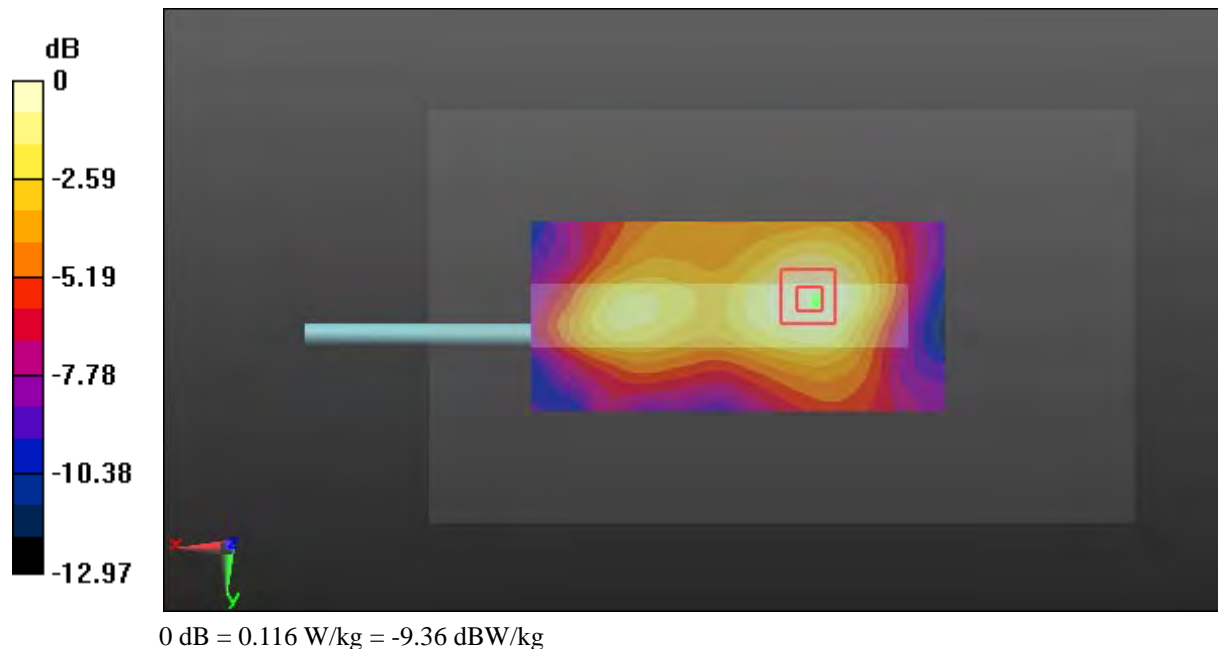

**Test Plot 56#: WCDMA Band 4\_Body Bottom\_Low****DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic WCDMA; Frequency: 1712.4 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 1712.4$  MHz;  $\sigma = 1.496$  S/m;  $\epsilon_r = 53.042$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.84, 4.84, 4.84); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (51x81x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.666 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 20.34 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 1.02 W/kg

**SAR(1 g) = 0.593 W/kg; SAR(10 g) = 0.334 W/kg**

Maximum value of SAR (measured) = 0.650 W/kg

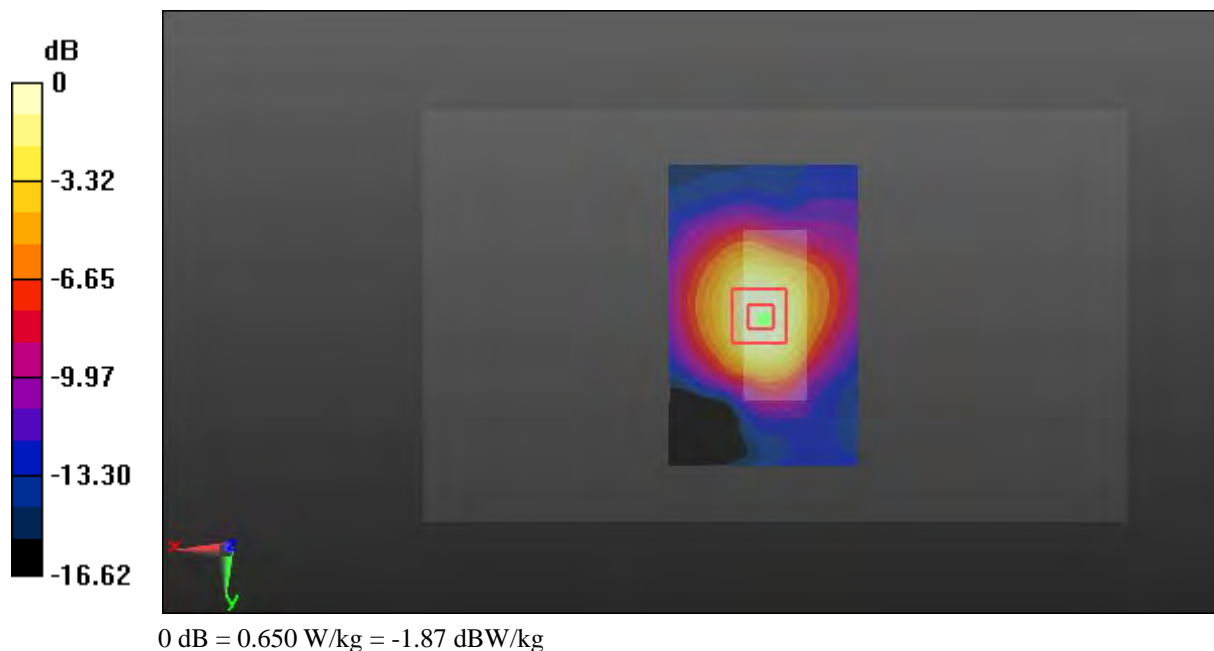



**Test Plot 57#: WCDMA Band 4\_Body Bottom\_Middle****DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic WCDMA; Frequency: 1732.6 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 1732.6$  MHz;  $\sigma = 1.528$  S/m;  $\epsilon_r = 52.811$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.84, 4.84, 4.84); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (51x81x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.764 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 21.84 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 1.12 W/kg

**SAR(1 g) = 0.650 W/kg; SAR(10 g) = 0.364 W/kg**

Maximum value of SAR (measured) = 0.703 W/kg

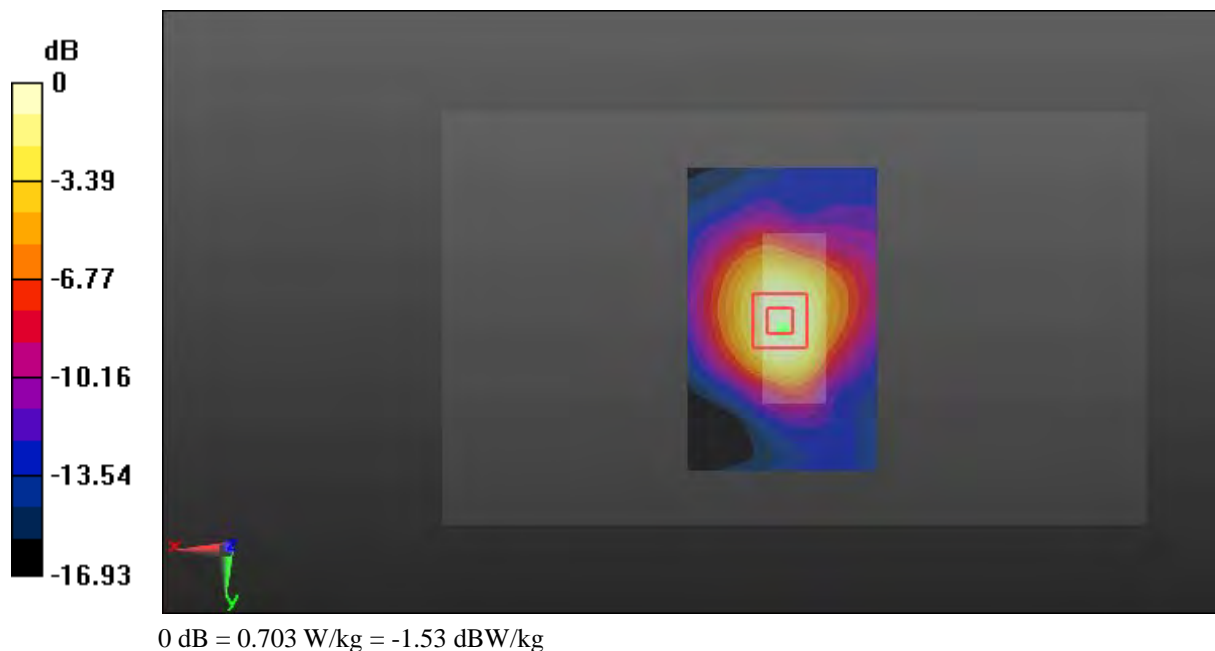

**Test Plot 58#: WCDMA Band 4\_Body Bottom\_High****DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic WCDMA; Frequency: 1752.6 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 1752.6$  MHz;  $\sigma = 1.547$  S/m;  $\epsilon_r = 52.608$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.84, 4.84, 4.84); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (51x81x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.600 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 18.71 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 0.898 W/kg

**SAR(1 g) = 0.516 W/kg; SAR(10 g) = 0.290 W/kg**

Maximum value of SAR (measured) = 0.561 W/kg

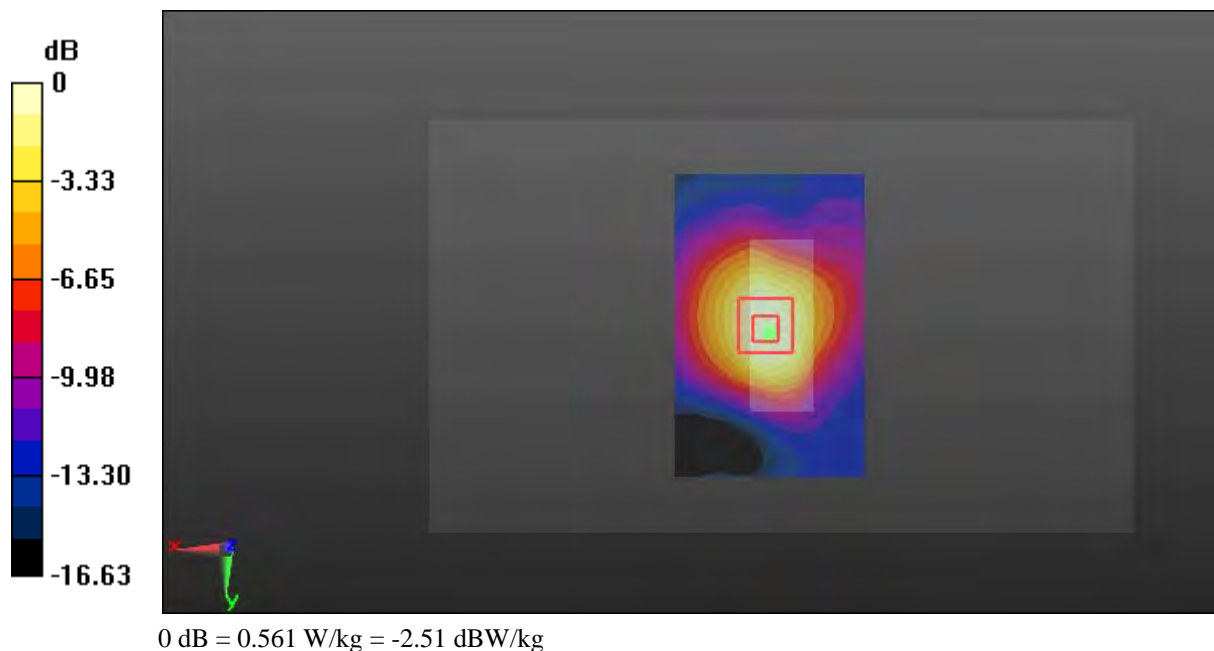

**Test Plot 59#: WCDMA Band 5\_Head Left Cheek\_Low****DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic WCDMA; Frequency: 826.4 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 826.4$  MHz;  $\sigma = 0.868$  S/m;  $\epsilon_r = 42.408$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.57, 6.57, 6.57); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (11x61x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.274 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.070 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 0.336 W/kg

**SAR(1 g) = 0.268 W/kg; SAR(10 g) = 0.206 W/kg**

Maximum value of SAR (measured) = 0.278 W/kg

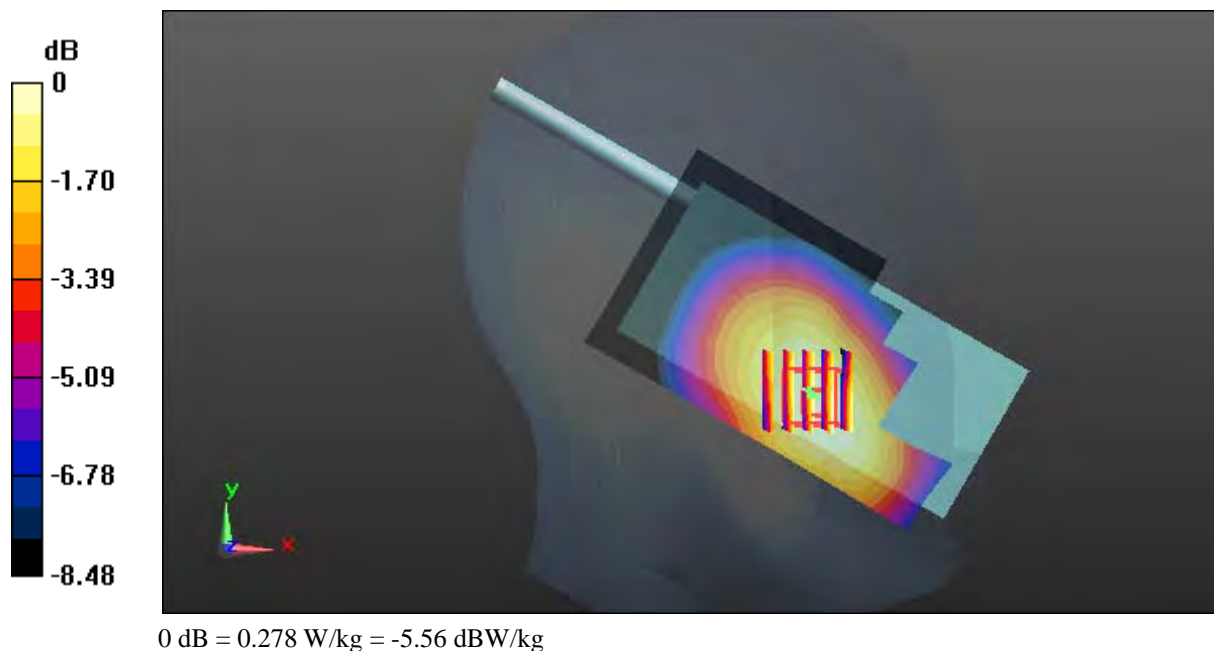

**Test Plot 60#: WCDMA Band 5\_Head Left Cheek\_Middle****DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic WCDMA; Frequency: 836.6 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 836.6$  MHz;  $\sigma = 0.88$  S/m;  $\epsilon_r = 42.316$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.57, 6.57, 6.57); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x61x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.292 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.231 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 0.359 W/kg

**SAR(1 g) = 0.285 W/kg; SAR(10 g) = 0.220 W/kg**

Maximum value of SAR (measured) = 0.297 W/kg

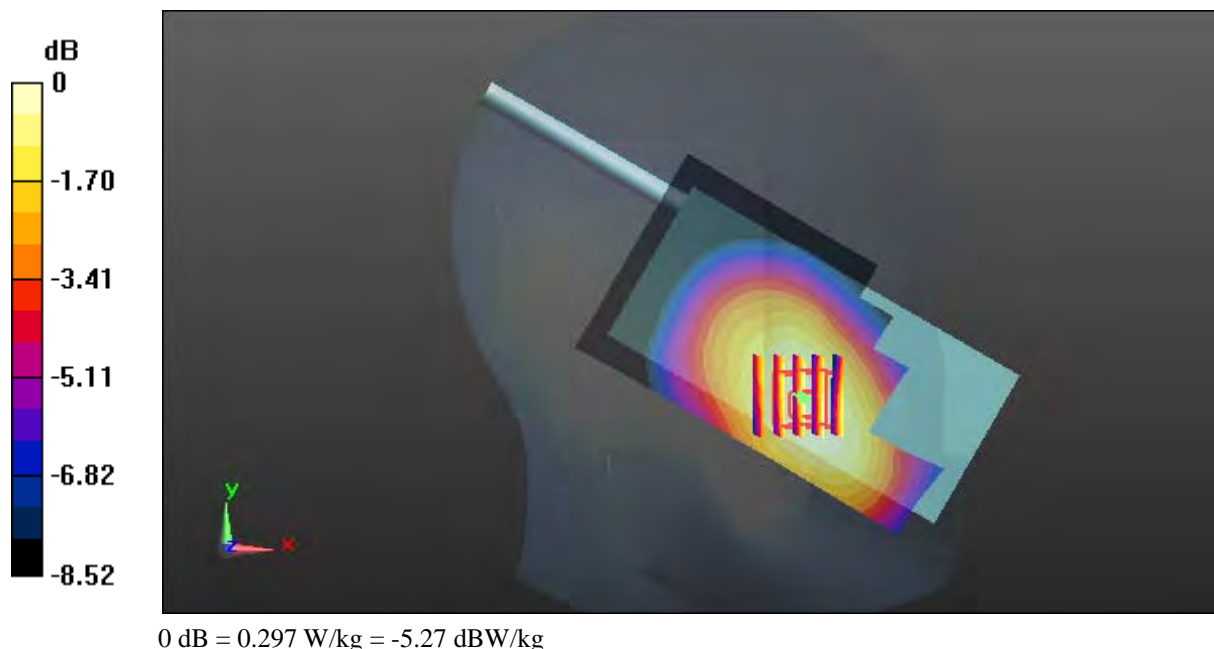

**Test Plot 61#: WCDMA Band 5\_Head Left Cheek\_High****DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic WCDMA; Frequency: 846.6 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 846.6$  MHz;  $\sigma = 0.884$  S/m;  $\epsilon_r = 42.26$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.57, 6.57, 6.57); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x61x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.306 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.422 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.376 W/kg

**SAR(1 g) = 0.297 W/kg; SAR(10 g) = 0.229 W/kg**

Maximum value of SAR (measured) = 0.308 W/kg

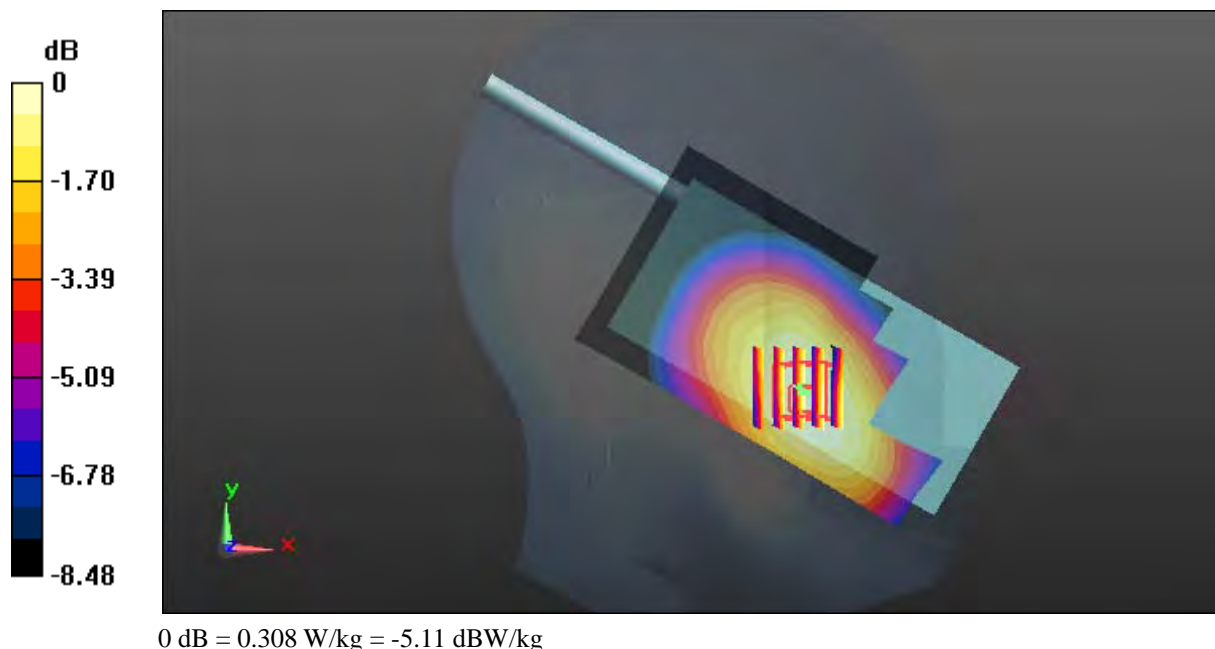

**Test Plot 62#: WCDMA Band 5\_Head Left Tilt\_Middle****DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic WCDMA; Frequency: 836.6 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 836.6$  MHz;  $\sigma = 0.88$  S/m;  $\epsilon_r = 42.316$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.57, 6.57, 6.57); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x61x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.171 W/kg


**Zoom Scan (6x6x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.91 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 0.200 W/kg

**SAR(1 g) = 0.163 W/kg; SAR(10 g) = 0.127 W/kg**

Maximum value of SAR (measured) = 0.171 W/kg

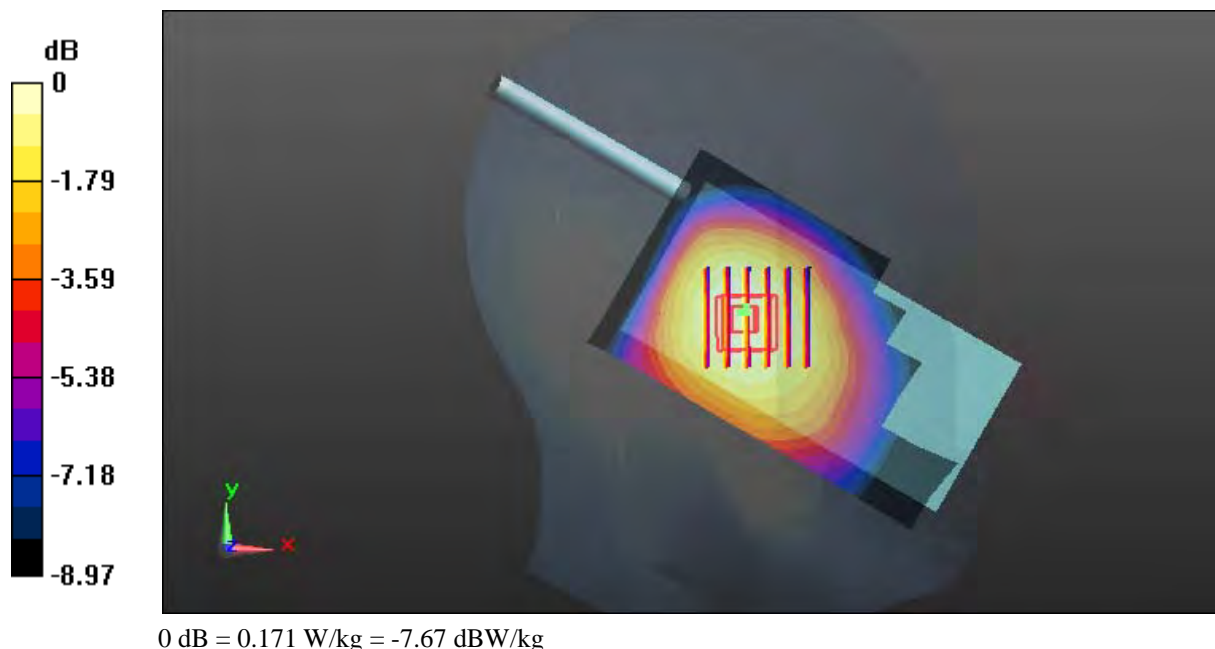

**Test Plot 63#: WCDMA Band 5\_Head Right Cheek\_Middle****DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic WCDMA; Frequency: 836.6 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 836.6$  MHz;  $\sigma = 0.88$  S/m;  $\epsilon_r = 42.316$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.57, 6.57, 6.57); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x61x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.272 W/kg


**Zoom Scan (6x6x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.559 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.302 W/kg

**SAR(1 g) = 0.253 W/kg; SAR(10 g) = 0.203 W/kg**

Maximum value of SAR (measured) = 0.263 W/kg

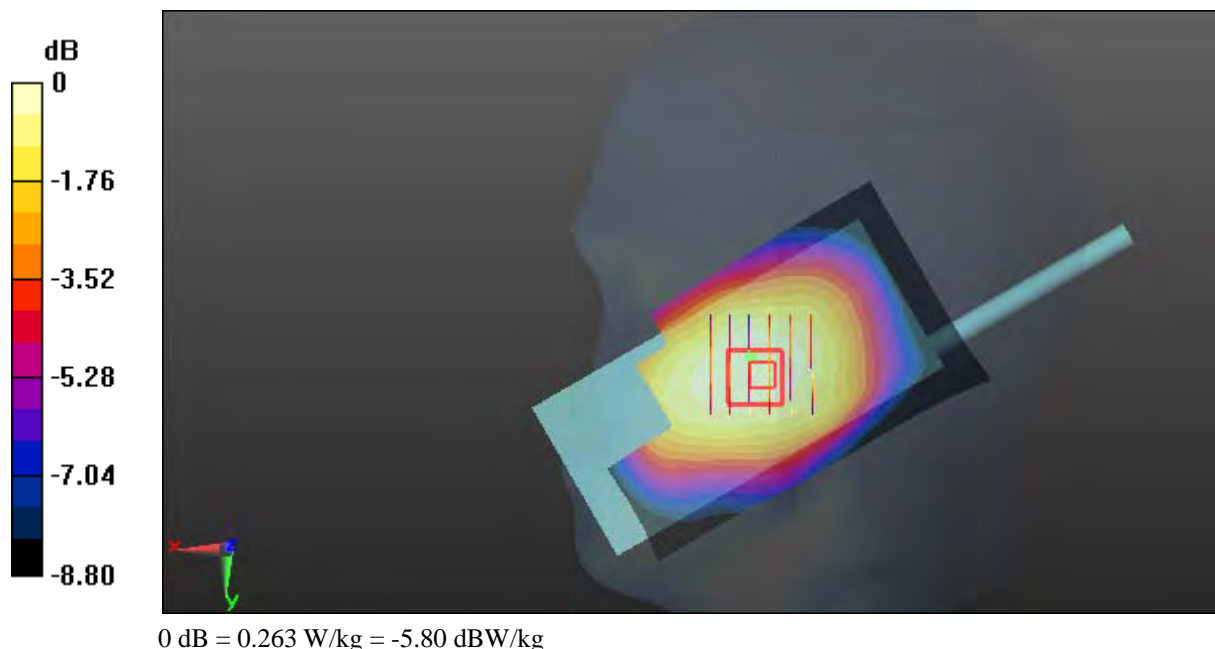

**Test Plot 64#: WCDMA Band 5\_Head Right Tilt\_Middle****DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic WCDMA; Frequency: 836.6 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 836.6$  MHz;  $\sigma = 0.88$  S/m;  $\epsilon_r = 42.316$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.57, 6.57, 6.57); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x61x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.139 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.52 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.156 W/kg

**SAR(1 g) = 0.131 W/kg; SAR(10 g) = 0.103 W/kg**

Maximum value of SAR (measured) = 0.137 W/kg

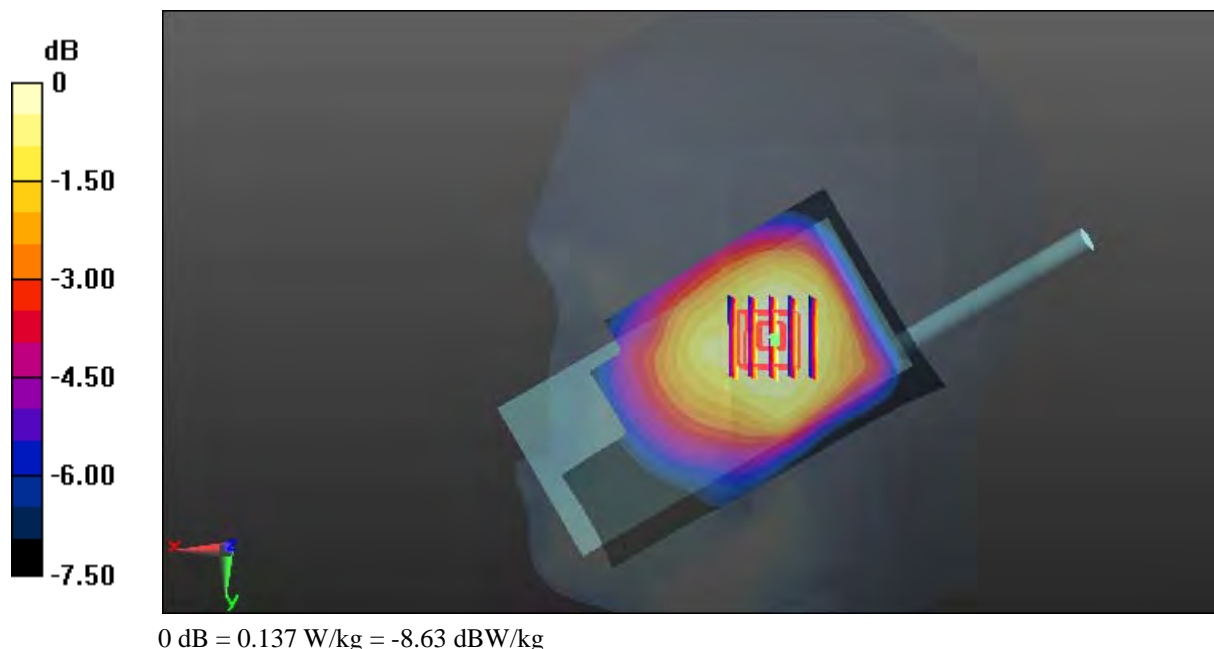



**Test Plot 65#: WCDMA Band 5\_Face Up\_Middle**

**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic WCDMA; Frequency: 836.6 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 836.6 \text{ MHz}$ ;  $\sigma = 0.88 \text{ S/m}$ ;  $\epsilon_r = 42.316$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.57, 6.57, 6.57); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x61x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.101 W/kg


**Zoom Scan (6x6x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 10.68 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 0.124 W/kg

**SAR(1 g) = 0.098 W/kg; SAR(10 g) = 0.075 W/kg**

Maximum value of SAR (measured) = 0.102 W/kg

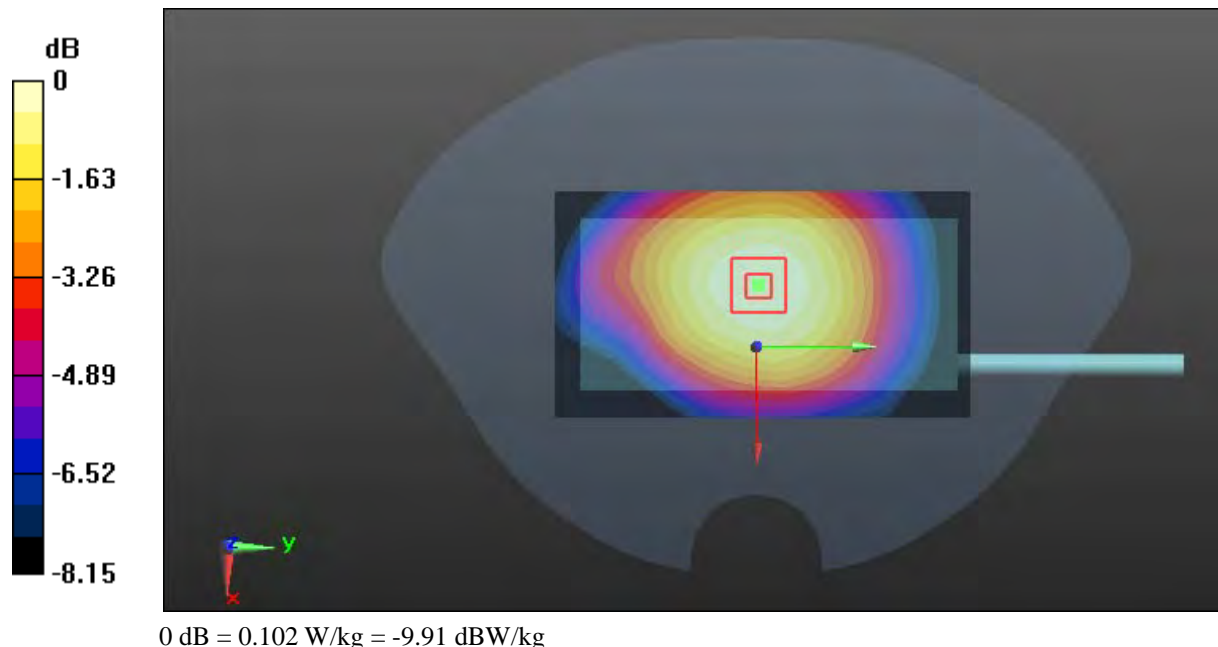

**Test Plot 66#: WCDMA Band 5\_Body Front \_Low**

**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic WCDMA; Frequency: 826.4 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 826.4 \text{ MHz}$ ;  $\sigma = 0.945 \text{ S/m}$ ;  $\epsilon_r = 57.372$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.42, 6.42, 6.42); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x61x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.500 W/kg


**Zoom Scan (6x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 21.76 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.668 W/kg

**SAR(1 g) = 0.465 W/kg; SAR(10 g) = 0.327 W/kg**

Maximum value of SAR (measured) = 0.496 W/kg

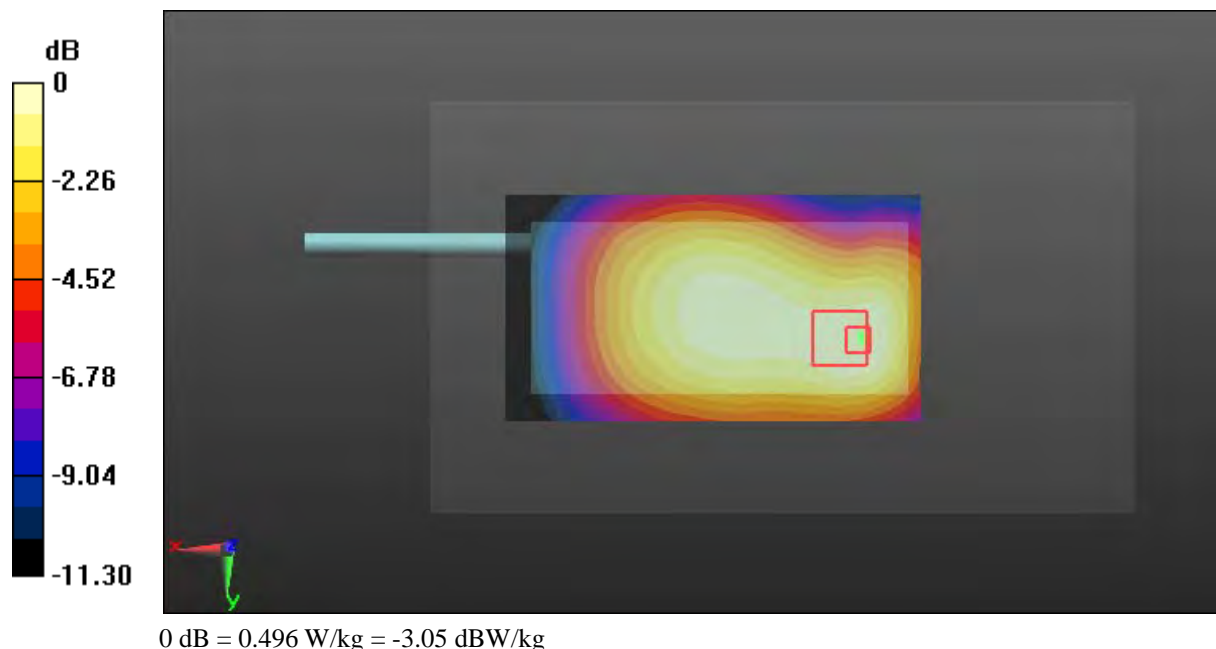

**Test Plot 67#: WCDMA Band 5\_Body Front \_Middle**

**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic WCDMA; Frequency: 836.6 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 836.6 \text{ MHz}$ ;  $\sigma = 0.955 \text{ S/m}$ ;  $\epsilon_r = 57.276$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.42, 6.42, 6.42); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x61x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.510 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 20.86 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 0.548 W/kg

**SAR(1 g) = 0.480 W/kg; SAR(10 g) = 0.385 W/kg**

Maximum value of SAR (measured) = 0.500 W/kg

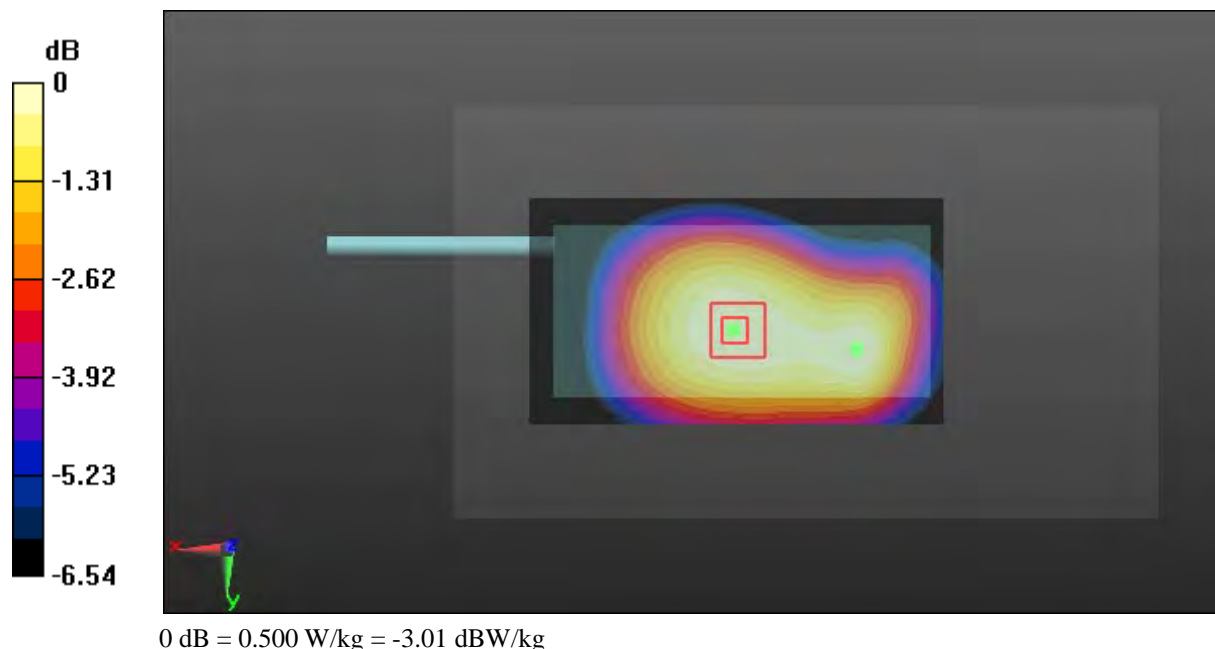

**Test Plot 68#: WCDMA Band 5\_Body Front \_High**

**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic WCDMA; Frequency: 846.6 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 846.6 \text{ MHz}$ ;  $\sigma = 0.963 \text{ S/m}$ ;  $\epsilon_r = 57.209$ ;  $\rho = 1000 \text{ kg/m}^3$ ;  
 Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.42, 6.42, 6.42); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x61x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.532 W/kg


**Zoom Scan (6x6x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 22.04 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 0.699 W/kg

**SAR(1 g) = 0.492 W/kg; SAR(10 g) = 0.345 W/kg**

Maximum value of SAR (measured) = 0.526 W/kg

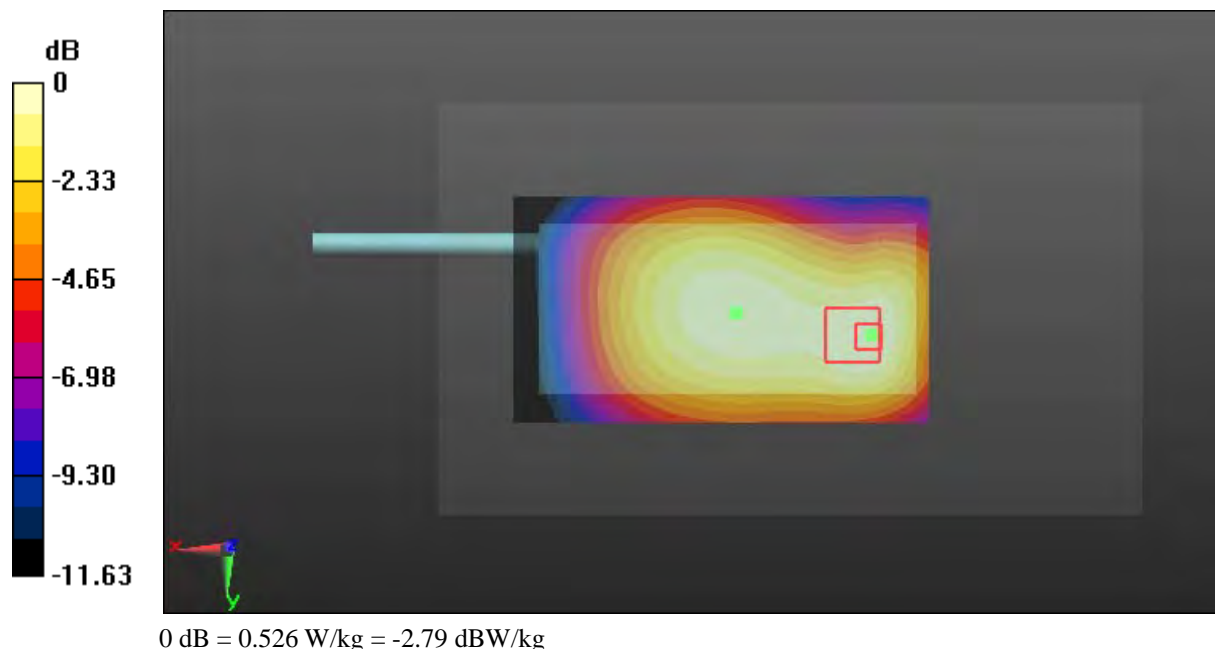

**Test Plot 69#: WCDMA Band 5\_Body Back\_Middle**

**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic WCDMA; Frequency: 836.6 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 836.6 \text{ MHz}$ ;  $\sigma = 0.955 \text{ S/m}$ ;  $\epsilon_r = 57.276$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.42, 6.42, 6.42); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x61x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.251 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 13.47 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.286 W/kg

**SAR(1 g) = 0.238 W/kg; SAR(10 g) = 0.186 W/kg**

Maximum value of SAR (measured) = 0.250 W/kg

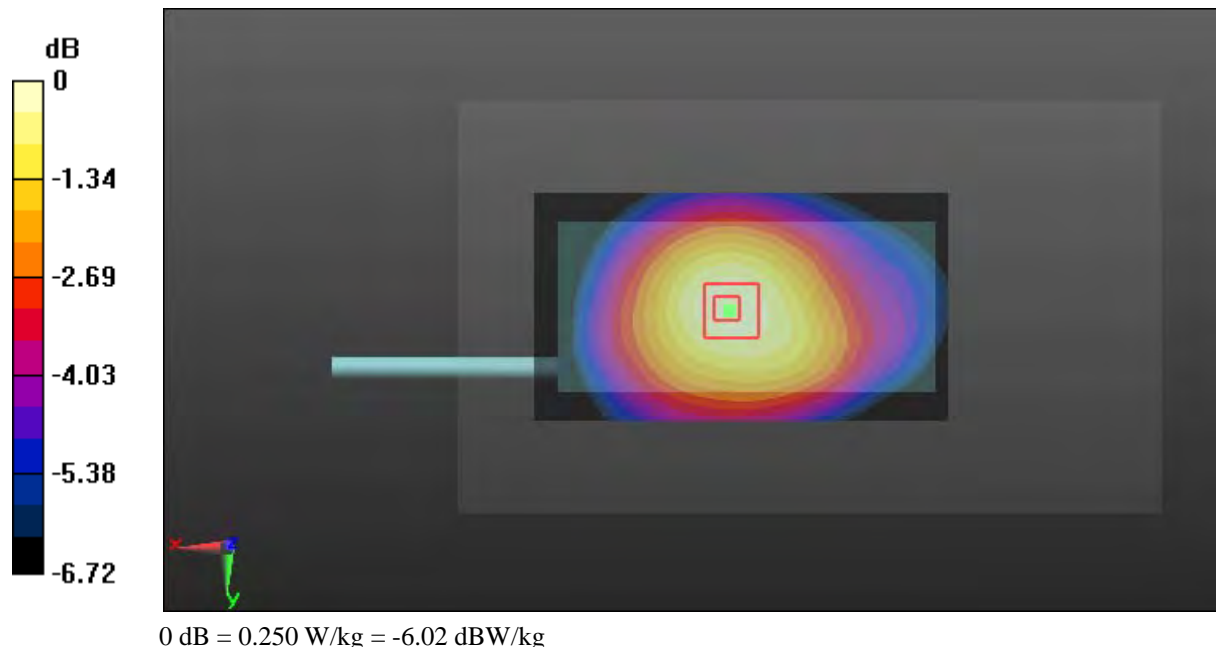

**Test Plot 70#: WCDMA Band 5\_Body Left\_Middle**

**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic WCDMA; Frequency: 836.6 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 836.6 \text{ MHz}$ ;  $\sigma = 0.955 \text{ S/m}$ ;  $\epsilon_r = 57.276$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.42, 6.42, 6.42); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x51x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.265 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 13.71 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 0.300 W/kg

**SAR(1 g) = 0.247 W/kg; SAR(10 g) = 0.188 W/kg**

Maximum value of SAR (measured) = 0.260 W/kg

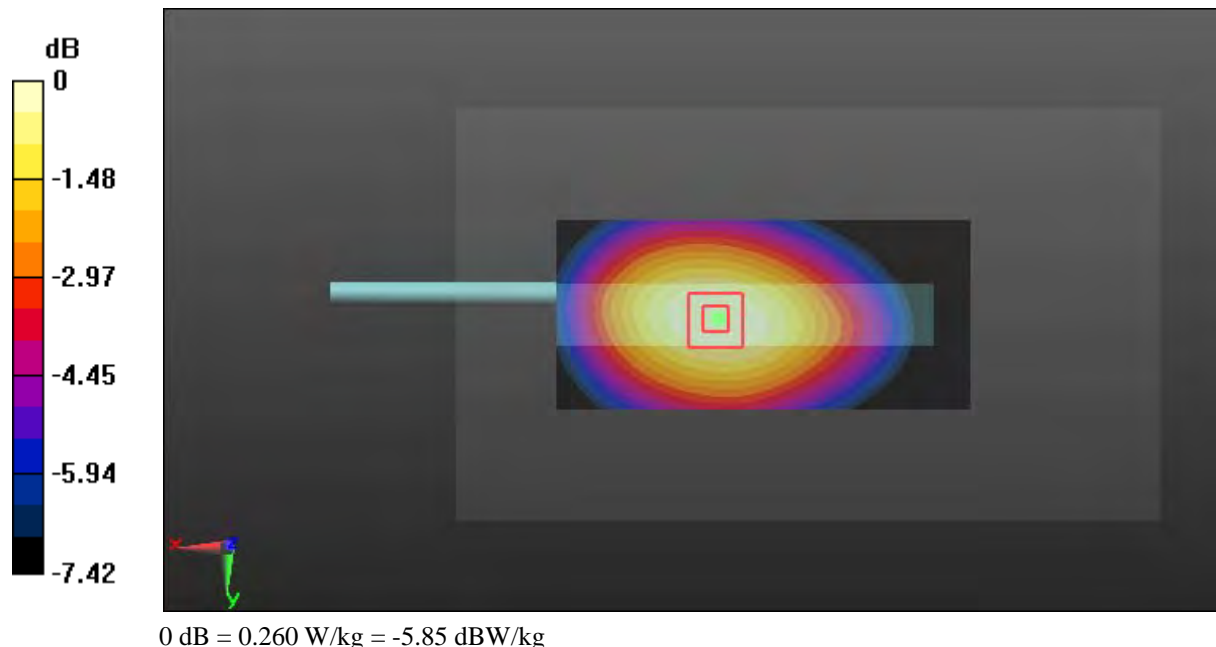

**Test Plot 71#: WCDMA Band 5\_Body Right\_Middle**

**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic WCDMA; Frequency: 836.6 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 836.6 \text{ MHz}$ ;  $\sigma = 0.955 \text{ S/m}$ ;  $\epsilon_r = 57.276$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.42, 6.42, 6.42); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x51x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.388 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 16.00 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 0.447 W/kg

**SAR(1 g) = 0.362 W/kg; SAR(10 g) = 0.271 W/kg**

Maximum value of SAR (measured) = 0.381 W/kg

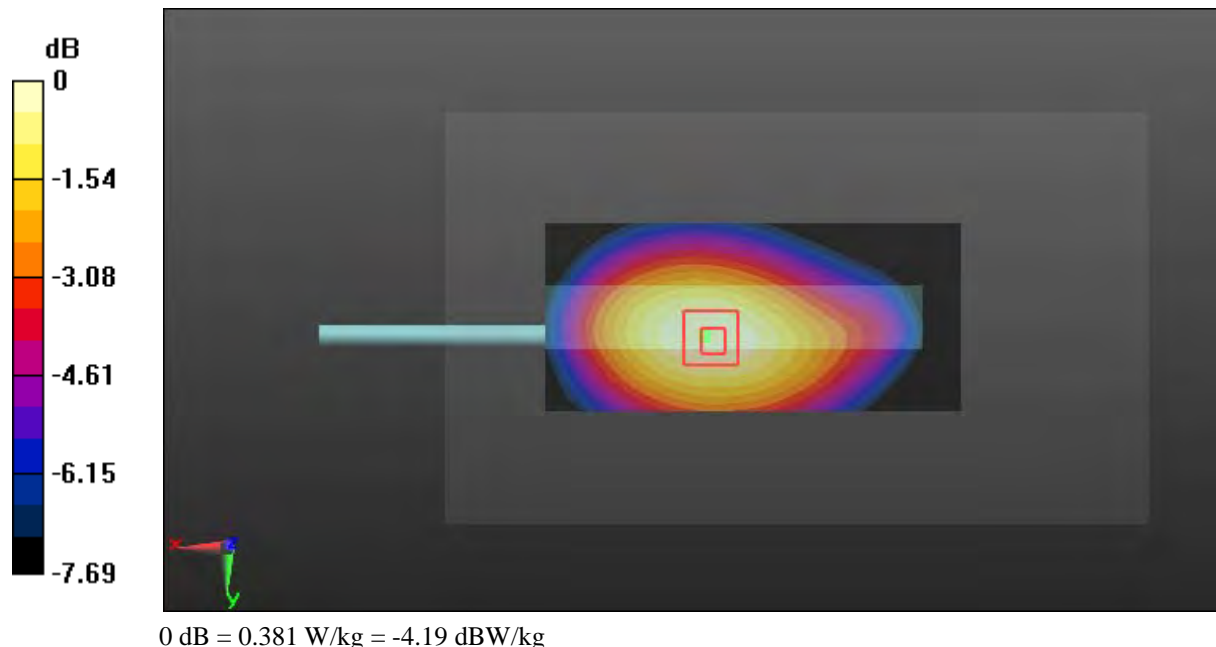

**Test Plot 72#: WCDMA Band 5\_Body Bottom\_Middle****DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic WCDMA; Frequency: 836.6 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 836.6$  MHz;  $\sigma = 0.955$  S/m;  $\epsilon_r = 57.276$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.42, 6.42, 6.42); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (51x81x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.242 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.45 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 0.557 W/kg

**SAR(1 g) = 0.225 W/kg; SAR(10 g) = 0.114 W/kg**

Maximum value of SAR (measured) = 0.245 W/kg





**Test Plot 73#: LTE Band 2\_Head Left Cheek\_Low\_1RB**

**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 1860 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 1860$  MHz;  $\sigma = 1.351$  S/m;  $\epsilon_r = 40.582$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
 Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.93, 4.93, 4.93); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (11x61x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.698 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.596 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 1.16 W/kg

**SAR(1 g) = 0.700 W/kg; SAR(10 g) = 0.420 W/kg**

Maximum value of SAR (measured) = 0.743 W/kg

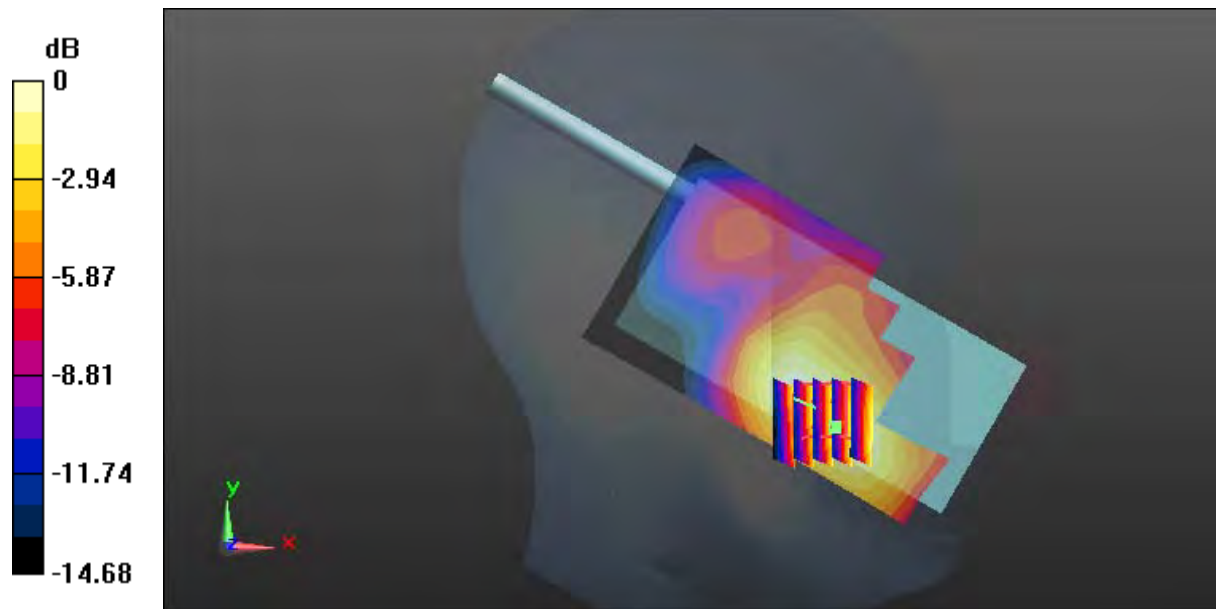

0 dB = 0.743 W/kg = -1.29 dBW/kg

**Test Plot 74#: LTE Band 2\_Head Left Cheek\_Middle\_1RB****DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 1880 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.36$  S/m;  $\epsilon_r = 40.47$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.93, 4.93, 4.93); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (141x81x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.754 W/kg


**Zoom Scan (6x7x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.576 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 1.05 W/kg

**SAR(1 g) = 0.643 W/kg; SAR(10 g) = 0.387 W/kg**

Maximum value of SAR (measured) = 0.686 W/kg

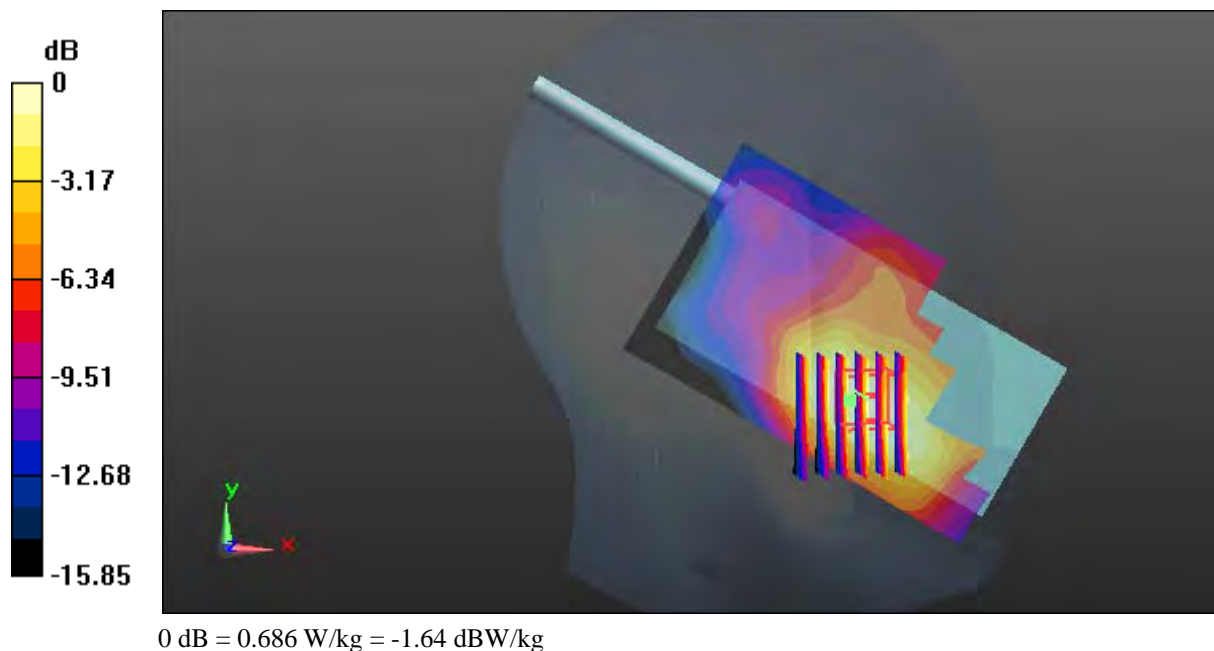

**Test Plot 75#: LTE Band 2\_Head Left Cheek\_High\_1RB****DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 1900 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 1900$  MHz;  $\sigma = 1.391$  S/m;  $\epsilon_r = 40.425$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.93, 4.93, 4.93); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x61x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.660 W/kg


**Zoom Scan (6x6x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.192 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 1.13 W/kg

**SAR(1 g) = 0.661 W/kg; SAR(10 g) = 0.393 W/kg**

Maximum value of SAR (measured) = 0.706 W/kg

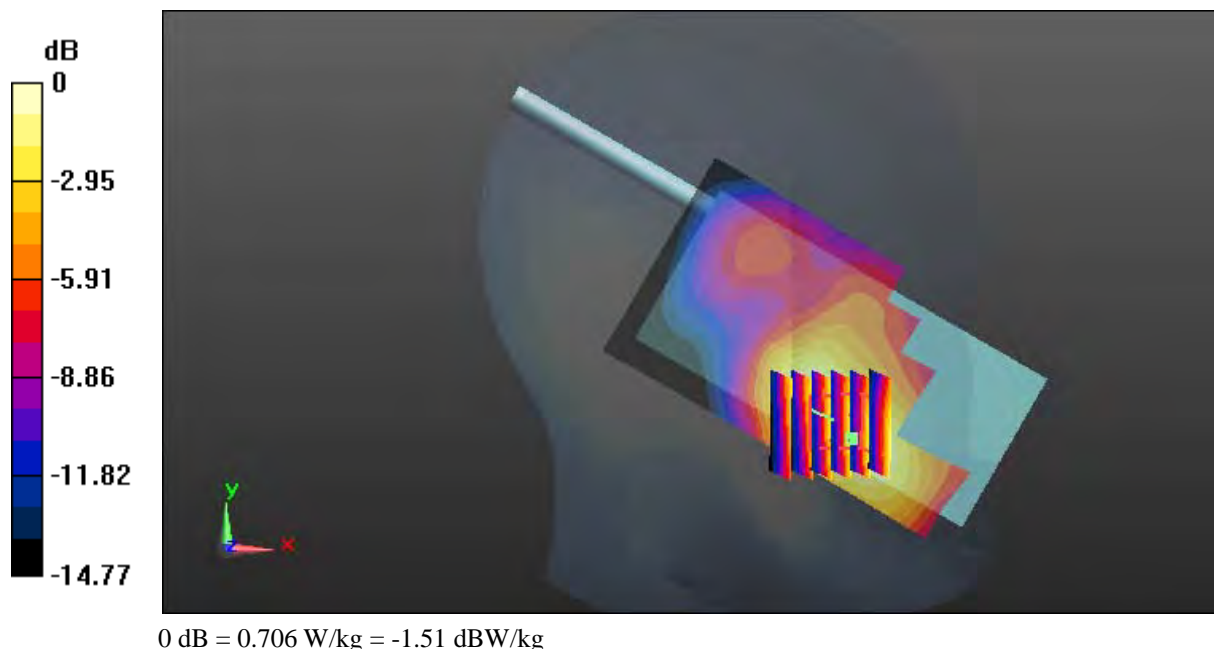

**Test Plot 76#: LTE Band 2\_Head Left Cheek\_Middle\_50%RB****DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 1880 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.36$  S/m;  $\epsilon_r = 40.47$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.93, 4.93, 4.93); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x61x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.545 W/kg


**Zoom Scan (6x6x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.031 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 0.898 W/kg

**SAR(1 g) = 0.532 W/kg; SAR(10 g) = 0.313 W/kg**

Maximum value of SAR (measured) = 0.561 W/kg

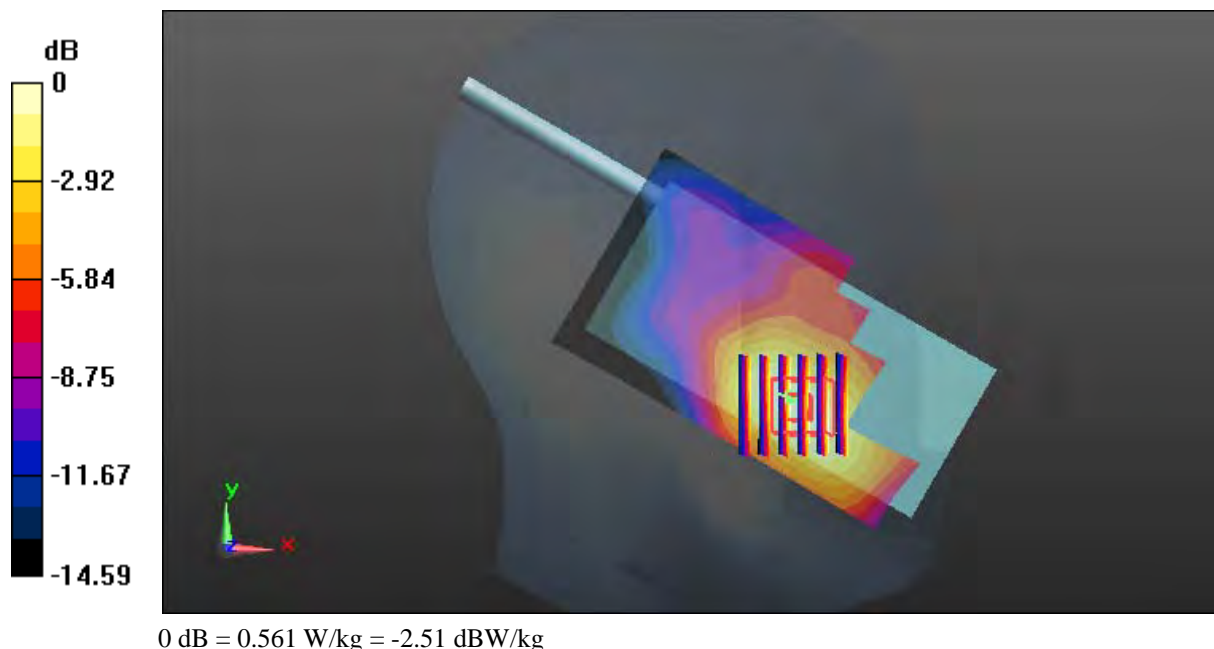

**Test Plot 77#: LTE Band 2\_Head Left Tilt\_Middle\_1RB**

**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 1880 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.36$  S/m;  $\epsilon_r = 40.47$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
 Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.93, 4.93, 4.93); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x61x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.176 W/kg


**Zoom Scan (6x6x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.137 V/m; Power Drift = 0.20 dB

Peak SAR (extrapolated) = 0.244 W/kg

**SAR(1 g) = 0.155 W/kg; SAR(10 g) = 0.097 W/kg**

Maximum value of SAR (measured) = 0.165 W/kg

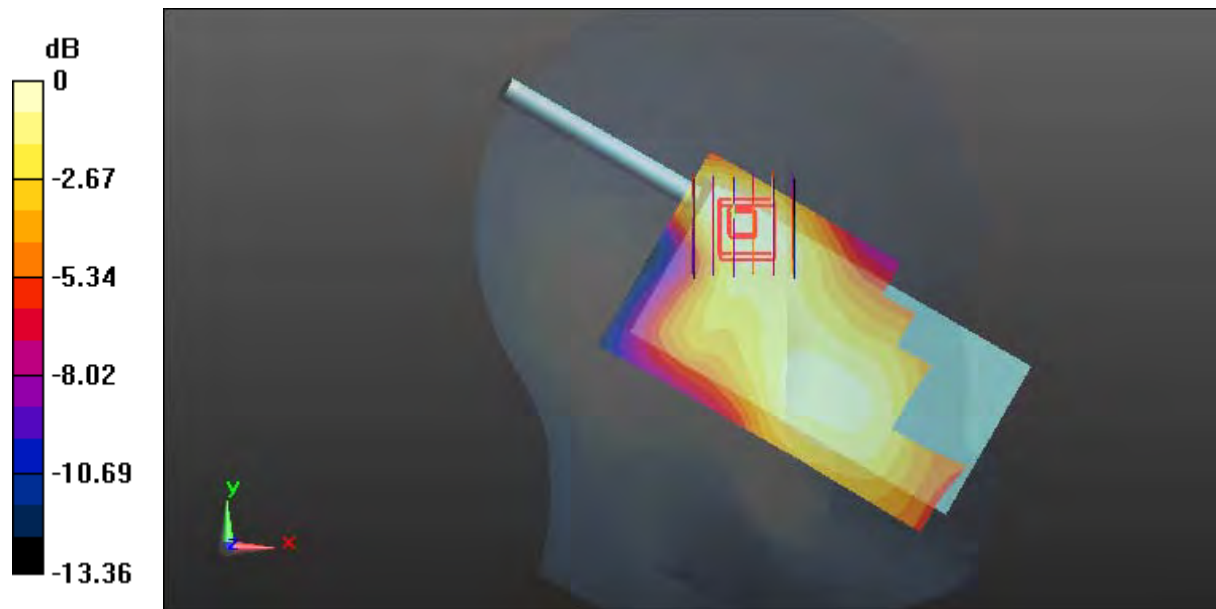

0 dB = 0.165 W/kg = -7.83 dBW/kg

**Test Plot 78#: LTE Band 2\_Head Left Tilt\_Middle\_50%RB**

**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 1880 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.36$  S/m;  $\epsilon_r = 40.47$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
 Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.93, 4.93, 4.93); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x61x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.129 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.071 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.181 W/kg

**SAR(1 g) = 0.115 W/kg; SAR(10 g) = 0.072 W/kg**

Maximum value of SAR (measured) = 0.124 W/kg

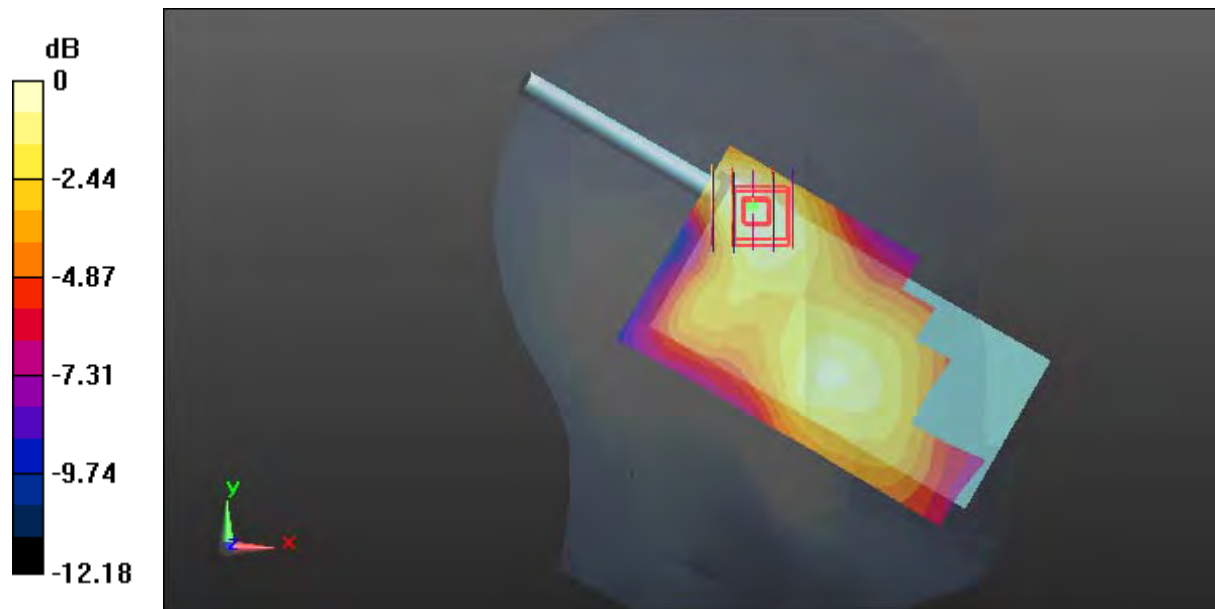

0 dB = 0.124 W/kg = -9.07 dBW/kg

**Test Plot 79#: LTE Band 2\_Head Right Cheek\_Middle\_1RB****DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 1880 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.36$  S/m;  $\epsilon_r = 40.47$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.93, 4.93, 4.93); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x61x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.326 W/kg


**Zoom Scan (6x6x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.986 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.531 W/kg

**SAR(1 g) = 0.352 W/kg; SAR(10 g) = 0.233 W/kg**

Maximum value of SAR (measured) = 0.372 W/kg

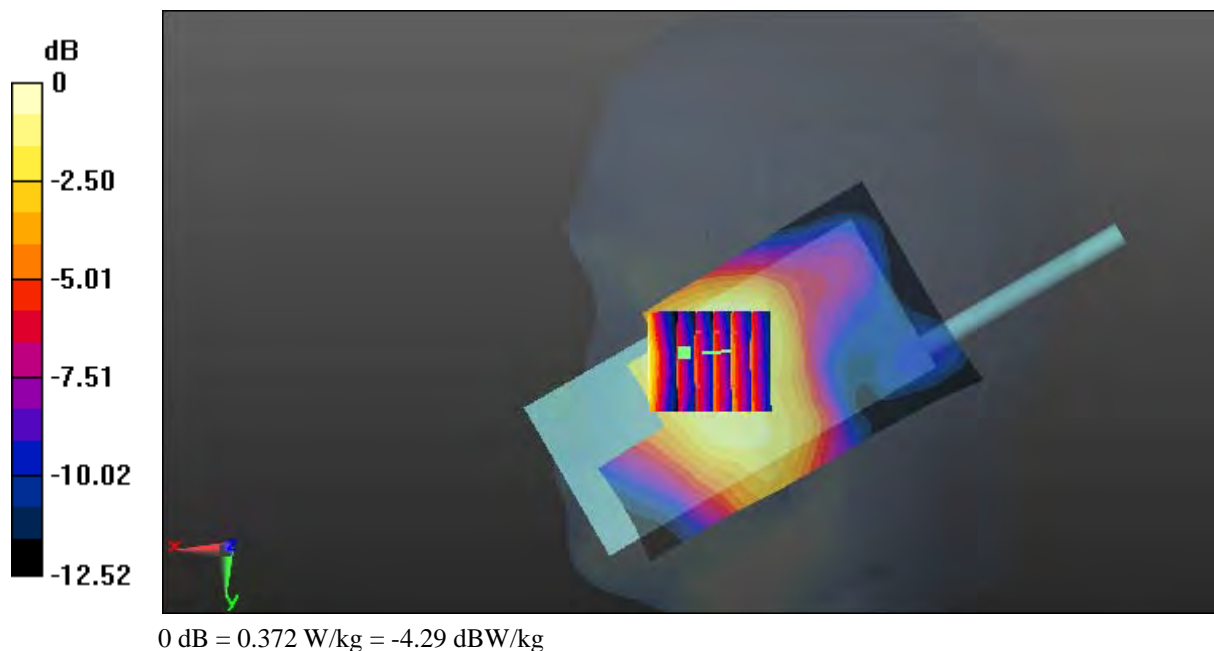

**Test Plot 80#: LTE Band 2\_Head Right Cheek\_Middle\_50%RB****DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 1880 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.36$  S/m;  $\epsilon_r = 40.47$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.93, 4.93, 4.93); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x61x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.208 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.417 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.379 W/kg

**SAR(1 g) = 0.209 W/kg; SAR(10 g) = 0.133 W/kg**

Maximum value of SAR (measured) = 0.220 W/kg

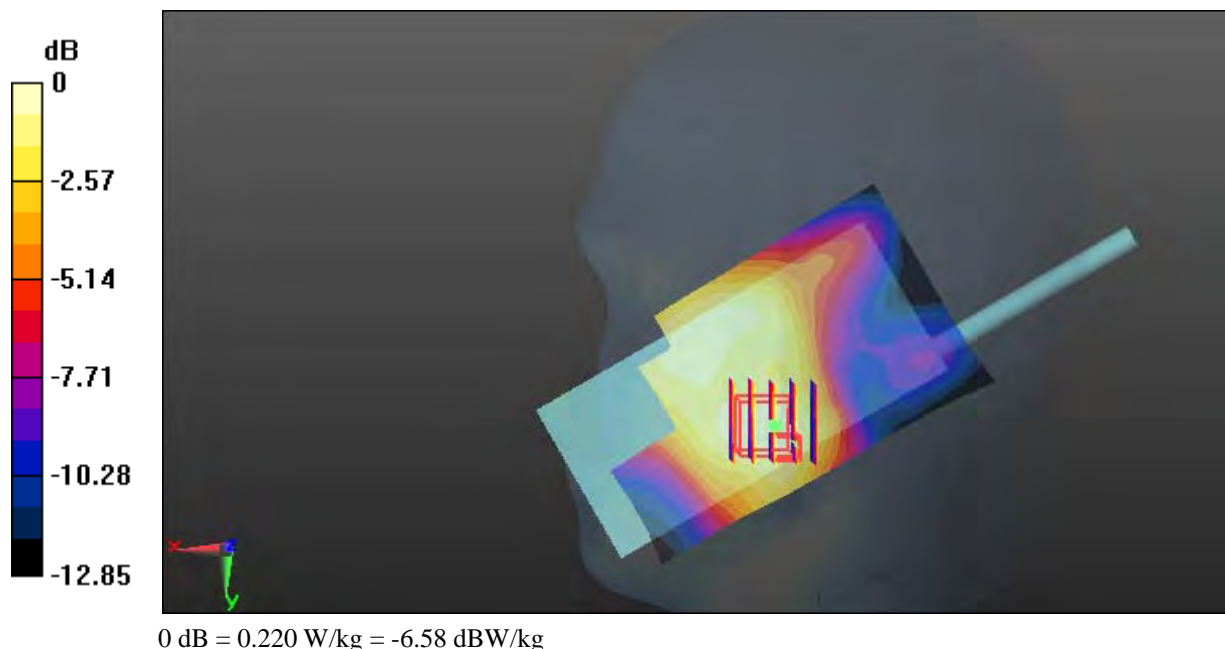



**Test Plot 81#: LTE Band 2\_Head Right Tilt\_Middle\_1RB****DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 1880 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.36$  S/m;  $\epsilon_r = 40.47$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.93, 4.93, 4.93); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x61x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0991 W/kg


**Zoom Scan (6x7x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.545 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.140 W/kg

**SAR(1 g) = 0.098 W/kg; SAR(10 g) = 0.069 W/kg**

Maximum value of SAR (measured) = 0.105 W/kg

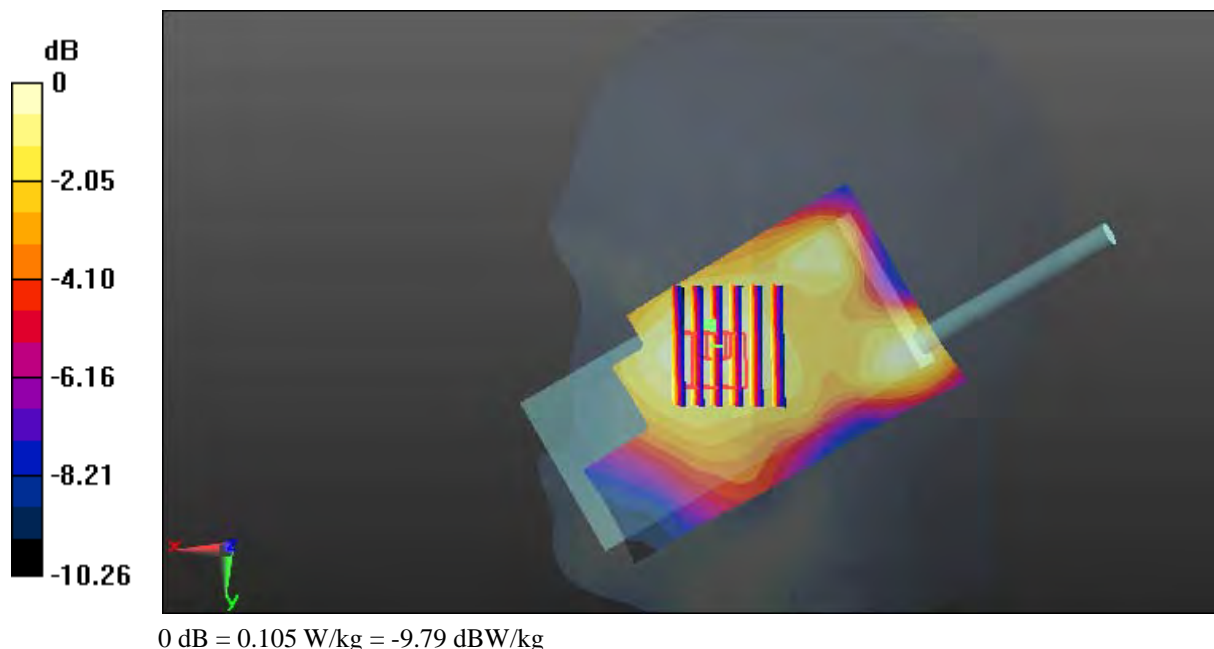

**Test Plot 82#: LTE Band 2\_Head Right Tilt\_Middle\_50%RB****DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 1880 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.36$  S/m;  $\epsilon_r = 40.47$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.93, 4.93, 4.93); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x61x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0813 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.162 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.105 W/kg

**SAR(1 g) = 0.077 W/kg; SAR(10 g) = 0.054 W/kg**

Maximum value of SAR (measured) = 0.0821 W/kg

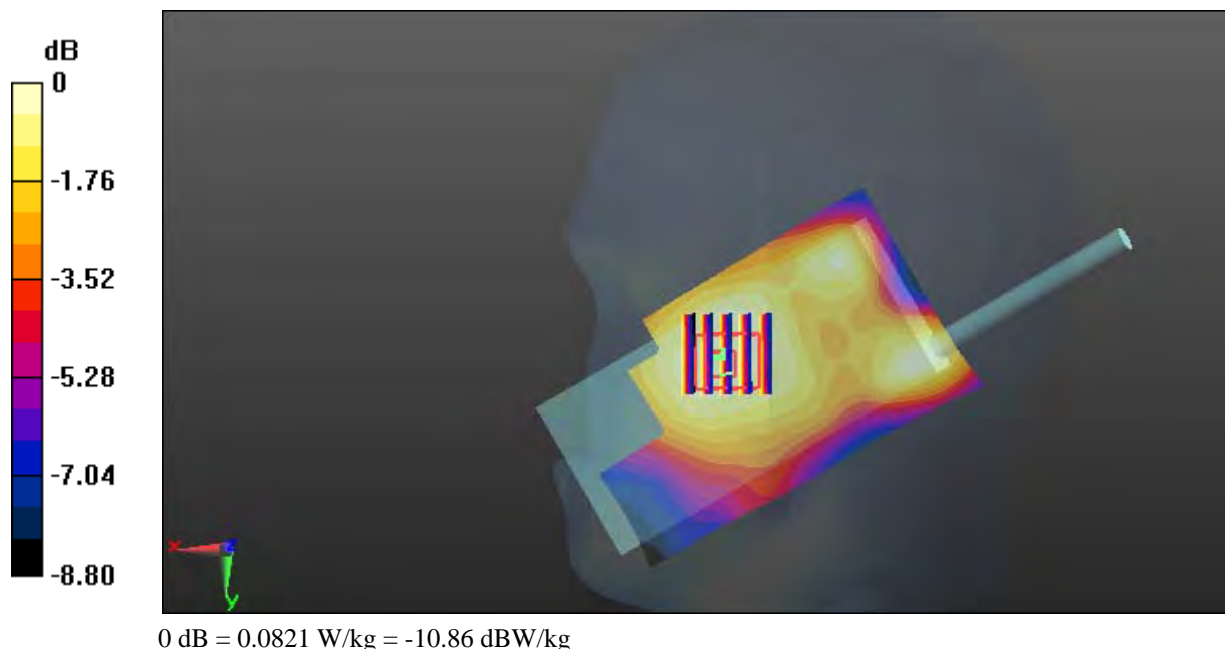

**Test Plot 83#: LTE Band 2\_Face Up\_Middle\_1RB**

**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 1880 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 1880 \text{ MHz}$ ;  $\sigma = 1.36 \text{ S/m}$ ;  $\epsilon_r = 40.47$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.93, 4.93, 4.93); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x61x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) =  $0.0749 \text{ W/kg}$


**Zoom Scan (6x6x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value =  $7.591 \text{ V/m}$ ; Power Drift =  $-0.15 \text{ dB}$

Peak SAR (extrapolated) =  $0.102 \text{ W/kg}$

**SAR(1 g) =  $0.071 \text{ W/kg}$ ; SAR(10 g) =  $0.048 \text{ W/kg}$**

Maximum value of SAR (measured) =  $0.0758 \text{ W/kg}$

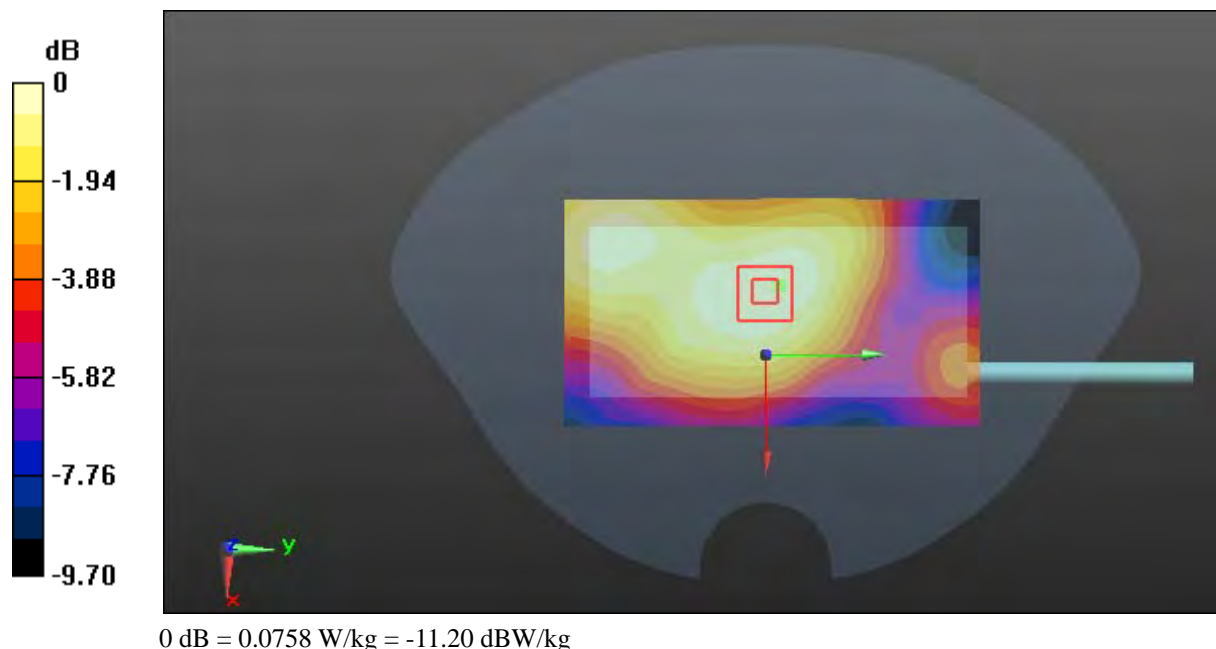

**Test Plot 84#: LTE Band 2\_Face Up\_Middle\_50%RB**

**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 1880 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 1880 \text{ MHz}$ ;  $\sigma = 1.36 \text{ S/m}$ ;  $\epsilon_r = 40.47$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.93, 4.93, 4.93); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x61x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.0871 W/kg


**Zoom Scan (6x6x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 7.138 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.128 W/kg

**SAR(1 g) = 0.081 W/kg; SAR(10 g) = 0.037 W/kg**

Maximum value of SAR (measured) = 0.0831 W/kg

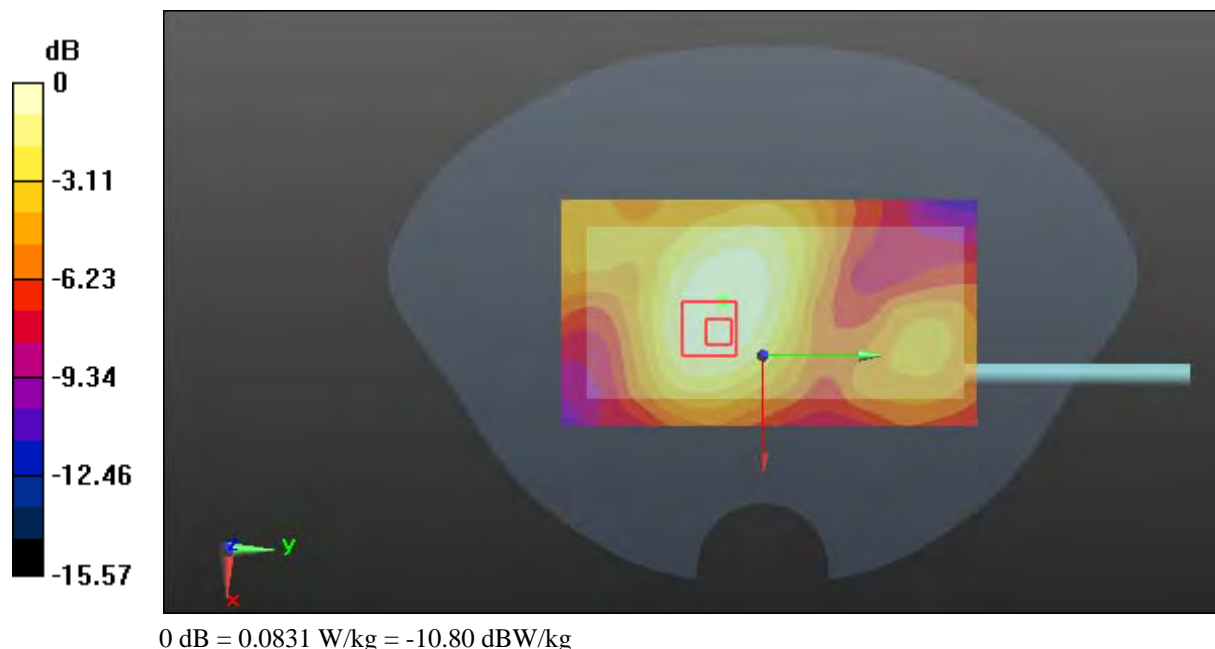

**Test Plot 85#: LTE Band 2\_Body Front \_Low\_1RB**

**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 1860 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 1860$  MHz;  $\sigma = 1.468$  S/m;  $\epsilon_r = 54.414$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
 Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.65, 4.65, 4.65); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x61x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.472 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 16.61 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.764 W/kg

**SAR(1 g) = 0.443 W/kg; SAR(10 g) = 0.267 W/kg**

Maximum value of SAR (measured) = 0.481 W/kg

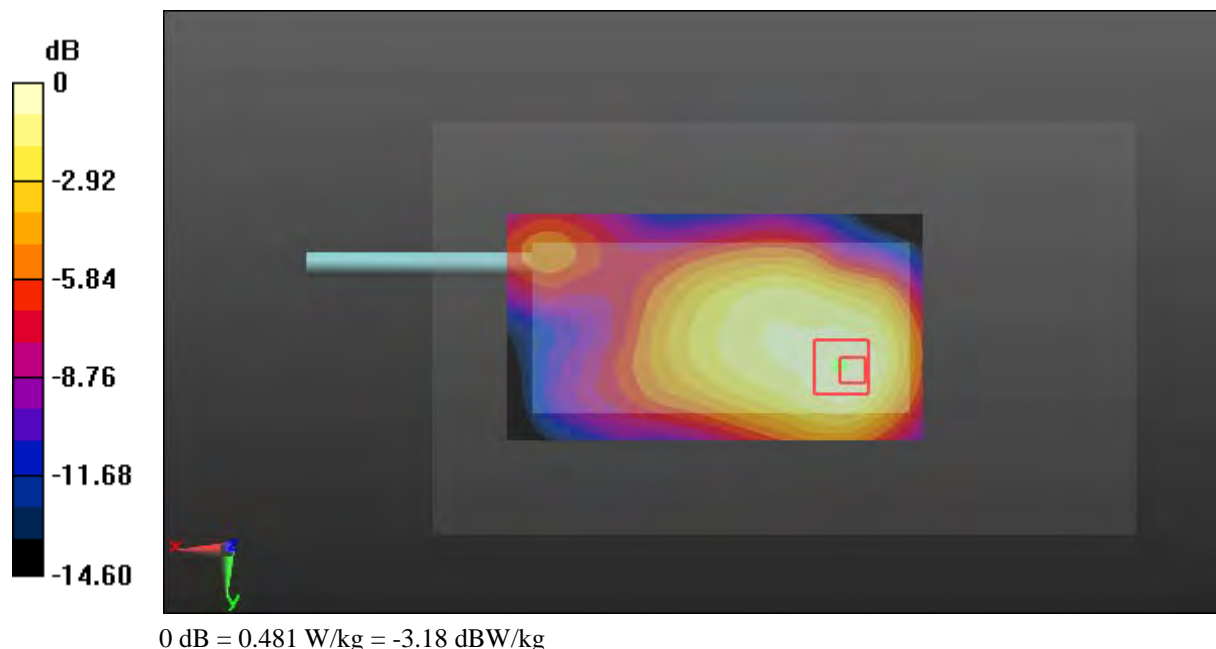

**Test Plot 86#: LTE Band 2\_Body Front \_Middle\_1RB**

**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 1880 MHz;Duty Cycle: 1:1  
 Medium parameters used:  $f = 1880 \text{ MHz}$ ;  $\sigma = 1.479 \text{ S/m}$ ;  $\epsilon_r = 54.231$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.65, 4.65, 4.65); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772;Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x61x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.445 W/kg


**Zoom Scan (7x6x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 14.58 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 0.708 W/kg

**SAR(1 g) = 0.418 W/kg; SAR(10 g) = 0.246 W/kg**

Maximum value of SAR (measured) = 0.455 W/kg

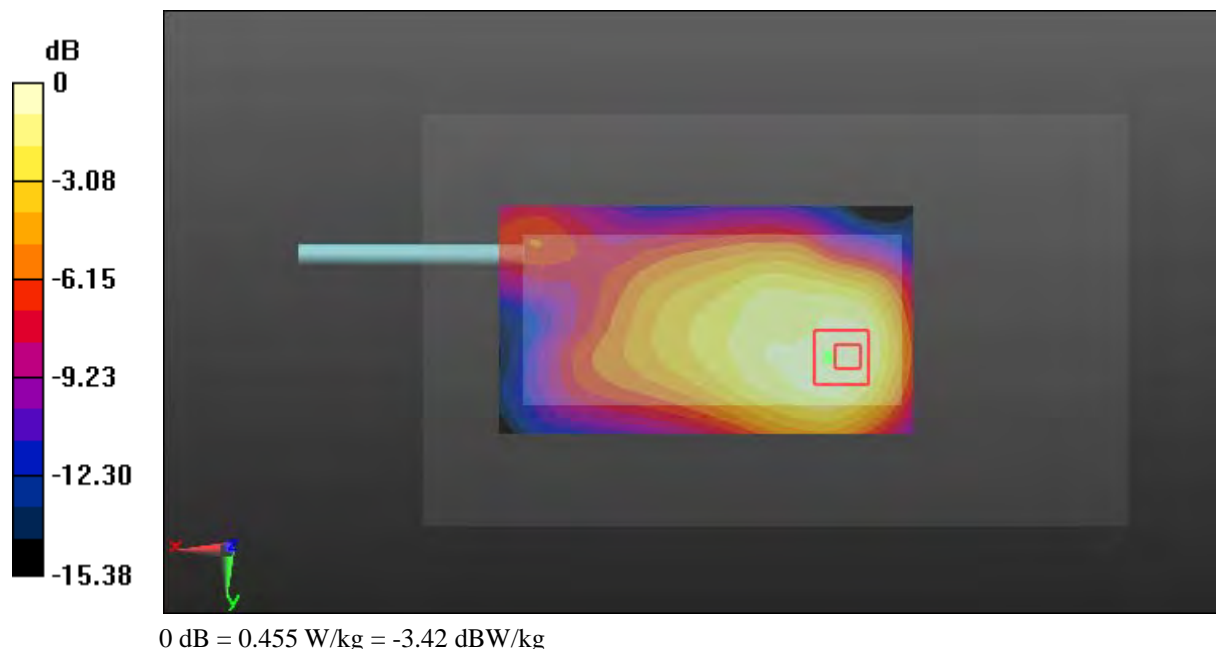

**Test Plot 87#: LTE Band 2\_Body Front \_High\_1RB**

**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 1900 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 1900$  MHz;  $\sigma = 1.514$  S/m;  $\epsilon_r = 54.191$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
 Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.65, 4.65, 4.65); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x61x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.394 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.79 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 0.647 W/kg

**SAR(1 g) = 0.369 W/kg; SAR(10 g) = 0.218 W/kg**

Maximum value of SAR (measured) = 0.401 W/kg

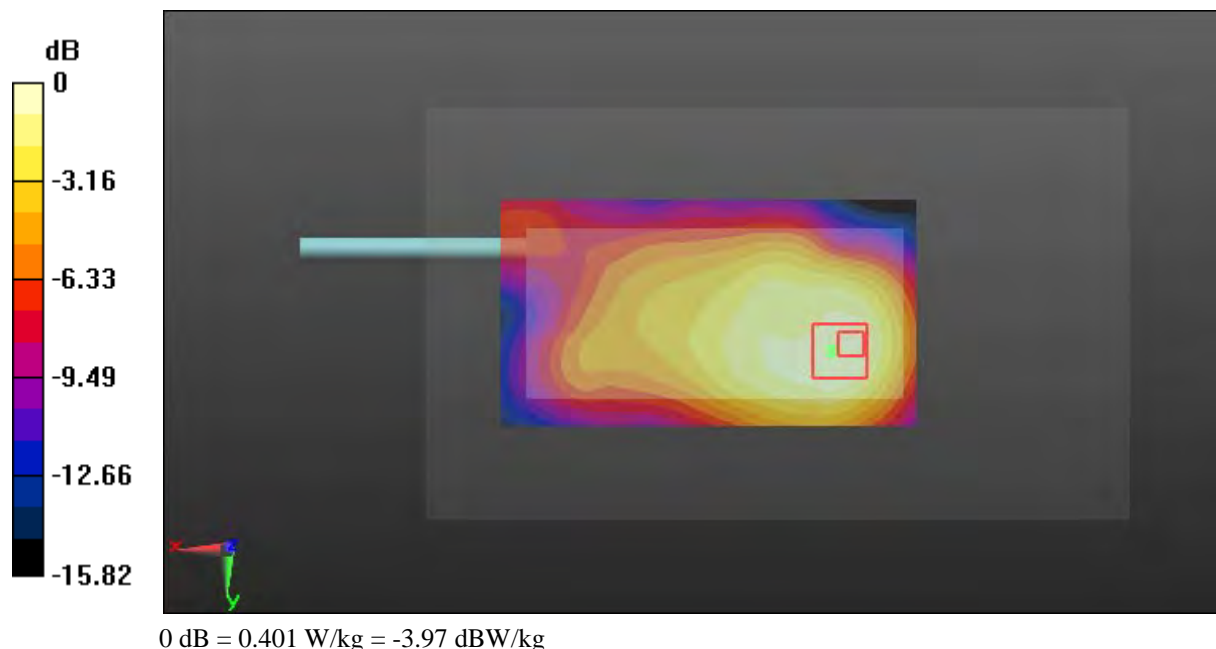

**Test Plot 88#: LTE Band 2\_Body Front \_Middle\_50%RB**

**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 1880 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 1880 \text{ MHz}$ ;  $\sigma = 1.479 \text{ S/m}$ ;  $\epsilon_r = 54.231$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.65, 4.65, 4.65); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x61x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.326 W/kg


**Zoom Scan (7x6x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 12.52 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.513 W/kg

**SAR(1 g) = 0.303 W/kg; SAR(10 g) = 0.177 W/kg**

Maximum value of SAR (measured) = 0.330 W/kg

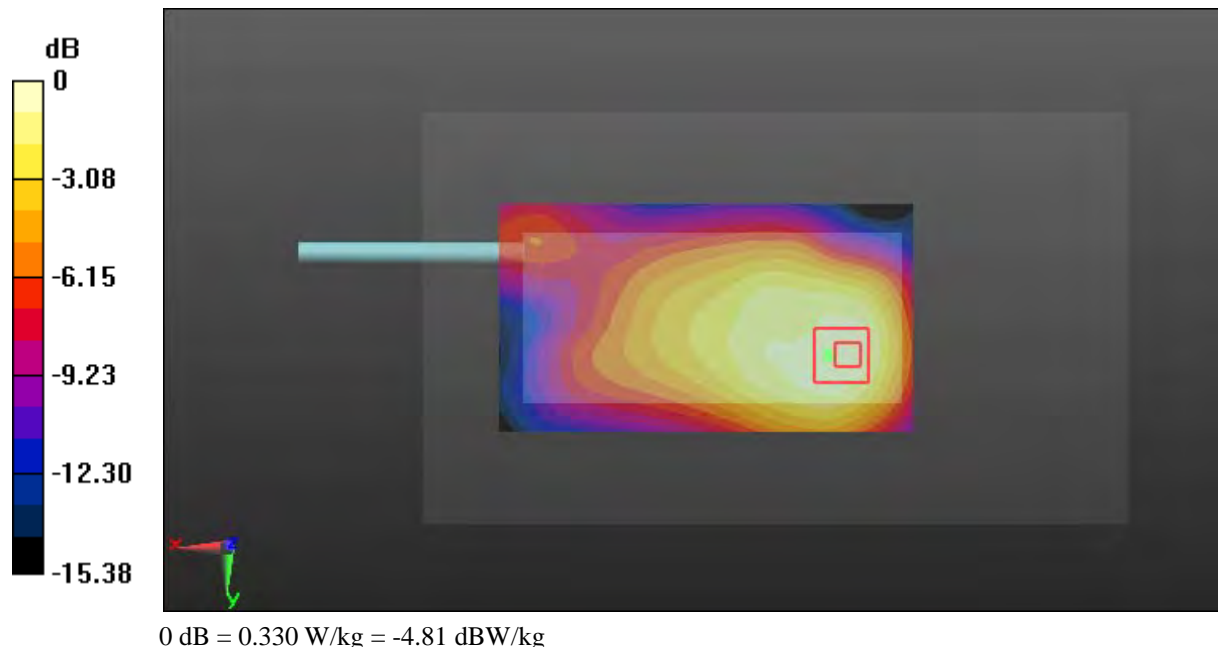



**Test Plot 89#: LTE Band 2\_Body Back\_Middle\_1RB**

**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 1880 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 1880 \text{ MHz}$ ;  $\sigma = 1.479 \text{ S/m}$ ;  $\epsilon_r = 54.231$ ;  $\rho = 1000 \text{ kg/m}^3$ ;  
 Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.65, 4.65, 4.65); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x61x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.196 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 7.144 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.280 W/kg

**SAR(1 g) = 0.180 W/kg; SAR(10 g) = 0.115 W/kg**

Maximum value of SAR (measured) = 0.192 W/kg

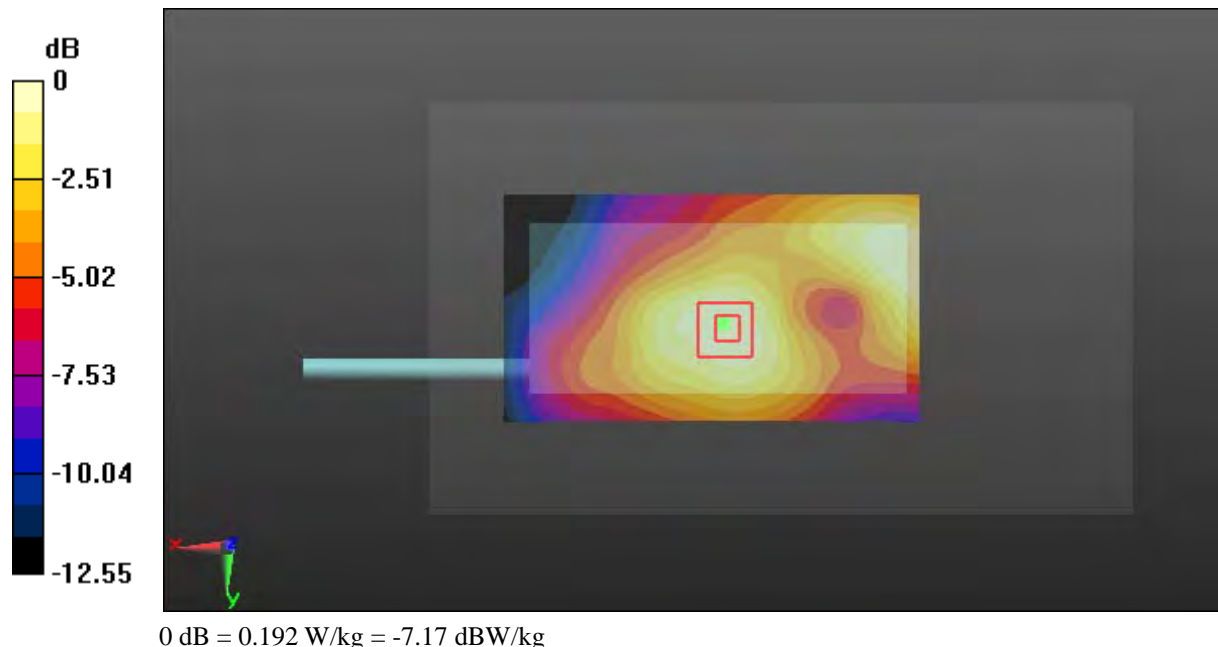

**Test Plot 90#: LTE Band 2\_Body Back\_Middle\_50%RB**

**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 1880 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 1880 \text{ MHz}$ ;  $\sigma = 1.479 \text{ S/m}$ ;  $\epsilon_r = 54.231$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.65, 4.65, 4.65); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (121x61x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) =  $0.156 \text{ W/kg}$


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value =  $7.131 \text{ V/m}$ ; Power Drift =  $-0.11 \text{ dB}$

Peak SAR (extrapolated) =  $0.221 \text{ W/kg}$

**SAR(1 g) =  $0.142 \text{ W/kg}$ ; SAR(10 g) =  $0.089 \text{ W/kg}$**

Maximum value of SAR (measured) =  $0.154 \text{ W/kg}$

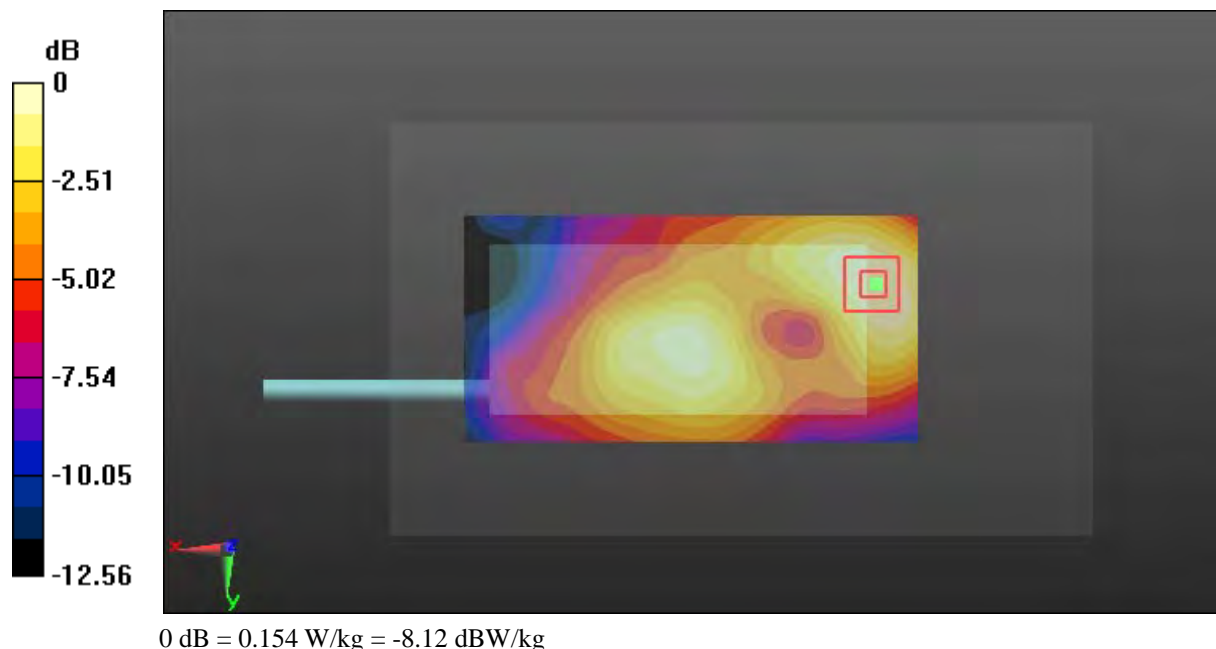

**Test Plot 91#: LTE Band 2\_Body Left\_Middle\_1RB**

**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 1880 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.479$  S/m;  $\epsilon_r = 54.231$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
 Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.65, 4.65, 4.65); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x51x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.553 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 18.62 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 0.822 W/kg

**SAR(1 g) = 0.507 W/kg; SAR(10 g) = 0.308 W/kg**

Maximum value of SAR (measured) = 0.550 W/kg

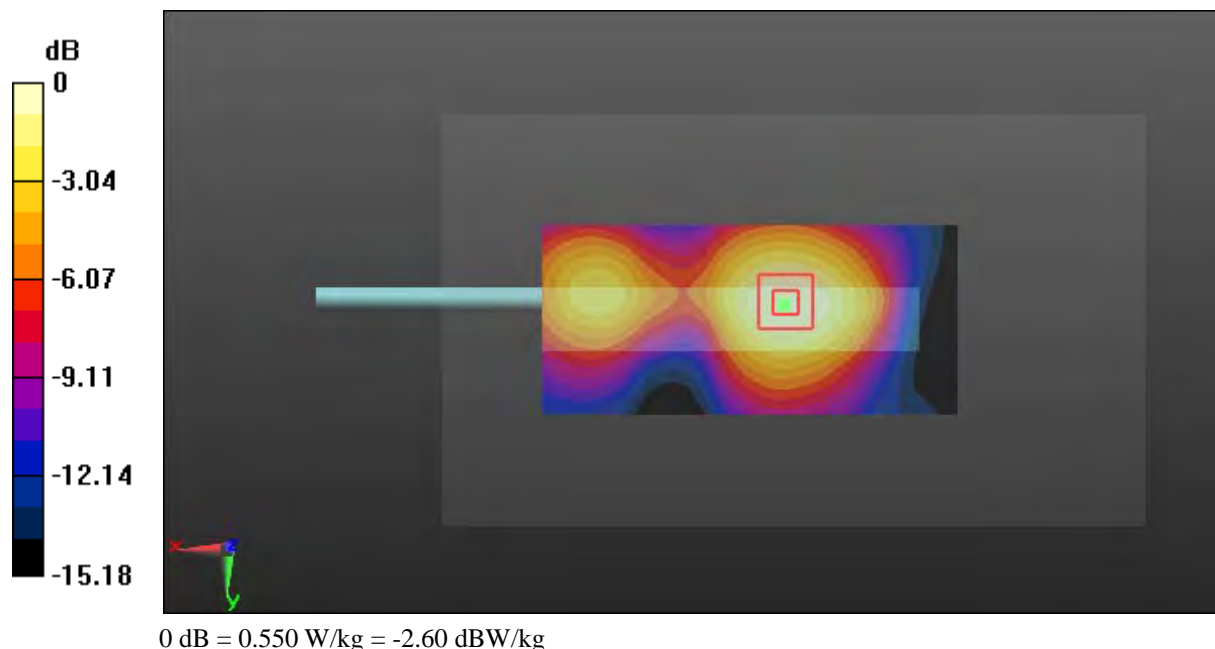

**Test Plot 92#: LTE Band 2\_Body Left\_Middle\_50%RB****DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 1880 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.479$  S/m;  $\epsilon_r = 54.231$ ;  $\rho = 1000$  kg/m<sup>3</sup>;  
Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.65, 4.65, 4.65); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x51x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.453 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 16.66 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.683 W/kg

**SAR(1 g) = 0.416 W/kg; SAR(10 g) = 0.251 W/kg**

Maximum value of SAR (measured) = 0.451 W/kg

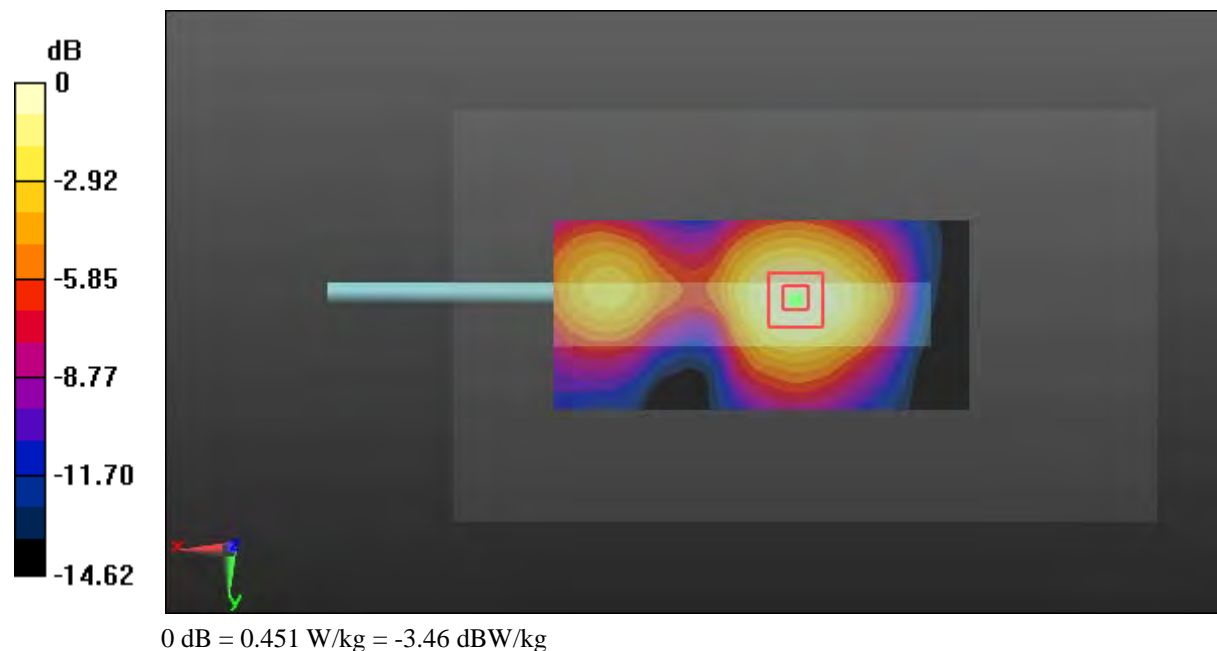

**Test Plot 93#: LTE Band 2\_Body Right\_Middle\_1RB**

**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 1880 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 1880 \text{ MHz}$ ;  $\sigma = 1.479 \text{ S/m}$ ;  $\epsilon_r = 54.231$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.65, 4.65, 4.65); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x51x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.201 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 7.638 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.310 W/kg

**SAR(1 g) = 0.183 W/kg; SAR(10 g) = 0.109 W/kg**

Maximum value of SAR (measured) = 0.198 W/kg

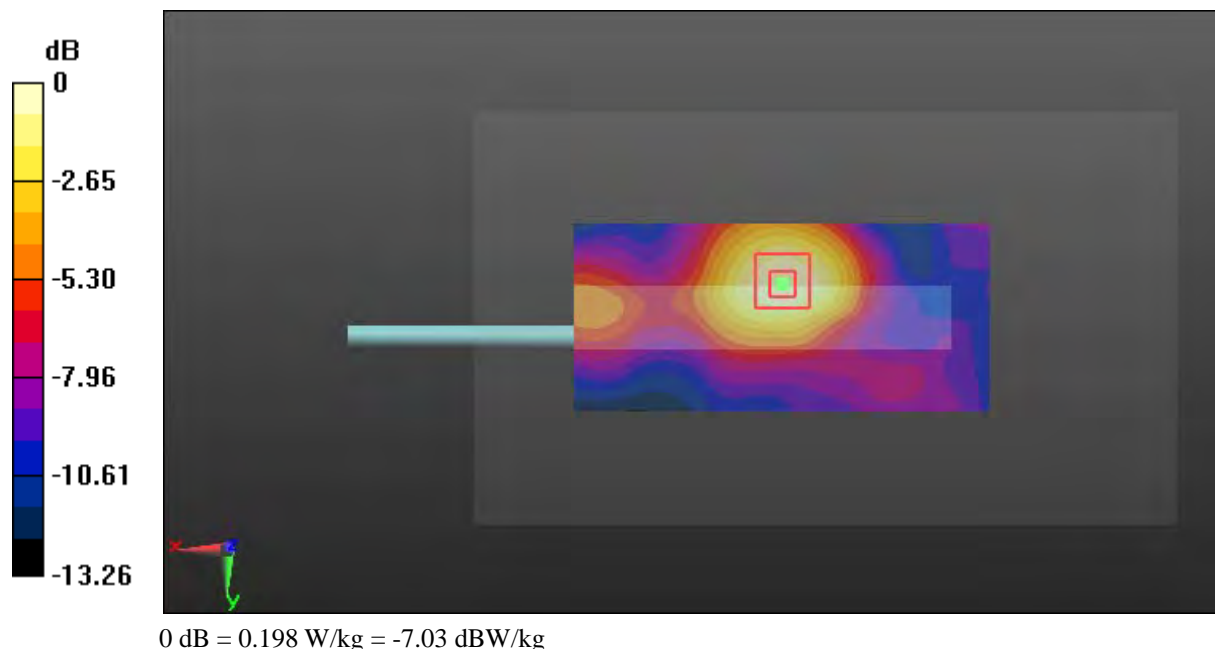

**Test Plot 94#: LTE Band 2\_Body Right\_Middle\_50%RB**

**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 1880 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 1880 \text{ MHz}$ ;  $\sigma = 1.479 \text{ S/m}$ ;  $\epsilon_r = 54.231$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.65, 4.65, 4.65); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x51x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.148 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 6.464 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.229 W/kg

**SAR(1 g) = 0.135 W/kg; SAR(10 g) = 0.082 W/kg**

Maximum value of SAR (measured) = 0.145 W/kg

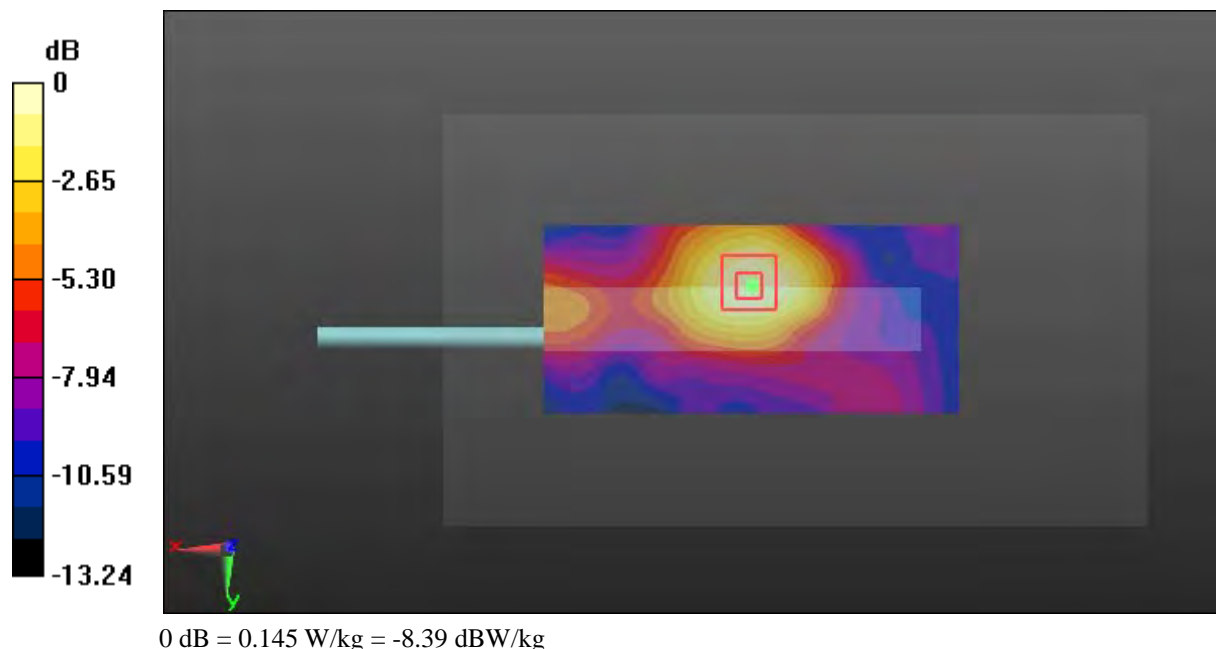

**Test Plot 95#: LTE Band 2\_Body Bottom\_Middle\_1RB**

**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 1880 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.479$  S/m;  $\epsilon_r = 54.231$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
 Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.65, 4.65, 4.65); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (51x81x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.447 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 16.27 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.723 W/kg

**SAR(1 g) = 0.396 W/kg; SAR(10 g) = 0.222 W/kg**

Maximum value of SAR (measured) = 0.428 W/kg

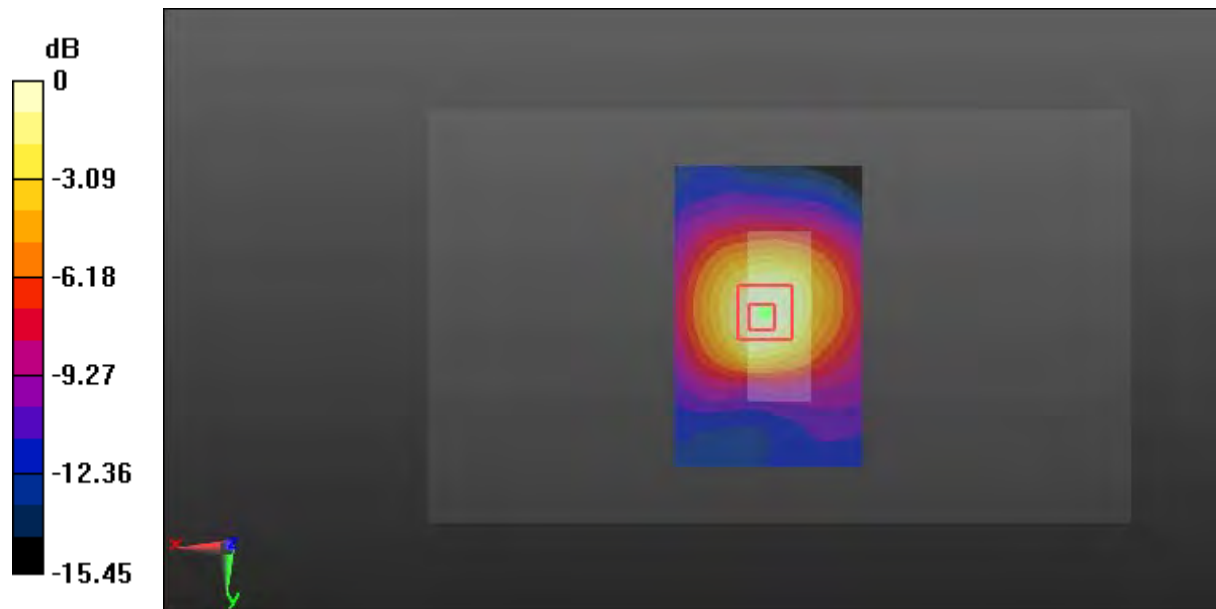

0 dB = 0.428 W/kg = -3.69 dBW/kg

**Test Plot 96#: LTE Band 2\_Body Bottom\_Middle\_50%RB****DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 1880 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.479$  S/m;  $\epsilon_r = 54.231$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.65, 4.65, 4.65); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (51x81x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.375 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.83 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 0.597 W/kg

**SAR(1 g) = 0.332 W/kg; SAR(10 g) = 0.187 W/kg**

Maximum value of SAR (measured) = 0.359 W/kg

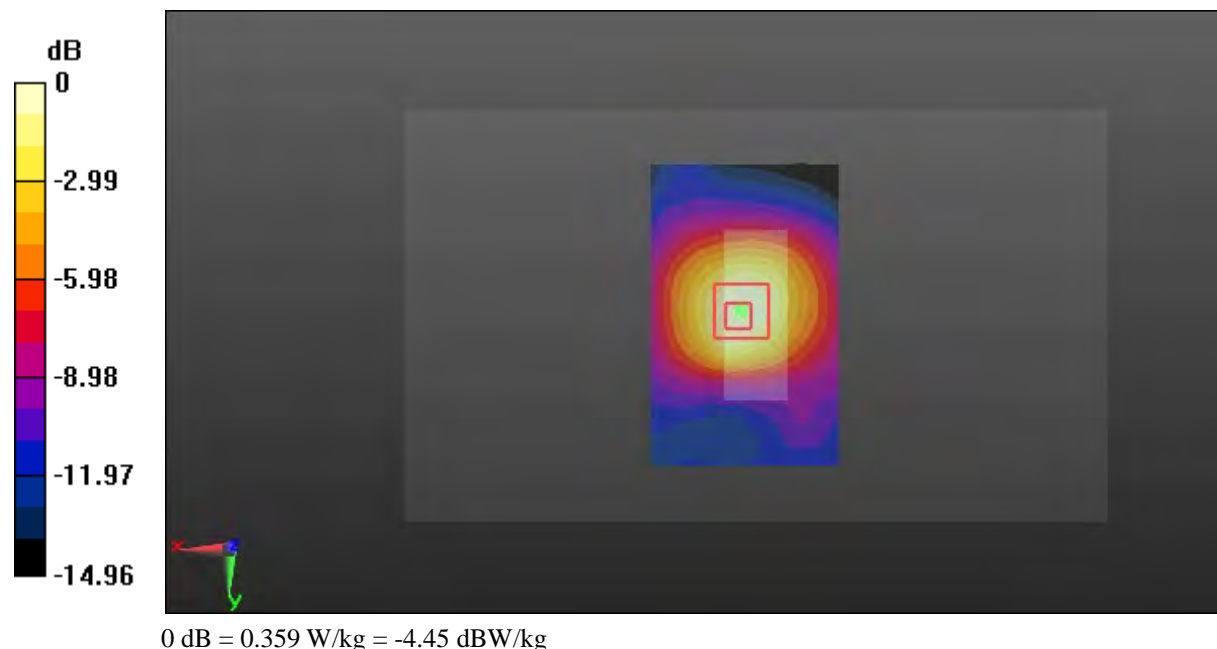



**Test Plot 97#: LTE Band 4\_Head Left Cheek\_Middle\_1RB****DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 1732.5 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 1732.5$  MHz;  $\sigma = 1.34$  S/m;  $\epsilon_r = 41.251$ ;  $\rho = 1000$  kg/m<sup>3</sup>;  
Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(5.13, 5.13, 5.13); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x71x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.279 W/kg


**Zoom Scan (6x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.397 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.376 W/kg

**SAR(1 g) = 0.269 W/kg; SAR(10 g) = 0.179 W/kg**

Maximum value of SAR (measured) = 0.285 W/kg

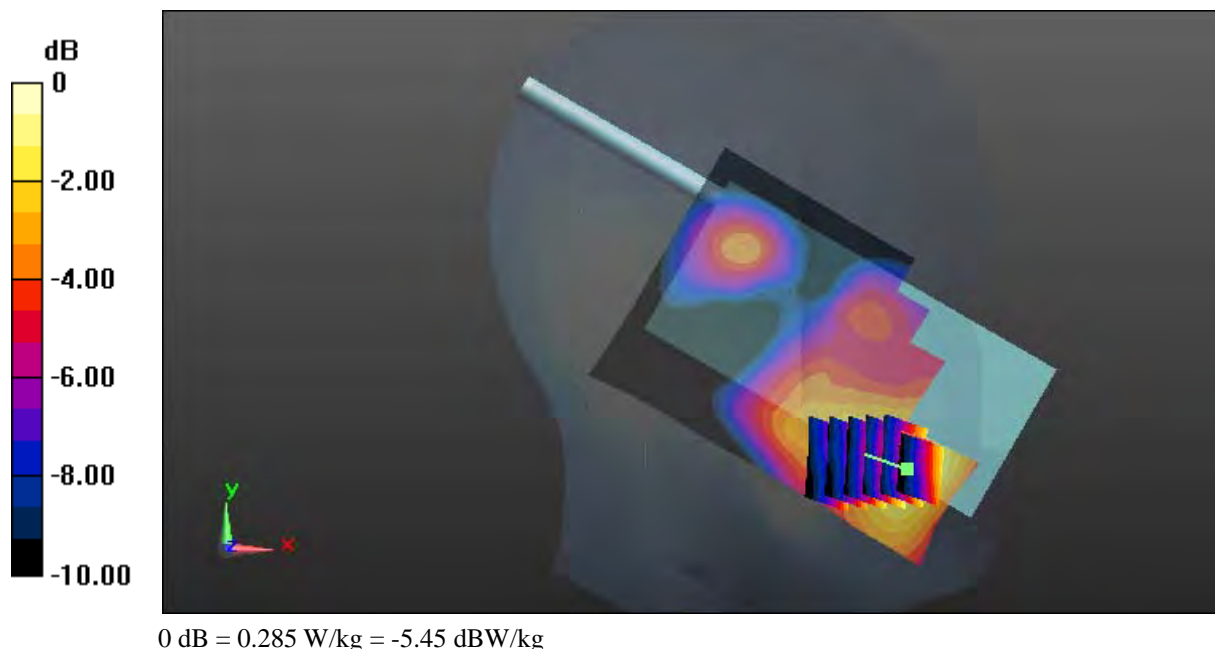

**Test Plot 98#: LTE Band 4\_Head Left Cheek\_Middle\_50%RB****DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 1732.5 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 1732.5$  MHz;  $\sigma = 1.34$  S/m;  $\epsilon_r = 41.251$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(5.13, 5.13, 5.13); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x71x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.236 W/kg


**Zoom Scan (6x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.678 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.317 W/kg

**SAR(1 g) = 0.220 W/kg; SAR(10 g) = 0.146 W/kg**

Maximum value of SAR (measured) = 0.236 W/kg

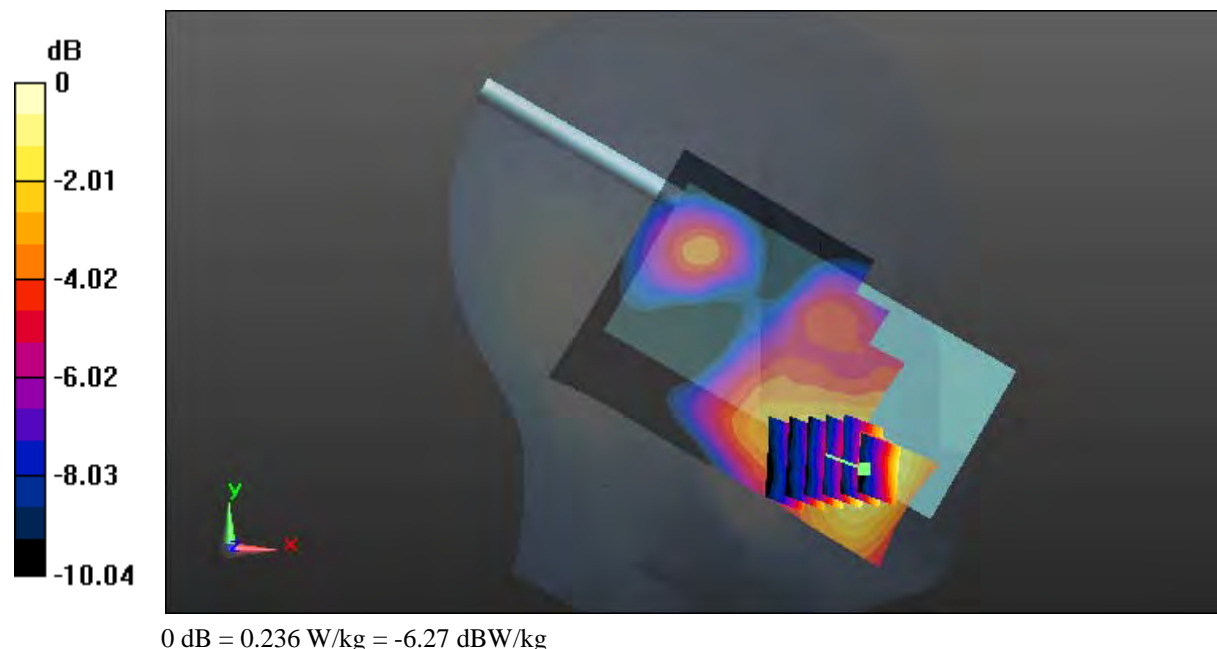

**Test Plot 99#: LTE Band 4\_Head Left Tilt\_Middle\_1RB****DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 1732.5 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 1732.5$  MHz;  $\sigma = 1.34$  S/m;  $\epsilon_r = 41.251$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(5.13, 5.13, 5.13); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x61x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.127 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.622 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.163 W/kg

**SAR(1 g) = 0.116 W/kg; SAR(10 g) = 0.076 W/kg**

Maximum value of SAR (measured) = 0.123 W/kg

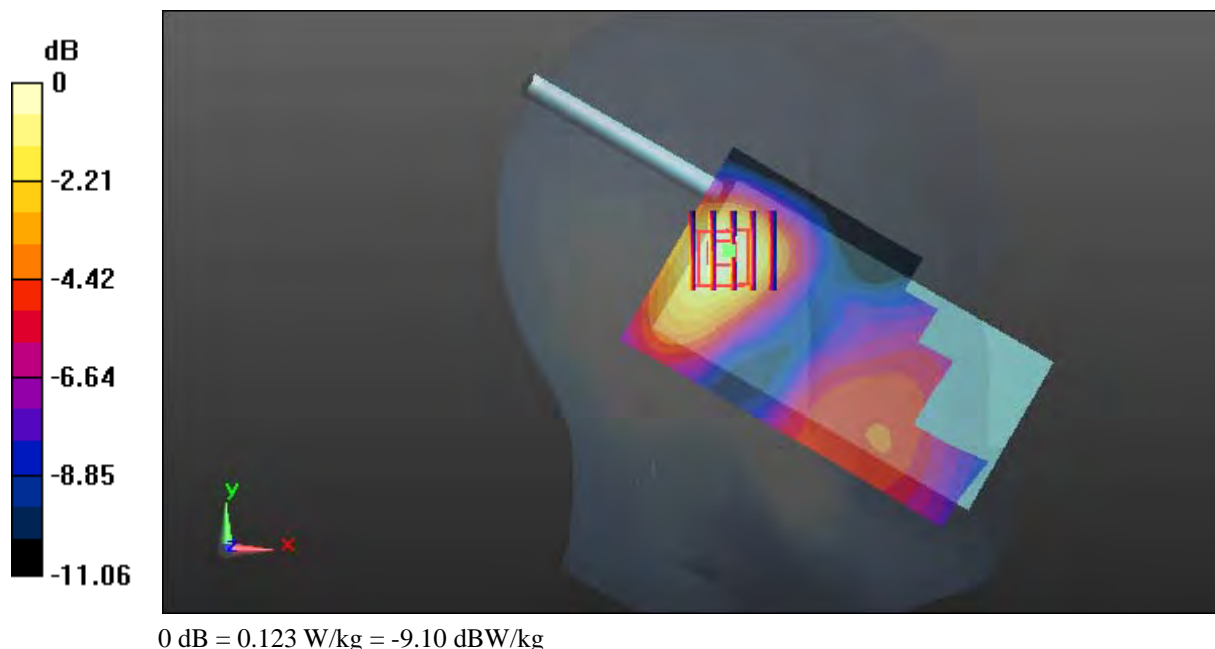

**Test Plot 100#: LTE Band 4\_Head Left Tilt\_Middle\_50%RB**

**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 1732.5 MHz;Duty Cycle: 1:1  
 Medium parameters used:  $f = 1732.5 \text{ MHz}$ ;  $\sigma = 1.34 \text{ S/m}$ ;  $\epsilon_r = 41.251$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(5.13, 5.13, 5.13); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772;Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x61x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.0917 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 6.584 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 0.119 W/kg

**SAR(1 g) = 0.086 W/kg; SAR(10 g) = 0.057 W/kg**

Maximum value of SAR (measured) = 0.0905 W/kg

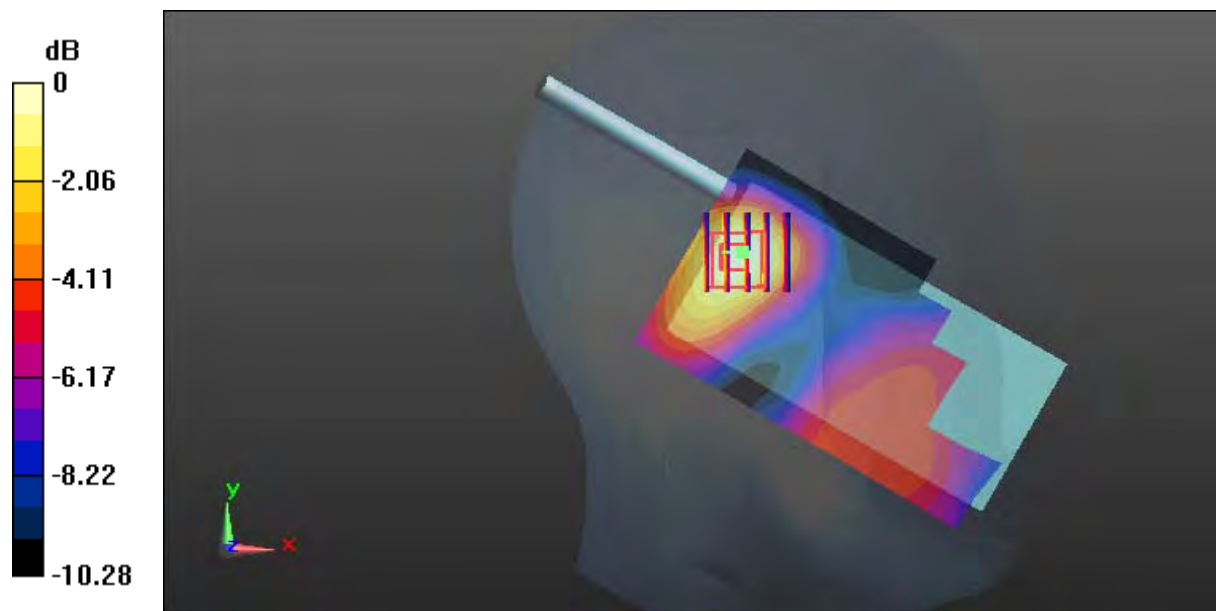

0 dB = 0.0905 W/kg = -10.43 dBW/kg

**Test Plot 101#: LTE Band 4\_Head Right Cheek\_Middle\_1RB****DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 1732.5 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 1732.5$  MHz;  $\sigma = 1.34$  S/m;  $\epsilon_r = 41.251$ ;  $\rho = 1000$  kg/m<sup>3</sup>;  
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(5.13, 5.13, 5.13); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x61x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.156 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.617 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 0.199 W/kg

**SAR(1 g) = 0.142 W/kg; SAR(10 g) = 0.101 W/kg**

Maximum value of SAR (measured) = 0.150 W/kg

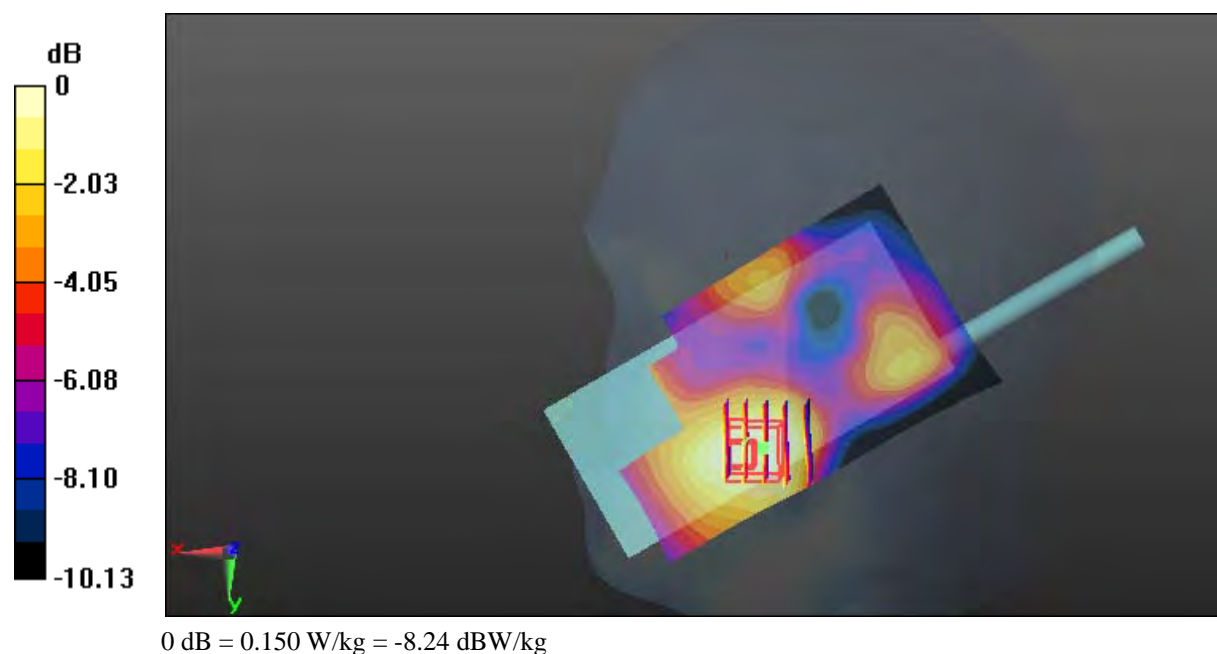

**Test Plot 102#: LTE Band 4\_Head Right Cheek\_Middle\_50%RB****DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 1732.5 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 1732.5$  MHz;  $\sigma = 1.34$  S/m;  $\epsilon_r = 41.251$ ;  $\rho = 1000$  kg/m<sup>3</sup>;  
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(5.13, 5.13, 5.13); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x61x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.123 W/kg


**Zoom Scan (6x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.909 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.149 W/kg

**SAR(1 g) = 0.109 W/kg; SAR(10 g) = 0.078 W/kg**

Maximum value of SAR (measured) = 0.118 W/kg

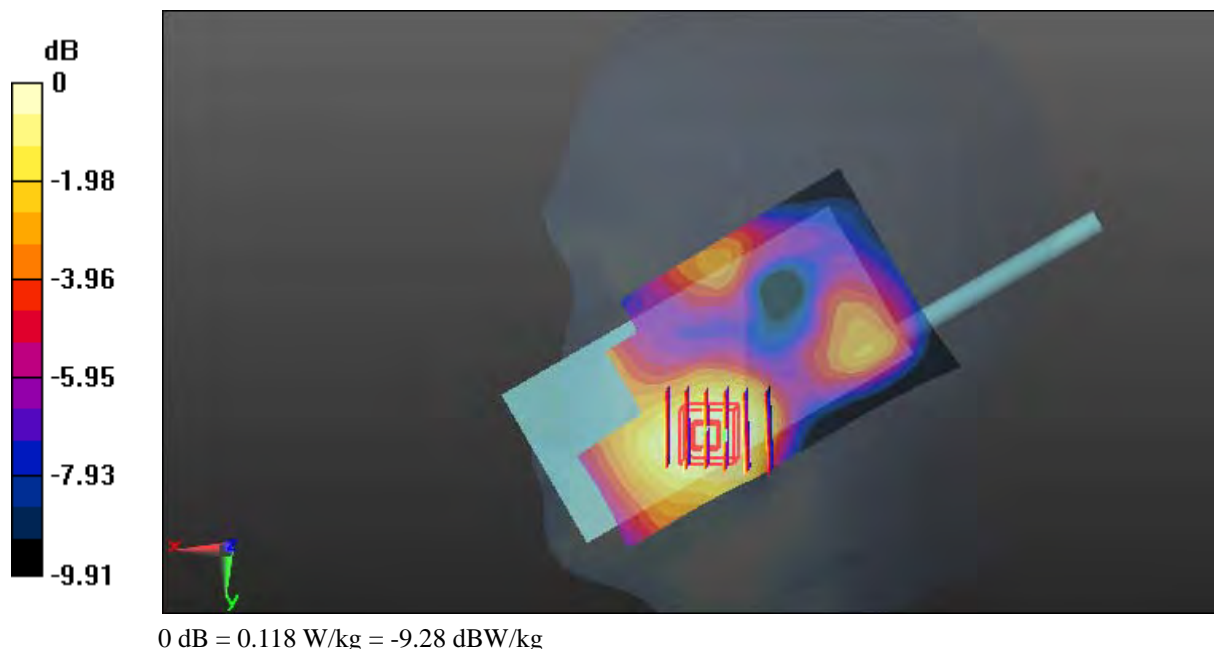

**Test Plot 103#: LTE Band 4\_Head Right Tilt\_Middle\_1RB****DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 1732.5 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 1732.5$  MHz;  $\sigma = 1.34$  S/m;  $\epsilon_r = 41.251$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(5.13, 5.13, 5.13); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x61x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0911 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.704 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 0.105 W/kg

**SAR(1 g) = 0.082 W/kg; SAR(10 g) = 0.058 W/kg**

Maximum value of SAR (measured) = 0.0860 W/kg

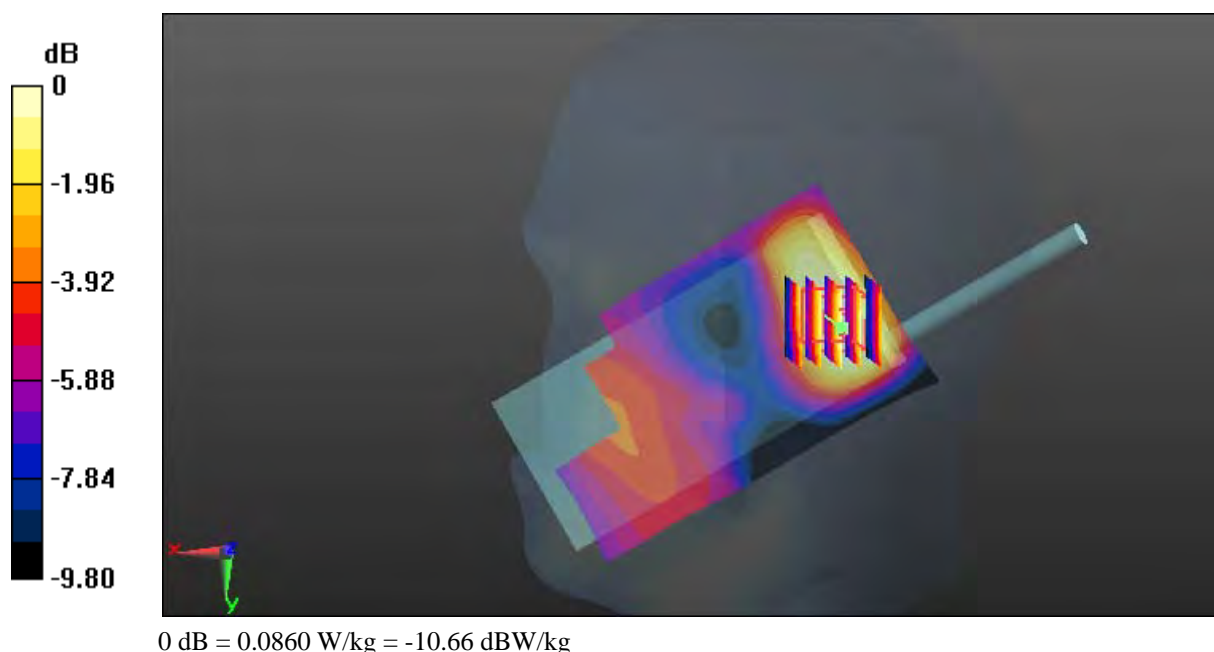

**Test Plot 104#: LTE Band 4\_Head Right Tilt\_Middle\_50%RB**

**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 1732.5 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 1732.5$  MHz;  $\sigma = 1.34$  S/m;  $\epsilon_r = 41.251$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
 Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(5.13, 5.13, 5.13); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x61x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0686 W/kg


**Zoom Scan (6x6x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.452 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.0800 W/kg

**SAR(1 g) = 0.062 W/kg; SAR(10 g) = 0.045 W/kg**

Maximum value of SAR (measured) = 0.0656 W/kg

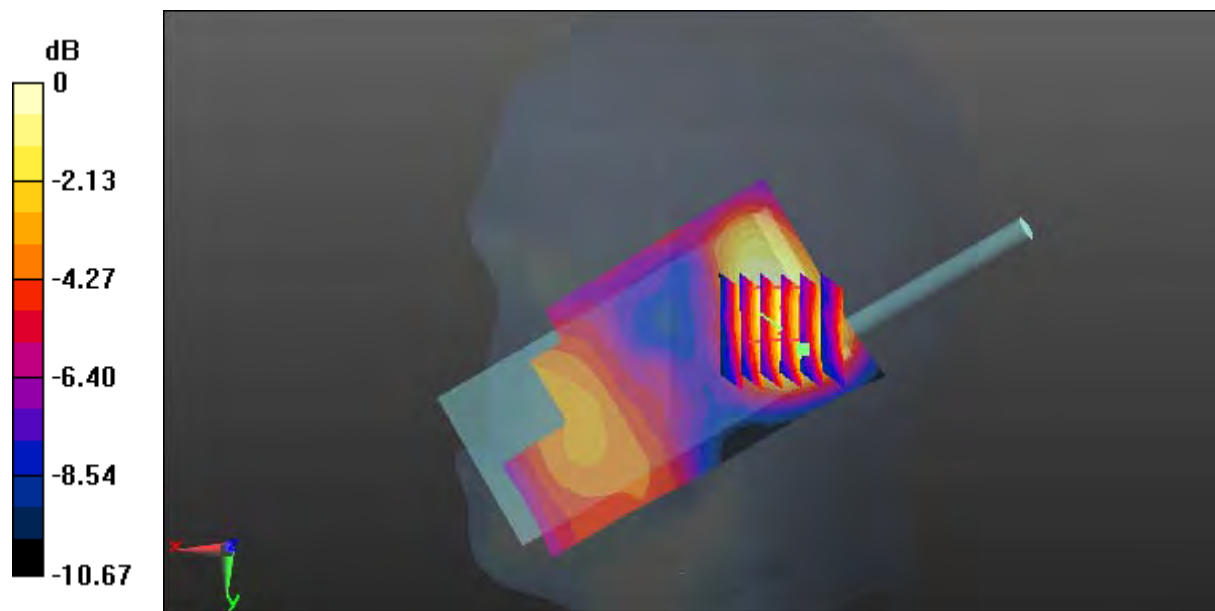

0 dB = 0.0656 W/kg = -11.83 dBW/kg



**Test Plot 105#: LTE Band 4\_Face Up\_Low\_1RB**

**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 1720 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 1720 \text{ MHz}$ ;  $\sigma = 1.333 \text{ S/m}$ ;  $\epsilon_r = 41.262$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(5.13, 5.13, 5.13); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x61x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.273 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 8.474 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.359 W/kg

**SAR(1 g) = 0.258 W/kg; SAR(10 g) = 0.178 W/kg**

Maximum value of SAR (measured) = 0.275 W/kg

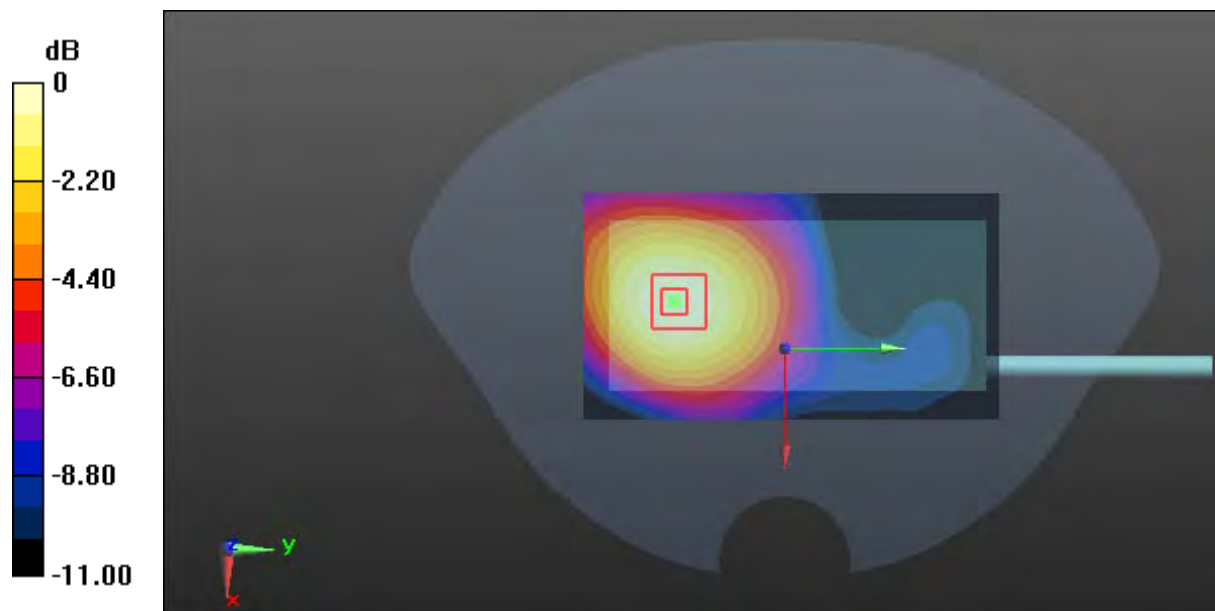

0 dB = 0.275 W/kg = -5.61 dBW/kg

**Test Plot 106#: LTE Band 4\_Face Up\_Middle\_1RB**

**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 1732.5 MHz;Duty Cycle: 1:1  
 Medium parameters used:  $f = 1732.5 \text{ MHz}$ ;  $\sigma = 1.34 \text{ S/m}$ ;  $\epsilon_r = 41.251$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(5.13, 5.13, 5.13); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772;Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x61x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.318 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 8.942 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.403 W/kg

**SAR(1 g) = 0.283 W/kg; SAR(10 g) = 0.194 W/kg**

Maximum value of SAR (measured) = 0.297 W/kg

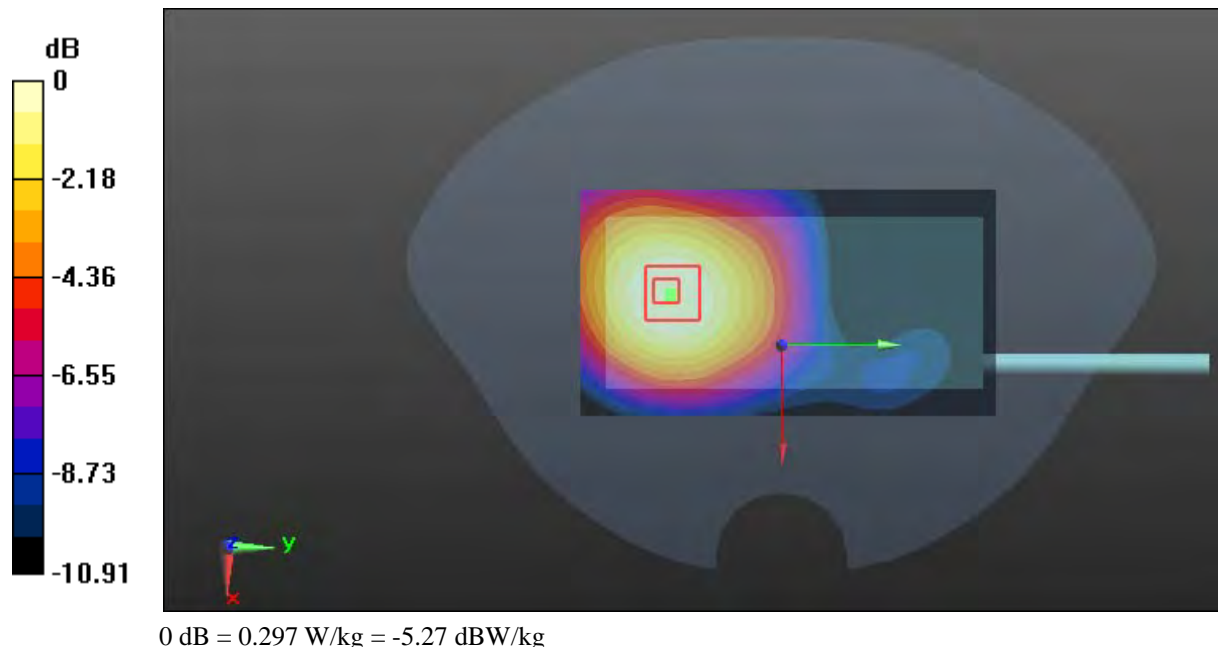

**Test Plot 107#: LTE Band 4\_Face Up\_High\_1RB**

**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 1745 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 1745 \text{ MHz}$ ;  $\sigma = 1.347 \text{ S/m}$ ;  $\epsilon_r = 41.091$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(5.13, 5.13, 5.13); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x61x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.291 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 9.353 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.376 W/kg

**SAR(1 g) = 0.272 W/kg; SAR(10 g) = 0.186 W/kg**

Maximum value of SAR (measured) = 0.290 W/kg

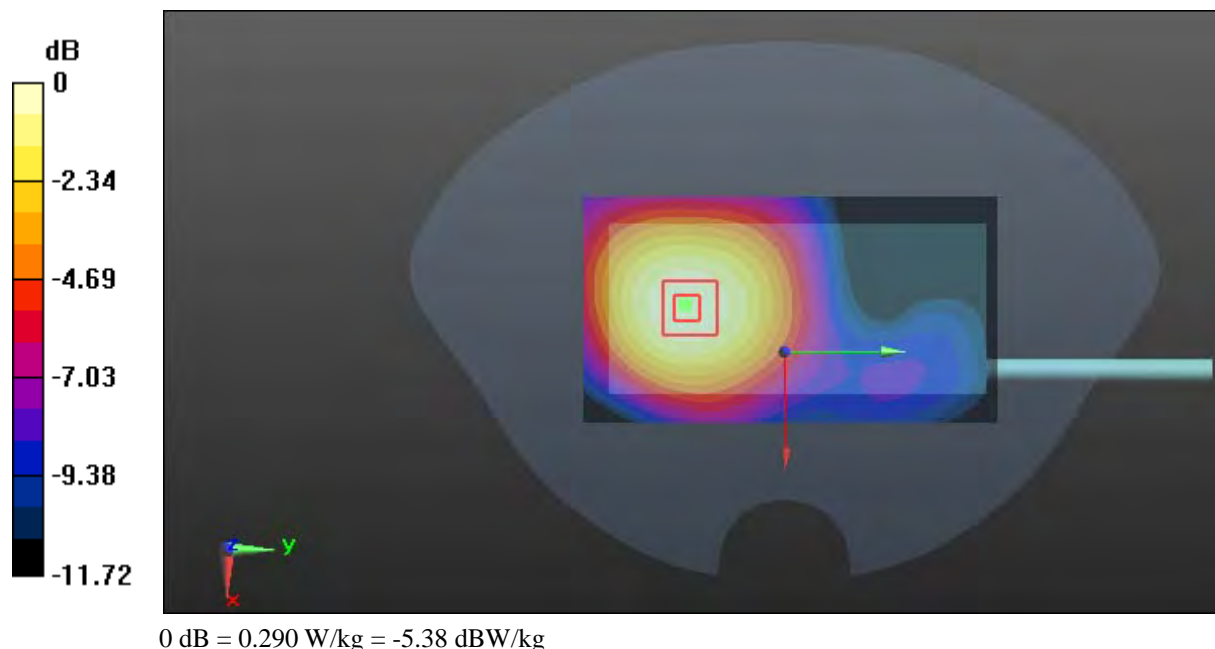

**Test Plot 108#: LTE Band 4\_Face Up\_Middle\_50%RB****DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 1732.5 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 1732.5$  MHz;  $\sigma = 1.34$  S/m;  $\epsilon_r = 41.251$ ;  $\rho = 1000$  kg/m<sup>3</sup>;  
Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(5.13, 5.13, 5.13); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x61x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.241 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.955 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.312 W/kg

**SAR(1 g) = 0.221 W/kg; SAR(10 g) = 0.152 W/kg**

Maximum value of SAR (measured) = 0.236 W/kg

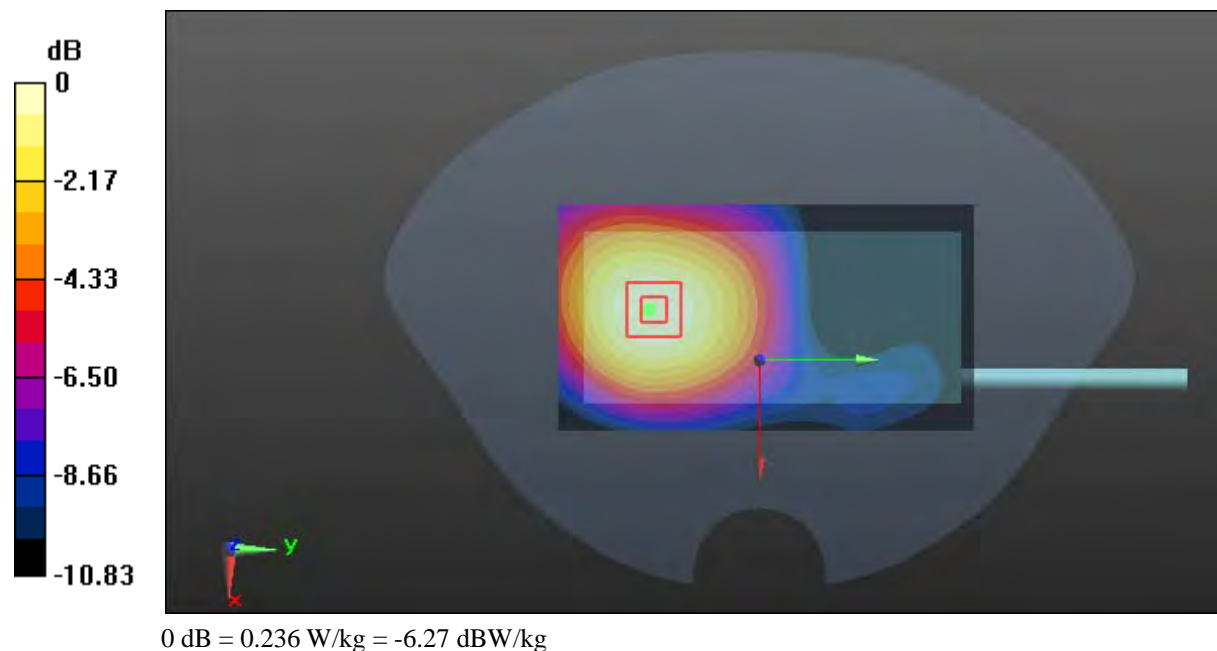

**Test Plot 109#: LTE Band 4\_Body Front \_Middle\_1RB****DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 1732.5 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 1732.5$  MHz;  $\sigma = 1.528$  S/m;  $\epsilon_r = 52.822$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.84, 4.84, 4.84); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x61x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.575 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.53 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.723 W/kg

**SAR(1 g) = 0.460 W/kg; SAR(10 g) = 0.286 W/kg**

Maximum value of SAR (measured) = 0.499 W/kg

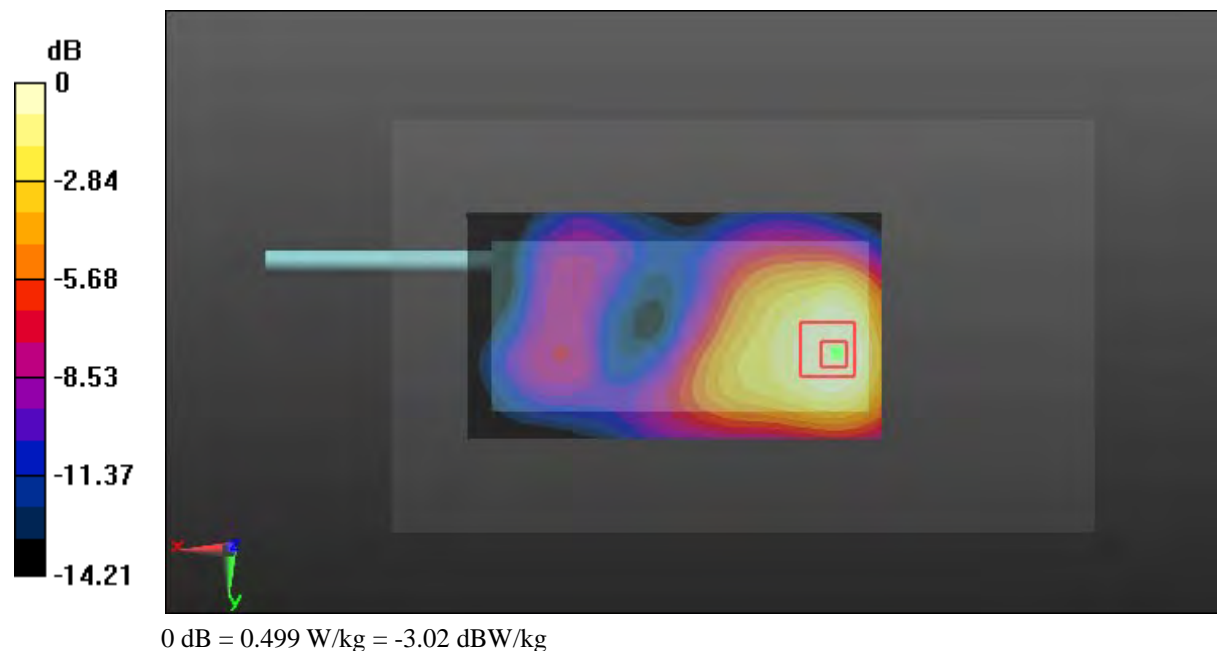

**Test Plot 110#: LTE Band 4\_Body Front \_Middle\_50%RB**

**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 1732.5 MHz;Duty Cycle: 1:1  
 Medium parameters used:  $f = 1732.5$  MHz;  $\sigma = 1.528$  S/m;  $\epsilon_r = 52.822$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
 Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.84, 4.84, 4.84); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772;Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x61x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.442 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.70 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.629 W/kg

**SAR(1 g) = 0.395 W/kg; SAR(10 g) = 0.242 W/kg**

Maximum value of SAR (measured) = 0.432 W/kg

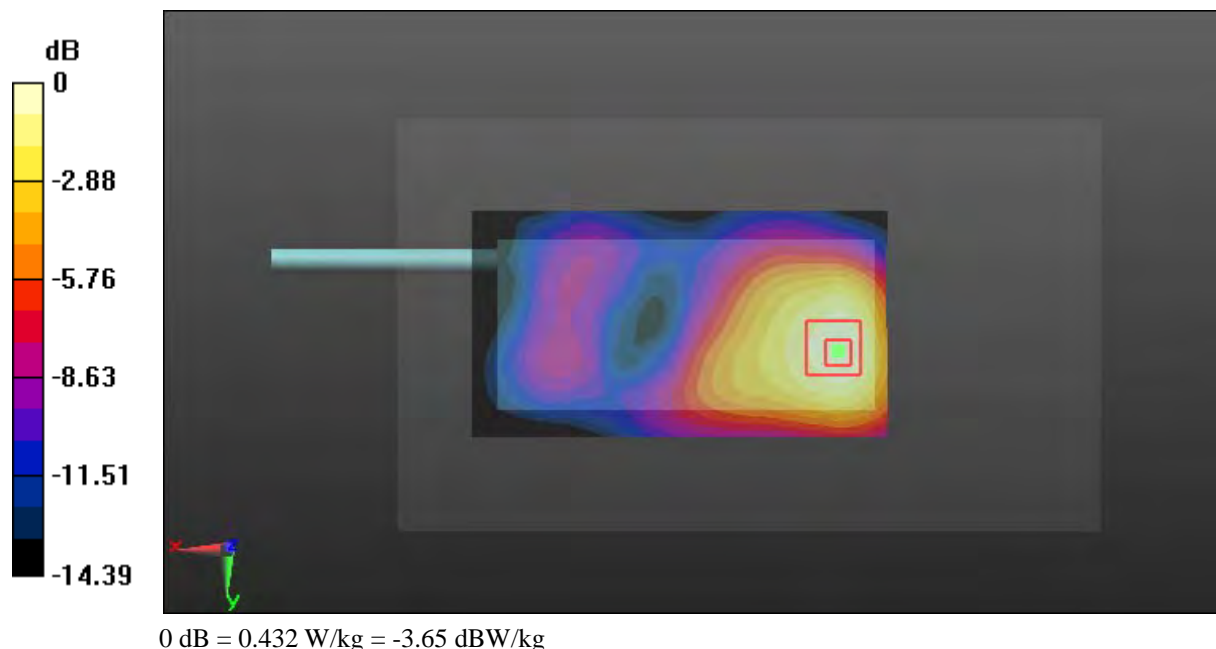

**Test Plot 111#: LTE Band 4\_Body Back\_Middle\_1RB****DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 1732.5 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 1732.5$  MHz;  $\sigma = 1.528$  S/m;  $\epsilon_r = 52.822$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.84, 4.84, 4.84); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x61x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.328 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.62 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 0.446 W/kg

**SAR(1 g) = 0.302 W/kg; SAR(10 g) = 0.200 W/kg**

Maximum value of SAR (measured) = 0.326 W/kg

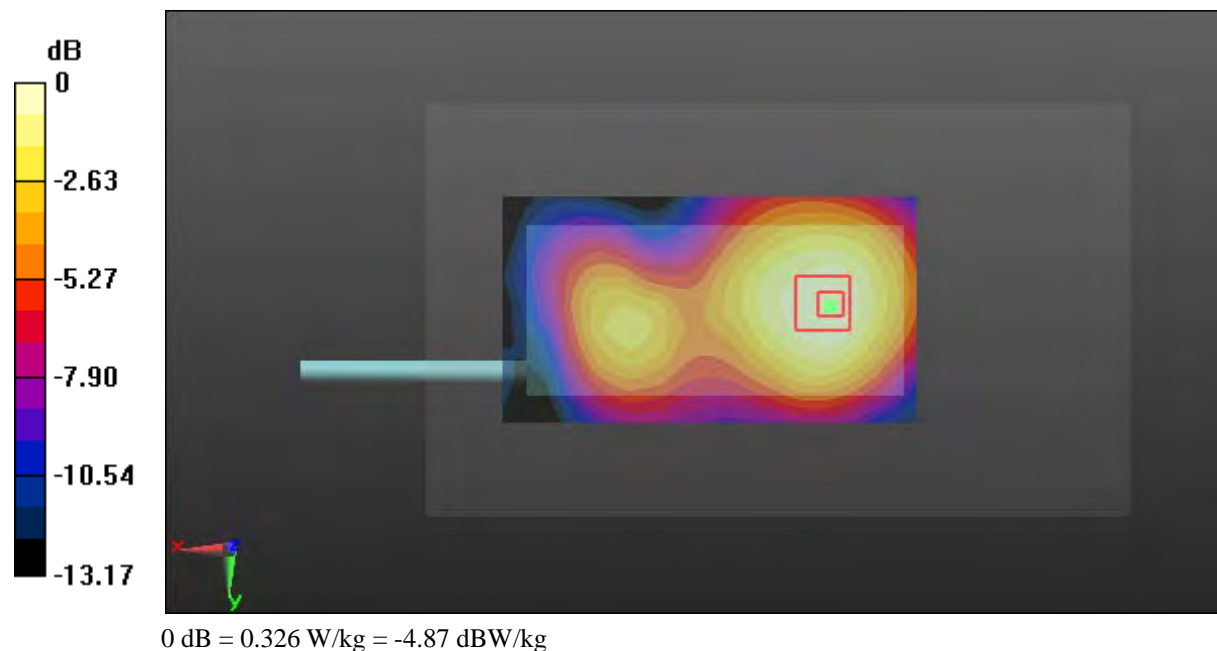

**Test Plot 112#: LTE Band 4\_Body Back\_Middle\_50%RB**

**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 1732.5 MHz;Duty Cycle: 1:1  
 Medium parameters used:  $f = 1732.5 \text{ MHz}$ ;  $\sigma = 1.528 \text{ S/m}$ ;  $\epsilon_r = 52.822$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.84, 4.84, 4.84); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772;Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x61x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.272 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 12.49 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.368 W/kg

**SAR(1 g) = 0.248 W/kg; SAR(10 g) = 0.165 W/kg**

Maximum value of SAR (measured) = 0.264 W/kg

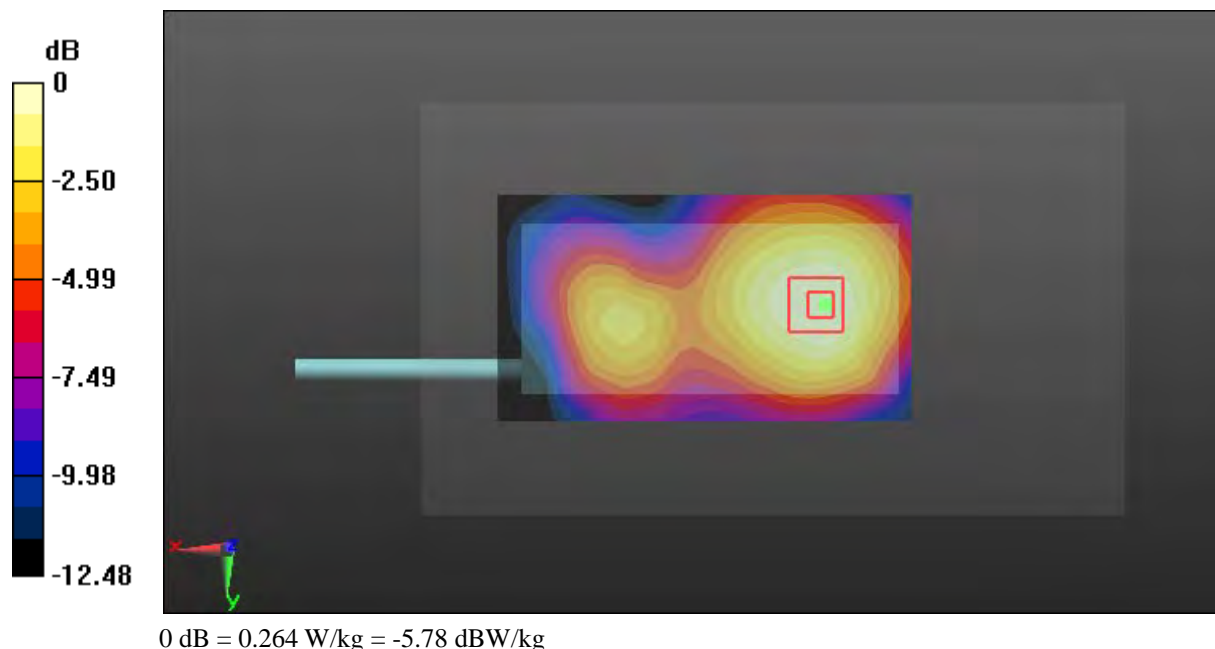



**Test Plot 113#: LTE Band 4\_Body Left\_Middle\_1RB**

**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 1732.5 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 1732.5 \text{ MHz}$ ;  $\sigma = 1.528 \text{ S/m}$ ;  $\epsilon_r = 52.822$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.84, 4.84, 4.84); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x51x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.414 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 16.31 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.590 W/kg

**SAR(1 g) = 0.380 W/kg; SAR(10 g) = 0.238 W/kg**

Maximum value of SAR (measured) = 0.410 W/kg

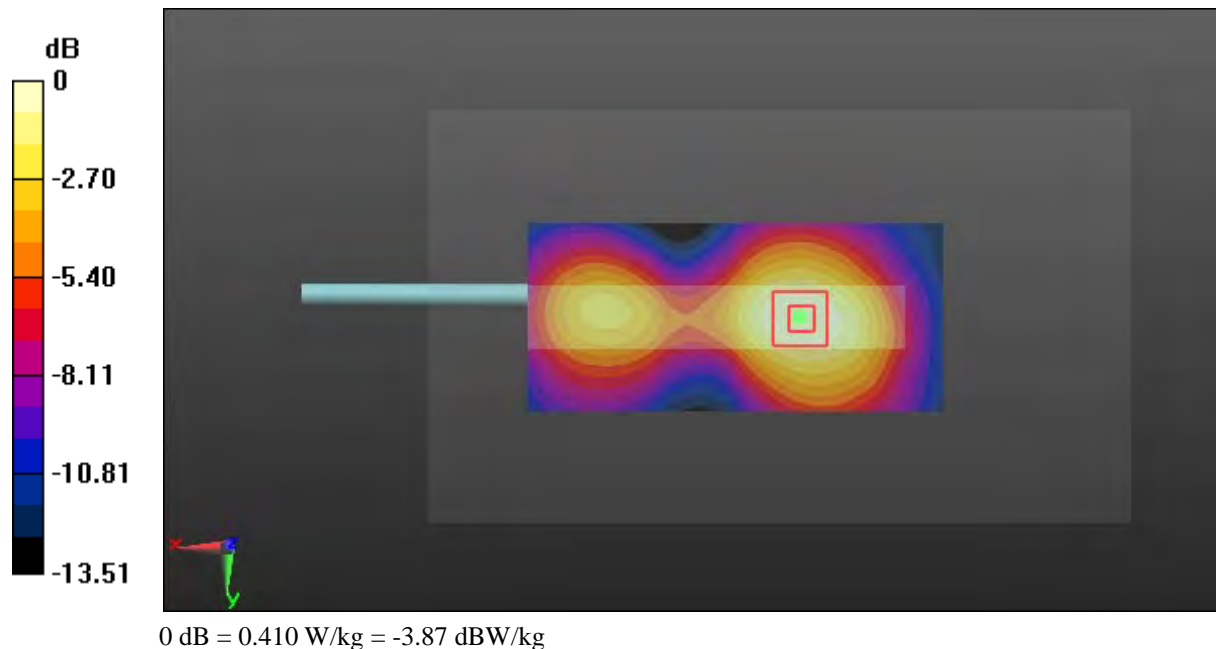

**Test Plot 114#: LTE Band 4\_Body Left\_Middle\_50%RB**

**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 1732.5 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 1732.5$  MHz;  $\sigma = 1.528$  S/m;  $\epsilon_r = 52.822$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
 Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.84, 4.84, 4.84); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x51x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.312 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.77 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.437 W/kg

**SAR(1 g) = 0.284 W/kg; SAR(10 g) = 0.179 W/kg**

Maximum value of SAR (measured) = 0.306 W/kg

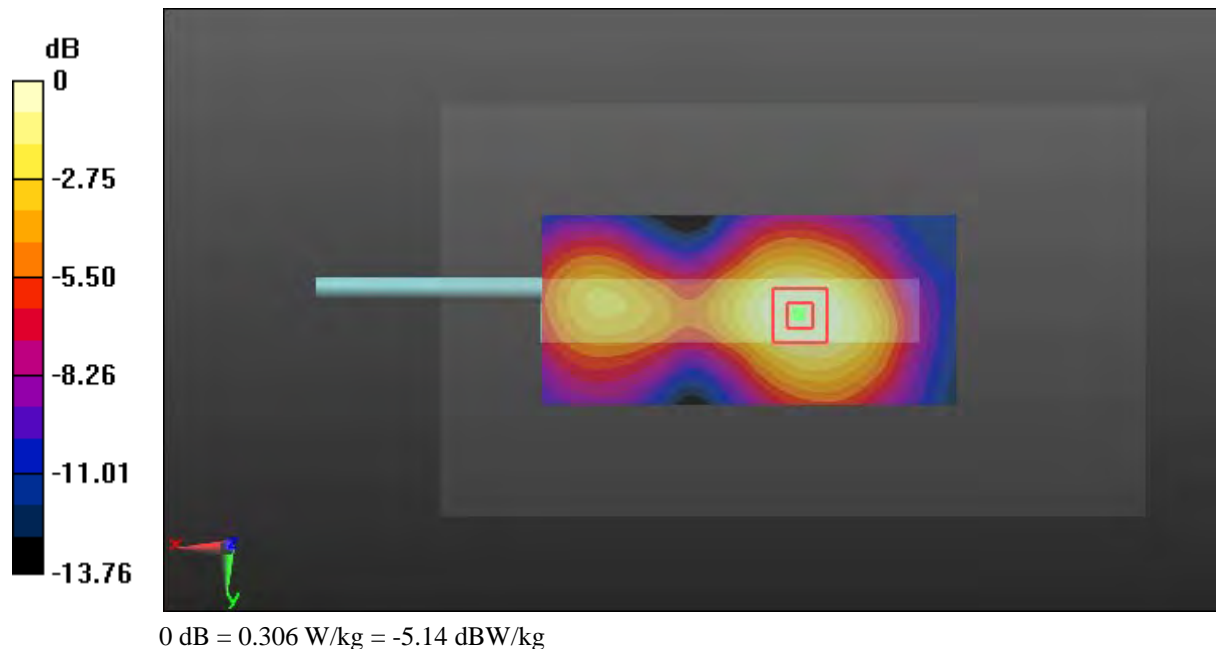

**Test Plot 115#: LTE Band 4\_Body Right\_Middle\_1RB**

**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 1732.5 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 1732.5 \text{ MHz}$ ;  $\sigma = 1.528 \text{ S/m}$ ;  $\epsilon_r = 52.822$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.84, 4.84, 4.84); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x51x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) =  $0.110 \text{ W/kg}$


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value =  $7.704 \text{ V/m}$ ; Power Drift =  $0.02 \text{ dB}$

Peak SAR (extrapolated) =  $0.166 \text{ W/kg}$

**SAR(1 g) =  $0.108 \text{ W/kg}$ ; SAR(10 g) =  $0.069 \text{ W/kg}$**

Maximum value of SAR (measured) =  $0.117 \text{ W/kg}$

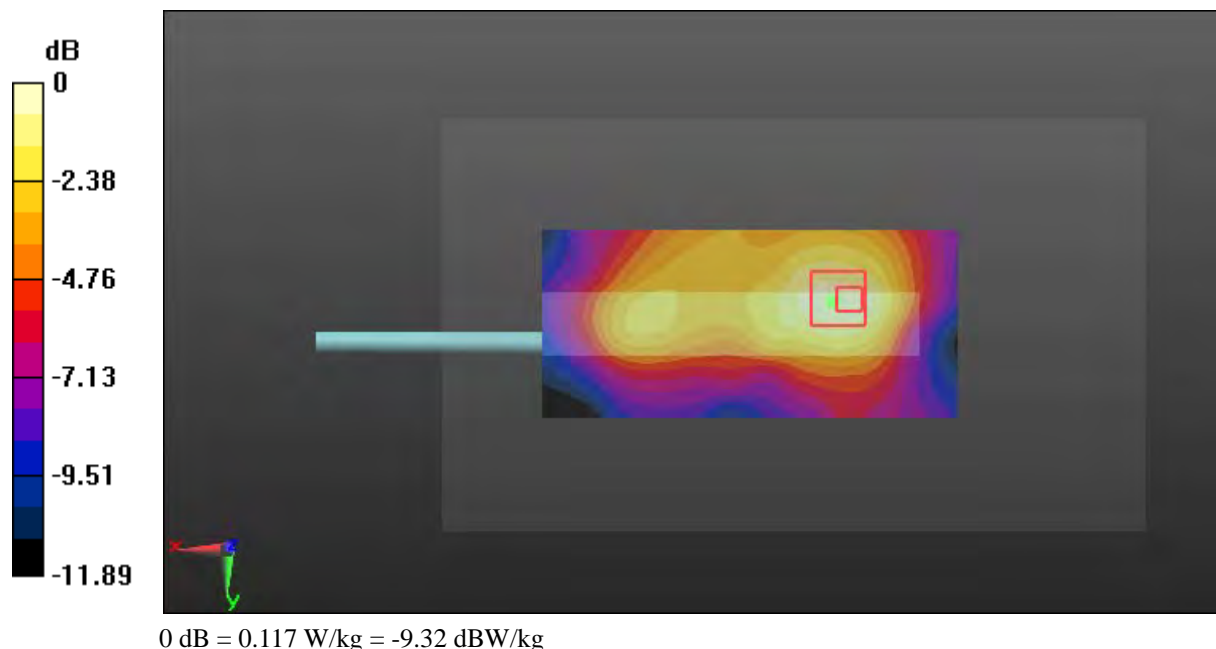

**Test Plot 116#: LTE Band 4\_Body Right\_Middle\_50%RB****DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 1732.5 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 1732.5$  MHz;  $\sigma = 1.528$  S/m;  $\epsilon_r = 52.822$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.84, 4.84, 4.84); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x51x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0937 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.259 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.128 W/kg

**SAR(1 g) = 0.088 W/kg; SAR(10 g) = 0.057 W/kg**

Maximum value of SAR (measured) = 0.0937 W/kg

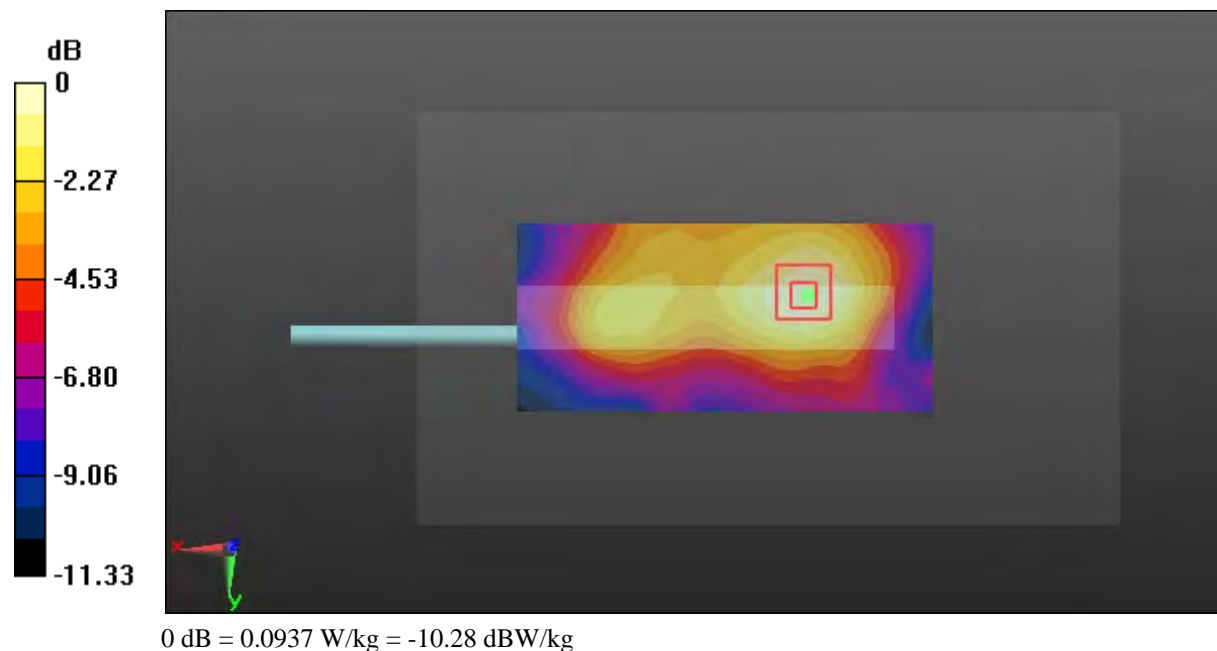

**Test Plot 117#: LTE Band 4\_Body Bottom\_Low\_1RB**

**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 1720 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 1720$  MHz;  $\sigma = 1.509$  S/m;  $\epsilon_r = 52.843$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
 Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.84, 4.84, 4.84); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (51x81x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.757 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 21.42 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 1.09 W/kg

**SAR(1 g) = 0.634 W/kg; SAR(10 g) = 0.354 W/kg**

Maximum value of SAR (measured) = 0.690 W/kg

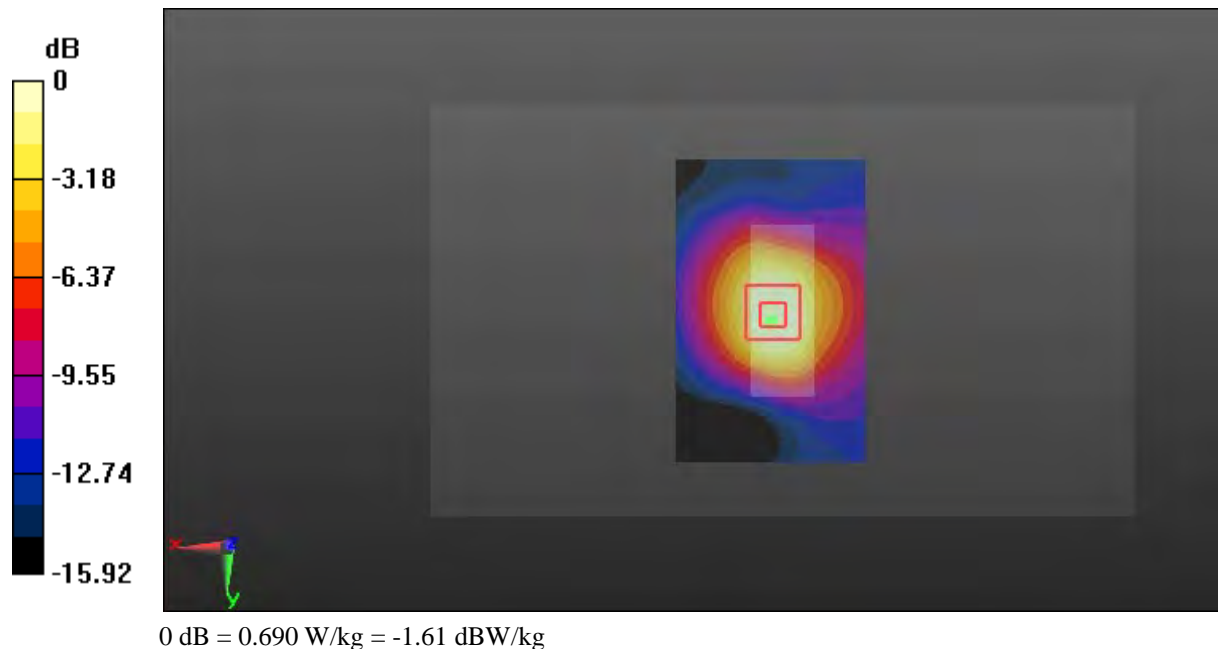

**Test Plot 118#: LTE Band 4\_Body Bottom\_Middle\_1RB**

**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 1732.5 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 1732.5$  MHz;  $\sigma = 1.528$  S/m;  $\epsilon_r = 52.822$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
 Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.84, 4.84, 4.84); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (51x81x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.757 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 19.69 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 1.13 W/kg

**SAR(1 g) = 0.654 W/kg; SAR(10 g) = 0.364 W/kg**

Maximum value of SAR (measured) = 0.717 W/kg

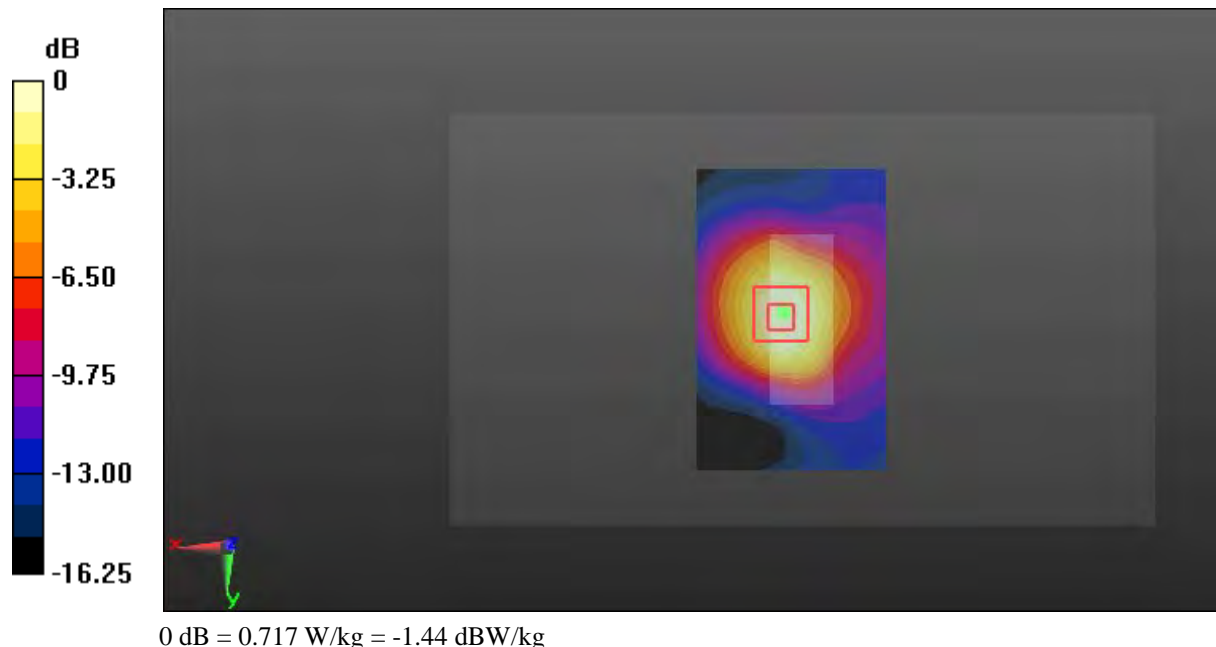

**Test Plot 119#: LTE Band 4\_Body Bottom\_High\_1RB****DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 1745 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 1745$  MHz;  $\sigma = 1.539$  S/m;  $\epsilon_r = 52.682$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.84, 4.84, 4.84); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (51x81x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.714 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 20.96 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 1.10 W/kg

**SAR(1 g) = 0.623 W/kg; SAR(10 g) = 0.345 W/kg**

Maximum value of SAR (measured) = 0.681 W/kg



**Test Plot 120#: LTE Band 4\_Body Bottom\_Middle\_50%RB****DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 1732.5 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 1732.5$  MHz;  $\sigma = 1.528$  S/m;  $\epsilon_r = 52.822$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.84, 4.84, 4.84); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (51x81x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.575 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 19.18 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 0.871 W/kg

**SAR(1 g) = 0.501 W/kg; SAR(10 g) = 0.279 W/kg**

Maximum value of SAR (measured) = 0.543 W/kg

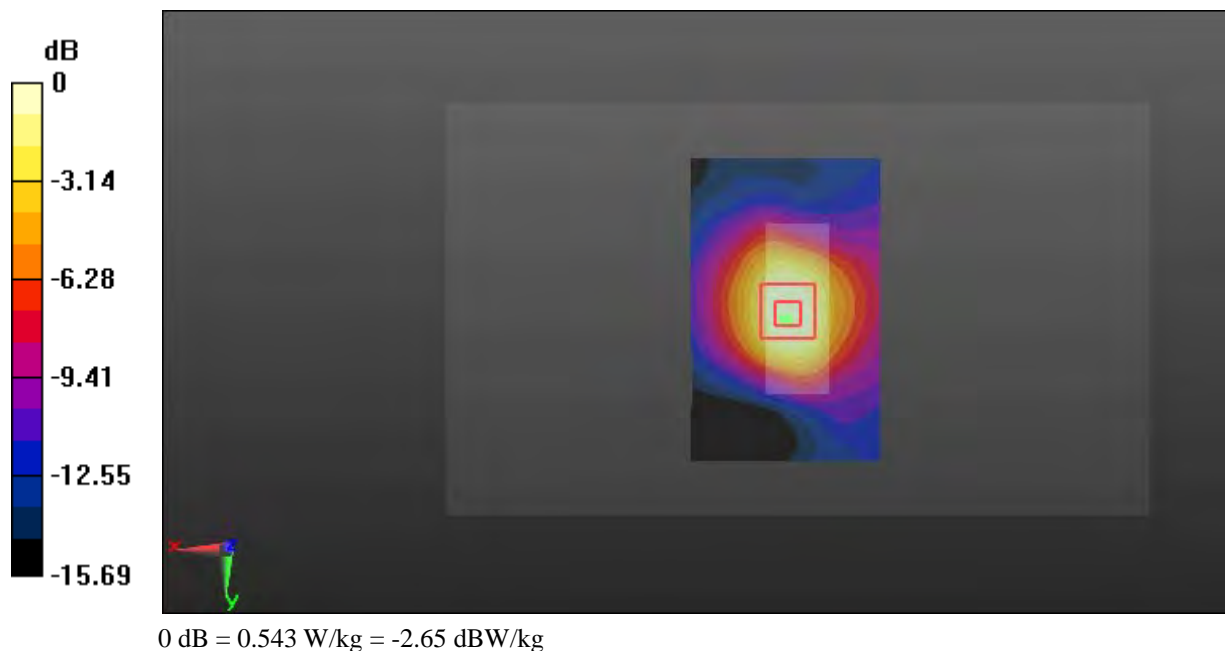



**Test Plot 121#: LTE Band 5\_Head Left Cheek\_Low\_1RB****DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 829 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 829$  MHz;  $\sigma = 0.871$  S/m;  $\epsilon_r = 42.387$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.57, 6.57, 6.57); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x61x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.227 W/kg


**Zoom Scan (6x6x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.389 V/m; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 0.271 W/kg

**SAR(1 g) = 0.218 W/kg; SAR(10 g) = 0.172 W/kg**

Maximum value of SAR (measured) = 0.231 W/kg

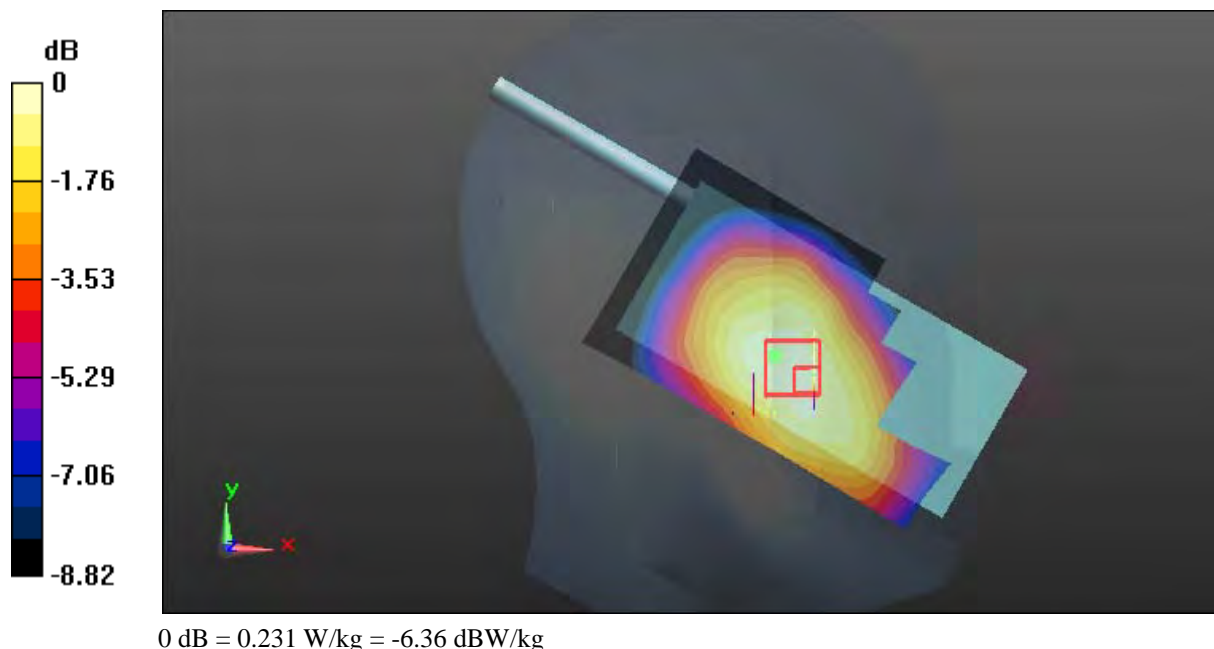

**Test Plot 122#: LTE Band 5\_Head Left Cheek\_Middle\_1RB****DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 836.5 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 836.5$  MHz;  $\sigma = 0.877$  S/m;  $\epsilon_r = 42.337$ ;  $\rho = 1000$  kg/m<sup>3</sup>;  
Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.57, 6.57, 6.57); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x61x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.277 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.701 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 0.357 W/kg

**SAR(1 g) = 0.281 W/kg; SAR(10 g) = 0.214 W/kg**

Maximum value of SAR (measured) = 0.293 W/kg

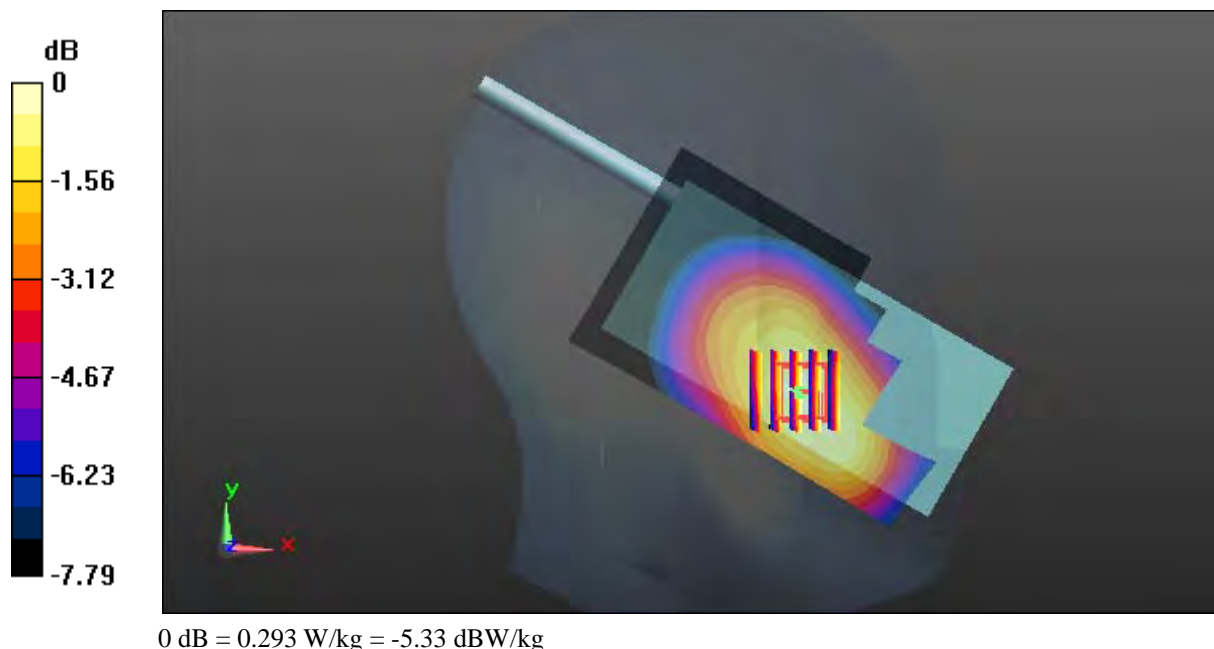

**Test Plot 123#: LTE Band 5\_Head Left Cheek\_High\_1RB****DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 844 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 844$  MHz;  $\sigma = 0.882$  S/m;  $\epsilon_r = 42.276$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.57, 6.57, 6.57); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x61x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.244 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.740 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 0.270 W/kg

**SAR(1 g) = 0.226 W/kg; SAR(10 g) = 0.183 W/kg**

Maximum value of SAR (measured) = 0.237 W/kg

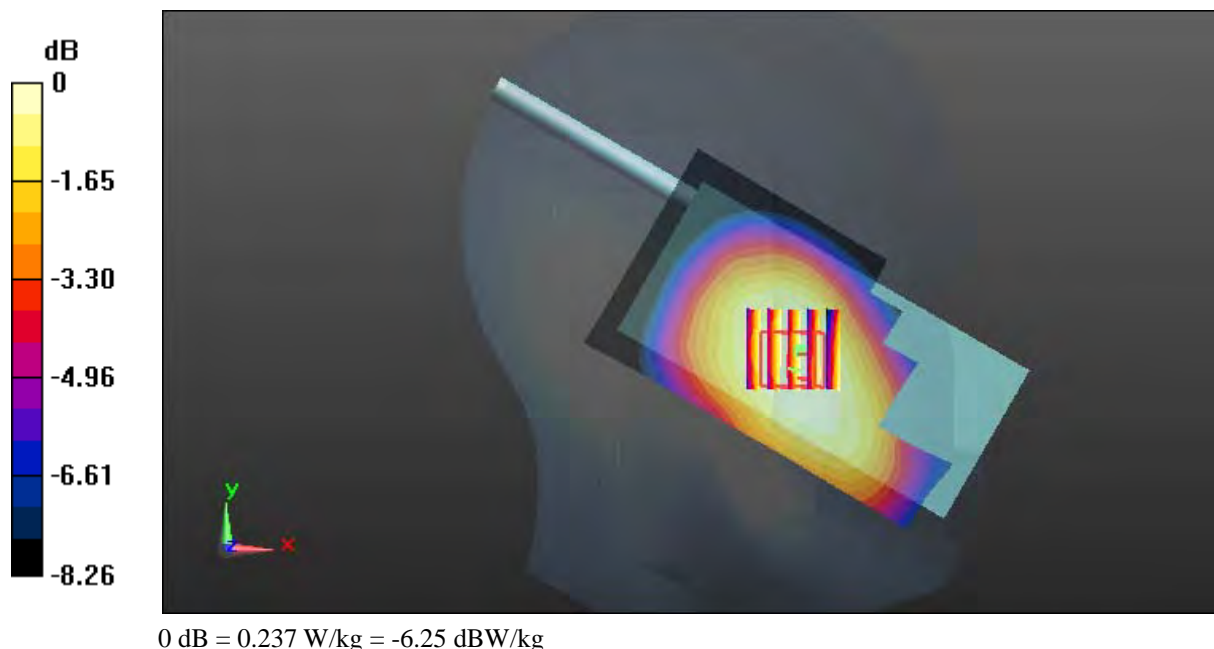

**Test Plot 124#: LTE Band 5\_Head Left Cheek\_Middle\_50%RB****DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 836.5 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 836.5$  MHz;  $\sigma = 0.877$  S/m;  $\epsilon_r = 42.337$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.57, 6.57, 6.57); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x61x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.229 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.845 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.281 W/kg

**SAR(1 g) = 0.221 W/kg; SAR(10 g) = 0.168 W/kg**

Maximum value of SAR (measured) = 0.232 W/kg

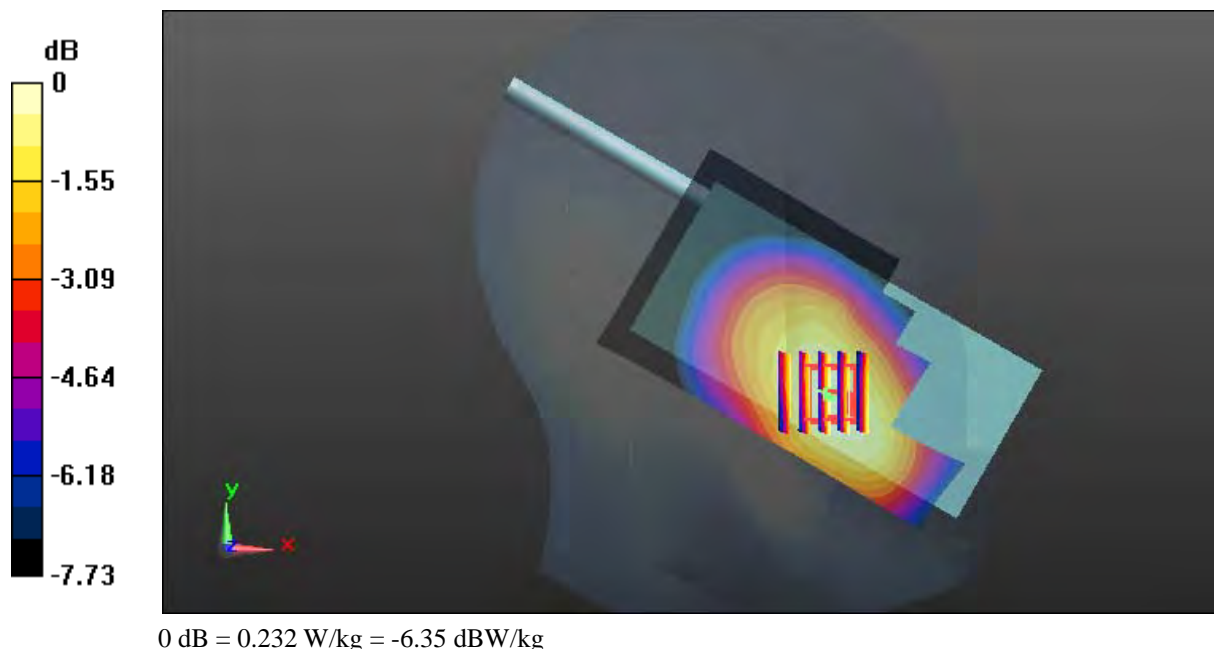

**Test Plot 125#: LTE Band 5\_Head Left Tilt\_Middle\_1RB****DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 836.5 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 836.5$  MHz;  $\sigma = 0.877$  S/m;  $\epsilon_r = 42.337$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.57, 6.57, 6.57); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x61x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.184 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.26 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.224 W/kg

**SAR(1 g) = 0.181 W/kg; SAR(10 g) = 0.139 W/kg**

Maximum value of SAR (measured) = 0.192 W/kg

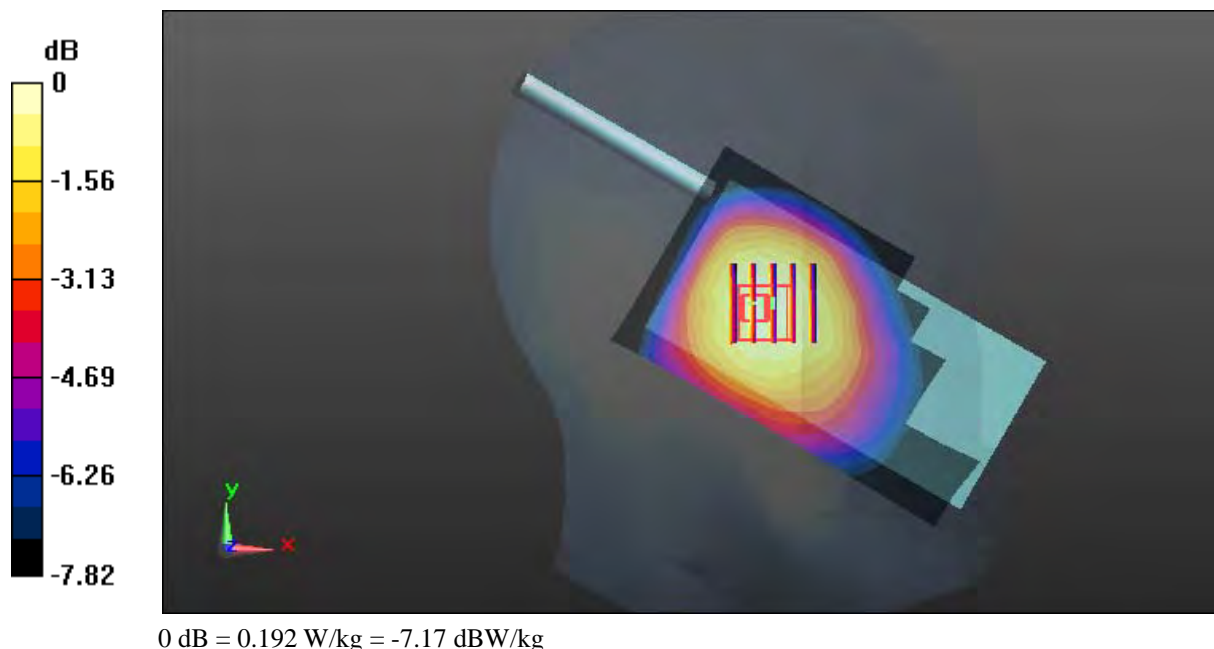

**Test Plot 126#: LTE Band 5\_Head Left Tilt\_Middle\_50%RB**

**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 836.5 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 836.5 \text{ MHz}$ ;  $\sigma = 0.877 \text{ S/m}$ ;  $\epsilon_r = 42.337$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.57, 6.57, 6.57); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x61x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.149 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 11.04 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 0.176 W/kg

**SAR(1 g) = 0.144 W/kg; SAR(10 g) = 0.112 W/kg**

Maximum value of SAR (measured) = 0.153 W/kg

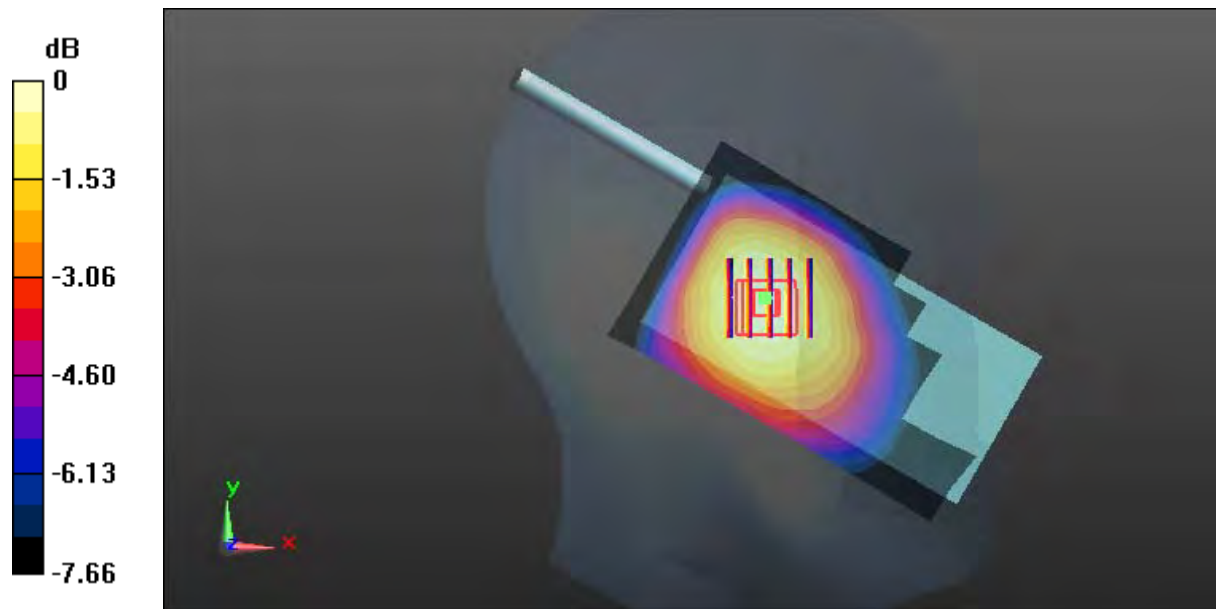

0 dB = 0.153 W/kg = -8.15 dBW/kg

**Test Plot 127#: LTE Band 5\_Head Right Cheek\_Middle\_1RB****DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 836.5 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 836.5$  MHz;  $\sigma = 0.877$  S/m;  $\epsilon_r = 42.337$ ;  $\rho = 1000$  kg/m<sup>3</sup>;  
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.57, 6.57, 6.57); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x61x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.290 W/kg


**Zoom Scan (6x6x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.18 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.342 W/kg

**SAR(1 g) = 0.277 W/kg; SAR(10 g) = 0.220 W/kg**

Maximum value of SAR (measured) = 0.287 W/kg

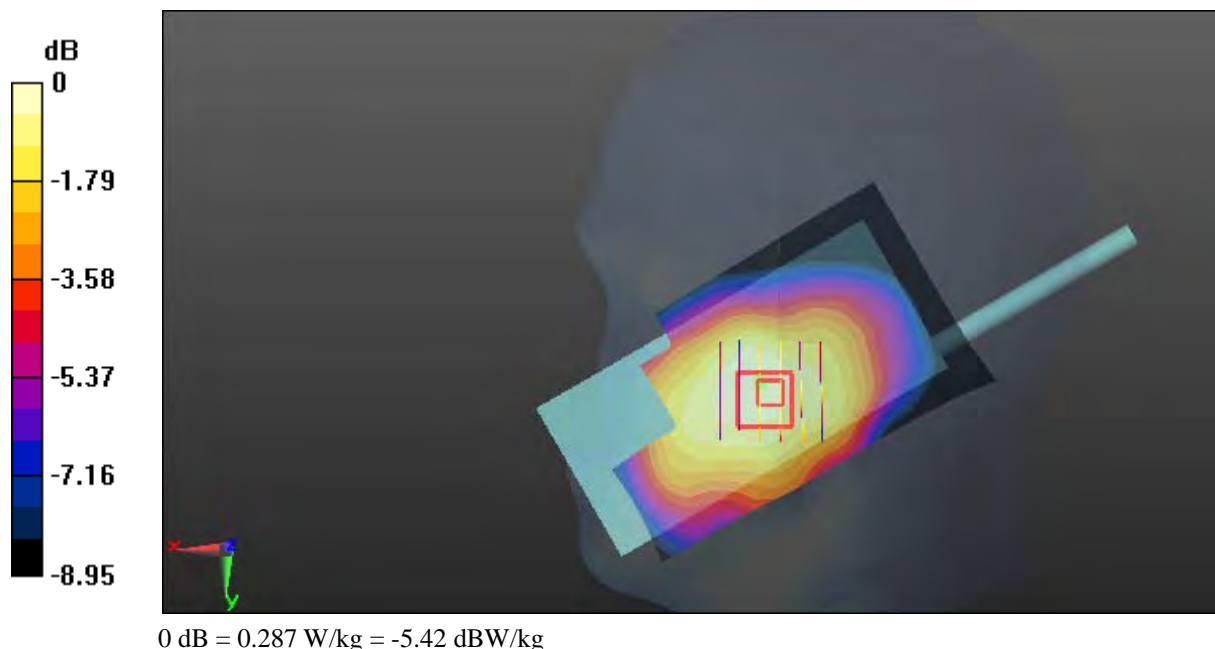

**Test Plot 128#: LTE Band 5\_Head Right Cheek\_Middle\_50%RB****DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 836.5 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 836.5$  MHz;  $\sigma = 0.877$  S/m;  $\epsilon_r = 42.337$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.57, 6.57, 6.57); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x61x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.221 W/kg


**Zoom Scan (5x6x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.943 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 0.266 W/kg

**SAR(1 g) = 0.214 W/kg; SAR(10 g) = 0.170 W/kg**

Maximum value of SAR (measured) = 0.221 W/kg

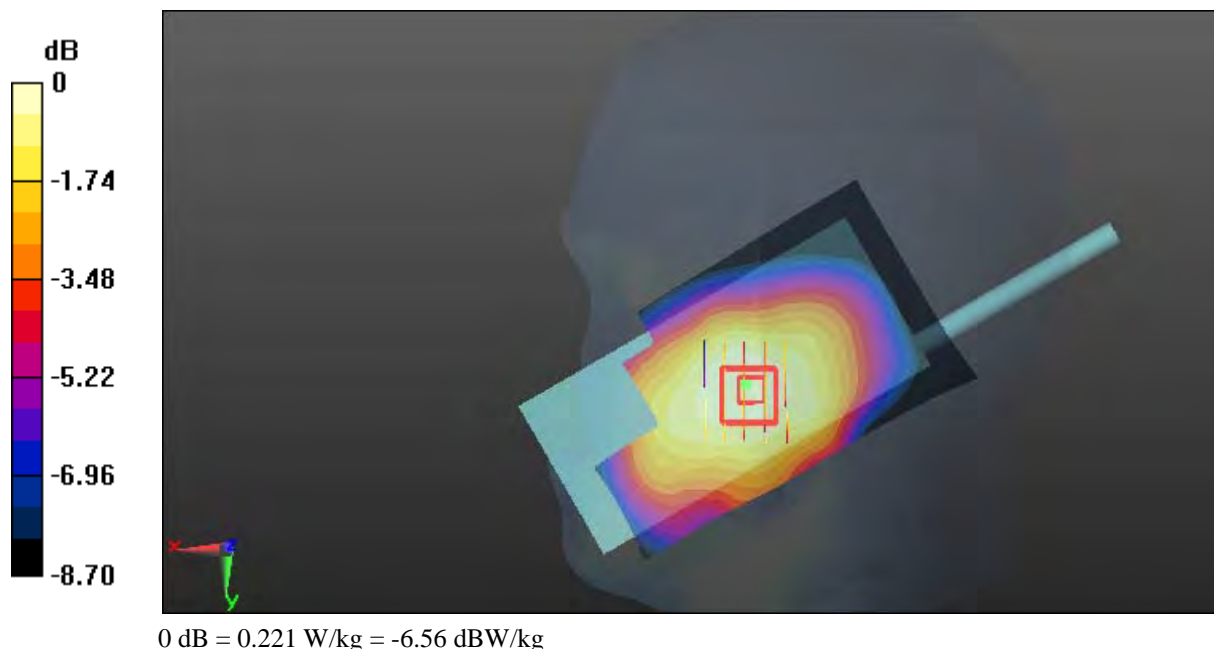



**Test Plot 129#: LTE Band 5\_Head Right Tilt\_Middle\_1RB****DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 836.5 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 836.5$  MHz;  $\sigma = 0.877$  S/m;  $\epsilon_r = 42.337$ ;  $\rho = 1000$  kg/m<sup>3</sup>;  
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.57, 6.57, 6.57); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x61x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.139 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.09 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.172 W/kg

**SAR(1 g) = 0.141 W/kg; SAR(10 g) = 0.108 W/kg**

Maximum value of SAR (measured) = 0.148 W/kg

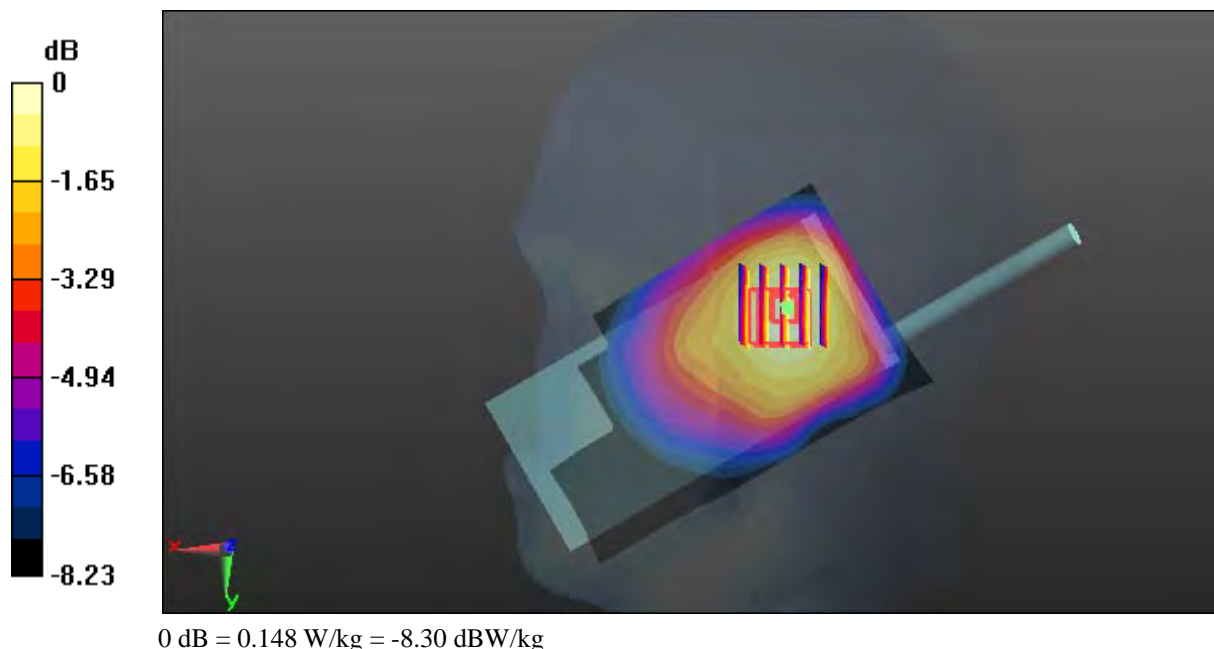

**Test Plot 130#: LTE Band 5\_Head Right Tilt\_Middle\_50%RB****DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 836.5 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 836.5$  MHz;  $\sigma = 0.877$  S/m;  $\epsilon_r = 42.337$ ;  $\rho = 1000$  kg/m<sup>3</sup>;  
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.57, 6.57, 6.57); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x61x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.112 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.86 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 0.131 W/kg

**SAR(1 g) = 0.107 W/kg; SAR(10 g) = 0.083 W/kg**

Maximum value of SAR (measured) = 0.111 W/kg

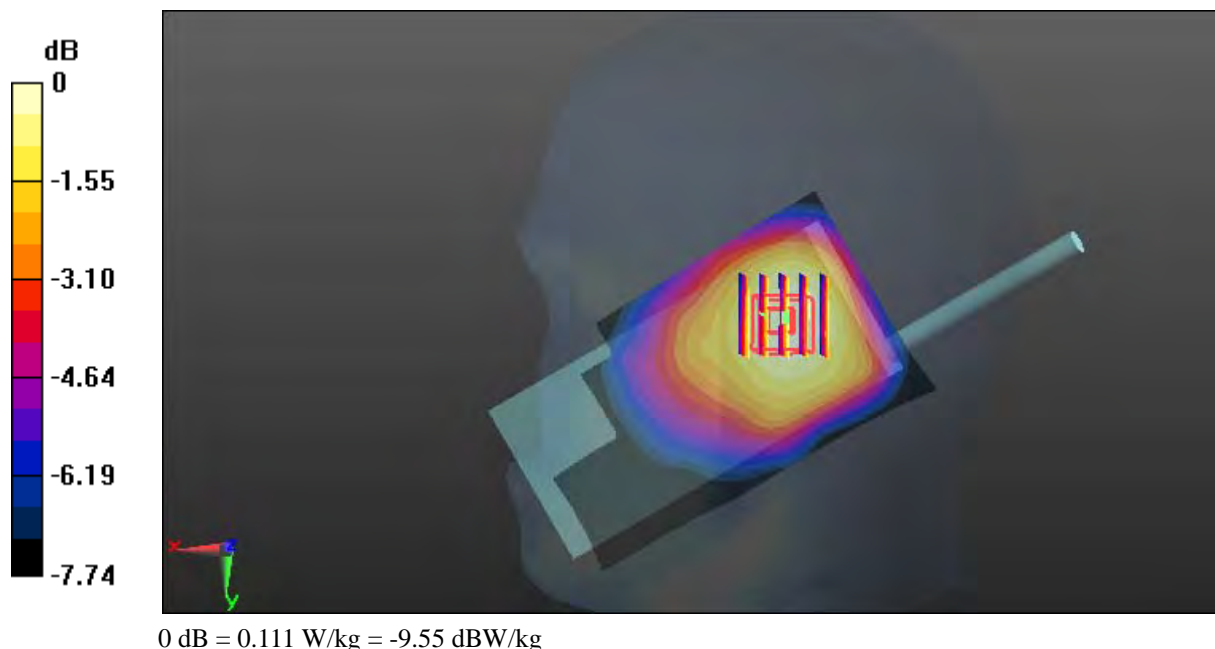

**Test Plot 131#: LTE Band 5\_Face Up\_Middle\_1RB****DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 836.5 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 836.5$  MHz;  $\sigma = 0.877$  S/m;  $\epsilon_r = 42.337$ ;  $\rho = 1000$  kg/m<sup>3</sup>;  
Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.57, 6.57, 6.57); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x61x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0630 W/kg


**Zoom Scan (6x6x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.254 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 0.0750 W/kg

**SAR(1 g) = 0.055 W/kg; SAR(10 g) = 0.040 W/kg**

Maximum value of SAR (measured) = 0.0575 W/kg

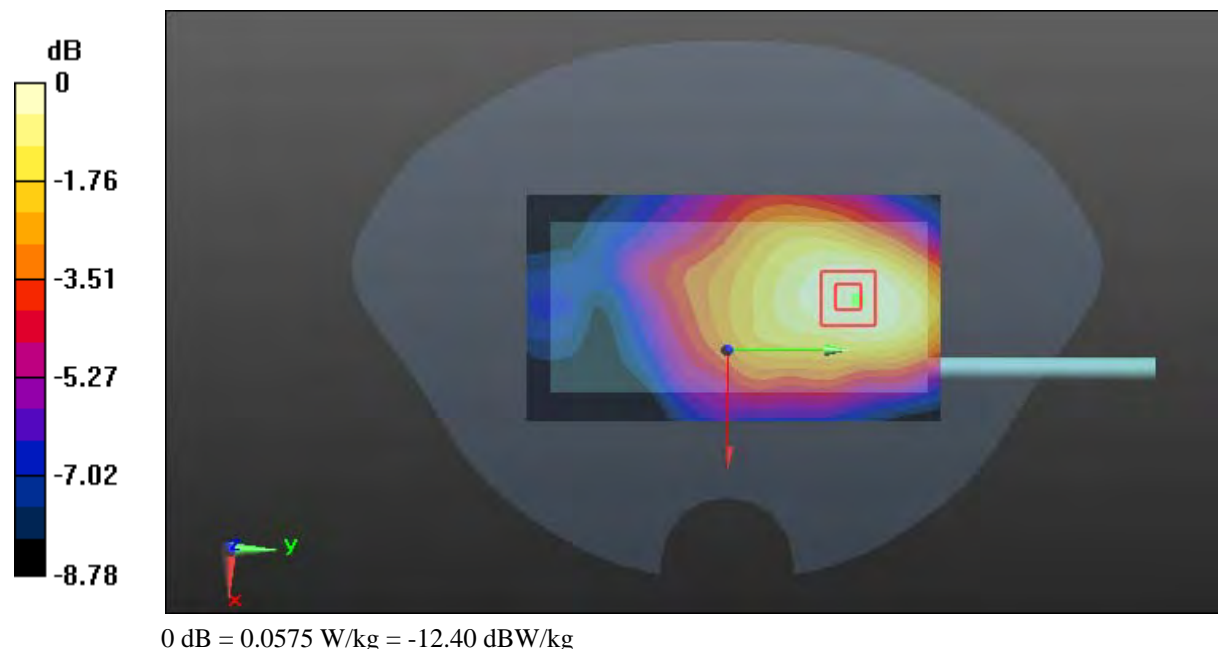

**Test Plot 132#: LTE Band 5\_Face Up\_Middle\_50%RB**

**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 836.5 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 836.5 \text{ MHz}$ ;  $\sigma = 0.877 \text{ S/m}$ ;  $\epsilon_r = 42.337$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.57, 6.57, 6.57); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x61x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.0490 W/kg


**Zoom Scan (6x6x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 5.536 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 0.0650 W/kg

**SAR(1 g) = 0.046 W/kg; SAR(10 g) = 0.034 W/kg**

Maximum value of SAR (measured) = 0.0494 W/kg

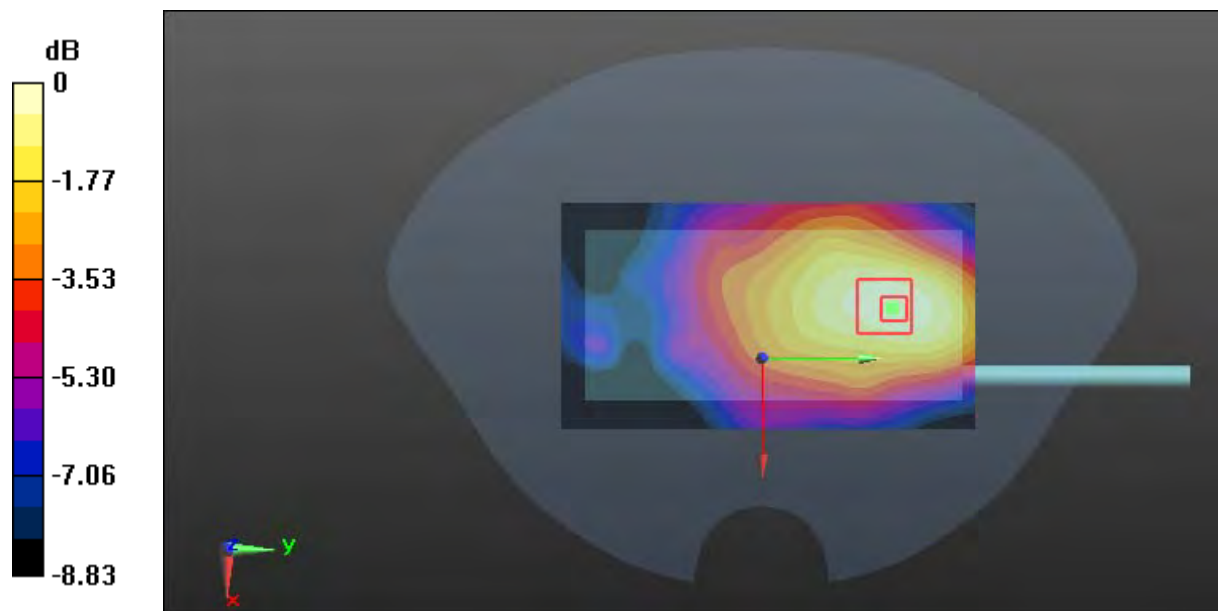

0 dB = 0.0494 W/kg = -13.06 dBW/kg

**Test Plot 133#: LTE Band 5\_Body Front \_Low\_1RB**

**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 829 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 829 \text{ MHz}$ ;  $\sigma = 0.951 \text{ S/m}$ ;  $\epsilon_r = 57.369$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.42, 6.42, 6.42); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x61x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.417 W/kg


**Zoom Scan (12x6x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 19.22 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 0.526 W/kg

**SAR(1 g) = 0.377 W/kg; SAR(10 g) = 0.295 W/kg**

Maximum value of SAR (measured) = 0.398 W/kg

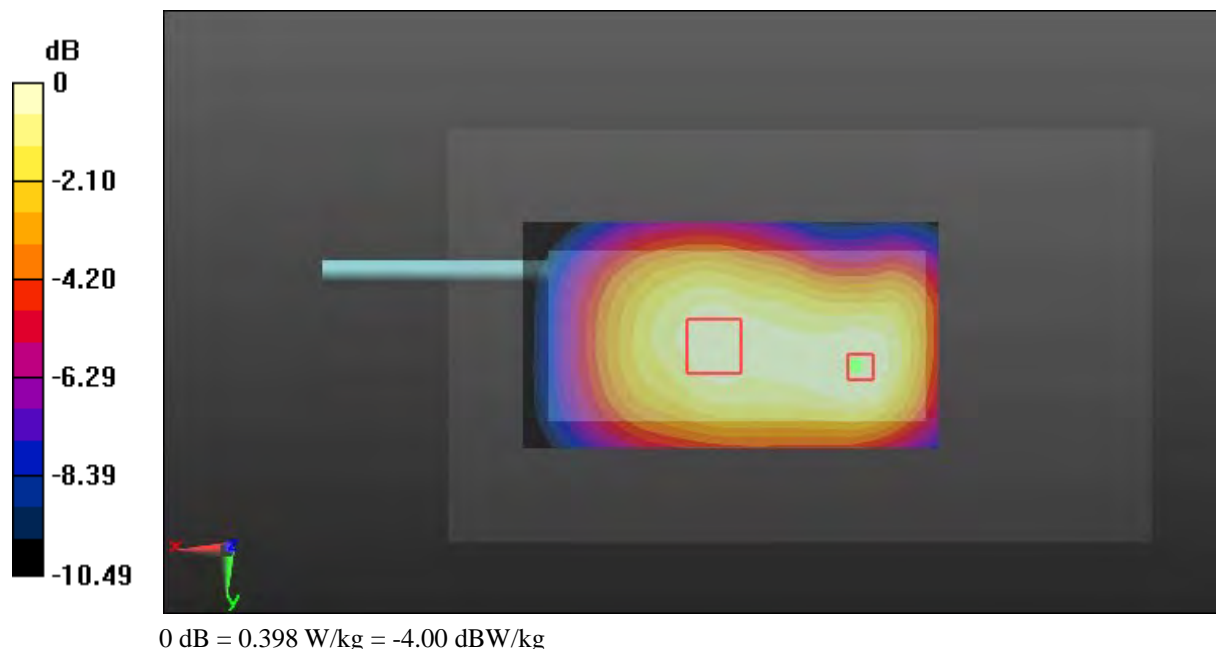

**Test Plot 134#: LTE Band 5\_Body Front \_Middle\_1RB**

**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 836.5 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 836.5 \text{ MHz}$ ;  $\sigma = 0.955 \text{ S/m}$ ;  $\epsilon_r = 57.279$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.42, 6.42, 6.42); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x61x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.472 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 20.52 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 0.593 W/kg

**SAR(1 g) = 0.422 W/kg; SAR(10 g) = 0.299 W/kg**

Maximum value of SAR (measured) = 0.444 W/kg

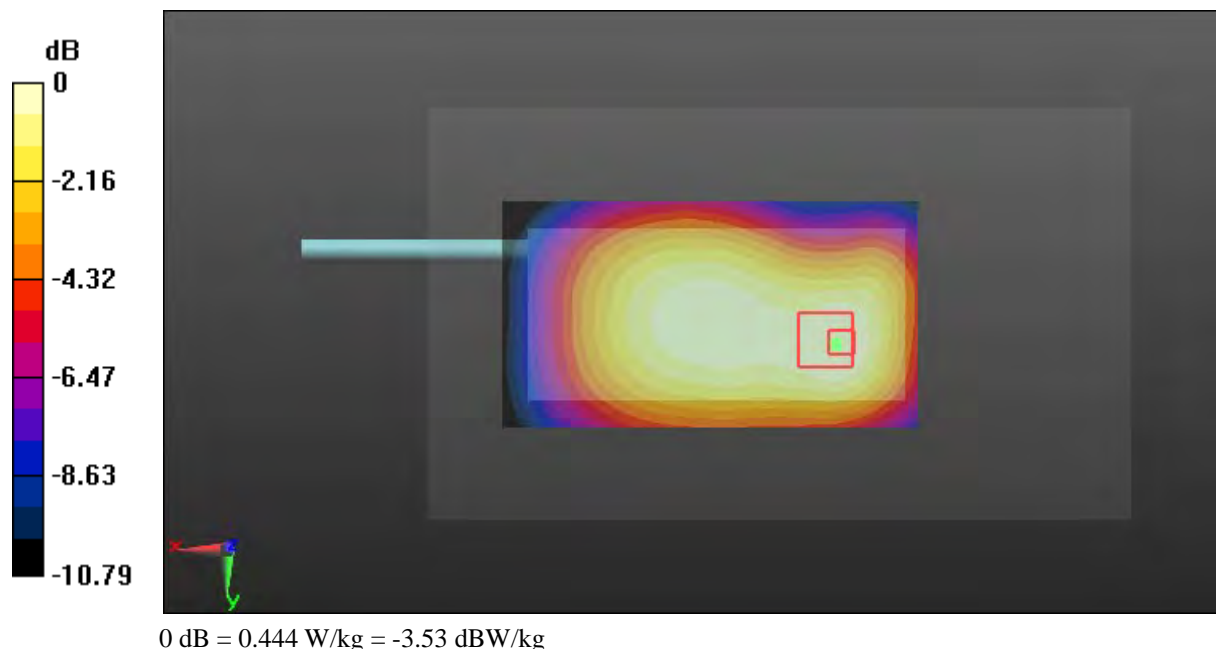

**Test Plot 135#: LTE Band 5\_Body Front \_High\_1RB**

**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 844 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 844 \text{ MHz}$ ;  $\sigma = 0.961 \text{ S/m}$ ;  $\epsilon_r = 57.174$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.42, 6.42, 6.42); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x61x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.422 W/kg


**Zoom Scan (6x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 19.21 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.645 W/kg

**SAR(1 g) = 0.387 W/kg; SAR(10 g) = 0.270 W/kg**

Maximum value of SAR (measured) = 0.398 W/kg

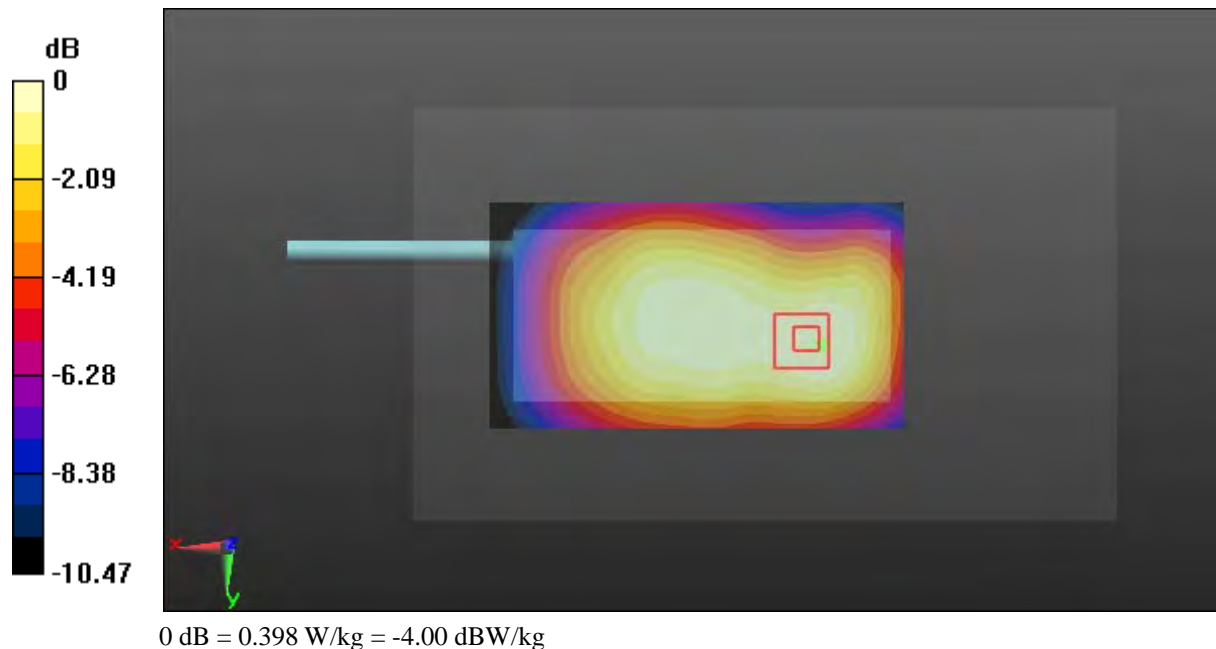

**Test Plot 136#: LTE Band 5\_Body Front \_Middle\_50%RB****DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 836.5 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 836.5$  MHz;  $\sigma = 0.955$  S/m;  $\epsilon_r = 57.279$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.42, 6.42, 6.42); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x61x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.332 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 16.81 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 0.361 W/kg

**SAR(1 g) = 0.312 W/kg; SAR(10 g) = 0.250 W/kg**

Maximum value of SAR (measured) = 0.325 W/kg

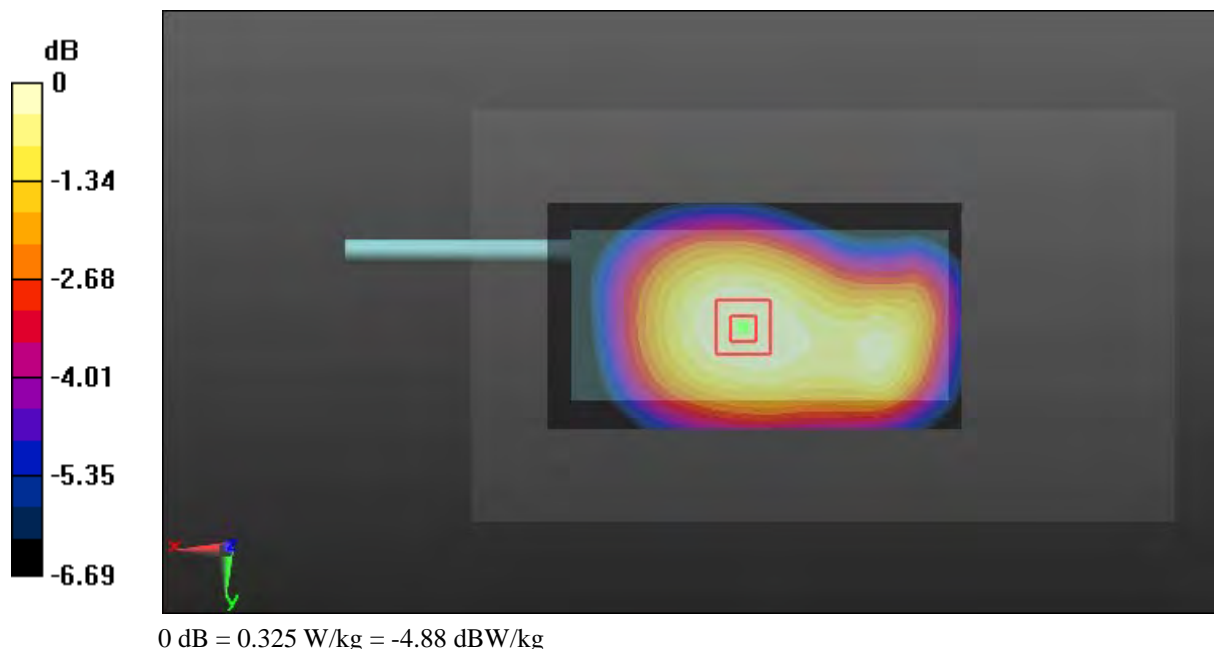



**Test Plot 137#: LTE Band 5\_Body Back\_Middle\_1RB****DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 836.5 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 836.5$  MHz;  $\sigma = 0.955$  S/m;  $\epsilon_r = 57.279$ ;  $\rho = 1000$  kg/m<sup>3</sup>;  
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.42, 6.42, 6.42); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x61x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.198 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.02 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.232 W/kg

**SAR(1 g) = 0.196 W/kg; SAR(10 g) = 0.154 W/kg**

Maximum value of SAR (measured) = 0.205 W/kg

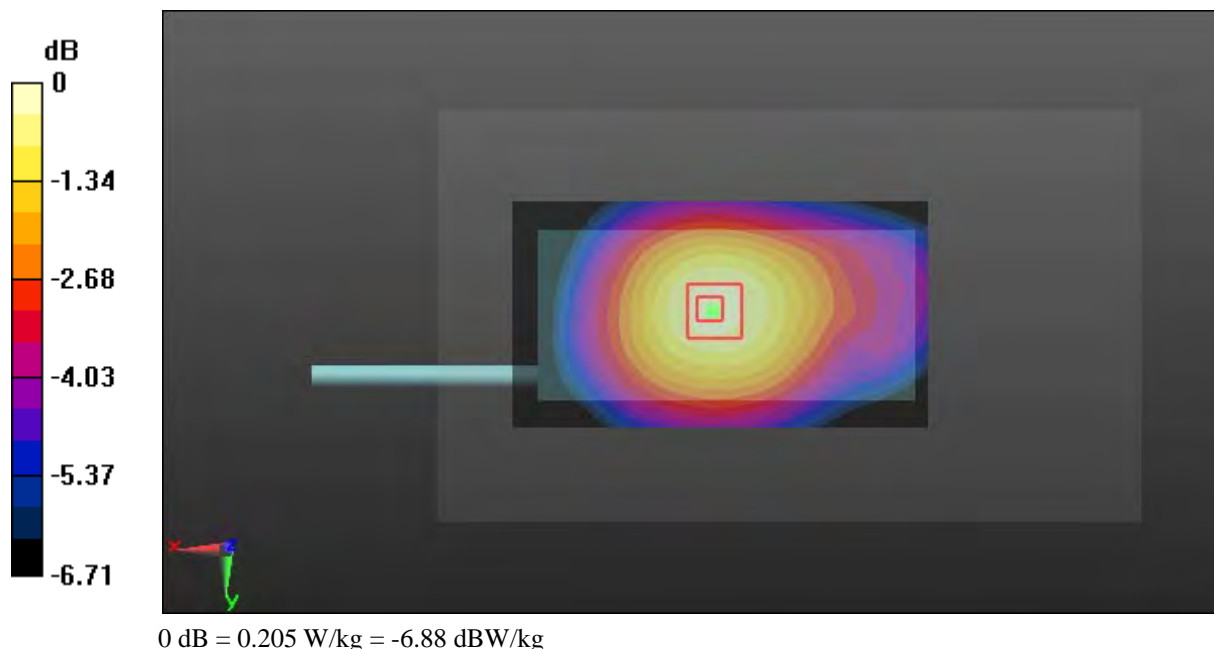

**Test Plot 138#: LTE Band 5\_Body Back\_Middle\_50%RB****DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 836.5 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 836.5$  MHz;  $\sigma = 0.955$  S/m;  $\epsilon_r = 57.279$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.42, 6.42, 6.42); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x61x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.167 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.58 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.187 W/kg

**SAR(1 g) = 0.156 W/kg; SAR(10 g) = 0.123 W/kg**

Maximum value of SAR (measured) = 0.163 W/kg

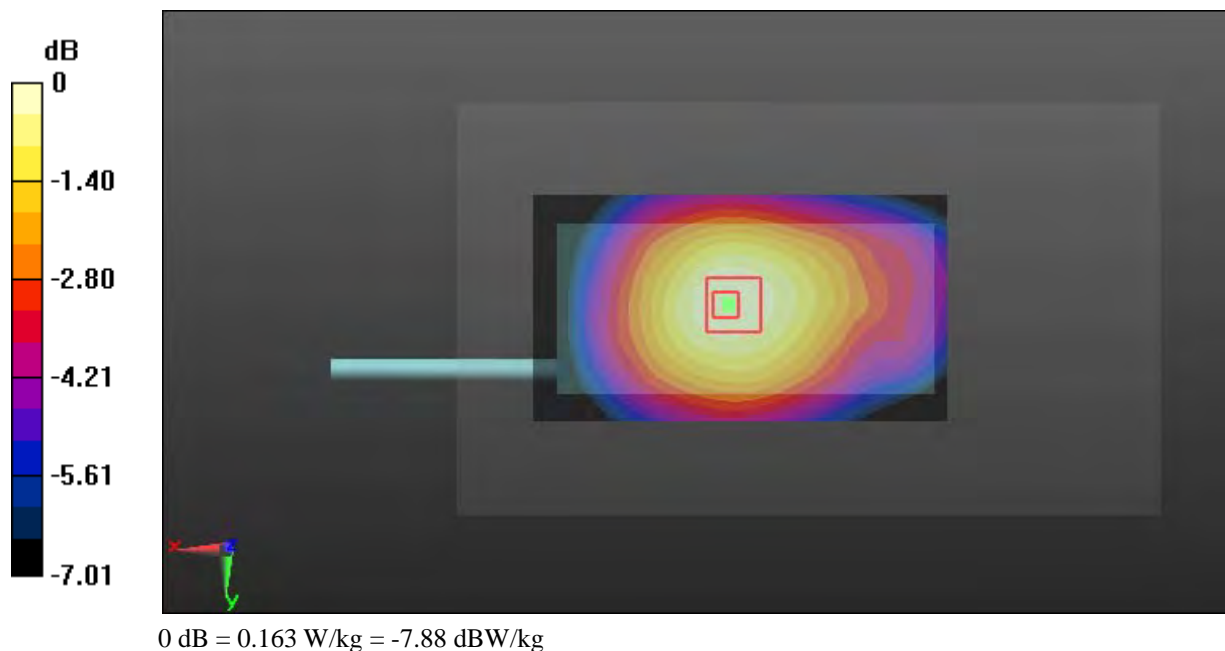

**Test Plot 139#: LTE Band 5\_Body Left\_Middle\_1RB**

**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 836.5 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 836.5 \text{ MHz}$ ;  $\sigma = 0.955 \text{ S/m}$ ;  $\epsilon_r = 57.279$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.42, 6.42, 6.42); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x51x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.255 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 12.58 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.295 W/kg

**SAR(1 g) = 0.237 W/kg; SAR(10 g) = 0.178 W/kg**

Maximum value of SAR (measured) = 0.250 W/kg

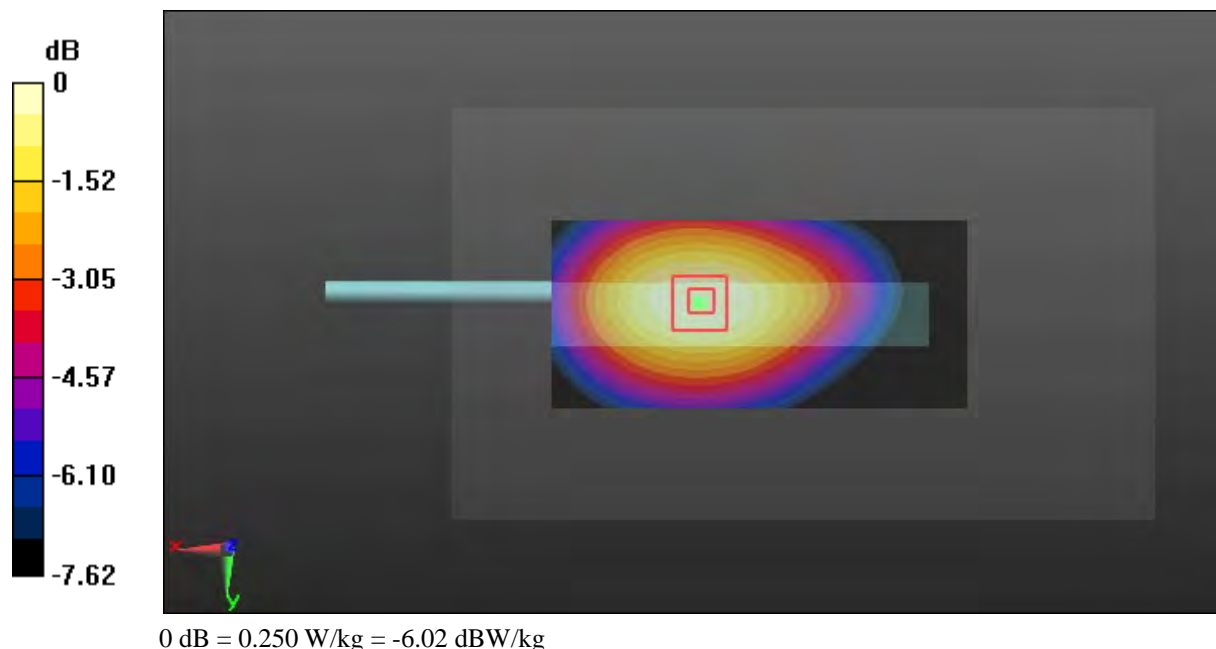

**Test Plot 140#: LTE Band 5\_Body Left\_Middle\_50%RB**

**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 836.5 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 836.5 \text{ MHz}$ ;  $\sigma = 0.955 \text{ S/m}$ ;  $\epsilon_r = 57.279$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.42, 6.42, 6.42); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x51x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.194 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 10.84 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.222 W/kg

**SAR(1 g) = 0.178 W/kg; SAR(10 g) = 0.135 W/kg**

Maximum value of SAR (measured) = 0.187 W/kg

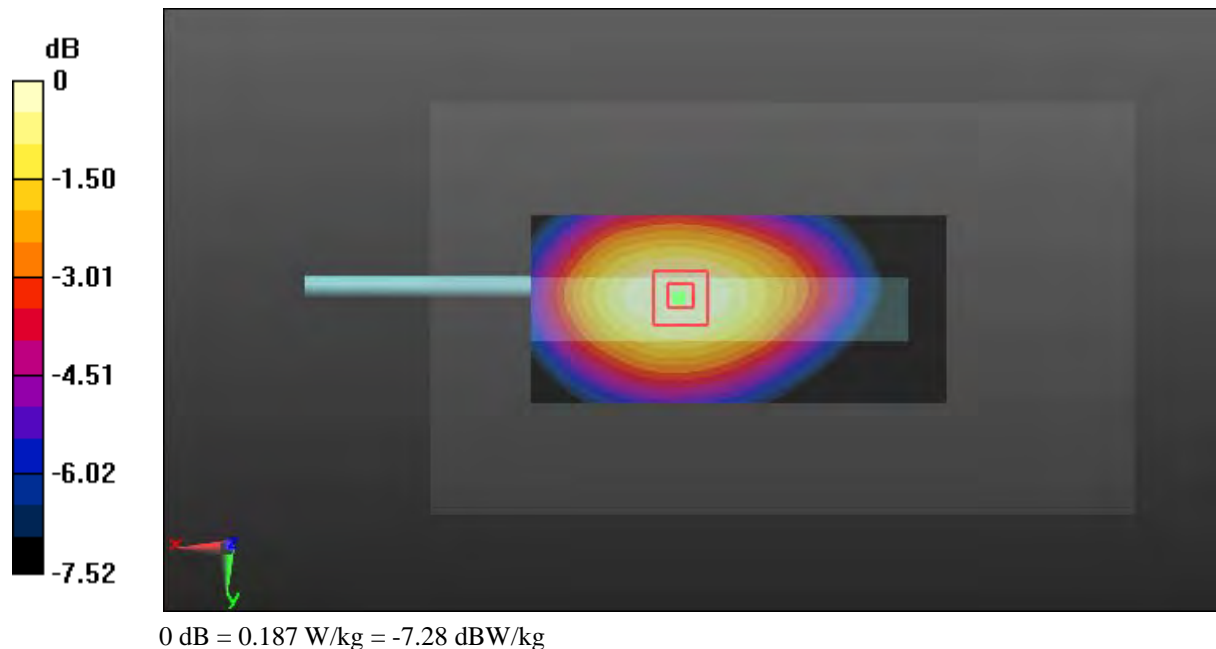

**Test Plot 141#: LTE Band 5\_Body Right\_Middle\_1RB**

**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 836.5 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 836.5 \text{ MHz}$ ;  $\sigma = 0.955 \text{ S/m}$ ;  $\epsilon_r = 57.279$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.42, 6.42, 6.42); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x51x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.293 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 12.81 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 0.350 W/kg

**SAR(1 g) = 0.280 W/kg; SAR(10 g) = 0.210 W/kg**

Maximum value of SAR (measured) = 0.295 W/kg

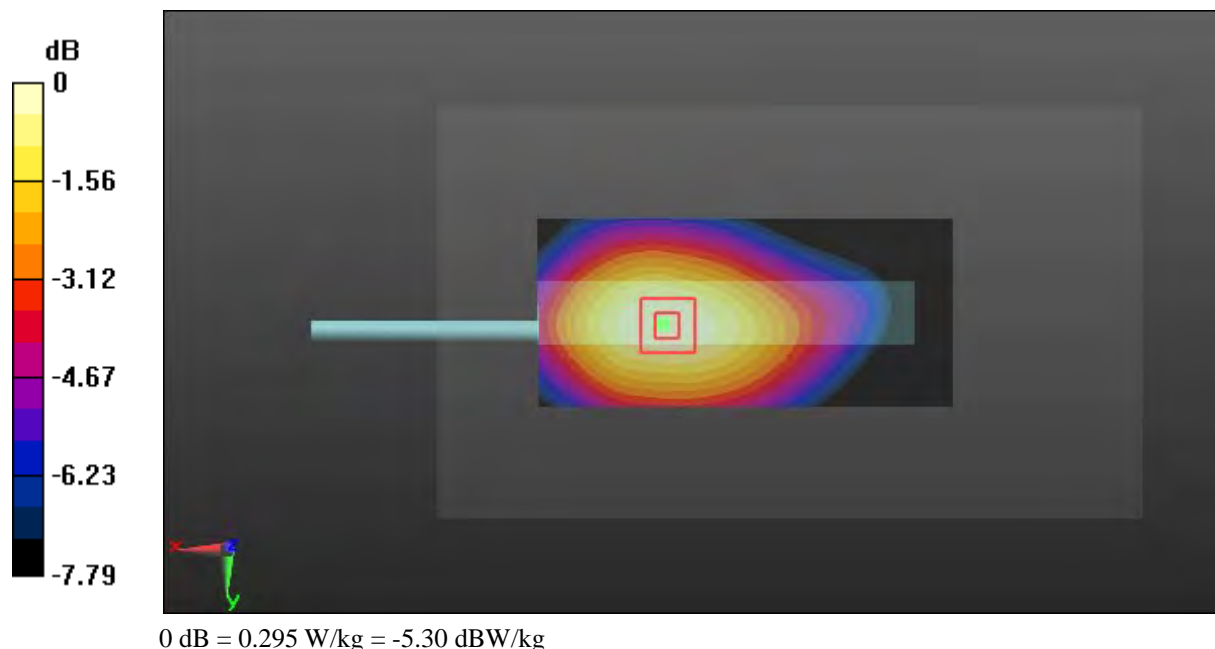

**Test Plot 142#: LTE Band 5\_Body Right\_Middle\_50%RB**

**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 836.5 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 836.5 \text{ MHz}$ ;  $\sigma = 0.955 \text{ S/m}$ ;  $\epsilon_r = 57.279$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.42, 6.42, 6.42); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x51x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.242 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 11.65 V/m; Power Drift = -0.19 dB

Peak SAR (extrapolated) = 0.284 W/kg

**SAR(1 g) = 0.227 W/kg; SAR(10 g) = 0.171 W/kg**

Maximum value of SAR (measured) = 0.238 W/kg

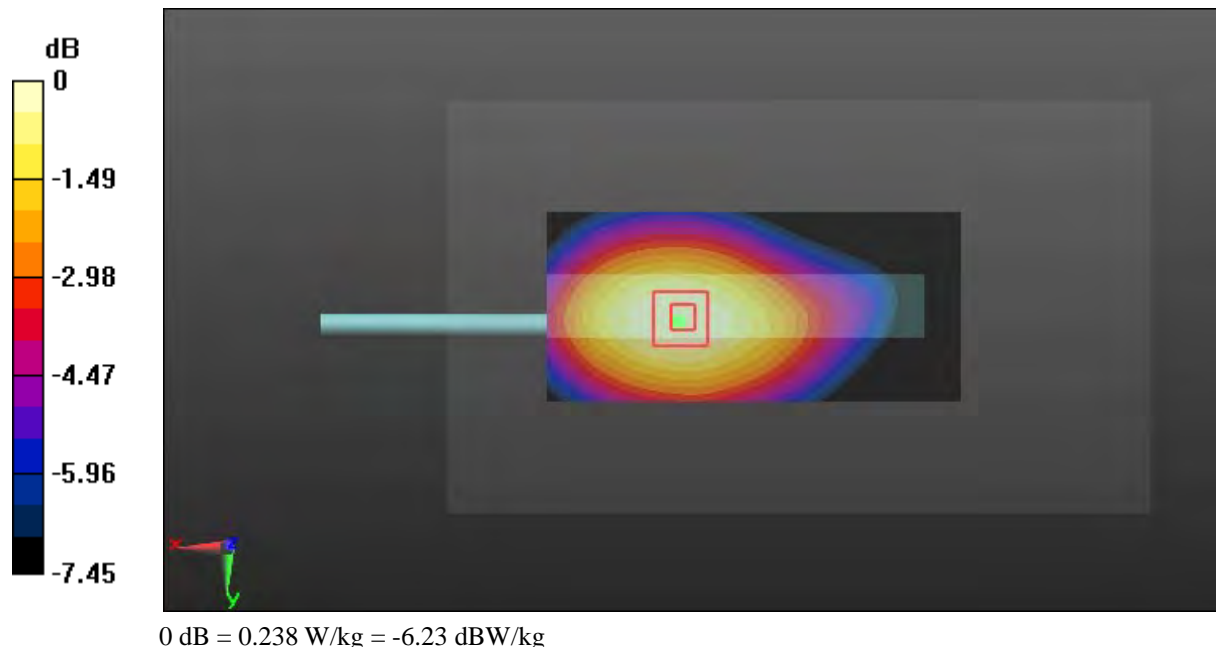

**Test Plot 143#: LTE Band 5\_Body Bottom\_Middle\_1RB****DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 836.5 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 836.5$  MHz;  $\sigma = 0.955$  S/m;  $\epsilon_r = 57.279$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.42, 6.42, 6.42); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (51x81x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.168 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.51 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 0.348 W/kg

**SAR(1 g) = 0.152 W/kg; SAR(10 g) = 0.081 W/kg**

Maximum value of SAR (measured) = 0.164 W/kg



**Test Plot 144#: LTE Band 5\_Body Bottom\_Middle\_50%RB**

**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 836.5 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 836.5 \text{ MHz}$ ;  $\sigma = 0.955 \text{ S/m}$ ;  $\epsilon_r = 57.279$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.42, 6.42, 6.42); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (51x81x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.129 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 9.965 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.259 W/kg

**SAR(1 g) = 0.114 W/kg; SAR(10 g) = 0.061 W/kg**

Maximum value of SAR (measured) = 0.123 W/kg





**Test Plot 145#: LTE Band 7\_Head Left Cheek\_Middle\_1RB****DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 2535 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 2535$  MHz;  $\sigma = 1.896$  S/m;  $\epsilon_r = 39.016$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.41, 4.41, 4.41); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (141x81x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.462 W/kg


**Zoom Scan (6x7x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.803 V/m; Power Drift = -0.18 dB

Peak SAR (extrapolated) = 0.714 W/kg

**SAR(1 g) = 0.421 W/kg; SAR(10 g) = 0.261 W/kg**

Maximum value of SAR (measured) = 0.450 W/kg

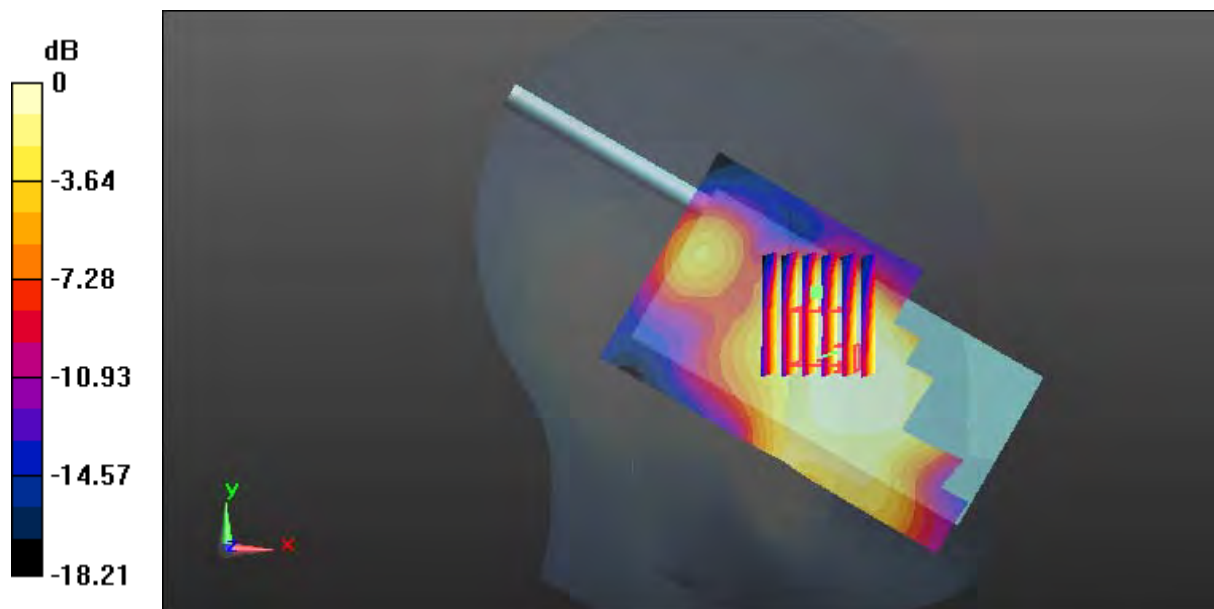

**Test Plot 146#: LTE Band 7\_Head Left Cheek\_Middle\_50%RB****DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 2535 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 2535$  MHz;  $\sigma = 1.896$  S/m;  $\epsilon_r = 39.016$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.41, 4.41, 4.41); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (141x81x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.391 W/kg


**Zoom Scan (6x7x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.910 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.868 W/kg

**SAR(1 g) = 0.346 W/kg; SAR(10 g) = 0.214 W/kg**

Maximum value of SAR (measured) = 0.364 W/kg

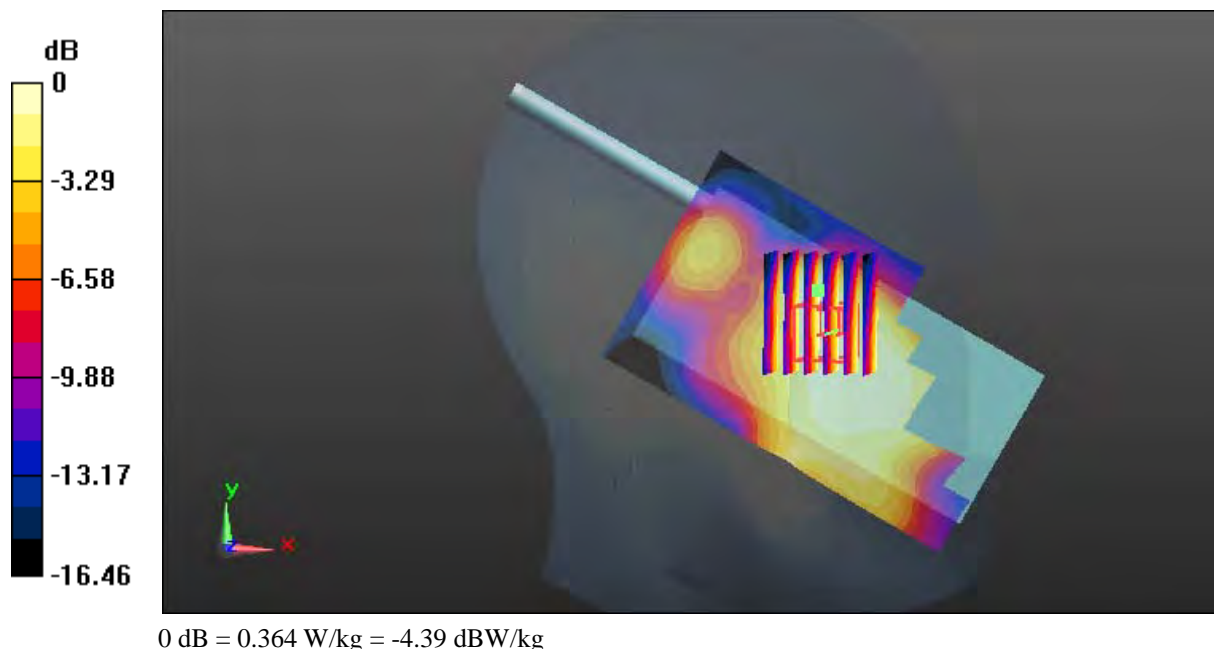

**Test Plot 147#: LTE Band 7\_Head Left Tilt\_Middle\_1RB****DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 2535 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 2535$  MHz;  $\sigma = 1.896$  S/m;  $\epsilon_r = 39.016$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.41, 4.41, 4.41); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (151x81x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.375 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.007 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 0.597 W/kg

**SAR(1 g) = 0.326 W/kg; SAR(10 g) = 0.164 W/kg**

Maximum value of SAR (measured) = 0.361 W/kg

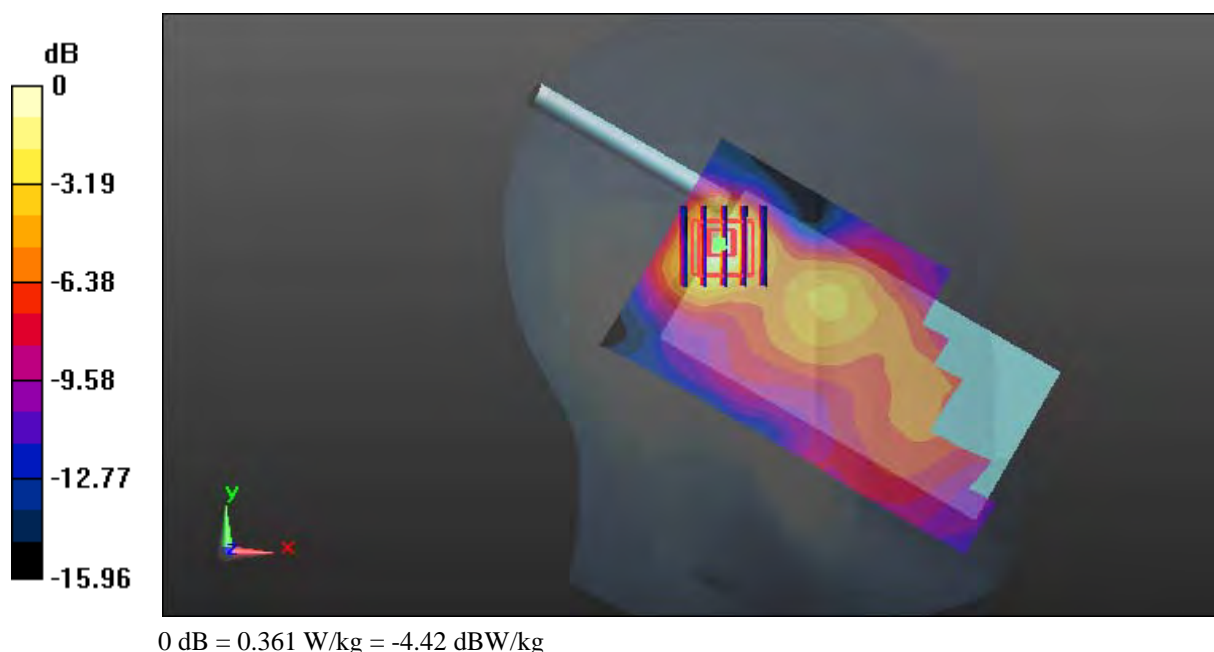

**Test Plot 148#: LTE Band 7\_Head Left Tilt\_Middle\_50%RB****DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 2535 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 2535$  MHz;  $\sigma = 1.896$  S/m;  $\epsilon_r = 39.016$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.41, 4.41, 4.41); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (151x81x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.311 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.238 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.504 W/kg

**SAR(1 g) = 0.267 W/kg; SAR(10 g) = 0.134 W/kg**

Maximum value of SAR (measured) = 0.297 W/kg

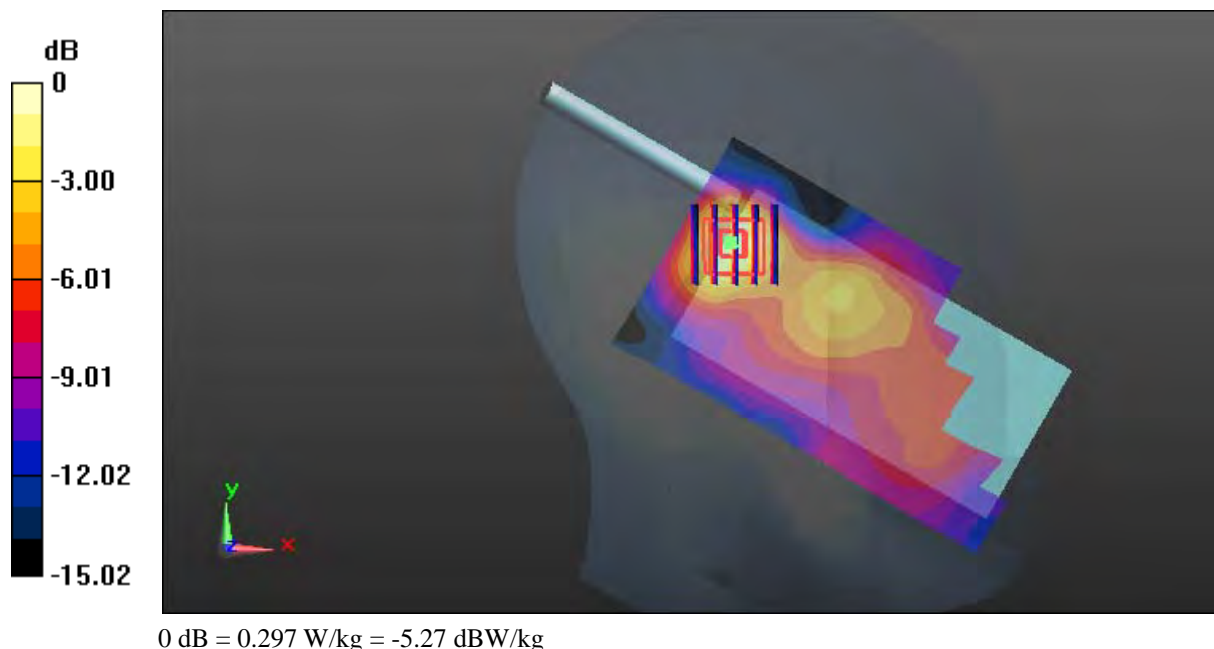

**Test Plot 149#: LTE Band 7\_Head Right Cheek\_Low\_1RB****DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 2510 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 2510$  MHz;  $\sigma = 1.816$  S/m;  $\epsilon_r = 40.069$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.41, 4.41, 4.41); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (141x81x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.714 W/kg


**Zoom Scan (6x6x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.230 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 1.04 W/kg

**SAR(1 g) = 0.615 W/kg; SAR(10 g) = 0.368 W/kg**

Maximum value of SAR (measured) = 0.663 W/kg

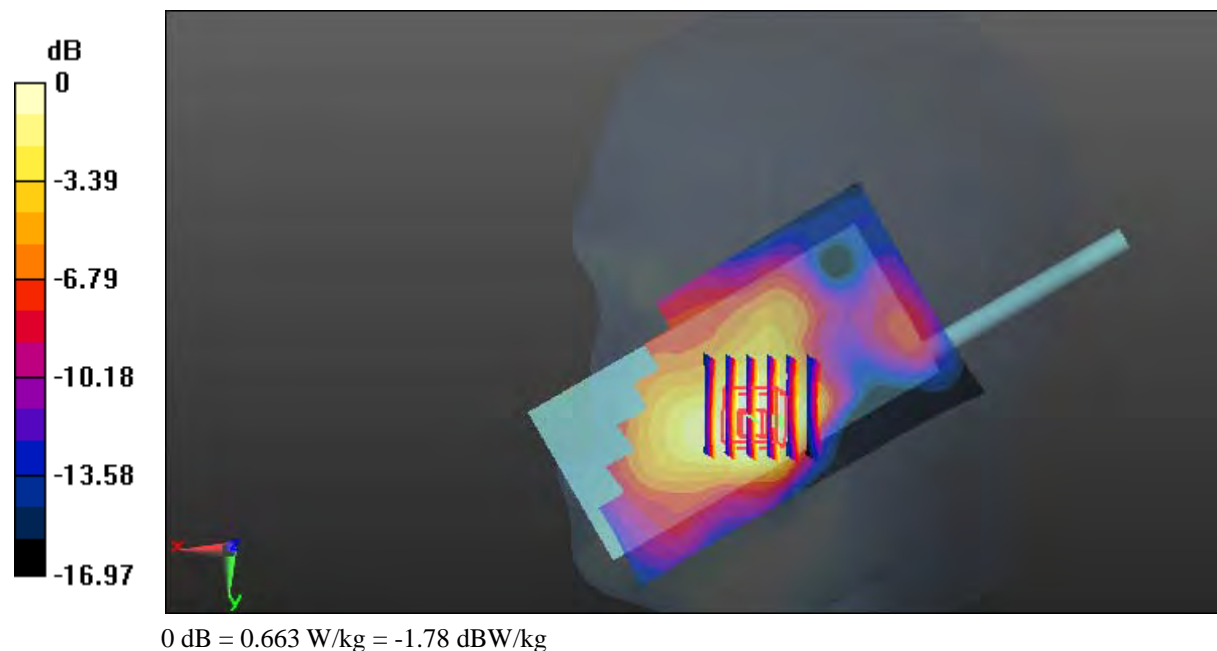

**Test Plot 150#: LTE Band 7\_Head Right Cheek\_Middle\_1RB****DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 2535 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 2535$  MHz;  $\sigma = 1.896$  S/m;  $\epsilon_r = 39.016$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.41, 4.41, 4.41); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (141x81x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.756 W/kg


**Zoom Scan (6x6x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.315 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 1.15 W/kg

**SAR(1 g) = 0.683 W/kg; SAR(10 g) = 0.410 W/kg**

Maximum value of SAR (measured) = 0.742 W/kg

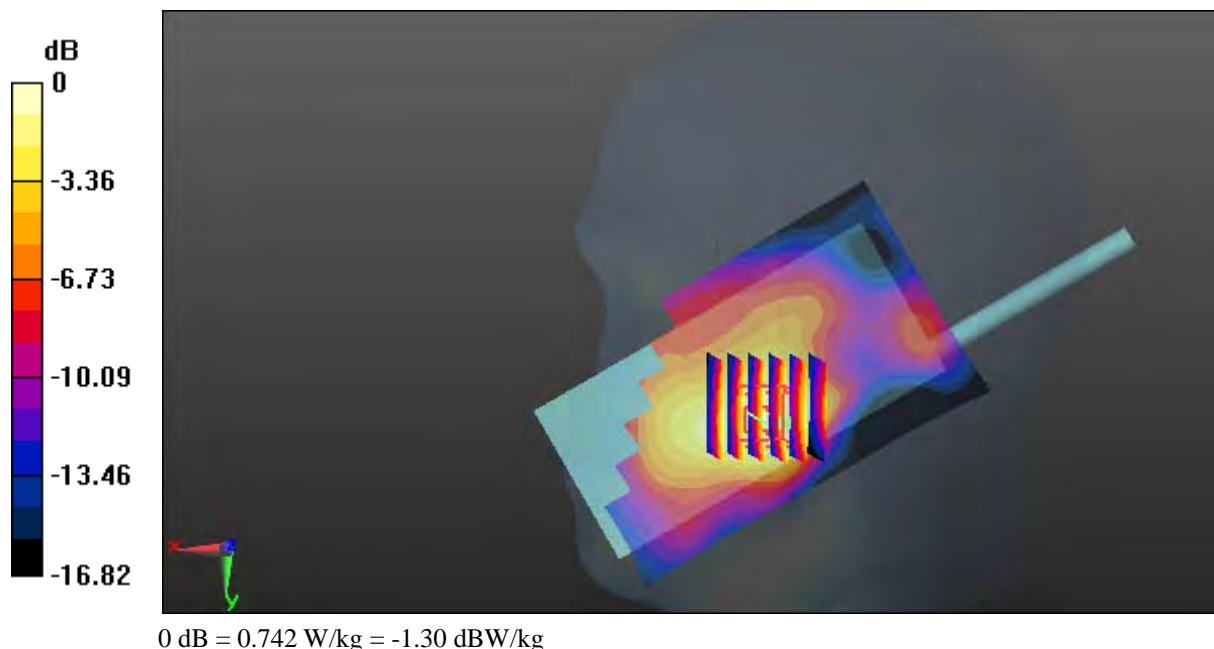

**Test Plot 151#: LTE Band 7\_Head Right Cheek\_High\_1RB****DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 2560 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 2560$  MHz;  $\sigma = 1.925$  S/m;  $\epsilon_r = 38.898$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.09, 4.09, 4.09); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (141x81x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.883 W/kg


**Zoom Scan (6x6x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.132 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 1.27 W/kg

**SAR(1 g) = 0.739 W/kg; SAR(10 g) = 0.438 W/kg**

Maximum value of SAR (measured) = 0.794 W/kg

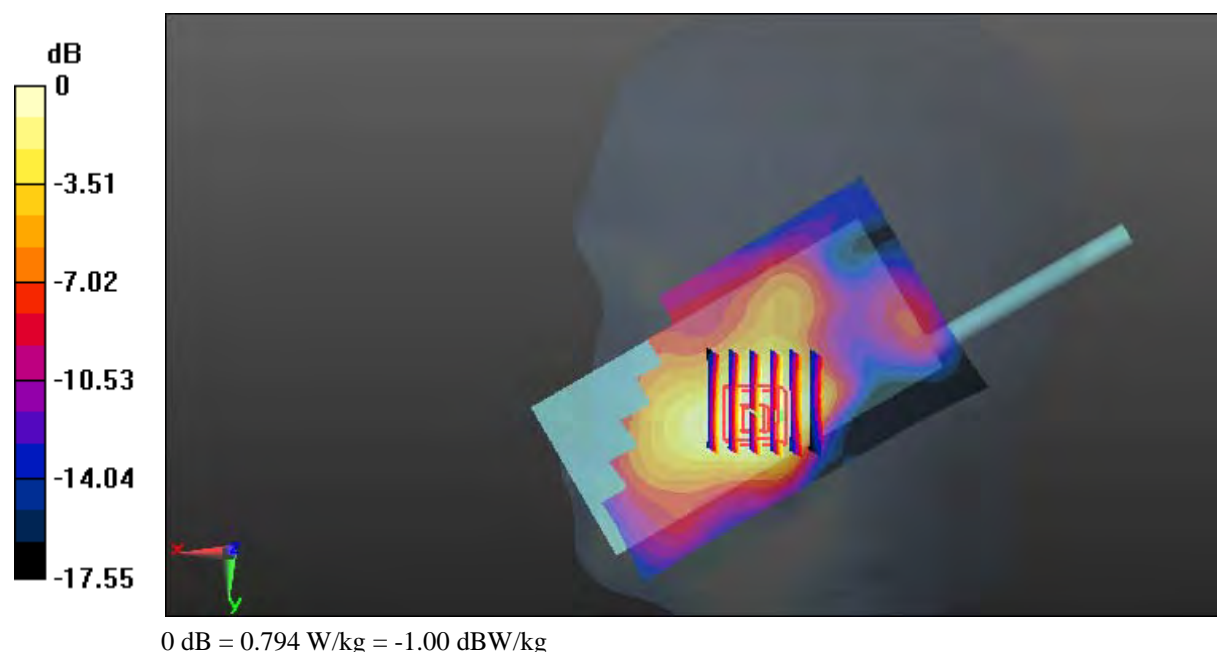

**Test Plot 152#: LTE Band 7\_Head Right Cheek\_Middle\_50%RB****DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 2535 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 2535$  MHz;  $\sigma = 1.896$  S/m;  $\epsilon_r = 39.016$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.41, 4.41, 4.41); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (141x81x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.614 W/kg


**Zoom Scan (6x6x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.910 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.893 W/kg

**SAR(1 g) = 0.531 W/kg; SAR(10 g) = 0.320 W/kg**

Maximum value of SAR (measured) = 0.570 W/kg

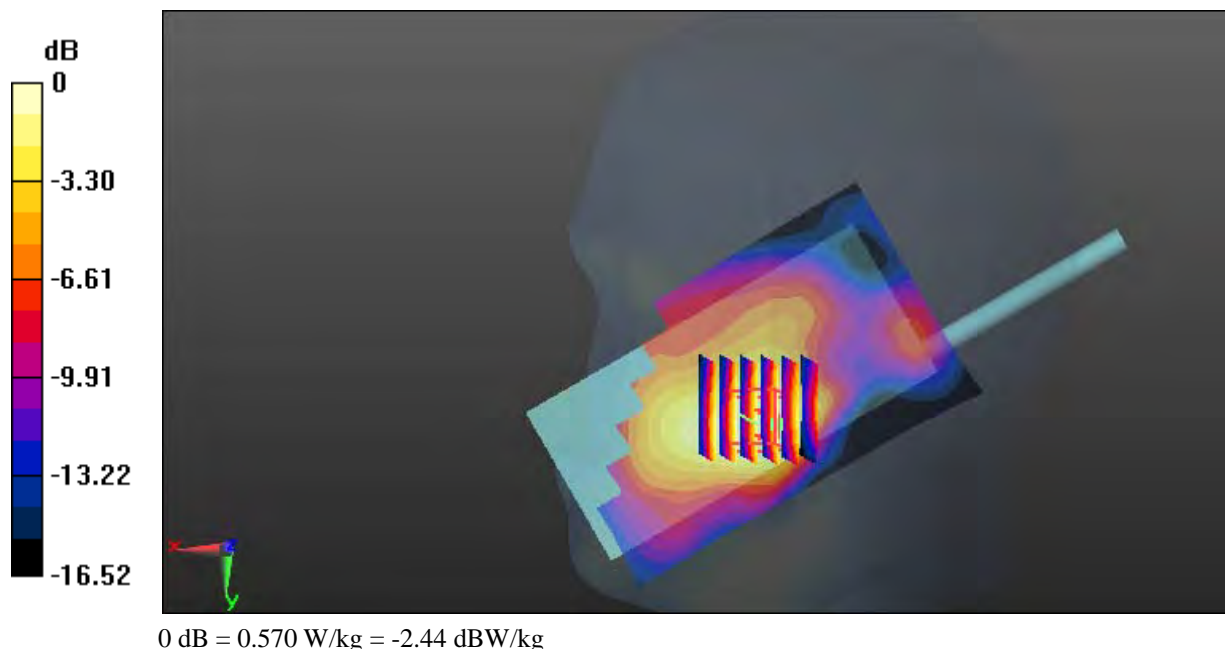



**Test Plot 153#: LTE Band 7\_Head Right Tilt\_Middle\_1RB****DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 2535 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 2535$  MHz;  $\sigma = 1.896$  S/m;  $\epsilon_r = 39.016$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.41, 4.41, 4.41); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (141x81x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.265 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.700 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.392 W/kg

**SAR(1 g) = 0.214 W/kg; SAR(10 g) = 0.116 W/kg**

Maximum value of SAR (measured) = 0.225 W/kg

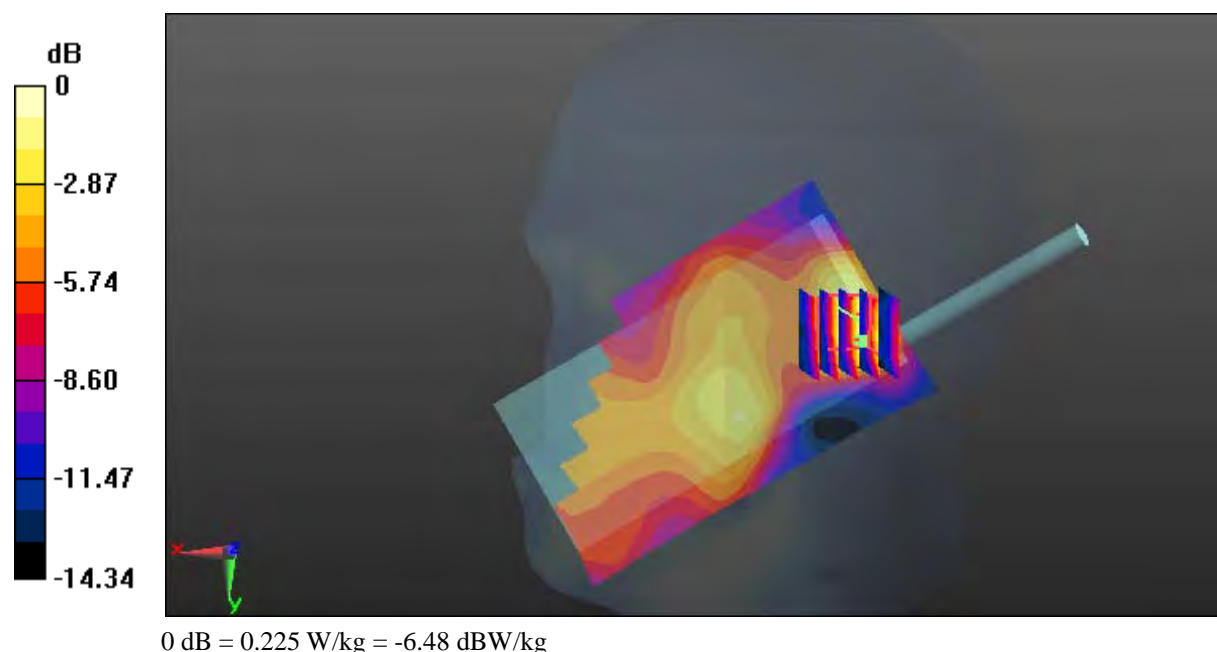

**Test Plot 154#: LTE Band 7\_Head Right Tilt\_Middle\_50%RB**

**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 2535 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 2535 \text{ MHz}$ ;  $\sigma = 1.896 \text{ S/m}$ ;  $\epsilon_r = 39.016$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.41, 4.41, 4.41); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (141x81x1):** Interpolated grid:  $dx=1.200 \text{ mm}$ ,  $dy=1.200 \text{ mm}$

Maximum value of SAR (interpolated) = 0.183 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 5.156 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.236 W/kg

**SAR(1 g) = 0.143 W/kg; SAR(10 g) = 0.081 W/kg**

Maximum value of SAR (measured) = 0.151 W/kg

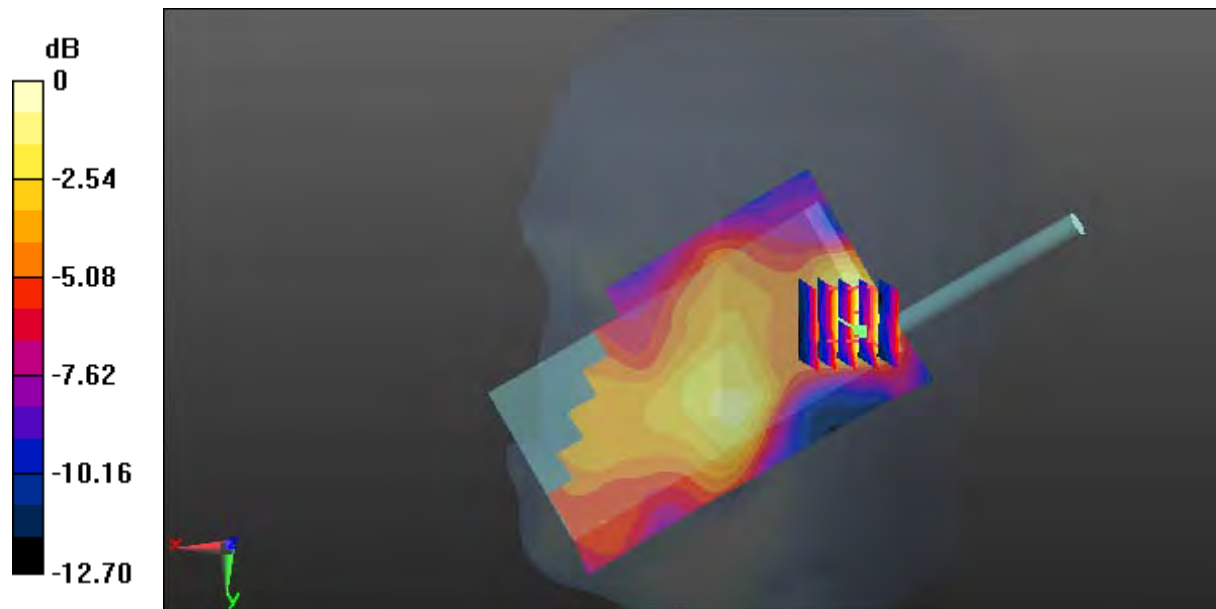

0 dB = 0.151 W/kg = -8.21 dBW/kg

**Test Plot 155#: LTE Band 7\_Face Up\_Middle\_1RB****DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 2535 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 2535$  MHz;  $\sigma = 1.896$  S/m;  $\epsilon_r = 39.016$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.41, 4.41, 4.41); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (141x81x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.114 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.418 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 0.159 W/kg

**SAR(1 g) = 0.102 W/kg; SAR(10 g) = 0.062 W/kg**

Maximum value of SAR (measured) = 0.110 W/kg

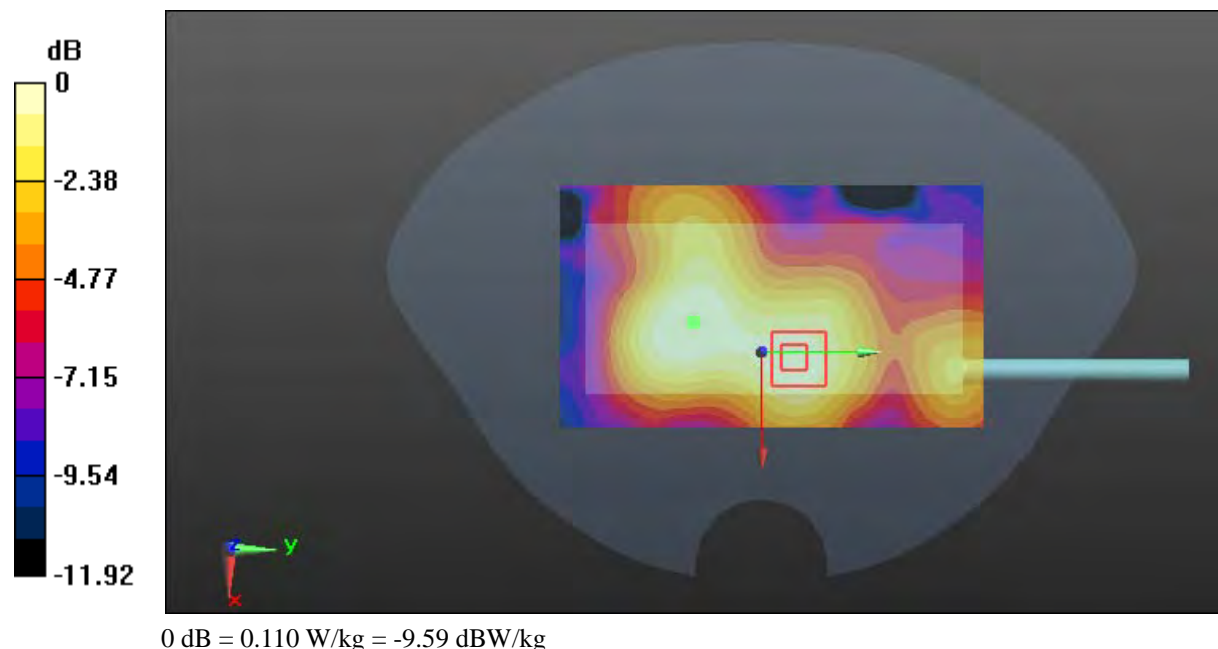

**Test Plot 156#: LTE Band 7\_Face Up\_Middle\_50%RB****DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 2535 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 2535$  MHz;  $\sigma = 1.896$  S/m;  $\epsilon_r = 39.016$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.41, 4.41, 4.41); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (141x81x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.0953 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.699 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.119 W/kg

**SAR(1 g) = 0.080 W/kg; SAR(10 g) = 0.047 W/kg**

Maximum value of SAR (measured) = 0.0878 W/kg

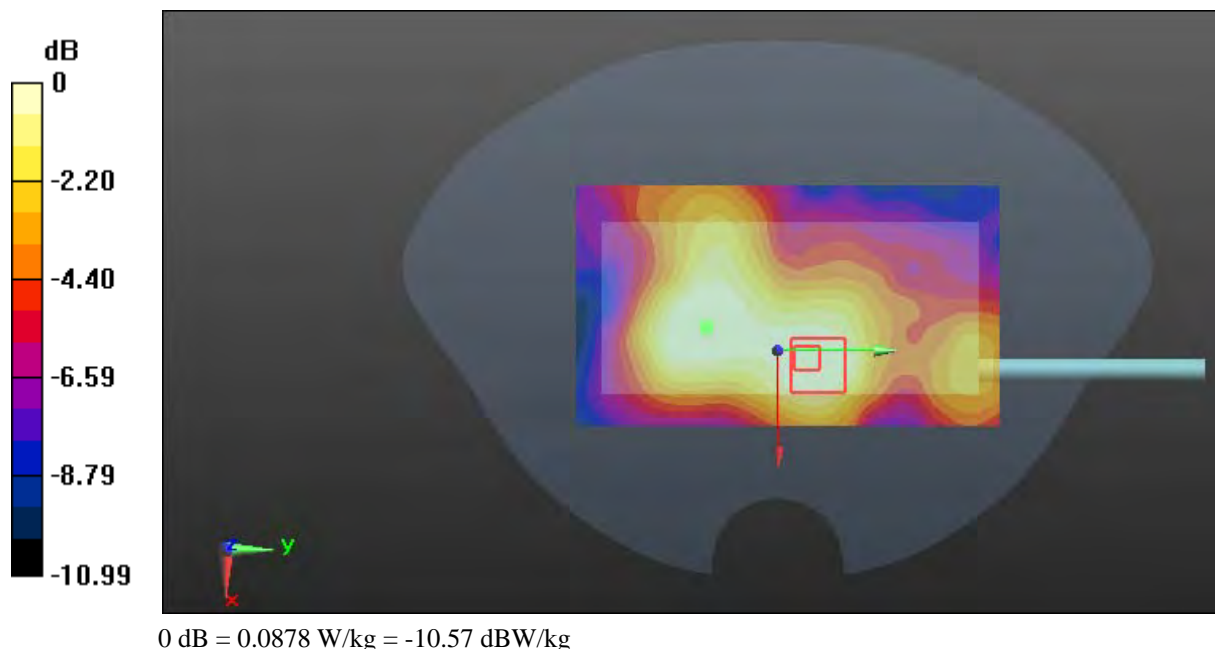

**Test Plot 157#: LTE Band 7\_Body Front \_Low\_1RB**

**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 2510 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 2510$  MHz;  $\sigma = 1.969$  S/m;  $\epsilon_r = 52.632$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
 Phantom section: Center Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.05, 4.05, 4.05); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (141x81x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.429 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.495 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 0.886 W/kg

**SAR(1 g) = 0.413 W/kg; SAR(10 g) = 0.212 W/kg**

Maximum value of SAR (measured) = 0.444 W/kg

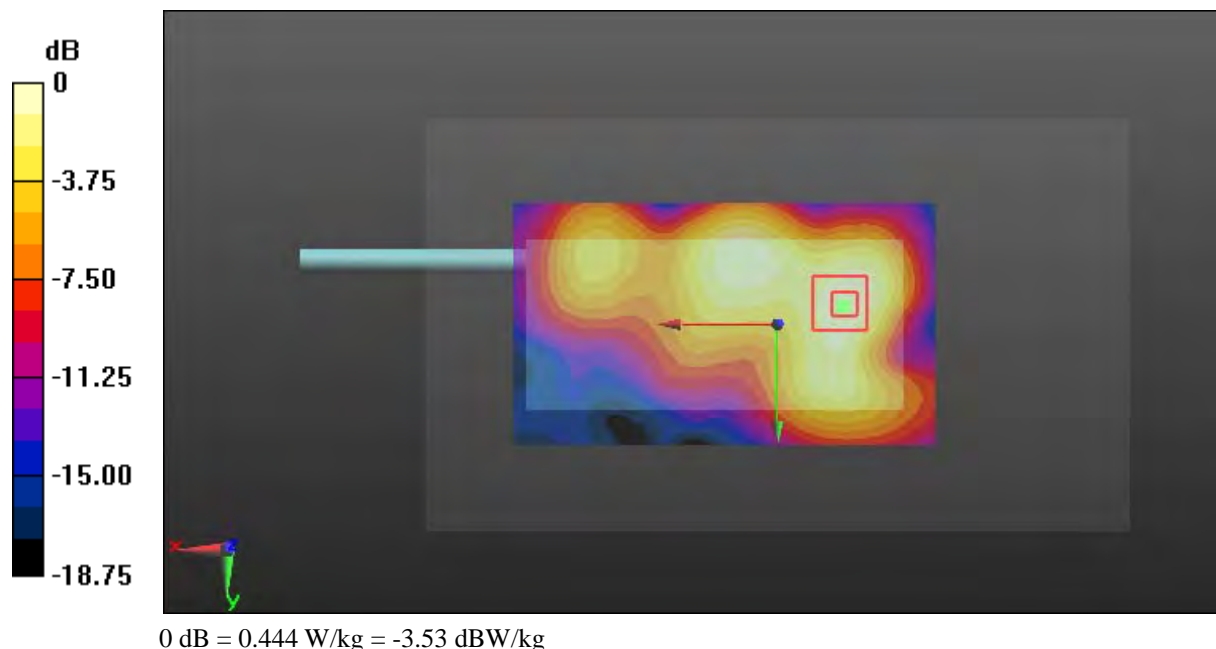

**Test Plot 158#: LTE Band 7\_Body Front \_Middle\_1RB**

**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 2535 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 2535 \text{ MHz}$ ;  $\sigma = 2.111 \text{ S/m}$ ;  $\epsilon_r = 52.483$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Center Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.05, 4.05, 4.05); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (141x81x1):** Interpolated grid:  $dx=1.200 \text{ mm}$ ,  $dy=1.200 \text{ mm}$

Maximum value of SAR (interpolated) = 0.430 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 9.806 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.902 W/kg

**SAR(1 g) = 0.407 W/kg; SAR(10 g) = 0.210 W/kg**

Maximum value of SAR (measured) = 0.431 W/kg

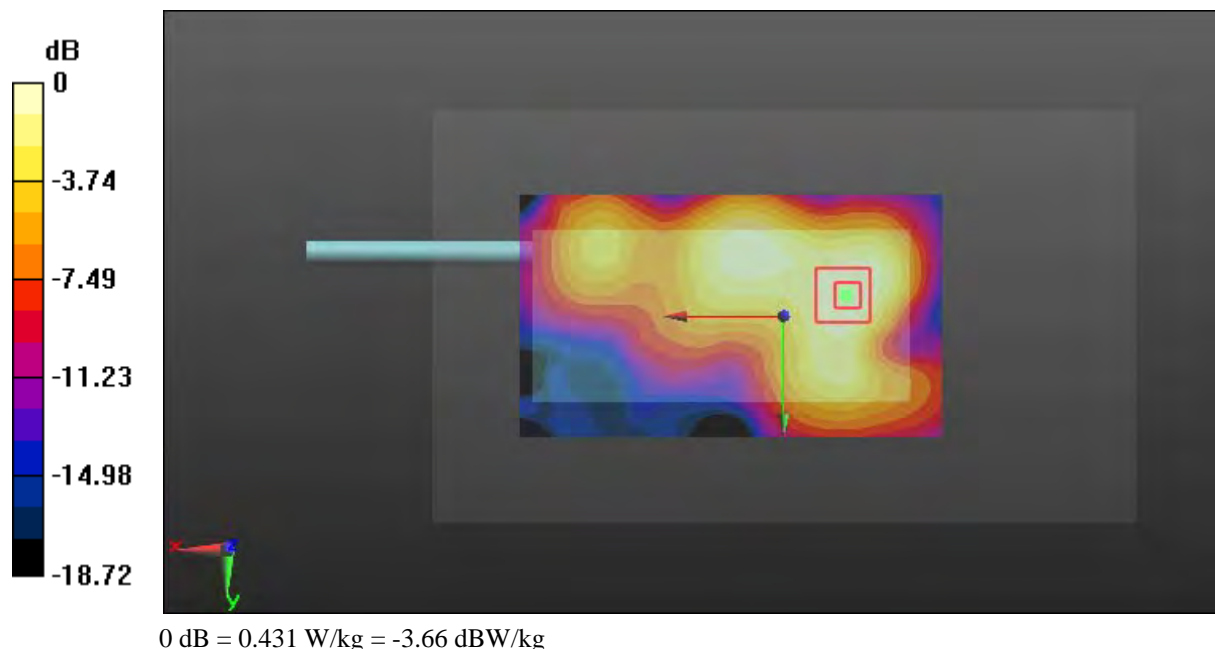

**Test Plot 159#: LTE Band 7\_Body Front \_High\_1RB**

**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 2560 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 2560$  MHz;  $\sigma = 2.119$  S/m;  $\epsilon_r = 54.244$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
 Phantom section: Center Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(3.82, 3.82, 3.82); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (141x81x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.503 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.99 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 0.992 W/kg

**SAR(1 g) = 0.461 W/kg; SAR(10 g) = 0.239 W/kg**

Maximum value of SAR (measured) = 0.491 W/kg

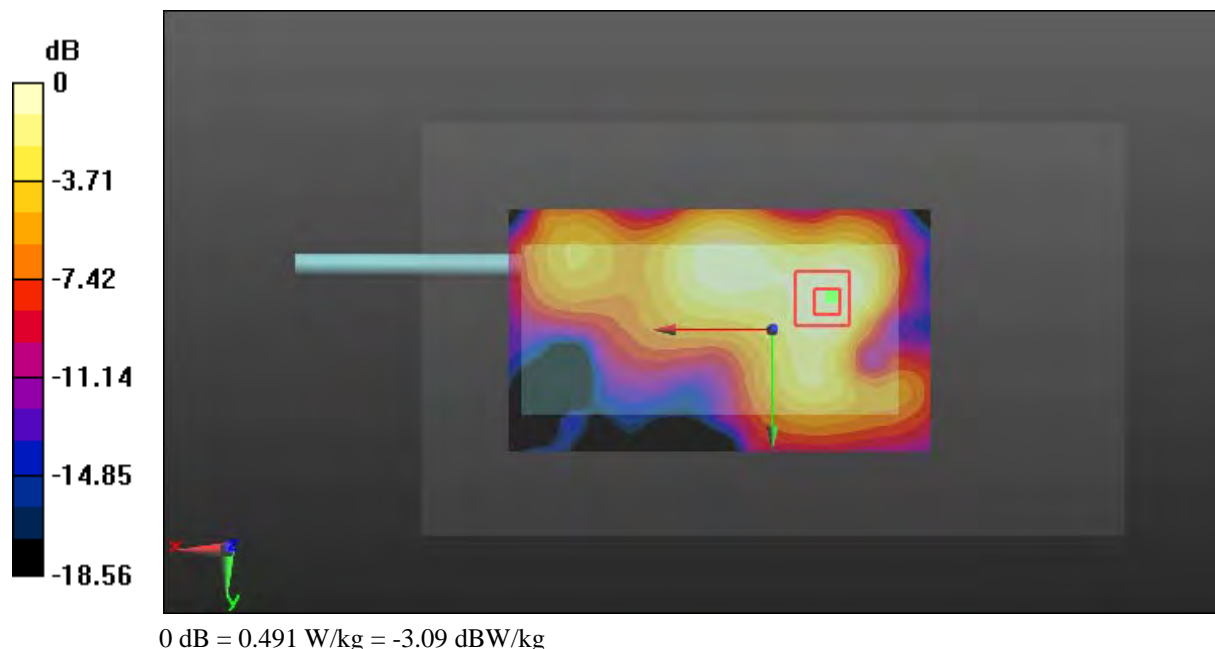

**Test Plot 160#: LTE Band 7\_Body Front \_Middle\_50%RB**

**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 2535 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 2535 \text{ MHz}$ ;  $\sigma = 2.111 \text{ S/m}$ ;  $\epsilon_r = 52.483$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Center Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.05, 4.05, 4.05); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (141x81x1):** Interpolated grid:  $dx=1.200 \text{ mm}$ ,  $dy=1.200 \text{ mm}$

Maximum value of SAR (interpolated) = 0.489 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 10.69 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.979 W/kg

**SAR(1 g) = 0.450 W/kg; SAR(10 g) = 0.234 W/kg**

Maximum value of SAR (measured) = 0.475 W/kg

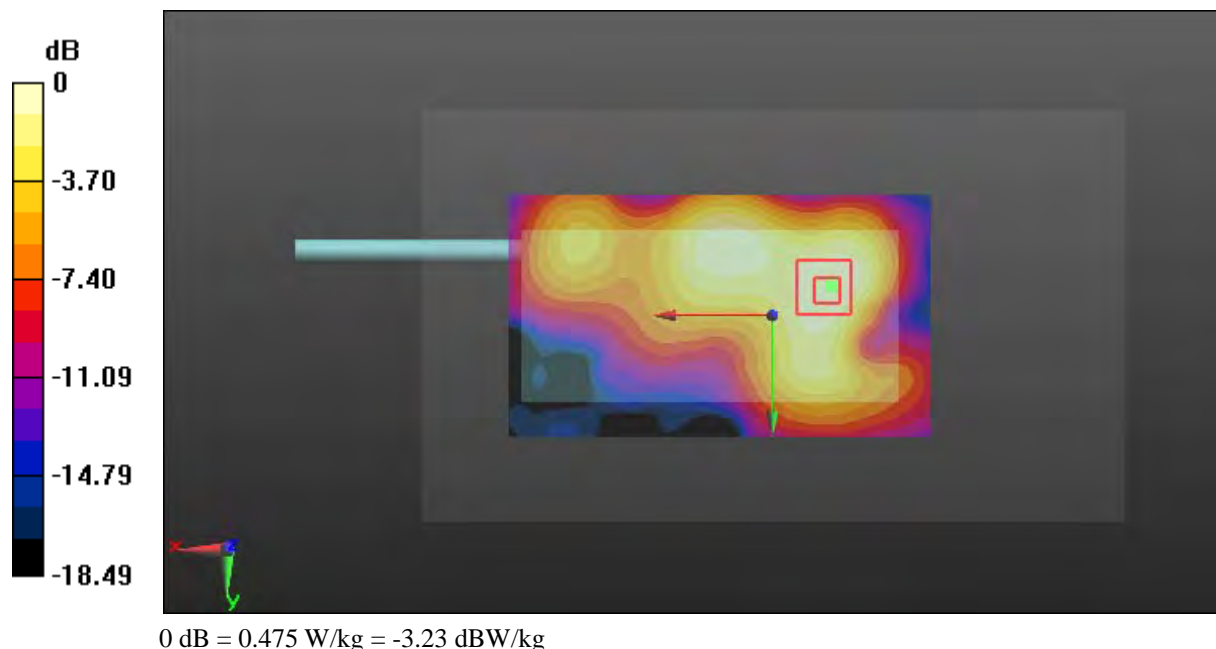



**Test Plot 161#: LTE Band 7\_Body Back\_Middle\_1RB**

**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 2535 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 2535 \text{ MHz}$ ;  $\sigma = 2.111 \text{ S/m}$ ;  $\epsilon_r = 52.483$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Center Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.05, 4.05, 4.05); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (141x81x1):** Interpolated grid:  $dx=1.200 \text{ mm}$ ,  $dy=1.200 \text{ mm}$

Maximum value of SAR (interpolated) = 0.293 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 5.796 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 0.455 W/kg

**SAR(1 g) = 0.246 W/kg; SAR(10 g) = 0.123 W/kg**

Maximum value of SAR (measured) = 0.287 W/kg

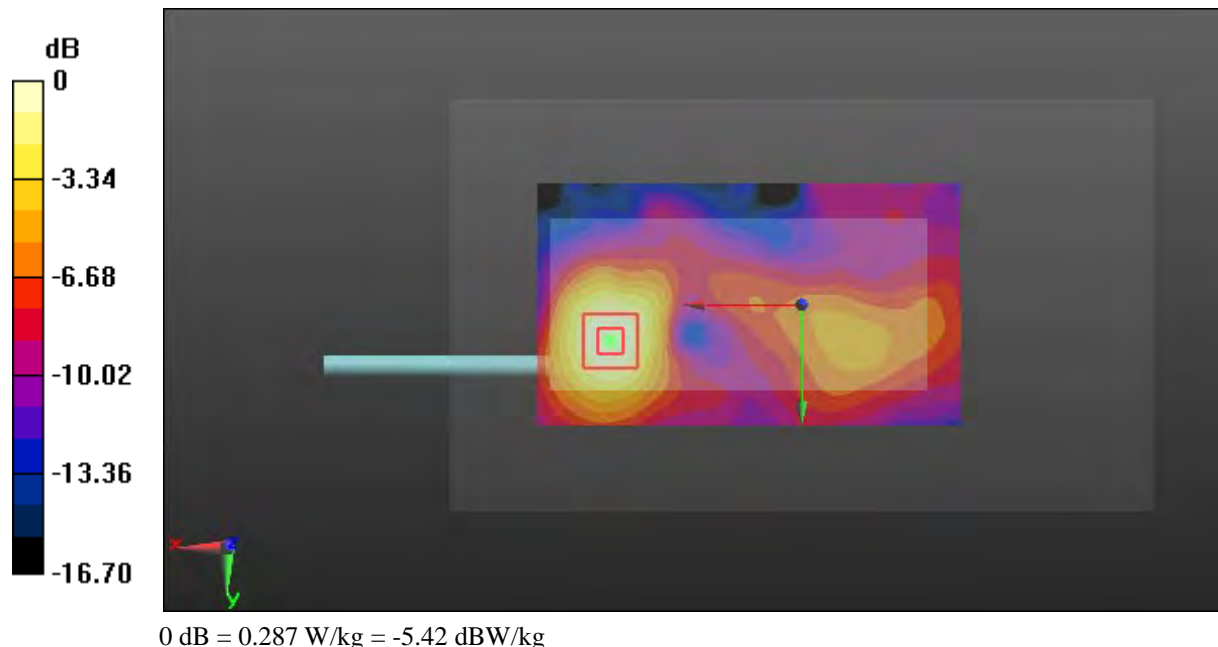

**Test Plot 162#: LTE Band 7\_Body Back\_Middle\_50%RB**

**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 2535 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 2535 \text{ MHz}$ ;  $\sigma = 2.111 \text{ S/m}$ ;  $\epsilon_r = 52.483$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Center Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.05, 4.05, 4.05); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (141x81x1):** Interpolated grid:  $dx=1.200 \text{ mm}$ ,  $dy=1.200 \text{ mm}$

Maximum value of SAR (interpolated) = 0.235 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 5.531 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 0.492 W/kg

**SAR(1 g) = 0.215 W/kg; SAR(10 g) = 0.109 W/kg**

Maximum value of SAR (measured) = 0.226 W/kg

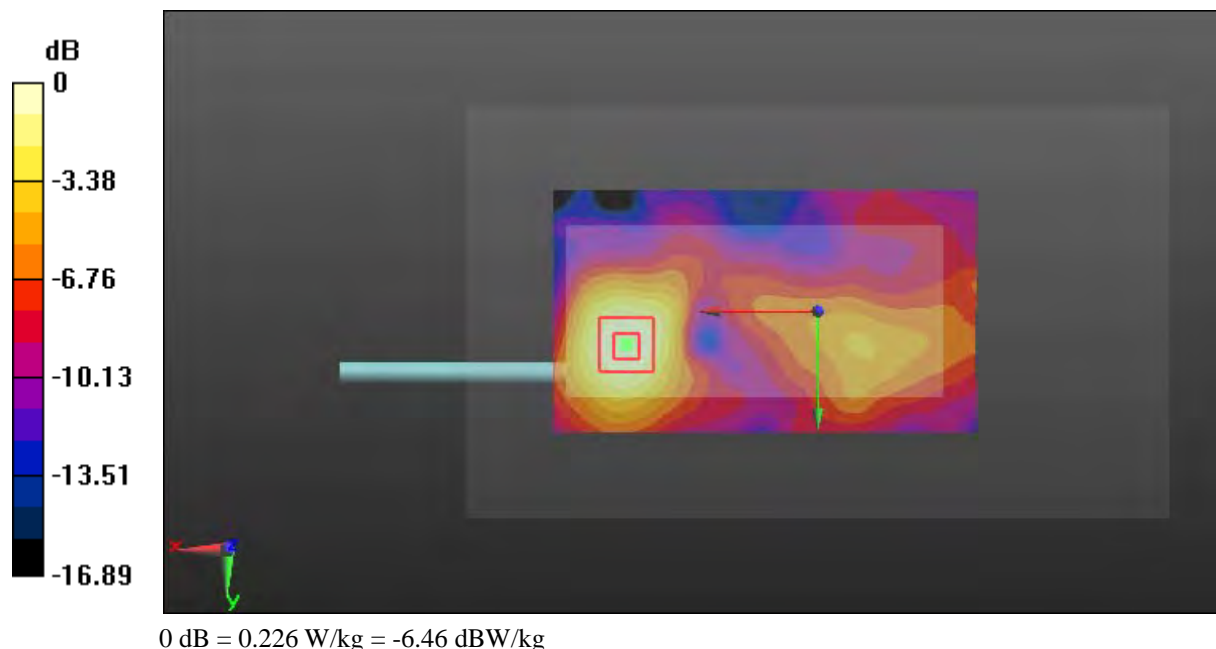

**Test Plot 163#: LTE Band 7\_Body Left\_Middle\_1RB**

**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 2535 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 2535 \text{ MHz}$ ;  $\sigma = 2.111 \text{ S/m}$ ;  $\epsilon_r = 52.483$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Center Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.05, 4.05, 4.05); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (131x61x1):** Interpolated grid:  $dx=1.200 \text{ mm}$ ,  $dy=1.200 \text{ mm}$

Maximum value of SAR (interpolated) = 0.229 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 6.070 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.523 W/kg

**SAR(1 g) = 0.227 W/kg; SAR(10 g) = 0.109 W/kg**

Maximum value of SAR (measured) = 0.246 W/kg

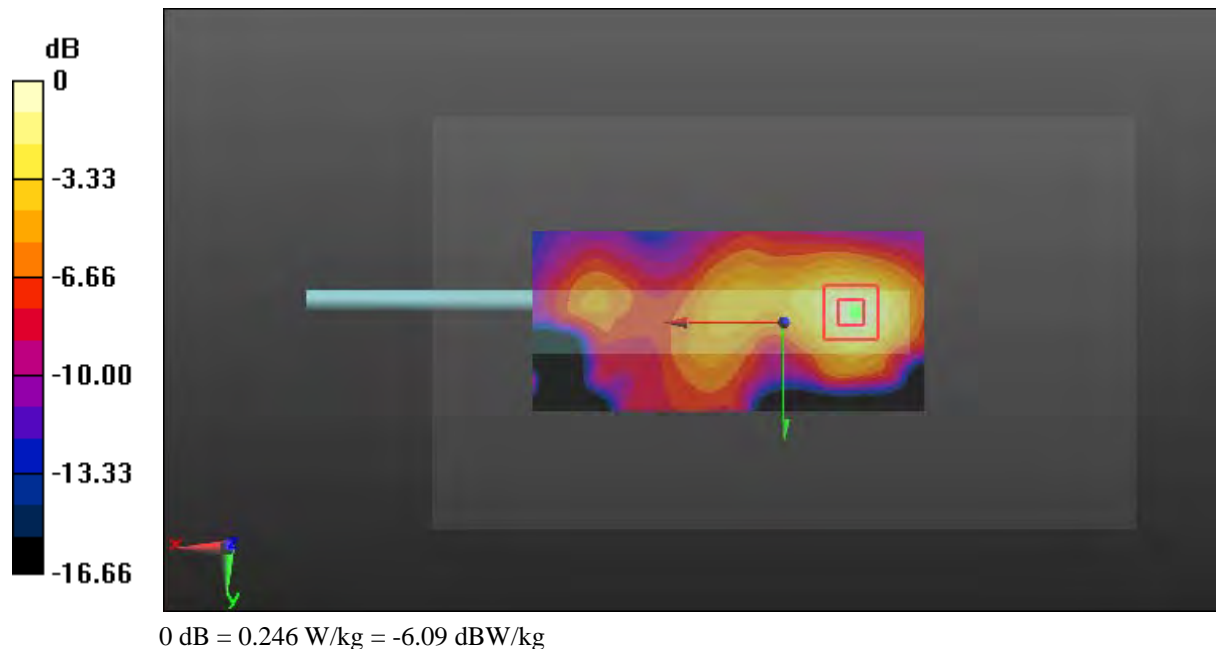

**Test Plot 164#: LTE Band 7\_Body Left\_Middle\_50%RB**

**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 2535 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 2535 \text{ MHz}$ ;  $\sigma = 2.111 \text{ S/m}$ ;  $\epsilon_r = 52.483$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Center Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.05, 4.05, 4.05); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (131x61x1):** Interpolated grid:  $dx=1.200 \text{ mm}$ ,  $dy=1.200 \text{ mm}$

Maximum value of SAR (interpolated) = 0.203 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 5.504 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 0.365 W/kg

**SAR(1 g) = 0.169 W/kg; SAR(10 g) = 0.082 W/kg**

Maximum value of SAR (measured) = 0.189 W/kg

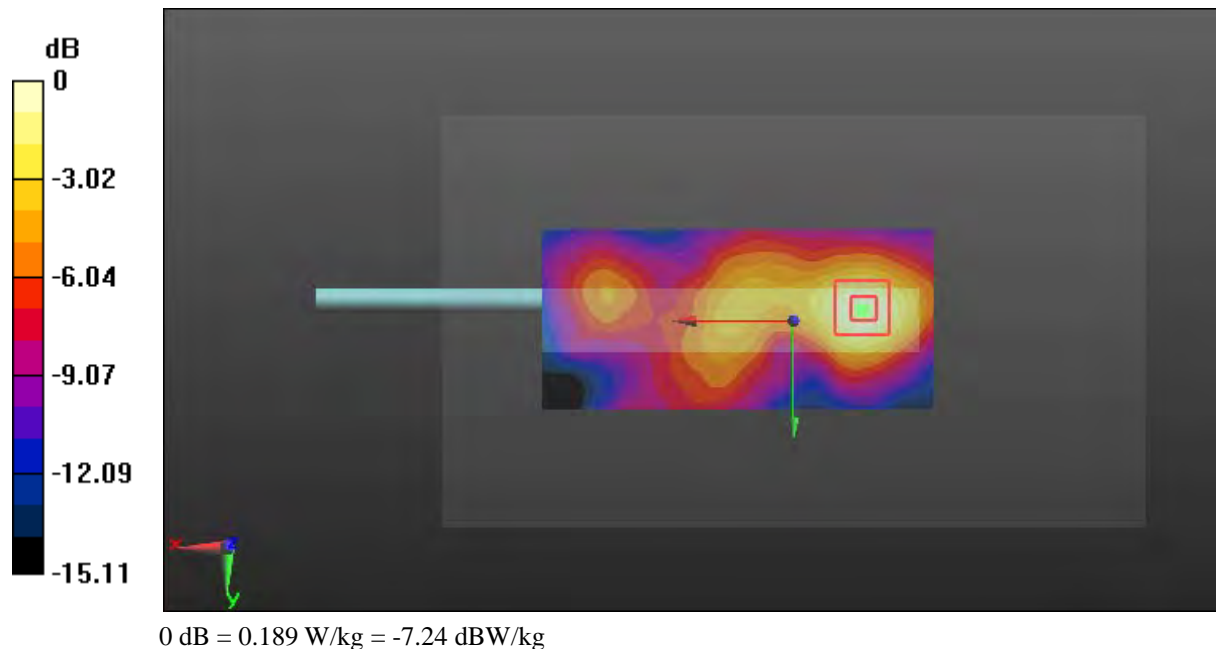

**Test Plot 165#: LTE Band 7\_Body Right\_Middle\_1RB****DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 2535 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 2535$  MHz;  $\sigma = 2.111$  S/m;  $\epsilon_r = 52.483$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Center Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.05, 4.05, 4.05); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (131x61x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.337 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.046 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.661 W/kg

**SAR(1 g) = 0.297 W/kg; SAR(10 g) = 0.148 W/kg**

Maximum value of SAR (measured) = 0.326 W/kg

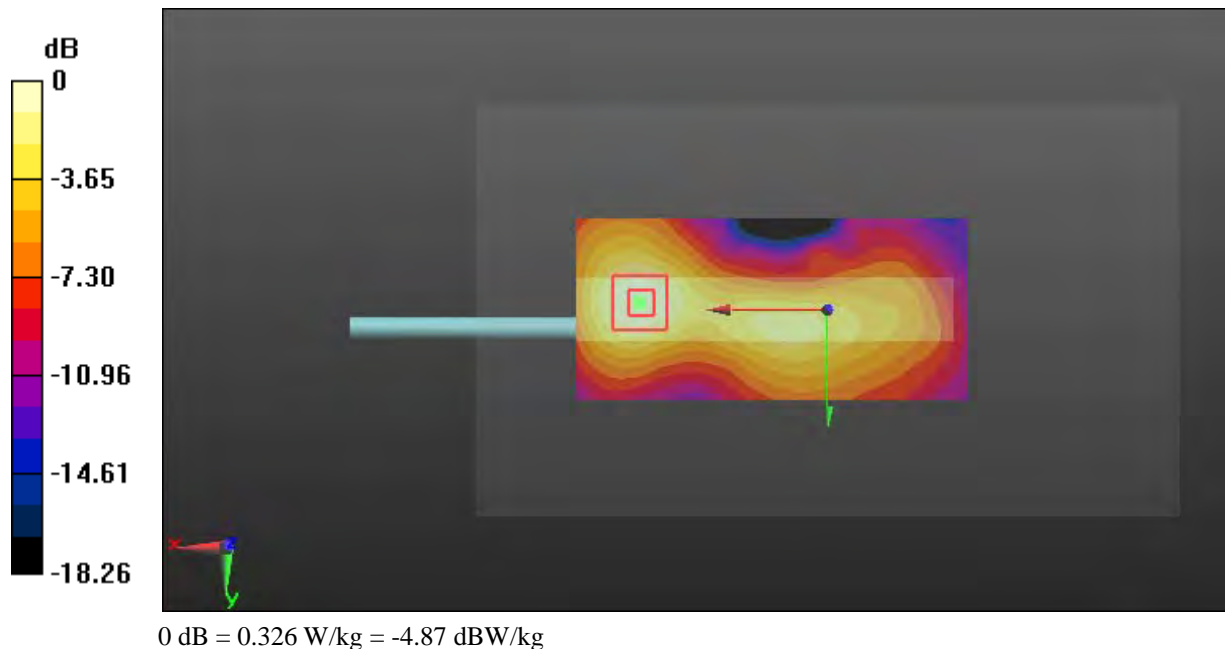

**Test Plot 166#: LTE Band 7\_Body Right\_Middle\_50%RB**

**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 2535 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 2535$  MHz;  $\sigma = 2.111$  S/m;  $\epsilon_r = 52.483$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
 Phantom section: Center Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.05, 4.05, 4.05); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (131x61x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.246 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.802 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.471 W/kg

**SAR(1 g) = 0.225 W/kg; SAR(10 g) = 0.112 W/kg**

Maximum value of SAR (measured) = 0.251 W/kg

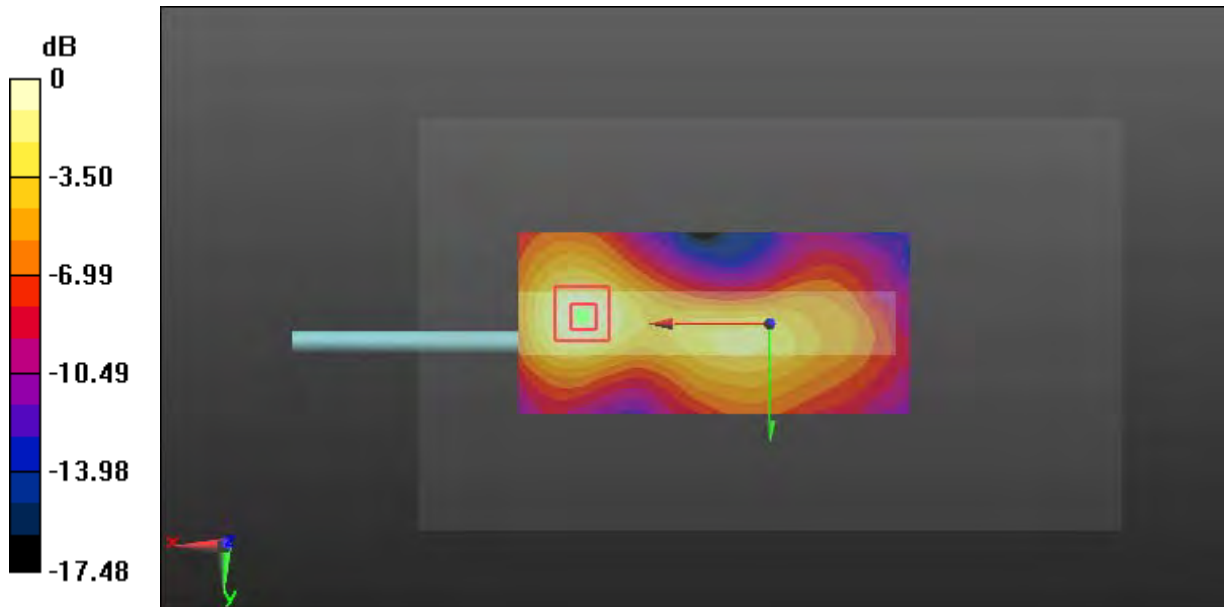

0 dB = 0.251 W/kg = -6.00 dBW/kg

**Test Plot 167#: LTE Band 7\_Body Bottom\_Middle\_1RB****DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 2535 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 2535$  MHz;  $\sigma = 2.111$  S/m;  $\epsilon_r = 52.483$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Center Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.05, 4.05, 4.05); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (61x101x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.209 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.010 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.460 W/kg

**SAR(1 g) = 0.199 W/kg; SAR(10 g) = 0.092 W/kg**

Maximum value of SAR (measured) = 0.225 W/kg

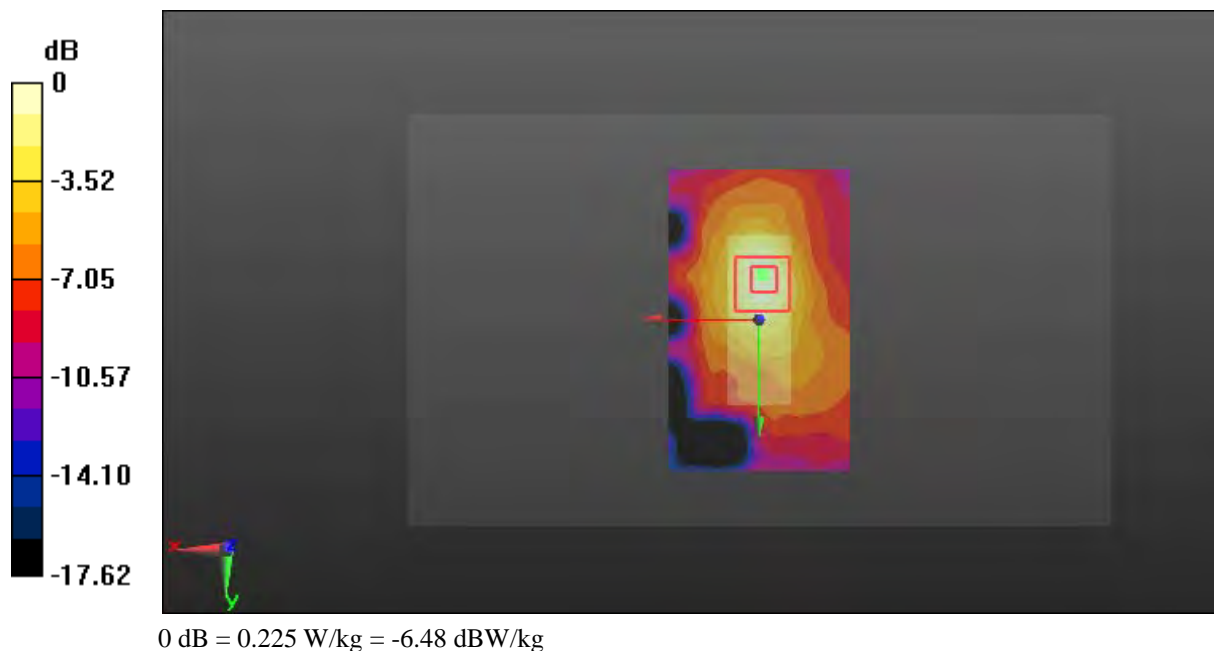

**Test Plot 168#: LTE Band 7\_Body Bottom\_Middle\_50%RB**

**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 2535 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 2535 \text{ MHz}$ ;  $\sigma = 2.111 \text{ S/m}$ ;  $\epsilon_r = 52.483$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Center Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.05, 4.05, 4.05); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (61x101x1):** Interpolated grid:  $dx=1.200 \text{ mm}$ ,  $dy=1.200 \text{ mm}$

Maximum value of SAR (interpolated) = 0.164 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 7.239 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 0.304 W/kg

**SAR(1 g) = 0.147 W/kg; SAR(10 g) = 0.071 W/kg**

Maximum value of SAR (measured) = 0.173 W/kg

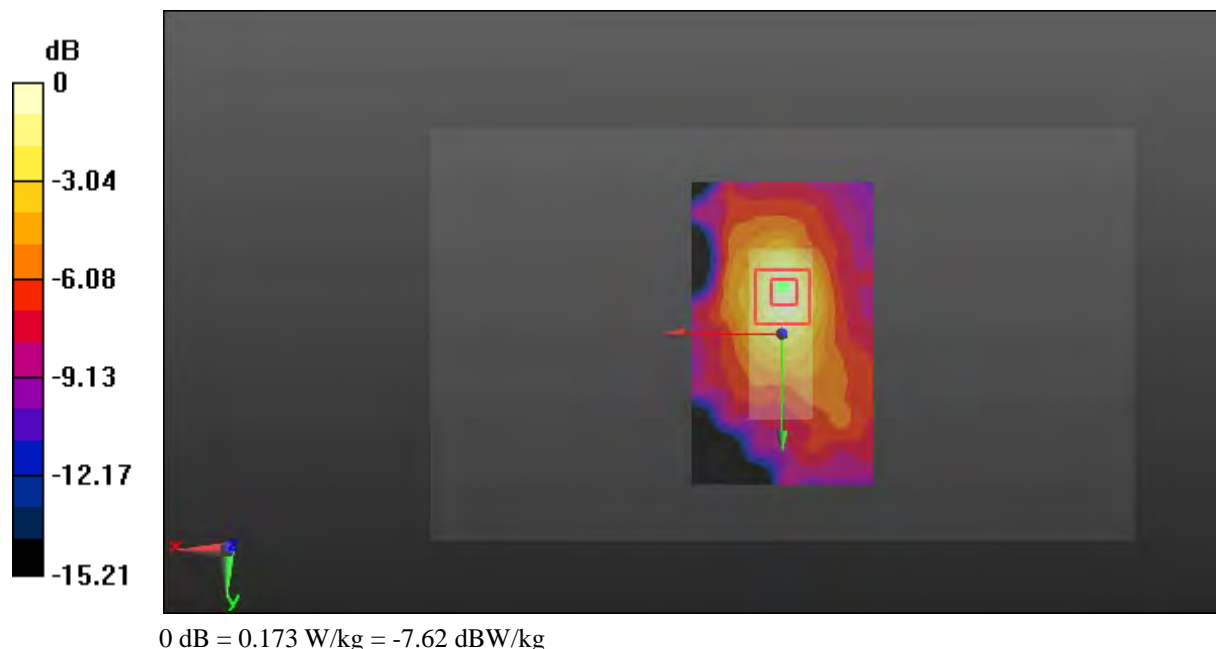



**Test Plot 169#: LTE Band 12\_Head Left Cheek\_Low\_1RB**

**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 704 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 704 \text{ MHz}$ ;  $\sigma = 0.884 \text{ S/m}$ ;  $\epsilon_r = 43.011$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.57, 6.57, 6.57); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x61x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.206 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 6.221 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 0.248 W/kg

**SAR(1 g) = 0.198 W/kg; SAR(10 g) = 0.151 W/kg**

Maximum value of SAR (measured) = 0.209 W/kg

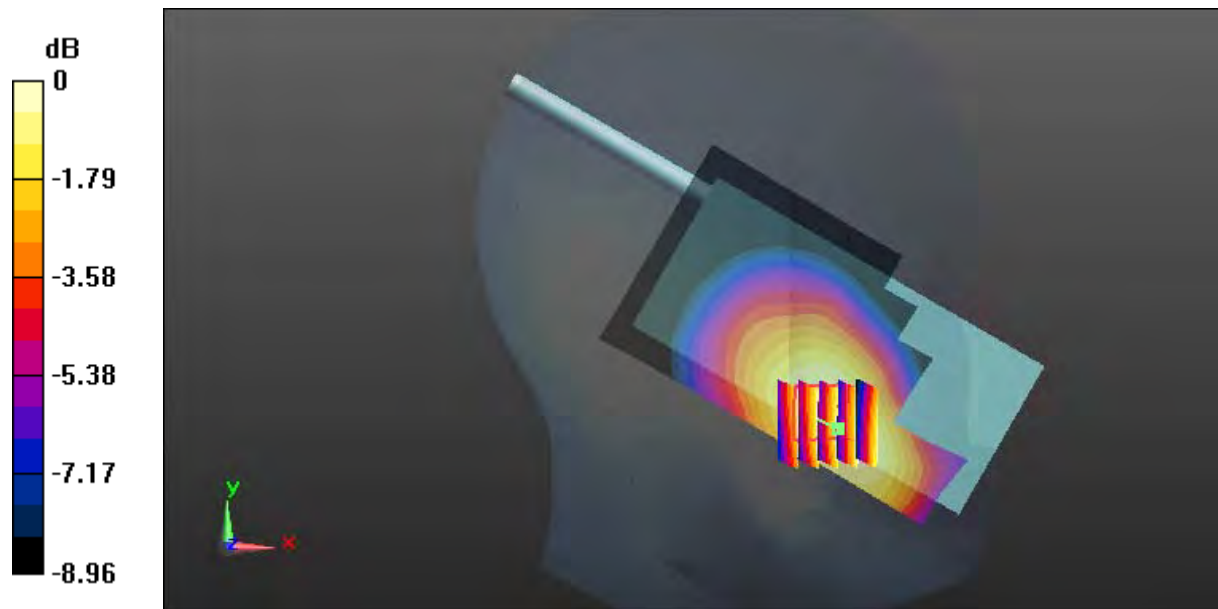

0 dB = 0.209 W/kg = -6.80 dBW/kg

**Test Plot 170#: LTE Band 12\_Head Left Cheek\_Middle\_1RB****DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 707.5 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 707.5$  MHz;  $\sigma = 0.885$  S/m;  $\epsilon_r = 43.008$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.57, 6.57, 6.57); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x61x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.242 W/kg


**Zoom Scan (6x6x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.556 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 0.297 W/kg

**SAR(1 g) = 0.236 W/kg; SAR(10 g) = 0.180 W/kg**

Maximum value of SAR (measured) = 0.248 W/kg

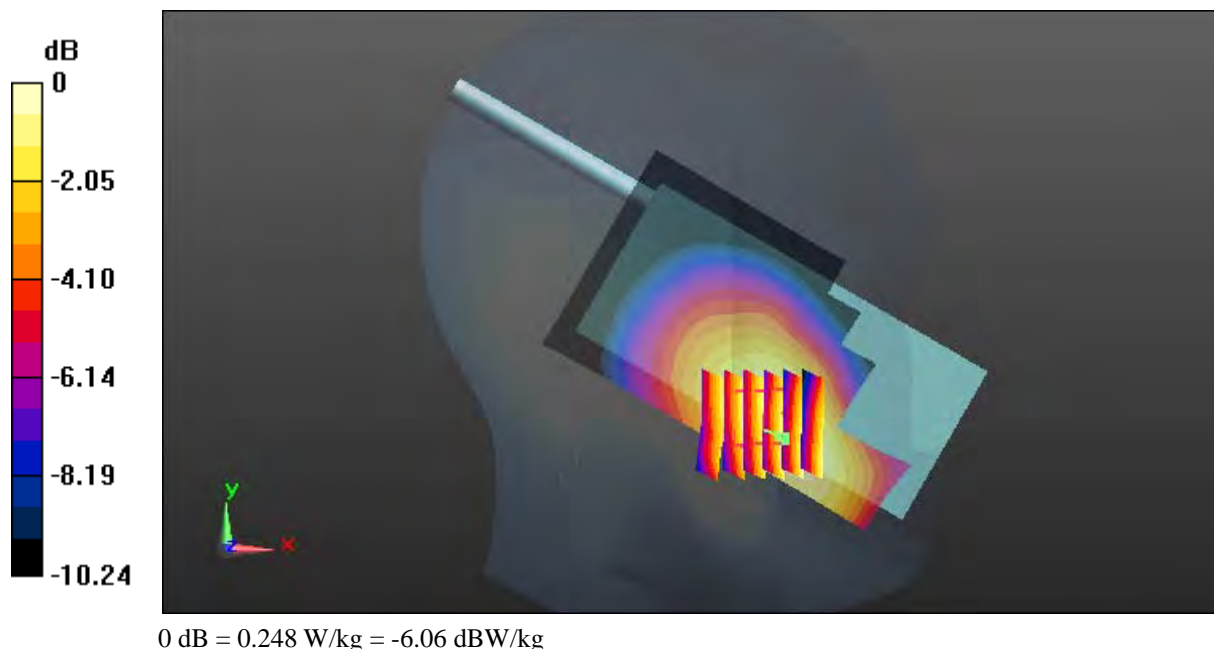

**Test Plot 171#: LTE Band 12\_Head Left Cheek\_High\_1RB**

**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 711 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 711 \text{ MHz}$ ;  $\sigma = 0.882 \text{ S/m}$ ;  $\epsilon_r = 42.975$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.57, 6.57, 6.57); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x61x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.225 W/kg


**Zoom Scan (6x6x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 10.08 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.254 W/kg

**SAR(1 g) = 0.218 W/kg; SAR(10 g) = 0.176 W/kg**

Maximum value of SAR (measured) = 0.225 W/kg

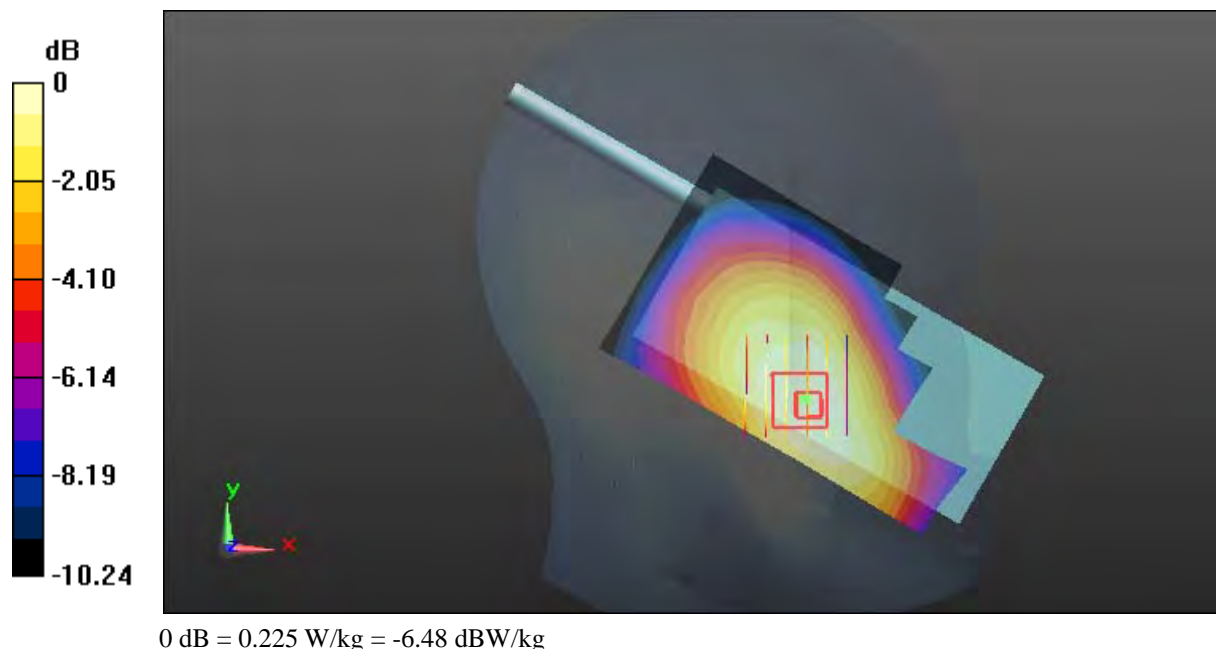

**Test Plot 172#: LTE Band 12\_Head Left Cheek\_Middle\_50%RB****DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 707.5 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 707.5$  MHz;  $\sigma = 0.885$  S/m;  $\epsilon_r = 43.008$ ;  $\rho = 1000$  kg/m<sup>3</sup>;  
Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.57, 6.57, 6.57); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x61x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.169 W/kg


**Zoom Scan (6x6x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.226 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.205 W/kg

**SAR(1 g) = 0.164 W/kg; SAR(10 g) = 0.129 W/kg**

Maximum value of SAR (measured) = 0.171 W/kg

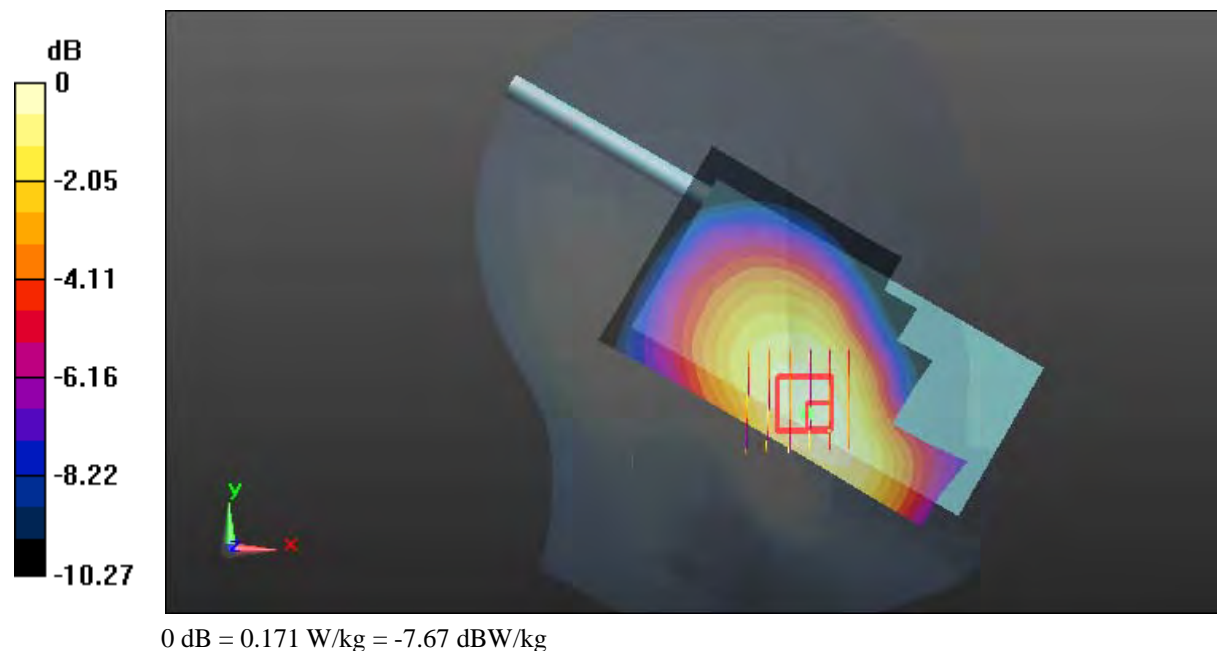

**Test Plot 173#: LTE Band 12\_Head Left Tilt\_Middle\_1RB****DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 707.5 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 707.5$  MHz;  $\sigma = 0.885$  S/m;  $\epsilon_r = 43.008$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.57, 6.57, 6.57); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x61x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0802 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.211 V/m; Power Drift = -0.18 dB

Peak SAR (extrapolated) = 0.0900 W/kg

**SAR(1 g) = 0.078 W/kg; SAR(10 g) = 0.064 W/kg**

Maximum value of SAR (measured) = 0.0809 W/kg

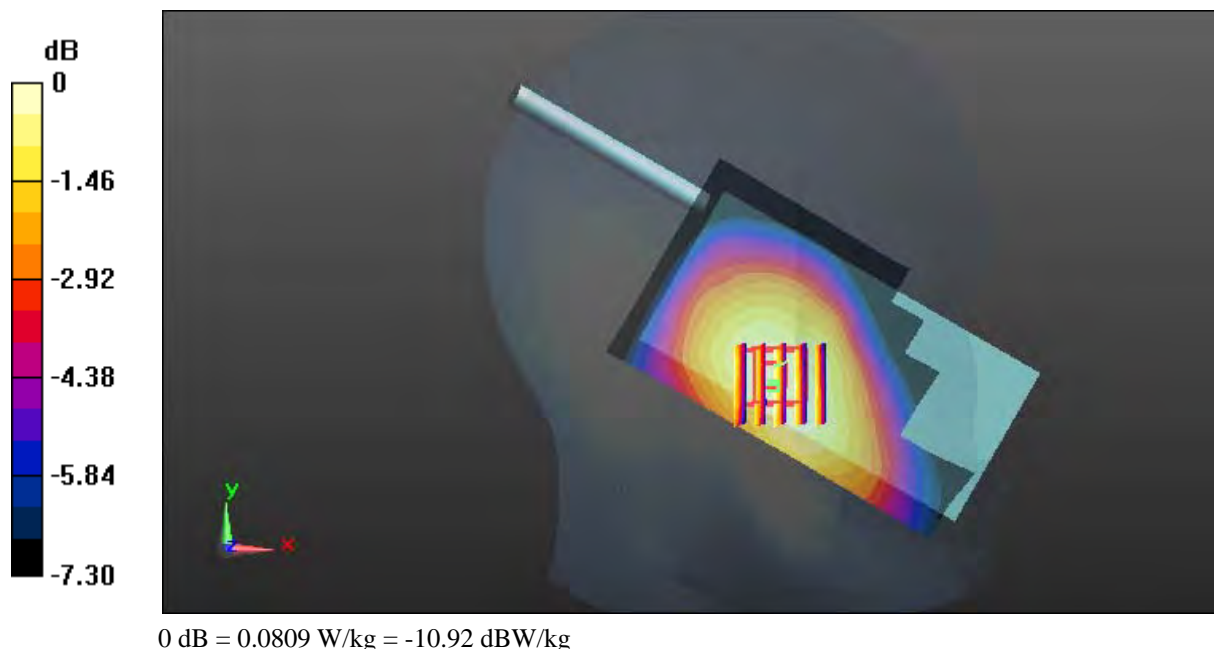

**Test Plot 174#: LTE Band 12\_Head Left Tilt\_Middle\_50%RB****DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 707.5 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 707.5$  MHz;  $\sigma = 0.885$  S/m;  $\epsilon_r = 43.008$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.57, 6.57, 6.57); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x61x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0714 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.800 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 0.0810 W/kg

**SAR(1 g) = 0.070 W/kg; SAR(10 g) = 0.057 W/kg**

Maximum value of SAR (measured) = 0.0717 W/kg

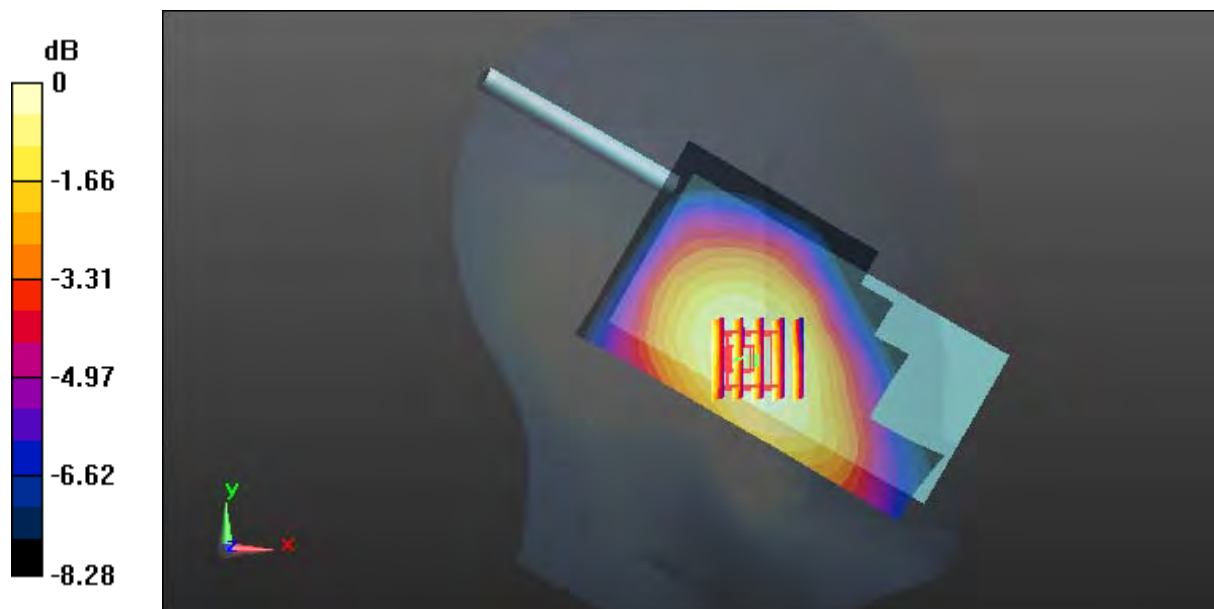

0 dB = 0.0717 W/kg = -11.44 dBW/kg

**Test Plot 175#: LTE Band 12\_Head Right Cheek\_Middle\_1RB**

**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 707.5 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 707.5 \text{ MHz}$ ;  $\sigma = 0.885 \text{ S/m}$ ;  $\epsilon_r = 43.008$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.57, 6.57, 6.57); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x61x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.211 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 8.188 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 0.232 W/kg

**SAR(1 g) = 0.193 W/kg; SAR(10 g) = 0.152 W/kg**

Maximum value of SAR (measured) = 0.202 W/kg

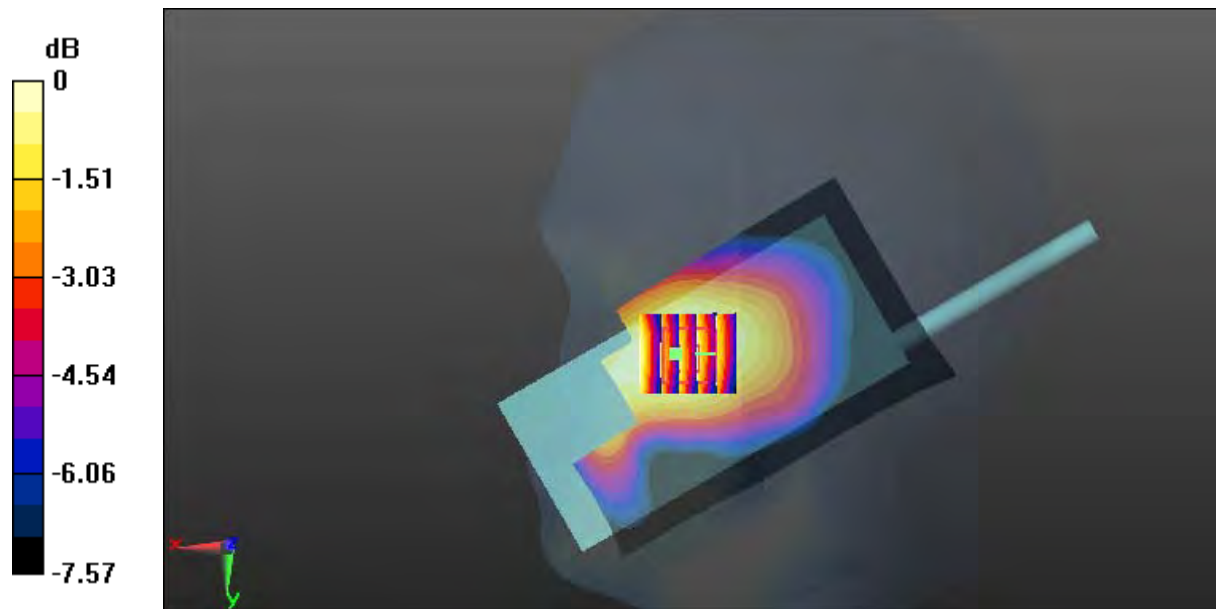

0 dB = 0.202 W/kg = -6.95 dBW/kg

**Test Plot 176#: LTE Band 12\_Head Right Cheek\_Middle\_50%RB****DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 707.5 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 707.5$  MHz;  $\sigma = 0.885$  S/m;  $\epsilon_r = 43.008$ ;  $\rho = 1000$  kg/m<sup>3</sup>;  
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.57, 6.57, 6.57); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x61x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.165 W/kg


**Zoom Scan (6x6x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.395 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.190 W/kg

**SAR(1 g) = 0.159 W/kg; SAR(10 g) = 0.126 W/kg**

Maximum value of SAR (measured) = 0.166 W/kg

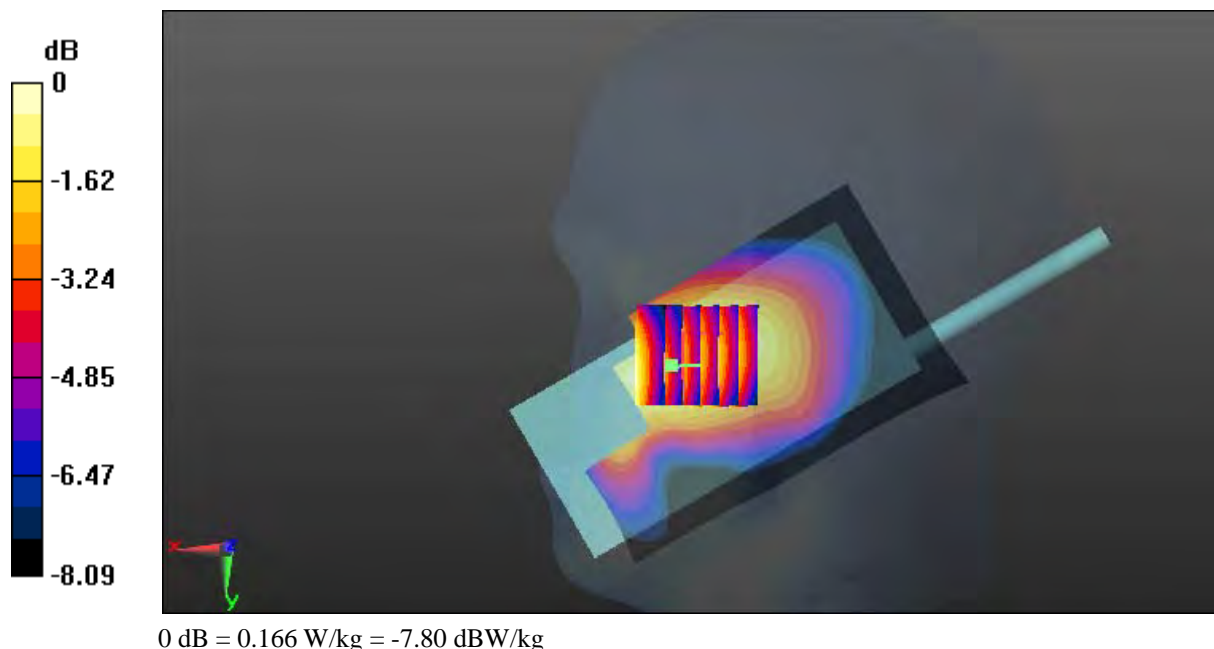



**Test Plot 177#: LTE Band 12\_Head Right Tilt\_Middle\_1RB****DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 707.5 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 707.5$  MHz;  $\sigma = 0.885$  S/m;  $\epsilon_r = 43.008$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.57, 6.57, 6.57); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x61x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0819 W/kg


**Zoom Scan (6x6x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.359 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.0910 W/kg

**SAR(1 g) = 0.077 W/kg; SAR(10 g) = 0.063 W/kg**

Maximum value of SAR (measured) = 0.0810 W/kg

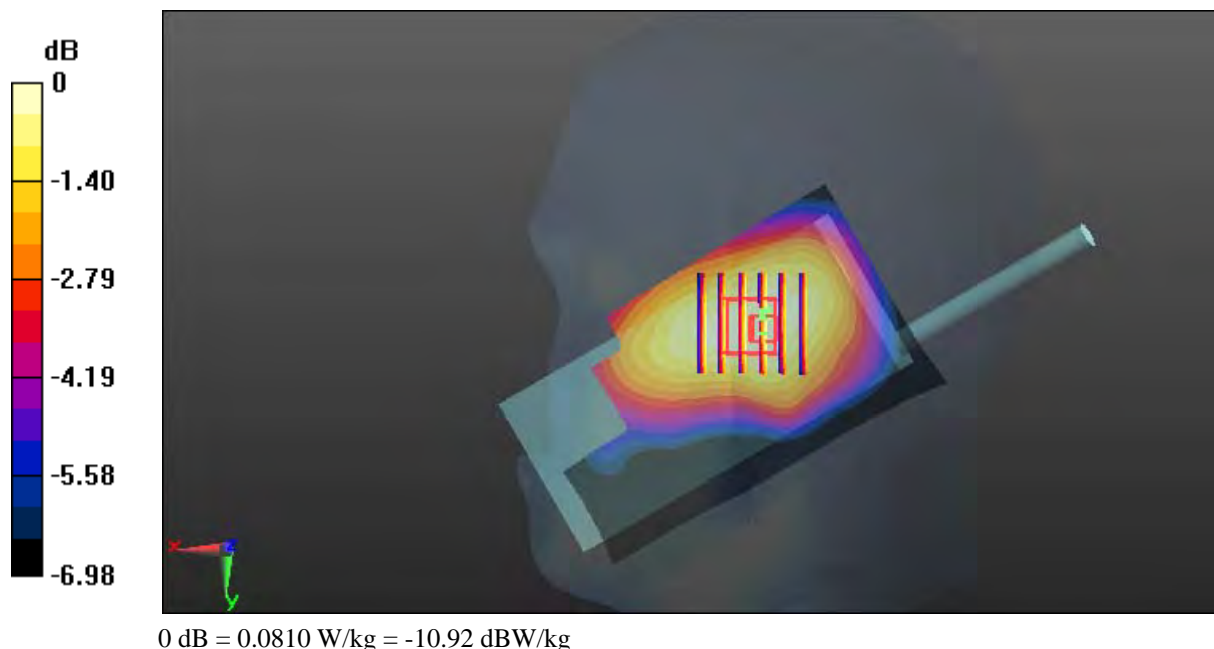

**Test Plot 178#: LTE Band 12\_Head Right Tilt\_Middle\_50%RB****DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 707.5 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 707.5$  MHz;  $\sigma = 0.885$  S/m;  $\epsilon_r = 43.008$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.57, 6.57, 6.57); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x61x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0696 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.896 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.0830 W/kg

**SAR(1 g) = 0.068 W/kg; SAR(10 g) = 0.055 W/kg**

Maximum value of SAR (measured) = 0.0714 W/kg

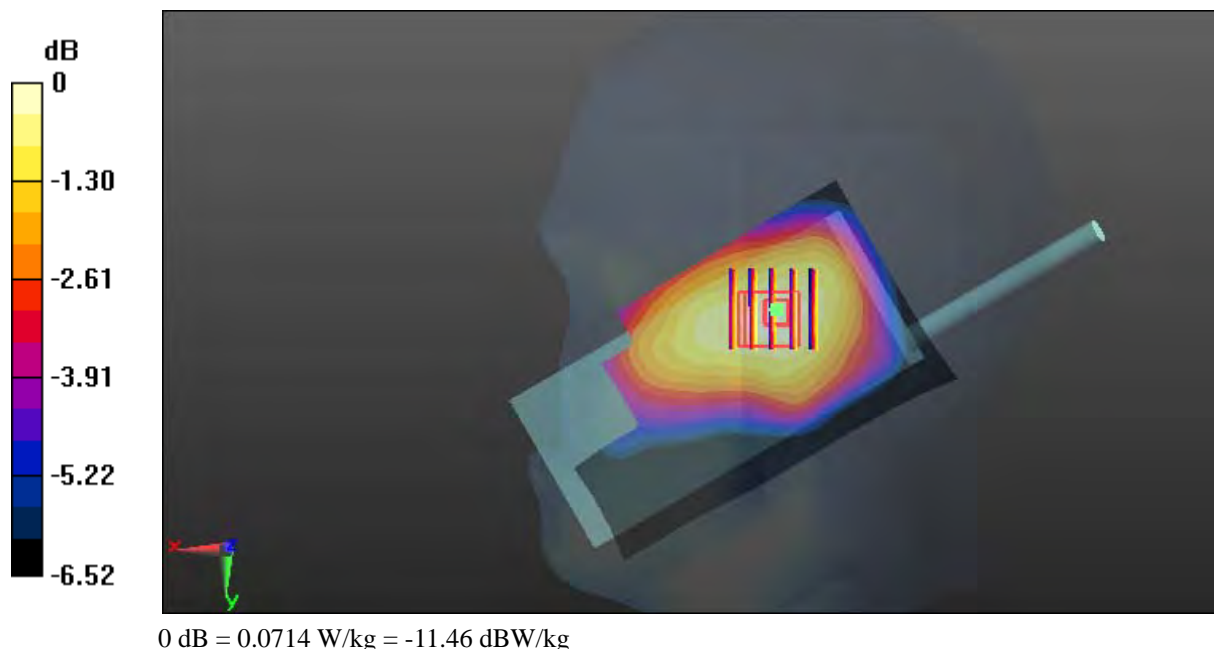

**Test Plot 179#: LTE Band 12\_Face Up\_Middle\_1RB**

**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 707.5 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 707.5 \text{ MHz}$ ;  $\sigma = 0.885 \text{ S/m}$ ;  $\epsilon_r = 43.008$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.57, 6.57, 6.57); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x61x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.0759 W/kg


**Zoom Scan (6x6x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 8.752 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.0960 W/kg

**SAR(1 g) = 0.075 W/kg; SAR(10 g) = 0.057 W/kg**

Maximum value of SAR (measured) = 0.0788 W/kg

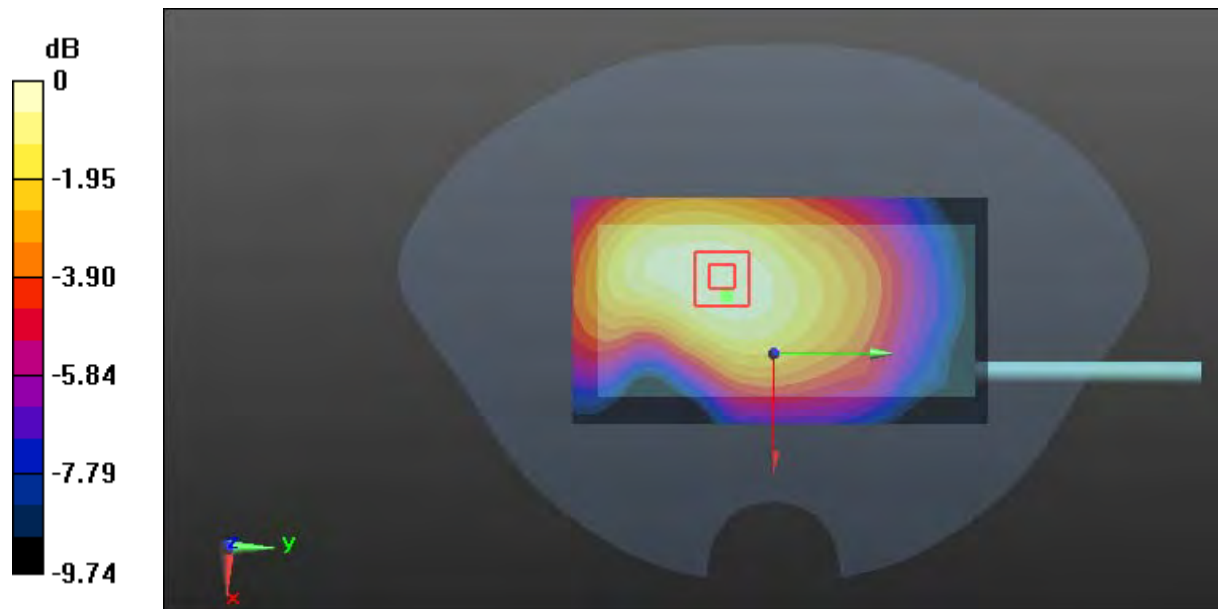

0 dB = 0.0788 W/kg = -11.03 dBW/kg

**Test Plot 180#: LTE Band 12\_Face Up\_Middle\_50%RB**

**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 707.5 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 707.5$  MHz;  $\sigma = 0.885$  S/m;  $\epsilon_r = 43.008$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.57, 6.57, 6.57); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x61x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0635 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.963 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.0770 W/kg

**SAR(1 g) = 0.061 W/kg; SAR(10 g) = 0.047 W/kg**

Maximum value of SAR (measured) = 0.0643 W/kg

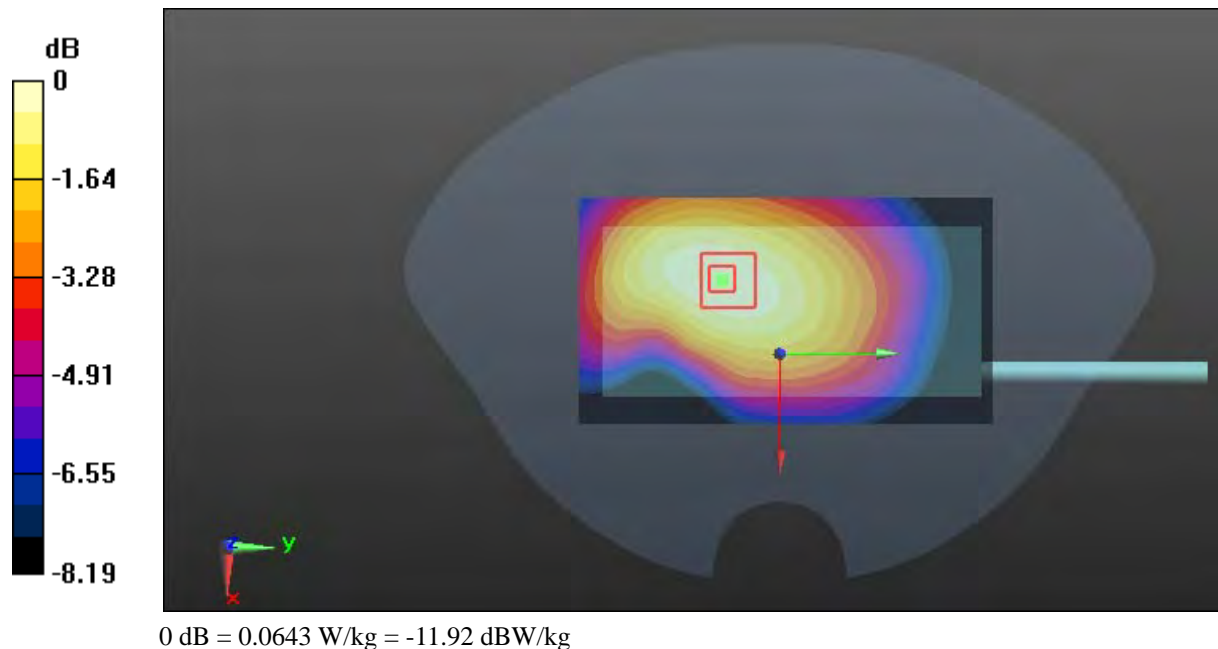

**Test Plot 181#: LTE Band 12\_Body Front \_Low\_1RB**

**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 704 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 704$  MHz;  $\sigma = 0.955$  S/m;  $\epsilon_r = 55.173$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
 Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.42, 6.42, 6.42); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x61x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.272 W/kg


**Zoom Scan (6x6x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.89 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.336 W/kg

**SAR(1 g) = 0.252 W/kg; SAR(10 g) = 0.185 W/kg**

Maximum value of SAR (measured) = 0.269 W/kg

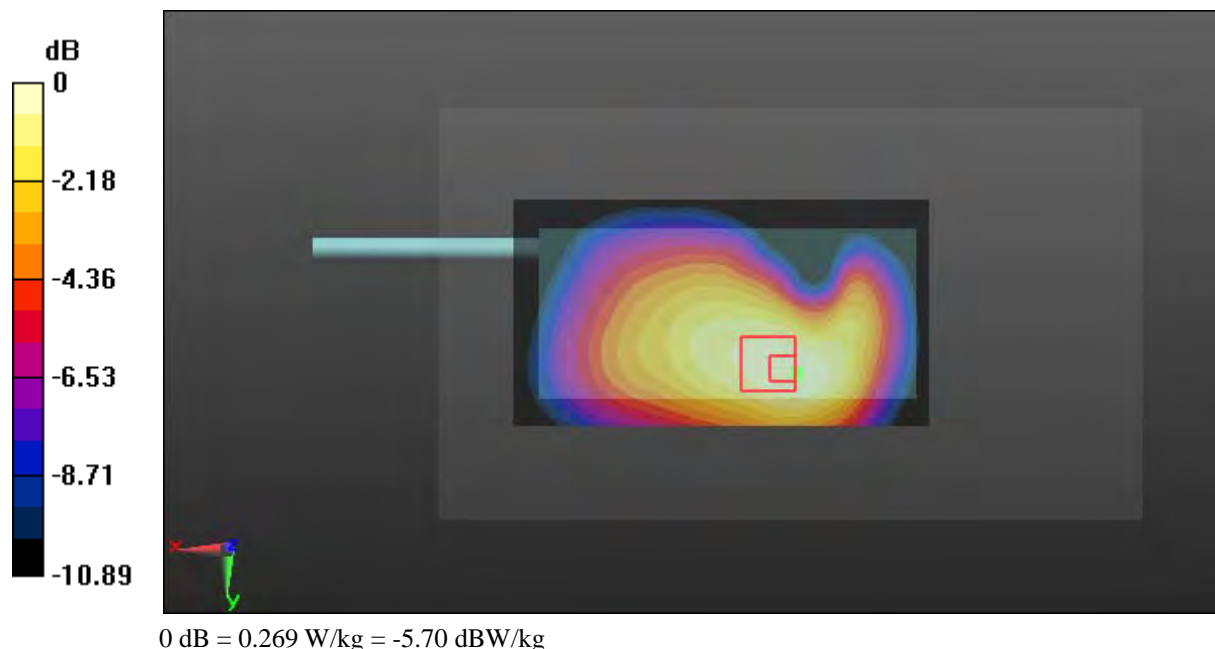

**Test Plot 182#: LTE Band 12\_Body Front \_Middle\_1RB**

**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 707.5 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 707.5 \text{ MHz}$ ;  $\sigma = 0.957 \text{ S/m}$ ;  $\epsilon_r = 55.172$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.42, 6.42, 6.42); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x61x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.334 W/kg


**Zoom Scan (6x6x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 16.75 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 0.427 W/kg

**SAR(1 g) = 0.314 W/kg; SAR(10 g) = 0.231 W/kg**

Maximum value of SAR (measured) = 0.331 W/kg

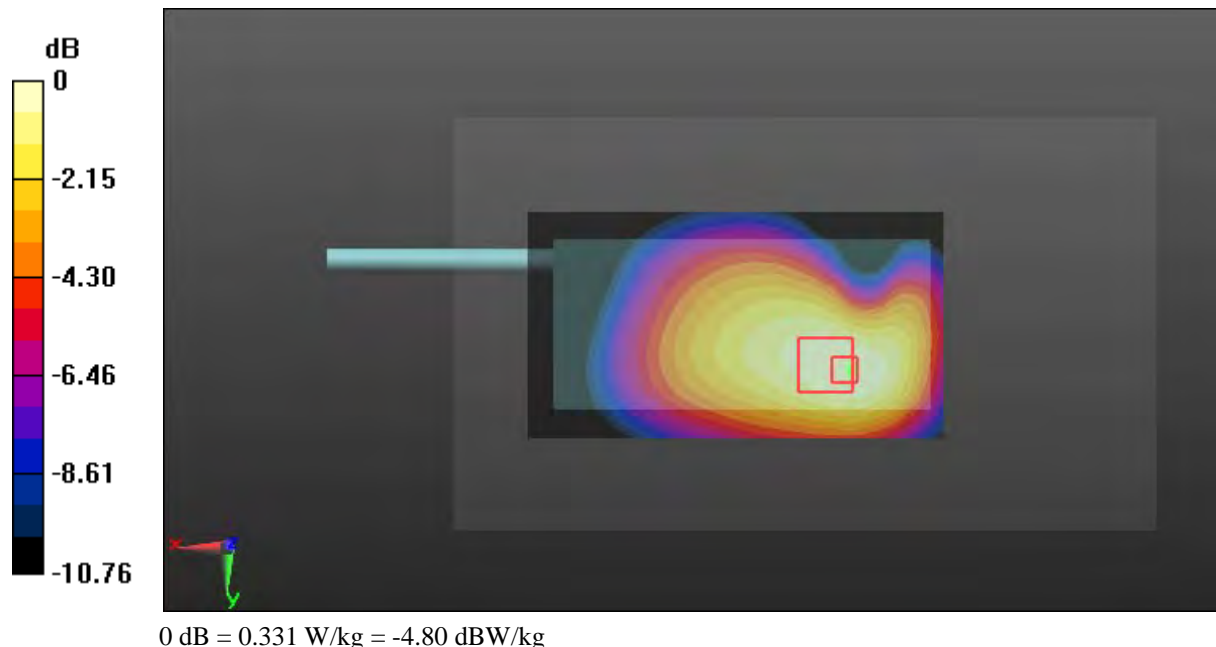

**Test Plot 183#: LTE Band 12\_Body Front \_High\_1RB**

**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 711 MHz;Duty Cycle: 1:1  
 Medium parameters used:  $f = 711 \text{ MHz}$ ;  $\sigma = 0.964 \text{ S/m}$ ;  $\epsilon_r = 54.997$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.42, 6.42, 6.42); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772;Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x61x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.296 W/kg


**Zoom Scan (6x6x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 13.56 V/m; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 0.361 W/kg

**SAR(1 g) = 0.284 W/kg; SAR(10 g) = 0.214 W/kg**

Maximum value of SAR (measured) = 0.299 W/kg

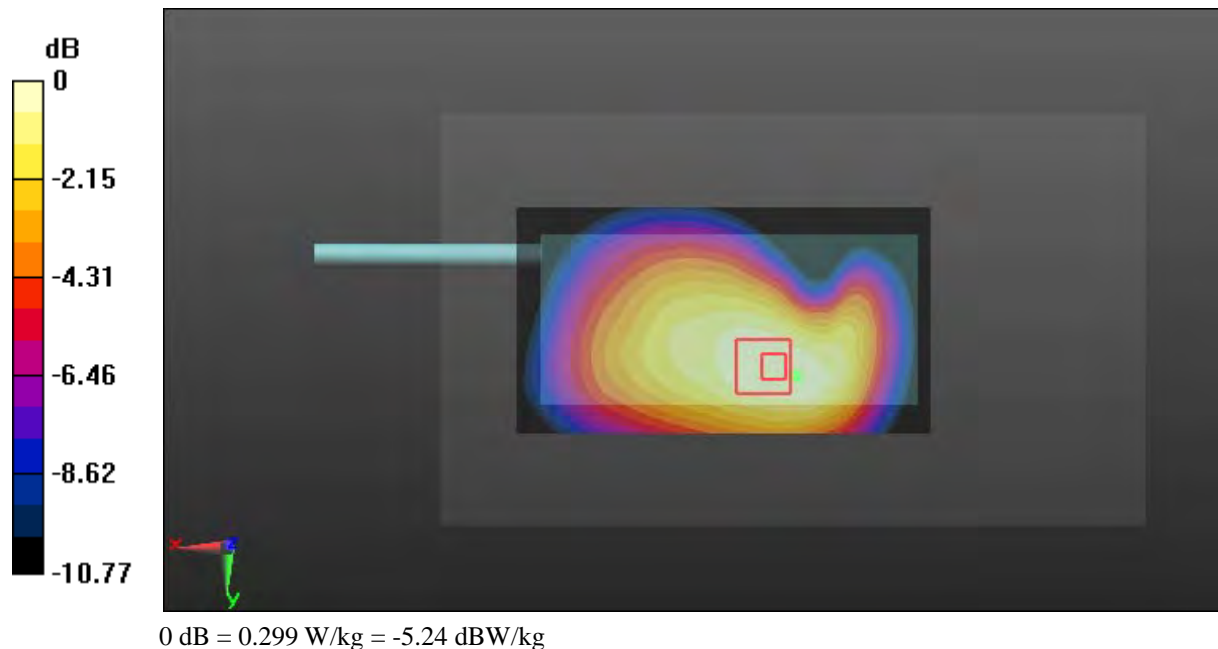

**Test Plot 184#: LTE Band 12\_Body Front \_Middle\_50%RB**

**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 707.5 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 707.5 \text{ MHz}$ ;  $\sigma = 0.957 \text{ S/m}$ ;  $\epsilon_r = 55.172$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.42, 6.42, 6.42); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x61x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.266 W/kg


**Zoom Scan (6x6x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 15.19 V/m; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 0.335 W/kg

**SAR(1 g) = 0.250 W/kg; SAR(10 g) = 0.185 W/kg**

Maximum value of SAR (measured) = 0.264 W/kg

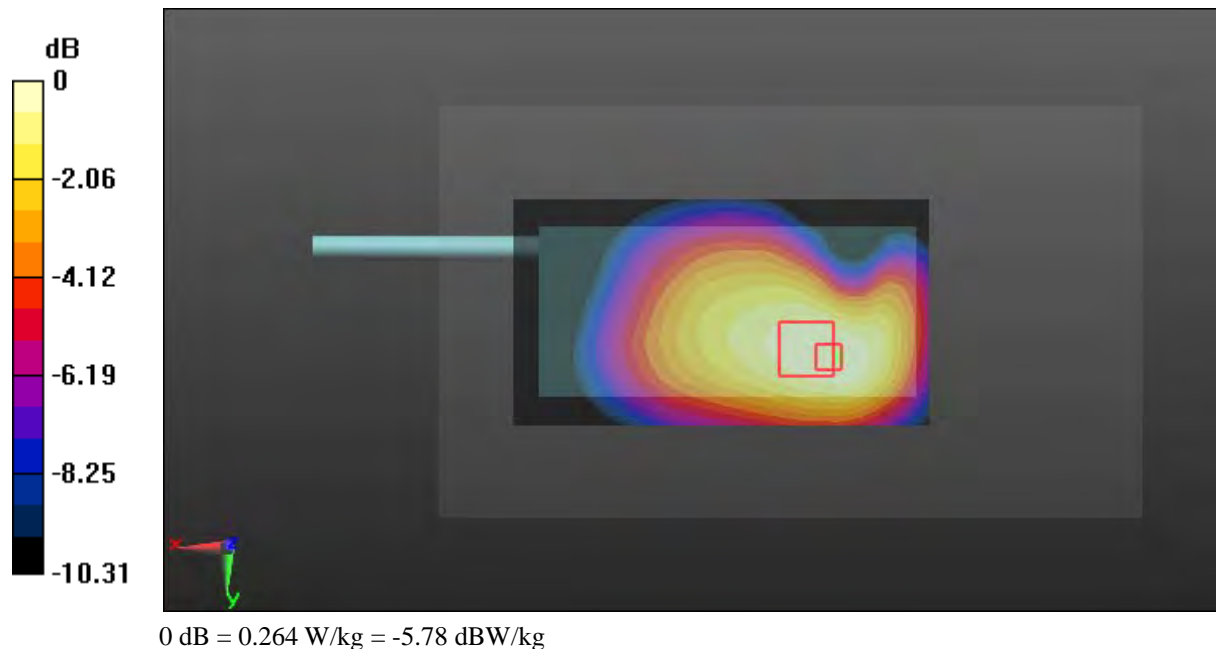



**Test Plot 185#: LTE Band 12\_Body Back\_Middle\_1RB****DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 707.5 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 707.5$  MHz;  $\sigma = 0.957$  S/m;  $\epsilon_r = 55.172$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.42, 6.42, 6.42); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x61x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0810 W/kg


**Zoom Scan (6x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.526 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.0950 W/kg

**SAR(1 g) = 0.078 W/kg; SAR(10 g) = 0.061 W/kg**

Maximum value of SAR (measured) = 0.0823 W/kg

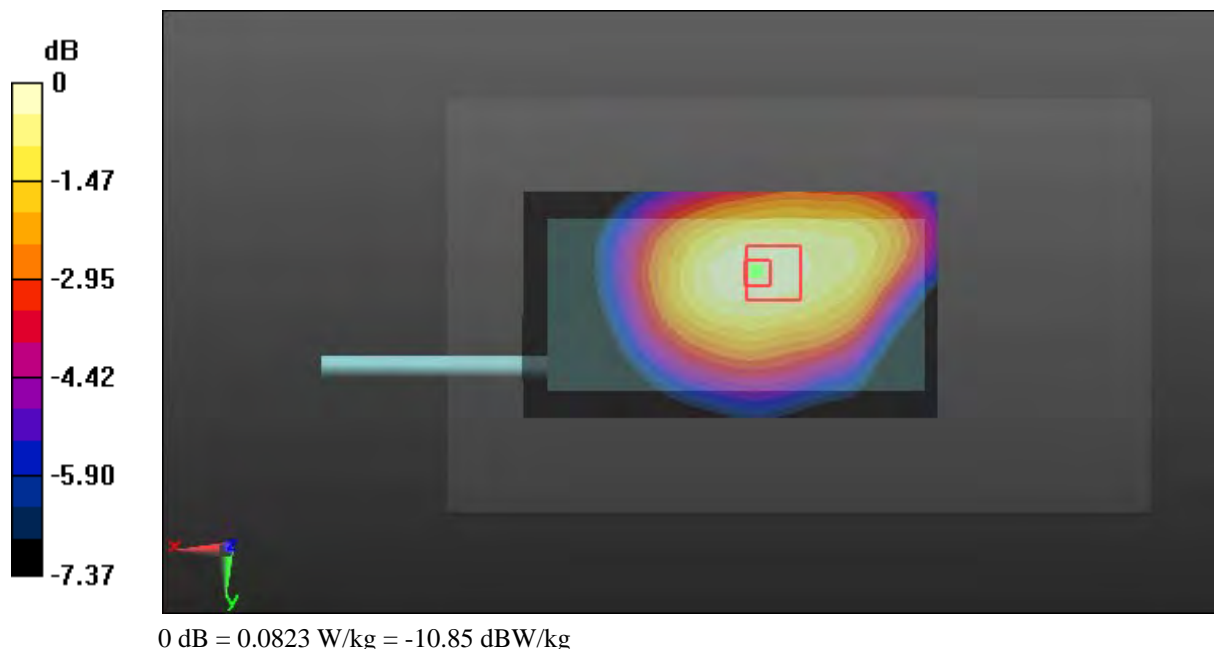

**Test Plot 186#: LTE Band 12\_Body Back\_Middle\_50%RB**

**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 707.5 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 707.5$  MHz;  $\sigma = 0.957$  S/m;  $\epsilon_r = 55.172$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
 Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.42, 6.42, 6.42); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x61x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0741 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.214 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.0900 W/kg

**SAR(1 g) = 0.070 W/kg; SAR(10 g) = 0.054 W/kg**

Maximum value of SAR (measured) = 0.0738 W/kg

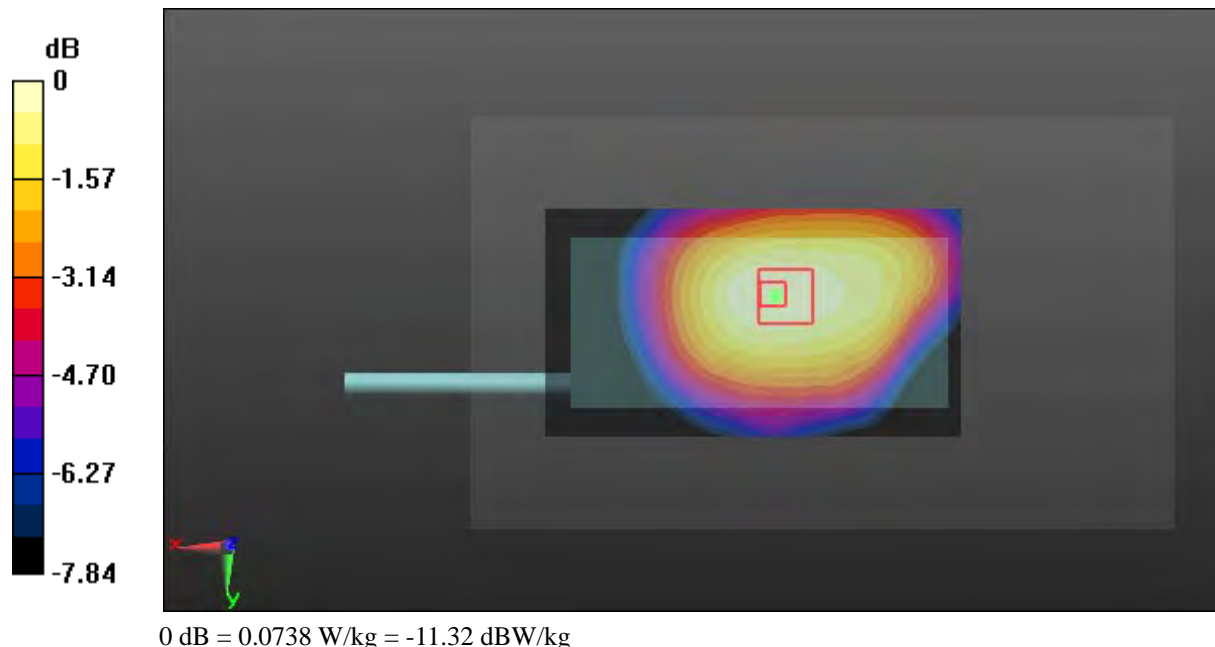

**Test Plot 187#: LTE Band 12\_Body Left\_Middle\_1RB**

**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 707.5 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 707.5 \text{ MHz}$ ;  $\sigma = 0.957 \text{ S/m}$ ;  $\epsilon_r = 55.172$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.42, 6.42, 6.42); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x51x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.165 W/kg


**Zoom Scan (6x6x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 11.95 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.211 W/kg

**SAR(1 g) = 0.161 W/kg; SAR(10 g) = 0.118 W/kg**

Maximum value of SAR (measured) = 0.169 W/kg

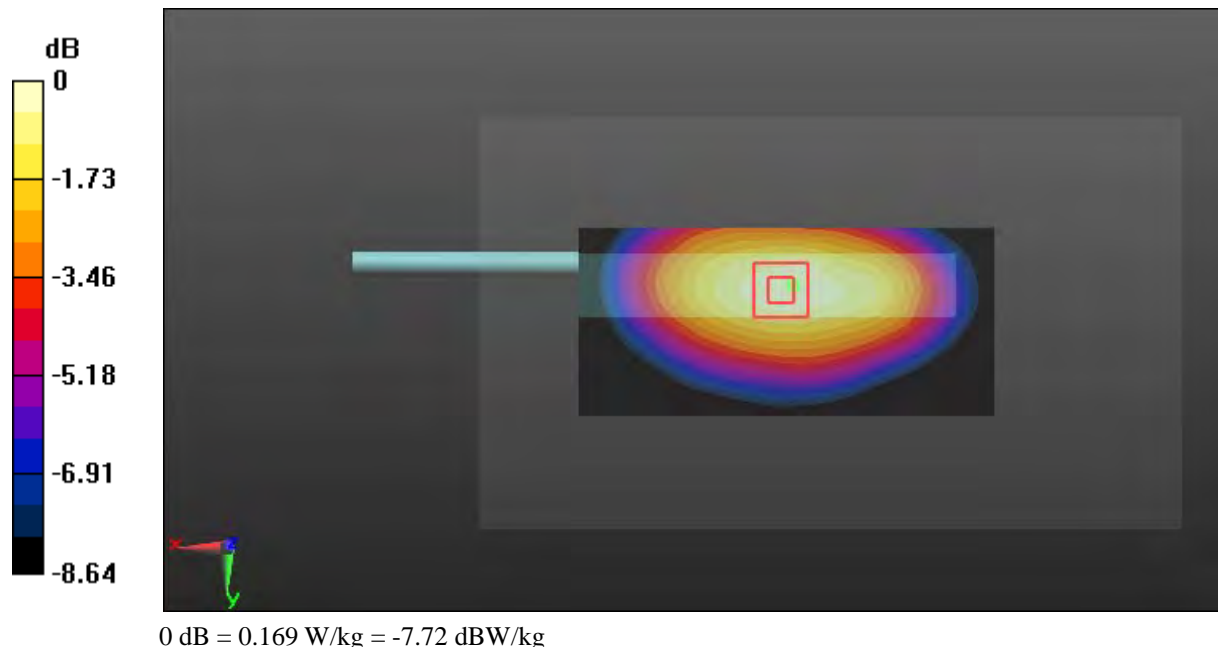

**Test Plot 188#: LTE Band 12\_Body Left\_Middle\_50%RB**

**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 707.5 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 707.5 \text{ MHz}$ ;  $\sigma = 0.957 \text{ S/m}$ ;  $\epsilon_r = 55.172$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.42, 6.42, 6.42); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x51x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.141 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 10.81 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.171 W/kg

**SAR(1 g) = 0.133 W/kg; SAR(10 g) = 0.099 W/kg**

Maximum value of SAR (measured) = 0.141 W/kg

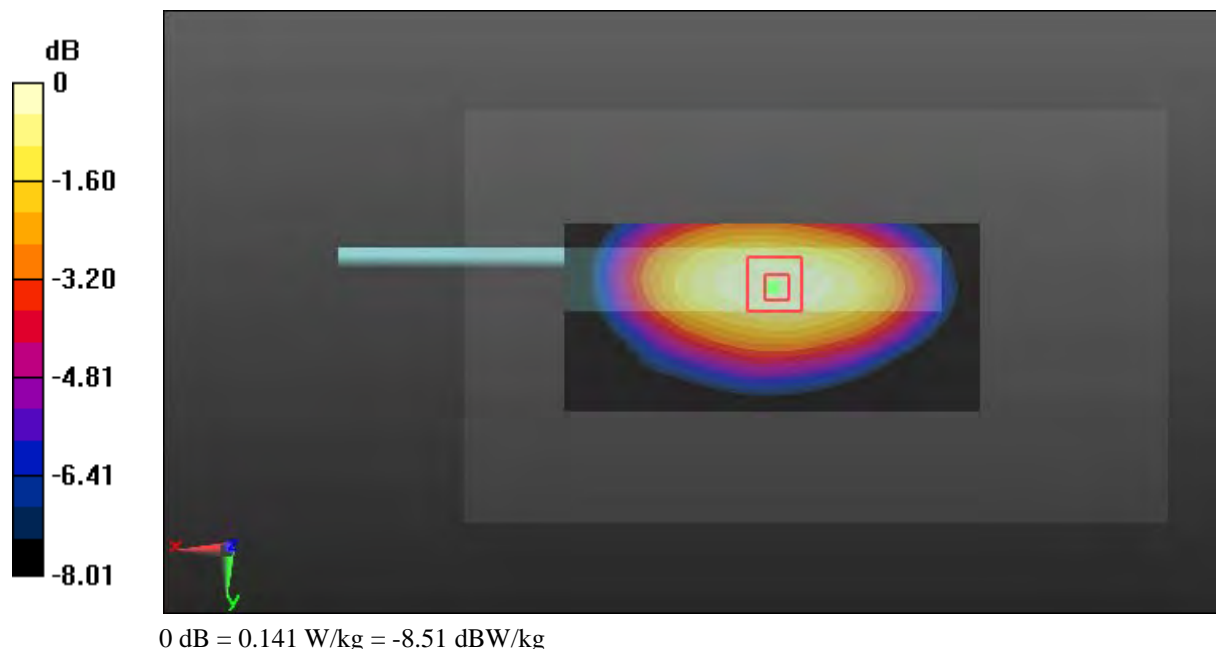

**Test Plot 189#: LTE Band 12\_Body Right\_Middle\_1RB**

**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 707.5 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 707.5 \text{ MHz}$ ;  $\sigma = 0.957 \text{ S/m}$ ;  $\epsilon_r = 55.172$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.42, 6.42, 6.42); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x51x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.0958 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 8.300 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 0.113 W/kg

**SAR(1 g) = 0.085 W/kg; SAR(10 g) = 0.062 W/kg**

Maximum value of SAR (measured) = 0.0899 W/kg

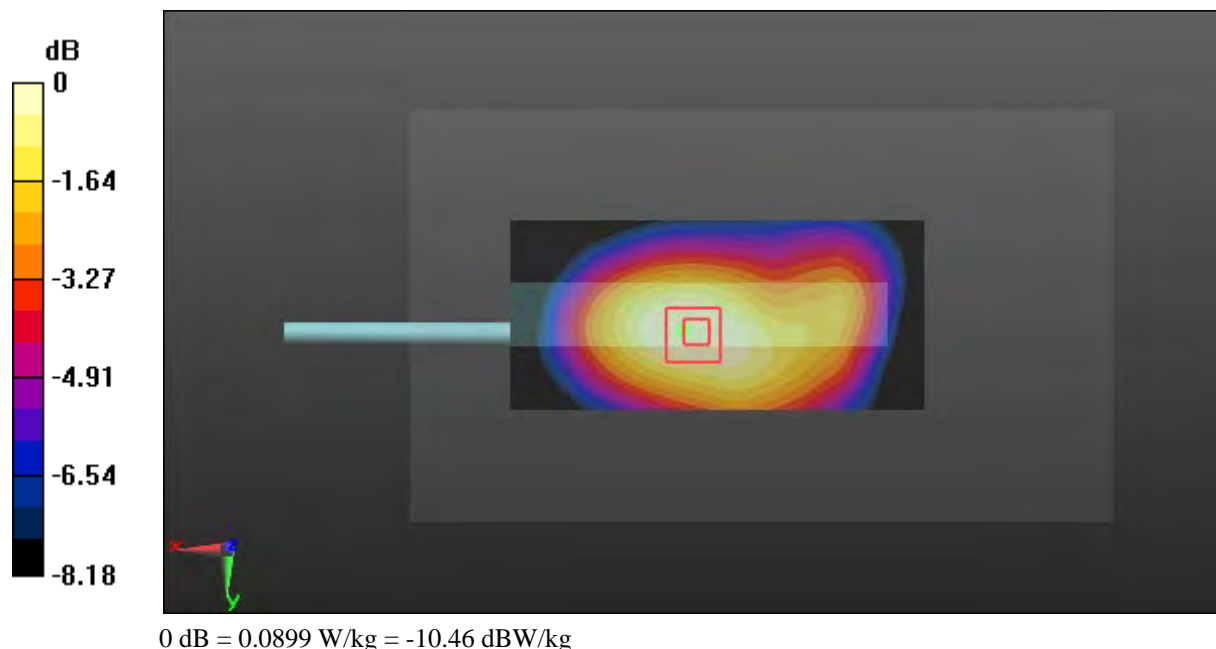

**Test Plot 190#: LTE Band 12\_Body Right\_Middle\_50%RB****DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 707.5 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 707.5$  MHz;  $\sigma = 0.957$  S/m;  $\epsilon_r = 55.172$ ;  $\rho = 1000$  kg/m<sup>3</sup>;  
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.42, 6.42, 6.42); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x51x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0882 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.995 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.109 W/kg

**SAR(1 g) = 0.083 W/kg; SAR(10 g) = 0.060 W/kg**

Maximum value of SAR (measured) = 0.0885 W/kg

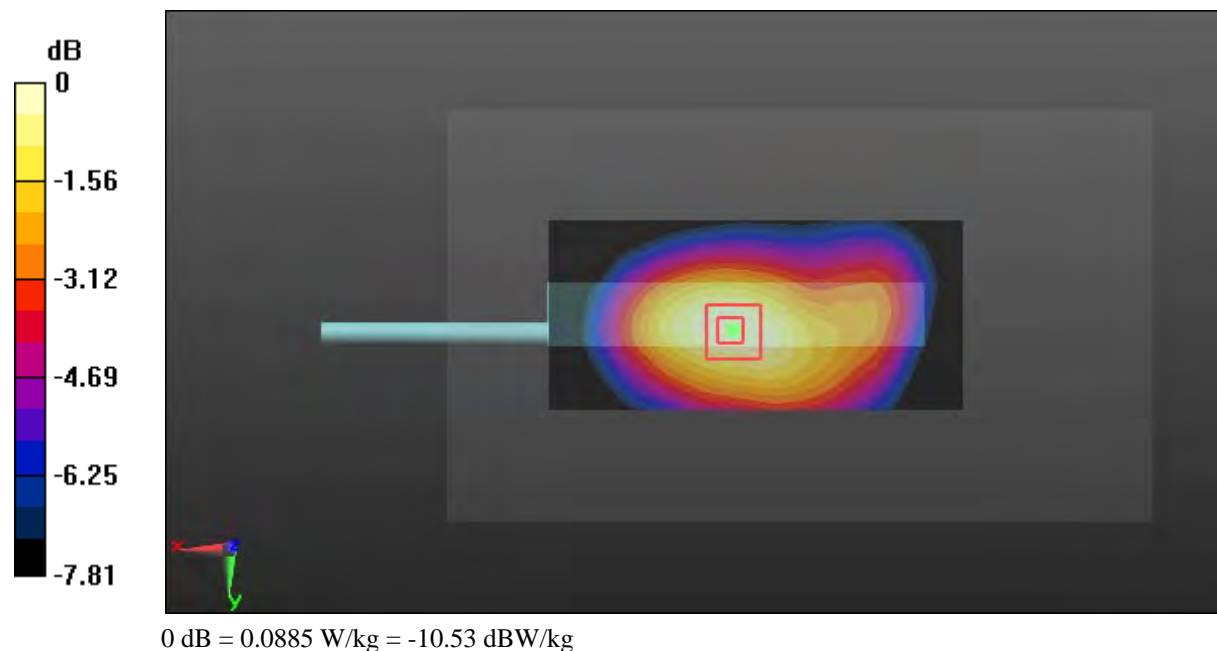

**Test Plot 191#: LTE Band 12\_Body Bottom\_Middle\_1RB****DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 707.5 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 707.5$  MHz;  $\sigma = 0.957$  S/m;  $\epsilon_r = 55.172$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.42, 6.42, 6.42); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (51x81x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0958 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.282 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 0.127 W/kg

**SAR(1 g) = 0.087 W/kg; SAR(10 g) = 0.058 W/kg**

Maximum value of SAR (measured) = 0.0929 W/kg

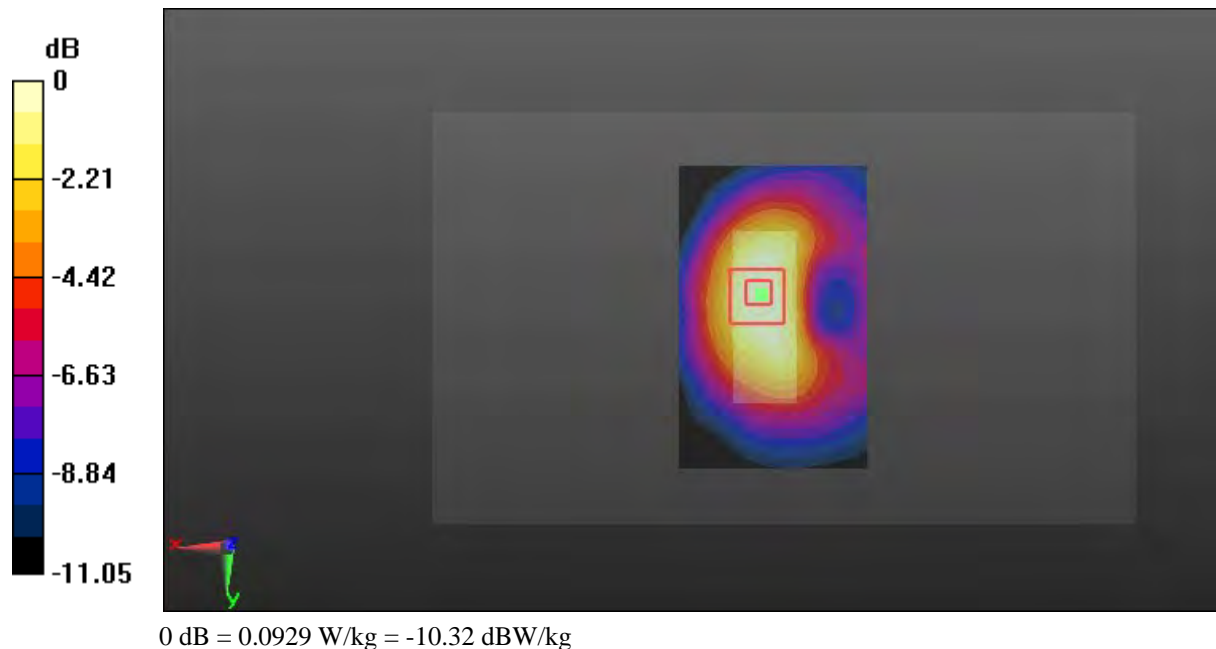

**Test Plot 192#: LTE Band 12\_Body Bottom\_Middle\_50%RB****DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 707.5 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 707.5$  MHz;  $\sigma = 0.957$  S/m;  $\epsilon_r = 55.172$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.42, 6.42, 6.42); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (51x81x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0712 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.857 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.0950 W/kg

**SAR(1 g) = 0.066 W/kg; SAR(10 g) = 0.044 W/kg**

Maximum value of SAR (measured) = 0.0696 W/kg

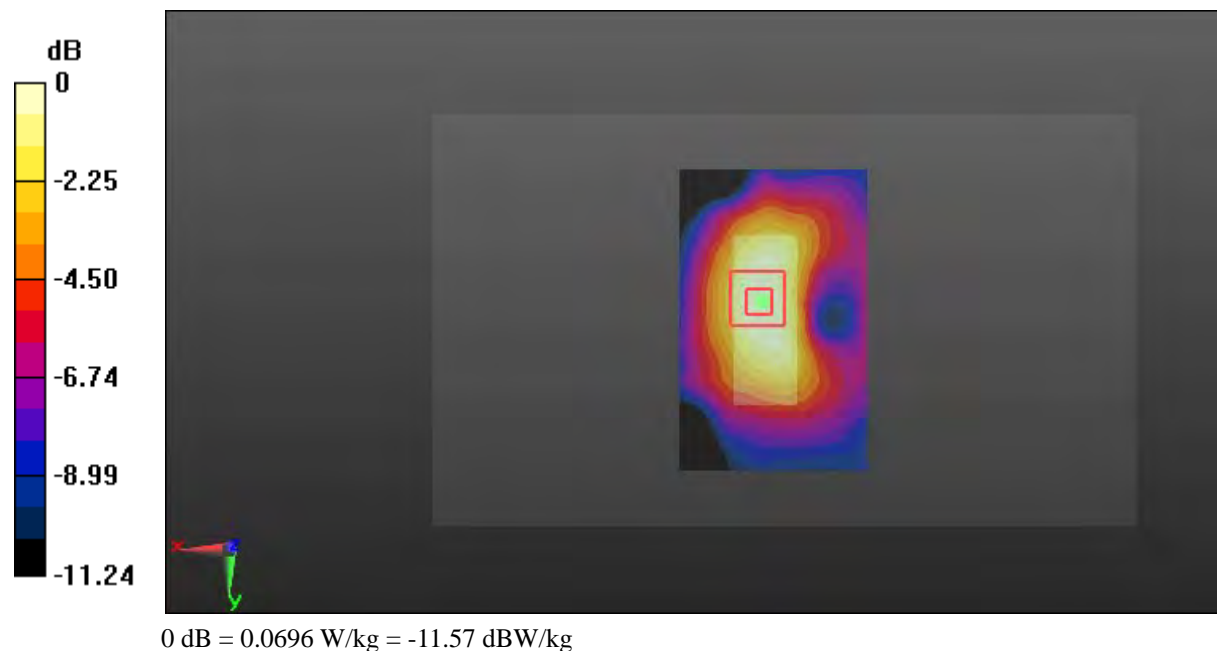



**Test Plot 193#: LTE Band 13\_Head Left Cheek\_Middle\_1RB**

**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 782 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 782 \text{ MHz}$ ;  $\sigma = 0.936 \text{ S/m}$ ;  $\epsilon_r = 40.327$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.57, 6.57, 6.57); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x61x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.300 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 8.721 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 0.336 W/kg

**SAR(1 g) = 0.256 W/kg; SAR(10 g) = 0.189 W/kg**

Maximum value of SAR (measured) = 0.271 W/kg

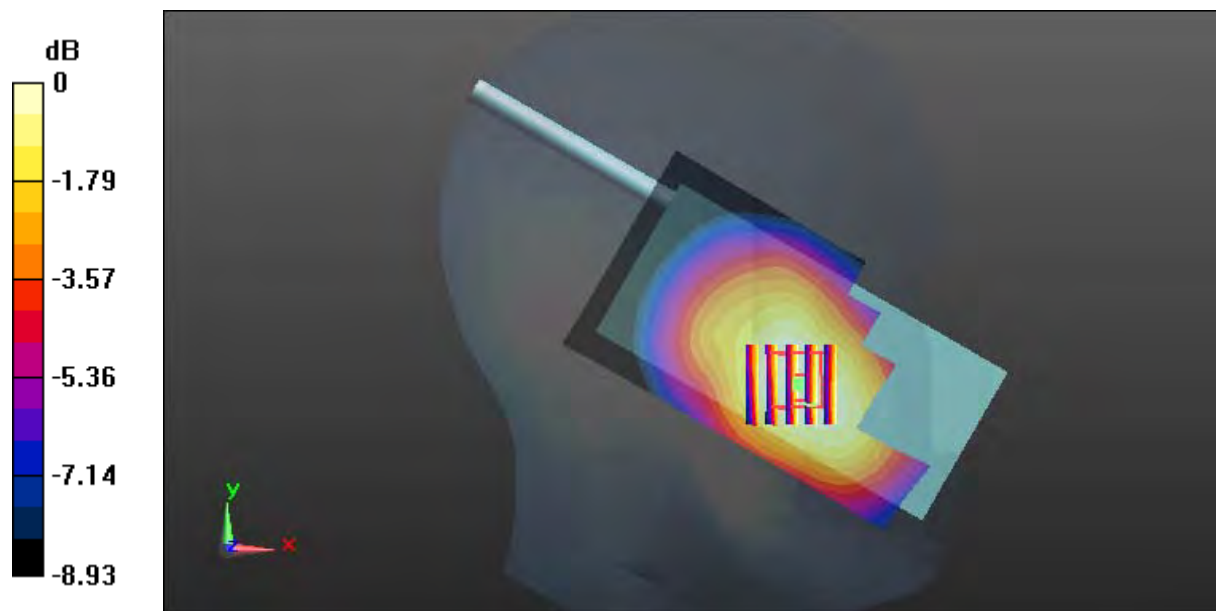

0 dB = 0.271 W/kg = -5.67 dBW/kg

**Test Plot 194#: LTE Band 13\_Head Left Cheek\_Middle\_50%RB****DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 782 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 782$  MHz;  $\sigma = 0.936$  S/m;  $\epsilon_r = 40.327$ ;  $\rho = 1000$  kg/m<sup>3</sup>;  
Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.57, 6.57, 6.57); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x61x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.223 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.593 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.279 W/kg

**SAR(1 g) = 0.209 W/kg; SAR(10 g) = 0.154 W/kg**

Maximum value of SAR (measured) = 0.221 W/kg

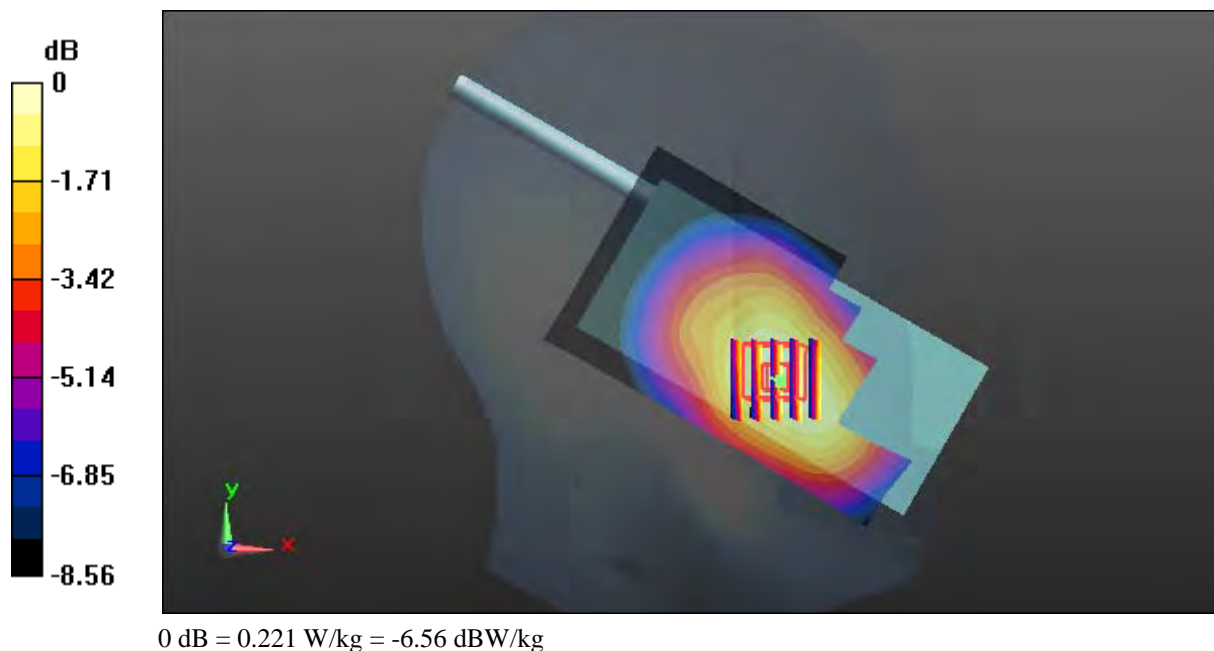

**Test Plot 195#: LTE Band 13\_Head Left Tilt\_Middle\_1RB****DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 782 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 782$  MHz;  $\sigma = 0.936$  S/m;  $\epsilon_r = 40.327$ ;  $\rho = 1000$  kg/m<sup>3</sup>;  
Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.57, 6.57, 6.57); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x61x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.161 W/kg


**Zoom Scan (5x6x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.76 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 0.197 W/kg

**SAR(1 g) = 0.155 W/kg; SAR(10 g) = 0.121 W/kg**

Maximum value of SAR (measured) = 0.162 W/kg

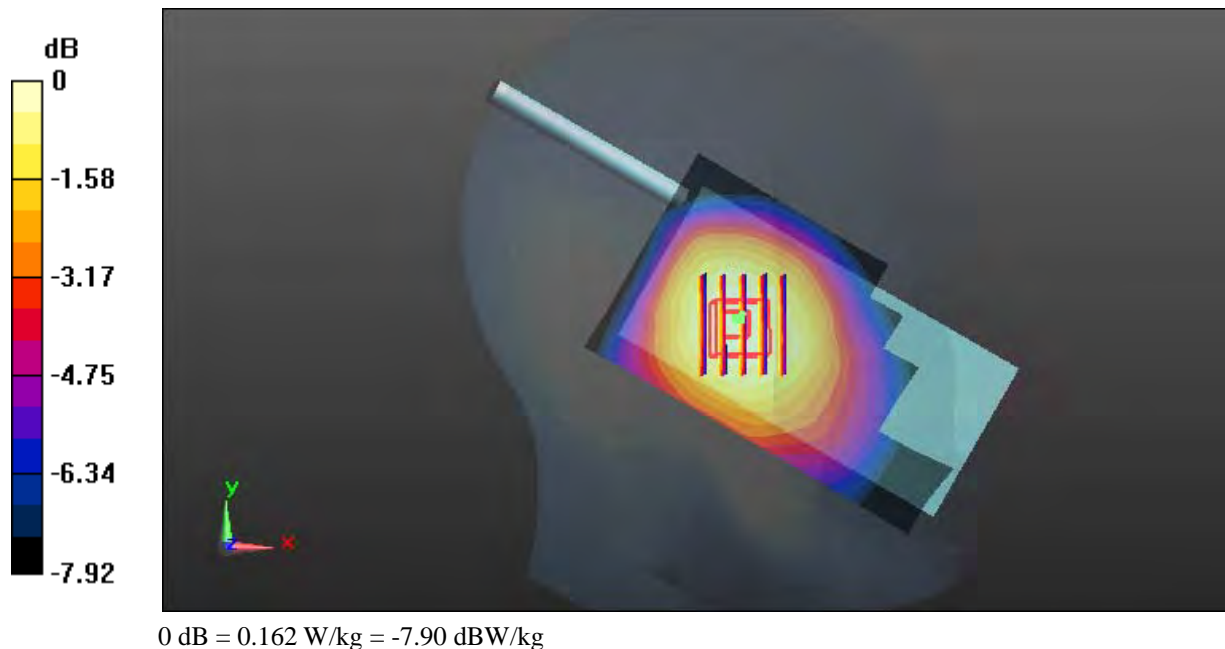

**Test Plot 196#: LTE Band 13\_Head Left Tilt\_Middle\_50%RB****DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 782 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 782$  MHz;  $\sigma = 0.936$  S/m;  $\epsilon_r = 40.327$ ;  $\rho = 1000$  kg/m<sup>3</sup>;  
Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.57, 6.57, 6.57); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x61x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.122 W/kg


**Zoom Scan (5x6x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.33 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 0.150 W/kg

**SAR(1 g) = 0.119 W/kg; SAR(10 g) = 0.093 W/kg**

Maximum value of SAR (measured) = 0.124 W/kg

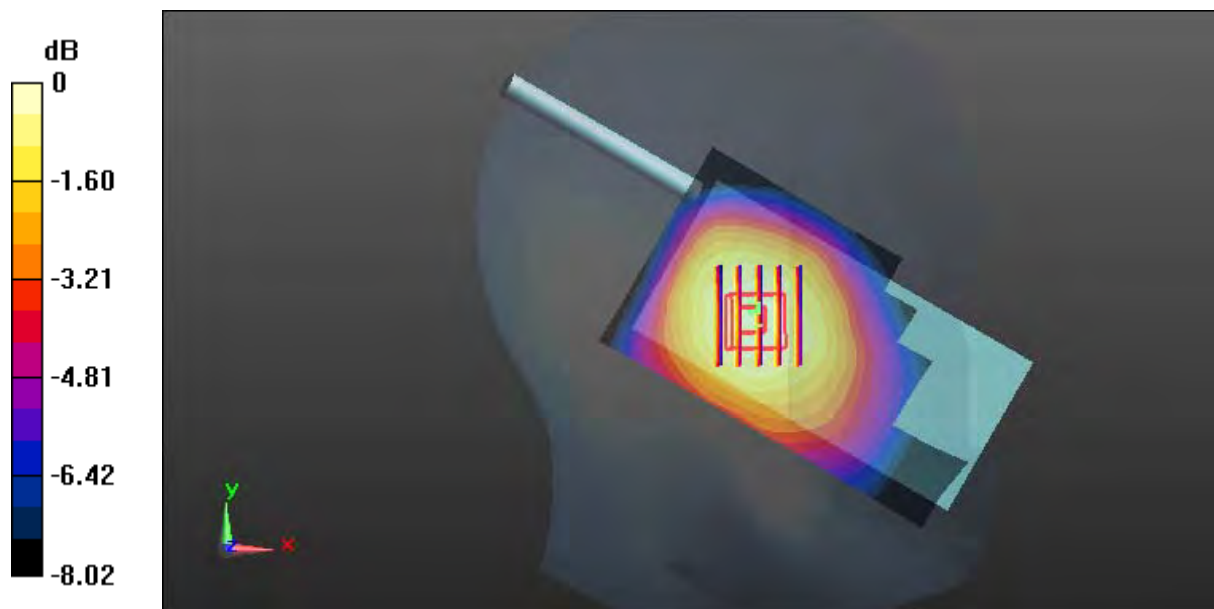

0 dB = 0.124 W/kg = -9.07 dBW/kg

**Test Plot 197#: LTE Band 13\_Head Right Cheek\_Middle\_1RB****DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 782 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 782$  MHz;  $\sigma = 0.936$  S/m;  $\epsilon_r = 40.327$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.57, 6.57, 6.57); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x61x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.240 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.005 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 0.286 W/kg

**SAR(1 g) = 0.234 W/kg; SAR(10 g) = 0.183 W/kg**

Maximum value of SAR (measured) = 0.245 W/kg

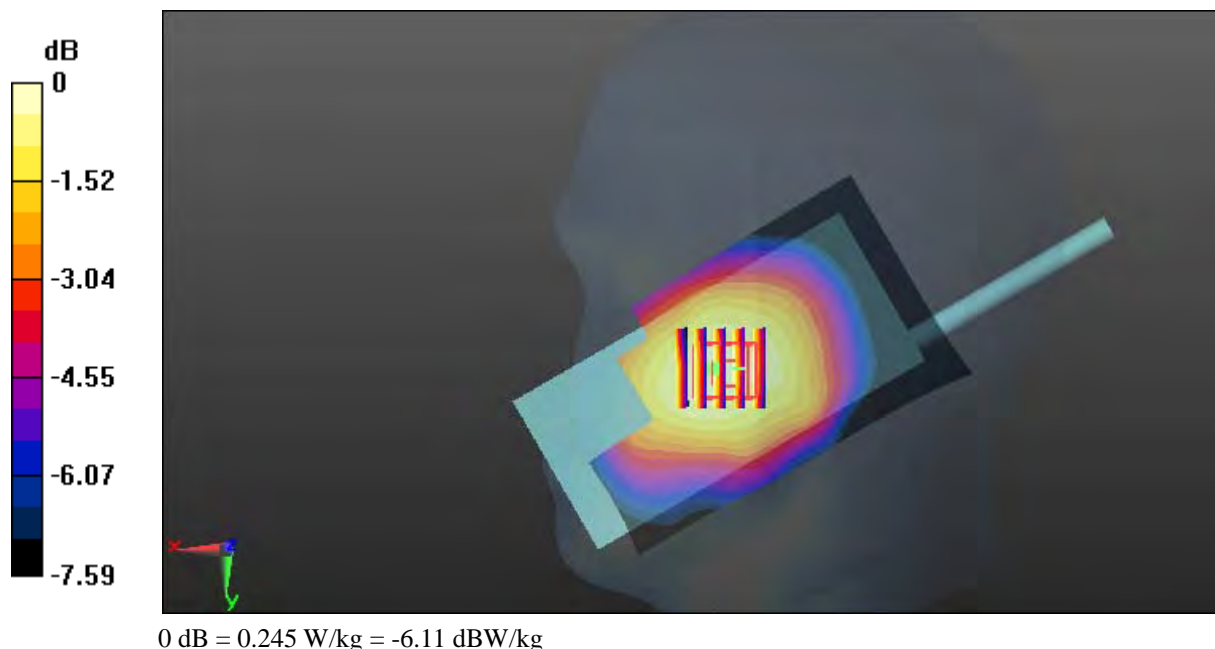

**Test Plot 198#: LTE Band 13\_Head Right Cheek\_Middle\_50%RB****DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 782 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 782$  MHz;  $\sigma = 0.936$  S/m;  $\epsilon_r = 40.327$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.57, 6.57, 6.57); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x61x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.184 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.215 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 0.218 W/kg

**SAR(1 g) = 0.177 W/kg; SAR(10 g) = 0.139 W/kg**

Maximum value of SAR (measured) = 0.185 W/kg

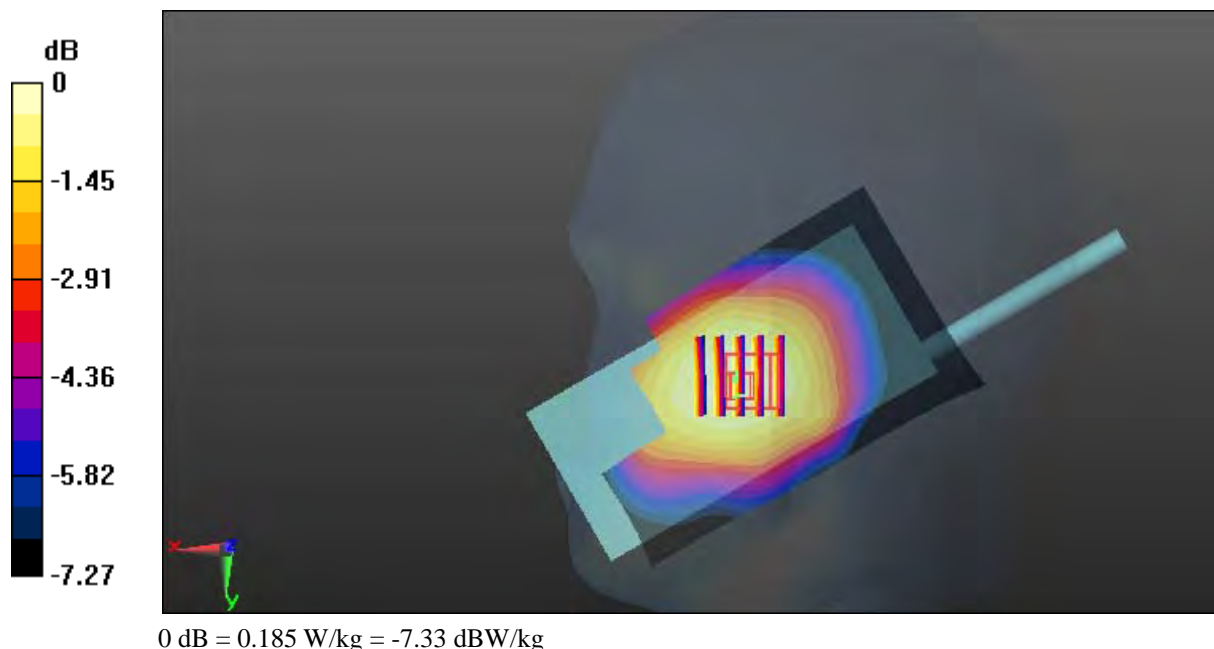

**Test Plot 199#: LTE Band 13\_Head Right Tilt\_Middle\_1RB****DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 782 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 782$  MHz;  $\sigma = 0.936$  S/m;  $\epsilon_r = 40.327$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.57, 6.57, 6.57); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x61x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.141 W/kg


**Zoom Scan (6x6x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.18 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.165 W/kg

**SAR(1 g) = 0.134 W/kg; SAR(10 g) = 0.106 W/kg**

Maximum value of SAR (measured) = 0.141 W/kg

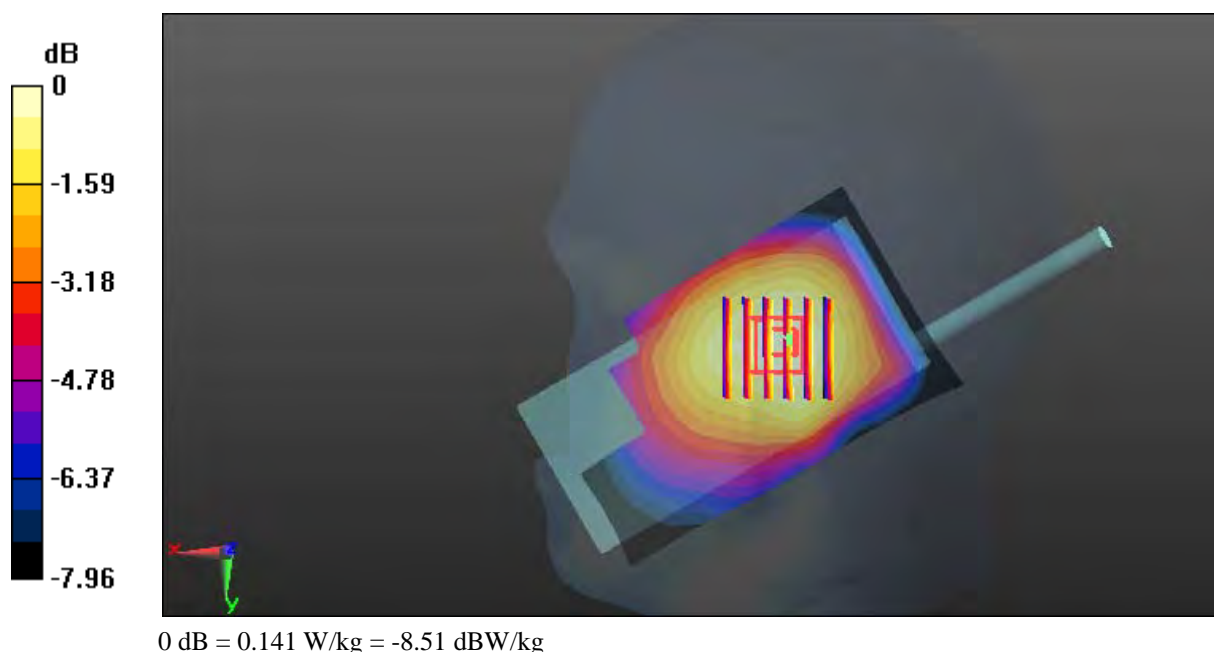

**Test Plot 200#: LTE Band 13\_Head Right Tilt\_Middle\_50%RB****DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 782 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 782$  MHz;  $\sigma = 0.936$  S/m;  $\epsilon_r = 40.327$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.57, 6.57, 6.57); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x61x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.109 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.953 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.127 W/kg

**SAR(1 g) = 0.104 W/kg; SAR(10 g) = 0.083 W/kg**

Maximum value of SAR (measured) = 0.108 W/kg

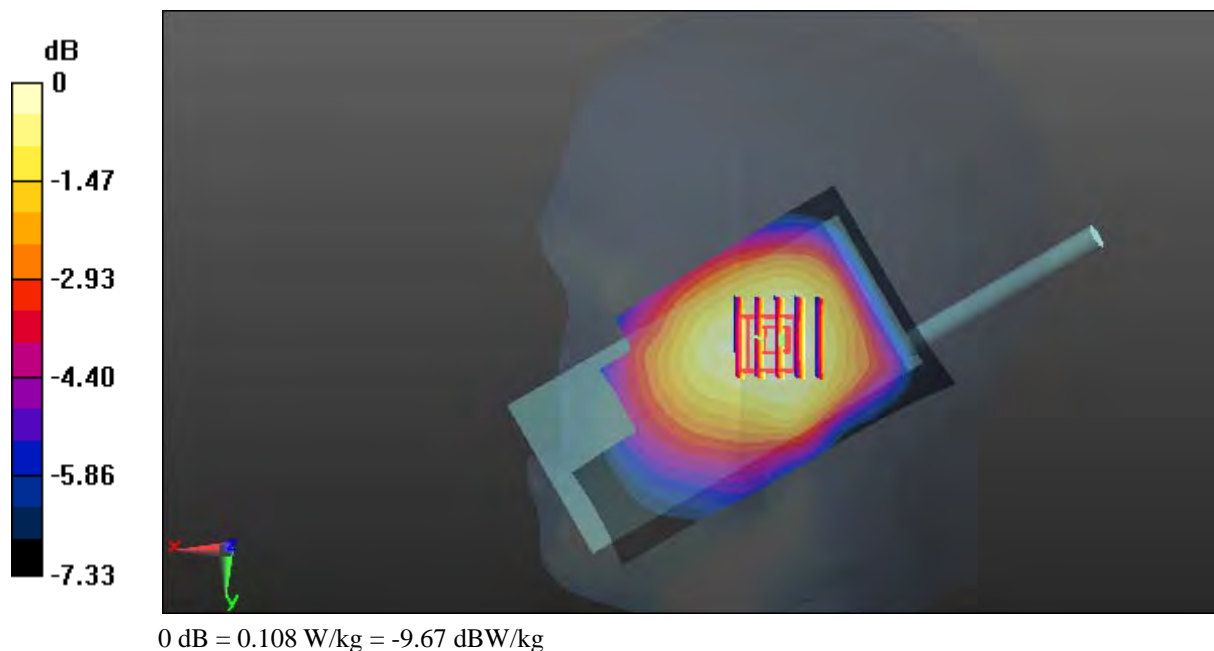



**Test Plot 201#: LTE Band 13\_Face Up\_Middle\_1RB**

**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 782 MHz;Duty Cycle: 1:1  
 Medium parameters used:  $f = 782 \text{ MHz}$ ;  $\sigma = 0.936 \text{ S/m}$ ;  $\epsilon_r = 40.327$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.57, 6.57, 6.57); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772;Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x61x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) =  $0.106 \text{ W/kg}$


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value =  $10.73 \text{ V/m}$ ; Power Drift =  $0.04 \text{ dB}$

Peak SAR (extrapolated) =  $0.128 \text{ W/kg}$

**SAR(1 g) =  $0.101 \text{ W/kg}$ ; SAR(10 g) =  $0.078 \text{ W/kg}$**

Maximum value of SAR (measured) =  $0.107 \text{ W/kg}$

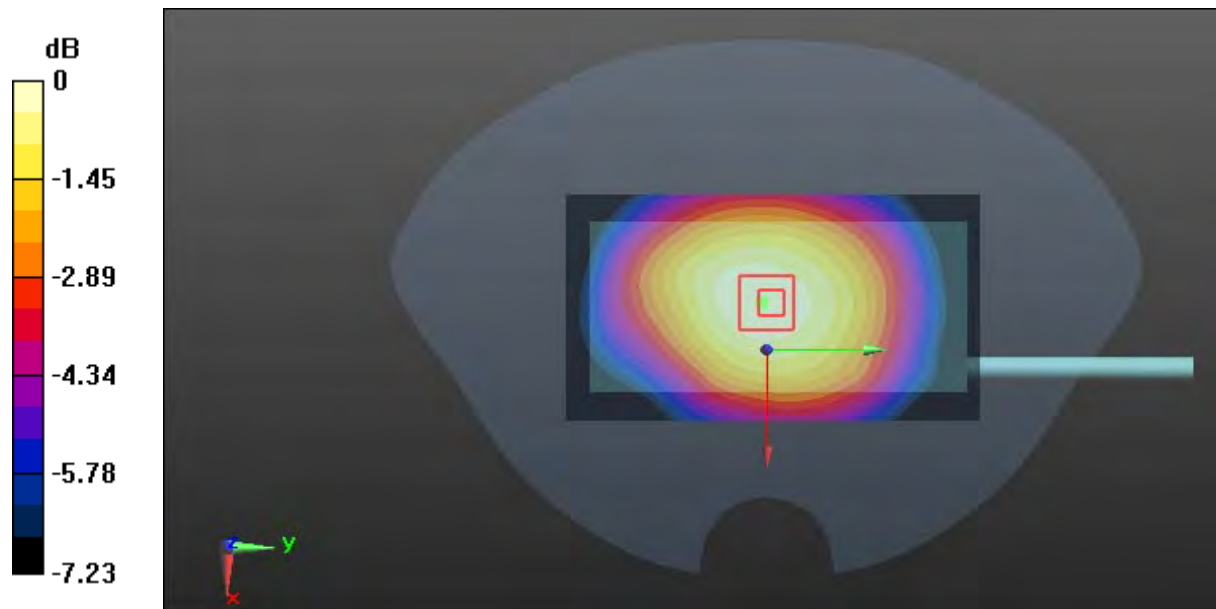

0 dB =  $0.107 \text{ W/kg}$  =  $-9.71 \text{ dBW/kg}$

**Test Plot 202#: LTE Band 13\_Face Up\_Middle\_50%RB**

**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 782 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 782 \text{ MHz}$ ;  $\sigma = 0.936 \text{ S/m}$ ;  $\epsilon_r = 40.327$ ;  $\rho = 1000 \text{ kg/m}^3$ ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.57, 6.57, 6.57); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x61x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.0819 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 9.536 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.0970 W/kg

**SAR(1 g) = 0.078 W/kg; SAR(10 g) = 0.060 W/kg**

Maximum value of SAR (measured) = 0.0818 W/kg

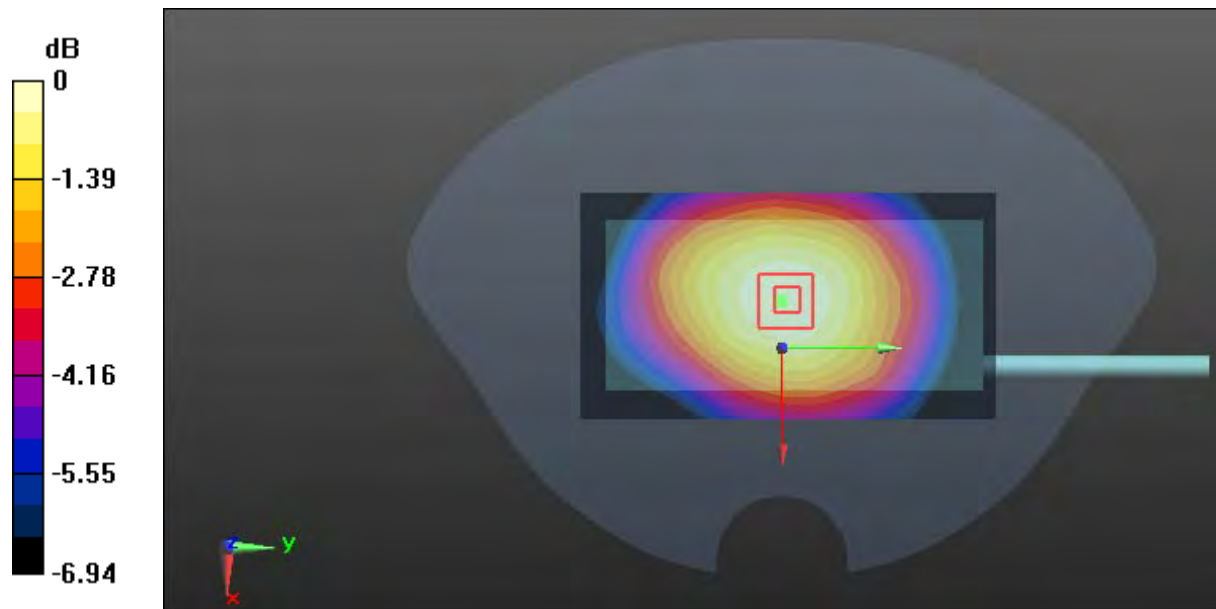

0 dB = 0.0818 W/kg = -10.87 dBW/kg

**Test Plot 203#: LTE Band 13\_Body Front \_Middle\_1RB**

**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 782 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 782 \text{ MHz}$ ;  $\sigma = 1.009 \text{ S/m}$ ;  $\epsilon_r = 52.79$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.42, 6.42, 6.42); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x61x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.334 W/kg


**Zoom Scan (6x6x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 17.13 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 0.410 W/kg

**SAR(1 g) = 0.325 W/kg; SAR(10 g) = 0.250 W/kg**

Maximum value of SAR (measured) = 0.353 W/kg

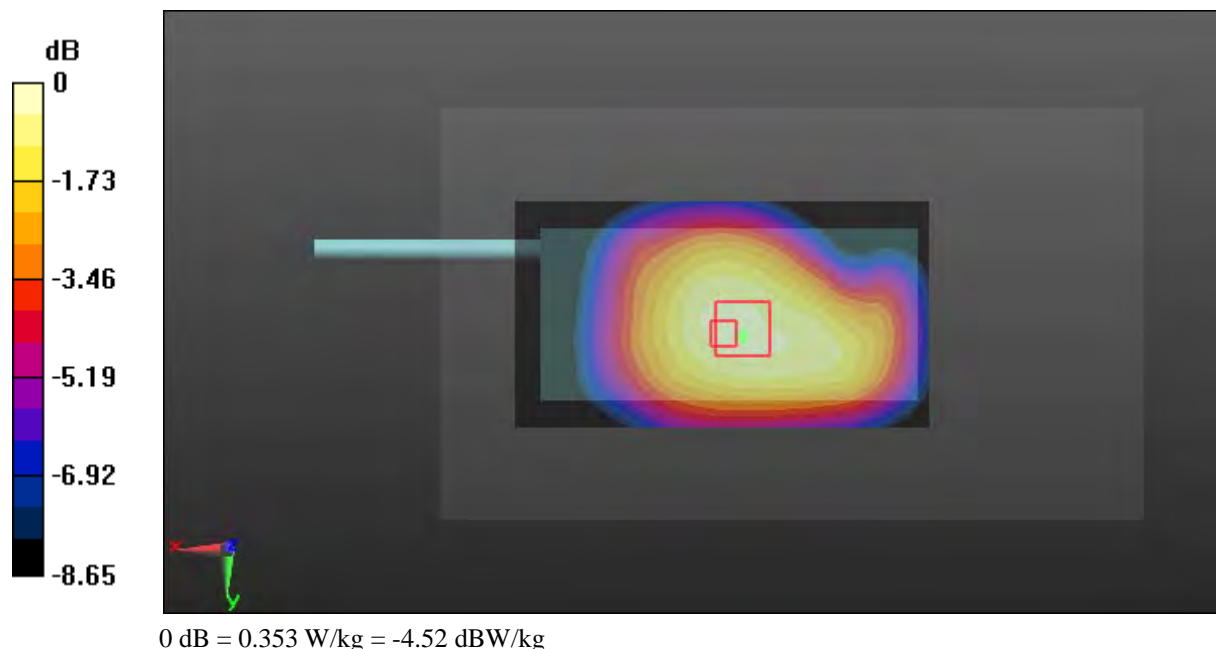

**Test Plot 204#: LTE Band 13\_Body Front \_Middle\_50%RB**

**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 782 MHz;Duty Cycle: 1:1  
 Medium parameters used:  $f = 782 \text{ MHz}$ ;  $\sigma = 1.009 \text{ S/m}$ ;  $\epsilon_r = 52.79$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.42, 6.42, 6.42); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772;Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x61x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.255 W/kg


**Zoom Scan (6x6x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 15.42 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 0.302 W/kg

**SAR(1 g) = 0.243 W/kg; SAR(10 g) = 0.189 W/kg**

Maximum value of SAR (measured) = 0.254 W/kg

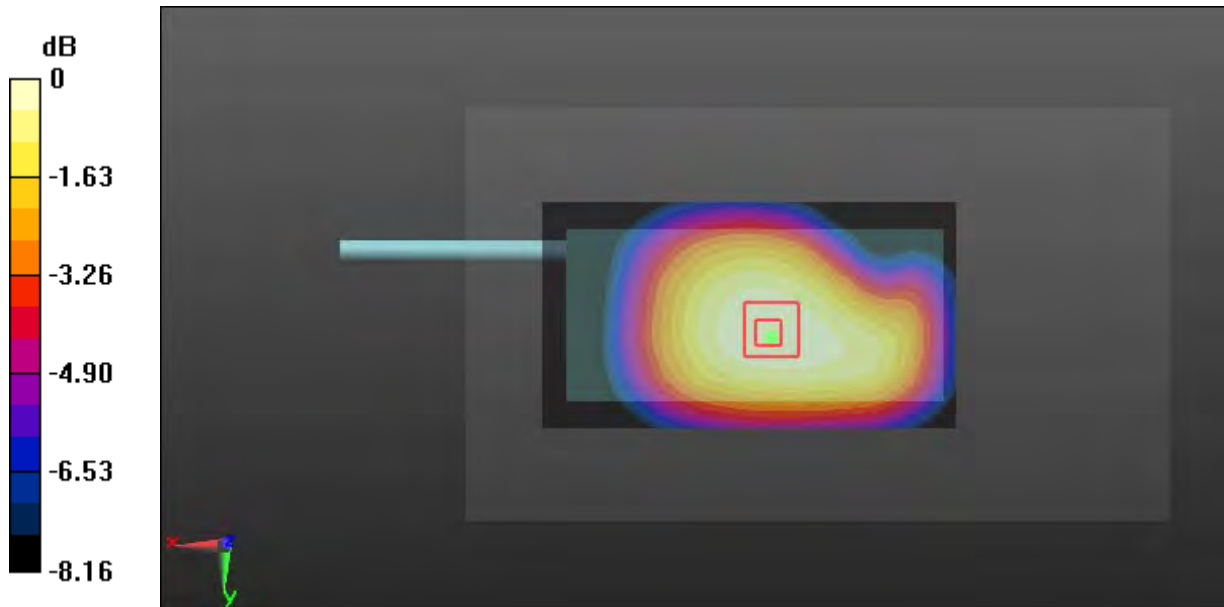

0 dB = 0.254 W/kg = -5.95 dBW/kg

**Test Plot 205#: LTE Band 13\_Body Back\_Middle\_1RB****DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 782 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 782$  MHz;  $\sigma = 1.009$  S/m;  $\epsilon_r = 52.79$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.42, 6.42, 6.42); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x61x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.176 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.63 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 0.206 W/kg

**SAR(1 g) = 0.165 W/kg; SAR(10 g) = 0.125 W/kg**

Maximum value of SAR (measured) = 0.173 W/kg

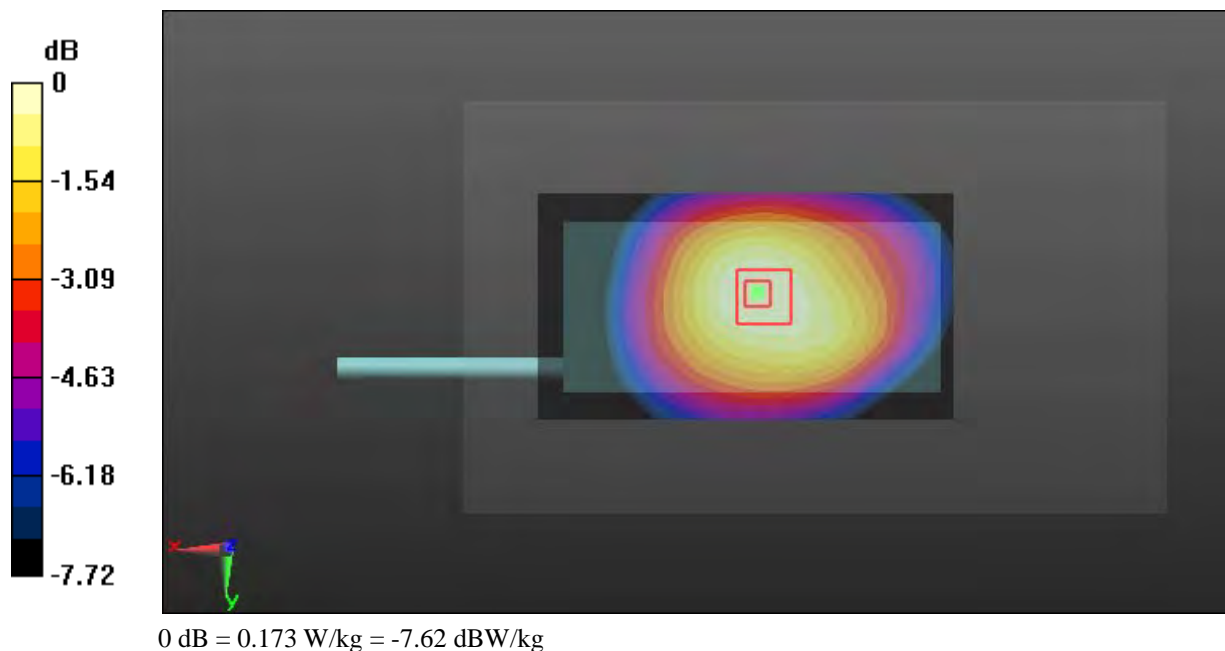

**Test Plot 206#: LTE Band 13\_Body Back\_Middle\_50%RB**

**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 782 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 782 \text{ MHz}$ ;  $\sigma = 1.009 \text{ S/m}$ ;  $\epsilon_r = 52.79$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.42, 6.42, 6.42); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x61x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.131 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 10.89 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.155 W/kg

**SAR(1 g) = 0.125 W/kg; SAR(10 g) = 0.095 W/kg**

Maximum value of SAR (measured) = 0.131 W/kg

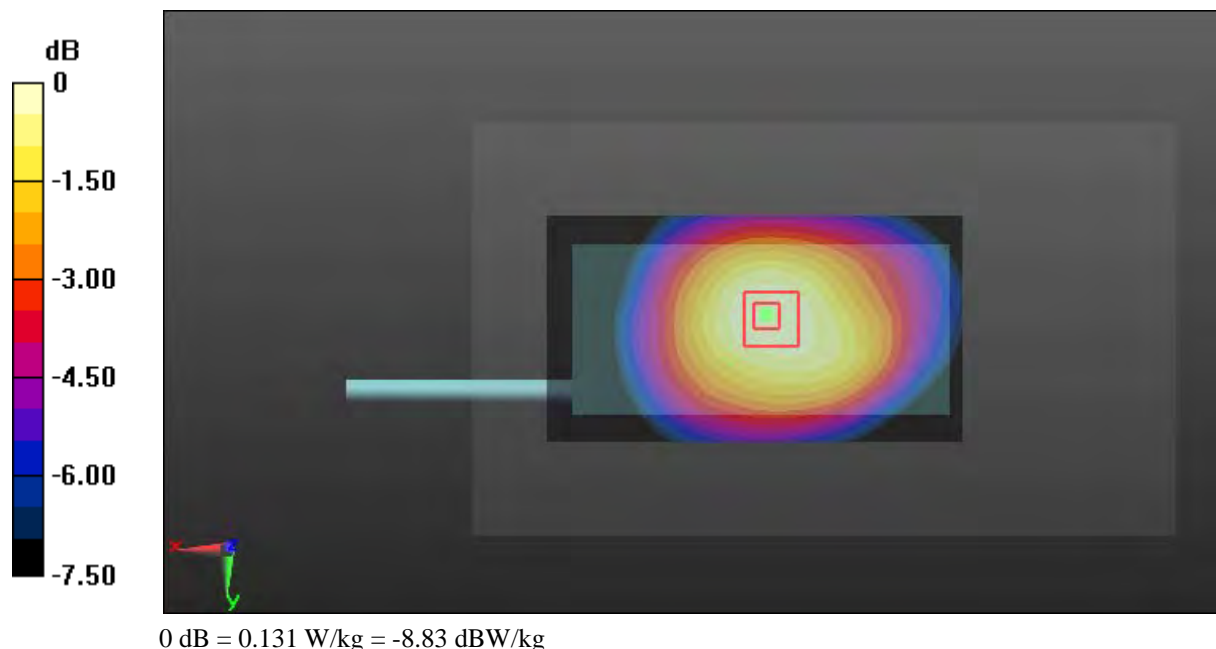

**Test Plot 207#: LTE Band 13\_Body Left\_Middle\_1RB**

**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 782 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 782 \text{ MHz}$ ;  $\sigma = 1.009 \text{ S/m}$ ;  $\epsilon_r = 52.79$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.42, 6.42, 6.42); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x51x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.276 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 15.57 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.340 W/kg

**SAR(1 g) = 0.260 W/kg; SAR(10 g) = 0.188 W/kg**

Maximum value of SAR (measured) = 0.276 W/kg

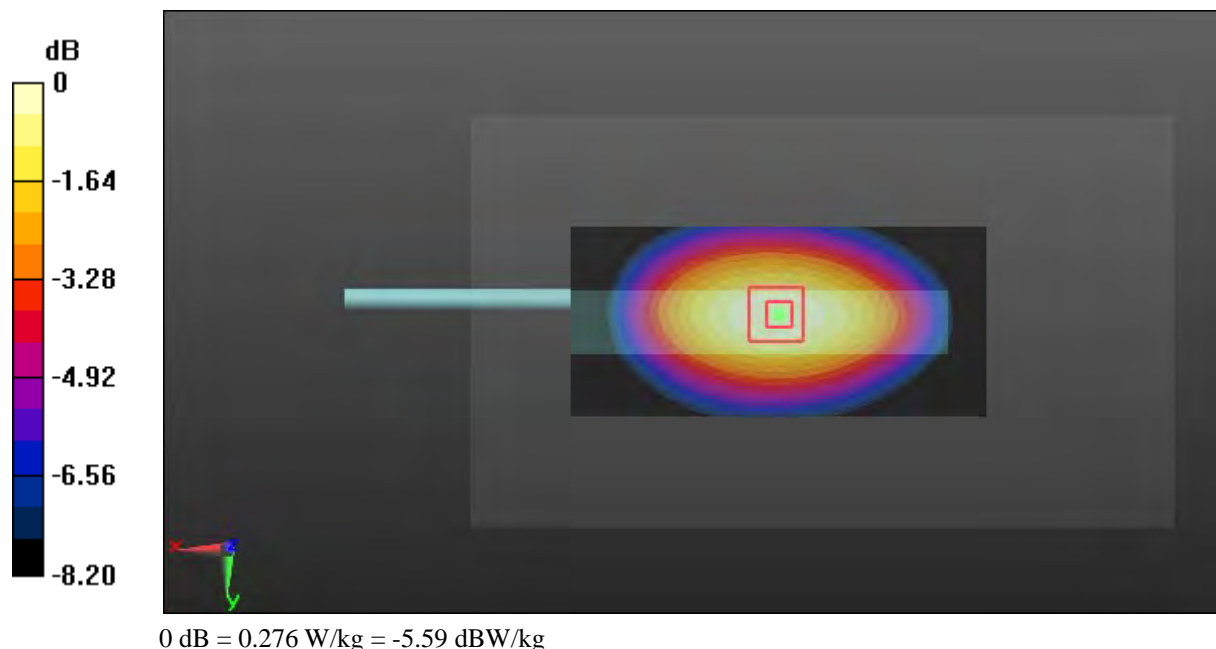

**Test Plot 208#: LTE Band 13\_Body Left\_Middle\_50%RB**

**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 782 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 782 \text{ MHz}$ ;  $\sigma = 1.009 \text{ S/m}$ ;  $\epsilon_r = 52.79$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.42, 6.42, 6.42); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x51x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.209 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 13.98 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.250 W/kg

**SAR(1 g) = 0.194 W/kg; SAR(10 g) = 0.141 W/kg**

Maximum value of SAR (measured) = 0.208 W/kg

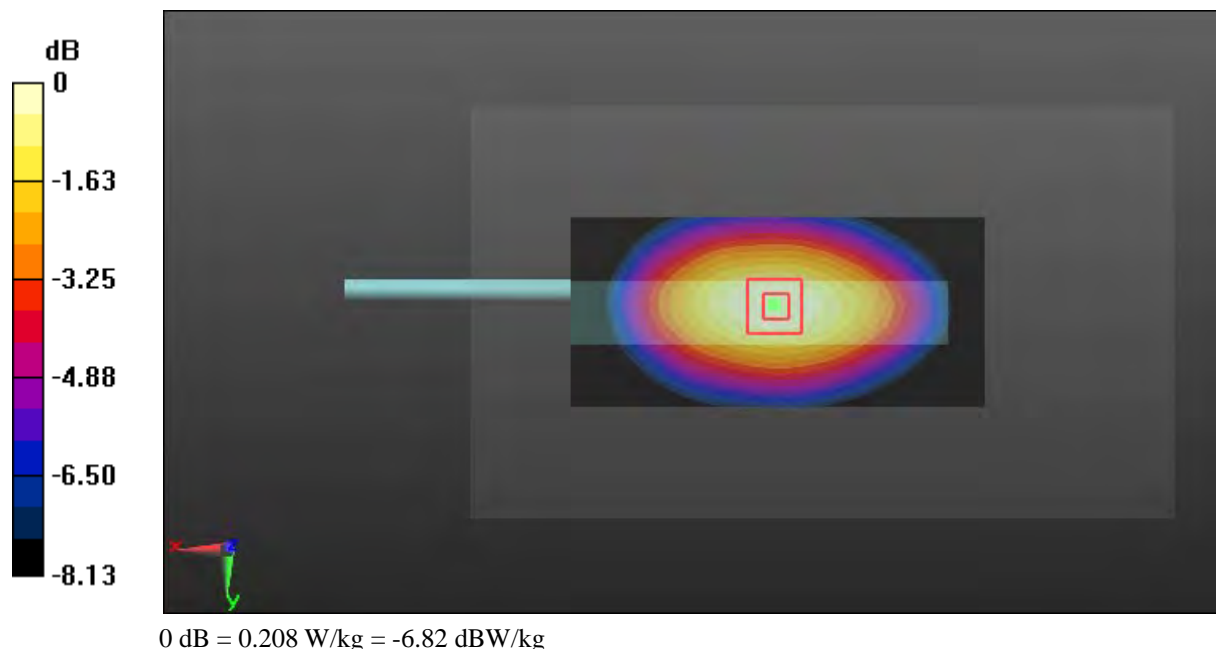



**Test Plot 209#: LTE Band 13\_Body Right\_Middle\_1RB**

**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 782 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 782 \text{ MHz}$ ;  $\sigma = 1.009 \text{ S/m}$ ;  $\epsilon_r = 52.79$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.42, 6.42, 6.42); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x51x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.321 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 14.82 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 0.400 W/kg

**SAR(1 g) = 0.297 W/kg; SAR(10 g) = 0.211 W/kg**

Maximum value of SAR (measured) = 0.316 W/kg

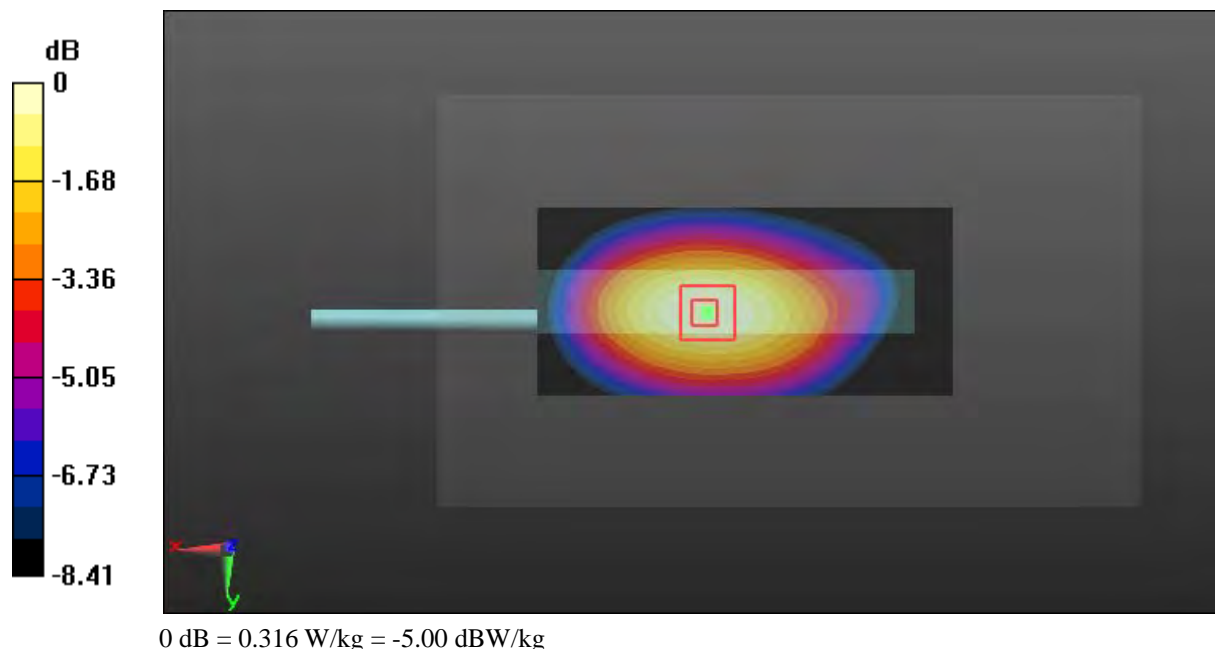

**Test Plot 210#: LTE Band 13\_Body Right\_Middle\_50%RB**

**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 782 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 782 \text{ MHz}$ ;  $\sigma = 1.009 \text{ S/m}$ ;  $\epsilon_r = 52.79$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.42, 6.42, 6.42); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x51x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.243 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 12.84 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 0.303 W/kg

**SAR(1 g) = 0.224 W/kg; SAR(10 g) = 0.158 W/kg**

Maximum value of SAR (measured) = 0.238 W/kg

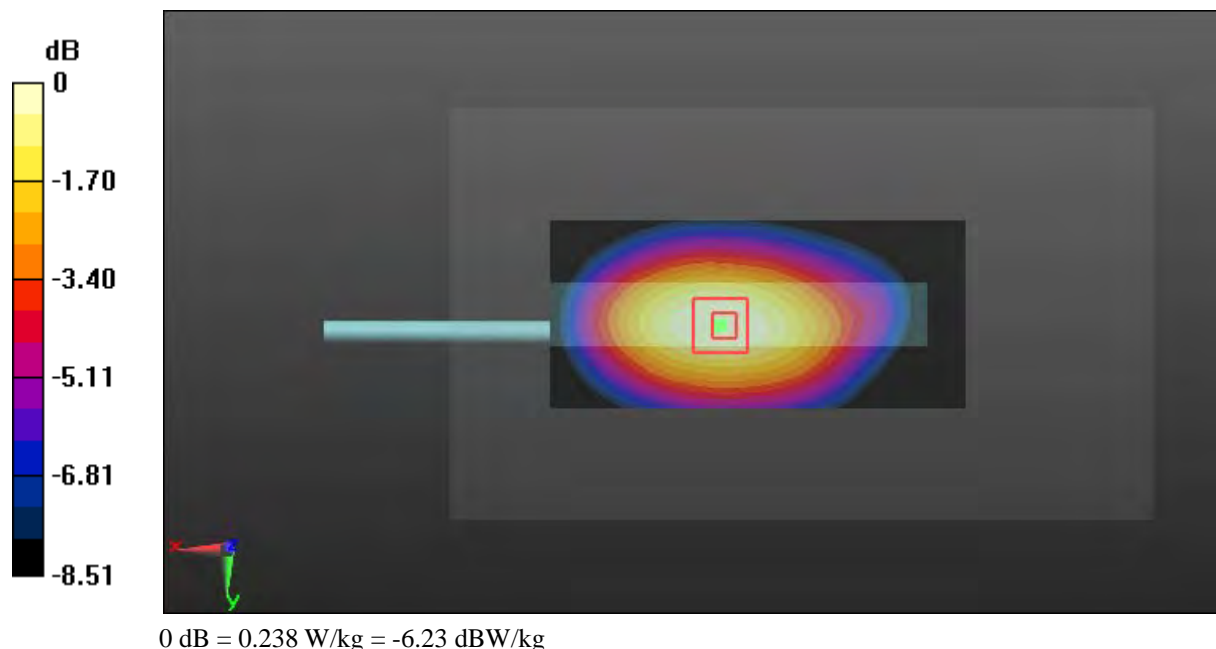

**Test Plot 211#: LTE Band 13\_Body Bottom\_Middle\_1RB**

**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 782 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 782 \text{ MHz}$ ;  $\sigma = 1.009 \text{ S/m}$ ;  $\epsilon_r = 52.79$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.42, 6.42, 6.42); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (51x81x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.0757 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 9.271 V/m; Power Drift = -0.20 dB

Peak SAR (extrapolated) = 0.123 W/kg

**SAR(1 g) = 0.067 W/kg; SAR(10 g) = 0.038 W/kg**

Maximum value of SAR (measured) = 0.0734 W/kg

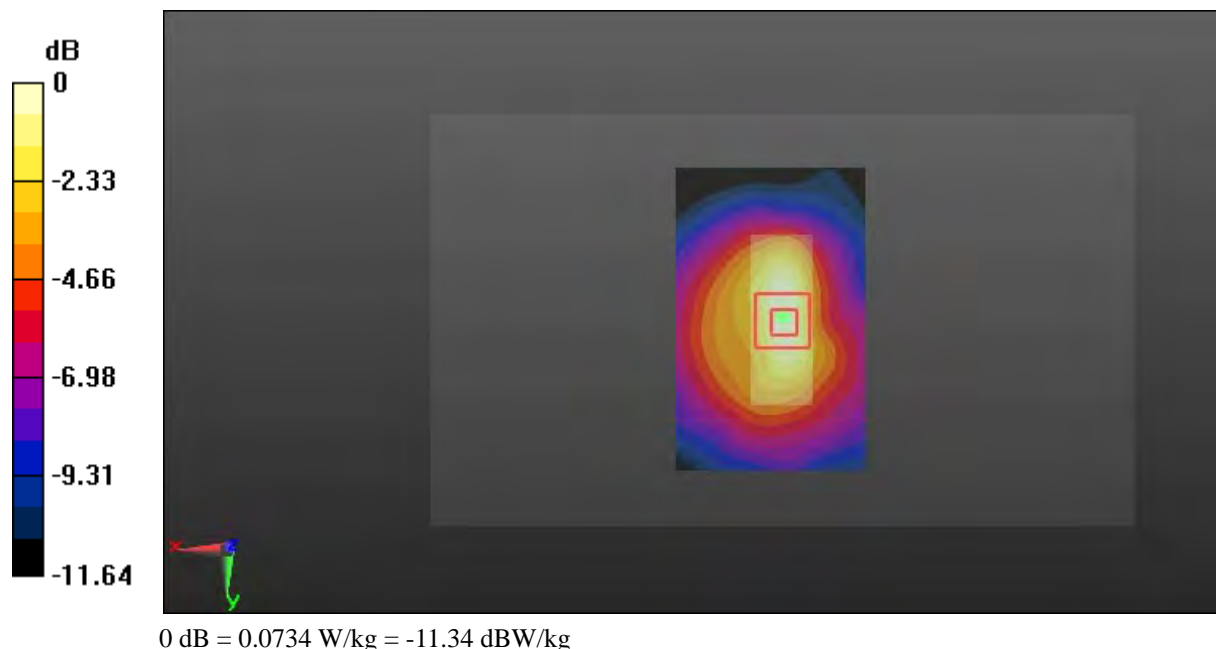

**Test Plot 212#: LTE Band 13\_Body Bottom\_Middle\_50%RB****DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 782 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 782$  MHz;  $\sigma = 1.009$  S/m;  $\epsilon_r = 52.79$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.42, 6.42, 6.42); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (51x81x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0631 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.020 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.0980 W/kg

**SAR(1 g) = 0.054 W/kg; SAR(10 g) = 0.031 W/kg**

Maximum value of SAR (measured) = 0.0605 W/kg

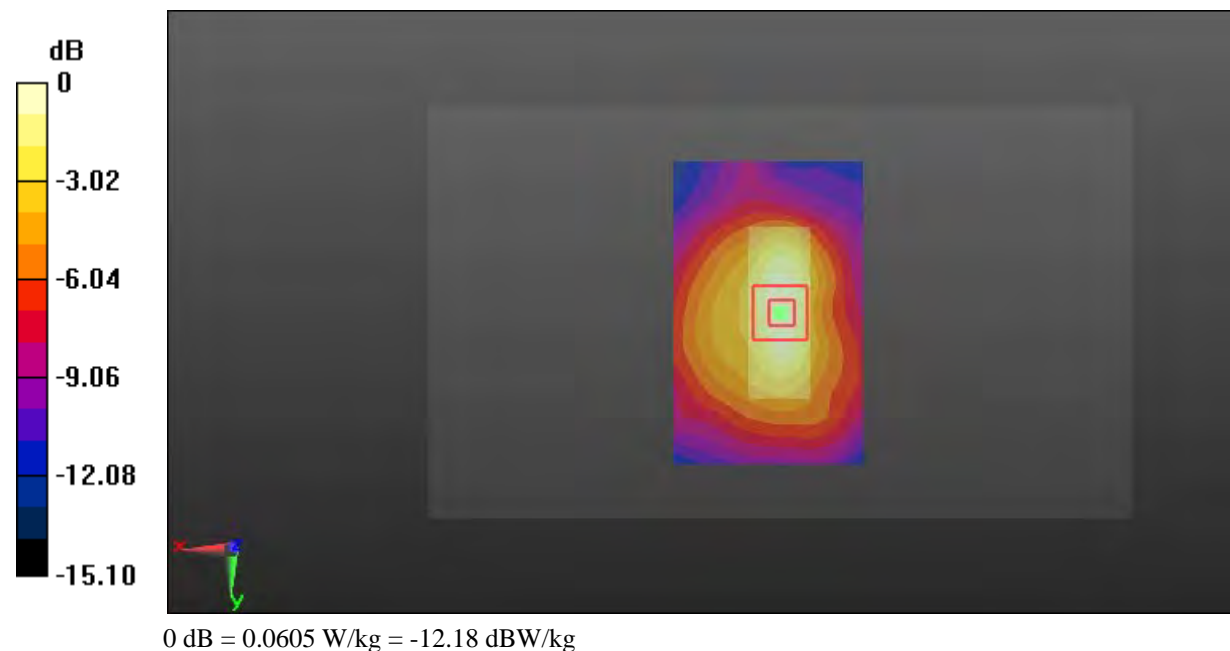

**Test Plot 213#: LTE Band 17\_Head Left Cheek\_Low\_1RB****DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 709 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 709$  MHz;  $\sigma = 0.878$  S/m;  $\epsilon_r = 42.99$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.57, 6.57, 6.57); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x61x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.250 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.713 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 0.283 W/kg

**SAR(1 g) = 0.228 W/kg; SAR(10 g) = 0.175 W/kg**

Maximum value of SAR (measured) = 0.238 W/kg

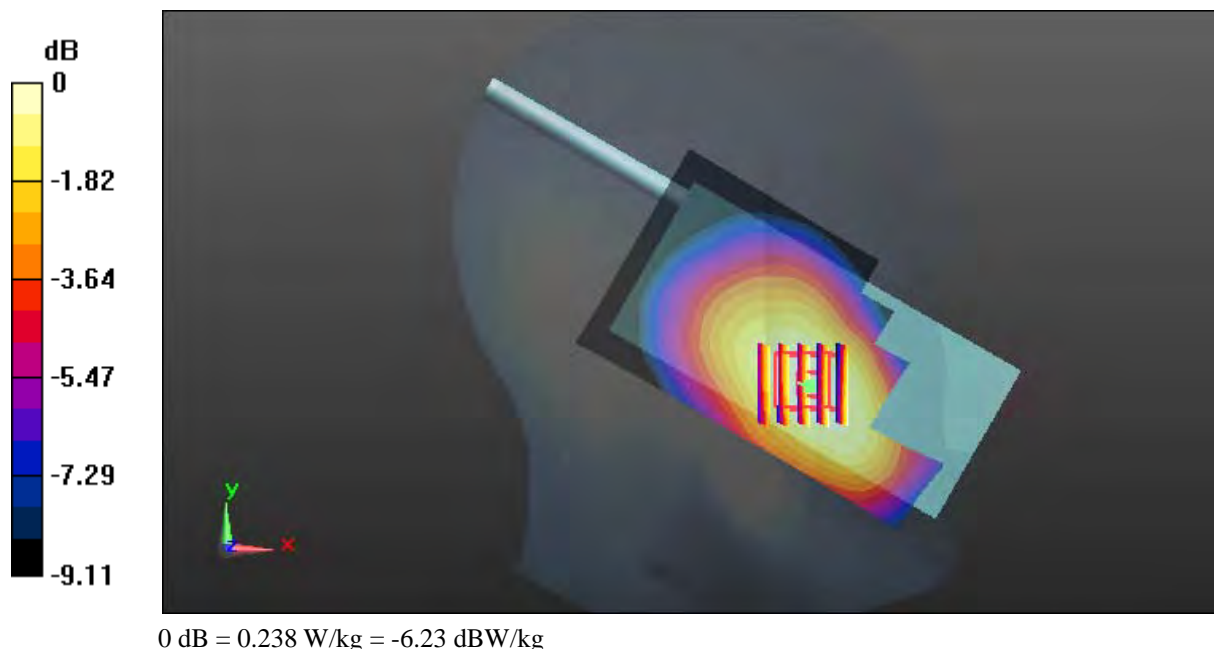

**Test Plot 214#: LTE Band 17\_Head Left Cheek\_Middle\_1RB****DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 710 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 710$  MHz;  $\sigma = 0.88$  S/m;  $\epsilon_r = 42.978$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.57, 6.57, 6.57); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x61x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.230 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.497 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.300 W/kg

**SAR(1 g) = 0.237 W/kg; SAR(10 g) = 0.176 W/kg**

Maximum value of SAR (measured) = 0.250 W/kg

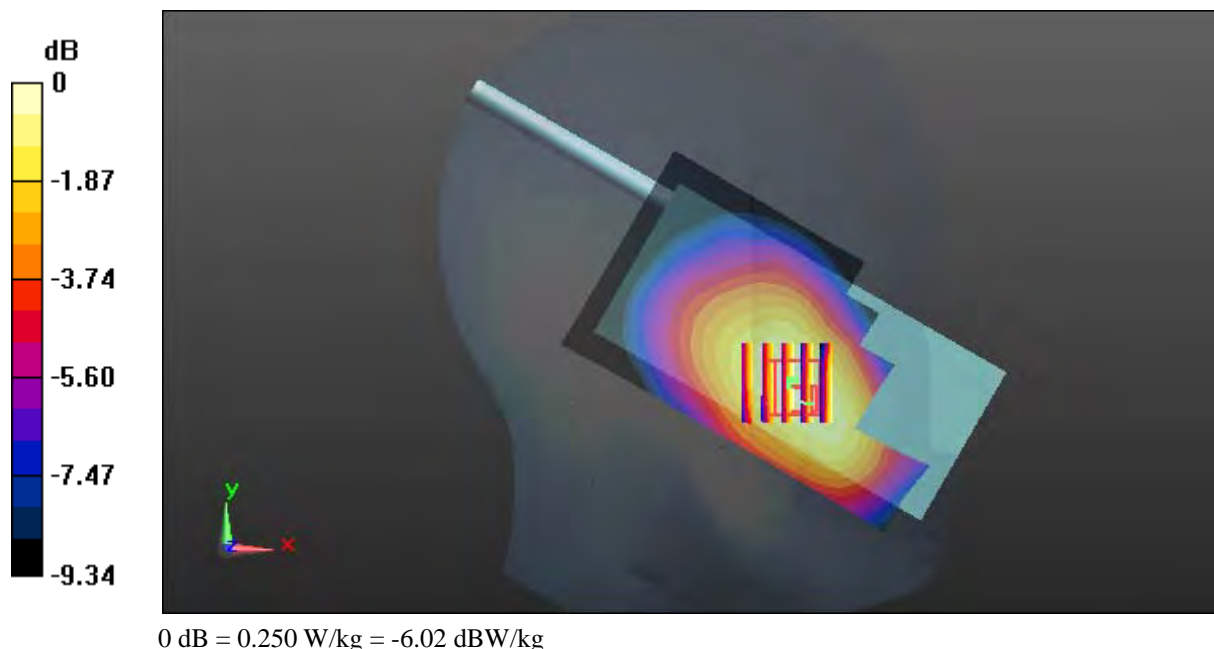

**Test Plot 215#: LTE Band 17\_Head Left Cheek\_High\_1RB****DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 711 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 711$  MHz;  $\sigma = 0.897$  S/m;  $\epsilon_r = 41.446$ ;  $\rho = 1000$  kg/m<sup>3</sup>;  
Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.57, 6.57, 6.57); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x61x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.241 W/kg


**Zoom Scan (6x6x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.989 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 0.281 W/kg

**SAR(1 g) = 0.227 W/kg; SAR(10 g) = 0.173 W/kg**

Maximum value of SAR (measured) = 0.237 W/kg

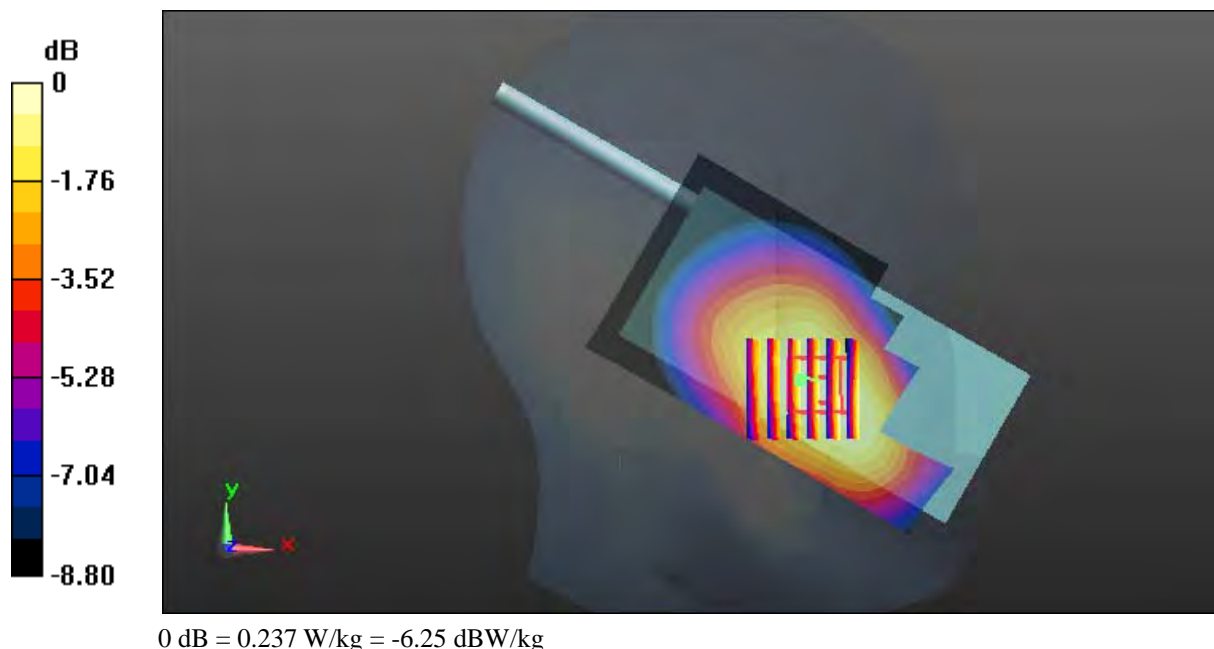

**Test Plot 216#: LTE Band 17\_Head Left Cheek\_Middle\_50%RB**

**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 710 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 710 \text{ MHz}$ ;  $\sigma = 0.88 \text{ S/m}$ ;  $\epsilon_r = 42.978$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.57, 6.57, 6.57); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (11x61x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.180 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 7.335 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.210 W/kg

**SAR(1 g) = 0.170 W/kg; SAR(10 g) = 0.129 W/kg**

Maximum value of SAR (measured) = 0.179 W/kg

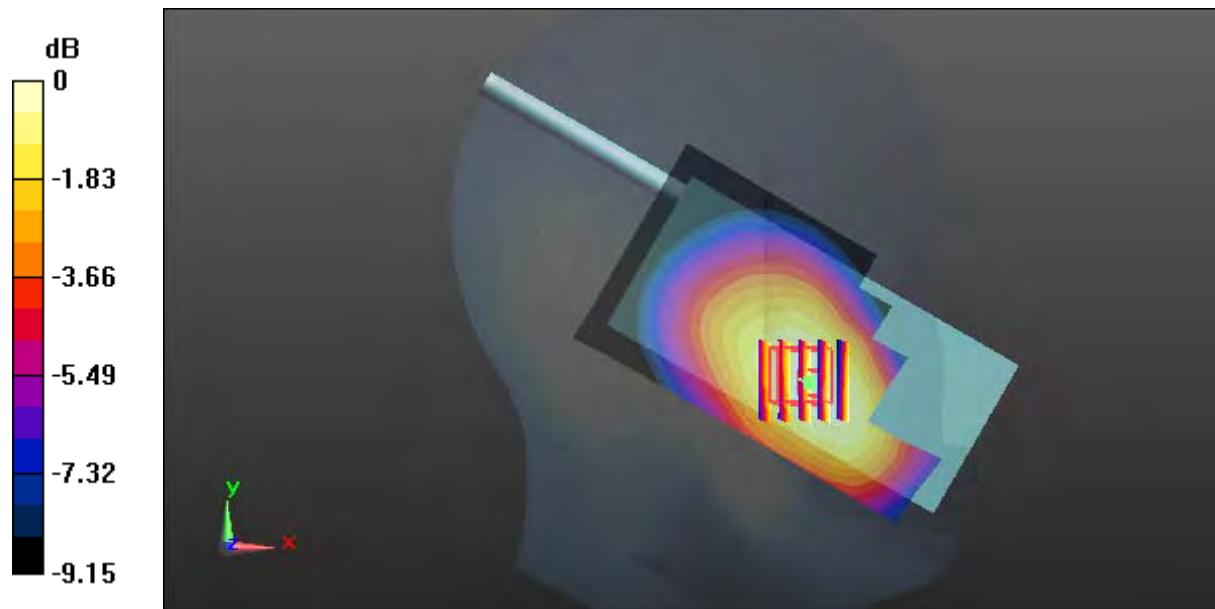

0 dB = 0.179 W/kg = -7.47 dBW/kg



**Test Plot 217#: LTE Band 17\_Head Left Tilt\_Middle\_1RB****DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 710 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 710$  MHz;  $\sigma = 0.88$  S/m;  $\epsilon_r = 42.978$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.57, 6.57, 6.57); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x61x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0963 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.028 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.103 W/kg

**SAR(1 g) = 0.089 W/kg; SAR(10 g) = 0.073 W/kg**

Maximum value of SAR (measured) = 0.0916 W/kg

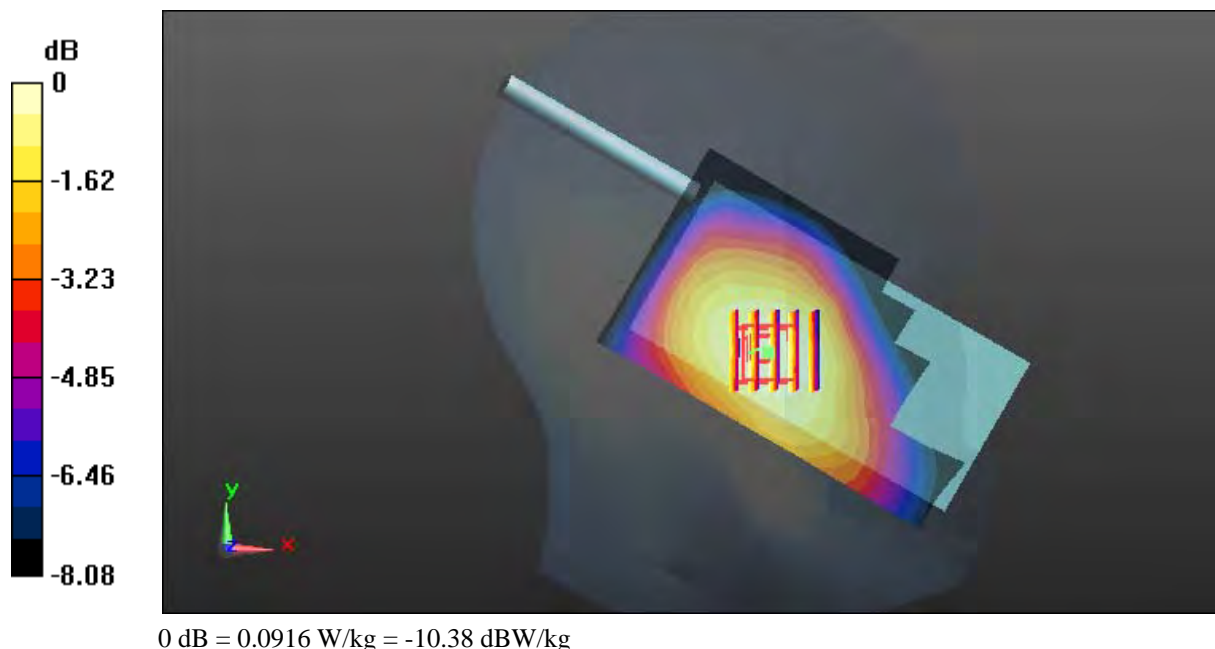

**Test Plot 218#: LTE Band 17\_Head Left Tilt\_Middle\_50%RB****DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 710 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 710$  MHz;  $\sigma = 0.88$  S/m;  $\epsilon_r = 42.978$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.57, 6.57, 6.57); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x61x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0665 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.617 V/m; Power Drift = 0.19 dB

Peak SAR (extrapolated) = 0.0790 W/kg

**SAR(1 g) = 0.066 W/kg; SAR(10 g) = 0.054 W/kg**

Maximum value of SAR (measured) = 0.0680 W/kg

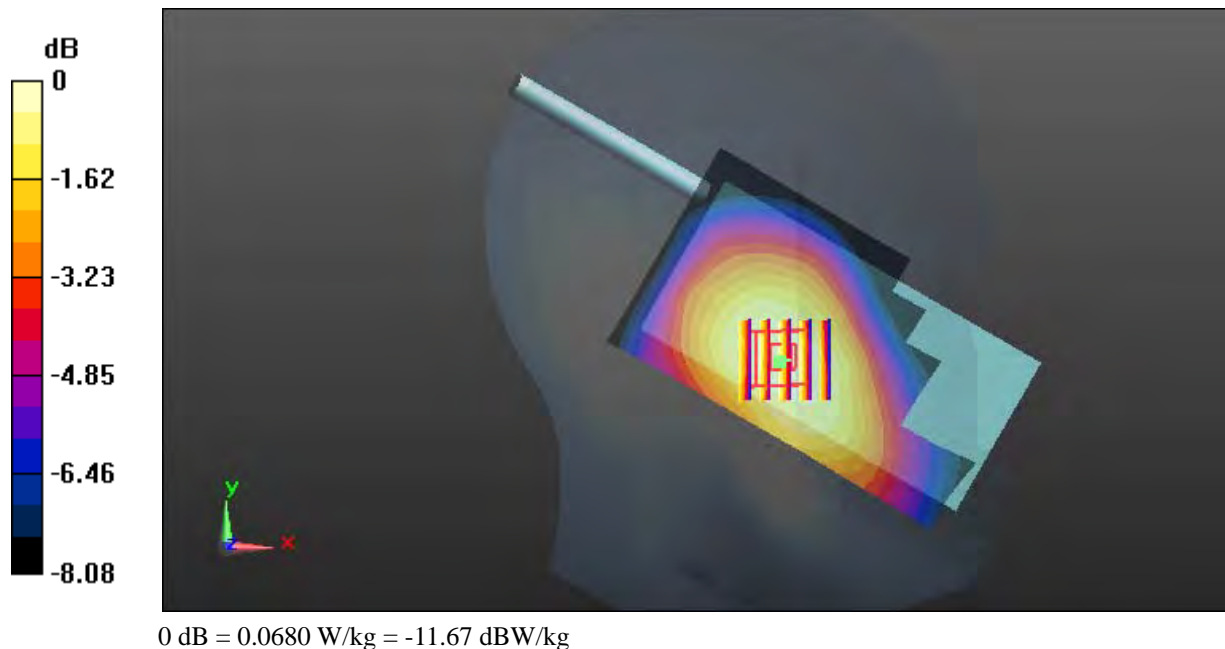

**Test Plot 219#: LTE Band 17\_Head Right Cheek\_Middle\_1RB****DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 710 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 710$  MHz;  $\sigma = 0.88$  S/m;  $\epsilon_r = 42.978$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.57, 6.57, 6.57); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x61x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.239 W/kg


**Zoom Scan (6x6x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.780 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 0.275 W/kg

**SAR(1 g) = 0.224 W/kg; SAR(10 g) = 0.175 W/kg**

Maximum value of SAR (measured) = 0.232 W/kg

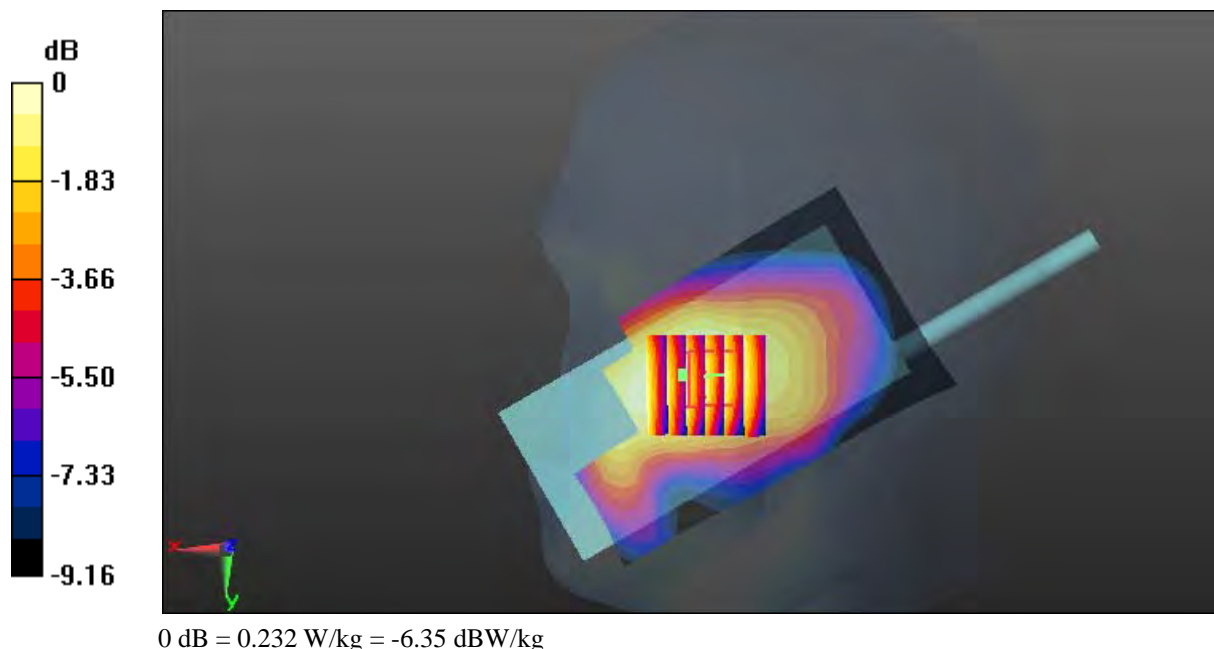

**Test Plot 220#: LTE Band 17\_Head Right Cheek\_Middle\_50%RB****DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 710 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 710$  MHz;  $\sigma = 0.88$  S/m;  $\epsilon_r = 42.978$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.57, 6.57, 6.57); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x61x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.174 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.187 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.198 W/kg

**SAR(1 g) = 0.168 W/kg; SAR(10 g) = 0.131 W/kg**

Maximum value of SAR (measured) = 0.175 W/kg

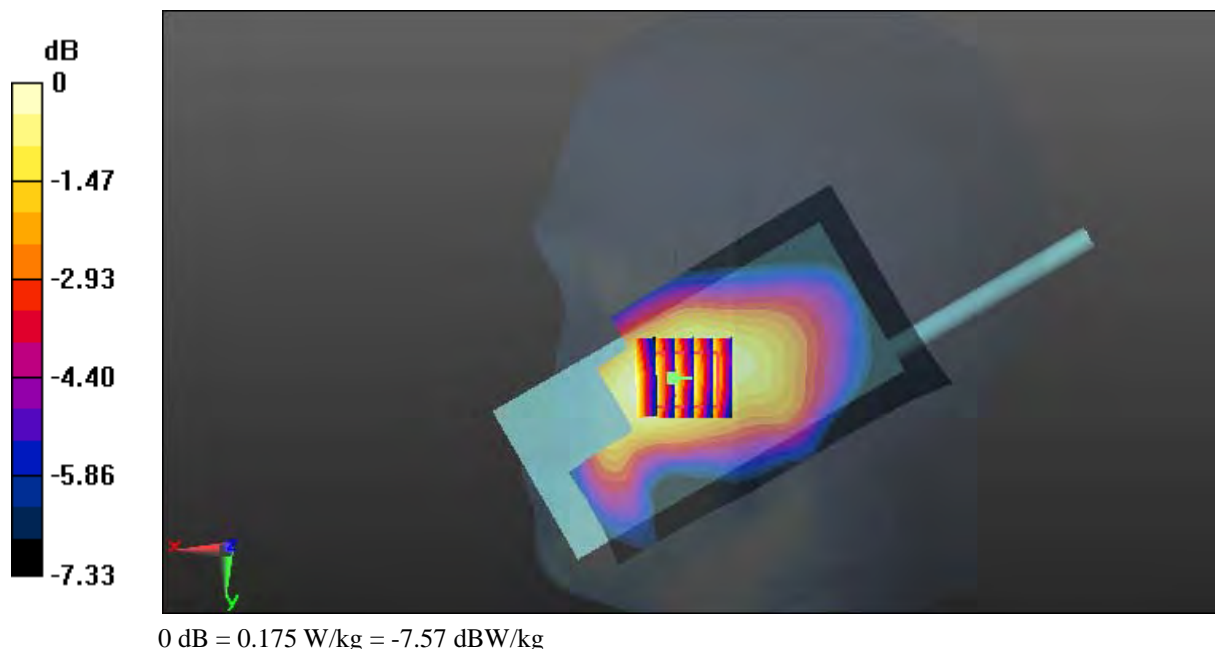

**Test Plot 221#: LTE Band 17\_Head Right Tilt\_Middle\_1RB****DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 710 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 710$  MHz;  $\sigma = 0.88$  S/m;  $\epsilon_r = 42.978$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.57, 6.57, 6.57); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x61x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0996 W/kg


**Zoom Scan (6x6x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.775 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 0.122 W/kg

**SAR(1 g) = 0.100 W/kg; SAR(10 g) = 0.081 W/kg**

Maximum value of SAR (measured) = 0.106 W/kg

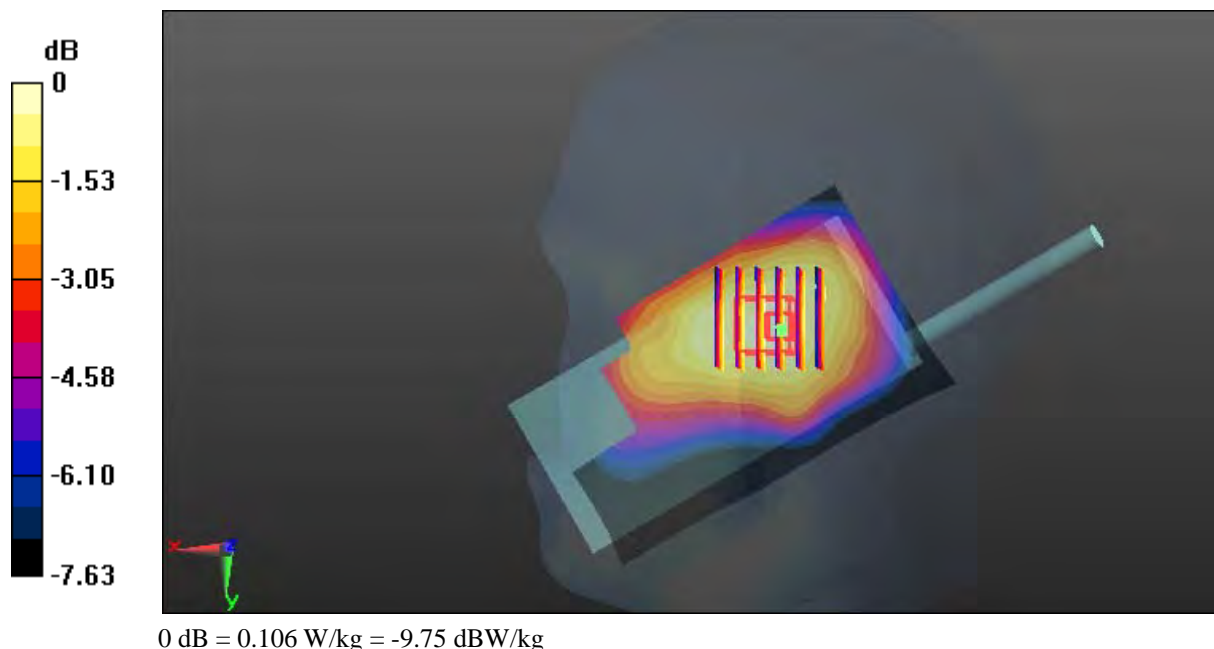

**Test Plot 222#: LTE Band 17\_Head Right Tilt\_Middle\_50%RB****DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 710 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 710$  MHz;  $\sigma = 0.88$  S/m;  $\epsilon_r = 42.978$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.57, 6.57, 6.57); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x61x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0705 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.138 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.0820 W/kg

**SAR(1 g) = 0.069 W/kg; SAR(10 g) = 0.057 W/kg**

Maximum value of SAR (measured) = 0.0719 W/kg

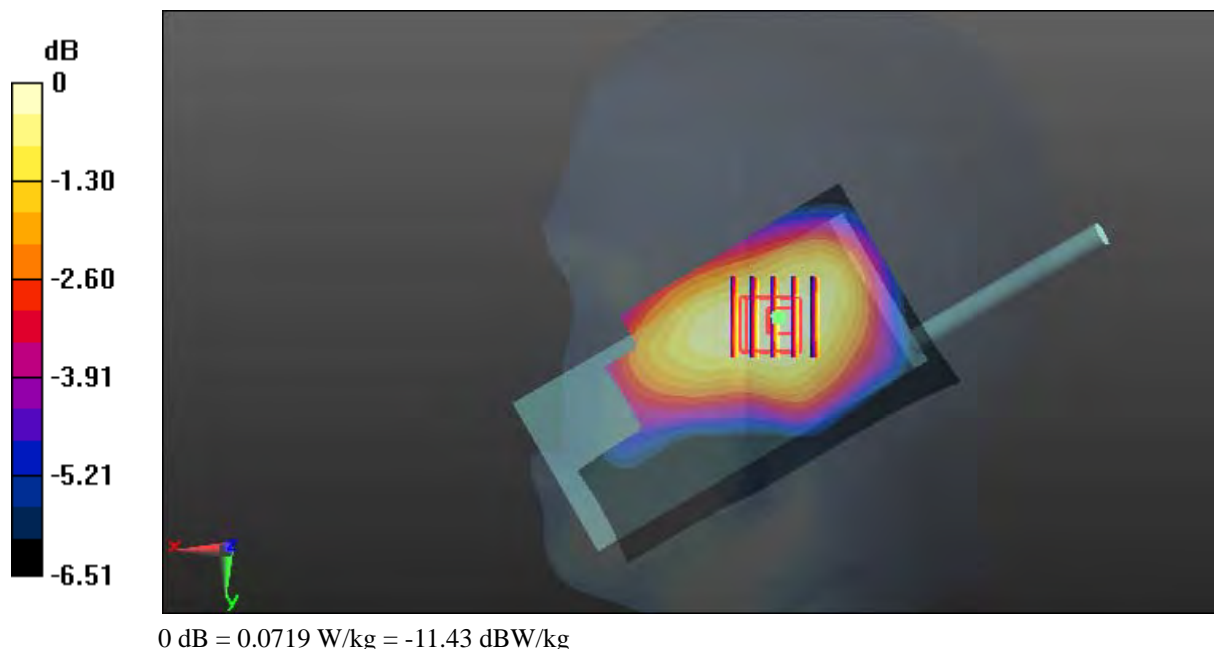

**Test Plot 223#: LTE Band 17\_Face Up\_Middle\_1RB**

**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 710 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 710 \text{ MHz}$ ;  $\sigma = 0.88 \text{ S/m}$ ;  $\epsilon_r = 42.978$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.57, 6.57, 6.57); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x61x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.108 W/kg


**Zoom Scan (5x6x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 10.12 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.135 W/kg

**SAR(1 g) = 0.107 W/kg; SAR(10 g) = 0.083 W/kg**

Maximum value of SAR (measured) = 0.112 W/kg

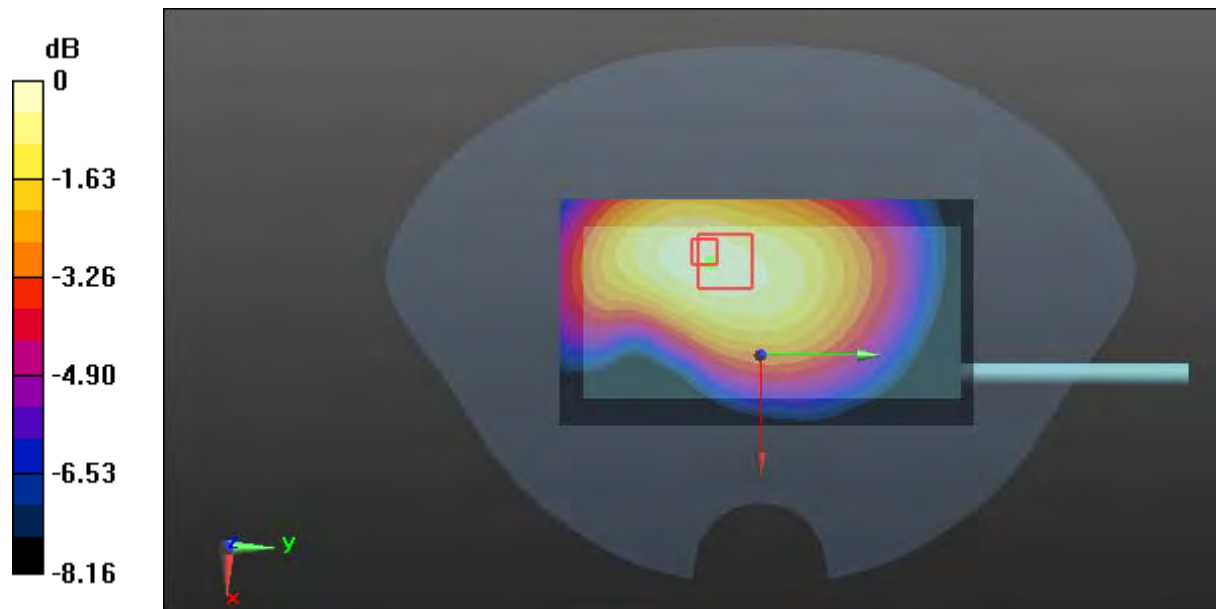

0 dB = 0.112 W/kg = -9.51 dBW/kg

**Test Plot 224#: LTE Band 17\_Face Up\_Middle\_50%RB****DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 710 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 710$  MHz;  $\sigma = 0.88$  S/m;  $\epsilon_r = 42.978$ ;  $\rho = 1000$  kg/m<sup>3</sup>;  
Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.57, 6.57, 6.57); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x61x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0856 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.866 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.105 W/kg

**SAR(1 g) = 0.083 W/kg; SAR(10 g) = 0.064 W/kg**

Maximum value of SAR (measured) = 0.0867 W/kg

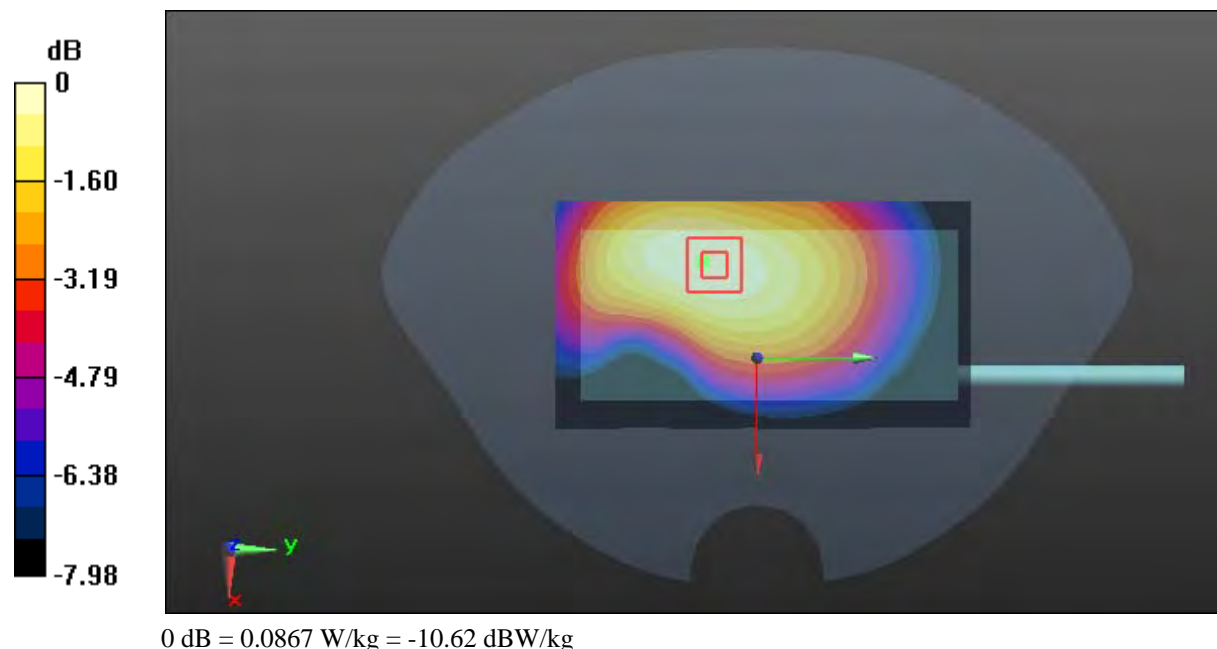



**Test Plot 225#: LTE Band 17\_Body Front \_Low\_1RB**

**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 709 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 709 \text{ MHz}$ ;  $\sigma = 0.959 \text{ S/m}$ ;  $\epsilon_r = 55.15$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.42, 6.42, 6.42); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x61x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) =  $0.290 \text{ W/kg}$


**Zoom Scan (6x6x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value =  $13.15 \text{ V/m}$ ; Power Drift =  $-0.11 \text{ dB}$

Peak SAR (extrapolated) =  $0.362 \text{ W/kg}$

**SAR(1 g) =  $0.275 \text{ W/kg}$ ; SAR(10 g) =  $0.206 \text{ W/kg}$**

Maximum value of SAR (measured) =  $0.293 \text{ W/kg}$

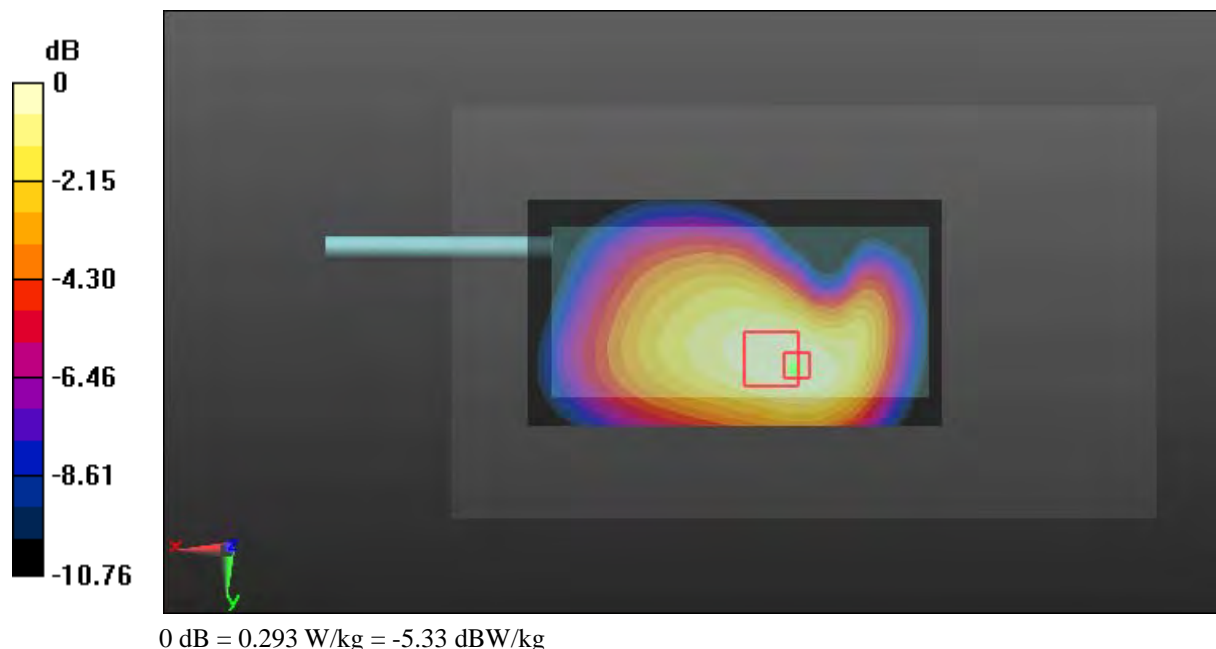

**Test Plot 226#: LTE Band 17\_Body Front \_Middle\_1RB**

**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 710 MHz;Duty Cycle: 1:1  
 Medium parameters used:  $f = 710 \text{ MHz}$ ;  $\sigma = 0.962 \text{ S/m}$ ;  $\epsilon_r = 55.094$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.42, 6.42, 6.42); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772;Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x61x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.312 W/kg


**Zoom Scan (6x6x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 17.13 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 0.396 W/kg

**SAR(1 g) = 0.298 W/kg; SAR(10 g) = 0.223 W/kg**

Maximum value of SAR (measured) = 0.313 W/kg

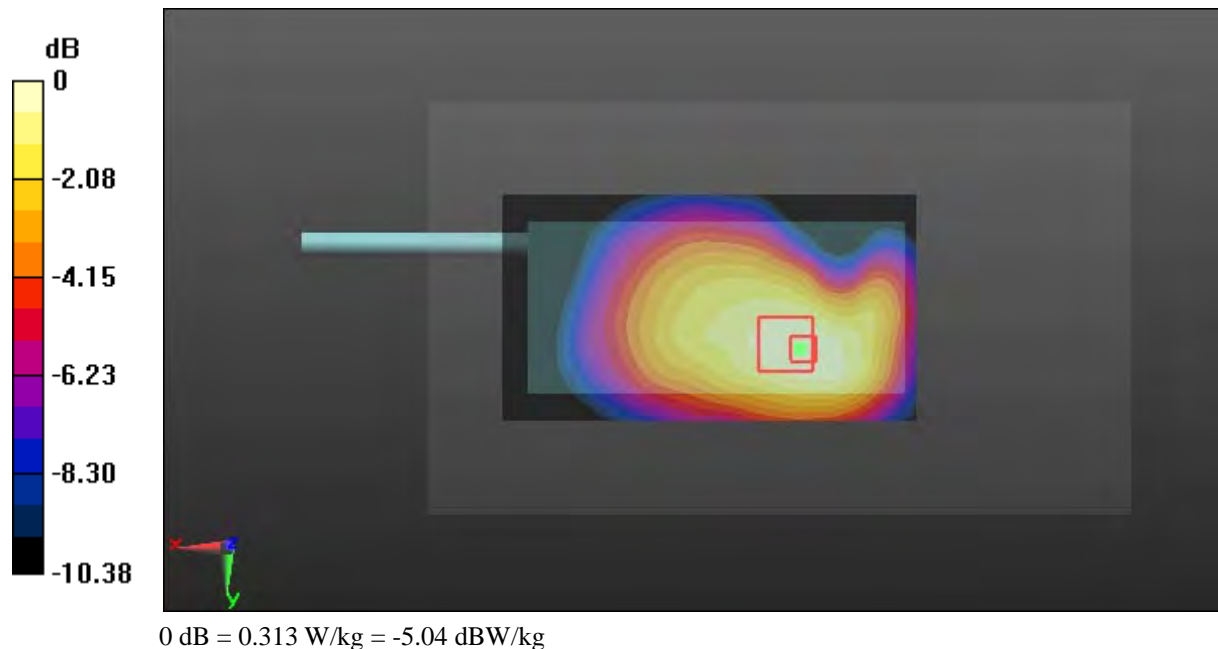

**Test Plot 227#: LTE Band 17\_Body Front\_High\_1RB**

**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 711 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 711 \text{ MHz}$ ;  $\sigma = 0.973 \text{ S/m}$ ;  $\epsilon_r = 54.985$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.42, 6.42, 6.42); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x61x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.288 W/kg


**Zoom Scan (6x6x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 13.13 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 0.351 W/kg

**SAR(1 g) = 0.270 W/kg; SAR(10 g) = 0.203 W/kg**

Maximum value of SAR (measured) = 0.285 W/kg

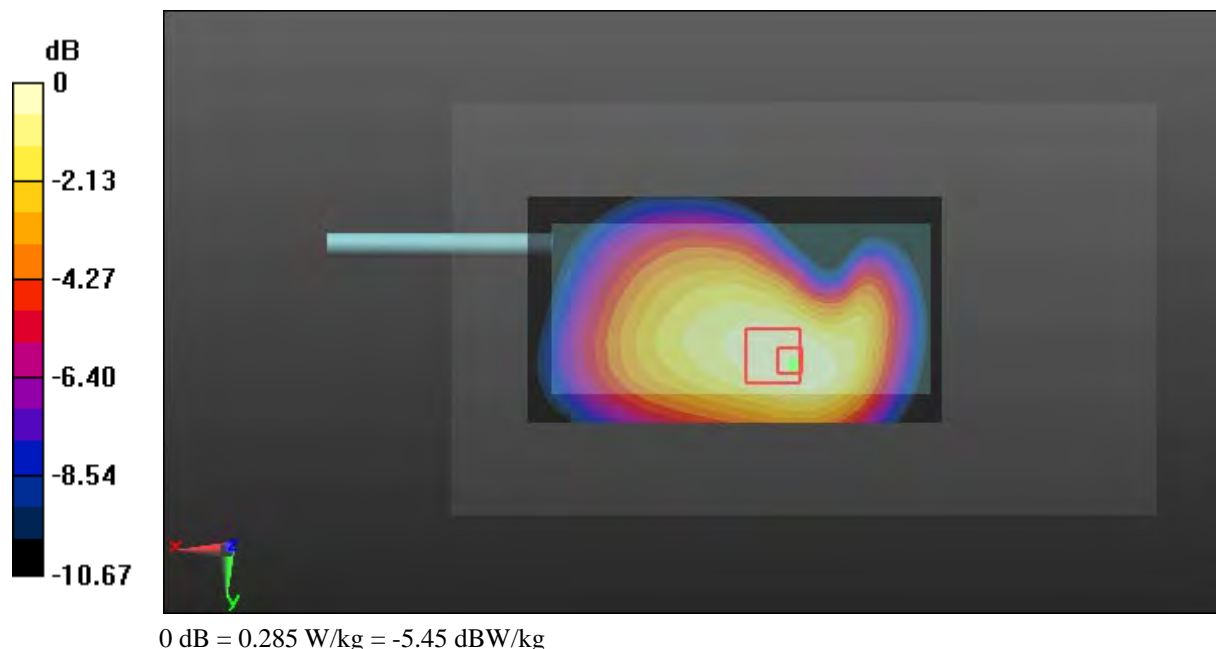

**Test Plot 228#: LTE Band 17\_Body Front \_Middle\_50%RB**

**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 710 MHz;Duty Cycle: 1:1  
 Medium parameters used:  $f = 710 \text{ MHz}$ ;  $\sigma = 0.962 \text{ S/m}$ ;  $\epsilon_r = 55.094$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.42, 6.42, 6.42); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772;Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x61x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) =  $0.246 \text{ W/kg}$


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value =  $14.85 \text{ V/m}$ ; Power Drift =  $-0.02 \text{ dB}$

Peak SAR (extrapolated) =  $0.305 \text{ W/kg}$

**SAR(1 g) =  $0.237 \text{ W/kg}$ ; SAR(10 g) =  $0.178 \text{ W/kg}$**

Maximum value of SAR (measured) =  $0.249 \text{ W/kg}$

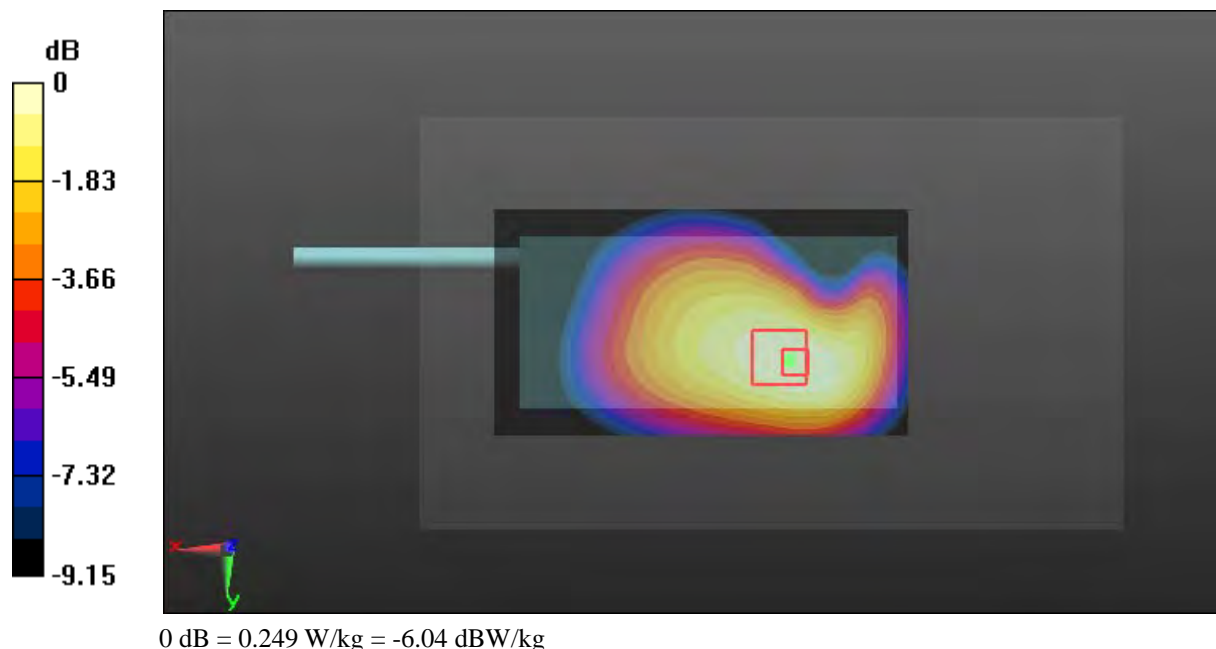

**Test Plot 229#: LTE Band 17\_Body Back\_Middle\_1RB**

**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 710 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 710 \text{ MHz}$ ;  $\sigma = 0.962 \text{ S/m}$ ;  $\epsilon_r = 55.094$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.42, 6.42, 6.42); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x61x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.0974 W/kg


**Zoom Scan (8x6x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 9.703 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.108 W/kg

**SAR(1 g) = 0.091 W/kg; SAR(10 g) = 0.071 W/kg**

Maximum value of SAR (measured) = 0.0949 W/kg

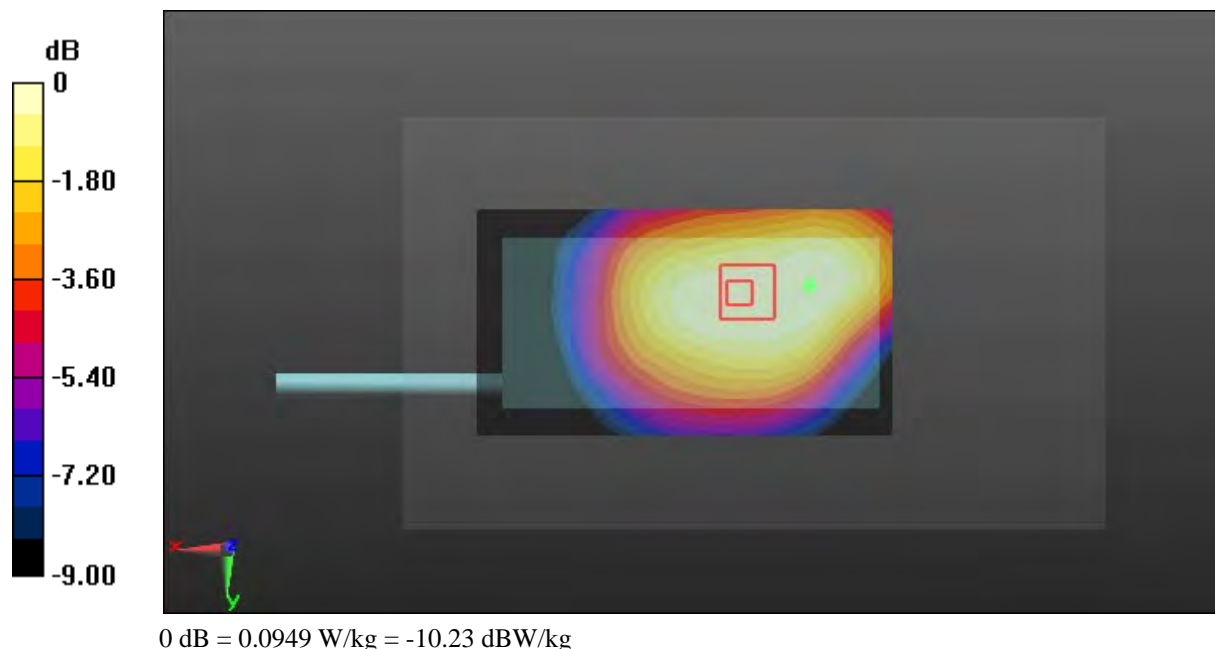

**Test Plot 230#: LTE Band 17\_Body Back\_Middle\_50%RB**

**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 710 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 710 \text{ MHz}$ ;  $\sigma = 0.962 \text{ S/m}$ ;  $\epsilon_r = 55.094$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.42, 6.42, 6.42); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x61x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) =  $0.0793 \text{ W/kg}$


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value =  $8.929 \text{ V/m}$ ; Power Drift =  $0.00 \text{ dB}$

Peak SAR (extrapolated) =  $0.0920 \text{ W/kg}$

**SAR(1 g) =  $0.075 \text{ W/kg}$ ; SAR(10 g) =  $0.059 \text{ W/kg}$**

Maximum value of SAR (measured) =  $0.0791 \text{ W/kg}$

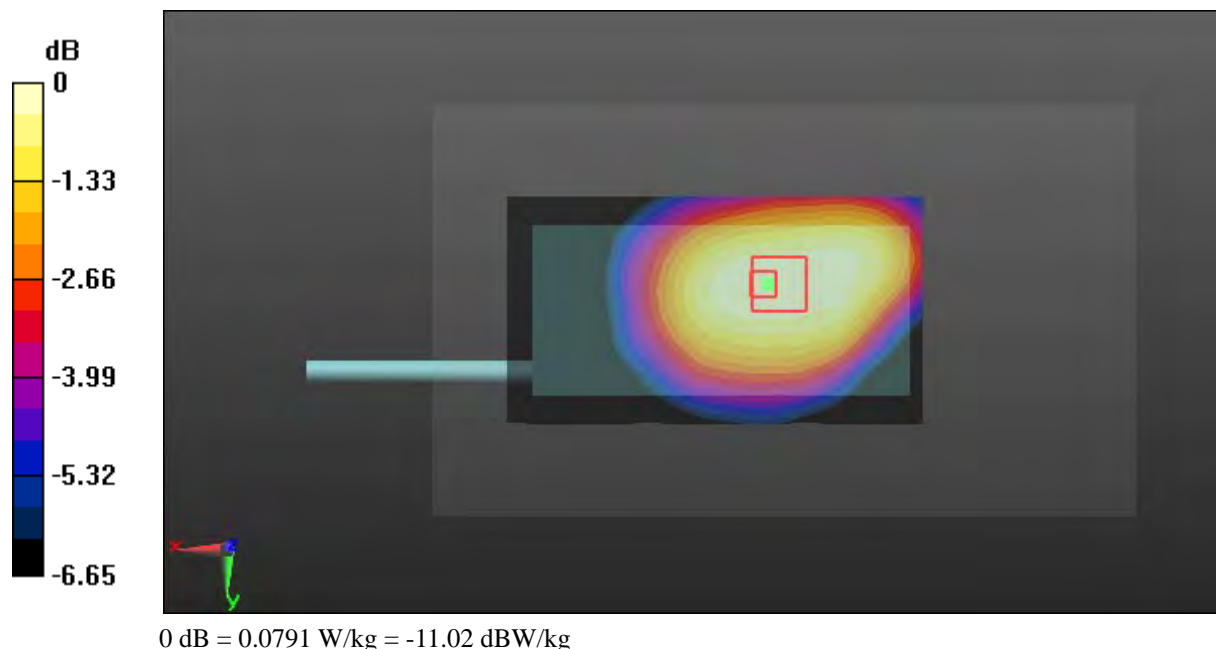

**Test Plot 231#: LTE Band 17\_Body Left\_Middle\_1RB**

**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 710 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 710 \text{ MHz}$ ;  $\sigma = 0.962 \text{ S/m}$ ;  $\epsilon_r = 55.094$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.42, 6.42, 6.42); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x51x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.186 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 14.05 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 0.232 W/kg

**SAR(1 g) = 0.184 W/kg; SAR(10 g) = 0.134 W/kg**

Maximum value of SAR (measured) = 0.195 W/kg

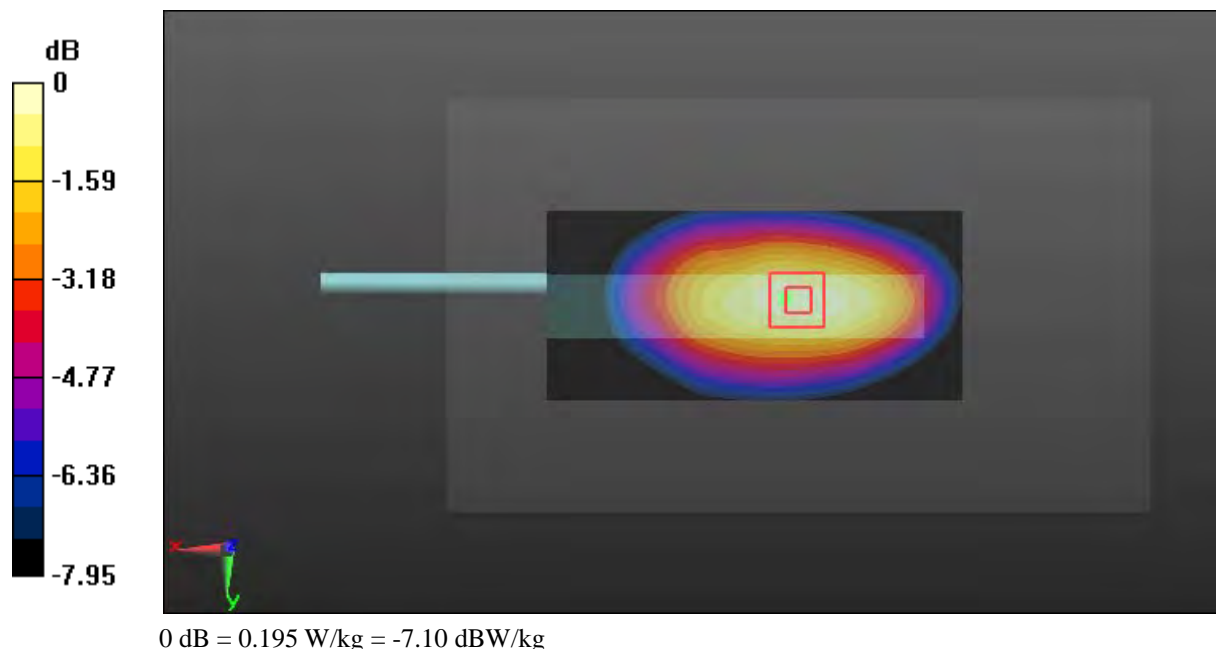

**Test Plot 232#: LTE Band 17\_Body Left\_Middle\_50%RB**

**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 710 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 710 \text{ MHz}$ ;  $\sigma = 0.962 \text{ S/m}$ ;  $\epsilon_r = 55.094$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.42, 6.42, 6.42); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (11x51x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.161 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 12.96 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.191 W/kg

**SAR(1 g) = 0.149 W/kg; SAR(10 g) = 0.110 W/kg**

Maximum value of SAR (measured) = 0.160 W/kg

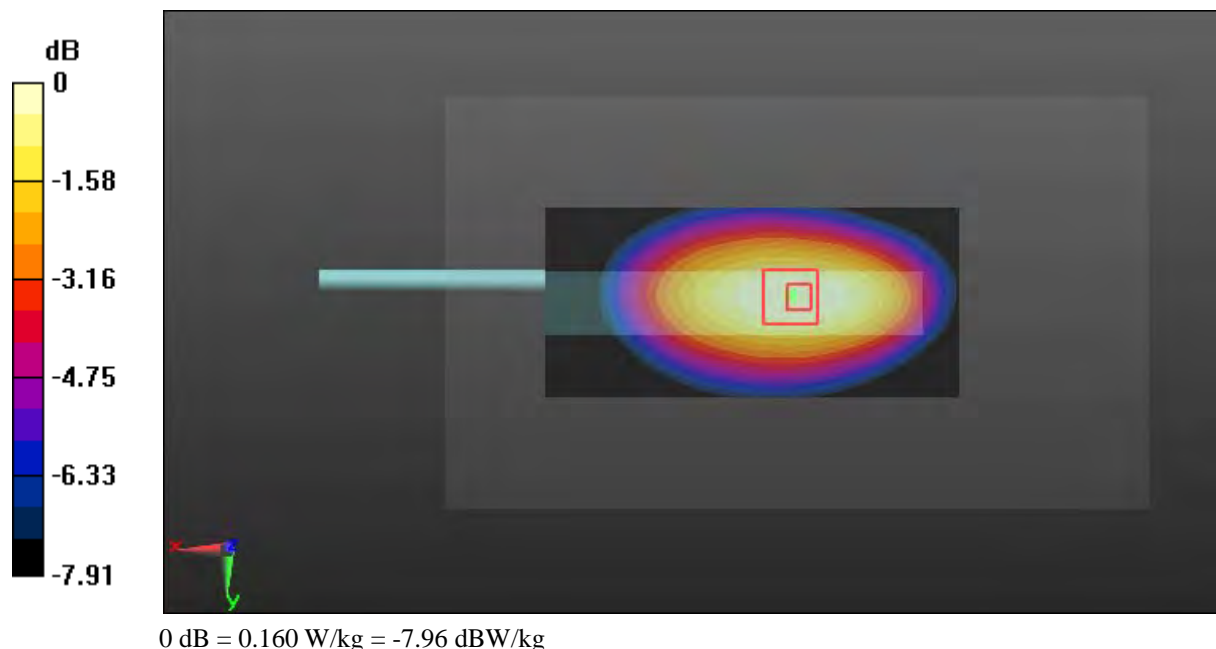



**Test Plot 233#: LTE Band 17\_Body Right\_Middle\_1RB**

**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 710 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 710 \text{ MHz}$ ;  $\sigma = 0.962 \text{ S/m}$ ;  $\epsilon_r = 55.094$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.42, 6.42, 6.42); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x51x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.116 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 9.041 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.143 W/kg

**SAR(1 g) = 0.108 W/kg; SAR(10 g) = 0.079 W/kg**

Maximum value of SAR (measured) = 0.115 W/kg

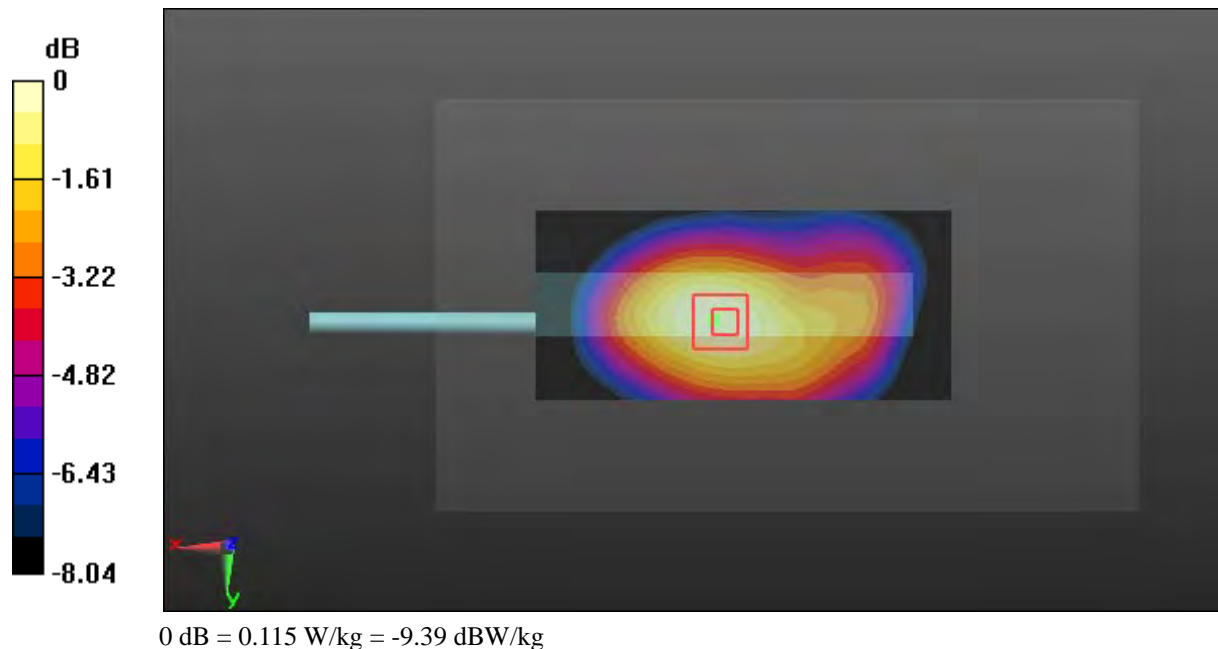

**Test Plot 234#: LTE Band 17\_Body Right\_Middle\_50%RB**

**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 710 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 710 \text{ MHz}$ ;  $\sigma = 0.962 \text{ S/m}$ ;  $\epsilon_r = 55.094$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.42, 6.42, 6.42); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (11x51x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) =  $0.102 \text{ W/kg}$


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value =  $8.591 \text{ V/m}$ ; Power Drift =  $-0.08 \text{ dB}$

Peak SAR (extrapolated) =  $0.127 \text{ W/kg}$

**SAR(1 g) =  $0.095 \text{ W/kg}$ ; SAR(10 g) =  $0.069 \text{ W/kg}$**

Maximum value of SAR (measured) =  $0.102 \text{ W/kg}$

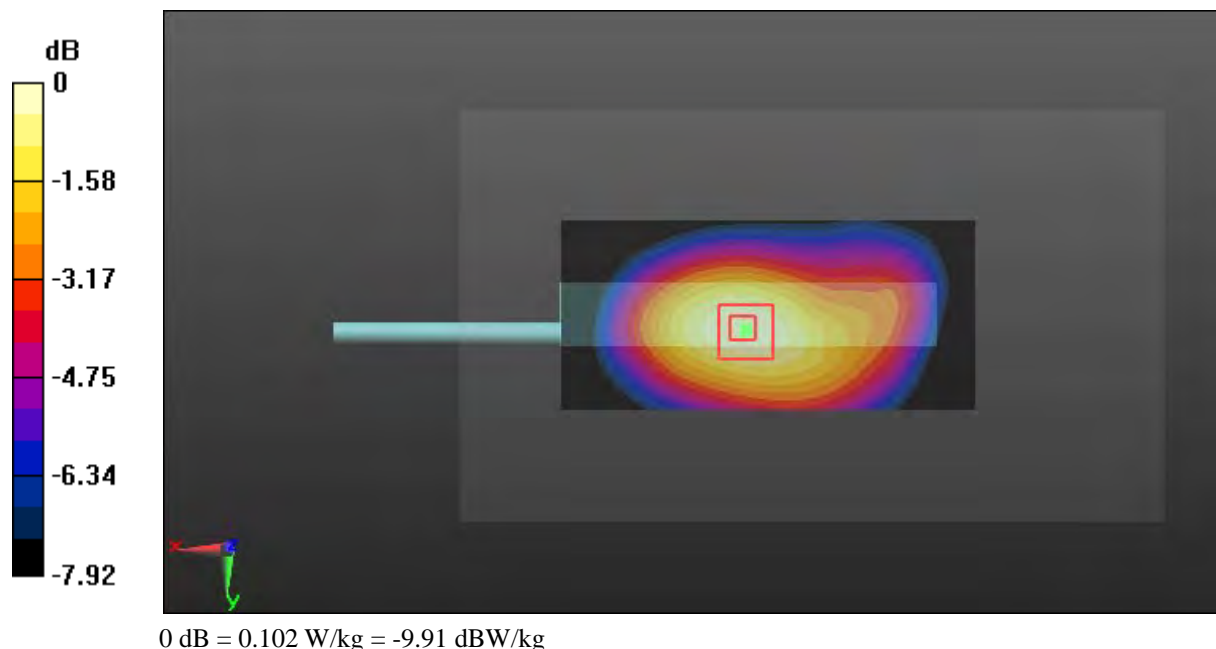

**Test Plot 235#: LTE Band 17\_Body Bottom\_Middle\_1RB**

**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 710 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 710 \text{ MHz}$ ;  $\sigma = 0.962 \text{ S/m}$ ;  $\epsilon_r = 55.094$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.42, 6.42, 6.42); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (51x81x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.0942 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 8.729 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 0.130 W/kg

**SAR(1 g) = 0.084 W/kg; SAR(10 g) = 0.055 W/kg**

Maximum value of SAR (measured) = 0.0919 W/kg

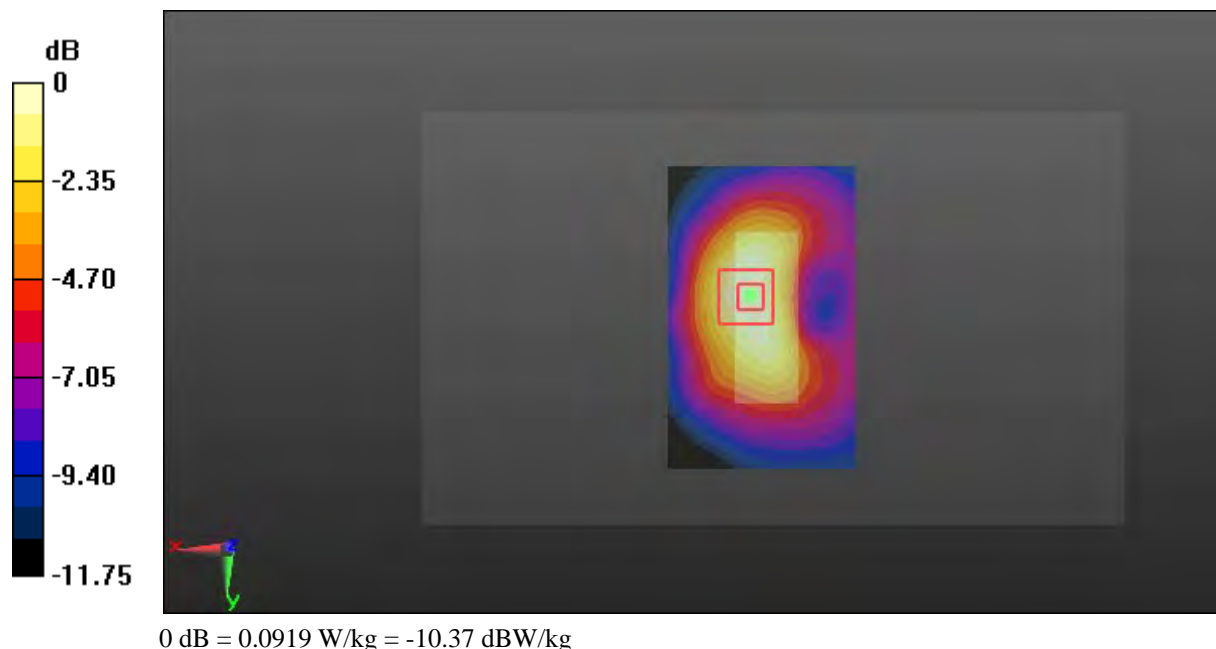

**Test Plot 236#: LTE Band 17\_Body Bottom\_Middle\_50%RB**

**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 710 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 710 \text{ MHz}$ ;  $\sigma = 0.962 \text{ S/m}$ ;  $\epsilon_r = 55.094$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.42, 6.42, 6.42); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (51x81x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) =  $0.0706 \text{ W/kg}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value =  $7.885 \text{ V/m}$ ; Power Drift =  $-0.11 \text{ dB}$

Peak SAR (extrapolated) =  $0.0960 \text{ W/kg}$

**SAR(1 g) =  $0.064 \text{ W/kg}$ ; SAR(10 g) =  $0.042 \text{ W/kg}$**

Maximum value of SAR (measured) =  $0.0692 \text{ W/kg}$



**Test Plot 237#: LTE Band 25\_Head Left Cheek\_Low\_1RB****DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 1860 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 1860$  MHz;  $\sigma = 1.375$  S/m;  $\epsilon_r = 40.211$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.93, 4.93, 4.93); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (11x61x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.544 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.981 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.771 W/kg

**SAR(1 g) = 0.494 W/kg; SAR(10 g) = 0.313 W/kg**

Maximum value of SAR (measured) = 0.527 W/kg

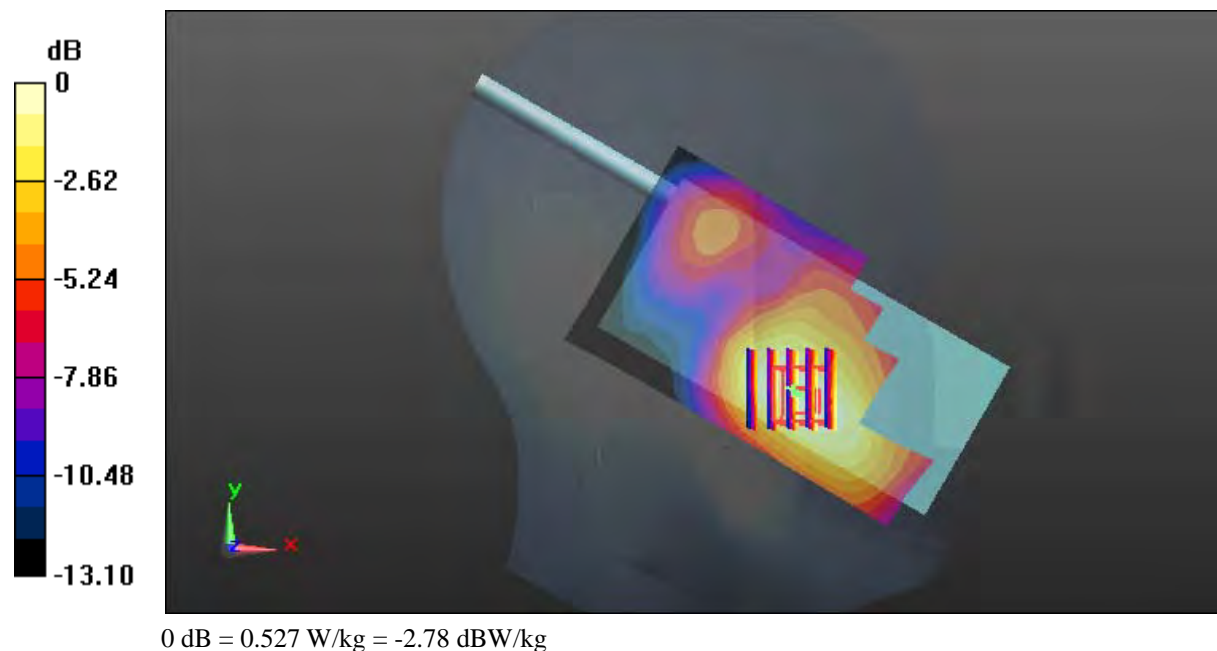

**Test Plot 238#: LTE Band 25\_Head Left Cheek\_Middle\_1RB****DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 1882.5 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 1882.5$  MHz;  $\sigma = 1.367$  S/m;  $\epsilon_r = 40.284$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.93, 4.93, 4.93); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x61x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.666 W/kg


**Zoom Scan (6x6x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.837 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 1.13 W/kg

**SAR(1 g) = 0.664 W/kg; SAR(10 g) = 0.397 W/kg**

Maximum value of SAR (measured) = 0.708 W/kg

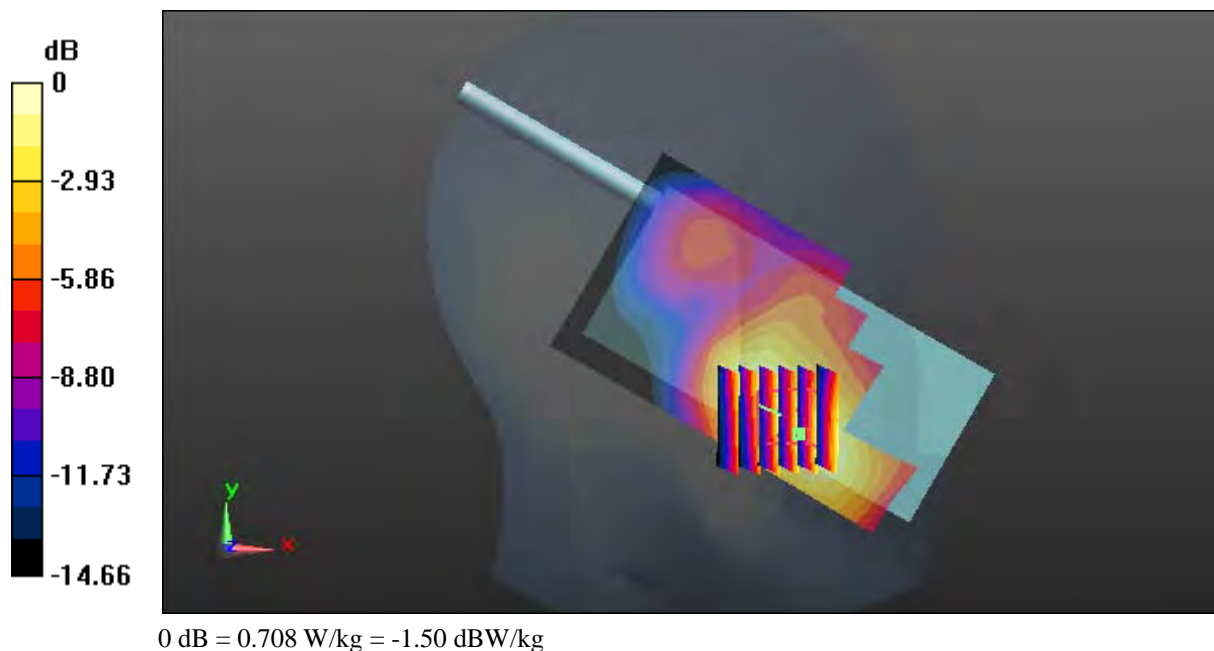

**Test Plot 239#: LTE Band 25\_Head Left Cheek\_High\_1RB****DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 1905 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 1905$  MHz;  $\sigma = 1.396$  S/m;  $\epsilon_r = 40.407$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.93, 4.93, 4.93); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x61x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.551 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.736 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.852 W/kg

**SAR(1 g) = 0.542 W/kg; SAR(10 g) = 0.336 W/kg**

Maximum value of SAR (measured) = 0.585 W/kg

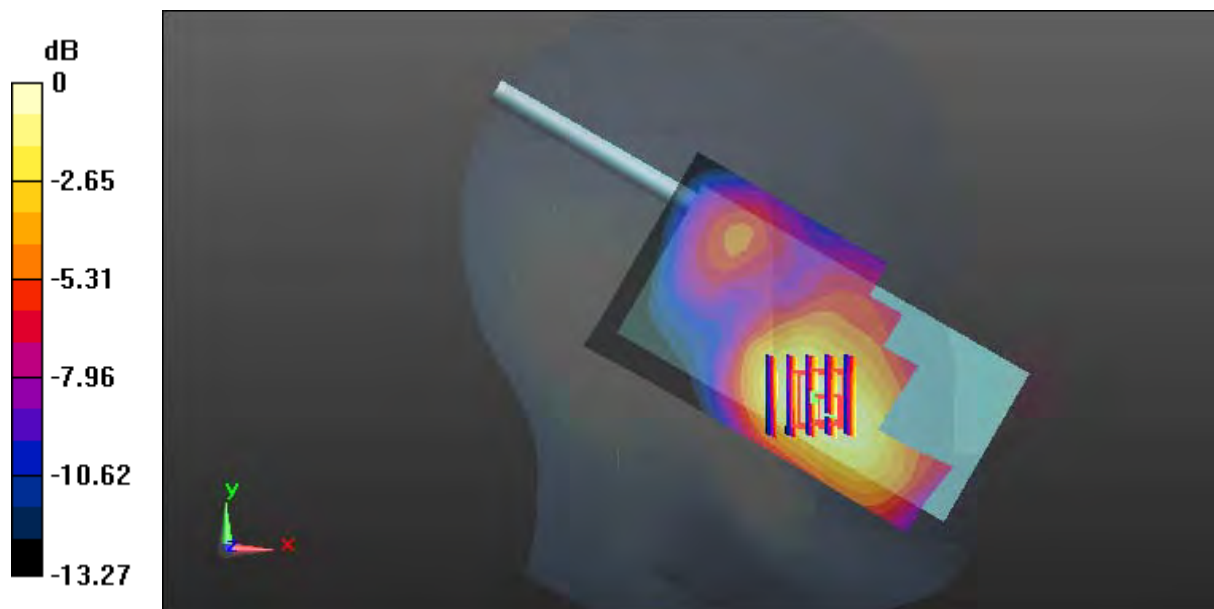

0 dB = 0.585 W/kg = -2.33 dBW/kg

**Test Plot 240#: LTE Band 25\_Head Left Cheek\_Middle\_50%RB**

**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 1882.5 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 1882.5 \text{ MHz}$ ;  $\sigma = 1.367 \text{ S/m}$ ;  $\epsilon_r = 40.284$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.93, 4.93, 4.93); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x61x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.510 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 6.077 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.873 W/kg

**SAR(1 g) = 0.513 W/kg; SAR(10 g) = 0.306 W/kg**

Maximum value of SAR (measured) = 0.549 W/kg

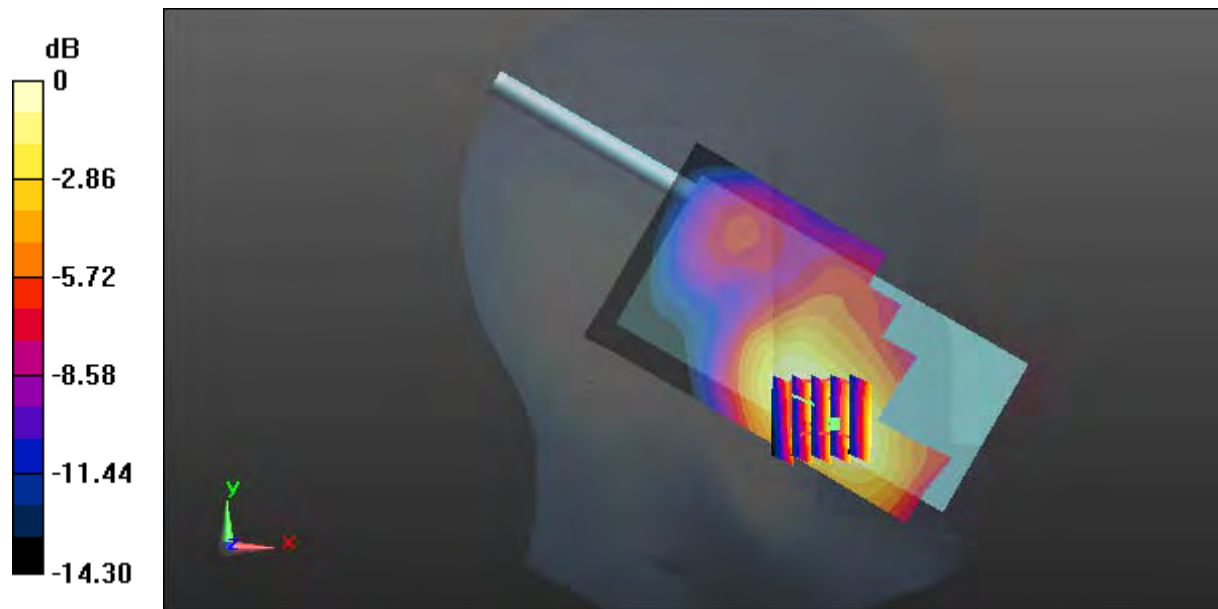

0 dB = 0.549 W/kg = -2.60 dBW/kg



**Test Plot 241#: LTE Band 25\_Head Left Tilt\_Middle\_1RB**

**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 1882.5 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 1882.5 \text{ MHz}$ ;  $\sigma = 1.367 \text{ S/m}$ ;  $\epsilon_r = 40.284$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.93, 4.93, 4.93); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x61x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.296 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 8.017 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.406 W/kg

**SAR(1 g) = 0.264 W/kg; SAR(10 g) = 0.161 W/kg**

Maximum value of SAR (measured) = 0.287 W/kg

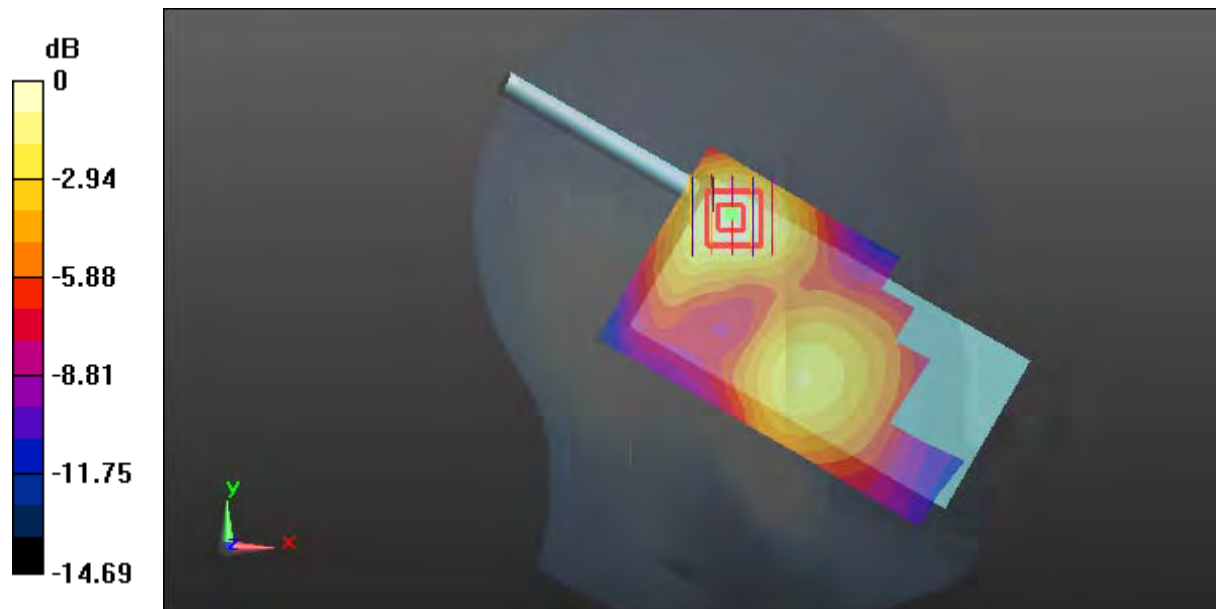

0 dB = 0.287 W/kg = -5.42 dBW/kg

**Test Plot 242#: LTE Band 25\_Head Left Tilt\_Middle\_50%RB****DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 1882.5 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 1882.5$  MHz;  $\sigma = 1.367$  S/m;  $\epsilon_r = 40.284$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.93, 4.93, 4.93); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x61x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.240 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.353 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.325 W/kg

**SAR(1 g) = 0.210 W/kg; SAR(10 g) = 0.128 W/kg**

Maximum value of SAR (measured) = 0.229 W/kg

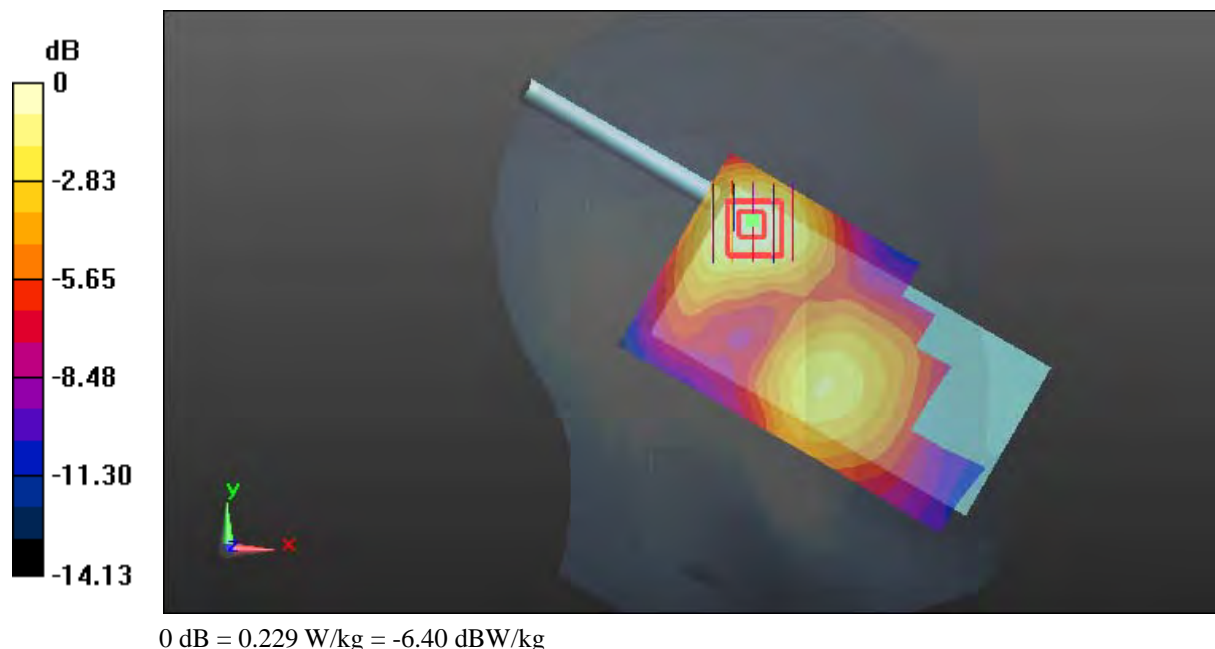

**Test Plot 243#: LTE Band 25\_Head Right Cheek\_Middle\_1RB**

**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 1882.5 MHz;Duty Cycle: 1:1  
 Medium parameters used:  $f = 1882.5 \text{ MHz}$ ;  $\sigma = 1.367 \text{ S/m}$ ;  $\epsilon_r = 40.284$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.93, 4.93, 4.93); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772;Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x61x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.288 W/kg


**Zoom Scan (5x6x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 6.371 V/m; Power Drift = -0.20 dB

Peak SAR (extrapolated) = 0.425 W/kg

**SAR(1 g) = 0.297 W/kg; SAR(10 g) = 0.203 W/kg**

Maximum value of SAR (measured) = 0.311 W/kg

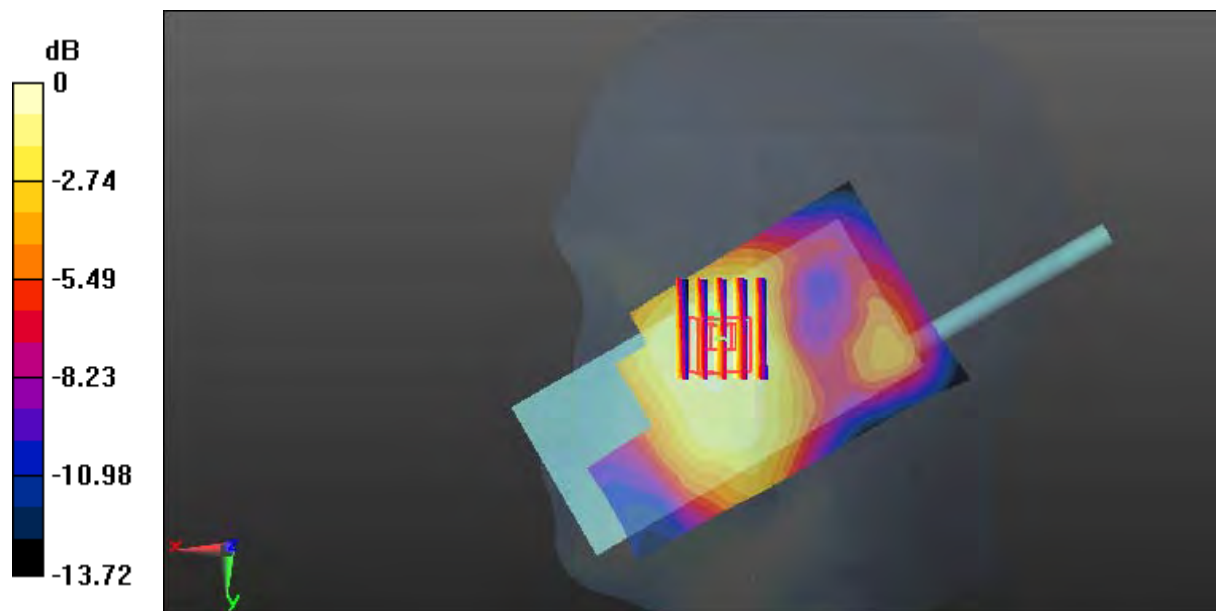

0 dB = 0.311 W/kg = -5.07 dBW/kg

**Test Plot 244#: LTE Band 25\_Head Right Cheek\_Middle\_50%RB**

**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 1882.5 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 1882.5 \text{ MHz}$ ;  $\sigma = 1.367 \text{ S/m}$ ;  $\epsilon_r = 40.284$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.93, 4.93, 4.93); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x61x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.238 W/kg


**Zoom Scan (5x6x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 5.627 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.316 W/kg

**SAR(1 g) = 0.222 W/kg; SAR(10 g) = 0.151 W/kg**

Maximum value of SAR (measured) = 0.233 W/kg

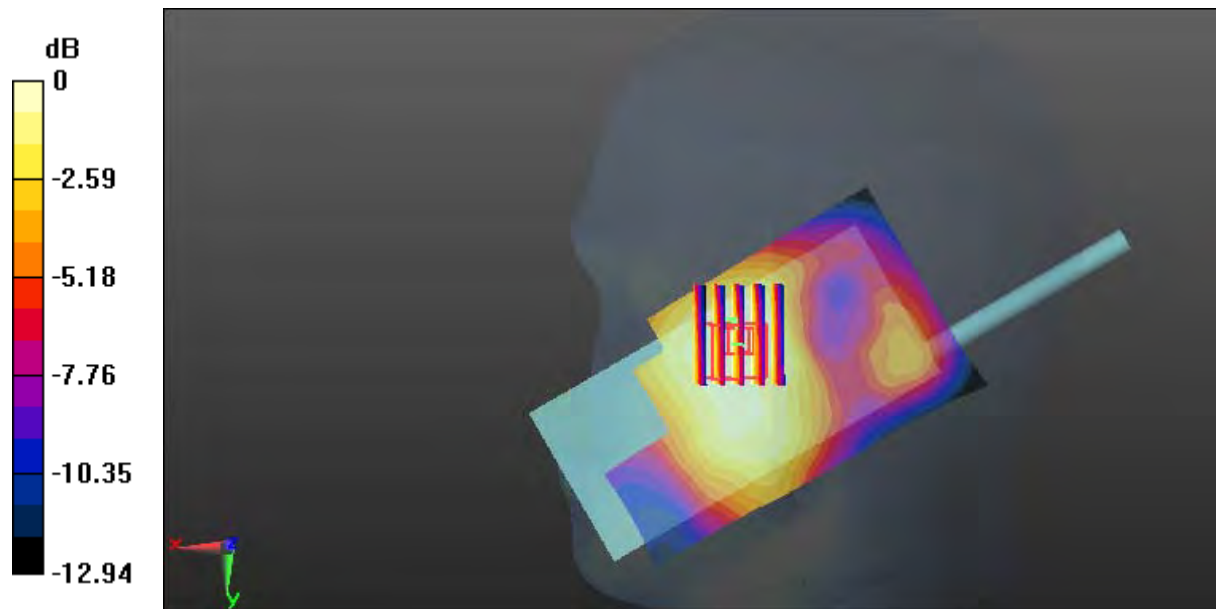

0 dB = 0.233 W/kg = -6.33 dBW/kg

**Test Plot 245#: LTE Band 25\_Head Right Tilt\_Middle\_1RB****DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 1882.5 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 1882.5$  MHz;  $\sigma = 1.367$  S/m;  $\epsilon_r = 40.284$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.93, 4.93, 4.93); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x61x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.188 W/kg


**Zoom Scan (6x6x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.056 V/m; Power Drift = -0.18 dB

Peak SAR (extrapolated) = 0.227 W/kg

**SAR(1 g) = 0.151 W/kg; SAR(10 g) = 0.096 W/kg**

Maximum value of SAR (measured) = 0.163 W/kg

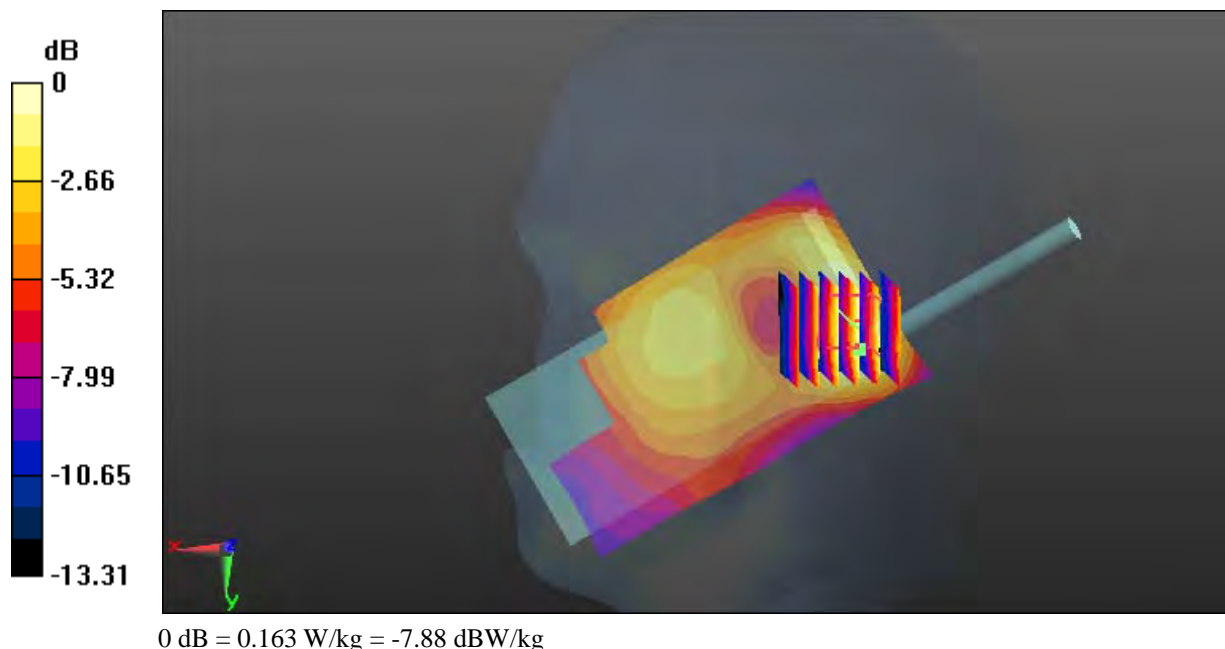

**Test Plot 246#: LTE Band 25\_Head Right Tilt\_Middle\_50%RB****DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 1882.5 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 1882.5$  MHz;  $\sigma = 1.367$  S/m;  $\epsilon_r = 40.284$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.93, 4.93, 4.93); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x61x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.150 W/kg


**Zoom Scan (6x6x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.326 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.176 W/kg

**SAR(1 g) = 0.118 W/kg; SAR(10 g) = 0.075 W/kg**

Maximum value of SAR (measured) = 0.126 W/kg

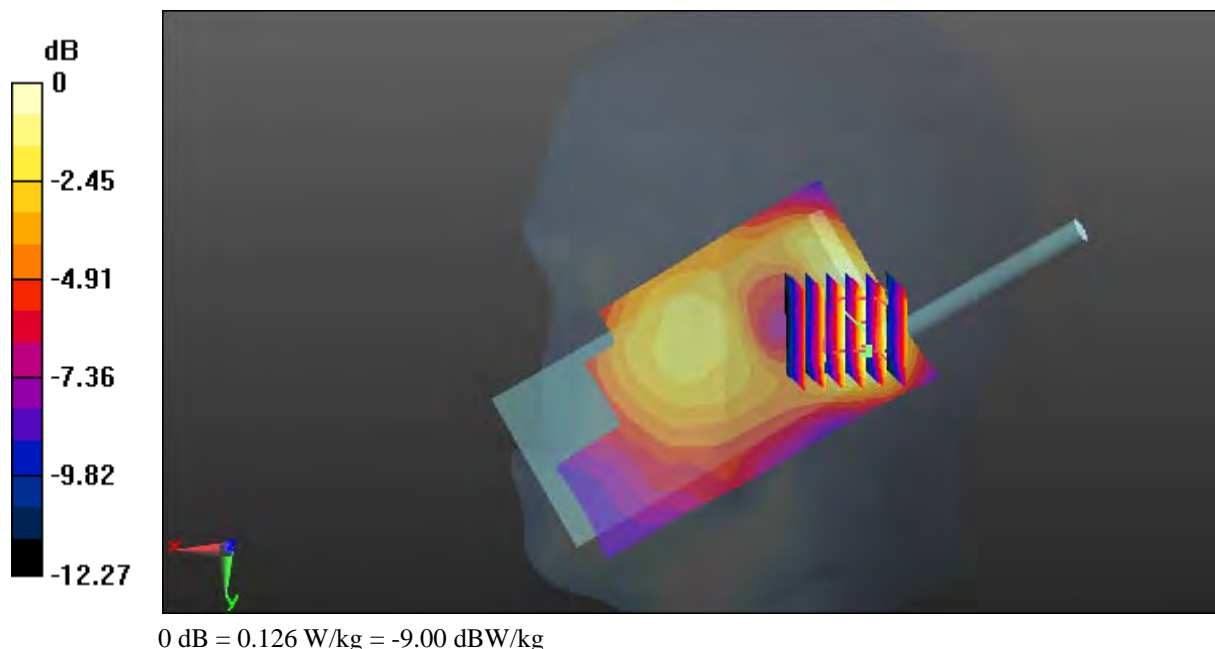

**Test Plot 247#: LTE Band 25\_Face Up\_Middle\_1RB**

**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 1882.5 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 1882.5 \text{ MHz}$ ;  $\sigma = 1.367 \text{ S/m}$ ;  $\epsilon_r = 40.284$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.93, 4.93, 4.93); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x61x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.179 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 8.827 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 0.249 W/kg

**SAR(1 g) = 0.165 W/kg; SAR(10 g) = 0.106 W/kg**

Maximum value of SAR (measured) = 0.178 W/kg

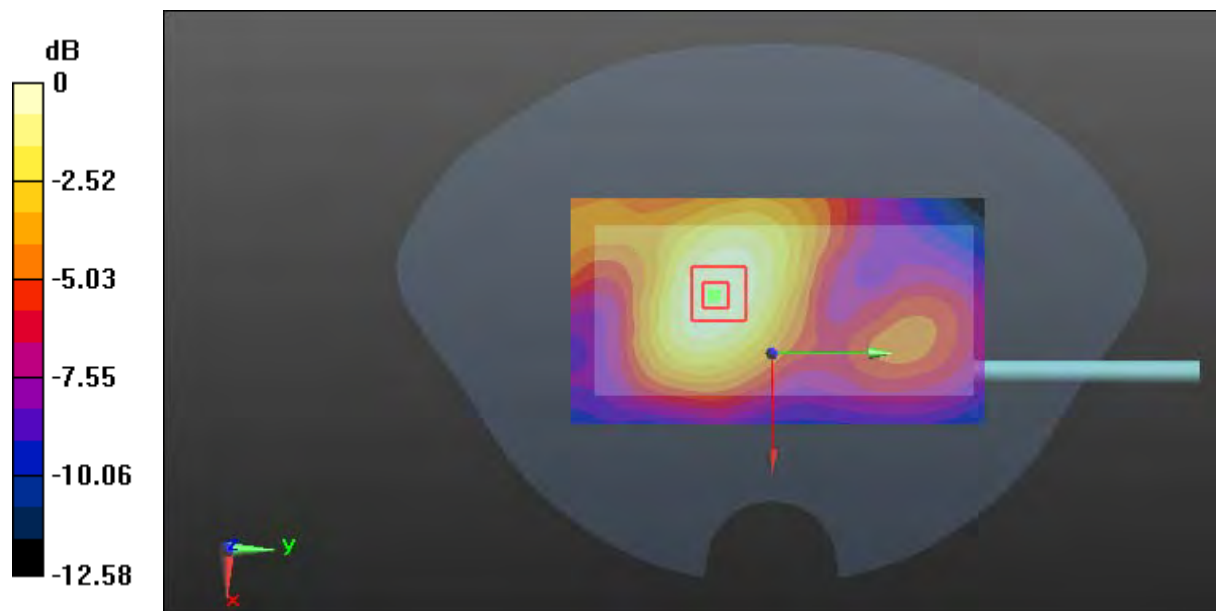

0 dB = 0.178 W/kg = -7.50 dBW/kg

**Test Plot 248#: LTE Band 25\_Face Up\_Middle\_50%RB**

**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 1882.5 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 1882.5 \text{ MHz}$ ;  $\sigma = 1.367 \text{ S/m}$ ;  $\epsilon_r = 40.284$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.93, 4.93, 4.93); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x61x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.140 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 8.060 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.194 W/kg

**SAR(1 g) = 0.128 W/kg; SAR(10 g) = 0.083 W/kg**

Maximum value of SAR (measured) = 0.138 W/kg

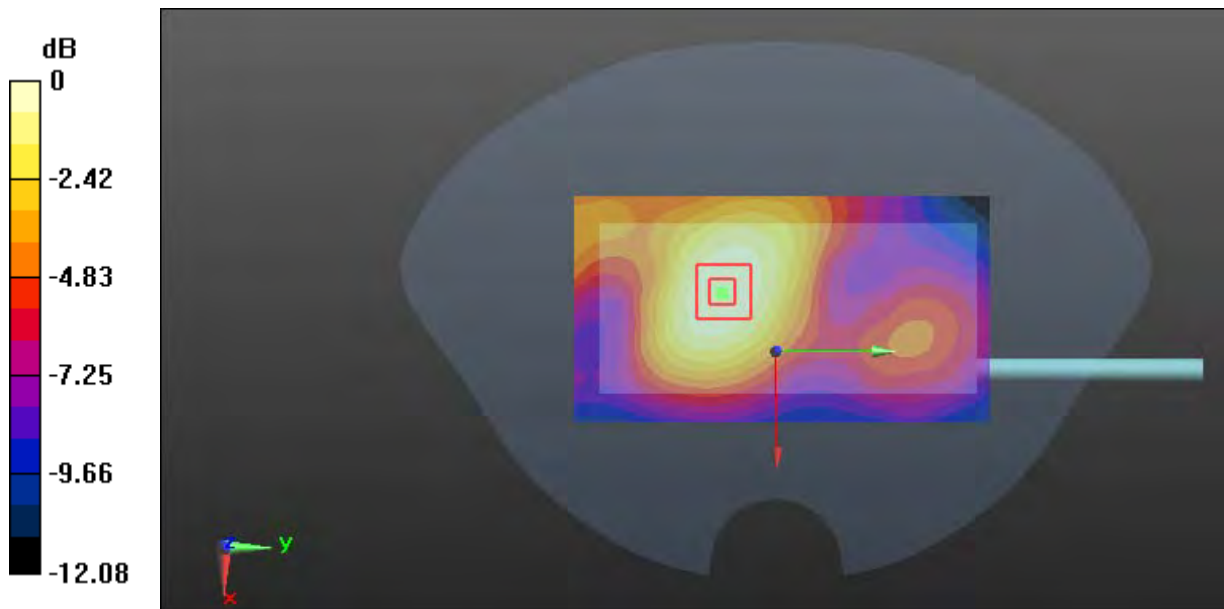

0 dB = 0.138 W/kg = -8.60 dBW/kg



**Test Plot 249#: LTE Band 25\_Body Front \_Middle\_1RB**

**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 1882.5 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 1882.5 \text{ MHz}$ ;  $\sigma = 1.491 \text{ S/m}$ ;  $\epsilon_r = 54.066$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.65, 4.65, 4.65); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x61x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) =  $0.409 \text{ W/kg}$


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value =  $13.70 \text{ V/m}$ ; Power Drift =  $0.01 \text{ dB}$

Peak SAR (extrapolated) =  $0.657 \text{ W/kg}$

**SAR(1 g) =  $0.382 \text{ W/kg}$ ; SAR(10 g) =  $0.226 \text{ W/kg}$**

Maximum value of SAR (measured) =  $0.417 \text{ W/kg}$

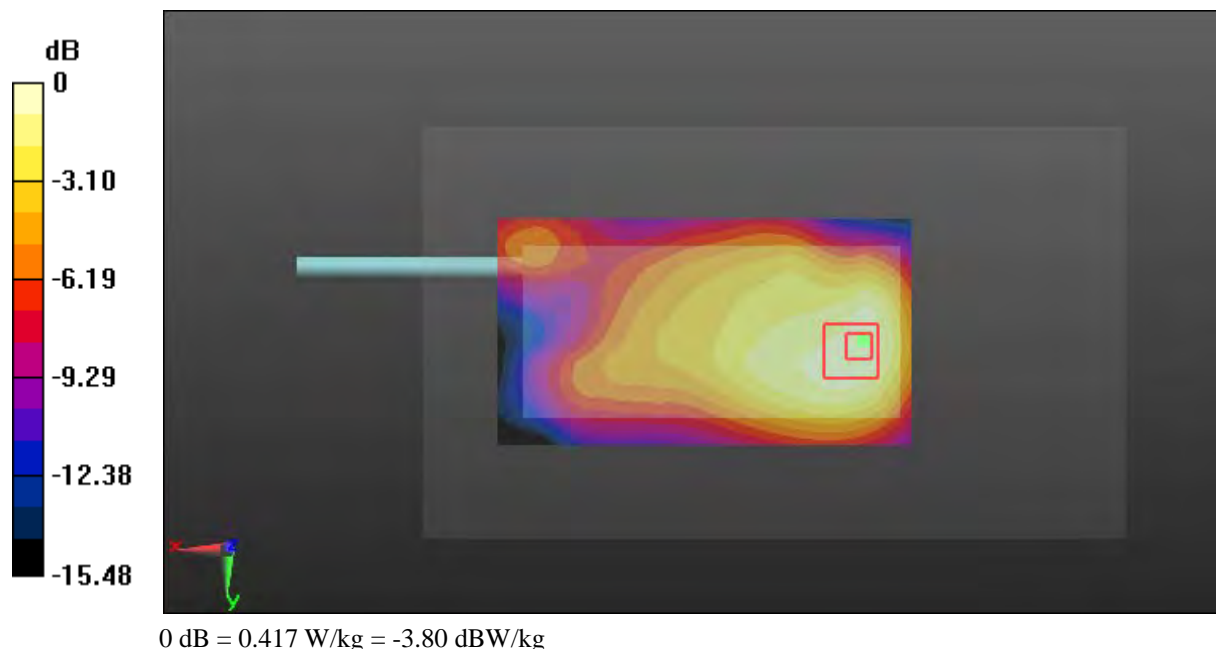

**Test Plot 250#: LTE Band 25\_Body Front \_Middle\_50%RB**

**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 1882.5 MHz;Duty Cycle: 1:1  
 Medium parameters used:  $f = 1882.5 \text{ MHz}$ ;  $\sigma = 1.491 \text{ S/m}$ ;  $\epsilon_r = 54.066$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.65, 4.65, 4.65); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772;Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x61x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.329 W/kg


**Zoom Scan (7x6x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 12.08 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.507 W/kg

**SAR(1 g) = 0.305 W/kg; SAR(10 g) = 0.180 W/kg**

Maximum value of SAR (measured) = 0.335 W/kg

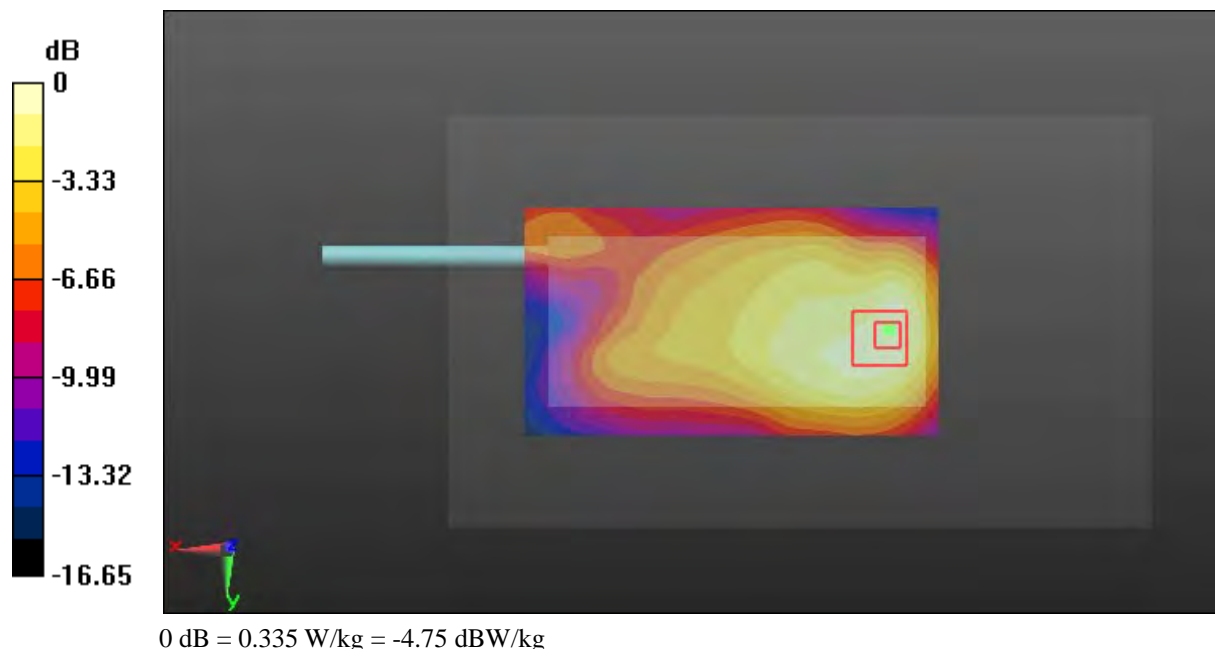

**Test Plot 251#: LTE Band 25\_Body Back\_Middle\_1RB**

**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 1882.5 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 1882.5 \text{ MHz}$ ;  $\sigma = 1.491 \text{ S/m}$ ;  $\epsilon_r = 54.066$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.65, 4.65, 4.65); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x61x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.189 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 5.820 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.279 W/kg

**SAR(1 g) = 0.174 W/kg; SAR(10 g) = 0.108 W/kg**

Maximum value of SAR (measured) = 0.187 W/kg

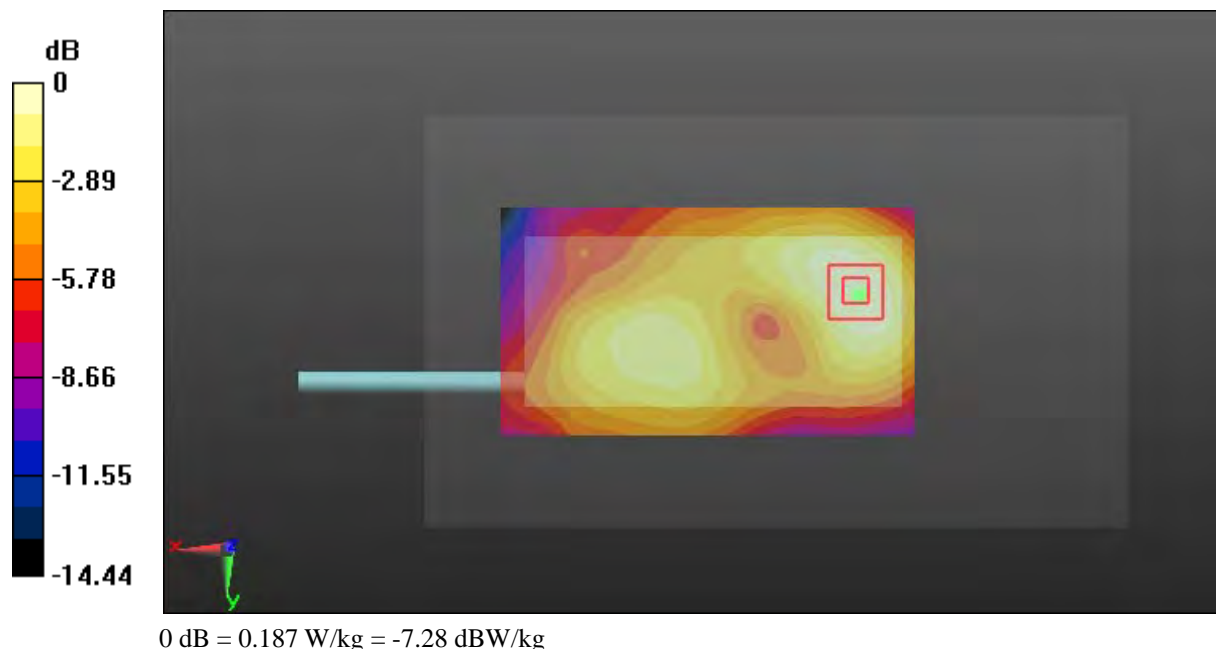

**Test Plot 252#: LTE Band 25\_Body Back\_Middle\_50%RB**

**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 1882.5 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 1882.5 \text{ MHz}$ ;  $\sigma = 1.491 \text{ S/m}$ ;  $\epsilon_r = 54.066$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.65, 4.65, 4.65); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x61x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.152 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 5.272 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.234 W/kg

**SAR(1 g) = 0.141 W/kg; SAR(10 g) = 0.087 W/kg**

Maximum value of SAR (measured) = 0.150 W/kg

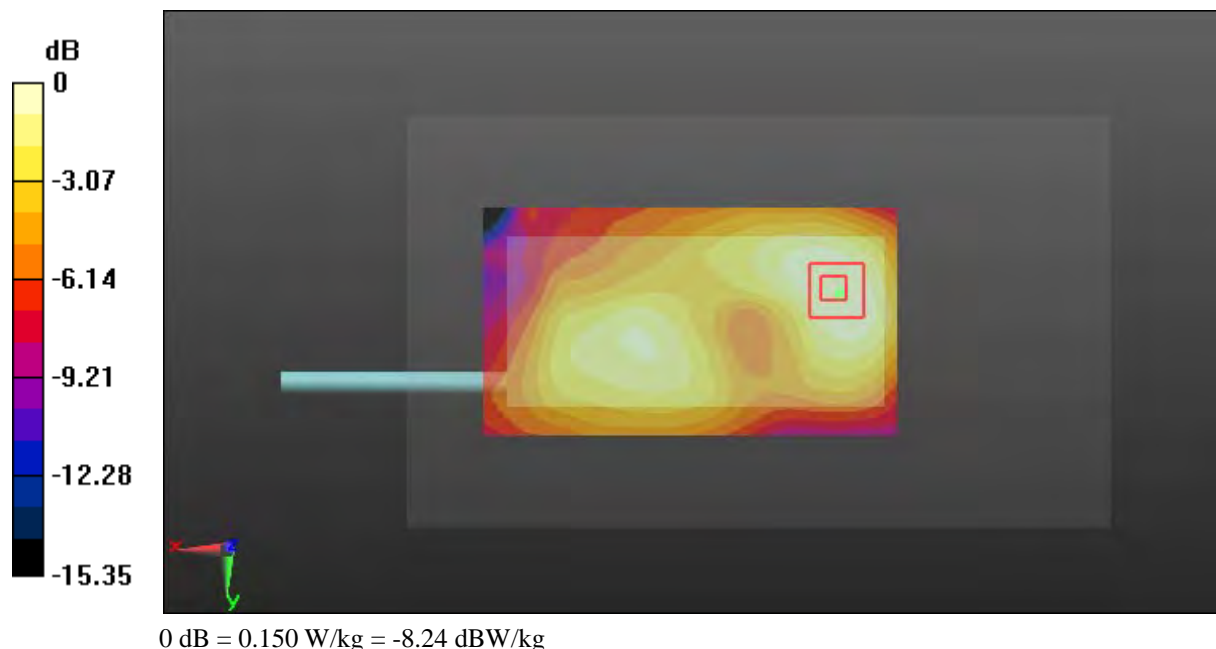

**Test Plot 253#: LTE Band 25\_Body Left\_Middle\_1RB**

**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 1882.5 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 1882.5 \text{ MHz}$ ;  $\sigma = 1.491 \text{ S/m}$ ;  $\epsilon_r = 54.066$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.65, 4.65, 4.65); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x51x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) =  $0.511 \text{ W/kg}$


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value =  $18.24 \text{ V/m}$ ; Power Drift =  $0.04 \text{ dB}$

Peak SAR (extrapolated) =  $0.756 \text{ W/kg}$

**SAR(1 g) =  $0.466 \text{ W/kg}$ ; SAR(10 g) =  $0.282 \text{ W/kg}$**

Maximum value of SAR (measured) =  $0.502 \text{ W/kg}$

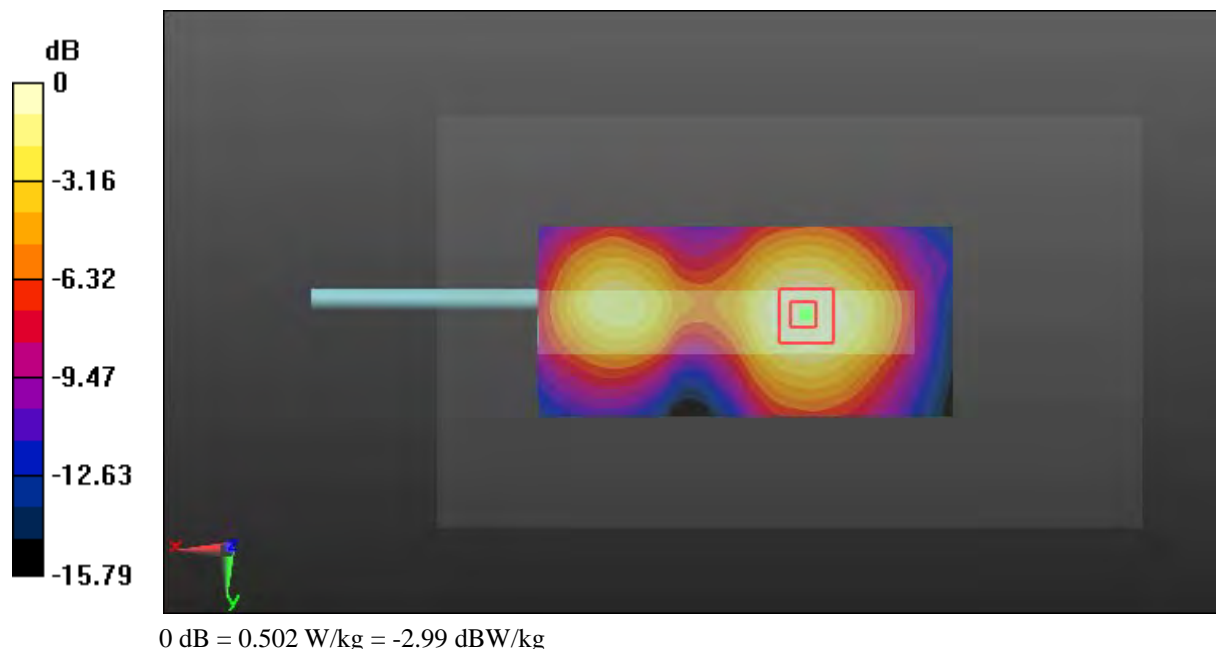

**Test Plot 254#: LTE Band 25\_Body Left\_Middle\_50%RB**

**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 1882.5 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 1882.5 \text{ MHz}$ ;  $\sigma = 1.491 \text{ S/m}$ ;  $\epsilon_r = 54.066$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.65, 4.65, 4.65); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x51x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) =  $0.406 \text{ W/kg}$


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value =  $16.29 \text{ V/m}$ ; Power Drift =  $-0.13 \text{ dB}$

Peak SAR (extrapolated) =  $0.602 \text{ W/kg}$

**SAR(1 g) =  $0.368 \text{ W/kg}$ ; SAR(10 g) =  $0.222 \text{ W/kg}$**

Maximum value of SAR (measured) =  $0.400 \text{ W/kg}$

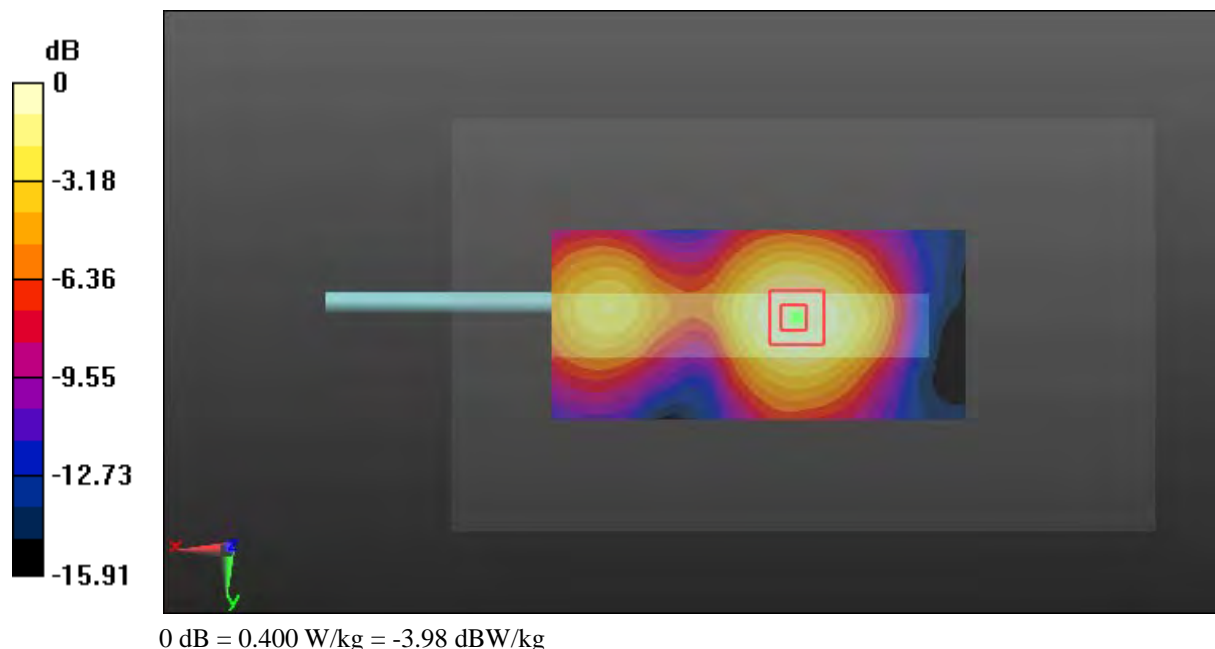

**Test Plot 255#: LTE Band 25\_Body Right\_Middle\_1RB**

**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 1882.5 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 1882.5 \text{ MHz}$ ;  $\sigma = 1.491 \text{ S/m}$ ;  $\epsilon_r = 54.066$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.65, 4.65, 4.65); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x51x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.192 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 8.370 V/m; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 0.271 W/kg

**SAR(1 g) = 0.169 W/kg; SAR(10 g) = 0.101 W/kg**

Maximum value of SAR (measured) = 0.186 W/kg

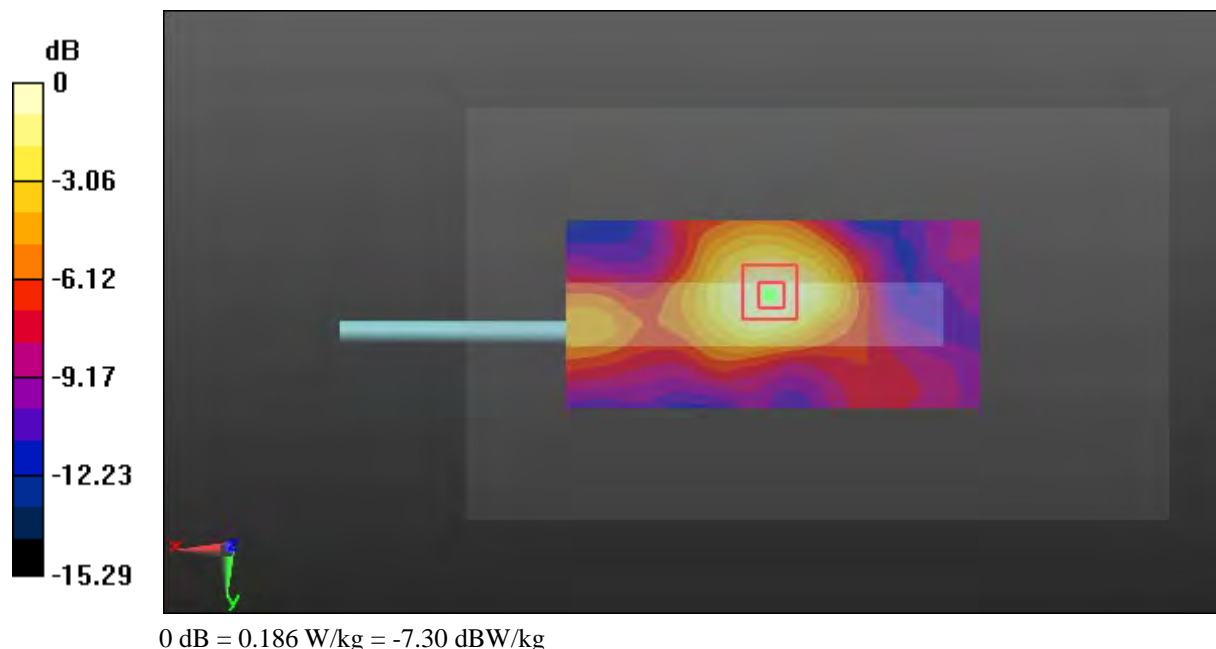

**Test Plot 256#: LTE Band 25\_Body Right\_Middle\_50%RB**

**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 1882.5 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 1882.5 \text{ MHz}$ ;  $\sigma = 1.491 \text{ S/m}$ ;  $\epsilon_r = 54.066$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.65, 4.65, 4.65); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x51x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) =  $0.155 \text{ W/kg}$


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value =  $7.448 \text{ V/m}$ ; Power Drift =  $-0.15 \text{ dB}$

Peak SAR (extrapolated) =  $0.237 \text{ W/kg}$

**SAR(1 g) =  $0.139 \text{ W/kg}$ ; SAR(10 g) =  $0.082 \text{ W/kg}$**

Maximum value of SAR (measured) =  $0.151 \text{ W/kg}$

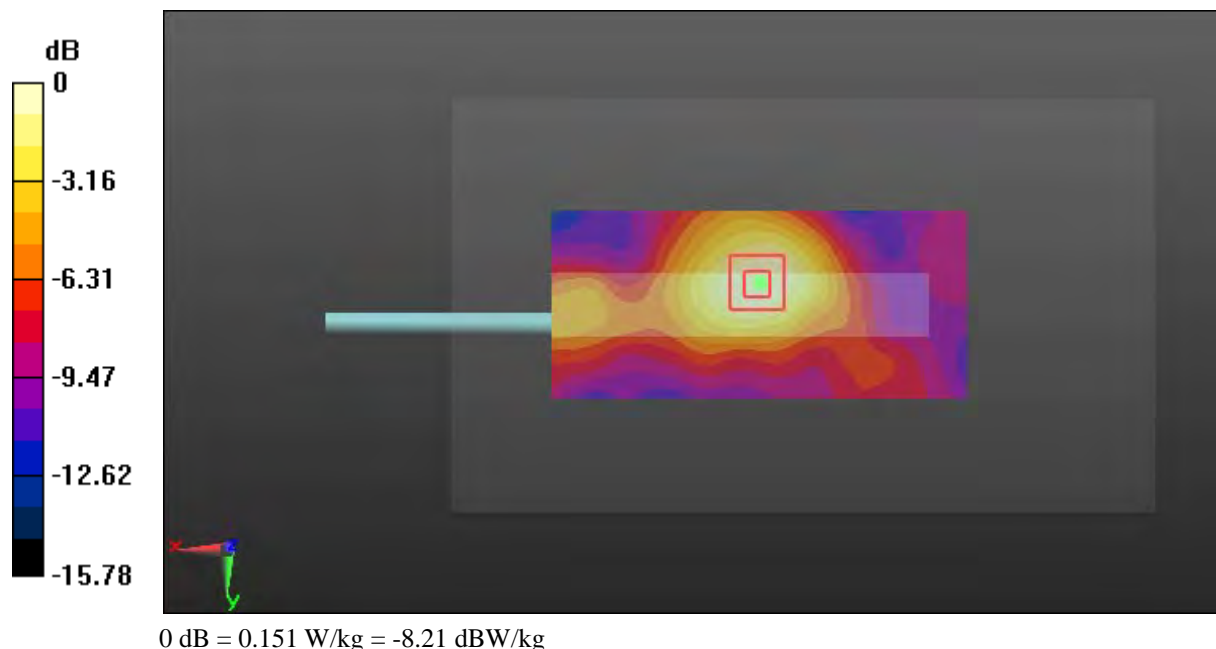



**Test Plot 257#: LTE Band 25\_Body Bottom\_Low\_1RB**

**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 1860 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 1860$  MHz;  $\sigma = 1.484$  S/m;  $\epsilon_r = 53.726$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
 Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.65, 4.65, 4.65); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (51x81x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.719 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 21.52 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 1.10 W/kg

**SAR(1 g) = 0.612 W/kg; SAR(10 g) = 0.334 W/kg**

Maximum value of SAR (measured) = 0.661 W/kg

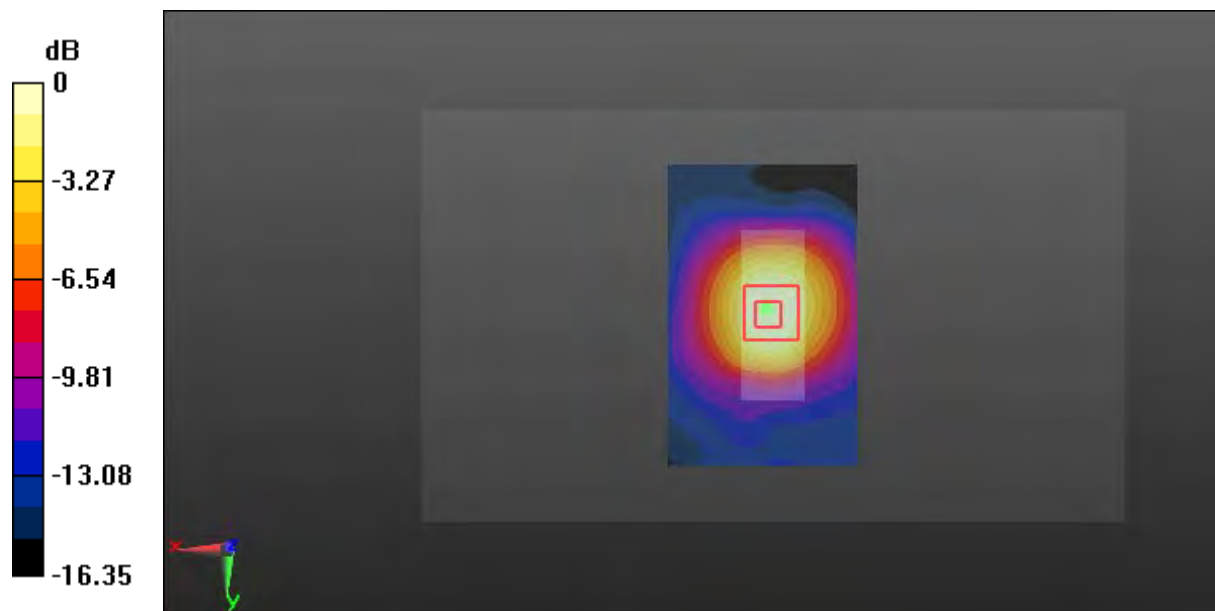

0 dB = 0.661 W/kg = -1.80 dBW/kg

**Test Plot 258#: LTE Band 25\_Body Bottom\_Middle\_1RB****DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 1882.5 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 1882.5$  MHz;  $\sigma = 1.491$  S/m;  $\epsilon_r = 54.066$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.65, 4.65, 4.65); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (51x81x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.707 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 20.81 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 1.14 W/kg

**SAR(1 g) = 0.624 W/kg; SAR(10 g) = 0.342 W/kg**

Maximum value of SAR (measured) = 0.660 W/kg

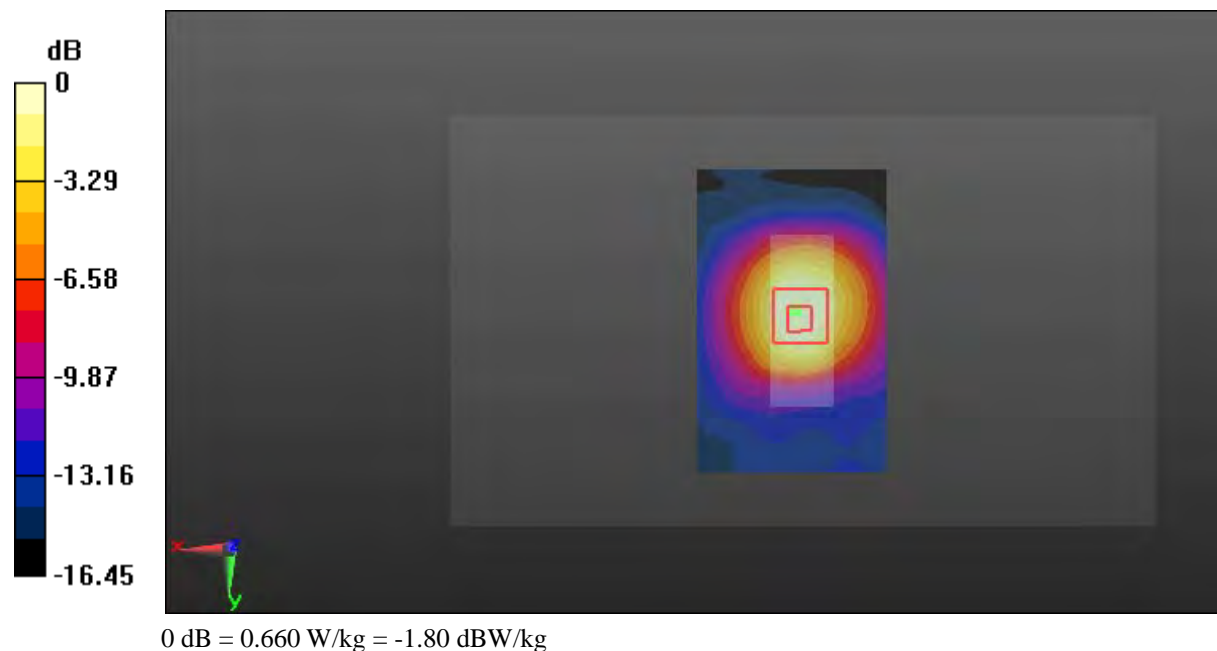

**Test Plot 259#: LTE Band 25\_Body Bottom\_High\_1RB****DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 1905 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 1905$  MHz;  $\sigma = 1.515$  S/m;  $\epsilon_r = 54.173$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.65, 4.65, 4.65); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (51x81x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.647 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 20.32 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.989 W/kg

**SAR(1 g) = 0.548 W/kg; SAR(10 g) = 0.301 W/kg**

Maximum value of SAR (measured) = 0.592 W/kg

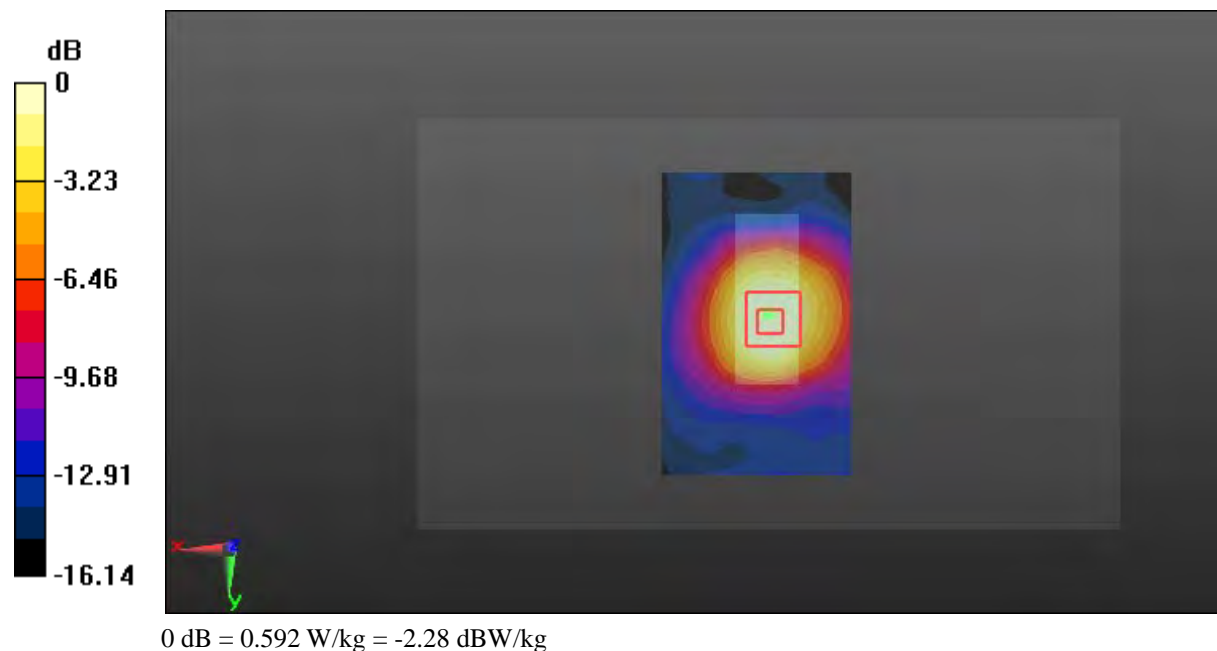

**Test Plot 260#: LTE Band 25\_Body Bottom\_Middle\_50%RB**

**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 1882.5 MHz;Duty Cycle: 1:1  
 Medium parameters used:  $f = 1882.5 \text{ MHz}$ ;  $\sigma = 1.491 \text{ S/m}$ ;  $\epsilon_r = 54.066$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.65, 4.65, 4.65); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772;Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (51x81x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) =  $0.600 \text{ W/kg}$


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value =  $19.53 \text{ V/m}$ ; Power Drift =  $-0.05 \text{ dB}$

Peak SAR (extrapolated) =  $0.933 \text{ W/kg}$

**SAR(1 g) =  $0.517 \text{ W/kg}$ ; SAR(10 g) =  $0.283 \text{ W/kg}$**

Maximum value of SAR (measured) =  $0.558 \text{ W/kg}$

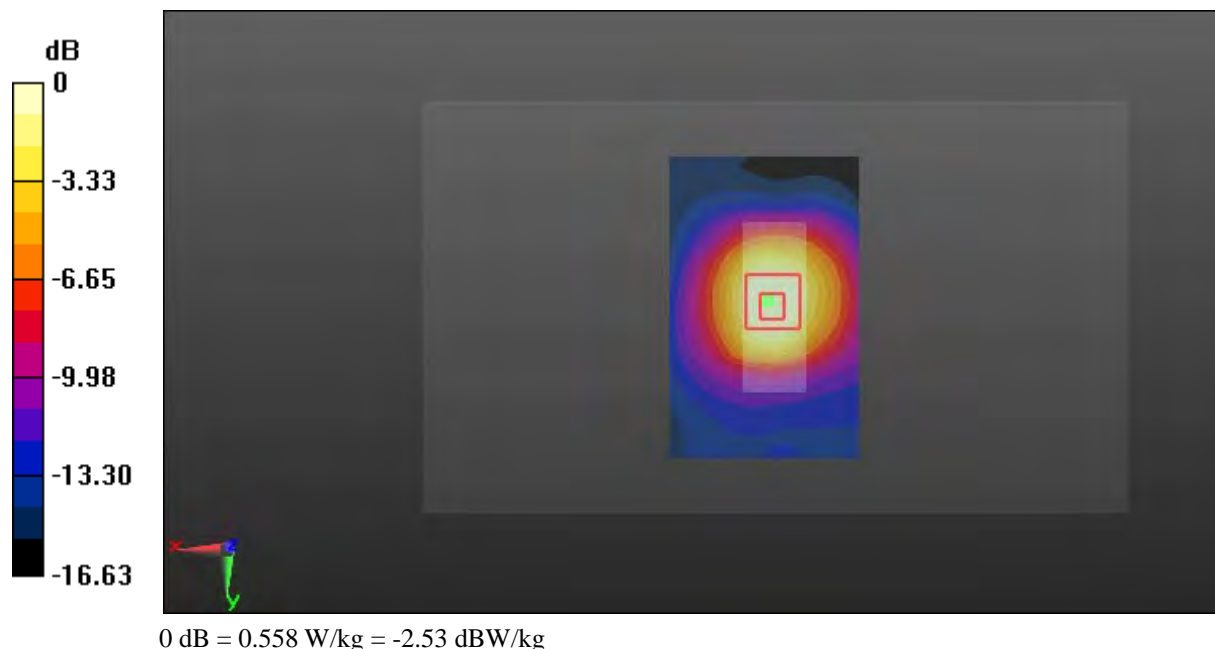

**Test Plot 261#: LTE Band 41\_Head Left Cheek\_Middle\_1RB****DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic TDD-LTE; Frequency: 2593 MHz; Duty Cycle: 1:1.58  
Medium parameters used:  $f = 2593$  MHz;  $\sigma = 1.974$  S/m;  $\epsilon_r = 37.934$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.09, 4.09, 4.09); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (141x81x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.201 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.309 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.359 W/kg

**SAR(1 g) = 0.189 W/kg; SAR(10 g) = 0.109 W/kg**

Maximum value of SAR (measured) = 0.197 W/kg

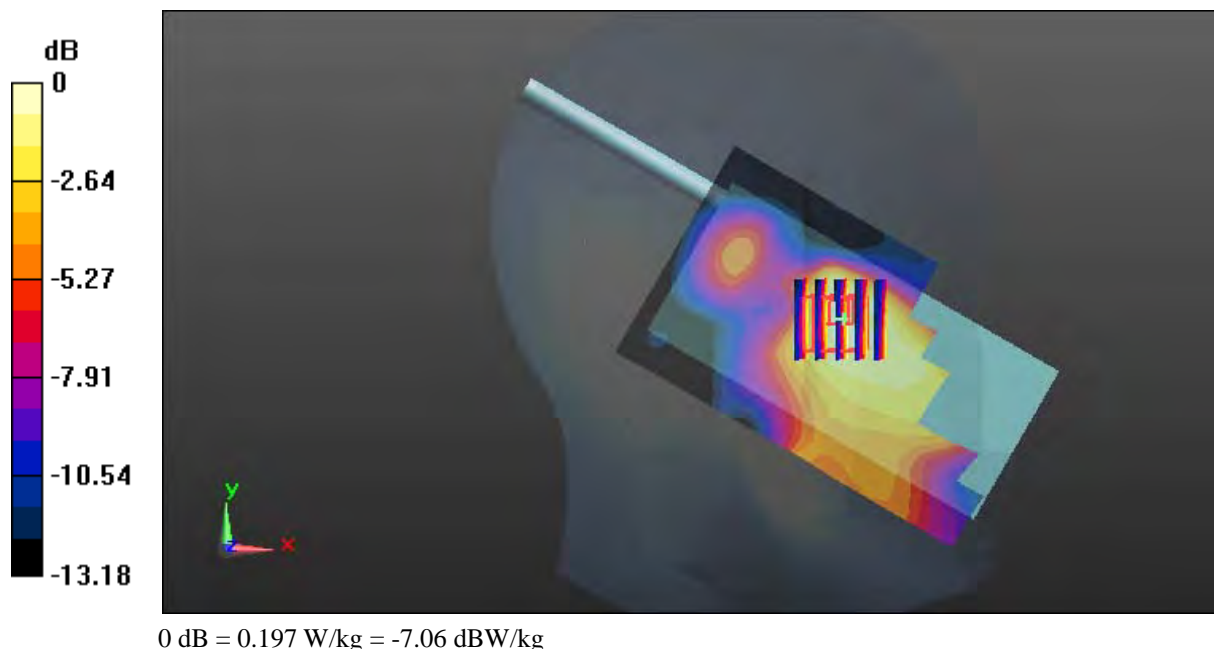

**Test Plot 262#: LTE Band 41\_Head Left Cheek\_Middle\_50%RB****DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic TDD-LTE; Frequency: 2593 MHz; Duty Cycle: 1:1.58  
Medium parameters used:  $f = 2593$  MHz;  $\sigma = 1.974$  S/m;  $\epsilon_r = 37.934$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.09, 4.09, 4.09); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (141x81x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.170 W/kg


**Zoom Scan (6x6x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.913 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.286 W/kg

**SAR(1 g) = 0.150 W/kg; SAR(10 g) = 0.087 W/kg**

Maximum value of SAR (measured) = 0.162 W/kg

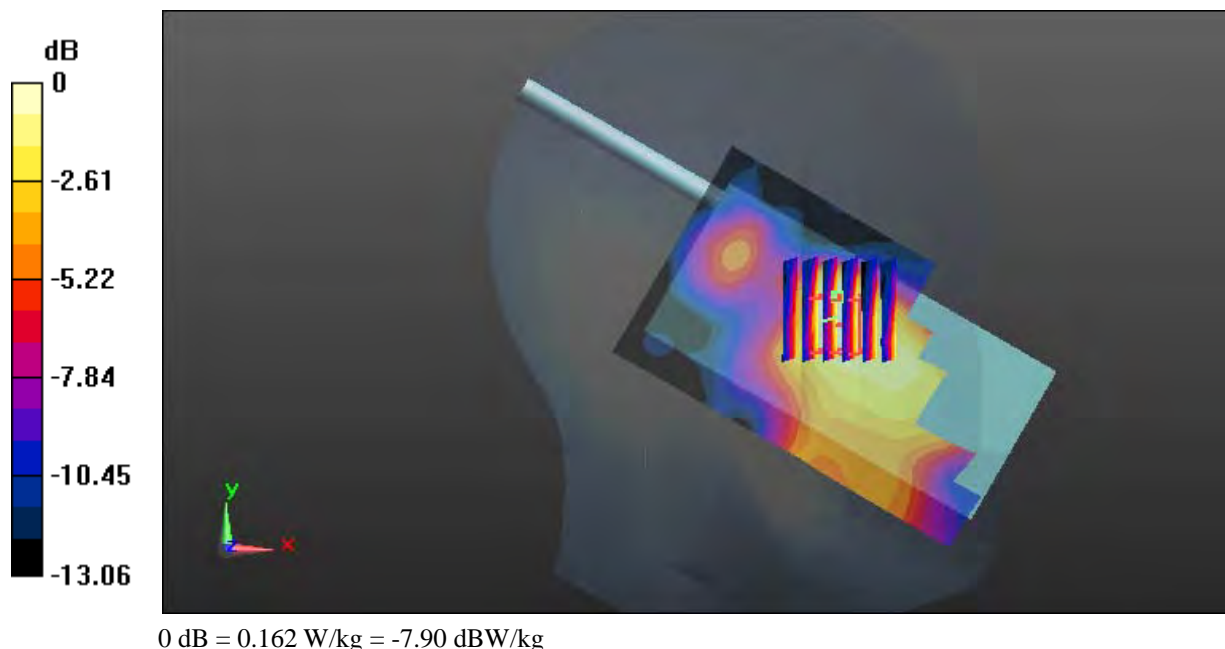

**Test Plot 263#: LTE Band 41\_Head Left Tilt\_Middle\_1RB****DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic TDD-LTE; Frequency: 2593 MHz; Duty Cycle: 1:1.58  
Medium parameters used:  $f = 2593$  MHz;  $\sigma = 1.974$  S/m;  $\epsilon_r = 37.934$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.09, 4.09, 4.09); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (151x81x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.136 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.736 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.243 W/kg

**SAR(1 g) = 0.115 W/kg; SAR(10 g) = 0.058 W/kg**

Maximum value of SAR (measured) = 0.127 W/kg

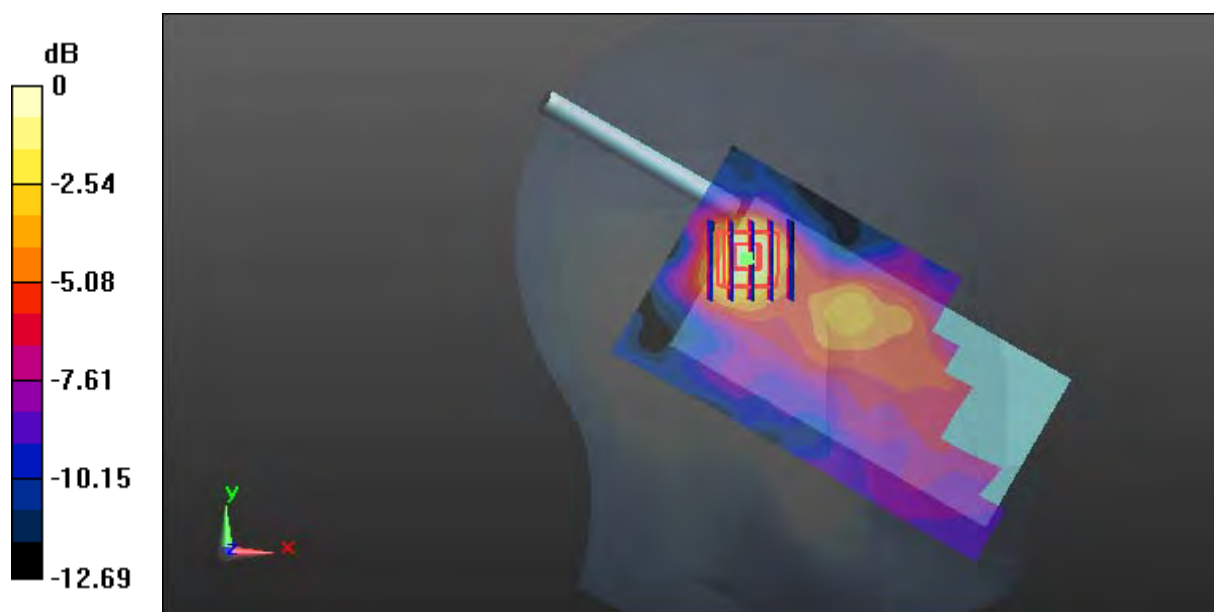

**Test Plot 264#: LTE Band 41\_Head Left Tilt\_Middle\_50%RB****DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic TDD-LTE; Frequency: 2593 MHz; Duty Cycle: 1:1.58  
Medium parameters used:  $f = 2593$  MHz;  $\sigma = 1.974$  S/m;  $\epsilon_r = 37.934$ ;  $\rho = 1000$  kg/m<sup>3</sup>;  
Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.09, 4.09, 4.09); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (151x81x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.112 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.283 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 0.156 W/kg

**SAR(1 g) = 0.089 W/kg; SAR(10 g) = 0.048 W/kg**

Maximum value of SAR (measured) = 0.102 W/kg

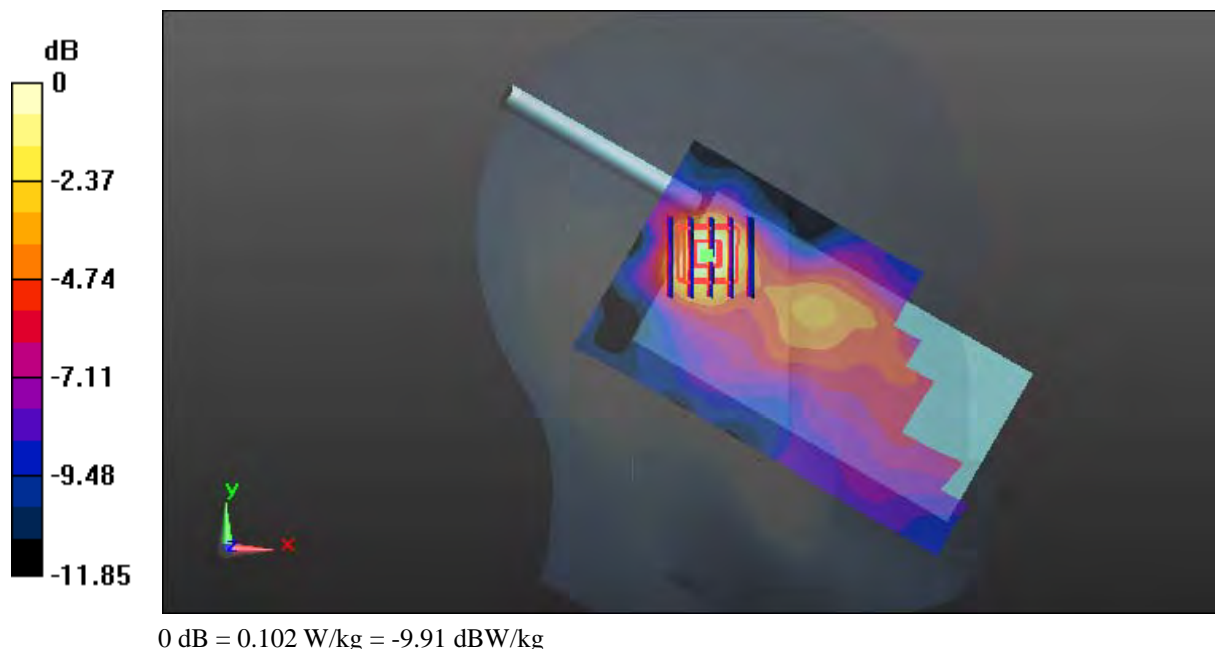



**Test Plot 265#: LTE Band 41\_Head Right Cheek\_Low(2506MHz)\_1RB****DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic TDD-LTE; Frequency: 2506 MHz; Duty Cycle: 1:1.58  
Medium parameters used:  $f = 2506$  MHz;  $\sigma = 1.801$  S/m;  $\epsilon_r = 40.224$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.41, 4.41, 4.41); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (141x81x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.265 W/kg


**Zoom Scan (6x6x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.650 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.366 W/kg

**SAR(1 g) = 0.220 W/kg; SAR(10 g) = 0.134 W/kg**

Maximum value of SAR (measured) = 0.237 W/kg

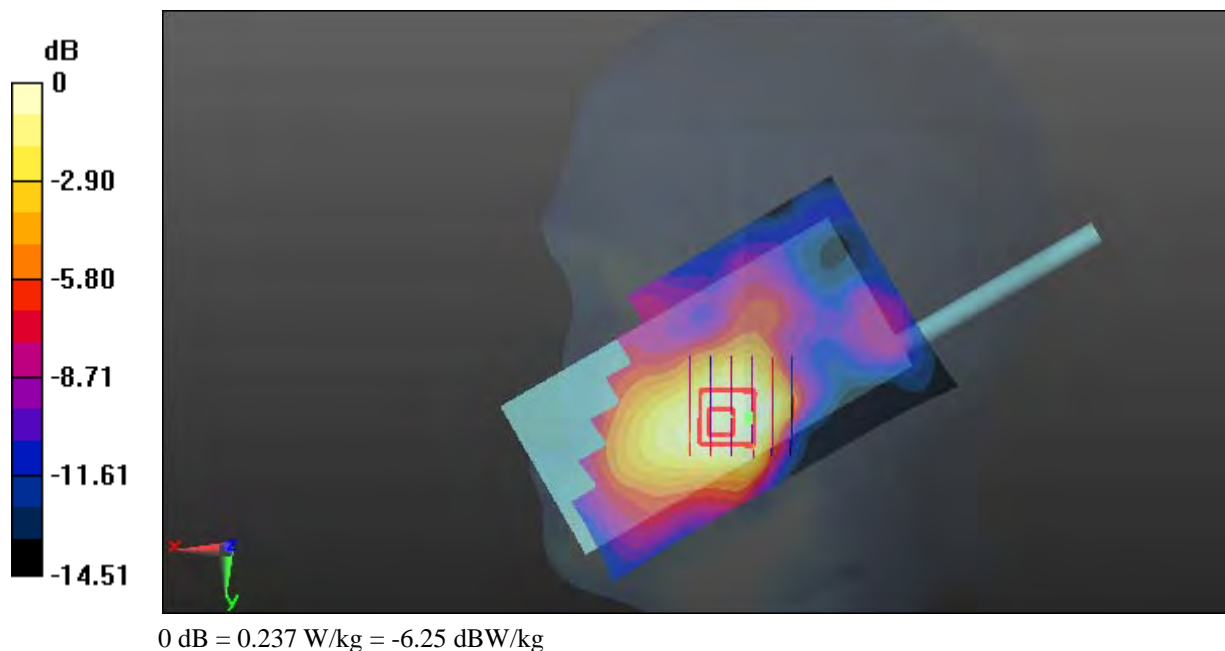

**Test Plot 266#: LTE Band 41\_Head Right Cheek\_Low(2545MHz)\_1RB**

**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic TDD-LTE; Frequency: 2545 MHz; Duty Cycle: 1:1.58  
 Medium parameters used:  $f = 2545 \text{ MHz}$ ;  $\sigma = 1.916 \text{ S/m}$ ;  $\epsilon_r = 39.002$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.41, 4.41, 4.41); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (141x81x1):** Interpolated grid:  $dx=1.200 \text{ mm}$ ,  $dy=1.200 \text{ mm}$

Maximum value of SAR (interpolated) = 0.260 W/kg


**Zoom Scan (6x6x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 2.668 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.359 W/kg

**SAR(1 g) = 0.212 W/kg; SAR(10 g) = 0.131 W/kg**

Maximum value of SAR (measured) = 0.237 W/kg

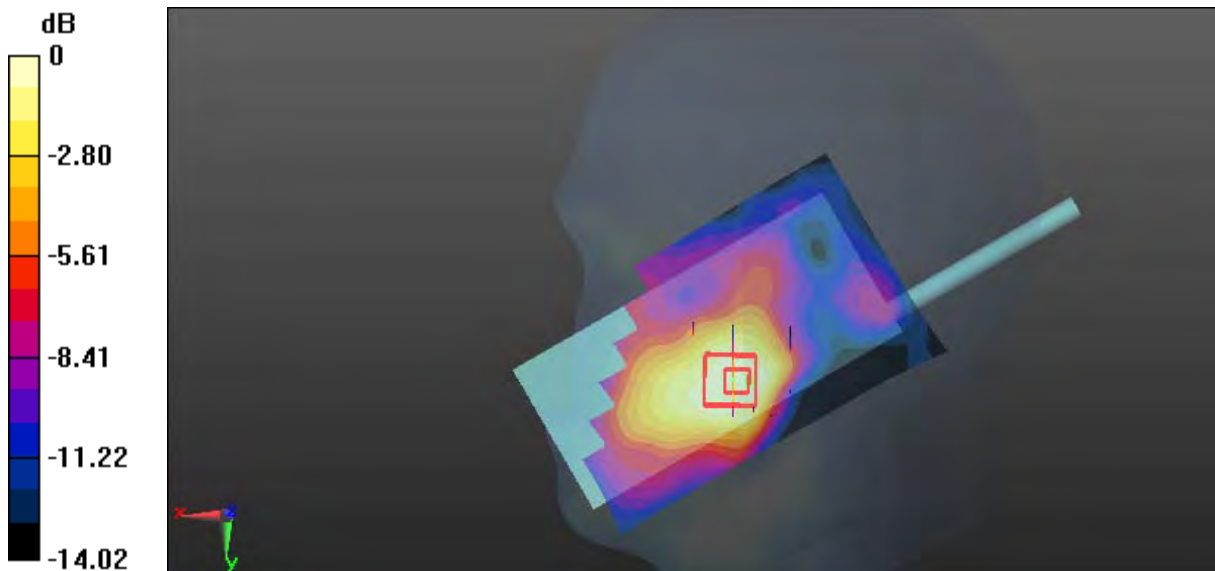

0 dB = 0.237 W/kg = -6.25 dBW/kg

**Test Plot 267#: LTE Band 41\_Head Right Cheek\_Middle\_1RB****DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic TDD-LTE; Frequency: 2593 MHz; Duty Cycle: 1:1.58  
Medium parameters used:  $f = 2593$  MHz;  $\sigma = 1.974$  S/m;  $\epsilon_r = 37.934$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.09, 4.09, 4.09); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (141x81x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.304 W/kg


**Zoom Scan (6x6x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.837 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.438 W/kg

**SAR(1 g) = 0.259 W/kg; SAR(10 g) = 0.157 W/kg**

Maximum value of SAR (measured) = 0.278 W/kg

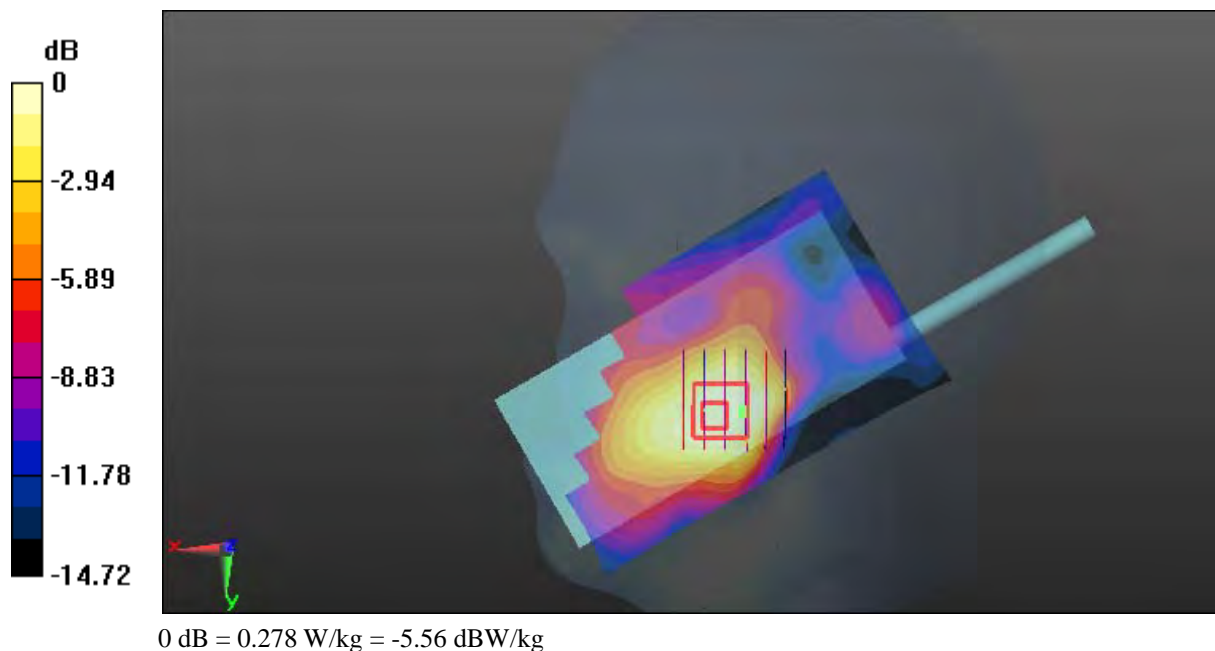

**Test Plot 268#: LTE Band 41\_Head Right Cheek\_High(2635MHz)\_1RB****DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic TDD-LTE; Frequency: 2635 MHz; Duty Cycle: 1:1.58  
Medium parameters used:  $f = 2635$  MHz;  $\sigma = 2.044$  S/m;  $\epsilon_r = 37.952$ ;  $\rho = 1000$  kg/m<sup>3</sup>;  
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.09, 4.09, 4.09); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (141x81x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.284 W/kg


**Zoom Scan (6x6x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.448 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.412 W/kg

**SAR(1 g) = 0.247 W/kg; SAR(10 g) = 0.151 W/kg**

Maximum value of SAR (measured) = 0.273 W/kg

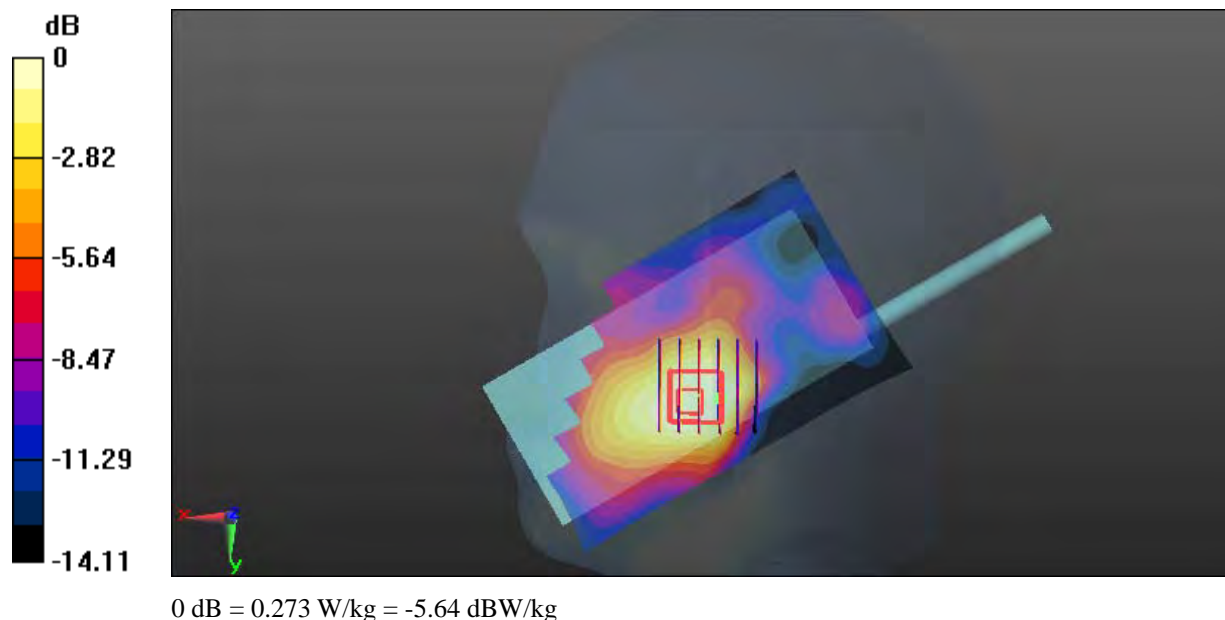

**Test Plot 269#: LTE Band 41\_Head Right Cheek\_High(2680MHz)\_1RB****DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic TDD-LTE; Frequency: 2680 MHz; Duty Cycle: 1:1.58  
Medium parameters used:  $f = 2680$  MHz;  $\sigma = 2.116$  S/m;  $\epsilon_r = 37.731$ ;  $\rho = 1000$  kg/m<sup>3</sup>;  
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.09, 4.09, 4.09); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (141x81x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.291 W/kg


**Zoom Scan (6x6x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.496 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.416 W/kg

**SAR(1 g) = 0.253 W/kg; SAR(10 g) = 0.155 W/kg**

Maximum value of SAR (measured) = 0.274 W/kg

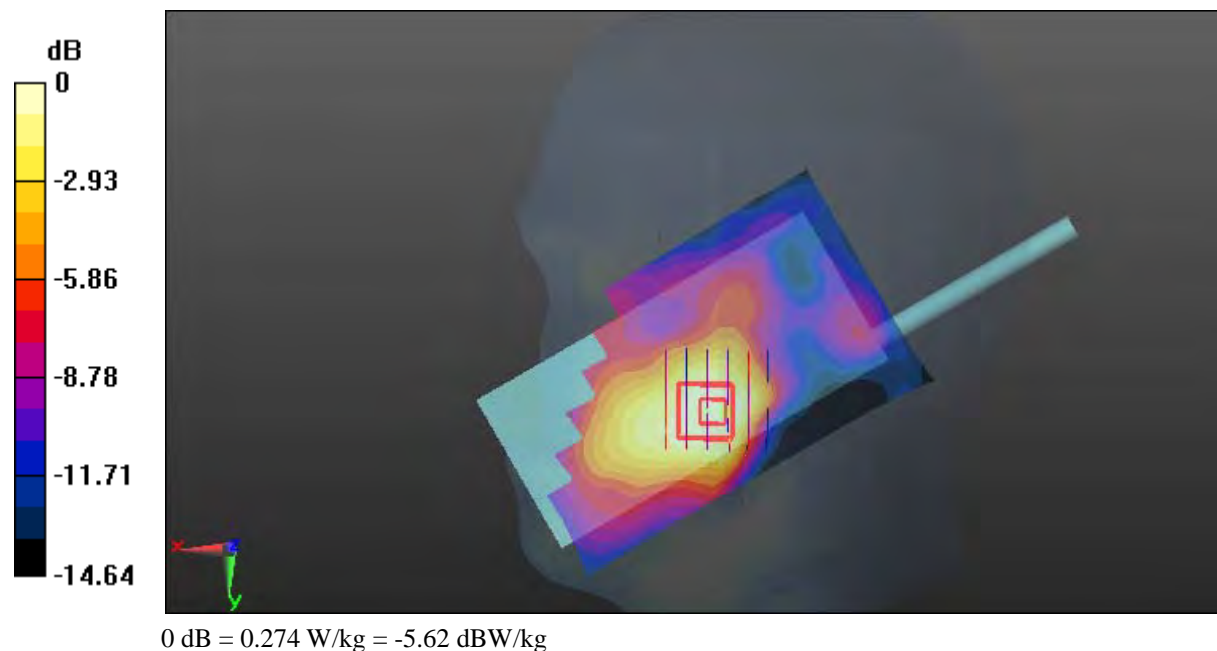

**Test Plot 270#: LTE Band 41\_Head Right Cheek\_Middle\_50%RB****DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic TDD-LTE; Frequency: 2593 MHz; Duty Cycle: 1:1.58  
Medium parameters used:  $f = 2593$  MHz;  $\sigma = 1.974$  S/m;  $\epsilon_r = 37.934$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.09, 4.09, 4.09); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (141x81x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.232 W/kg


**Zoom Scan (6x6x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.697 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 0.354 W/kg

**SAR(1 g) = 0.207 W/kg; SAR(10 g) = 0.127 W/kg**

Maximum value of SAR (measured) = 0.220 W/kg

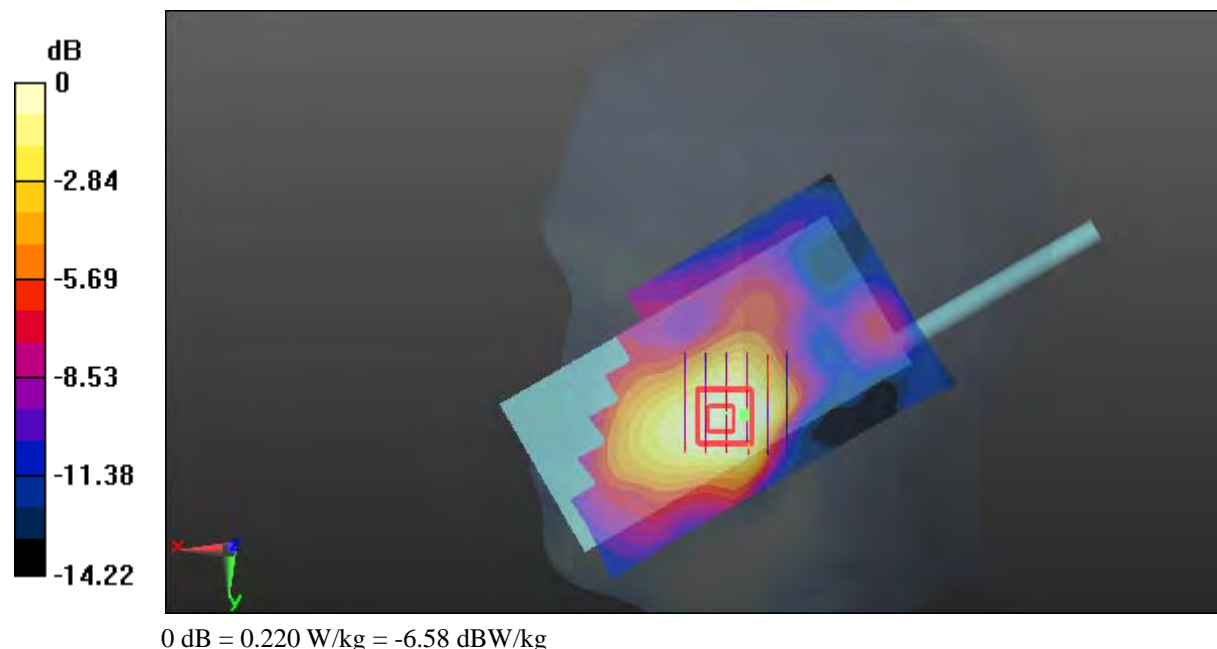

**Test Plot 271#: LTE Band 41\_Head Right Tilt\_Middle\_1RB****DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic TDD-LTE; Frequency: 2593 MHz; Duty Cycle: 1:1.58  
Medium parameters used:  $f = 2593$  MHz;  $\sigma = 1.974$  S/m;  $\epsilon_r = 37.934$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.09, 4.09, 4.09); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (141x81x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.0975 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.626 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 0.133 W/kg

**SAR(1 g) = 0.077 W/kg; SAR(10 g) = 0.044 W/kg**

Maximum value of SAR (measured) = 0.0844 W/kg

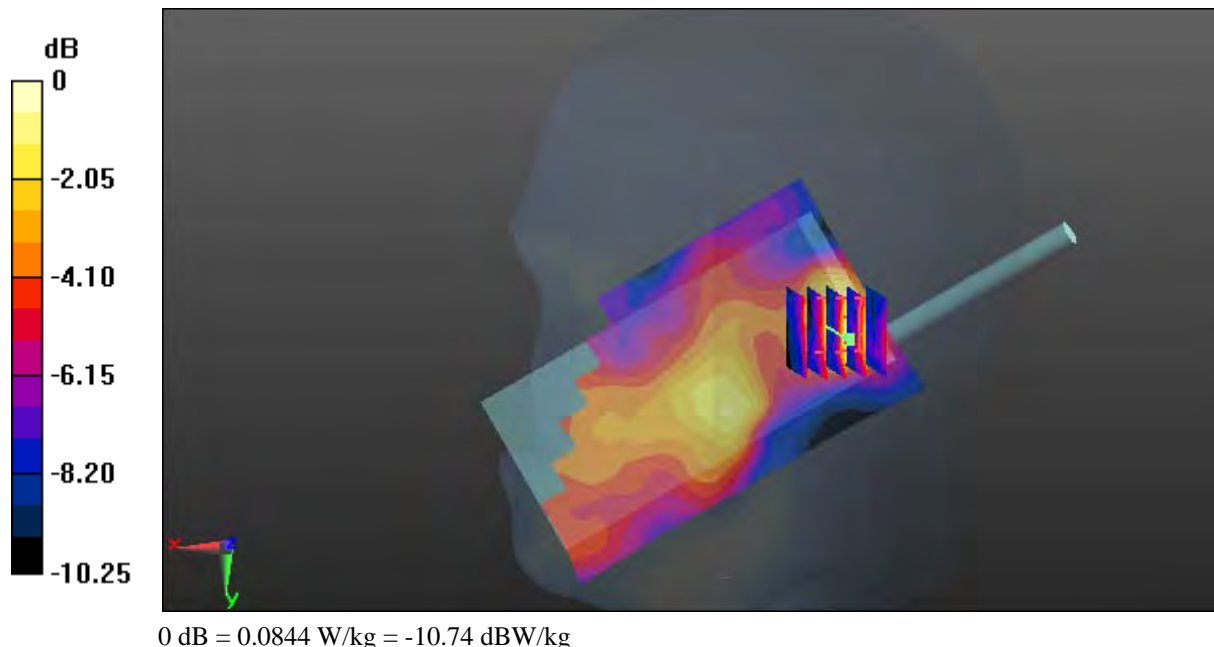

**Test Plot 272#: LTE Band 41\_Head Right Tilt\_Middle\_50%RB**

**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic TDD-LTE; Frequency: 2593 MHz; Duty Cycle: 1:1.58  
 Medium parameters used:  $f = 2593 \text{ MHz}$ ;  $\sigma = 1.974 \text{ S/m}$ ;  $\epsilon_r = 37.934$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Right Section

DASY5 Configuration:


- Probe: ES3DV2 - SN3019; ConvF(4.09, 4.09, 4.09); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (141x81x1):** Interpolated grid:  $dx=1.200 \text{ mm}$ ,  $dy=1.200 \text{ mm}$   
 Maximum value of SAR (interpolated) =  $0.0749 \text{ W/kg}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value =  $3.618 \text{ V/m}$ ; Power Drift =  $-0.04 \text{ dB}$   
 Peak SAR (extrapolated) =  $0.111 \text{ W/kg}$

**SAR(1 g) = 0.064 W/kg; SAR(10 g) = 0.038 W/kg**

Maximum value of SAR (measured) =  $0.0666 \text{ W/kg}$

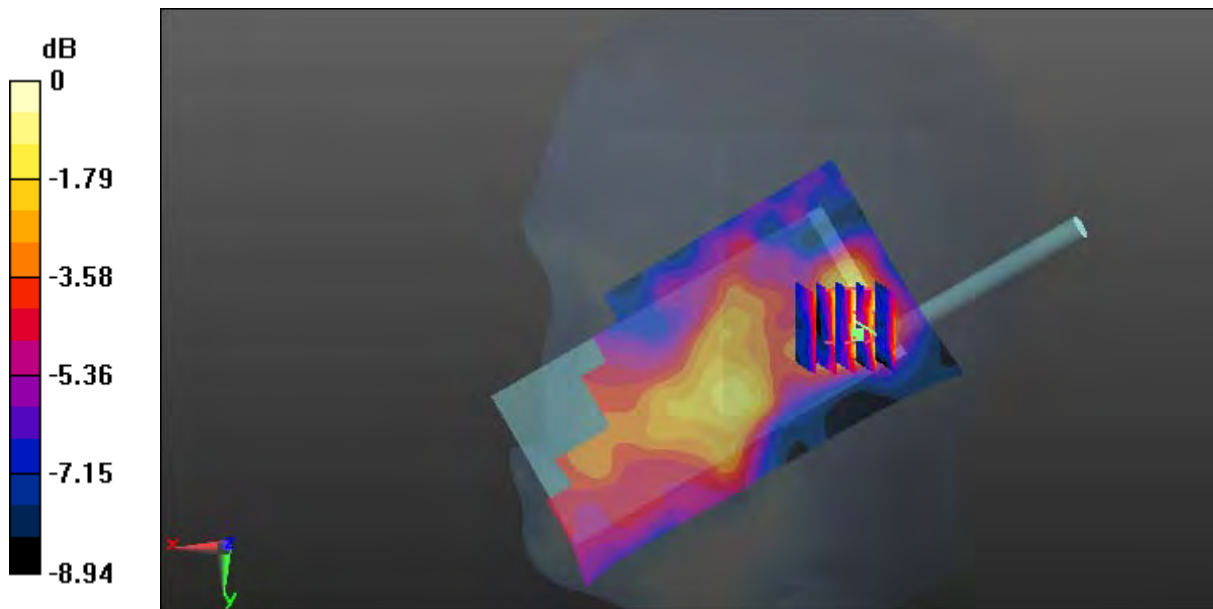

0 dB =  $0.0666 \text{ W/kg} = -11.77 \text{ dBW/kg}$



**Test Plot 273#: LTE Band 41\_Face Up\_Middle\_1RB****DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic TDD-LTE; Frequency: 2593 MHz; Duty Cycle: 1:1.58  
Medium parameters used:  $f = 2593$  MHz;  $\sigma = 1.974$  S/m;  $\epsilon_r = 37.934$ ;  $\rho = 1000$  kg/m<sup>3</sup>;  
Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.09, 4.09, 4.09); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (141x81x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.0627 W/kg


**Zoom Scan (9x11x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.615 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.221 W/kg

**SAR(1 g) = 0.058 W/kg; SAR(10 g) = 0.030 W/kg**

Maximum value of SAR (measured) = 0.0561 W/kg

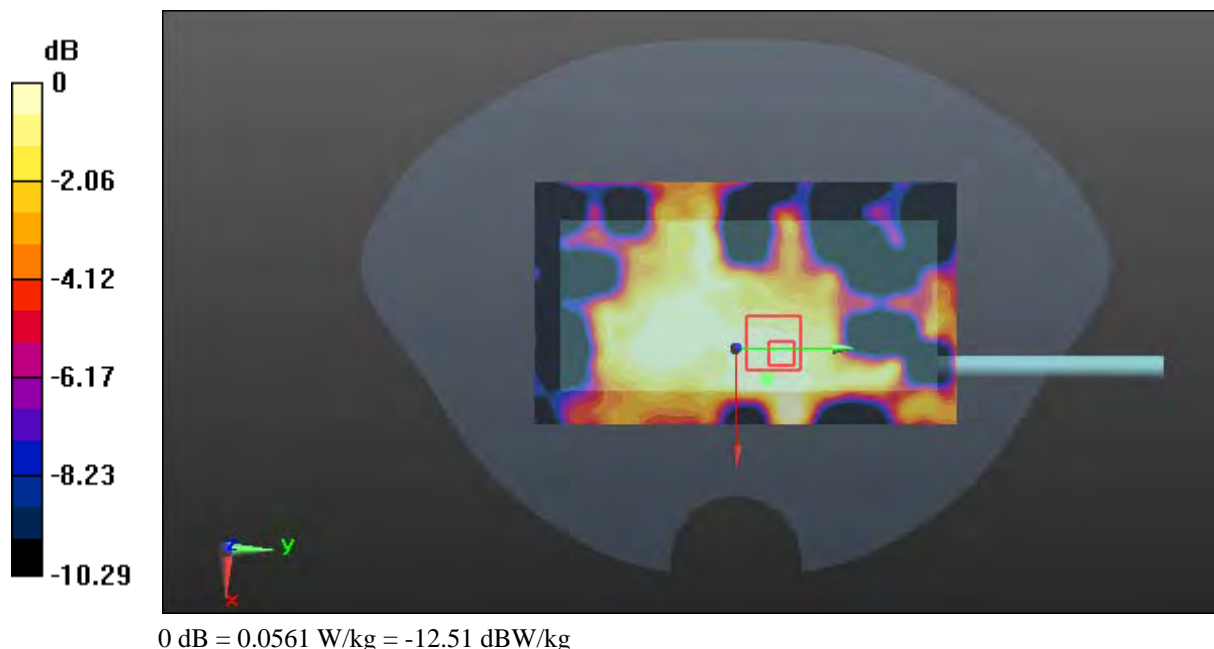

**Test Plot 274#: LTE Band 41\_Face Up\_Middle\_50%RB****DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic TDD-LTE; Frequency: 2593 MHz; Duty Cycle: 1:1.58  
Medium parameters used:  $f = 2593$  MHz;  $\sigma = 1.974$  S/m;  $\epsilon_r = 37.934$ ;  $\rho = 1000$  kg/m<sup>3</sup>;  
Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.09, 4.09, 4.09); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (141x81x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.0510 W/kg


**Zoom Scan (7x10x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.247 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.136 W/kg

**SAR(1 g) = 0.044 W/kg; SAR(10 g) = 0.025 W/kg**

Maximum value of SAR (measured) = 0.0442 W/kg

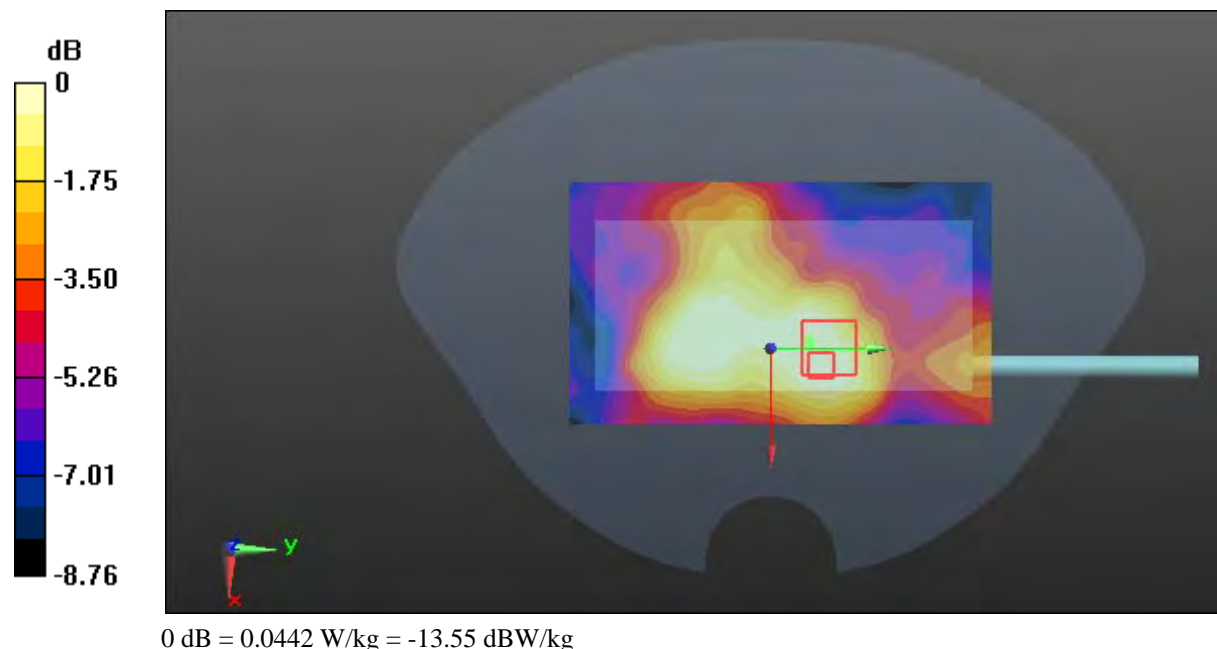

**Test Plot 275#: LTE Band 41\_Body Front \_Low(2506MHz)\_1RB**

**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic TDD-LTE; Frequency: 2506 MHz; Duty Cycle: 1:1.58  
 Medium parameters used:  $f = 2506 \text{ MHz}$ ;  $\sigma = 1.943 \text{ S/m}$ ;  $\epsilon_r = 52.824$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Center Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.05, 4.05, 4.05); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (141x81x1):** Interpolated grid:  $dx=1.200 \text{ mm}$ ,  $dy=1.200 \text{ mm}$

Maximum value of SAR (interpolated) = 0.147 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 7.503 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 0.254 W/kg

**SAR(1 g) = 0.129 W/kg; SAR(10 g) = 0.069 W/kg**

Maximum value of SAR (measured) = 0.138 W/kg

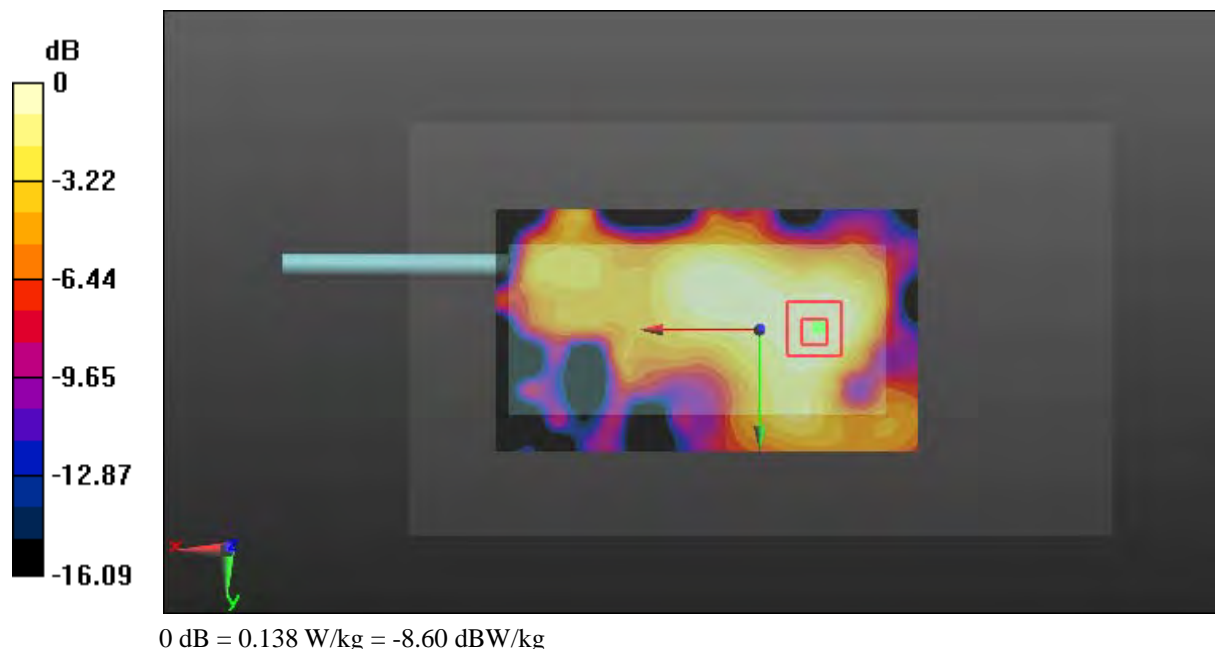

**Test Plot 276#: LTE Band 41\_Body Front \_Low(2545MHz)\_1RB**

**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic TDD-LTE; Frequency: 2545 MHz; Duty Cycle: 1:1.58  
 Medium parameters used:  $f = 2545 \text{ MHz}$ ;  $\sigma = 2.145 \text{ S/m}$ ;  $\epsilon_r = 52.635$ ;  $\rho = 1000 \text{ kg/m}^3$ ;  
 Phantom section: Center Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.05, 4.05, 4.05); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (141x81x1):** Interpolated grid:  $dx=1.200 \text{ mm}$ ,  $dy=1.200 \text{ mm}$

Maximum value of SAR (interpolated) = 0.129 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 7.232 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.227 W/kg

**SAR(1 g) = 0.12 W/kg; SAR(10 g) = 0.063 W/kg**

Maximum value of SAR (measured) = 0.128 W/kg

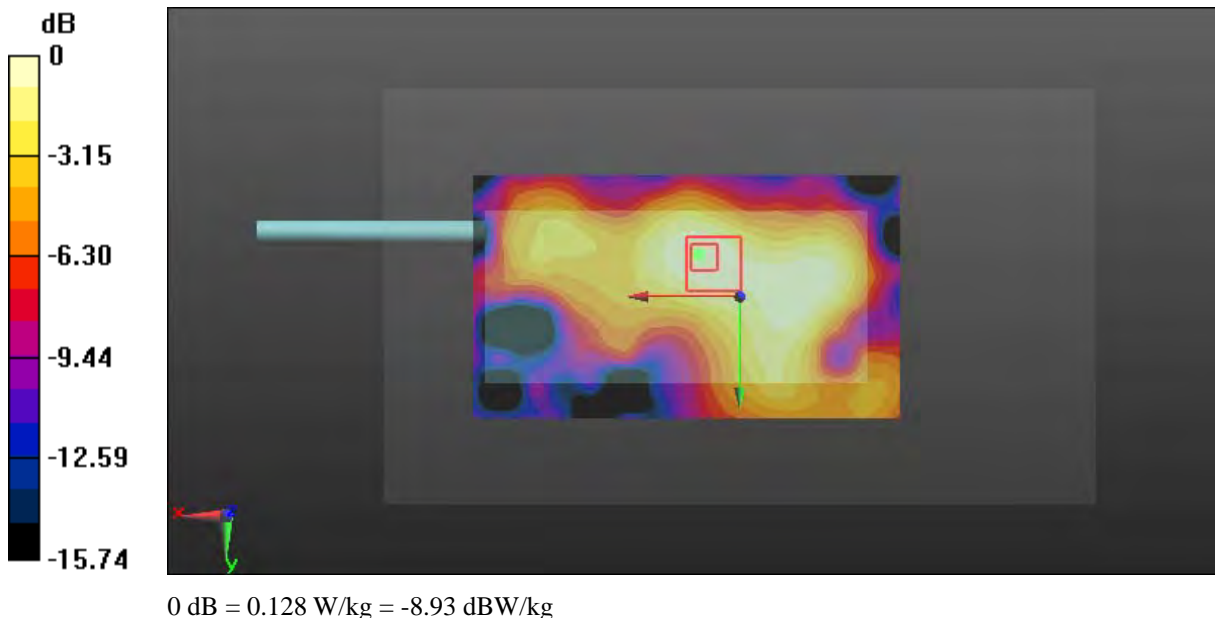

**Test Plot 277#: LTE Band 41\_Body Front \_Middle\_1RB**

**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic TDD-LTE; Frequency: 2593 MHz; Duty Cycle: 1:1.58  
 Medium parameters used:  $f = 2593 \text{ MHz}$ ;  $\sigma = 2.212 \text{ S/m}$ ;  $\epsilon_r = 51.786$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Center Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(3.82, 3.82, 3.82); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (141x81x1):** Interpolated grid:  $dx=1.200 \text{ mm}$ ,  $dy=1.200 \text{ mm}$

Maximum value of SAR (interpolated) = 0.157 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 7.196 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.309 W/kg

**SAR(1 g) = 0.146 W/kg; SAR(10 g) = 0.077 W/kg**

Maximum value of SAR (measured) = 0.155 W/kg

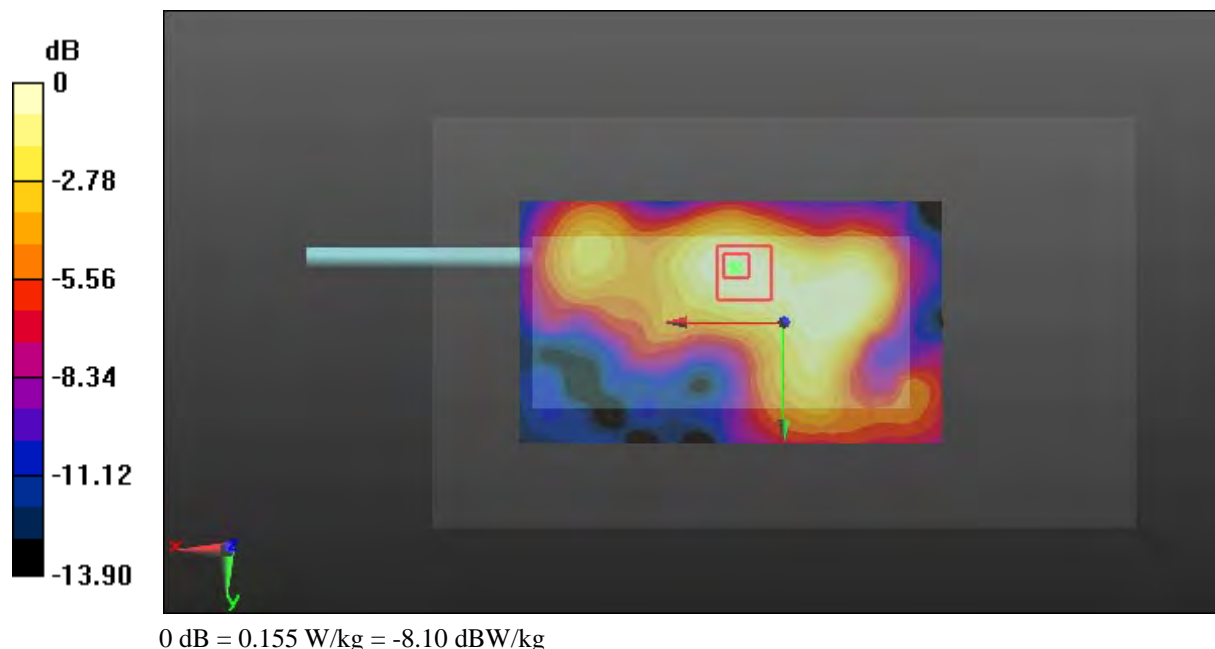

**Test Plot 278#: LTE Band 41\_Body Front \_High(2635MHz)\_1RB**

**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic TDD-LTE; Frequency: 2635 MHz; Duty Cycle: 1:1.58  
 Medium parameters used:  $f = 2635 \text{ MHz}$ ;  $\sigma = 2.282 \text{ S/m}$ ;  $\epsilon_r = 51.114$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Center Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(3.82, 3.82, 3.82); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (141x81x1):** Interpolated grid:  $dx=1.200 \text{ mm}$ ,  $dy=1.200 \text{ mm}$

Maximum value of SAR (interpolated) = 0.153 W/kg


**Zoom Scan (6x6x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 7.712 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.264 W/kg

**SAR(1 g) = 0.136 W/kg; SAR(10 g) = 0.069 W/kg**

Maximum value of SAR (measured) = 0.158 W/kg

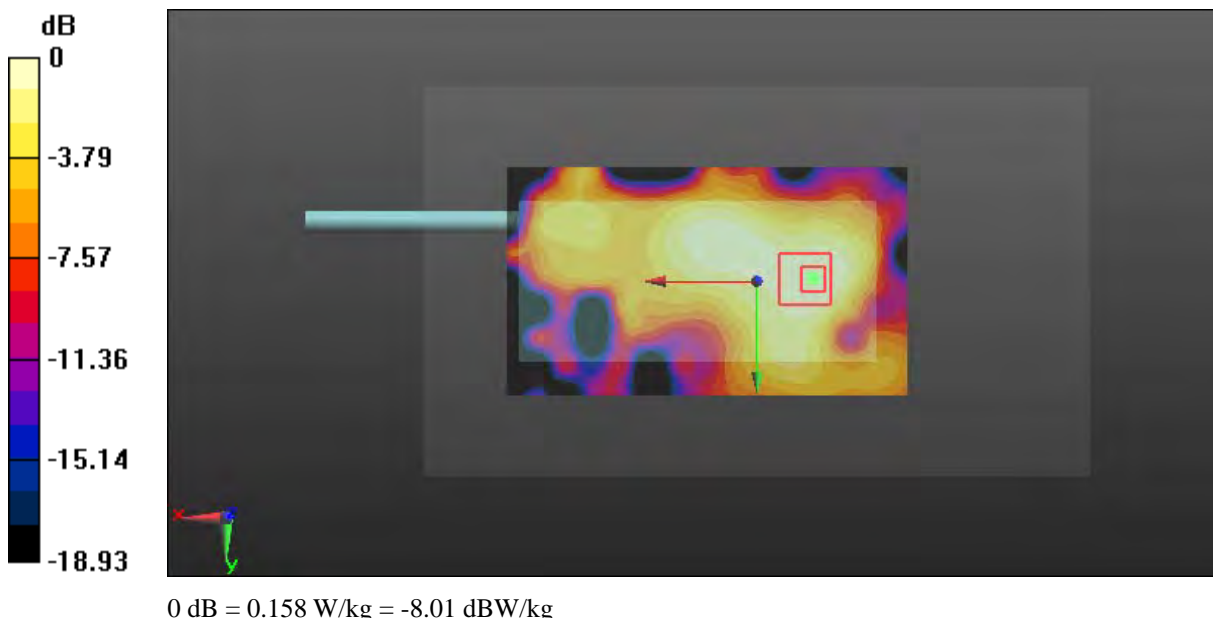

**Test Plot 279#: LTE Band 41\_Body Front \_High(2680MHz)\_1RB**

**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic TDD-LTE; Frequency: 2680 MHz; Duty Cycle: 1:1.58  
 Medium parameters used:  $f = 2680$  MHz;  $\sigma = 2.343$  S/m;  $\epsilon_r = 50.624$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
 Phantom section: Center Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(3.82, 3.82, 3.82); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (141x81x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.164 W/kg


**Zoom Scan (6x6x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.788 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.283 W/kg

**SAR(1 g) = 0.150 W/kg; SAR(10 g) = 0.080 W/kg**

Maximum value of SAR (measured) = 0.166 W/kg

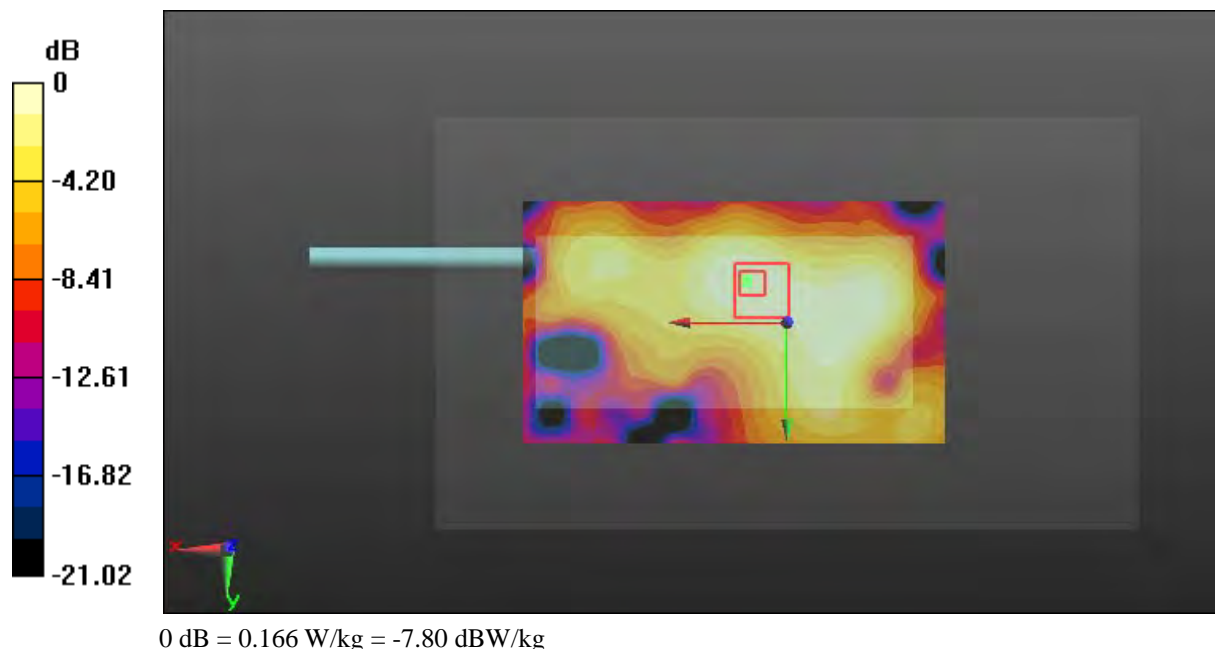

**Test Plot 280#: LTE Band 41\_Body Front \_Middle\_50%RB**

**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic TDD-LTE; Frequency: 2593 MHz; Duty Cycle: 1:1.58  
 Medium parameters used:  $f = 2593 \text{ MHz}$ ;  $\sigma = 2.212 \text{ S/m}$ ;  $\epsilon_r = 51.786$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Center Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(3.82, 3.82, 3.82); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (141x81x1):** Interpolated grid:  $dx=1.200 \text{ mm}$ ,  $dy=1.200 \text{ mm}$

Maximum value of SAR (interpolated) = 0.132 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 6.541 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.230 W/kg

**SAR(1 g) = 0.121 W/kg; SAR(10 g) = 0.066 W/kg**

Maximum value of SAR (measured) = 0.131 W/kg

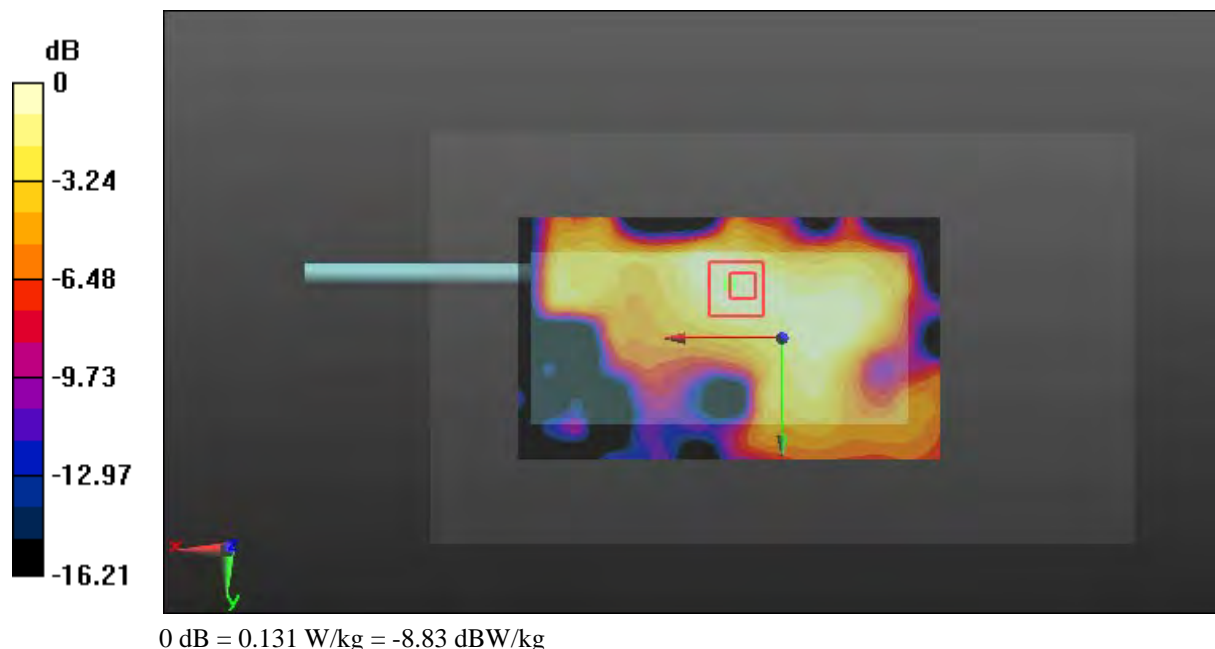



**Test Plot 281#: LTE Band 41\_Body Back\_Middle\_1RB**

**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic TDD-LTE; Frequency: 2593 MHz; Duty Cycle: 1:1.58  
 Medium parameters used:  $f = 2593$  MHz;  $\sigma = 2.212$  S/m;  $\epsilon_r = 51.786$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
 Phantom section: Center Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(3.82, 3.82, 3.82); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (141x81x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.0796 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.163 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 0.128 W/kg

**SAR(1 g) = 0.071 W/kg; SAR(10 g) = 0.036 W/kg**

Maximum value of SAR (measured) = 0.0815 W/kg

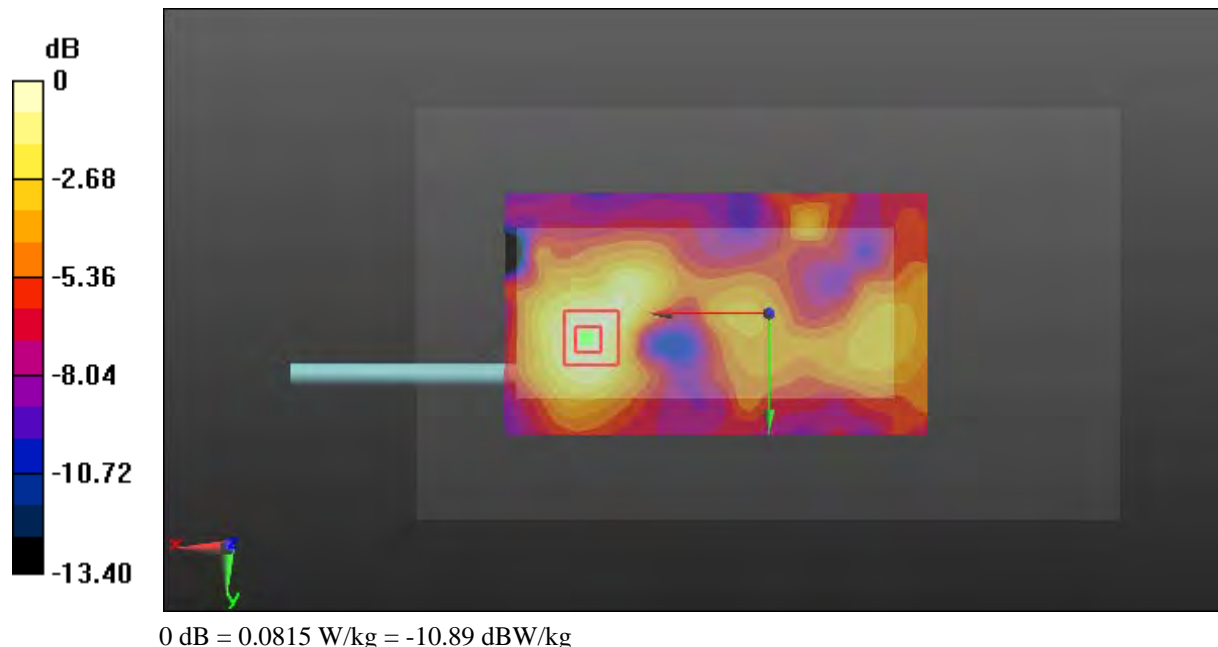

**Test Plot 282#: LTE Band 41\_Body Back\_Middle\_50%RB**

**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic TDD-LTE; Frequency: 2593 MHz; Duty Cycle: 1:1.58  
 Medium parameters used:  $f = 2593$  MHz;  $\sigma = 2.212$  S/m;  $\epsilon_r = 51.786$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
 Phantom section: Center Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(3.82, 3.82, 3.82); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (141x81x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.0669 W/kg


**Zoom Scan (6x7x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.643 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 0.135 W/kg

**SAR(1 g) = 0.054 W/kg; SAR(10 g) = 0.028 W/kg**

Maximum value of SAR (measured) = 0.0635 W/kg

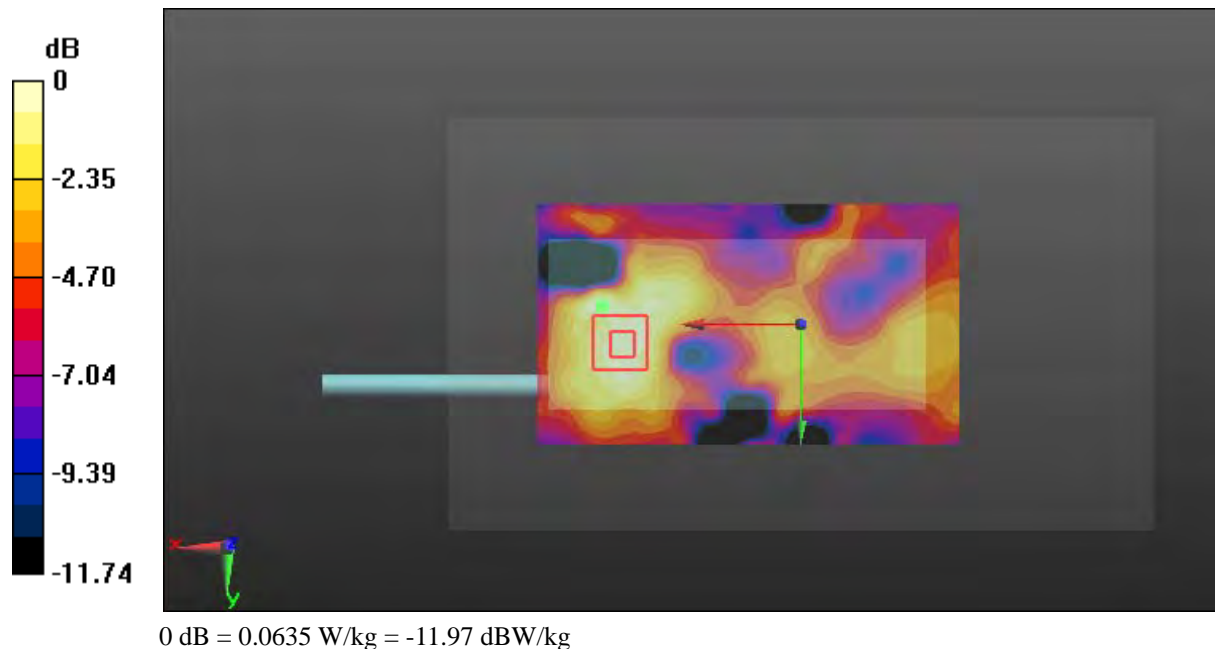

**Test Plot 283#: LTE Band 41\_Body Left\_Middle\_1RB**

**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic TDD-LTE; Frequency: 2593 MHz; Duty Cycle: 1:1.58  
 Medium parameters used:  $f = 2593 \text{ MHz}$ ;  $\sigma = 2.212 \text{ S/m}$ ;  $\epsilon_r = 51.786$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Center Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(3.82, 3.82, 3.82); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (131x61x1):** Interpolated grid:  $dx=1.200 \text{ mm}$ ,  $dy=1.200 \text{ mm}$

Maximum value of SAR (interpolated) = 0.107 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 4.336 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.159 W/kg

**SAR(1 g) = 0.083 W/kg; SAR(10 g) = 0.041 W/kg**

Maximum value of SAR (measured) = 0.0940 W/kg

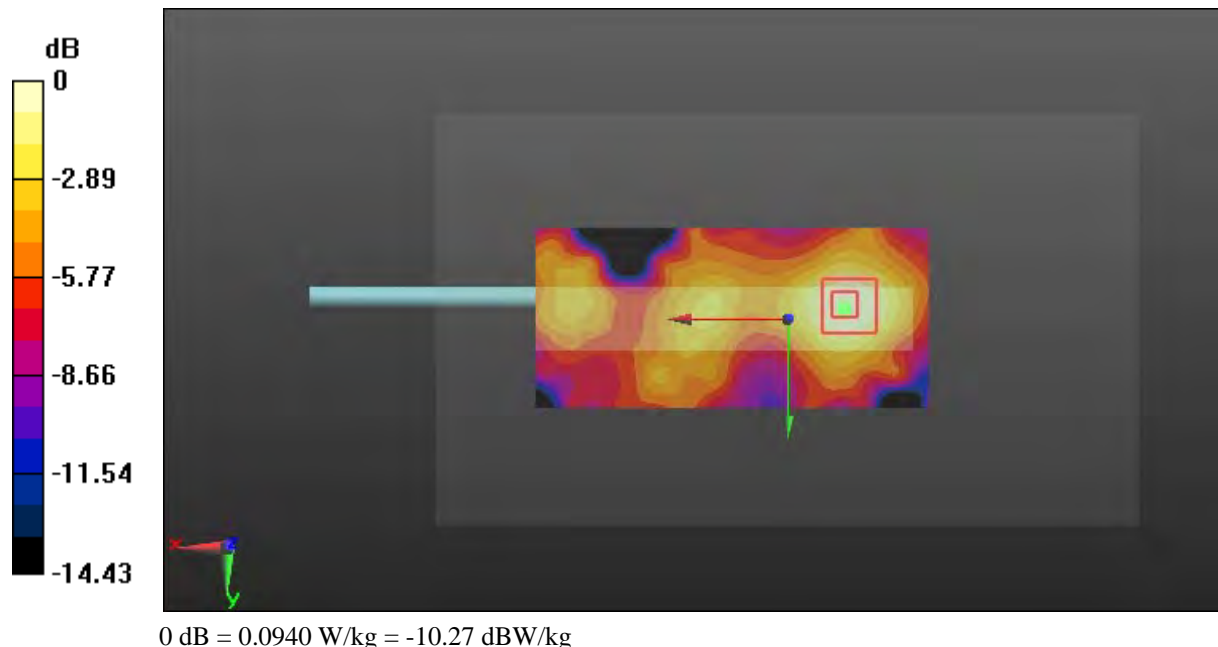

**Test Plot 284#: LTE Band 41\_Body Left\_Middle\_50%RB**

**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic TDD-LTE; Frequency: 2593 MHz; Duty Cycle: 1:1.58  
 Medium parameters used:  $f = 2593 \text{ MHz}$ ;  $\sigma = 2.212 \text{ S/m}$ ;  $\epsilon_r = 51.786$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Center Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(3.82, 3.82, 3.82); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (131x61x1):** Interpolated grid:  $dx=1.200 \text{ mm}$ ,  $dy=1.200 \text{ mm}$

Maximum value of SAR (interpolated) = 0.0845 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 3.996 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.0930 W/kg

**SAR(1 g) = 0.067 W/kg; SAR(10 g) = 0.034 W/kg**

Maximum value of SAR (measured) = 0.0891 W/kg

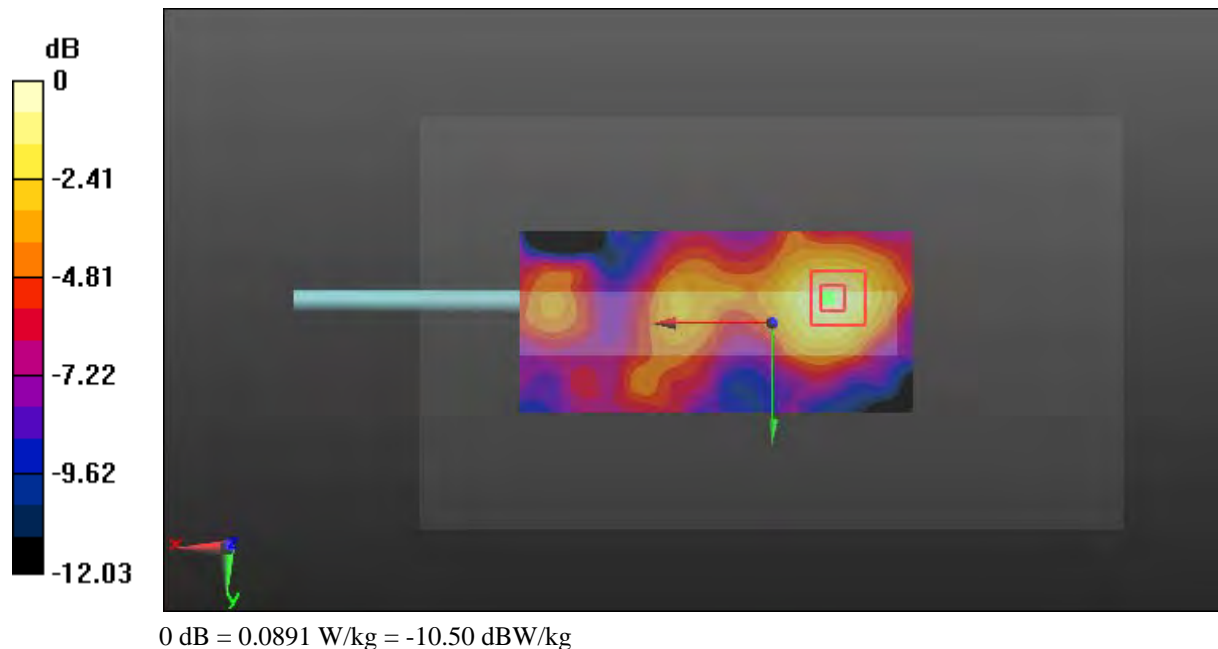

**Test Plot 285#: LTE Band 41\_Body Right\_Middle\_1RB**

**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic TDD-LTE; Frequency: 2593 MHz; Duty Cycle: 1:1.58  
 Medium parameters used:  $f = 2593 \text{ MHz}$ ;  $\sigma = 2.212 \text{ S/m}$ ;  $\epsilon_r = 51.786$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Center Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(3.82, 3.82, 3.82); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (131x61x1):** Interpolated grid:  $dx=1.200 \text{ mm}$ ,  $dy=1.200 \text{ mm}$

Maximum value of SAR (interpolated) = 0.0973 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 5.176 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.154 W/kg

**SAR(1 g) = 0.084 W/kg; SAR(10 g) = 0.041 W/kg**

Maximum value of SAR (measured) = 0.0947 W/kg

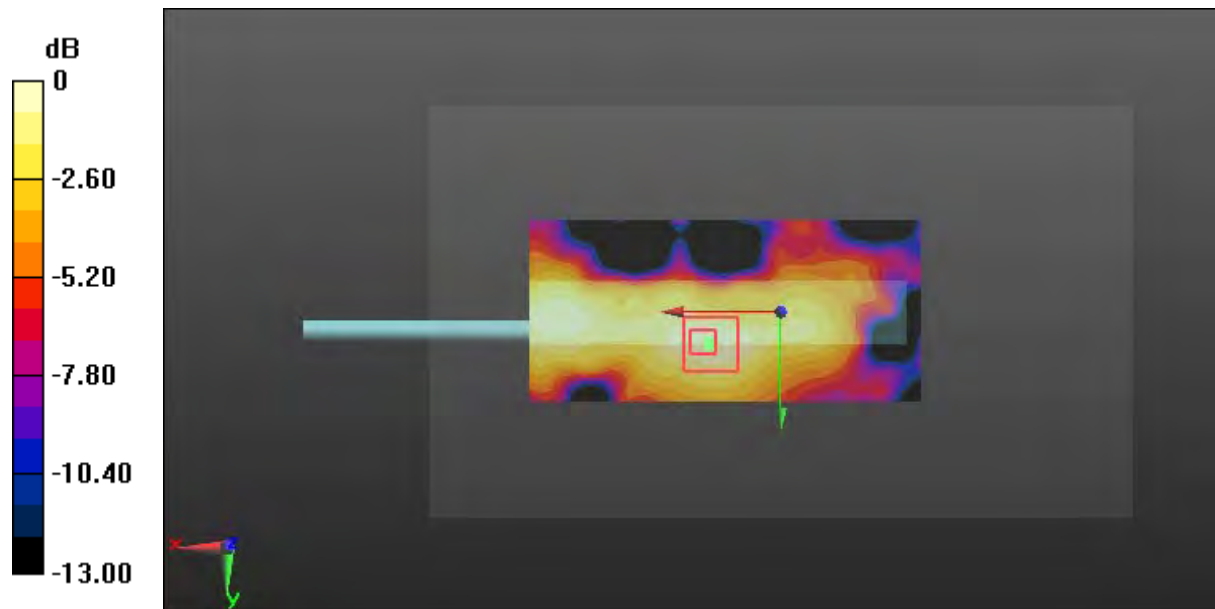

0 dB = 0.0947 W/kg = -10.24 dBW/kg

**Test Plot 286#: LTE Band 41\_Body Right\_Middle\_50%RB**

**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic TDD-LTE; Frequency: 2593 MHz; Duty Cycle: 1:1.58  
 Medium parameters used:  $f = 2593 \text{ MHz}$ ;  $\sigma = 2.212 \text{ S/m}$ ;  $\epsilon_r = 51.786$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Center Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(3.82, 3.82, 3.82); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (131x61x1):** Interpolated grid:  $dx=1.200 \text{ mm}$ ,  $dy=1.200 \text{ mm}$

Maximum value of SAR (interpolated) = 0.0818 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 4.818 V/m; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 0.0910 W/kg

**SAR(1 g) = 0.061 W/kg; SAR(10 g) = 0.030 W/kg**

Maximum value of SAR (measured) = 0.0820 W/kg

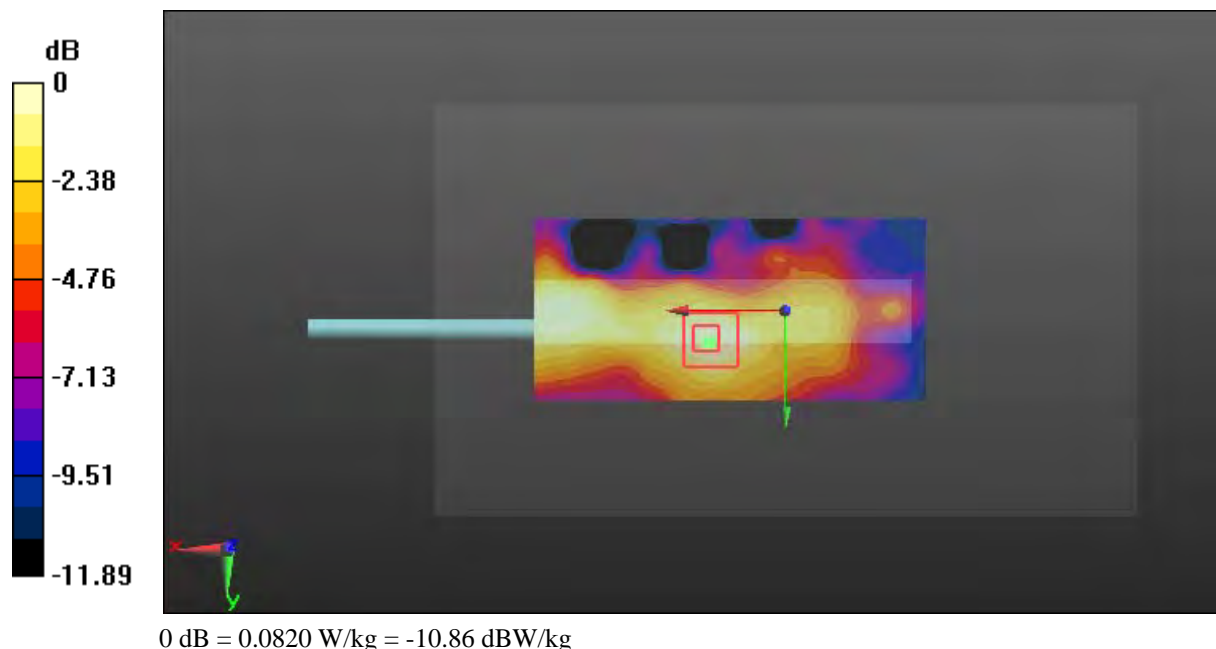

**Test Plot 287#: LTE Band 41\_Body Bottom\_Middle\_1RB**

**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic TDD-LTE; Frequency: 2593 MHz; Duty Cycle: 1:1.58  
 Medium parameters used:  $f = 2593$  MHz;  $\sigma = 2.212$  S/m;  $\epsilon_r = 51.786$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
 Phantom section: Center Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(3.82, 3.82, 3.82); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (61x101x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.107 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.031 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 0.166 W/kg

**SAR(1 g) = 0.095 W/kg; SAR(10 g) = 0.048 W/kg**

Maximum value of SAR (measured) = 0.107 W/kg

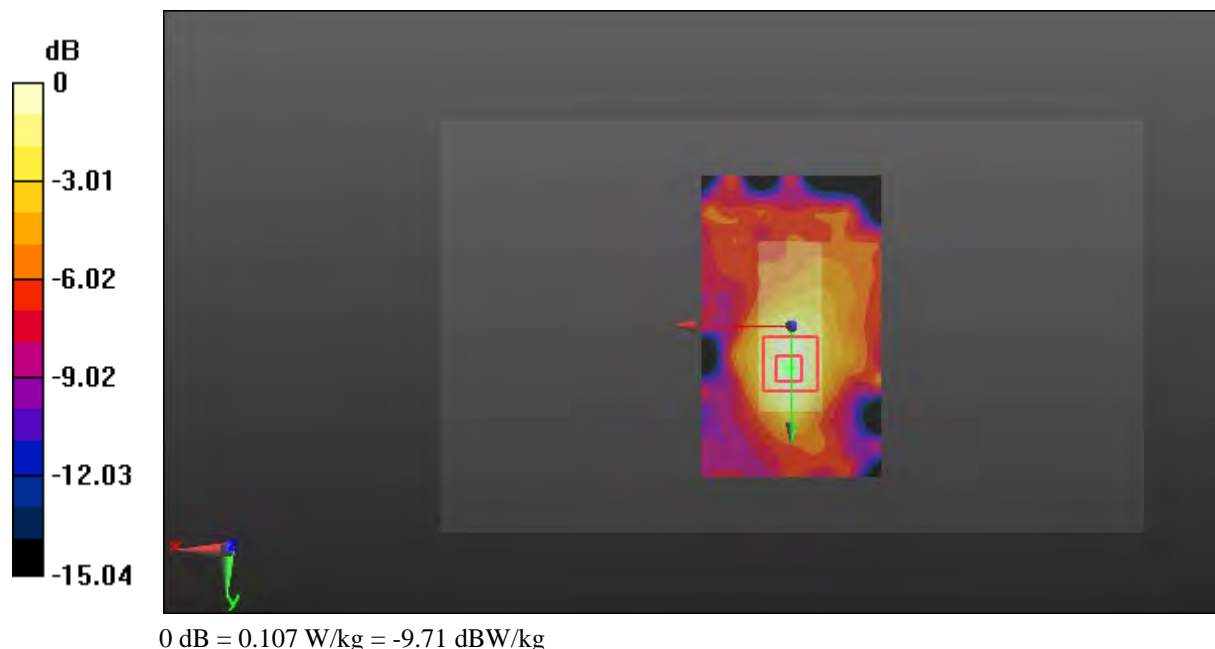

**Test Plot 288#: LTE Band 41\_Body Bottom\_Middle\_50%RB**

**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic TDD-LTE; Frequency: 2593 MHz; Duty Cycle: 1:1.58  
 Medium parameters used:  $f = 2593$  MHz;  $\sigma = 2.212$  S/m;  $\epsilon_r = 51.786$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
 Phantom section: Center Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(3.82, 3.82, 3.82); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (61x101x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.0965 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.557 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.147 W/kg

**SAR(1 g) = 0.077 W/kg; SAR(10 g) = 0.039 W/kg**

Maximum value of SAR (measured) = 0.0874 W/kg

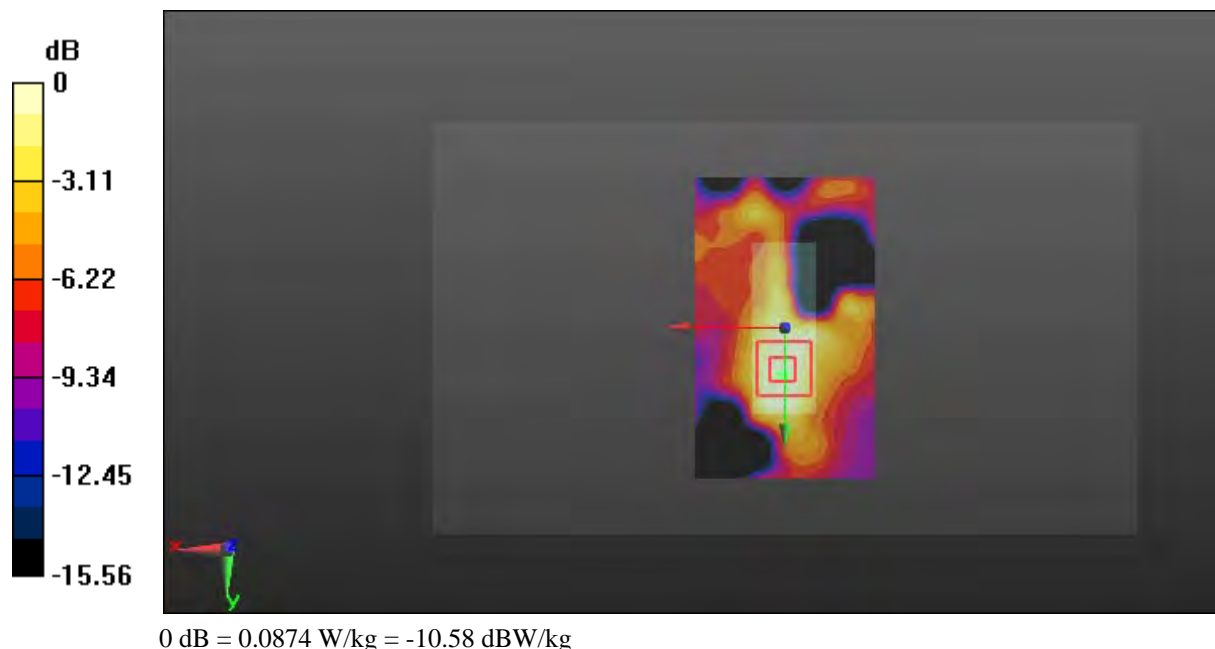



**Test Plot 289#: CDMA 850(BC0)\_Head Left Cheek\_Low**

**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**


Communication System: CDMA 1xRTT; Frequency: 824.7 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 824.7 \text{ MHz}$ ;  $\sigma = 0.864 \text{ S/m}$ ;  $\epsilon_r = 42.42$ ;  $\rho = 1000 \text{ kg/m}^3$   
 Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.57, 6.57, 6.57); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x61x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) = 0.337 W/kg

**Zoom Scan (6x6x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value = 11.50 V/m; Power Drift = 0.13 dB  
 Peak SAR (extrapolated) = 0.404 W/kg  
**SAR(1 g) = 0.323 W/kg; SAR(10 g) = 0.254 W/kg**  
 Maximum value of SAR (measured) = 0.340 W/kg

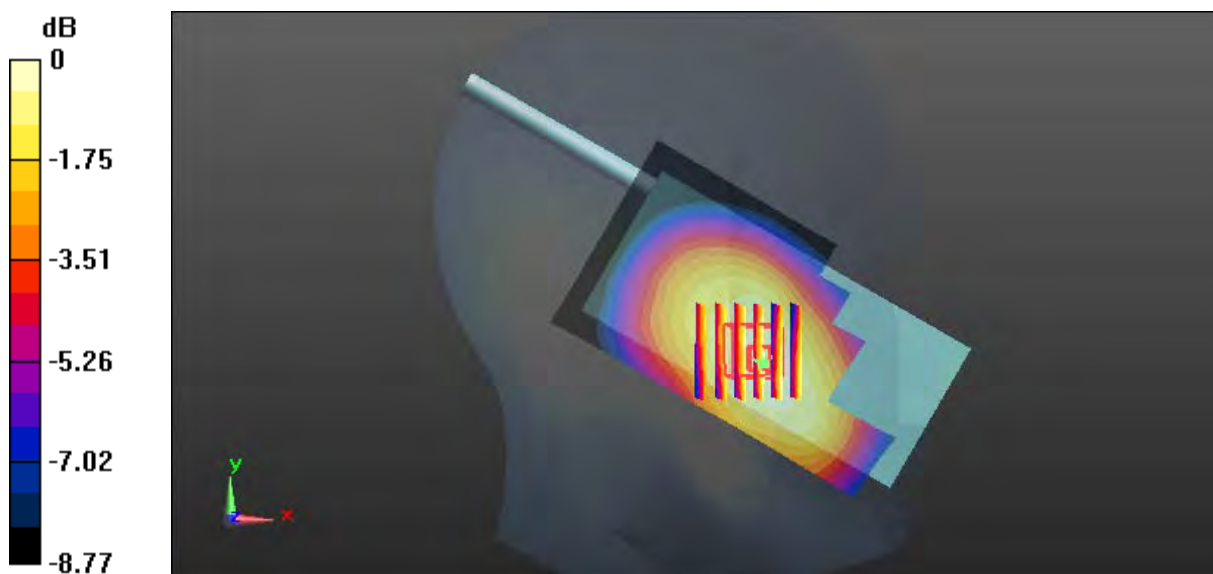

0 dB = 0.340 W/kg = -4.69 dBW/kg

**Test Plot 290#: CDMA 850(BC0)\_Head Left Cheek\_Middle**

**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**


Communication System: CDMA 1xRTT; Frequency: 836.52 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 836.52 \text{ MHz}$ ;  $\sigma = 0.879 \text{ S/m}$ ;  $\epsilon_r = 42.319$ ;  $\rho = 1000 \text{ kg/m}^3$   
 Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.57, 6.57, 6.57); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x61x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) = 0.360 W/kg

**Zoom Scan (6x6x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value = 12.08 V/m; Power Drift = -0.02 dB  
 Peak SAR (extrapolated) = 0.437 W/kg  
**SAR(1 g) = 0.347 W/kg; SAR(10 g) = 0.271 W/kg**  
 Maximum value of SAR (measured) = 0.365 W/kg

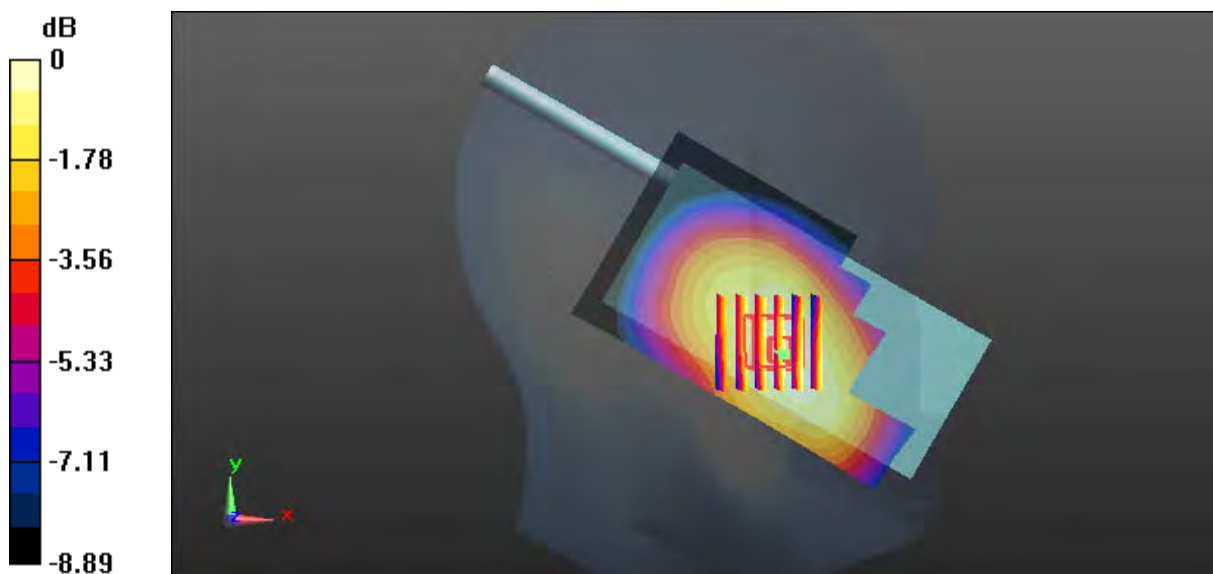

0 dB = 0.365 W/kg = -4.38 dBW/kg

**Test Plot 291#: CDMA 850(BC0)\_Head Left Cheek\_High**

**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**


Communication System: CDMA 1xRTT; Frequency: 848.31 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 848.8 \text{ MHz}$ ;  $\sigma = 0.886 \text{ S/m}$ ;  $\epsilon_r = 42.073$ ;  $\rho = 1000 \text{ kg/m}^3$   
 Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.57, 6.57, 6.57); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x61x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) = 0.395 W/kg

**Zoom Scan (6x6x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value = 12.44 V/m; Power Drift = -0.04 dB  
 Peak SAR (extrapolated) = 0.475 W/kg  
**SAR(1 g) = 0.381 W/kg; SAR(10 g) = 0.297 W/kg**  
 Maximum value of SAR (measured) = 0.401 W/kg

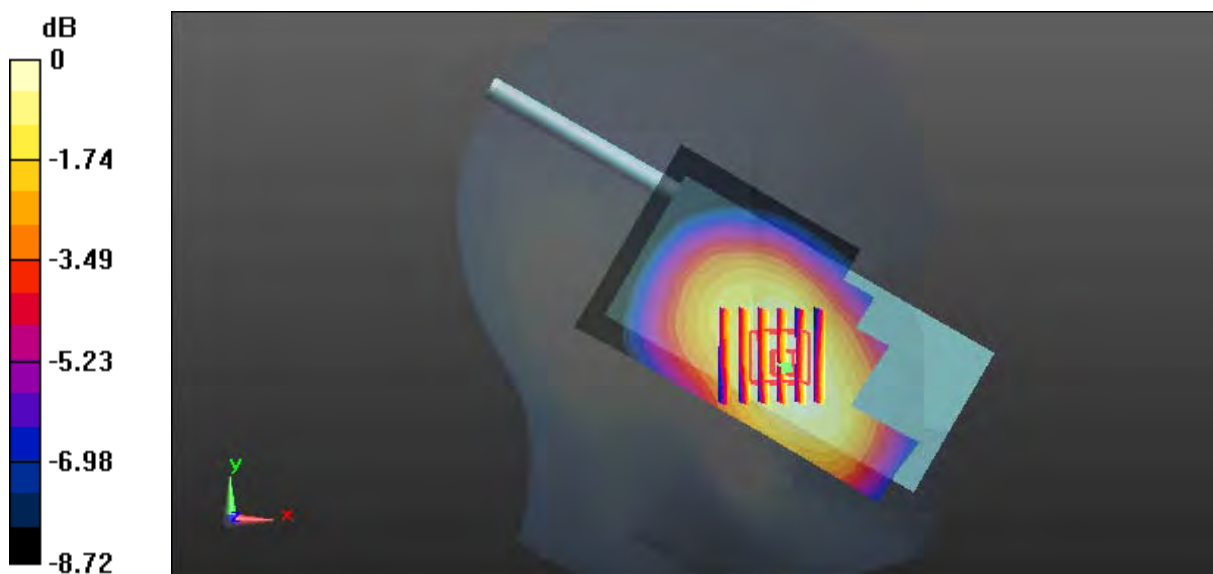

0 dB = 0.401 W/kg = -3.97 dBW/kg

**Test Plot 292#: CDMA 850(BC0)\_Head Left Tilt\_Middle**

**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**


Communication System: CDMA 1xRTT; Frequency: 836.52 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 836.52 \text{ MHz}$ ;  $\sigma = 0.879 \text{ S/m}$ ;  $\epsilon_r = 42.319$ ;  $\rho = 1000 \text{ kg/m}^3$   
 Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.57, 6.57, 6.57); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x61x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) = 0.245 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value = 15.17 V/m; Power Drift = 0.03 dB  
 Peak SAR (extrapolated) = 0.290 W/kg  
**SAR(1 g) = 0.235 W/kg; SAR(10 g) = 0.181 W/kg**  
 Maximum value of SAR (measured) = 0.245 W/kg

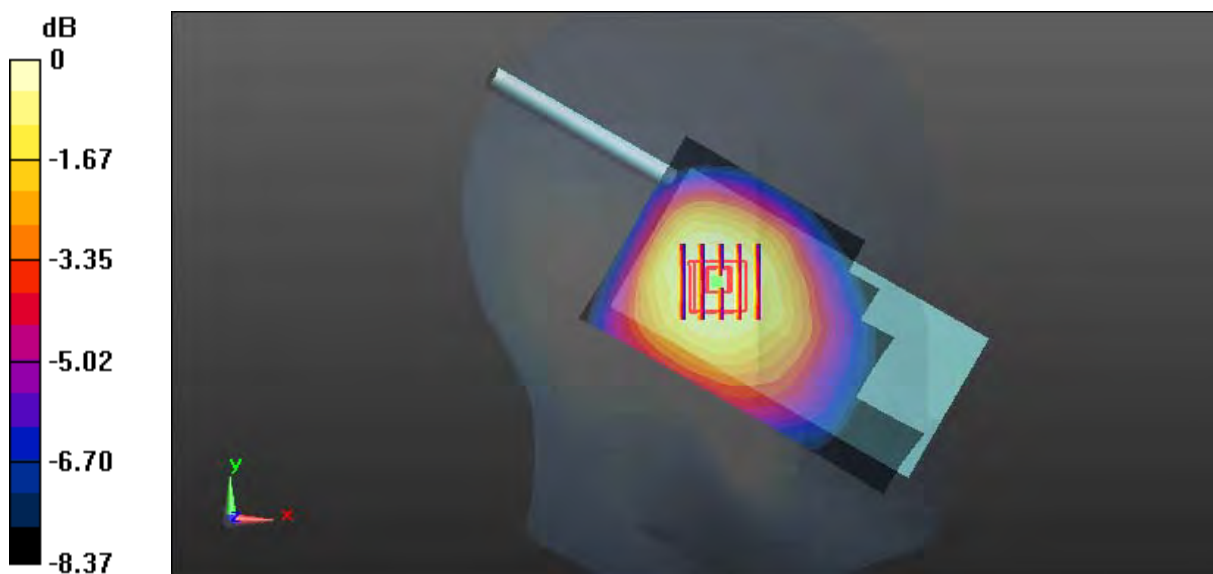

0 dB = 0.245 W/kg = -6.11 dBW/kg

**Test Plot 293#: CDMA 850(BC0)\_Head Right Cheek\_Middle****DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: CDMA 1xRTT; Frequency: 836.52 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 836.52$  MHz;  $\sigma = 0.879$  S/m;  $\epsilon_r = 42.319$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.57, 6.57, 6.57); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x61x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.303 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.149 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.351 W/kg

**SAR(1 g) = 0.296 W/kg; SAR(10 g) = 0.239 W/kg**

Maximum value of SAR (measured) = 0.305 W/kg

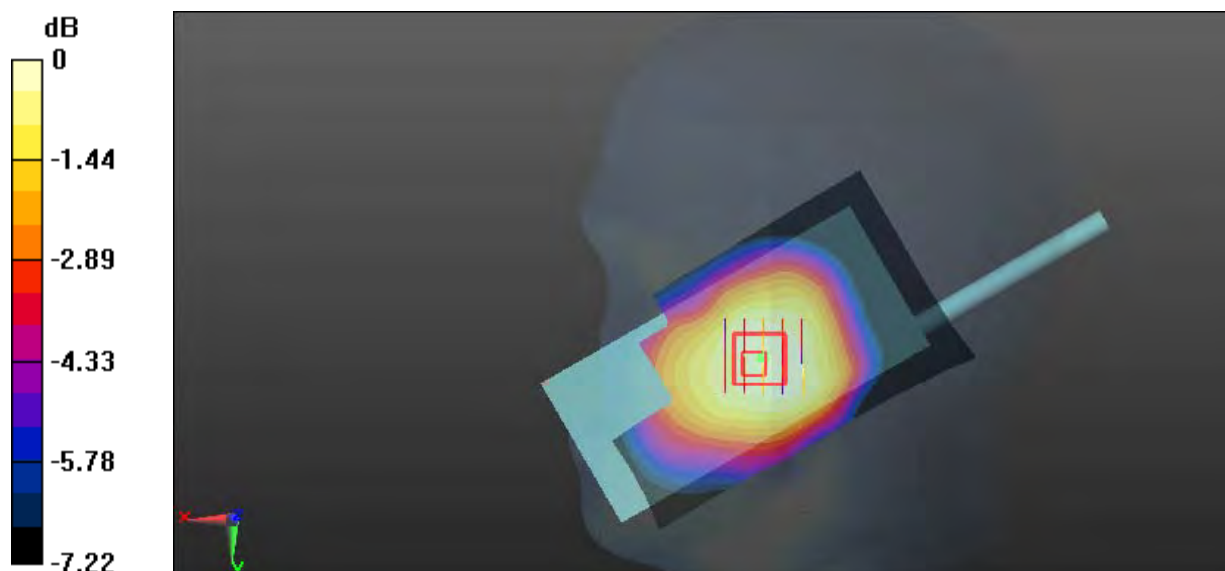

0 dB = 0.305 W/kg = -5.16 dBW/kg

**Test Plot 294#: CDMA 850(BC0)\_Head Right Tilt\_Middle****DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: CDMA 1xRTT; Frequency: 836.52 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 836.52$  MHz;  $\sigma = 0.879$  S/m;  $\epsilon_r = 42.319$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.57, 6.57, 6.57); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x61x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.186 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.67 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.216 W/kg

**SAR(1 g) = 0.177 W/kg; SAR(10 g) = 0.138 W/kg**

Maximum value of SAR (measured) = 0.183 W/kg

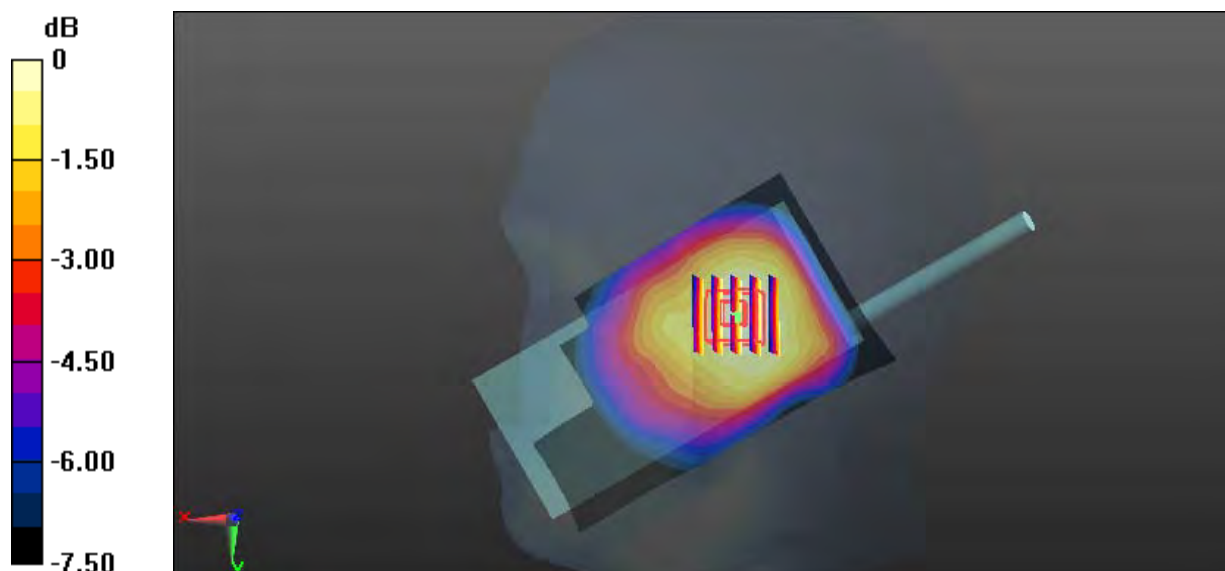

0 dB = 0.183 W/kg = -7.38 dBW/kg

**Test Plot 295#: CDMA 850(BC0)\_Face Up\_Middle**

**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**


Communication System: CDMA EV-DO; Frequency: 836.52 MHz;Duty Cycle: 1:1  
 Medium parameters used:  $f = 836.52 \text{ MHz}$ ;  $\sigma = 0.879 \text{ S/m}$ ;  $\epsilon_r = 42.319$ ;  $\rho = 1000 \text{ kg/m}^3$   
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.57, 6.57, 6.57); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x61x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) = 0.173 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value = 13.09 V/m; Power Drift = -0.07 dB  
 Peak SAR (extrapolated) = 0.207 W/kg  
**SAR(1 g) = 0.165 W/kg; SAR(10 g) = 0.126 W/kg**  
 Maximum value of SAR (measured) = 0.173 W/kg

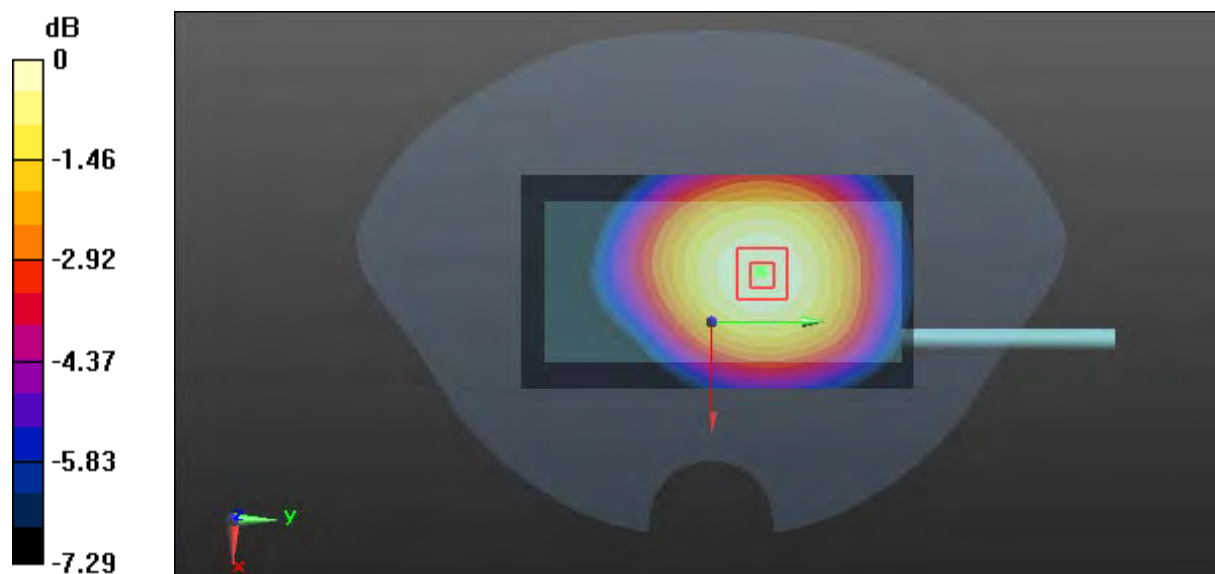

0 dB = 0.173 W/kg = -7.62 dBW/kg

**Test Plot 296#: CDMA 850(BC0)\_Body Worn Back\_Middle**

**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**


Communication System: CDMA 1xRTT; Frequency: 836.52 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 836.52 \text{ MHz}$ ;  $\sigma = 0.955 \text{ S/m}$ ;  $\epsilon_r = 57.276$ ;  $\rho = 1000 \text{ kg/m}^3$   
 Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.42, 6.42, 6.42); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x61x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) = 0.141 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value = 10.17 V/m; Power Drift = -0.06 dB  
 Peak SAR (extrapolated) = 0.165 W/kg  
**SAR(1 g) = 0.124 W/kg; SAR(10 g) = 0.105 W/kg**  
 Maximum value of SAR (measured) = 0.141 W/kg

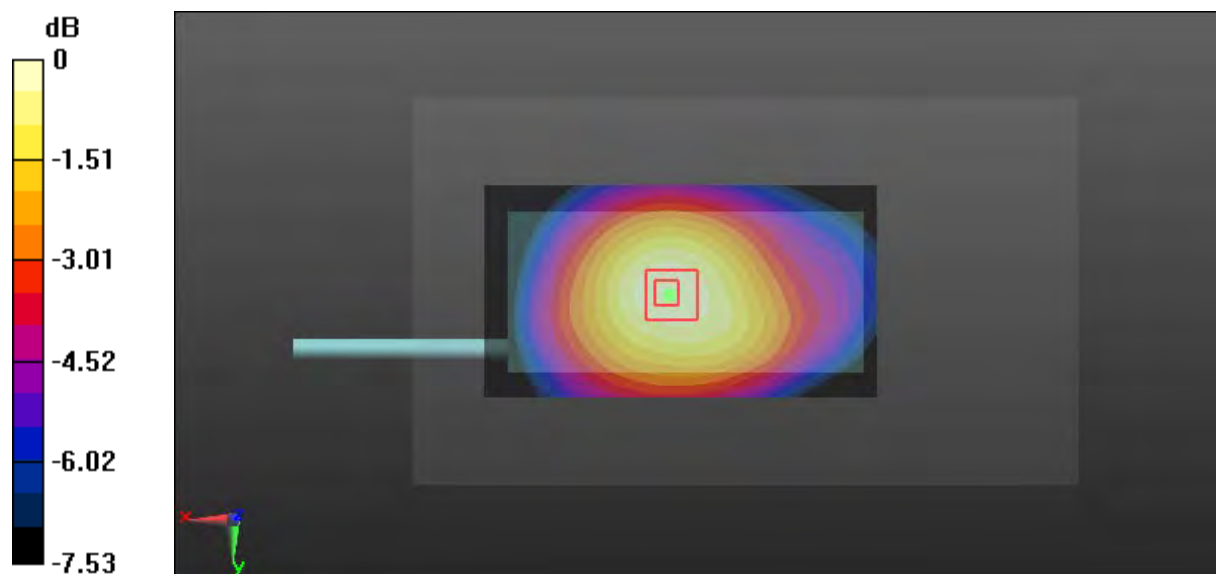

0 dB = 0.141 W/kg = -8.51 dBW/kg



**Test Plot 297#: CDMA 850(BC0)\_Body Front \_Low**

**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**


Communication System: CDMA EV-DO; Frequency: 824.7 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 824.7 \text{ MHz}$ ;  $\sigma = 0.973 \text{ S/m}$ ;  $\epsilon_r = 56.846$ ;  $\rho = 1000 \text{ kg/m}^3$   
 Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.42, 6.42, 6.42); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x61x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) = 0.455 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value = 17.97 V/m; Power Drift = -0.16 dB  
 Peak SAR (extrapolated) = 0.453 W/kg  
**SAR(1 g) = 0.368 W/kg; SAR(10 g) = 0.283 W/kg**  
 Maximum value of SAR (measured) = 0.385 W/kg

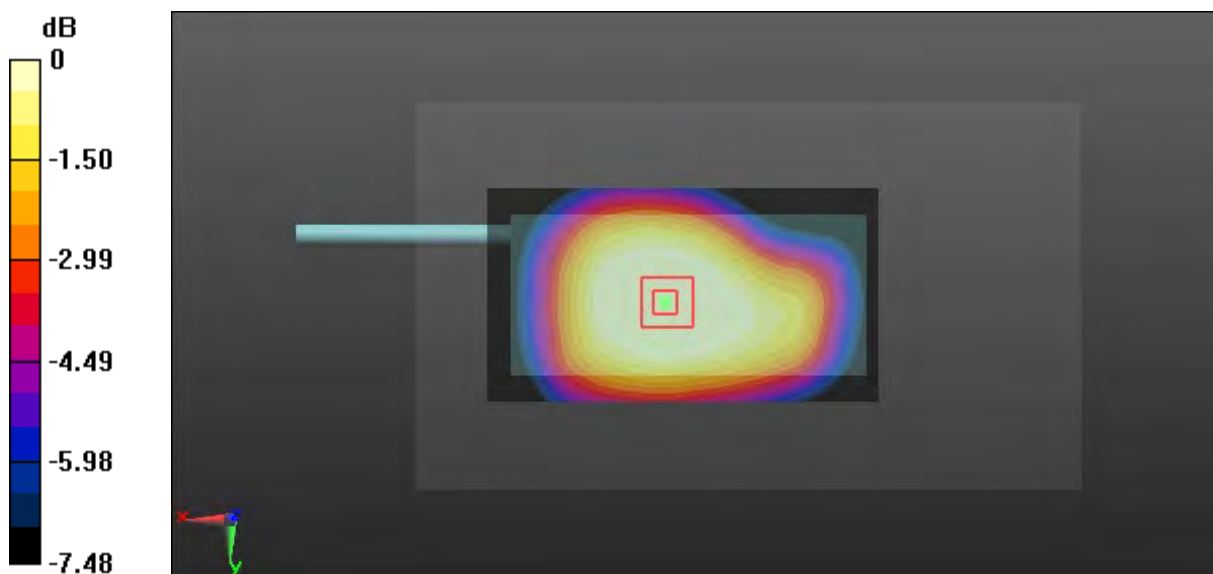

0 dB = 0.385 W/kg = -4.15 dBW/kg

**Test Plot 298#: CDMA 850(BC0)\_Body Front \_Middle**

**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**


Communication System: CDMA EV-DO; Frequency: 836.52 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 836.52 \text{ MHz}$ ;  $\sigma = 0.955 \text{ S/m}$ ;  $\epsilon_r = 57.276$ ;  $\rho = 1000 \text{ kg/m}^3$   
 Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.42, 6.42, 6.42); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x61x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) = 0.415 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value = 18.07 V/m; Power Drift = -0.03 dB  
 Peak SAR (extrapolated) = 0.493 W/kg  
**SAR(1 g) = 0.401 W/kg; SAR(10 g) = 0.309 W/kg**  
 Maximum value of SAR (measured) = 0.418 W/kg

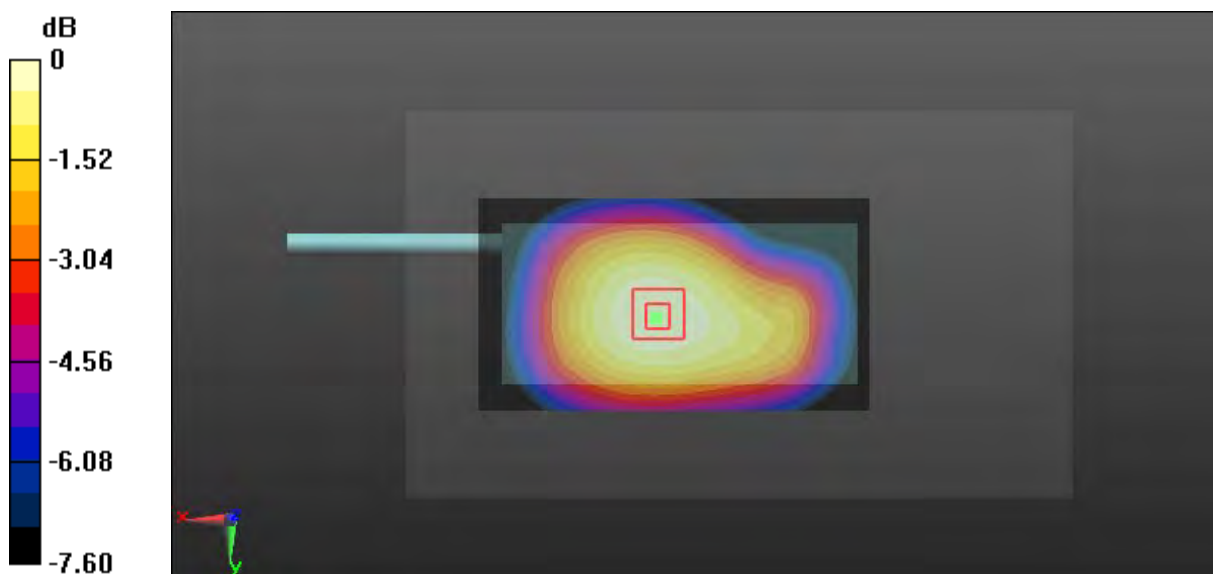

0 dB = 0.418 W/kg = -3.79 dBW/kg

**Test Plot 299#: CDMA 850(BC0)\_Body Front \_High**

**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**


Communication System: CDMA EV-DO; Frequency: 848.31 MHz;Duty Cycle: 1:1  
 Medium parameters used:  $f = 848.31 \text{ MHz}$ ;  $\sigma = 0.965 \text{ S/m}$ ;  $\epsilon_r = 56.928$ ;  $\rho = 1000 \text{ kg/m}^3$   
 Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.42, 6.42, 6.42); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x61x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) = 0.400 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value = 17.76 V/m; Power Drift = -0.08 dB  
 Peak SAR (extrapolated) = 0.473 W/kg  
**SAR(1 g) = 0.381 W/kg; SAR(10 g) = 0.293 W/kg**  
 Maximum value of SAR (measured) = 0.398 W/kg

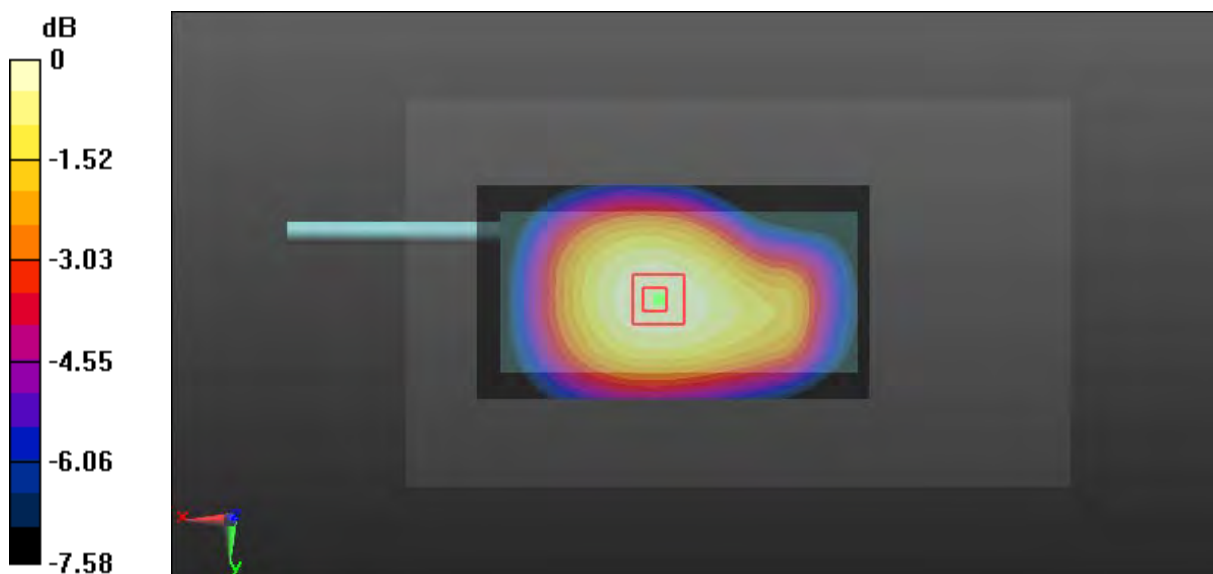

0 dB = 0.398 W/kg = -4.00 dBW/kg

**Test Plot 300#: CDMA 850(BC0)\_Body Back\_Middle**

**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**


Communication System: CDMA EV-DO; Frequency: 836.52 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 836.52 \text{ MHz}$ ;  $\sigma = 0.955 \text{ S/m}$ ;  $\epsilon_r = 57.276$ ;  $\rho = 1000 \text{ kg/m}^3$   
 Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.42, 6.42, 6.42); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x61x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) = 0.156 W/kg

**Zoom Scan (6x6x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value = 12.55 V/m; Power Drift = -0.07 dB  
 Peak SAR (extrapolated) = 0.186 W/kg  
**SAR(1 g) = 0.148 W/kg; SAR(10 g) = 0.113 W/kg**  
 Maximum value of SAR (measured) = 0.156 W/kg

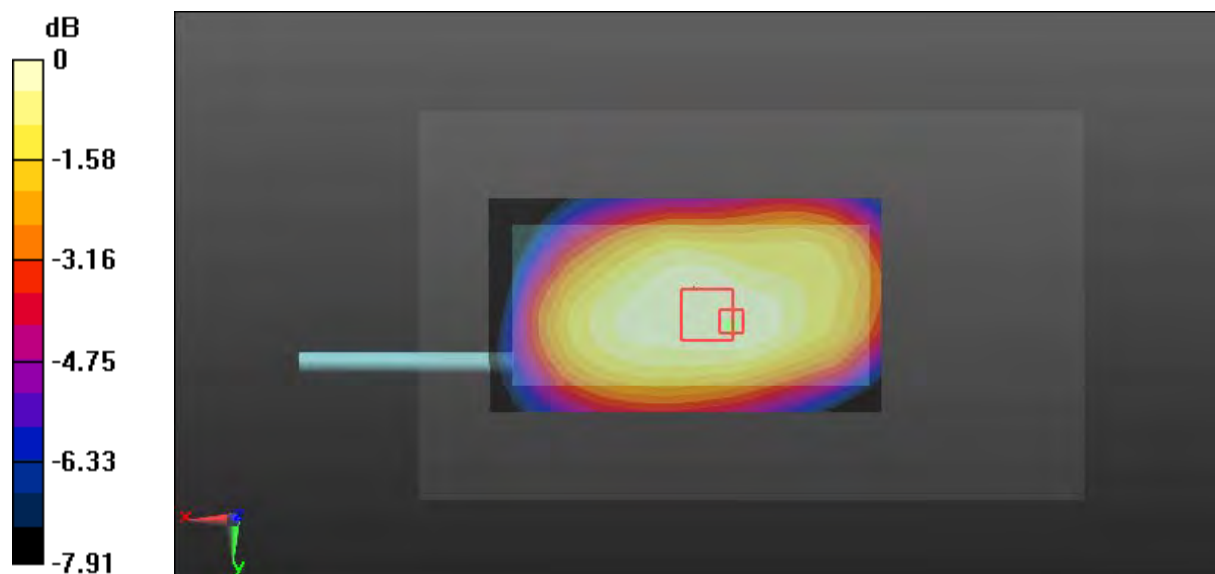

0 dB = 0.156 W/kg = -8.07 dBW/kg

**Test Plot 301#: CDMA 850(BC0)\_Body Left\_Middle**

**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**


Communication System: CDMA EV-DO; Frequency: 836.52 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 836.52 \text{ MHz}$ ;  $\sigma = 0.955 \text{ S/m}$ ;  $\epsilon_r = 57.276$ ;  $\rho = 1000 \text{ kg/m}^3$   
 Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.42, 6.42, 6.42); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x51x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) = 0.186 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value = 10.71 V/m; Power Drift = -0.07 dB  
 Peak SAR (extrapolated) = 0.237 W/kg  
**SAR(1 g) = 0.177 W/kg; SAR(10 g) = 0.128 W/kg**  
 Maximum value of SAR (measured) = 0.188 W/kg

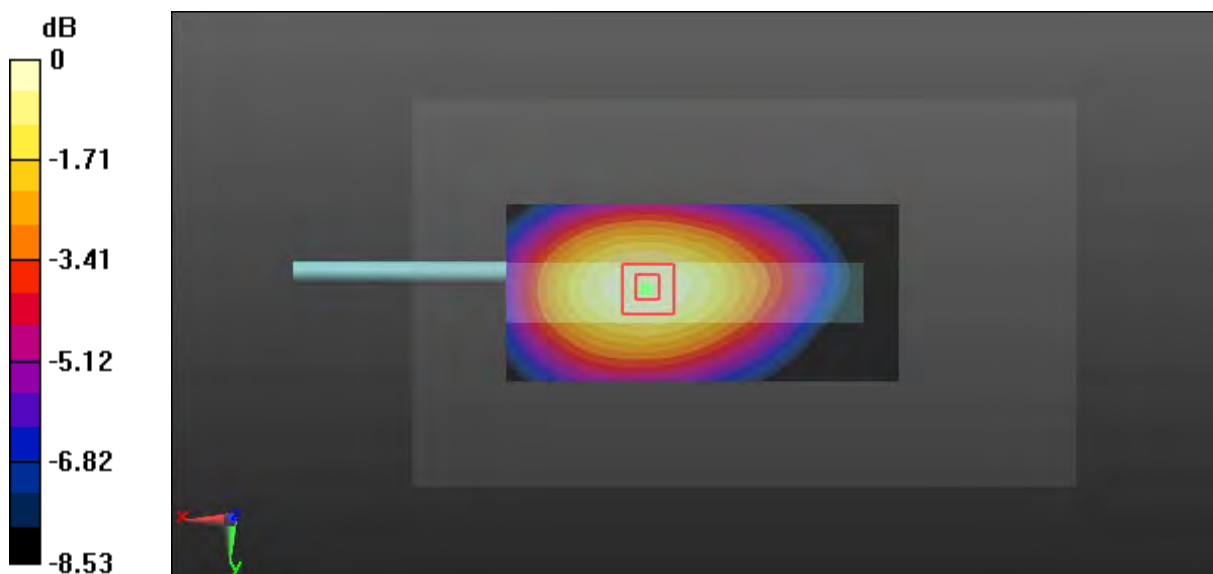

0 dB = 0.188 W/kg = -7.26 dBW/kg

**Test Plot 302#: CDMA 850(BC0)\_Body Right\_Middle**

**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**


Communication System: CDMA EV-DO; Frequency: 836.52 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 836.52 \text{ MHz}$ ;  $\sigma = 0.955 \text{ S/m}$ ;  $\epsilon_r = 57.276$ ;  $\rho = 1000 \text{ kg/m}^3$   
 Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.42, 6.42, 6.42); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x51x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) = 0.274 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value = 12.91 V/m; Power Drift = -0.08 dB  
 Peak SAR (extrapolated) = 0.344 W/kg  
**SAR(1 g) = 0.257 W/kg; SAR(10 g) = 0.187 W/kg**  
 Maximum value of SAR (measured) = 0.273 W/kg

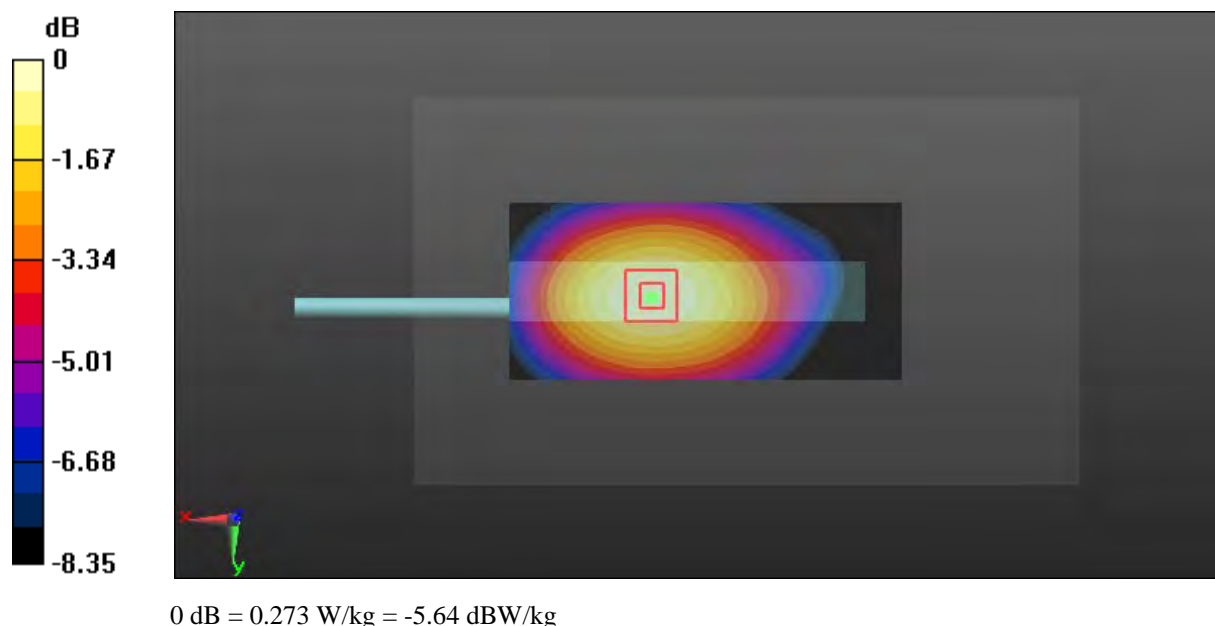

**Test Plot 303#: CDMA 850(BC0)\_Body Bottom\_Middle**

**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**


Communication System: CDMA EV-DO; Frequency: 836.52 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 836.52 \text{ MHz}$ ;  $\sigma = 0.955 \text{ S/m}$ ;  $\epsilon_r = 57.276$ ;  $\rho = 1000 \text{ kg/m}^3$   
 Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.42, 6.42, 6.42); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (51x81x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) = 0.156 W/kg

**Zoom Scan (5x6x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value = 12.44 V/m; Power Drift = -0.13 dB  
 Peak SAR (extrapolated) = 0.255 W/kg  
**SAR(1 g) = 0.142 W/kg; SAR(10 g) = 0.081 W/kg**  
 Maximum value of SAR (measured) = 0.159 W/kg

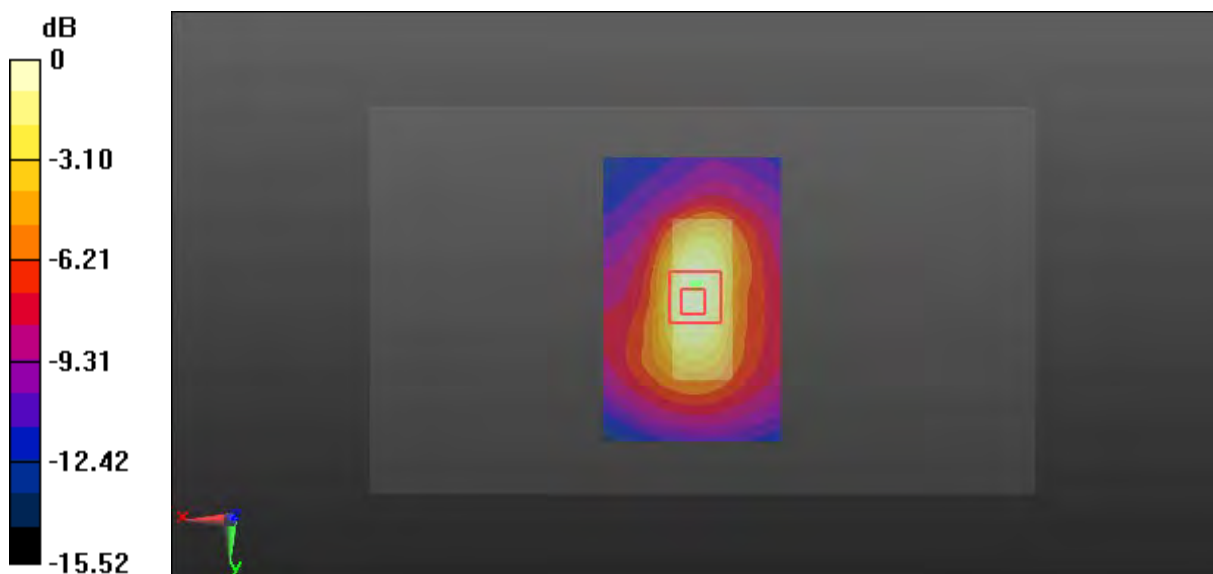

0 dB = 0.159 W/kg = -7.99 dBW/kg

**Test Plot 304#: CDMA 1900(BC1)\_Head Left Cheek\_Low****DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**


Communication System: CDMA 1XRTT; Frequency: 1851.25 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 1851.5$  MHz;  $\sigma = 1.344$  S/m;  $\epsilon_r = 40.728$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.93, 4.93, 4.93); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x71x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
Maximum value of SAR (interpolated) = 0.0750 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 4.154 V/m; Power Drift = 0.04 dB  
Peak SAR (extrapolated) = 0.101 W/kg  
**SAR(1 g) = 0.072 W/kg; SAR(10 g) = 0.049 W/kg**  
Maximum value of SAR (measured) = 0.0763 W/kg

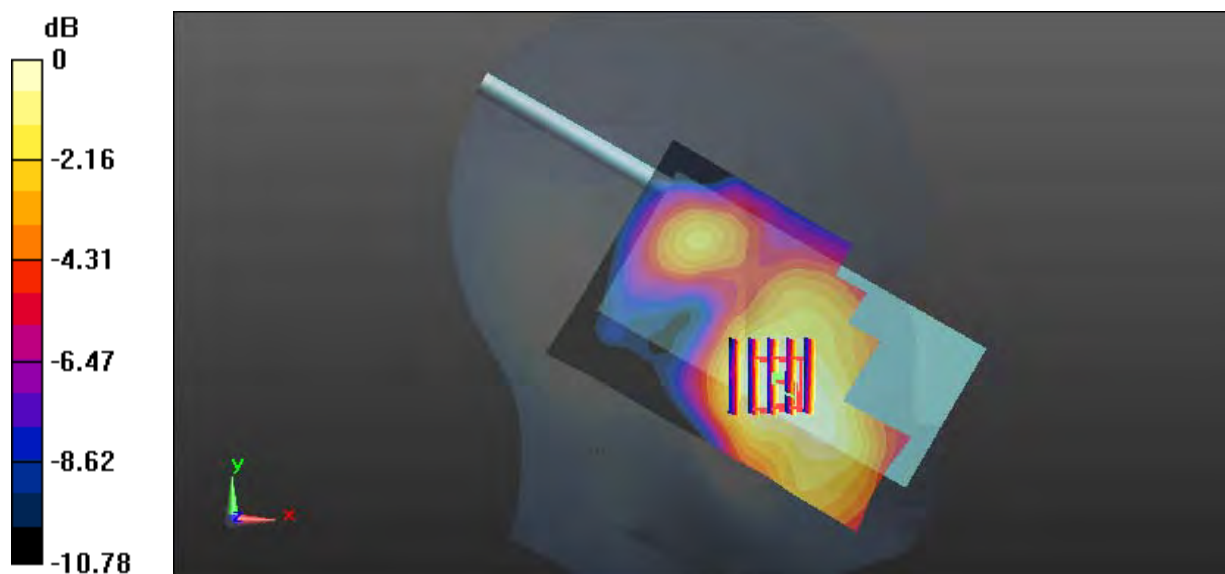

0 dB = 0.0763 W/kg = -11.17 dBW/kg



**Test Plot 305#: CDMA 1900(BC1)\_Head Left Cheek\_Middle**

**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**


Communication System: CDMA 1xRTT; Frequency: 1880 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 1880 \text{ MHz}$ ;  $\sigma = 1.36 \text{ S/m}$ ;  $\epsilon_r = 40.47$ ;  $\rho = 1000 \text{ kg/m}^3$   
 Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.93, 4.93, 4.93); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x71x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) = 0.0857 W/kg

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value = 5.857 V/m; Power Drift = -0.13 dB  
 Peak SAR (extrapolated) = 0.123 W/kg  
**SAR(1 g) = 0.083 W/kg; SAR(10 g) = 0.055 W/kg**  
 Maximum value of SAR (measured) = 0.0878 W/kg

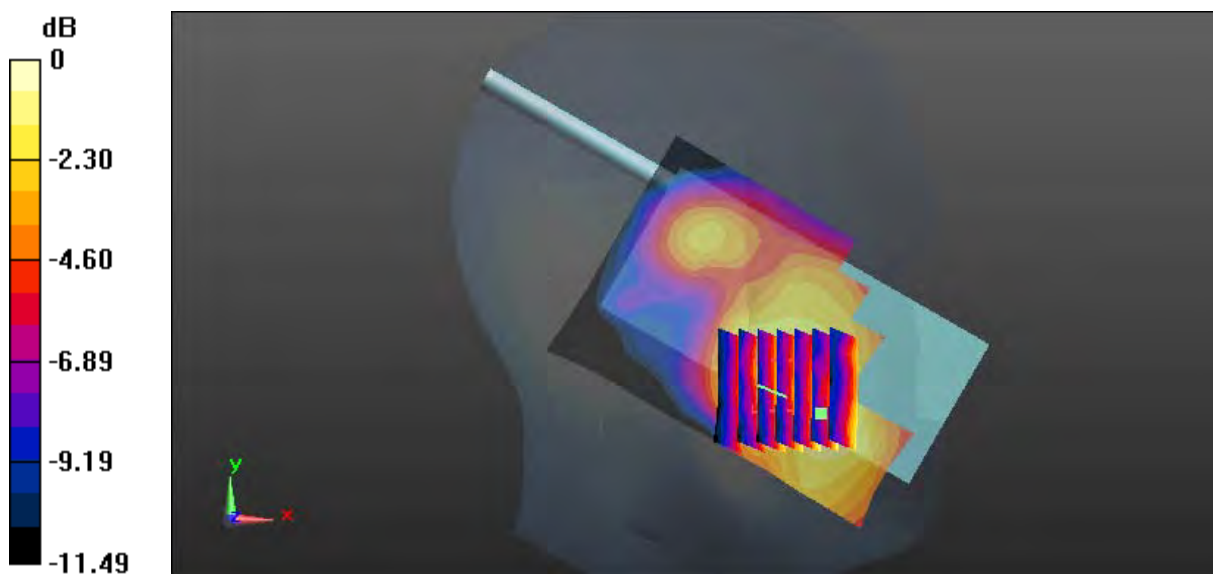

0 dB = 0.0878 W/kg = -10.57 dBW/kg

**Test Plot 306#: CDMA 1900(BC1)\_Head Left Cheek\_High**

**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**


Communication System: CDMA 1xRTT; Frequency: 1908.75 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 1908.75 \text{ MHz}$ ;  $\sigma = 1.403 \text{ S/m}$ ;  $\epsilon_r = 40.313$ ;  $\rho = 1000 \text{ kg/m}^3$   
 Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.93, 4.93, 4.93); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x71x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) = 0.0831 W/kg

**Zoom Scan (6x6x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value = 4.421 V/m; Power Drift = 0.11 dB  
 Peak SAR (extrapolated) = 0.122 W/kg  
**SAR(1 g) = 0.081 W/kg; SAR(10 g) = 0.055 W/kg**  
 Maximum value of SAR (measured) = 0.0866 W/kg

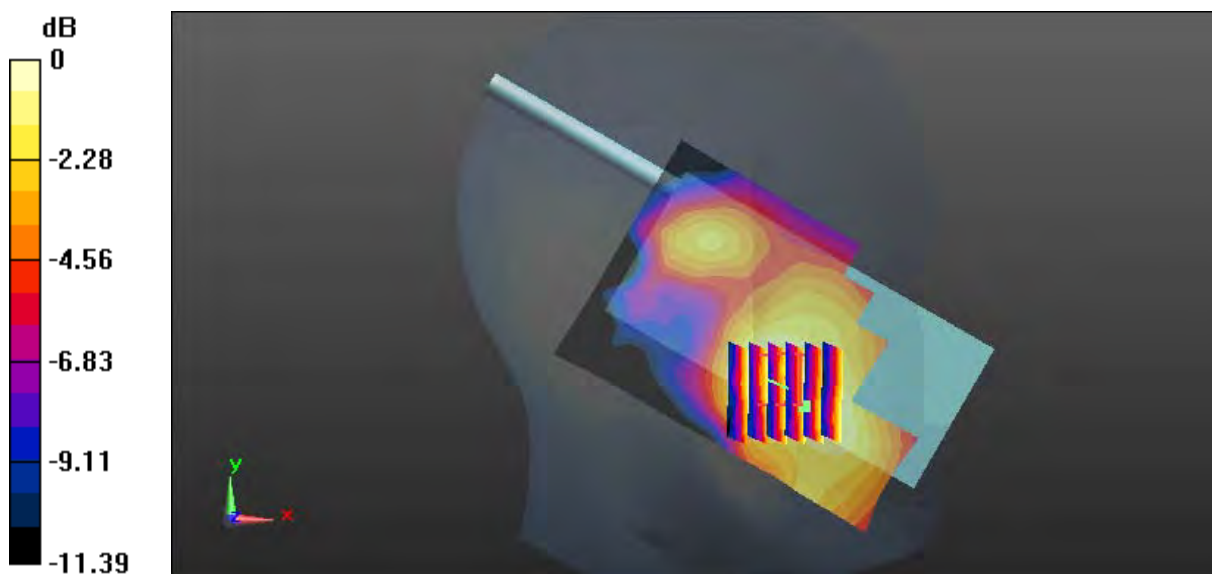

0 dB = 0.0866 W/kg = -10.62 dBW/kg

**Test Plot 307#: CDMA 1900(BC1)\_Head Left Tilt\_Middle**

**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**


Communication System: CDMA 1xRTT; Frequency: 1880 MHz;Duty Cycle: 1:1  
 Medium parameters used:  $f = 1880 \text{ MHz}$ ;  $\sigma = 1.36 \text{ S/m}$ ;  $\epsilon_r = 40.47$ ;  $\rho = 1000 \text{ kg/m}^3$   
 Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.93, 4.93, 4.93); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x61x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) = 0.0694 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value = 4.996 V/m; Power Drift = 0.06 dB  
 Peak SAR (extrapolated) = 0.0970 W/kg  
**SAR(1 g) = 0.061 W/kg; SAR(10 g) = 0.037 W/kg**  
 Maximum value of SAR (measured) = 0.0655 W/kg

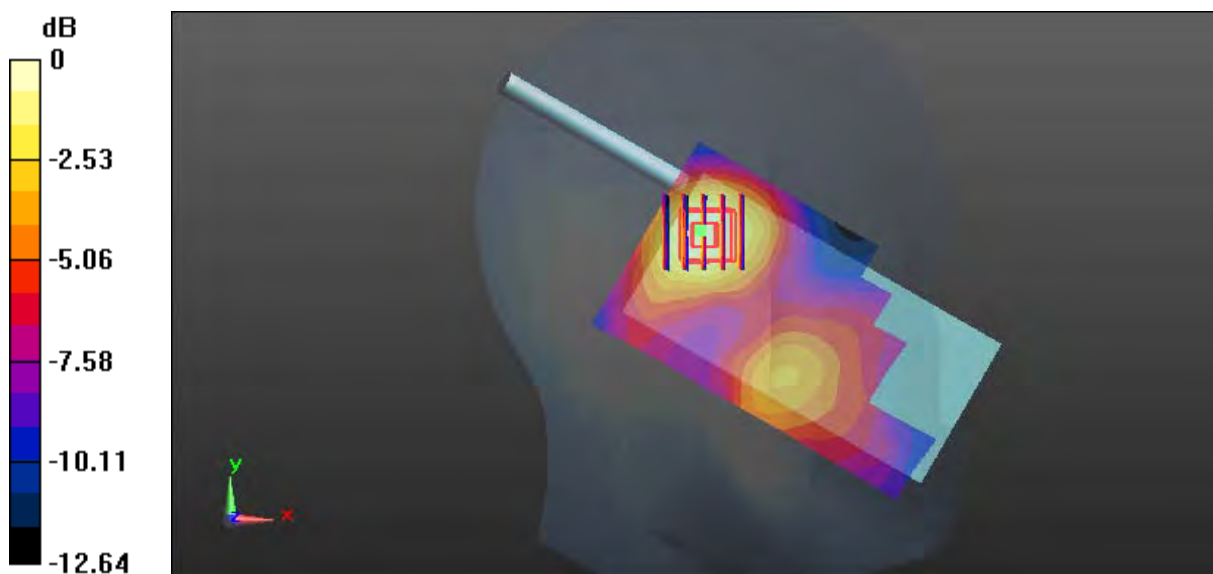

0 dB = 0.0655 W/kg = -11.84 dBW/kg

**Test Plot 308#: CDMA 1900(BC1)\_Head Right Cheek\_Middle**

**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**


Communication System: CDMA 1xRTT; Frequency: 1880 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 1880 \text{ MHz}$ ;  $\sigma = 1.36 \text{ S/m}$ ;  $\epsilon_r = 40.47$ ;  $\rho = 1000 \text{ kg/m}^3$   
 Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.93, 4.93, 4.93); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x61x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) = 0.0614 W/kg

**Zoom Scan (6x7x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value = 2.895 V/m; Power Drift = 0.01 dB  
 Peak SAR (extrapolated) = 0.0750 W/kg  
**SAR(1 g) = 0.056 W/kg; SAR(10 g) = 0.040 W/kg**  
 Maximum value of SAR (measured) = 0.0599 W/kg

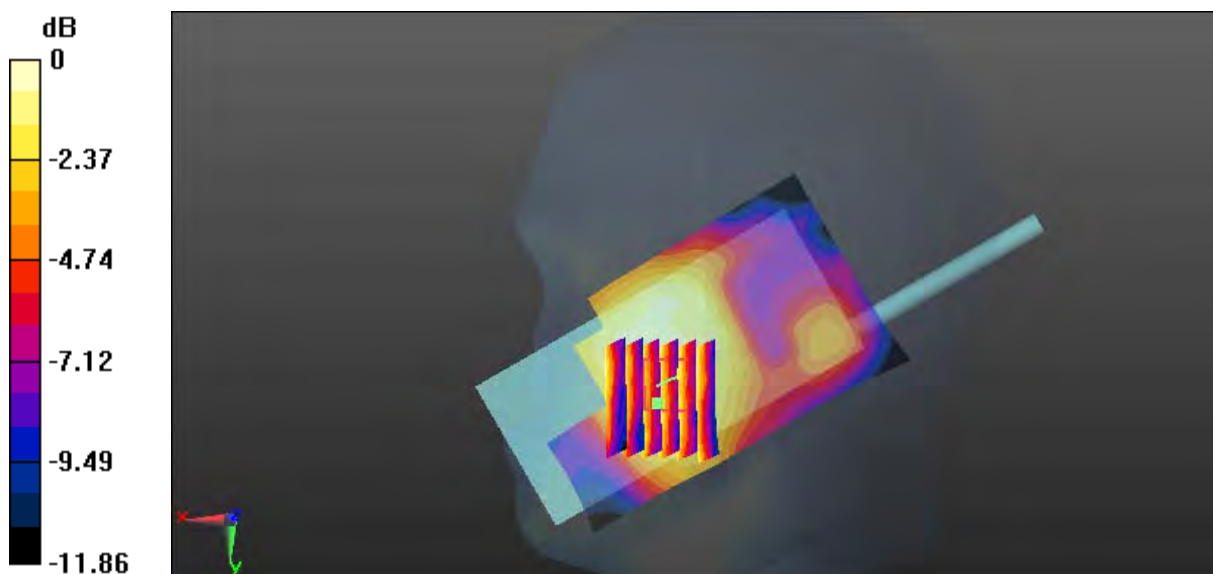

0 dB = 0.0599 W/kg = -12.23 dBW/kg

**Test Plot 309#: CDMA 1900(BC1)\_Head Right Tilt\_Middle****DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**


Communication System: CDMA 1xRTT; Frequency: 1880 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.36$  S/m;  $\epsilon_r = 40.47$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.93, 4.93, 4.93); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x61x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
Maximum value of SAR (interpolated) = 0.0521 W/kg

**Zoom Scan (6x6x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 4.264 V/m; Power Drift = -0.14 dB  
Peak SAR (extrapolated) = 0.0590 W/kg  
**SAR(1 g) = 0.038 W/kg; SAR(10 g) = 0.025 W/kg**  
Maximum value of SAR (measured) = 0.0402 W/kg

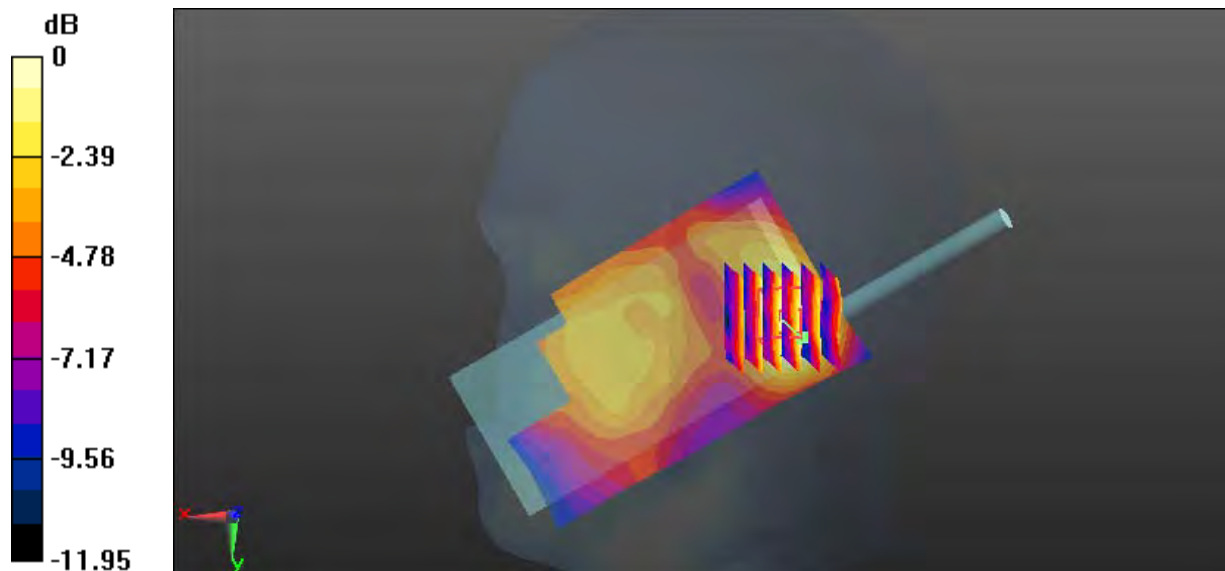

0 dB = 0.0402 W/kg = -13.96 dBW/kg

**Test Plot 310#: CDMA 1900(BC1)\_Face Up\_Middle****DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**


Communication System: CDMA EV-DO; Frequency: 1880 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.36$  S/m;  $\epsilon_r = 40.47$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.93, 4.93, 4.93); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x61x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
Maximum value of SAR (interpolated) = 0.0348 W/kg

**Zoom Scan (8x7x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 5.253 V/m; Power Drift = -0.07 dB  
Peak SAR (extrapolated) = 0.185 W/kg  
**SAR(1 g) = 0.037 W/kg; SAR(10 g) = 0.017 W/kg**  
Maximum value of SAR (measured) = 0.0315 W/kg

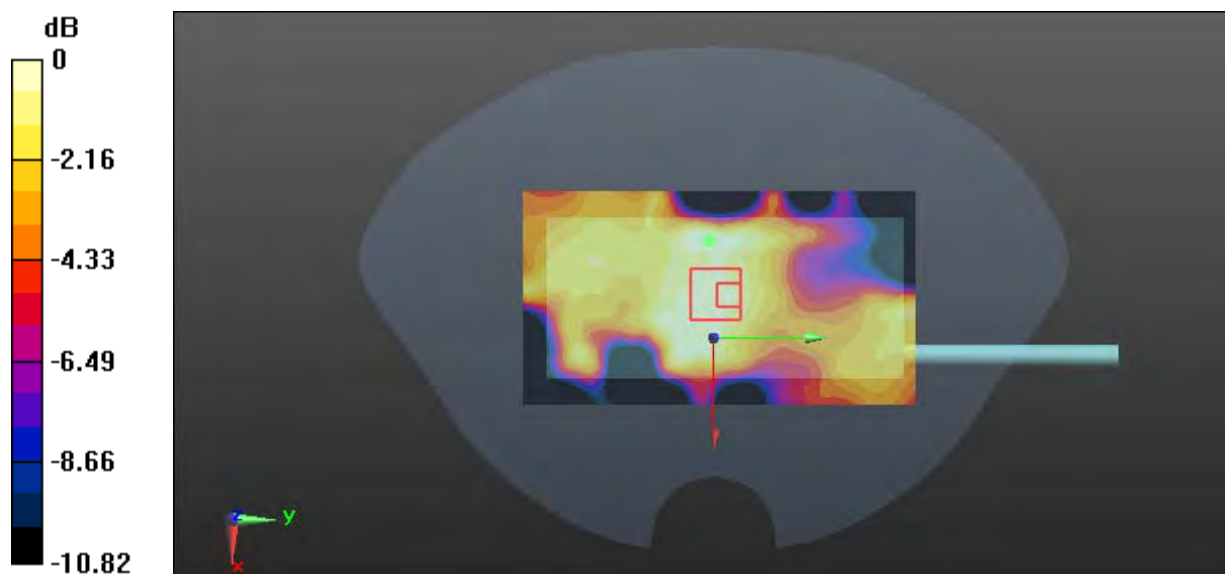

0 dB = 0.0315 W/kg = -15.02 dBW/kg

**Test Plot 311#: CDMA 1900(BC1)\_Body Worn Back\_Middle**

**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: CDMA 1xRTT; Frequency: 1880 MHz;Duty Cycle: 1:1  
 Medium parameters used:  $f = 1880 \text{ MHz}$ ;  $\sigma = 1.479 \text{ S/m}$ ;  $\epsilon_r = 54.231$ ;  $\rho = 1000 \text{ kg/m}^3$   
 Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.65, 4.65, 4.65); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (121x61x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.0315 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 5.138 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 0.0443 W/kg

**SAR(1 g) = 0.028 W/kg; SAR(10 g) = 0.018 W/kg**

Maximum value of SAR (measured) = 0.0310 W/kg

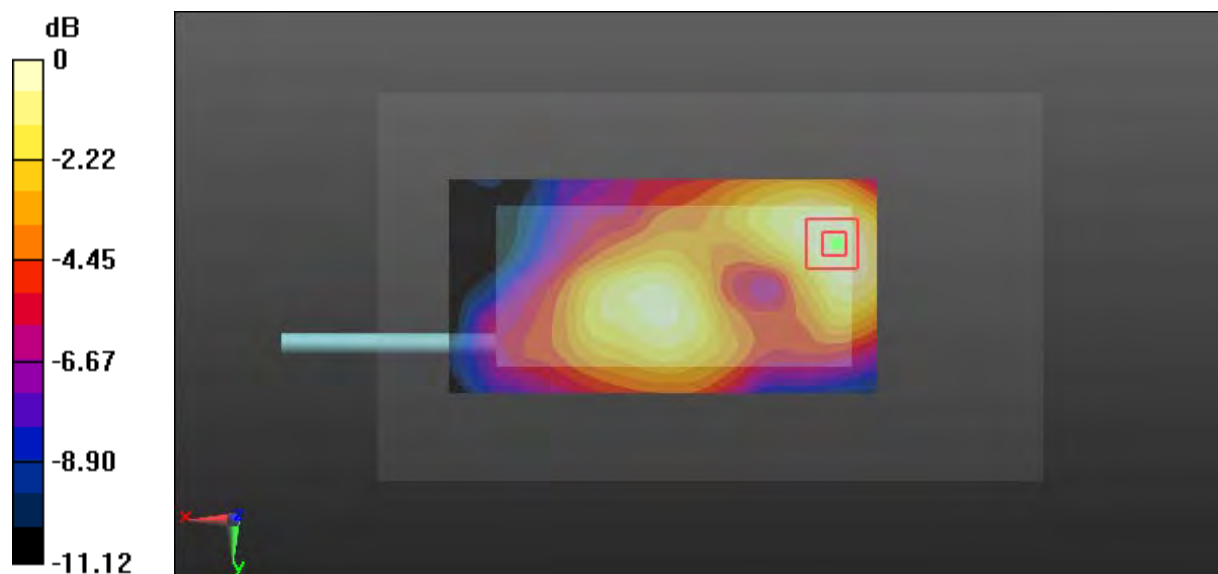

0 dB = 0.0310 W/kg = -15.09 dBW/kg

**Test Plot 312#: CDMA 1900(BC1)\_Body Front \_Middle**

**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**


Communication System: CDMA EV-DO; Frequency: 1880 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 1880 \text{ MHz}$ ;  $\sigma = 1.479 \text{ S/m}$ ;  $\epsilon_r = 54.231$ ;  $\rho = 1000 \text{ kg/m}^3$   
 Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.65, 4.65, 4.65); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x61x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) = 0.0782 W/kg

**Zoom Scan (7x6x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value = 7.089 V/m; Power Drift = 0.05 dB  
 Peak SAR (extrapolated) = 0.110 W/kg  
**SAR(1 g) = 0.073 W/kg; SAR(10 g) = 0.049 W/kg**  
 Maximum value of SAR (measured) = 0.0784 W/kg

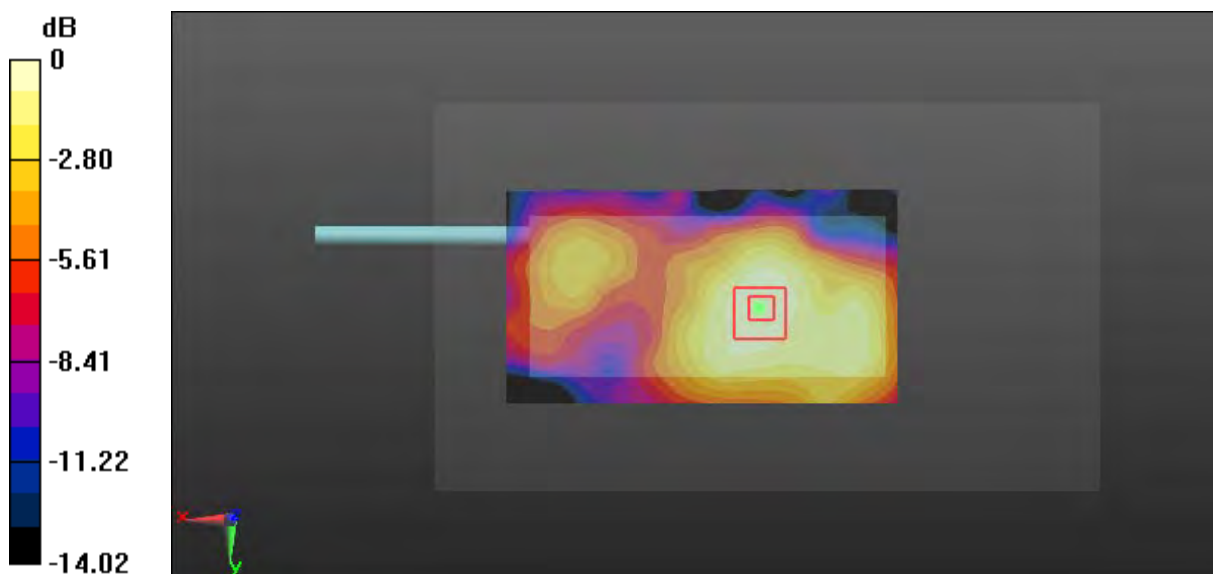

0 dB = 0.0784 W/kg = -11.06 dBW/kg



**Test Plot 313#: CDMA 1900(BC1)\_Body Back\_Middle**

**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**


Communication System: CDMA EV-DO; Frequency: 1880 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 1880 \text{ MHz}$ ;  $\sigma = 1.479 \text{ S/m}$ ;  $\epsilon_r = 54.231$ ;  $\rho = 1000 \text{ kg/m}^3$   
 Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.65, 4.65, 4.65); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x61x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) = 0.0438 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value = 3.341 V/m; Power Drift = -0.08 dB  
 Peak SAR (extrapolated) = 0.0570 W/kg  
**SAR(1 g) = 0.039 W/kg; SAR(10 g) = 0.027 W/kg**  
 Maximum value of SAR (measured) = 0.0421 W/kg

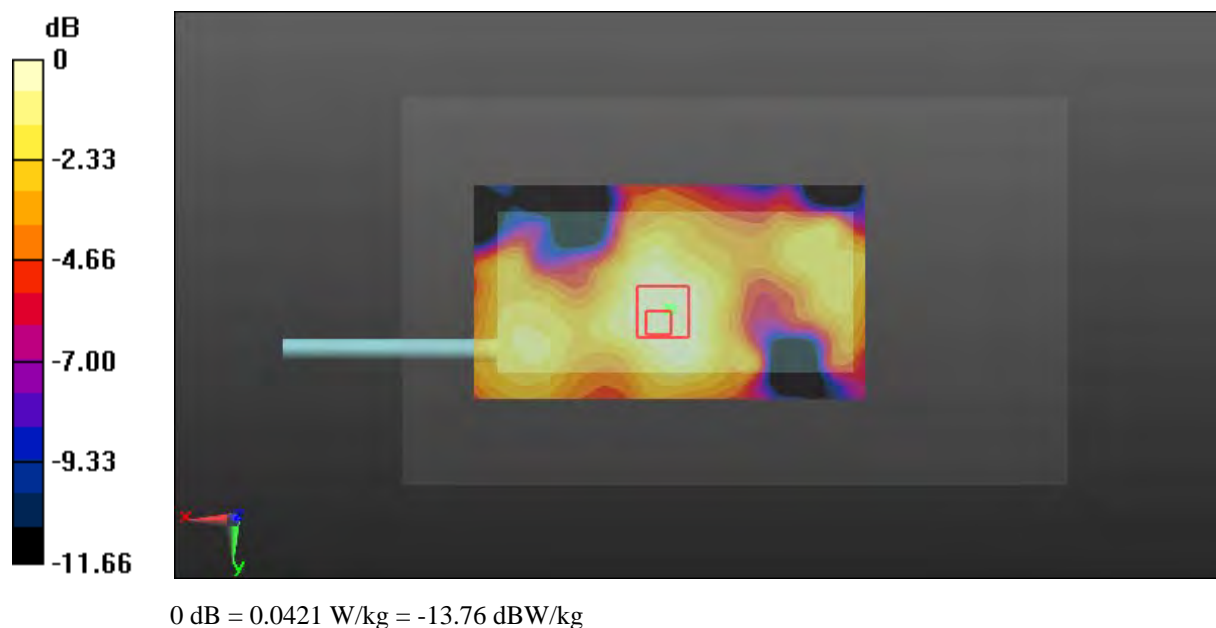

**Test Plot 314#: CDMA 1900(BC1)\_Body Left\_Low**

**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**


Communication System: CDMA EV-DO; Frequency: 1851.25 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 1851.25 \text{ MHz}$ ;  $\sigma = 1.462 \text{ S/m}$ ;  $\epsilon_r = 54.612$ ;  $\rho = 1000 \text{ kg/m}^3$   
 Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.65, 4.65, 4.65); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x51x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) = 0.0846 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value = 7.581 V/m; Power Drift = 0.04 dB  
 Peak SAR (extrapolated) = 0.124 W/kg  
**SAR(1 g) = 0.080 W/kg; SAR(10 g) = 0.050 W/kg**  
 Maximum value of SAR (measured) = 0.0861 W/kg

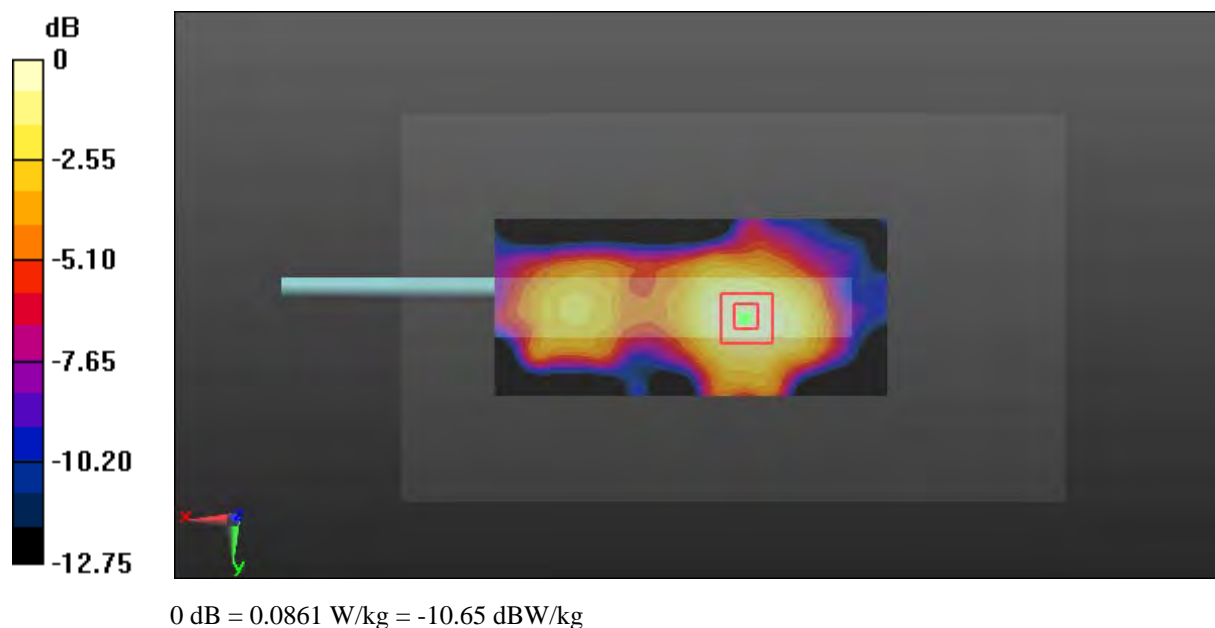

**Test Plot 315#: CDMA 1900(BC1)\_Body Left\_Middle**

**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**


Communication System: CDMA EV-DO; Frequency: 1880 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 1880 \text{ MHz}$ ;  $\sigma = 1.479 \text{ S/m}$ ;  $\epsilon_r = 54.231$ ;  $\rho = 1000 \text{ kg/m}^3$   
 Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.65, 4.65, 4.65); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x51x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) = 0.103 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value = 8.271 V/m; Power Drift = -0.14 dB  
 Peak SAR (extrapolated) = 0.149 W/kg  
**SAR(1 g) = 0.094 W/kg; SAR(10 g) = 0.058 W/kg**  
 Maximum value of SAR (measured) = 0.104 W/kg

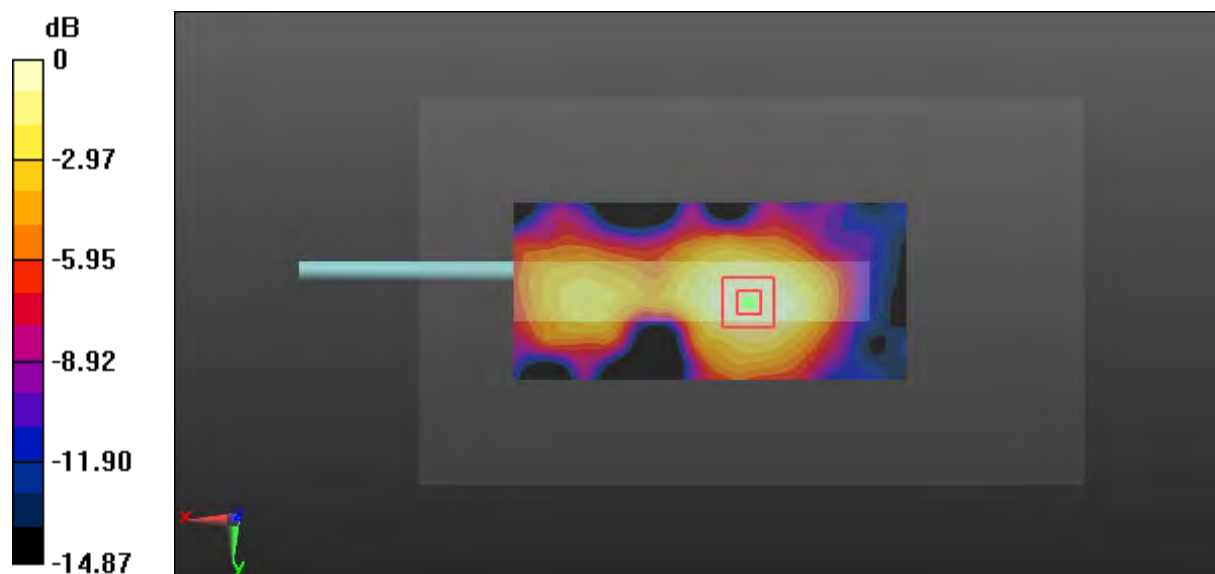

0 dB = 0.104 W/kg = -9.83 dBW/kg

**Test Plot 316#: CDMA 1900(BC1)\_Body Left\_High**

**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**


Communication System: CDMA EV-DO; Frequency: 1908.75 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 1908.75 \text{ MHz}$ ;  $\sigma = 1.517 \text{ S/m}$ ;  $\epsilon_r = 54.105$ ;  $\rho = 1000 \text{ kg/m}^3$   
 Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.65, 4.65, 4.65); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x51x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) = 0.119 W/kg

**Zoom Scan (6x6x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value = 8.525 V/m; Power Drift = -0.03 dB  
 Peak SAR (extrapolated) = 0.160 W/kg  
**SAR(1 g) = 0.102 W/kg; SAR(10 g) = 0.063 W/kg**  
 Maximum value of SAR (measured) = 0.108 W/kg

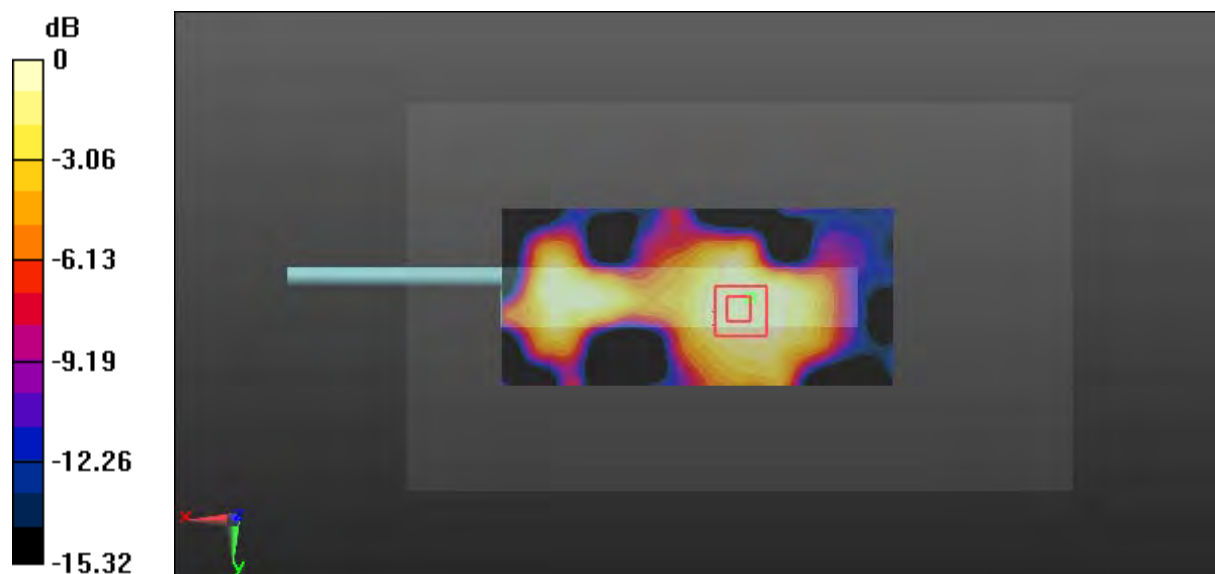

0 dB = 0.108 W/kg = -9.67 dBW/kg

**Test Plot 317#: CDMA 1900(BC1)\_Body Right\_Middle****DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: CDMA EV-DO; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.479$  S/m;  $\epsilon_r = 54.231$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.65, 4.65, 4.65); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x51x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0510 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.349 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.0600 W/kg

**SAR(1 g) = 0.030 W/kg; SAR(10 g) = 0.020 W/kg**

Maximum value of SAR (measured) = 0.0319 W/kg

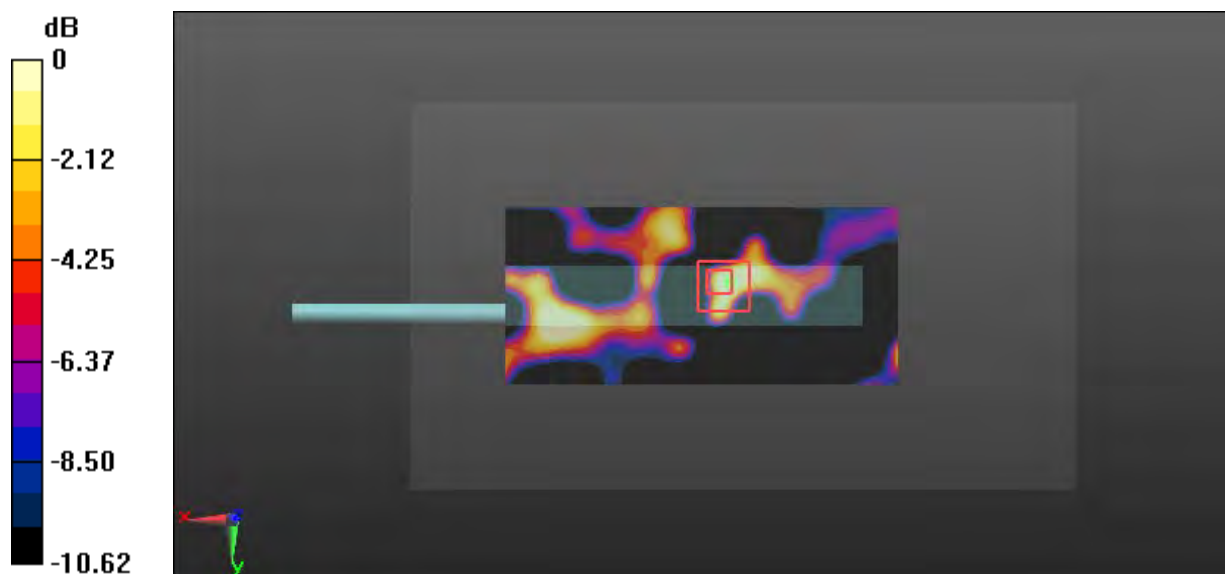

0 dB = 0.0319 W/kg = -14.96 dBW/kg

**Test Plot 318#: CDMA 1900(BC1)\_Body Bottom\_Middle**

**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**


Communication System: CDMA EV-DO; Frequency: 1880 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 1880 \text{ MHz}$ ;  $\sigma = 1.479 \text{ S/m}$ ;  $\epsilon_r = 54.231$ ;  $\rho = 1000 \text{ kg/m}^3$   
 Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.65, 4.65, 4.65); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (51x81x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) =  $0.0984 \text{ W/kg}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value =  $7.109 \text{ V/m}$ ; Power Drift =  $-0.10 \text{ dB}$   
 Peak SAR (extrapolated) =  $0.134 \text{ W/kg}$   
**SAR(1 g) =  $0.081 \text{ W/kg}$ ; SAR(10 g) =  $0.048 \text{ W/kg}$**   
 Maximum value of SAR (measured) =  $0.0898 \text{ W/kg}$

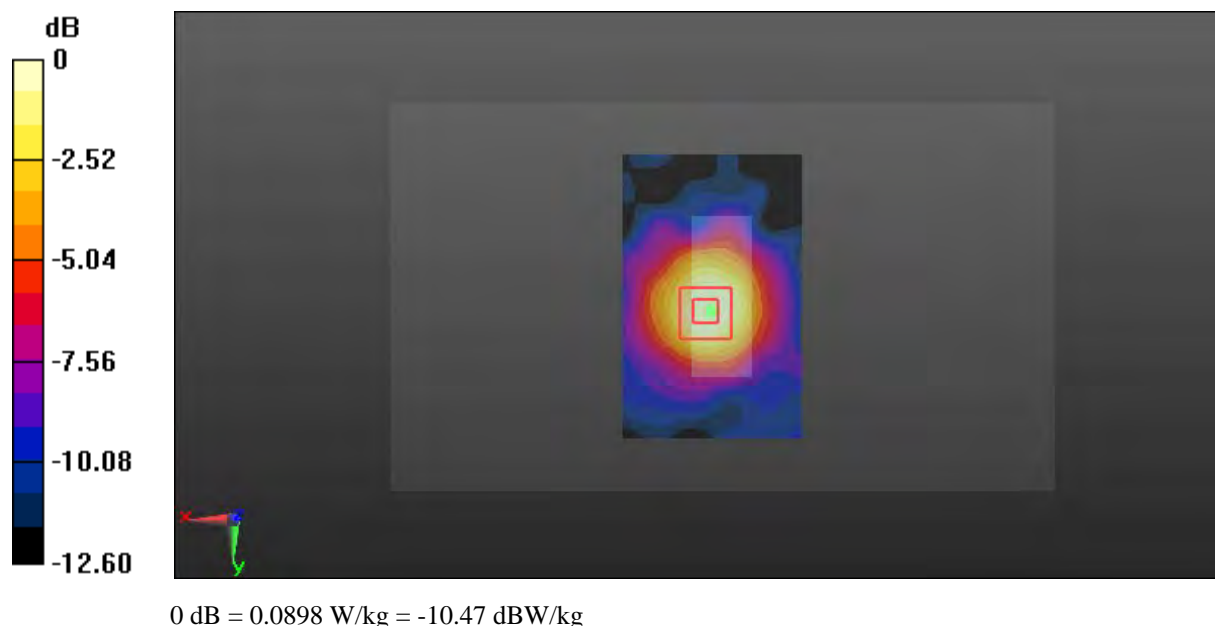

**Test Plot 319#: CDMA 800(BC10)\_Head Left Cheek\_Low**

**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**


Communication System: CDMA 1XRTT; Frequency: 817.25 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 817.25 \text{ MHz}$ ;  $\sigma = 0.862 \text{ S/m}$ ;  $\epsilon_r = 42.478$ ;  $\rho = 1000 \text{ kg/m}^3$   
 Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.57, 6.57, 6.57); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x61x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) = 0.299 W/kg

**Zoom Scan (6x6x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value = 10.88 V/m; Power Drift = -0.03 dB  
 Peak SAR (extrapolated) = 0.353 W/kg  
**SAR(1 g) = 0.286 W/kg; SAR(10 g) = 0.224 W/kg**  
 Maximum value of SAR (measured) = 0.301 W/kg

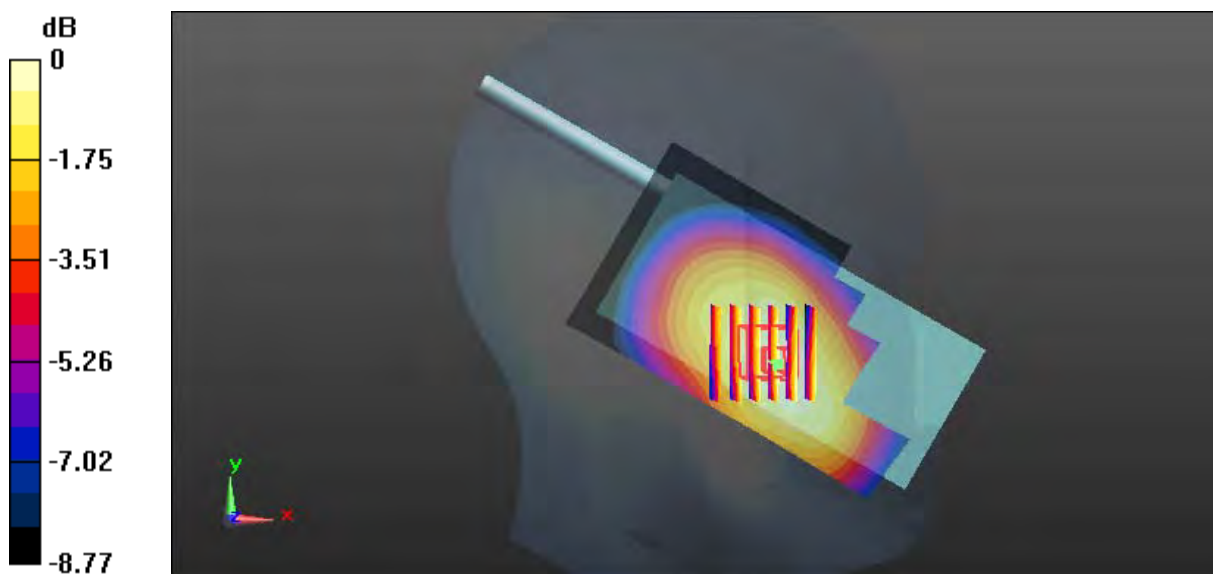

0 dB = 0.301 W/kg = -5.21 dBW/kg

**Test Plot 320#: CDMA 800(BC10)\_Head Left Cheek\_Middle****DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: CDMA 1xRTT; Frequency: 820.5 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 820.5$  MHz;  $\sigma = 0.874$  S/m;  $\epsilon_r = 42.386$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.57, 6.57, 6.57); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x61x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.316 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.28 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 0.376 W/kg

**SAR(1 g) = 0.303 W/kg; SAR(10 g) = 0.236 W/kg**

Maximum value of SAR (measured) = 0.320 W/kg

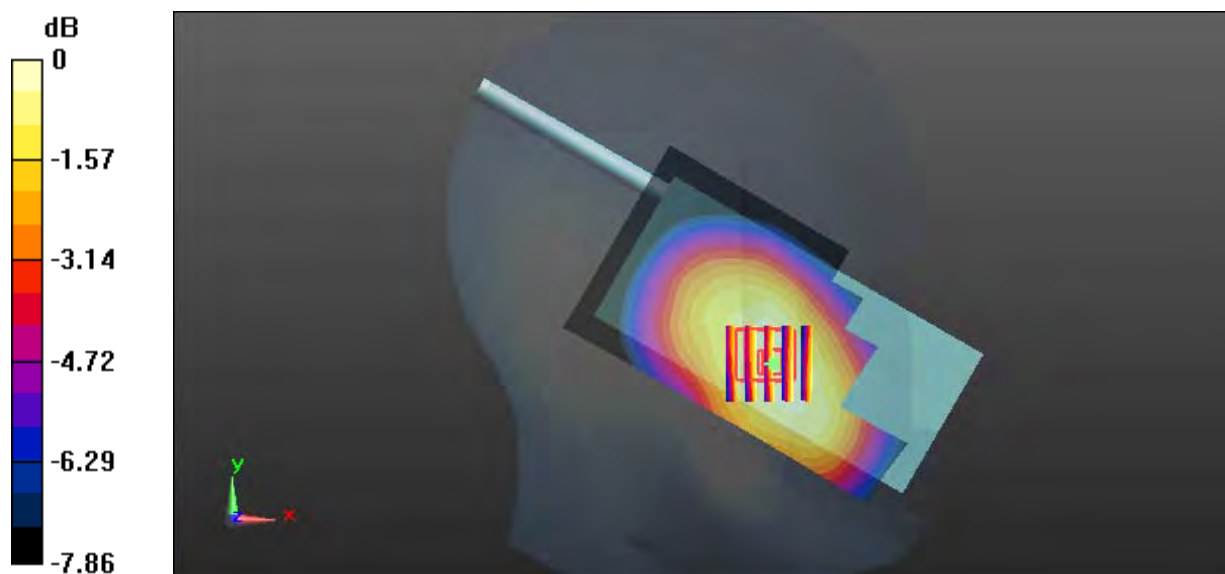

0 dB = 0.320 W/kg = -4.95 dBW/kg



**Test Plot 321#: CDMA 800(BC10)\_Head Left Cheek\_High**

**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**


Communication System: CDMA 1xRTT; Frequency: 822.75 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 822.75 \text{ MHz}$ ;  $\sigma = 0.881 \text{ S/m}$ ;  $\epsilon_r = 42.316$ ;  $\rho = 1000 \text{ kg/m}^3$   
 Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.57, 6.57, 6.57); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x61x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) = 0.344 W/kg

**Zoom Scan (6x6x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value = 11.43 V/m; Power Drift = -0.04 dB  
 Peak SAR (extrapolated) = 0.406 W/kg  
**SAR(1 g) = 0.328 W/kg; SAR(10 g) = 0.255 W/kg**  
 Maximum value of SAR (measured) = 0.343 W/kg

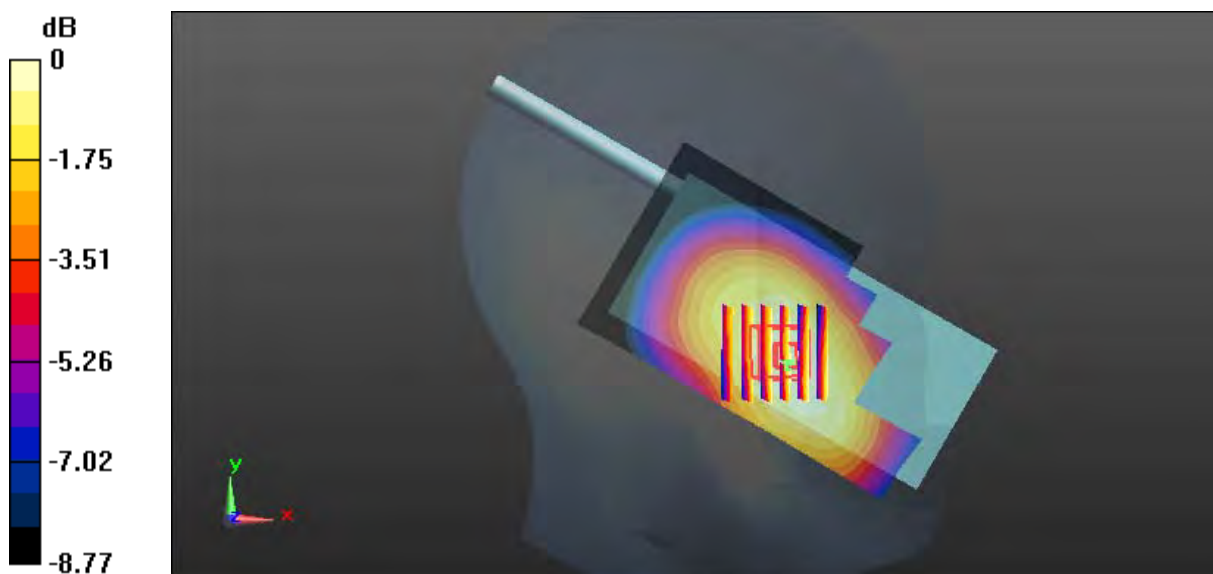

0 dB = 0.343 W/kg = -4.65 dBW/kg

**Test Plot 322#: CDMA 800(BC10)\_Head Left Tilt\_Middle**

**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**


Communication System: CDMA 1xRTT; Frequency: 820.5 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 820.5 \text{ MHz}$ ;  $\sigma = 0.874 \text{ S/m}$ ;  $\epsilon_r = 42.386$ ;  $\rho = 1000 \text{ kg/m}^3$   
 Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.57, 6.57, 6.57); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x61x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) = 0.199 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value = 13.38 V/m; Power Drift = -0.03 dB  
 Peak SAR (extrapolated) = 0.245 W/kg  
**SAR(1 g) = 0.194 W/kg; SAR(10 g) = 0.149 W/kg**  
 Maximum value of SAR (measured) = 0.204 W/kg

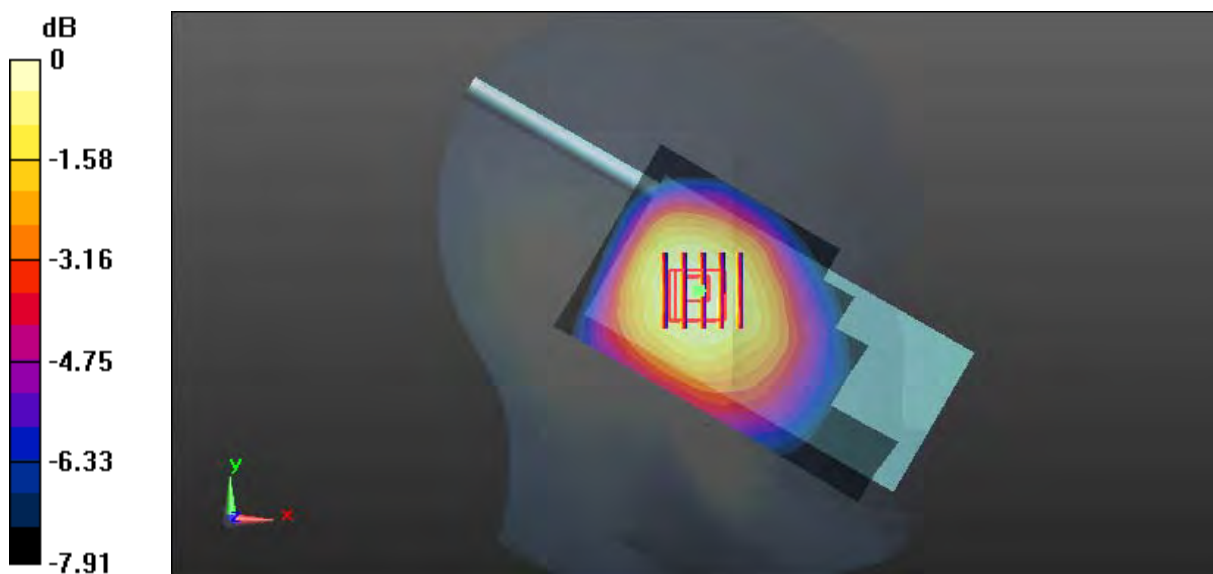

0 dB = 0.204 W/kg = -6.90 dBW/kg

**Test Plot 323#: CDMA 800(BC10)\_Head Right Cheek\_Middle**

**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**


Communication System: CDMA 1xRTT; Frequency: 820.5 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 820.5 \text{ MHz}$ ;  $\sigma = 0.874 \text{ S/m}$ ;  $\epsilon_r = 42.386$ ;  $\rho = 1000 \text{ kg/m}^3$   
 Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.57, 6.57, 6.57); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: SAM 1; Type: QD000P40CC; Serial: TP:1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x61x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) = 0.267 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value = 7.685 V/m; Power Drift = -0.02 dB  
 Peak SAR (extrapolated) = 0.304 W/kg  
**SAR(1 g) = 0.257 W/kg; SAR(10 g) = 0.208 W/kg**  
 Maximum value of SAR (measured) = 0.265 W/kg

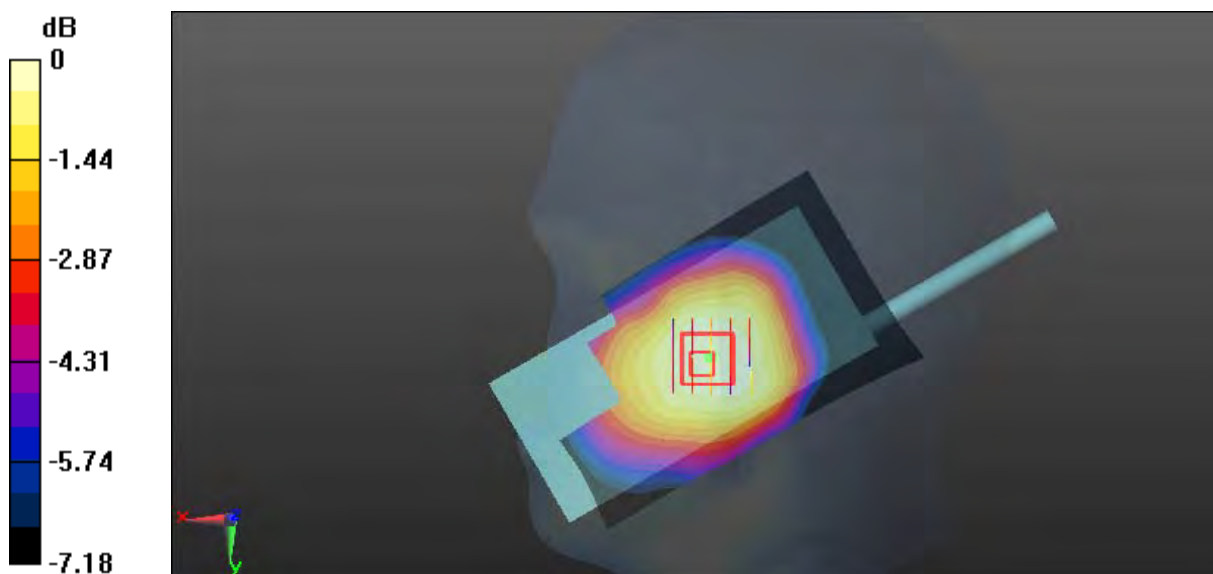

0 dB = 0.265 W/kg = -5.77 dBW/kg

**Test Plot 324#: CDMA 800(BC10)\_Head Right Tilt\_Middle****DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: CDMA 1xRTT; Frequency: 820.5 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 820.5$  MHz;  $\sigma = 0.874$  S/m;  $\epsilon_r = 42.386$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.57, 6.57, 6.57); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x61x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.160 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.76 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 0.186 W/kg

**SAR(1 g) = 0.153 W/kg; SAR(10 g) = 0.119 W/kg**

Maximum value of SAR (measured) = 0.160 W/kg

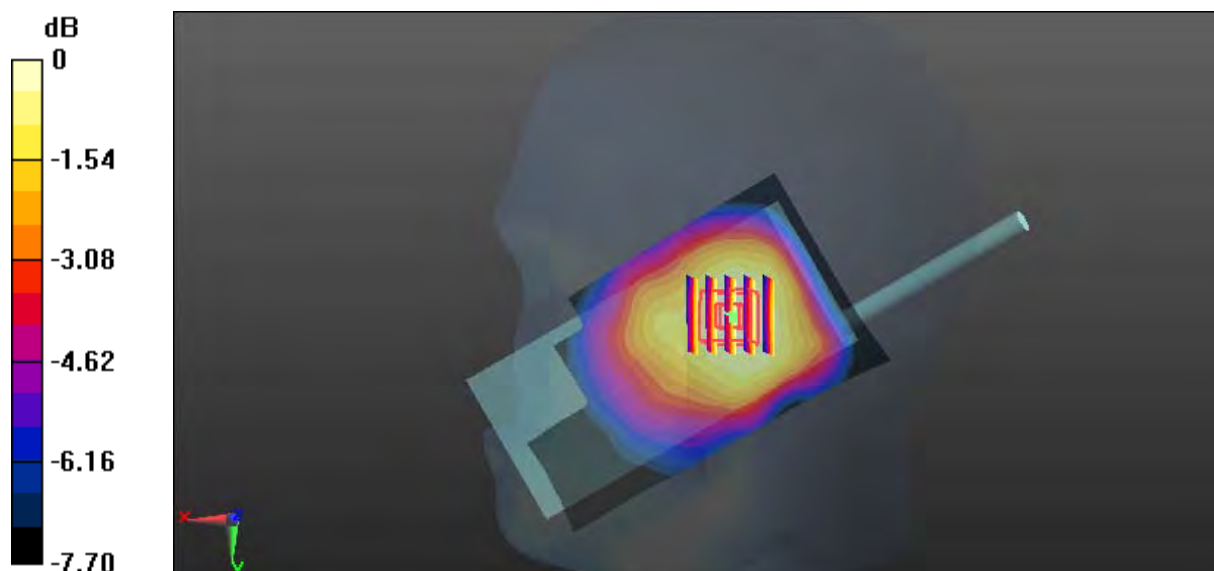

0 dB = 0.160 W/kg = -7.96 dBW/kg

**Test Plot 325#: CDMA 800(BC10)\_Face Up\_Middle**

**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**


Communication System: CDMA EV-DO; Frequency: 820.5 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 820.5 \text{ MHz}$ ;  $\sigma = 0.874 \text{ S/m}$ ;  $\epsilon_r = 42.386$ ;  $\rho = 1000 \text{ kg/m}^3$   
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.57, 6.57, 6.57); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x61x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) = 0.150 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value = 12.23 V/m; Power Drift = -0.07 dB  
 Peak SAR (extrapolated) = 0.176 W/kg  
**SAR(1 g) = 0.142 W/kg; SAR(10 g) = 0.109 W/kg**  
 Maximum value of SAR (measured) = 0.149 W/kg

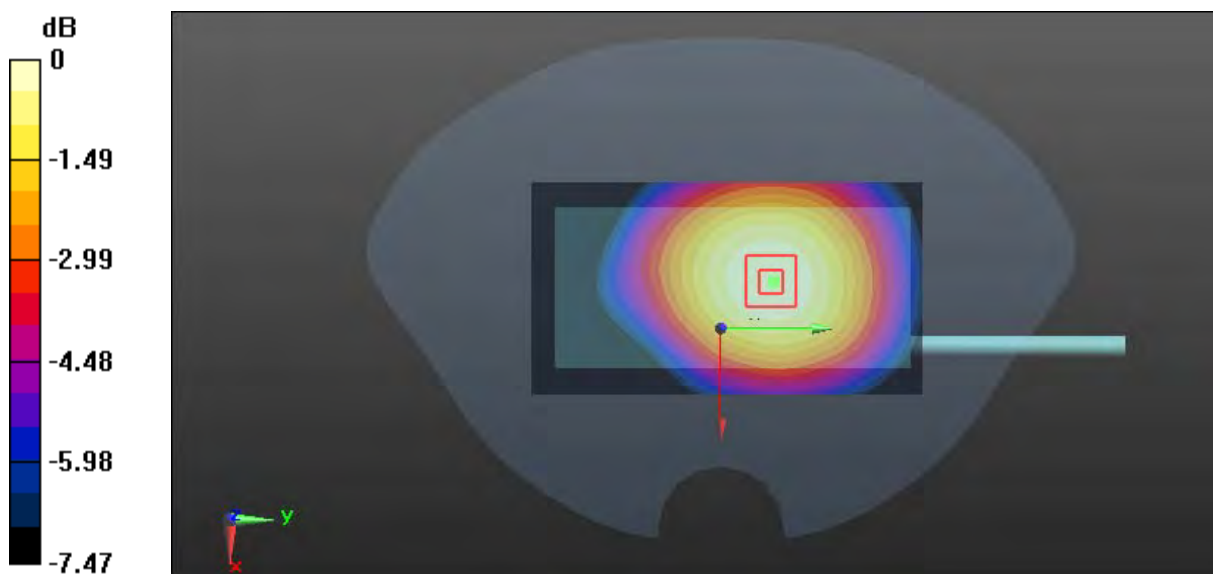

0 dB = 0.149 W/kg = -8.27 dBW/kg

**Test Plot 326#: CDMA 800(BC10)\_Body Worn Back\_Middle**

**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**


Communication System: CDMA 1xRTT; Frequency: 820.5 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 820.5 \text{ MHz}$ ;  $\sigma = 0.955 \text{ S/m}$ ;  $\epsilon_r = 57.323$ ;  $\rho = 1000 \text{ kg/m}^3$   
 Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.42, 6.42, 6.42); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x61x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) = 0.121 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value = 10.02 V/m; Power Drift = -0.05 dB  
 Peak SAR (extrapolated) = 0.136 W/kg  
**SAR(1 g) = 0.113 W/kg; SAR(10 g) = 0.089 W/kg**  
 Maximum value of SAR (measured) = 0.118 W/kg

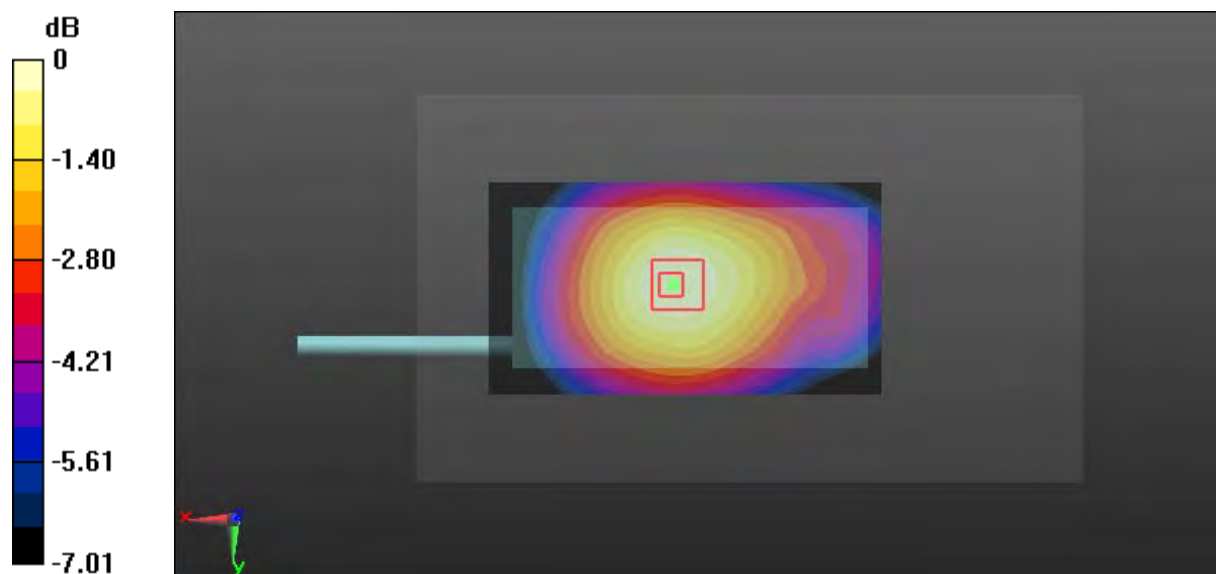

0 dB = 0.118 W/kg = -9.28 dBW/kg

**Test Plot 327#: CDMA 800(BC10)\_Body Front \_Low**

**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**


Communication System: CDMA EV-DO; Frequency: 817.25 MHz;Duty Cycle: 1:1  
 Medium parameters used:  $f = 817.25 \text{ MHz}$ ;  $\sigma = 0.937 \text{ S/m}$ ;  $\epsilon_r = 57.437$ ;  $\rho = 1000 \text{ kg/m}^3$   
 Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.42, 6.42, 6.42); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x61x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) = 0.322 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value = 16.26 V/m; Power Drift = -0.08 dB  
 Peak SAR (extrapolated) = 0.384 W/kg  
**SAR(1 g) = 0.312 W/kg; SAR(10 g) = 0.240 W/kg**  
 Maximum value of SAR (measured) = 0.327 W/kg

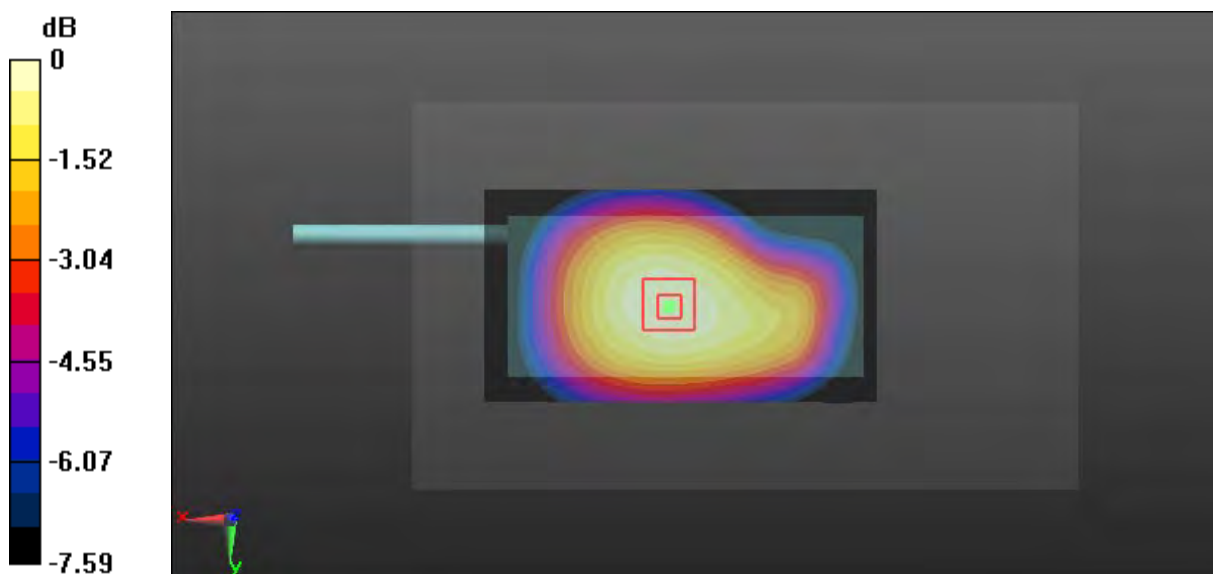

0 dB = 0.327 W/kg = -4.85 dBW/kg

**Test Plot 328#: CDMA 800(BC10)\_Body Front \_Middle**

**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**


Communication System: CDMA EV-DO; Frequency: 820.5 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 820.5 \text{ MHz}$ ;  $\sigma = 0.955 \text{ S/m}$ ;  $\epsilon_r = 57.323$ ;  $\rho = 1000 \text{ kg/m}^3$   
 Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.42, 6.42, 6.42); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x61x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) = 0.369 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value = 17.15 V/m; Power Drift = -0.15 dB  
 Peak SAR (extrapolated) = 0.439 W/kg  
**SAR(1 g) = 0.353 W/kg; SAR(10 g) = 0.272 W/kg**  
 Maximum value of SAR (measured) = 0.370 W/kg

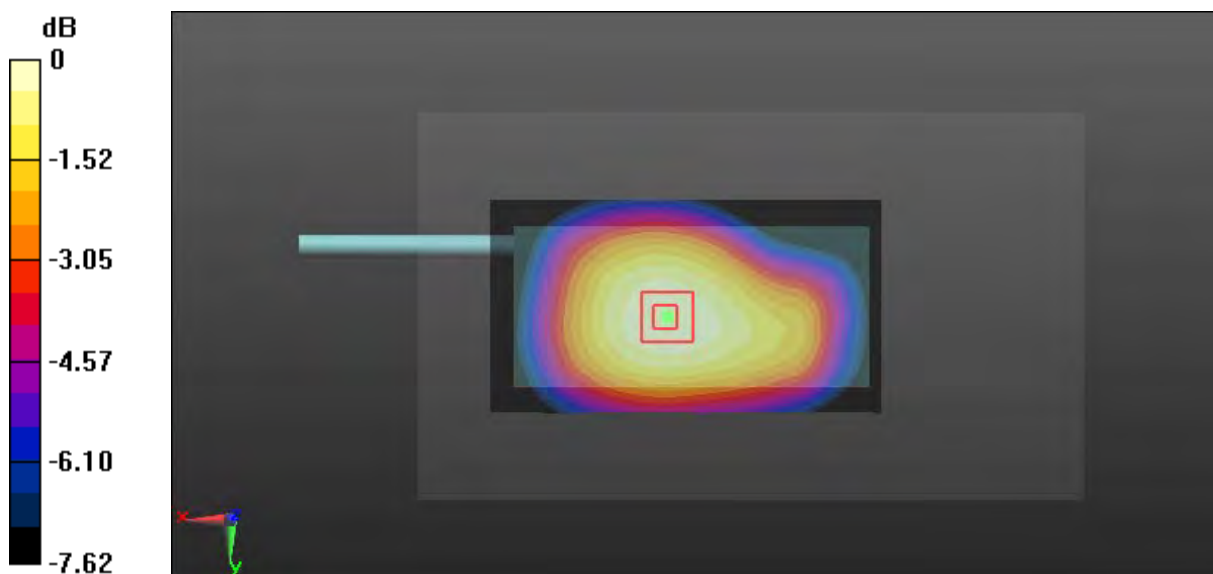

0 dB = 0.370 W/kg = -4.32 dBW/kg



**Test Plot 329#: CDMA 800(BC10)\_Body Front \_High**

**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**


Communication System: CDMA EV-DO; Frequency: 822.75 MHz;Duty Cycle: 1:1  
 Medium parameters used:  $f = 822.75 \text{ MHz}$ ;  $\sigma = 0.957 \text{ S/m}$ ;  $\epsilon_r = 57.26$ ;  $\rho = 1000 \text{ kg/m}^3$   
 Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.42, 6.42, 6.42); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x61x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) = 0.325 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value = 15.90 V/m; Power Drift = -0.03 dB  
 Peak SAR (extrapolated) = 0.385 W/kg  
**SAR(1 g) = 0.309 W/kg; SAR(10 g) = 0.236 W/kg**  
 Maximum value of SAR (measured) = 0.323 W/kg

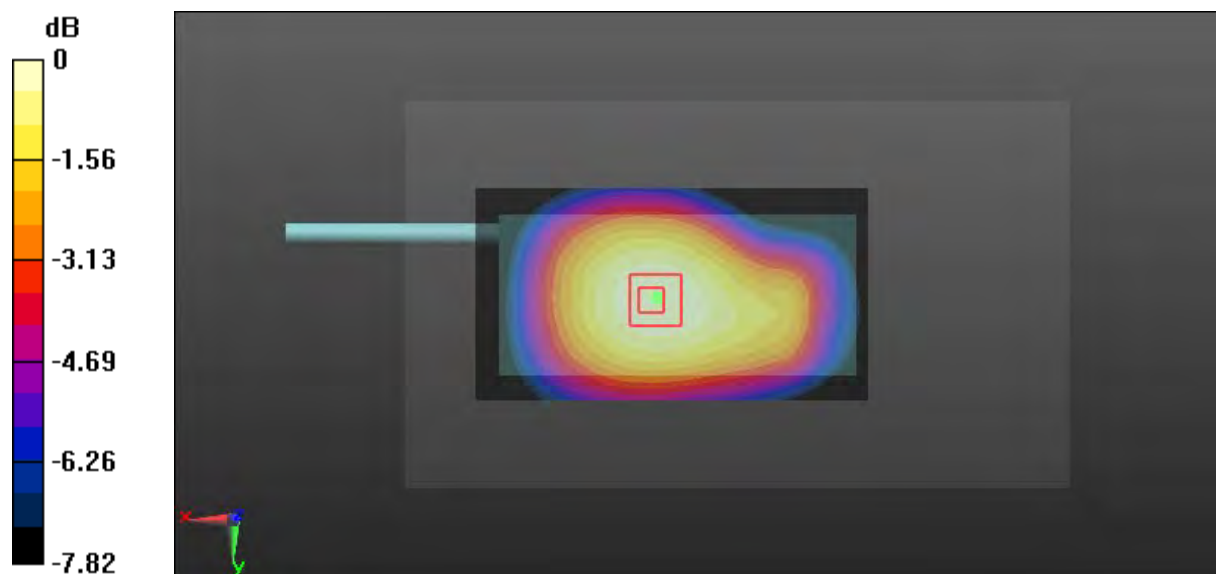

0 dB = 0.323 W/kg = -4.91 dBW/kg

**Test Plot 330#: CDMA 800(BC10)\_Body Back\_Middle**

**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**


Communication System: CDMA EV-DO; Frequency: 820.5 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 820.5 \text{ MHz}$ ;  $\sigma = 0.955 \text{ S/m}$ ;  $\epsilon_r = 57.323$ ;  $\rho = 1000 \text{ kg/m}^3$   
 Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.42, 6.42, 6.42); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x61x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) = 0.135 W/kg

**Zoom Scan (6x6x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value = 11.75 V/m; Power Drift = -0.15 dB  
 Peak SAR (extrapolated) = 0.169 W/kg  
**SAR(1 g) = 0.129 W/kg; SAR(10 g) = 0.098 W/kg**  
 Maximum value of SAR (measured) = 0.136 W/kg

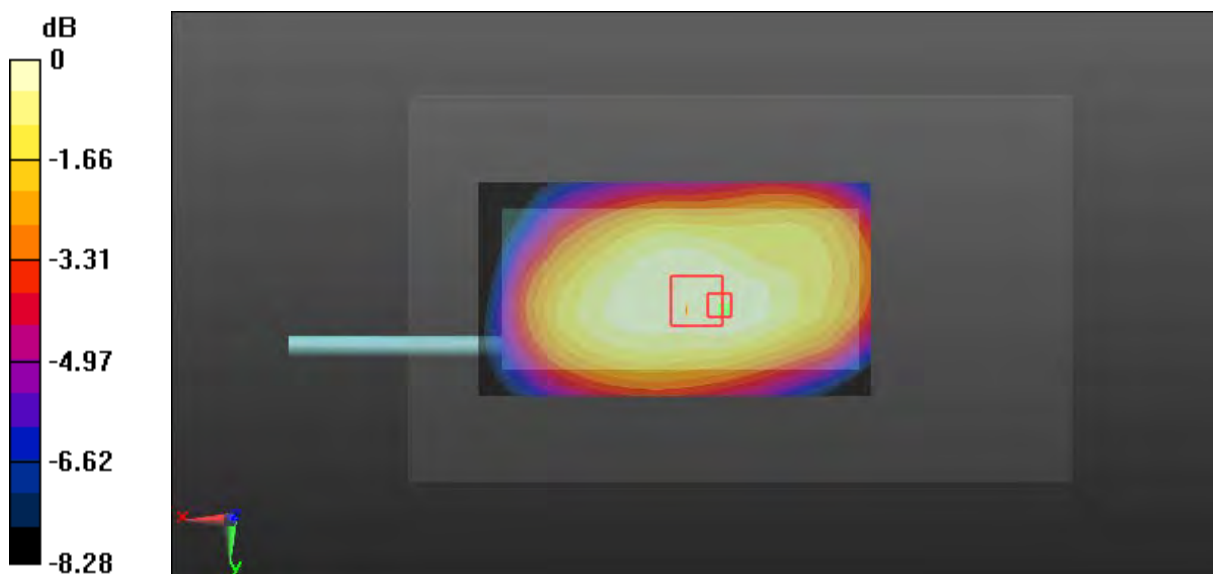

0 dB = 0.136 W/kg = -8.66 dBW/kg

**Test Plot 331#: CDMA 800(BC10)\_Body Left\_Middle**

**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**


Communication System: CDMA EV-DO; Frequency: 820.5 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 820.5 \text{ MHz}$ ;  $\sigma = 0.955 \text{ S/m}$ ;  $\epsilon_r = 57.323$ ;  $\rho = 1000 \text{ kg/m}^3$   
 Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.42, 6.42, 6.42); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x51x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) = 0.190 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value = 11.12 V/m; Power Drift = 0.18 dB  
 Peak SAR (extrapolated) = 0.248 W/kg  
**SAR(1 g) = 0.184 W/kg; SAR(10 g) = 0.133 W/kg**  
 Maximum value of SAR (measured) = 0.197 W/kg

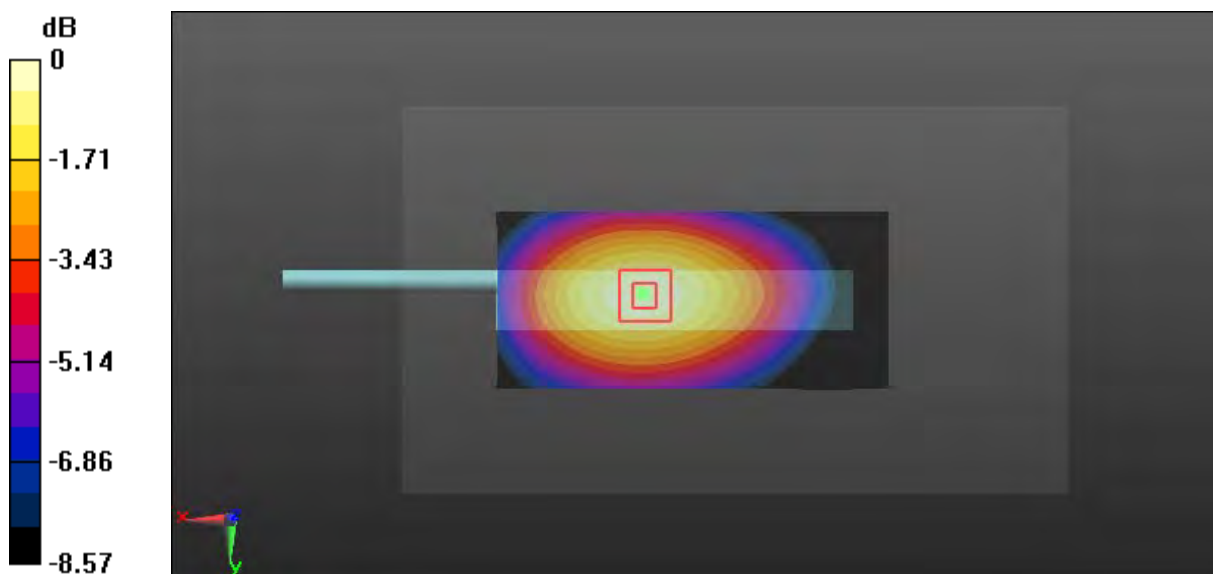

0 dB = 0.197 W/kg = -7.06 dBW/kg

**Test Plot 332#: CDMA 800(BC10)\_Body Right\_Middle**

**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**


Communication System: CDMA EV-DO; Frequency: 820.5 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 820.5 \text{ MHz}$ ;  $\sigma = 0.955 \text{ S/m}$ ;  $\epsilon_r = 57.323$ ;  $\rho = 1000 \text{ kg/m}^3$   
 Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.42, 6.42, 6.42); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x51x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) = 0.145 W/kg

**Zoom Scan (8x6x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value = 12.17 V/m; Power Drift = -0.06 dB  
 Peak SAR (extrapolated) = 0.283 W/kg  
**SAR(1 g) = 0.205 W/kg; SAR(10 g) = 0.140 W/kg**  
 Maximum value of SAR (measured) = 0.213 W/kg

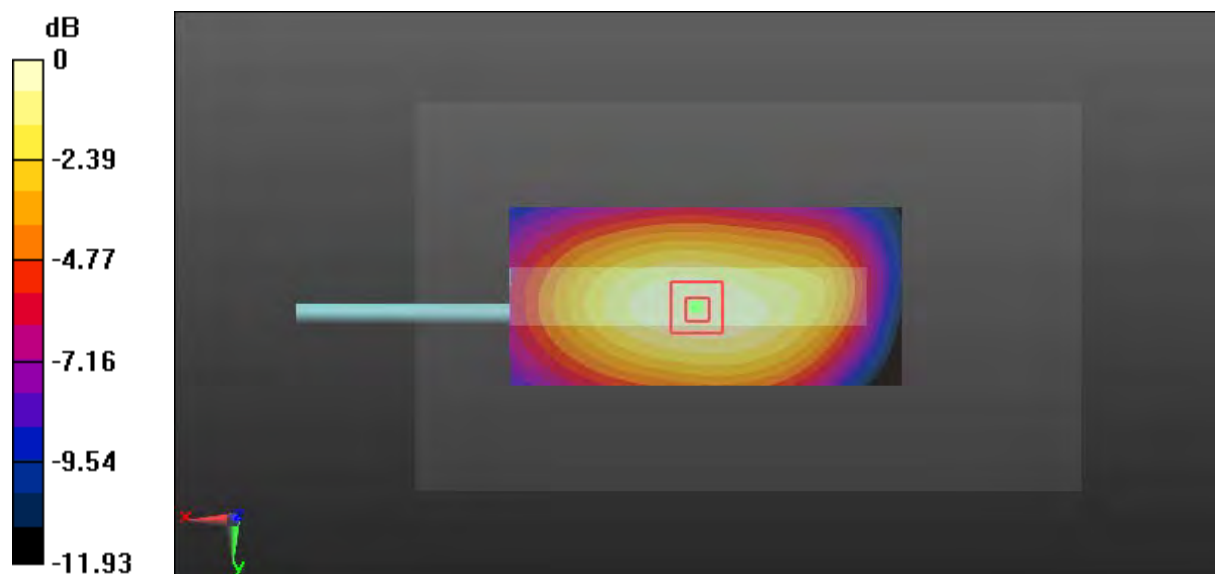

0 dB = 0.213 W/kg = -6.72 dBW/kg

**Test Plot 333#: CDMA 800(BC10)\_Body Bottom\_Middle**

**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**


Communication System: CDMA EV-DO; Frequency: 820.5 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 820.5 \text{ MHz}$ ;  $\sigma = 0.955 \text{ S/m}$ ;  $\epsilon_r = 57.323$ ;  $\rho = 1000 \text{ kg/m}^3$   
 Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.42, 6.42, 6.42); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (51x81x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) = 0.139 W/kg

**Zoom Scan (5x6x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value = 11.73 V/m; Power Drift = -0.19 dB  
 Peak SAR (extrapolated) = 0.226 W/kg  
**SAR(1 g) = 0.125 W/kg; SAR(10 g) = 0.070 W/kg**  
 Maximum value of SAR (measured) = 0.139 W/kg

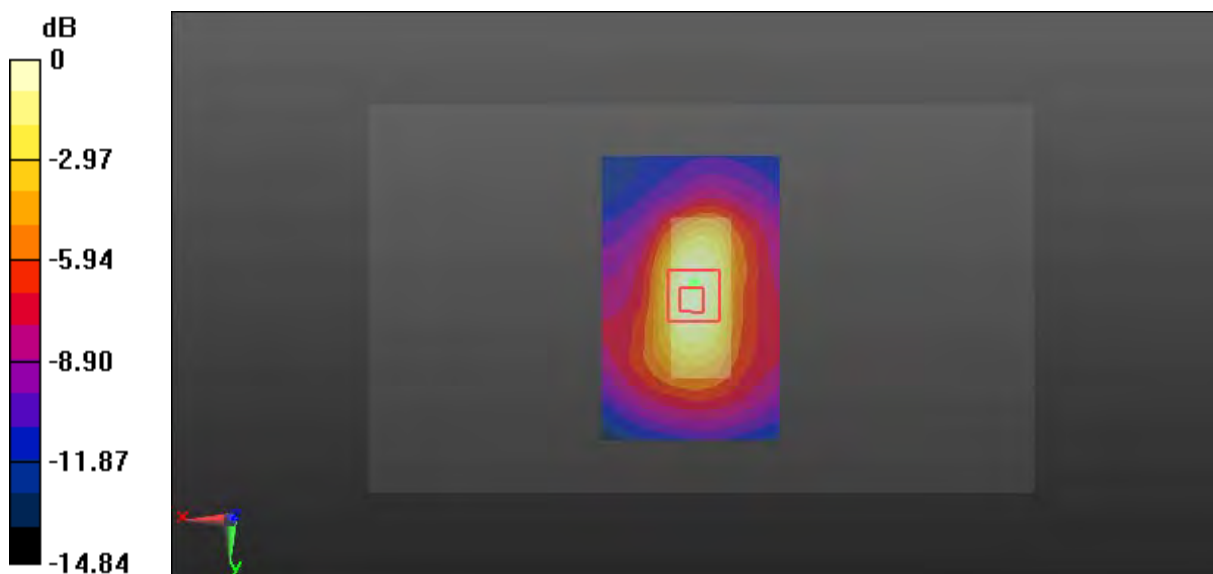

0 dB = 0.139 W/kg = -8.57 dBW/kg

**Test Plot 334#: WLAN 2.4G Mode b\_Head Left Cheek\_Middle**

**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: IEEE 802.11b WiFi 2.4 GHz; Frequency: 2442 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 2442 \text{ MHz}$ ;  $\sigma = 1.775 \text{ S/m}$ ;  $\epsilon_r = 38.955$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.41, 4.41, 4.41); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (141x81x1):** Interpolated grid:  $dx=1.200 \text{ mm}$ ,  $dy=1.200 \text{ mm}$

Maximum value of SAR (interpolated) = 0.0409 W/kg


**Zoom Scan (7x6x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 3.020 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.127 W/kg

**SAR(1 g) = 0.037 W/kg; SAR(10 g) = 0.016 W/kg**

Maximum value of SAR (measured) = 0.0454 W/kg

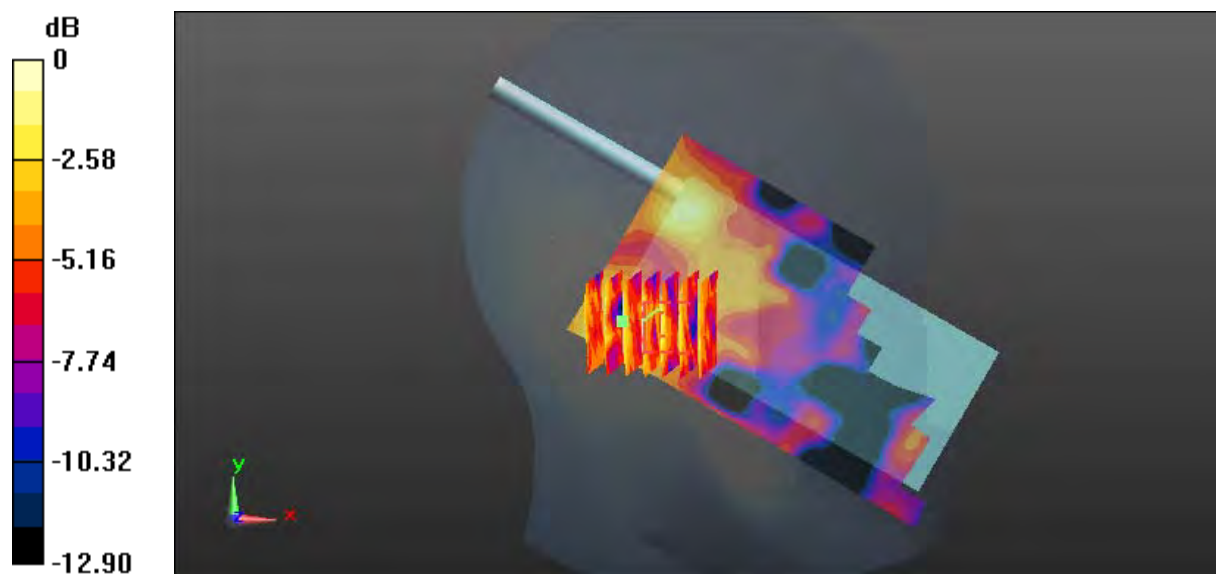

0 dB = 0.0454 W/kg = -13.43 dBW/kg

**Test Plot 335#: WLAN 2.4G Mode b\_Head Left Tilt\_Middle**

**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: IEEE 802.11b WiFi 2.4 GHz; Frequency: 2442 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 2442 \text{ MHz}$ ;  $\sigma = 1.775 \text{ S/m}$ ;  $\epsilon_r = 38.955$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.41, 4.41, 4.41); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (141x91x1):** Interpolated grid:  $dx=1.200 \text{ mm}$ ,  $dy=1.200 \text{ mm}$

Maximum value of SAR (interpolated) = 0.0485 W/kg


**Zoom Scan (5x6x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 2.616 V/m; Power Drift = -0.00 dB

Peak SAR (extrapolated) = 0.0890 W/kg

**SAR(1 g) = 0.045 W/kg; SAR(10 g) = 0.027 W/kg**

Maximum value of SAR (measured) = 0.0508 W/kg

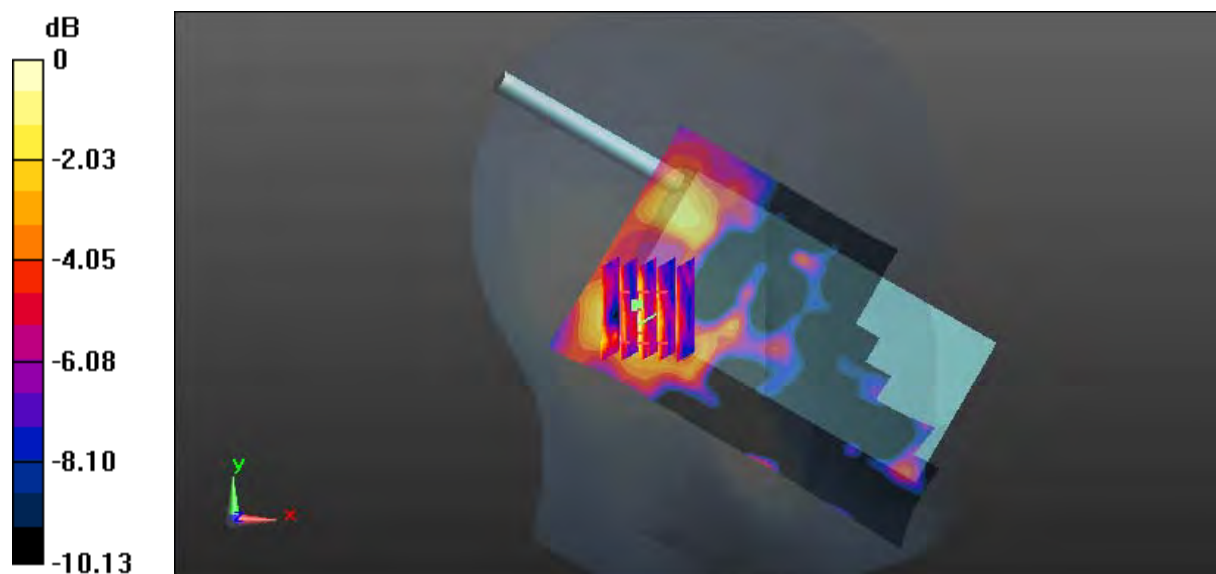

0 dB = 0.0508 W/kg = -12.94 dBW/kg

**Test Plot 336#: WLAN 2.4G Mode b\_Head Right Cheek\_Low****DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: IEEE 802.11b WiFi 2.4 GHz; Frequency: 2412 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 2412$  MHz;  $\sigma = 1.738$  S/m;  $\epsilon_r = 40.245$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.41, 4.41, 4.41); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (141x81x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.0783 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.798 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 0.124 W/kg

**SAR(1 g) = 0.070 W/kg; SAR(10 g) = 0.040 W/kg**

Maximum value of SAR (measured) = 0.0764 W/kg

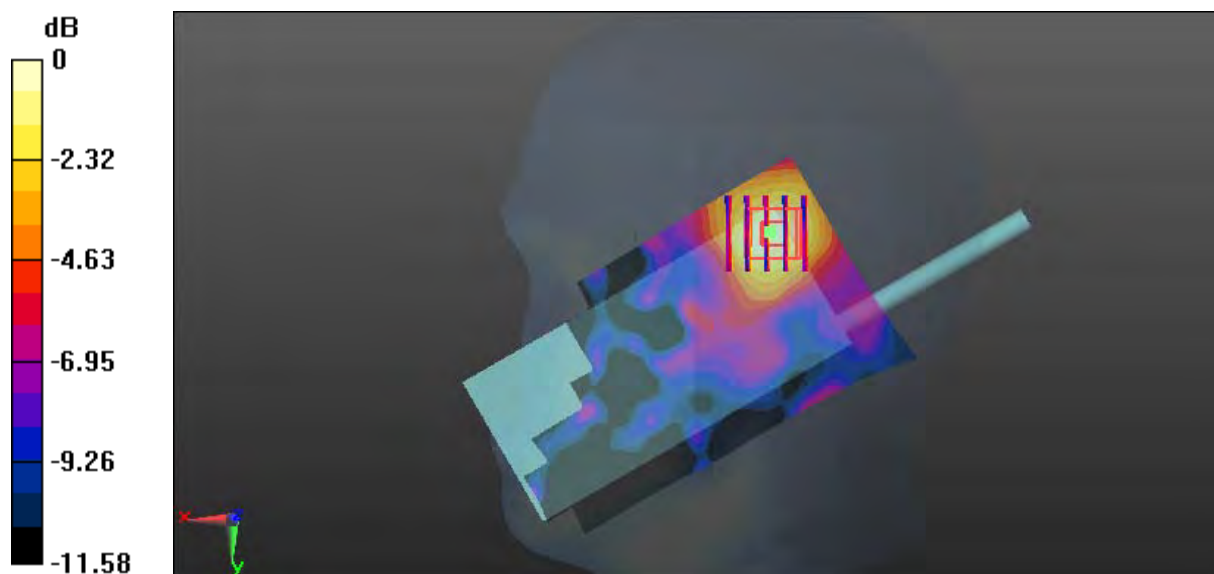

0 dB = 0.0764 W/kg = -11.17 dBW/kg



**Test Plot 337#: WLAN 2.4G Mode b\_Head Right Cheek\_Middle****DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: IEEE 802.11b WiFi 2.4 GHz; Frequency: 2442 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 2442$  MHz;  $\sigma = 1.775$  S/m;  $\epsilon_r = 38.955$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.41, 4.41, 4.41); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (141x81x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.0653 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.214 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.118 W/kg

**SAR(1 g) = 0.061 W/kg; SAR(10 g) = 0.033 W/kg**

Maximum value of SAR (measured) = 0.0700 W/kg

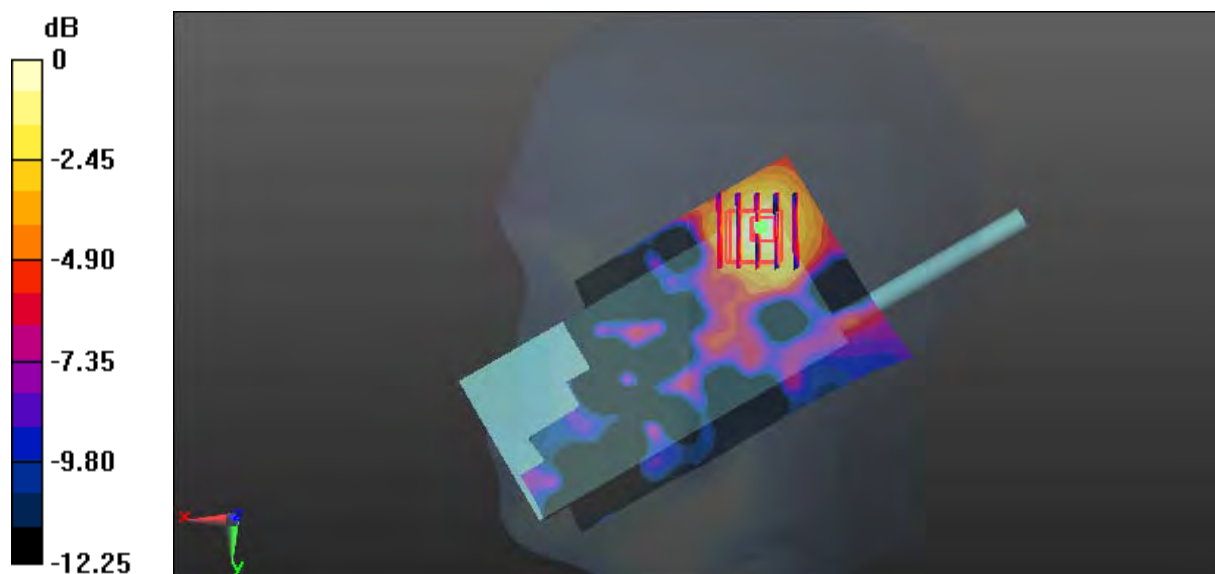

0 dB = 0.0700 W/kg = -11.55 dBW/kg

**Test Plot 338#: WLAN 2.4G Mode b\_Head Right Cheek\_High**

**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: IEEE 802.11b WiFi 2.4 GHz; Frequency: 2472 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 2472 \text{ MHz}$ ;  $\sigma = 1.817 \text{ S/m}$ ;  $\epsilon_r = 38.36$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.41, 4.41, 4.41); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (141x81x1):** Interpolated grid:  $dx=1.200 \text{ mm}$ ,  $dy=1.200 \text{ mm}$

Maximum value of SAR (interpolated) = 0.0718 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 4.493 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 0.119 W/kg

**SAR(1 g) = 0.066 W/kg; SAR(10 g) = 0.039 W/kg**

Maximum value of SAR (measured) = 0.0699 W/kg

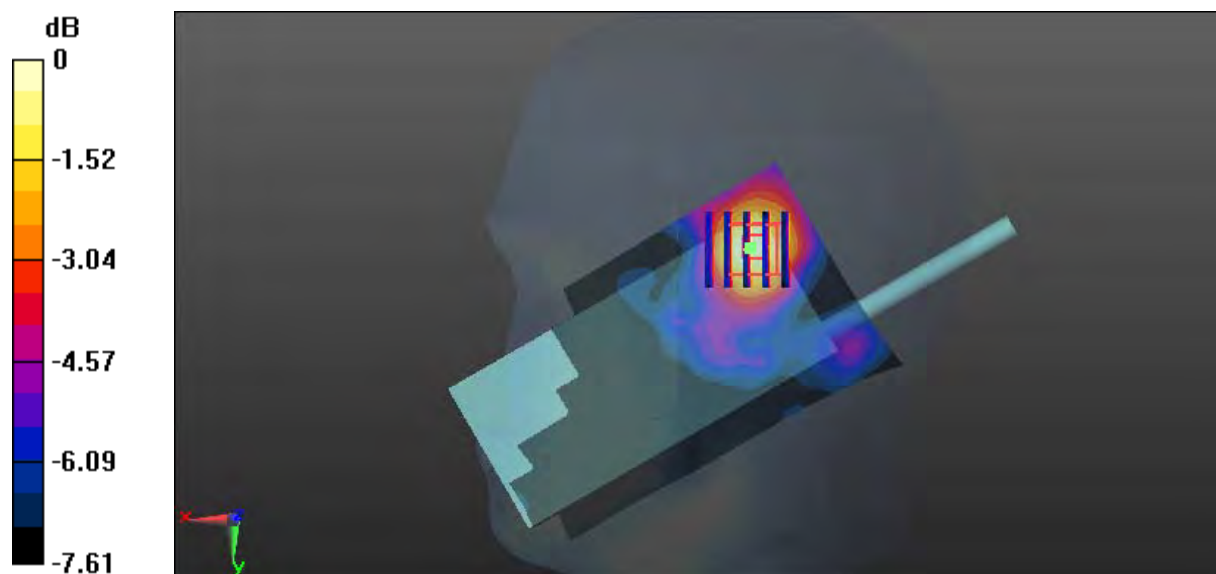

0 dB = 0.0699 W/kg = -11.56 dBW/kg

**Test Plot 339#: WLAN 2.4G Mode b\_Head Right Tilt\_Middle****DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: IEEE 802.11b WiFi 2.4 GHz; Frequency: 2442 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 2442$  MHz;  $\sigma = 1.775$  S/m;  $\epsilon_r = 38.955$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.41, 4.41, 4.41); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (141x81x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.0638 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.388 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 0.122 W/kg

**SAR(1 g) = 0.060 W/kg; SAR(10 g) = 0.035 W/kg**

Maximum value of SAR (measured) = 0.0632 W/kg

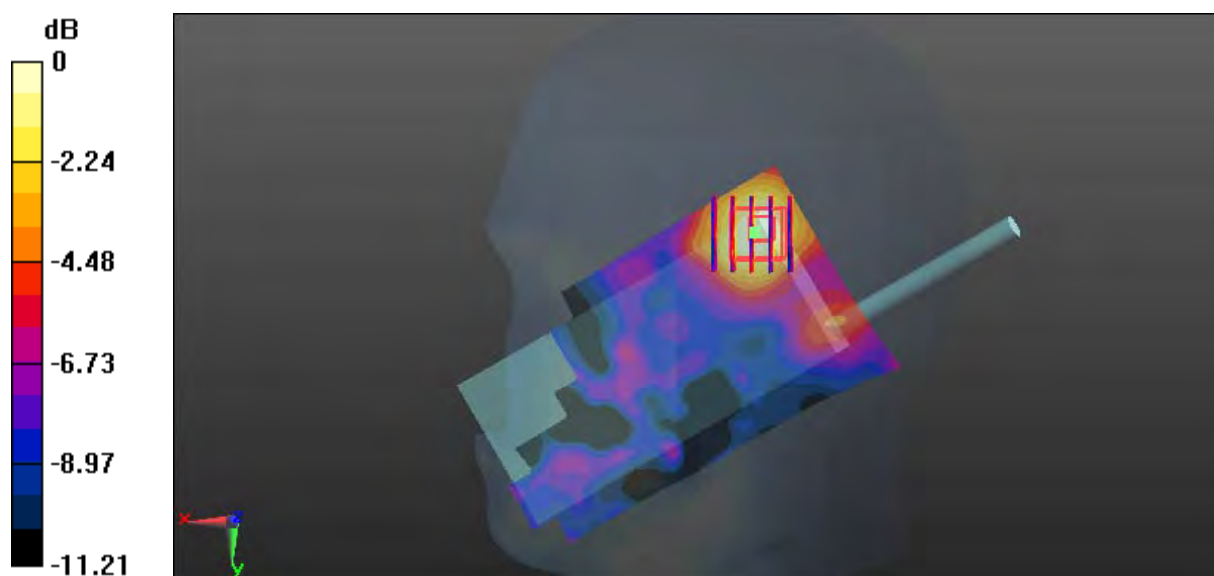

0 dB = 0.0632 W/kg = -11.99 dBW/kg

**Test Plot 340#: WLAN 2.4G Mode b\_Face Up\_Middle**

**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: IEEE 802.11b WiFi 2.4 GHz; Frequency: 2442 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 2442 \text{ MHz}$ ;  $\sigma = 1.775 \text{ S/m}$ ;  $\epsilon_r = 38.955$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.41, 4.41, 4.41); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (141x81x1):** Interpolated grid:  $dx=1.200 \text{ mm}$ ,  $dy=1.200 \text{ mm}$

Maximum value of SAR (interpolated) = 0.0389 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 1.820 V/m; Power Drift = 0.19 dB

Peak SAR (extrapolated) = 0.0390 W/kg

**SAR(1 g) = 0.00844 W/kg; SAR(10 g) = 0.00194 W/kg**

Maximum value of SAR (measured) = 0.0225 W/kg



0 dB = 0.0225 W/kg = -16.48 dBW/kg

**Test Plot 341#: WLAN 2.4G Mode b\_Body Back\_Low**

**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: IEEE 802.11b WiFi 2.4 GHz; Frequency: 2412 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 2412 \text{ MHz}$ ;  $\sigma = 1.905 \text{ S/m}$ ;  $\epsilon_r = 54.382$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Center Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.05, 4.05, 4.05); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (141x81x1):** Interpolated grid:  $dx=1.200 \text{ mm}$ ,  $dy=1.200 \text{ mm}$

Maximum value of SAR (interpolated) = 0.0554 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 1.944 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.125 W/kg

**SAR(1 g) = 0.055 W/kg; SAR(10 g) = 0.028 W/kg**

Maximum value of SAR (measured) = 0.0590 W/kg

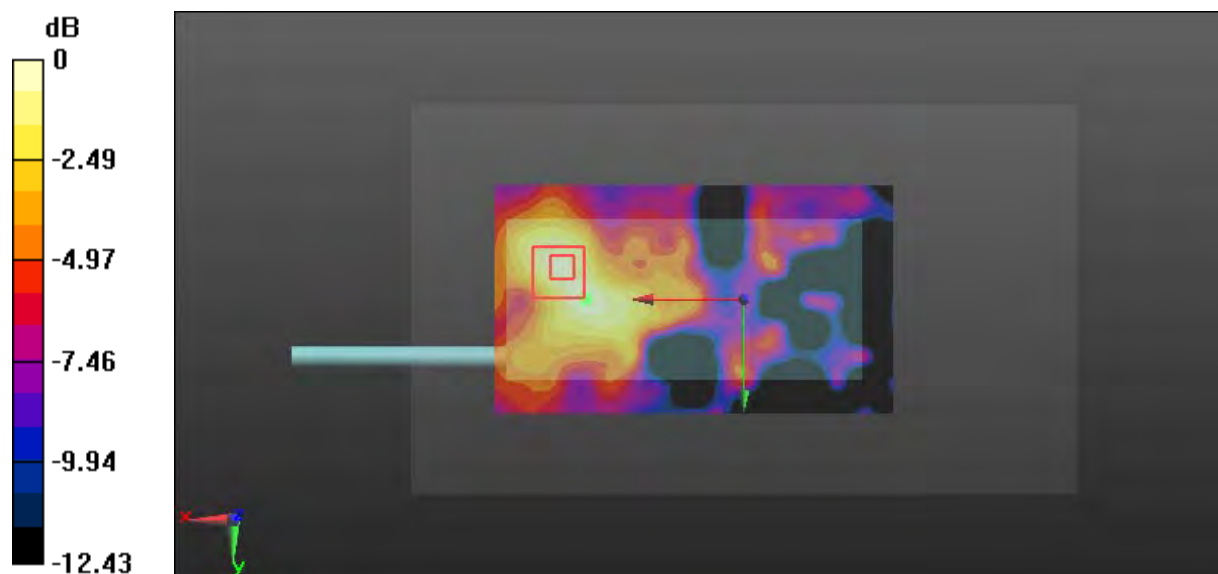

0 dB = 0.0590 W/kg = -12.29 dBW/kg

**Test Plot 342#: WLAN 2.4G Mode b\_Body Back\_Middle**

**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: IEEE 802.11b WiFi 2.4 GHz; Frequency: 2442 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 2442 \text{ MHz}$ ;  $\sigma = 1.942 \text{ S/m}$ ;  $\epsilon_r = 52.705$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Center Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.05, 4.05, 4.05); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (141x81x1):** Interpolated grid:  $dx=1.200 \text{ mm}$ ,  $dy=1.200 \text{ mm}$

Maximum value of SAR (interpolated) = 0.0761 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 1.856 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 0.0960 W/kg

**SAR(1 g) = 0.052 W/kg; SAR(10 g) = 0.029 W/kg**

Maximum value of SAR (measured) = 0.0574 W/kg

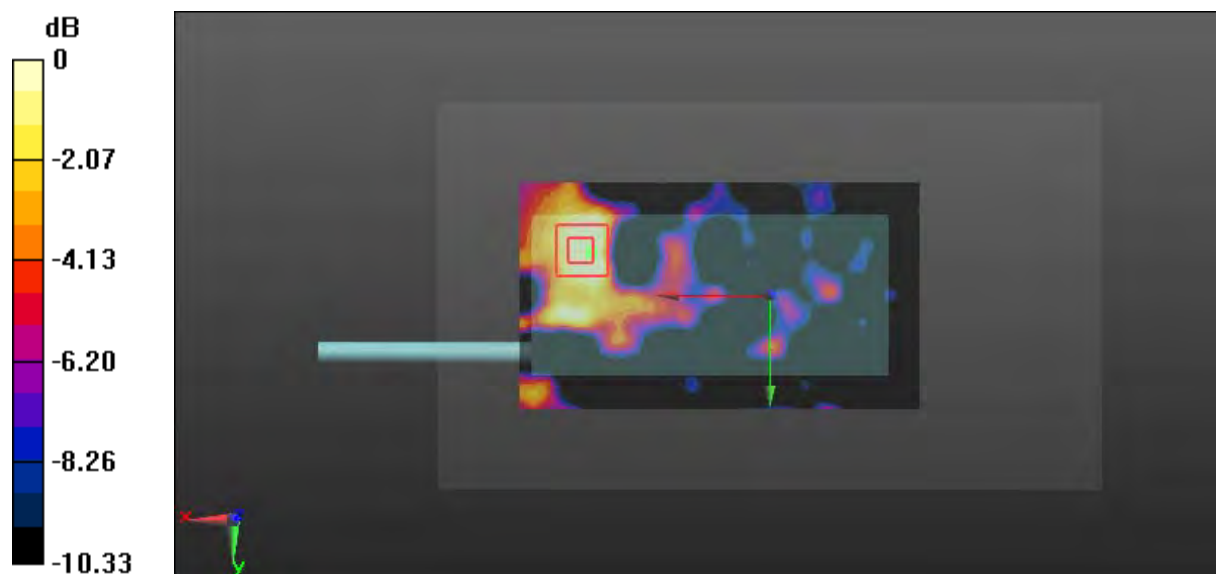

0 dB = 0.0574 W/kg = -12.41 dBW/kg

**Test Plot 343#: WLAN 2.4G Mode b\_Body Back\_High**

**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: IEEE 802.11b WiFi 2.4 GHz; Frequency: 2472 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 2472 \text{ MHz}$ ;  $\sigma = 1.978 \text{ S/m}$ ;  $\epsilon_r = 51.91$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Center Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.05, 4.05, 4.05); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (141x81x1):** Interpolated grid:  $dx=1.200 \text{ mm}$ ,  $dy=1.200 \text{ mm}$

Maximum value of SAR (interpolated) = 0.0837 W/kg


**Zoom Scan (6x7x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 2.408 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.127 W/kg

**SAR(1 g) = 0.048 W/kg; SAR(10 g) = 0.027 W/kg**

Maximum value of SAR (measured) = 0.0553 W/kg

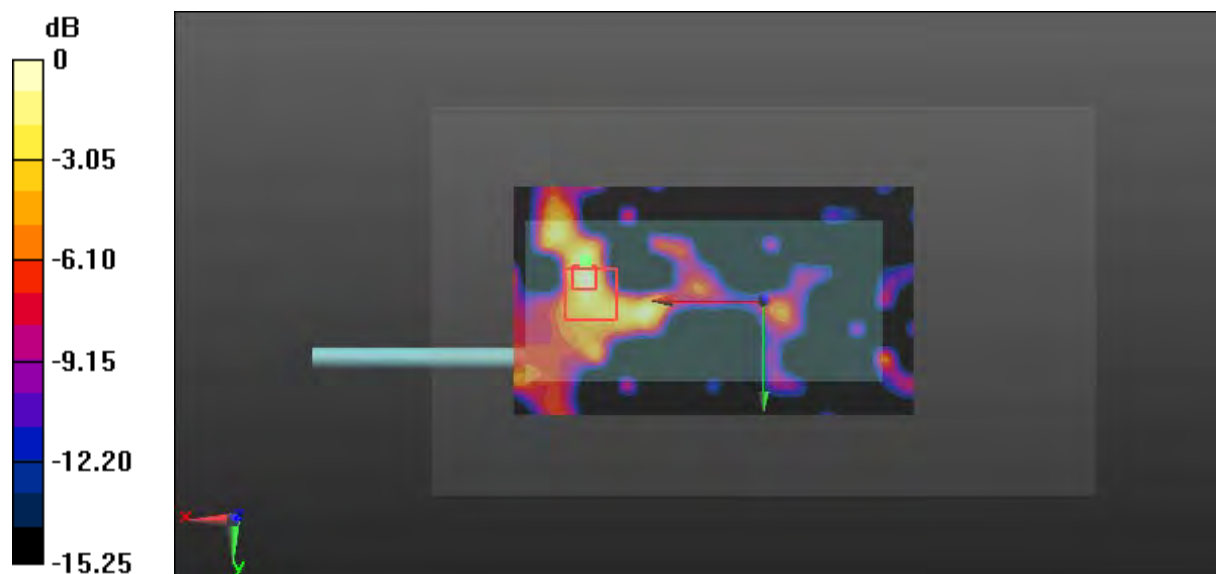

0 dB = 0.0553 W/kg = -12.57 dBW/kg

**Test Plot 344#: WLAN 2.4G Mode b\_Body Front\_Middle**

**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: IEEE 802.11b WiFi 2.4 GHz; Frequency: 2442 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 2442 \text{ MHz}$ ;  $\sigma = 1.942 \text{ S/m}$ ;  $\epsilon_r = 52.705$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Center Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.05, 4.05, 4.05); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (141x81x1):** Interpolated grid:  $dx=1.200 \text{ mm}$ ,  $dy=1.200 \text{ mm}$

Maximum value of SAR (interpolated) = 0.0288 W/kg


**Zoom Scan (8x8x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 1.596 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 0.0380 W/kg

**SAR(1 g) = 0.00717 W/kg; SAR(10 g) = 0.0023 W/kg**

Maximum value of SAR (measured) = 0.0276 W/kg

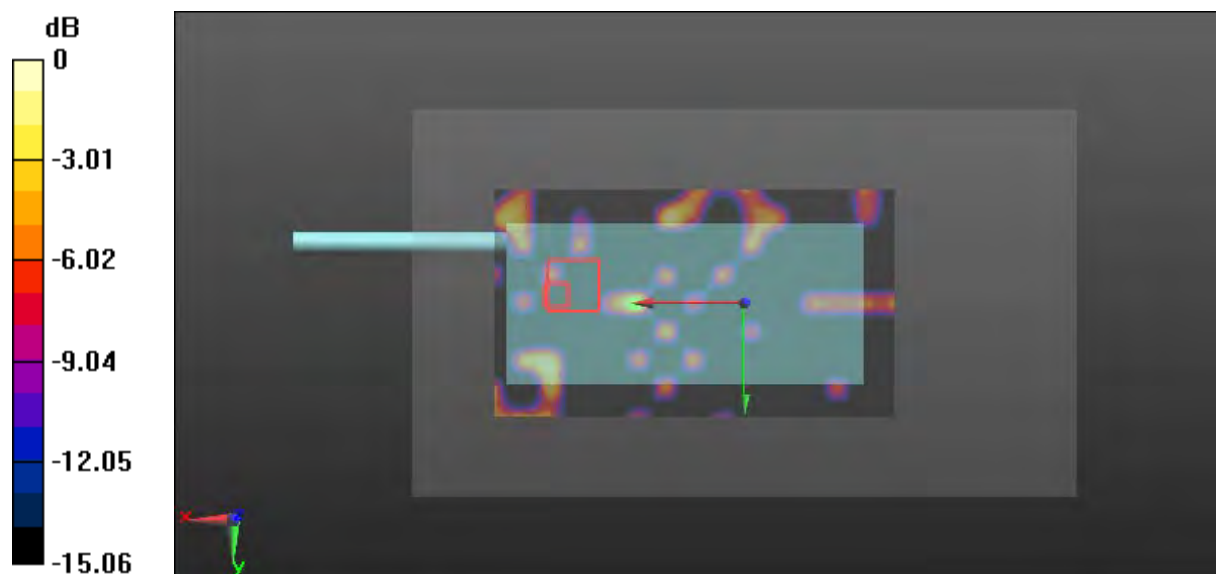

0 dB = 0.0276 W/kg = -15.59 dBW/kg



**Test Plot 345#: WLAN 2.4G Mode b\_Body Left\_Middle**

**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: IEEE 802.11b WiFi 2.4 GHz; Frequency: 2442 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 2442 \text{ MHz}$ ;  $\sigma = 1.942 \text{ S/m}$ ;  $\epsilon_r = 52.705$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Center Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.05, 4.05, 4.05); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (131x51x1):** Interpolated grid:  $dx=1.200 \text{ mm}$ ,  $dy=1.200 \text{ mm}$

Maximum value of SAR (interpolated) = 0.0390 W/kg


**Zoom Scan (8x8x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 1.686 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.0750 W/kg

**SAR(1 g) = 0.019 W/kg; SAR(10 g) = 0.0094 W/kg**

Maximum value of SAR (measured) = 0.0289 W/kg

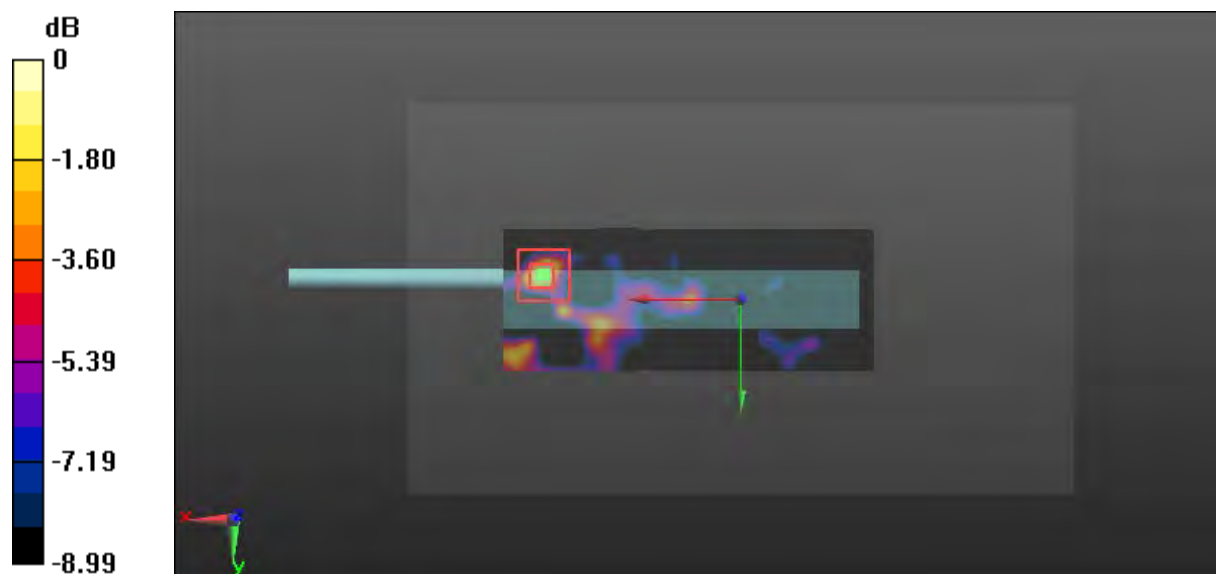

0 dB = 0.0289 W/kg = -15.39 dBW/kg

**Test Plot 346#: WLAN 2.4G Mode b\_Body Right\_Middle**

**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: IEEE 802.11b WiFi 2.4 GHz; Frequency: 2442 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 2442 \text{ MHz}$ ;  $\sigma = 1.942 \text{ S/m}$ ;  $\epsilon_r = 52.705$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Center Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.05, 4.05, 4.05); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (141x51x1):** Interpolated grid:  $dx=1.200 \text{ mm}$ ,  $dy=1.200 \text{ mm}$

Maximum value of SAR (interpolated) = 0.0556 W/kg


**Zoom Scan (5x7x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 1.371 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.0600 W/kg

**SAR(1 g) = 0.013 W/kg; SAR(10 g) = 0.00417 W/kg**

Maximum value of SAR (measured) = 0.0234 W/kg

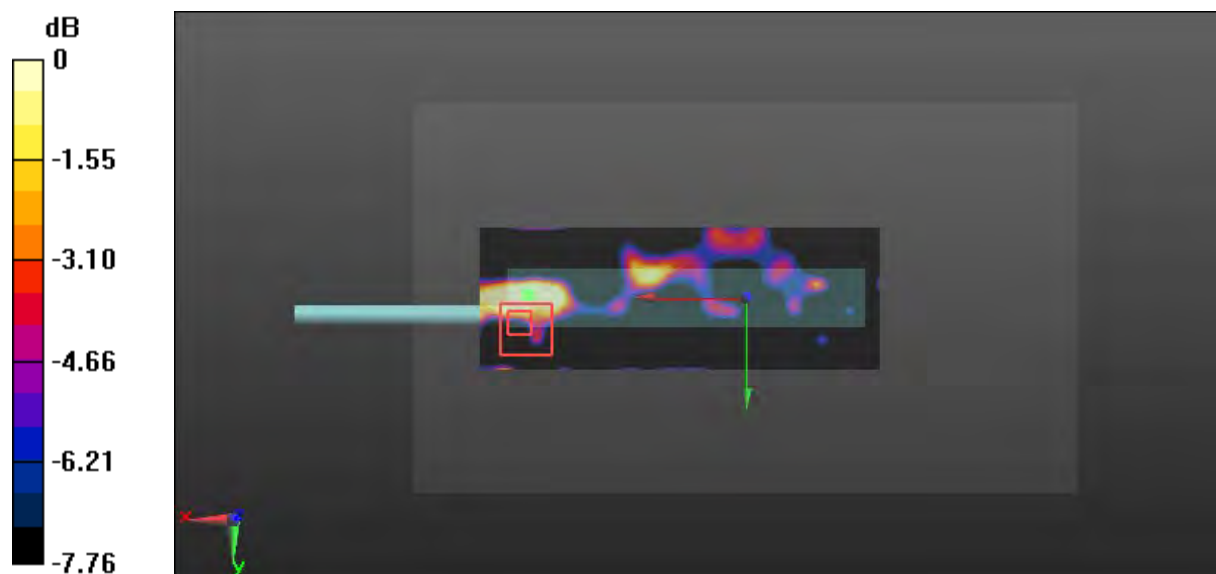

0 dB = 0.0234 W/kg = -16.31 dBW/kg

**Test Plot 347#: BT(8-DPSK DH5) \_Head Left Cheek\_Middle**

**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: BT(8-DPSK\_DH5); Frequency: 2441 MHz; Duty Cycle: 1:1.26

Medium parameters used:  $f = 2441 \text{ MHz}$ ;  $\sigma = 1.768 \text{ S/m}$ ;  $\epsilon_r = 40.139$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.41, 4.41, 4.41); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (141x81x1):** Interpolated grid:  $dx=1.200 \text{ mm}$ ,  $dy=1.200 \text{ mm}$

Maximum value of SAR (interpolated) = 0.0238 W/kg


**Zoom Scan (7x6x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 2.559 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.0520 W/kg

**SAR(1 g) = 0.017 W/kg; SAR(10 g) = 0.00901 W/kg**

Maximum value of SAR (measured) = 0.0198 W/kg

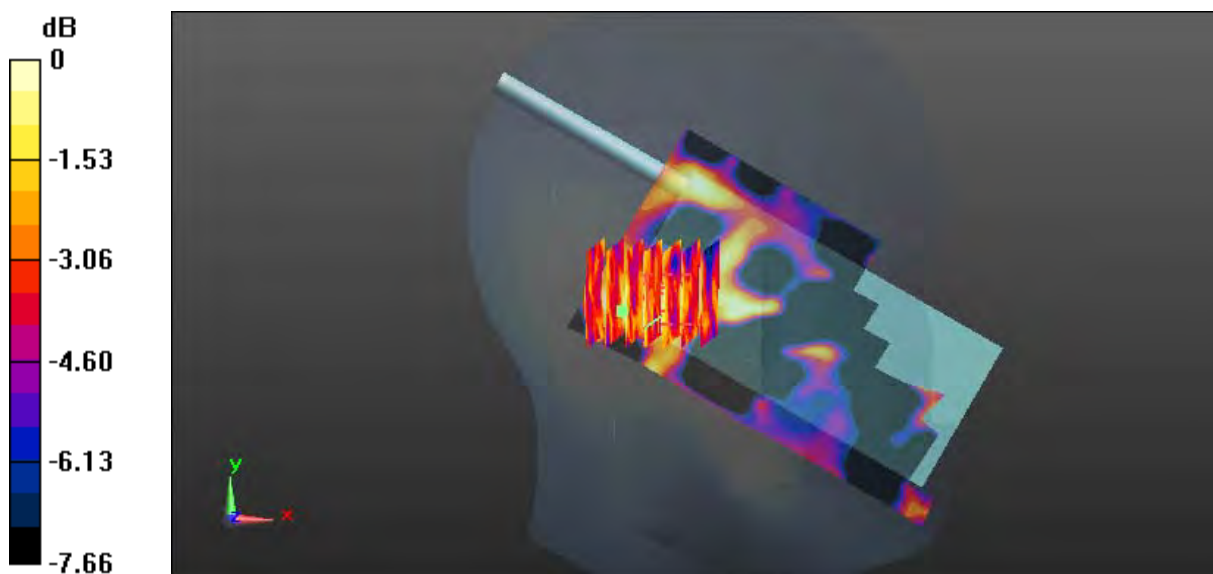

0 dB = 0.0198 W/kg = -17.03 dBW/kg

**Test Plot 348#: BT(8-DPSK DH5)\_Head Left Tilt\_Middle****DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: BT(8-DPSK\_DH5); Frequency: 2441 MHz; Duty Cycle: 1:1.26

Medium parameters used:  $f = 2441$  MHz;  $\sigma = 1.768$  S/m;  $\epsilon_r = 40.139$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.41, 4.41, 4.41); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (151x91x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.0527 W/kg


**Zoom Scan (6x6x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.271 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.0250 W/kg

**SAR(1 g) = 0.011 W/kg; SAR(10 g) = 0.00561 W/kg**

Maximum value of SAR (measured) = 0.0245 W/kg

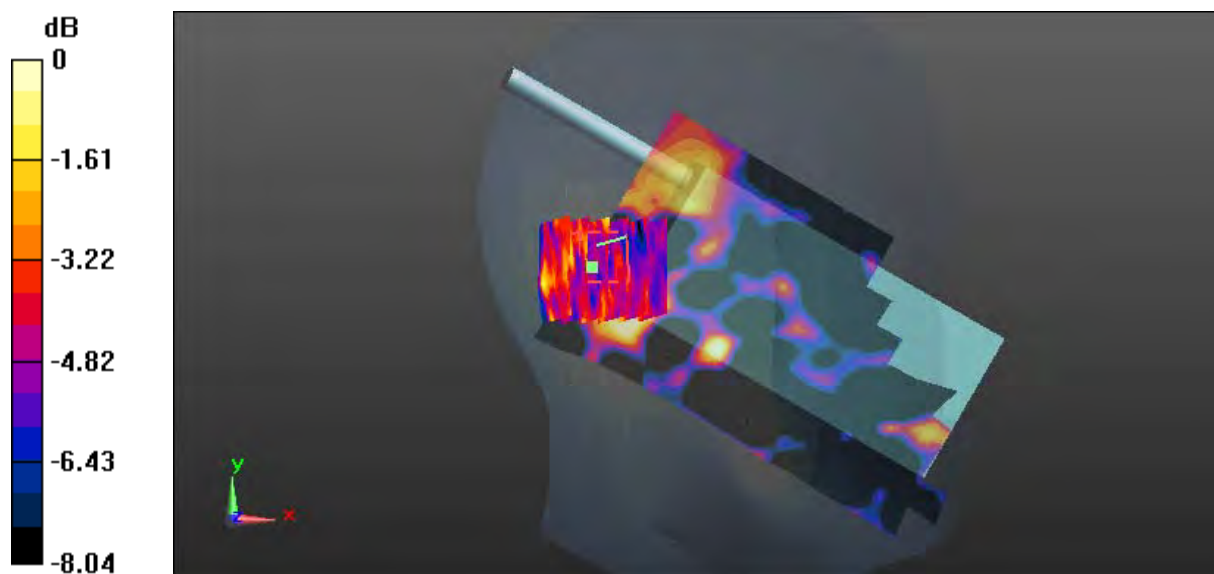

0 dB = 0.0245 W/kg = -16.11 dBW/kg

**Test Plot 349#: BT(8-DPSK DH5)\_Head Right Cheek\_Middle****DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: BT(8-DPSK\_DH5); Frequency: 2441 MHz; Duty Cycle: 1:1.26

Medium parameters used:  $f = 2441$  MHz;  $\sigma = 1.768$  S/m;  $\epsilon_r = 40.139$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.41, 4.41, 4.41); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (141x81x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.0242 W/kg


**Zoom Scan (6x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.810 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.0350 W/kg

**SAR(1 g) = 0.025 W/kg; SAR(10 g) = 0.016 W/kg**

Maximum value of SAR (measured) = 0.0275 W/kg

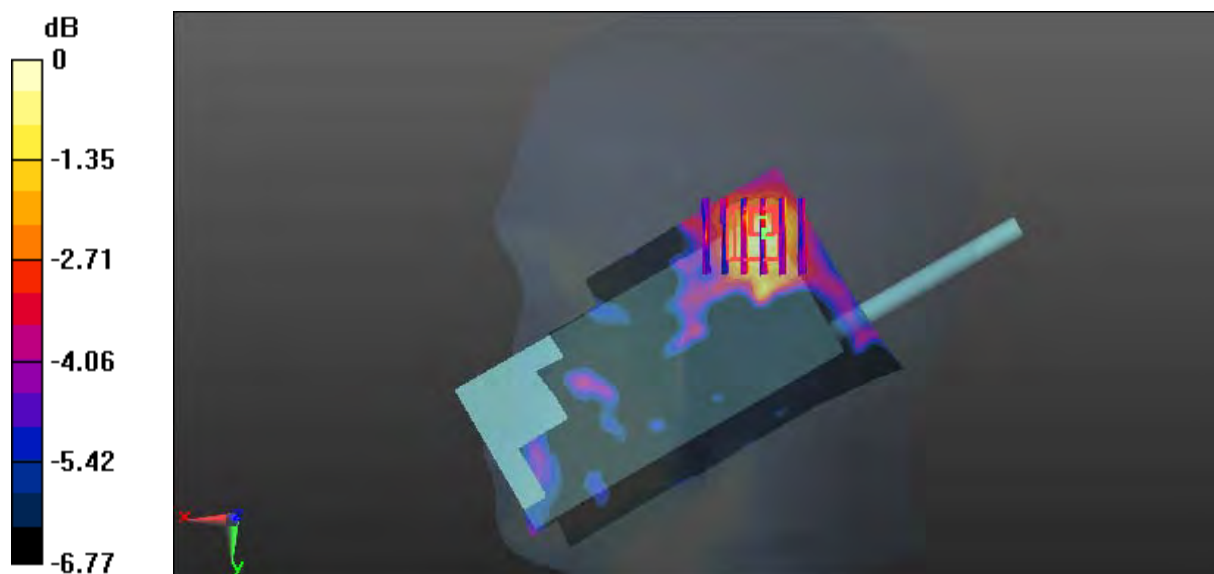

0 dB = 0.0275 W/kg = -15.61 dBW/kg

**Test Plot 350#: BT(8-DPSK DH5)\_Head Right Tilt\_Low**

**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: BT(8-DPSK\_DH5); Frequency: 2402 MHz; Duty Cycle: 1:1.26

Medium parameters used:  $f = 2402 \text{ MHz}$ ;  $\sigma = 1.703 \text{ S/m}$ ;  $\epsilon_r = 40.266$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.41, 4.41, 4.41); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (141x71x1):** Interpolated grid:  $dx=1.200 \text{ mm}$ ,  $dy=1.200 \text{ mm}$

Maximum value of SAR (interpolated) = 0.0209 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 2.403 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 0.0190 W/kg

**SAR(1 g) = 0.015 W/kg; SAR(10 g) = 0.013 W/kg**

Maximum value of SAR (measured) = 0.0188 W/kg

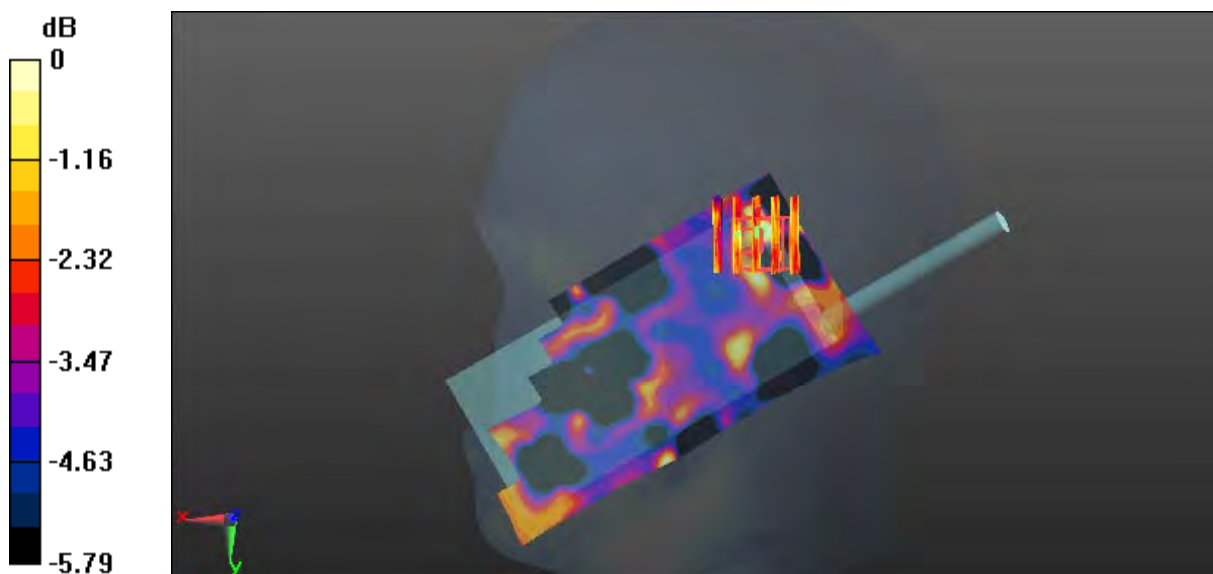

0 dB = 0.0188 W/kg = -17.26 dBW/kg

**Test Plot 351#: BT(8-DPSK DH5)\_Head Right Tilt\_Low(2416MHz)**

**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: BT(8-DPSK\_DH5); Frequency: 2416 MHz; Duty Cycle: 1:1.26

Medium parameters used:  $f = 2416 \text{ MHz}$ ;  $\sigma = 1.744 \text{ S/m}$ ;  $\epsilon_r = 40.203$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.41, 4.41, 4.41); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (141x81x1):** Interpolated grid:  $dx=1.200 \text{ mm}$ ,  $dy=1.200 \text{ mm}$

Maximum value of SAR (interpolated) = 0.0273 W/kg


**Zoom Scan (6x6x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 2.663 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 0.0478 W/kg

**SAR(1 g) = 0.025 W/kg; SAR(10 g) = 0.016 W/kg**

Maximum value of SAR (measured) = 0.0301 W/kg

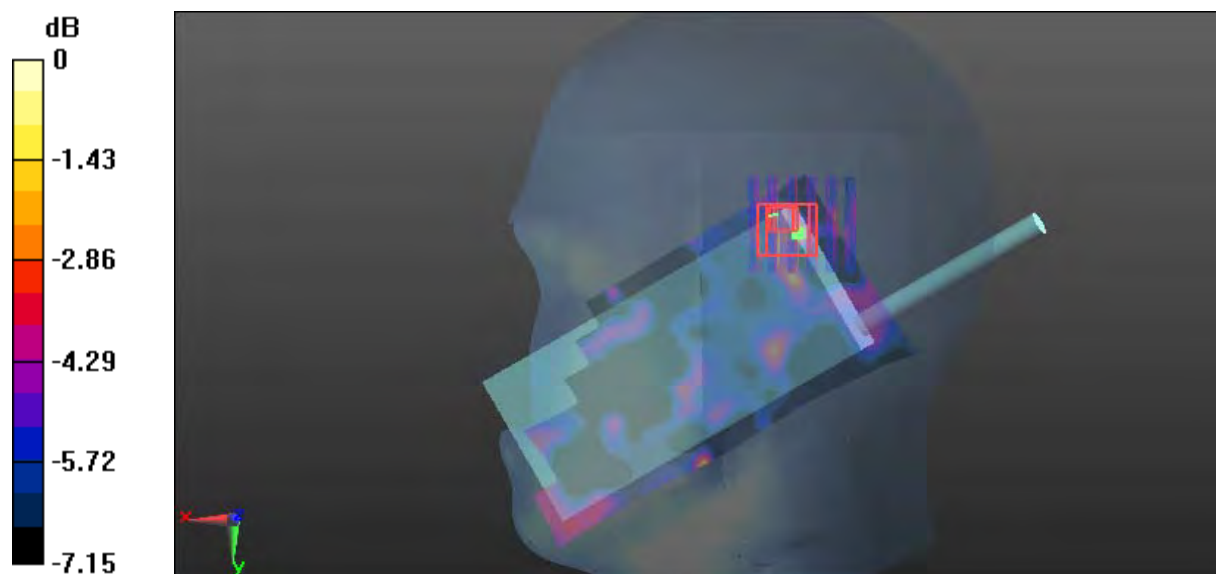

0 dB = 0.0301 W/kg = -15.21 dBW/kg

**Test Plot 352#: BT(8-DPSK DH5)\_Head Right Tilt\_Middle****DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: BT(8-DPSK\_DH5); Frequency: 2441 MHz; Duty Cycle: 1:1.26

Medium parameters used:  $f = 2441$  MHz;  $\sigma = 1.768$  S/m;  $\epsilon_r = 40.139$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.41, 4.41, 4.41); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (141x81x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.0247 W/kg


**Zoom Scan (6x6x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.579 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.0470 W/kg

**SAR(1 g) = 0.025 W/kg; SAR(10 g) = 0.016 W/kg**

Maximum value of SAR (measured) = 0.0306 W/kg

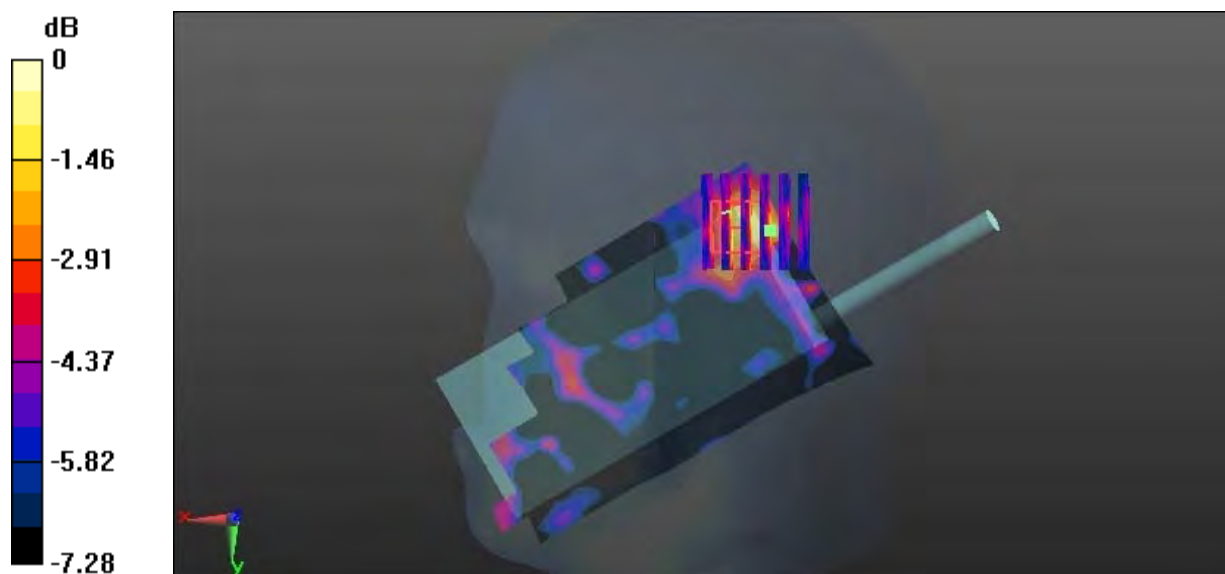

0 dB = 0.0306 W/kg = -15.14 dBW/kg



**Test Plot 353#: BT(8-DPSK DH5)\_Head Right Tilt\_High****DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: BT(8-DPSK\_DH5); Frequency: 2480 MHz; Duty Cycle: 1:1.26

Medium parameters used:  $f = 2480$  MHz;  $\sigma = 1.825$  S/m;  $\epsilon_r = 38.205$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.41, 4.41, 4.41); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (141x71x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.0222 W/kg


**Zoom Scan (6x6x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.448 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.0220 W/kg

**SAR(1 g) = 0.018 W/kg; SAR(10 g) = 0.014 W/kg**

Maximum value of SAR (measured) = 0.0222 W/kg

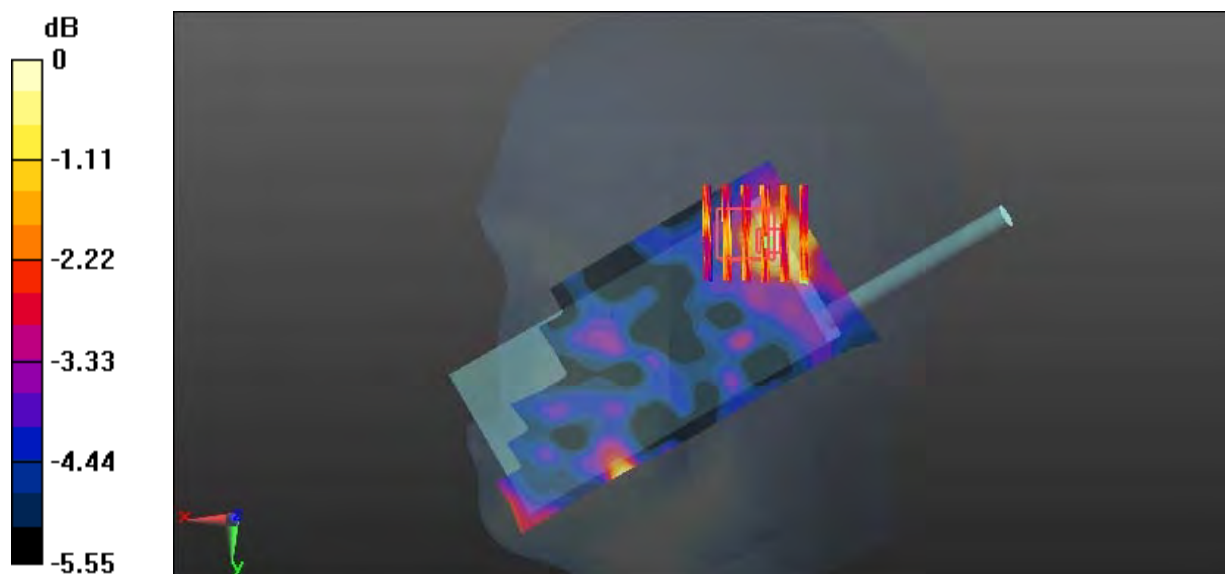

0 dB = 0.0222 W/kg = -16.54 dBW/kg

**Test Plot 354#: BT(8-DPSK DH5)\_Face Up\_Middle**

**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: BT(8-DPSK\_DH5); Frequency: 2441 MHz; Duty Cycle: 1:1.26

Medium parameters used:  $f = 2441$  MHz;  $\sigma = 1.768$  S/m;  $\epsilon_r = 40.139$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.41, 4.41, 4.41); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (141x81x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.0205 W/kg


**Zoom Scan (7x6x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 1.399 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.0220 W/kg

**SAR(1 g) = 0.00525 W/kg; SAR(10 g) = 0.00153 W/kg**

Maximum value of SAR (measured) = 0.0148 W/kg

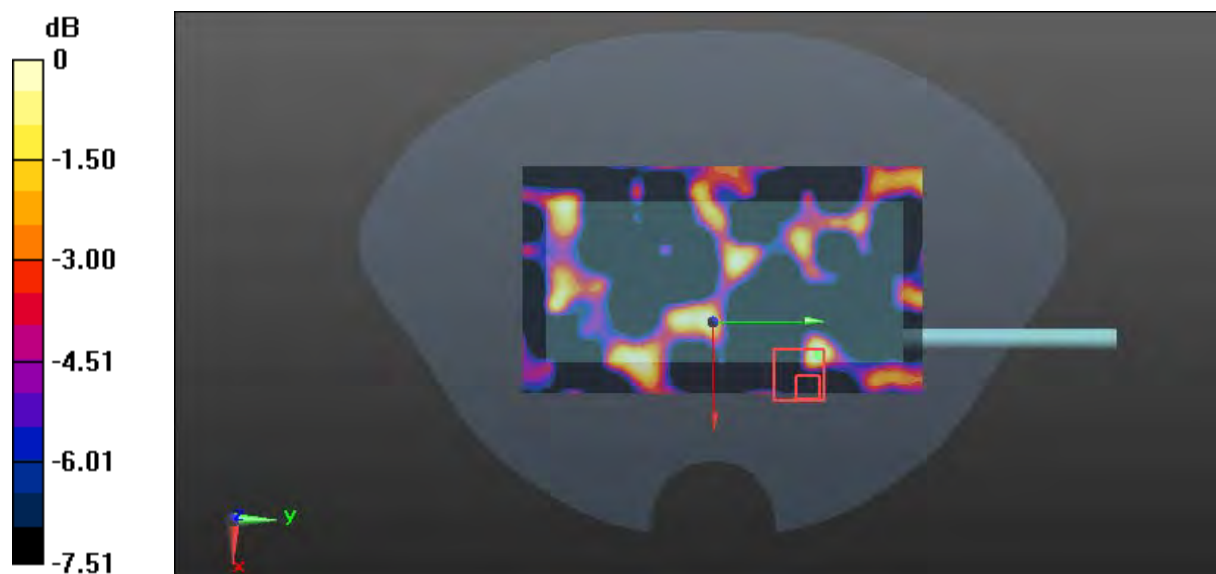

0 dB = 0.0148 W/kg = -18.30 dBW/kg

**Test Plot 355#: BT(8-DPSK DH5)\_Body Back\_Low**

**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: BT(8-DPSK\_DH5); Frequency: 2402 MHz; Duty Cycle: 1:1.26

Medium parameters used:  $f = 2402$  MHz;  $\sigma = 1.891$  S/m;  $\epsilon_r = 54.434$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Center Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.05, 4.05, 4.05); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (141x81x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.0207 W/kg


**Zoom Scan (7x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 1.625 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 0.0420 W/kg

**SAR(1 g) = 0.019 W/kg; SAR(10 g) = 0.00684 W/kg**

Maximum value of SAR (measured) = 0.0416 W/kg

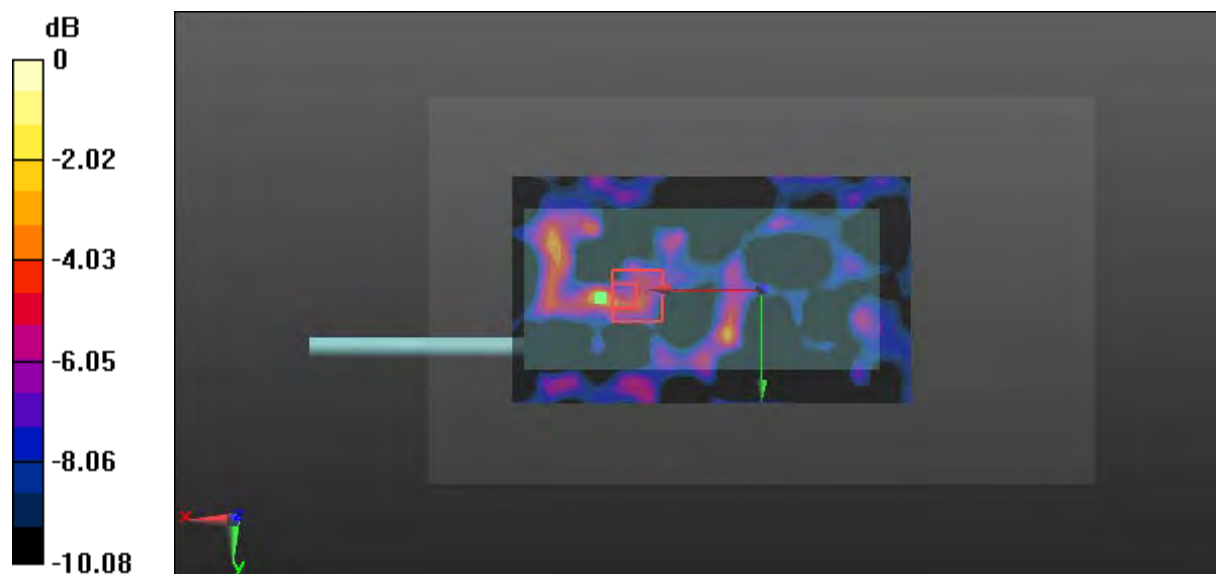

0 dB = 0.0416 W/kg = -13.81 dBW/kg

**Test Plot 356#: BT(8-DPSK DH5)\_Body Back\_Low(2416MHz)**

**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: BT(8-DPSK\_DH5); Frequency: 2416 MHz; Duty Cycle: 1:1.26

Medium parameters used:  $f = 2416 \text{ MHz}$ ;  $\sigma = 1.911 \text{ S/m}$ ;  $\epsilon_r = 54.302$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Center Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.05, 4.05, 4.05); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (141x81x1):** Interpolated grid:  $dx=1.200 \text{ mm}$ ,  $dy=1.200 \text{ mm}$

Maximum value of SAR (interpolated) = 0.0528 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 1.662 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.0610 W/kg

**SAR(1 g) = 0.028 W/kg; SAR(10 g) = 0.0142 W/kg**

Maximum value of SAR (measured) = 0.0408 W/kg

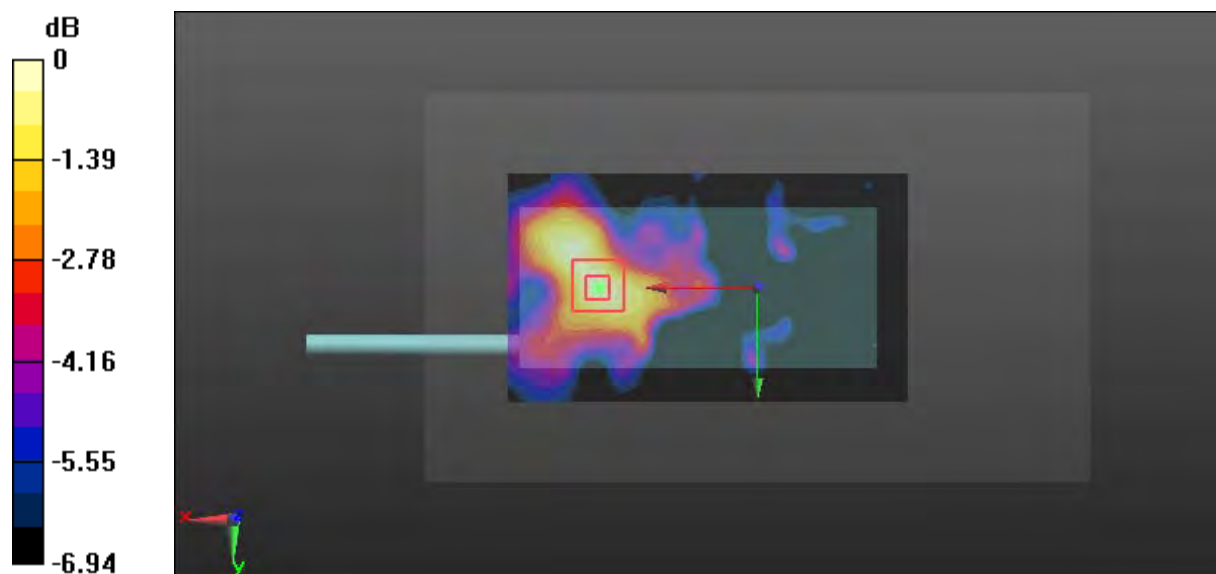

0 dB = 0.0408 W/kg = -13.89 dBW/kg

**Test Plot 357#: BT(8-DPSK DH5)\_Body Back\_Middle**

**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: BT(8-DPSK\_DH5); Frequency: 2441 MHz; Duty Cycle: 1:1.26

Medium parameters used:  $f = 2441 \text{ MHz}$ ;  $\sigma = 1.933 \text{ S/m}$ ;  $\epsilon_r = 54.189$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Center Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.05, 4.05, 4.05); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (141x81x1):** Interpolated grid:  $dx=1.200 \text{ mm}$ ,  $dy=1.200 \text{ mm}$

Maximum value of SAR (interpolated) = 0.0263 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 1.623 V/m; Power Drift = 0.19 dB

Peak SAR (extrapolated) = 0.0310 W/kg

**SAR(1 g) = 0.014 W/kg; SAR(10 g) = 0.00712 W/kg**

Maximum value of SAR (measured) = 0.0204 W/kg

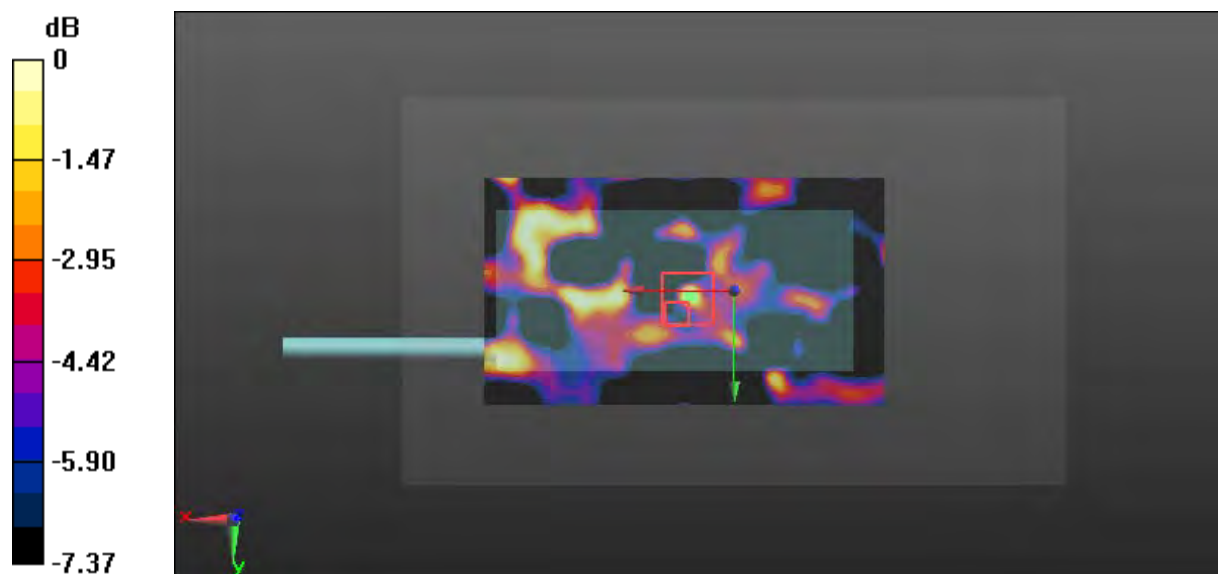

0 dB = 0.0204 W/kg = -16.90 dBW/kg

**Test Plot 358#: BT(8-DPSK DH5)\_Body Back\_High**

**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: BT(8-DPSK\_DH5); Frequency: 2480 MHz; Duty Cycle: 1:1.26

Medium parameters used:  $f = 2480$  MHz;  $\sigma = 1.983$  S/m;  $\epsilon_r = 51.578$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Center Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(4.05, 4.05, 4.05); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (141x81x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.0516 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 1.298 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.0450 W/kg

**SAR(1 g) = 0.028 W/kg; SAR(10 g) = 0.014 W/kg**

Maximum value of SAR (measured) = 0.0324 W/kg

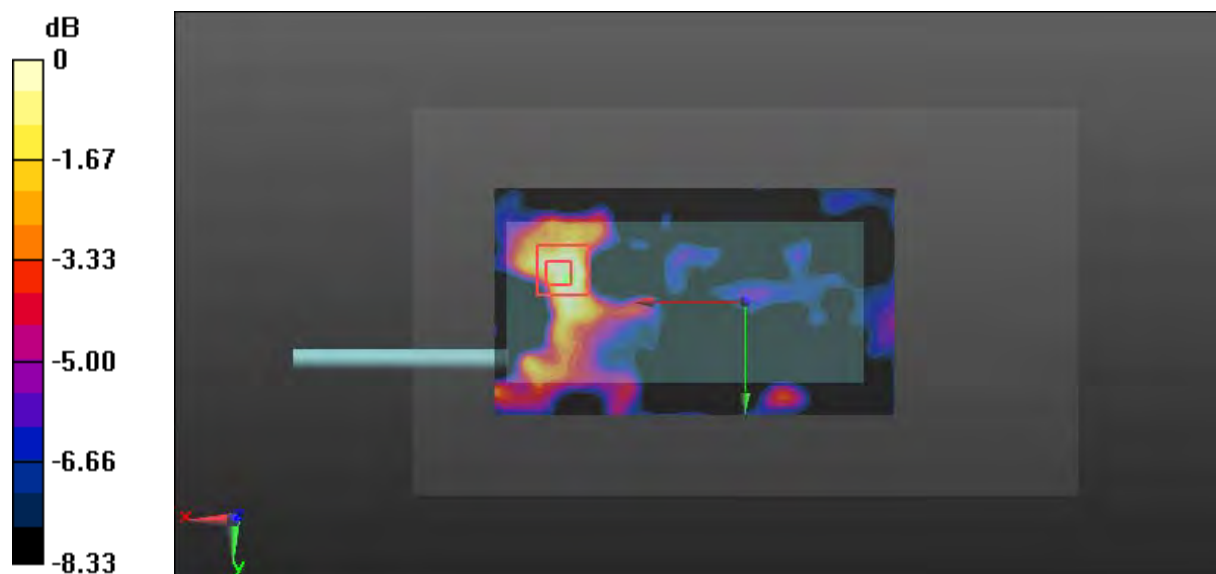

0 dB = 0.0324 W/kg = -14.89 dBW/kg

**Test Plot 359#: LTE Band 26\_Head Left Cheek\_Middle\_1RB**

**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 819 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 819 \text{ MHz}$ ;  $\sigma = 0.874 \text{ S/m}$ ;  $\epsilon_r = 42.386$ ;  $\rho = 1000 \text{ kg/m}^3$ ;  
 Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.57, 6.57, 6.57); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x61x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.217 W/kg


**Zoom Scan (6x6x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 9.533 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 0.259 W/kg

**SAR(1 g) = 0.213 W/kg; SAR(10 g) = 0.169 W/kg**

Maximum value of SAR (measured) = 0.224 W/kg

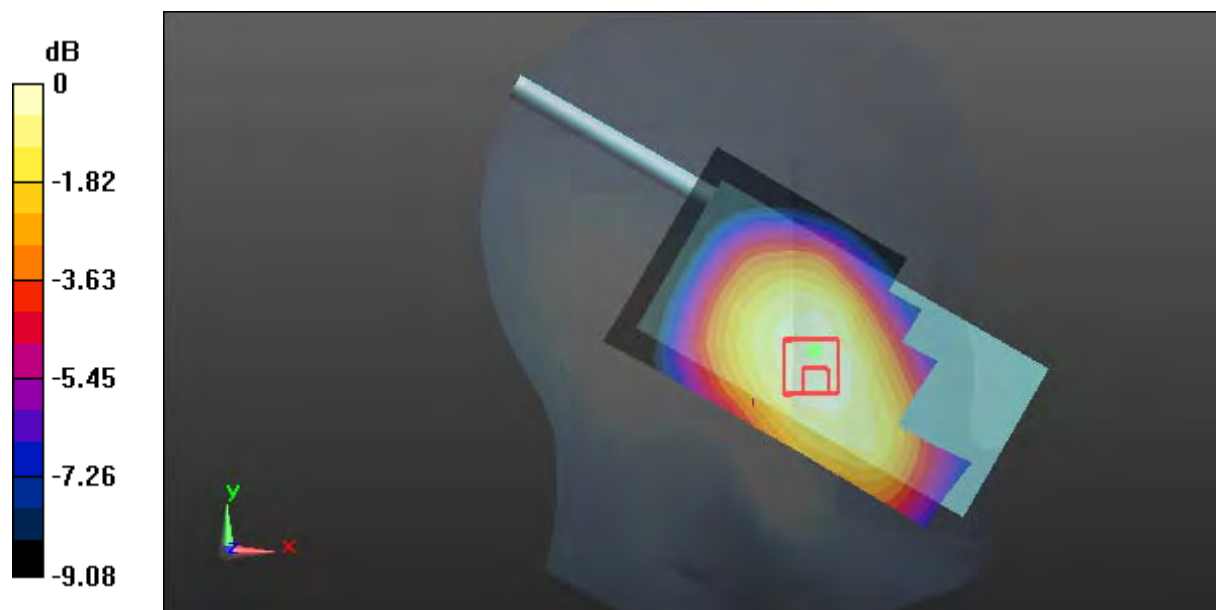

0 dB = 0.224 W/kg = -6.50 dBW/kg

**Test Plot 360#: LTE Band 26\_Head Left Cheek\_Middle\_50%RB****DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 819 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 819$  MHz;  $\sigma = 0.874$  S/m;  $\epsilon_r = 42.386$ ;  $\rho = 1000$  kg/m<sup>3</sup>;  
Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.57, 6.57, 6.57); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x61x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.176 W/kg


**Zoom Scan (6x6x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.333 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.204 W/kg

**SAR(1 g) = 0.168 W/kg; SAR(10 g) = 0.135 W/kg**

Maximum value of SAR (measured) = 0.173 W/kg

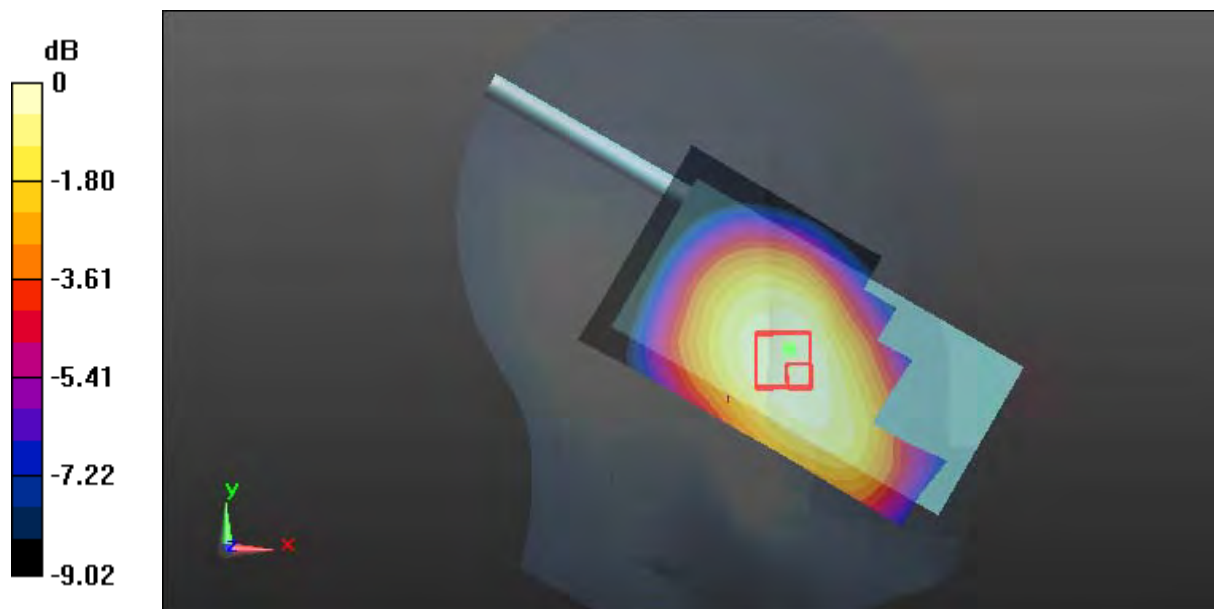

0 dB = 0.173 W/kg = -7.62 dBW/kg



**Test Plot 361#: LTE Band 26\_Head Left Tilt\_Middle\_1RB****DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 819 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 819$  MHz;  $\sigma = 0.874$  S/m;  $\epsilon_r = 42.386$ ;  $\rho = 1000$  kg/m<sup>3</sup>;  
Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.57, 6.57, 6.57); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x61x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.141 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.975 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 0.169 W/kg

**SAR(1 g) = 0.130 W/kg; SAR(10 g) = 0.100 W/kg**

Maximum value of SAR (measured) = 0.139 W/kg

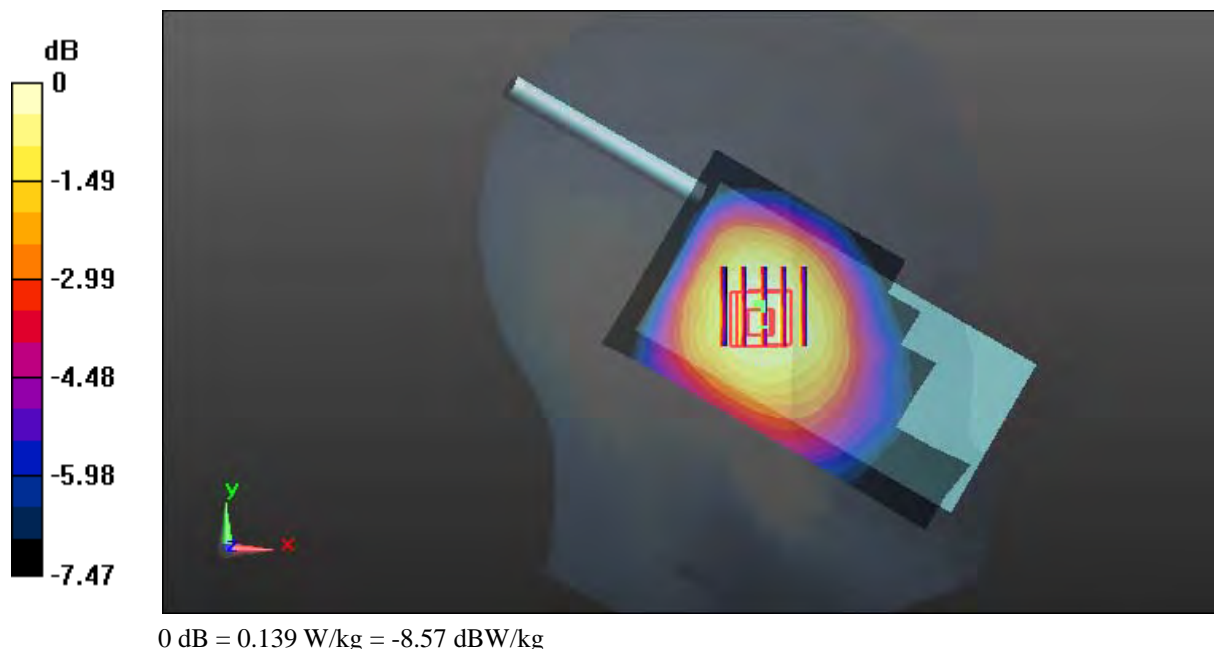

**Test Plot 362#: LTE Band 26\_Head Left Tilt\_Middle\_50%RB****DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 819 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 819$  MHz;  $\sigma = 0.874$  S/m;  $\epsilon_r = 42.386$ ;  $\rho = 1000$  kg/m<sup>3</sup>;  
Phantom section: Left Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.57, 6.57, 6.57); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x61x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.109 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.243 V/m; Power Drift = -0.19 dB

Peak SAR (extrapolated) = 0.123 W/kg

**SAR(1 g) = 0.103 W/kg; SAR(10 g) = 0.080 W/kg**

Maximum value of SAR (measured) = 0.108 W/kg

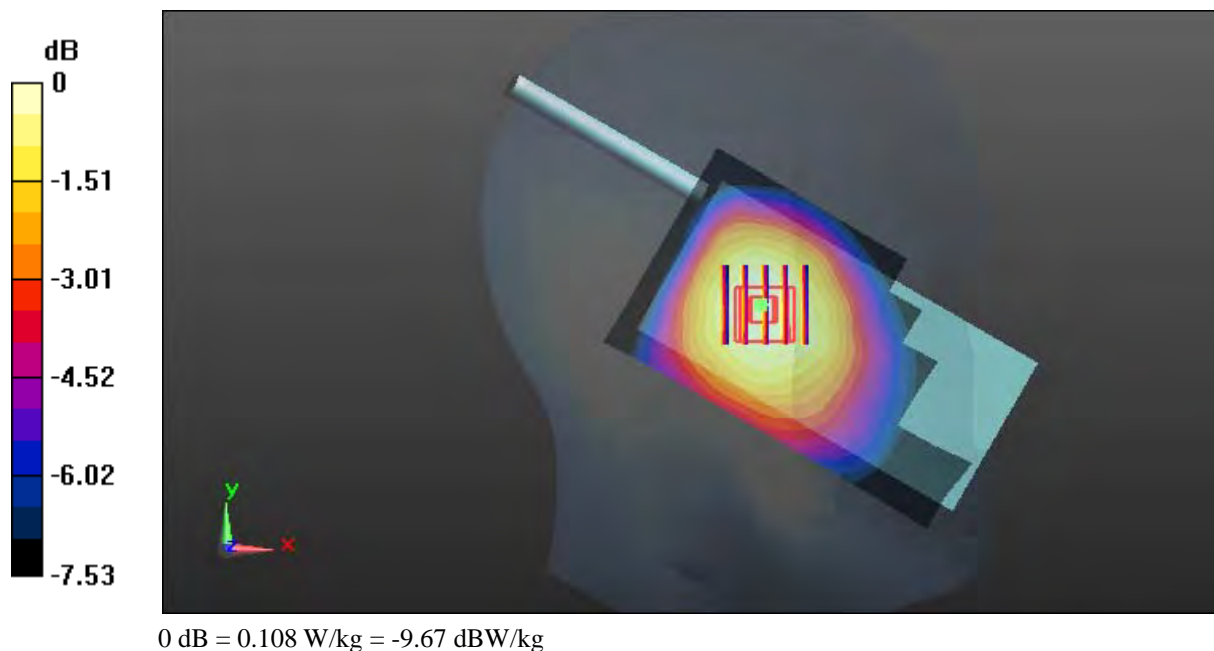

**Test Plot 363#: LTE Band 26\_Head Right Cheek\_Middle\_1RB****DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 819 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 819$  MHz;  $\sigma = 0.874$  S/m;  $\epsilon_r = 42.386$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.57, 6.57, 6.57); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x61x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.221 W/kg


**Zoom Scan (6x6x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.450 V/m; Power Drift = -0.18 dB

Peak SAR (extrapolated) = 0.247 W/kg

**SAR(1 g) = 0.204 W/kg; SAR(10 g) = 0.162 W/kg**

Maximum value of SAR (measured) = 0.216 W/kg

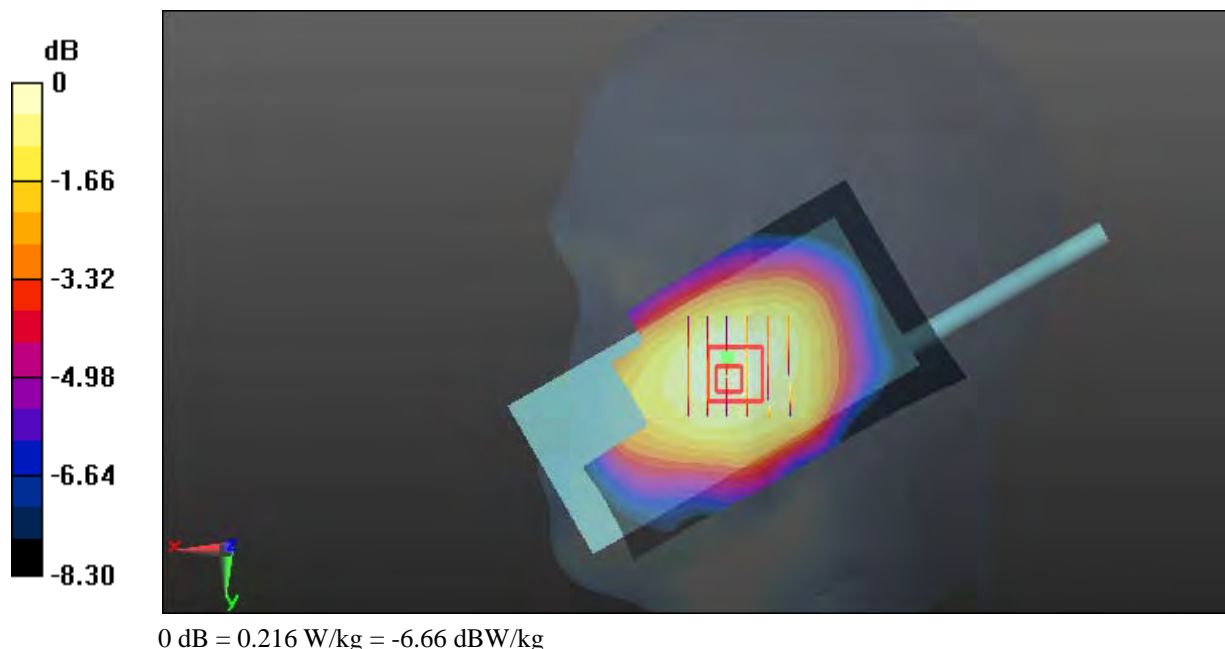

**Test Plot 364#: LTE Band 26\_Head Right Cheek\_Middle\_50%RB****DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 819 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 819$  MHz;  $\sigma = 0.874$  S/m;  $\epsilon_r = 42.386$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.57, 6.57, 6.57); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x61x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.179 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.420 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.202 W/kg

**SAR(1 g) = 0.169 W/kg; SAR(10 g) = 0.136 W/kg**

Maximum value of SAR (measured) = 0.174 W/kg

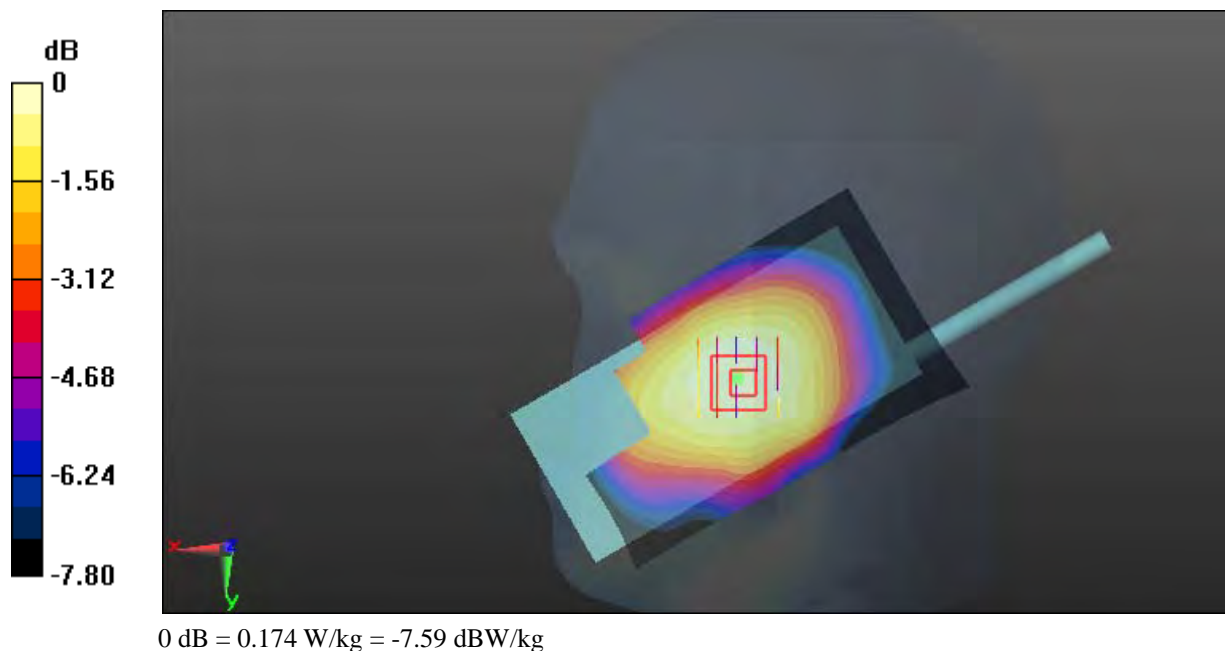

**Test Plot 365#: LTE Band 26\_Head Right Tilt\_Middle\_1RB****DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 819 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 819$  MHz;  $\sigma = 0.874$  S/m;  $\epsilon_r = 42.386$ ;  $\rho = 1000$  kg/m<sup>3</sup>;  
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.57, 6.57, 6.57); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x61x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.133 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.09 V/m; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 0.159 W/kg

**SAR(1 g) = 0.128 W/kg; SAR(10 g) = 0.098 W/kg**

Maximum value of SAR (measured) = 0.134 W/kg

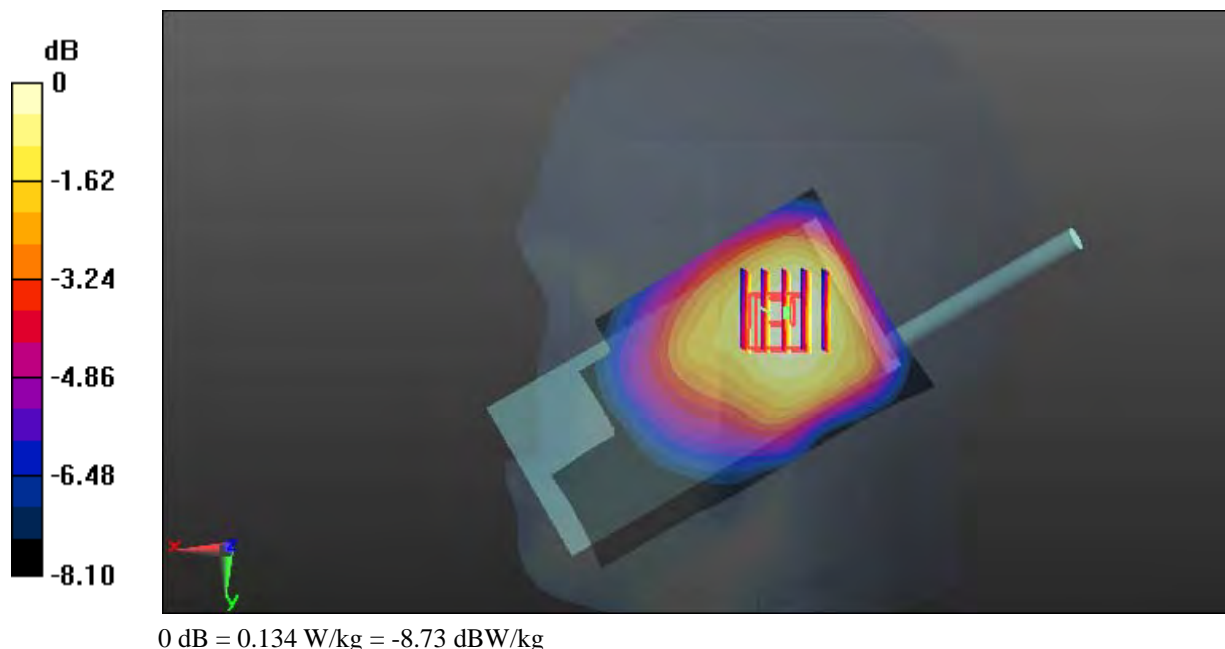

**Test Plot 366#: LTE Band 26\_Head Right Tilt\_Middle\_50%RB**

**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 819 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 819 \text{ MHz}$ ;  $\sigma = 0.874 \text{ S/m}$ ;  $\epsilon_r = 42.386$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.57, 6.57, 6.57); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x61x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.108 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 10.77 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.125 W/kg

**SAR(1 g) = 0.102 W/kg; SAR(10 g) = 0.079 W/kg**

Maximum value of SAR (measured) = 0.107 W/kg

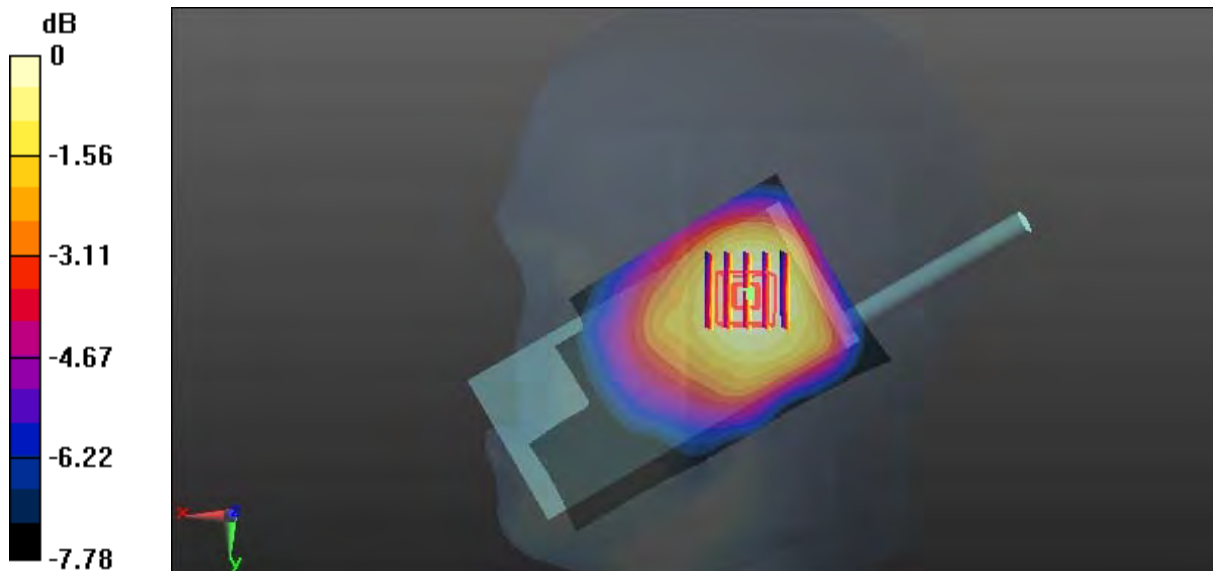

0 dB = 0.107 W/kg = -9.71 dBW/kg

**Test Plot 367#: LTE Band 26\_Body Face Up\_Middle\_1RB****DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 819 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 819$  MHz;  $\sigma = 0.955$  S/m;  $\epsilon_r = 57.323$ ;  $\rho = 1000$  kg/m<sup>3</sup>;  
Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.57, 6.57, 6.57); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x61x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0606 W/kg


**Zoom Scan (6x7x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.245 V/m; Power Drift = 0.19 dB

Peak SAR (extrapolated) = 0.0760 W/kg

**SAR(1 g) = 0.056 W/kg; SAR(10 g) = 0.042 W/kg**

Maximum value of SAR (measured) = 0.0598 W/kg

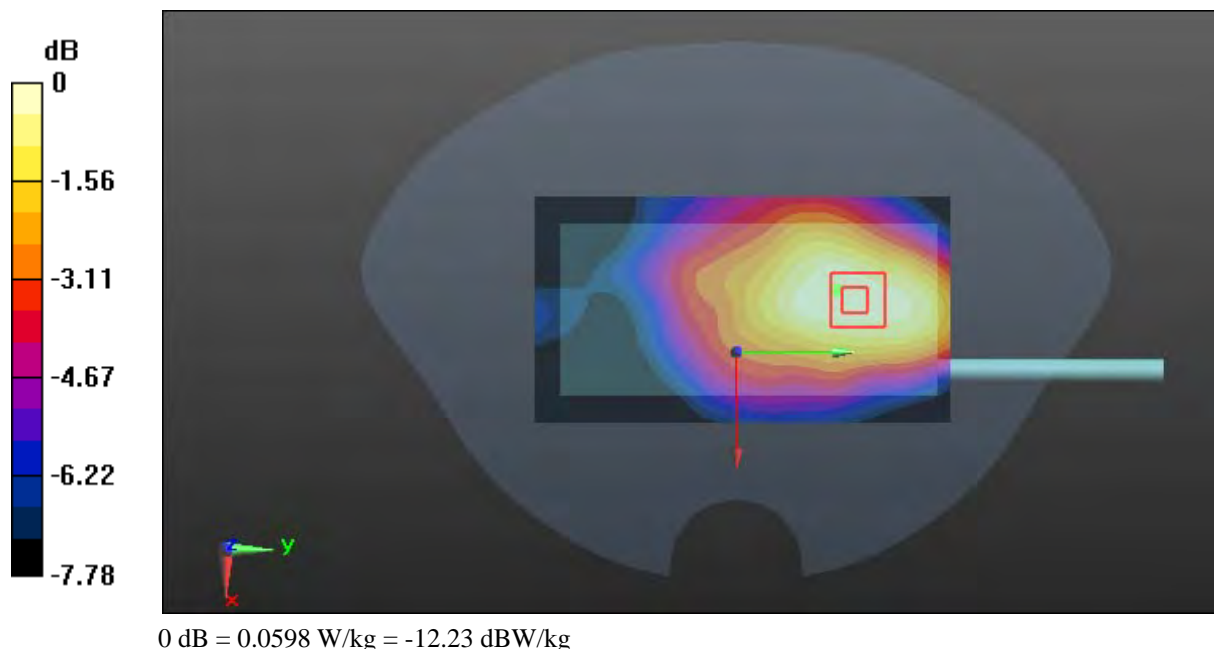

**Test Plot 368#: LTE Band 26\_Face Up\_Middle\_50%RB**

**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 819 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 819 \text{ MHz}$ ;  $\sigma = 0.955 \text{ S/m}$ ;  $\epsilon_r = 57.323$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.57, 6.57, 6.57); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x61x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.0481 W/kg


**Zoom Scan (6x6x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 5.676 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.0580 W/kg

**SAR(1 g) = 0.045 W/kg; SAR(10 g) = 0.033 W/kg**

Maximum value of SAR (measured) = 0.0473 W/kg

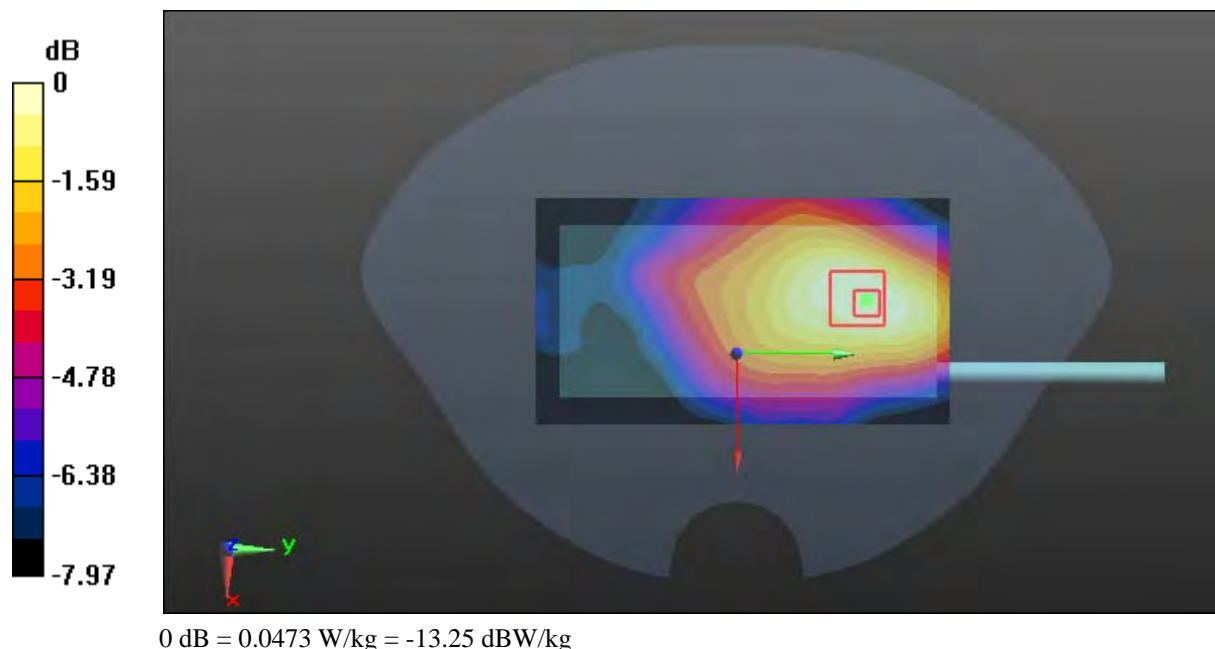



**Test Plot 369#: LTE Band 26\_Body Front\_Middle\_1RB**

**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 819 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 819 \text{ MHz}$ ;  $\sigma = 0.955 \text{ S/m}$ ;  $\epsilon_r = 57.323$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.42, 6.42, 6.42); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x61x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.431 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 17.85 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.481 W/kg

**SAR(1 g) = 0.403 W/kg; SAR(10 g) = 0.314 W/kg**

Maximum value of SAR (measured) = 0.436 W/kg

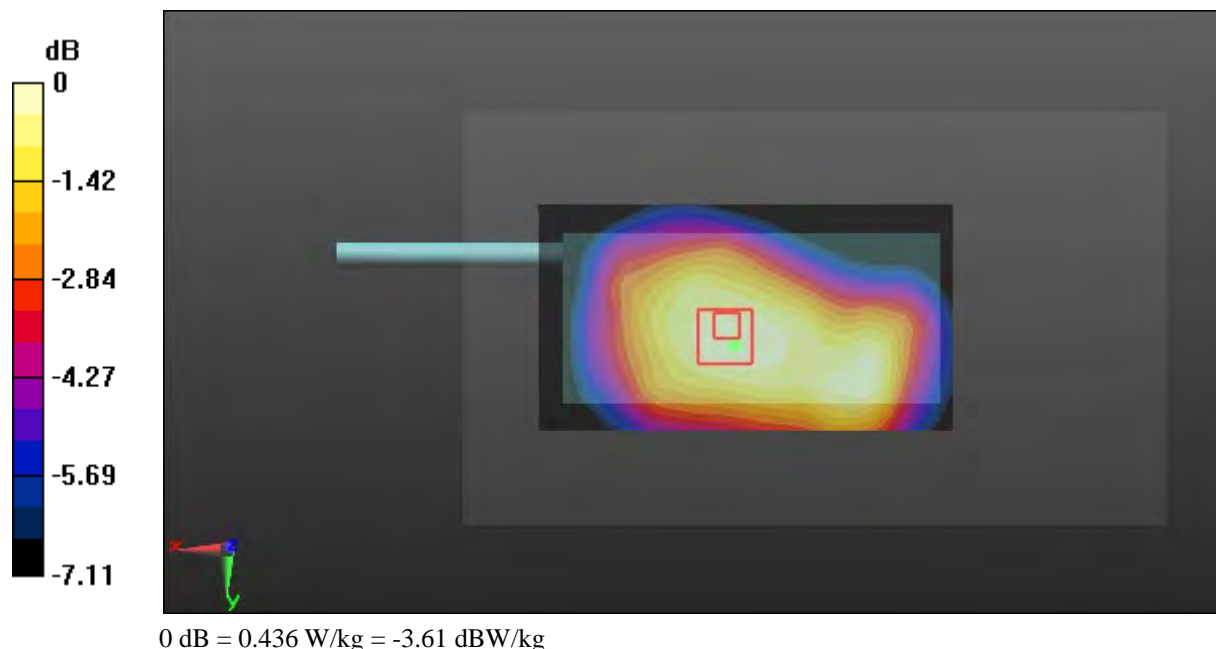

**Test Plot 370#: LTE Band 26\_Body Front\_Middle\_50%RB**

**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 819 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 819 \text{ MHz}$ ;  $\sigma = 0.955 \text{ S/m}$ ;  $\epsilon_r = 57.323$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.42, 6.42, 6.42); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x61x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.312 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 16.89 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.338 W/kg

**SAR(1 g) = 0.293 W/kg; SAR(10 g) = 0.234 W/kg**

Maximum value of SAR (measured) = 0.306 W/kg

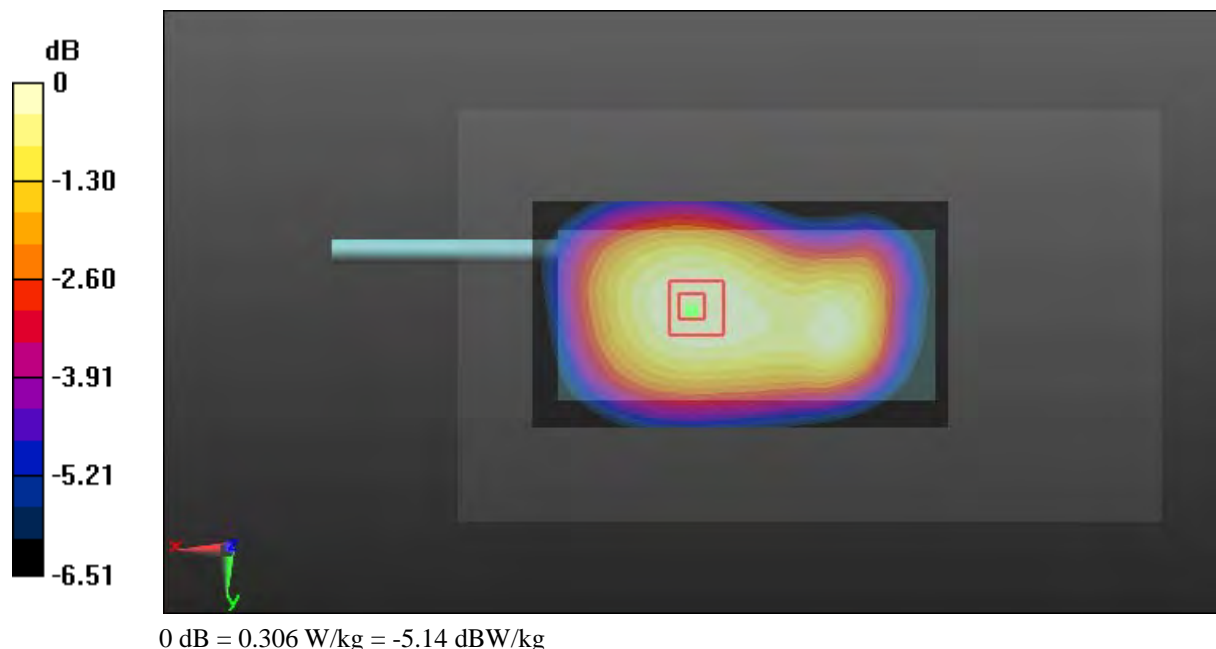

**Test Plot 371#: LTE Band 26\_Body Back\_Middle\_1RB**

**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 819 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 819 \text{ MHz}$ ;  $\sigma = 0.955 \text{ S/m}$ ;  $\epsilon_r = 57.323$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.42, 6.42, 6.42); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x61x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.214 W/kg


**Zoom Scan (6x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 12.47 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 0.243 W/kg

**SAR(1 g) = 0.200 W/kg; SAR(10 g) = 0.159 W/kg**

Maximum value of SAR (measured) = 0.214 W/kg

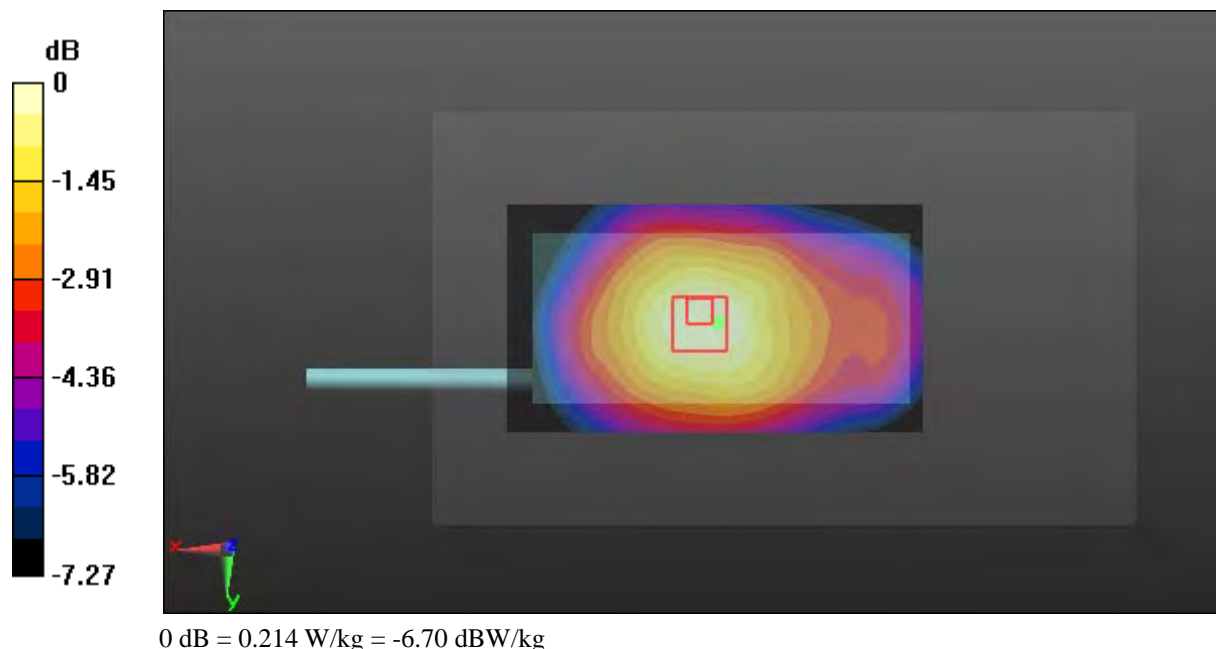

**Test Plot 372#: LTE Band 26\_Body Back\_Middle\_50%RB**

**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 819 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 819 \text{ MHz}$ ;  $\sigma = 0.955 \text{ S/m}$ ;  $\epsilon_r = 57.323$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.42, 6.42, 6.42); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x61x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) =  $0.168 \text{ W/kg}$


**Zoom Scan (6x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value =  $11.10 \text{ V/m}$ ; Power Drift =  $-0.18 \text{ dB}$

Peak SAR (extrapolated) =  $0.194 \text{ W/kg}$

**SAR(1 g) =  $0.161 \text{ W/kg}$ ; SAR(10 g) =  $0.125 \text{ W/kg}$**

Maximum value of SAR (measured) =  $0.168 \text{ W/kg}$

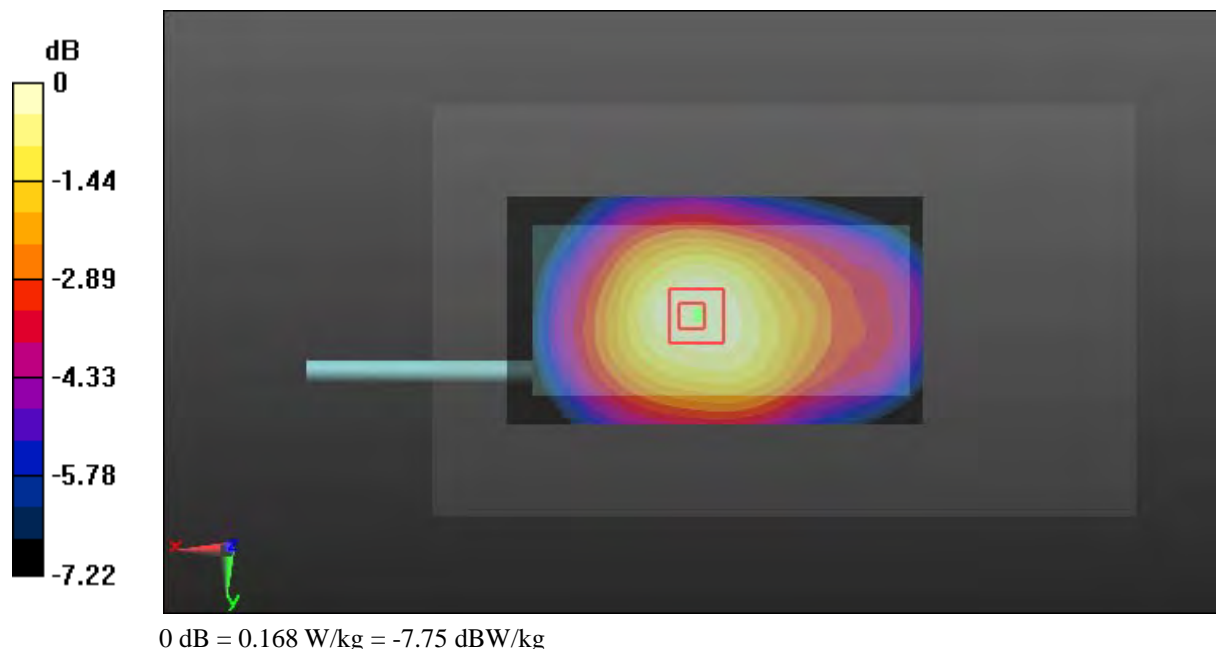

**Test Plot 373#: LTE Band 26\_Body Left\_Middle\_1RB**

**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 819 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 819 \text{ MHz}$ ;  $\sigma = 0.955 \text{ S/m}$ ;  $\epsilon_r = 57.323$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.42, 6.42, 6.42); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x51x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.270 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 13.61 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.319 W/kg

**SAR(1 g) = 0.252 W/kg; SAR(10 g) = 0.189 W/kg**

Maximum value of SAR (measured) = 0.271 W/kg

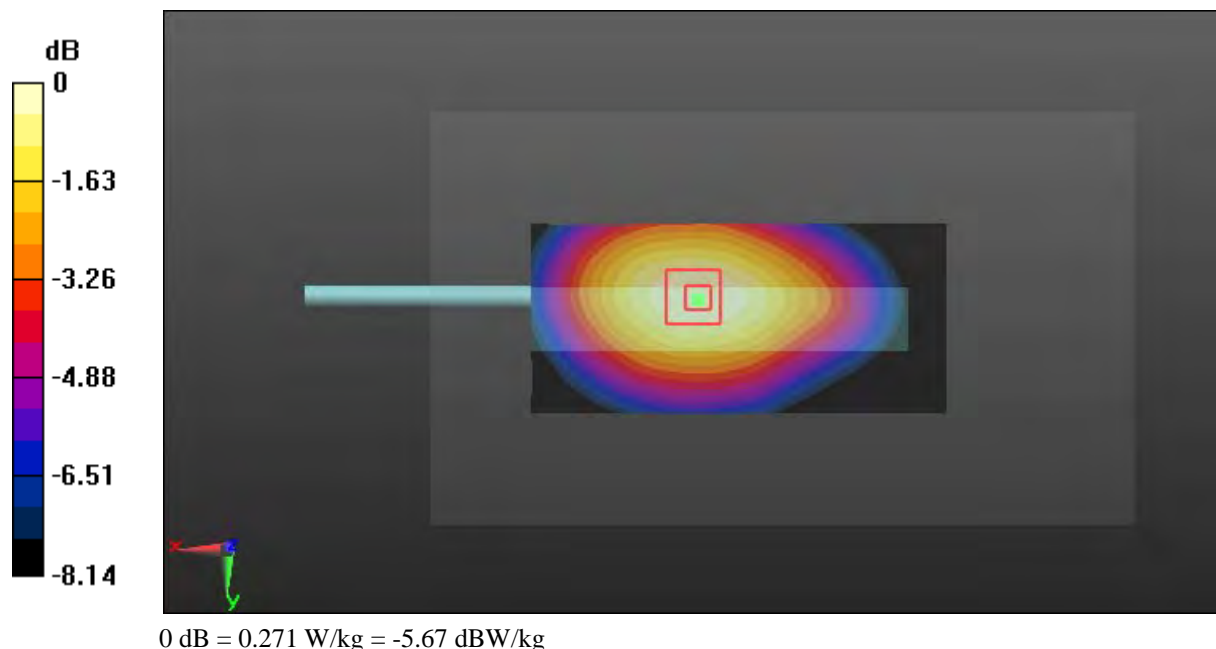

**Test Plot 374#: LTE Band 26\_Body Left\_Middle\_50%RB**

**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 819 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 819 \text{ MHz}$ ;  $\sigma = 0.955 \text{ S/m}$ ;  $\epsilon_r = 57.323$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.42, 6.42, 6.42); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x51x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.214 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 12.20 V/m; Power Drift = -0.18 dB

Peak SAR (extrapolated) = 0.247 W/kg

**SAR(1 g) = 0.199 W/kg; SAR(10 g) = 0.150 W/kg**

Maximum value of SAR (measured) = 0.211 W/kg

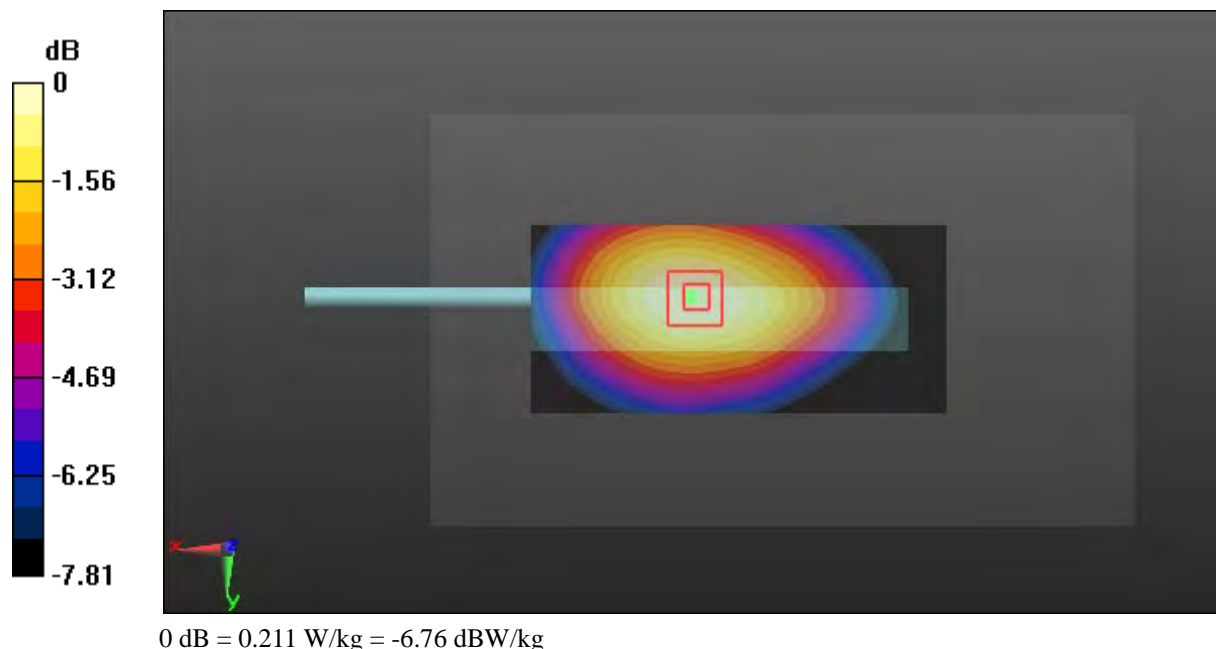

**Test Plot 375#: LTE Band 26\_Body Right\_Middle\_1RB**

**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 819 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 819 \text{ MHz}$ ;  $\sigma = 0.955 \text{ S/m}$ ;  $\epsilon_r = 57.323$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.42, 6.42, 6.42); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x51x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.320 W/kg


**Zoom Scan (6x6x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 14.61 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 0.374 W/kg

**SAR(1 g) = 0.297 W/kg; SAR(10 g) = 0.222 W/kg**

Maximum value of SAR (measured) = 0.313 W/kg

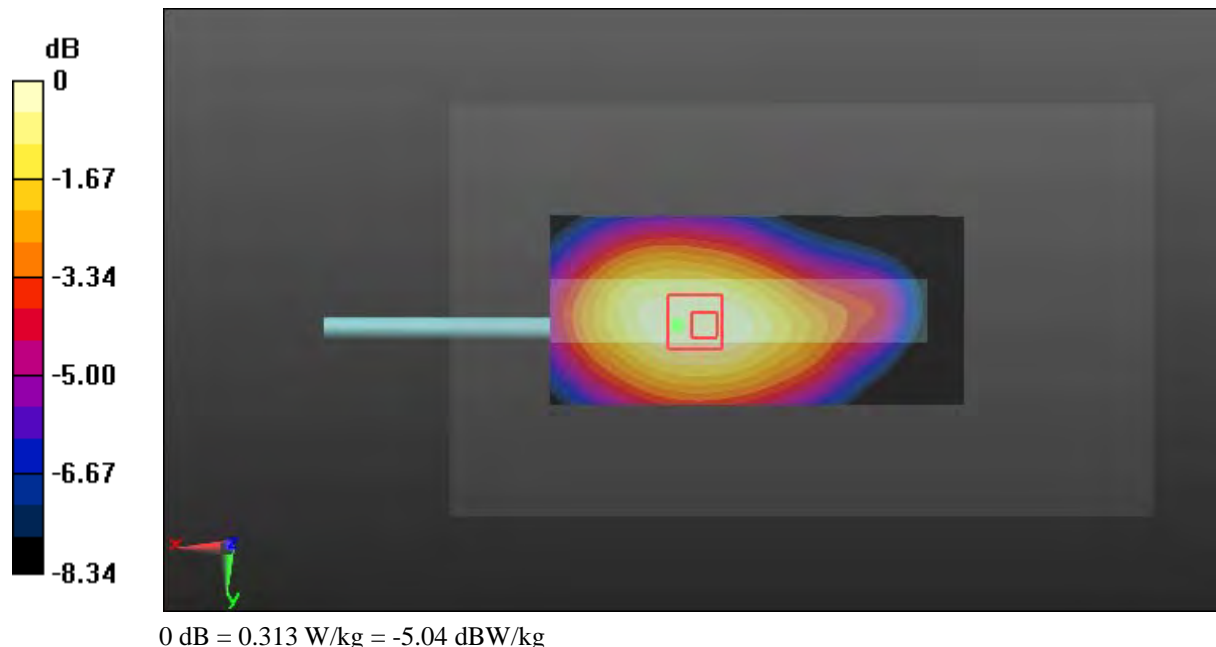

**Test Plot 376#: LTE Band 26\_Body Right\_Middle\_50%RB****DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 819 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 819$  MHz;  $\sigma = 0.955$  S/m;  $\epsilon_r = 57.323$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.42, 6.42, 6.42); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (111x51x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.258 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.77 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 0.304 W/kg

**SAR(1 g) = 0.241 W/kg; SAR(10 g) = 0.180 W/kg**

Maximum value of SAR (measured) = 0.255 W/kg

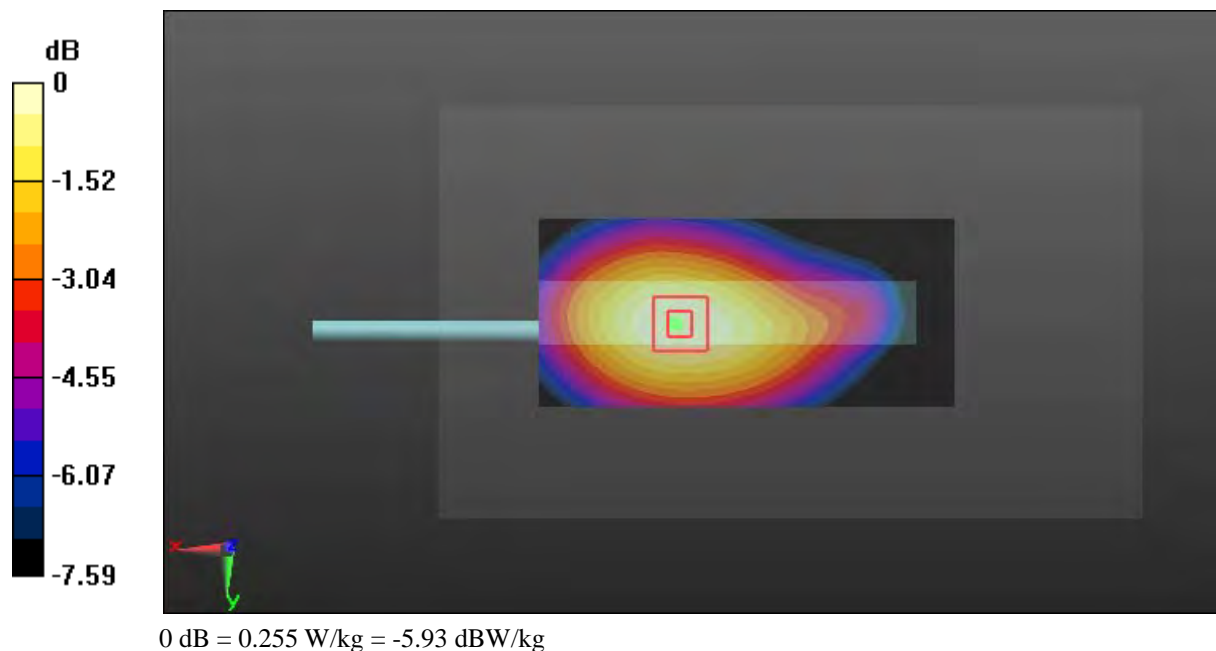



**Test Plot 377#: LTE Band 26\_Body Bottom\_Middle\_1RB**

**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 819 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 819 \text{ MHz}$ ;  $\sigma = 0.955 \text{ S/m}$ ;  $\epsilon_r = 57.323$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.42, 6.42, 6.42); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (51x81x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) =  $0.161 \text{ W/kg}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value =  $11.37 \text{ V/m}$ ; Power Drift =  $-0.16 \text{ dB}$

Peak SAR (extrapolated) =  $0.336 \text{ W/kg}$

**SAR(1 g) =  $0.148 \text{ W/kg}$ ; SAR(10 g) =  $0.080 \text{ W/kg}$**

Maximum value of SAR (measured) =  $0.160 \text{ W/kg}$



**Test Plot 378#: LTE Band 26\_Body Bottom\_Middle\_50%RB**

**DUT: Multi-mode Advanced Radio; Type: PDC760 UxB2; Serial: 17122600820**

Communication System: Generic FDD-LTE; Frequency: 819 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 819 \text{ MHz}$ ;  $\sigma = 0.955 \text{ S/m}$ ;  $\epsilon_r = 57.323$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Right Section

DASY5 Configuration:

- Probe: ES3DV2 - SN3019; ConvF(6.42, 6.42, 6.42); Calibrated: 2017/10/30;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2017/10/9
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

**Area Scan (51x81x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.133 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 10.24 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 0.258 W/kg

**SAR(1 g) = 0.117 W/kg; SAR(10 g) = 0.064 W/kg**

Maximum value of SAR (measured) = 0.126 W/kg

