

FCC PART 15.247

TEST REPORT

For

Hytera Communications Co., Ltd.

HYT Tower, Hi-Tech Industrial Park North,
Nanshan District, Shenzhen, Guangdong, China

FCC ID: YAMX1PU5

Report Type: Original Report	Product Type: Digital Portable Radio
Test Engineer: <u>Bell Hu</u>	<i>Bell Hu</i>
Report Number: <u>RSZ130508001-00A</u>	
Report Date: <u>2013-08-05</u>	
Reviewed By: <u>Alvin Huang</u> RF Leader	<i>Alvin Huang</i>
Prepared By: Bay Area Compliance Laboratories Corp. (Shenzhen) 6/F, the 3rd Phase of WanLi Industrial Building, ShiHua Road, FuTian Free Trade Zone, Shenzhen, Guangdong, China Tel: +86-755-33320018 Fax: +86-755-33320008 www.baclcorp.com.cn	

Note: This test report is prepared for the customer shown above and for the equipment described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp.

TABLE OF CONTENTS

GENERAL INFORMATION.....4

 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)4

 OBJECTIVE4

 RELATED SUBMITTAL(S)/GRANT(S).....4

 TEST METHODOLOGY4

 TEST FACILITY4

SYSTEM TEST CONFIGURATION.....5

 DESCRIPTION OF TEST CONFIGURATION5

 EQUIPMENT MODIFICATIONS5

 EUT EXERCISE SOFTWARE5

 BLOCK DIAGRAM OF TEST SETUP5

SUMMARY OF TEST RESULTS6

FCC §15.247 (i) & §2.1093 – RF EXPOSURE7

 APPLICABLE STANDARD7

 RESULT7

FCC §15.203 – ANTENNA REQUIREMENT8

 APPLICABLE STANDARD8

 ANTENNA CONNECTOR CONSTRUCTION8

FCC §15.205, §15.209 & §15.247(d) – RADIATED EMISSIONS.....9

 APPLICABLE STANDARD9

 MEASUREMENT UNCERTAINTY9

 EUT SETUP9

 EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP10

 TEST PROCEDURE10

 CORRECTED AMPLITUDE & MARGIN CALCULATION10

 TEST EQUIPMENT LIST AND DETAILS11

 TEST RESULTS SUMMARY11

 TEST DATA11

FCC §15.247(a)(1) - CHANNEL SEPARATION TEST14

 APPLICABLE STANDARD14

 TEST PROCEDURE14

 TEST EQUIPMENT LIST AND DETAILS14

 TEST DATA14

FCC §15.247(a) (1) – 20 dB EMISSION BANDWIDTH.....21

 APPLICABLE STANDARD21

 TEST PROCEDURE21

 TEST EQUIPMENT LIST AND DETAILS21

 TEST DATA21

FCC §15.247(a)(1)(iii) - QUANTITY OF HOPPING CHANNEL TEST27

 APPLICABLE STANDARD27

 TEST PROCEDURE27

 TEST EQUIPMENT LIST AND DETAILS27

 TEST DATA27

FCC §15.247(a) (1) (iii) -TIME OF OCCUPANCY (DWELL TIME).....30
APPLICABLE STANDARD30
TEST PROCEDURE30
TEST EQUIPMENT LIST AND DETAILS.....30
TEST DATA30

FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT46
APPLICABLE STANDARD46
TEST PROCEDURE46
TEST EQUIPMENT LIST AND DETAILS.....46
TEST DATA46

FCC §15.247(d) - BAND EDGES TESTING52
APPLICABLE STANDARD52
TEST PROCEDURE52
TEST EQUIPMENT LIST AND DETAILS.....52
TEST DATA53

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

The *Hytera Communications Co., Ltd.*'s product, model number: *X1p U(5)* (FCC ID: *YAMX1PU5*) or the "EUT" in this report was a *Digital Portable Radio*, which was measured approximately: 21.1 cm (L) x 6.0 cm (W) x 2.1 cm (H), rated with input voltage: DC 7.4V battery.

** All measurement and test data in this report was gathered from production sample serial number: 1305028 (Assigned by BACL, Shenzhen). The EUT supplied by the applicant was received on 2013-05-08.*

Objective

This test report is prepared on behalf of *Hytera Communications Co., Ltd.* in accordance with Part 2-Subpart J, Part 15-Subparts A, B and C of the Federal Communication Commissions rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

Related Submittal(s)/Grant(s)

FCC Part 24D/90 PCF submissions with FCC ID: *YAMX1PU5*.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.4-2009, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

All emissions measurement was performed and Bay Area Compliance Laboratories Corp. (Shenzhen). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Measurement uncertainty with radiated emission is 5.91 dB for 30 MHz – 1 GHz.and 4.92 dB for above 1GHz, 1.95 dB for conducted measurement.

Test Facility

The test site used by Bay Area Compliance Laboratories Corp. (Shenzhen) to collect test data is located on the 6/F, the 3rd Phase of WanLi Industrial Building, ShiHua Road, FuTian Free Trade Zone Shenzhen, Guangdong, China.

Test site at Bay Area Compliance Laboratories Corp. (Shenzhen) has been fully described in reports submitted to the Federal Communication Commission (FCC). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on December 06, 2010. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2009.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 382179. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system was configured for testing in a testing mode which was controlled by bluetooth test software.


Equipment Modifications

No modification was made to the EUT tested.

EUT Exercise Software

CSR Blue Test 3

Block Diagram of Test Setup

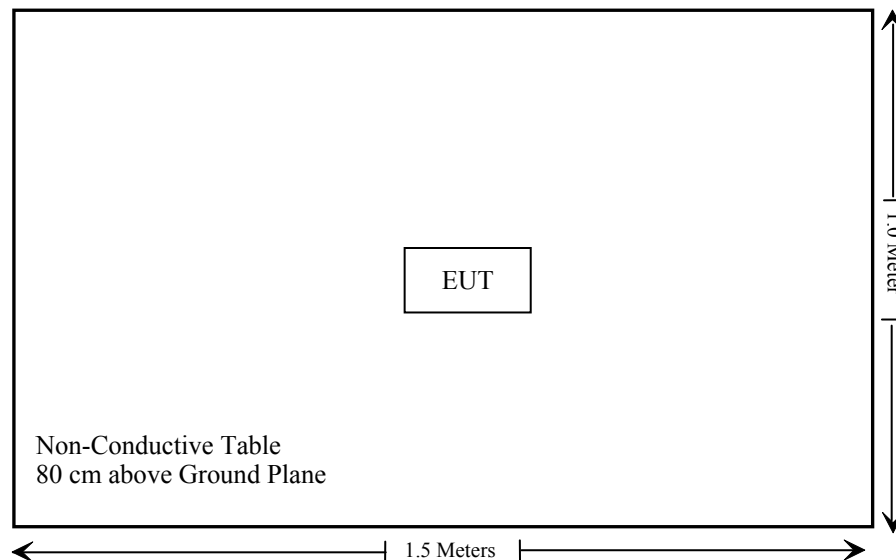

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§15.247 (i), §2.1093	RF Exposure	Compliance
§15.203	Antenna Requirement	Compliance
§15.207(a)	AC Line Conducted Emissions	Not Applicable
§15.205, §15.209 & §15.247(d)	Radiated Emissions	Compliance
§15.247(a)(1)	20 dB Emission Bandwidth	Compliance
§15.247(a)(1)	Channel Separation Test	Compliance
§15.247(a)(1)(iii)	Time of Occupancy (Dwell Time)	Compliance
§15.247(a)(1)(iii)	Quantity of hopping channel Test	Compliance
§15.247(b)(1)	Peak Output Power Measurement	Compliance
§15.247(d)	Band edges	Compliance

Not Applicable: the EUT is powered by battery.

FCC §15.247 (i) & §2.1093 – RF EXPOSURE

Applicable Standard

According to FCC §2.1093 and §1.1307(b) (1), systems operating under the provisions of this section shall be operated in a manner that ensure that the public is not exposed to radio frequency energy level in excess of the Commission's guideline.

According to KDB 447498 D01 General RF Exposure Guidance v05

Result

According to FCC KDB 447498 D01 General RF Exposure Guidance v05 generic portable criteria

The distance between antenna and test point is 5 mm

The Max output power: 1.596 mW

According to the Appendix A of KDB 447498, the exclusion thresholds for 2450 MHz is 10 mW

Conclusion:

The time-averaged output power is 1.596 mW <the exclusion thresholds is 10 mW

Stand-alone SAR evaluation for Bluetooth radio is not required.

FCC §15.203 – ANTENNA REQUIREMENT

Applicable Standard

According to FCC §15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Antenna Connector Construction

The EUT has an integrated antenna arrangement for bluetooth, which was permanently attached, the antenna gain is -0.5dBi, fulfill the requirement of this section. Please refer to the internal photos.

Result: Compliance.

FCC §15.205, §15.209 & §15.247(d) – RADIATED EMISSIONS

Applicable Standard


FCC §15.205; §15.209; §15.247(d)

Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.

Based on CISPR 16-4-2:2011, the expended combined standard uncertainty of radiation emissions at Bay Area Compliance Laboratories Corp. (Shenzhen) is shown in below table. And the uncertainty will not be taken into consideration for the test data recorded in the report

EUT Setup

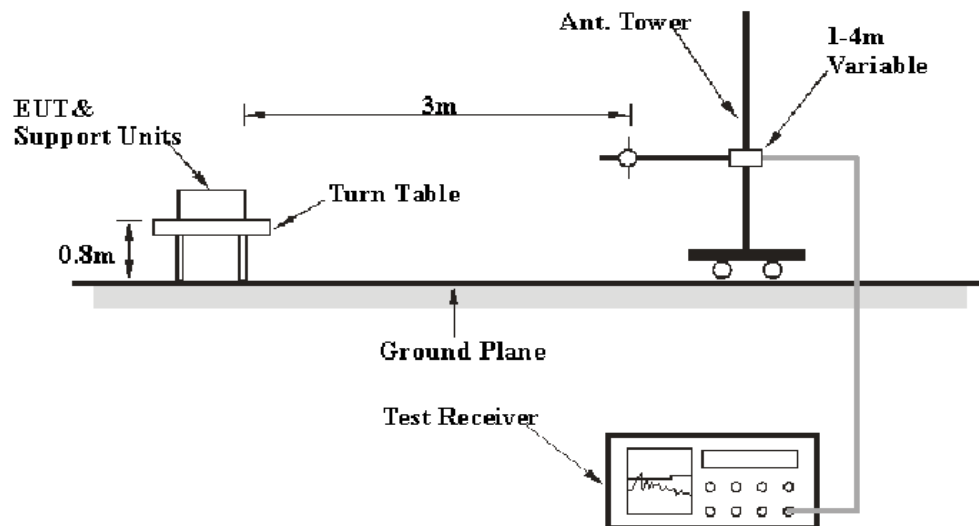

The radiated emission tests were performed in the 3 meters, using the setup accordance with the ANSI C63.4-2009. The specification used was the FCC 15.209 and FCC 15.247 limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 25 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Detector
30MHz – 1000 MHz	100 kHz	300 kHz	120kHz	QP
Above 1 GHz	1MHz	3 MHz	/	PK
	1MHz	10 Hz	/	Ave.

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz -1 GHz and peak and Average detection modes for frequencies above 1 GHz.

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\begin{aligned} \text{Corrected Factor} &= \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain} \\ \text{Corrected Amplitude} &= \text{Meter Reading} + \text{Corrected Factor} \end{aligned}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7 dB means the emission is 7 dB below the maximum limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
HP	Amplifier	8447E	1937A01046	2012-11-24	2013-11-23
Rohde & Schwarz	EMI Test Receiver	ESCI	101122	2013-05-09	2014-05-09
Sunol Sciences	Broadband Antenna	JB1	A040904-2	2011-11-28	2014-11-27
SUPER ULTRA	Amplifier	ZVA-213+	N/A	2012-11-24	2013-11-23
Sunol Sciences	Horn Antenna	DRH-118	A052304	2011-12-01	2014-11-30
Rohde & Schwarz	Signal Analyzer	FSIQ26	8386001028	2012-11-24	2013-11-23
the electro-Mechanics Co.	Horn Antenna	3116	9510-2270	2010-10-14	2013-10-13

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements, traceable to National Primary Standards and International System of Units (SI).

Test Results Summary

According to the data in the following table, with the worst margin reading of:

2.27 dB at 7206.0 MHz in the Vertical polarization

Refer to CISPR16-4-2:2011 and CISPR 16-4-1:2009, the measured level is in compliance with the limit if

$$L_m + U_{(L_m)} \leq L_{lim} + U_{cispr}$$

in BACL, $U_{(L_m)}$ is less than U_{cispr} , if L_m is less than L_{lim} , it implies that the EUT complies with the limit.

Test Data

Environmental Conditions

Temperature:	25°C
Relative Humidity:	56 %
ATM Pressure:	100.0 kPa

The testing was performed by Bell Hu on 2013-06-05.

EUT operation mode: Transmitting

30 MHz ~25 GHz: (Scan with GFSK, $\pi/4$ -DQPSK, 8-DPSK, the worst case is BDR Mode (GFSK))

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB)	Corrected Amplitude (dBuV/m)	FCC Part 15.247/205/209	
	Reading (dBuV)	Detector (PK/QP/Ave.)		Height (m)	Polar (H/V)			Limit (dBuV/m)	Margin (dB)
Low Channel (2402 MHz)									
2402.0	91.19	PK	117	1.4	H	6.13	97.32	/	/
2402.0	81.32	Ave.	117	1.4	H	6.13	87.45	/	/
2402.0	91.02	PK	231	1.8	V	6.13	97.15	/	/
2402.0	81.22	Ave.	231	1.8	V	6.13	87.35	/	/
7206.0	34.67	Ave.	136	1.1	V	17.06	51.73	54	2.27*
2489.6	36.61	Ave.	226	1.2	V	6.81	43.42	54	10.58
2333.2	36.11	Ave.	237	1.6	V	5.48	41.59	54	12.41
2365.3	35.52	Ave.	60	1.1	H	5.48	41.00	54	13.00
7206.0	42.70	PK	136	1.1	V	17.06	59.76	74	14.24
4804.0	25.89	Ave.	106	1.4	V	12.4	38.29	54	15.71
9608.0	17.20	Ave.	138	1.8	H	19.28	36.48	54	17.52
4804.0	41.28	PK	106	1.4	V	12.4	53.68	74	20.32
2489.6	46.13	PK	226	1.2	V	6.81	52.94	74	21.06
9608.0	32.48	PK	138	1.8	H	19.28	51.76	74	22.24
2333.2	45.86	PK	237	1.6	V	5.48	51.34	74	22.66
2365.3	44.55	PK	60	1.1	H	5.48	50.03	74	23.97
Middle Channel (2441 MHz)									
2441.0	91.70	PK	132	1.9	H	7.21	98.91	/	/
2441.0	80.31	Ave.	132	1.9	H	7.21	87.52	/	/
2441.0	92.18	PK	207	1.9	V	6.81	98.99	/	/
2441.0	80.68	Ave.	207	1.9	V	6.81	87.49	/	/
7323.0	34.85	Ave.	256	1.6	V	16.49	51.34	54	2.66*
7323.0	49.14	PK	256	1.6	V	16.49	65.63	74	8.37
2362.9	35.67	Ave.	178	1.8	H	5.48	41.15	54	12.85
2489.3	34.30	Ave.	59	1.1	V	6.81	41.11	54	12.89
2331.5	35.27	Ave.	167	1.1	V	5.48	40.75	54	13.25
4882.0	26.55	Ave.	241	1.4	V	12.46	39.01	54	14.99
9764.0	17.67	Ave.	189	1.1	H	19.4	37.07	54	16.93
9764.0	34.02	PK	189	1.1	H	19.4	53.42	74	20.58
4882.0	40.66	PK	241	1.4	V	12.46	53.12	74	20.88
2489.3	46.17	PK	59	1.1	V	6.81	52.98	74	21.02
2362.9	46.98	PK	178	1.8	H	5.48	52.46	74	21.54
2331.5	46.89	PK	167	1.1	V	5.48	52.37	74	21.63

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB)	Corrected Amplitude (dBuV/m)	FCC Part 15.247/205/209	
	Reading (dBμV)	Detector (PK/QP/Ave.)		Height (m)	Polar (H/V)			Limit (dBμV/m)	Margin (dB)
High Channel (2480 MHz)									
2480.0	93.24	PK	80	1.5	H	7.21	100.45	/	/
2480.0	80.09	Ave.	80	1.5	H	7.21	87.30	/	/
2480.0	93.84	PK	63	1.2	V	6.81	100.65	/	/
2480.0	81.00	Ave.	63	1.2	V	6.81	87.81	/	/
7440.0	35.21	Ave.	237	1.1	V	15.9	51.11	54	2.89*
2489.4	35.76	Ave.	259	1.0	V	6.81	42.57	54	11.43
2333.5	36.64	Ave.	267	1.3	V	5.48	42.12	54	11.88
7440.0	45.55	PK	237	1.1	V	15.9	61.45	74	12.55
2359.6	35.84	Ave.	114	1.5	H	5.48	41.32	54	12.68
4960.0	27.41	Ave.	41	1.2	V	12.5	39.91	54	14.09
9920.0	17.59	Ave.	232	1.8	H	19.38	36.97	54	17.03
4960.0	42.58	PK	41	1.2	V	12.5	55.08	74	18.92
2489.4	47.51	PK	259	1.0	V	6.81	54.32	74	19.68
2359.6	46.42	PK	114	1.5	H	5.48	51.90	74	22.10
2333.5	46.36	PK	267	1.3	V	5.48	51.84	74	22.16
9920.0	31.82	PK	232	1.8	H	19.38	51.20	74	22.80

Note:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Corrected Amplitude = Corrected Factor + Reading

Corrected Factor = Antenna factor (RX) + Cable Loss – Amplifier Factor

Margin = Limit – Corr. Amplitude

*Within measurement uncertainty!

FCC §15.247(a)(1) - CHANNEL SEPARATION TEST

Applicable Standard

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater provided the systems operate with an output power no greater than 125 mW.

Test Procedure

1. Set the EUT in transmitting mode, maxhold the channel.
2. Set the adjacent channel of the EUT and maxhold another trace
3. Measure the channel separation.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	Signal Analyzer	FSIQ26	8386001028	2012-11-24	2013-11-23

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

Temperature:	25°C
Relative Humidity:	56 %
ATM Pressure:	100.0 kPa

The testing was performed by Bell Hu on 2013-06-08.


EUT operation mode: Transmitting

Test Result: Compliance. Please refer to following tables and plots


Mode	Channel	Frequency (MHz)	Channel Separation (MHz)	Limit (MHz)	Result
BDR (GFSK)	Low	2402	1.004	0.673	Pass
	Adjacent	2403			
	Middle	2441	1.004	0.673	Pass
	Adjacent	2442			
	High	2480	1.004	0.673	Pass
	Adjacent	2479			
EDR ($\pi/4$ -DQPSK)	Low	2402	1.004	0.849	Pass
	Adjacent	2403			
	Middle	2441	1.004	0.849	Pass
	Adjacent	2442			
	High	2480	1.004	0.852	Pass
	Adjacent	2479			
EDR (8DPSK)	Low	2402	1.004	0.845	Pass
	Adjacent	2403			
	Middle	2441	1.004	0.845	Pass
	Adjacent	2442			
	High	2480	1.001	0.845	Pass
	Adjacent	2479			

Note: Limit = 20 dB bandwidth *2/3


BDR (GFSK): Low Channel

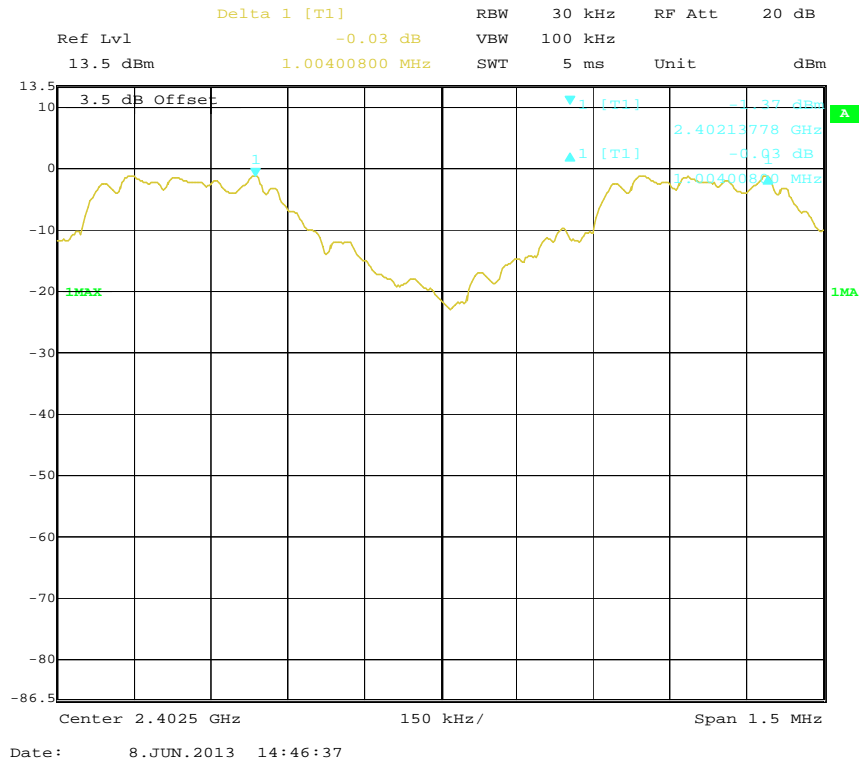


BDR (GFSK): Middle Channel

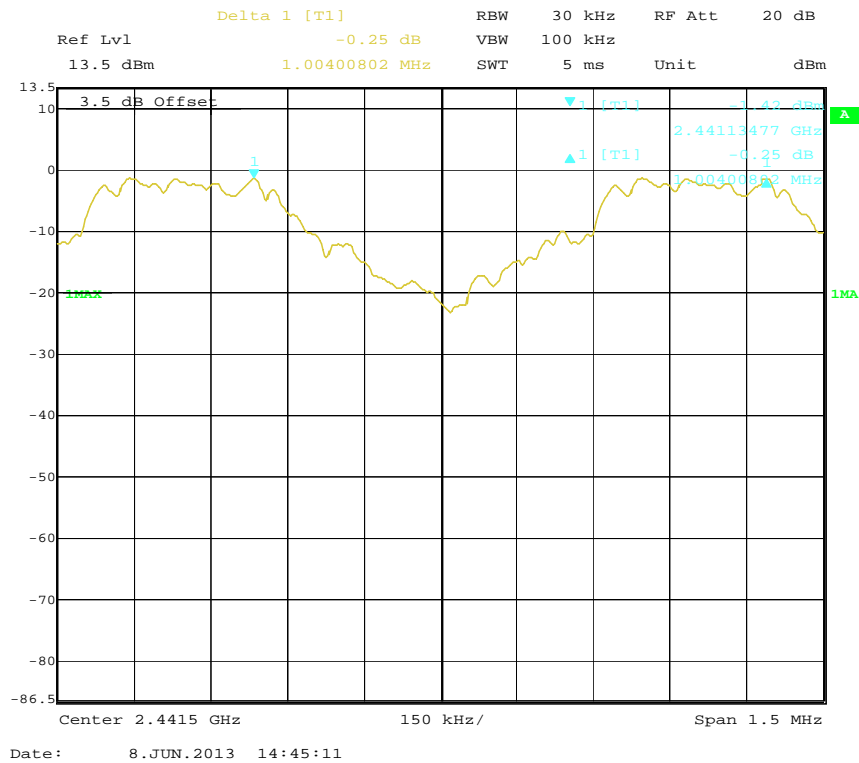


BDR (GFSK): High Channel

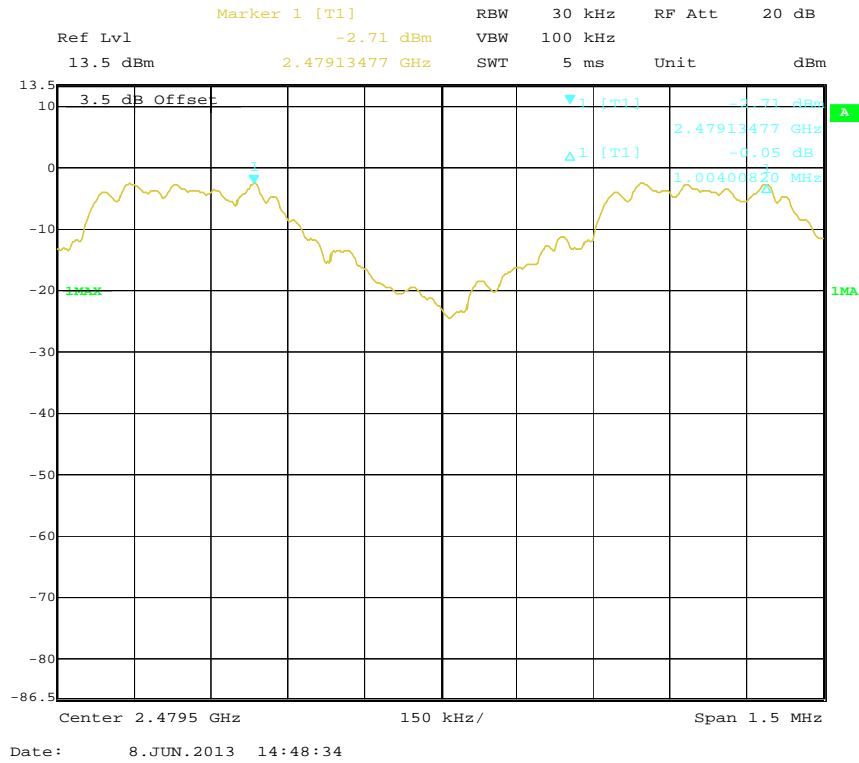


EDR ($\pi/4$ -DQPSK): Low Channel

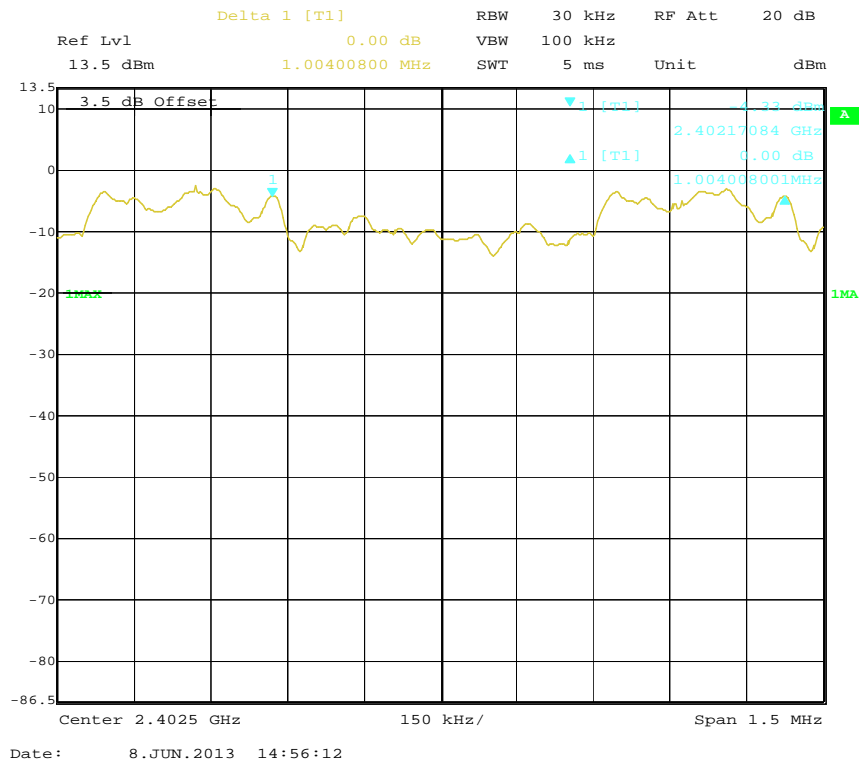


EDR ($\pi/4$ -DQPSK): Middle Channel

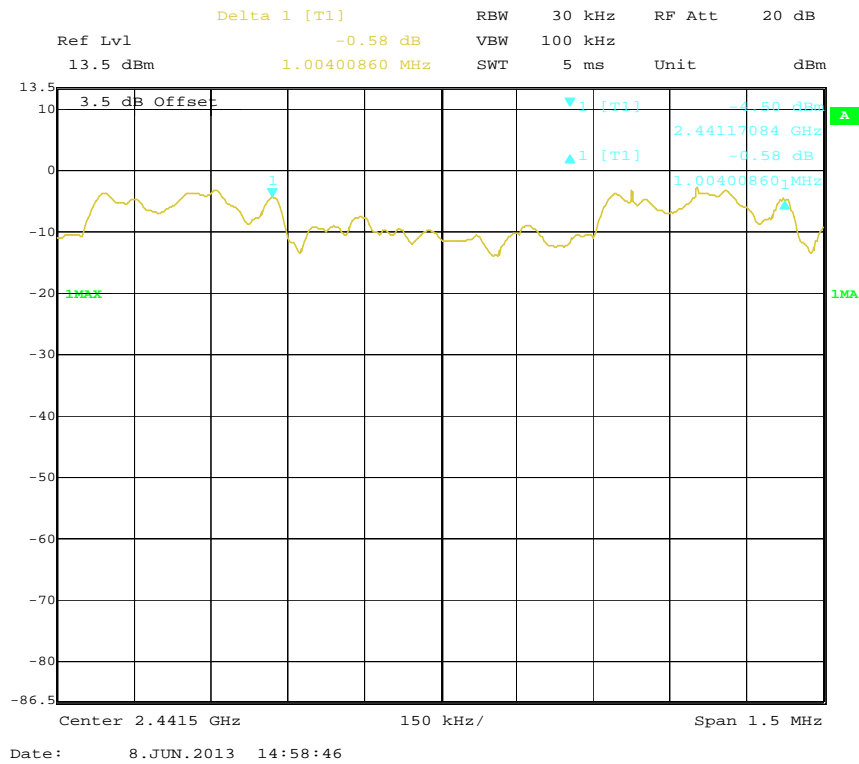


EDR ($\pi/4$ -DQPSK): High Channel

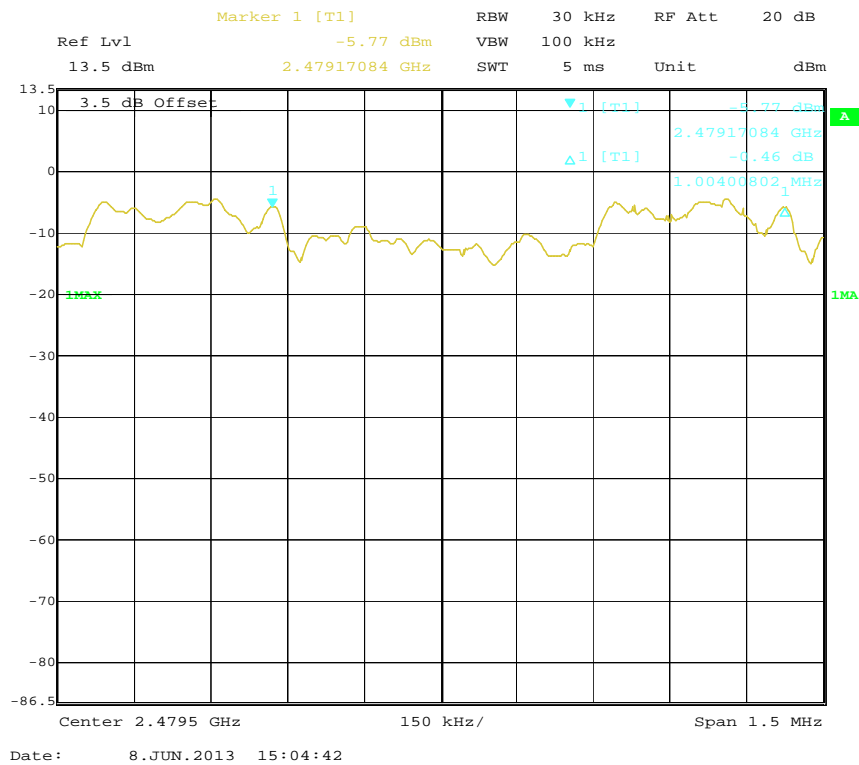


EDR (8DPSK): Low Channel

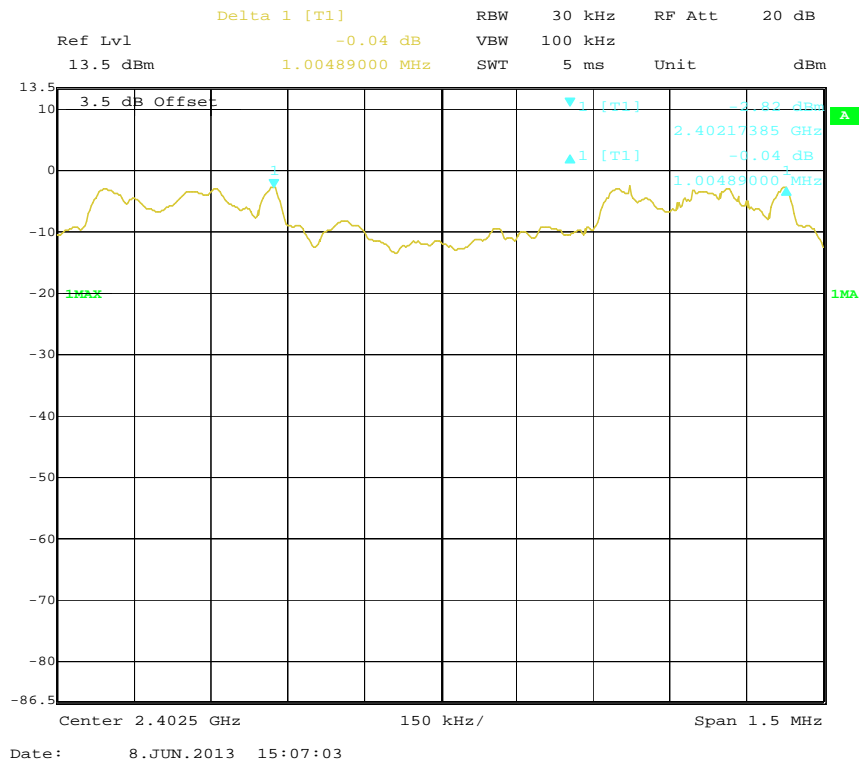

EDR (8DPSK): Middle Channel

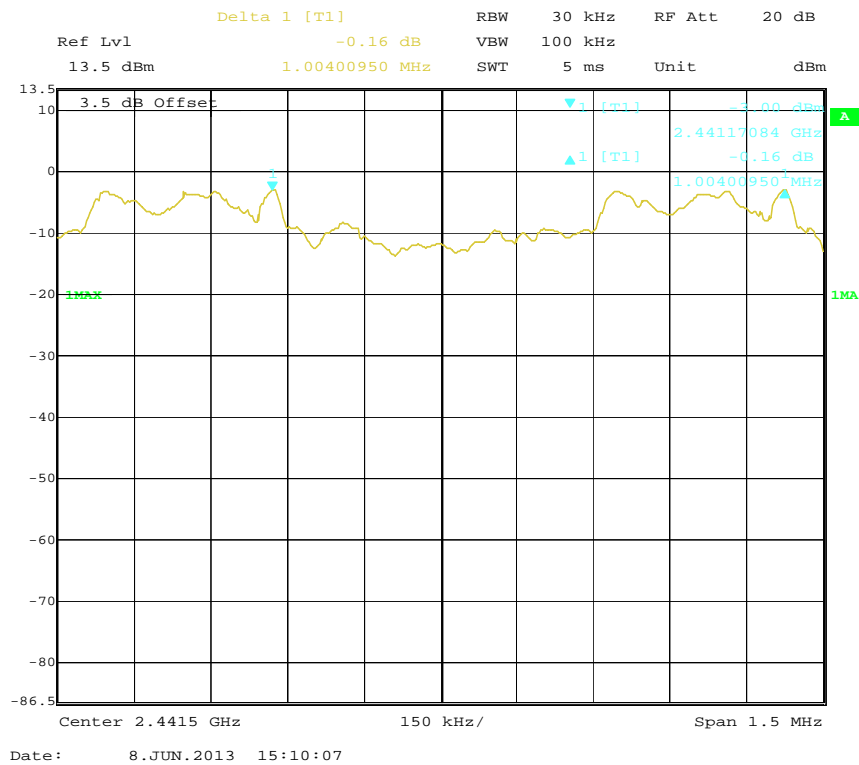

EDR (8DPSK): High Channel

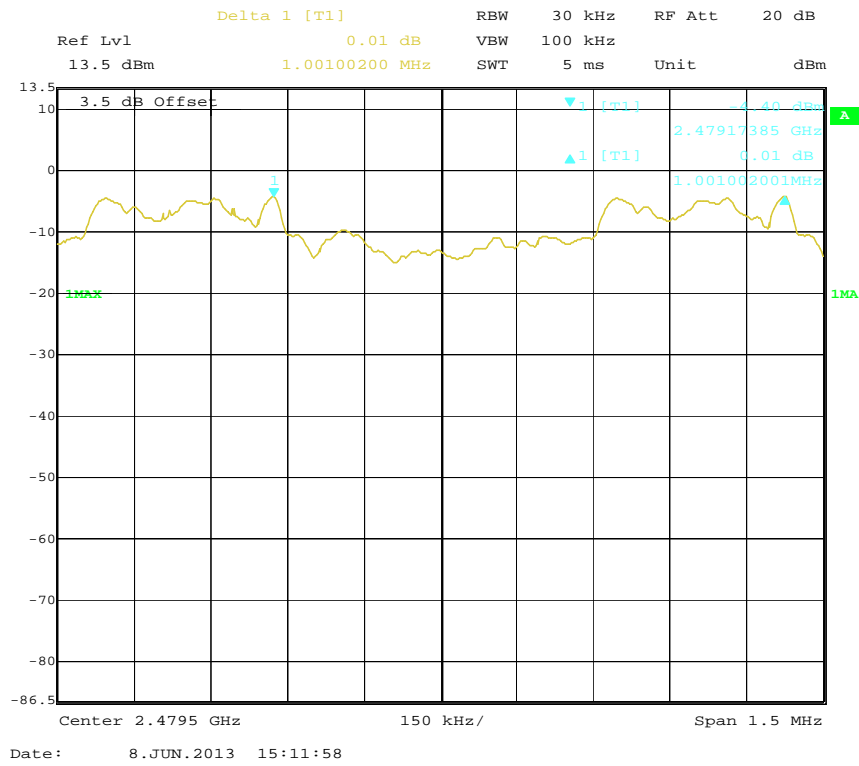

FCC §15.247(a) (1) – 20 dB EMISSION BANDWIDTH

Applicable Standard

Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 20 dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	Signal Analyzer	FSIQ26	8386001028	2012-11-24	2013-11-23

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

Temperature:	25 °C
Relative Humidity:	56 %
ATM Pressure:	100.0 kPa


The testing was performed by Bell Hu on 2013-06-08.

EUT operation mode: Transmitting


Test Result: Compliance. Please refer to following tables and plots

Mode	Channel	Frequency (MHz)	20 dB Emission Bandwidth (MHz)
BDR (GFSK)	Low	2402	1.010
	Middle	2441	1.010
	High	2480	1.010
EDR ($\pi/4$ -DQPSK)	Low	2402	1.275
	Middle	2441	1.275
	High	2480	1.279
EDR (8DPSK)	Low	2402	1.267
	Middle	2441	1.267
	High	2480	1.267


BDR (GFSK): Low Channel

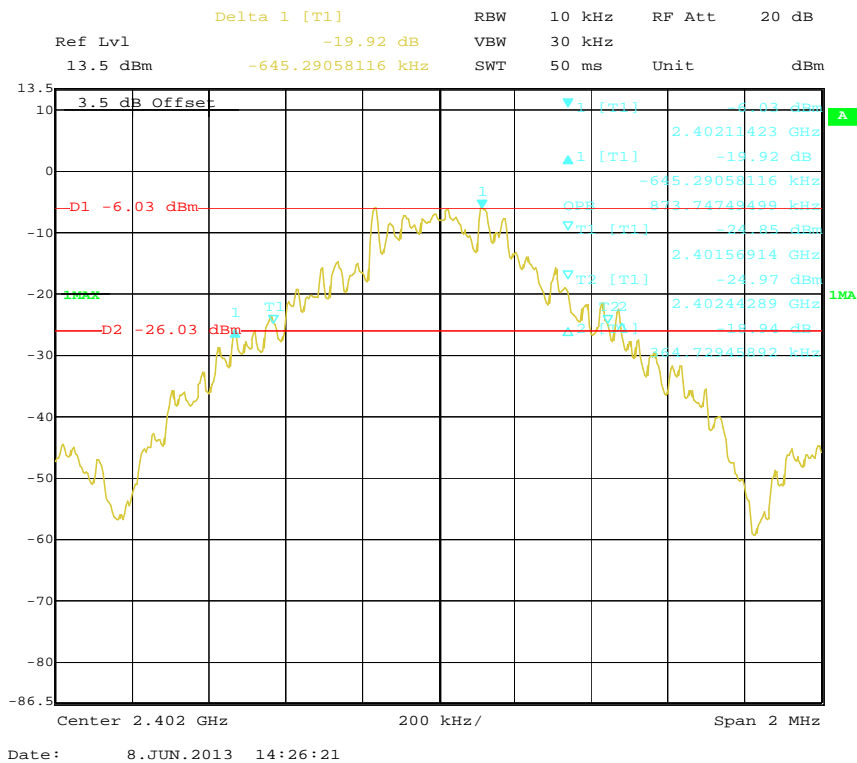


BDR (GFSK): Middle Channel

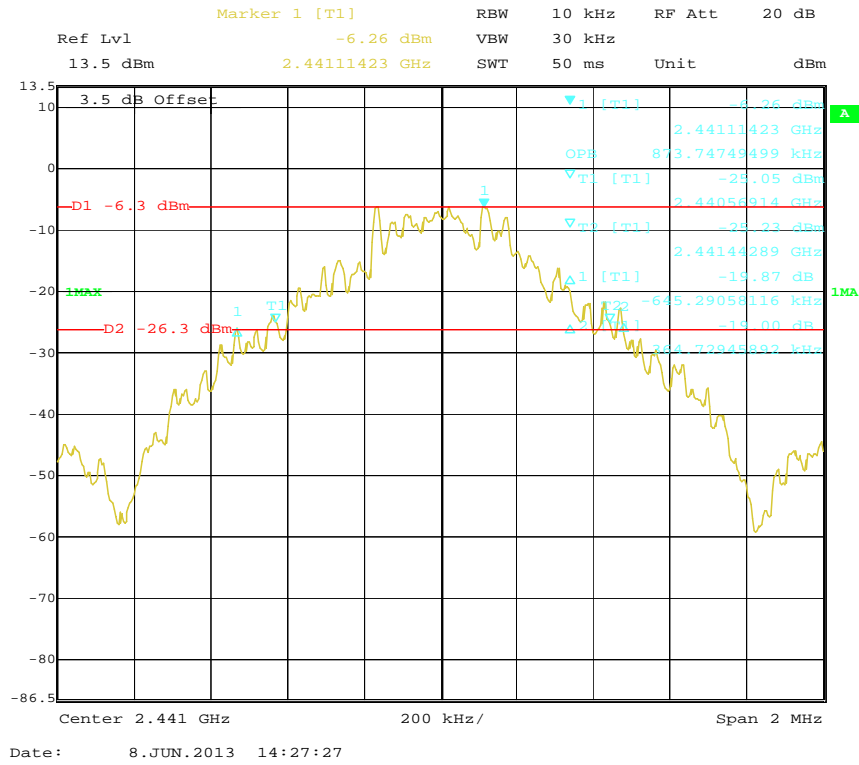


BDR (GFSK): High Channel

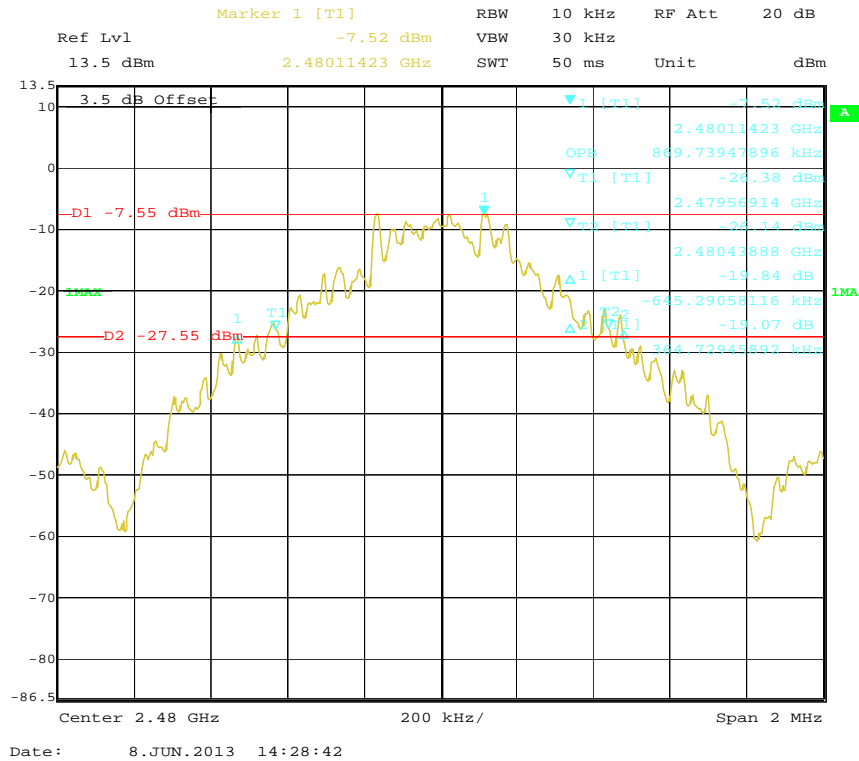


EDR ($\pi/4$ -DQPSK): Low Channel

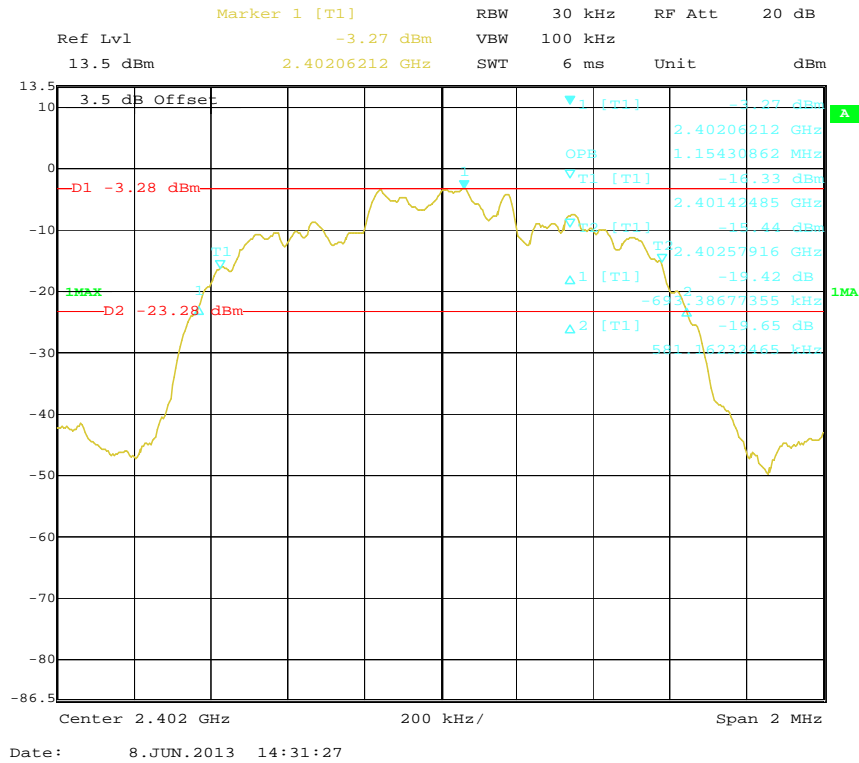


EDR ($\pi/4$ -DQPSK): Middle Channel

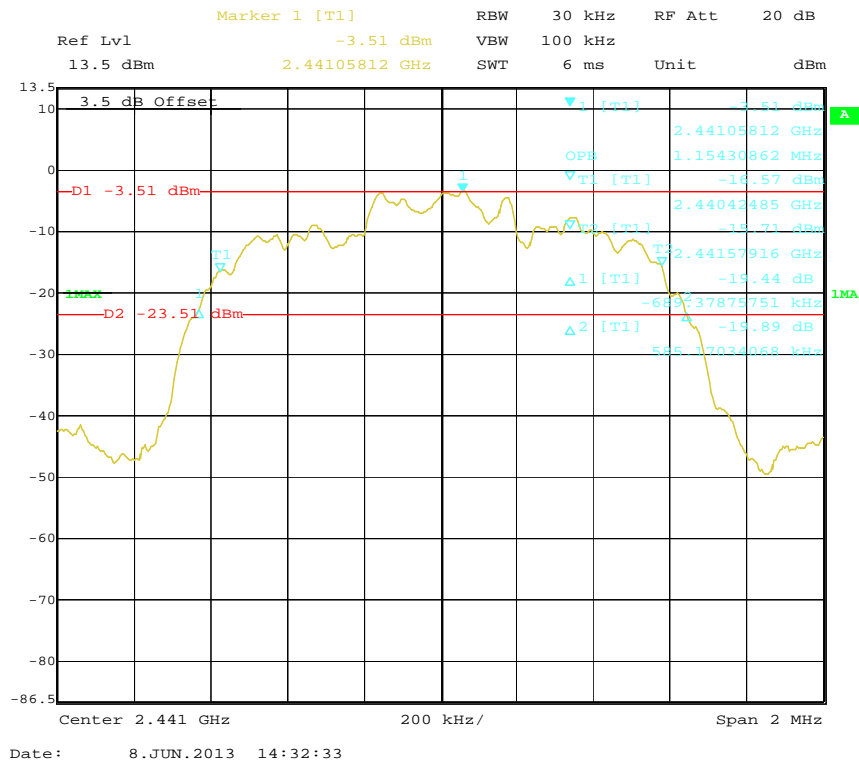


EDR ($\pi/4$ -DQPSK): High Channel

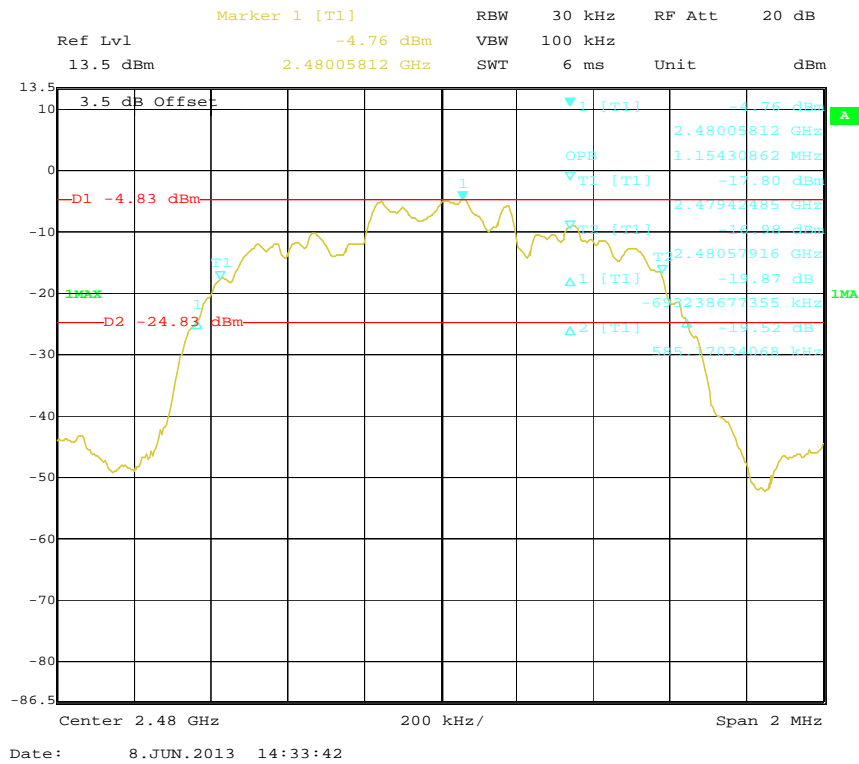


EDR (8DPSK): Low Channel

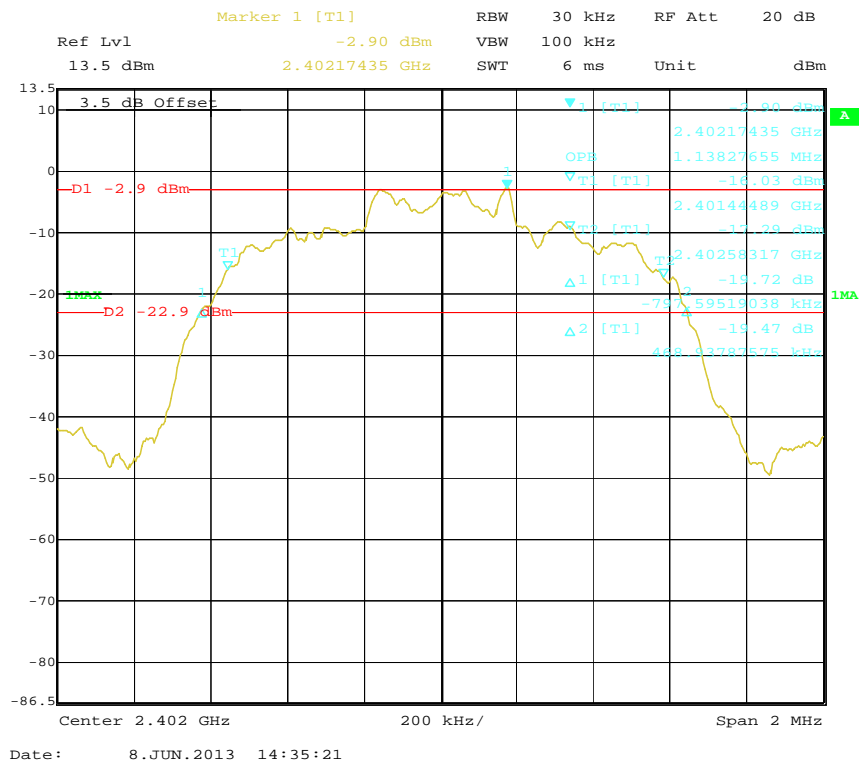

EDR (8DPSK): Middle Channel

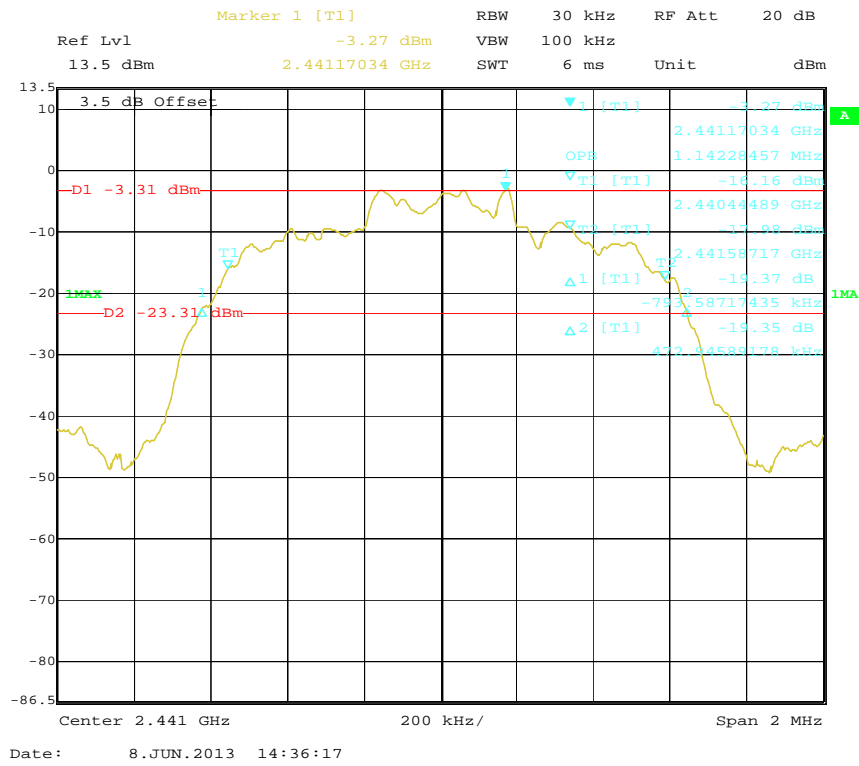

EDR (8DPSK): High Channel

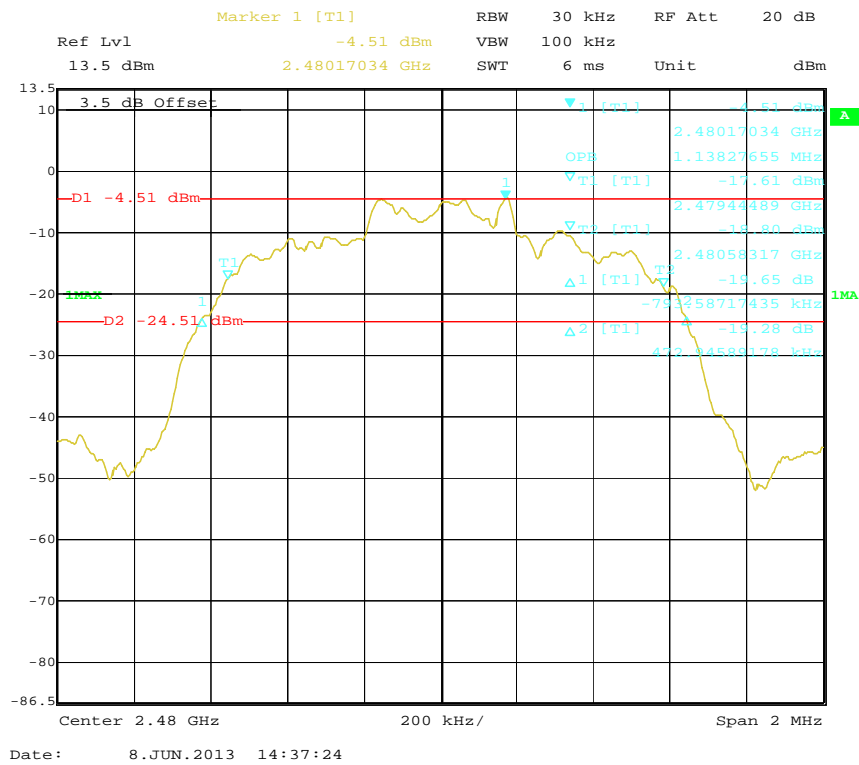

FCC §15.247(a)(1)(iii) - QUANTITY OF HOPPING CHANNEL TEST

Applicable Standard

Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Test Procedure

1. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
2. Set the EUT in hopping mode from first channel to last.
3. By using the max-hold function record the quantity of the channel.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	Signal Analyzer	FSIQ26	8386001028	2012-11-24	2013-11-23

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

Temperature:	25 °C
Relative Humidity:	56 %
ATM Pressure:	100.0 kPa


The testing was performed by Bell Hu on 2013-06-08.

EUT operation mode: Transmitting


Test Result: Compliance. Please refer to following tables and plots

Mode	Frequency Range (MHz)	Number of Hopping Channel	Limit
BDR (GFSK)	2400-2483.5	79	≥15
EDR (π/4-DQPSK)	2400-2483.5	79	≥15
EDR (8DPSK)	2400-2483.5	79	≥15


BDR (GFSK): Number of Hopping Channels

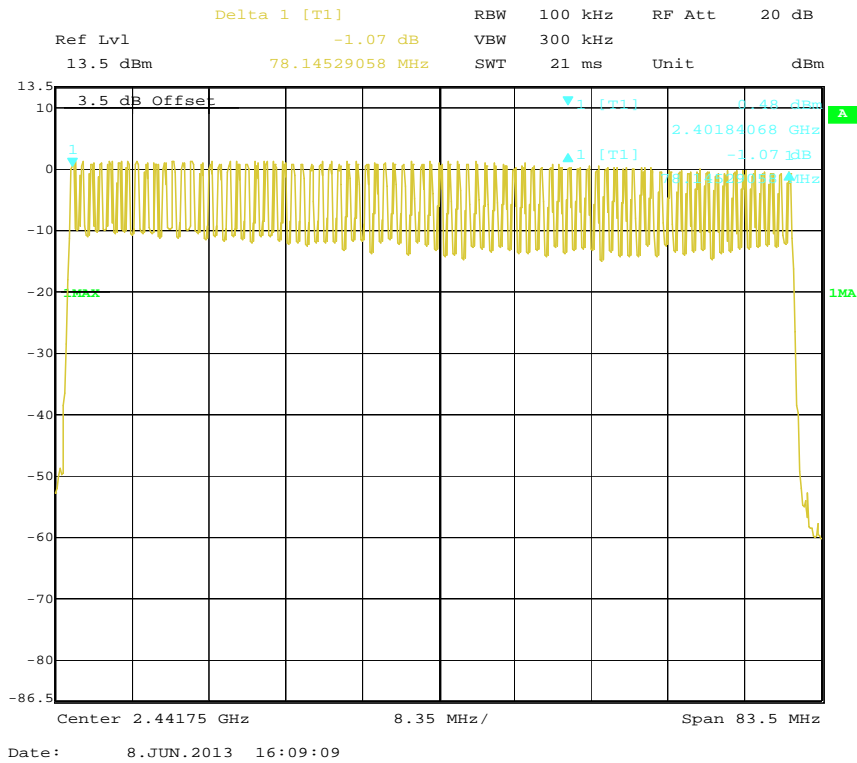

EDR ($\pi/4$ -DQPSK): Number of Hopping Channels

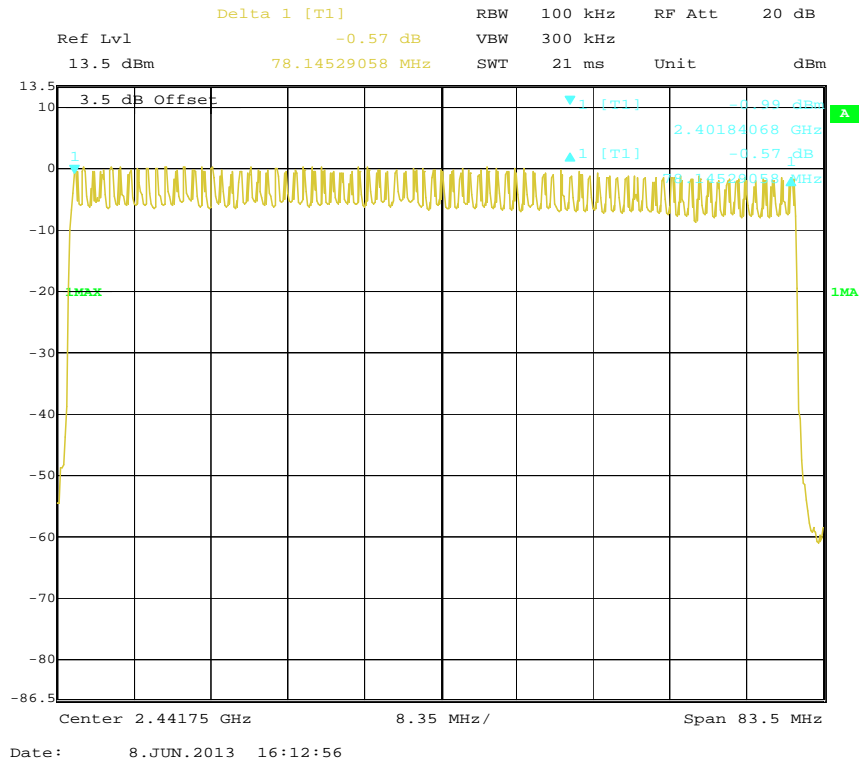

EDR (8DPSK): Number of Hopping Channels

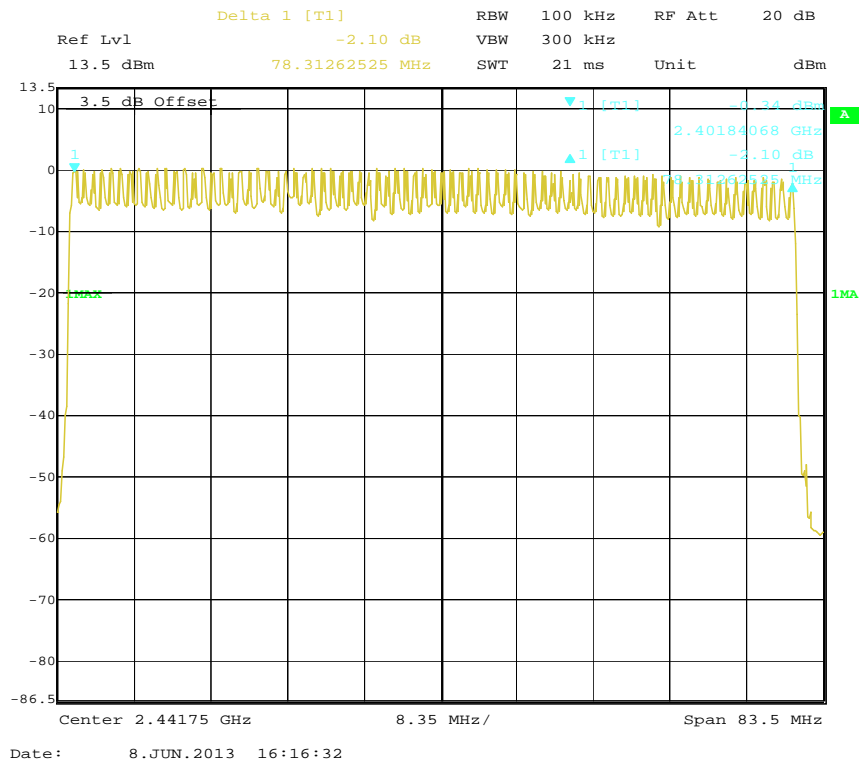

FCC §15.247(a) (1) (iii) -TIME OF OCCUPANCY (DWELL TIME)

Applicable Standard

Frequency hopping systems in the 2400-2483.5 MHz shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Test Procedure

The EUT was worked in channel hopping; Spectrum SPAN was set as 0. Sweep was set as 0.4 X channel no. (s), the quantity of pulse was get from single sweep. In addition, the time of single pulses was tested.

Dwell time = Pulse time*hop rate/number of hopping channels*31.6S
Hop rate=1600/S

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	Signal Analyzer	FSIQ26	8386001028	2012-11-24	2013-11-23

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

Temperature:	25°C
Relative Humidity:	55 %
ATM Pressure:	100.1 kPa

The testing was performed by Bell Hu on 2013-08-02.


EUT operation mode: Transmitting

Test Result: Compliance. Please refer to following tables and plots


Mode		Channel	Pulse Width (ms)	Dwell Time (S)	Limit (S)	Result	
BDR (GFSK)	DH 1	Low	0.393	0.130	0.4	Pass	
		Middle	0.393	0.130	0.4	Pass	
		High	0.393	0.130	0.4	Pass	
	Note: DH1:Dwell time = Pulse time*(1600/2/79)*31.6S						
	DH 3	Low	1.667	0.267	0.4	Pass	
		Middle	1.667	0.267	0.4	Pass	
		High	1.672	0.268	0.4	Pass	
	Note: DH3:Dwell time = Pulse time*(1600/4/79)*31.6S						
	DH 5	Low	2.929	0.312	0.4	Pass	
		Middle	2.929	0.312	0.4	Pass	
		High	2.929	0.312	0.4	Pass	
	Note: DH5:Dwell time = Pulse time*(1600/6/79)*31.6S						
EDR ($\pi/4$ -DQPSK)	DH 1	Low	0.399	0.128	0.4	Pass	
		Middle	0.399	0.128	0.4	Pass	
		High	0.396	0.127	0.4	Pass	
	Note: DH1:Dwell time = Pulse time*(1600/2/79)*31.6S						
	DH 3	Low	1.667	0.267	0.4	Pass	
		Middle	1.662	0.266	0.4	Pass	
		High	1.667	0.267	0.4	Pass	
	Note: DH3:Dwell time = Pulse time*(1600/4/79)*31.6S						
	DH 5	Low	2.929	0.312	0.4	Pass	
		Middle	2.929	0.312	0.4	Pass	
		High	2.929	0.312	0.4	Pass	
	Note: DH5:Dwell time = Pulse time*(1600/6/79)*31.6S						
EDR (8DPSK)	DH 1	Low	0.399	0.128	0.4	Pass	
		Middle	0.399	0.128	0.4	Pass	
		High	0.397	0.127	0.4	Pass	
	Note: DH1:Dwell time = Pulse time*(1600/2/79)*31.6S						
	DH 3	Low	1.666	0.267	0.4	Pass	
		Middle	1.666	0.267	0.4	Pass	
		High	1.666	0.267	0.4	Pass	
	Note: DH3:Dwell time = Pulse time*(1600/4/79)*31.6S						
	DH 5	Low	2.919	0.311	0.4	Pass	
		Middle	2.929	0.312	0.4	Pass	
		High	2.929	0.312	0.4	Pass	
	Note: DH5:Dwell time = Pulse time*(1600/6/79)*31.6S						

BDR (GFSK):


Pulse time, Low Channel, DH1

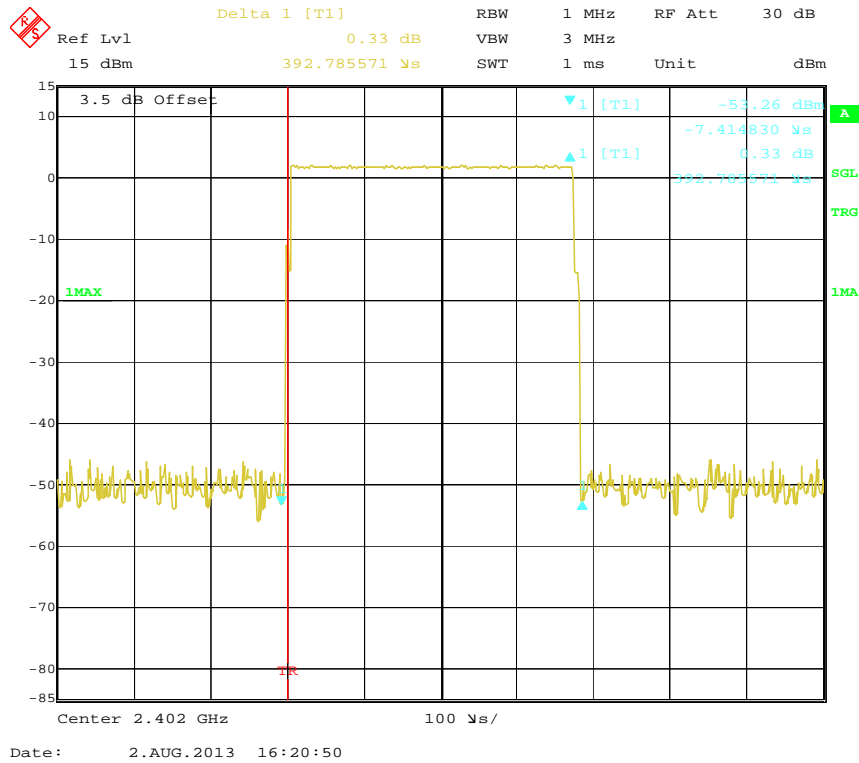


Pulse time, Middle Channel, DH1

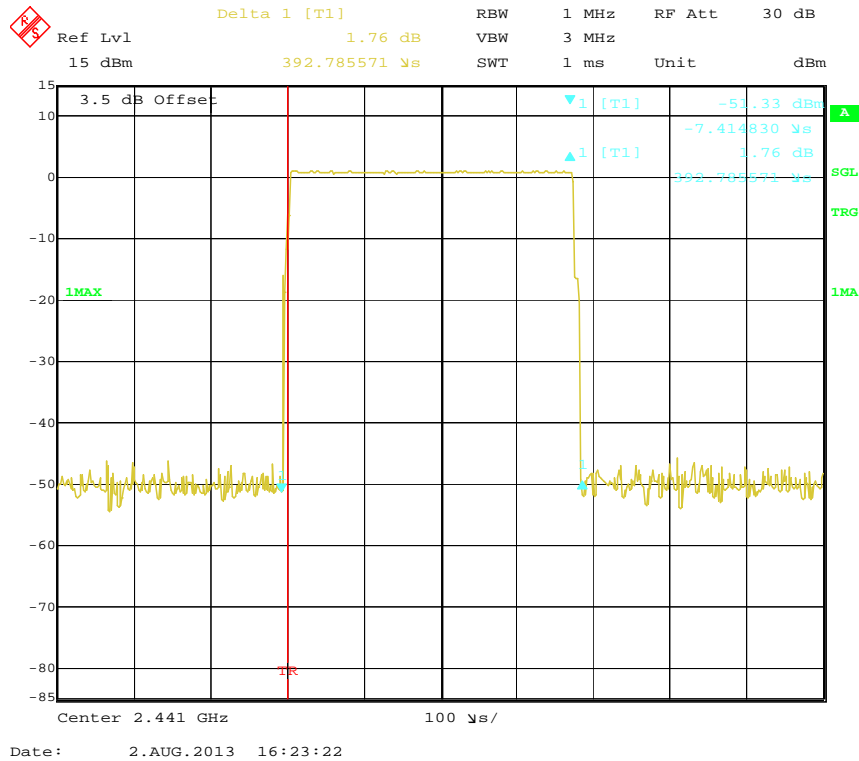


Pulse time, High Channel, DH1

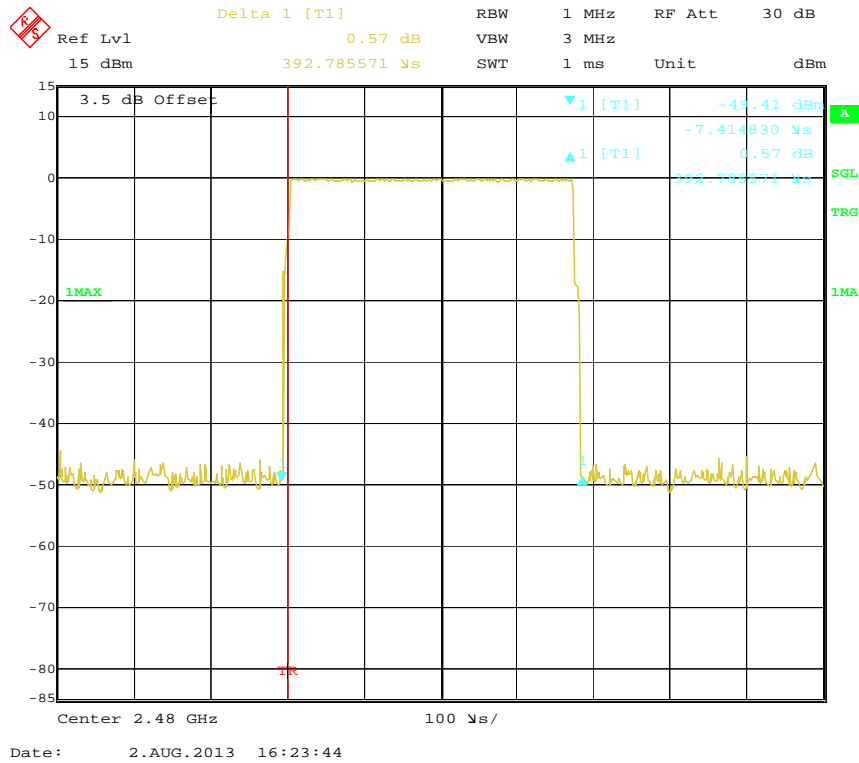


Pulse time, Low Channel, DH3

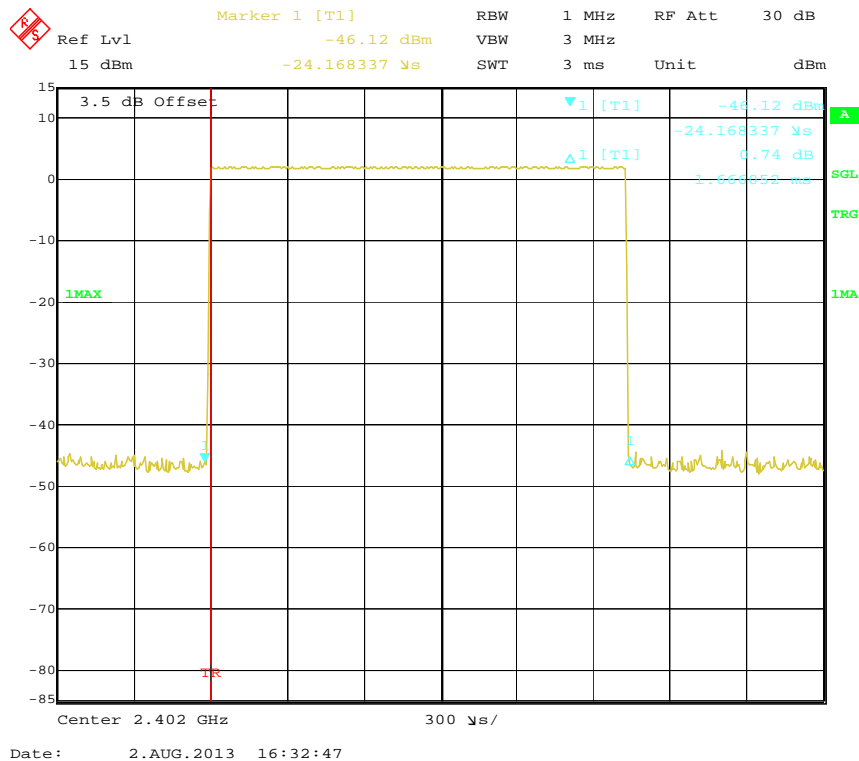


Pulse time, Middle Channel, DH3

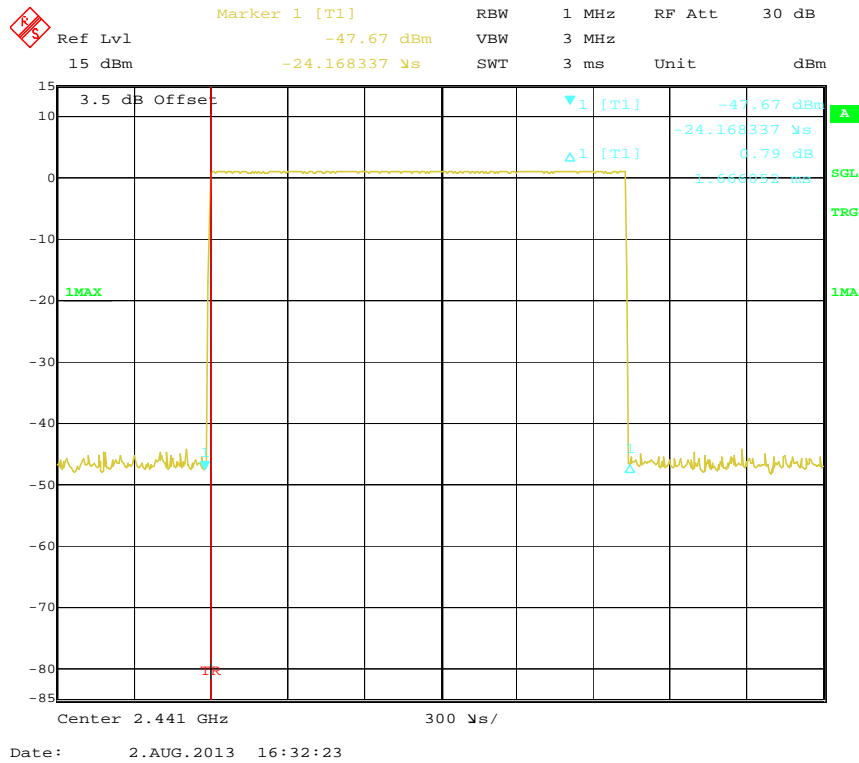


Pulse time, High Channel, DH3

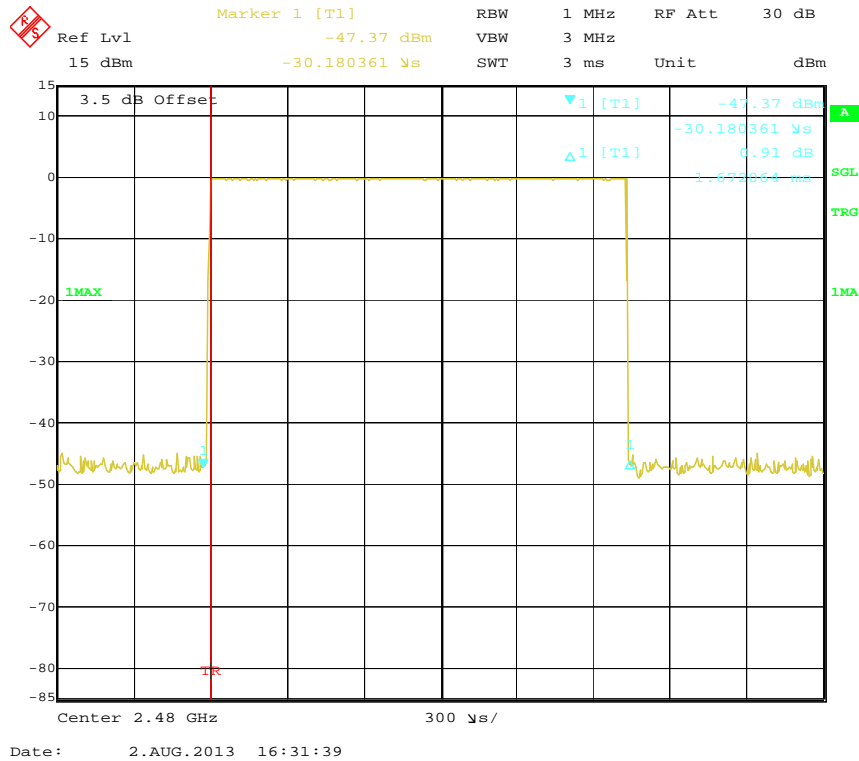


Pulse time, Low Channel, DH5

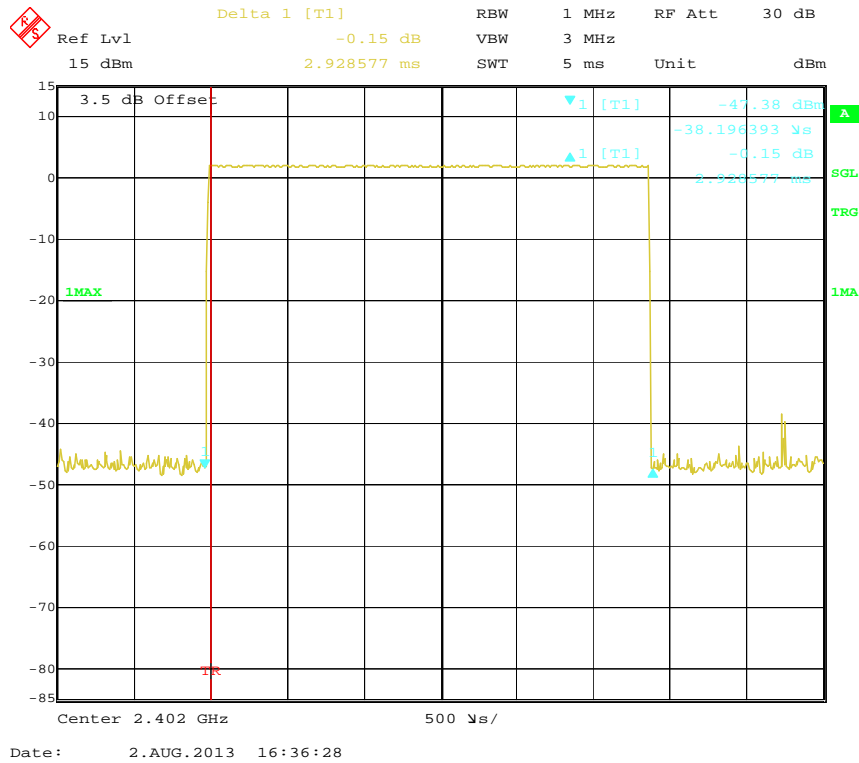

Pulse time, Middle Channel, DH5

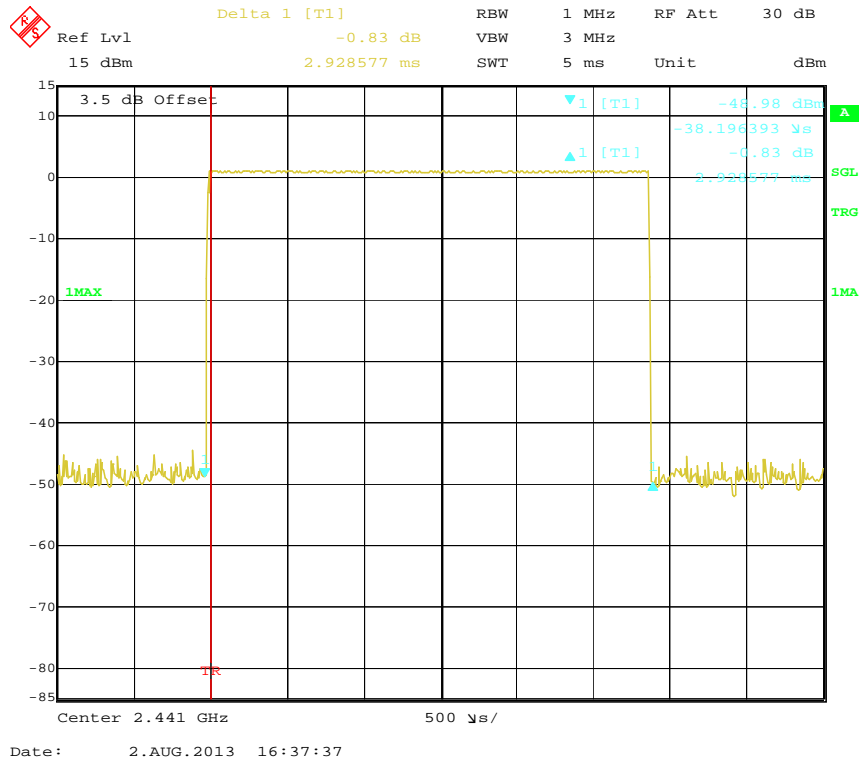


Pulse time, High Channel, DH5

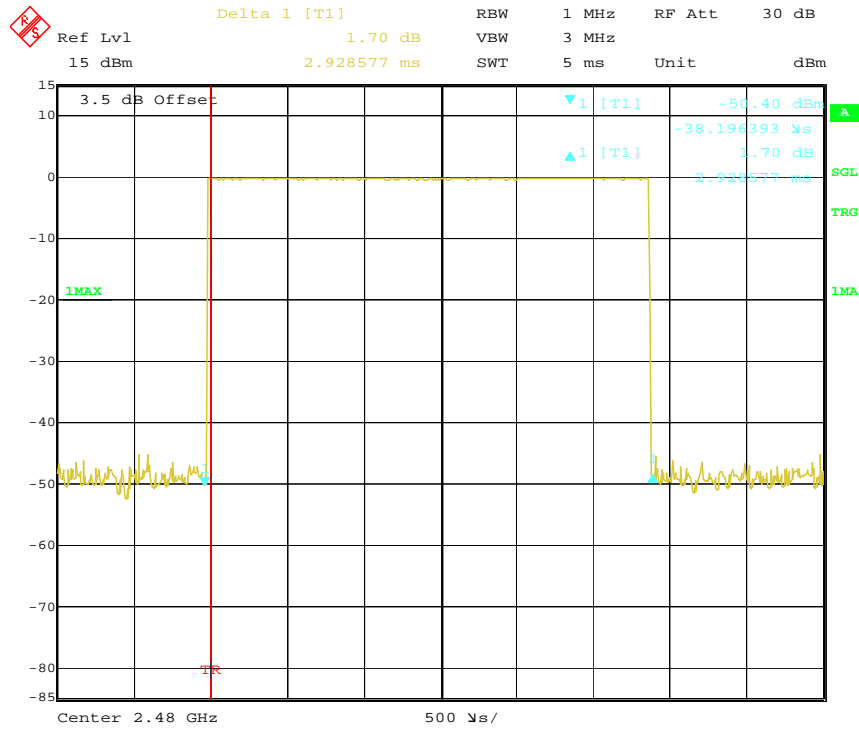

Date: 2.AUG.2013 16:37:19


EDR ($\pi/4$ -DQPSK):

Pulse time, Low Channel, DH1

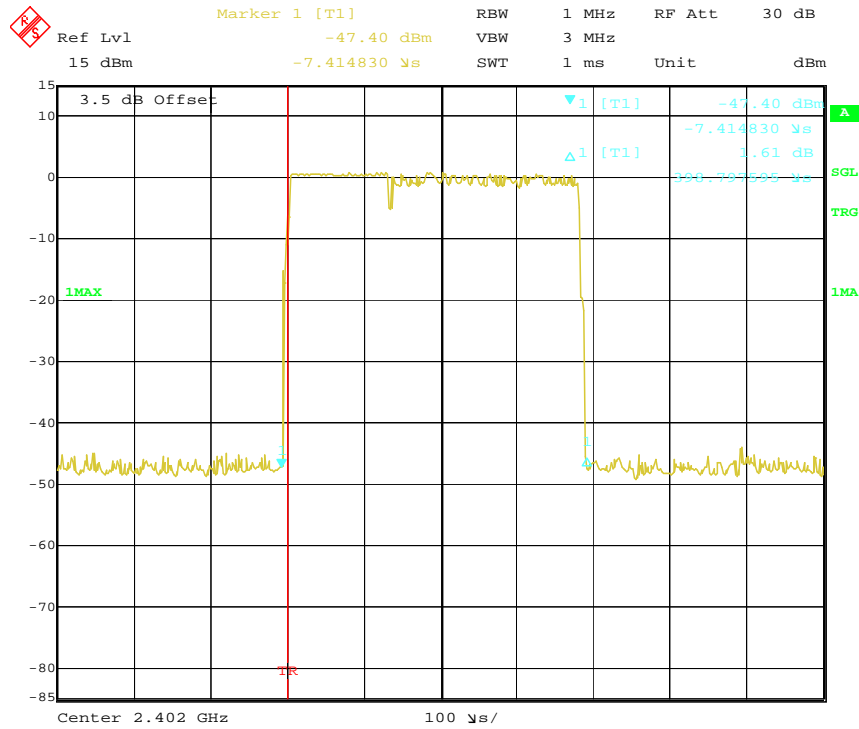


Date: 2.AUG.2013 16:27:58


Pulse time, Middle Channel, DH1

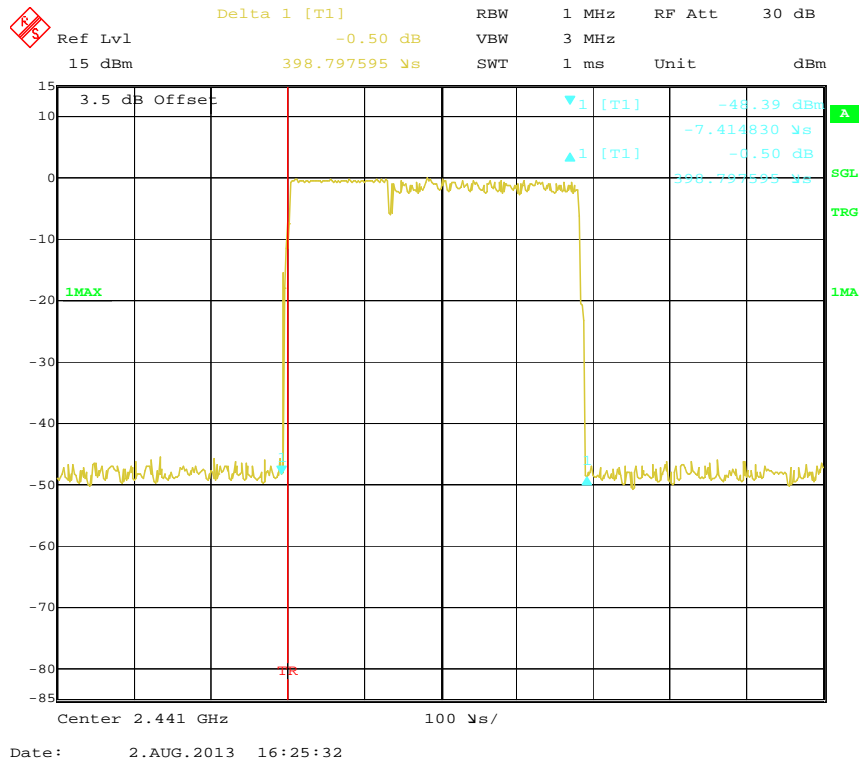


Pulse time, High Channel, DH1

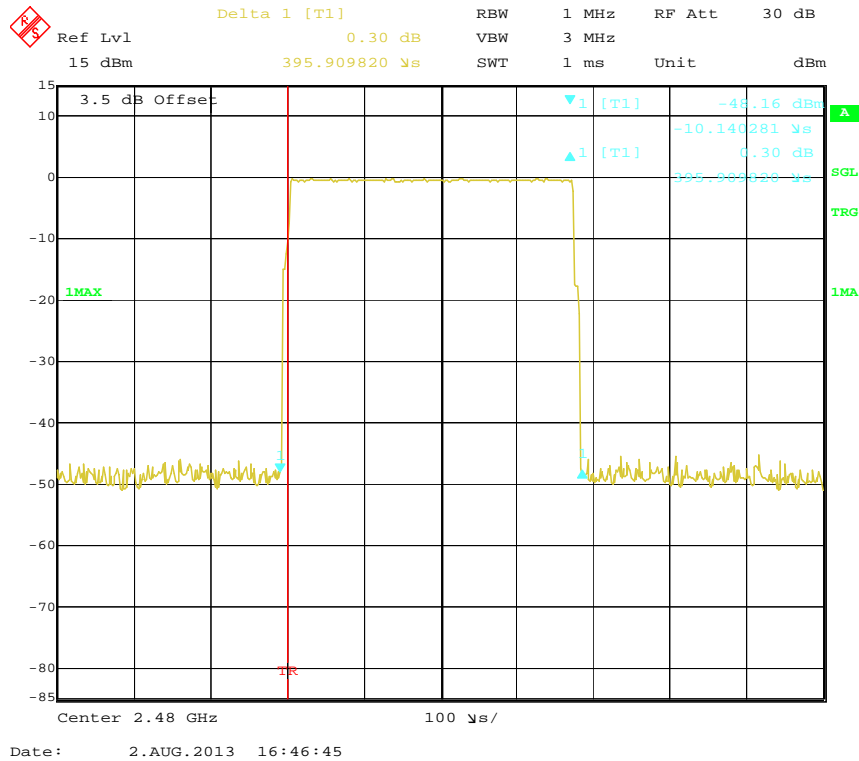


Pulse time, Low Channel, DH3

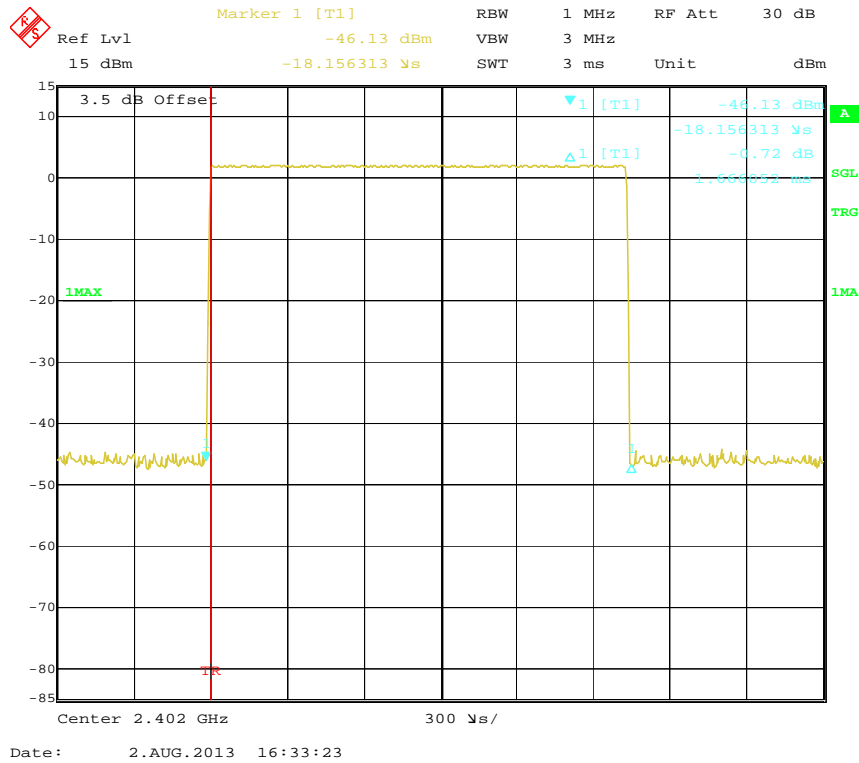


Pulse time, Middle Channel, DH3

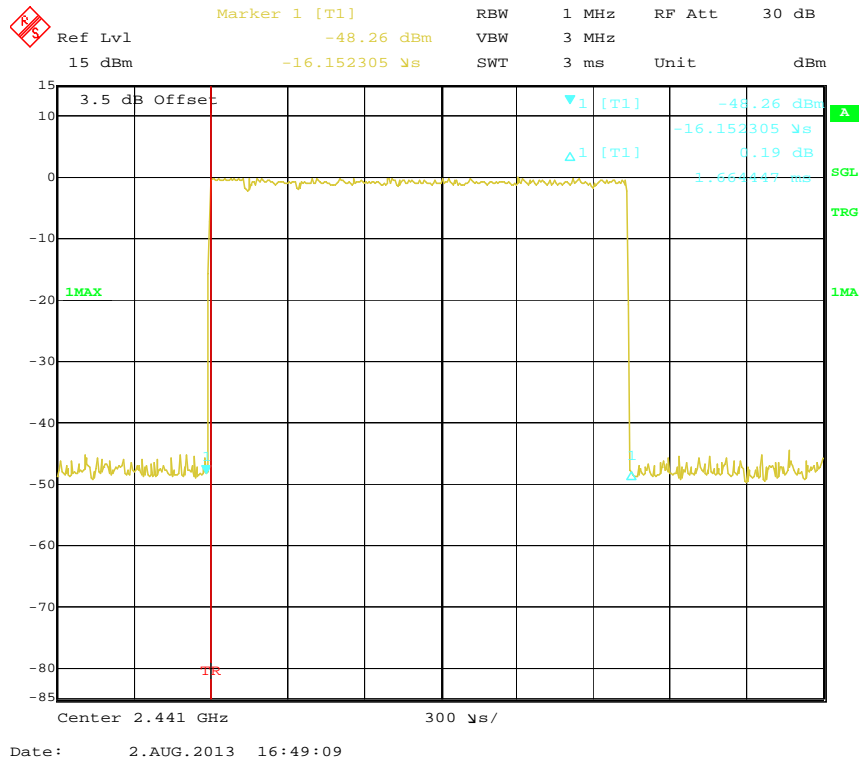


Pulse time, High Channel, DH3

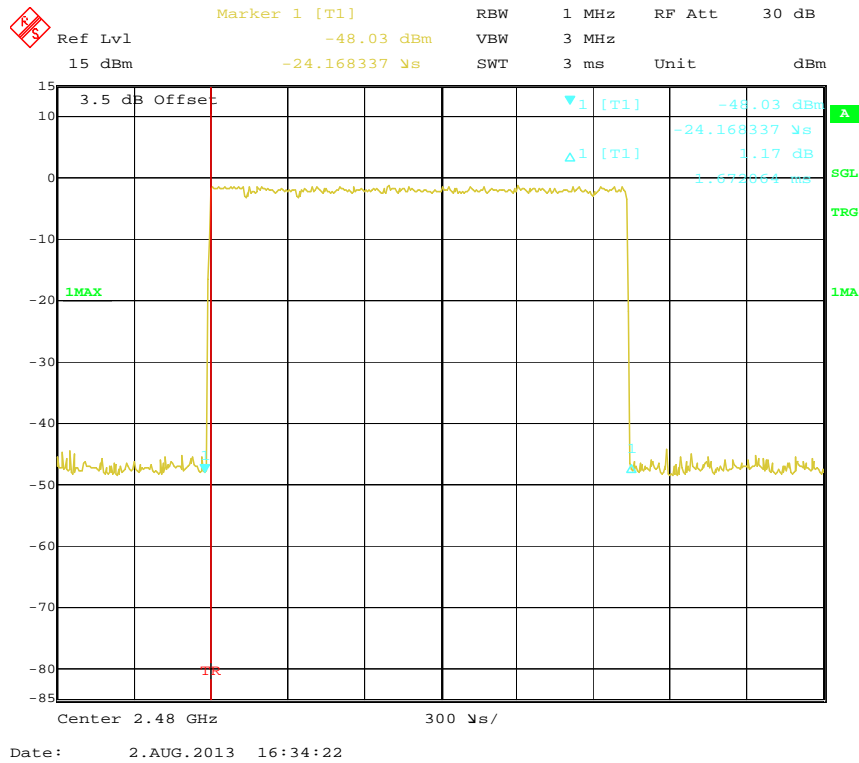


Pulse time, Low Channel, DH5

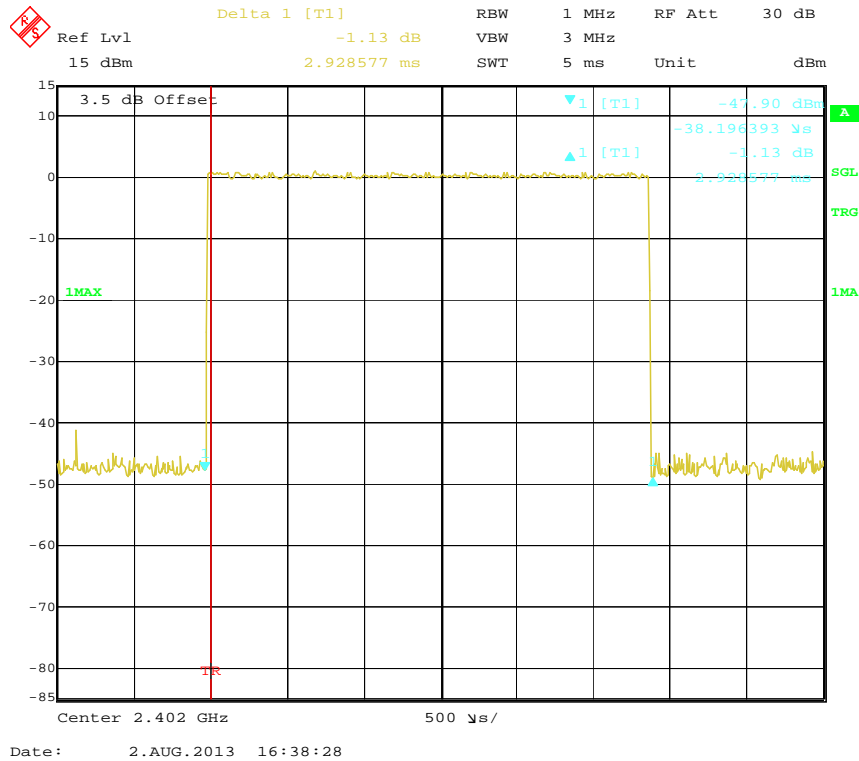

Pulse time, Middle Channel, DH5

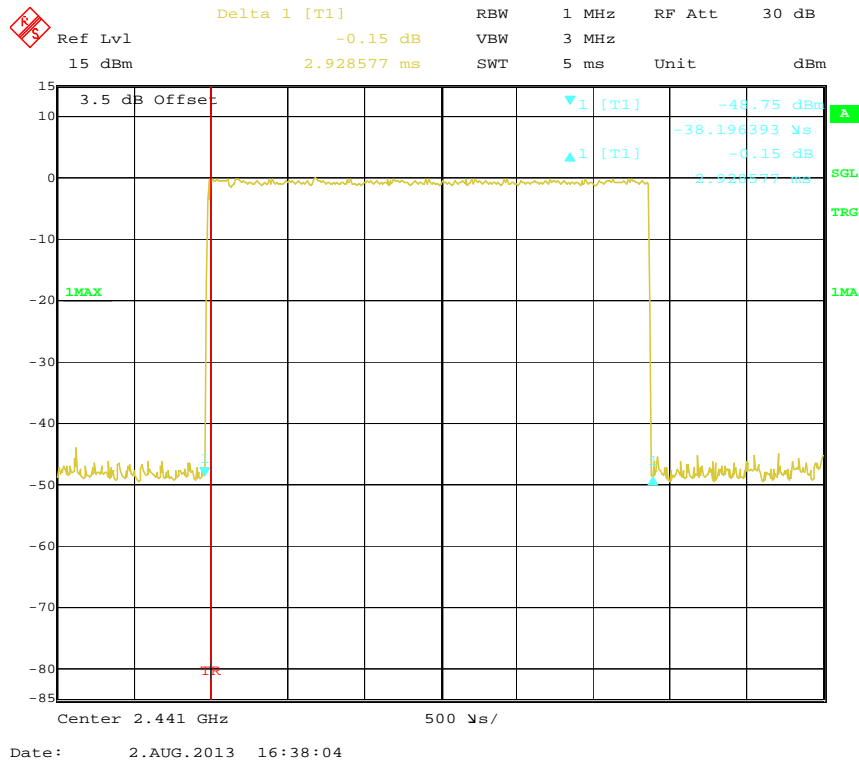


Pulse time, High Channel, DH5

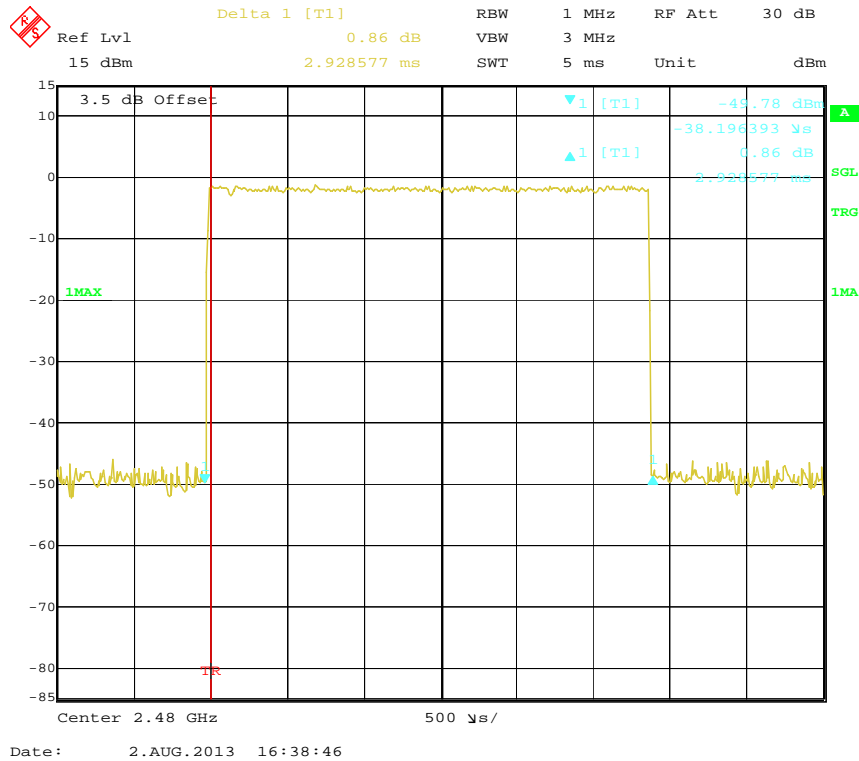


EDR (8DPSK):

Pulse time, Low Channel, DH1

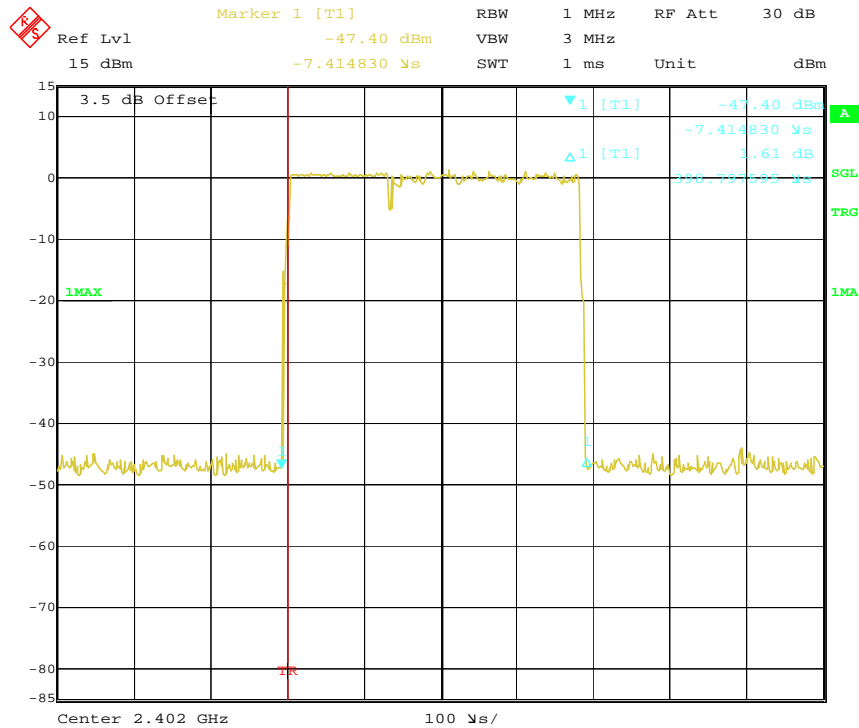


Date: 2.AUG.2013 16:28:20

Pulse time, Middle Channel, DH1

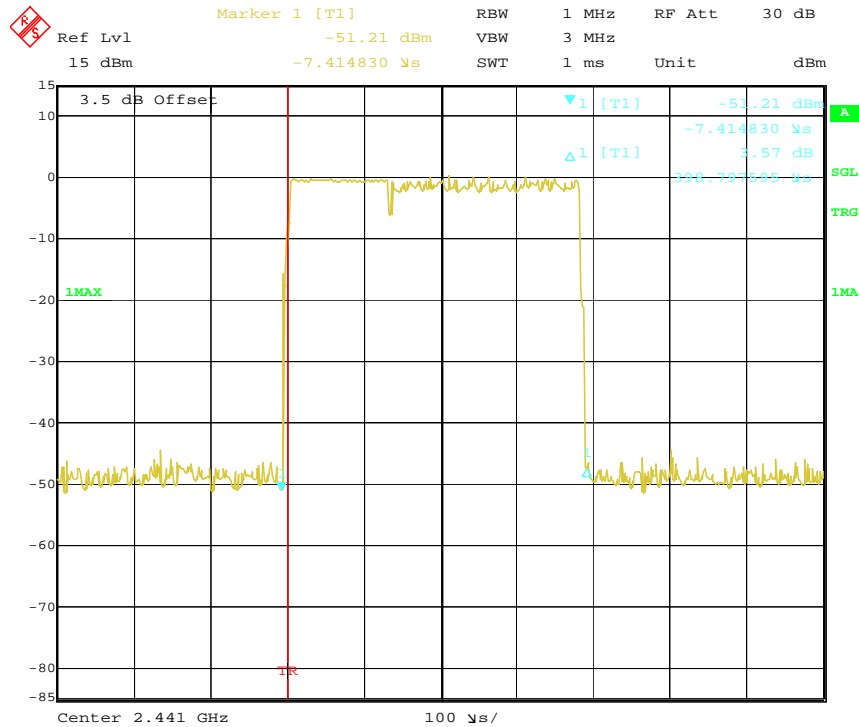


Date: 2.AUG.2013 16:28:53


Pulse time, High Channel, DH1

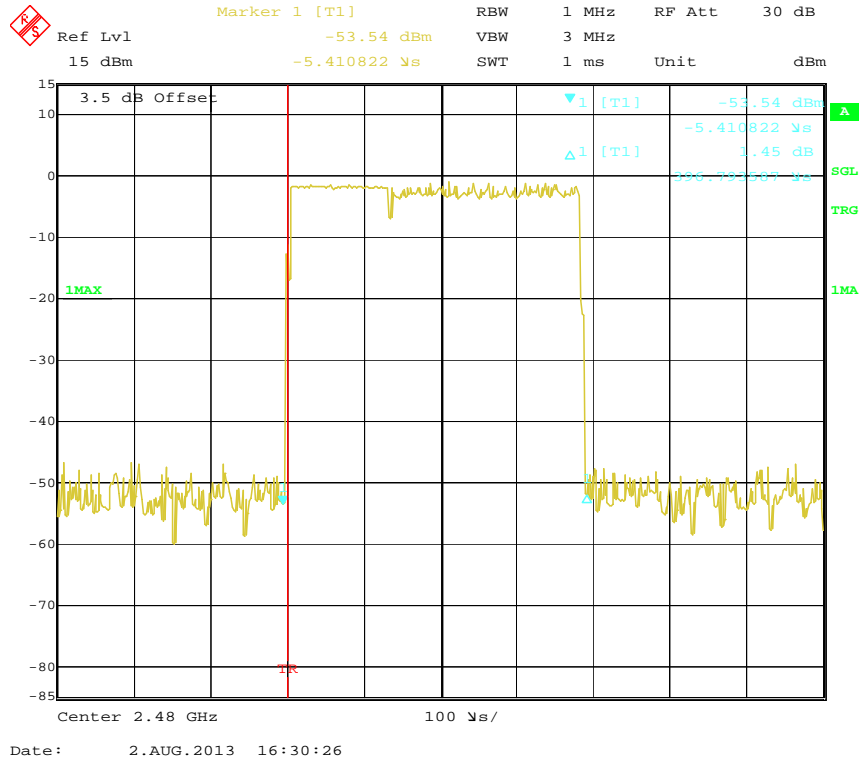


Pulse time, Low Channel, DH3

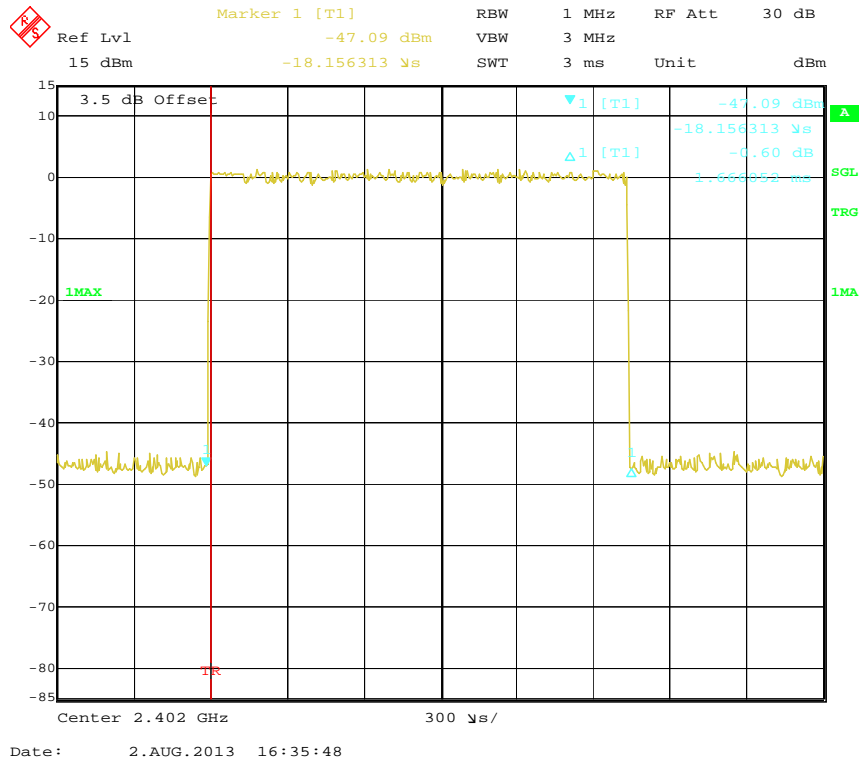


Pulse time, Middle Channel, DH3

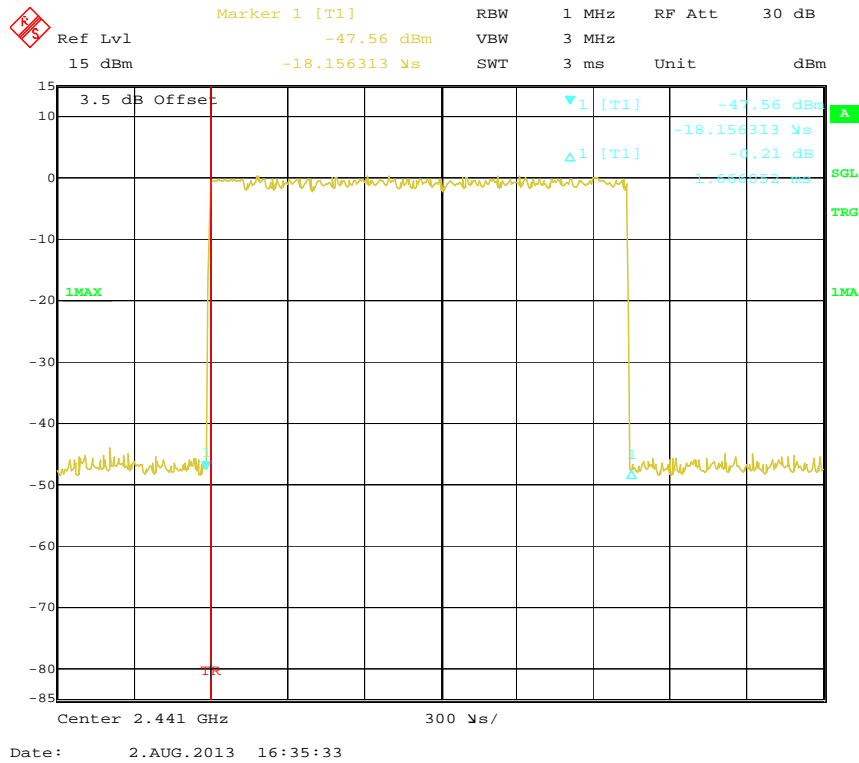


Pulse time, High Channel, DH3

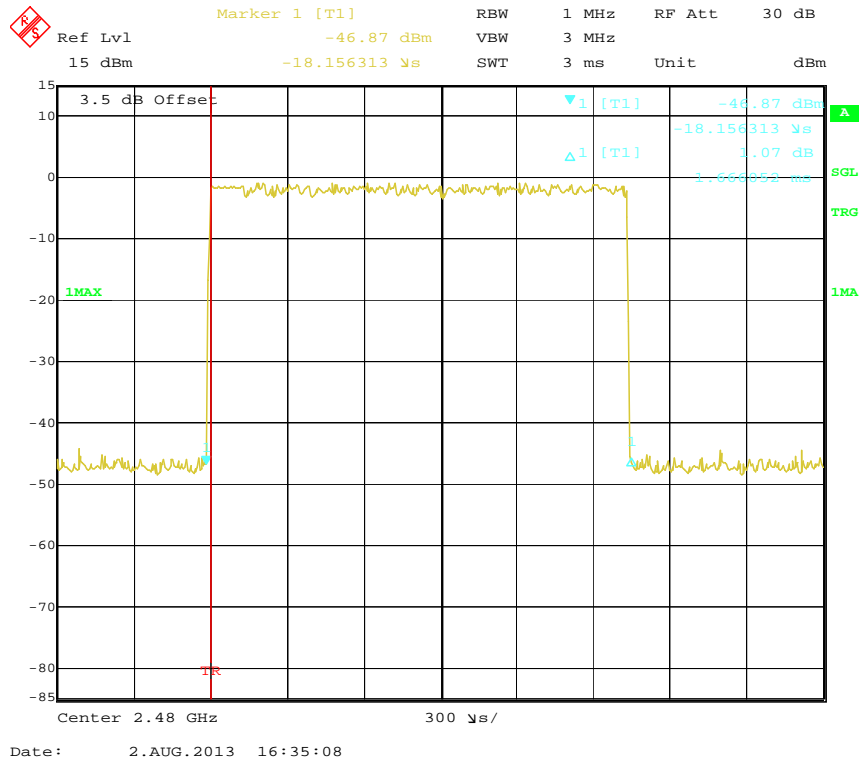


Pulse time, Low Channel, DH5

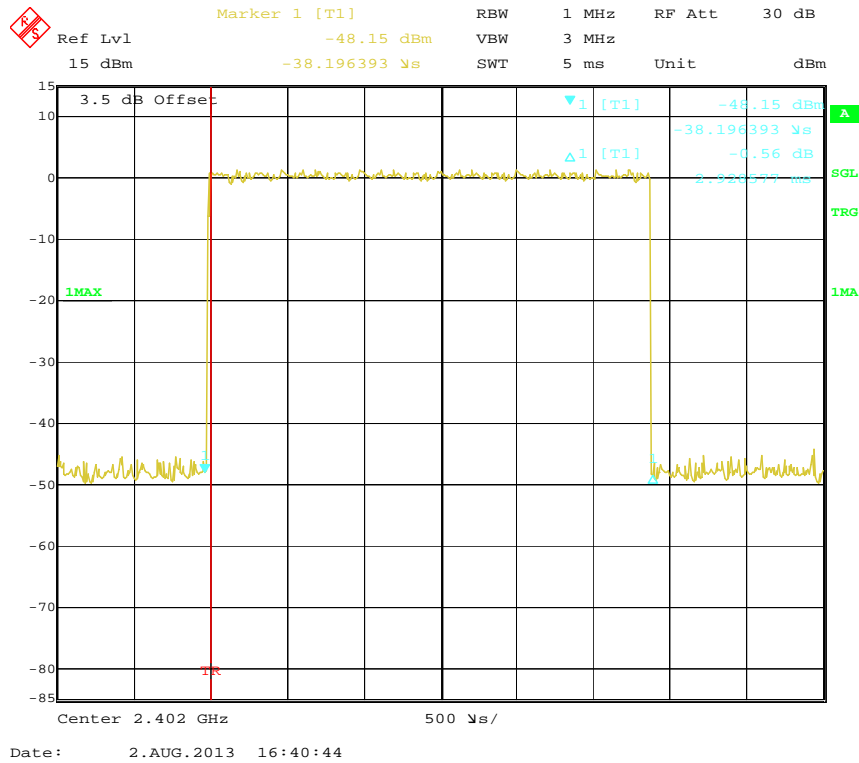

Pulse time, Middle Channel, DH5

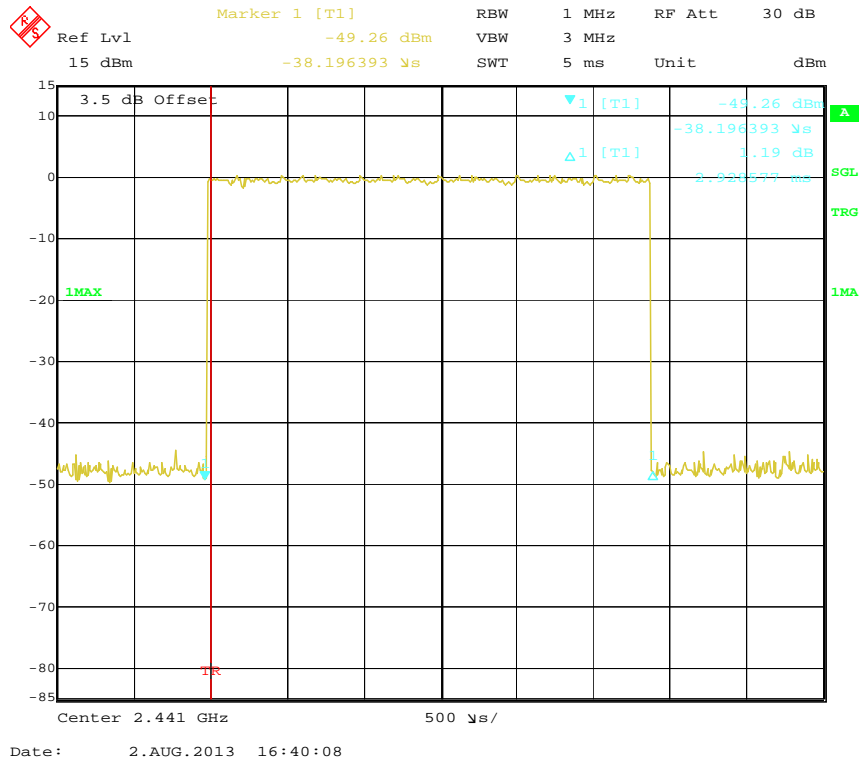

Pulse time, High Channel, DH5

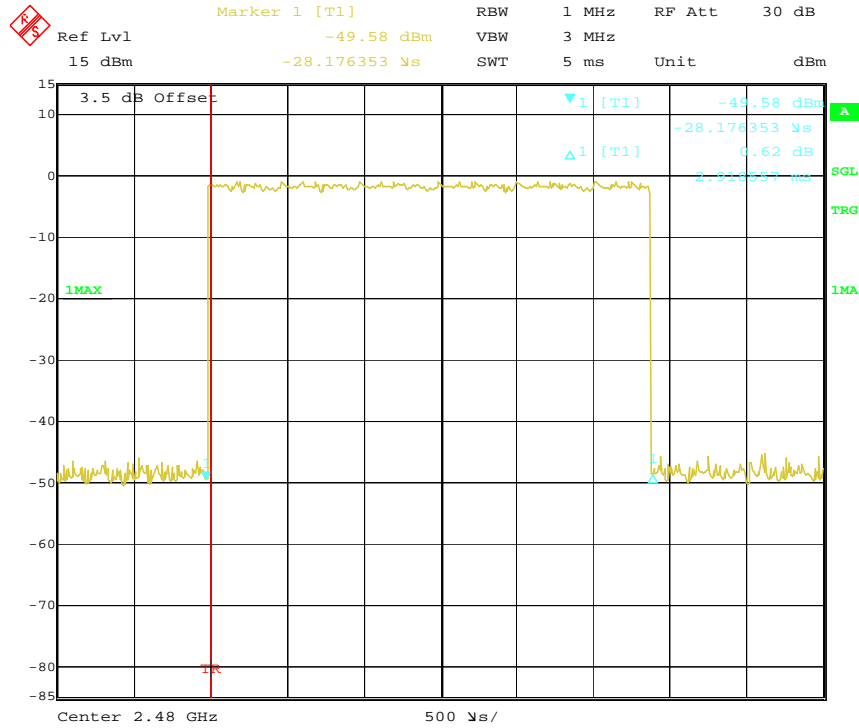

Date: 2.AUG.2013 16:39:46

FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT

Applicable Standard

According to §15.247(b) (1), for frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725–5850 MHz band: 1 watt. And for all other frequency hopping systems in the 2400–2483.5 MHz band: 0.125 watts.

Test Procedure

1. Place the EUT on a bench and set in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to an EMI test receiver.
3. Add a correction factor to the display.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	Signal Analyzer	FSIQ26	8386001028	2012-11-24	2013-11-23

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

Temperature:	25 °C
Relative Humidity:	56 %
ATM Pressure:	100.0 kPa


The testing was performed by Bell Hu on 2013-06-08.

EUT operation mode: Transmitting


Test Result: Compliance. Please refer to following tables and plots

Mode	Channel	Frequency (MHz)	Conducted Output Power		Limit (mW)
			(dBm)	(mW)	
BDR (GFSK)	Low	2402	1.92	1.556	1000
	Middle	2441	1.70	1.479	1000
	High	2480	0.47	1.114	1000
EDR ($\pi/4$ -DQPSK)	Low	2402	1.68	1.472	1000
	Middle	2441	1.44	1.393	1000
	High	2480	0.21	1.050	1000
EDR (8DPSK)	Low	2402	2.03	1.596	1000
	Middle	2441	1.81	1.517	1000
	High	2480	-0.04	0.991	1000


BDR (GFSK): Low Channel

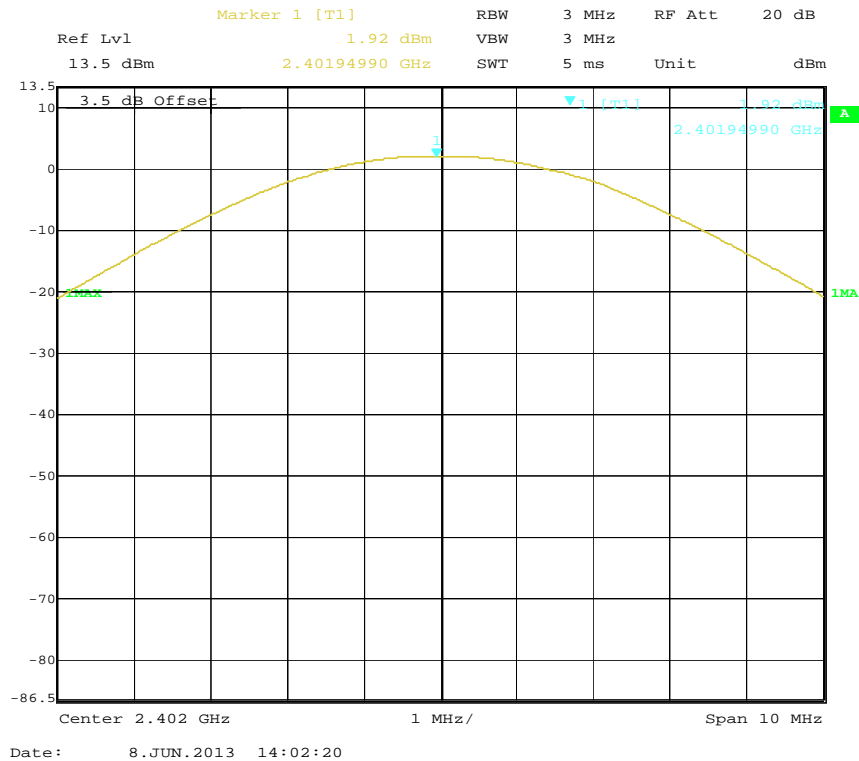


BDR (GFSK): Middle Channel

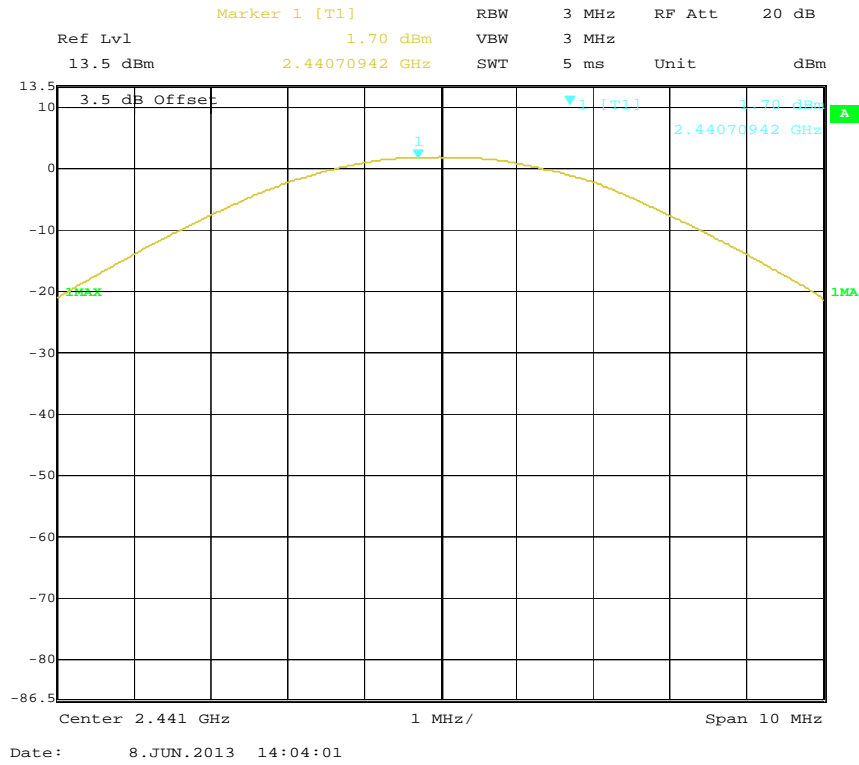


BDR (GFSK): High Channel

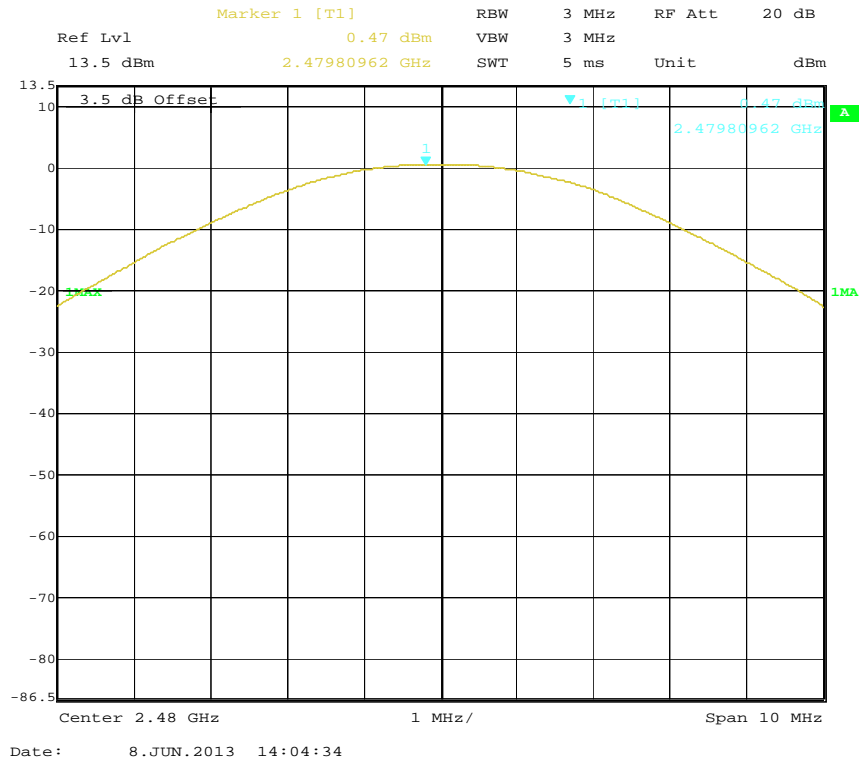


EDR($\pi/4$ -DQPSK): Low Channel

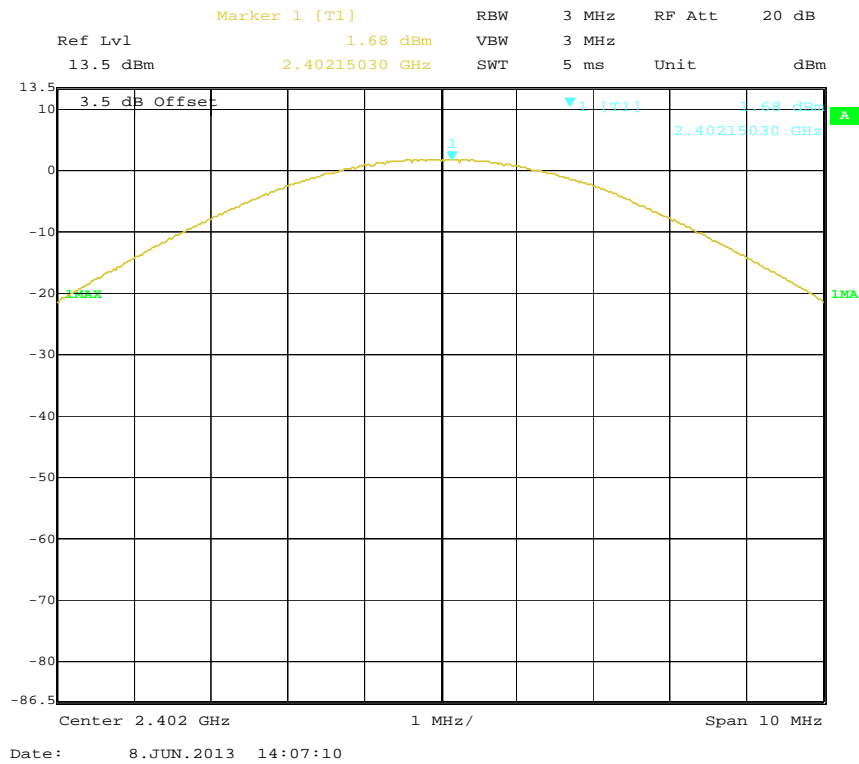


EDR($\pi/4$ -DQPSK): Middle Channel

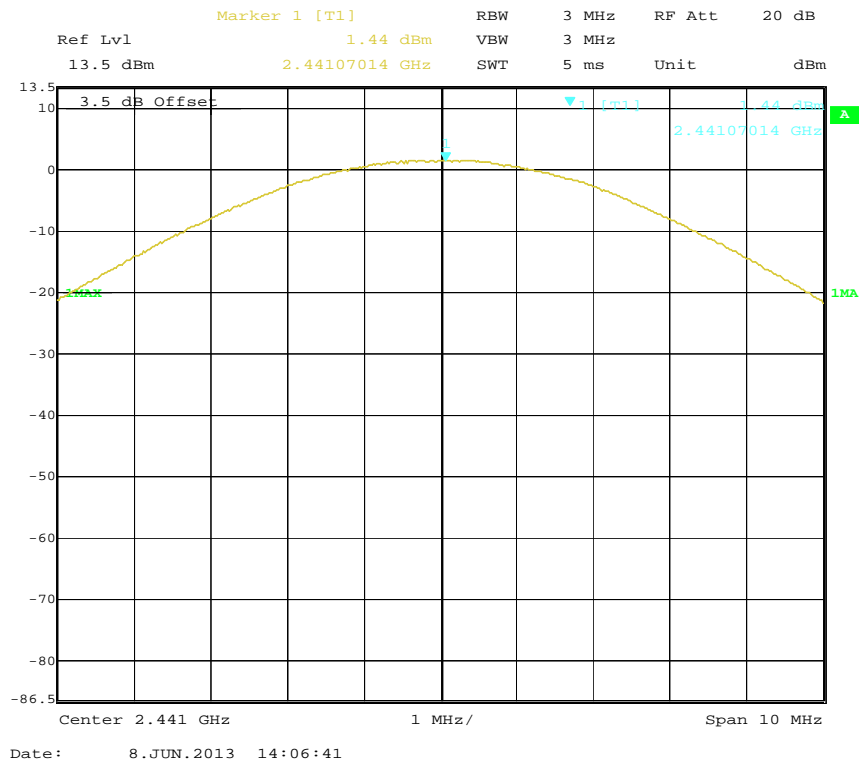


EDR($\pi/4$ -DQPSK): High Channel

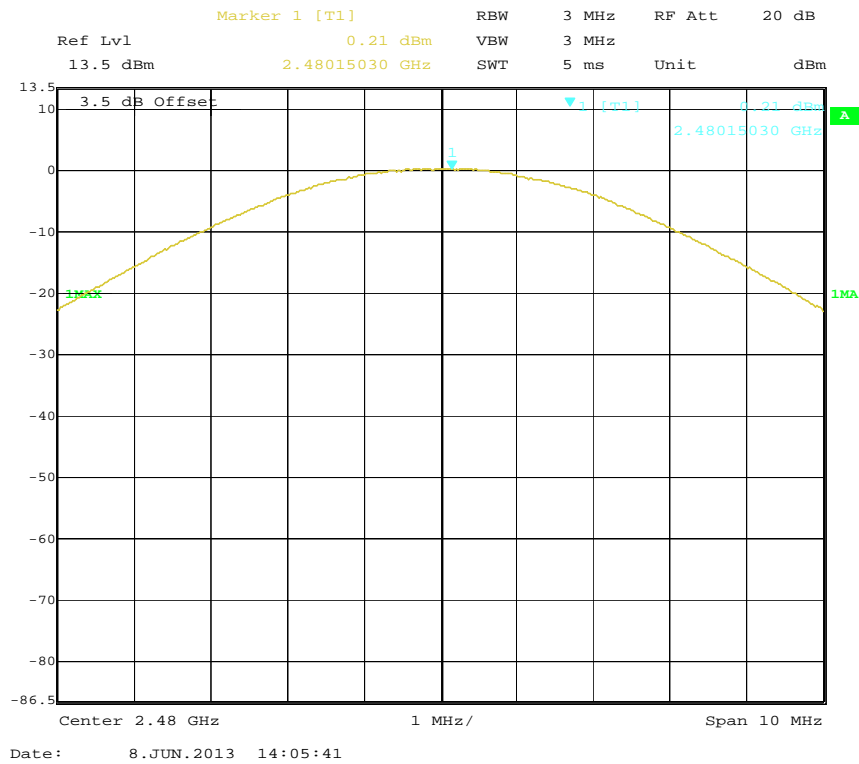


EDR(8DPSK): Low Channel

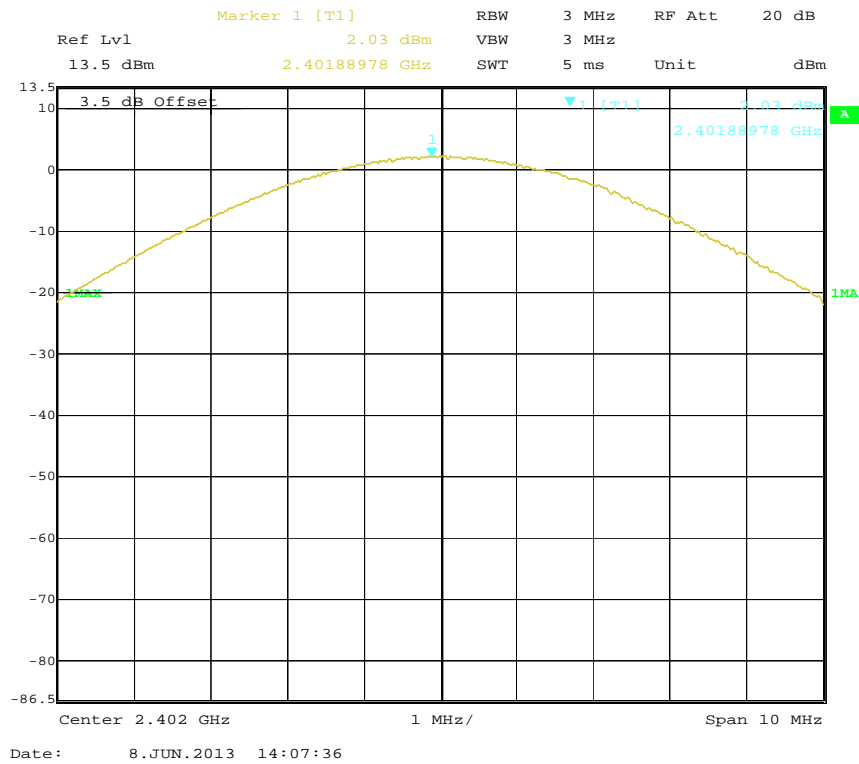

EDR(8DPSK): Middle Channel

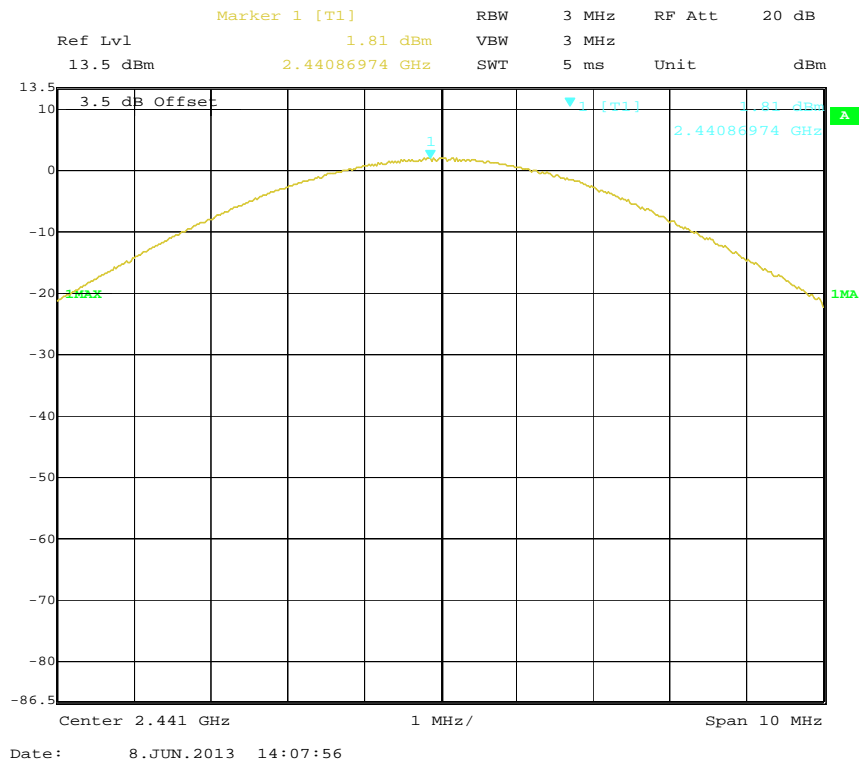

EDR(8DPSK): High Channel

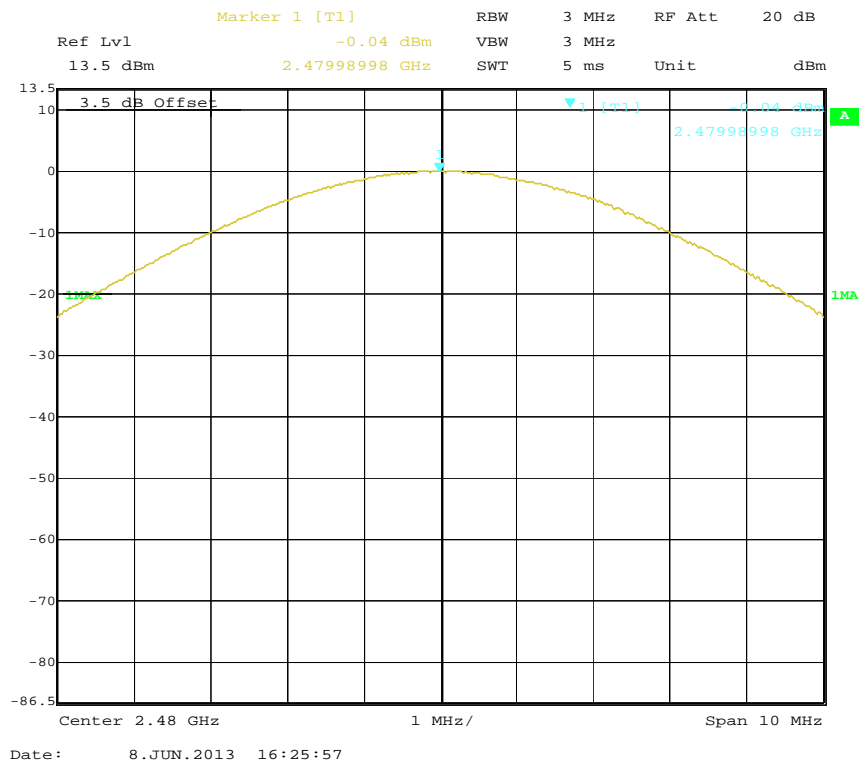

FCC §15.247(d) - BAND EDGES TESTING

Applicable Standard

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Remove the antenna from the EUT and then connect to a low loss RF cable from the antenna port to a EMI test receiver, then turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW of spectrum analyzer to 100 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	Signal Analyzer	FSIQ26	8386001028	2012-11-24	2013-11-23

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions


Temperature:	25 °C
Relative Humidity:	55 %
ATM Pressure:	100.0 kPa

The testing was performed by Bell Hu on 2013-06-10.


EUT operation mode: Transmitting

Mode	Band edges	Delta Peak to band emission (dBc)	≥Limit (dBc)
BDR (GFSK)	Left Band	49.52	20
	Right Band	51.13	20
EDR (π/4-DQPSK)	Left Band	47.11	20
	Right Band	49.19	20
EDR (8DPSK)	Left Band	48.35	20
	Right Band	49.25	20


BDR (GFSK): Band Edge-Left Side

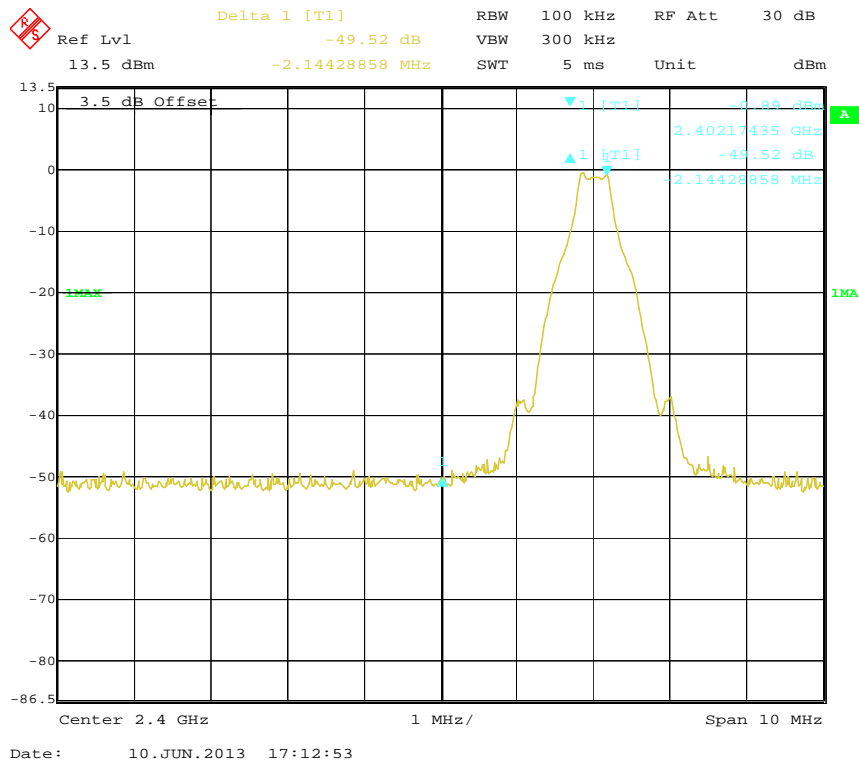


BDR (GFSK): Band Edge-Right Side

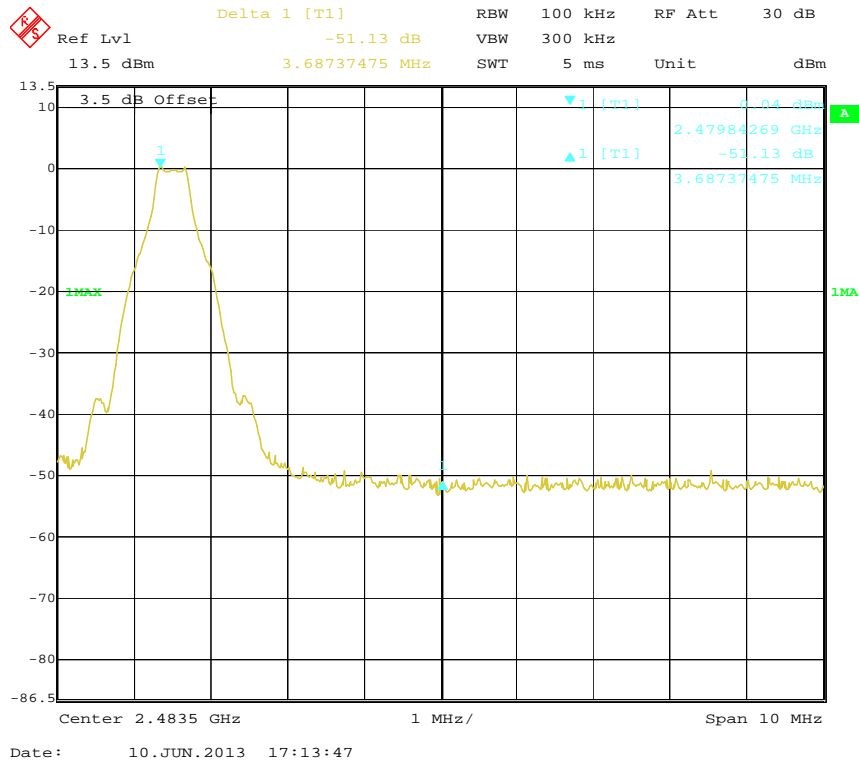


EDR ($\pi/4$ -DQPSK): Band Edge-Left Side

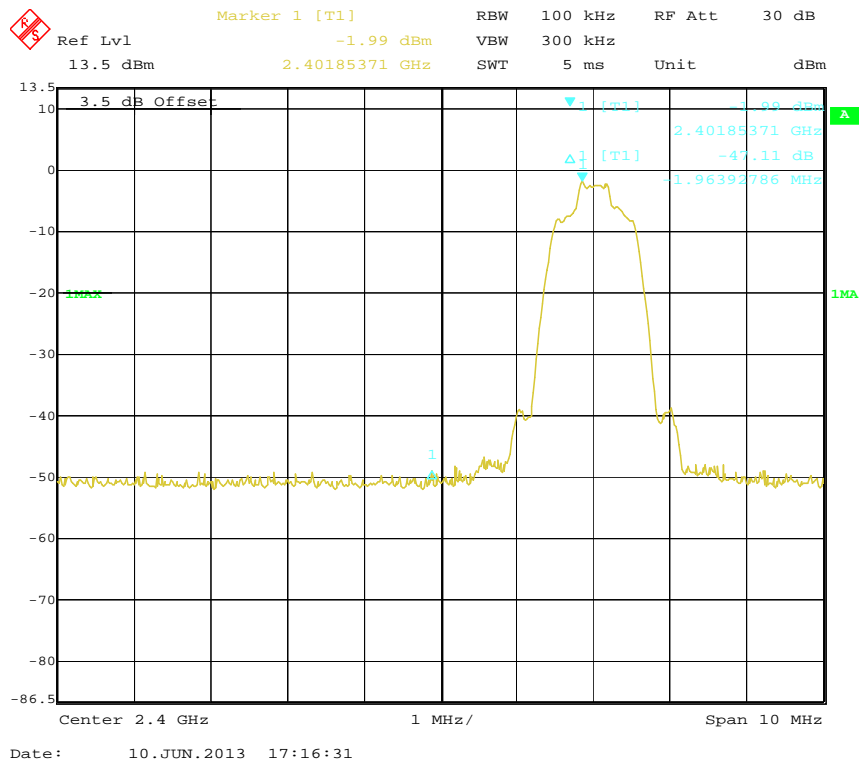


EDR ($\pi/4$ -DQPSK): Band Edge-Right Side

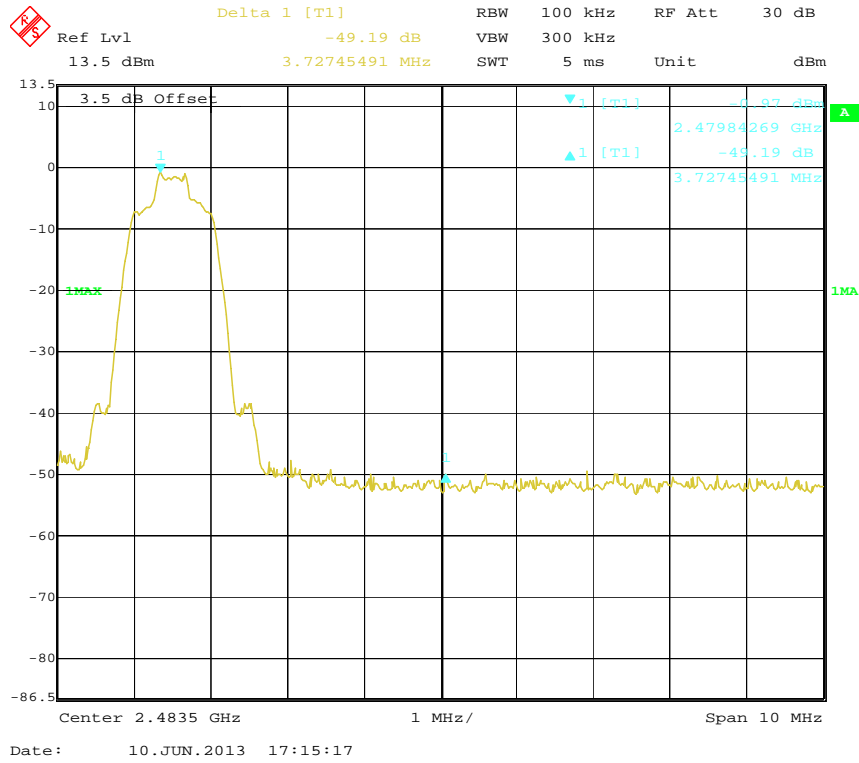

EDR (8DPSK): Band Edge-Left Side

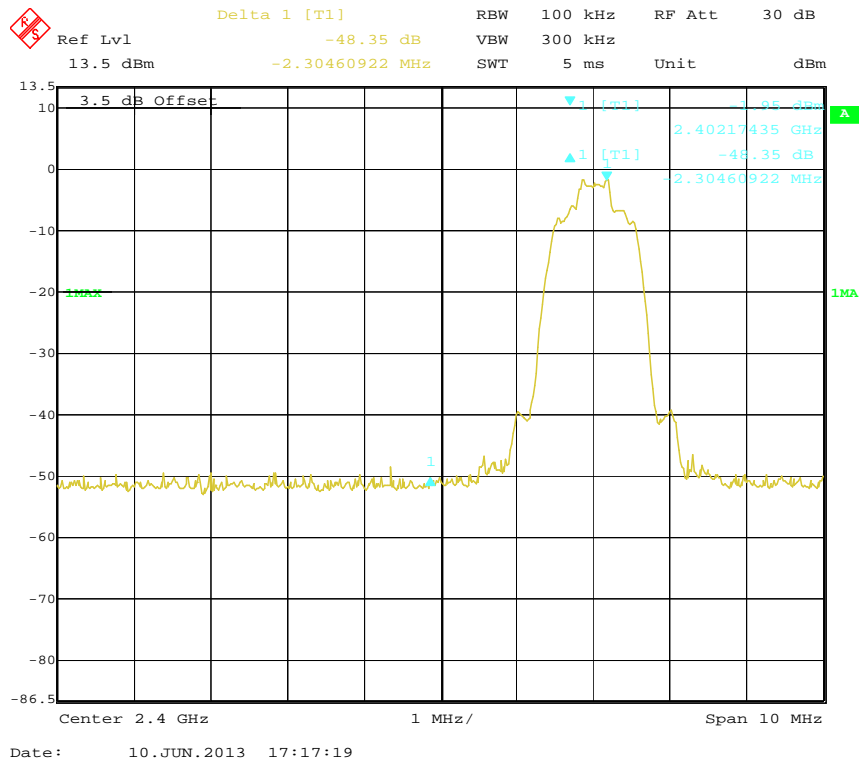

BDR (8DPSK): Band Edge-Right Side

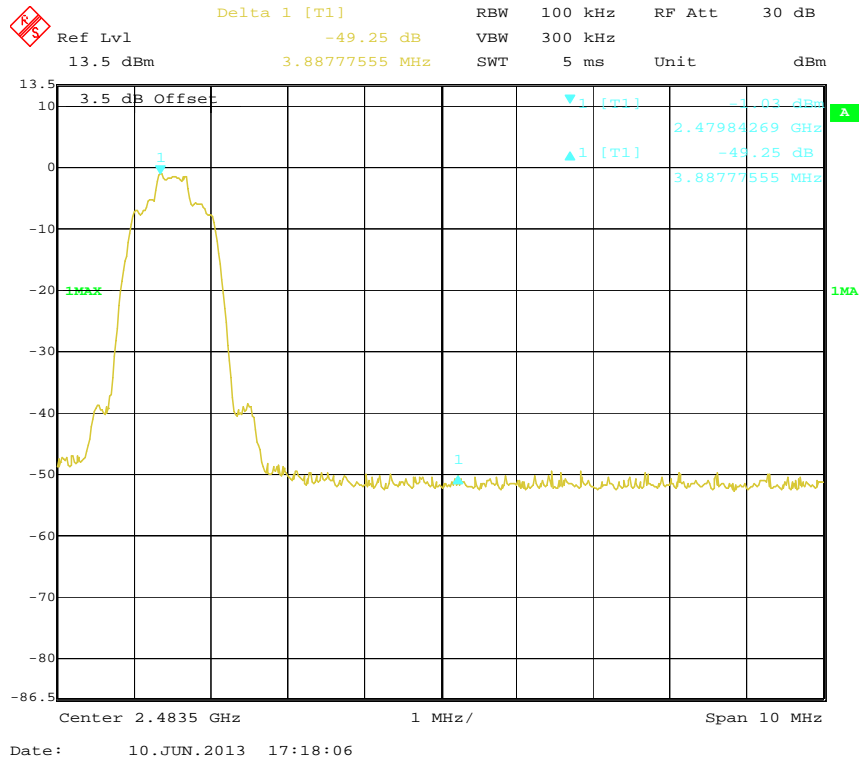

***** END OF REPORT *****