

FCC Radio Test Report

FCC ID: YBN-AIVIL42N0

This report concerns (check one): Original Grant Class I Change Class II Change

Project No. : 1808C227
Equipment : Car Radio with navigation, BT and WLAN
Test Model : AIVIL42N0
Series Model : N/A
Applicant : Bosch Car Multimedia GmbH
Address : Robert-Bosch-Straße 200; 31139 Hildesheim

Date of Receipt : Aug. 29, 2018
Date of Test : Sep. 03, 2018 ~ Sep. 12, 2018
Issued Date : Oct. 12, 2018
Tested by : BTL Inc.

Testing Engineer : Chay Cai
(Chay Cai)

Technical Manager : David Mao
(David Mao)

Authorized Signatory : Steven Lu
(Steven Lu)

B T L I N C .

No.3, Jinshagang 1st Road, Shixia, Dalang Town, Dongguan,
Guangdong, China.

TEL: +86-769-8318-3000 FAX: +86-769-8319-6000



Declaration

BTL represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with standards traceable to international standard(s) and/or national standard(s).

BTL's reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **BTL** shall have no liability for any declarations, inferences or generalizations drawn by the client or others from **BTL** issued reports.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S. Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and ourselves, the test report shall not be reproduced, except in full, without our written approval.

BTL's laboratory quality assurance procedures are in compliance with the **ISO Guide 17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

BTL is not responsible for the sampling stage, so the results only apply to the sample as received.

The information, data and test plan are provided by manufacturer, so it is manufacturer's responsibility to ensure that the apparatus meets the essential requirements in all the possible configurations as representative of its intended use.

Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

Table of Contents	Page
1 . CERTIFICATION	6
2 . SUMMARY OF TEST RESULTS	7
2.1 TEST FACILITY	8
2.2 MEASUREMENT UNCERTAINTY	8
3 . GENERAL INFORMATION	9
3.1 GENERAL DESCRIPTION OF EUT	9
3.2 DESCRIPTION OF TEST MODES	10
3.3 TABLE OF PARAMETERS OF TEXT SOFTWARE SETTING	12
3.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	13
3.5 DESCRIPTION OF SUPPORT UNITS	13
4 . EMC EMISSION TEST	14
4.1 RADIATED EMISSION MEASUREMENT	14
4.1.1 RADIATED EMISSION LIMITS	14
4.1.2 TEST PROCEDURE	15
4.1.3 DEVIATION FROM TEST STANDARD	15
4.1.4 TEST SETUP	16
4.1.5 EUT OPERATING CONDITIONS	18
4.1.6 EUT TEST CONDITIONS	18
4.1.7 TEST RESULTS (9KHZ TO 30MHZ)	18
4.1.8 TEST RESULTS (30MHZ TO 1000MHZ)	18
4.1.9 TEST RESULTS (ABOVE 1000MHZ)	18
5 . BANDWIDTH TEST	19
5.1 APPLIED PROCEDURES	19
5.1.1 TEST PROCEDURE	19
5.1.2 DEVIATION FROM STANDARD	19
5.1.3 TEST SETUP	19
5.1.4 EUT OPERATION CONDITIONS	19
5.1.5 EUT TEST CONDITIONS	19
5.1.6 TEST RESULTS	19
6 . MAXIMUM AVG OUTPUT POWER TEST	20
6.1 APPLIED PROCEDURES / LIMIT	20
6.1.1 TEST PROCEDURE	20
6.1.2 DEVIATION FROM STANDARD	20
6.1.3 TEST SETUP	20
6.1.4 EUT OPERATION CONDITIONS	20
6.1.5 EUT TEST CONDITIONS	20
6.1.6 TEST RESULTS	20

Table of Contents	Page
7 . ANTENNA CONDUCTED SPURIOUS EMISSION	21
7.1 APPLIED PROCEDURES / LIMIT	21
7.1.1 TEST PROCEDURE	21
7.1.2 DEVIATION FROM STANDARD	21
7.1.3 TEST SETUP	21
7.1.4 EUT OPERATION CONDITIONS	21
7.1.5 EUT TEST CONDITIONS	21
7.1.6 TEST RESULTS	21
8 . POWER SPECTRAL DENSITY TEST	22
8.1 APPLIED PROCEDURES / LIMIT	22
8.1.1 TEST PROCEDURE	22
8.1.2 DEVIATION FROM STANDARD	22
8.1.3 TEST SETUP	22
8.1.4 EUT OPERATION CONDITIONS	22
8.1.5 EUT TEST CONDITIONS	22
8.1.6 TEST RESULTS	22
9 . MEASUREMENT INSTRUMENTS LIST	23
10 . EUT TEST PHOTO	25
APPENDIX A - RADIATED EMISSION (9KHZ TO 30MHZ)	30
APPENDIX B - RADIATED EMISSION (30MHZ TO 1000MHZ)	35
APPENDIX C - RADIATED EMISSION (ABOVE 1000MHZ)	42
APPENDIX D - BANDWIDTH	115
APPENDIX E - MAXIMUM AVG OUTPUT POWER	116
APPENDIX F - ANTENNA CONDUCTED SPURIOUS EMISSION	119
APPENDIX G - POWER SPECTRAL DENSITY	120

REPORT ISSUED HISTORY

Issued No.	Version	Description	Issued Date
BTL-FCCP-5-1808C227	Rev.01	Original Issue.	Sep. 28, 2018
BTL-FCCP-5-1808C227	Rev.02	Changed the test software version	Oct. 12, 2018

1. CERTIFICATION

Equipment : Car Radio with navigation, BT and WLAN
Brand Name : Bosch
Test Model : AIVIL42N0
Series Model : N/A
Applicant : Bosch Car Multimedia GmbH
Manufacturer : #1 Bosch Car Multimedia GmbH
 #2 Bosch Car Multimedia Portugal, S.A.
Address : #1 Robert-Bosch-Straße 200; 31139 Hildesheim
 #2 Rua Max Grundig, 35-Lomar, 4705-820 Braga
Factory : Robert Bosch (Malaysia)
Address : Free Trade Zone 11900, Bayan Lepas, Penang
Date of Test : Sep. 03, 2018 ~ Sep. 12, 2018
Test Sample : Engineering Sample No.: D180907334
Standard(s) : FCC Part15, Subpart C (15.247) / ANSI C63.10-2013

The above equipment has been tested and found compliance with the requirement of the relative standards by BTL Inc.

The test data, data evaluation, and equipment configuration contained in our test report (Ref No. BTL-FCCP-5-1808C227) were obtained utilizing the test procedures, test instruments, test sites that has been accredited by the Authority of NVLAP according to the ISO-17025 quality assessment standard and technical standard(s).

Test results included in this report is only for the WLAN 2.4G part.

2. SUMMARY OF TEST RESULTS

Test procedures according to the technical standard(s):

Applied Standard(s): FCC Part15 (15.247) , Subpart C			
Standard(s) Section	Test Item	Judgment	Remark
15.247(d)	Antenna conducted Spurious Emission	N/A (Note1)	
15.247(a)(2)	6dB Bandwidth	N/A (Note1)	
15.247(b)(3)	AVG Output Power	PASS	
15.247(e)	Power Spectral Density	N/A (Note1)	
15.203	Antenna Requirement	N/A (Note1)	
15.247(d)/ 15.205/ 15.209	Transmitter Radiated Emissions	PASS	

NOTE:

- (1)According to customers's requirement, this test item wasn't performed and the test data wasn't contained in this test report.

2.1 TEST FACILITY

The test facilities used to collect the test data in this report is at the location of No.3,Jinshagang 1st Road, Shixia, Dalang Town, Dongguan, Guangdong, China.

BTL's test firm number for FCC: 854385

BTL's designation number for FCC: CN5020

2.2 MEASUREMENT UNCERTAINTY

The measurement uncertainty figures shall be calculated according the methods described in the ETSI TR 100 028 and shall correspond to an expansion factor (coverage factor) $k=1.96$ or $k=2$ (which provide confidence levels of respectively 90% and 95.45% in the case where the distributions characterizing the actual measurement uncertainties are normal (Gaussian)). Measurement Uncertainty for a Level of Confidence of 95 %, $U=2xUc(y)$.

The BTL measurement uncertainty as below table:

A. Radiated Measurement:

Test Site	Method	Measurement Frequency Range	Ant. H / V	U, (dB)
DG-CB03	CISPR	9KHz~30MHz	V	3.79
		9KHz~30MHz	H	3.57
		30MHz ~ 200MHz	V	3.82
		30MHz ~ 200MHz	H	3.78
		200MHz ~ 1,000MHz	V	4.10
		200MHz ~ 1,000MHz	H	4.06
		1GHz~18GHz	V	3.12
		1GHz~18GHz	H	3.68
		18GHz~40GHz	V	4.15
		18GHz~40GHz	H	4.14

Note: Unless specifically mentioned, the uncertainty of measurement has not been taken into account to declare the compliance or non-compliance to the specification.

3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

Equipment	Car Radio with navigation, BT and WLAN	
Brand Name	Bosch	
Test Model	AIVIL42N0	
Series Model	N/A	
Model Difference	N/A	
Product Description	Operation Frequency	2412 ~ 2462 MHz
	Modulation Technology	802.11b:DSSS 802.11g:OFDM 802.11n:OFDM
	Bit Rate of Transmitter	802.11b: 11/5.5/2/1 Mbps 802.11g: 54/48/36/24/18/12/9/6 Mbps 802.11n up to 150 Mbps
	Average Output Power (Max.)	802.11b: 9.89 dBm 802.11g: 7.65 dBm 802.11n(20MHz): 7.45 dBm 802.11n(40MHz): 5.95 dBm
Power Source	DC voltage supplied from external power supply.	
Power Rating	DC 13.5V	

Note:

- For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.
- Channel List:

CH01 - CH11 for 802.11b, 802.11g, 802.11n(20MHz) CH03 - CH09 for 802.11n(40MHz)							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
01	2412	04	2427	07	2442	10	2457
02	2417	05	2432	08	2447	11	2462
03	2422	06	2437	09	2452		

3. Table for Filed Antenna

Ant.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)
1	N/A	N/A	Internal	N/A	5.3

3.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generated from EUT, the test system was pre-scanning tested based on the consideration of following EUT operation mode or test configuration mode which possibly have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	TX B MODE CHANNEL 01/06/11
Mode 2	TX G MODE CHANNEL 01/06/11
Mode 3	TX N-20MHZ MODE CHANNEL 01/06/11
Mode 4	TX N-40MHZ MODE CHANNEL 03/06/09

The EUT system operated these modes were found to be the worst case during the pre-scanning test as following:

For Radiated Test	
Final Test Mode	Description
Mode 1	TX B MODE CHANNEL 01/06/11
Mode 2	TX G MODE CHANNEL 01/06/11
Mode 3	TX N-20MHZ MODE CHANNEL 01/06/11
Mode 4	TX N-40MHZ MODE CHANNEL 03/06/09

For Band Edge Test	
Final Test Mode	Description
Mode 1	TX B MODE CHANNEL 01/06/11
Mode 2	TX G MODE CHANNEL 01/06/11
Mode 3	TX N-20MHZ MODE CHANNEL 01/06/11
Mode 4	TX N-40MHZ MODE CHANNEL 03/06/09

Maximum AVG Output Power	
Final Test Mode	Description
Mode 1	TX B MODE CHANNEL 01/06/11
Mode 2	TX G MODE CHANNEL 01/06/11
Mode 3	TX N-20MHZ MODE CHANNEL 01/06/11
Mode 4	TX N-40MHZ MODE CHANNEL 03/06/09

Note:


- (1) The measurements are performed at the high, middle, low available channels.
- (2) 802.11b mode: DSSS(11/5.5/2/1 Mbps)
 802.11g mode: OFDM (54/48/36/24/18/12/9/6 Mbps)
 802.11n HT20 mode : OFDM (MCS0/1/2/3/4/5/6/7)
 802.11n HT40 mode : OFDM (MCS0/1/2/3/4/5/6/7)
 For all tests except conducted output power, the highest output powers were set for final test.
- (3) For radiated below 1G test, the 802.11b is found to be the worst case and recorded.

3.3 TABLE OF PARAMETERS OF TEXT SOFTWARE SETTING

During testing, channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product power parameters of WLAN

Test software version	Dut labtool_2.0.0.89_Mar. 09, 2016		
Frequency (MHz)	2412	2437	2462
802.11b	14	14	14
802.11g	11	11	11
802.11n (20MHz)	11	11	11
Frequency (MHz)	2422	2437	2452
802.11n (40MHz)	11	11	11

3.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

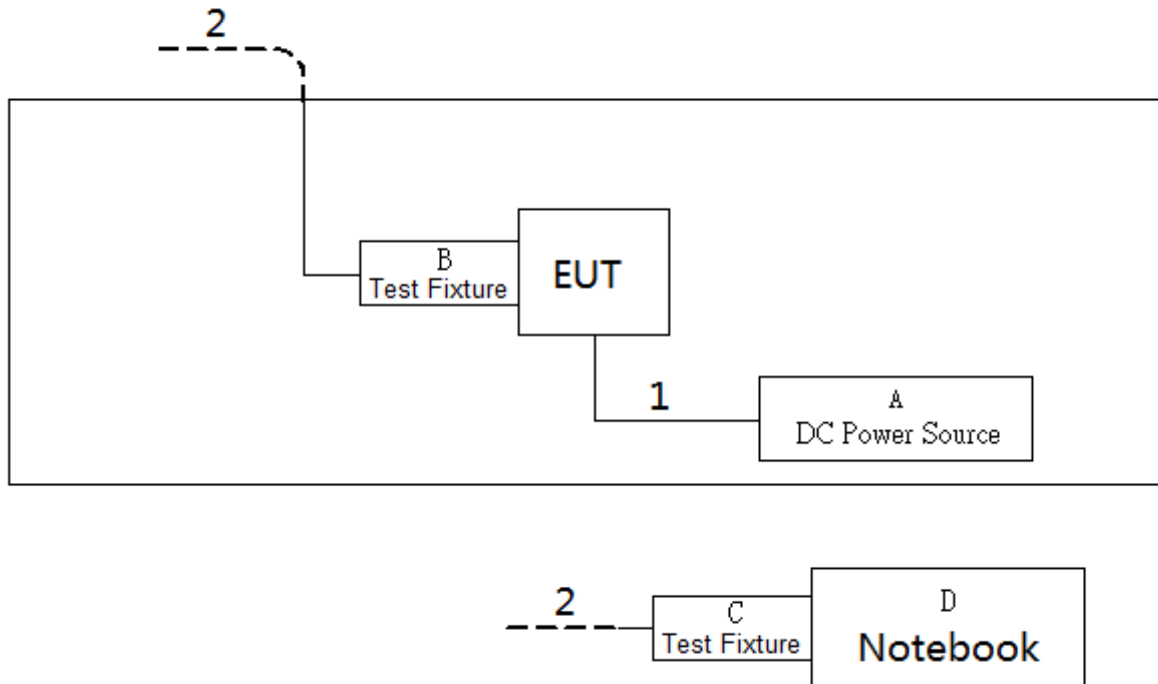

3.5 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	FCC ID	Series No.
A	DC Power Source	TRUE-POWER	GPC30300N	N/A	N/A
B	Test Fixture	N/A	N/A	N/A	N/A
C	Test Fixture	N/A	N/A	N/A	N/A
D	Notebook	Dell	Inspiron 15-7559	N/A	N/A

Item	Shielded Type	Ferrite Core	Length	Note
1	NO	NO	1m	DC Cable
2	NO	NO	10m	RJ45 Cable

4. EMC EMISSION TEST

4.1 RADIATED EMISSION MEASUREMENT

4.1.1 RADIATED EMISSION LIMITS

In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

LIMITS OF RADIATED EMISSION MEASUREMENT (9KHz-1000MHz)

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
960~1000	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

Frequency (MHz)	Band edge at 3m (dBµV/m)		Harmonic at 1.5m (dBµV/m)	
	Peak	Average	Peak	Average
Above 1000	74	54	80 (Note 5)	60(Note 5)

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).
- (4) The test result calculated as following:
 Measurement Value = Reading Level + Correct Factor
 Correct Factor = Antenna Factor + Cable Loss - Amplifier Gain(if use)
 Margin Level = Measurement Value - Limit Value

(5)

$$FS_{\text{limit}} = FS_{\text{max}} - 20 \log \left(\frac{d_{\text{limit}}}{d_{\text{measure}}} \right)$$

$$20 \log d_{\text{limit}}/d_{\text{measure}} = 20 \log 3/1.5 = 6 \text{dB.}$$

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RBW / VBW (Emission in restricted band)	1MHz / 3MHz for Peak, 1MHz / 1/T for Average

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9KHz~90KHz for PK/AVG detector
Start ~ Stop Frequency	90KHz~110KHz for QP detector
Start ~ Stop Frequency	110KHz~490KHz for PK/AVG detector
Start ~ Stop Frequency	490KHz~30MHz for QP detector
Start ~ Stop Frequency	30MHz~1000MHz for QP detector

4.1.2 TEST PROCEDURE


- a. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(below 1GHz)
- b. The measuring distance of 3 m or 1.5m shall be used for measurements. The EUT was placed on the top of a rotating table 1.5 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(above 1GHz)
- c. The height of the equipment or of the substitution antenna shall be 0.8m or 1.5m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights find the maximum reading (used Bore sight function).
- e. The receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1GHz.
- f. The initial step in collecting radiated emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- g. All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform. (below 1GHz)
- h. All readings are Peak Mode value unless otherwise stated AVG in column of Note. If the Peak Mode Measured value compliance with the Peak Limits and lower than AVG Limits, the EUT shall be deemed to meet both Peak & AVG Limits and then only Peak Mode was measured, but AVG Mode didn't perform. (above 1GHz)
- i. For the actual test configuration, please refer to the related Item -EUT Test Photos.

4.1.3 DEVIATION FROM TEST STANDARD


No deviation

4.1.4 TEST SETUP


(A) Radiated Emission Test Set-Up Frequency Below 1 GHz

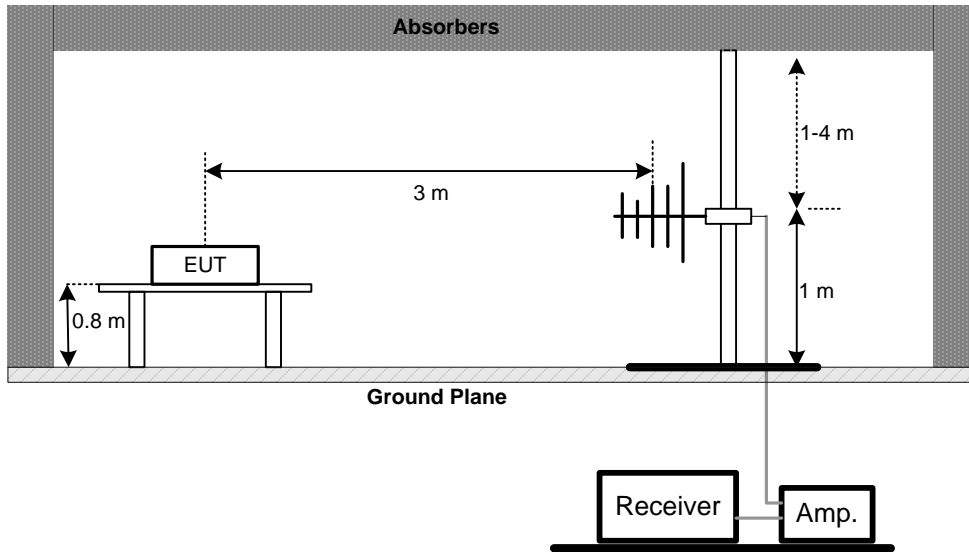


(B) Radiated Emission Test Set-Up Frequency Above 1 GHz
Band edge

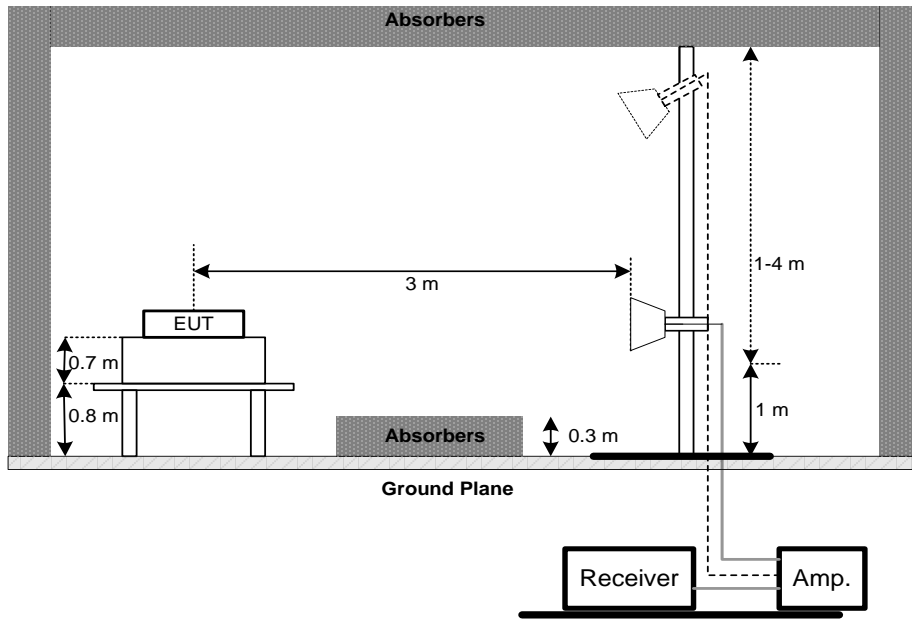

Harmonic

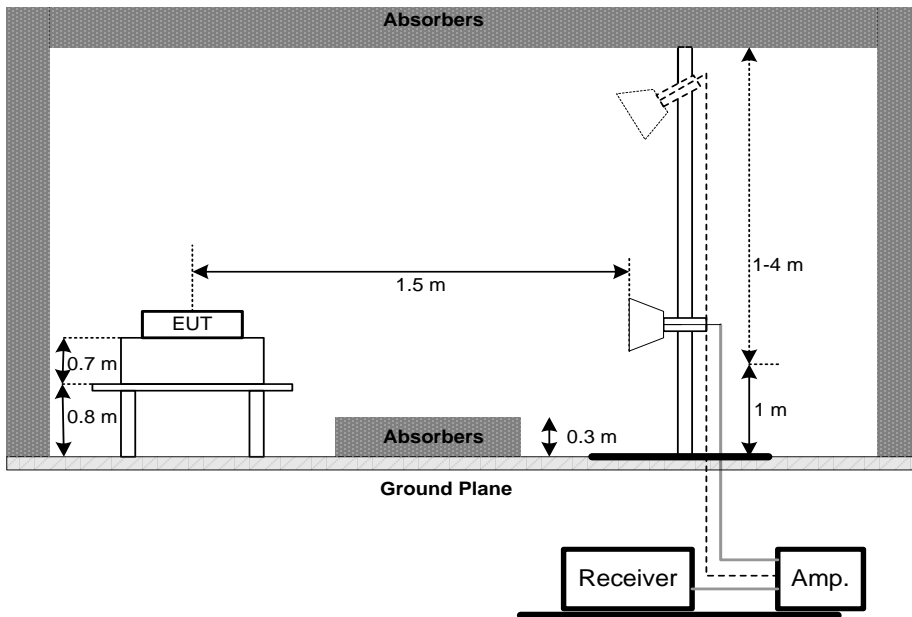

(C) For Radiated Emissions Below 30MHz

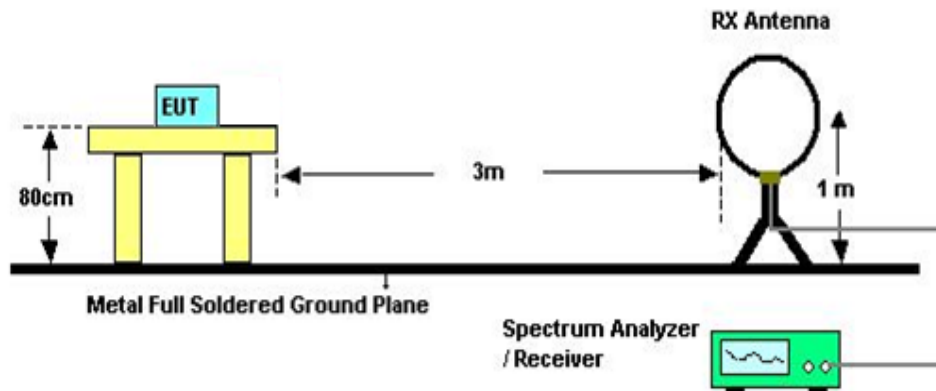

4.1.5 EUT OPERATING CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

4.1.6 EUT TEST CONDITIONS

Temperature: 25°C Relative Humidity: 55% Test Voltage: DC 13.5V

4.1.7 TEST RESULTS (9KHZ TO 30MHZ)

Please refer to the Appendix A.

Remark:

- (1) The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.
- (2) Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB).
- (3) Limit line = specific limits (dBuV) + distance extrapolation factor.

4.1.8 TEST RESULTS (30MHZ TO 1000MHZ)

Please refer to the Appendix B.

4.1.9 TEST RESULTS (ABOVE 1000MHZ)

Please refer to the Appendix C.

Remark:

- (1) No limit: This is fundamental signal, the judgment is not applicable.
For fundamental signal judgment was referred to Peak output test.

5. BANDWIDTH TEST

5.1 APPLIED PROCEDURES

FCC Part15 (15.247) , Subpart C			
Section	Test Item	Frequency Range (MHz)	Result
15.247(a)(2)	Bandwidth	2400-2483.5	PASS

5.1.1 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- b. Spectrum Setting: RBW= 100KHz, VBW=300KHz, Sweep time = 2.5 ms.

5.1.2 DEVIATION FROM STANDARD

No deviation.

5.1.3 TEST SETUP



5.1.4 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

5.1.5 EUT TEST CONDITIONS

Temperature: 25°C Relative Humidity: 55% Test Voltage: DC 13.5V

5.1.6 TEST RESULTS

Please refer to the Appendix D.

6. MAXIMUM AVG OUTPUT POWER TEST

6.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(b)(3)	Maximum Output Power	1 Watt or 30dBm	2400-2483.5	PASS

6.1.1 TEST PROCEDURE

- The EUT was directly connected to the power meter and antenna output port as show in the block diagram below,
- The maximum average conducted output power was performed in accordance with method 9.1.2 of FCC KDB 558074 D01 v04 DTS Meas Guidance.

6.1.2 DEVIATION FROM STANDARD

No deviation.

6.1.3 TEST SETUP



6.1.4 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

6.1.5 EUT TEST CONDITIONS

Temperature: 25°C Relative Humidity: 55% Test Voltage: DC 13.5V

6.1.6 TEST RESULTS

Please refer to the Appendix E.

7. ANTENNA CONDUCTED SPURIOUS EMISSION

7.1 APPLIED PROCEDURES / LIMIT

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c))

7.1.1 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- b. Spectrum Setting: RBW= 100KHz, VBW=300KHz, Sweep time = Auto.

7.1.2 DEVIATION FROM STANDARD

No deviation.

7.1.3 TEST SETUP



7.1.4 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

7.1.5 EUT TEST CONDITIONS

Temperature: 25°C Relative Humidity: 55% Test Voltage: DC 13.5V

7.1.6 TEST RESULTS

Please refer to the Appendix F.

8. POWER SPECTRAL DENSITY TEST

8.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(e)	Power Spectral Density	8 dBm (in any 3KHz)	2400-2483.5	PASS


8.1.1 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- b. Spectrum Setting: RBW=3KHz, VBW=10KHz, Sweep time = Auto.

8.1.2 DEVIATION FROM STANDARD

No deviation.

8.1.3 TEST SETUP

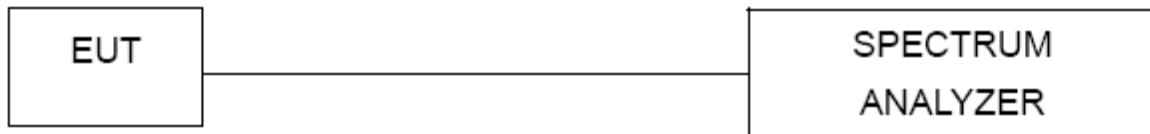

8.1.4 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

8.1.5 EUT TEST CONDITIONS

Temperature: 25°C Relative Humidity: 55% Test Voltage: DC 13.5V

8.1.6 TEST RESULTS

Please refer to the Appendix G.

9. MEASUREMENT INSTRUMENTS LIST


Radiated Emission Measurement - 9kHz TO 30 MHz					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Loop Antenna	EM	EM-6876-1	230	Feb. 07, 2019
2	Cable	N/A	RG 213/U	C-102	Jun. 01, 2019
3	EMI Test Receiver	R&S	ESCI	100382	Mar. 11, 2019
4	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A

Radiated Emission Measurement – 30 MHz TO 1000 MHz					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Antenna	Schwarbeck	VULB9160	9160-3232	Mar. 11, 2019
2	Amplifier	HP	8447D	2944A09673	Aug. 11, 2019
3	Receiver	Agilent	N9038A	MY52130039	Aug. 11, 2019
4	Cable	emci	LMR-400(30MHz-1 GHz)(8m+5m)	N/A	May 25, 2019
5	Controller	CT	SC100	N/A	N/A
6	Controller	MF	MF-7802	MF780208416	N/A
7	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A

Radiated Emission Measurement - Above 1 GHz					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Double Ridged Guide Antenna	ETS	3115	75789	Mar. 11, 2019
2	Broad-Band Horn Antenna	Schwarzbeck	BBHA 9170	9170319	Jun. 30, 2019
3	Amplifier	Agilent	8449B	3008A02274	Mar. 11, 2019
4	Microwave Preamplifier With Adaptor	EMC INSTRUMENT	EMC2654045	980039 & HA01	Mar. 11, 2019
5	Receiver	Agilent	N9038A	MY52130039	Aug. 11, 2019
6	Controller	CT	SC100	N/A	N/A
7	Controller	MF	MF-7802	MF780208416	N/A
8	Cable	mitron	B10-01-01-12M	18072744	Jul. 30, 2019
9	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A

AVG Output Power					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Cable	emci	EMC104-SM-SM-9000(0.01GHz–26.5GHz)	N/A	N/A
2	Power Sensor	Agilent	U2021XA	MY53020007	Mar. 11, 2019
3	Measurement Software	Keysight	EN300328v2.1.1(V1.02.07)	N/A	N/A

Remark: "N/A" denotes no model name, serial no. or calibration specified.
 All calibration period of equipment list is one year.

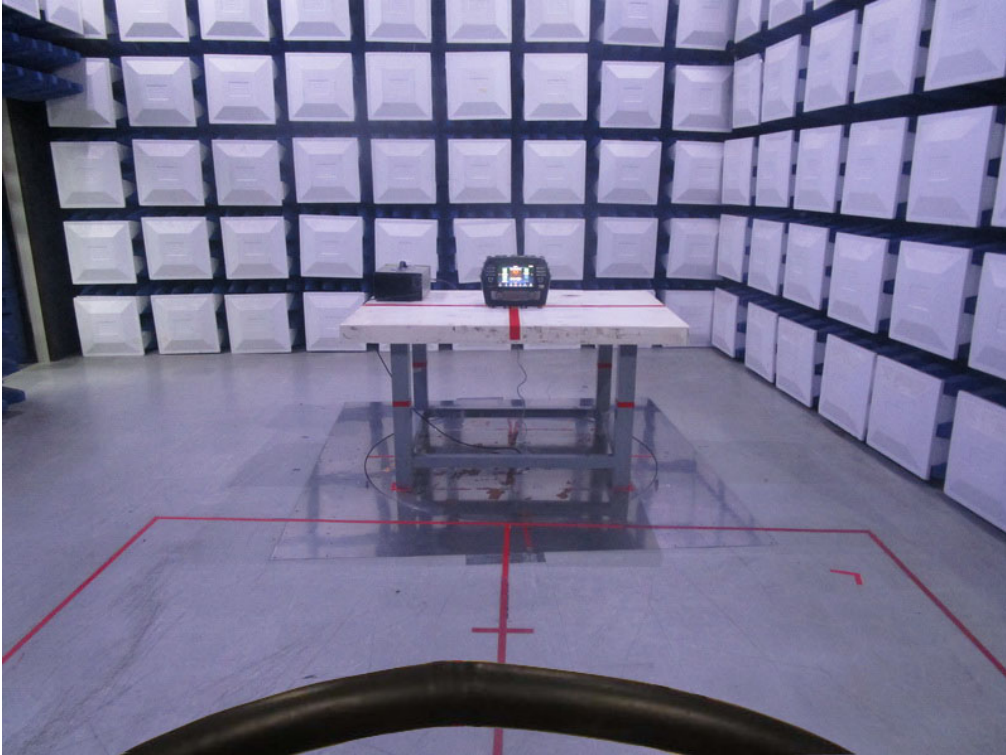10. EUT TEST PHOTO**Radiated Measurement Photos****9KHz to 30MHz**



Radiated Measurement Photos

30MHz to 1000MHz




Radiated Measurement Photos

1GHz to 18GHz

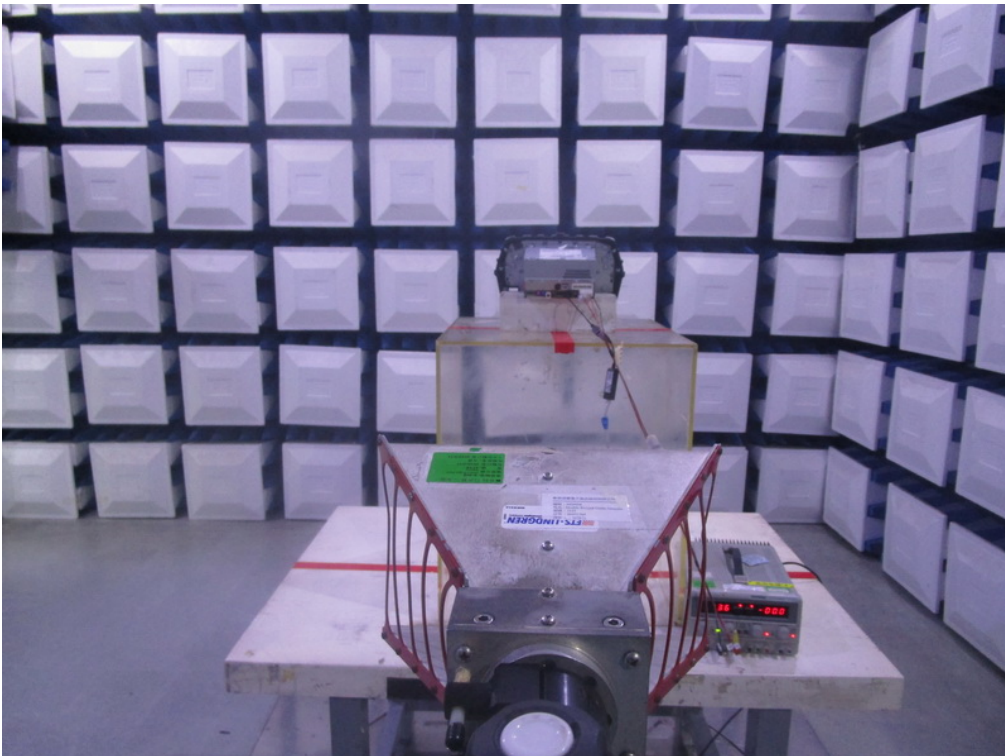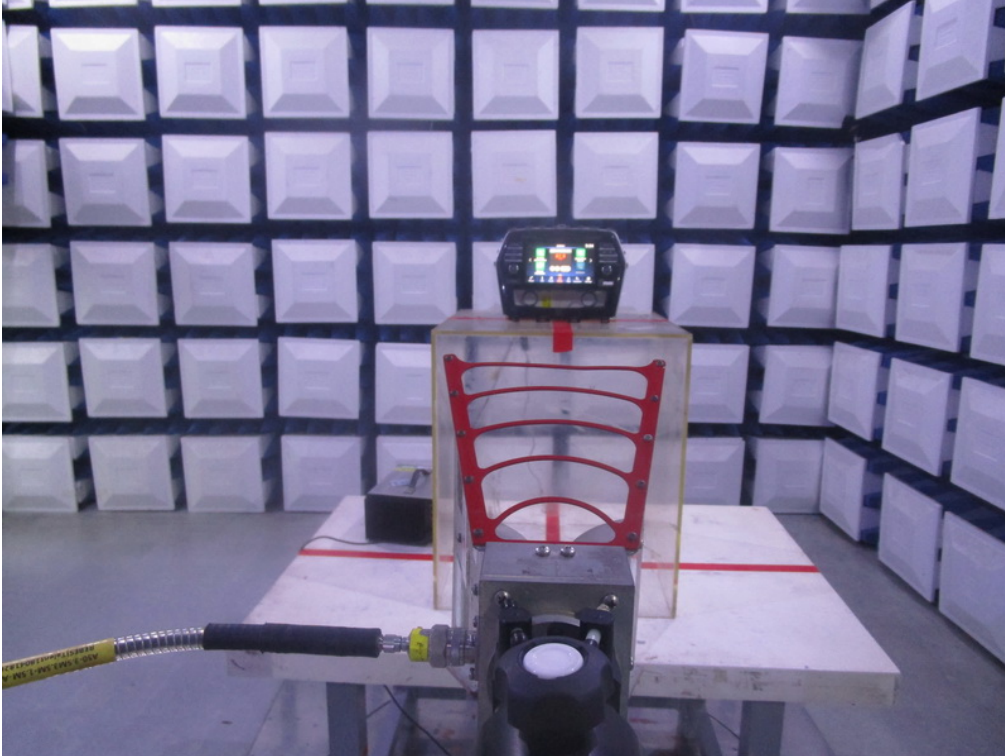

Radiated Measurement Photos

18GHz to 26.5GHz

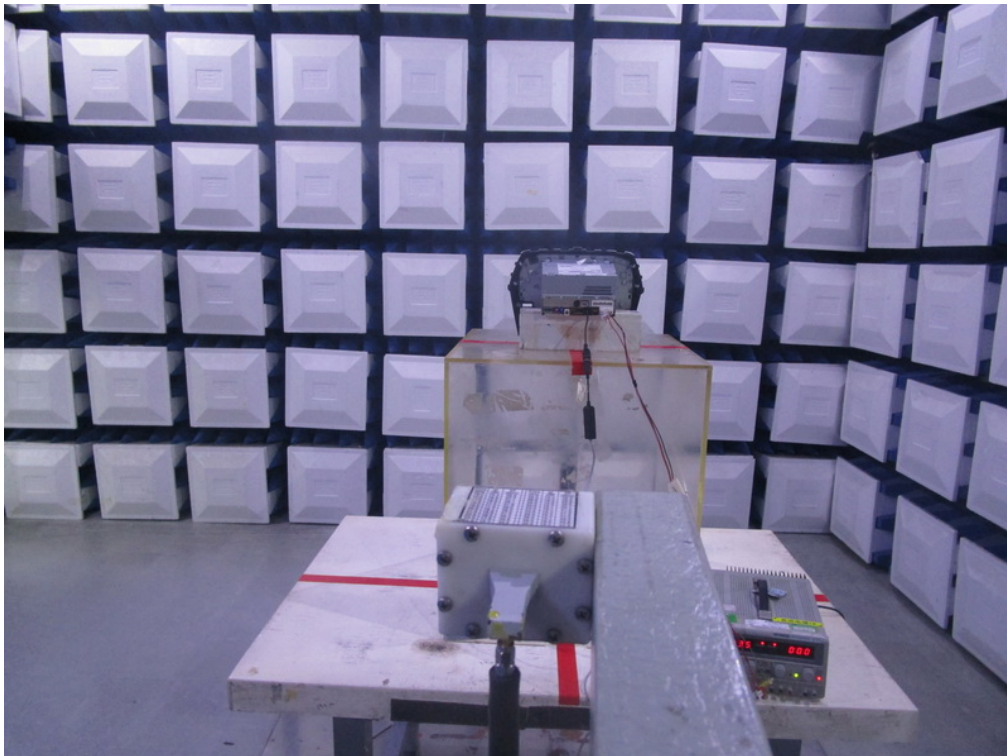


Band Edge Measurement Photos



APPENDIX A - RADIATED EMISSION (9KHZ TO 30MHZ)

Test Mode: TX Mode


Ant 0°

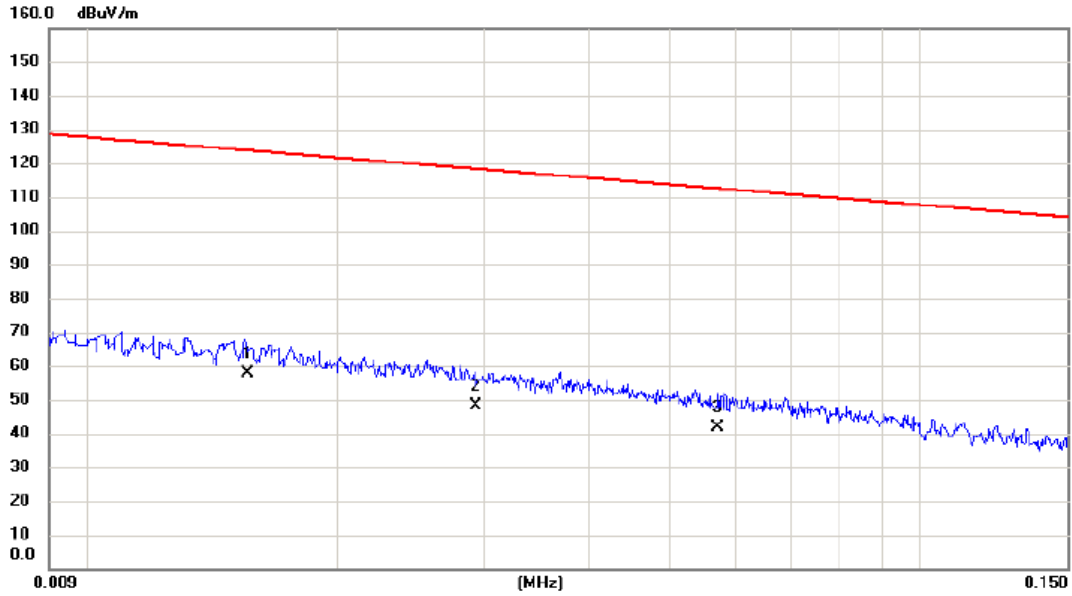

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	0.0156	37.20	20.64	57.84	123.74	-65.90	AVG	
2		0.0293	28.50	19.86	48.36	118.27	-69.91	AVG	
3		0.0571	22.40	19.39	41.79	112.47	-70.68	AVG	

Test Mode: TX Mode


Ant 0°

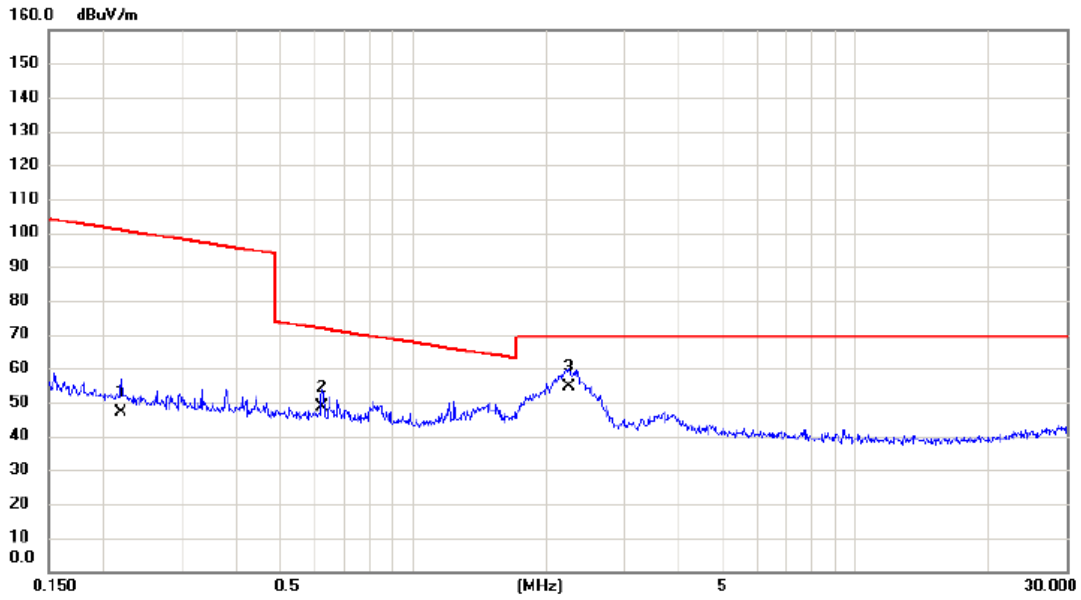

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		0.2185	29.70	17.11	46.81	100.82	-54.01	AVG	
2		0.6238	31.80	16.92	48.72	71.70	-22.98	QP	
3	*	2.2486	37.70	16.96	54.66	69.54	-14.88	QP	

Test Mode: TX Mode


Ant 90°

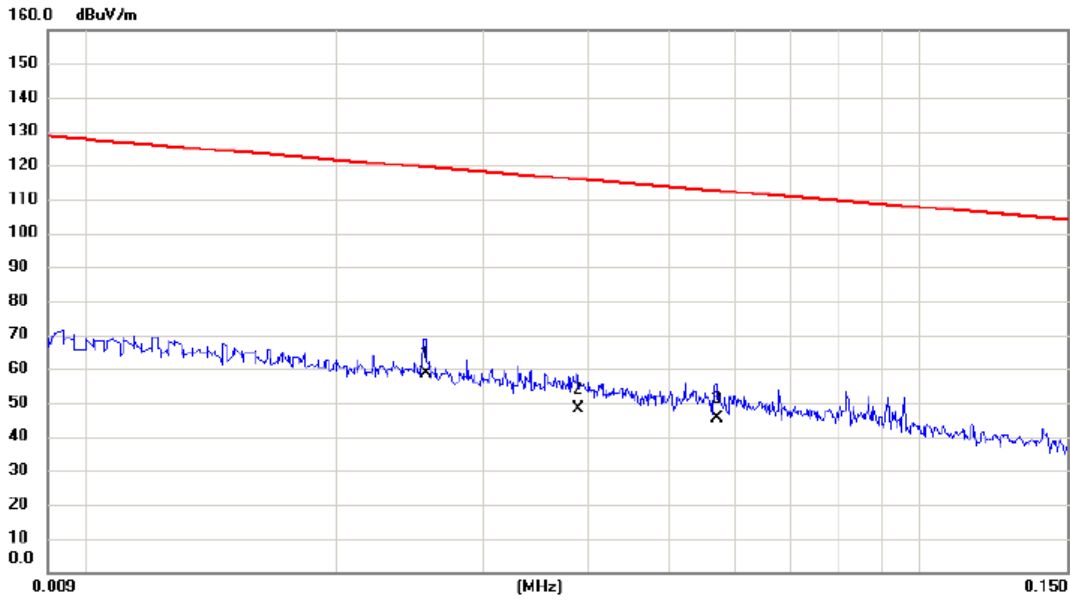

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	0.0256	38.60	19.93	58.53	119.44	-60.91	AVG	
2		0.0390	28.70	19.70	48.40	115.78	-67.38	AVG	
3		0.0570	26.20	19.39	45.59	112.49	-66.90	AVG	

Test Mode: TX Mode

Ant 90°

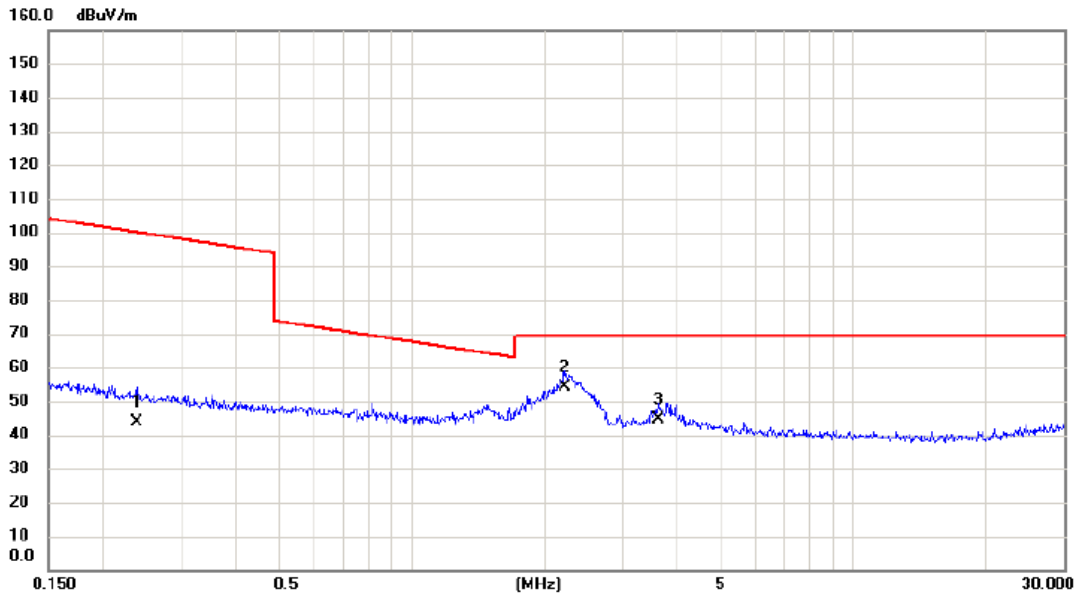


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		0.2378	26.90	17.08	43.98	100.08	-56.10	AVG	
2	*	2.2132	37.10	16.98	54.08	69.54	-15.46	QP	
3		3.6225	28.40	16.04	44.44	69.54	-25.10	QP	

APPENDIX B - RADIATED EMISSION (30MHZ TO 1000MHZ)

Test Mode: TX B Mode Channel 01

Vertical

80 dBuV/m

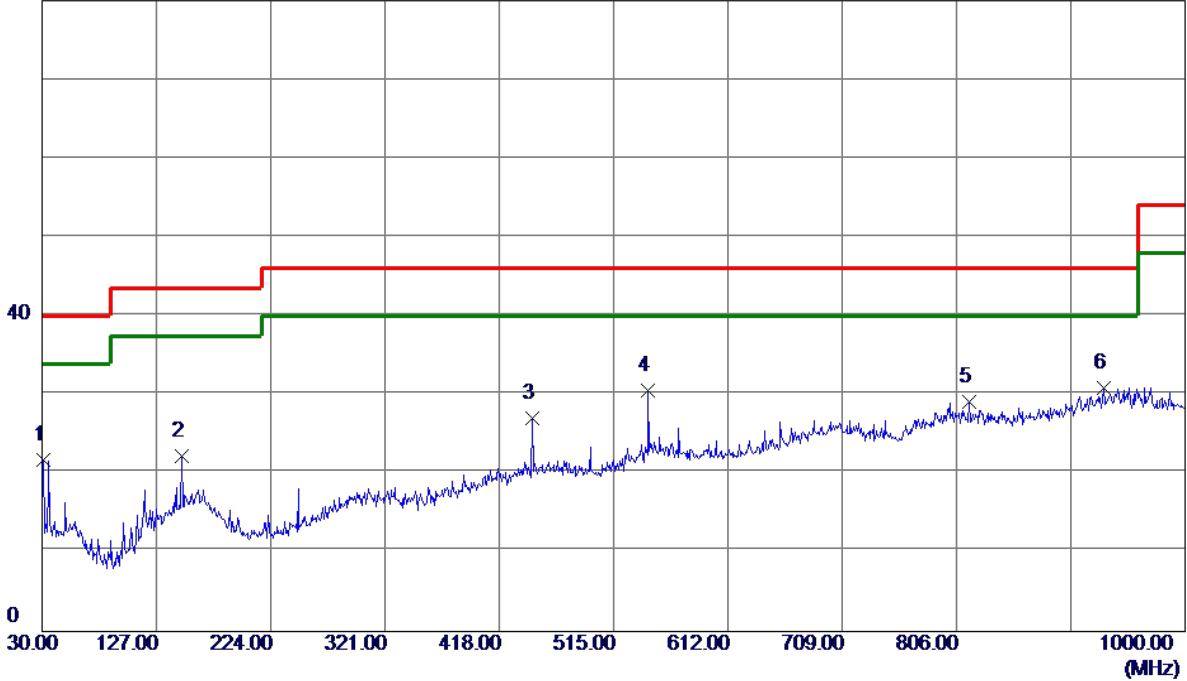


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	31.4550	36.81	-15.02	21.79	40.00	-18.21	Peak	
2	148.3400	33.87	-11.59	22.28	43.50	-21.22	Peak	
3	445.6450	34.61	-7.58	27.03	46.00	-18.97	Peak	
4	544.5850	36.35	-5.80	30.55	46.00	-15.45	Peak	
5	817.1550	30.48	-1.31	29.17	46.00	-16.83	Peak	
6 *	930.6450	30.26	0.63	30.89	46.00	-15.11	Peak	

Test Mode: TX B Mode Channel 01

Horizontal

80 dBuV/m

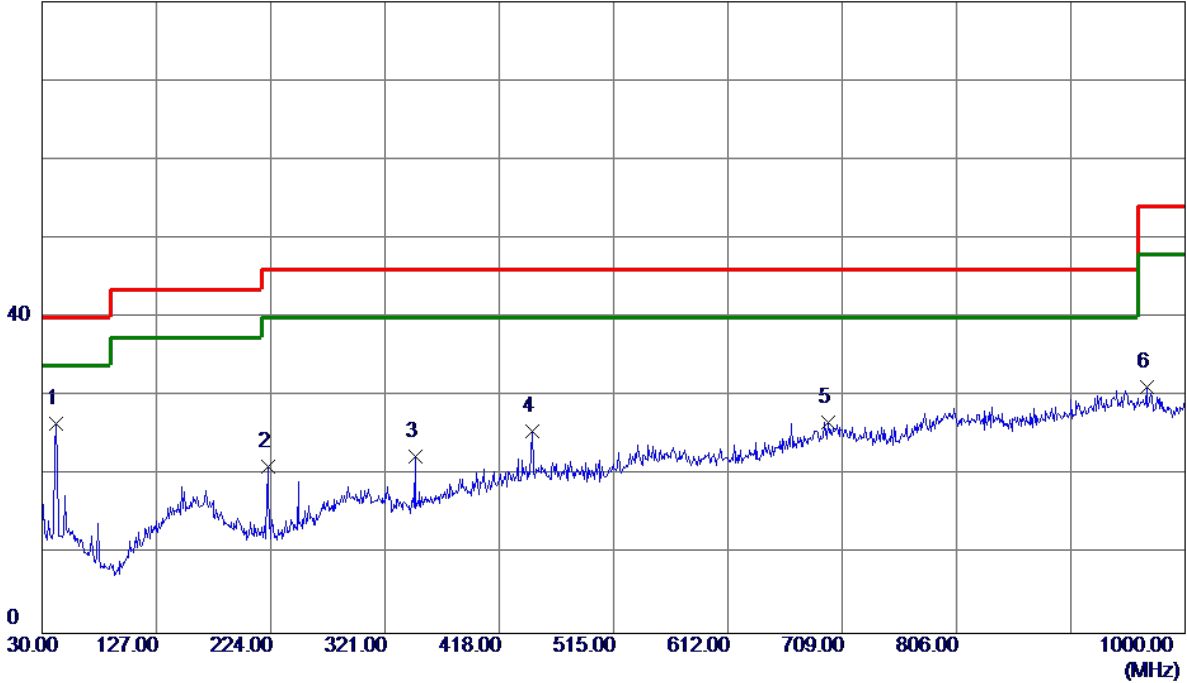


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	42.1250	41.32	-14.70	26.62	40.00	-13.38	Peak	
2	221.5750	35.96	-14.86	21.10	46.00	-24.90	Peak	
3	346.7049	33.46	-11.03	22.43	46.00	-23.57	Peak	
4	445.6450	33.13	-7.58	25.55	46.00	-20.45	Peak	
5	696.8750	29.65	-2.90	26.75	46.00	-19.25	Peak	
6	967.5050	30.26	0.99	31.25	54.00	-22.75	Peak	

Test Mode: TX B Mode Channel 06

Vertical

80 dBuV/m

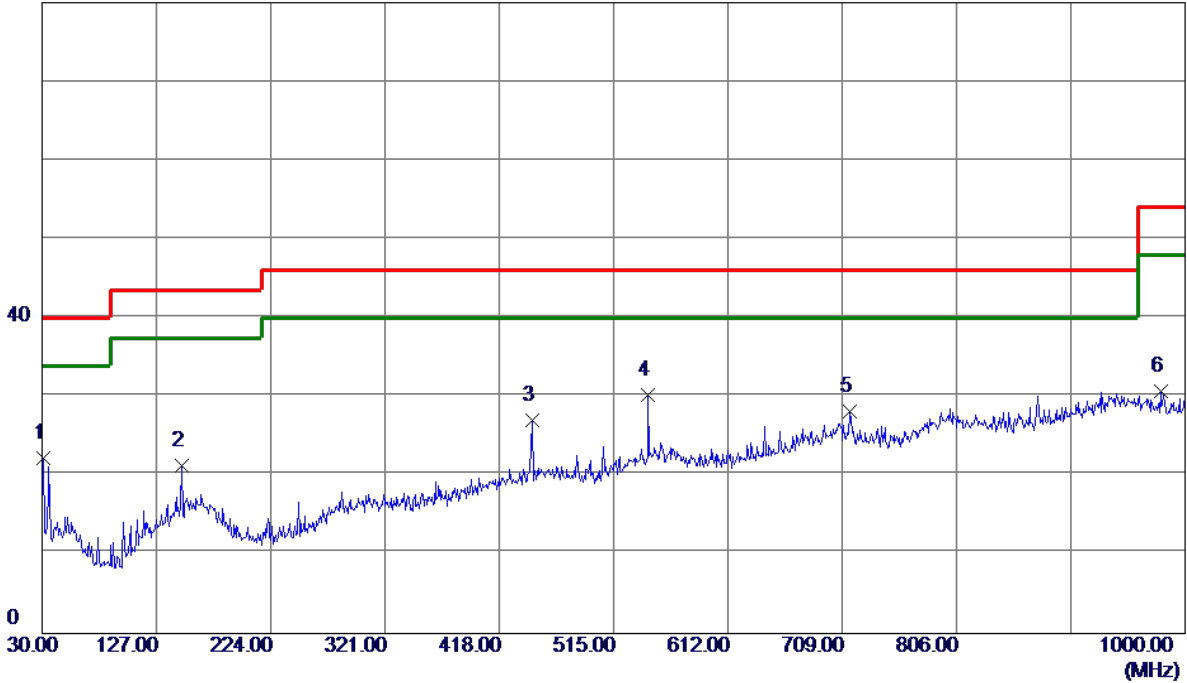


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	31.4550	37.20	-15.02	22.18	40.00	-17.82	Peak	
2	148.3400	32.92	-11.59	21.33	43.50	-22.17	Peak	
3	445.6450	34.68	-7.58	27.10	46.00	-18.90	Peak	
4 *	544.5850	36.00	-5.80	30.20	46.00	-15.80	Peak	
5	715.7900	31.28	-3.15	28.13	46.00	-17.87	Peak	
6	979.1450	30.04	0.72	30.76	54.00	-23.24	Peak	

Test Mode: TX B Mode Channel 06

Horizontal

80 dBuV/m

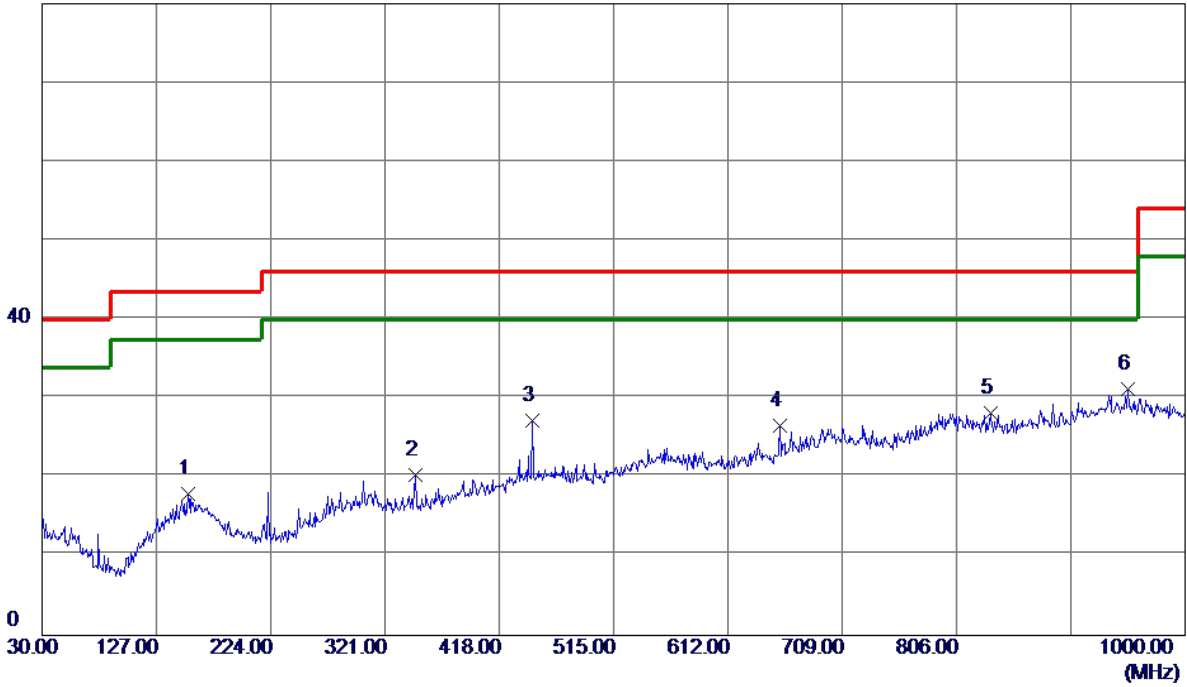


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	154.1600	29.05	-11.12	17.93	43.50	-25.57	Peak	
2	346.7049	31.39	-11.03	20.36	46.00	-25.64	Peak	
3	445.6450	34.82	-7.58	27.24	46.00	-18.76	Peak	
4	656.6200	31.39	-4.85	26.54	46.00	-19.46	Peak	
5	834.6150	29.70	-1.58	28.12	46.00	-17.88	Peak	
6 *	951.5000	29.82	1.37	31.19	46.00	-14.81	Peak	

Test Mode: TX B Mode Channel 11

Vertical

80 dBuV/m

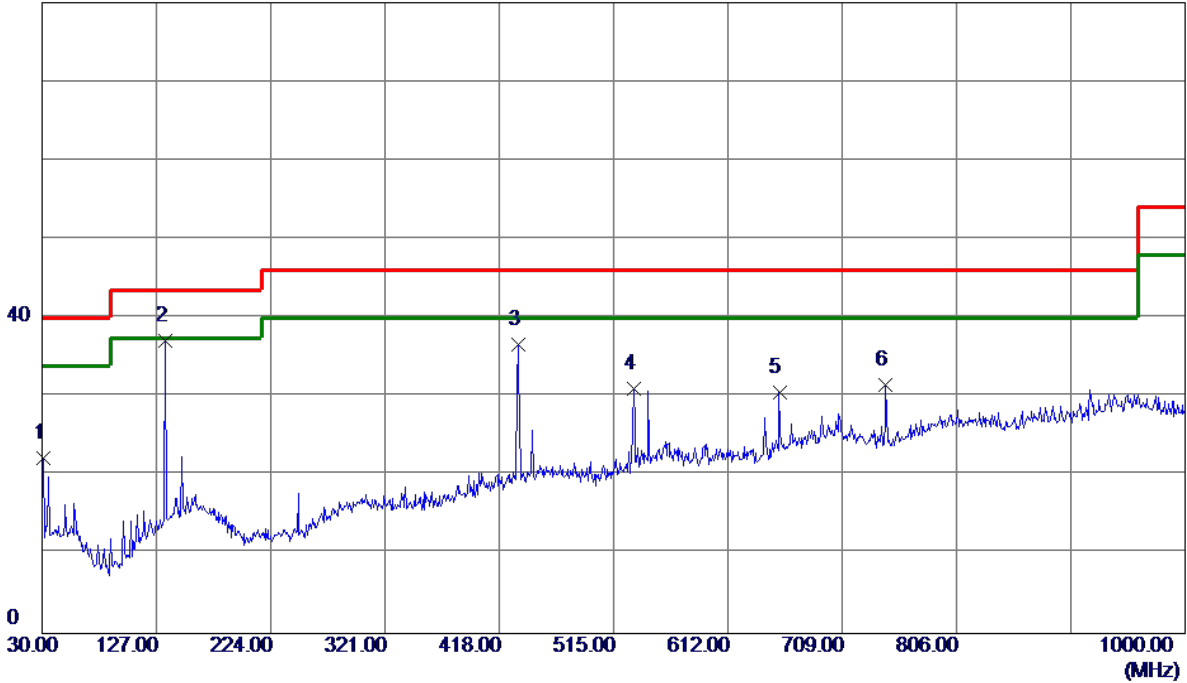


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	31.4550	37.26	-15.02	22.24	40.00	-17.76	Peak	
2 *	134.7600	49.83	-12.77	37.06	43.50	-6.44	Peak	
3	434.0050	44.69	-8.04	36.65	46.00	-9.35	Peak	
4	531.9750	37.63	-6.57	31.06	46.00	-14.94	Peak	
5	655.6500	35.42	-4.90	30.52	46.00	-15.48	Peak	
6	745.8600	35.44	-3.94	31.50	46.00	-14.50	Peak	

Test Mode: TX B Mode Channel 11

Horizontal

80 dBuV/m

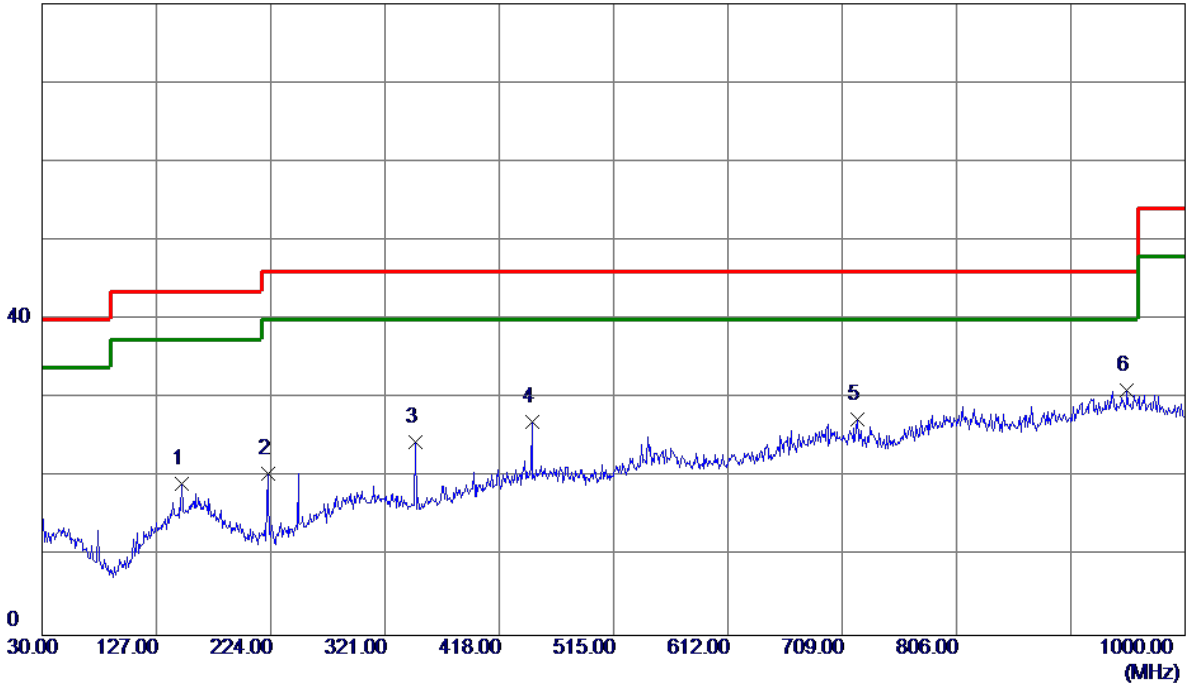


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	148.3400	30.82	-11.59	19.23	43.50	-24.27	Peak	
2	221.5750	35.38	-14.86	20.52	46.00	-25.48	Peak	
3	346.7049	35.53	-11.03	24.50	46.00	-21.50	Peak	
4	445.6450	34.65	-7.58	27.07	46.00	-18.93	Peak	
5	722.0949	30.63	-3.32	27.31	46.00	-18.69	Peak	
6 *	950.5300	29.71	1.40	31.11	46.00	-14.89	Peak	

APPENDIX C - RADIATED EMISSION (ABOVE 1000MHZ)

Orthogonal Axis	X
Test Mode:	TX B Mode 2412 MHz

Vertical

130 dBuV/m

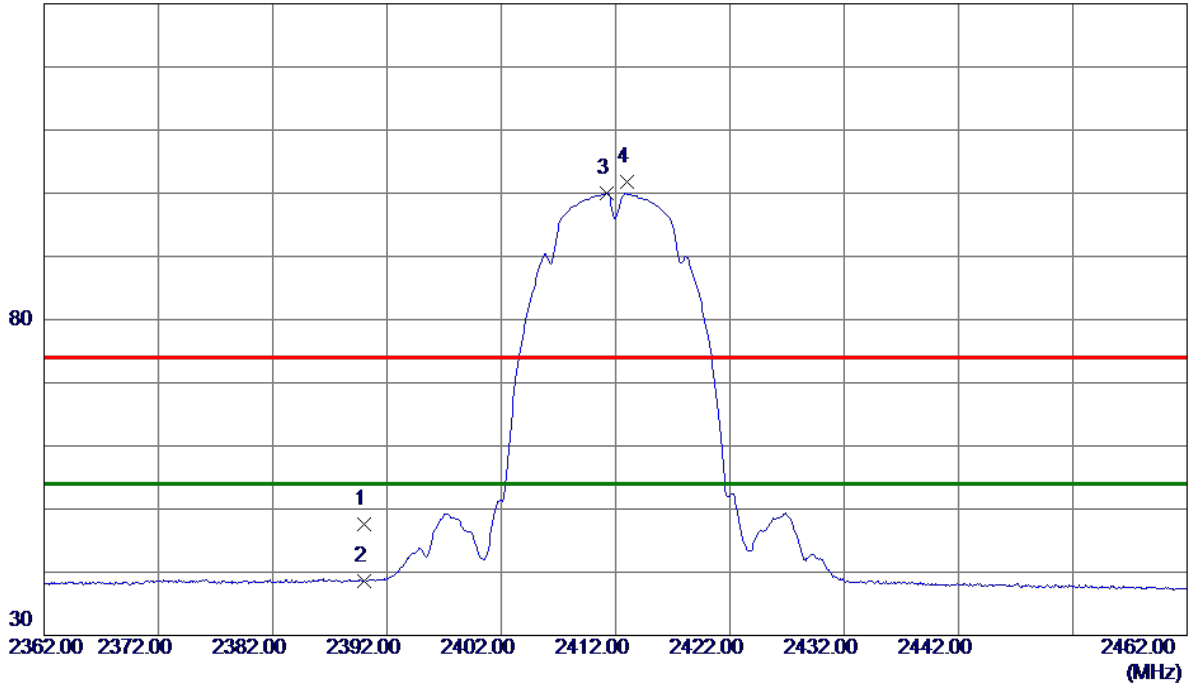


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2390.0000	40.30	7.39	47.69	74.00	-26.31	Peak	
2	2390.0000	31.26	7.39	38.65	54.00	-15.35	AVG	
3 *	2411.2000	92.60	7.37	99.97	54.00	45.97	AVG	No Limit
4	2412.9500	94.49	7.37	101.86	74.00	27.86	Peak	No Limit

Orthogonal Axis	X
Test Mode:	TX B Mode 2412 MHz

Vertical

130 dBuV/m

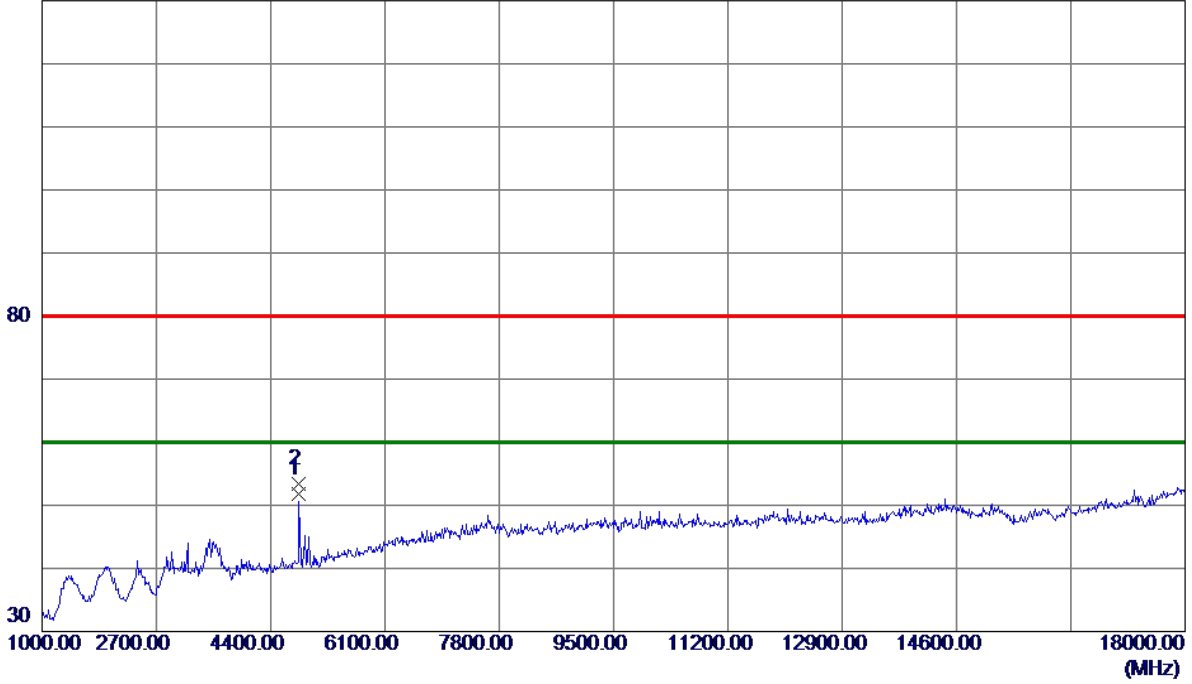


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	4823.9540	48.28	3.49	51.77	60.00	-8.23	AVG	
2	4823.9660	49.83	3.49	53.32	80.00	-26.68	Peak	

Orthogonal Axis	X
Test Mode:	TX B Mode 2412 MHz

Vertical


130 dBuV/m

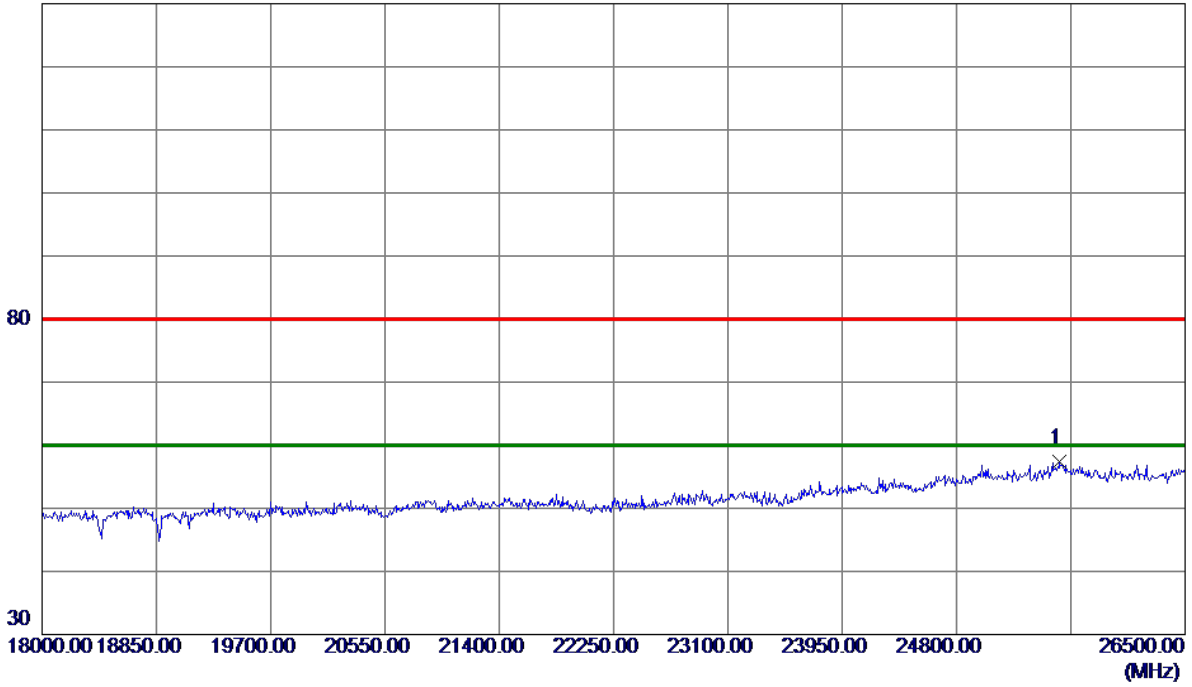

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	25569.2500	40.05	17.25	57.30	80.00	-22.70	Peak	

Orthogonal Axis	X
Test Mode:	TX B Mode 2412 MHz

Horizontal

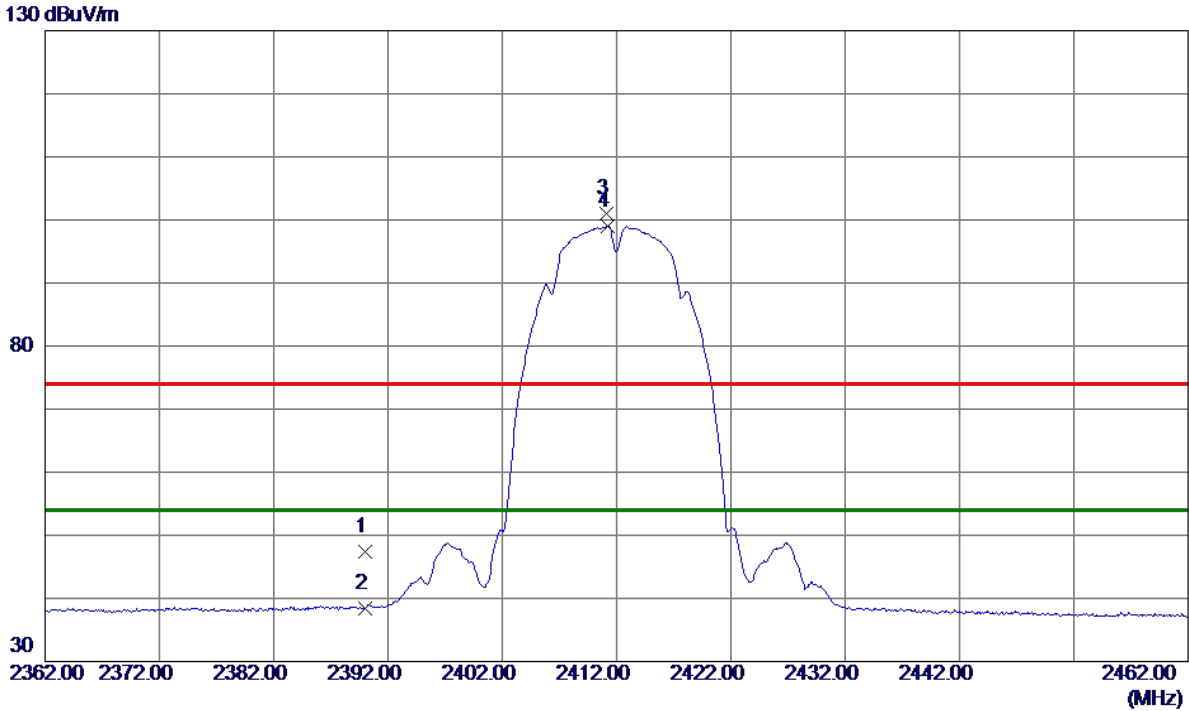


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2390.0000	39.95	7.39	47.34	74.00	-26.66	Peak	
2	2390.0000	31.05	7.39	38.44	54.00	-15.56	AVG	
3	2411.1500	93.53	7.37	100.90	74.00	26.90	Peak	No Limit
4 *	2411.2500	91.61	7.37	98.98	54.00	44.98	AVG	No Limit

Orthogonal Axis	X
Test Mode:	TX B Mode 2412 MHz

Horizontal

130 dBuV/m

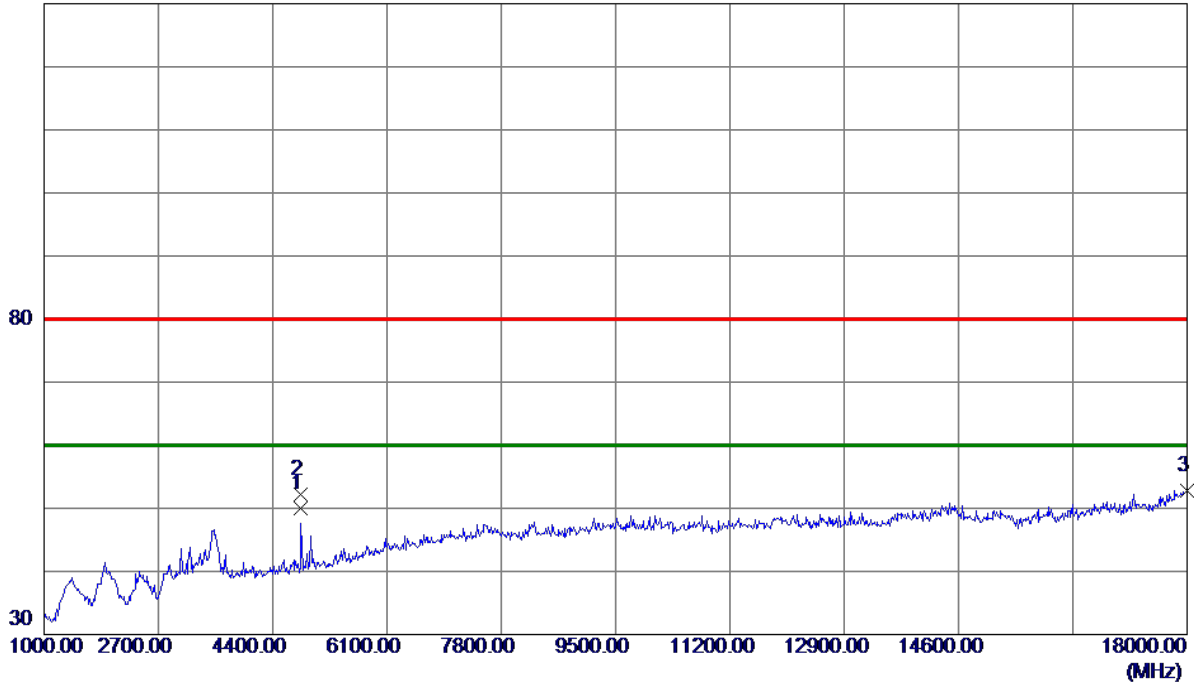


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	4823.9790	46.59	3.49	50.08	60.00	-9.92	AVG	
2	4824.0940	48.67	3.49	52.16	80.00	-27.84	Peak	
3	18000.0000	35.07	17.77	52.84	80.00	-27.16	Peak	

Orthogonal Axis	X
Test Mode:	TX B Mode 2412 MHz

Horizontal


130 dBuV/m

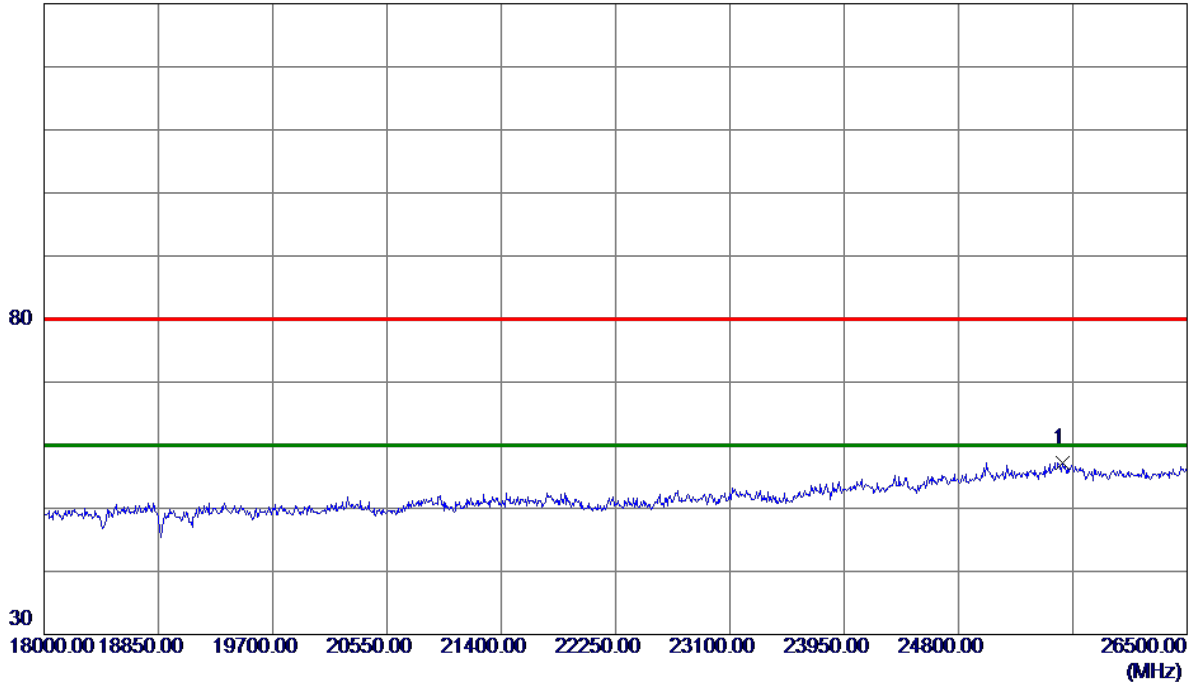

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	25573.5000	39.97	17.24	57.21	80.00	-22.79	Peak	

Orthogonal Axis	X
Test Mode:	TX B Mode 2437 MHz

Vertical

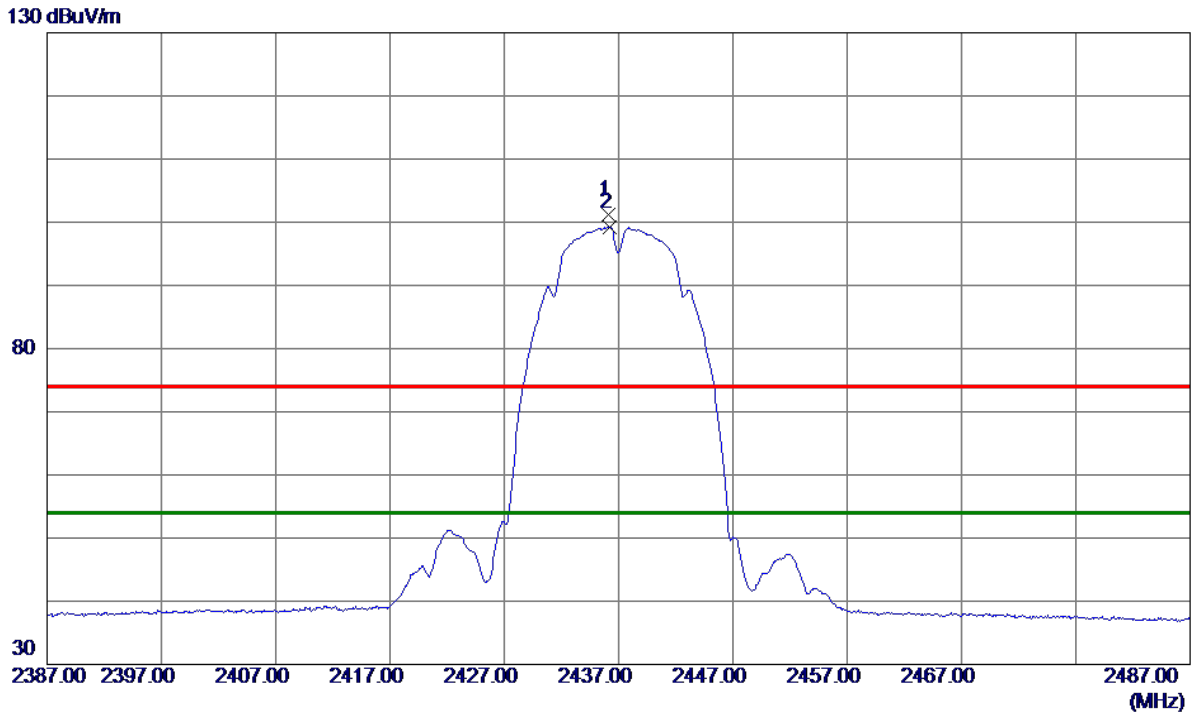


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2436.1500	93.76	7.35	101.11	74.00	27.11	Peak	No Limit
2 *	2436.2000	91.88	7.35	99.23	54.00	45.23	AVG	No Limit

Orthogonal Axis	X
Test Mode:	TX B Mode 2437 MHz

Vertical

130 dBuV/m

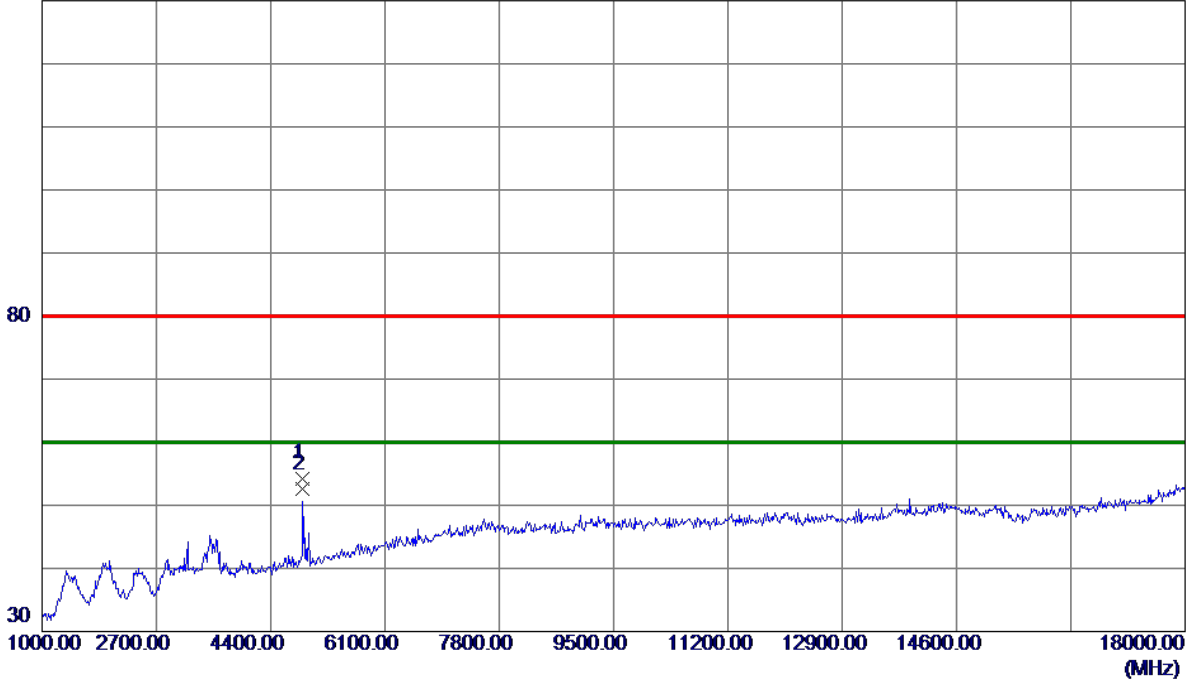


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	4873.8980	50.69	3.61	54.30	80.00	-25.70	Peak	
2 *	4873.9730	49.00	3.61	52.61	60.00	-7.39	AVG	

Orthogonal Axis	X
Test Mode:	TX B Mode 2437 MHz

Vertical


130 dBuV/m

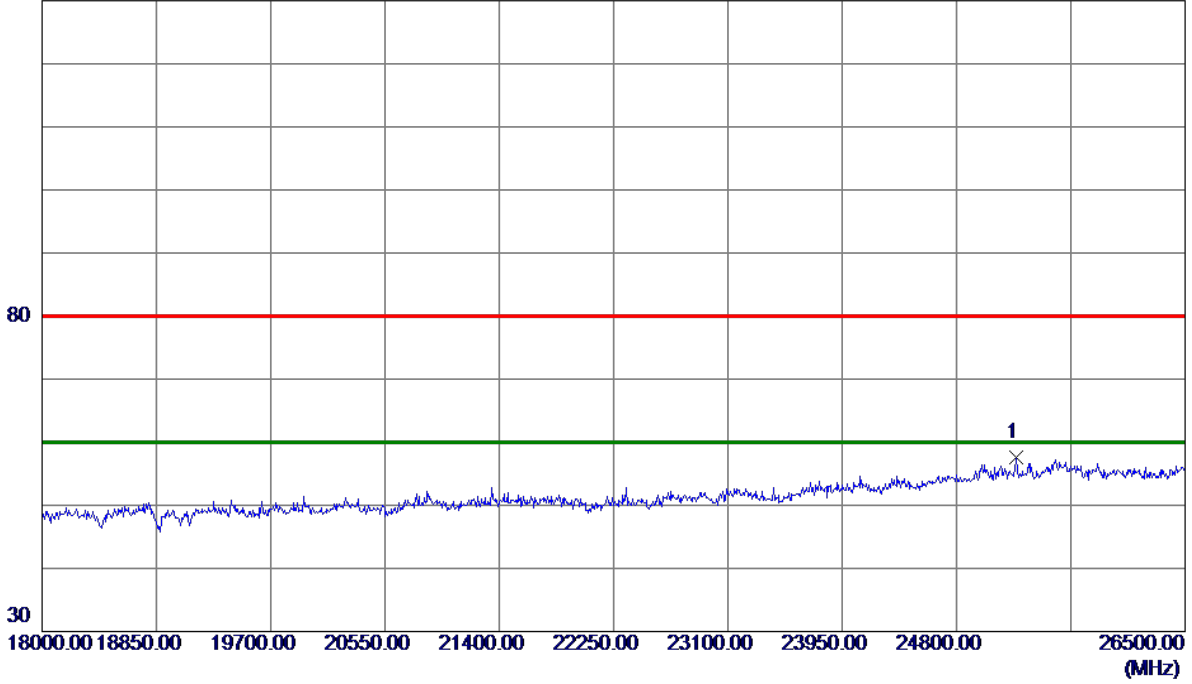

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	25242.0000	40.34	17.17	57.51	80.00	-22.49	Peak	

Orthogonal Axis	X
Test Mode:	TX B Mode 2437 MHz

Horizontal

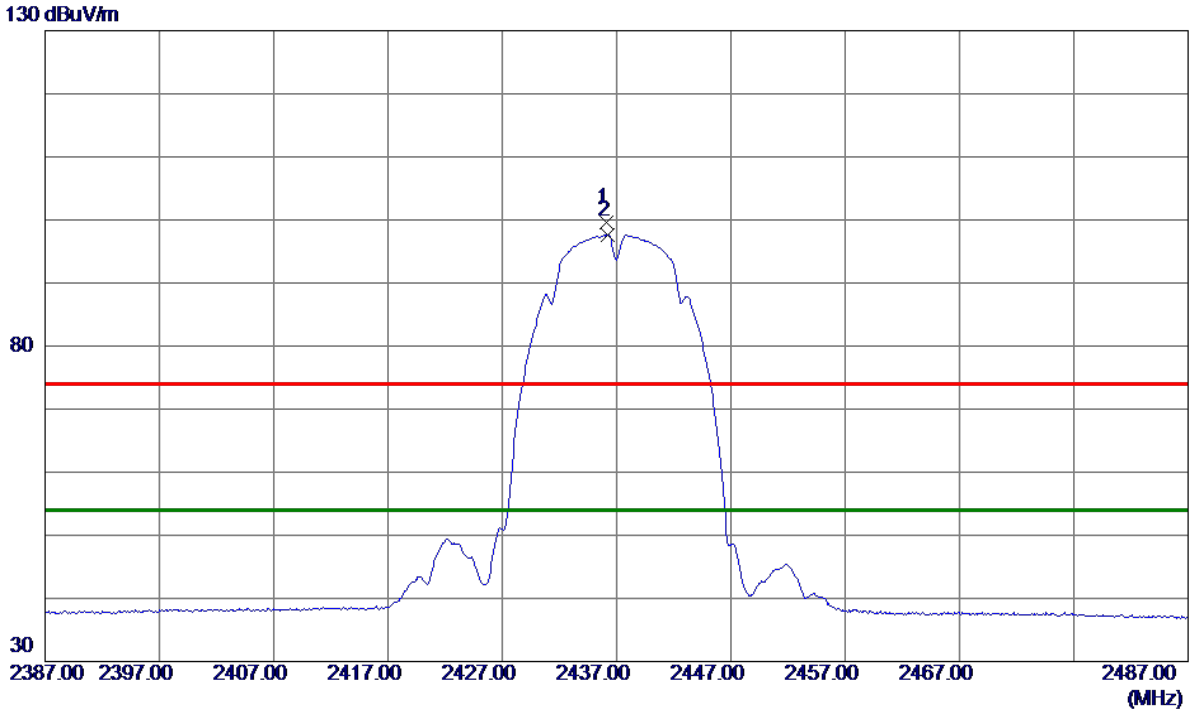


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2436.1500	92.22	7.35	99.57	74.00	25.57	Peak	No Limit
2 *	2436.2500	90.31	7.35	97.66	54.00	43.66	AVG	No Limit

Orthogonal Axis	X
Test Mode:	TX B Mode 2437 MHz

Horizontal

130 dBuV/m

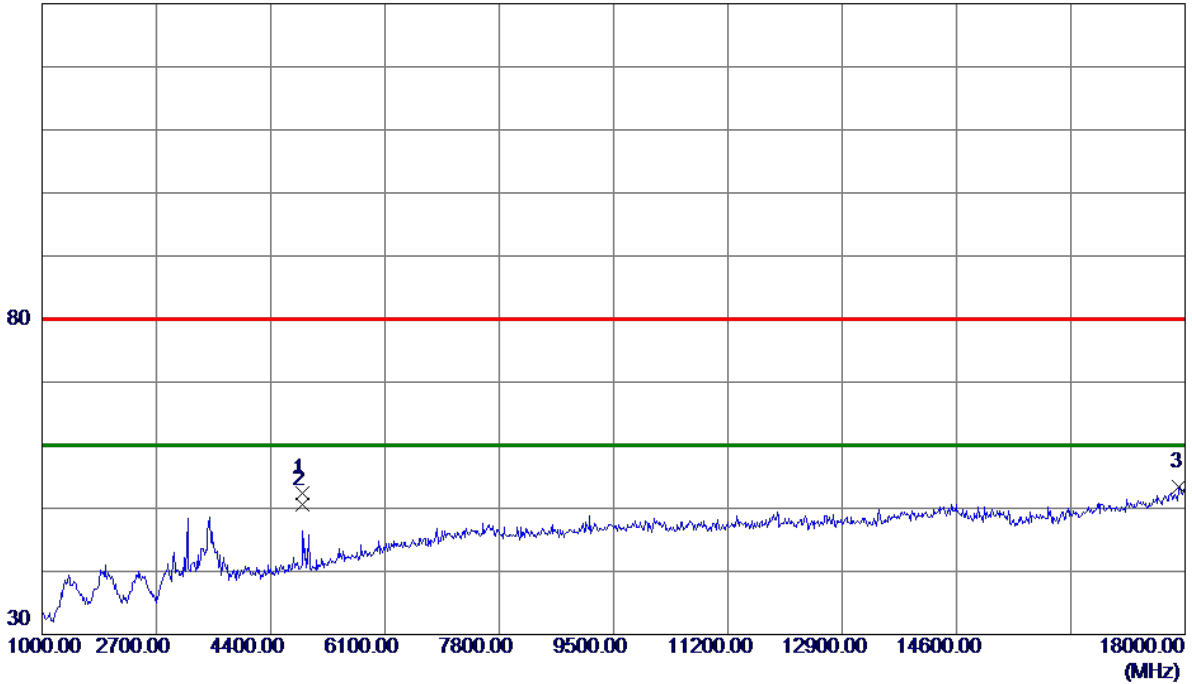


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	4873.9650	48.78	3.61	52.39	80.00	-27.61	Peak	
2 *	4873.9770	46.91	3.61	50.52	60.00	-9.48	AVG	
3	17915.0000	35.88	17.51	53.39	80.00	-26.61	Peak	

Orthogonal Axis	X
Test Mode:	TX B Mode 2437 MHz

Horizontal

130 dBuV/m

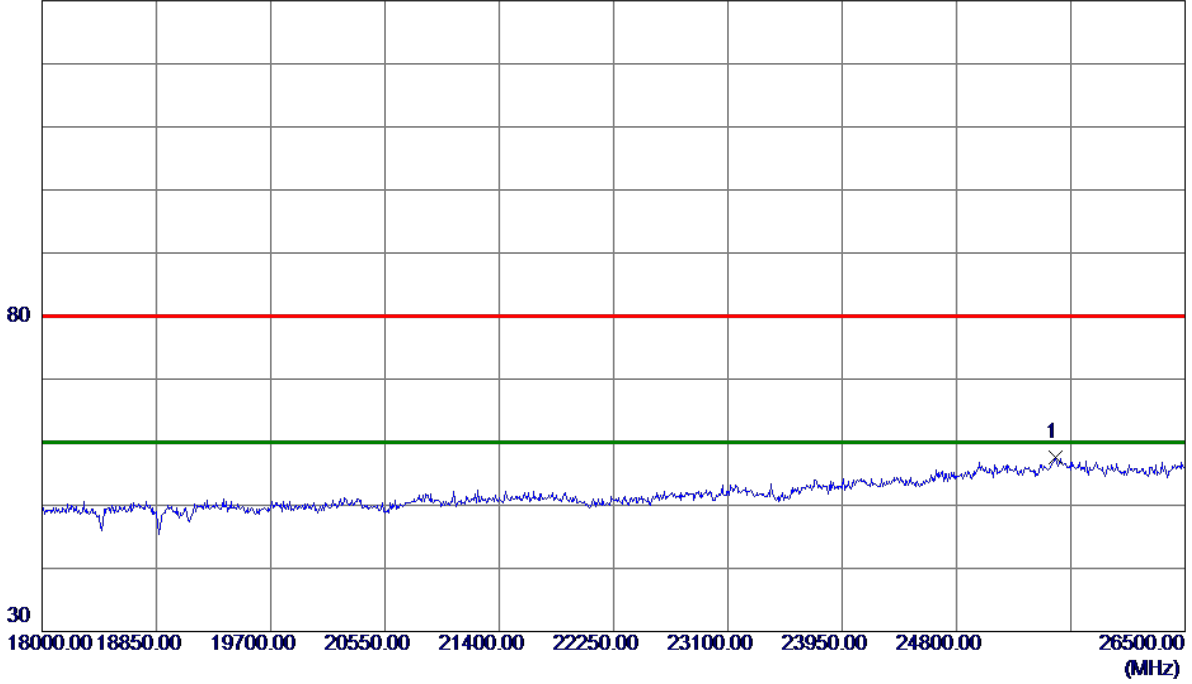


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	25535.2500	40.37	17.28	57.65	80.00	-22.35	Peak	

Orthogonal Axis	X
Test Mode:	TX B Mode 2462 MHz

Vertical

130 dBuV/m

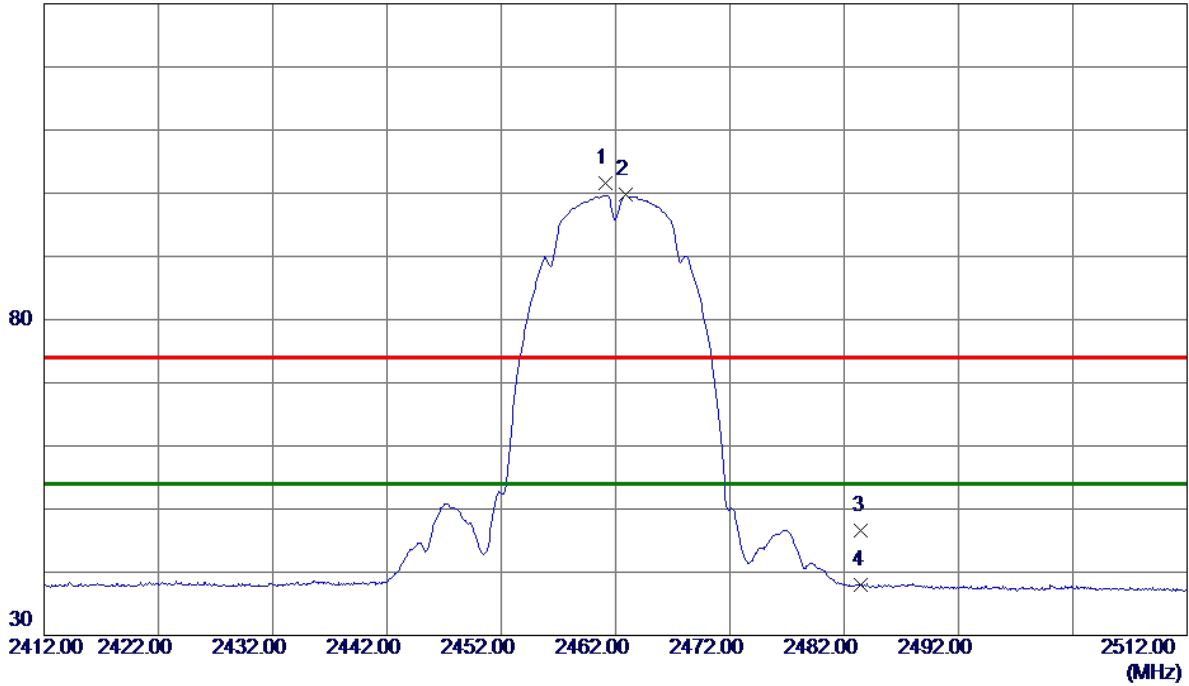


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2461.1500	94.27	7.33	101.60	74.00	27.60	Peak	No Limit
2 *	2462.9000	92.44	7.33	99.77	54.00	45.77	AVG	No Limit
3	2483.5000	39.26	7.32	46.58	74.00	-27.42	Peak	
4	2483.5000	30.75	7.32	38.07	54.00	-15.93	AVG	

Orthogonal Axis	X
Test Mode:	TX B Mode 2462 MHz

Vertical

130 dBuV/m

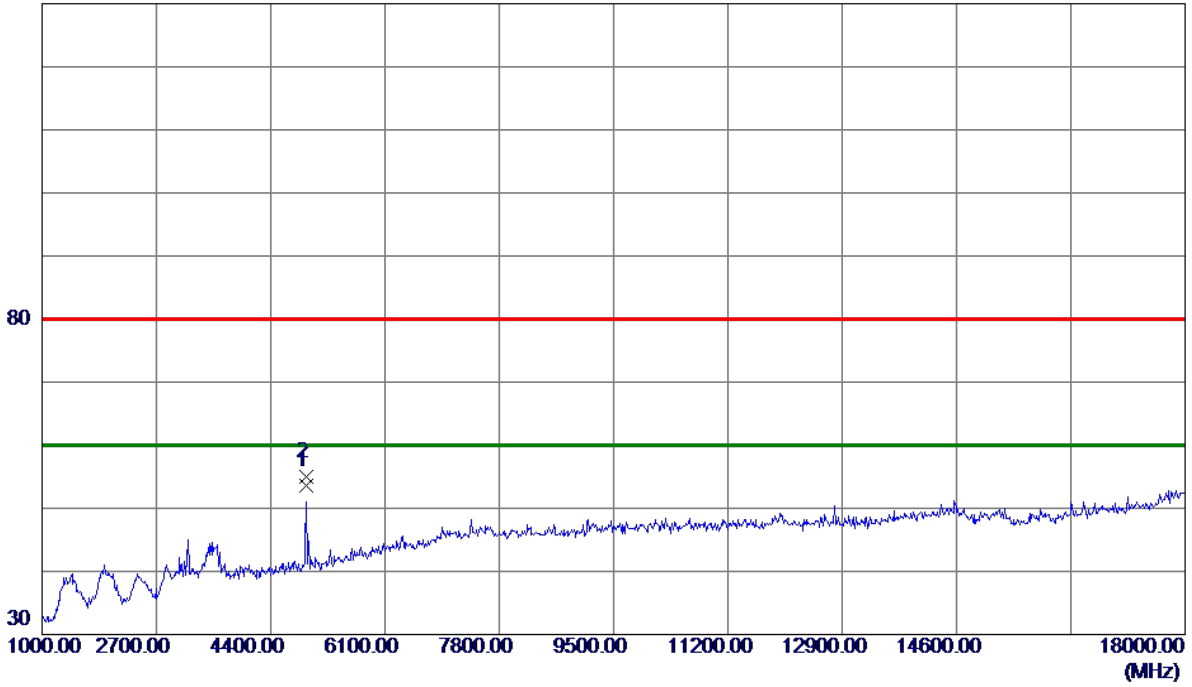


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	4923.9400	49.86	3.73	53.59	60.00	-6.41	AVG	
2	4923.9540	51.28	3.73	55.01	80.00	-24.99	Peak	

Orthogonal Axis	X
Test Mode:	TX B Mode 2462 MHz

Vertical

130 dBuV/m

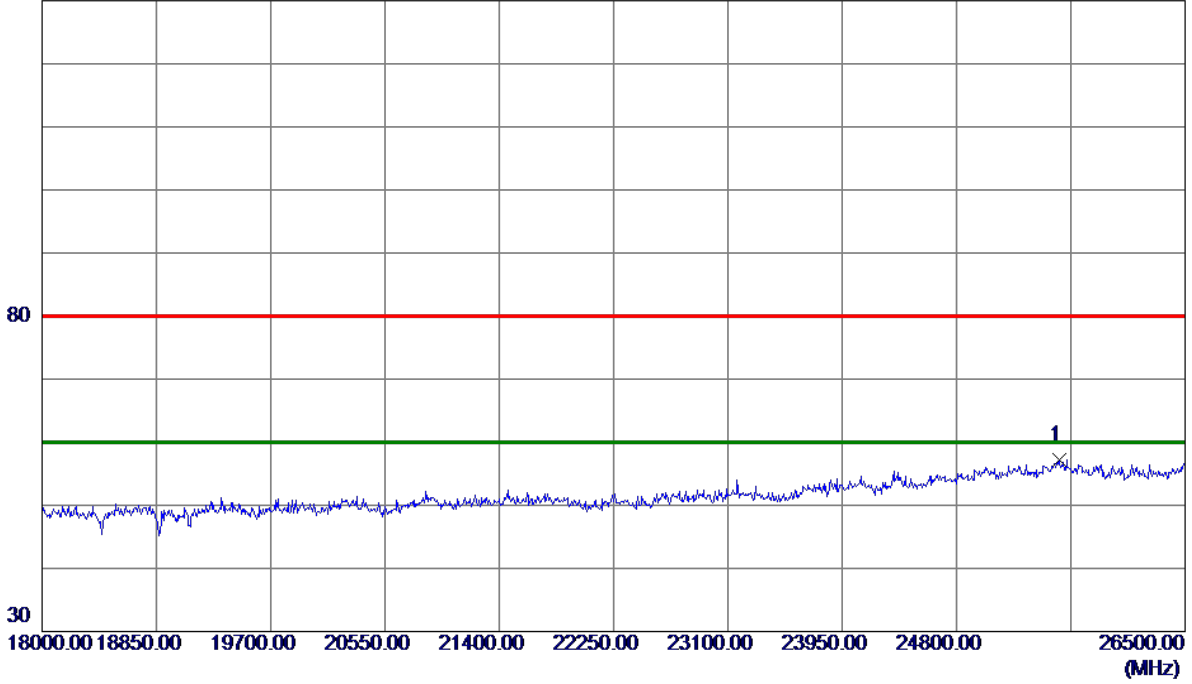


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	25560.7500	40.03	17.26	57.29	80.00	-22.71	Peak	

Orthogonal Axis	X
Test Mode:	TX B Mode 2462 MHz

Horizontal

130 dBuV/m

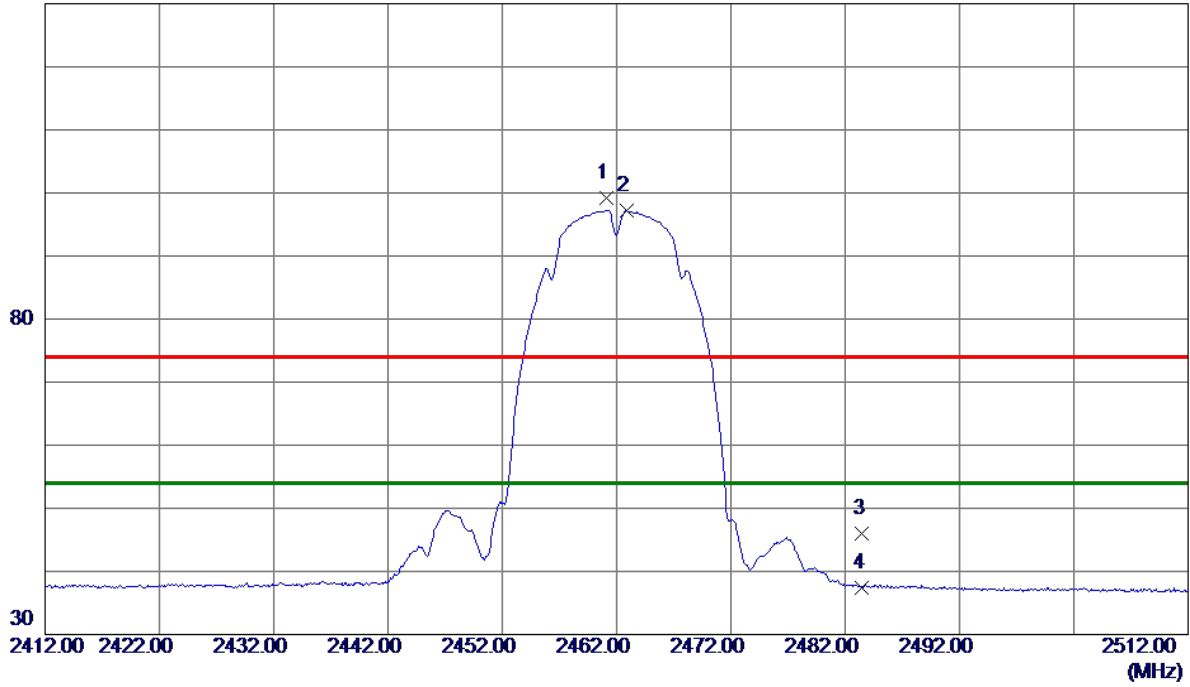


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2461.1500	91.79	7.33	99.12	74.00	25.12	Peak	No Limit
2 *	2462.8500	89.94	7.33	97.27	54.00	43.27	AVG	No Limit
3	2483.5000	38.59	7.32	45.91	74.00	-28.09	Peak	
4	2483.5000	30.02	7.32	37.34	54.00	-16.66	AVG	

Orthogonal Axis	X
Test Mode:	TX B Mode 2462 MHz

Horizontal

130 dBuV/m

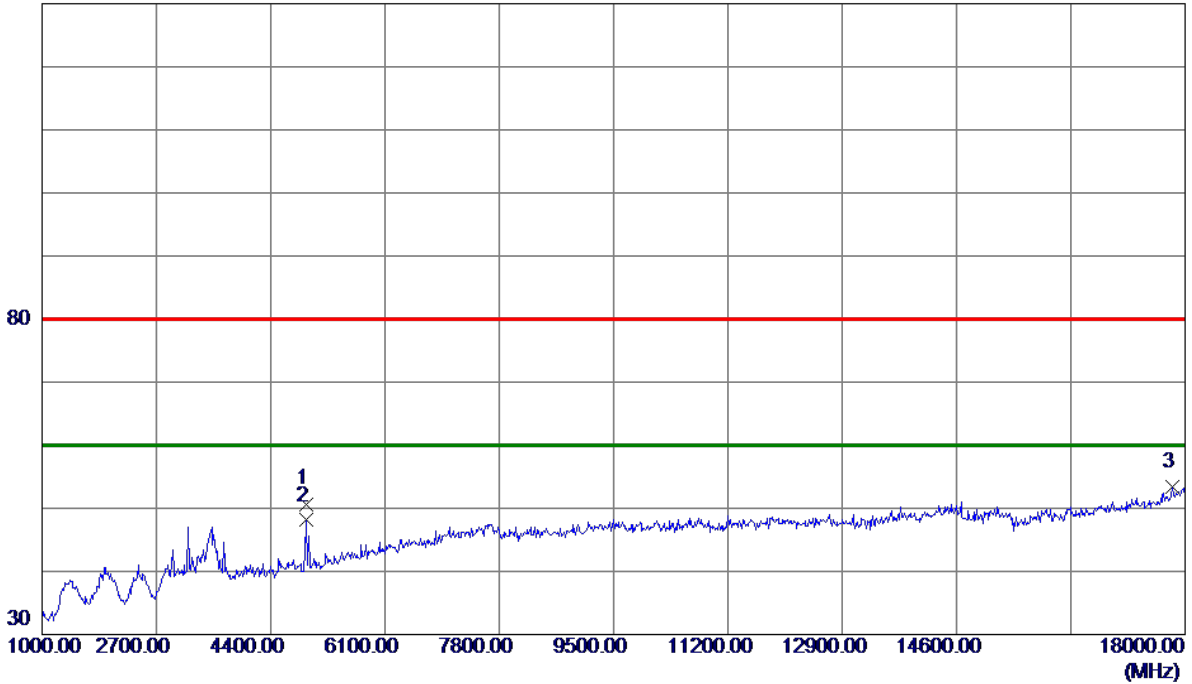


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	4923.8900	46.97	3.73	50.70	80.00	-29.30	Peak	
2 *	4923.9530	44.37	3.73	48.10	60.00	-11.90	AVG	
3	17804.5000	36.26	17.18	53.44	80.00	-26.56	Peak	

Orthogonal Axis	X
Test Mode:	TX B Mode 2462 MHz

Horizontal

130 dBuV/m

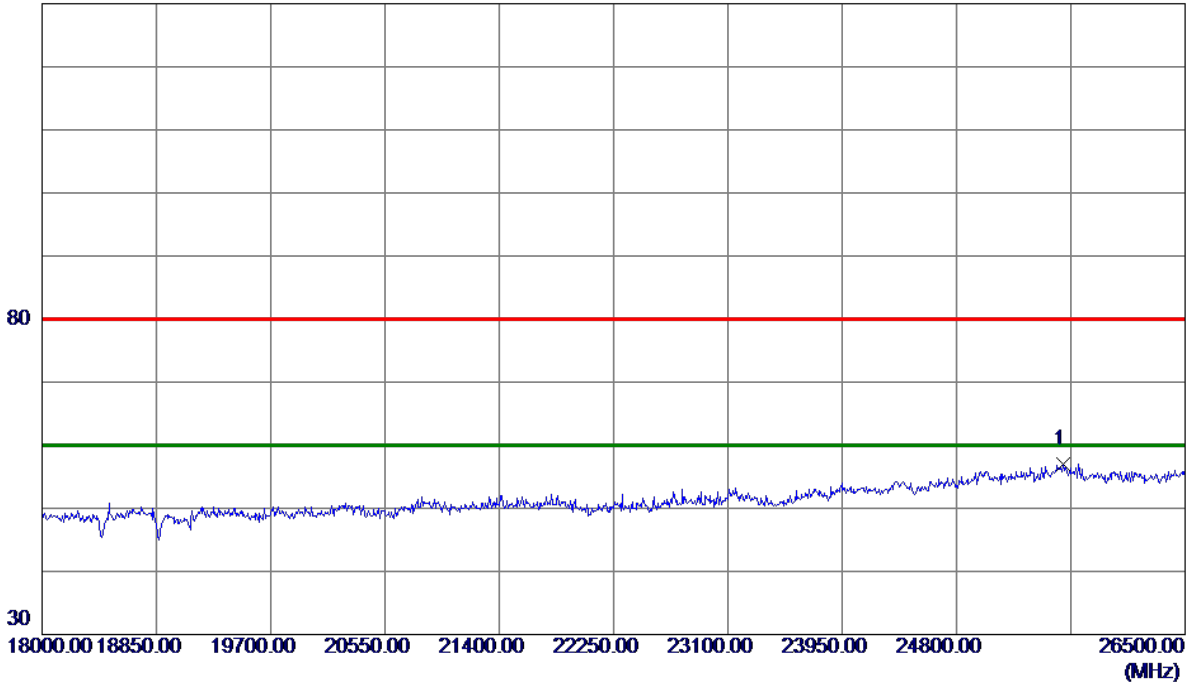


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	25594.7500	39.79	17.22	57.01	80.00	-22.99	Peak	

Orthogonal Axis	X
Test Mode:	TX G Mode 2412 MHz

Vertical

130 dBuV/m

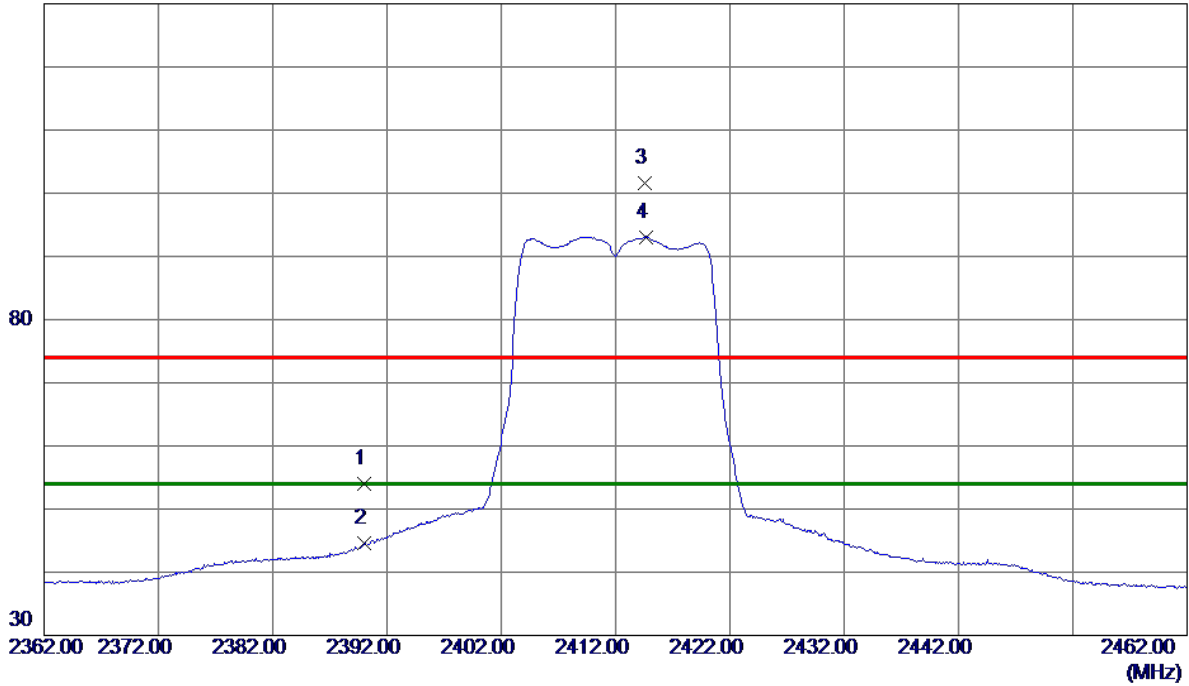


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2390.0000	46.59	7.39	53.98	74.00	-20.02	Peak	
2	2390.0000	37.21	7.39	44.60	54.00	-9.40	AVG	
3	2414.6000	94.28	7.37	101.65	74.00	27.65	Peak	No Limit
4 *	2414.6500	85.73	7.37	93.10	54.00	39.10	AVG	No Limit

Orthogonal Axis	X
Test Mode:	TX G Mode 2412 MHz

Vertical

130 dBuV/m

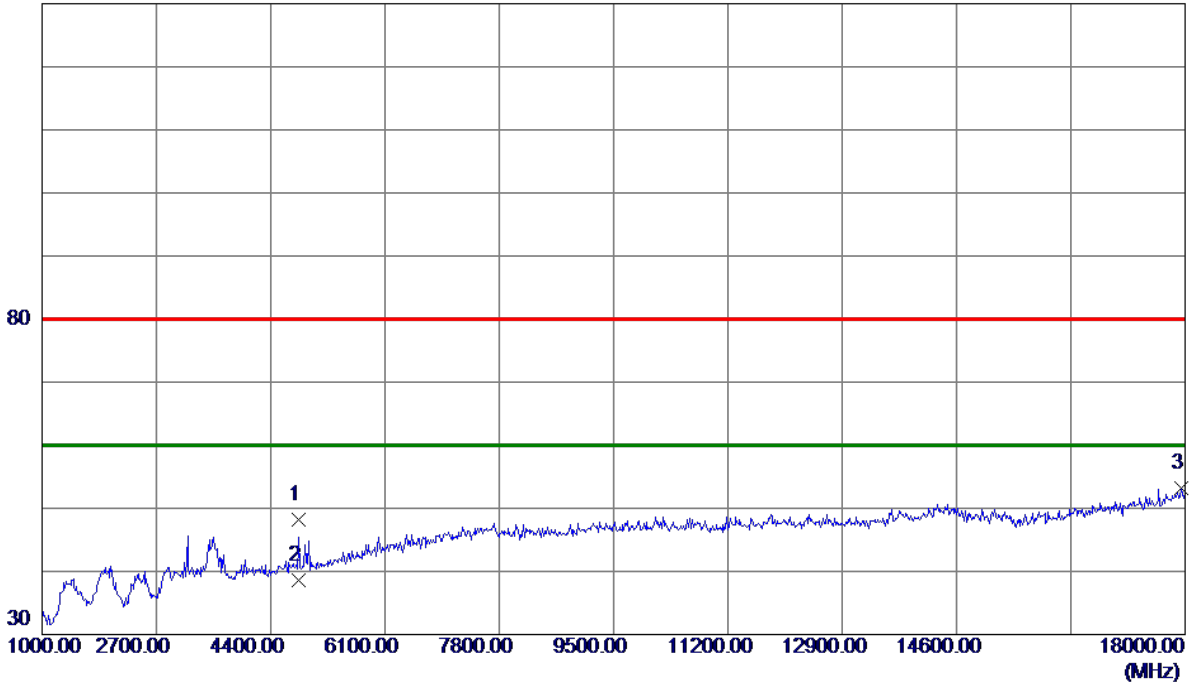


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	4822.9600	44.72	3.49	48.21	80.00	-31.79	Peak	
2 *	4823.8700	35.19	3.49	38.68	60.00	-21.32	AVG	
3	17949.0000	35.51	17.62	53.13	80.00	-26.87	Peak	

Orthogonal Axis	X
Test Mode:	TX G Mode 2412 MHz

Vertical


130 dBuV/m

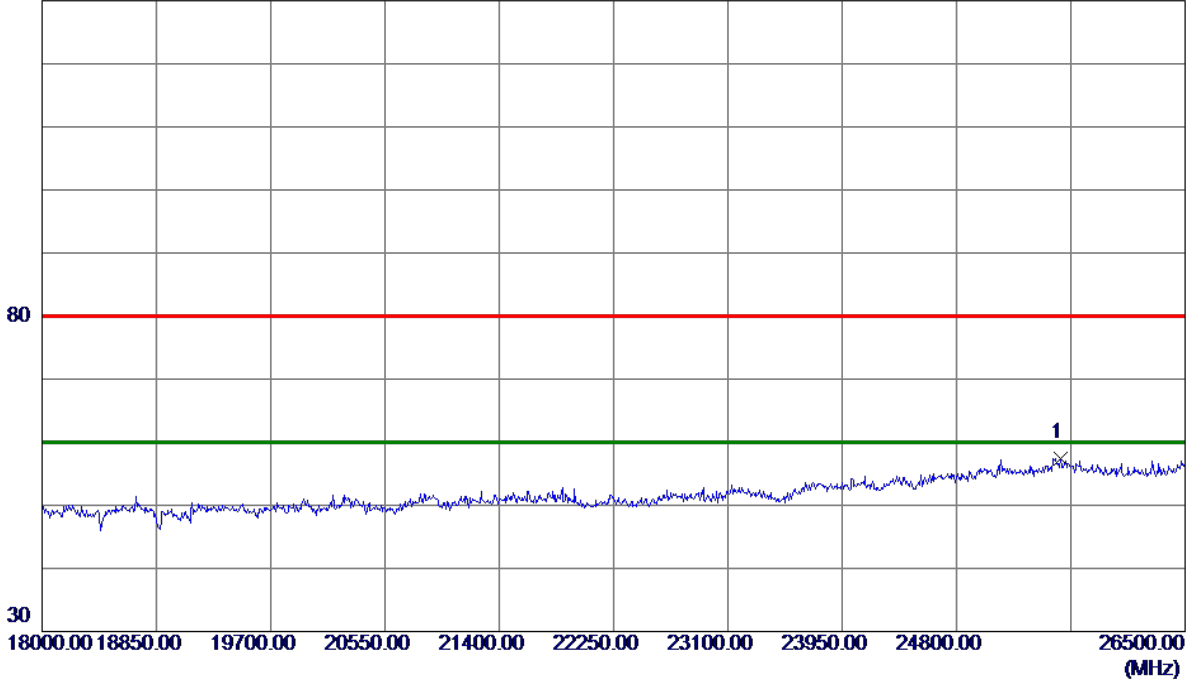

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	25573.5000	40.26	17.24	57.50	80.00	-22.50	Peak	

Orthogonal Axis	X
Test Mode:	TX G Mode 2412 MHz

Horizontal

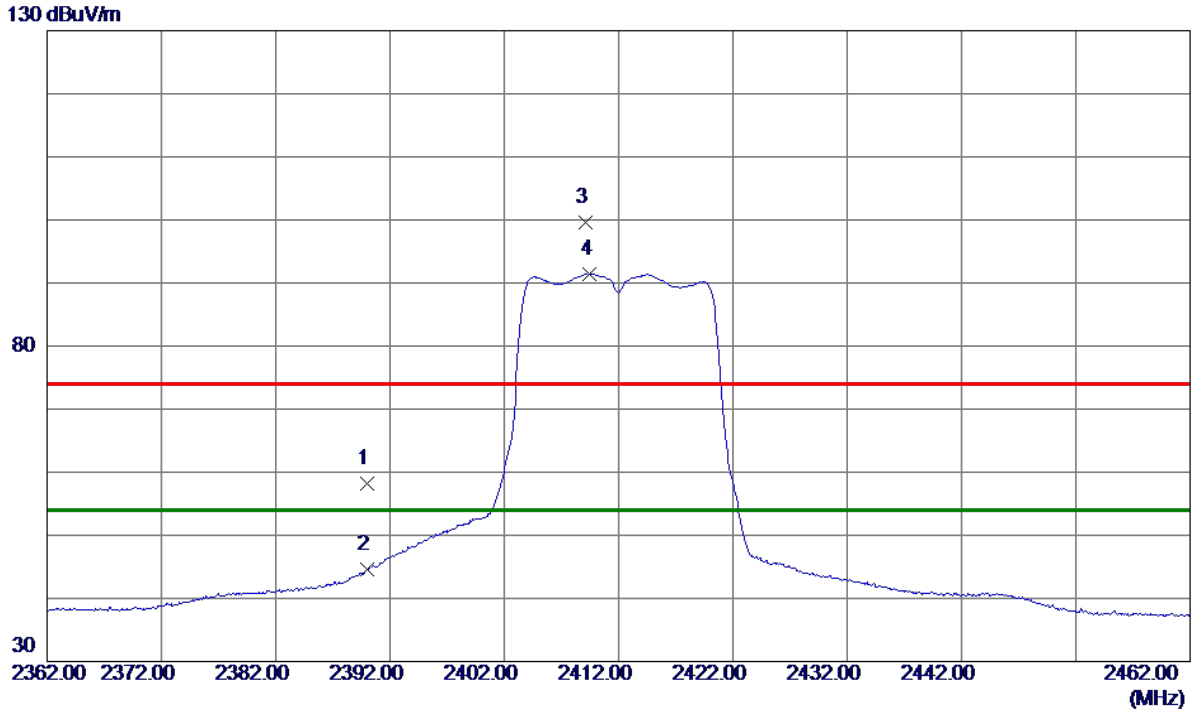


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2390.0000	50.89	7.39	58.28	74.00	-15.72	Peak	
2	2390.0000	37.21	7.39	44.60	54.00	-9.40	AVG	
3	2409.1500	92.17	7.37	99.54	74.00	25.54	Peak	No Limit
4 *	2409.5000	84.04	7.37	91.41	54.00	37.41	AVG	No Limit

Orthogonal Axis	X
Test Mode:	TX G Mode 2412 MHz

Horizontal

130 dBuV/m

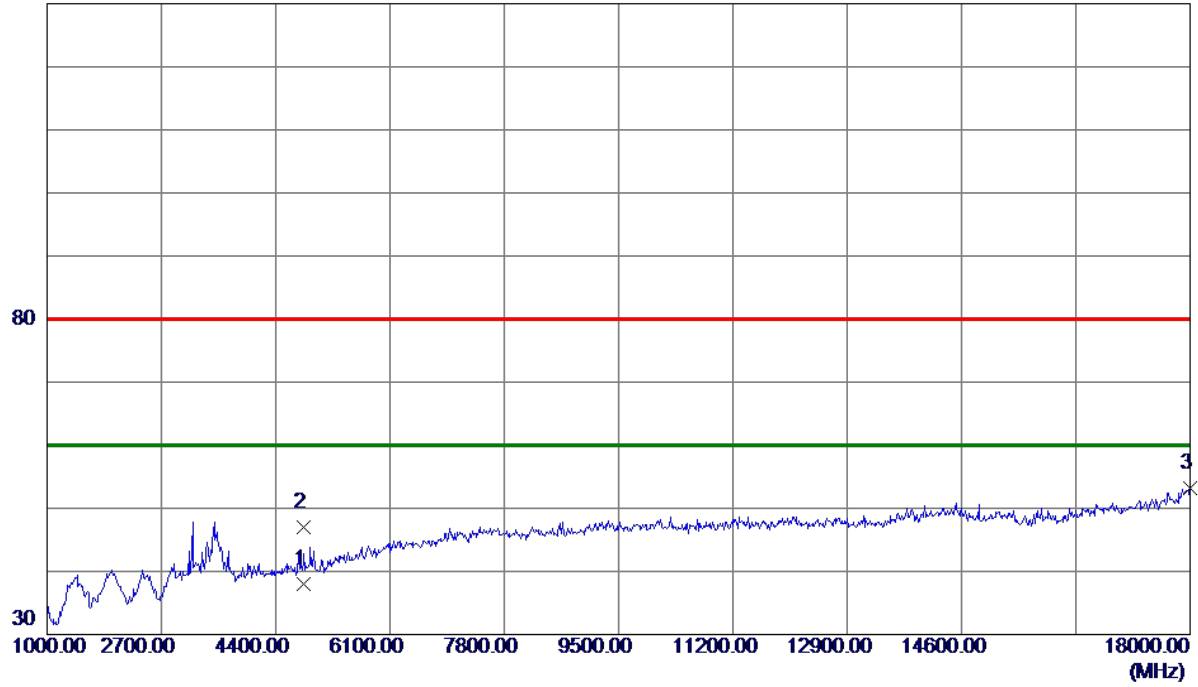


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	4823.9800	34.49	3.49	37.98	60.00	-22.02	AVG	
2	4824.3300	43.50	3.50	47.00	80.00	-33.00	Peak	
3	18000.0000	35.49	17.77	53.26	80.00	-26.74	Peak	

Orthogonal Axis	X
Test Mode:	TX G Mode 2412 MHz

Horizontal

130 dBuV/m

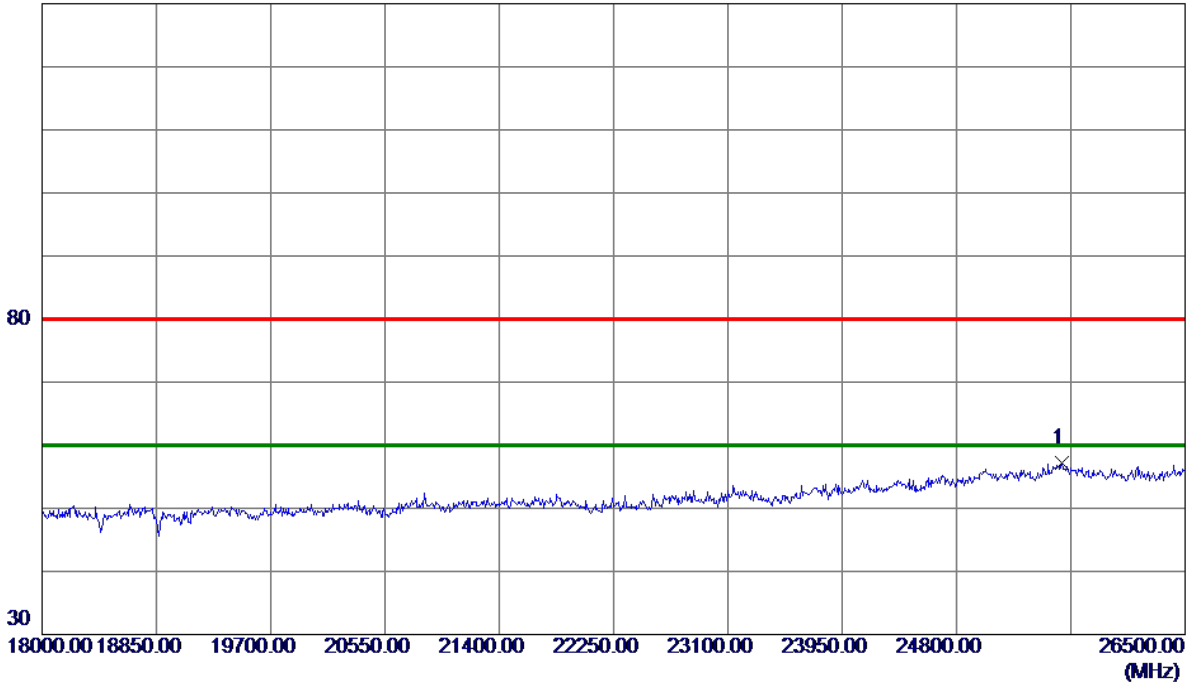


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	25586.2500	40.03	17.23	57.26	80.00	-22.74	Peak	

Orthogonal Axis	X
Test Mode:	TX G Mode 2437 MHz

Vertical

130 dBuV/m

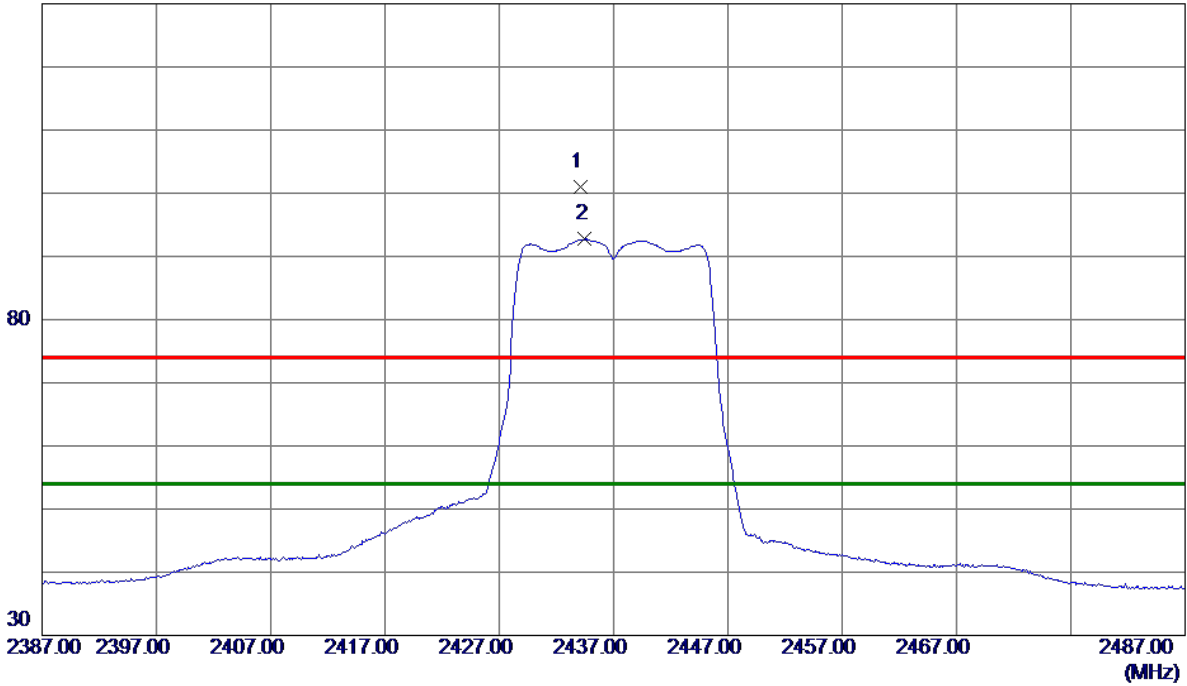


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2434.1500	93.57	7.35	100.92	74.00	26.92	Peak	No Limit
2 *	2434.5000	85.38	7.35	92.73	54.00	38.73	AVG	No Limit

Orthogonal Axis	X
Test Mode:	TX G Mode 2437 MHz

Vertical

130 dBuV/m

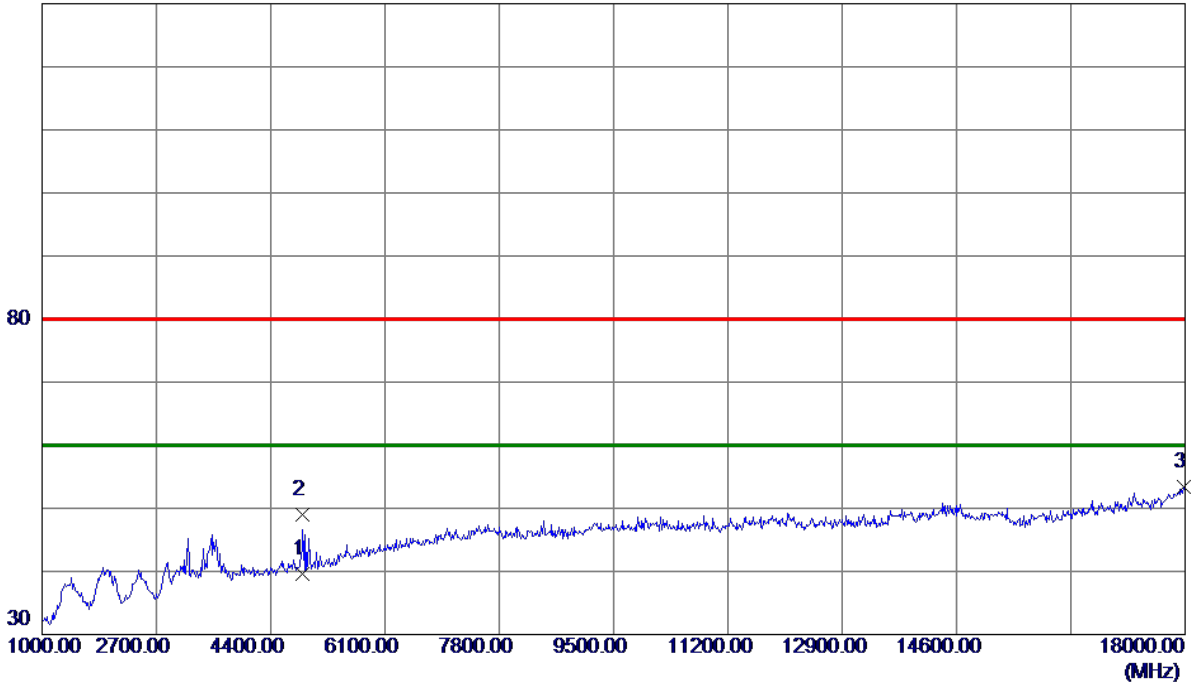


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	4873.9950	35.90	3.61	39.51	60.00	-20.49	AVG	
2	4874.6250	45.37	3.61	48.98	80.00	-31.02	Peak	
3	17974.5000	35.75	17.69	53.44	80.00	-26.56	Peak	

Orthogonal Axis	X
Test Mode:	TX G Mode 2437 MHz

Vertical


130 dBuV/m

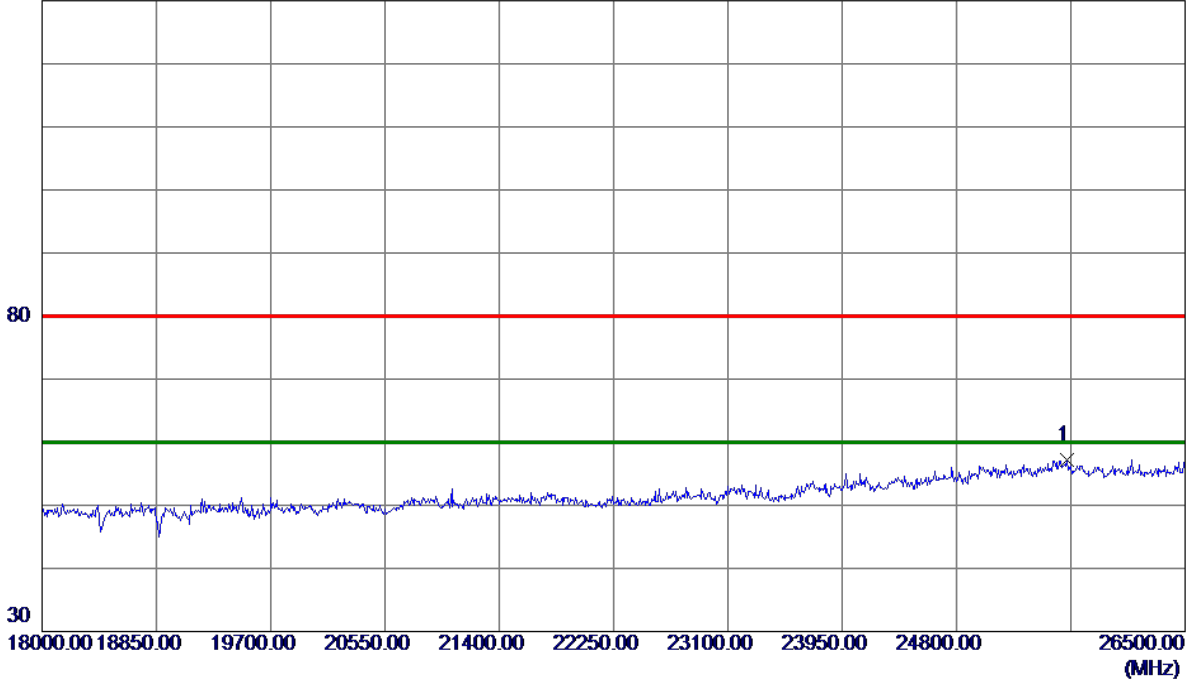

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	25624.5000	40.06	17.18	57.24	80.00	-22.76	Peak	

Orthogonal Axis	X
Test Mode:	TX G Mode 2437 MHz

Horizontal

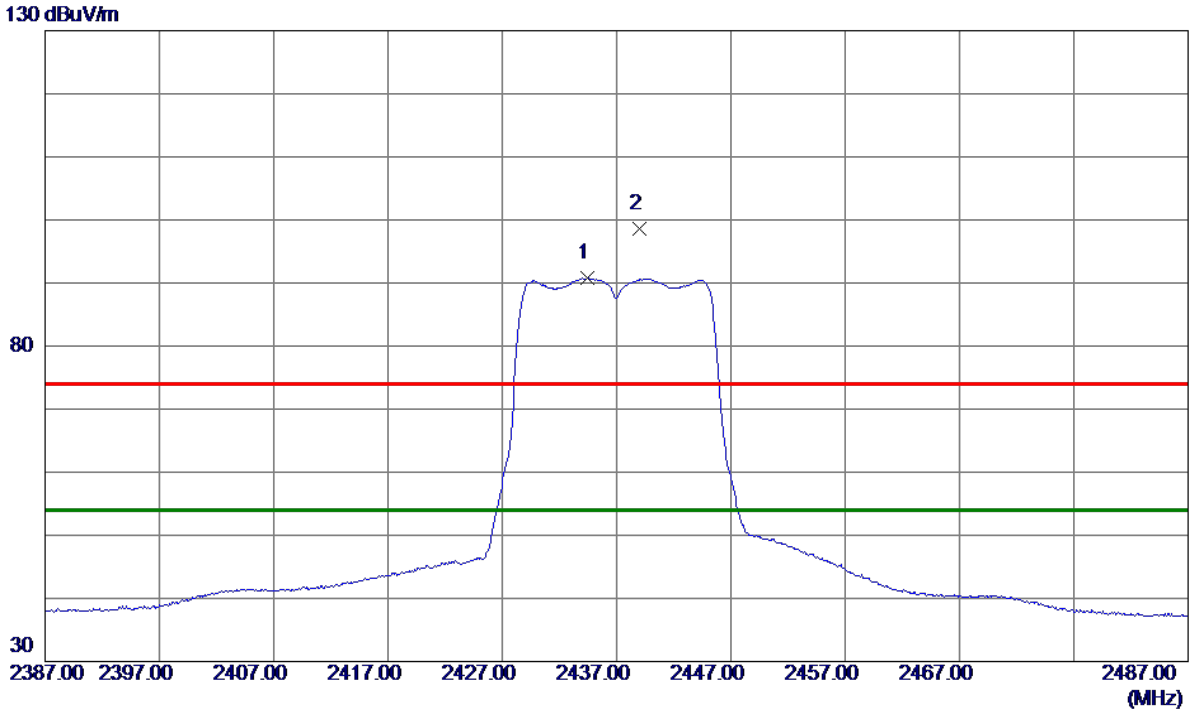


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	2434.4500	83.43	7.35	90.78	54.00	36.78	AVG	No Limit
2	2438.9500	91.32	7.35	98.67	74.00	24.67	Peak	No Limit

Orthogonal Axis	X
Test Mode:	TX G Mode 2437 MHz

Horizontal

130 dBuV/m

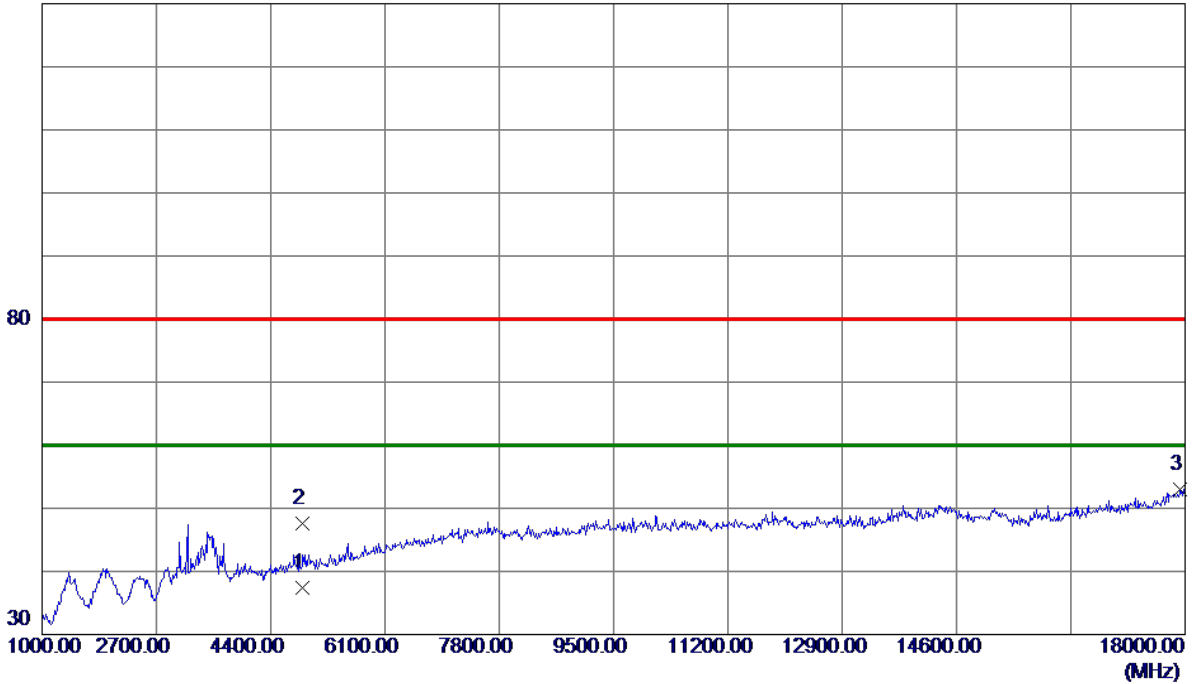


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	4873.9650	33.75	3.61	37.36	60.00	-22.64	AVG	
2	4874.2599	44.03	3.61	47.64	80.00	-32.36	Peak	
3	17932.0000	35.37	17.56	52.93	80.00	-27.07	Peak	

Orthogonal Axis	X
Test Mode:	TX G Mode 2437 MHz

Horizontal

130 dBuV/m

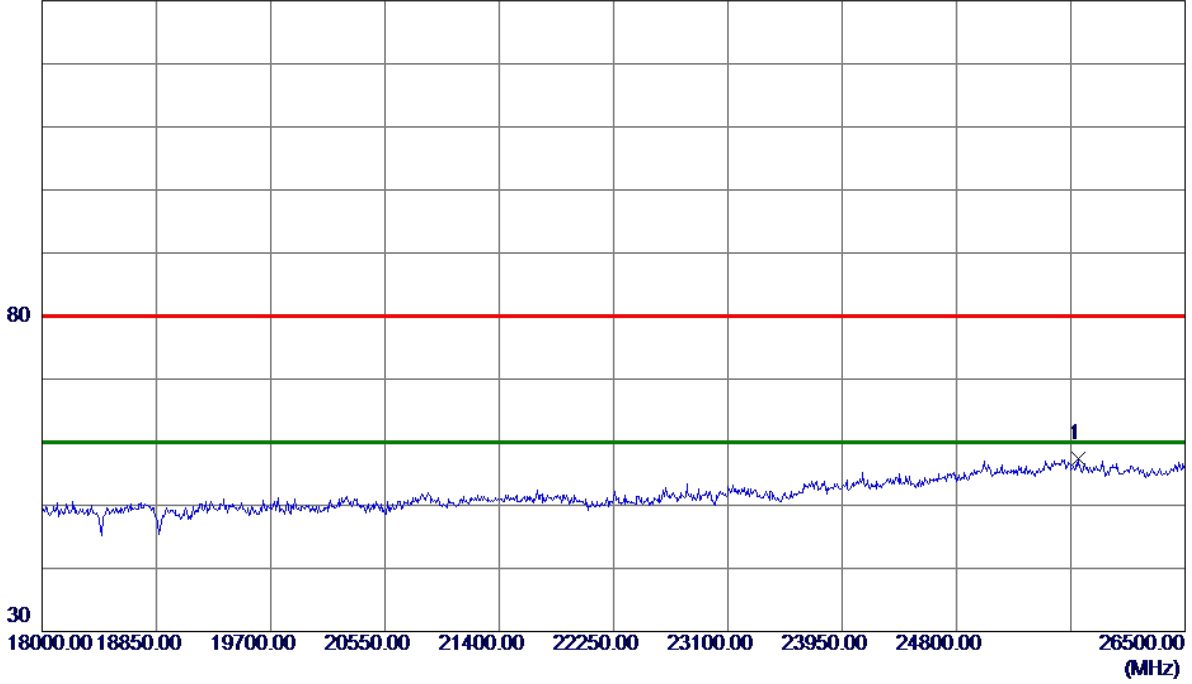


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	25705.2500	40.30	17.09	57.39	80.00	-22.61	Peak	

Orthogonal Axis	X
Test Mode:	TX G Mode 2462 MHz

Vertical

130 dBuV/m

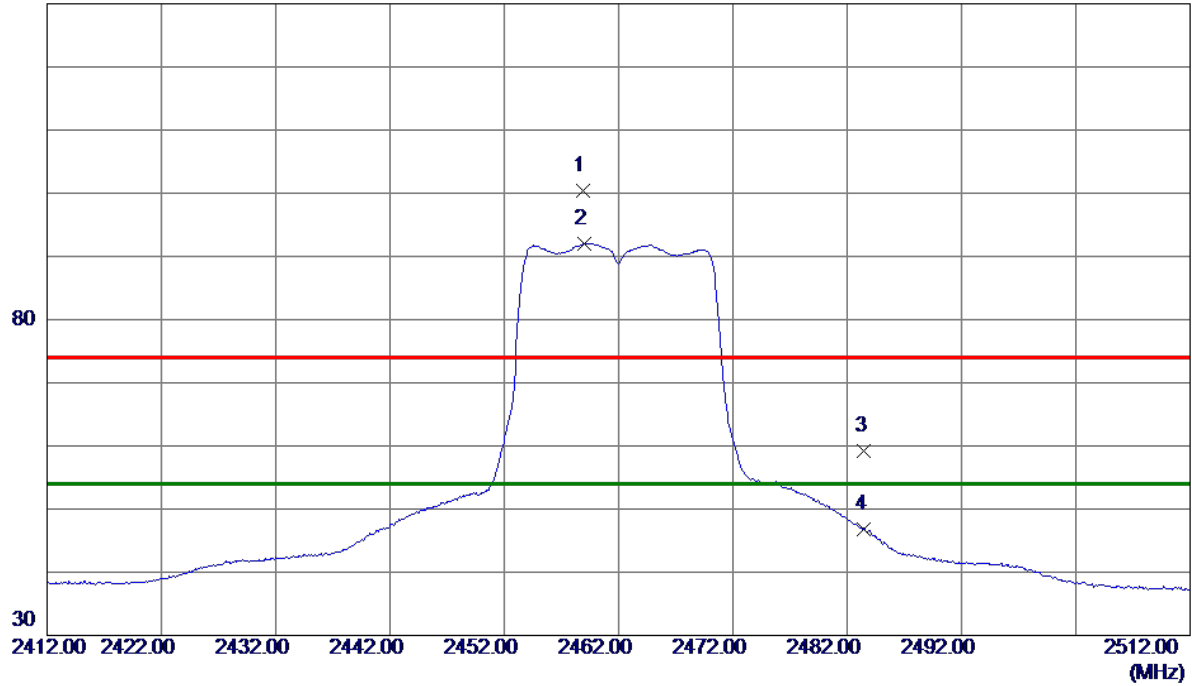


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2458.9000	93.05	7.34	100.39	74.00	26.39	Peak	No Limit
2 *	2459.0500	84.75	7.34	92.09	54.00	38.09	AVG	No Limit
3	2483.5000	51.95	7.32	59.27	74.00	-14.73	Peak	
4	2483.5000	39.55	7.32	46.87	54.00	-7.13	AVG	

Orthogonal Axis	X
Test Mode:	TX G Mode 2462 MHz

Vertical

130 dBuV/m

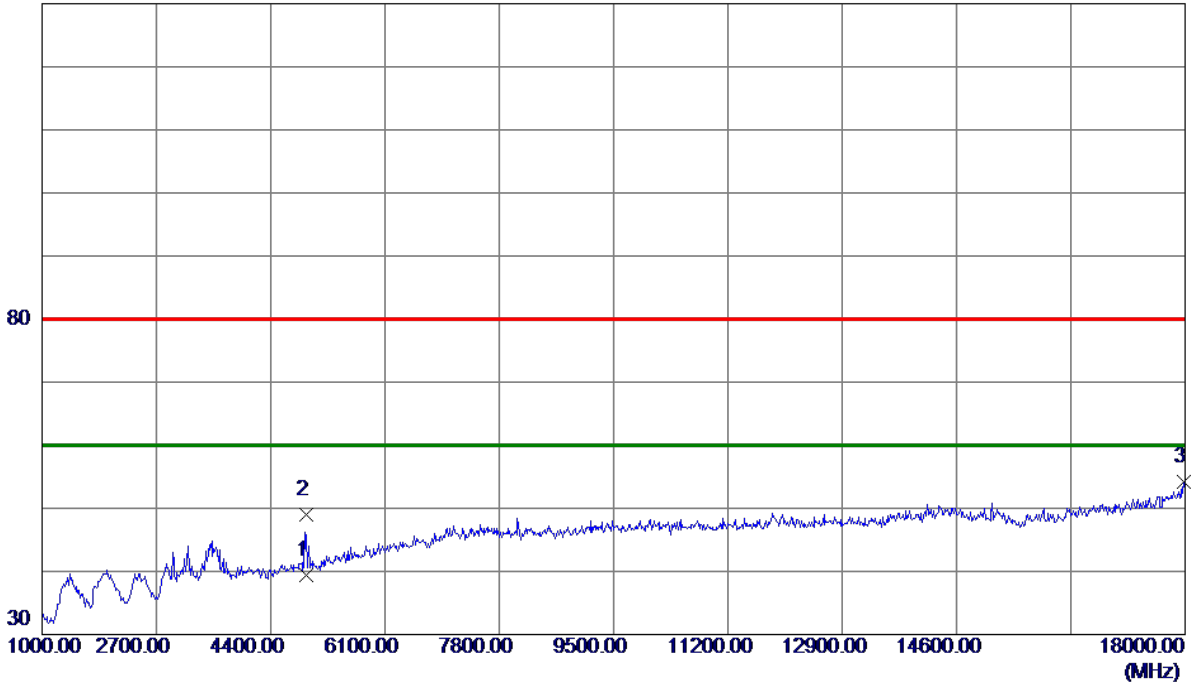


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	4924.0150	35.66	3.73	39.39	60.00	-20.61	AVG	
2	4924.3350	45.28	3.73	49.01	80.00	-30.99	Peak	
3	17974.5000	36.46	17.69	54.15	80.00	-25.85	Peak	

Orthogonal Axis	X
Test Mode:	TX G Mode 2462 MHz

Vertical

130 dBuV/m

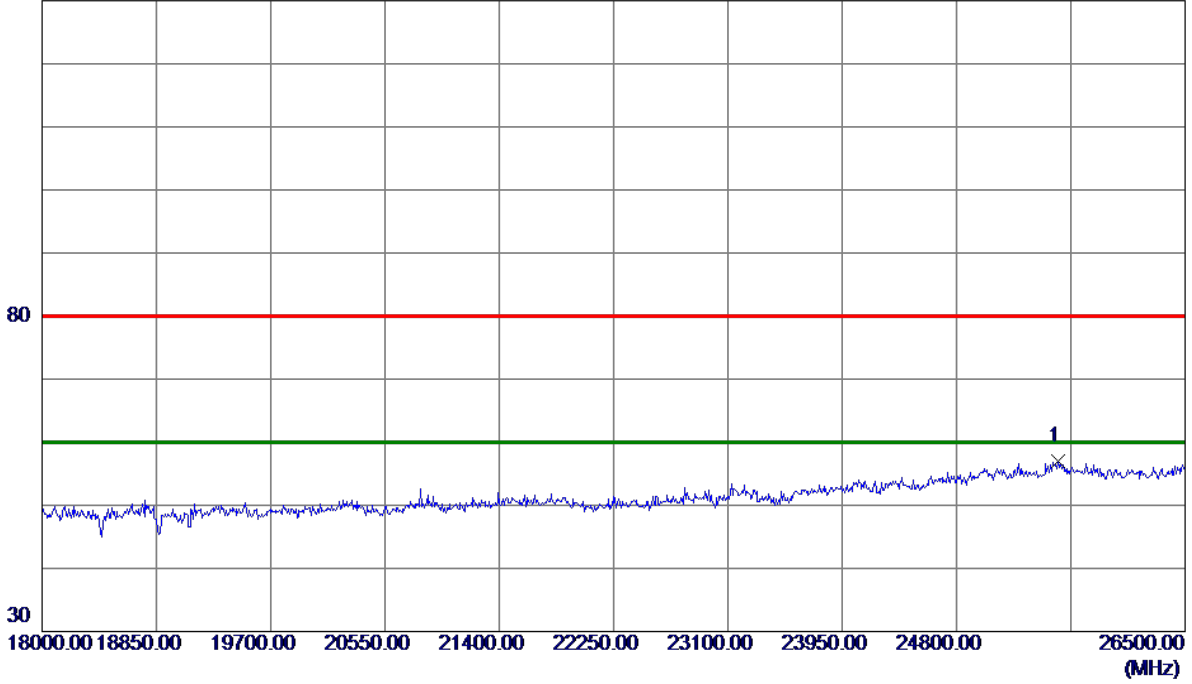


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	25556.5000	39.76	17.26	57.02	80.00	-22.98	Peak	

Orthogonal Axis	X
Test Mode:	TX G Mode 2462 MHz

Horizontal

130 dBuV/m

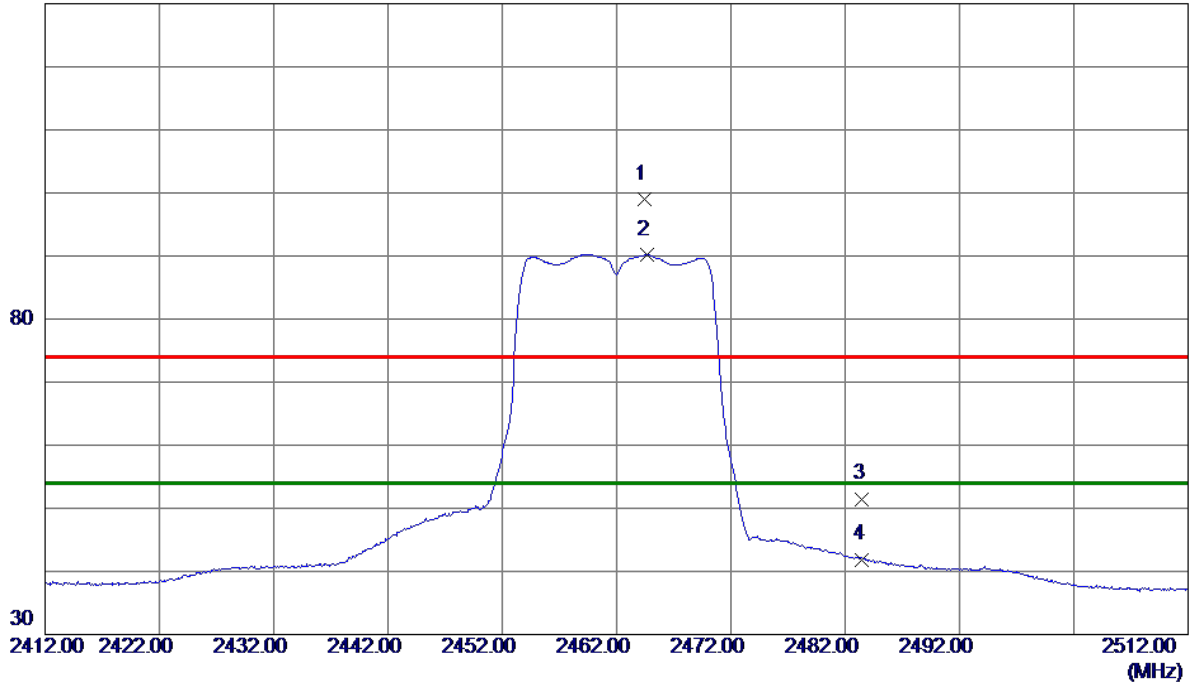


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2464.4500	91.59	7.33	98.92	74.00	24.92	Peak	No Limit
2 *	2464.6500	82.96	7.33	90.29	54.00	36.29	AVG	No Limit
3	2483.5000	44.18	7.32	51.50	74.00	-22.50	Peak	
4	2483.5000	34.58	7.32	41.90	54.00	-12.10	AVG	

Orthogonal Axis	X
Test Mode:	TX G Mode 2462 MHz

Horizontal

130 dBuV/m

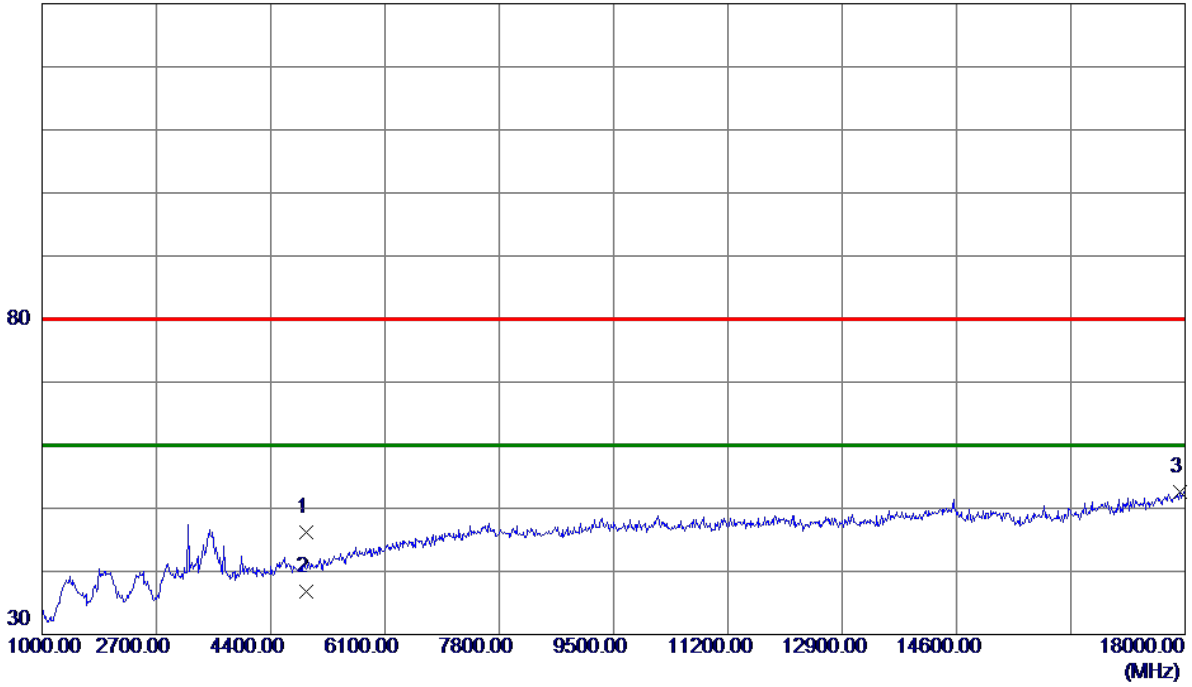


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	4923.9900	42.50	3.73	46.23	80.00	-33.77	Peak	
2 *	4924.0299	33.13	3.73	36.86	60.00	-23.14	AVG	
3	17923.5000	35.15	17.54	52.69	80.00	-27.31	Peak	

Orthogonal Axis	X
Test Mode:	TX G Mode 2462 MHz

Horizontal

130 dBuV/m

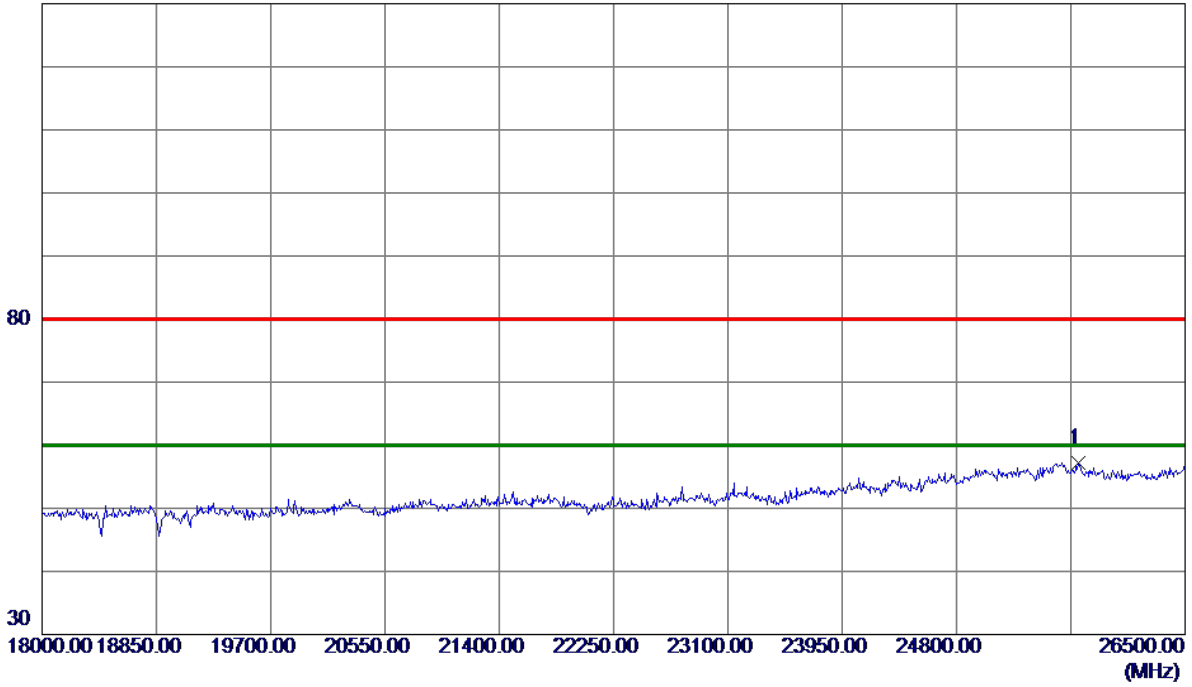


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	25709.5000	40.15	17.09	57.24	80.00	-22.76	Peak	

Orthogonal Axis	X
Test Mode:	TX N-20M Mode 2412 MHz

Vertical

130 dBuV/m

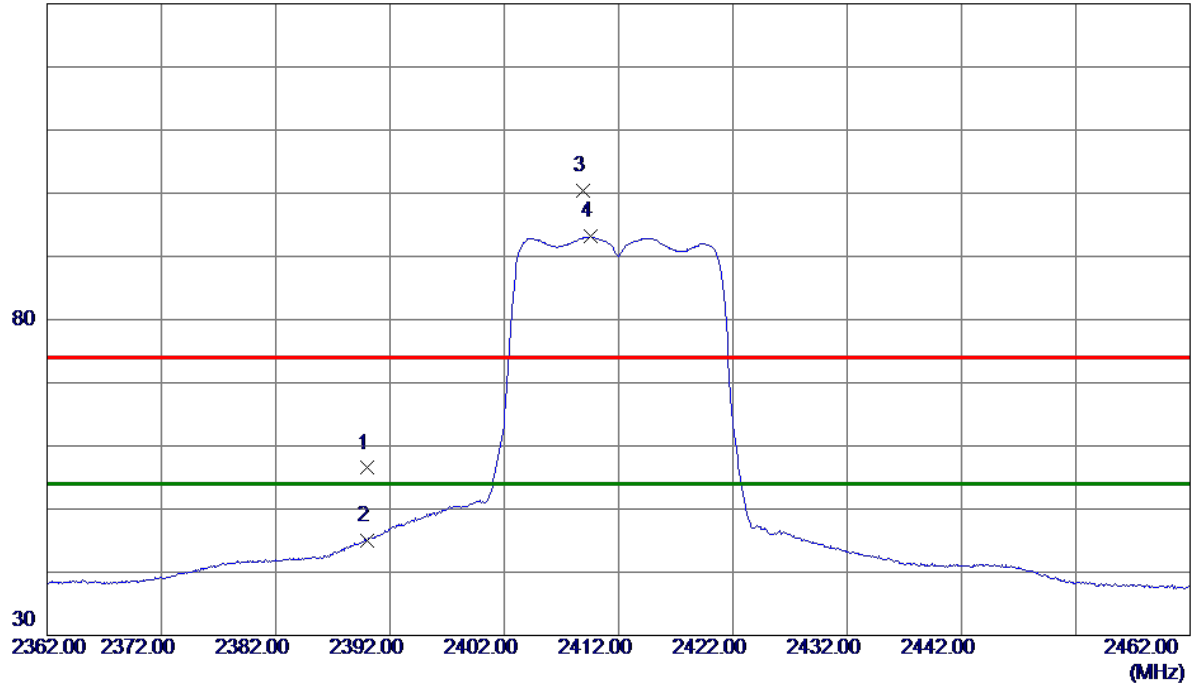


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2390.0000	49.11	7.39	56.50	74.00	-17.50	Peak	
2	2390.0000	37.59	7.39	44.98	54.00	-9.02	AVG	
3	2408.8500	93.07	7.37	100.44	74.00	26.44	Peak	No Limit
4 *	2409.5500	85.83	7.37	93.20	54.00	39.20	AVG	No Limit

Orthogonal Axis	X
Test Mode:	TX N-20M Mode 2412 MHz

Vertical

130 dBuV/m

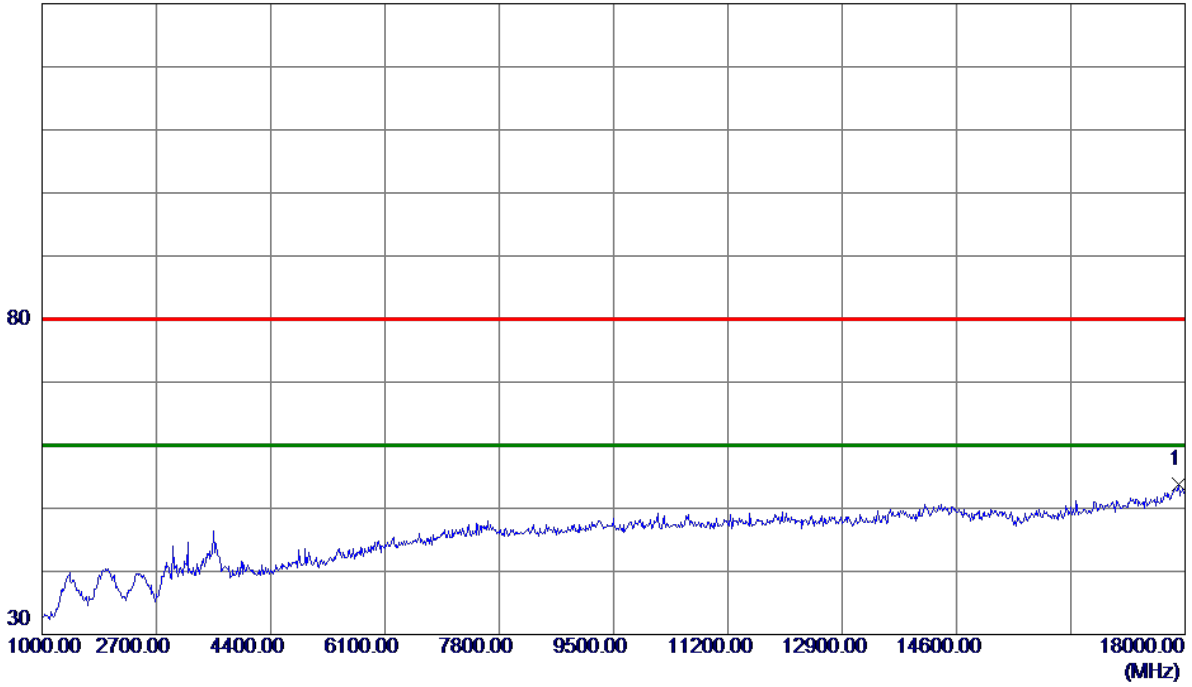


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	17906.5000	36.34	17.49	53.83	80.00	-26.17	Peak	

Orthogonal Axis	X
Test Mode:	TX N-20M Mode 2412 MHz

Vertical


130 dBuV/m

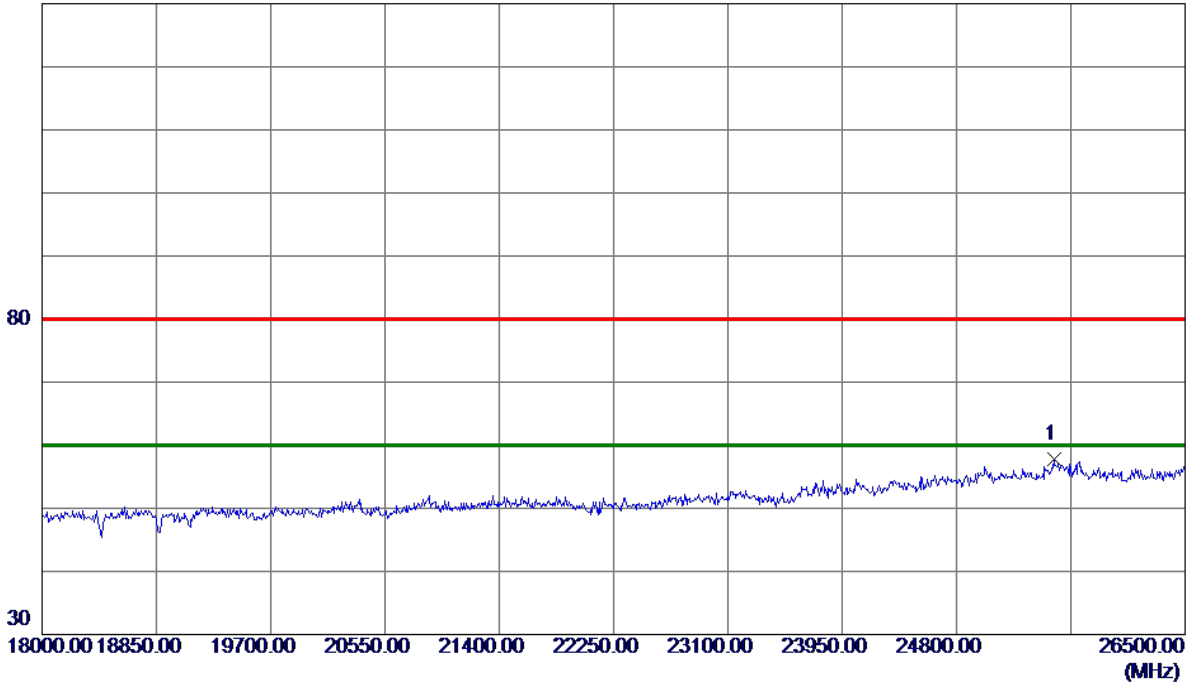

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	25526.7500	40.58	17.29	57.87	80.00	-22.13	Peak	

Orthogonal Axis	X
Test Mode:	TX N-20M Mode 2412 MHz

Horizontal

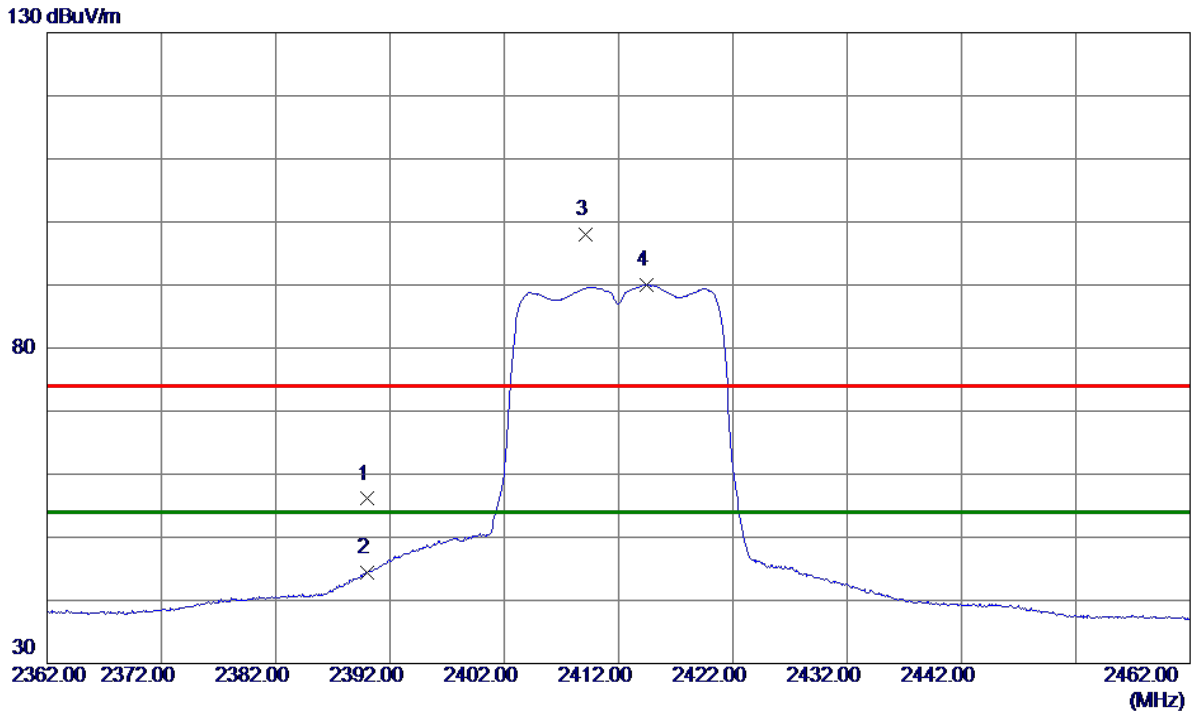


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2390.0000	48.71	7.39	56.10	74.00	-17.90	Peak	
2	2390.0000	37.06	7.39	44.45	54.00	-9.55	AVG	
3	2409.1500	90.66	7.37	98.03	74.00	24.03	Peak	No Limit
4 *	2414.4500	82.64	7.37	90.01	54.00	36.01	AVG	No Limit

Orthogonal Axis	X
Test Mode:	TX N-20M Mode 2412 MHz

Horizontal

130 dBuV/m

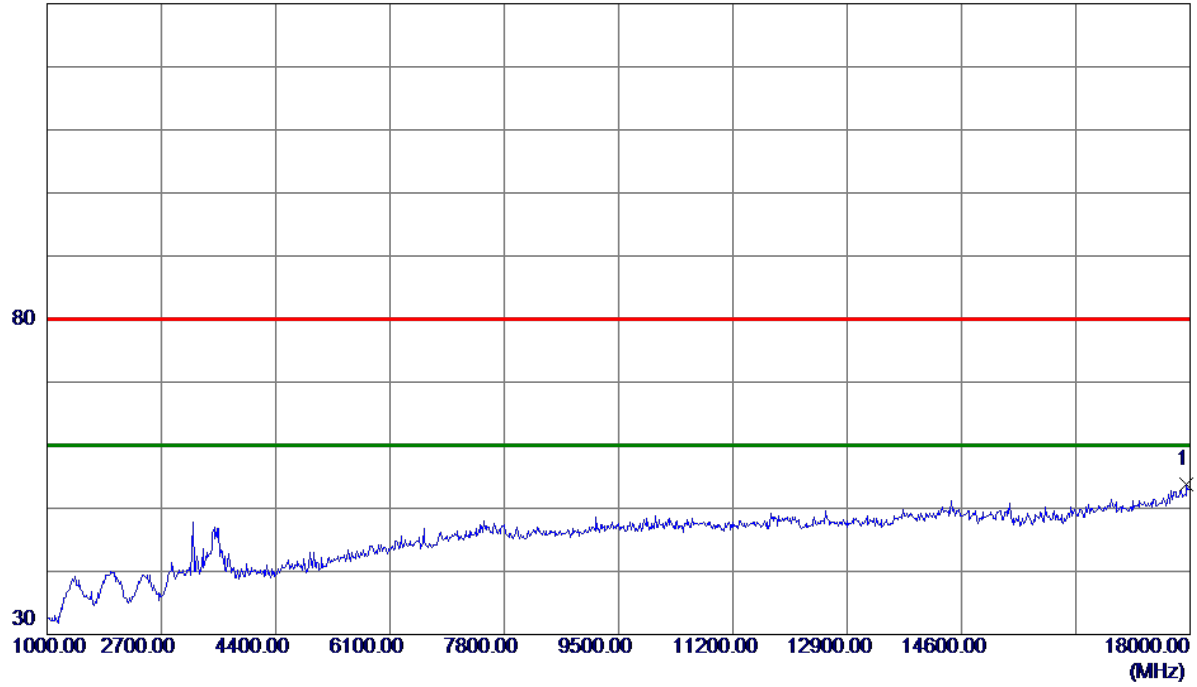


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	17949.0000	36.23	17.62	53.85	80.00	-26.15	Peak	

Orthogonal Axis	X
Test Mode:	TX N-20M Mode 2412 MHz

Horizontal


130 dBuV/m

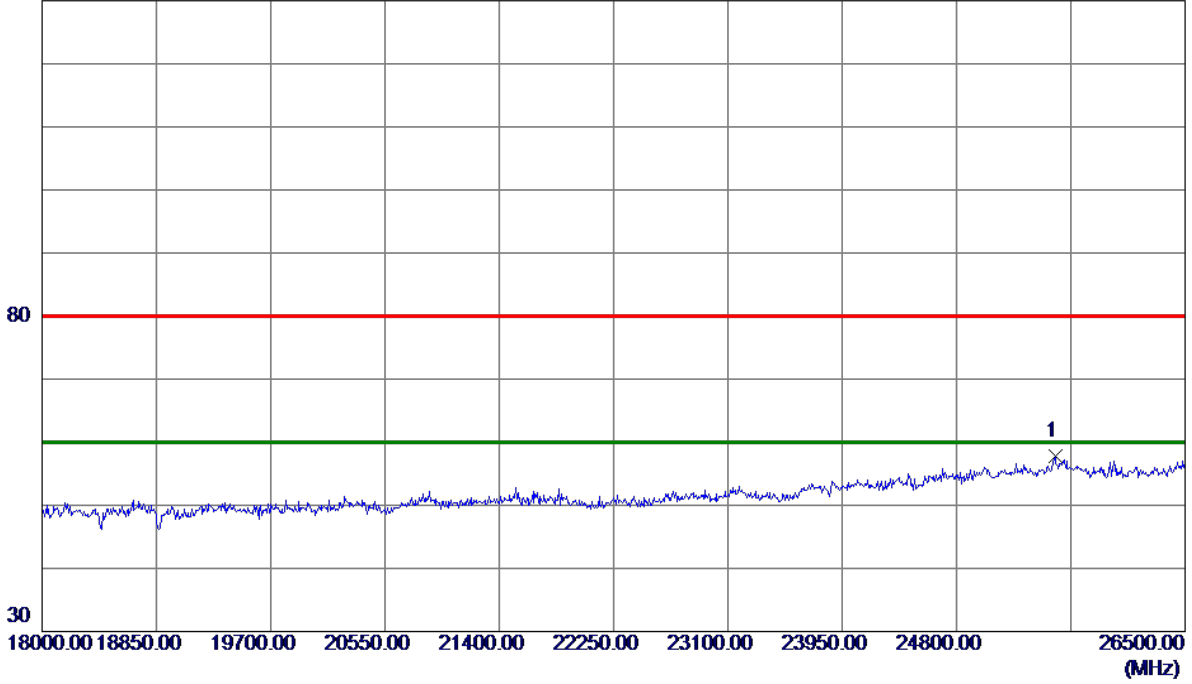

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	25535.2500	40.49	17.28	57.77	80.00	-22.23	Peak	

Orthogonal Axis	X
Test Mode:	TX N-20M Mode 2437 MHz

Vertical

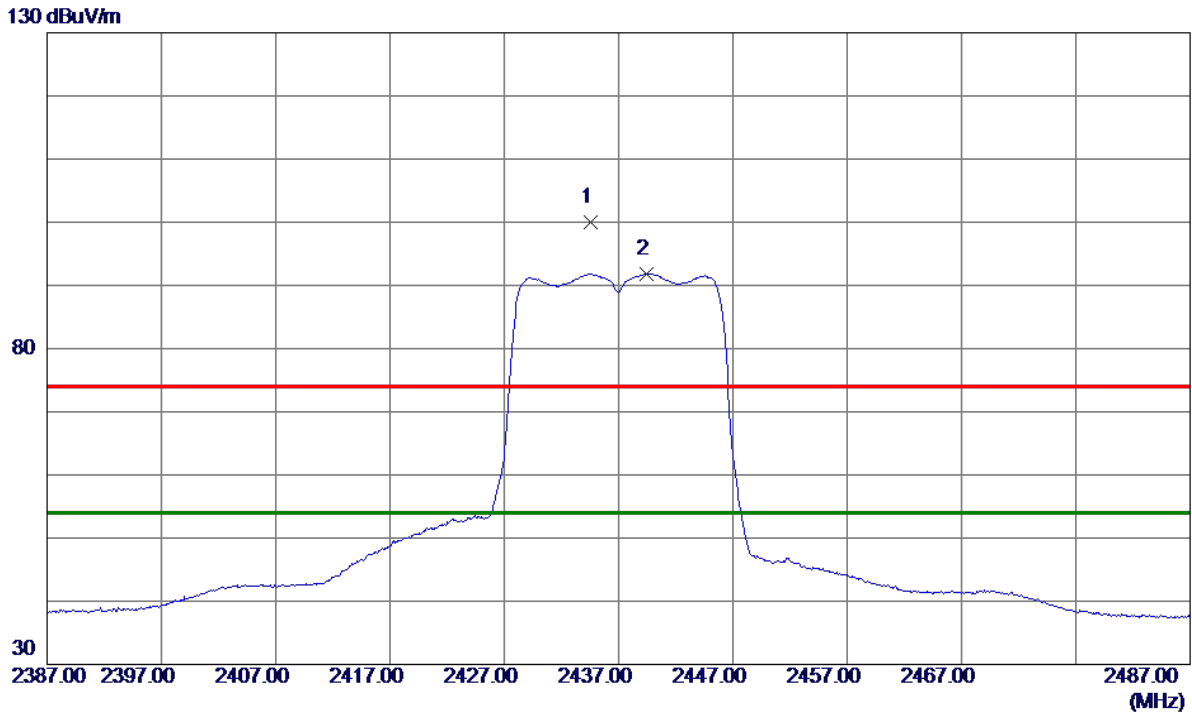


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2434.6000	92.70	7.35	100.05	74.00	26.05	Peak	No Limit
2 *	2439.4500	84.53	7.35	91.88	54.00	37.88	AVG	No Limit

Orthogonal Axis	X
Test Mode:	TX N-20M Mode 2437 MHz

Vertical

130 dBuV/m

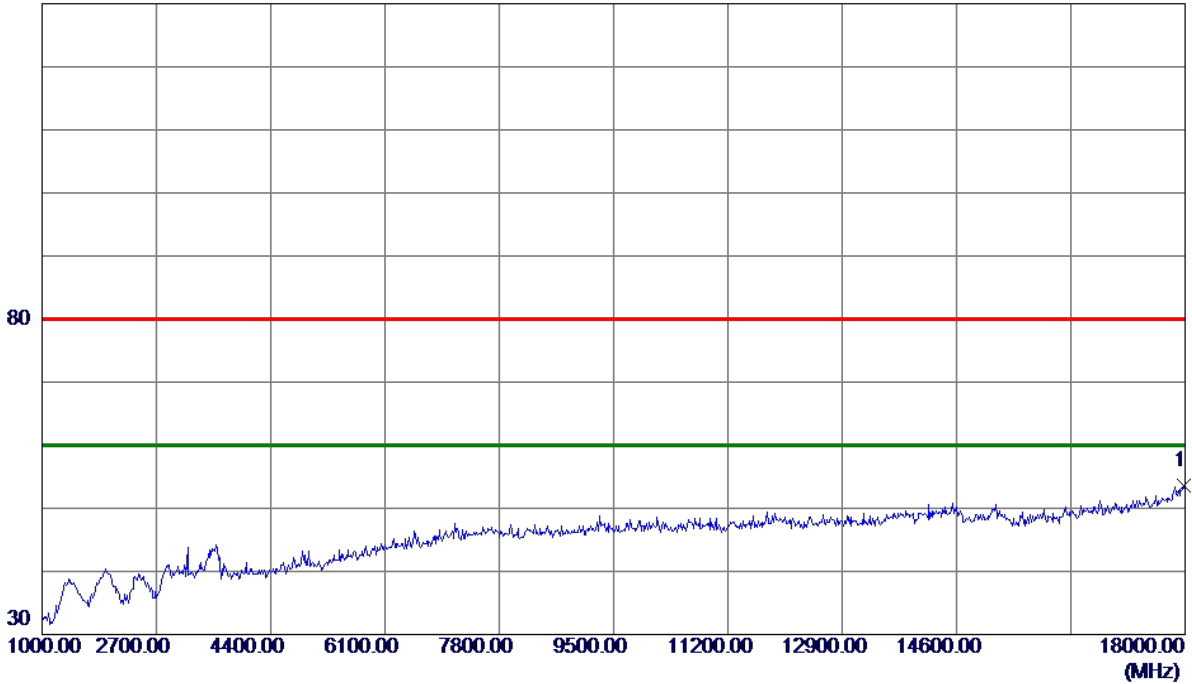


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB		
1 *	17983.0000	35.90	17.72	53.62	80.00	-26.38	Peak	

Orthogonal Axis	X
Test Mode:	TX N-20M Mode 2437 MHz

Vertical


130 dBuV/m

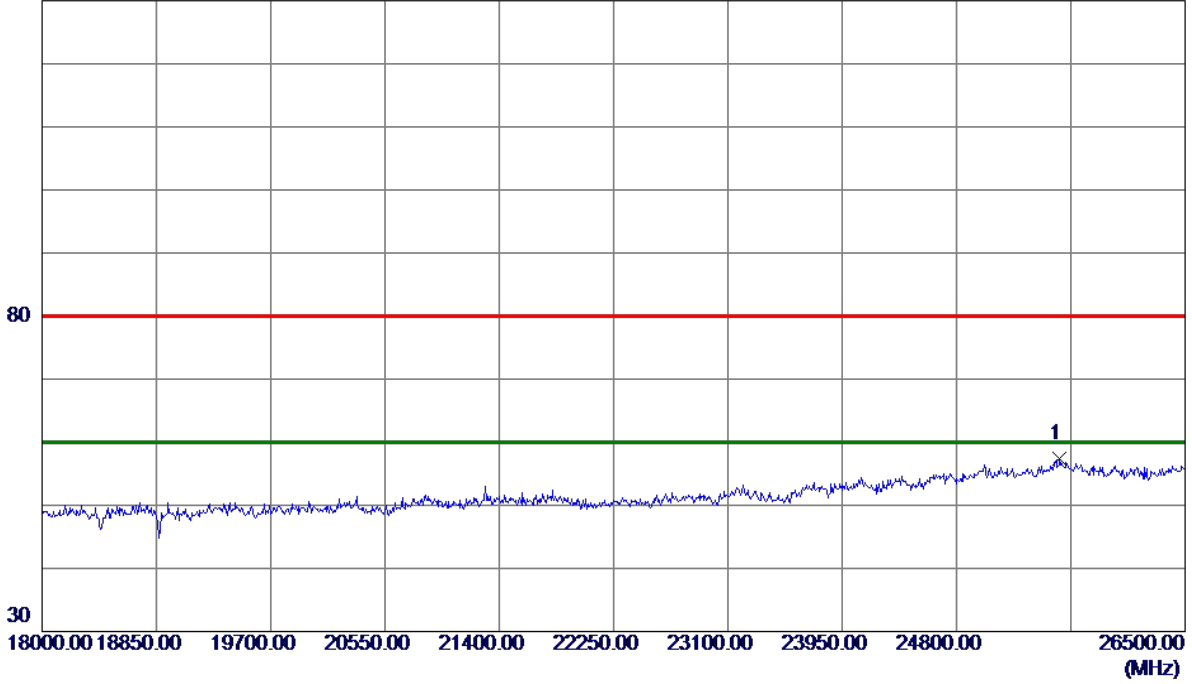

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	25565.0000	40.17	17.25	57.42	80.00	-22.58	Peak	

Orthogonal Axis	X
Test Mode:	TX N-20M Mode 2437 MHz

Horizontal

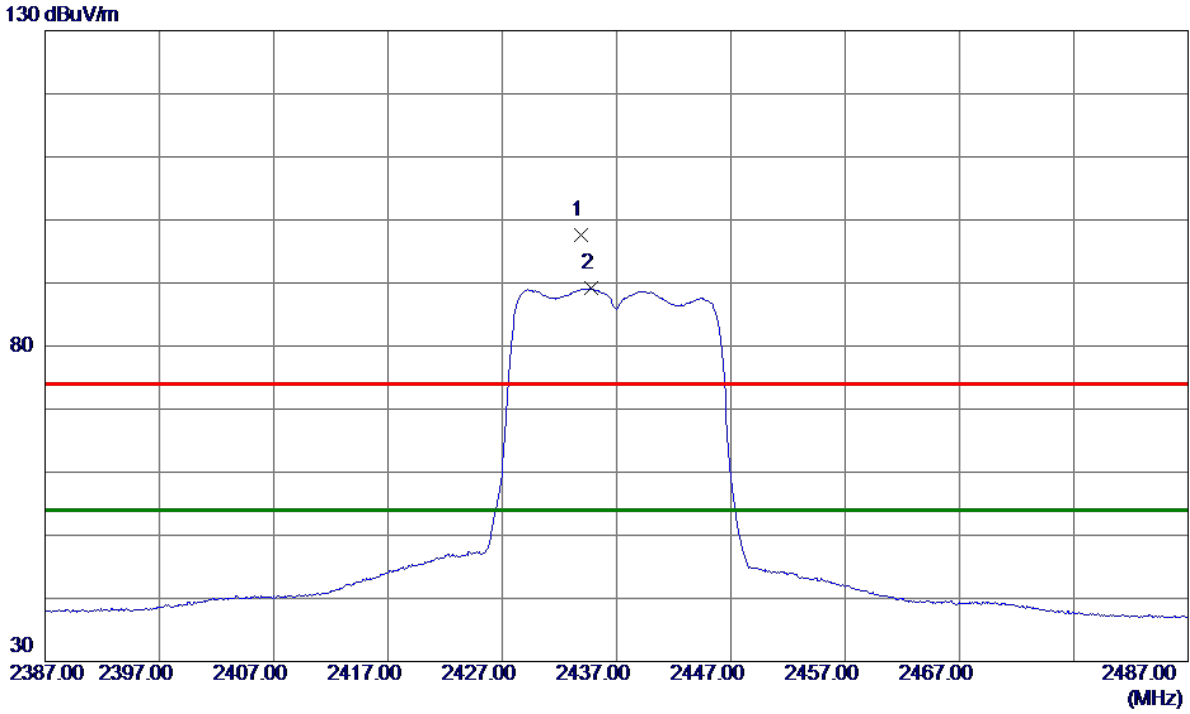


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2433.8500	90.32	7.35	97.67	74.00	23.67	Peak	No Limit
2 *	2434.7500	81.76	7.35	89.11	54.00	35.11	AVG	No Limit

Orthogonal Axis	X
Test Mode:	TX N-20M Mode 2437 MHz

Horizontal

130 dBuV/m

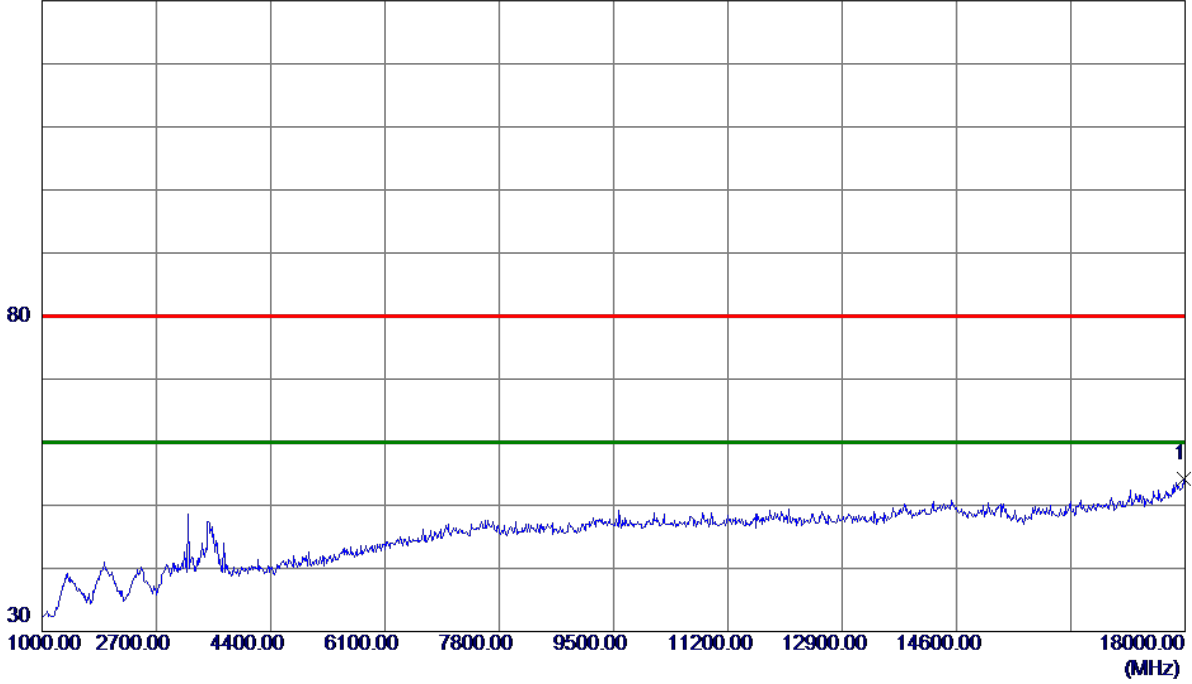


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	17983.0000	36.47	17.72	54.19	80.00	-25.81	Peak	

Orthogonal Axis	X
Test Mode:	TX N-20M Mode 2437 MHz

Horizontal

130 dBuV/m

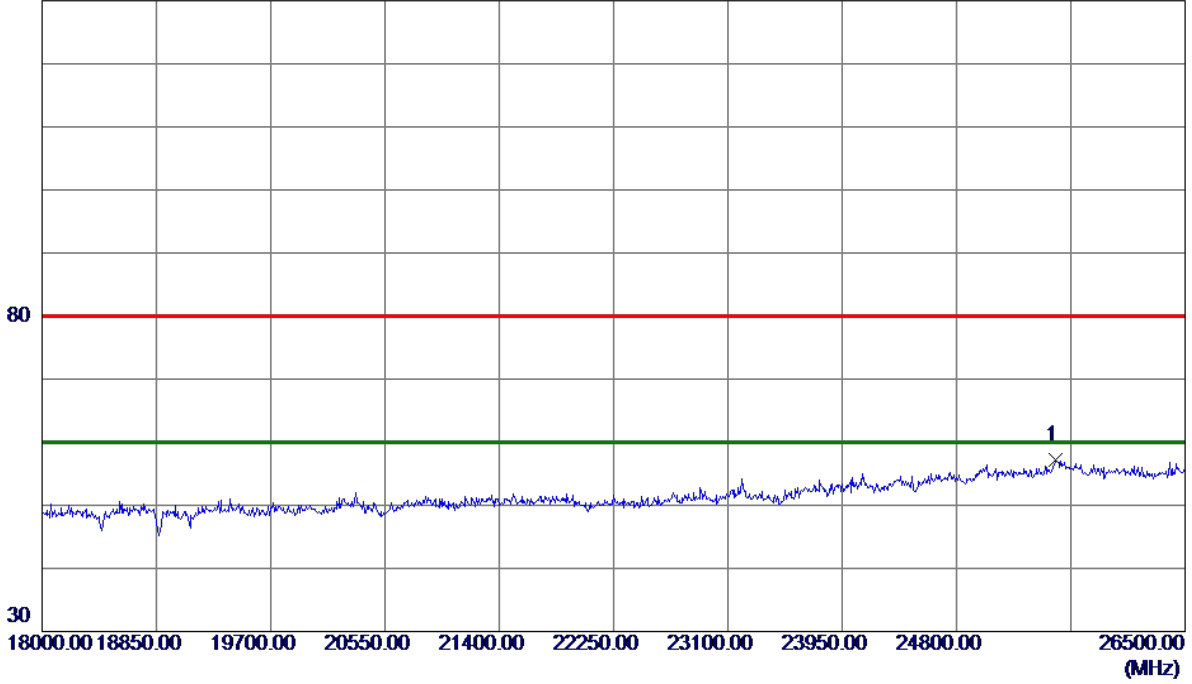


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	25539.5000	39.91	17.28	57.19	80.00	-22.81	Peak	

Orthogonal Axis	X
Test Mode:	TX N-20M Mode 2462 MHz

Vertical

130 dBuV/m

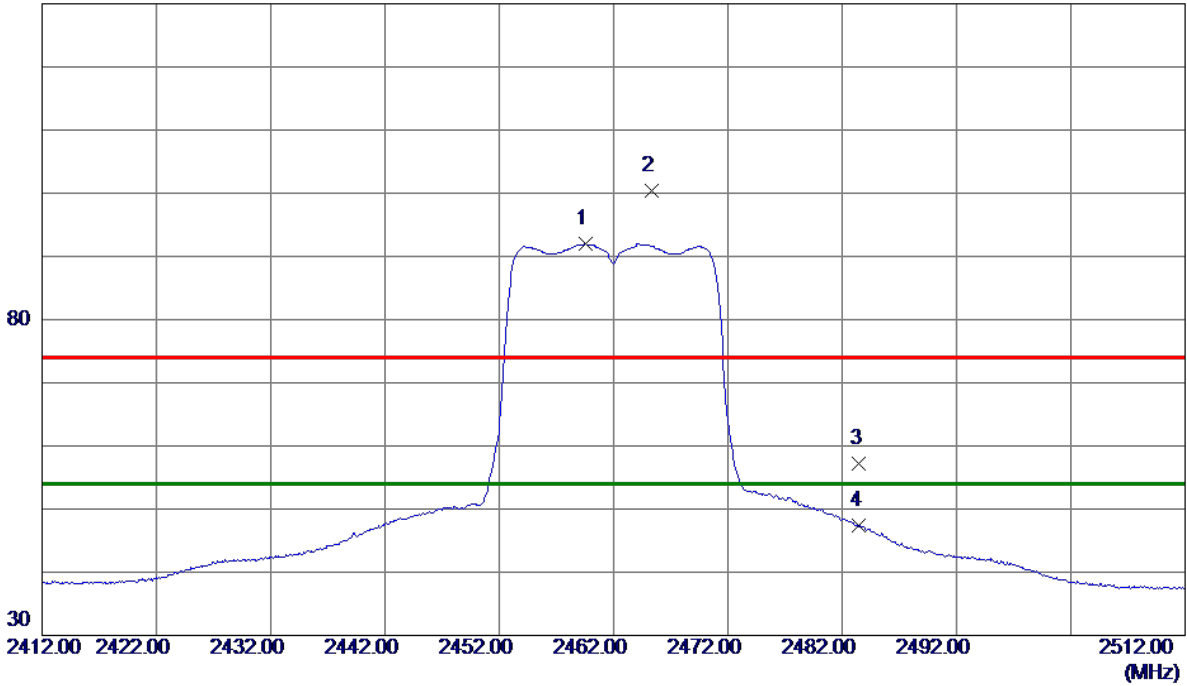


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	2459.6000	84.70	7.34	92.04	54.00	38.04	AVG	No Limit
2	2465.3500	93.05	7.33	100.38	74.00	26.38	Peak	No Limit
3	2483.5000	49.91	7.32	57.23	74.00	-16.77	Peak	
4	2483.5000	40.12	7.32	47.44	54.00	-6.56	AVG	

Orthogonal Axis	X
Test Mode:	TX N-20M Mode 2462 MHz

Vertical

130 dBuV/m

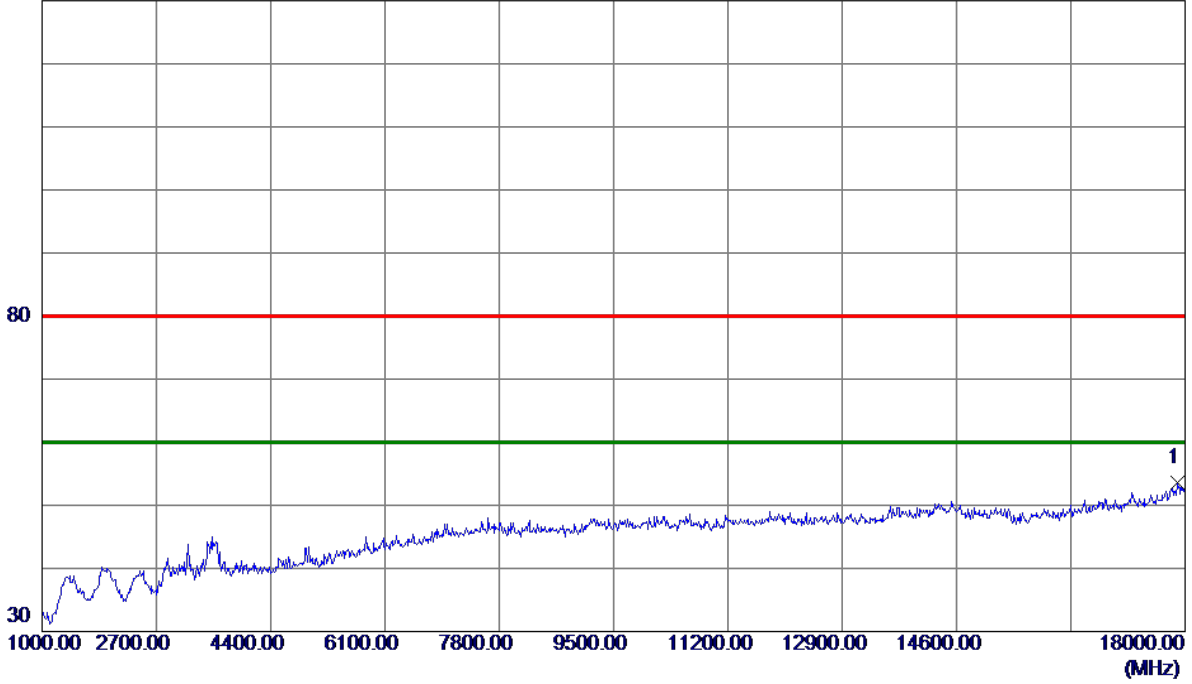


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	17889.5000	36.07	17.44	53.51	80.00	-26.49	Peak	

Orthogonal Axis	X
Test Mode:	TX N-20M Mode 2462 MHz

Vertical


130 dBuV/m

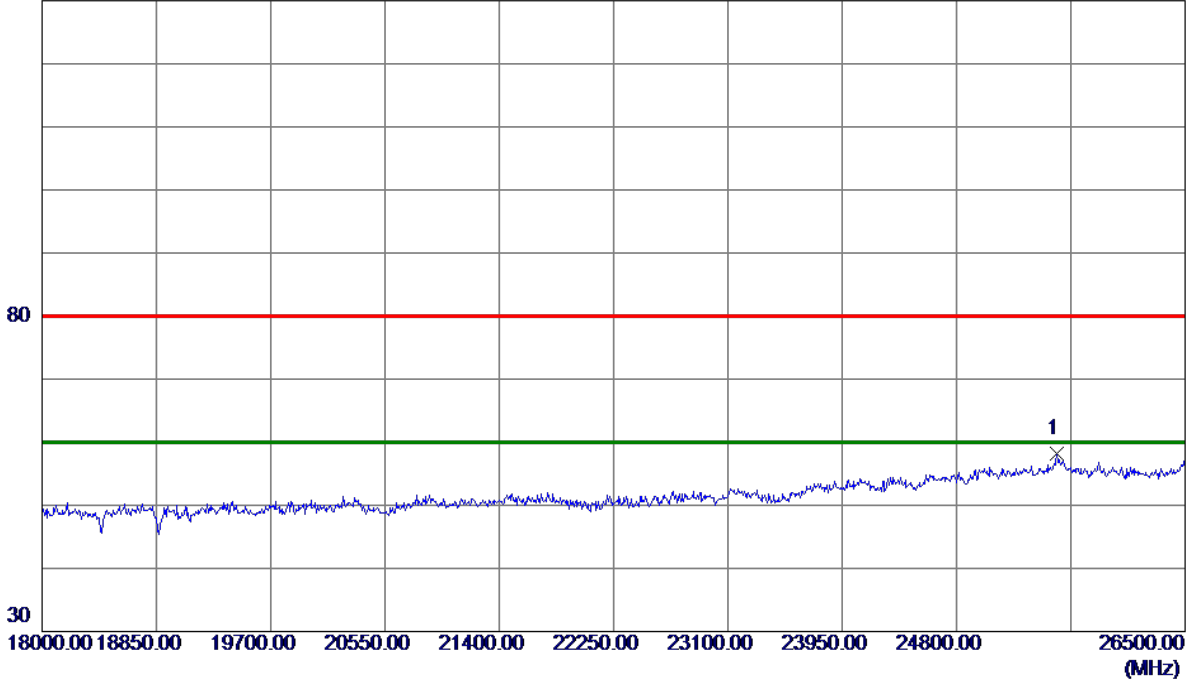

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	25548.0000	40.87	17.27	58.14	80.00	-21.86	Peak	

Orthogonal Axis	X
Test Mode:	TX N-20M Mode 2462 MHz


Horizontal

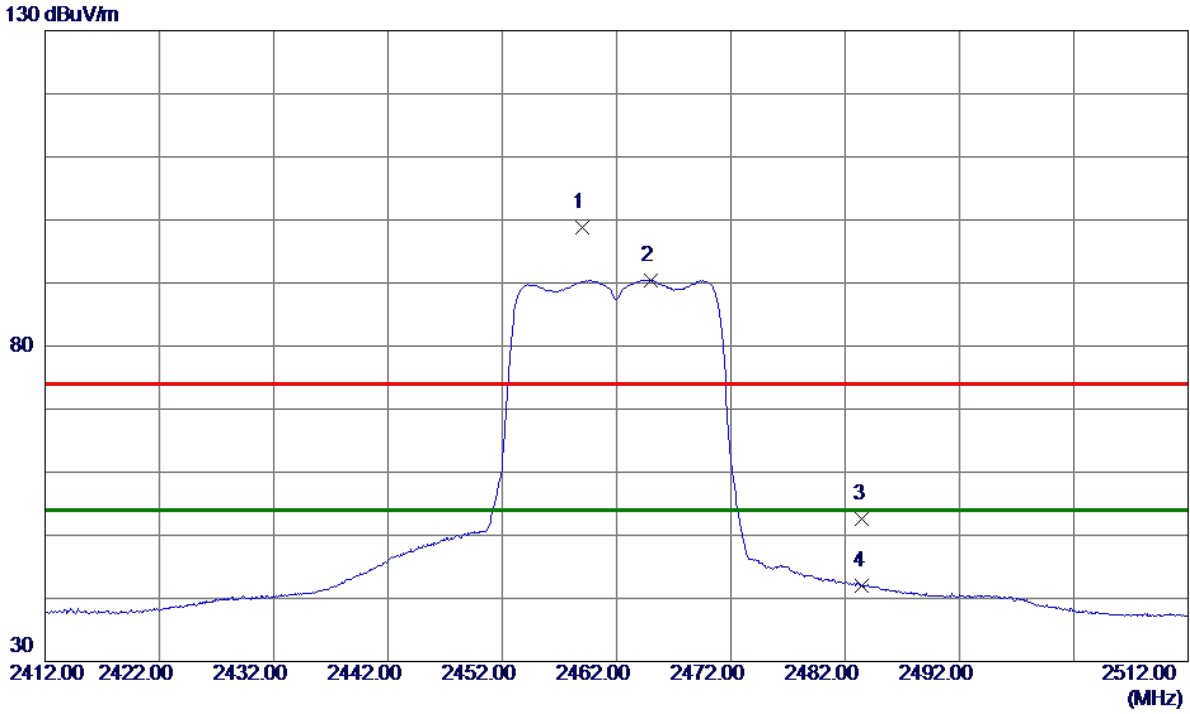

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2459.0000	91.43	7.34	98.77	74.00	24.77	Peak	No Limit
2 *	2464.9500	83.10	7.33	90.43	54.00	36.43	AVG	No Limit
3	2483.5000	45.35	7.32	52.67	74.00	-21.33	Peak	
4	2483.5000	34.74	7.32	42.06	54.00	-11.94	AVG	

Orthogonal Axis	X
Test Mode:	TX N-20M Mode 2462 MHz

Horizontal

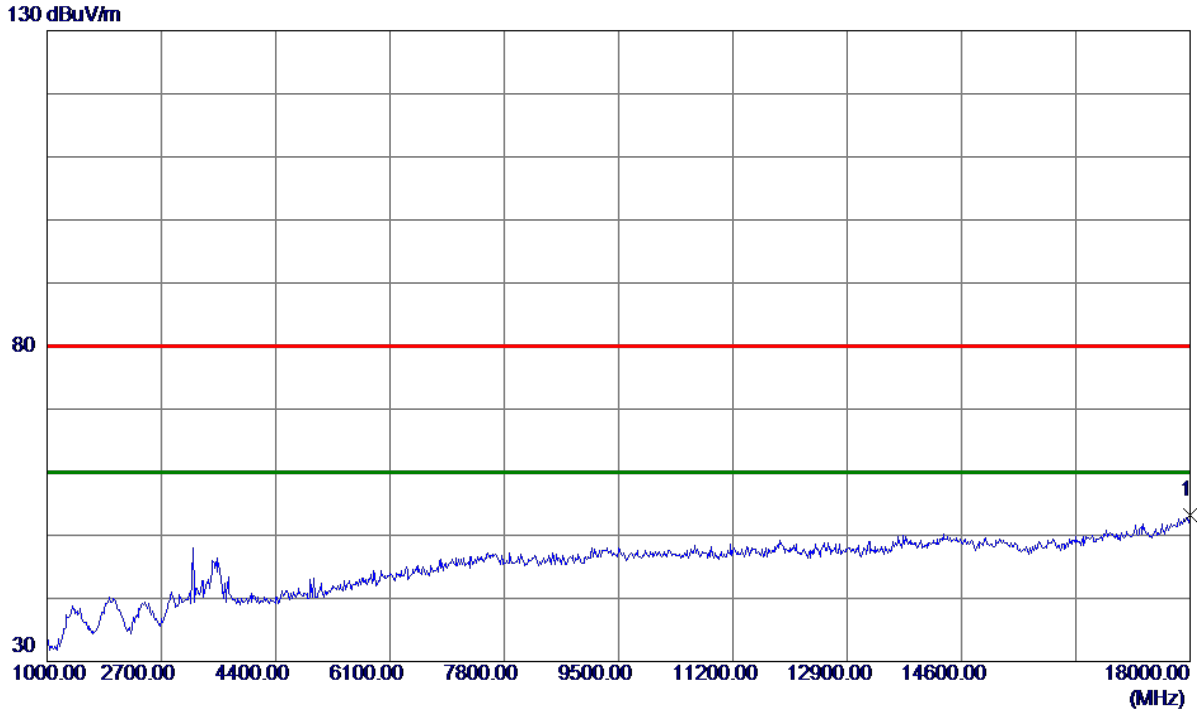


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	17991.5000	35.54	17.74	53.28	80.00	-26.72	Peak	

Orthogonal Axis	X
Test Mode:	TX N-20M Mode 2462 MHz

Horizontal

130 dBuV/m

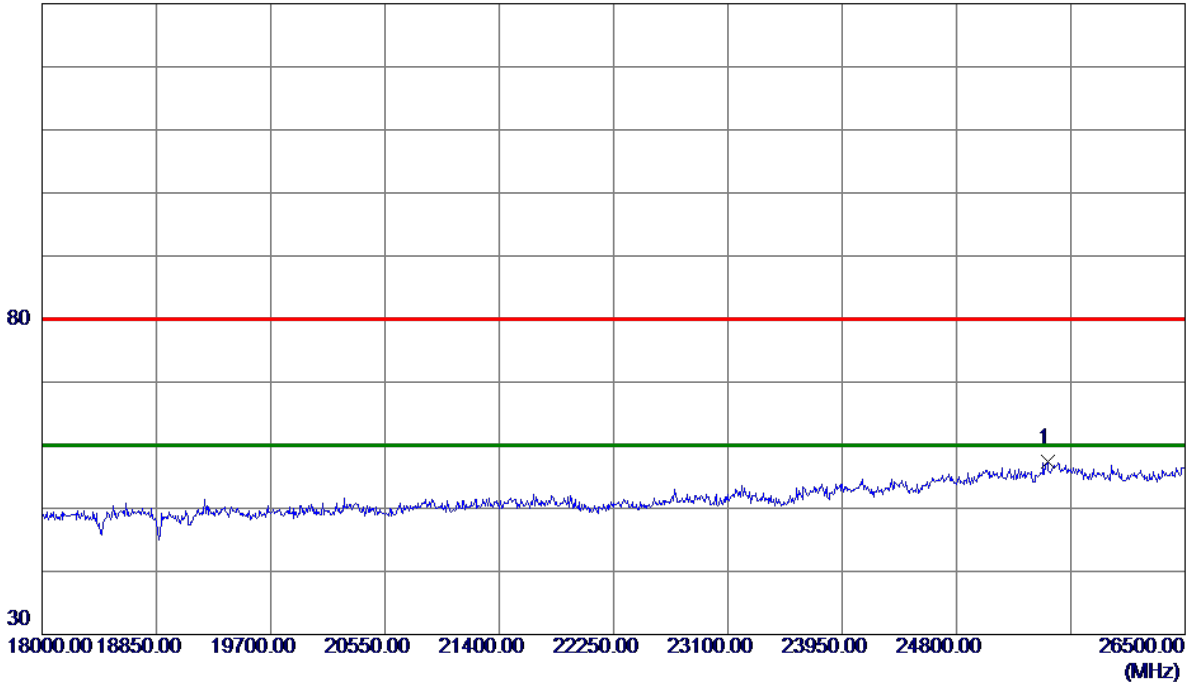


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	25475.7500	39.99	17.31	57.30	80.00	-22.70	Peak	

Orthogonal Axis	X
Test Mode:	TX N-40M Mode 2422MHz

Vertical

130 dBuV/m

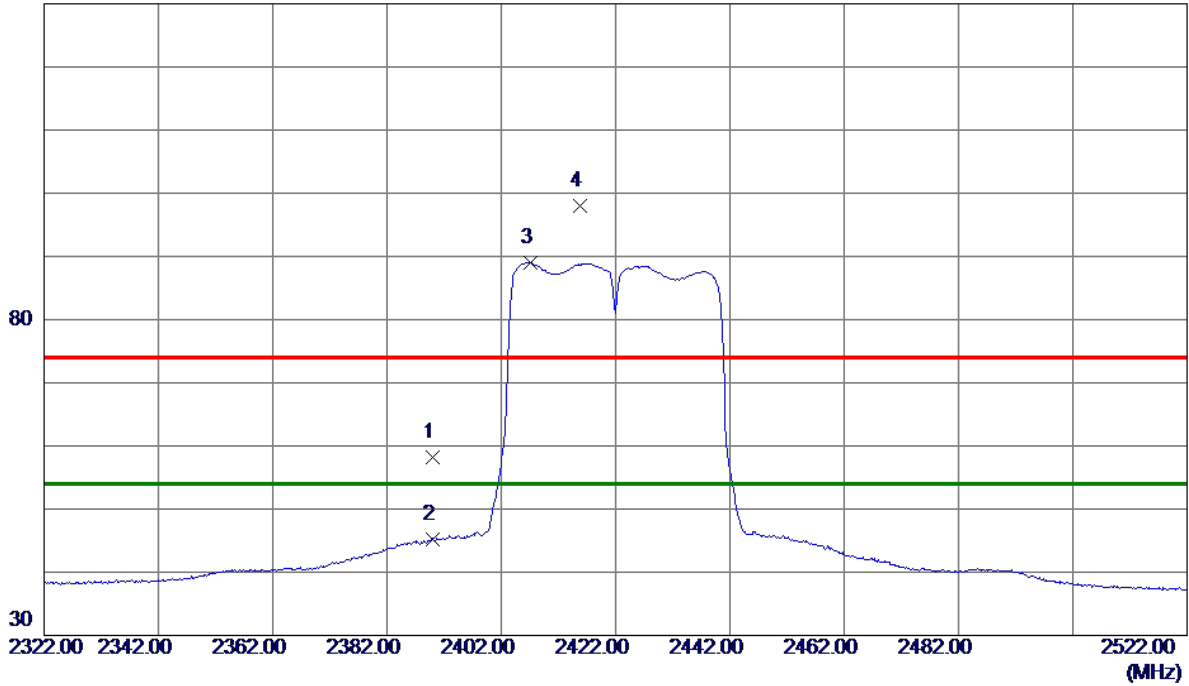


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2390.0000	50.74	7.39	58.13	74.00	-15.87	Peak	
2	2390.0000	37.86	7.39	45.25	54.00	-8.75	AVG	
3 *	2407.2000	81.62	7.37	88.99	54.00	34.99	AVG	No Limit
4	2415.8000	90.60	7.37	97.97	74.00	23.97	Peak	No Limit

Orthogonal Axis	X
Test Mode:	TX N-40M Mode 2422MHz

Vertical

130 dBuV/m

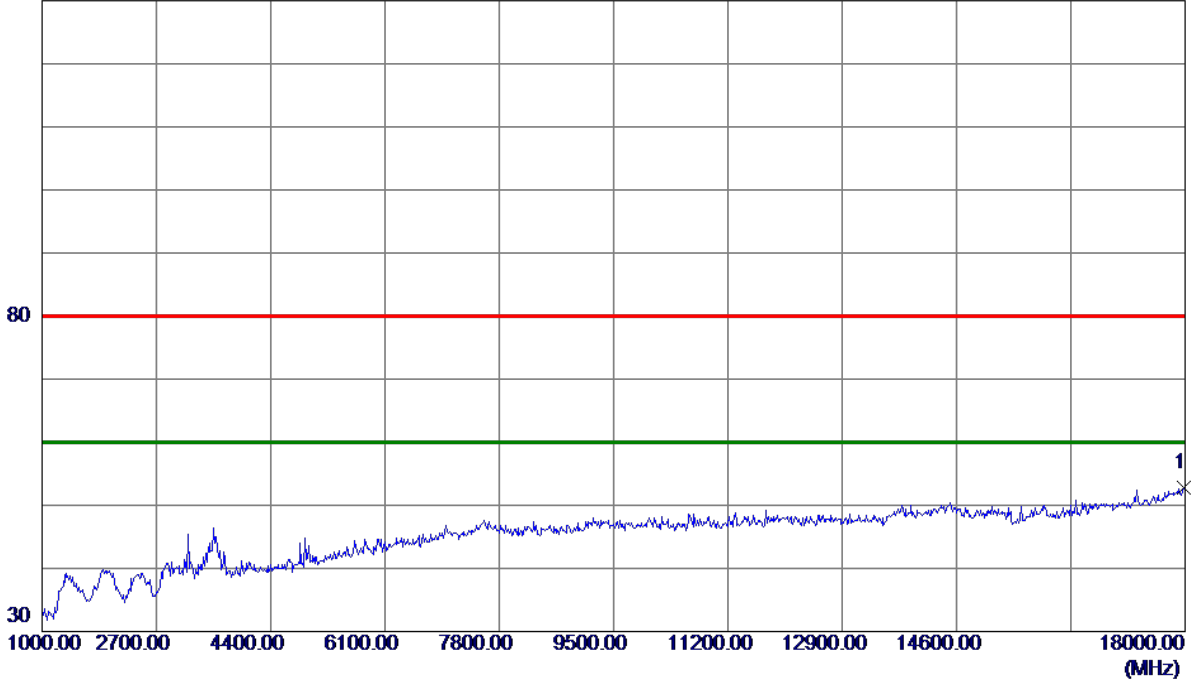


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	17974.5000	35.09	17.69	52.78	80.00	-27.22	Peak	

Orthogonal Axis	X
Test Mode:	TX N-40M Mode 2422MHz

Vertical

130 dBuV/m

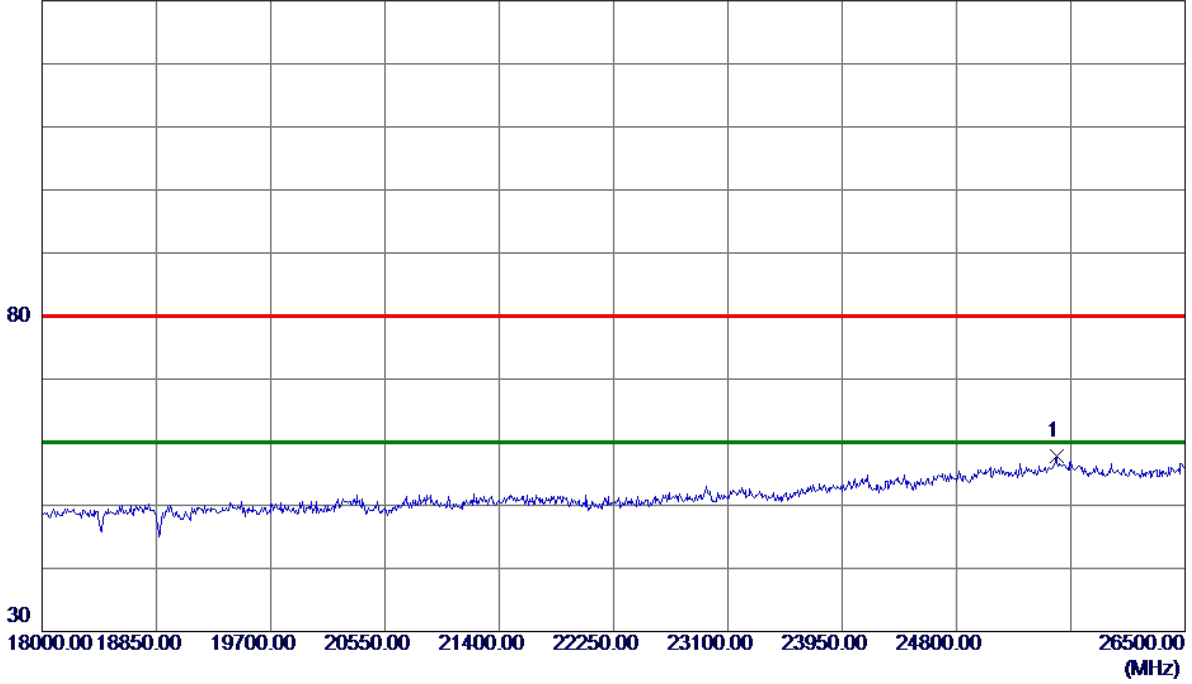


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	25543.7500	40.43	17.28	57.71	80.00	-22.29	Peak	

Orthogonal Axis	X
Test Mode:	TX N-40M Mode 2422MHz

Horizontal

130 dBuV/m

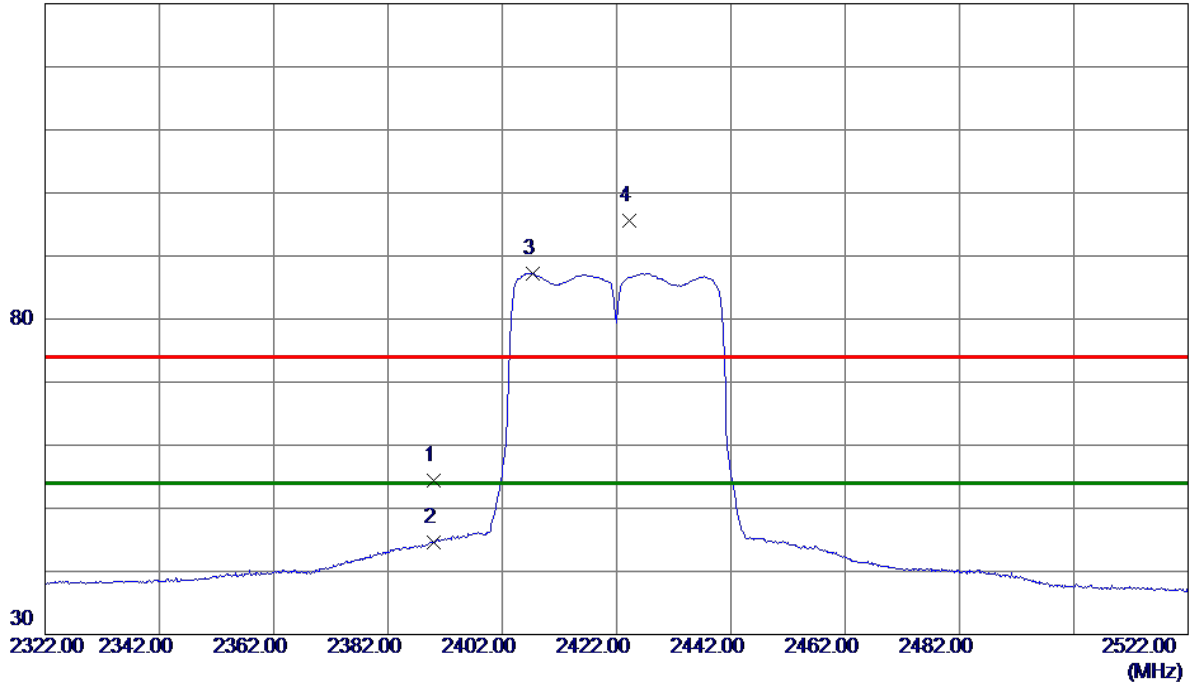


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2390.0000	46.96	7.39	54.35	74.00	-19.65	Peak	
2	2390.0000	37.13	7.39	44.52	54.00	-9.48	AVG	
3 *	2407.3000	79.87	7.37	87.24	54.00	33.24	AVG	No Limit
4	2424.2000	88.25	7.36	95.61	74.00	21.61	Peak	No Limit

Orthogonal Axis	X
Test Mode:	TX N-40M Mode 2422MHz

Horizontal

130 dBuV/m

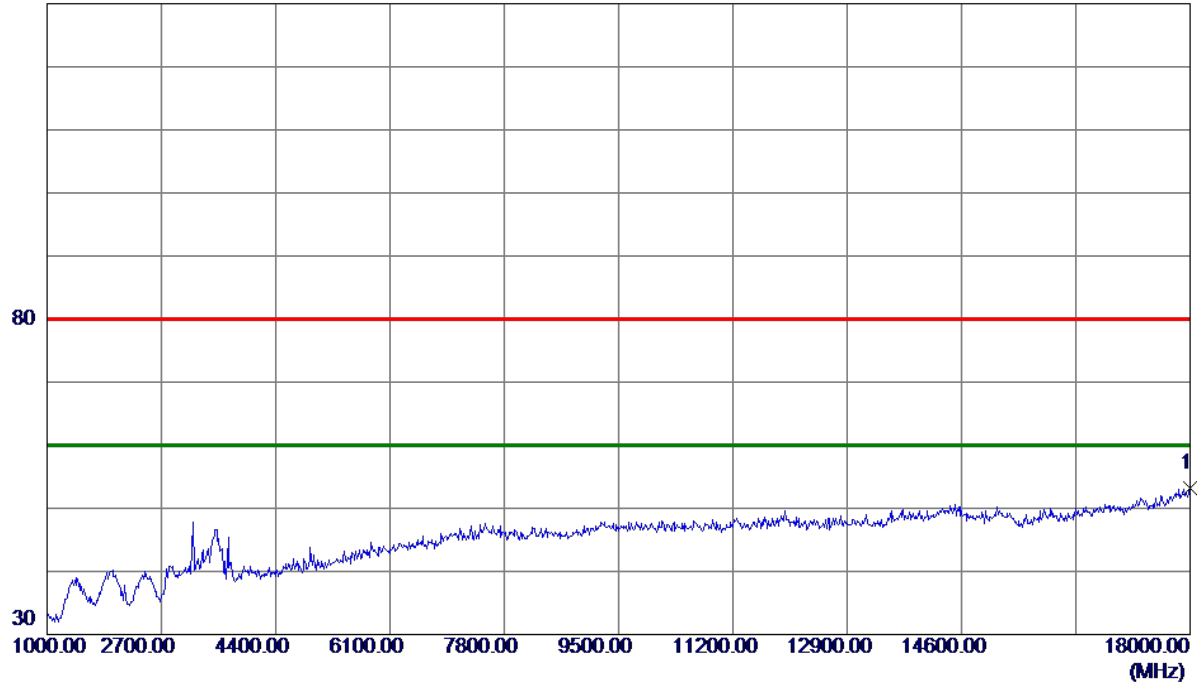


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	18000.0000	35.49	17.77	53.26	80.00	-26.74	Peak	

Orthogonal Axis	X
Test Mode:	TX N-40M Mode 2422MHz

Horizontal


130 dBuV/m

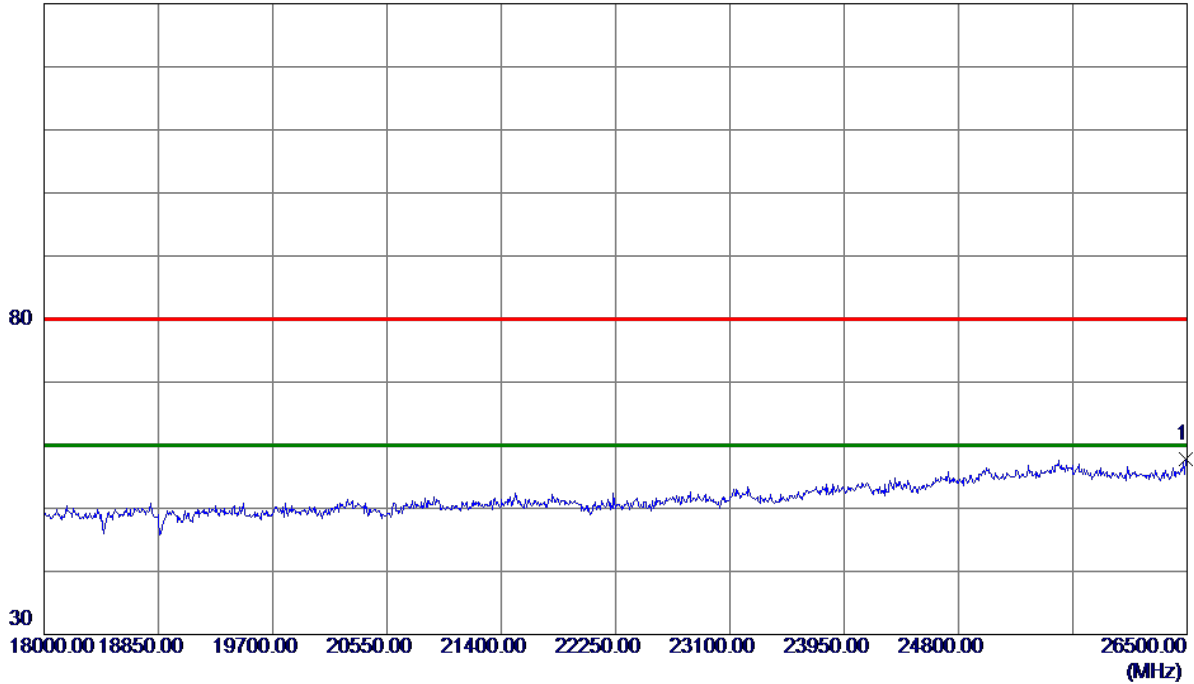

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	26491.5000	39.78	18.00	57.78	80.00	-22.22	Peak	

Orthogonal Axis	X
Test Mode:	TX N-40M Mode 2437 MHz

Vertical

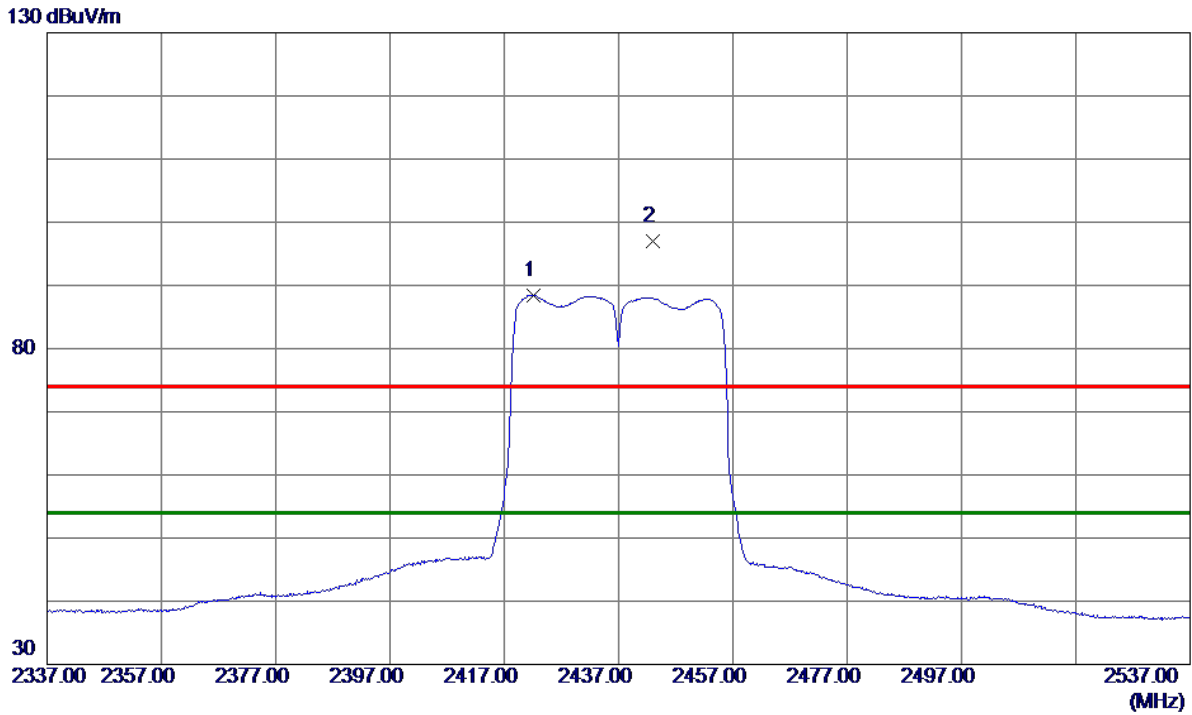


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	2422.2000	81.11	7.36	88.47	54.00	34.47	AVG	No Limit
2	2443.0000	89.57	7.35	96.92	74.00	22.92	Peak	No Limit

Orthogonal Axis	X
Test Mode:	TX N-40M Mode 2437 MHz

Vertical

130 dBuV/m

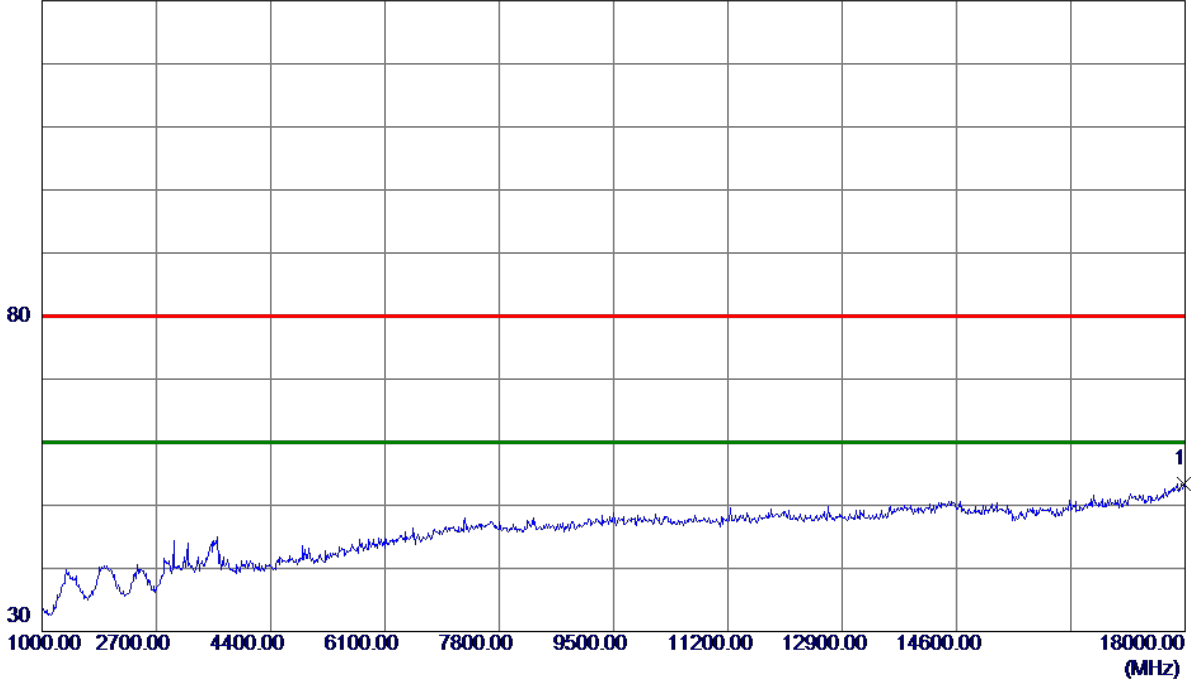


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	17983.0000	35.76	17.72	53.48	80.00	-26.52	Peak	

Orthogonal Axis	X
Test Mode:	TX N-40M Mode 2437 MHz

Vertical


130 dBuV/m

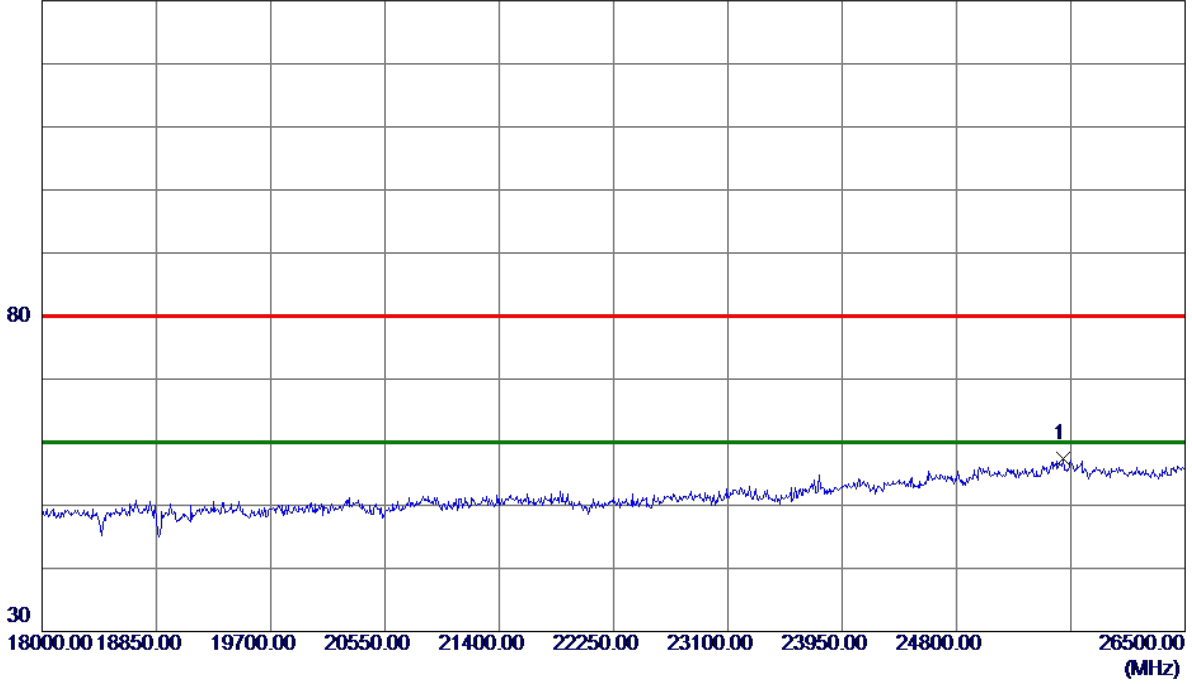

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	25594.7500	40.23	17.22	57.45	80.00	-22.55	Peak	

Orthogonal Axis	X
Test Mode:	TX N-40M Mode 2437 MHz

Horizontal

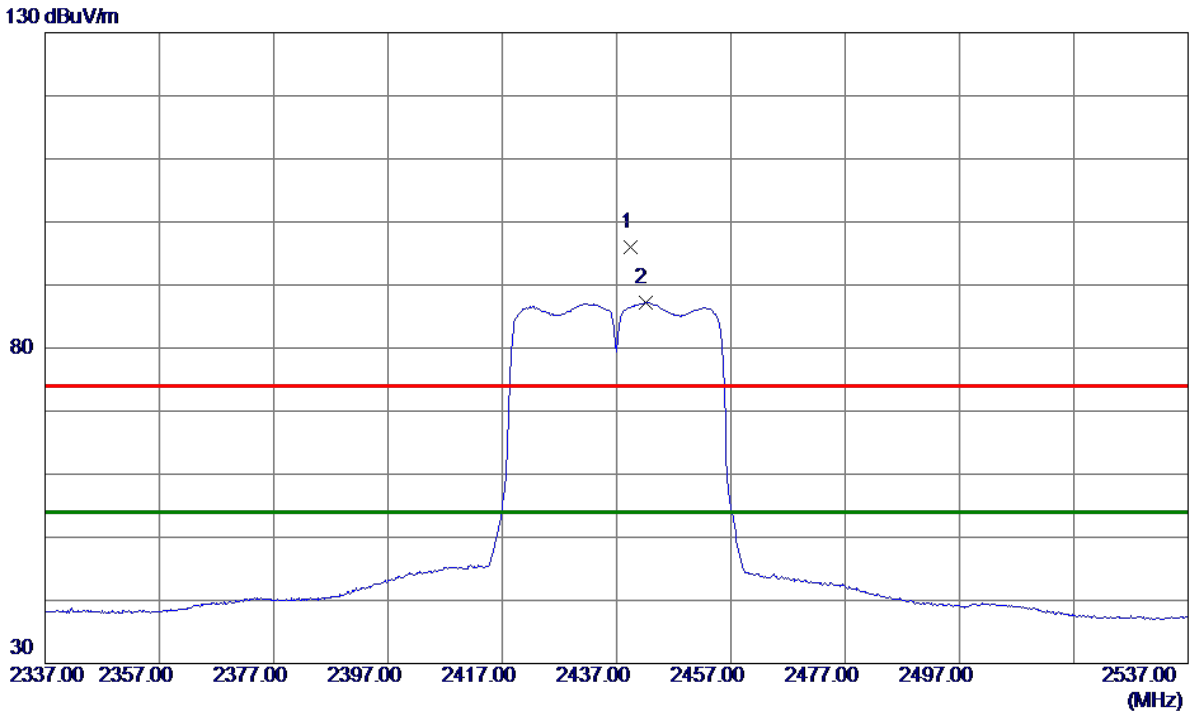


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2439.5000	88.66	7.35	96.01	74.00	22.01	Peak	No Limit
2 *	2442.0000	79.84	7.35	87.19	54.00	33.19	AVG	No Limit

Orthogonal Axis	X
Test Mode:	TX N-40M Mode 2437 MHz

Horizontal

130 dBuV/m

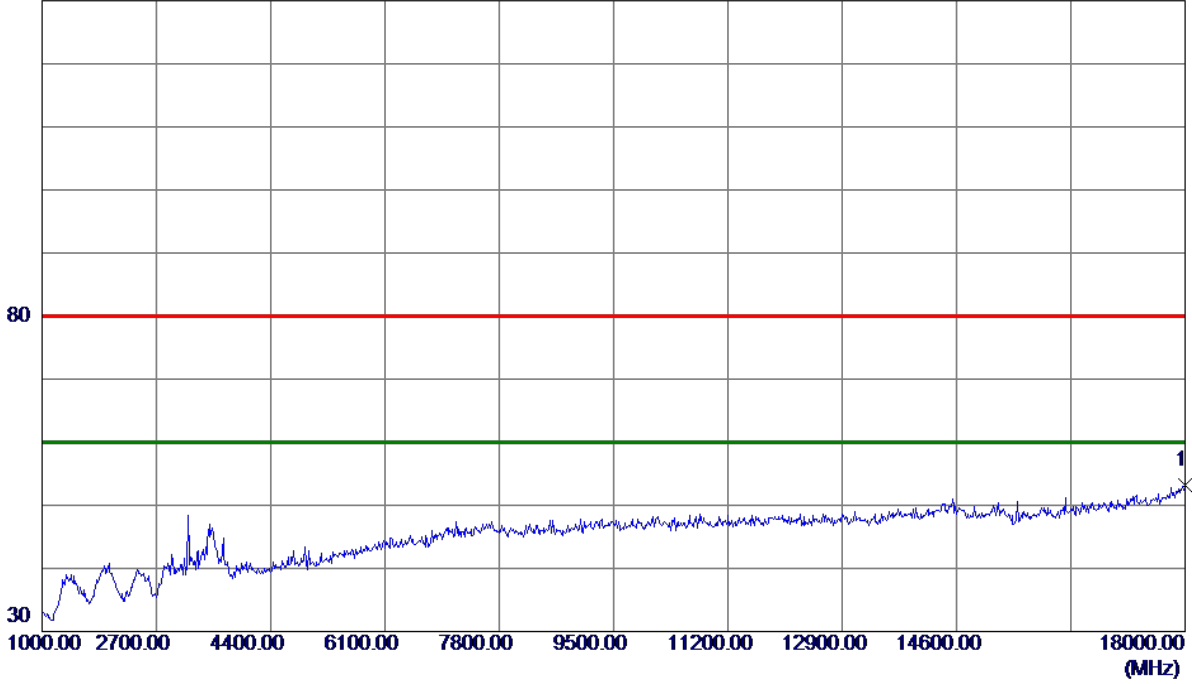


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	18000.0000	35.34	17.77	53.11	80.00	-26.89	Peak	

Orthogonal Axis	X
Test Mode:	TX N-40M Mode 2437 MHz

Horizontal

130 dBuV/m

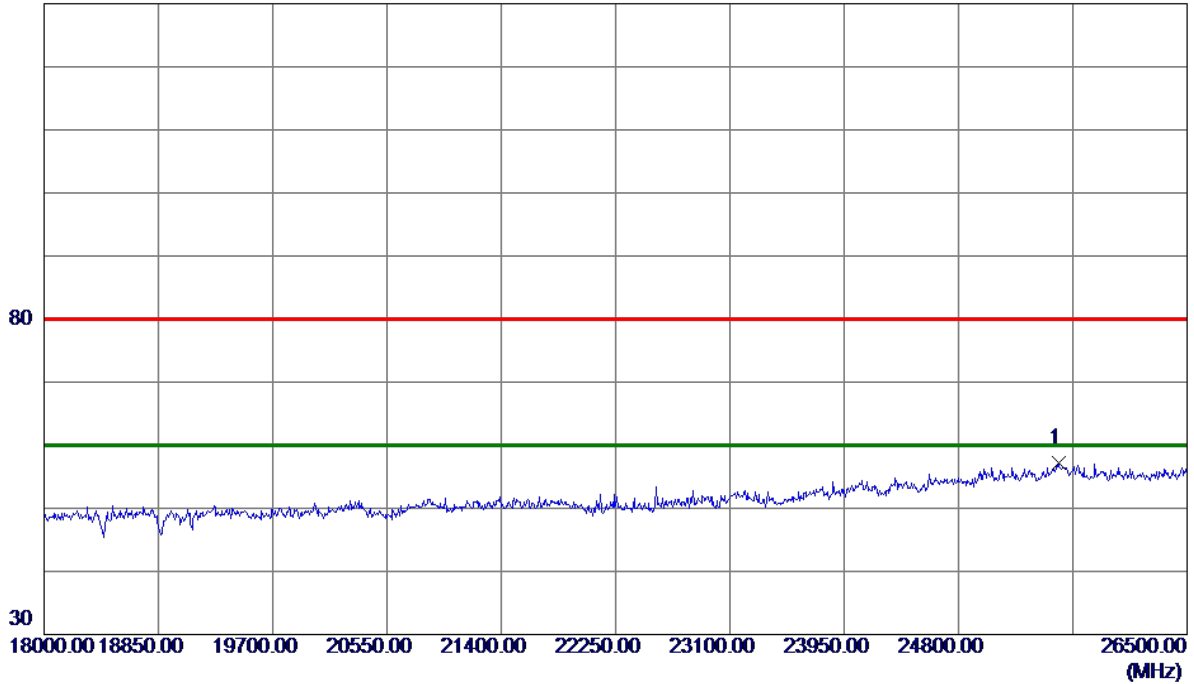


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	25543.7500	39.89	17.28	57.17	80.00	-22.83	Peak	

Orthogonal Axis	X
Test Mode:	TX N-40M Mode 2452MHz

Vertical

130 dBuV/m

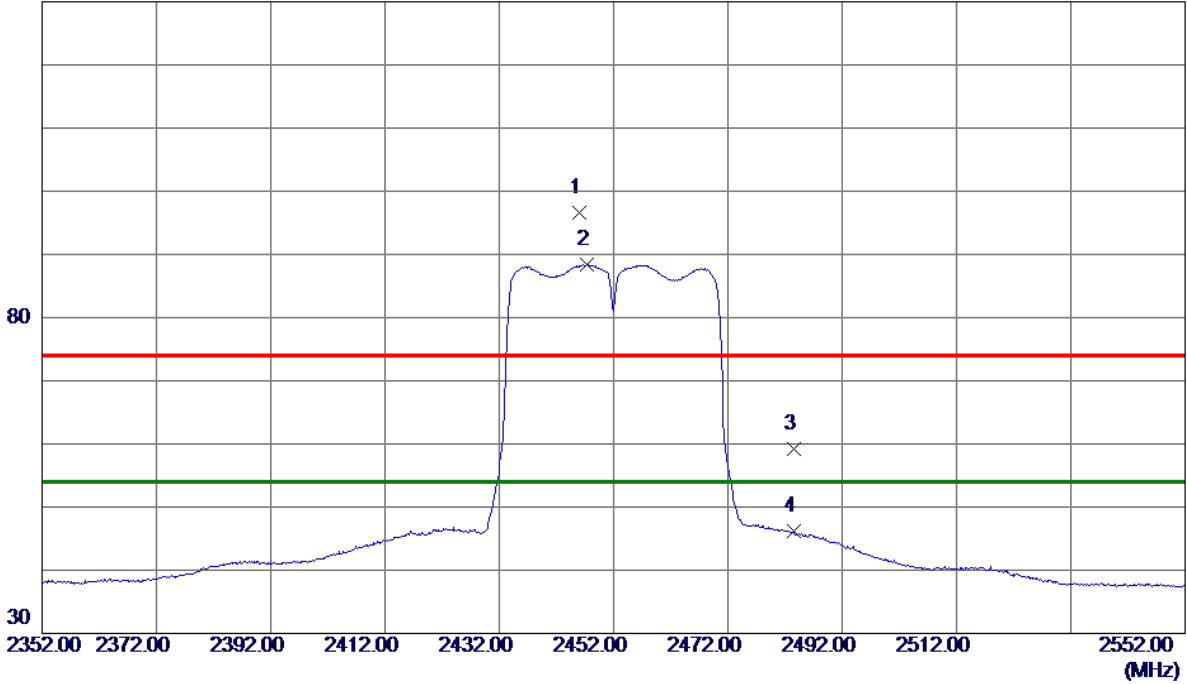


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2446.0000	89.29	7.35	96.64	74.00	22.64	Peak	No Limit
2 *	2447.3000	81.02	7.34	88.36	54.00	34.36	AVG	No Limit
3	2483.5000	51.94	7.32	59.26	74.00	-14.74	Peak	
4	2483.5000	38.79	7.32	46.11	54.00	-7.89	AVG	

Orthogonal Axis	X
Test Mode:	TX N-40M Mode 2452MHz

Vertical

130 dBuV/m

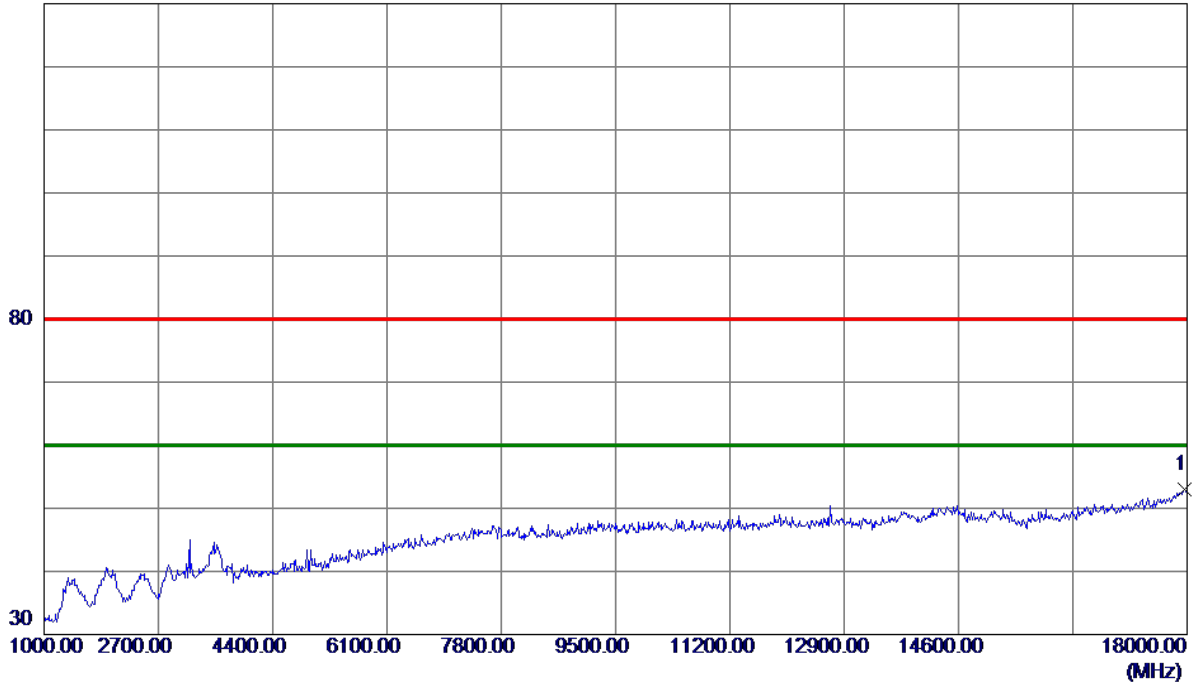


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	17966.0000	35.34	17.67	53.01	80.00	-26.99	Peak	

Orthogonal Axis	X
Test Mode:	TX N-40M Mode 2452MHz

Vertical


130 dBuV/m

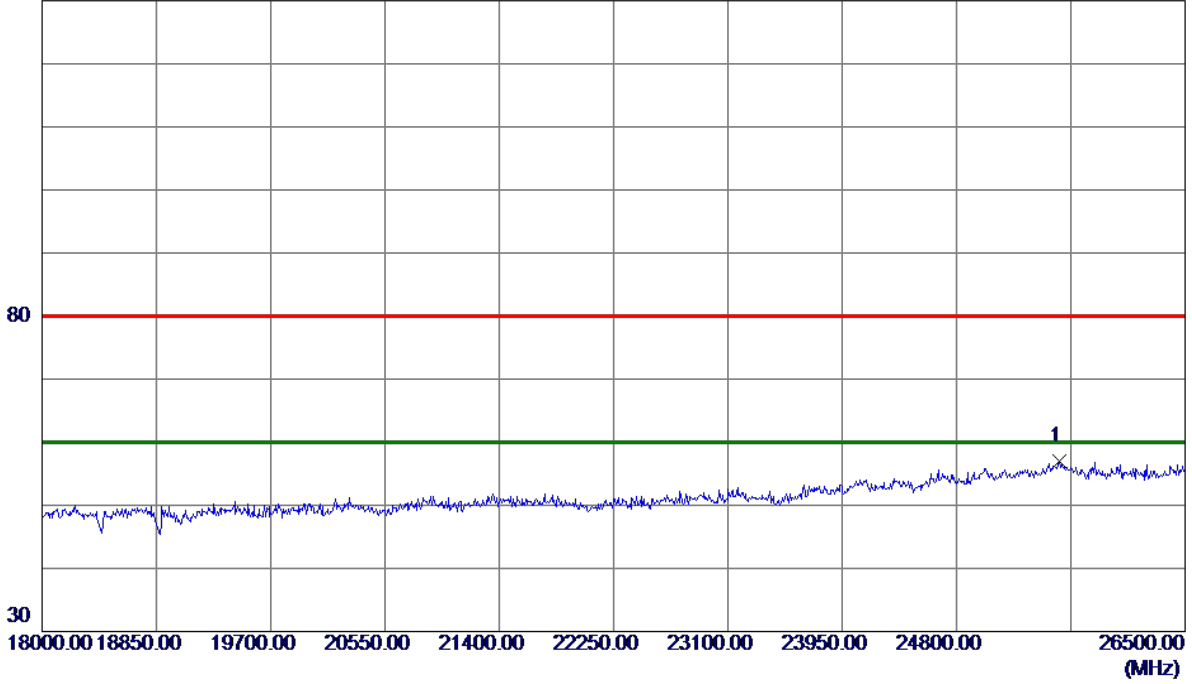

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	25565.0000	39.71	17.25	56.96	80.00	-23.04	Peak	

Orthogonal Axis	X
Test Mode:	TX N-40M Mode 2452MHz

Horizontal

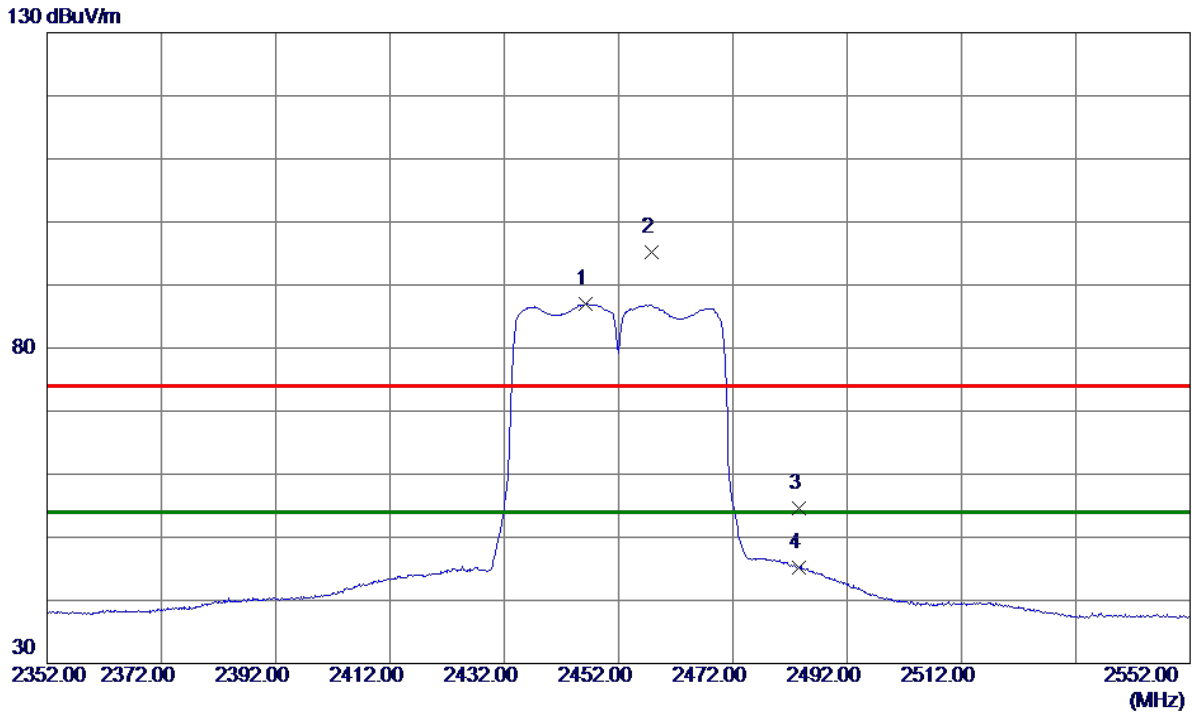


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	2446.2000	79.63	7.35	86.98	54.00	32.98	AVG	No Limit
2	2457.8000	87.79	7.34	95.13	74.00	21.13	Peak	No Limit
3	2483.5000	47.24	7.32	54.56	74.00	-19.44	Peak	
4	2483.5000	37.79	7.32	45.11	54.00	-8.89	AVG	

Orthogonal Axis	X
Test Mode:	TX N-40M Mode 2452MHz

Horizontal

130 dBuV/m

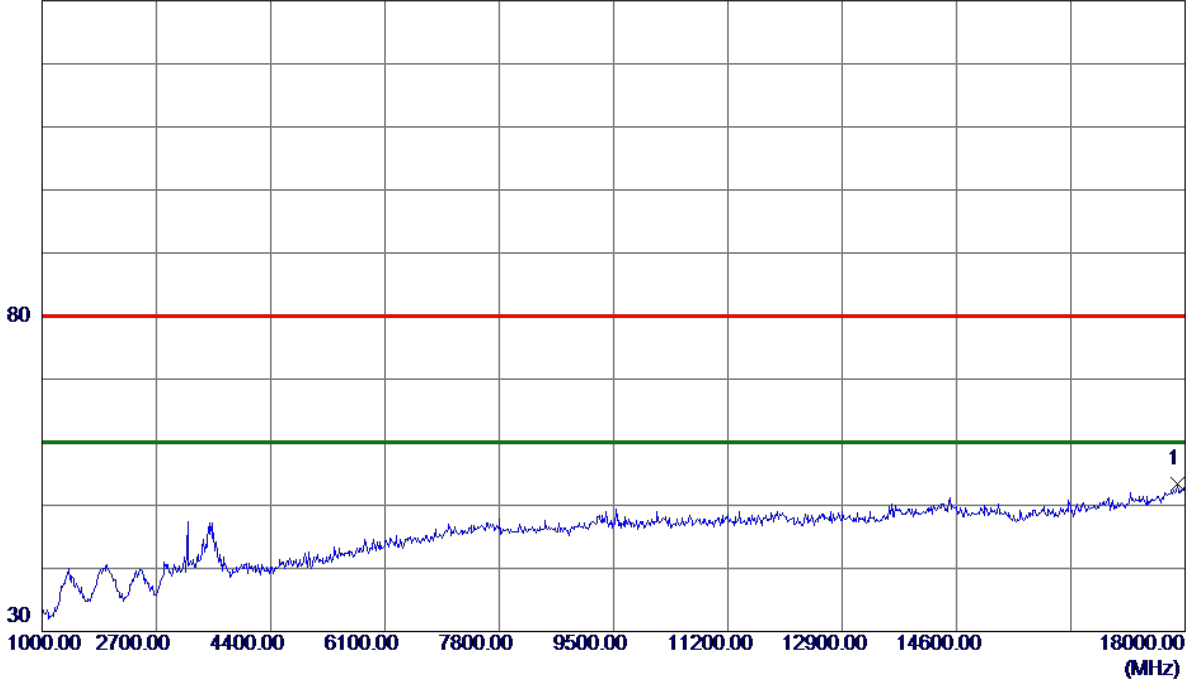


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	17889.5000	35.93	17.44	53.37	80.00	-26.63	Peak	

Orthogonal Axis	X
Test Mode:	TX N-40M Mode 2452MHz

Horizontal

130 dBuV/m

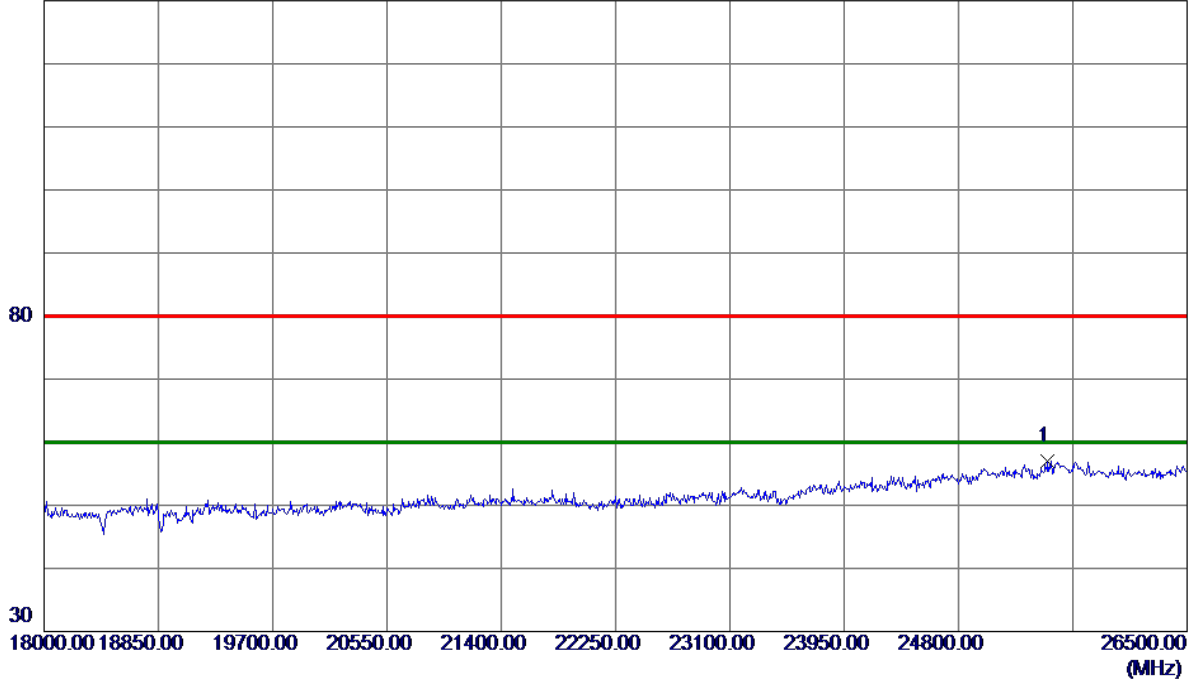

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	25463.0000	39.69	17.30	56.99	80.00	-23.01	Peak	

APPENDIX D - BANDWIDTH

Test Mode: N/A

Note: According to customers's requirement, this test item wasn't performed.

APPENDIX E - MAXIMUM AVG OUTPUT POWER

Test Mode :TX B Mode_CH01/06/11				
Average Output Power(dBm)				
Frequency (MHz)	2412	2437	2462	
Channel	CH01	CH06	CH11	
Bit Rate of Transmitter	1 Mbps	9.89	8.88	9.02
	2 Mbps	9.86	8.89	9.07
	5.5 Mbps	9.13	7.89	8.07
	11 Mbps	9.39	8.39	8.57
Max Average Power		9.89		
Limits		30.0		
Result		Pass		

Test Mode :TX G Mode_CH01/06/11				
Average Output Power(dBm)				
Frequency (MHz)	2412	2437	2462	
Channel	CH01	CH06	CH11	
Bit Rate of Transmitter	6 Mbps	7.59	6.31	6.83
	9 Mbps	6.83	6.58	6.86
	12 Mbps	7.59	6.30	6.88
	18 Mbps	7.65	6.40	6.82
	24 Mbps	7.27	6.39	6.47
	36 Mbps	7.23	6.33	6.35
	48 Mbps	7.23	6.37	6.33
	54 Mbps	7.28	6.41	6.41
Max Average Power		7.65		
Limits		30.0		
Result		Pass		

Test Mode :TX N20 Mode_CH01/06/11				
Average Output Power(dBm)				
Frequency (MHz)		2412	2437	2462
Channel		CH01	CH06	CH11
Bit Rate of Transmitter	MCS0	7.32	6.41	6.74
	MCS1	7.27	6.43	6.48
	MCS2	7.40	6.43	6.53
	MCS3	7.30	6.48	6.53
	MCS4	7.45	6.53	6.56
	MCS5	7.36	6.50	6.60
	MCS6	7.40	6.57	6.49
	MCS7	7.45	6.48	6.60
Max Average Power		7.45		
Limits		30.0		
Result		Pass		

Test Mode :TX N40 Mode_CH03/06/09				
Average Output Power(dBm)				
Frequency (MHz)		2422	2437	2452
Channel		CH03	CH06	CH09
Bit Rate of Transmitter	MCS0	5.82	5.49	5.34
	MCS1	5.93	5.48	5.39
	MCS2	5.95	5.46	5.32
	MCS3	5.76	5.43	5.36
	MCS4	5.84	5.39	5.38
	MCS5	5.80	5.39	5.35
	MCS6	5.82	5.40	5.30
	MCS7	5.41	5.41	5.23
Max Average Power		5.95		
Limits		30.0		
Result		Pass		

APPENDIX F - ANTENNA CONDUCTED SPURIOUS EMISSION

Test Mode: N/A

Note: According to customers's requirement, this test item wasn't performed.

APPENDIX G - POWER SPECTRAL DENSITY

Test Mode: N/A

Note: According to customers's requirement, this test item wasn't performed.

-----END OF TEST REPORT-----