

Test Report

Report Number: F113093E3

Applicant:

Robert Bosch Car Multimedia GmbH

Manufacturer:

Robert Bosch Car Multimedia GmbH

Equipment under Test (EUT):

John Deere Base 4

Article number: 7 620 200 026

Laboratory (CAB) accredited by
Deutsche Gesellschaft für Akkreditierung mbH
in compliance with DIN EN ISO/IEC 17025
under the Reg. No. DGA-PL-105/99-22,
FCC Test site registration number 90877 and
Industry Canada Test site registration IC3469A-1



REFERENCES

- [1] **ANSI C63.4-2009** American National Standard for Methods of Measuring of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz.
- [2] **FCC CFR 47 Part 15 (August 2011)** Radio Frequency Devices
- [3] **FCC Public Notice DA 00-705 (March 2000)**
- [4] **RSS-210 Issue 8 (December 2010)** Licence-exempt Radio Apparatus (All Frequency Bands): Category I Equipment
- [5] **RSS-Gen Issue 3 (December 2010)** General Requirements and Information for the Certification of Radio Apparatus
- [6] **Publication Number 913591 (March 2007)** Measurement of radiated emissions at the edge of the band for a Part 15 RF Device

TEST RESULT

The requirements of the tests performed as shown in the overview (clause 4) were fulfilled by the equipment under test.

The complete test results are presented in the following.

Test engineer:	Manuel BASTERT <small>Name</small>	 <small>Signature</small>	27 October 2011 <small>Date</small>
Authorized reviewer:	Bernd STEINER <small>Name</small>	 <small>Signature</small>	27 October 2011 <small>Date</small>

RESERVATION

This test report is only valid in its original form.

Any reproduction of its contents in extracts without written permission of the accredited test laboratory PHOENIX TESTLAB GmbH is prohibited.

The test results herein refer only to the tested sample. PHOENIX TESTLAB GmbH is not responsible for any generalisations or conclusions drawn from these test results concerning further samples. Any modification of the tested samples is prohibited and leads to the invalidity of this test report. Each page necessarily contains the PHOENIX TESTLAB Logo and the TEST REPORT NUMBER.

Contents:	Page
1 IDENTIFICATION.....	4
1.1 Applicant	4
1.2 Manufacturer	4
1.3 Test laboratory	4
1.4 EUT (Equipment Under Test)	5
1.5 Technical data of equipment	5
1.6 Dates.....	6
2 OPERATIONAL STATES.....	6
3 ADDITIONAL INFORMATION	8
4 OVERVIEW	8
5 TEST RESULTS.....	9
5.1 20 dB bandwidth	9
5.1.1 Method of measurement (20 dB bandwidth)	9
5.1.2 Test results (20 dB bandwidth).....	10
5.2 Carrier frequency separation	12
5.2.1 Method of measurement (carrier frequency separation)	12
5.2.2 Test results (carrier frequency separation).....	13
5.3 Number of hopping frequencies.....	15
5.3.1 Method of measurement (number of hopping frequencies)	15
5.3.2 Test results (number of hopping frequencies)	16
5.4 Dwell time.....	17
5.4.1 Method of measurement (dwell time)	17
5.4.2 Test results (dwell time).....	18
5.5 Maximum peak output power.....	21
5.5.1 Method of measurement (maximum peak output power)	21
5.5.2 Test results (maximum peak output power)	22
5.6 Band-edge compliance	24
5.6.1 Method of measurement (band-edge compliance (radiated))	24
5.6.2 Test results (band-edge compliance (radiated)).....	25
5.7 Radiated emissions.....	29
5.7.1 Method of measurement (radiated emissions)	29
5.7.2 Test results (radiated emissions)	34
5.7.2.1 Preliminary radiated emission measurement (9 kHz to 1 GHz)	34
5.7.2.2 Final radiated emission test (30 MHz to 1 GHz).....	37
5.7.2.3 Preliminary radiated emission measurement (1 GHz to 25 GHz)	39
5.7.2.4 Final radiated emission measurement (1 GHz to 25 GHz).....	46
6 TEST EQUIPMENT AND ANCILLARIES USED FOR TESTS	48
7 REPORT HISTORY	49
8 LIST OF ANNEXES.....	49

1 IDENTIFICATION

1.1 Applicant

Name:	Robert Bosch Car Multimedia GmbH
Address:	Robert-Bosch-Straße 200
	31129 Hildesheim
Country:	Germany
Name for contact purposes:	Mr. Manfred AUFZUG
Phone:	+49 (0) 5121 49 26 08
Fax:	+49 (0) 5121 49 17 26 08
Mail address:	Manfred.Aufzug@de.bosch.com

1.2 Manufacturer

Name:	Robert Bosch Car Multimedia GmbH
Address:	Robert-Bosch-Straße 200
	31129 Hildesheim
Country:	Germany
Name for contact purposes:	Mr. Manfred AUFZUG
Phone:	+49 (0) 5121 49 26 08
Fax:	+49 (0) 5121 49 17 26 08
Mail address:	Manfred.Aufzug@de.bosch.com

1.3 Test laboratory

The tests were carried out at: **PHOENIX TESTLAB GmbH**
Königswinkel 10
32825 Blomberg
Germany

Accredited by DGA Deutsche Gesellschaft für Akkreditierung mbH in compliance with DIN EN ISO/IEC 17025 under Reg. No. DGA-PL-105/99-22, FCC Test site registration number 90877 and Industry Canada Test site registration IC3469A-1.

1.4 EUT (Equipment Under Test)

Equipment under test: *	Car radio with CD drive, Bluetooth and USB
Model name: *	John Deere Base 4
Brand name: *	Bosch
Article number: *	7 620 200 082
FCC ID:	YBN-JD-BASE4
IC:	9595A-JDBASE4
Serial number:	905 CM0082 B 0002644
Hardware version:	0096G011
Software version:	SW 03.08

1.5 Technical data of equipment

Fulfills Bluetooth specification: *	V2.1 (with EDR)					
Antenna type: *	ISM2400 Vertical Embedded Antenna					
Antenna gain: *	3 dBi					
Rated output power: *	0.0 dBm (50 Ω)					
Antenna connector: *	None (SMB connector temporary installed for conducted tests)					
Power supply: *	$U_{nom} =$	12.0 V _{DC}	$U_{min} =$	10.8 V _{DC}	$U_{max} =$	15.6 V _{DC}
Type of modulation: *	FHSS (GFSK, $\pi/4$ -DQPSK, 8DPSK)					
Operating frequency range:*	2402 MHz to 2480 MHz					
Number of channels: *	79					
Temperature range: *	-20 °C to +55 °C					

*: declared by the applicant

The following external I/O cables were used:

Identification	Connector		Length *
	EUT	Ancillary	
Power supply	Customer defined	-	2 m
-	-	-	-
-	-	-	-

*: Length during the test if no other specified.

Ancillary equipment:

An ALPS Bluetooth evaluation board FX417Z24-2 was used to set up the operation modes as described in chapter 0 of this report.

1.6 Dates

Date of receipt of test sample:	18 August 2011
Start of test:	30 August 2011
End of test:	08 September 2011

2 OPERATIONAL STATES

The EUT is a car radio providing Bluetooth functionality to take a telephone call using the Hands Free Profile (HFP). For the tests two modified samples were used. One with the internal antenna and one with a temporary antenna connector installed instead of the internal antenna. At both samples the UART interface of the Bluetooth chip was wired to an external connector.

If not otherwise stated, for modulating the transmitter, a pseudo random bit sequence with a length of 339 byte and with a pattern type DH5 was used. During all tests a power setting of 50 was used.

Because the EUT was not able to hop only on the highest, mid and lowest operating frequency it was tested on these frequencies separately.


The spurious emission measurement was carried out as radiated spurious emissions with the integrated antenna. The receiver spurious radiation measurement was carried out in the same manner. During the tests the test sample was powered with 12 V_{DC}.

The operation mode was adjusted with the help of a configuration-software installed on a laptop computer. It was connected to the EUT via ALPS evaluation board to the UART interface of the Bluetooth part. After adjusting the operation mode the ALPS evaluation board and the PC were disconnected from the EUT.

The following operation modes were used during the tests:

Operation mode	Description of the operation mode	Modulation	Data rate / Mbps
1	Continuous transmitting on 2402 MHz	GFSK	1
1a		$\pi/4$ -DQPSK	2
1b		8DPSK	3
2	Continuous transmitting on 2441 MHz	GFSK	1
2a		$\pi/4$ -DQPSK	2
2b		8DPSK	3
3	Continuous transmitting on 2480 MHz	GFSK	1
3a		$\pi/4$ -DQPSK	2
3b		8DPSK	3
4	Transmitter hopping on all channels	GFSK	1
4a		$\pi/4$ -DQPSK	2
4b		8DPSK	3
5	Continuous receiving on 2402 MHz		
6	Continuous receiving on 2480 MHz		

Physical boundary of the EUT

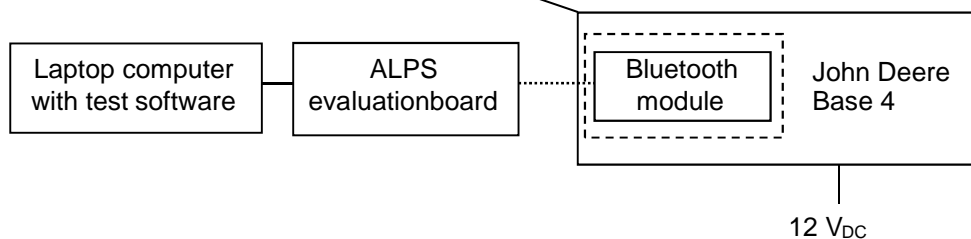

The following test modes were adjusted during the tests:

Preliminary tests were performed in different data rates and different orthogonal directions (if applicable), to find worst-case configuration and position. The data rate shown in the table below shows the found worst-case rate with respect to specific test item. The following table shows a list of the test modes used for the results, documented in this report. The radiated emission measurement was carried out in the orthogonal direction that emits the highest spurious emission levels.

Test items	Operation mode
20 dB bandwidth	1b, 2b, 3b (3 Mbps)
Carrier frequency separation	1b, 2b, 3b (3 Mbps)
Number of hopping channels	4
Dwell time	2, 2a, 2b (1, 2 and 3 Mbps)
Maximum peak output power	1, 2, 3 (1 Mbps)
Band edge compliance (radiated)	1, 3, 4 (1 Mbps)
Radiated emissions (transmitter)	1, 2, 3 (1 Mbps)
Radiated emissions (receiver)	5

3 ADDITIONAL INFORMATION

During the tests the EUT was not labelled with a label which fulfils the FCC / IC requirements.

4 OVERVIEW

Application	Frequency range [MHz]	FCC 47 CFR Part 15 section [2]	RSS 210, Issue 8 [4] or RSS-Gen, Issue 3 [5]	Status	Referpage
20 dB bandwidth	General	15.247 (a) (1)	A8.1 (a) [4]	Passed	9 et seq.
Carrier frequency separation	General	15.247 (a) (1)	A8.1 (b) [4]	Passed	12 et seq.
Number of hopping channels	2400.0 - 2483.5	15.247 (a) (1) (iii)	A8.1 (c) [4]	Passed	15 et seq.
Dwell time	2400.0 - 2483.5	15.247 (a) (1) (iii)	A8.1 (d) [4]	Passed	17 et seq.
Maximum peak output power	2400.0 - 2483.5	15.247 (b) (1)	A8.4 (2) [4]	Passed	21 et seq.
Band edge compliance	2400.0 - 2483.5	15.247 (d)	A8.5 [4]	Passed	24 et seq.
Radiated emissions (transmitter)	0.009 - 25,000	15.205 (a) 15.209 (a)	A8.5 [4] 2.5 [4]	Passed	29 et seq.
Conducted emissions on supply line	0.15 - 30	15.207 (a)	7.2.2 [5]	Not applicable *	
Radiated emissions (receiver)	0.009 - 25,000	15.109 (a)	6 [5]	Passed	Annex D

*: Not applicable because of vehicular environment.

5 TEST RESULTS

5.1 20 dB bandwidth

5.1.1 Method of measurement (20 dB bandwidth)

The calibration of the spectrum analyser has to be checked with the help of a known signal from a signal generator. The EUT has to be connected to the spectrum analyser via a low loss cable. If the EUT is not equipped with an antenna connector, a temporary antenna connector has to be installed. The EUT has to be switched on and the hopping function has to be disabled, the transmitter shall work with its maximum data rate.

The following spectrum analyser settings shall be used:

- Span: App. 2 to 3 times the 20 dB bandwidth, centred on the actual hopping channel.
- Resolution bandwidth: $\geq 1\%$ of the 20 dB bandwidth.
- Video bandwidth: \geq the resolution bandwidth.
- Sweep: Auto.
- Detector function: peak.
- Trace mode: Max hold.

After trace stabilisation the marker shall be set on the signal peak. The first display line has to be set on this value. The second display line has to be set 20 dB below the first line (or the peak marker). The frequency lines shall be set on the intersection points between the second display line and the measured curve.

The measurement will be performed at the upper, the lower end and the middle of the assigned frequency band.


Test set-up:




5.1.2 Test results (20 dB bandwidth)

Ambient temperature	21 °C	Relative humidity	37 %
---------------------	-------	-------------------	------


113093_37.wmf: 20 dB bandwidth at the lower end of the assigned frequency band:

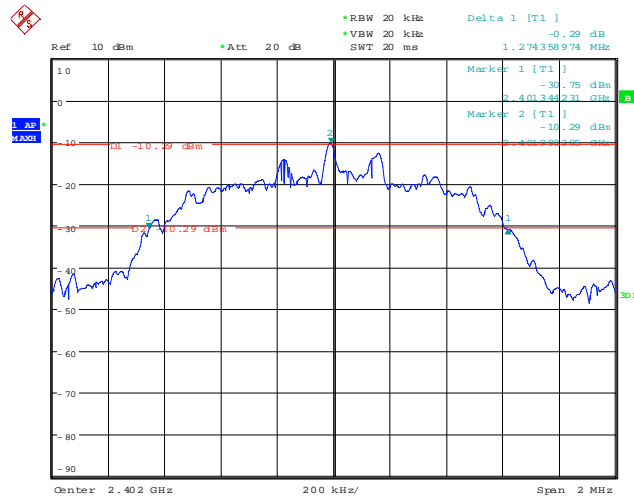

113093_38.wmf: 20 dB bandwidth at the middle of the assigned frequency band:

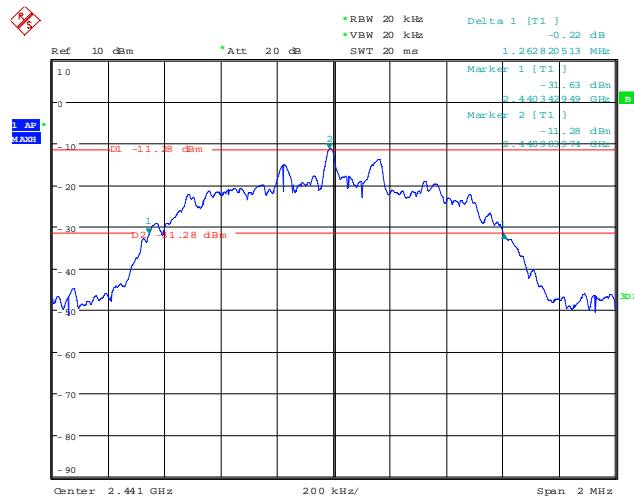

113093_39.wmf: 20 dB bandwidth at the upper end of the assigned frequency band:

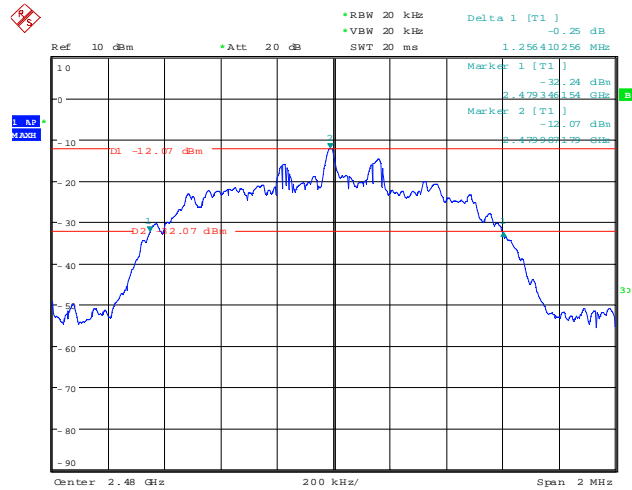

Channel number	Channel frequency [MHz]	20 dB bandwidth [kHz]
Operation mode 1, 2, 3 (GFSK)		
0	2402	926.282
39	2441	932.692
78	2480	932.692
Operation mode 1b, 2b, 3b (8DPSK)		
0	2402	1274.358
39	2441	1262.821
78	2480	1256.410
Measurement uncertainty		+0.66 dB / -0.72 dB

TEST EQUIPMENT USED FOR THE TEST:

165

5.2 Carrier frequency separation

5.2.1 Method of measurement (carrier frequency separation)

The calibration of the spectrum analyser has to be checked with the help of a known signal from a signal generator. The EUT has to be connected to the spectrum analyser via a low loss cable. If the EUT is not equipped with an antenna connector, a temporary antenna connector has to be installed. The EUT has to be switched on and the hopping function has to be enabled.


The following spectrum analyser settings shall be used:

- Span: Wide enough to capture the peaks of two adjacent channels.
- Resolution bandwidth: ≥ 1 % of the span.
- Video bandwidth: \geq the resolution bandwidth.
- Sweep: Auto.
- Detector function: peak.
- Trace mode: Max hold.

After trace stabilisation the marker and the delta marker function will be used to determine the separation between the peaks of two adjacent channel signals.

The measurement will be performed at the upper, the lower end and the middle of the assigned frequency band.


Test set-up:

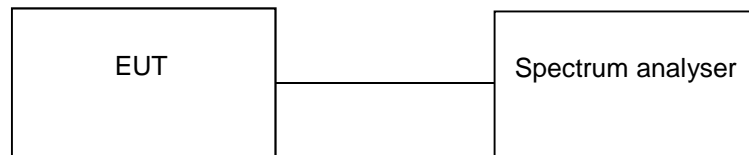


5.2.2 Test results (carrier frequency separation)

Ambient temperature	21 °C	Relative humidity	37 %
---------------------	-------	-------------------	------


113093_40.wmf: Channel separation at the lower end of the assigned frequency band:

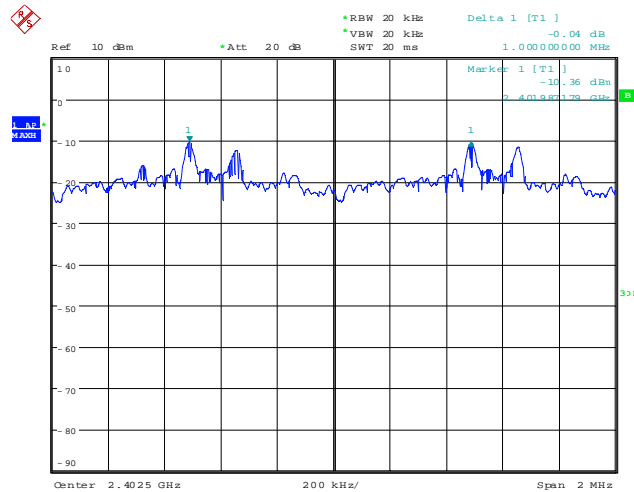

113093_41.wmf: Channel separation at the middle of the assigned frequency band:

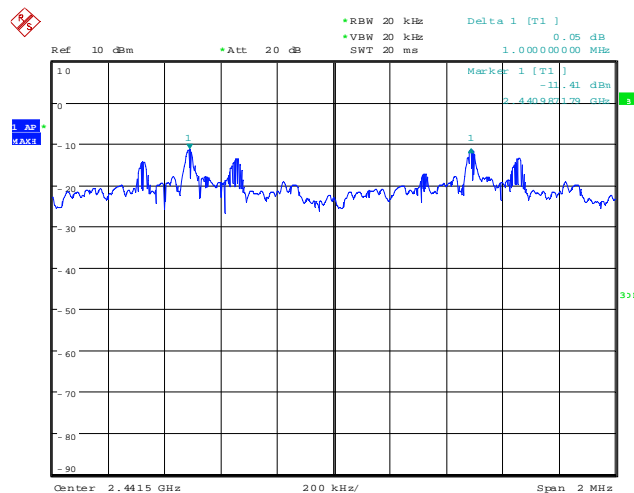

113093_42.wmf: Channel separation at the upper end of the assigned frequency band:

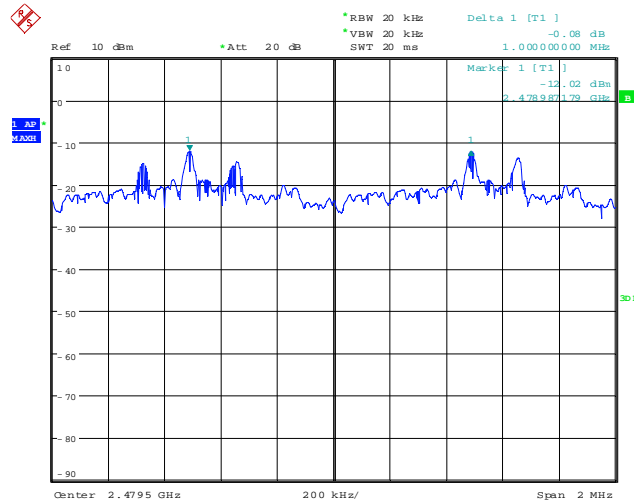

Channel number	Channel frequency [MHz]	Channel separation [kHz]	Minimum limit [kHz]
Operation mode 4			
0	2402	1000.000	849.572 ($2/3$ of the 20 dB bandwidth)
39	2441	1000.000	841.881 ($2/3$ of the 20 dB bandwidth)
78	2480	1000.000	837.607 ($2/3$ of the 20 dB bandwidth)
Measurement uncertainty			$<10^{-7}$

Test result:

Passed

TEST EQUIPMENT USED FOR THE TEST:

165

5.3 Number of hopping frequencies

5.3.1 Method of measurement (number of hopping frequencies)


The calibration of the spectrum analyser has to be checked with the help of a known signal from a signal generator. The EUT has to be connected to the spectrum analyser via a low loss cable. If the EUT is not equipped with an antenna connector, a temporary antenna connector has to be installed. The EUT has to be switched on and the hopping function has to be enabled.

The following spectrum analyser settings shall be used:

- Span: Equal to the assigned frequency band.
- Resolution bandwidth: $\geq 1\%$ of the span.
- Video bandwidth: \geq the resolution bandwidth.
- Sweep: Auto.
- Detector function: Peak.
- Trace mode: Max hold.

After trace stabilisation the number of hopping channels could be counted. It might be possible to divide the span into some sub ranges in order to clearly show all hopping frequencies.


Test set-up:

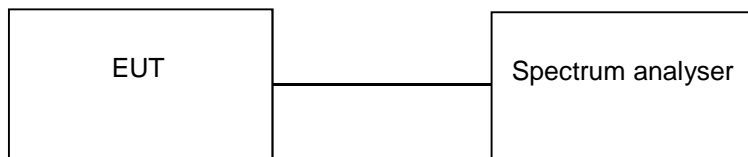

5.3.2 Test results (number of hopping frequencies)

Ambient temperature	21 °C	Relative humidity	37 %
---------------------	-------	-------------------	------

113093_43.wmf: Number of hopping channels:

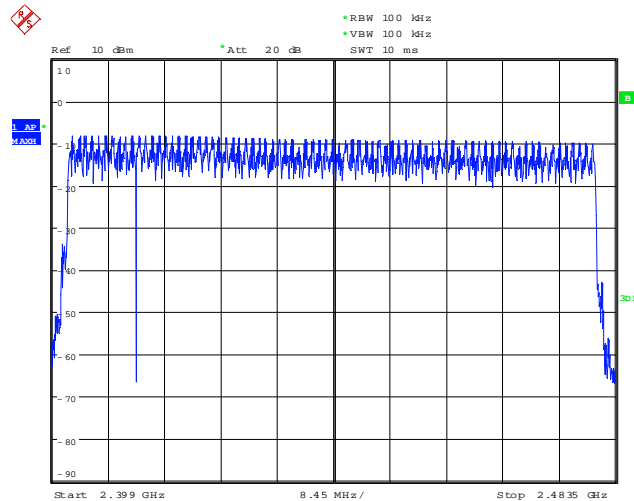

Number of hopping channels	Limit
79	At least 15

TEST EQUIPMENT USED FOR THE TEST:

165

5.4 Dwell time

5.4.1 Method of measurement (dwell time)

The calibration of the spectrum analyser has to be checked with the help of a known signal from a signal generator. The EUT has to be connected to the spectrum analyser via a low loss cable. If the EUT is not equipped with an antenna connector, a temporary antenna connector has to be installed. The EUT has to be switched on and the hopping function has to be enabled.

The following spectrum analyser settings shall be used:


- Span: Zero, centred on a hopping channel.
- Resolution bandwidth: 1 MHz.
- Video bandwidth: \geq the resolution bandwidth.
- Sweep: As necessary to capture the entire dwell time per hopping channel.
- Detector function: peak.
- Trace mode: Max hold.

The marker and delta marker function of the spectrum analyser will be used to determine the dwell time.

The measurement will be performed at the upper and lower end and the middle of the assigned frequency band.

If the EUT is possible to operate with different mode of operation (data rates, modulation formats etc.) the test will be repeated with every different operation mode of the EUT.


Test set-up:

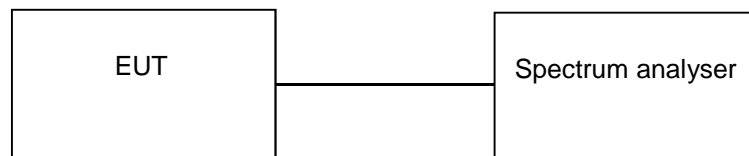


5.4.2 Test results (dwell time)

Ambient temperature	21 °C	Relative humidity	37 %
---------------------	-------	-------------------	------


113093_34.wmf: Dwell time at the middle of the assigned frequency band (operation mode 2):

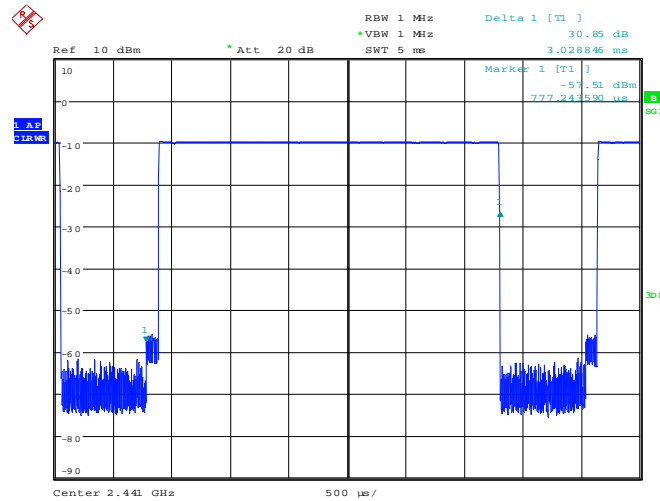

113093_35.wmf: Dwell time at the middle of the assigned frequency band (operation mode 2a):

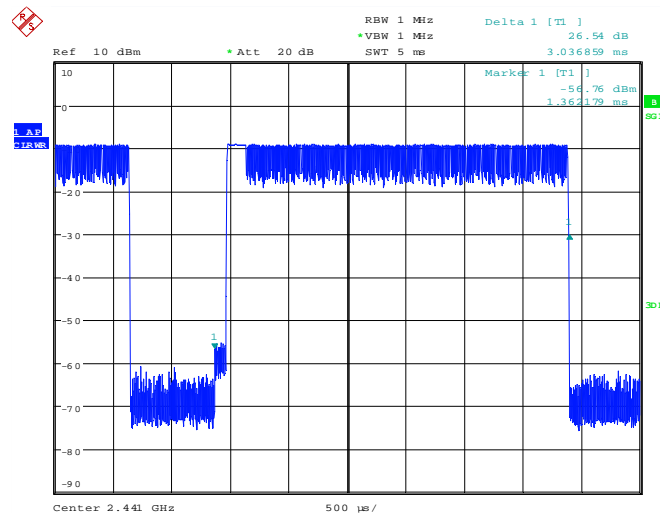

113093_36.wmf: Dwell time at the middle of the assigned frequency band (operation mode 2b):

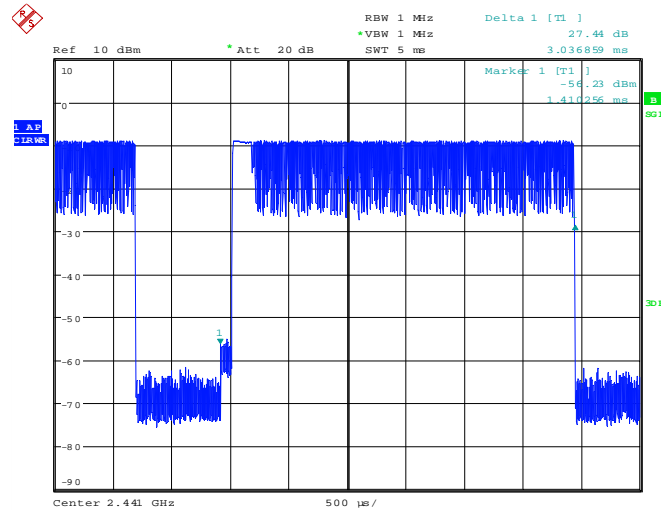

The dwell time is calculated with the following formula:

Dwell time = $t_{\text{pulse}} \times n_{\text{hops}} / \text{number of hopping channels} \times 31.6$ (equal to 0.4 s x number of hopping channels)

Where:

t_{pulse} is the measured pulse time (pls. refer the plots of the spectrum analyser above) [s],
 n_{hops} is the number of hops per second in the actual operating mode of the transmitter [1/s].

The hopping rate of the system is 1600 hops per second and the system uses 79 channels. For this reason one time slot has a length of 625 μs .

With the used hopping mode (DH1) a packet need 1 timeslot for transmitting and the next timeslot for receiving. So the system makes in worst case 800 hops per second in transmit mode ($n_{\text{hops}} = 800 \text{ 1/s}$).

With the used hopping mode (DH3) a packet need 3 timeslots for transmitting and the next timeslot for receiving. So the system makes in worst case 400 hops per second in transmit mode ($n_{\text{hops}} = 400 \text{ 1/s}$).

With the used hopping mode (DH5, 2DH5 and 3DH5) a packet need 5 timeslots for transmitting and the next timeslot for receiving. So the system makes in worst case 267 hops per second in transmit mode ($n_{\text{hops}} = 267 \text{ 1/s}$).

Operation mode 2				
Channel number	Channel frequency [MHz]	t_{pulse} [μs]	Dwell time [ms]	Limit [ms]
39	2441	3028.85	323.48	400
Operation mode 2a				
Channel number	Channel frequency [MHz]	t_{pulse} [μs]	Dwell time [ms]	Limit [ms]
39	2441	3036.86	324.34	400
Operation mode 2b				
Channel number	Channel frequency [MHz]	t_{pulse} [μs]	Dwell time [ms]	Limit [ms]
39	2441	3036.86	324.34	400
Measurement uncertainty			$<10^{-7}$	

Test result:

Passed

TEST EQUIPMENT USED FOR THE TEST:

165

5.5 Maximum peak output power

5.5.1 Method of measurement (maximum peak output power)

The calibration of the spectrum analyser has to be checked with the help of a known signal from a signal generator. The EUT has to be connected to the spectrum analyser via a low loss cable. If the EUT is not equipped with an antenna connector, a temporary antenna connector has to be installed. The EUT has to be switched on and the hopping function has to be disabled.


The following spectrum analyser settings shall be used:

- Span: Approx. 5 times the 20 dB bandwidth, centred on a hopping channel.
- Resolution bandwidth: > the 20 dB bandwidth of the emission being measured.
- Video bandwidth: \geq the resolution bandwidth.
- Sweep: Auto.
- Detector function: peak.
- Trace mode: Max hold.

After trace stabilisation the marker shall be set on the signal peak. The indicated level is the peak output power, which has to be corrected with the value of the cable loss and an external attenuation (if necessary).

The measurement will be performed at the upper and lower end and the middle of the assigned frequency band.


Test set-up:

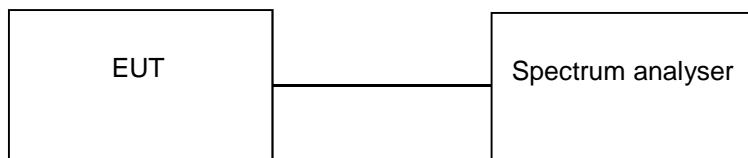


5.5.2 Test results (maximum peak output power)

Ambient temperature	21 °C	Relative humidity	37 %
---------------------	-------	-------------------	------


113093_58.wmf: Maximum peak output power at the lower end of the assigned frequency band (operation mode 1):

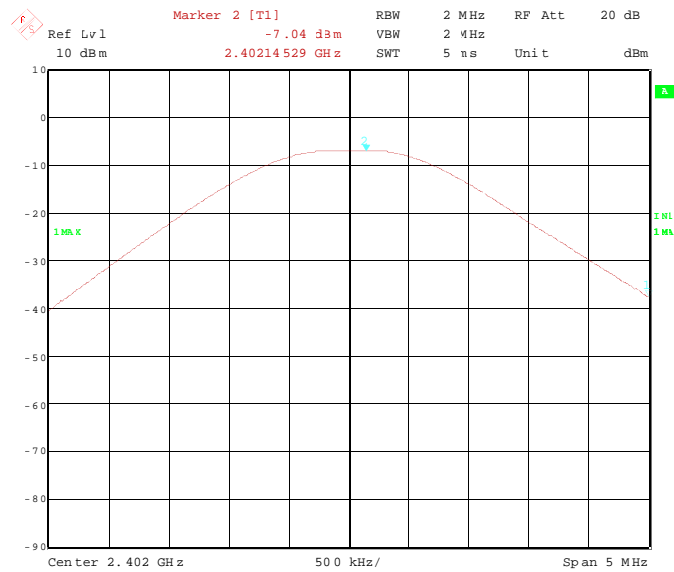

113093_59.wmf: Maximum peak output power at the middle of the assigned frequency band (operation mode 2):

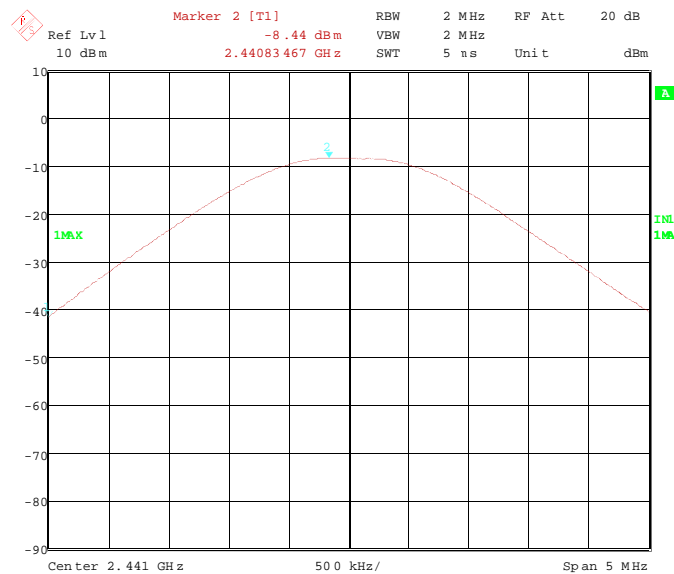

113093_60.wmf: Maximum peak output power at the upper end of the assigned frequency band (operation mode 3):

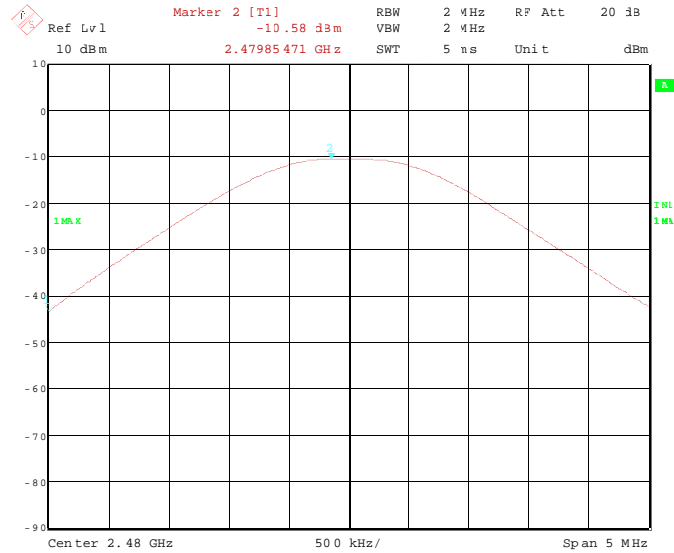

Operation mode	Channel number	Channel frequency [MHz]	Maximum peak output power [dBm]	Antenna gain [dBi]	Peak power limit [dBm]
1 1a 1b	0	2402	-7.0 -10.1 -11.0	3.0	30.0
2 2a 2b	39	2441	-8.4 -11.3 -12.1	3.0	30.0
3 3a 3b	78	2480	-10.6 -13.0 -13.9	3.0	30.0
Measurement uncertainty				+0.66 dB / -0.72 dB	

These values represent the worst case operation mode.

Test result: Passed

TEST EQUIPMENT USED FOR THE TEST:

165

5.6 Band-edge compliance

5.6.1 Method of measurement (band-edge compliance (radiated))

The same test set-up as used for the final radiated emission measurement shall be used (refer also subclause 5.2.1 of this test report). The measurements shall be carried out with using a resolution bandwidth of 100 kHz.

The following spectrum analyser settings shall be used:

- Span: Wide enough to capture the peak level of the emission on the channel closest to the band-edge, as well as any modulation products, which fall outside the assigned frequency band.
- Resolution bandwidth: 100 kHz.
- Video bandwidth: \geq the resolution bandwidth.
- Sweep: Auto.
- Detector function: Peak.
- Trace mode: Max hold.


After trace stabilisation the marker shall be set on the signal peak. The first display line has to be set on this value. The second display line has to be set 20 dB below the first line (or the peak marker). The frequency line shall be set on the edge of the assigned frequency band. Set the second marker on the emission at the band-edge, or on the highest modulation product outside of the band, if this level is higher than that at the band-edge. This frequency shall be measured with the EMI receiver as described in subclause 5.2.1 of this test report, but 100 kHz resolution bandwidth shall be used.

The measurement will be performed at the upper end of the assigned frequency band and with hopping on and off.


5.6.2 Test results (band-edge compliance (radiated))

Ambient temperature	21 °C	Relative humidity	38 %
---------------------	-------	-------------------	------


113093_54.wmf: Radiated band-edge compliance, lower band edge, hopping off:

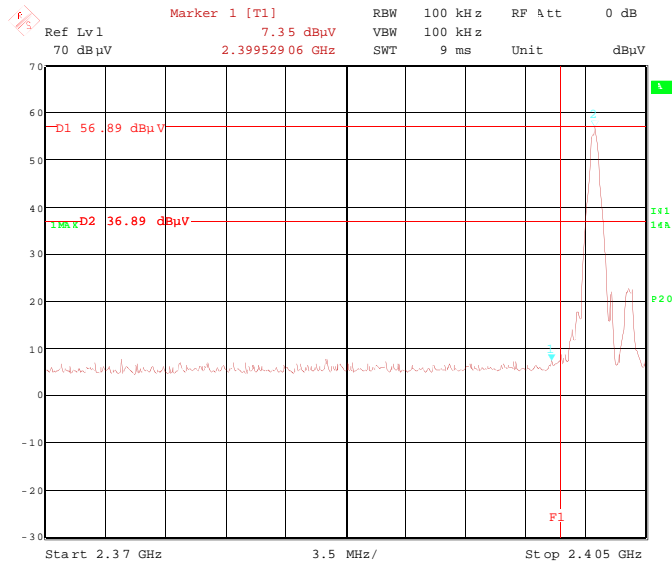


113093_55.wmf: Radiated band-edge compliance, lower band edge, hopping on:

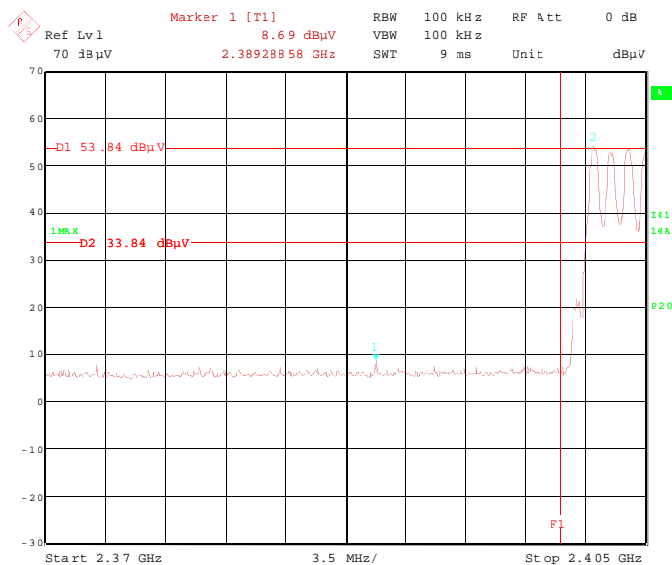

113093_57.wmf: Radiated band-edge compliance, upper band edge, hopping off:

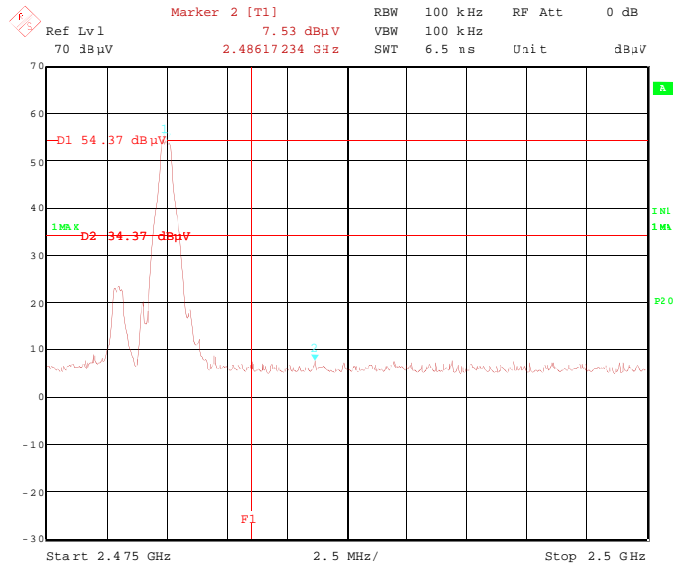

113093_56.wmf: Radiated band-edge compliance, upper band edge, hopping on:

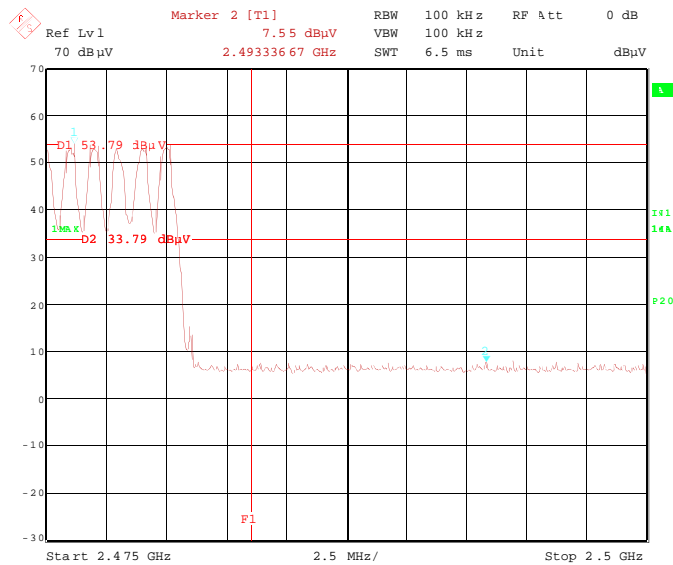

The plots on the page before are showing the radiated band-edge compliance for the upper band-edge, with and without hopping. The display line 1 (D1) in these plots represents the highest level within the assigned frequency band. The display line 2 (D2) represents the 20 dB offset to this highest level and shows the compliance with FCC 47 CFR Part 15.247 (d). The frequency line 1 (F1) shows the edge of the assigned frequency.

Band-edge compliance (lower band edge. hopping disabled)										
Result measured with the peak detector:										
Frequency GHz	Corr. value dB μ V/m	Limit dB μ V/m	Margin dB	Readings dB μ V	Antenna factor 1/m	Preamp dB	Cable loss dB	Height cm	Pol.	Restr. Band
2.402	87.7	-	-	55.7	28.3	0.0	3.7	150	Vert.	-
2.3995	38.2	74.0	35.8	6.2	28.3	0.0	3.7	150	Vert.	No
Result measured with the average detector:										
Frequency GHz	Corr. value dB μ V/m	Limit dB μ V/m	Margin dB	Readings dB μ V	Antenna factor 1/m	Preamp dB	Cable loss dB	Height cm	Pol.	Restr. Band
2.402	77.1	-	-	45.1	28.3	0.0	3.7	150	Vert.	-
2.3995	29.2	54.0	24.8	-2.8	28.3	0.0	3.7	150	Vert.	No
Measurement uncertainty							+2.2 dB / -3.6 dB			

Band-edge compliance (lower band edge. hopping enabled)										
Result measured with the peak detector:										
Frequency GHz	Corr. value dB μ V/m	Limit dB μ V/m	Margin dB	Readings dB μ V	Antenna factor 1/m	Preamp dB	Cable loss dB	Height cm	Pol.	Restr. Band
2.402	87.7	-	-	55.7	28.3	0.0	3.7	150	Vert.	-
2.3893	42.6	74.0	31.4	10.6	28.3	0.0	3.7	150	Vert.	No
Result measured with the average detector:										
Frequency GHz	Corr. value dB μ V/m	Limit dB μ V/m	Margin dB	Readings dB μ V	Antenna factor 1/m	Preamp dB	Cable loss dB	Height cm	Pol.	Restr. Band
2.402	77.1	-	-	45.1	28.3	0.0	3.7	150	Vert.	-
2.3893	33.2	54.0	20.8	1.2	28.3	0.0	3.7	150	Vert.	No
Measurement uncertainty							+2.2 dB / -3.6 dB			

Band-edge compliance (upper band edge. hopping disabled)										
Result measured with the peak detector:										
Frequency	Corr. value	Limit	Margin	Readings	Antenna factor	Preamp	Cable loss	Height	Pol.	Restr. Band
GHz	dB μ V/m	dB μ V/m	dB	dB μ V	1/m	dB	dB	cm		
2.480	89.1	-	-	56.8	28.5	0.0	3.8	150	Vert.	
2.4862	42.3	74.0	31.7	10.0	28.5	0.0	3.8	150	Vert.	Yes
Result measured with the average detector:										
Frequency	Corr. value	Limit	Margin	Readings	Antenna factor	Preamp	Cable loss	Height	Pol.	Restr. Band
GHz	dB μ V/m	dB μ V/m	dB	dB μ V	1/m	dB	dB	cm		
2.480	78.6	-	-	46.3	28.5	0.0	3.8	150	Vert.	-
2.4862	33.8	54.0	20.3	1.5	28.5	0.0	3.8	150	Vert.	Yes
Measurement uncertainty							+2.2 dB / -3.6 dB			

Band-edge compliance (upper band edge. hopping enabled)										
Result measured with the peak detector:										
Frequency	Corr. value	Limit	Margin	Readings	Antenna factor	Preamp	Cable loss	Height	Pol.	Restr. Band
GHz	dB μ V/m	dB μ V/m	dB	dB μ V	1/m	dB	dB	cm		
2.480	89.1	-	-	56.8	28.5	0.0	3.8	150	Vert.	-
2.4933	42.9	74.0	31.1	10.6	28.5	0.0	3.8	150	Vert.	Yes
Result measured with the average detector:										
Frequency	Corr. value	Limit	Margin	Readings	Antenna factor	Preamp	Cable loss	Height	Pol.	Restr. Band
GHz	dB μ V/m	dB μ V/m	dB	dB μ V	1/m	dB	dB	cm		
2.480	78.6	-	-	46.3	28.5	0.0	3.8	150	Vert.	-
2.4933	34.2	54.0	19.8	1.9	28.5	0.0	3.8	150	Vert.	Yes
Measurement uncertainty							+2.2 dB / -3.6 dB			

Test result: Passed

TEST EQUIPMENT USED FOR THE TEST:

29, 31 – 34, 36, 44

5.7 Radiated emissions

5.7.1 Method of measurement (radiated emissions)

The radiated emission measurement is subdivided into four stages.

- A preliminary measurement carried out in a fully anechoic chamber with a fixed antenna height in the frequency range 30 MHz to 1 GHz.
- A final measurement carried out on an open area test site with reflecting ground plane and various antenna height in the frequency range 30 MHz to 1 GHz.
- A preliminary measurement carried out in a fully anechoic chamber with a variable antenna distance and height in the frequency range 1 GHz to 110 GHz.
- A final measurement carried out in a fully anechoic chamber with a fixed antenna height in the frequency range 1 GHz to 110 GHz.

All measurements will be carried out with the EUT working on the middle of the assigned frequency band.


Preliminary measurement (30 MHz to 1 GHz)

In the first stage a preliminary measurement will be performed in a fully anechoic chamber with a measuring distance of 3 meter. Tabletop devices will set up on a non-conducting support with a size of 1 m by 1.5 m and a height of 80 cm. Floor-standing devices will be placed directly on the turntable/ground plane. The setup of the Equipment under test will be in accordance to ANSI C63.4-2009 [1].

The frequency range 30 MHz to 1 GHz will be measured with an EMI Receiver set to MAX Hold mode and a resolution bandwidth of 100 kHz. The measurement will be performed in horizontal and vertical polarisation of the measuring antenna and while rotating the EUT in its vertical axis in the range of 0 ° to 360 °.

The resolution bandwidth of the EMI Receiver will be set to the following values:

Frequency range	Resolution bandwidth
30 MHz to 230 MHz	100 kHz
230 MHz to 1 GHz	100 kHz

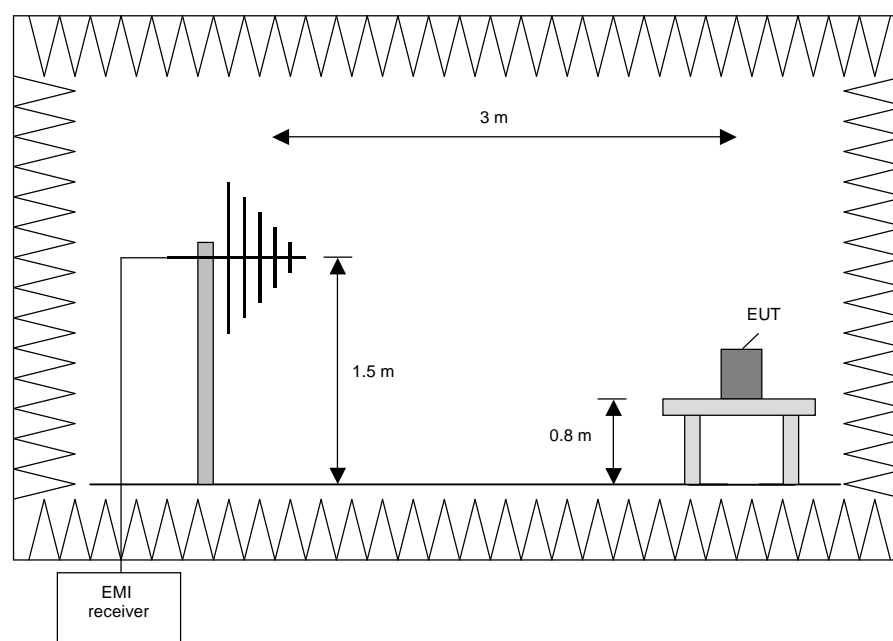

Procedure preliminary measurement:

Prescans were performed in the frequency range 30 MHz to 230 MHz and 230 MHz to 1 GHz.

The following procedure will be used:


1. Monitor the frequency range at horizontal polarisation and a EUT azimuth of 0 °.
2. Manipulate the system cables within the range to produce the maximum level of emission.
3. Rotate the EUT by 360 ° to maximize the detected signals.
4. Make a hardcopy of the spectrum.
5. Measure the frequency of the detected emissions with a lower span and resolution bandwidth to increase the accuracy and note the frequency value.
6. Repeat 1) to 4) with the other orthogonal axes of the EUT (because of EUT is a module and might be used in a handheld equipment application).
7. Repeat 1) to 5) with the vertical polarisation of the measuring antenna.

Final measurement (30 MHz to 1 GHz)

A final measurement on an open area test site will be performed on selected frequencies found in the preliminary measurement. During this test the EUT will be rotated in the range of 0 ° to 360 °, the measuring antenna will be set to horizontal and vertical polarisation and raised and lowered in the range from 1 m to 4 m to find the maximum level of emissions.

The resolution bandwidth of the EMI Receiver will be set to the following values:

Frequency range	Resolution bandwidth
30 MHz to 1 GHz	120 kHz

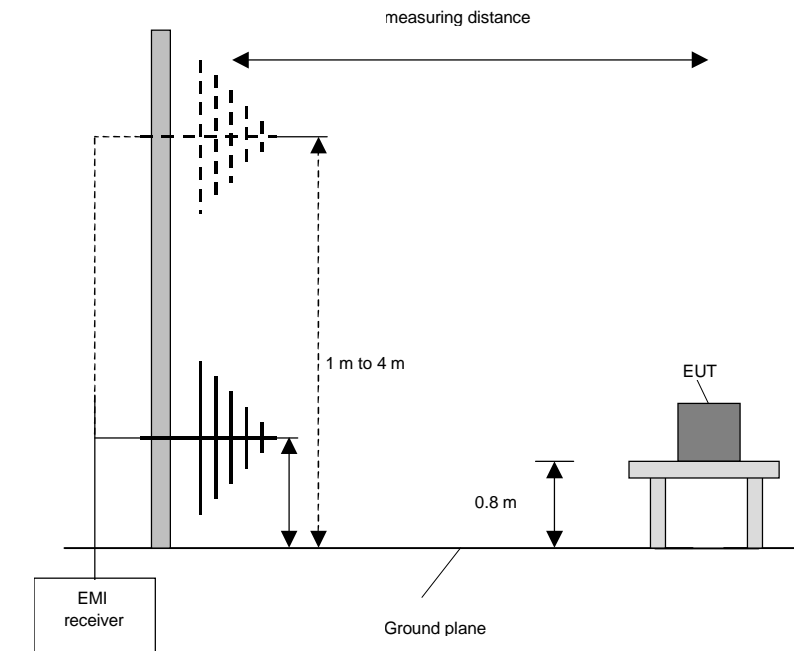

Procedure final measurement:

The following procedure will be used:

- 1) Measure on the selected frequencies at an antenna height of 1 m and a EUT azimuth of 23 °.
- 2) Move the antenna from 1 m to 4 m and note the maximum value at each frequency.
- 3) Rotate the EUT by 45 ° and repeat 2) until an azimuth of 337 ° is reached.
- 4) Repeat 1) to 3) for the other orthogonal antenna polarization.
- 5) Move the antenna and the turntable to the position where the maximum value is detected.
- 6) Measure while moving the antenna slowly +/- 1 m.
- 7) Set the antenna to the position where the maximum value is found.
- 8) Measure while moving the turntable +/- 45 °.
- 9) Set the turntable to the azimuth where the maximum value is found.
- 10) Measure with Final detector (QP and AV) and note the value.
- 11) Repeat 5) to 10) for each frequency.
- 12) Repeat 1) to 11) for each orthogonal axes of the EUT (because of EUT is a module and might be used in a handheld equipment application).

Preliminary and final measurement (1 GHz to 110 GHz)


This measurement will be performed in a fully anechoic chamber. Tabletop devices will set up on a non-conducting support with a size of 1 m by 1.5 m and a height of 80 cm. Floor-standing devices will be placed directly on the turntable/ground plane. The set up of the Equipment under test will be in accordance to ANSI C63.4-2009 [1].

Preliminary measurement (1 GHz to 110 GHz)

The frequency range will be divided into different sub ranges depending of the frequency range of the used horn antenna. The spectrum analyser set to MAX Hold mode and a resolution bandwidth of 100 kHz. The measurement will be performed in horizontal and vertical polarisation of the measuring antenna, the antenna close to the EUT and while moving the antenna over all sides of the EUT. With the spectrum analyser in CLEAR / WRITE mode the cone of the emission should be found and then the measuring distance will be set to 3 m with the receiving antenna moving in this cone of emission. At this position the final measurement will be carried out.

The resolution bandwidth of the EMI Receiver will be set to the following values:

Frequency range	Resolution bandwidth
1 GHz to 4 GHz	100 kHz
4 GHz to 12 GHz	100 kHz
12 GHz to 18 GHz	100 kHz
18 GHz to 26.5 GHz	100 kHz
26.5 GHz to 40 GHz	100 kHz
40 GHz to 60 GHz	100 kHz
50 GHz to 75 GHz	100 kHz
75 GHz to 110 GHz	100 kHz

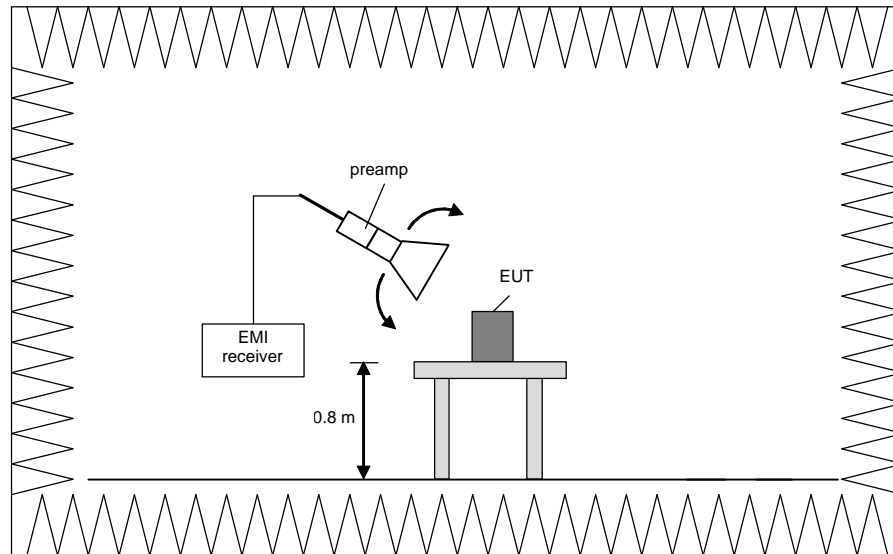


Final measurement (1 GHz to 110 GHz)

The frequency range will be divided into different sub ranges depending of the frequency range of the used horn antenna. The EMI Receiver set to peak and average mode and a resolution bandwidth of 1 MHz. The measurement will be performed in horizontal and vertical polarisation of the measuring antenna and while rotating the EUT in its vertical axis in the range of 0 ° to 360 ° in order to have the antenna inside the cone of radiation.

The resolution bandwidth of the EMI Receiver will be set to the following values:

Frequency range	Resolution bandwidth
1 GHz to 4 GHz	1 MHz
4 GHz to 12 GHz	1 MHz
12 GHz to 18 GHz	1 MHz
18 GHz to 26.5 GHz	1 MHz
26.5 GHz to 40 GHz	1 MHz
40 GHz to 60 GHz	1 MHz
50 GHz to 75 GHz	1 MHz
75 GHz to 110 GHz	1 MHz

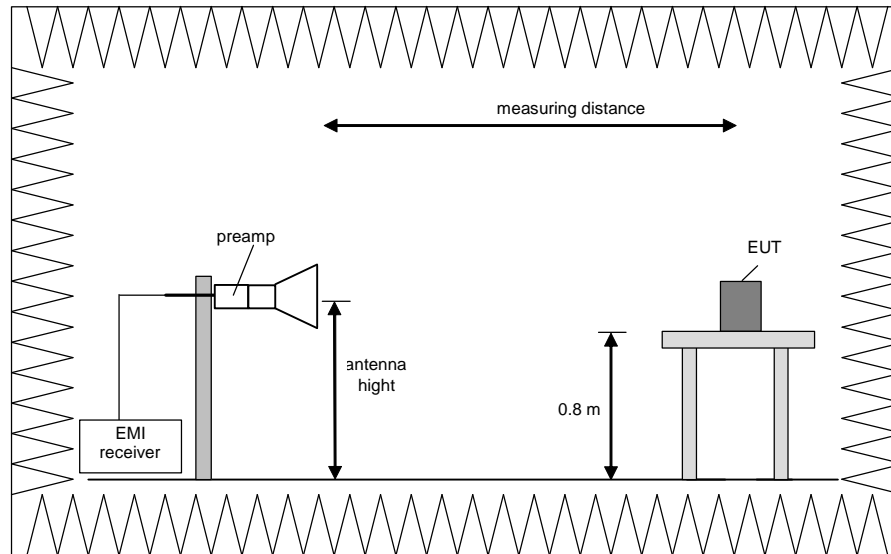

Procedure of measurement:

The measurements were performed in the frequency range 1 GHz to 4 GHz, 4 GHz to 12 GHz, 12 GHz to 18 GHz, 18 GHz to 26.5 GHz, 26.5 GHz to 40 GHz, 40 GHz to 60 GHz, 60 GHz to 75 GHz and 75 GHz to 110 GHz.

The following procedure will be used:

- 1) Monitor the frequency range at horizontal polarisation and move the antenna over all sides of the EUT (if necessary move the EUT to another orthogonal axis).
- 2) Change the antenna polarisation and repeat 1) with vertical polarisation.
- 3) Make a hardcopy of the spectrum.
- 4) Measure the frequency of the detected emissions with a lower span and resolution bandwidth to increase the accuracy and note the frequency value.
- 5) Change the analyser mode to Clear / Write and found the cone of emission.
- 6) Rotate and move the EUT, so that the measuring distance can be enlarged to 3 m and the antenna will be still inside the cone of emission.
- 7) Measure the level of the detected frequency with the correct resolution bandwidth, with the antenna polarisation and azimuth and the peak and average detector, which causes the maximum emission.
- 8) Repeat steps 1) to 7) for the next antenna spot if the EUT is larger than the antenna beamwidth.

Step 1) to 6) are defined as preliminary measurement.

5.7.2 Test results (radiated emissions)

5.7.2.1 Preliminary radiated emission measurement (9 kHz to 1 GHz)

Ambient temperature	20 °C	Relative humidity	43 %
---------------------	-------	-------------------	------


Position of EUT: The EUT was set-up on a non-conducting table of a height of 0.8 m. The distance between EUT and antenna was 3 m.

Cable guide: The cable of the EUT is running vertically to the false floor. For detail information of test set-up and the cable guide refer to the pictures in annex A of this test report.

Test record: All results are shown in the following.

Supply voltage: During all measurements the EUT was supplied with 12.0 V_{DC}.


113093_31.wmf: Spurious emissions from 9 kHz to 150 kHz (operation mode 2):

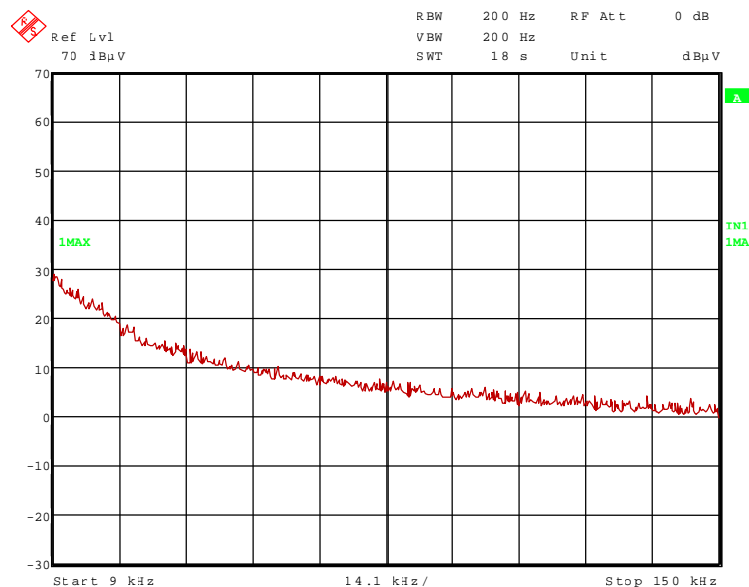


TEST EQUIPMENT USED FOR THE TEST:

29, 31 – 35, 43, 55

113093_32.wmf: Spurious emissions from 150 kHz to 1 MHz (operation mode 2):

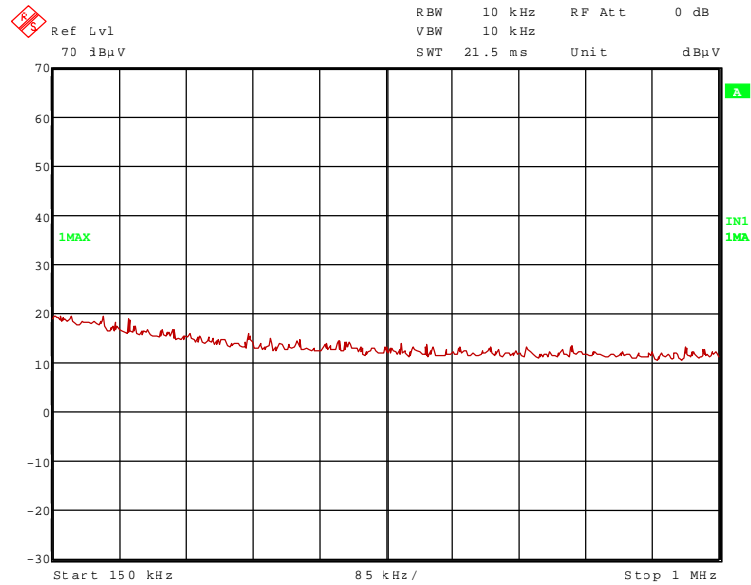


113093_33.wmf: Spurious emissions from 1 MHz to 30 MHz (operation mode 2):

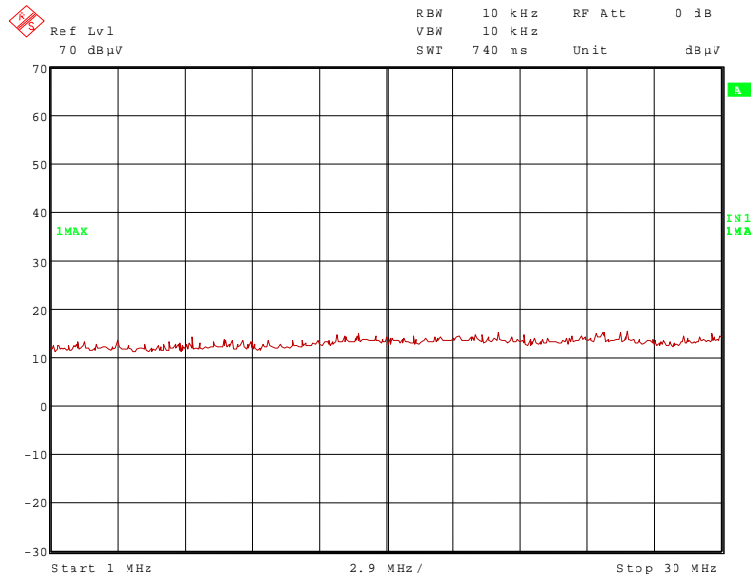

No significant frequencies above the noise floor of the system were found during the preliminary radiated emission test inside this frequency range, so no measurements were carried out on the outdoor test site.

Spurious emissions from 30 MHz to 1000 MHz (operation mode 2):

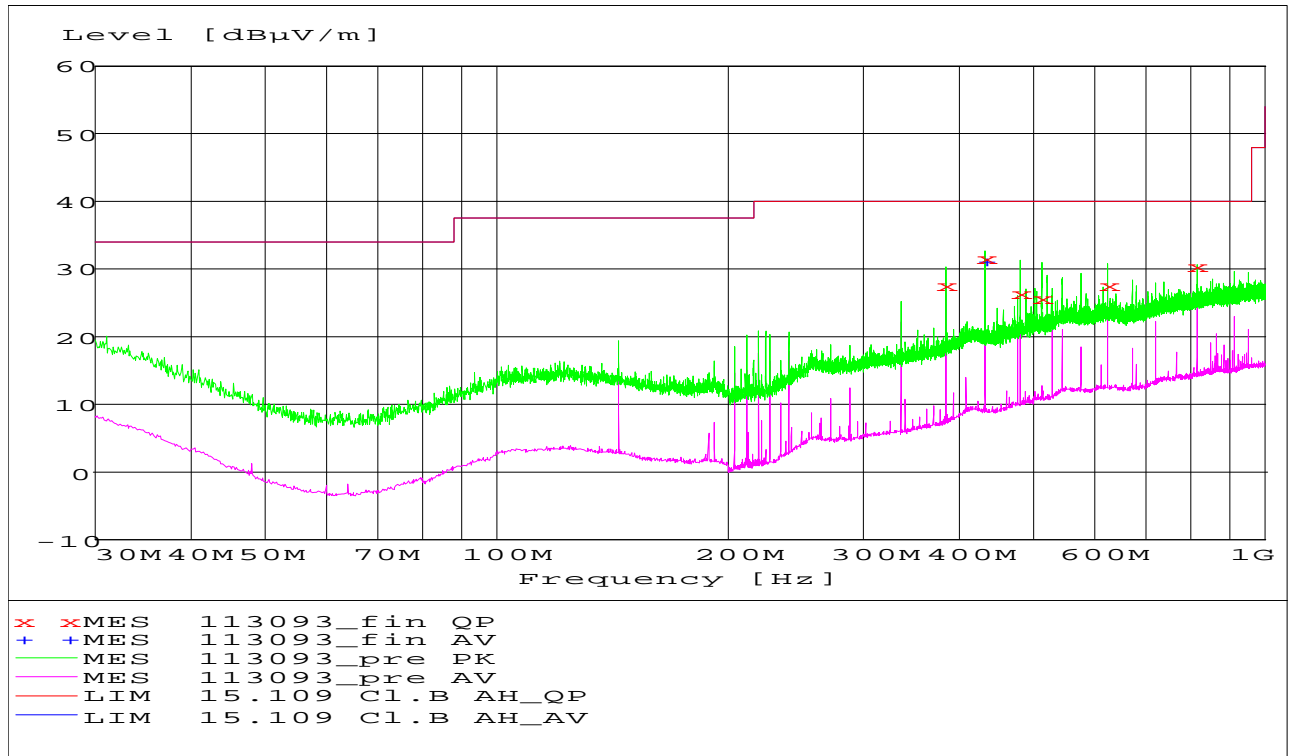

Result measured with the quasipeak detector (marked by an x):

Frequency MHz	Level dBµV/m	Transducer dB	Limit dBµV/m	Margin dB	Height cm	Azimuth deg	Polarisation
384.000000	28.00	16.4	40.0	12.0	150.0	45.00	HORIZONTAL
431.988000	31.60	17.8	40.0	8.4	150.0	78.00	HORIZONTAL
480.012000	26.50	18.7	40.0	13.5	150.0	68.00	HORIZONTAL
512.004000	25.90	18.9	40.0	14.1	150.0	89.00	HORIZONTAL
624.012000	27.70	20.7	40.0	12.3	150.0	190.00	HORIZONTAL
816.144000	30.50	22.4	40.0	9.5	150.0	181.00	VERTICAL

Result measured with the average detector (marked by a +):

Frequency MHz	Level dBµV/m	Transducer dB	Limit dBµV/m	Margin dB	Height cm	Azimuth deg	Polarisation
432.000000	31.50	17.8	40.0	8.5	150.0	76.00	HORIZONTAL

These frequencies have to be measured on the open area test site. The result is presented in the following.


5.7.2.2 Final radiated emission test (30 MHz to 1 GHz)

Ambient temperature	20 °C	Relative humidity	40 %
---------------------	-------	-------------------	------

- Position of EUT: The EUT was set-up on a non-conducting table of a height of 0.8 m. The distance between EUT and antenna was 3 m.
- Cable guide: The cable of the EUT is running vertically to the false floor. For detail information of test set-up and the cable guide refer to the pictures in annex A of this test report.
- Test record: All results are shown in the following.
- Supply voltage: During all measurements the EUT was supplied with 12.0 V_{DC}.
- Test results: The test results were calculated with the following formula:

$$\text{Result [dB}\mu\text{V/m]} = \text{reading [dB}\mu\text{V]} + \text{cable loss [dB]} + \text{antenna factor [dB/m]}$$

The measured points and the limit line in the following diagram refer to the standard measurement of the emitted interference in compliance with the above-mentioned standard. The measured points marked with an x are the measured results of the standard final measurement on the open area test site.

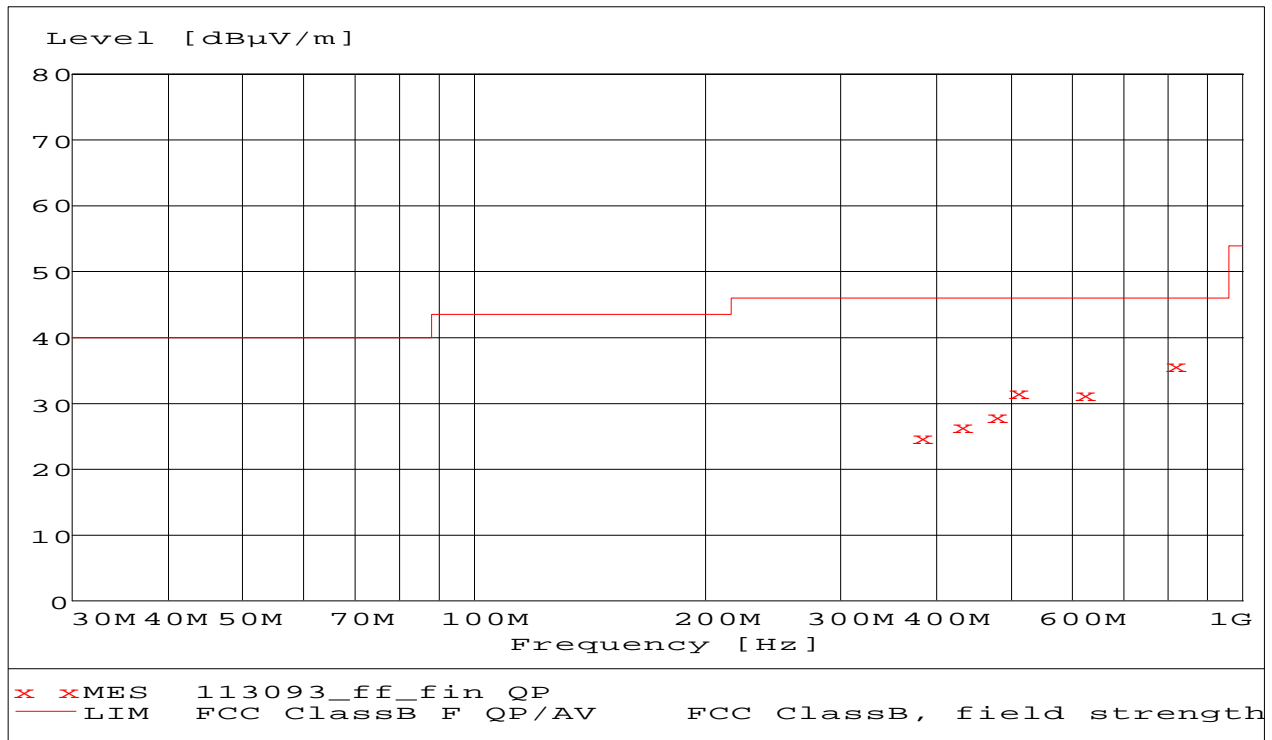

The results of the standard subsequent measurement on the open area test site are indicated in the table below. The limits as well as the measured results (levels) refer to the above mentioned standard while taking account of the specified requirements for a 3 m measuring distance.

The measurement time with the quasi-peak measuring detector is 1 second.

Result measured with the quasi-peak detector (marked in the diagram by an x):

Spurious emissions outside restricted bands									
Frequency MHz	Result dB μ V/m	Limit dB μ V/m	Margin dB	Readings dB μ V	Antenna factor dB/m	Cable loss dB	Height cm	Azimuth deg	Pol.
384.000	24.9	46.0	21.1	7.5	15.2	2.2	377	18	Vert.
431.988	26.4	46.0	19.6	7.8	16.3	2.3	384	189	Vert.
480.102	28.10	46.0	17.9	8.7	17.0	2.4	175	46	Vert.
512.004	32.00	46.0	14.0	11.9	17.6	2.5	327	0	Vert.
624.012	31.40	46.0	14.6	8.9	19.7	2.8	400	179	Vert.
816.144	35.80	46.0	10.2	10.8	21.8	3.2	74	74	Vert.
Spurious emissions in restricted bands									
Frequency MHz	Result dB μ V/m	Limit dB μ V/m	Margin dB	Readings dB μ V	Antenna factor dB/m	Cable loss dB	Height cm	Azimuth deg	Pol.
-	-	-	-	-	-	-	-	-	-
Measurement uncertainty					+2.2 dB / -3.6 dB				

The test results were calculated with the following formula:

$$\text{Result [dB}\mu\text{V/m]} = \text{reading [dB}\mu\text{V]} + \text{cable loss [dB]} + \text{antenna factor [dB/m]}$$

Test result: Passed

TEST EQUIPMENT USED FOR THE TEST:

14 – 20


5.7.2.3 Preliminary radiated emission measurement (1 GHz to 25 GHz)

Ambient temperature	21 °C	Relative humidity	38 %
---------------------	-------	-------------------	------


- Position of EUT: The EUT was set-up on a non-conducting table of a height of 0.8 m. The distance between EUT and antenna was 3 m.
- Cable guide: The cable of the EUT is running vertically to the false floor. For detail information of test set-up and the cable guide refer to the pictures in annex A of this test report.
- Test record: All results are shown in the following.
- Supply voltage: During all measurements the EUT was supplied with 12.0 V_{DC}.

Transmitter operates at the lower end of the assigned frequency band (operation mode 1)

113093_24.wmf: Spurious emissions from 1 GHz to 4 GHz:

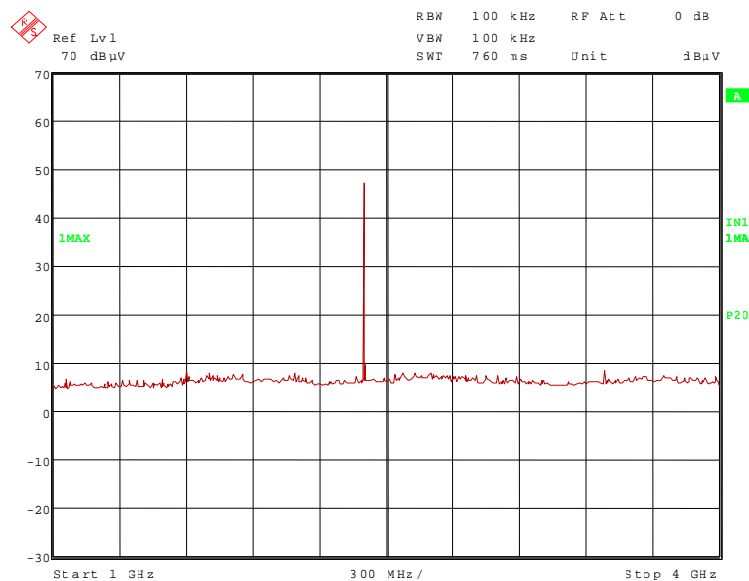

113093_42.wmf: Spurious emissions from 18 GHz to 25 GHz:

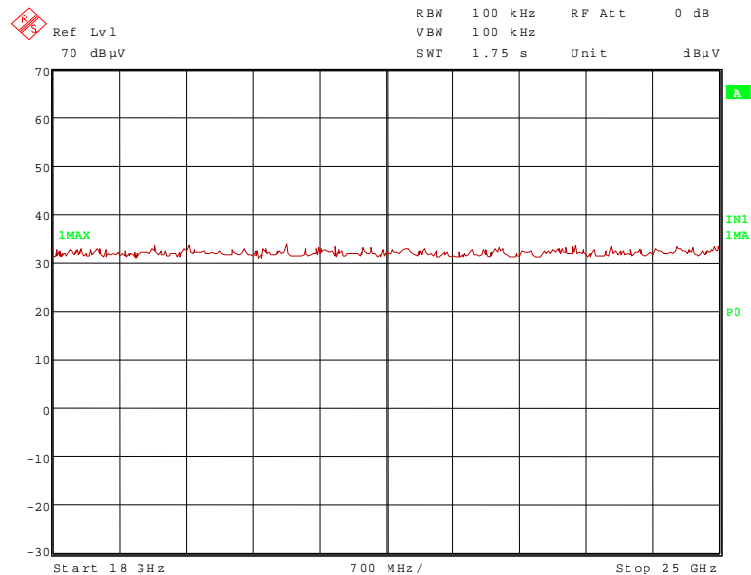

The following frequency was found inside the restricted bands during the preliminary radiated emission test:

- 4.804 GHz.

The following frequency was found outside the restricted bands during the preliminary radiated emission test:

- 2.402 GHz.


These frequencies have to be measured in a final measurement. The results were presented in the following.

TEST EQUIPMENT USED FOR THE TEST:


29, 31 -34, 36, 37, 39, 44, 46, 49 - 51, 72

Transmitter operates on the middle of the assigned frequency band (operation mode 2)


113093_26.wmf: Spurious emissions from 1 GHz to 4 GHz:

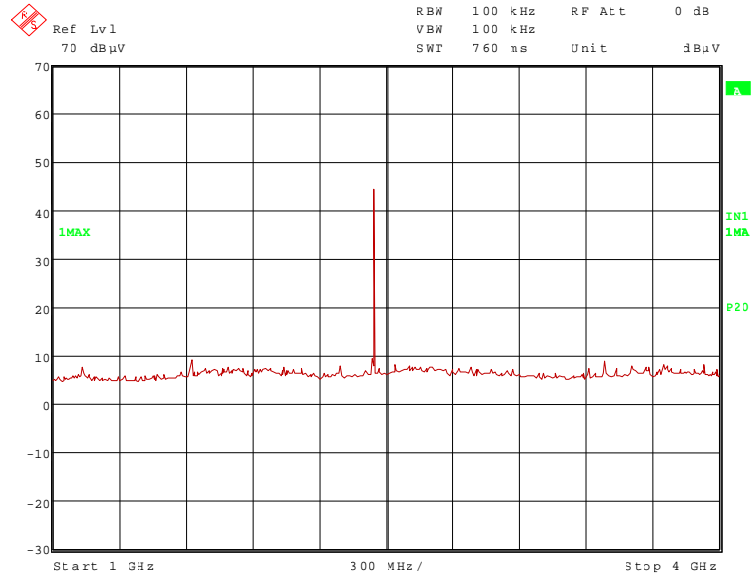


113093_32.wmf: Spurious emissions from 4 GHz to 12 GHz:

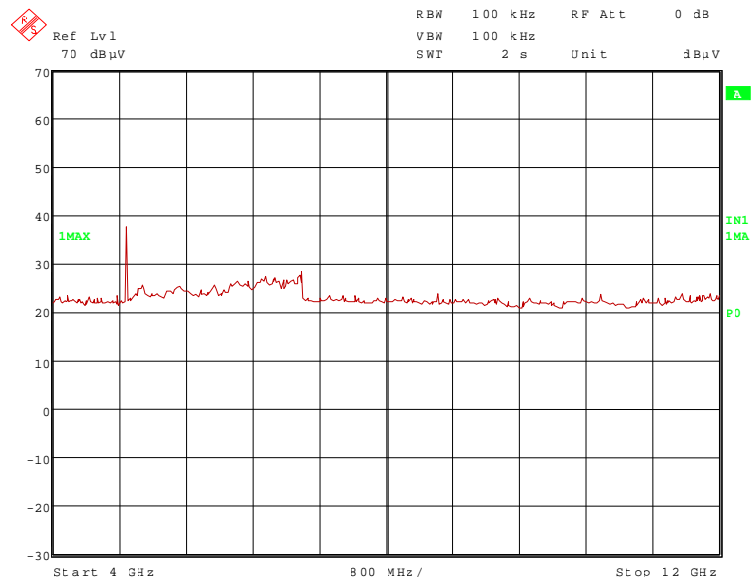

113093_44.wmf: Spurious emissions from 12 GHz to 18 GHz:

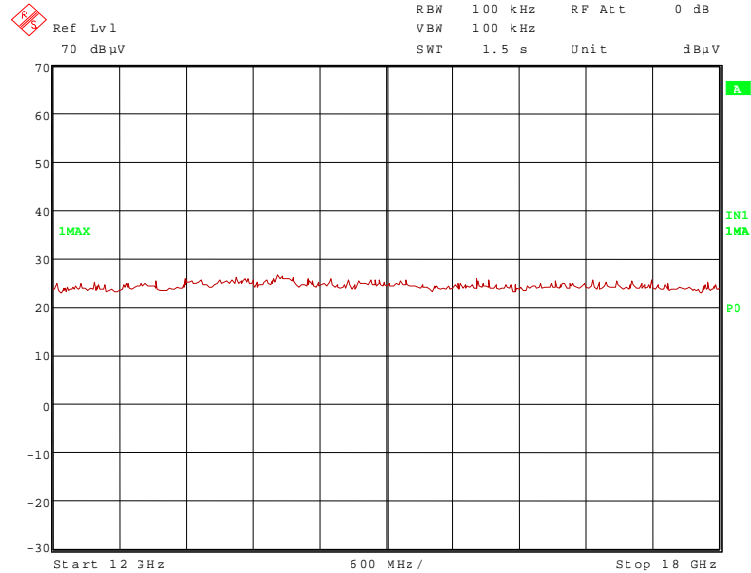

113093_43.wmf: Spurious emissions from 18 GHz to 25 GHz:

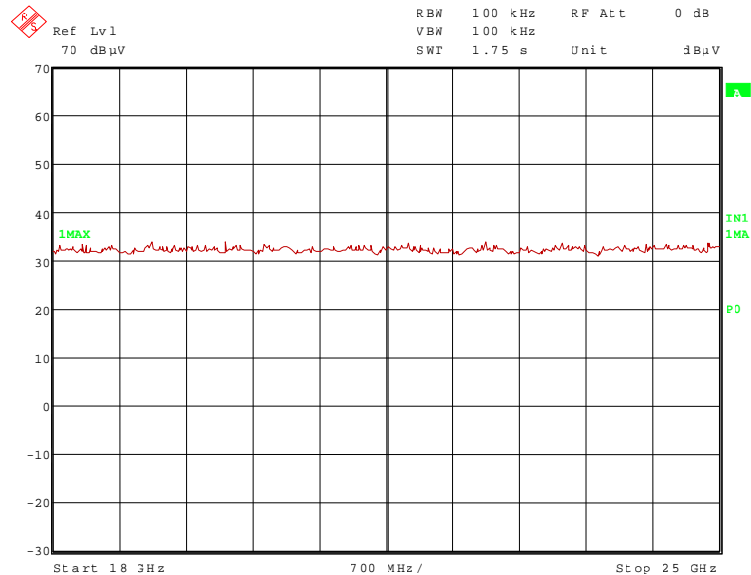

The following frequency was found inside the restricted bands during the preliminary radiated emission test:

- 4.882 GHz.


The following frequency was found outside the restricted bands during the preliminary radiated emission test:

- 2.441 GHz.


These frequencies have to be measured in a final measurement. The results were presented in the following.

Transmitter operates on the upper end of the assigned frequency (operation mode 3)


113093_27.wmf: Spurious emissions from 1 GHz to 4 GHz:

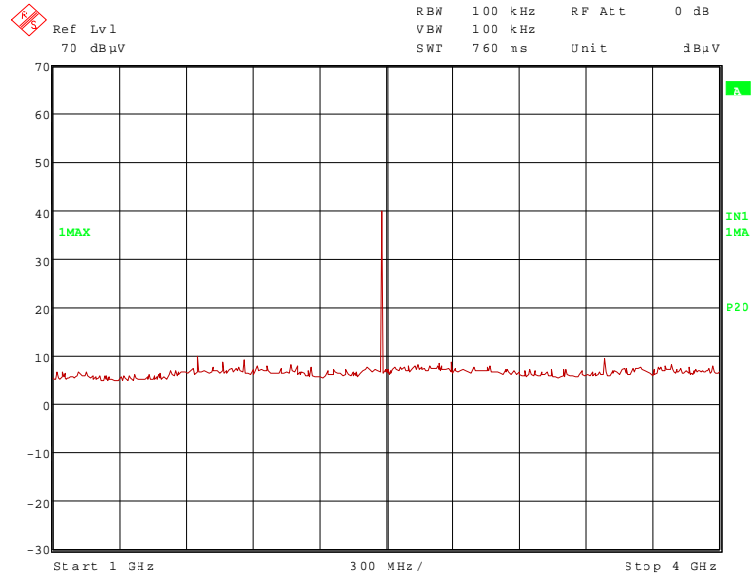


113093_31.wmf: Spurious emissions from 4 GHz to 12 GHz:

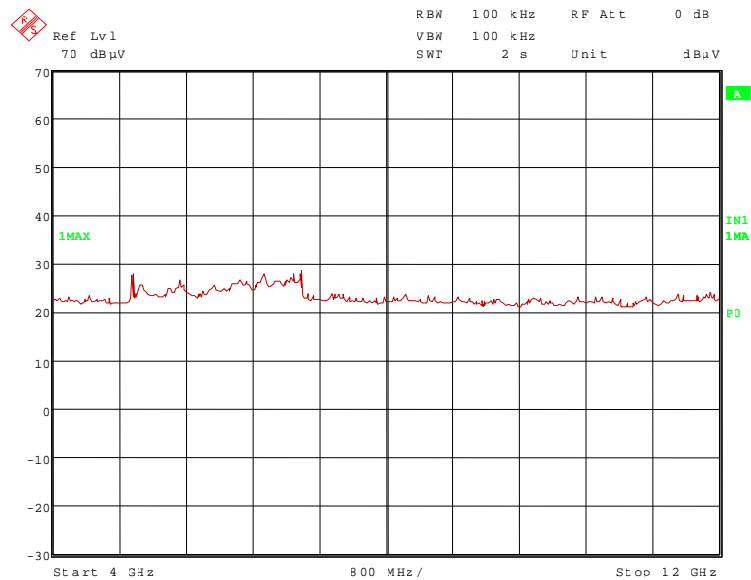

113093_45.wmf: Spurious emissions from 12 GHz to 18 GHz:

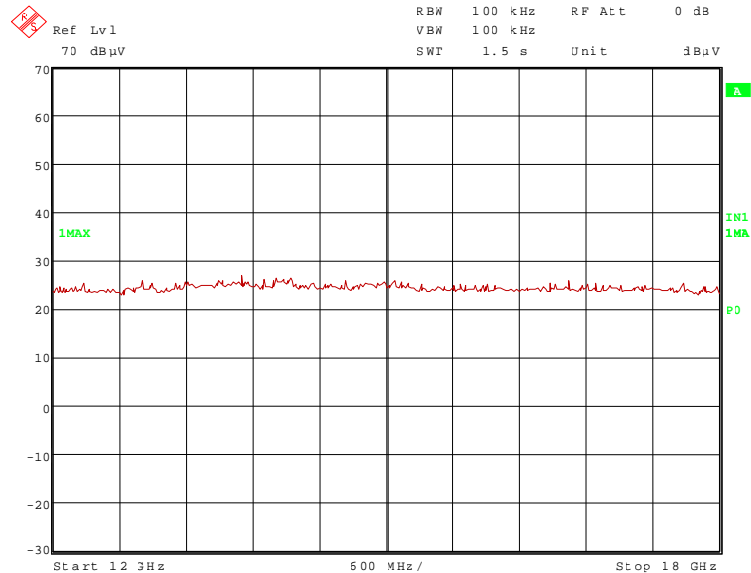

113093_46.wmf: Spurious emissions from 18 GHz to 25 GHz:

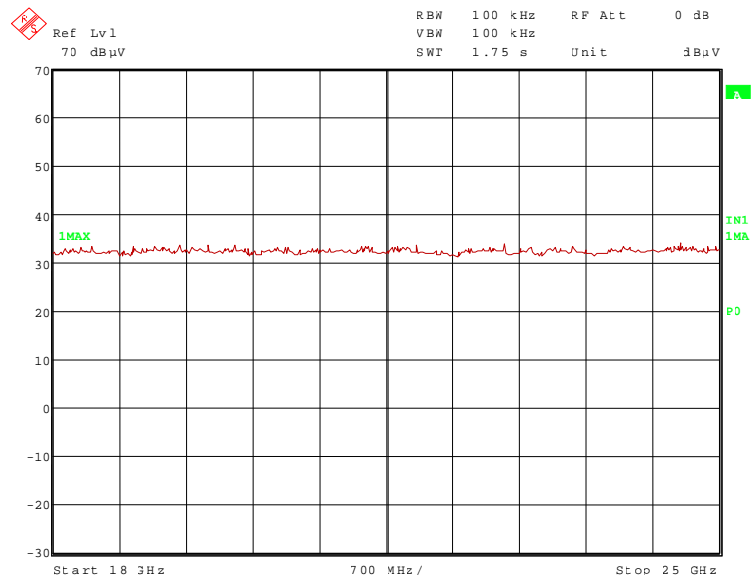

The following frequency was found inside the restricted bands during the preliminary radiated emission test:

- 4.960 GHz.

The following frequency was found outside the restricted bands during the preliminary radiated emission test:

- 2.480 GHz.

These frequencies have to be measured in a final measurement. The results were presented in the following.

5.7.2.4 Final radiated emission measurement (1 GHz to 25 GHz)

Ambient temperature	21 °C	Relative humidity	38 %
---------------------	-------	-------------------	------

Position of EUT: The EUT was set-up on a non-conducting table of a height of 0.8 m. The distance between EUT and antenna was 3 m.

Cable guide: The cable of the EUT is running vertically to the false floor. For detail information of test set-up and the cable guide refer to the pictures in annex A of this test report.

Test record: All results are shown in the following.

Supply voltage: During all measurements the EUT was supplied with 12.0 V_{DC}.

Resolution bandwidth: For all measurements a resolution bandwidth of 1 MHz was used.

Transmitter operates at the lower end of the assigned frequency band (operation mode 1)

Result measured with the peak detector:

Frequency GHz	Corr. value dB μ V/m	Limit dB μ V/m	Margin dB	Readings dB μ V	Antenna factor 1/m	Preamp dB	Cable loss dB	Height cm	Pol.	Restr. Band
2.402	87.7	-	-	55.7	28.3	0.0	3.7	150	Vert.	-
4.804	55.2	74.0	18.8	43.0	32.6	25.7	5.3	150	Vert.	Yes
Measurement uncertainty						+2.2 dB / -3.6 dB				

Result measured with the average detector:

Frequency GHz	Corr. value dB μ V/m	Limit dB μ V/m	Margin dB	Readings dB μ V	Antenna factor 1/m	Preamp dB	Cable loss dB	Height cm	Pol.	Restr. Band
2.402	77.1	-	-	45.1	28.3	0.0	3.7	150	Vert.	-
4.804	42.2	54.0	11.8	30.0	32.6	25.7	5.3	150	Hor.	Yes
Measurement uncertainty						+2.2 dB / -3.6 dB				

Transmitter operates at the middle of the assigned frequency band (operation mode 2)

Result measured with the peak detector:

Frequency GHz	Corr. value dB μ V/m	Limit dB μ V/m	Margin dB	Readings dB μ V	Antenna factor 1/m	Preamp dB	Cable loss dB	Height Cm	Pol.	Restr. Band
2.441	90.0			57.9	28.4	0.0	3.7	150	Vert.	-
4.882	54.0	74.0	20.0	41.6	32.8	25.7	5.3	150	Vert.	Yes
Measurement uncertainty						+2.2 dB / -3.6 dB				

Result measured with the average detector:

Frequency GHz	Corr. value dB μ V/m	Limit dB μ V/m	Margin dB	Readings dB μ V	Antenna factor 1/m	Preamp dB	Cable loss dB	Height cm	Pol.	Restr. Band
2.441	79.5	-	-	47.4	28.4	0.0	3.7	150	Vert.	-
4.882	40.4	54.0	13.6	28.0	32.8	25.7	5.3	150	Hor.	Yes
Measurement uncertainty						+2.2 dB / -3.6 dB				

Transmitter operates at the upper end of the assigned frequency band (operation mode 3)

Result measured with the peak detector:

Frequency GHz	Corr. value dB μ V/m	Limit dB μ V/m	Margin dB	Readings dB μ V	Antenna factor 1/m	Preamp dB	Cable loss dB	Height cm	Pol.	Restr. Band
2.480	89.1	-	-	56.8	28.5	0.0	3.8	150	Vert.	-
4.960	51.1	74.0	22.9	38.5	32.9	25.6	5.3	150	Vert.	Yes
Measurement uncertainty						+2.2 dB / -3.6 dB				

Result measured with the average detector:

Frequency GHz	Corr. value dB μ V/m	Limit dB μ V/m	Margin dB	Readings dB μ V	Antenna factor 1/m	Preamp dB	Cable loss dB	Height cm	Pol.	Restr. Band
2.480	78.6	-	-	46.3	28.5	0.0	3.8	150	Vert.	-
4.960	35.9	54.0	18.1	23.3	32.9	25.6	5.3	150	Hor.	Yes
Measurement uncertainty						+2.2 dB / -3.6 dB				

Test result: Passed

TEST EQUIPMENT USED FOR THE TEST:

29, 31 -34, 36, 37, 39, 44, 46, 49 - 51, 72

6 TEST EQUIPMENT AND ANCILLARIES USED FOR TESTS

No.	Test equipment	Type	Manufacturer	Serial No.	PM. No.	Cal. Date	Cal. due
14	Open area test site	-	Phoenix Test-Lab	-	480085	Weekly verification (system cal.)	
15	Measuring receiver	ESIB7	Rohde & Schwarz	100304	480521	03/15/2010	03/2012
16	Controller	HD100	Deisel	100/670	480139	-	-
17	Turntable	DS420HE	Deisel	420/620/80	480087	-	-
18	Antenna support	AS615P	Deisel	615/310	480086	-	-
19	Antenna	CBL6111 A	Chase	1643	480147	08/01/2007	08/2012
20	EMI Software	ES-K1	Rohde & Schwarz	-	480111	-	-
29	Fully anechoic chamber M20	-	Albatross Projects	B83107-E2439-T232	480303	Weekly verification (system cal.)	
30	Spectrumanalyser	FSU	Rohde & Schwarz	200125	480956	04/15/2010	04/2012
31	Measuring receiver	ESI 40	Rohde & Schwarz	100064	480355	03/17/2010	03/2012
32	Controller	MCU	Maturo	MCU/043/971107	480832	-	-
33	Turntable	DS420HE	Deisel	420/620/80	480315	-	-
34	Antenna support	AS615P	Deisel	615/310	480187	-	-
35	Antenna	CBL6112 B	Chase	2917	480447	09/28/2010	09/2015
36	Antenna	3115 A	EMCO	9609-4918	480183	04/11/2008	11/2013
37	Standard Gain Horn 11.9 GHz – 18 GHz	18240-20	Flann Microwave	483	480294	Six month verification (system cal.)	
39	Standard Gain Horn 17.9 GHz – 26.7 GHz	20240-20	Flann Microwave	411	480297	Six month verification (system cal.)	
43	RF-cable No. 30	RTK 081	Rosenberger	-	410141	Weekly verification (system cal.)	
44	RF-cable No. 31	RTK 081	Rosenberger	-	410142	Weekly verification (system cal.)	
46	RF-cable 1 m	KPS-1533-400-KPS	Insulated Wire	-	480301	Six month verification (system cal.)	
49	Preamplifier	JS3-00101200-23-5A	Miteq	681851	480337	Six month verification (system cal.)	
50	Preamplifier	JS3-12001800-16-5A	Miteq	571667	480343	Six month verification (system cal.)	
51	Preamplifier	JS3-18002600-20-5A	Miteq	658697	480342	Six month verification (system cal.)	
55	Antenna	HFH2-Z2	Rohde & Schwarz	832609/014	480059	03/10/2010	03/2012
72	4 GHz High Pass Filter	WHKX4.0/18 G-8SS	Wainwright Instruments	1	480587	Weekly verification (system cal.)	

7 REPORT HISTORY

Report Number	Date	Comment
F113093E3	27 October 2011	Document created

8 LIST OF ANNEXES

ANNEX A TEST SETUP PHOTOS 6pages

113093_13.jpg	Test set-up fully anechoic chamber
113093_08.jpg	Test set-up fully anechoic chamber
113093_09.jpg	Test set-up fully anechoic chamber
113093_10.jpg	Test set-up fully anechoic chamber
113093_11.jpg	Test set-up fully anechoic chamber
113093_15.jpg	Test set-up open area test site

ANNEX B EXTERNAL PHOTOS 4pages

113093_EUT19.jpg	3D view 1
113093_EUT20.jpg	3D view 2
113093_EUT3.jpg	Type plate 1
113093_EUT32.jpg	Connector view

ANNEX C INTERNAL PHOTOS 8 pages

113093_EUT30.jpg	ALPS evaluation board, top view
113093_EUT31.jpg	ALPS evaluation board, bottom view
113093_EUT23.jpg	Switch PCB, rear view
113093_EUT25.jpg	Switch PCB, front view
113093_EUT24.jpg	Switch PCB, detail view to Bluetooth unit (shielded)
113093_EUT24.jpg	Switch PCB, detail view to Bluetooth unit (unshielded)
113093_EUT27.jpg	Switch PCB, detail view to temporary antenna connector
113093_EUT15.jpg	Switch PCB, detail view to integrated antenna

ANNEX D RESULTS OF THE RECEIVER MEASUREMENT 8 pages